

[MS-AVEDGEA]: Audio Video Edge Authentication Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final

documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial version
04/25/2008	0.2		Revised and edited the technical content
06/27/2008	1.0		Revised and edited the technical content
08/15/2008	1.01		Revised and edited the technical content
12/12/2008	2.0		Revised and edited the technical content
02/13/2009	2.01		Revised and edited the technical content
03/13/2009	2.02		Edited the technical content
07/13/2009	2.03	Major	Revised and edited the technical content
08/28/2009	2.04	Editorial	Revised and edited the technical content
11/06/2009	2.05	Editorial	Revised and edited the technical content
02/19/2010	2.06	Editorial	Revised and edited the technical content
03/31/2010	2.07	Major	Updated and revised the technical content
04/30/2010	2.08	Editorial	Revised and edited the technical content
06/07/2010	2.09	Editorial	Revised and edited the technical content
06/29/2010	2.10	Editorial	Changed language and formatting in the technical content.
07/23/2010	2.10	No change	No changes to the meaning, language, or formatting of the technical content.
09/27/2010	3.0	Major	Significantly changed the technical content.
11/15/2010	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	3.0	No change	No changes to the meaning, language, or formatting of

Date	Revision History	Revision Class	Comments
			the technical content.
06/10/2011	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	4.0	Major	Significantly changed the technical content.

Preliminary

Table of Contents

1 Introduction	6
1.1 Glossary	6
1.2 References	6
1.2.1 Normative References	6
1.2.2 Informative References	7
1.3 Protocol Overview (Synopsis)	7
1.4 Relationship to Other Protocols	8
1.5 Prerequisites/Preconditions	8
1.6 Applicability Statement	9
1.7 Versioning and Capability Negotiation	9
1.8 Vendor-Extensible Fields	9
1.9 Standards Assignments	10
2 Messages	11
2.1 Transport	11
2.2 Message Syntax	11
2.2.1 Request by the Client	11
2.2.1.1 request Element	11
2.2.1.1.1 request Element Definition	11
2.2.1.1.2 requestType Type Definition	11
2.2.1.1.3 Child Element	12
2.2.1.1.3.1 credentialsRequest Element Definition	12
2.2.1.1.3.2 credentialsRequestType Type Definition	12
2.2.2 Response by the Server	13
2.2.2.1 response Element	13
2.2.2.1.1 response Element Definition	13
2.2.2.1.2 responseType Type Definition	13
2.2.2.1.3 Child Element	14
2.2.2.1.3.1 credentialsResponse Element Definition	14
2.2.2.1.3.2 credentialsResponseType Type Definition	14
2.2.3 Basic Datatypes	15
2.2.3.1 routeType	15
2.2.3.2 locationType	16
2.2.3.3 credentialsType	16
2.2.3.4 mediaRelayType	16
2.2.3.5 mediaRelayListType	17
2.2.3.6 hostNameType	17
2.2.3.7 reasonPhraseType	18
2.2.3.8 max64CharStringType	18
2.2.3.9 max64kCharStringType	18
2.2.3.10 max8CharStringType	18
2.2.3.11 mrasUriType	19
2.2.3.12 versionType	19
3 Protocol Details	20
3.1 Server Details	20
3.1.1 Abstract Data Model	20
3.1.2 Timers	20
3.1.3 Initialization	20
3.1.4 Higher-Layer Triggered Events	20

3.1.5	Message Processing Events and Sequencing Rules	20
3.1.5.1	General Rules.....	20
3.1.5.1.1	Processing a Malformed Request	20
3.1.5.1.2	Server Policies	21
3.1.5.2	Version Validation	21
3.1.5.2.1	Validating the Version in the Request.....	21
3.1.5.2.2	Setting the Version in the Response	21
3.1.5.3	Checking the Attributes of the Request.....	21
3.1.5.4	Generating the credentialResponse	21
3.1.5.5	Populating Attributes of the Response	22
3.1.5.6	Error Codes.....	22
3.1.5.7	Token Generation	23
3.1.6	Timer Events	23
3.1.7	Other Local Events	23
4	Protocol Examples.....	24
4.1	Version 2.0 LoadBalanced Request/Response	24
4.1.1	Client Request to Server	24
4.1.2	Server Response to Client	24
4.2	Version 3.0 DirectIP Request/Response	25
4.2.1	Client Request to Server	26
4.2.2	Server Response to Client	26
5	Security.....	28
5.1	Security Considerations for Implementers.....	28
5.1.1	Keyed Hash Function	28
5.1.2	Underlying Transport	28
5.1.3	Authentication	28
5.2	Index of Security Parameters	28
6	Appendix A: MS-AVEDGEA Schema.....	29
6.1	Office Communications Server 2007 Schema.....	32
7	Appendix B: Product Behavior.....	36
8	Change Tracking.....	38
9	Index	43

1 Introduction

This document specifies the Audio Video Edge Authentication Protocol. This is a proprietary protocol used by protocol clients to get security tokens needed to authenticate themselves with a server that implements the Traversal Using Relay NAT (TURN) Extensions protocol, as described in [\[MS-TURN\]](#), for use with the Interactive Connectivity Establishment (ICE) Extensions protocol, as described in [\[MS-ICE\]](#) and [\[MS-ICE2\]](#).

Sections 1.8, 2, and 3 of this specification are normative and contain RFC 2119 language. Sections 1.5 and 1.9 are also normative but cannot contain RFC 2119 language. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

fully qualified domain name (FQDN)
network address translation (NAT)
Transmission Control Protocol (TCP)
User Datagram Protocol (UDP)

The following terms are defined in [\[MS-OFCGLOS\]](#):

Audio/Video Edge Server (A/V Edge Server)
base64 encoding
Content-Type header
endpoint
SERVICE
Session Initiation Protocol (SIP)
SHA-1
SHA-256
Transport Layer Security (TLS)
TURN server
Uniform Resource Identifier (URI)

The following terms are specific to this document:

shared-secret: Data that is known only to the parties that are involved in a secure communication.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site,

<http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[IETF DRAFT-SIP SOAP-00] Deason, N., "SIP and SOAP", draft-deason-sip-soap-00, June 30 2000, <http://www.softarmor.com/wgdb/docs/draft-deason-sip-soap-00.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[XMLSCHEMA1/2] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures Second Edition", W3C Recommendation, October 2004, <http://www.w3.org/TR/xmlschema-1/>

[XMLSCHEMA2/2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes Second Edition", W3C Recommendation, October 2004, <http://www.w3.org/TR/xmlschema-2>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-ICE] Microsoft Corporation, "[Interactive Connectivity Establishment \(ICE\) Extensions](#)".

[MS-ICE2] Microsoft Corporation, "[Interactive Connectivity Establishment \(ICE\) Extensions 2.0](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[MS-SIPRE] Microsoft Corporation, "[Session Initiation Protocol \(SIP\) Routing Extensions](#)".

[MS-TURN] Microsoft Corporation, "[Traversal Using Relay NAT \(TURN\) Extensions](#)".

[RFC2104] Krawczyk, H., Bellare, M., and Canetti, R., "HMAC: Keyed-Hashing for Message Authentication", RFC 2104, February 1997, <http://www.ietf.org/rfc/rfc2104.txt>

[XML10] World Wide Web Consortium, "Extensible Markup Language (XML) 1.0 (Third Edition)", February 2004, <http://www.w3.org/TR/REC-xml>

1.3 Protocol Overview (Synopsis)

[MS-TURN] is used for **network address translation (NAT)** and firewall traversal. To help protocol clients traverse NATs and firewalls, a **TURN server** or servers need to be deployed at particular places in the network topology. With the security tokens supplied by this protocol, a protocol client can authenticate with these TURN servers.

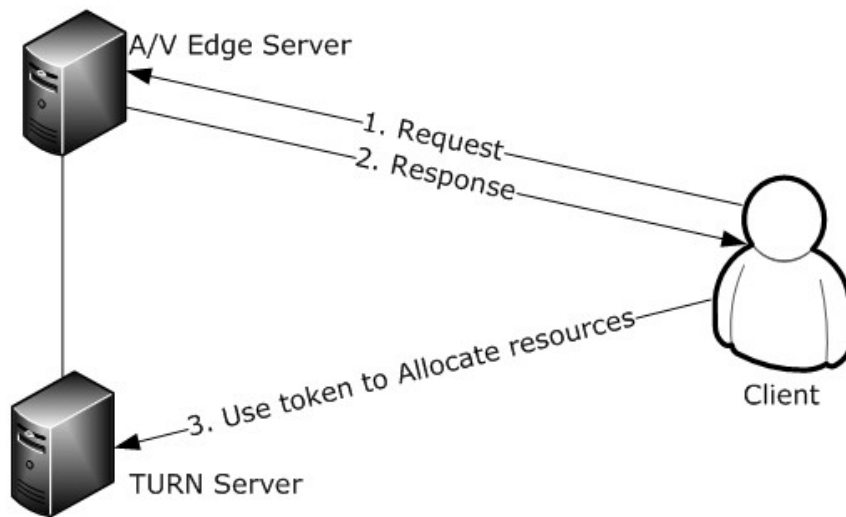


Figure 1: Protocol overview

The **Audio/Video Edge Server (A/V Edge Server)** is associated with a TURN server and is aware of the configuration details of the associated TURN server. When the protocol client needs tokens, it sends a **Session Initiation Protocol (SIP) SERVICE** request, as described in [\[IETF DRAFT-SIPSOAP-00\]](#), to the A/V Edge Server with the body of the message encoded in an XML format, as described in [\[XML10\]](#). The server responds with a SIP SERVICE response message and a response code which indicates whether the response was a success or failure. If it was a success, the response contains the security tokens along with location information of the associated TURN server. If it was a failure, the response code indicates the type of failure. If there was an error with the XML body of the request, the response also contains an XML body that describes the exact cause of the problem.

The A/V Edge Server shares **shared-secret** keys with the associated TURN server and uses these keys to generate tokens. A security token consists of a user name and password. The token is valid only for a certain amount of time. If the protocol client requires the token to be valid for a shorter time interval, it can specify the length of the interval in the XML request. The server honors this value if it is less than the default duration it uses. Because the expiration time in the token is not easily decipherable, the response also includes a duration element that specifies how long the token is valid. The token also includes a hash of the identity specified by the protocol client, which the TURN server can use to implement resource management.

1.4 Relationship to Other Protocols

This protocol uses [\[MS-SIPRE\]](#) for receiving requests and sending out responses. This protocol uses the Session Initiation Protocol (SIP) SERVICE method, as described in [\[IETF DRAFT-SIPSOAP-00\]](#), which is an extension to the standard SIP, to receive and send responses. The security tokens received from the A/V Edge Server are used to obtain access to the TURN server for use with the [\[MS-ICE\]](#) protocol.

1.5 Prerequisites/Preconditions

This protocol assumes that the TURN server associated with the A/V Edge Server has two network interfaces, one facing the internet and the other facing the intranet as shown in the following figure.

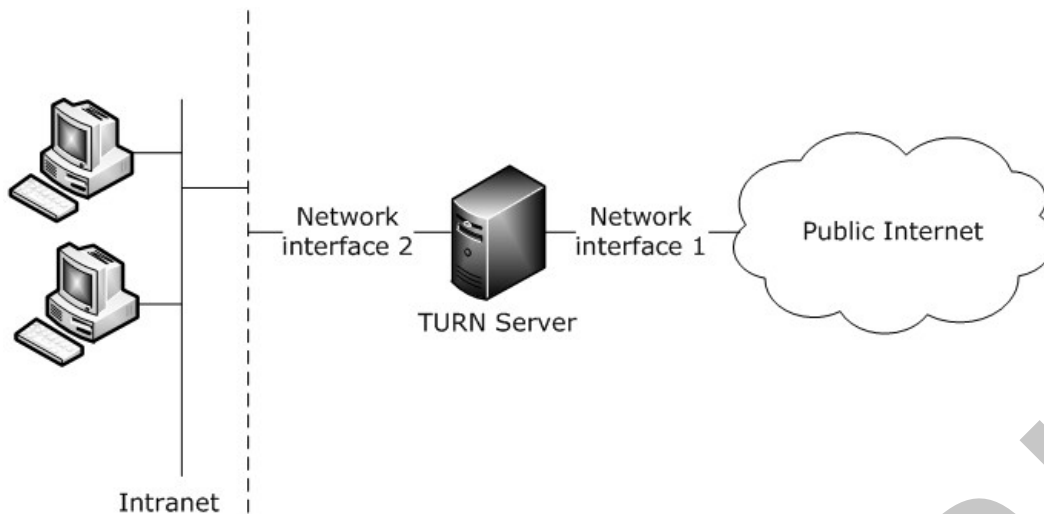


Figure 2: TURN server with two interfaces

The server implementing this protocol is assumed to be configured with the following:

- A certificate for establishing **Transport Layer Security (TLS)** connections. The certificate has a private key.
- Two shared-secret keys, known both to the A/V Edge Server and the associated TURN server.
- **User Datagram Protocol (UDP)** and **Transmission Control Protocol (TCP)** ports, on which the associated TURN server listens for protocol requests described in [\[MS-TURN\]](#). The default for UDP is port 3478. The default for TCP is port 443.
- The IP address and **fully qualified domain name (FQDN) (1)** of each network interface of the associated TURN server.
- The server version with the value "3.0".

1.6 Applicability Statement

This protocol is used to provide a protocol client with security tokens for accessing the TURN server.

1.7 Versioning and Capability Negotiation

This protocol negotiates versions in the following manner:

1. The protocol client specifies the version in the XML body of the request.
2. If the server does not support the version requested by the protocol client, the request is rejected with a "Version Mismatch" error.

For more information, see section [3.1.5](#).

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

Preliminary

2 Messages

2.1 Transport

Audio/video edge authentication protocol messages MUST be transported using SIP SERVICE messages through a connection secured with TLS.

2.2 Message Syntax

The request and response messages of this protocol MUST be SIP SERVICE messages, as specified in [\[IETF DRAFT-SIP SOAP-00\]](#). Protocol requests MUST include a **Content-Type header**, "application/msrtc-media-relay-auth+xml". The schema definition specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#) for the request and response messages is documented in section 6.

2.2.1 Request by the Client

The XML request sent by the protocol client MUST include exactly one **request** element.

2.2.1.1 request Element

2.2.1.1.1 request Element Definition

The schema definition for the **request** element is as follows.

```
<!-- REQUEST ELEMENT-->
<xs:element name="request" type="tns:requestType" />
```

2.2.1.1.2 requestType Type Definition

The schema definition for the **requestType** type is as follows. [<1>](#)

```
<!-- REQUEST TYPE-->
<xs:complexType name="requestType">
  <xs:sequence>
    <!-- number of credentials requests will be bound within MRAS-->
    <xs:element name="credentialsRequest" type="tns:credentialsRequestType"
      minOccurs="1" maxOccurs="100"/>
  </xs:sequence>
  <xs:attribute name="requestID" type="tns:max64CharStringType" use="required"/>
  <xs:attribute name="version" type="tns:versionType" use="required"/>
  <xs:attribute name="to" type="tns:mrasUriType" use="required"/>
  <xs:attribute name="from" type="tns:mrasUriType" use="required"/>
  <xs:attribute name="route" type="tns:routeType" use="optional"
    default="loadbalanced"/>
</xs:complexType>
```

The following table describes the **requestType** type's attributes.

Attribute	Description
requestID	Type max64CharStringType , as defined in section 2.2.3.8 . An ID that is used to identify the request. This can be used by the protocol client to associate the response with the request, in case the protocol client sent multiple simultaneous requests to the server with a

Attribute	Description
	unique requestID .
version	Type versionType , as defined in section 2.2.3.12 . This is the version requested by the protocol client. The version MUST be set as specified in section 3.1.5.2.1 .
to	Type mrasUriType , as defined in section 2.2.3.11 . A restricted length Uniform Resource Identifier (URI) type that identifies the entity to which the request needs to be sent. It MUST be a Session Initiation Protocol (SIP) URI.
from	Type mrasUriType , as defined in section 2.2.3.11 . A restricted length URI type that identifies the entity that originated the request. It MUST be a SIP URI.
route	Type routeType , as defined in section 2.2.3.1 . An optional attribute with a default value of "loadbalanced".

2.2.1.1.3 Child Element

The child element of the **requestType** element is defined in the following subsections.

2.2.1.1.3.1 credentialsRequest Element Definition

The schema definition for the **credentialsRequest** element is as follows.

```
<xs:element name="credentialsRequest" type="tns:credentialsRequestType" minOccurs="1"
maxOccurs="100" />
```

The following table describes the **credentialsRequest** element.

Element	Description
credentialsRequest	One or more subelements of type credentialsRequestType MUST be present within the requestType . The maxOccurs attribute specifies the maximum number of subelements that MUST be present in the request. The schema allows 100 subelements.

2.2.1.1.3.2 credentialsRequestType Type Definition

The schema definition for the **credentialsRequestType** type is as follows.

```
<!-- CREDENTIALS REQUEST TYPE-->
<xs:complexType name="credentialsRequestType">
  <xs:sequence>
    <xs:element name="identity" type="tns:max64kCharStringType" />
    <xs:element name="location" type="tns:locationType" minOccurs="0" />
    <xs:element name="duration" type="xs:positiveInteger" minOccurs="0" />
  </xs:sequence>
  <xs:attribute name="credentialsRequestID" type="tns:max64CharStringType"
    use="required" />
</xs:complexType>
```

The following table describes the **credentialsRequestType** type's elements.

Element	Description
identity	Type max64kCharStringType , as defined in section 2.2.3.9 . A restricted length string type that identifies the entity to which the token SHOULD be issued. This is a required field.
location	Type locationType , as defined in section 2.2.3.2 . This is an optional attribute that specifies the network interface on the associated TURN server for which the tokens and FQDN (1) or IP address and port information MUST be returned.
duration	Type positiveInteger . This is an optional attribute that specifies the number of minutes for which the token needs to be valid. The default duration is 480 minutes.

The following table describes the **credentialsRequestType** type's attribute.

Attribute	Description
credentialsRequestID	Type max64CharStringType , as defined in section 2.2.3.8 . A restricted length string type that identifies the credentialsRequest element within a requestType .

2.2.2 Response by the Server

The XML response sent by the server MUST include exactly one **response** element.

2.2.2.1 response Element

2.2.2.1.1 response Element Definition

The schema definition for the **response** element is as follows.

```
<!-- RESPONSE ELEMENT-->
<xs:element name="response" type="tns:responseType" />
```

2.2.2.1.2 responseType Type Definition

The schema definition for the **responseType** type is as follows. [<2>](#)

```
<!-- RESPONSE TYPE-->
<xs:complexType name="responseType">
  <xs:sequence>
    <xs:element name="credentialsResponse" type="tns:credentialsResponseType"
      minOccurs="0" maxOccurs="100"/>
  </xs:sequence>
  <xs:attribute name="requestID" type="tns:max64CharStringType"/>
  <xs:attribute name="version" type="tns:versionType" use="required"/>
  <xs:attribute name="serverVersion" type="tns:versionType" use="optional"/>
  <xs:attribute name="to" type="tns:mrasUriType"/>
  <xs:attribute name="from" type="tns:mrasUriType"/>
  <xs:attribute name="reasonPhrase" type="tns:reasonPhraseType" use="required"/>
</xs:complexType>
```

The following table describes the **responseType** type's attributes.

Attribute	Description
requestID	Type max64CharStringType , as defined in section 2.2.3.8 . If the request is malformed (based on the rules in section 3.1.5.1.1), this attribute is not present. If present, this attribute MUST have the same value as the requestID attribute in the request.
version	Type versionType , as defined in section 2.2.3.12 . The version MUST be set as specified in section 3.1.5.2.2 .
serverVersion	Type versionType , as defined in section 2.2.3.12 . This is an optional attribute. If present, this SHOULD be the server version with a value of "3.0" <3> .
to	Type mrasUriType , as defined in section 2.2.3.11 . If the request is malformed (based on the rules in section 3.1.5.1.1), this attribute is not present. If present, this attribute MUST have the same value as the to attribute in the request.
from	Type mrasUriType , as defined in section 2.2.3.11 . If the request is malformed (based on the rules in section 3.1.5.1.1), this attribute is not present. If present, this attribute MUST have the same value as the from attribute in the request.
reasonPhrase	Type reasonPhraseType , as defined in section 2.2.3.7 . Specifies the reason for the error. A detailed description of when each error message is thrown is provided in section 3.1.5 .

2.2.2.1.3 Child Element

The child element of the **responseType** element is defined in the following subsections.

2.2.2.1.3.1 credentialsResponse Element Definition

The schema definition for the **credentialsResponse** element is as follows.

```
<xs:element name="credentialsResponse" type="tns:credentialsResponseType" minOccurs="0"
maxOccurs="100" />
```

The following table describes the **credentialsResponse** element.

Element	Description
credentialsResponse	For each credentialsRequest in the request from the protocol client, if the request succeeded, a credentialsResponse element MUST be included with the TURN server information and the token for the identity in the credentialsRequest . If the processing of the request does not succeed, there MUST be no credentialsResponse in the response sent by the server.

2.2.2.1.3.2 credentialsResponseType Type Definition

The schema definition for **credentialsResponseType** type is as follows.

```
<!--CREDENTIALS RESPONSE TYPE-->
<xs:complexType name="credentialsResponseType">
  <xs:sequence>
    <xs:element name="credentials" type="tns:credentialsType" />
    <xs:element name="mediaRelayList" type="tns:mediaRelayListType" />
  </xs:sequence>
```

```

    <xs:attribute name="credentialsRequestID" type="tns:max64CharStringType" use="required"
  />
</xs:complexType>

```

The following table describes the **credentialsResponseType** type's elements.

Element	Description
credentials	<p>Type credentialsType, as defined in section 2.2.3.3. It MUST contain the following subelements:</p> <ul style="list-style-type: none"> ▪ a username and password, which form the security token needed by the protocol client to contact the TURN server. ▪ duration that specifies how long the token is valid. <p>SHOULD contain an optional realm element that specifies which network segment the server belongs to. The network segment information is configured on the server and is implementation specific.</p>
mediaRelayList	<p>Type mediaRelayListType, as defined in section 2.2.3.5. Each mediaRelay element in mediaRelayList, MUST contain location subelement that indicates internet or intranet. Either hostname subelement or directIPAddress subelement MUST be present. If the hostname subelement is present, it SHOULD contain the IP address of the TURN server or the FQDN (1) that resolves to the TURN server's IP address. If the directIPAddress subelement is present, it MUST contain the IP4 or IPv6 <4> address of the TURN server. SHOULD contain an optional tcpPort element that specifies the port the TURN server is using to listen for TCP. SHOULD contain an optional udpPort element that specifies the port the TURN server is using to listen for UDP.</p>

The following table describes the **credentialsResponseType** type's attribute.

Attribute	Description
credentialsRequestID	This MUST be the same as the credentialsRequestID attribute in the request.

2.2.3 Basic Datatypes

This section lists the basic datatypes used in the XML request from the client and the response from the server.

2.2.3.1 routeType

The schema definition for the **routeType** datatype is as follows.

```

<xs:simpleType name="routeType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="loadbalanced"/>
    <xs:enumeration value="directip"/>
  </xs:restriction>
</xs:simpleType>

```

The **routeType** datatype is a string type that can take only 2 possible values, "loadbalanced" or "directip".

2.2.3.2 locationType

The schema definition for the **locationType** datatype is as follows.

```
<xs:simpleType name="locationType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="intranet"/>
    <xs:enumeration value="internet"/>
  </xs:restriction>
</xs:simpleType>
```

The **locationType** datatype is a string type that can take only 2 possible values, "intranet" or "internet".

2.2.3.3 credentialsType

The schema definition for the **credentialsType** datatype is as follows.

```
<xs:complexType name="credentialsType">
  <xs:sequence>
    <xs:element name="username" type="tns:max64kCharStringType" />
    <xs:element name="password" type="tns:max64kCharStringType" />
    <xs:element name="duration" type="xs:positiveInteger" />
    <xs:element name="realm" type="tns:max64kCharStringType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

The **credentialsType** datatype is a complex datatype that contains the following elements.

Element	Description
username	Type max64kCharStringType , as defined in section 2.2.3.9 . Part of the security token sent by the server to the protocol client.
password	Type max64kCharStringType , as defined in section 2.2.3.9 . Part of the security token sent by the server to the protocol client.
duration	Type positiveInteger . A positive integer that specifies how long the token is valid.
realm	Type max64kCharStringType , as defined in section 2.2.3.9 . Optional attribute. Specifies which network segment the server belongs to.

2.2.3.4 mediaRelayType

The schema definition for the **mediaRelayType** datatype is as follows.

```
<xs:complexType name="mediaRelayType">
  <xs:sequence>
    <xs:element name="location" type="tns:locationType"/>
    <xs:choice>
      <xs:element name="hostName" type="tns:hostNameType"/>
      <xs:element name="directIPAddress" type="tns:max64CharStringType"/>
    </xs:choice>
  </xs:sequence>
</xs:complexType>
```



```

    </xs:choice>
    <xs:element name="udpPort" type="xs:unsignedShort" minOccurs="0"/>
    <xs:element name="tcpPort" type="xs:unsignedShort" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

```

The **mediaRelayType** datatype is a complex datatype that specifies the details of the TURN server.

Element	Description
location	Type locationType , as defined in section 2.2.3.2 . The location of the TURN server whose IPAddress and Port information are returned to the client.
Hostname	Type hostNameType , as defined in section 2.2.3.6 . The FQDN (1) or the IP address of the TURN server. Either this element or the directIPAddress element in the mediarelayType is present.
directIPAddress	Type max64CharStringType , as defined in section 2.2.3.8 . The IPAddress of the TURN server.
udpPort	Type unsignedShort . The UDP port on which the TURN server is listening.
tcpPort	Type unsignedShort . The TCP port on which the TURN server is listening.

2.2.3.5 mediaRelayListType

The schema definition for the **mediaRelayListType** datatype is as follows.

```

<xs:complexType name="mediaRelayListType">
  <xs:sequence>
    <xs:element name="mediaRelay" type="tns:mediaRelayType" minOccurs="1"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

```

The **mediaRelayListType** datatype contains a list of elements of type **mediaRelayType**, as defined in section [2.2.3.4](#).

2.2.3.6 hostNameType

The schema definition for the **hostNameType** datatype is as follows.

```

<xs:simpleType name="hostNameType">
  <xs:restriction base="xs:string">
    <xs:pattern value="[a-zA-Z0-9_-\.\.]" />
    <xs:maxLength value="255"/>
  </xs:restriction>
</xs:simpleType>

```

The **hostNameType** datatype is a string type with a length restriction of 255 characters and the pattern of characters adhering to the regular expression defined previously in the schema.

2.2.3.7 reasonPhraseType

The schema definition for the **reasonPhraseType** datatype is as follows.

```
<xs:simpleType name="reasonPhraseType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="OK"/>
    <xs:enumeration value="Request Malformed"/>
    <xs:enumeration value="Request Too Large"/>
    <xs:enumeration value="Not Supported"/>
    <xs:enumeration value="Server Busy"/>
    <xs:enumeration value="Time Out"/>
    <xs:enumeration value="Forbidden"/>
    <xs:enumeration value="Internal Server Error"/>
    <xs:enumeration value="Other Failure"/>
    <xs:enumeration value="Version Mismatch"/>
  </xs:restriction>
</xs:simpleType>
```

The **reasonPhraseType** datatype is a string type that can only take one of the values specified in the previous enumeration.

2.2.3.8 max64CharStringType

The schema definition for the **max64CharStringType** datatype is as follows.

```
<xs:simpleType name='max64CharStringType'>
  <xs:restriction base='xs:string'>
    <xs:maxLength value='64'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>
```

The **max64CharStringType** datatype is a string type with a length restriction of 64 characters.

2.2.3.9 max64kCharStringType

The schema definition for the **max64kCharStringType** datatype is as follows.

```
<xs:simpleType name='max64kCharStringType'>
  <xs:restriction base='xs:string'>
    <xs:maxLength value='64000'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>
```

The **max64kCharStringType** datatype is a string type with a length restriction of 64000 characters.

2.2.3.10 max8CharStringType

The schema definition for the **max8CharStringType** datatype is as follows.

```
<xs:simpleType name='max8CharStringType'>
  <xs:restriction base='xs:string'>
    <xs:maxLength value='8'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>
```

```
</xs:restriction>
</xs:simpleType>
```

The **max8CharStringType** datatype is a string type with a length restriction of 8 characters.

2.2.3.11 mrasUriType

The schema definition for the **mrasUriType** datatype is as follows.

```
<xs:simpleType name='mrasUriType'>
  <xs:restriction base='xs:anyURI'>
    <xs:maxLength value='10000'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>
```

The **mrasUriType** datatype is defined as an **anyURI** type with a length restriction of 10000 characters.

2.2.3.12 versionType

The schema definition for the **versionType** datatype is as follows.

```
<xs:simpleType name='versionType'>
  <xs:restriction base='xs:string'>
    <xs:pattern value="[0-9]+\.[0-9]+"></xs:pattern>
    <xs:maxLength value="5"/>
  </xs:restriction>
</xs:simpleType>
```

The **versionType** datatype is a string type with a length restriction of 5 characters and a pattern adhering to the regular expression as defined previously in the schema.

3 Protocol Details

3.1 Server Details

3.1.1 Abstract Data Model

None.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

When a SIP SERVICE request, as described in section [2.2.1](#), is received by the server, the request MUST be processed based on the rules given in section [3.1.5](#) and a SIP SERVICE response message, as described in section [2.2.2](#), MUST be sent back to the client. The message contains the token information if the processing of the request succeeded or a detailed error description if the processing failed.

3.1.5 Message Processing Events and Sequencing Rules

The SIP SERVICE request described in section [2.2.1](#) MUST be the only message type that is accepted. The server MUST respond with a SIP SERVICE response message, as described in section [2.2.2](#), with the exceptions specified in section [3.1.5.1](#). The error codes indicate the type of the error in the request.

3.1.5.1 General Rules

When a request is received from the protocol client, it is processed based on the following rules:

If the request message type is not SIP SERVICE, the request MUST be rejected and an **UnsupportedMessageType** error response MUST be sent.

If the **contentType** of the request is not equal to "application/msrtc-media-relay-auth+xml", an **UnsupportedContentType** error response MUST be sent. The SIP header of the response MUST include an **Accept** header with the value "application/msrtc-media-relay-auth+xml".

For the previous two rules, the server does not send a XML response in its body. The error codes described in this section indicate the nature of the problem. In the checks that follow, if an error condition occurs, an XML body adhering to conditions described in section [2.2.2](#) MUST be sent. The **reasonPhrase** of the error message MUST be as described in the following sections.

3.1.5.1.1 Processing a Malformed Request

If the request does not adhere to schema rules, the request is malformed and MUST be rejected with a **reasonPhrase** set to "Request Malformed". If the request adheres to schema rules, except that the number of **credentialsRequest** in the XML request is greater than the **maxOccurs** attribute in the schema, the request is not considered malformed. In this case, the **reasonPhrase** in the error response MUST be "Request Too Large".

3.1.5.1.2 Server Policies

The server can implement policies that restrict the request that can be sent by the protocol client. For example, the server can implement policies that restrict the number of subelements that are allowed in the request. If these policies are violated, the server MAY send an error response with a "Forbidden" **reasonPhrase**

3.1.5.2 Version Validation

The **version** attribute in the request and response is of the type **versionType**, as defined in section [2.2.3.12.<5>](#)

3.1.5.2.1 Validating the Version in the Request

The version in the request SHOULD be either "3.0", "2.0" or "1.0". Otherwise, the server SHOULD return an error response with **reasonPhrase** "Version Mismatch".

3.1.5.2.2 Setting the Version in the Response

If the server cannot read the protocol client's request because it does not adhere to the schema, the **version** in the response SHOULD be the server version.

If the protocol client's request adheres to the schema:

- If a "Version Mismatch" error response is returned to the protocol client, the highest version supported by the server that is less than the protocol client's version SHOULD be returned in the response.
- Otherwise, the **version** MUST be the version in the protocol client's request.

3.1.5.3 Checking the Attributes of the Request

Schema validation MUST be done as specified in section [3.1.5.1.1](#) which checks if all the attributes of the request conform to the schema rules. If schema validation succeeds, some more checks MUST be done as follows.

The version validation is done as specified in section [3.1.5.2.1](#). The server can include an optional **serverVersion** attribute in the response which, if present, SHOULD [<6>](#) be the same as the server version. If the client's request is valid and the version is "1.0" in the protocol client's request, the server MUST NOT include the **serverVersion** attribute.

The **from** and **to** attributes MUST be SIP URIs. If the server is not able to parse the URI, the server MUST send an error message with **reasonPhrase** with the value "Request Malformed". If these attributes are valid, the values of these attributes along with **requestID** are copied to the response. The client SHOULD use the **requestID** to correlate the server response with its request in case multiple requests are pending at the same time to the server.

3.1.5.4 Generating the credentialResponse

For each **credentialRequest** in the XML request:

- If the **duration** attribute is present in the request, the lifetime of the token MUST be calculated as the minimum of the duration specified by the protocol client and the preconfigured default lifetime value. Otherwise the preconfigured default lifetime value MUST be used.

- The tokens, **username** and **password**, are generated using the lifetime calculated as stated previously and the **identity** specified by the protocol client in the XML request. The **username** and **password** generated MUST use **base64 encoding** and be included in the XML response.
- A **credentialResponse** MUST be created with the same **credentialsRequestID** as the **credentialsRequest** element in the protocol client's request. The token information MUST be in the **credentials** element and the information regarding the TURN server MUST be in the **mediaRelayList** element.
- If the **location** element was specified by the protocol client, the TURN server information related to that location only MUST be included in the **mediaRelayList** element. Otherwise, both the intranet and internet information of the TURN server, as shown in the figure titled "TURN server with two interfaces" in section [1.5](#), MUST be included in the **mediaRelayList** element.
- If the **route** attribute is "directip", the server MUST return the IPv4 or IPv6 address of the TURN server's **endpoint (5)** in the **directIPAddress** attribute in the response. If the attribute is not present or if the value is "loadbalanced", the **hostName** subelement MUST be present and SHOULD contain the IP address of the TURN server or the FQDN (1) that resolves to the TURN server's IP address.

3.1.5.5 Populating Attributes of the Response

If the request was processed successfully without an error, the **reasonPhrase** MUST be set to "OK", and the following apply:

- The **version** attribute in the response MUST be set as specified in section [3.1.5.2.2](#).
- The **from**, **to**, and **requestID** attributes MUST be included and MUST be equal to the appropriate values in the XML request.

If the **reasonPhrase** is "Request Malformed", the **from**, **to**, and **requestID** attributes MAY be included in the response. Otherwise, the **from**, **to**, and **requestID** attributes MUST be included and MUST be equal to the appropriate values in the XML request.

If an unexpected server error occurs during the processing of the request, the **reasonPhrase** MUST be "Internal Server Error."

The SIP error codes that MUST be sent for the different response messages are specified in section [3.1.5.6](#).

3.1.5.6 Error Codes

The following table shows SIP error codes corresponding to the different **reasonPhrases** in the SIP responses. Some of these **reasonPhrases** are not currently used by the server. The unused values are indicated in the table with a "No" value in the column titled "Used now".

reasonPhrase in the response	SIP error codes	Used now
OK	200	Yes
Request Malformed	400	Yes
Forbidden	403	Yes
Time Out	408	No
Request Too Large	413	Yes

reasonPhrase in the response	SIP error codes	Used now
Server Busy	486	No
Internal Server Error	500	Yes
Other Failure	500	No
Not Supported	501	No
Version Mismatch	501	Yes

The following two error responses are used when the XML body of the response is not sent.

Response	SIP error codes	Used now
UnsupportedMessageType	501	Yes
UnsupportedContentType	415	Yes

3.1.5.7 Token Generation

The A/V Edge Server and the associated TURN server share two secret keys. These keys are used to create the security tokens **username** and **password**, as defined in section [2.2.3.3](#), which the protocol clients use to authenticate themselves with the TURN server. The server MUST include the lifetime of the token and the **identity** specified by the protocol client in the XML request while generating **username**. If the **duration** attribute is present in the request, the lifetime of the token MUST be calculated as the minimum of the duration specified by the protocol client and the configured lifetime value in the server. The server MUST base64 encode the **username** and **password** before including it in the XML response.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

4 Protocol Examples

The following examples illustrate the protocol request-response sequence.

4.1 Version 2.0 LoadBalanced Request/Response

This section follows the product behavior as described in product behavior note [<7>](#).

In this example a client is making a version "2.0" request for the TURN server's intranet FQDN (1).

4.1.1 Client Request to Server

```
SERVICE sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA
SIP/2.0

Via: SIP/2.0/TLS 10.56.65.225:7012

Max-Forwards: 70

From: <sip:client@contoso.com>;tag=09f804a3b1;epid=4906ed5712

To: <sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA>

Call-ID: 7b25d8f0304c4655814760e624d7c3aa

CSeq: 1 SERVICE

Contact: <sip: client@contoso.com;opaque=user:epid:4Wj1ENTBIVSXgZyN1UZ6VgAA;gruu>

User-Agent: UCCP/2.0.6545.0 OC/2.0.6545.0 (Microsoft Office Communicator)

Proxy-Authorization: NTLM qop="auth", realm="SIP Communications Service", opaque="9574F9DA",
crand="5999c389", cnum="580", targetname="server1.contoso.com",
response="0100000064386630f99f6cb864399660"

Content-Type: application/msrtc-media-relay-auth+xml
Content-Length: 471

<request requestID="990512"
from="sip:client@contoso.com"
version="2.0"
to="sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA"
xmlns="http://schemas.microsoft.com/2006/09/sip/mrasp"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <credentialsRequest credentialsRequestID="990512">
    <identity>sip:client@contoso.com</identity>
    <location>intranet</location>
    <duration>480</duration>
  </credentialsRequest>
</request>
```

4.1.2 Server Response to Client

```
SIP/2.0 200 OK
```


Authentication-Info: NTLM rspauth="0100000000000000C614C5BD64399660", srand="B8926199", snum="862", opaque="9574F9DA", qop="auth", targetname="server1.contoso.com", realm="SIP Communications Service"

Via: SIP/2.0/TLS 10.56.65.225:7012;ms-received-port=7012;ms-received-cid=19E00

FROM: "Client"<sip:client@contoso.com>;tag=09f804a3b1;epid=4906ed5712

TO: <sip:relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA>;tag=554ef3a784

CSEQ: 1 SERVICE

CALL-ID: 7b25d8f0304c4655814760e624d7c3aa

CONTENT-LENGTH: 960

CONTENT-TYPE: application/msrtc-media-relay-auth+xml

SERVER: RTCC/3.0.0.0 Media Relay Authentication Service

ms-edge-proxy-message-trust: ms-source-type=EdgeProxyGenerated;ms-ep-fqdn=relay.contoso.com@contoso.com;ms-source-verified-user=verified

```
<?xml version="1.0"?>
<response xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  requestID="990512"
  version="2.0"
  serverVersion="3.0"
  to="sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA"
  from="sip:client@contoso.com"
  reasonPhrase="OK"
  xmlns="http://schemas.microsoft.com/2006/09/sip/mras">
  <credentialsResponse credentialsRequestID="990512">
  <credentials>
  <username>AQAgAIaoZr4EM8gBrxTJGY83uqdEgRXUunam2c+RID/vAJeJSL4YINbAYMvRAHeANv+Zew==</username>
  <password>35yqSF/p3A8gWXFHOC9YJA2kdvY=</password>
  <duration>480</duration>
  </credentials>
  <mediaRelayList>
  <mediaRelay>
  <location>intranet</location>
  <hostName>relay.contoso.com</hostName>
  <udpPort>3478</udpPort>
  <tcpPort>443</tcpPort>
  </mediaRelay>
  </mediaRelayList>
  </credentialsResponse>
</response>
```

4.2 Version 3.0 DirectIP Request/Response

This section follows the product behavior as described in product behavior note [<8>](#).

In this example a client is making a version "3.0" request for the direct ip internet address of a TURN server that is configured with both IPv4 and IPv6 addresses.

4.2.1 Client Request to Server

```
SERVICE sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA
SIP/2.0

Via: SIP/2.0/TLS 10.56.65.225:7012

Max-Forwards: 70

From: <sip:client@contoso.com>;tag=09f804a3b1;epid=4906ed5712

To: <sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA>

Call-ID: 7b25d8f0304c4655814760e624d7c3aa

CSeq: 1 SERVICE

Contact: <sip: client@contoso.com;opaque=user:epid:4Wj1eNtBIVSXgZyN1UZ6VgAA;gruu>

User-Agent: UCCP/2.0.6545.0 OC/2.0.6545.0 (Microsoft Office Communicator)

Proxy-Authorization: NTLM qop="auth", realm="SIP Communications Service", opaque="9574F9DA",
crand="5999c389", cnum="580", targetname="server1.contoso.com",
response="0100000064386630f99f6cb864399660"

Content-Type: application/msrtc-media-relay-auth+xml
Content-Length: 471

<request requestID="990512"
from="sip:client@contoso.com"
version="3.0"
to="sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA"
xmlns="http://schemas.microsoft.com/2006/09/sip/mrasp"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
  <credentialsRequest credentialsRequestID="990512">
    <identity>sip:client@contoso.com</identity>
    <location>internet</location>
    <duration>480</duration>
    <route>directip</route>
  </credentialsRequest>
</request>
```

4.2.2 Server Response to Client

```
SIP/2.0 200 OK

Authentication-Info: NTLM rspauth="0100000000000000C614C5BD64399660", srand="B8926199",
snum="862", opaque="9574F9DA", qop="auth", targetname="server1.contoso.com", realm="SIP
Communications Service"

Via: SIP/2.0/TLS 10.56.65.225:7012;ms-received-port=7012;ms-received-cid=19E00

FROM: "Client"<sip:client@contoso.com>;tag=09f804a3b1;epid=4906ed5712

TO: <sip:
relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA>;tag=554ef3a784
```

CSEQ: 1 SERVICE

CALL-ID: 7b25d8f0304c4655814760e624d7c3aa

CONTENT-LENGTH: 960

CONTENT-TYPE: application/msrtc-media-relay-auth+xml

SERVER: RTCC/3.0.0.0 Media Relay Authentication Service

ms-edge-proxy-message-trust: ms-source-type=EdgeProxyGenerated;ms-ep-fqdn=relay.contoso.com@contoso.com;ms-source-verified-user=verified

```
<?xml version="1.0"?>
<response xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
requestID="990512"
version="3.0"
serverVersion="3.0"
to="sip: relay.contoso.com@contoso.com;gruu;opaque=srvr:MRAS:OKPDbAVxIEKtPh2g624vPAAA"
from="sip:client@contoso.com"
reasonPhrase="OK"
xmlns="http://schemas.microsoft.com/2006/09/sip/mrasp">

  <credentialsResponse credentialsRequestID="990512">
<credentials>
<username>AQAgAIaoZr4EM8gBrxTJGY83uqdEgRXUunam2c+RID/vAJeJSL4YINbAYMvRAHeANv+Zew==</username>
  <password>35yqSF/p3A8gWXFHOC9YJA2kdvY=</password>
  <duration>480</duration>
</credentials>
<mediaRelayList>
  <mediaRelay>
    <location>internet</location>
    <directIPAddress>192.0.2.254</directIPAddress>
    <udpPort>3478</udpPort>
    <tcpPort>443</tcpPort>
  </mediaRelay>
  <mediaRelay>
    <location>internet</location>
    <directIPAddress>2001:0DB8::943c:fa53</directIPAddress>
    <udpPort>3478</udpPort>
    <tcpPort>443</tcpPort>
  </mediaRelay>
</mediaRelayList>
</credentialsResponse>
</response>
```

5 Security

5.1 Security Considerations for Implementers

5.1.1 Keyed Hash Function

This protocol uses the HMAC-**SHA-256**[<9>](#) and HMAC-SHA-1 keyed hash functions for generating tokens.

5.1.2 Underlying Transport

Because the security tokens sent in this protocol response are in plain text, all the protocol clients communicate with the A/V Edge Server through a connection secured by TLS, as specified in section [2.1](#).

5.1.3 Authentication

Using this protocol, it is possible for unauthorized protocol clients to request tokens and obtain them. Also, a protocol client without proper authorization can send audio/video edge authentication protocol requests with different identities and obtain security tokens. This type of unauthorized activity precludes attempts by the TURN server to perform resource management based on protocol client identity that is present as the hash in the token. Consequently, the A/V Edge Server authenticates the protocol clients and verifies the request before distributing tokens.

5.2 Index of Security Parameters

Security Parameter	Section
shared-secret keys between the A/V Edge Server and the TURN server	3.1.5.7
HMAC- SHA-1 keyed hash algorithm, as specified in [RFC2104] .	5.1.1
HMAC-SHA-256 keyed hash algorithm, as specified in [RFC2104] .	5.1.1
Token generation algorithm	3.1.5.7
TLS certificate, if TLS is used	2.1

6 Appendix A: MS-AVEDGEA Schema

This section follows the product behavior as described in product behavior note [<10>](#).

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema targetNamespace="http://schemas.microsoft.com/2006/09/sip/mrasp"
xmlns:tns="http://schemas.microsoft.com/2006/09/sip/mrasp"
xmlns:xs="http://www.w3.org/2001/XMLSchema" elementFormDefault="qualified"
attributeFormDefault="unqualified">

  <xs:annotation>
    <xs:documentation xml:lang="en">
      XML Schema for the MS-AVEDGEA
    </xs:documentation>
  </xs:annotation>

  <!-- REQUEST ELEMENT-->
  <xs:element name="request" type="tns:requestType" />

  <!-- RESPONSE ELEMENT-->
  <xs:element name="response" type="tns:responseType" />

  <!-- REQUEST TYPE-->
  <xs:complexType name="requestType">
    <xs:sequence>

      <xs:element name="credentialsRequest" type="tns:credentialsRequestType" minOccurs="1"
maxOccurs="100" />
    </xs:sequence>

    <xs:attribute name="requestID" type="tns:max64CharStringType" use="required" />
    <xs:attribute name="version" type="tns:versionType" use="required" />
    <xs:attribute name="to" type="tns:mrasUriType" use="required" />
    <xs:attribute name="from" type="tns:mrasUriType" use="required" />
    <xs:attribute name="route" type="tns:routeType" use="optional" default="loadbalanced" />
  </xs:complexType>

  <!-- RESPONSE TYPE-->
  <xs:complexType name="responseType">
    <xs:sequence>
      <xs:element name="credentialsResponse" type="tns:credentialsResponseType" minOccurs="0"
maxOccurs="100" />
    </xs:sequence>

    <xs:attribute name="requestID" type="tns:max64CharStringType" />
    <xs:attribute name="version" type="tns:versionType" use="required" />
    <xs:attribute name="serverVersion" type="tns:versionType" use="optional"/>
    <xs:attribute name="to" type="tns:mrasUriType" />
    <xs:attribute name="from" type="tns:mrasUriType" />
    <xs:attribute name="reasonPhrase" type="tns:reasonPhraseType" use="required" />
  </xs:complexType>

  <!-- CREDENTIALS REQUEST TYPE-->
```

```

<xs:complexType name="credentialsRequestType">
  <xs:sequence>
    <xs:element name="identity" type="tns:max64kCharStringType" />
    <xs:element name="location" type="tns:locationType" minOccurs="0" />
    <xs:element name="duration" type="xs:positiveInteger" minOccurs="0" />
  </xs:sequence>
  <xs:attribute name="credentialsRequestID" type="tns:max64CharStringType" use="required"
/>
</xs:complexType>

<!-- CREDENTIALS RESPONSE TYPE -->
<xs:complexType name="credentialsResponseType">
  <xs:sequence>
    <xs:element name="credentials" type="tns:credentialsType" />
    <xs:element name="mediaRelayList" type="tns:mediaRelayListType" />
  </xs:sequence>
  <xs:attribute name="credentialsRequestID" type="tns:max64CharStringType" use="required"
/>
</xs:complexType>

<!-- ROUTE TYPE -->
<xs:simpleType name="routeType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="loadbalanced" />
    <xs:enumeration value="directip" />
  </xs:restriction>
</xs:simpleType>

<!-- LOCATION TYPE -->
<xs:simpleType name="locationType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="intranet" />
    <xs:enumeration value="internet" />
  </xs:restriction>
</xs:simpleType>
<!-- CREDENTIALS TYPE -->
<xs:complexType name="credentialsType">
  <xs:sequence>
    <xs:element name="username" type="tns:max64kCharStringType" />
    <xs:element name="password" type="tns:max64kCharStringType" />
    <xs:element name="duration" type="xs:positiveInteger" />
    <xs:element name="realm" type="tns:max64kCharStringType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<!-- MEDIA RELAY LIST TYPE -->
<xs:complexType name="mediaRelayListType">
  <xs:sequence>
    <xs:element name="mediaRelay" type="tns:mediaRelayType" minOccurs="1"
maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>

<!-- MEDIA RELAY TYPE -->
<xs:complexType name="mediaRelayType">
  <xs:sequence>
    <xs:element name="location" type="tns:locationType" />

```

```

    <xs:choice>
      <xs:element name="hostName" type="tns:hostNameType" />
      <xs:element name="directIPAddress" type="tns:max64CharStringType" />
    </xs:choice>
    <xs:element name="udpPort" type="xs:unsignedShort" minOccurs="0" />
    <xs:element name="tcpPort" type="xs:unsignedShort" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

<!--DOMAIN NAME TYPE-->
<xs:simpleType name="hostNameType">
  <xs:restriction base="xs:string">
    <xs:pattern value="[a-zA-Z0-9_-\.\]" />
    <xs:maxLength value="255" />
  </xs:restriction>
</xs:simpleType>

<!--RESPONSE REASON PHRASE-->
<xs:simpleType name="reasonPhraseType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="OK" />
    <xs:enumeration value="Request Malformed" />
    <xs:enumeration value="Request Too Large" />
    <xs:enumeration value="Not Supported" />
    <xs:enumeration value="Server Busy" />
    <xs:enumeration value="Time Out" />
    <xs:enumeration value="Forbidden" />
    <xs:enumeration value="Internal Server Error" />
    <xs:enumeration value="Other Failure" />
    <xs:enumeration value="Version Mismatch" />
  </xs:restriction>
</xs:simpleType>

<!--MAX 64 CHAR STRING TYPE-->
<xs:simpleType name="max64CharStringType">
  <xs:restriction base="xs:string">
    <xs:maxLength value="64">
  </xs:maxLength>
  </xs:restriction>
</xs:simpleType>

<!--MAX 64k CHAR STRING TYPE-->
<xs:simpleType name="max64kCharStringType">
  <xs:restriction base="xs:string">
    <xs:maxLength value="64000">
  </xs:maxLength>
  </xs:restriction>
</xs:simpleType>

<!--MAX 8 CHAR STRING TYPE-->
<xs:simpleType name="max8CharStringType">
  <xs:restriction base="xs:string">
    <xs:maxLength value="8">
  </xs:maxLength>
  </xs:restriction>

```

```

</xs:simpleType>

<!-- mrasUri -->
<xs:simpleType name="mrasUriType">
  <xs:restriction base="xs:anyURI">
    <xs:maxLength value="10000">
      </xs:maxLength>
    </xs:restriction>
  </xs:simpleType>

<xs:simpleType name='versionType'>
  <xs:restriction base='xs:string'>
    <xs:pattern value="[0-9]+\.[0-9]+"></xs:pattern>
  <xs:maxLength value="5"/>
  </xs:restriction>
</xs:simpleType>
</xs:schema>

```

6.1 Office Communications Server 2007 Schema

This section follows the product behavior as described in product behavior note [<11>](#).

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema
  targetNamespace="http://schemas.microsoft.com/2006/09/sip/mrasp"
  xmlns:tns="http://schemas.microsoft.com/2006/09/sip/mrasp"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">
  <xs:annotation>
    <xs:documentation xml:lang="en">
      XML Schema for the MS-AVEDGEA
    </xs:documentation>
  </xs:annotation>

  <!-- REQUEST ELEMENT-->
  <xs:element name="request" type="tns:requestType" />

  <!-- RESPONSE ELEMENT-->
  <xs:element name="response" type="tns:responseType" />

  <!-- REQUEST TYPE-->
  <xs:complexType name="requestType">
    <xs:sequence>
      <!-- number of credentials requests will be bound within MRAS-->
      <xs:element name="credentialsRequest" type="tns:credentialsRequestType" minOccurs="1"
maxOccurs="100"/>
    </xs:sequence>
    <xs:attribute name="requestID" type="tns:max64CharStringType" use="required"/>
    <xs:attribute name="version" type="tns:max8CharStringType" use="required"/>
    <xs:attribute name="to" type="tns:mrasUriType" use="required"/>
    <xs:attribute name="from" type="tns:mrasUriType" use="required"/>
    <xs:attribute name="route" type="tns:routeType" use="optional" default="loadbalanced"/>
  </xs:complexType>

  <!-- RESPONSE TYPE-->

```



```

<xs:complexType name="responseType">
  <xs:sequence>
    <xs:element name="credentialsResponse" type="tns:credentialsResponseType" minOccurs="0"
maxOccurs="100"/>
  </xs:sequence>
  <xs:attribute name="requestID" type="tns:max64CharStringType"/>
  <xs:attribute name="version" type="tns:max8CharStringType" use="required"/>
  <xs:attribute name="to" type="tns:mrasUriType"/>
  <xs:attribute name="from" type="tns:mrasUriType"/>
  <xs:attribute name="reasonPhrase" type="tns:reasonPhraseType" use="required"/>
</xs:complexType>

<!-- CREDENTIALS REQUEST TYPE-->
<xs:complexType name="credentialsRequestType">
  <xs:sequence>
    <xs:element name="identity" type="tns:max64kCharStringType" />
    <xs:element name="location" type="tns:locationType" minOccurs="0"/>
    <xs:element name="duration" type="xs:positiveInteger" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="credentialsRequestID" type="tns:max64CharStringType" use="required"/>
</xs:complexType>

<!-- RESPONSE TYPE-->
<xs:complexType name="credentialsResponseType">
  <xs:sequence>
    <xs:element name="credentials" type="tns:credentialsType" />
    <xs:element name="mediaRelayList" type="tns:mediaRelayListType" />
  </xs:sequence>
  <xs:attribute name="credentialsRequestID" type="xs:string" use="required"/>
</xs:complexType>

<!--ROUTE TYPE-->
<xs:simpleType name="routeType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="loadbalanced"/>
    <xs:enumeration value="directip"/>
  </xs:restriction>
</xs:simpleType>

<!--LOCATION TYPE-->
<xs:simpleType name="locationType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="intranet"/>
    <xs:enumeration value="internet"/>
  </xs:restriction>
</xs:simpleType>

<!--CREDENTIALS TYPE-->
<xs:complexType name="credentialsType">
  <xs:sequence>
    <xs:element name="username" type="tns:max64kCharStringType" />
    <xs:element name="password" type="tns:max64kCharStringType" />
    <xs:element name="duration" type="xs:positiveInteger" />
    <xs:element name="realm" type="tns:max64kCharStringType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<!--MEDIA RELAY LIST TYPE-->
<xs:complexType name="mediaRelayListType">

```

```

    <xs:sequence>
      <xs:element name="mediaRelay" type="tns:mediaRelayType" minOccurs="1"
maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>

<!--MEDIA RELAY TYPE-->
<xs:complexType name="mediaRelayType">
  <xs:sequence>
    <xs:element name="location" type="tns:locationType"/>
    <xs:choice>
      <xs:element name="hostName" type="tns:hostNameType"/>
      <xs:element name="directIPAddress" type="tns:max64CharStringType"/>
    </xs:choice>
    <xs:element name="udpPort" type="xs:unsignedShort" minOccurs="0"/>
    <xs:element name="tcpPort" type="xs:unsignedShort" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

<!--DOMAIN NAME TYPE-->
<xs:simpleType name="hostNameType">
  <xs:restriction base="xs:string">
    <xs:pattern value="[a-zA-Z0-9_-\.\]*" />
    <xs:maxLength value="255"/>
  </xs:restriction>
</xs:simpleType>

<!--RESPONSE REASON PHRASE-->
<xs:simpleType name="reasonPhraseType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="OK"/>
    <xs:enumeration value="Request Malformed"/>
    <xs:enumeration value="Request Too Large"/>
    <xs:enumeration value="Not Supported"/>
    <xs:enumeration value="Server Busy"/>
    <xs:enumeration value="Time Out"/>
    <xs:enumeration value="Forbidden"/>
    <xs:enumeration value="Internal Server Error"/>
    <xs:enumeration value="Other Failure"/>
    <xs:enumeration value="Version Mismatch"/>
  </xs:restriction>
</xs:simpleType>

<!--MAX 64 CHAR STRING TYPE-->
<xs:simpleType name='max64CharStringType'>
  <xs:restriction base='xs:string'>
    <xs:maxLength value='64'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>

<!--MAX 1024 CHAR STRING TYPE-->
<xs:simpleType name='max64kCharStringType'>
  <xs:restriction base='xs:string'>
    <xs:maxLength value='64000'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>

<!--MAX 8 CHAR STRING TYPE-->
<xs:simpleType name='max8CharStringType'>

```

```
<xs:restriction base='xs:string'>
  <xs:maxLength value='8'></xs:maxLength>
</xs:restriction>
</xs:simpleType>

<!--mrasUri-->
<xs:simpleType name='mrasUriType'>
  <xs:restriction base='xs:anyURI'>
    <xs:maxLength value='10000'></xs:maxLength>
  </xs:restriction>
</xs:simpleType>

</xs:schema>
```

7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Office Communications Server 2007
- Microsoft® Office Communications Server 2007 R2
- Microsoft® Office Communicator 2007
- Microsoft® Office Communicator 2007 R2
- Microsoft® Lync™ Server 2010
- Microsoft® Lync™ 2010
- Microsoft® Lync Server 15 Technical Preview
- Microsoft® Lync 15 Technical Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.1.1.2:](#) Office Communications Server 2007, Office Communicator 2007: The **requestType** is the same as in the document except for the type of the version attribute which is defined as a string with 8 characters.

[<2> Section 2.2.2.1.2:](#) Office Communications Server 2007, Office Communicator 2007: The **responseType** is the same as in the document except that the **serverVersion** attribute is not present and the type of the version attribute is "tns:max8CharStringType".

`<xs:attribute name="version" type="tns:max8CharStringType" use="required"/>`

[<3> Section 2.2.2.1.2:](#) Office Communications Server 2007 R2, Office Communicator 2007 R2, Lync Server 2010, Lync 2010: This value SHOULD be "2.0".

[<4> Section 2.2.2.1.3.2:](#) Office Communications Server 2007, Office Communicator 2007, Office Communications Server 2007 R2, Office Communicator 2007 R2, Lync Server 2010, Lync 2010: This behavior is not supported.

[<5> Section 3.1.5.2:](#) Office Communications Server 2007, Office Communicator 2007: The **version** attribute is defined as a string with 8 characters.

[<6> Section 3.1.5.3:](#) Office Communications Server 2007, Office Communicator 2007: This behavior is not supported.

[<7> Section 4.1:](#) Office Communications Server 2007, Office Communicator 2007: This behavior is not supported.

[<8> Section 4.2:](#) Office Communications Server 2007, Office Communicator 2007: This behavior is not supported.

[<9> Section 5.1.1:](#) Office Communications Server 2007, Office Communicator 2007, Office Communications Server 2007 R2, Office Communicator 2007 R2, Lync Server 2010, Lync 2010: behavior not supported.

[<10> Section 6:](#) Office Communications Server 2007, Office Communicator 2007: This behavior is not supported.

[<11> Section 6.1:](#) Supported in Office Communications Server 2007, Office Communicator 2007 only.

8 Change Tracking

This section identifies changes that were made to the [MS-AVEDGEA] protocol document between the June 2011 and January 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
1.5 Prerequisites/Preconditions	Updated the version used by the server.	Y	Content updated due to protocol revision.
2.2.1.1.1 request Element Definition	Added type information.	N	Content updated.
2.2.1.1.2 requestType Type Definition	Updated the product behavior note to include the definition of the version attribute.	N	Product behavior note updated.
2.2.1.1.2 requestType Type Definition	Updated the product behavior note to include the definition of the version attribute.	N	Product behavior note updated.
2.2.1.1.2 requestType Type Definition	Server Behavior moved to a different section.	N	Content updated.
2.2.1.1.3.1 credentialsRequest Element Definition	Removed proscriptive information regarding server behavior.	Y	Content removed.
2.2.1.1.3.2 credentialsRequestType Type Definition	Server Behavior moved to a different section.	N	Content updated.
2.2.1.1.3.2 credentialsRequestType Type Definition	Added type information.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.2.1.2 responseType Type Definition	Updated the serverVersion returned by the server in the responseType.	Y	Content updated due to protocol revision.
2.2.2.1.2 responseType Type Definition	Added product behavior note to identify serverVersion value for previous releases.	Y	New product behavior note added.
2.2.2.1.2 responseType Type Definition	Added a link to a different section for the definition of malformed.	N	Content updated.
2.2.2.1.2 responseType Type Definition	Added type information.	N	Content updated.
2.2.2.1.3.2 credentialsResponseType Type Definition	Moved the contents of former section "credentialsResponseType Child Elements" to this section, and removed section "credentialsResponseType Child Elements".	N	Content updated.
2.2.2.1.3.2 credentialsResponseType Type Definition	Added content indicating the support of IPv6 addresses in this revision of the protocol.	Y	Content updated due to protocol revision.
2.2.2.1.3.2 credentialsResponseType Type Definition	Added product behavior note specifying that IPv6 is not supported by previous versions of the product.	Y	New product behavior note added.
2.2.2.1.3.2 credentialsResponseType Type Definition	Modified server behavior.	N	Content updated.
2.2.2.1.3.2 credentialsResponseType Type Definition	Added type information.	N	Content updated.
2.2.3.3 credentialsType	Added type information.	N	Content updated.
3.1.5.1 General Rules	Clarified that the server can implement policies that restrict client requests.	Y	Content updated.
3.1.5.1 General Rules	Moved some of the bullets to a different section.	N	Content updated.
3.1.5.1.1 Processing a Malformed Request	Moved this content as a subsection of 3.1.5.1.	N	Content updated.
3.1.5.1.2 Server Policies	Moved this content as a subsection of section 3.1.5.1.	N	Content updated.
3.1.5.2	Added support for new version in the	Y	New content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Version Validation	Request.		added due to protocol revision.
3.1.5.2.1 Validating the Version in the Request	Removed the product behavior note about the "version" attribute in the client's request equaling the server version.	N	Product behavior note removed.
3.1.5.2.1 Validating the Version in the Request	Added support for new version in the Request.	Y	New content added due to protocol revision.
3.1.5.2.2 Setting the Version in the Response	Removed the product behavior note that states the version in the response MUST be the server version.	N	Product behavior note removed.
3.1.5.2.2 Setting the Version in the Response	Clarified wording around the version returned by the server when a version mismatch occurs between a client and server.	N	Content updated.
3.1.5.3 Checking the Attributes of the Request	Changed SHOULD to MUST making the description of the from and to fields consistent.	N	Content updated.
3.1.5.3 Checking the Attributes of the Request	Changed SHOULD to MUST making the description of the from and to fields consistent.	N	Content updated.
3.1.5.3 Checking the Attributes of the Request	Updated attributes.	N	Content updated.
3.1.5.4 Generating the credentialResponse	Moved server behavior to this section.	N	Content updated.
3.1.5.5 Populating Attributes of the Response	Changed the word might to the prescriptive word MAY to identify that the from, to and requestid fields are not filled by the product but could be filled by an implementor.	N	Content updated.
4.1 Version 2.0 LoadBalanced Request/Response	Added protocol example for a version "2.0" FQDN request/response.	Y	New content added due to protocol revision.
4.2 Version 3.0 DirectIP Request/Response	Added a protocol example for a version "3.0" directip address request/response.	Y	New content added due to protocol revision.
5.1.1 Keyed Hash Function	Added content describing new hash function used in this revision.	Y	New content added due to protocol

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			revision.
5.1.1 Keyed Hash Function	Added behavior note identifying that the new hash function is not supported by previous revisions of this protocol.	Y	New product behavior note added.
5.1.3 Authentication	Added behavior note identifying that the new hash function is not supported by previous revisions of this protocol.	Y	New product behavior note added.
5.2 Index of Security Parameters	Added new hash algorithm to the Security Parameter table.	Y	New content added due to protocol revision.
6.1 Office Communications Server 2007 Schema	Updated the schema.	N	Content updated.

9 Index

A

Abstract data model
[server](#) 20
[Applicability](#) 9

B

[Basic Datatypes message](#) 15
[credentialsType](#) 16
[hostNameType](#) 17
[locationType](#) 16
[max64CharStringType](#) 18
[max64kCharStringType](#) 18
[max8CharStringType](#) 18
[mediarelayListType](#) 17
[mediarelayType](#) 16
[mrasUriType](#) 19
[reasonPhraseType](#) 18
[routeType](#) 15
[versionType](#) 19

C

[Capability negotiation](#) 9
[Change tracking](#) 38

D

Data model - abstract
[server](#) 20

E

Examples
[request from client to server](#) 24
server response to client ([section 4.1.2](#) 24,
[section 4.2](#) 25)

F

[Fields - vendor-extensible](#) 9

G

[Glossary](#) 6

H

Higher-layer triggered events
[server](#) 20

I

Implementer - security considerations
[authentication](#) 28
[keyed hash function](#) 28
[underlying transport](#) 28

[Index of security parameters](#) 28
[Informative references](#) 7
Initialization
[server](#) 20
[Introduction](#) 6

M

Message processing
[server](#) 20
[check request attributes](#) 21
[error codes](#) 22
[general rules](#) 20
[generate the credentialResponse](#) 21
[populate response attributes](#) 22
[token generation](#) 23
[version validation](#) 21
[Message Syntax](#) 11
Messages
[Basic Datatypes](#) 15
[credentialsType](#) 16
[hostNameType](#) 17
[locationType](#) 16
[mediarelay Type](#) 16
[mediarelayListType](#) 17
[reasonPhraseType](#) 18
[routeType](#) 15
[message syntax](#) 11
[Request by the Client](#) 11
[Response by the Server](#) 13
[transport](#) 11

N

[Normative references](#) 6

O

Other local events
[server](#) 23
[Overview \(synopsis\)](#) 7

P

[Parameters - security index](#) 28
[Preconditions](#) 8
[Prerequisites](#) 8
[Product behavior](#) 36

R

References
[informative](#) 7
[normative](#) 6
[Relationship to other protocols](#) 8
[Request by the Client example](#) 24
[Request by the Client message](#) 11

Response by the Server example ([section 4.1.2](#) 24, [section 4.2](#) 25) [Versioning](#) 9
[Response by the Server message](#) 13

S

[Schema](#) 29
[Office Communications Server 2007](#) 32

Security

implementer considerations

[authentication](#) 28
[keyed hash function](#) 28
[underlying transport](#) 28
[parameter index](#) 28

Sequencing rules

[server](#) 20
[check request attributes](#) 21
[error codes](#) 22
[general](#) 20
[generate the credentialResponse](#) 21
[populate response attributes](#) 22
[token generation](#) 23
[version validation](#) 21

Server

[abstract data model](#) 20
[higher-layer triggered events](#) 20
[initialization](#) 20
[message processing](#) 20
[check request attributes](#) 21
[error codes](#) 22
[general rules](#) 20
[generate the credentialResponse](#) 21
[populate response attributes](#) 22
[token generation](#) 23
[version validation](#) 21
[other local events](#) 23
[sequencing rules](#) 20
[check request attributes](#) 21
[error codes](#) 22
[general](#) 20
[generate the credentialResponse](#) 21
[populate response attributes](#) 22
[token generation](#) 23
[version validation](#) 21
[timer events](#) 23
[timers](#) 20
[Standards assignments](#) 10

T

Timer events

[server](#) 23

Timers

[server](#) 20

[Tracking changes](#) 38

[Transport](#) 11

Triggered events - higher-layer

[server](#) 20

V

[Vendor-extensible fields](#) 9