

[MS-OXCMAPIHTTP]:

Messaging Application Programming Interface (MAPI) Extensions for HTTP

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplq@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the

documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Preliminary

Revision Summary

Date	Revision History	Revision Class	Comments
11/18/2013	1.0	New	Released new document.
2/10/2014	2.0	Major	Significantly changed the technical content.
4/30/2014	2.1	Minor	Clarified the meaning of the technical content.
7/31/2014	3.0	Major	Significantly changed the technical content.
10/30/2014	4.0	Major	Significantly changed the technical content.
3/16/2015	5.0	Major	Significantly changed the technical content.

Preliminary

Table of Contents

1	Introduction	8
1.1	Glossary	8
1.2	References	10
1.2.1	Normative References	10
1.2.2	Informative References	10
1.3	Overview	11
1.4	Relationship to Other Protocols	12
1.5	Prerequisites/Preconditions	13
1.6	Applicability Statement	13
1.7	Versioning and Capability Negotiation	13
1.8	Vendor-Extensible Fields	13
1.9	Standards Assignments.....	13
2	Messages.....	14
2.1	Transport.....	14
2.2	Message Syntax.....	14
2.2.1	Common Data Types.....	14
2.2.1.1	AddressBookPropertyValue Structure.....	14
2.2.1.2	AddressBookTaggedPropertyValue Structure	14
2.2.1.3	AddressBookPropertyValueList Structure.....	15
2.2.1.4	AddressBookTypedPropertyValue Structure	15
2.2.1.5	AddressBookFlaggedPropertyValue Structure.....	16
2.2.1.6	AddressBookFlaggedPropertyValueWithType Structure.....	16
2.2.1.7	AddressBookPropertyRow Structure	17
2.2.1.8	LargePropertyTagArray Structure	17
2.2.2	POST Method	18
2.2.2.1	Common Request Format.....	18
2.2.2.2	Common Response Format.....	19
2.2.3	Header Fields	20
2.2.3.1	Host Header Field.....	20
2.2.3.2	Entity Header Fields	20
2.2.3.2.1	Content-Length Header Field.....	20
2.2.3.2.2	Content-Type Header Field	20
2.2.3.2.3	Set-Cookie Header Field	20
2.2.3.2.4	Cookie Header Field	20
2.2.3.2.5	Transfer-Encoding Header Field.....	20
2.2.3.3	X-Header Fields	21
2.2.3.3.1	X-RequestType Header Field	21
2.2.3.3.2	X-RequestId Header Field	22
2.2.3.3.3	X-ResponseCode Header Field.....	22
2.2.3.3.4	X-ClientInfo Header Field.....	23
2.2.3.3.5	X-PendingPeriod Header Field	23
2.2.3.3.6	X-ClientApplication Header Field	23
2.2.3.3.7	X-ServerApplication Header Field.....	23
2.2.3.3.8	X-ExpirationInfo Header Field	24
2.2.3.3.9	X-ElapsedTime Header Field.....	24
2.2.3.3.10	X-StartTime Header Field	24
2.2.3.3.11	X-DeviceInfo Header Field	24
2.2.4	Request Types for Mailbox Server Endpoint.....	24
2.2.4.1	Connect Request Type	24
2.2.4.1.1	Connect Request Type Request Body	24
2.2.4.1.2	Connect Request Type Success Response Body	25
2.2.4.1.3	Connect Request Type Failure Response Body.....	27

2.2.4.2	Execute Request Type	27
2.2.4.2.1	Execute Request Type Request Body.....	27
2.2.4.2.2	Execute Request Type Success Response Body	28
2.2.4.2.3	Execute Request Type Failure Response Body	29
2.2.4.3	Disconnect Request Type	30
2.2.4.3.1	Disconnect Request Type Request Body	30
2.2.4.3.2	Disconnect Request Type Success Response Body	30
2.2.4.3.3	Disconnect Request Type Failure Response Body	31
2.2.4.4	NotificationWait Request Type	31
2.2.4.4.1	NotificationWait Request Type Request Body.....	31
2.2.4.4.2	NotificationWait Request Type Success Response Body	32
2.2.4.4.3	NotificationWait Request Type Failure Response Body	33
2.2.5	Request Types for Address Book Server Endpoint	33
2.2.5.1	Bind Request Type	33
2.2.5.1.1	Bind Request Type Request Body	33
2.2.5.1.2	Bind Request Type Success Response Body	34
2.2.5.1.3	Bind Request Type Failure Response Body	35
2.2.5.2	Unbind Request Type.....	35
2.2.5.2.1	Unbind Request Type Request Body.....	36
2.2.5.2.2	Unbind Request Type Success Response Body.....	36
2.2.5.2.3	Unbind Request Type Failure Response Body	37
2.2.5.3	CompareMinIds Request Type.....	37
2.2.5.3.1	CompareMinIds Request Type Request Body.....	37
2.2.5.3.2	CompareMinIds Request Type Success Response Body.....	38
2.2.5.3.3	CompareMinIds Request Type Failure Response Body	39
2.2.5.4	DnToMinId Request Type	40
2.2.5.4.1	DnToMinId Request Type Request Body.....	40
2.2.5.4.2	DnToMinId Request Type Success Response Body	40
2.2.5.4.3	DnToMinId Request Type Failure Response Body	41
2.2.5.5	GetMatches Request Type	42
2.2.5.5.1	GetMatches Request Type Request Body	42
2.2.5.5.2	GetMatches Request Type Success Response Body	44
2.2.5.5.3	GetMatches Request Type Failure Response Body	45
2.2.5.6	GetPropList Request Type	46
2.2.5.6.1	GetPropList Request Type Request Body.....	46
2.2.5.6.2	GetPropList Request Type Success Response Body	47
2.2.5.6.3	GetPropList Request Type Failure Response Body	47
2.2.5.7	GetProps Request Type.....	48
2.2.5.7.1	GetProps Request Type Request Body	48
2.2.5.7.2	GetProps Request Type Success Response Body	49
2.2.5.7.3	GetProps Request Type Failure Response Body.....	50
2.2.5.8	GetSpecialTable Request Type	50
2.2.5.8.1	GetSpecialTable Request Type Request Body	50
2.2.5.8.2	GetSpecialTable Request Type Success Response Body	51
2.2.5.8.3	GetSpecialTable Request Type Failure Response Body.....	52
2.2.5.9	GetTemplateInfo Request Type	53
2.2.5.9.1	GetTemplateInfo Request Type Request Body	53
2.2.5.9.2	GetTemplateInfo Request Type Success Response Body	54
2.2.5.9.3	GetTemplateInfo Request Type Failure Response Body.....	55
2.2.5.10	ModLinkAtt Request Type.....	55
2.2.5.10.1	ModLinkAtt Request Type Request Body	55
2.2.5.10.2	ModLinkAtt Request Type Success Response Body	57
2.2.5.10.3	ModLinkAtt Request Type Failure Response Body.....	57
2.2.5.11	ModProps Request Type.....	58
2.2.5.11.1	ModProps Request Type Request Body	58
2.2.5.11.2	ModProps Request Type Success Response Body	59
2.2.5.11.3	ModProps Request Type Failure Response Body.....	59

2.2.5.12	QueryRows Request Type.....	60
2.2.5.12.1	QueryRows Request Type Request Body	60
2.2.5.12.2	QueryRows Request Type Success Response Body	61
2.2.5.12.3	QueryRows Request Type Failure Response Body	63
2.2.5.13	QueryColumns Request Type.....	63
2.2.5.13.1	QueryColumns Request Type Request Body	63
2.2.5.13.2	QueryColumns Request Type Success Response Body	64
2.2.5.13.3	QueryColumns Request Type Failure Response Body.....	65
2.2.5.14	ResolveNames Request Type.....	65
2.2.5.14.1	ResolveNames Request Type Request Body	65
2.2.5.14.2	ResolveNames Request Type Success Response Body	66
2.2.5.14.3	ResolveNames Request Type Failure Response Body	68
2.2.5.15	ResortRestriction Request Type.....	68
2.2.5.15.1	ResortRestriction Request Type Request Body	68
2.2.5.15.2	ResortRestriction Request Type Success Response Body	69
2.2.5.15.3	ResortRestriction Request Type Failure Response Body	71
2.2.5.16	SeekEntries Request Type.....	71
2.2.5.16.1	SeekEntries Request Type Request Body	71
2.2.5.16.2	SeekEntries Request Type Success Response Body	73
2.2.5.16.3	SeekEntries Request Type Failure Response Body.....	74
2.2.5.17	UpdateStat Request Type.....	74
2.2.5.17.1	UpdateStat Request Type Request Body	74
2.2.5.17.2	UpdateStat Request Type Success Response Body	75
2.2.5.17.3	UpdateStat Request Type Failure Response Body	76
2.2.5.18	GetMailboxUrl Request Type.....	77
2.2.5.18.1	GetMailboxUrl Request Type Request Body	77
2.2.5.18.2	GetMailboxUrl Request Type Success Response Body	77
2.2.5.18.3	GetMailboxUrl Request Type Failure Response Body.....	78
2.2.5.19	GetAddressBookUrl Request Type	79
2.2.5.19.1	GetAddressBookUrl Request Type Request Body	79
2.2.5.19.2	GetAddressBookUrl Request Type Success Response Body.....	79
2.2.5.19.3	GetAddressBookUrl Request Type Failure Response Body	80
2.2.6	PING Request Type	81
2.2.7	Response Meta-Tags	81
3	Protocol Details.....	82
3.1	Client Details.....	82
3.1.1	Abstract Data Model.....	82
3.1.2	Timers	82
3.1.3	Initialization.....	82
3.1.4	Higher-Layer Triggered Events	82
3.1.5	Message Processing Events and Sequencing Rules	82
3.1.5.1	Creating a Session Context by Using the Connect or Bind Request Type.....	82
3.1.5.2	Sending Remote Operations by Using the Execute Request Type.....	83
3.1.5.3	Keeping a Session Context Alive by Using the PING Request Type.....	83
3.1.5.4	Destroying a Session Context by Using the Disconnect or Unbind Request Type	83
3.1.5.5	Requesting Notification by Using the NotificationWait Request Type	83
3.1.5.6	Handling a Chunked Response	84
3.1.5.7	Reconnecting and Establishing a New Session Context.....	84
3.1.6	Timer Events.....	85
3.1.7	Other Local Events.....	85
3.1.7.1	Handling Communication Failure Sending a Request.....	85
3.1.7.2	Handling Communication Failure Reading a Response.....	85
3.2	Server Details.....	85
3.2.1	Abstract Data Model.....	85
3.2.2	Timers	85

3.2.3	Initialization	86
3.2.4	Higher-Layer Triggered Events	86
3.2.5	Message Processing Events and Sequencing Rules	86
3.2.5.1	Responding to a Connect or Bind Request Type Request	86
3.2.5.2	Responding to All Request Type Requests	86
3.2.5.3	Responding to a PING Request Type	87
3.2.5.4	Responding to a Disconnect or Unbind Request Type Request	87
3.2.5.5	Responding to a NotificationWait Request Type Request	87
3.2.5.6	Reconnecting and Establishing a New Session Context Server	88
3.2.6	Timer Events	88
3.2.7	Other Local Events	88
4	Protocol Examples	89
4.1	Establish a New Session Context	89
4.2	Issue ROP Commands to the Server	89
4.3	Refresh an Idle Session Context	91
4.4	Re-Establish a Timed-Out Connection to the Server	91
4.5	Disconnect from the Server	92
5	Security	94
5.1	Security Considerations for Implementers	94
5.2	Index of Security Parameters	94
6	Appendix A: Product Behavior	95
7	Change Tracking	96
8	Index	98

Preliminary

1 Introduction

The Messaging Application Programming Interface (MAPI) Extensions for HTTP enable a client to access personal messaging data and directory data on a server by sending HTTP requests and receiving responses returned on the same HTTP connection. This protocol extends HTTP/1.1 and HTTP Over TLS (**HTTPS**).

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are specific to this document:

address book: A collection of **Address Book objects**, each of which are contained in any number of address lists.

address book container: An **Address Book object** that describes an address list.

address book hierarchy table: A collection of **address book containers** arranged in a hierarchy.

Address Book object: An entity in an **address book** that contains a set of attributes (1), each attribute with a set of associated values.

address creation table: A table containing information about the templates that an address book server supports for creating new email addresses.

ambiguous name resolution (ANR): A search algorithm that permits a client to search multiple naming-related attributes (2) on objects by way of a single clause of the form "(anr=value)" in a Lightweight Directory Access Protocol (LDAP) search filter. This permits a client to query for an object when the client possesses some identifying material related to the object but does not know which attribute of the object contains that identifying material.

ASCII: The American Standard Code for Information Interchange (ASCII) is an 8-bit character-encoding scheme based on the English alphabet. ASCII codes represent text in computers, communications equipment, and other devices that work with text. ASCII refers to a single 8-bit ASCII character or an array of 8-bit ASCII characters with the high bit of each character set to zero.

binary large object (BLOB): A discrete packet of data that is stored in a database and is treated as a sequence of uninterpreted bytes.

code page: An ordered set of characters of a specific script in which a numerical index (code-point value) is associated with each character. Code pages are a means of providing support for character sets (1) and keyboard layouts used in different countries. Devices such as the display and keyboard can be configured to use a specific code page and to switch from one code page (such as the United States) to another (such as Portugal) at the user's request.

cookie: A small data file that is stored on a user's computer and carries state information between participating protocol servers and protocol clients.

distinguished name (DN): A name that uniquely identifies an object by using the relative distinguished name (RDN) for the object, and the names of container objects and domains that contain the object. The distinguished name (DN) identifies the object and its location in a tree.

endpoint: A communication port that is exposed by an application server for a specific shared service and to which messages can be addressed.

entry ID: See EntryID.

globally unique identifier (GUID): A term used interchangeably with universally unique identifier (UUID) in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms specified in [\[RFC4122\]](#) or [\[C706\]](#) must be used for generating the **GUID**. See also universally unique identifier (UUID).

Hypertext Transfer Protocol (HTTP): An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS): An extension of **HTTP** that securely encrypts and decrypts webpage requests.

language code identifier (LCID): A 32-bit number that identifies the user interface human language dialect or variation that is supported by an application or a client computer.

mailbox: A message store that contains email, calendar items, and other Message objects for a single recipient.

Minimal Entry ID: A property of an **Address Book object** that can be used to uniquely identify the object.

name service provider interface (NSPI): A method of performing address-book-related operations on Active Directory.

NT LAN Manager (NTLM) Authentication Protocol: A protocol using a challenge-response mechanism for authentication (2) in which clients are able to verify their identities without sending a password to the server. It consists of three messages, commonly referred to as Type 1 (negotiation), Type 2 (challenge) and Type 3 (authentication). For more information, see [\[MS-NLMP\]](#).

property tag: A 32-bit value that contains a property type and a property ID. The low-order 16 bits represent the property type. The high-order 16 bits represent the property ID.

recipient: An entity that can receive email messages.

remote operation (ROP): An operation that is invoked against a server. Each ROP represents an action, such as delete, send, or query. A ROP is contained in a ROP buffer for transmission over the wire.

restriction: A filter used to map some domain into a subset of itself, by passing only those items from the domain that match the filter. Restrictions can be used to filter existing Table objects or to define new ones, such as search folder (2) or rule criteria.

ROP request: See ROP request buffer.

ROP response: See ROP response buffer.

Session Context: A server-side partitioning for client isolation. All client actions against a server are scoped to a specific Session Context. All messaging objects and data that is opened by a client are isolated to a Session Context.

Unicode: A character encoding standard developed by the Unicode Consortium that represents almost all of the written languages of the world. The **Unicode** standard [\[UNICODE5.0.0/2007\]](#)

provides three forms (UTF-8, UTF-16, and UTF-32) and seven schemes (UTF-8, UTF-16, UTF-16 BE, UTF-16 LE, UTF-32, UTF-32 LE, and UTF-32 BE).

Uniform Resource Identifier (URI): A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [\[RFC3986\]](#).

Uniform Resource Locator (URL): A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-LCID] Microsoft Corporation, "[Windows Language Code Identifier \(LCID\) Reference](#)".

[MS-OXABREF] Microsoft Corporation, "[Address Book Name Service Provider Interface \(NSPI\) Referral Protocol](#)".

[MS-OXCDATA] Microsoft Corporation, "[Data Structures](#)".

[MS-OXCNOTIF] Microsoft Corporation, "[Core Notifications Protocol](#)".

[MS-OXCROPS] Microsoft Corporation, "[Remote Operations \(ROP\) List and Encoding Protocol](#)".

[MS-OXCRPC] Microsoft Corporation, "[Wire Format Protocol](#)".

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol](#)".

[MS-OXNSPI] Microsoft Corporation, "[Exchange Server Name Service Provider Interface \(NSPI\) Protocol](#)".

[MS-OXOABK] Microsoft Corporation, "[Address Book Object Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

1.2.2 Informative References

[C706] The Open Group, "DCE 1.1: Remote Procedure Call", C706, August 1997, <https://www2.opengroup.org/ogsys/catalog/c706>

[MS-NLMP] Microsoft Corporation, "[NT LAN Manager \(NTLM\) Authentication Protocol](#)".

[MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".

[RFC1738] Berners-Lee, T., Masinter, L., and McCahill, M., Eds., "Uniform Resource Locators (URL)", RFC 1738, December 1994, <http://www.ietf.org/rfc/rfc1738.txt>

[RFC3986] Berners-Lee, T., Fielding, R., and Masinter, L., "Uniform Resource Identifier (URI): Generic Syntax", STD 66, RFC 3986, January 2005, <http://www.ietf.org/rfc/rfc3986.txt>

[RFC4122] Leach, P., Mealling, M., and Salz, R., "A Universally Unique Identifier (UUID) URN Namespace", RFC 4122, July 2005, <http://www.ietf.org/rfc/rfc4122.txt>

[RFC896] Nagle, J., "Congestion Control in IP/TCP Internetworks", RFC 896, January 1984, <http://www.ietf.org/rfc/rfc896.txt>

[UNICODE5.0.0/2007] The Unicode Consortium, "Unicode 5.0.0", 2007, <http://www.unicode.org/versions/Unicode5.0.0/>

1.3 Overview

The MAPI Extensions for HTTP enable a client to communicate with a server to access personal messaging and directory data. When the client initiates communication with the server, the server creates a virtual **Session Context** and returns a session context **cookie** to the client. Once established, the Session Context allows the client to perform operations on the server. Even if network connectivity is interrupted, use of the virtual Session Context, in conjunction with the session context cookie, allows the server to keep the messaging object open and gives the client the ability to reconnect with the Session Context and to continue using the open objects. The client does not have to maintain a persistent, long-lived connection with the server.

Communications with the server are divided into three major function areas: (1) initiating and establishing connection with the server; (2) issuing **remote operations (ROPs)** to the **mailbox** server and sending commands to the **address book** server; (3) terminating communications with the server. If events on the server require more than a configured length of time, the client can either terminate the network connection and re-establish the connection at a later time or continue to keep the connection alive until the processing is completed and the server is ready to return the results to the client.

The following figure shows a simplified overview of client and server communications for a mailbox.

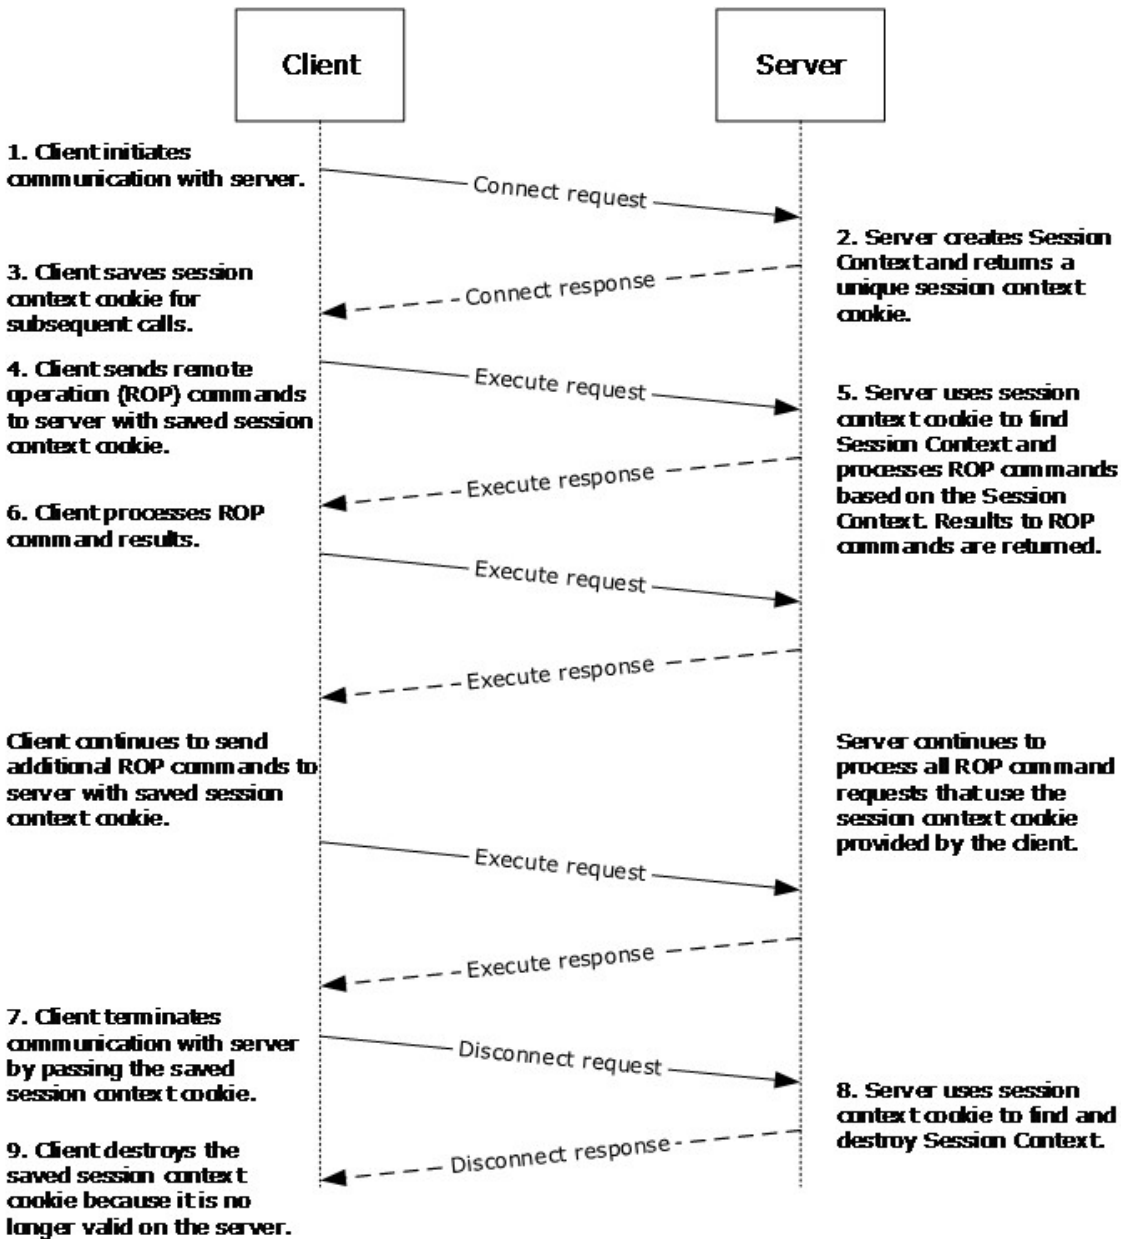


Figure 1: Client/server communications for a mailbox

1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), to determine support for this protocol and to identify the target **endpoint** to use for the requests.

This protocol uses **HTTP**, as described in [\[RFC2616\]](#), and **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

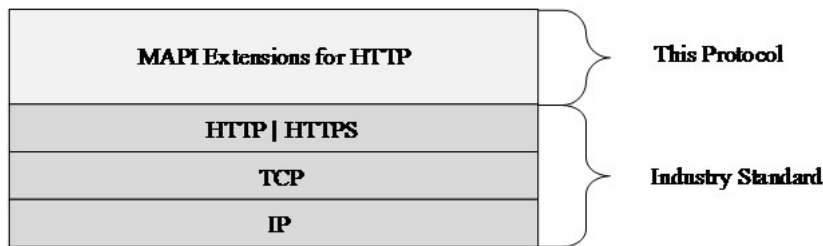


Figure 2: This protocol in relation to other protocols

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

1.5 Prerequisites/Preconditions

It is assumed that a client has discovered support for this protocol via information returned by an Autodiscover response that contains the **Uniform Resource Identifier (URI)** the client will use to access either the mailbox server endpoint or the address book server endpoint.

1.6 Applicability Statement

This protocol is applicable to environments that require access to private mailbox messaging end-user data and **NSPI**.

1.7 Versioning and Capability Negotiation

This specification covers versioning and capability negotiation issues in the following areas:

Supported Transports: This protocol uses the transport described in section [2.1](#).

Protocol Versions: The **EMSMDB** protocol interface for this protocol has a single version number of 1.

Security and Authentication Methods: This protocol supports the following authentication methods: basic authentication scheme, **NT LAN Manager (NTLM) Authentication Protocol**, and Negotiate.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

The protocol MUST use HTTPS secure requests using version 1.1 of HTTP, as specified in [\[RFC2616\]](#) and [\[RFC2818\]](#). All requests MUST use the **POST** method. **POST** supports uploading a request block and returning a response block.

The Autodiscover response, as specified in [\[MS-OXDCLI\]](#), contains a URI that the client will use to access the two endpoints used by this protocol: the mailbox server endpoint (same as that used for the **EMSMDB** interface) and the address book server endpoint (same as that used for the **NSPI** interface).

2.2 Message Syntax

2.2.1 Common Data Types

In addition to the structures defined in the following subsections, this protocol uses data types and structures that are defined in [\[MS-OXCRPC\]](#) section 2.2, [\[MS-OXNSPI\]](#) section 2.3, and [\[MS-OXCADATA\]](#) section 2, as needed, in the request and response bodies defined in section [2.2.4](#), section [2.2.5](#), and section [2.2.6](#).

2.2.1.1 AddressBookPropertyValue Structure

The **AddressBookPropertyValue** structure includes a property value.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31					
HasValue (optional)										PropertyValue (optional) (variable)																										
...																																				

HasValue (optional) (1 byte): An unsigned integer when the **PropertyType** ([\[MS-OXCADATA\]](#) section 2.11.1) is known to be either **PtypString**, **PtypString8**, **PtypBinary** or **PtypMultiple** ([\[MS-OXCADATA\]](#) section 2.11.1). This field MUST contain either **TRUE** (0x01) or **FALSE** (0x00). A **TRUE** value means that the **PropertyValue** field is present, whereas a **FALSE** value indicates that the **PropertyValue** field is not present. The **PropertyType** is not present within this structure, but conditional based on the context in which this structure is used.

PropertyValue (optional) (variable): A **PropertyValue** structure ([\[MS-OXCADATA\]](#) section 2.11.2.1), unless **HasValue** is present with a value of **FALSE** (0x00). This field is always present when **HasValue** is not present.

2.2.1.2 AddressBookTaggedPropertyValue Structure

The **AddressBookTaggedPropertyValue** structure includes property type, property identifier and property value.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
PropertyType										PropertyId																					
PropertyValue (variable)																															
...																															

PropertyType (2 bytes): An unsigned integer that identifies the data type of the property value ([MS-OXCDATA] section 2.11.1).

PropertyId (2 bytes): An unsigned integer that identifies the property.

PropertyValue (variable): An **AddressBookPropertyValue** structure, see section 2.2.1.1.

2.2.1.3 AddressBookPropertyValueList Structure

The **AddressBookPropertyValueList** structure contains a list of properties and their values.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
PropertyValueCount										PropertyValues (variable)																					
...																															

PropertyValueCount (4 bytes): An unsigned integer that specifies the number of structures contained in the **PropertyValues** field.

PropertyValues (variable): An array of **AddressBookTaggedPropertyValue** structures, as specified in section 2.2.1.2.

2.2.1.4 AddressBookTypedPropertyValue Structure

The **AddressBookTypedPropertyValue** structure includes a property type and property value.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
PropertyType										PropertyValue (variable)																					
...																															

PropertyType (2 bytes): An unsigned integer that identifies the data type of the property value ([MS-OXCDATA] section 2.11.1).

PropertyValue (variable): An **AddressBookPropertyValue** structure, see section 2.2.1.1.

2.2.1.5 AddressBookFlaggedPropertyValue Structure

The **AddressBookFlaggedPropertyValue** structure includes a flag to indicate whether the value was successfully retrieved or not.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31					
Flag										PropertyValue (optional) (variable)																										
...																																				

Flag (1 byte): An unsigned integer. This value of this flag determines what is conveyed in the **PropertyValue** field. The flag MUST be set to one of the values in the following table.

Flag value	Meaning
0x0	The PropertyValue field will be an AddressBookPropertyValue structure containing a value compatible with the property type implied by the context.
0x1	The PropertyValue field is not present.
0xA	The PropertyValue field will be an AddressBookPropertyValue structure containing an unsigned 32-bit integer, see section 2.2.1.1 . This value is an error code of property type PtypErrorCode ([MS-OXCDATA] section 2.11.1), as specified in [MS-OXCDATA] section 2.4.2, that indicates why the property value is not present.

PropertyValue (optional) (variable): An **AddressBookPropertyValue** structure, as specified in section [2.2.1.1](#), unless the **Flag** field is set to 0x1.

2.2.1.6 AddressBookFlaggedPropertyValueWithType Structure

The **AddressBookFlaggedPropertyValueWithType** structure includes both the property type and a flag giving more information about the property value.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
PropertyType																Flag						PropertyValue (optional) (variable)									
...																															

PropertyType (2 bytes): An unsigned integer that identifies the data type of the property value ([\[MS-OXCDATA\]](#) section 2.11.1).

Flag (1 byte): An unsigned integer. This flag MUST be set one of three possible values: 0x0, 0x1, or 0xA, which determines what is conveyed in the **PropertyValue** field. For the interpretation of this flag, refer to the table in section [2.2.1.5](#).

PropertyValue (optional) (variable): An **AddressBookPropertyValue** structure, as specified in section [2.2.1.1](#), unless **Flag** field is set to 0x01. The value MUST be compatible with the value of the **PropertyType** field.

2.2.1.7 AddressBookPropertyRow Structure

The **AddressBookPropertyRow** structure a list of property values without including the **property tags** that correspond to the property values. This structure is used when the list of property tags is known in advance.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1		
Flags										ValueArray (variable)																							
...																																	

Flags (1 byte): An unsigned integer that indicates whether all property values are present and without error in the **ValueArray** field. The flag MUST be set to one of the values in the following table.

Flag value	Meaning
0x0	The ValueArray field contains either an AddressBookPropertyValue structure, see section 2.2.1.1 , if the type of the property is specified, or an AddressBookTypedPropertyValue structure, see section 2.2.1.4 , if the type of the property is PtypUnspecified ([MS-OXCDATA] section 2.11.1).
0x1	The ValueArray field contains either an AddressBookFlaggedPropertyValue structure, see section 2.2.1.5 , if the type of the property is specified, or an AddressBooklaggedPropertyValueWithType structure, see section 2.2.1.6 , if the type of the property is PtypUnspecified ([MS-OXCDATA] section 2.11.1).

ValueArray (variable): An array of variable-sized structures. Each structure in the array MUST be interpreted based on the **Flag** field.

2.2.1.8 LargePropertyTagArray Structure

The **LargePropertyTagArray** structure contains a list of property tags.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
PropertyTagCount																															
PropertyTags (variable)																															
...																															

PropertyTagCount (4 bytes): An unsigned integer that specifies the number of structures contained in the **PropertyTags** field. The number is limited to 100,000.

PropertyTags (variable): An array of **PropertyTag** structures ([\[MS-OXCDATA\]](#) section 2.9), each of which contains a property tag that specifies a property.

2.2.2 POST Method

All requests in this protocol are made using the **POST** method, as specified in [\[RFC2616\]](#).

The destination server, request path, and optional parameters for accessing a given mailbox are returned in URIs from Autodiscover. A separate URI is returned in Autodiscover for each endpoint. The URI is used by the server to route a request to the appropriate mailbox server.

This protocol uses a common request and common response format for all endpoints. Body content that depends on the request type, as specified in section [2.2.5](#), follows the common request or common response to complete the request or response.

All requests **MUST** be authenticated prior to being processed by server. No anonymous requests are allowed.

2.2.2.1 Common Request Format

The common client request across all endpoints used in this protocol has the following format.

```
POST <Autodiscover-provided endpoint> HTTP/1.1
Host: <URL of the host server>
Content-Length: <length of REQUEST BODY>
Content-Type: application/mapi-http
X-RequestType: <?>
X-RequestId: <id>
X-ClientApplication:<client version>

<REQUEST BODY>
```

The client request **MUST** contain the following headers:

- **Host**, as specified in section [2.2.4.1](#)
- **X-RequestType**, as specified in section [2.2.4.3.1](#)
- **X-RequestId**, as specified in section [2.2.4.3.2](#)
- **Content-Type**, as specified in section [2.2.4.2.2](#)
- **Content-Length**, as specified in section [2.2.4.2.1](#)

Other headers are allowed based on the request type used. For details about all headers allowed, see section [2.2.3](#).

2.2.2.2 Common Response Format

The common server response across all endpoints used in this protocol has one of the following formats, depending on whether the response is chunked.

Non-chunked response:

```
HTTP/1.1 200 OK
Content-Length: <length of META-TAGS, ADDITIONAL HEADERS and RESPONSE BODY>
Content-Type: application/mapi-http
X-RequestType: <?>
X-ResponseCode: <?>
X-RequestId: <?>
X-ServerApplication:<server version>

<META-TAGS>
<ADDITIONAL HEADERS>
<RESPONSE BODY>
```

Chunked response:

```
HTTP/1.1 200 OK
Transfer-Encoding: chunked
Content-Type: application/mapi-http
X-RequestType: <?>
X-ResponseCode: <?>
X-RequestId: <?>
X-ServerApplication:<server version>

<META-TAGS>
<ADDITIONAL HEADERS>
<RESPONSE BODY>
```

The first line of all server responses begins with the **POST** method response specified in [\[RFC2616\]](#), "HTTP/1.1". It also contains an HTTP status code, as described in this section.

Both non-chunked and chunked responses **MUST** contain the following headers:

- **Content-Type**, specified in section [2.2.4.2.2](#)
- **X-RequestType**, specified in section [2.2.4.3.1](#)
- **X-ResponseCode**, specified in section [2.2.3.3.3](#)
- **X-RequestId**, specified in section [2.2.3.3.2](#)

In addition to these headers, a non-chunked response contains the **Content-Length** header, specified in section [2.2.4.2.1](#), and a chunked response contains the **Transfer-Encoding** header, specified in section [2.2.3.2.5](#).

The server returns a "200 OK" HTTP status code even if the request failed for all non-exceptional failures. The server deviates from a "200 OK" HTTP status code only for authentication ("401 Access Denied"), redirection ("302 Redirect"), or if there is some exceptional condition for which the server cannot continue. Exceptional failures will produce a "500 Internal Server Error" status code or other 5xx-level status codes. For more details about the status codes, see [\[RFC2616\]](#) section 10.

For success or non-exceptional conditions (most failures), the server will return "200 OK" and an **X-ResponseCode** header. This header contains a numerical value that indicates the specific failure that occurred on the server. An **X-ResponseCode** of 0 (zero) means success from the perspective of the protocol transport, and the client parses the RESPONSE BODY based on the request that was issued. If the **X-ResponseCode** is not zero, the server populates the RESPONSE BODY with diagnostic information.

2.2.3 Header Fields

The following sections specify the header fields that are used by this protocol.

2.2.3.1 Host Header Field

The **Host** header field specifies the server and the endpoint that are being used for the connection. The value of this header field is in the format of a **URL** and port number, as specified in [\[RFC2616\]](#) section 14.23.

2.2.3.2 Entity Header Fields

The following sections specify the entity header fields that are used by this protocol.

2.2.3.2.1 Content-Length Header Field

The **Content-Length** header field contains the length, in bytes, of the request or response body, as specified in section [2.2.5](#). This header is not used in chunked responses.

2.2.3.2.2 Content-Type Header Field

The **Content-Type** header field specifies the type of content. The **Content-Type** header MUST contain the string "application/mapi-http" on requests. The **Content-Type** header MUST contain the string "application/mapi-http" on responses with **X-ResponseCode** header of 0. If **X-ResponseCode** is non-zero, the **Content-Type** header MUST contain the string "text/html".

2.2.3.2.3 Set-Cookie Header Field

The **Set-Cookie** header field contains an opaque value of the form <cookie name>=<opaque string>. For details on the use of this header field, see section [3.2.5.1](#). Any **Set-Cookie** header value sent by the server to the client in response to a request is saved by the client for future use, as specified in section [3.1.1](#).

2.2.3.2.4 Cookie Header Field

The **Cookie** header field contains the name and value of one or more cookies. The name and value of a cookie are formatted as <cookie name>=<opaque string>. Multiple cookies are separated by a semi-colon. For example: cookie1=value1; cookie2=value2. The client's use of cookies is specified in section [3.1.5.1](#).

2.2.3.2.5 Transfer-Encoding Header Field

The **Transfer-Encoding** header field contains the string "chunked" transfer coding, as specified in [\[RFC2616\]](#) section 3.6. The use of the **Transfer-Encoding** header field is specified in section [3.1.5.2.1](#) and section [3.2.5.2](#).

2.2.3.3 X-Header Fields

The following sections specify the X-header fields that are used by this protocol.

2.2.3.3.1 X-RequestType Header Field

The **X-RequestType** header identifies the request type for a mailbox server endpoint or an address book server endpoint. For details about these endpoints, see section [2.2.4](#) and section [2.2.5](#), respectively.

The following table lists the possible values for the **X-RequestType** header.

Value	Description	Reference
Connect	Indicates the Connect request type for the mailbox server endpoint.	Section 2.2.4.1
Execute	Indicates the Execute request type for the mailbox server endpoint.	Section 2.2.4.2
Disconnect	Indicates the Disconnect request type for the mailbox server endpoint.	Section 2.2.4.3
NotificationWait	Indicates the NotificationWait request type for the mailbox server endpoint.	Section 2.2.4.4
PING	Indicates the PING request type for the mailbox server endpoint and address book server endpoint.	Section 2.2.4.5
Bind	Indicates the Bind request type for the address book server endpoint.	Section 2.2.5.1
Unbind	Indicates the Unbind request type for the address book server endpoint.	Section 2.2.5.2
CompareMIds	Indicates the CompareMinIds request type for the address book server endpoint.	Section 2.2.5.3
DNToMId	Indicates the DNToMinId request type for the address book server endpoint.	Section 2.2.5.4
GetMatches	Indicates the GetMatches request type for the address book server endpoint.	Section 2.2.5.5
GetPropList	Indicates the GetPropList request type for the address book server endpoint.	Section 2.2.5.6
GetProps	Indicates the GetProps request type for the address book server endpoint.	Section 2.2.5.7
GetSpecialTable	Indicates the GetSpecialTable request type for the address book server endpoint.	Section 2.2.5.8
GetTemplateInfo	Indicates the GetTemplateInfo request type for the address book server endpoint.	Section 2.2.5.9
ModLinkAtt	Indicates the ModLinkAtt request type for the address book server endpoint.	Section 2.2.5.10
ModProps	Indicates the ModProps request type for the address book server	Section 2.2.5.11

	endpoint.	
QueryColumns	Indicates the QueryColumns request type for the address book server endpoint.	Section 2.2.5.13
QueryRows	Indicates the QueryRows request type for the address book server endpoint.	Section 2.2.5.12
ResolveNames	Indicates the ResolveNames request type for the address book server endpoint.	Section 2.2.5.14
ResortRestriction	Indicates the ResortRestriction request type for the address book server endpoint.	Section 2.2.5.15
SeekEntries	Indicates the SeekEntries request type for the address book server endpoint.	Section 2.2.5.16
UpdateStat	Indicates the UpdateStat request type for the address book server endpoint.	Section 2.2.5.17
GetMailboxUrl	Indicates the GetMailboxUrl request type for the specified mailbox server endpoint.	Section 2.2.5.18
GetAddressBookUrl	Indicates the GetAddressBookUrl request type for the address book server endpoint.	Section 2.2.5.19

2.2.3.3.2 X-RequestId Header Field

The **X-RequestId** header field MUST be a combination of a globally unique value in the format of a **GUID** followed by an increasing decimal counter which MUST increase with every new HTTP request (for example, "{E2EA6C1C-E61B-49E9-9CFB-38184F907552}:123456"). The GUID portion of the **X-RequestId** header MUST be unique across all Session Contexts and MUST NOT change for the life of the Session Context. The client MUST send this header on every request and the server MUST return this header with the same information in the response back to the client.

2.2.3.3.3 X-ResponseCode Header Field

The **X-ResponseCode** header contains a numerical value that represents the specific result that occurred on the server.

An **X-ResponseCode** of 0 (zero) means success from the perspective of the protocol transport, and the client SHOULD parse the response body based on the request that was issued. If the **X-ResponseCode** is not zero, the client parses the response body for diagnostic information.

The response codes that can be returned in the **X-ResponseCode** header are listed in the following table.

Code	Error	Description
0	Success	The request was properly formatted and accepted.
1	Unknown Failure	The request produced an unknown failure.
2	Invalid Verb	The request has an invalid verb.
3	Invalid Path	The request has an invalid path.

4	Invalid Header	The request has an invalid header.
5	Invalid Request Type	The request has an invalid X-RequestType header.
6	Invalid Context Cookie	The request has an invalid session context cookie.
7	Missing Header	The request has a missing required header.
8	Anonymous Not Allowed	The request is anonymous, but anonymous requests are not accepted.
9	Too Large	The request is too large.
10	Context Not Found	The Session Context is not found.
11	No Privilege	The client has no privileges to the Session Context.
12	Invalid Request Body	The request body is invalid.
13	Missing Cookie	The request is missing a required cookie.
14	Reserved	This value MUST be ignored by the client.
15	Invalid Sequence	The request has violated the sequencing requirement of one request at a time per Session Context.
16	Endpoint Disabled	The endpoint is disabled.
17	Invalid Response	The response is invalid.
18	Endpoint Shutting Down	The endpoint is shutting down.

2.2.3.3.4 X-ClientInfo Header Field

The **X-ClientInfo** header field MUST be a combination of a globally unique value in the format of a GUID followed by a decimal counter (for example, "{2EF33C39-49C8-421C-B876-CDF7F2AC3AA0}:123"). The GUID portion of the **X-ClientInfo** header MUST be unique across all client instances and MUST be the same for all requests from a client instance. The client MUST use a different decimal counter when establishing a new Session Context with the server endpoint. The client can use the same decimal counter when re-establishing a Session Context with the server endpoint. The client MUST send this header on every request and the server MUST return this header with the same information in the response back to the client.

2.2.3.3.5 X-PendingPeriod Header Field

The **X-PendingPeriod** header field, returned by the server, specifies the number of milliseconds to be expected between keep-alive **PENDING** meta-tags in the response stream while the server is executing the request. The default value of this header is 15000 milliseconds (15 seconds).

For more details about client keep-alive functions, see section [3.1.5.3](#). For more details about the server keep-alive function, see section [3.2.5.3](#).

2.2.3.3.6 X-ClientApplication Header Field

On every request, the client includes the **X-ClientApplication** header to indicate to the server what version of the client is being used. The value of this header field has the following format: "Outlook/15.xx.xxxx.xxxx". For details about client versions, see [\[MS-OXCRPC\]](#) section 3.2.4.1.3.

2.2.3.3.7 X-ServerApplication Header Field

On every response, the server includes the **X-ServerApplication** header to indicate to the client what server version is being used. The value of this header field has the following format: "Exchange/15.xx.xxxx.xxx". For details about server versions, see [\[MS-OXCRPC\]](#) section 3.1.4.1.3.

2.2.3.3.8 X-ExpirationInfo Header Field

The **X-ExpirationInfo** header is returned by the server in every response to notify the client of the number of milliseconds before the server times-out the Session Context.

2.2.3.3.9 X-ElapsedTime Header Field

The **X-ElapsedTime** header specifies the amount of time, in milliseconds, that the server took to process the request. This header is returned by the server as an additional header in the final response.

2.2.3.3.10 X-StartTime Header Field

The **X-StartTime** header specifies the time that the server started processing the request. This header is returned by the server as an additional header in the final response. This header follows the date/time format, as specified in [\[RFC2616\]](#).

2.2.3.3.11 X-DeviceInfo Header Field

The **X-DeviceInfo** header specifies information used by devices positioned between the client and server endpoints and is to be considered opaque to the client and server. This field is intended for use by intermediate devices and SHOULD be discarded by the client or server endpoint upon receipt. The client endpoint MUST not send this header in a request to a server endpoint. The server MUST not send this header in a response to a client endpoint. A device positioned between the client and server can add the **X-DeviceInfo** header on a request to the server endpoint and add the **X-DeviceInfo** header on a response to a client endpoint. The format of the **X-DeviceInfo** header field is not specified in this document and is specific to the device(s) positioned between the client and server endpoints. The size of this field MUST not exceed 64 characters. The information in this header can be used to help diagnose communication issues between client and server endpoints.

2.2.4 Request Types for Mailbox Server Endpoint

The mailbox server endpoint supports the four request types that are specified in section [2.2.4.1](#) through section [2.2.4.4](#). The mailbox server endpoint also supports the **PING** request type, which is specified in section [2.2.6](#). The **X-RequestType** header, specified in section [2.2.3.3.1](#), identifies which request type is being used.

The request and response bodies associated with the specific request types are each a raw binary data **binary large object (BLOB)** that follows the common request format, as specified in section [2.2.2.1](#), and the common response format, as specified in section [2.2.2.2](#). Request and response bodies are separated from the common request and response by a blank line, as specified in [\[RFC2616\]](#).

2.2.4.1 Connect Request Type

The **Connect** request type is used to establish a Session Context with the server, as specified in section [3.1.5.1](#) and section [3.1.5.7](#).

2.2.4.1.1 Connect Request Type Request Body

The **Connect** request type request body contains the following fields. For more details about the fields, see the *[in]* parameters in [\[MS-OXCRPC\]](#) section 3.1.4.1.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
UserDn (variable)																															
...																															
Flags																															
DefaultCodePage																															
LcidSort																															
LcidString																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

UserDn (variable): A null-terminated **ASCII** string that specifies the **DN** of the user who is requesting the connection. This field is equivalent to the *szUserDN* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

Flags (4 bytes): A set of flags that designate the type of connection being requested. This field is equivalent to the *ulFlags* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

DefaultCodePage (4 bytes): An unsigned integer that specifies the **code page** that the server is being requested to use for string values of properties. This field is equivalent to the *ulCpid* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

LcidSort (4 bytes): An unsigned integer that specifies the **language code identifier (LCID)**, as specified in [\[MS-LCID\]](#), to be used for sorting. This field is equivalent to the *ulLcidSort* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

LcidString (4 bytes): An unsigned integer that specifies the language code identifier (LCID), as specified in [\[MS-LCID\]](#), to be used for everything other than sorting. This field is equivalent to the *ulLcidString* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field. This field is equivalent to the *cbAuxIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. This field is equivalent to the *rgbAuxIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

2.2.4.1.2 Connect Request Type Success Response Body

The **Connect** request type success response body contains the following fields. For more details about the fields, see the *[out]* parameters in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
PollsMax																															
RetryCount																															
RetryDelay																															
DnPrefix (variable)																															
...																															
DisplayName (variable)																															
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXCRPC\]](#) section 3.1.4.1 as the Return Values.

PollsMax (4 bytes): An unsigned integer that specifies the number of milliseconds for the maximum polling interval. This field is equivalent to the *pcmsPollsMax* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.1.

RetryCount (4 bytes): An unsigned integer that specifies the number of times to retry request types. This field is equivalent to the *pcRetry* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.1.

RetryDelay (4 bytes): An unsigned integer that specifies the number of milliseconds for the client to wait before retrying a failed request type. This field is equivalent to the *pcmsRetryDelay* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.1.

DnPrefix (variable): A null-terminated ASCII string that specifies the DN prefix to be used for building message **recipients**. This field is equivalent to the *szDNPrefix* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.1.

DisplayName (variable): A null-terminated **Unicode** string that specifies the display name of the user who is specified in the **UserDn** field of the **Connect** request type request body. This field is equivalent to the *szDisplayName* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.1.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field. This field is equivalent to the *pcbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. This field is equivalent to the *rgbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

2.2.4.1.3 Connect Request Type Failure Response Body

The **Connect** request type failure response body contains the following fields. For more details about the fields, see the *[out]* parameters in [\[MS-OXCRPC\]](#) section 3.1.4.1.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field. This field is equivalent to the *pcbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. This field is equivalent to the *rgbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.1](#).

2.2.4.2 Execute Request Type

The **Execute** request type is used by the client to send remote operation requests to the server.

2.2.4.2.1 Execute Request Type Request Body

The **Execute** request type request body contains the following fields. For more details about the fields, see the *[in]* parameters in [\[MS-OXCRPC\]](#) section 3.1.4.2.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
RopBufferSize																															
RopBuffer (variable)																															

...
MaxRopOut
AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

Flags (4 bytes): A set of flags that specify to the server how to build the **ROP responses** in the **RopBuffer** field of the **Execute** request type success response body, as specified in section 2.2.4.2.2. This field is equivalent to the *pulFlags* input parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

RopBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **RopBuffer** field. This field is equivalent to the *cbIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

RopBuffer (variable): An array of bytes that constitute the **ROP requests** payload. The size of this field, in bytes, is specified by the **RopBufferSize** field. This field is equivalent to the *rgbIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

MaxRopOut (4 bytes): An unsigned integer that specifies the maximum size for the **RopBuffer** field of the **Execute** request type success response body. This field is equivalent to the *pcbOut* input parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field. This field is equivalent to the *cbAuxIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. This field is equivalent to the *rgbAuxIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

2.2.4.2.2 Execute Request Type Success Response Body

The **Execute** request type success response body contains the following fields. For more details about the fields, see the *[out]* parameters in [\[MS-OXCRPC\]](#) section 3.1.4.2.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
StatusCode																																		
ErrorCode																																		
Flags																																		
RopBufferSize																																		
RopBuffer (variable)																																		

...
AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXCRPC\]](#) section 3.1.4.2 as the Return Values.

Flags (4 bytes): Reserved. The server MUST set this field to 0x00000000 and the client MUST ignore this field. This field is equivalent to the *pulFlags* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

RopBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **RopBuffer** field. This field is equivalent to the *pcbOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

RopBuffer (variable): An array of bytes that constitute the ROP responses payload. The size of this field, in bytes, is specified by the **RopBufferSize** field. This field is equivalent to the *rgbOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field. This field is equivalent to the *pcbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. This field is equivalent to the *rgbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section 3.1.4.2.

2.2.4.2.3 Execute Request Type Failure Response Body

The **Execute** request type failure response body contains the following fields. For more details about the fields, see the *[out]* parameters in [\[MS-OXCRPC\]](#) section 3.1.4.2.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field. This field is equivalent to the *pcbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.2](#).

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. This field is equivalent to the *rgbAuxOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.1.4.2](#).

2.2.4.3 Disconnect Request Type

The **Disconnect** request type is used by the client to delete a Session Context with the server, as specified in section [3.1.5.4](#).

2.2.4.3.1 Disconnect Request Type Request Body

The **Disconnect** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.4.3.2 Disconnect Request Type Success Response Body

The **Disconnect** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXCRPC\]](#) section 3.1.4.3 as the Return Values.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.4.3.3 Disconnect Request Type Failure Response Body

The **Disconnect** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.4.4 NotificationWait Request Type

The **NotificationWait** request type is used by the client to request that the server notify the client when a processing request that takes an extended amount of time completes.

2.2.4.4.1 NotificationWait Request Type Request Body

The **NotificationWait** request type request body contains the following fields. For more details about the fields, see the *[in]* parameters in [\[MS-OXCRPC\]](#) section 3.3.4.1.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															

AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

Flags (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field. This field is equivalent to the *ulFlagsIn* input parameter, as specified in [\[MS-OXCRPC\]](#) section [3.3.4.1](#).

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.4.4.2 NotificationWait Request Type Success Response Body

The **NotificationWait** request type success response body contains the following fields. For more details about the fields, see the *[out]* parameters in [\[MS-OXCRPC\]](#) section 3.3.4.1.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
ErrorCode																															
EventPending																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXCRPC\]](#) section 3.3.4.1 as the Return Values.

EventPending (4 bytes): An unsigned integer that indicates whether an event is pending on the Session Context. The value 0x00000001 indicates that an event is pending; the value 0x00000000 indicates that no event is pending. This field is equivalent to the *pulFlagsOut* output parameter, as specified in [\[MS-OXCRPC\]](#) section [3.3.4.1](#).

The client MUST send the **Execute** request type, as specified in section [2.2.4.2](#), with additional data in the request body if there is additional data to send to the server, or with an empty request body if there is no additional data to send to the server. The server will return the event details in the **Execute** request type response body.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.4.4.3 NotificationWait Request Type Failure Response Body

The **NotificationWait** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5 Request Types for Address Book Server Endpoint

The address book server endpoint supports the 19 request types that are specified in section [2.2.5.1](#) through section [2.2.5.19](#). The address book server endpoint also supports the **PING** request type, which is specified in section [2.2.6](#). The **X-RequestType** header, specified in section [2.2.3.3.1](#), identifies which request type is being used.

The request and response bodies associated with the specific request types are each a raw binary data binary large object (BLOB) that follows the common request format, as specified in section [2.2.2.1](#), and the common response format, as specified in section [2.2.2.2](#). Request and response bodies are separated from the common request and response by a blank line, as specified in [\[RFC2616\]](#).

2.2.5.1 Bind Request Type

The **Bind** request type is used by the client to establish a Session Context with the server, as specified in section [3.1.5.1](#) and section [3.1.5.7](#). For information regarding the server-side processing of the **Bind** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.1.

2.2.5.1.1 Bind Request Type Request Body

The **Bind** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
HasState								State (optional)																							
...																															
(State field continues for 7 rows)																															
...								AuxiliaryBufferSize																							
...								AuxiliaryBuffer (variable)																							
...																															

Flags (4 bytes): A set of bit flags that specify the authentication type for the connection. The server MUST ignore values other than the bit flag **fAnonymousLogin** (0x00000020).

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific **address book container**. This field is present when the **HasState** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.5.1.2 Bind Request Type Success Response Body

The **Bind** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
ServerGuid																															
...																															
...																															
...																															

AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

ServerGuid (16 bytes): A GUID that is associated with a specific address book server.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.5.1.3 Bind Request Type Failure Response Body

The **Bind** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.5.2 Unbind Request Type

The **Unbind** request type is used by the client to delete a Session Context with the server, as specified in section [3.1.5.4](#). For information regarding the server-side processing of the **Unbind** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.2.

2.2.5.2.1 Unbind Request Type Request Body

The **Unbind** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Reserved																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.5.2.2 Unbind Request Type Success Response Body

The **Unbind** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For

details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.5.2.3 Unbind Request Type Failure Response Body

The **Unbind** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.1.1](#) and section [3.1.4.1.2](#).

2.2.5.3 CompareMinIds Request Type

The **CompareMinIds** request type is used by the client to compare the positions of two objects in an address book container. For information regarding the server-side processing of the **CompareMinIds** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.12.

2.2.5.3.1 CompareMinIds Request Type Request Body

The **CompareMinIds** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Reserved																															
HasState																State (optional)															
...																															
(State field continues for 7 rows)																															
...																MinimalId1															
...																MinimalId2															

...	AuxiliaryBufferSize
...	AuxiliaryBuffer (variable)
...	

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

MinimalId1 (4 bytes): A **MinimalEntryID** structure ([\[MS-OXNSPI\]](#) section 2.2.9.1) that specifies the **Minimal Entry ID** of the first object.

MinimalId2 (4 bytes): A **MinimalEntryID** structure that specifies the Minimal Entry ID of the second object.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.3.2 CompareMinIds Request Type Success Response Body

The **CompareMinIds** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
Result																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

Result (4 bytes): A signed integer that specifies the result of the comparison. The valid values for this field are specified in the following table.

Value	Meaning
0 (zero)	The position of the object specified by the MinimalId1 field of the request body is the same as the position of the object specified by the MinimalId2 field. That is, the two fields specify the same object.
A value less than 0 (zero)	The position of the object specified by the MinimalId1 field of the request body precedes the position of the object specified by the MinimalId2 field.
A value greater than 0 (zero)	The position of the object specified by the MinimalId1 field of the request body succeeds the position of the object specified by the MinimalId2 field.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.3.3 CompareMinIds Request Type Failure Response Body

The **CompareMinIds** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.4 DnToMinId Request Type

The **DnToMinId** request type is used by the client to map a set of DNs to a set of Minimal Entry IDs. For information regarding the server-side processing of the **DnToMinId** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.13.

2.2.5.4.1 DnToMinId Request Type Request Body

The **DnToMinId** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
Reserved																															
HasNames										NameCount (optional)																					
...										NameValues (optional) (variable)																					
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasNames (1 byte): A Boolean value that specifies whether the **NameCount** and **NameValues** fields are present.

NameCount (optional) (4 bytes): An unsigned integer that specifies the number of null-terminated Unicode strings in the **NameValues** field. This field is present when the value of the **HasNames** field is nonzero and is not present otherwise.

NameValues (optional) (variable): An array of null-terminated ASCII strings which are distinguished names (DNs) to be mapped to Minimal Entry IDs. The number of strings is specified by the **NameCount** field. This field is present when the **HasNames** field is nonzero and is not present otherwise. For details about Minimal Entry IDs, see [\[MS-OXNSPI\]](#) section 2.2.9.1.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.4.2 DnToMinId Request Type Success Response Body

The **DnToMinId** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
HasMinimalIds								MinimalIdCount (optional)																							
...								MinimalIds (optional) (variable)																							
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasMinimalIds (1 byte): A Boolean value that specifies whether the **MinimalIdCount** and **MinimalIds** fields are present.

MinimalIdCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **MinimalIds** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

MinimalIds (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1), each of which specifies a Minimal Entry ID that matches a requested distinguished name (DN). This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.4.3 DnToMinId Request Type Failure Response Body

The **DnToMinId** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															

AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.5 GetMatches Request Type

The **GetMatches** request type is used by the client to get an Explicit Table, in which the rows are determined by the specified criteria. For details about Explicit Tables, see [\[MS-OXNSPI\]](#) section 3.1.4.4.2. For information regarding the server-side processing of the **GetMatches** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.10.

2.2.5.5.1 GetMatches Request Type Request Body

The **GetMatches** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Reserved																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										HasMinimalIds										MinimalIdCount (optional)											
...										MinimalIds (optional) (variable)																					
...																															
InterfaceOptionFlags																															
HasFilter										Filter (optional) (variable)																					
...																															

HasPropertyName	PropertyNameGuid (optional)	
...		
...		
...		
...	PropertyNameId (optional)	
...	RowCount	
...	HasColumns	Columns (optional) (variable)
...		
AuxiliaryBufferSize		
AuxiliaryBuffer (variable)		
...		

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the value of the **HasState** field is nonzero and is not present otherwise.

HasMinimalIds (1 byte): A Boolean value that specifies whether the **MinimalIdCount** and **MinimalIds** fields are present.

MinimalIdCount (optional) (4 bytes): An unsigned integer that specifies the number of structures present in the **MinimalIds** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

MinimalIds (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1) that constitute an Explicit Table. For details about Explicit Tables, see [\[MS-OXNSPI\]](#) section 3.1.4.4.2. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

InterfaceOptionFlags (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasFilter (1 byte): A Boolean value that specifies whether the **Filter** field is present.

Filter (optional) (variable): A **restriction**, as specified in [\[MS-OXCDATA\]](#) section 2.12, that is to be applied to the rows in the address book container. This field is present when the value of **HasFilter** is nonzero and is not present otherwise.

HasPropertyName (1 byte): A Boolean value that specifies whether the **PropertyNameGuid** and **PropertyNameId** fields are present.

PropertyNameGuid (optional) (16 bytes): The GUID of the property to be opened. This field is present when the value of the **HasPropertyName** field is nonzero and is not present otherwise.

PropertyNameId (optional) (4 bytes): A 4-byte value that specifies the ID of the property to be opened. This field is present when the value of the **HasPropertyName** field is nonzero and is not present otherwise.

RowCount (4 bytes): An unsigned integer that specifies the number of rows the client is requesting.

HasColumns (1 byte): A Boolean value that specifies whether the **Columns** field is present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the columns that the client is requesting. This field is present when the value of the **HasColumns** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.5.2 GetMatches Request Type Success Response Body

The **GetMatches** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Status Code																															
Error Code																															
HasState																State (optional)															
...																															
(State field continues for 7 rows)																															
...																HasMinimalIds								MinimalIdCount (optional)							
...																MinimalIds (optional) (variable)															
...																															
HasColsAndRows																Columns (optional) (variable)															
...																															
RowCount (optional)																															
RowData (optional) (variable)																															

...
AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. . This field is present when the **HasState** field is nonzero and is not present otherwise.

HasMinimalIds (1 byte): A Boolean value that specifies whether the **MinimalIdCount** and **MinimalIds** fields are present.

MinimalIdCount (optional) (4 bytes): An unsigned integer that specifies the number of structures present in the **MinimalIds** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

MinimalIds (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1), each of which is the ID of an object found. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

HasColsAndRows (1 byte): A Boolean value that specifies whether the **Columns**, **RowCount**, and **RowData** fields are present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the columns used for each row returned. This field is present when the value of the **HasColumnsAndRows** field is nonzero and is not present otherwise.

RowCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **RowData** field. This field is present when the value of the **HasColumnsAndRows** field is nonzero and is not present otherwise.

RowData (optional) (variable): An array of **AddressBookPropertyRow** structures (section [2.2.1.2](#)), each of which specifies the row data for the entries requested. This field is present when the **HasColumnsAndRows** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.5.3 GetMatches Request Type Failure Response Body

The **GetMatches** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.6 GetPropList Request Type

The **GetPropList** request type is used by the client to get a list of all of the properties that have values on an object. For information regarding the server-side processing of the **GetPropList** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.6.

2.2.5.6.1 GetPropList Request Type Request Body

The **GetPropList** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
Flags																															
MinimalId																															
CodePage																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Flags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flag **fSkipObjects** (0x00000001).

MinimalId (4 bytes): A **MinimalEntryID** structure ([\[MS-OXNSPI\]](#) section 2.2.9.1) that specifies the object for which to return properties.

CodePage (4 bytes): An unsigned integer that specifies the code page that the server is being requested to use for string values of properties. For more details about code pages, see [\[MS-OXNSPI\]](#) section 2.2.1.5.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section 3.1.4.2.1 and section 3.1.4.2.2.

2.2.5.6.2 GetPropList Request Type Success Response Body

The **GetPropList** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
ErrorCode																															
HasPropertyTags				PropertyTags (optional) (variable)																											
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasPropertyTags (1 byte): A Boolean value that specifies whether the **PropertyTags** field is present.

PropertyTags (optional) (variable): A **LargePropertyTagArray** structure (section 2.2.1.3) that contains the property tags of properties that have values on the requested object. This field is present when the value of the **HasPropertyTags** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section 3.1.4.2.1 and section 3.1.4.2.2.

2.2.5.6.3 GetPropList Request Type Failure Response Body

The **GetPropList** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field **MUST NOT** be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.7 GetProps Request Type

The **GetProps** request type is used by the client to get specific properties on an object. For information regarding the server-side processing of the **GetProps** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.7.

2.2.5.7.1 GetProps Request Type Request Body

The **GetProps** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										HasPropertyTags										PropertyTags (optional) (variable)											
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															

...

Flags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flags **fEphID** (0x00000002) and **fSkipObjects** (0x00000001).

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasPropertyTags (1 byte): A Boolean value that specifies whether the **PropertyTags** field is present.

PropertyTags (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that contains the property tags of the properties that the client is requesting. This field is present when the value of the **HasPropertyTags** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.7.2 GetProps Request Type Success Response Body

The **GetProps** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
CodePage																															
HasPropertyValues										PropertyValues (optional) (variable)																					
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

CodePage (4 bytes): An unsigned integer that specifies the code page that the server used to express string properties. For details about code pages, see [\[MS-OXNSPI\]](#) section 2.2.1.5.

HasPropertyValues (1 byte): A Boolean value that specifies whether the **PropertyValues** field is present.

PropertyValues (optional) (variable): An **AddressBookPropertyValueList** structure (section [2.2.1.1](#)) that contains the values of the properties requested. This field is present when the value of the **HasPropertyValues** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.7.3 GetProps Request Type Failure Response Body

The **GetProps** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.8 GetSpecialTable Request Type

The **GetSpecialTable** request type is used by the client to get a special table, which can be either an **address book hierarchy table** or an **address creation table**. For details about tables that are used in the NSPI data model, see [\[MS-OXNSPI\]](#) section 3.1.4.4. For information regarding the server-side processing of the **GetSpecialTable** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.3.

2.2.5.8.1 GetSpecialTable Request Type Request Body

The **GetSpecialTable** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
HasState								State (optional)																							
...																															
(State field continues for 7 rows)																															
...								HasVersion								Version (optional)															
...																AuxiliaryBufferSize															
...																AuxiliaryBuffer (variable)															
...																															

Flags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flags **NspiAddressCreationTemplates** (0x00000002) and **NspiUnicodeStrings** (0x00000004).

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasVersion (1 byte): A Boolean value that specifies whether the **Version** field is present.

Version (optional) (4 bytes): An unsigned integer that specifies the version number of the address book hierarchy table that the client has. This field is present when the value of the **HasVersion** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section 3.1.4.2.1 and section 3.1.4.2.2.

2.2.5.8.2 GetSpecialTable Request Type Success Response Body

The **GetSpecialTable** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															

CodePage		
HasVersion	Version (optional)	
...	HasRows	RowCount (optional)
...	Rows (optional) (variable)	
...		
AuxiliaryBufferSize		
AuxiliaryBuffer (variable)		
...		

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

CodePage (4 bytes): An unsigned integer that specifies the code page the server used to express string properties. The required code pages are specified in For details about code pages, see .

HasVersion (1 byte): A Boolean value that specifies whether the **Version** field is present.

Version (optional) (4 bytes): An unsigned integer that specifies the version number of the address book hierarchy table that the server has. This field is present when the value of the **HasVersion** field is nonzero and is not present otherwise.

HasRows (1 byte): A Boolean value that specifies whether the **RowCount** and **Rows** fields are present.

RowCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **Rows** field. This field is present when the value of the **HasRows** field is nonzero and is not present otherwise.

Rows (optional) (variable): An array of **AddressBookPropertyValueList** structures (section [2.2.1.1](#)), each of which contains a row of the table that the client requested. This field is present when the value of the **HasRows** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.8.3 GetSpecialTable Request Type Failure Response Body

The **GetSpecialTable** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.9 GetTemplateInfo Request Type

The **GetTemplateInfo** request type is used by the client to get information about a template that is used by the address book. For information regarding the server-side processing of the **GetTemplateInfo** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.18.

2.2.5.9.1 GetTemplateInfo Request Type Request Body

The **GetTemplateInfo** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
DisplayType																															
HasTemplateDn										TemplateDn (optional) (variable)																					
...																															
CodePage																															
LocaleId																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Flags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flags **TI_HELPFILE_NAME** (0x00000020), **TI_HELPFILE_CONTENTS** (0x00000040), **TI_SCRIPT** (0x00000004), **TI_TEMPLATE** (0x00000001), and **TI_EMT** (0x00000010).

DisplayType (4 bytes): An unsigned integer that specifies the display type of the template for which information is requested. The valid values for this field are specified in [\[MS-OXNSPI\]](#) section 2.2.1.3.

HasTemplateDn (1 byte): A Boolean value that specifies whether the **TemplateDn** field is present.

TemplateDn (optional) (variable): A null-terminated ASCII string that specifies the DN of the template requested. This field is present when the **HasTemplateDn** field is nonzero and is not present otherwise.

CodePage (4 bytes): An unsigned integer that specifies the code page of the template for which information is requested.

LocaleId (4 bytes): An unsigned integer that specifies the language code identifier (LCID), as specified in [\[MS-LCID\]](#), of the template for which information is requested.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section 3.1.4.2.1 and section 3.1.4.2.2.

2.2.5.9.2 GetTemplateInfo Request Type Success Response Body

The **GetTemplateInfo** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
CodePage																															
HasRow										Row (optional) (variable)																					
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

CodePage (4 bytes): An unsigned integer that specifies the code page the server used to express string values of properties.

HasRow (1 byte): A Boolean value that specifies whether the **Row** field is present.

Row (optional) (variable): A **AddressBookPropertyValueList** structure (section [2.2.1.1](#)) that specifies the information that the client requested. This field is present when the value of the **HasRow** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.9.3 GetTemplateInfo Request Type Failure Response Body

The **GetTemplateInfo** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.10 ModLinkAtt Request Type

The **ModLinkAtt** request type is used by the client to modify a specific property of a row in the address book. For information regarding the server-side processing of the **ModLinkAtt** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.15.

2.2.5.10.1 ModLinkAtt Request Type Request Body

The **ModLinkAtt** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
Flags																																		
PropertyTag																																		
MinimalId																																		
HasEntryIds										EntryIdCount (optional)																								
...										EntryIds (optional) (variable)																								
...																																		
AuxiliaryBufferSize																																		
AuxiliaryBuffer (variable)																																		
...																																		

Flags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flag **fDelete** (0x00000001).

PropertyTag (4 bytes): A **PropertyTag** structure ([\[MS-OXCDATA\]](#) section 2.9) that specifies the property to be modified.

The **PidTagAddressBookMember** property ([\[MS-OXOABK\]](#) section 2.2.6.1) can be modified only on an **Address Book object** that has a display type of **DT_DISTLIST**. The **PidTagAddressBookPublicDelegates** property ([\[MS-OXOABK\]](#) section 2.2.5.5) can be modified only on an Address Book object that has a display type of **DT_MAILUSER**. For details about display types, see [\[MS-OXNSPI\]](#) section 2.2.1.3.

MinimalId (4 bytes): A **MinimalEntryID** structure ([\[MS-OXNSPI\]](#) section 2.2.9.1) that specifies the Minimal Entry ID of the address book row to be modified.

HasEntryIds (1 byte): A Boolean value that specifies whether the **EntryIdCount** and **EntryIds** fields are present.

EntryIdCount (optional) (4 bytes): An unsigned integer that specifies the count of structures in the **EntryIds** field. This field is present when the value of the **HasEntryIds** field is nonzero and is not present otherwise.

EntryIds (optional) (variable): An array of **entry IDs**, each of which is either an **EphemeralEntryID** structure ([\[MS-OXNSPI\]](#) section 2.2.9.2) or a **PermanentEntryID** structure ([\[MS-OXNSPI\]](#) section 2.2.9.3). Each entry ID in the array specifies an address book row in which the specified property is to be modified. This field is present when the value of the **HasEntryIds** field is nonzero and is not present otherwise.

For details about how entry IDs are used to identify objects in the address book, see [\[MS-OXNSPI\]](#) section 3.1.4.6.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.10.2 ModLinkAtt Request Type Success Response Body

The **ModLinkAtt** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
ErrorCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.10.3 ModLinkAtt Request Type Failure Response Body

The **ModLinkAtt** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.11 ModProps Request Type

The **ModProps** request type is used by the client to modify the specified properties of an Address Book object. For information regarding the server-side processing of the **ModProps** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.14.

2.2.5.11.1 ModProps Request Type Request Body

The **ModProps** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Reserved																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										HasPropsToRemove										PropertiesToRemove (optional) (variable)											
...																															
HasPropertyValues										PropertyValues (optional) (variable)																					
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasPropertyTags (1 byte): A Boolean value that specifies whether the **PropertyTags** field is present.

PropertiesTags (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the properties to be removed. This field is present when the value of the **HasPropertyTags** field is nonzero and is not present otherwise.

HasPropertyValues (1 byte): A Boolean value that specifies whether the **PropertyValues** field is present.

PropertyValues (optional) (variable): An **AddressBookPropertyValueList** structure (section [2.2.1.1](#)) that specifies the values of the properties to be modified. This field is present when the value of the **HasPropertyValues** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.11.2 ModProps Request Type Success Response Body

The **ModProps** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.11.3 ModProps Request Type Failure Response Body

The **ModProps** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
StatusCode																																		
AuxiliaryBufferSize																																		
AuxiliaryBuffer (variable)																																		
...																																		

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.12 QueryRows Request Type

The **QueryRows** request type is used by the client to get a number of rows from the specified Explicit Table. For details about Explicit Tables, see [\[MS-OXNSPI\]](#) section 3.1.4.4.2. For information regarding the server-side processing of the **QueryRows** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.8.

Although the protocol places no boundary or requirements on the minimum number of rows the server returns, implementations SHOULD return as many rows as possible to improve usability of the server for clients.

2.2.5.12.1 QueryRows Request Type Request Body

The **QueryRows** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
Flags																																		
HasState										State (optional)																								
...																																		
(State field continues for 7 rows)																																		
...										ExplicitTableCount																								
...										ExplicitTable (variable)																								

...	
RowCount	
HasColumns	Columns (optional) (variable)
...	
AuxiliaryBufferSize	
AuxiliaryBuffer (variable)	
...	

Flags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flags **fEphID** (0x00000002) and **fSkipObjects** (0x00000001).

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

ExplicitTableCount (4 bytes): An unsigned integer that specifies the number of structures present in the **ExplicitTable** field. This value is limited to 100,000.

ExplicitTable (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1) that constitute the Explicit Table.

RowCount (4 bytes): An unsigned integer that specifies the number of rows the client is requesting.

HasColumns (1 byte): A Boolean value that specifies whether the **Columns** field is present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the properties that the client requires for each row returned. This field is present when the value of the **HasColumns** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.12.2 QueryRows Request Type Success Response Body

The **QueryRows** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															

ErrorCode		
HasState	State (optional)	
...		
(State field continues for 7 rows)		
...	HasColsAndRows	Columns (optional) (variable)
...		
RowCount (optional)		
RowData (optional) (variable)		
...		
AuxiliaryBufferSize		
AuxiliaryBuffer (variable)		
...		

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field **MUST** be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasColsAndRows (1 byte): A Boolean value that specifies whether the **Columns**, **RowCount**, and **RowData** fields are present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the columns for the returned rows. This field is present when the value of the **HasColsAndRows** field is nonzero and is not present otherwise.

RowCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **RowData** field. This field is present when the value of the **HasColsAndRows** field is nonzero and is not present otherwise.

RowData (optional) (variable): An array of **AddressBookPropertyRow** structures (section [2.2.1.2](#)), each of which specifies the row data of the Explicit Table. This field is present when the **HasColsAndRows** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.12.3 QueryRows Request Type Failure Response Body

The **QueryRows** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.13 QueryColumns Request Type

The **QueryColumns** request type is used by the client to get a list of all of the properties that exist in the address book. For information regarding the server-side processing of the **QueryColumns** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.5.

2.2.5.13.1 QueryColumns Request Type Request Body

The **QueryColumns** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
Reserved																															
MapiFlags																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

MapiFlags (4 bytes): A set of bit flags that specify options to the server. The server MUST ignore values other than the bit flag **NspiUnicodeProptypes** (0x80000000).

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.13.2 QueryColumns Request Type Success Response Body

The **QueryColumns** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
HasColumns	Columns (optional) (variable)																														
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasColumns (1 byte): A Boolean value that specifies whether the **Columns** field is present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the properties that exist on the address book. This field is present when the **HasColumns** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.13.3 QueryColumns Request Type Failure Response Body

The **QueryColumns** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field **MUST NOT** be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.14 ResolveNames Request Type

The **ResolveNames** request type is used by the client to perform **ambiguous name resolution (ANR)**, as specified in [\[MS-OXNSPI\]](#) section 3.1.4.7. For information regarding the server-side processing of the **ResolveNames** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.16

2.2.5.14.1 ResolveNames Request Type Request Body

The **ResolveNames** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Reserved																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										HasPropertyTags										PropertyTags (optional) (variable)											
...																															

HasNames	NameCount (optional)
...	NameValues (optional) (variable)
...	
AuxiliaryBufferSize	
AuxiliaryBuffer (variable)	
...	

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasPropertyTags (1 byte): A Boolean value that specifies whether the **PropertyTags** field is present.

PropertyTags (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the properties that client requires for the rows returned. This field is present when the value of the **HasPropertyTags** field is nonzero and is not present otherwise.

HasNames (1 byte): A Boolean value that specifies whether the **NameCount** and **NameValues** fields are present.

NameCount (optional) (4 bytes): An unsigned integer that specifies the number of null-terminated Unicode strings in the **NameValues** field. This field is present when the value of the **HasNames** field is nonzero and is not present otherwise.

NameValues (optional) (variable): An array of null-terminated Unicode strings. The number of strings is specified by the **NameCount** field. This field is present when the **HasNames** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.14.2 ResolveNames Request Type Success Response Body

The **ResolveNames** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															

ErrorCode	
CodePage	
HasMinimalIds	MinimalIdCount (optional)
...	MinimalIds (optional) (variable)
...	
HasRowsAndCols	PropertyTags (optional) (variable)
...	
RowCount (optional)	
RowData (optional) (variable)	
...	
AuxiliaryBufferSize	
AuxiliaryBuffer (variable)	
...	

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

CodePage (4 bytes): An unsigned integer that specifies the code page the server used to express string values of properties.

HasMinimalIds (1 byte): A Boolean value that specifies whether the **MinimalIdCount** and **MinimalIds** fields are present.

MinimalIdCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **MinimalIds** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

MinimalIds (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1), each of which specifies a Minimal Entry ID matching a name requested by the client. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

HasRowsAndCols (1 byte): A Boolean value that specifies whether the **PropertyTags**, **RowCount**, and **RowData** fields are present.

PropertyTags (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the properties returned for the rows in the **RowData** field. This field is present when the value of the **HasRowsAndCols** field is nonzero and is not present otherwise.

RowCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **RowData** field. This field is present when the value of the **HasRowsAndCols** field is nonzero and is not present otherwise.

RowData (optional) (variable): An array of **AddressBookPropertyRow** structures (section [2.2.1.2](#)), each of which specifies the row data requested. This field is present when the value of the **HasRowsAndCols** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.14.3 ResolveNames Request Type Failure Response Body

The **ResolveNames** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.15 ResortRestriction Request Type

The **ResortRestriction** request type is used by the client to sort the objects in a restricted address book container. For information regarding the server-side processing of the **ResortRestriction** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.11.

2.2.5.15.1 ResortRestriction Request Type Request Body

The **ResortRestriction** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
Reserved																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										HasMinimalIds										MinimalIdCount (optional)											
...										MinimalIds (optional) (variable)																					
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasMinimalIds (1 byte): A Boolean value that specifies whether the **MinimalIdCount** and **MinimalIds** fields are present.

MinimalIdCount (optional) (4 bytes): An unsigned integer that specifies the number of structures in the **MinimalIds** field. This field is present when the value of the **HasMinimalIds** field is present and is not present otherwise.

MinimalIds (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1) that compose a restricted address book container. The number of structures contained in this field is specified by the **MinimalIdCount** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section 3.1.4.2.1 and section 3.1.4.2.2.

2.2.5.15.2 ResortRestriction Request Type Success Response Body

The **ResortRestriction** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
ErrorCode																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										HasMinimalIds										MinimalIdCount (optional)											
...										MinimalIds (optional) (variable)																					
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field **MUST** be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasMinimalIds (1 byte): A Boolean value that specifies whether the **MinimalIdCount** and **MinimalIds** fields are present.

MinimalIdCount (optional) (4 bytes): An unsigned integer that specifies the number of structures present in the **MinimalIds** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

MinimalIds (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1) that compose a restricted address book container. The number of structures contained in this field is specified by the **MinimalIdCount** field. This field is present when the value of the **HasMinimalIds** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.15.3 ResortRestriction Request Type Failure Response Body

The **ResortRestriction** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
StatusCode																																		
AuxiliaryBufferSize																																		
AuxiliaryBuffer (variable)																																		
...																																		

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.16 SeekEntries Request Type

The **SeekEntries** request type is used by the client to search for and set the logical position in a specific table to the first entry greater than or equal to a specified value. Optionally, the **SeekEntries** request type can also be used to retrieve information about rows in an Explicit Table. For details about Explicit Tables, see [\[MS-OXNSPI\]](#) section 3.1.4.4.2. For information regarding the server-side processing of the **SeekEntries** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.9.

2.2.5.16.1 SeekEntries Request Type Request Body

The **SeekEntries** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
Reserved																																		
HasState																State (optional)																		
...																																		

(State field continues for 7 rows)		
...	HasTarget	Target (optional) (variable)
...		
HasExplicitTable	ExplicitTableCount (optional)	
...	ExplicitTable (optional) (variable)	
...		
HasColumns	Columns (optional) (variable)	
...		
AuxiliaryBufferSize		
AuxiliaryBuffer (variable)		
...		

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasTarget (1 byte): A Boolean value that specifies whether the **Target** field is present.

Target (optional) (variable): An **AddressBookTaggedPropertyValue** structure (section [2.2.1.2](#)) that specifies the property value being sought. This field is present when the value of the **HasTarget** field is nonzero and is not present otherwise.

HasExplicitTable (1 byte): A Boolean value that specifies whether the **ExplicitTableCount** and **ExplicitTable** fields are present.

ExplicitTableCount (optional) (4 bytes): An unsigned integer that specifies the number of structures present in the **ExplicitTable** field. The number is limited to 100,000. This field is present when the value of the **HasExplicitTable** field is nonzero and is not present otherwise.

ExplicitTable (optional) (variable): An array of **MinimalEntryID** structures ([\[MS-OXNSPI\]](#) section 2.2.9.1) that constitute an Explicit Table. This field is present when the value of the **HasExplicitTable** field is nonzero and is not present otherwise.

HasColumns (1 byte): A Boolean value that specifies whether the **Columns** field is present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the columns that the client is requesting. This field is present when the value of the **HasColumns** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section 3.1.4.2.1 and section 3.1.4.2.2.

2.2.5.16.2 SeekEntries Request Type Success Response Body

The **SeekEntries** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
HasState								State (optional)																							
...																															
(State field continues for 7 rows)																															
...								HasColsAndRows								Columns (optional) (variable)															
...																															
RowCount (optional)																															
RowData (optional) (variable)																															
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field **MUST** be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasColsAndRows (1 byte): A Boolean value that specifies whether the **Columns**, **RowCount**, and **RowData** fields are present.

Columns (optional) (variable): A **LargePropertyTagArray** structure (section [2.2.1.3](#)) that specifies the columns used for the rows returned. This field is present when the value of the **HasColsAndRows** field is nonzero and is not present otherwise.

RowCount (optional) (4 bytes): An unsigned integer that specifies the number of structures contained in the **RowData** field. This field is present when the value of the **HasColsAndRows** field is nonzero and is not present otherwise.

RowData (optional) (variable): An array of **AddressBookPropertyRow** structures (section [2.2.1.2](#)), each of which specifies the row data for the entries queried. This field is present when the **HasColsAndRows** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.16.3 SeekEntries Request Type Failure Response Body

The **SeekEntries** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.17 UpdateStat Request Type

The **UpdateStat** request type is used by the client to update the **STAT** structure ([\[MS-OXNSPI\]](#) section 2.3.7) to reflect the client's changes. For information regarding the server-side processing of the **UpdateStat** request type, see Server Processing Rules in [\[MS-OXNSPI\]](#) section 3.1.4.1.4.

2.2.5.17.1 UpdateStat Request Type Request Body

The **UpdateStat** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
Reserved																															
HasState										State (optional)																					
...																															
(State field continues for 7 rows)																															
...										DeltaRequested										AuxiliaryBufferSize											
...										AuxiliaryBuffer (variable)																					
...																															

Reserved (4 bytes): Reserved. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

DeltaRequested (1 byte): A Boolean value that specifies whether the client is requesting a value to be returned in the **Delta** field of the response. The value zero (0x00) indicates that the value is not requested. A nonzero value indicates that the value is requested.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.17.2 UpdateStat Request Type Success Response Body

The **UpdateStat** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
StatusCode																															
ErrorCode																															
HasState										State (optional)																					

...		
(State field continues for 7 rows)		
...	HasDelta	Delta (optional)
...		AuxiliaryBufferSize
...		AuxiliaryBuffer (variable)
...		

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field **MUST** be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

HasState (1 byte): A Boolean value that specifies whether the **State** field is present.

State (optional) (36 bytes): A **STAT** structure ([\[MS-OXNSPI\]](#) section 2.2.8) that specifies the state of a specific address book container. This field is present when the **HasState** field is nonzero and is not present otherwise.

HasDelta (1 byte): A Boolean value that specifies whether the **Delta** field is present.

Delta (optional) (4 bytes): A signed integer that specifies the movement within the address book container that was specified in the **State** field of the request. This field is present when the value of the **HasDelta** field is nonzero and is not present otherwise.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.17.3 UpdateStat Request Type Failure Response Body

The **UpdateStat** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	1	0	1	2	3	4	5	6	7	8	9	2	0	1	2	3	4	5	6	7	8	9	3	0	1
StatusCode																																		
AuxiliaryBufferSize																																		
AuxiliaryBuffer (variable)																																		
...																																		

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.18 GetMailboxUrl Request Type

The **GetMailboxUrl** request type is used by the client to get the Uniform Resource Locator (URL) of the specified mailbox server endpoint. For information regarding the server-side processing of the **GetMailboxUrl** request type, see [\[MS-OXABREF\]](#) section 3.1.4.2.

2.2.5.18.1 GetMailboxUrl Request Type Request Body

The **GetMailboxUrl** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
ServerDn (variable)																															
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Flags (4 bytes): Not used. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

ServerDn (variable): A null-terminated Unicode string that specifies the distinguished name (DN) of the mailbox server for which to look up the URL.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.18.2 GetMailboxUrl Request Type Success Response Body

The **GetMailboxUrl** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
ErrorCode																															
ServerUrl (variable)																															
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

ServerUrl (variable): A null-terminated Unicode string that specifies URL of the **EMSMDB** server.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.18.3 GetMailboxUrl Request Type Failure Response Body

The **GetMailboxUrl** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.19 GetAddressBookUrl Request Type

The **GetAddressBookUrl** request type is used by the client to get the URL of the specified address book server endpoint. For information regarding the server-side processing of the **GetAddressBookUrl** request type, see [\[MS-OXABREF\]](#) section 3.1.4.1.

2.2.5.19.1 GetAddressBookUrl Request Type Request Body

The **GetAddressBookUrl** request type request body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Flags																															
UserDn (variable)																															
...																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

Flags (4 bytes): Not used. The client MUST set this field to 0x00000000 and the server MUST ignore this field.

UserDn (variable): A null-terminated Unicode string that specifies the distinguished name (DN) of the user's mailbox. This DN is used by the server to determine which NSPI server is used.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data sent from the client. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.19.2 GetAddressBookUrl Request Type Success Response Body

The **GetAddressBookUrl** request type success response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															

ErrorCode
ServerUrl (variable)
...
AuxiliaryBufferSize
AuxiliaryBuffer (variable)
...

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST be set to 0x00000000.

ErrorCode (4 bytes): An unsigned integer that specifies the return status of the operation. The error code values are specified in [\[MS-OXNSPI\]](#) section 2.2.1.2.

ServerUrl (variable): A null-terminated Unicode string that specifies the URL of the NSPI server.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.5.19.3 GetAddressBookUrl Request Type Failure Response Body

The **GetAddressBookUrl** request type failure response body contains the following fields.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
StatusCode																															
AuxiliaryBufferSize																															
AuxiliaryBuffer (variable)																															
...																															

StatusCode (4 bytes): An unsigned integer that specifies the status of the request. This field MUST NOT be set to 0x00000000.

AuxiliaryBufferSize (4 bytes): An unsigned integer that specifies the size, in bytes, of the **AuxiliaryBuffer** field.

AuxiliaryBuffer (variable): An array of bytes that constitute the auxiliary payload data returned from the server. The size of this field, in bytes, is specified by the **AuxiliaryBufferSize** field. For details about extended buffers and auxiliary payloads, see [\[MS-OXCRPC\]](#) section [3.1.4.2.1](#) and section [3.1.4.2.2](#).

2.2.6 PING Request Type

The **PING** request type allows a client to determine whether a server's endpoint is reachable and operational. The **PING** request type has no request body and no response body.

The **PING** request type is supported by both the mailbox server endpoint and the address book server endpoint. For details about these endpoints, see section [2.2.4](#) and section [2.2.5](#), respectively.

2.2.7 Response Meta-Tags

The protocol defines three meta-tags that are used to inform the client as to the state of processing a request on the server. A meta-tag is returned at the beginning of the response body. For details, see section [3.2.5.2.1](#).

The following table specifies the three meta-tags that are used by this protocol.

Meta-tag	Meaning
PROCESSING	The server has queued the request to be processed.
PENDING	The server is processing the request.
DONE	The server has completed the processing of the request and additional response headers and the response body follow the DONE meta-tag.

3 Protocol Details

3.1 Client Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This specification does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this specification.

Cookies: All cookies returned to the client **MUST** be saved during the life of the Session Context.

3.1.2 Timers

An idle-time timer measures the time during which the Session Context has no pending requests.

3.1.3 Initialization

The client **MUST** establish a Session Context, as specified in section [3.1.5.1](#).

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

3.1.5.1 Creating a Session Context by Using the Connect or Bind Request Type

The client establishes a Session Context in the **EMSMDB** interface by issuing a request, as specified in section [2.2.3.1](#), using the **Connect** request type as specified in section [2.2.4.3.1](#), including the contents of the **Connect** request type request body, as specified in section [2.2.5.1.1](#). The client establishes a Session Context in the **NSPI** interface by issuing a request, as specified in section [2.2.3.1](#), using the **Bind** request type as specified in section [2.2.5.1](#), including the contents of the **Bind** request type request body, as specified in section [2.2.5.1.1](#). An example of using the **Connect** request type to establish a new Session Context is given in section [4.1](#).

The client can pass an **X-ClientInfo** header, as specified in section [2.2.4.3.4](#). This information is simply returned to the client in the response.

As specified in section [3.2.5.1](#), the server returns cookies used to identify the Session Context that has been created. The client **MUST** store all returned cookies and associate them with the Session Context. The client **MUST** include all cookies received from the previous call to the server for a given Session Context when issuing the next request to the server for that Session Context. If the server uses a session sequence cookie to guarantee the sequencing of requests, the client **MUST** pass this cookie, along with the session context cookie, to the server on the next request. The **Cookie** header, specified in section [2.2.3.2.4](#), is used to pass the cookies.

3.1.5.2 Sending Remote Operations by Using the Execute Request Type

The client submits ROPs, as specified in [\[MS-OXCROPS\]](#), by sending a request as specified in section [2.2.3.1](#), using the **Execute** request type as specified in section [2.2.4.3.1](#), including an **Execute** request type request body as specified in section [2.2.5.2.1](#). Before using the **Execute** request type, the client MUST have created a valid Session Context on the server as specified in section [3.1.5.1](#).

The client MUST include all cookies received from the previous call to the server for a given Session Context when issuing the next request to the server for that Session Context. The **Cookie** header, specified in section [2.2.3.2.4](#), is used to pass the cookies.

A scenario that describes issuing ROP commands using the **Execute** request type is presented in section [4.2](#).

3.1.5.3 Keeping a Session Context Alive by Using the PING Request Type

Since the Session Context will automatically expire on the server after a period of inactivity, the client MUST keep the Session Context alive. The client can do this by issuing a **PING** request type request, as specified in section [2.2.5.5](#). The client MUST pass all of the session context cookies that are returned from the server in the previous response. Additional cookies, such as the return sequence cookie, are also passed if available.

The client gets verification that the Session Context idle-time timer (section [3.1.2](#)) was refreshed when it receives a successful **PING** response containing the **X-ExpirationInfo** header. The client SHOULD allow for network latency and issue a **PING** request type request at an interval that is less than what is specified in the **X-ExpirationInfo** header.

3.1.5.4 Destroying a Session Context by Using the Disconnect or Unbind Request Type

The client destroys the Session Context by sending a request using the **Disconnect** request type, as specified in section [2.2.4.3.1](#), or the **Unbind** request type, as specified in section [2.2.5.2.1](#). Destroying the Session Context releases all state information associated with the Session Context. The **Disconnect** or **Unbind** request type request MUST include the session context cookie returned when the Session Context was created, plus any other cookies returned by the server while the Session Context is active.

The client MUST NOT consider the Session Context destroyed until it receives a successful response to the **Disconnect** or **Unbind** request, as specified in section [2.2.5.3.2](#) and section [2.2.5.2.2](#), respectively.

3.1.5.5 Requesting Notification by Using the NotificationWait Request Type

A request, as specified in section [2.2.3.1](#), that uses the **NotificationWait** request type, as specified in section [2.2.4.3.1](#), with the associated **NotificationWait** request body, as specified in section [2.2.5.4.1](#), creates an operation on the server that will not complete until events pending on the Session Context complete, or at the end of a 5-minute duration during which there has been no event activity on the Session Context.

Unlike other request types, the client can send this request to the server while another request is pending (such as an **Execute** request type).

This request type is part of notification handling. For more information about notifications, see [\[MS-OXCNOTIF\]](#).

3.1.5.6 Handling a Chunked Response

To facilitate a positive connection between the server and client, the server uses the **Transfer-Encoding** header, as specified in section [2.2.4.2.5](#), with "chunked" transfer encoding, as specified in [\[RFC2616\]](#). By using "chunked" transfer encoding, the server is able to return data to the client while the request is still being processed. This gives the client the expectation of always getting an immediate acknowledgment of the request. If the client doesn't get this immediate acknowledgment, it can abandon the request and recover if the server's initial response is not received within a reasonable time.

After the initial immediate response, the client periodically receives a keep-alive response indicating that the server is still processing the request. The keep-alive response contains the **PENDING** meta-tag. As with the client's ability to quickly detect whether a request was received by the server, the client can abandon a request if no periodic keep-alive response is received within a reasonable amount of time. A secondary advantage of receiving the periodic keep-alive data is that the underlying HTTP connection remains open. This is particularly useful when there are devices in the middle that might be prone to timing out long-running requests.

The immediate response includes an **X-PendingPeriod** header, specified in section [2.2.4.3.5](#), to tell the client the number of milliseconds to be expected between keep-alive **PENDING** meta-tags in the response stream during the time a request is currently being processed on the server. The default value for the keep-alive interval is 15 seconds, until the request is done.

The client **MUST** be able to receive a "chunked" response for any request and know how to parse the chunked transfer encoding and work with the inner response stream (the response body) as if the chunked transfer encoding wasn't present. The initial response, plus the intermediate keep-alive transmissions, and the final response body are all part of the inner response stream. The use of "chunked" transfer encoding is a means to return an unknown amount of data to the client. The client **MUST** isolate the receiving of response "chunks" from the parsing and interpreting of the inner response stream. For more details about the "chunked" response, see section [3.2.5.2](#).

The inner response stream contains response meta-tags, as specified in section [2.2.6](#), to be used by the client in interpreting where the server is in the process of completing the request, the keep-alive messages, and finally the response body. For more details about the use of meta-tags, see section [3.2.5.3.4](#).

3.1.5.7 Reconnecting and Establishing a New Session Context

To re-establish a Session Context after a failure, a prolonged period of inactivity, or a forced action by the user, the client sends a new request using the **Connect** request type, along with the **Connect** request type request body, as specified in section [2.2.5.1.1](#), or by using the **Bind** request type, along with the **Bind** request type request body, as specified in section [2.2.5.1.1](#). The only difference between reconnecting and an initial connection is that the client passes all existing cookies that are associated with the previous Session Context that the client is attempting to re-establish. If the client reconnects, it **SHOULD** always pass any cookie values it has stored for the Session Context to which it is attempting to reconnect. A client can do this if the end user forcefully reconnects. This allows the server to clean up the previous context in a timely fashion to prevent session limits from being reached. The reconnection request will look very much like a request to establish a new Session Context, with the exception of passing all existing cookies that are associated with the previous Session Context that the client is attempting to re-establish.

Since the client is not aware of the semantic meaning of the cookies, it **MUST** pass all cookies that it has that relate to the specific Session Context. For details about the server response, see section [3.2.5.3.2](#).

Before the client attempts to reconnect, the client SHOULD always assume the Session Context is still valid. If it is unable to communicate with the server, no matter how much time has passed, when it finally re-establishes an HTTP connection the client SHOULD continue where it left off.

3.1.6 Timer Events

The client can choose to keep the Session Context alive by sending a **PING** request type request, as specified in section [2.2.4.3.1](#), before the idle-time timer specified in section [3.1.2](#) expires.

3.1.7 Other Local Events

Since a request or response can fail, the client and server need to be able to handle communication failures so that they do not get into an inconsistent state. A majority of failures are expected to occur as the client is attempting to send a new request after the server has dropped the connection because of the expiration of the idle-time timer (section [3.1.2](#)). Under any circumstances, the client MUST be able to properly handle failures during all aspects of sending and receiving a request or response.

3.1.7.1 Handling Communication Failure Sending a Request

If the client attempts to send a new request to the server and a failure occurs either before streaming the request body or while streaming the request body, the client establishes a new HTTP connection, passing all existing cookies for the Session Context, and then resubmits the request as-is to the server. The client does not need to re-establish a new Session Context in this case.

3.1.7.2 Handling Communication Failure Reading a Response

If the client receives a failure while attempting to read the response after the entire request, including the request body, is streamed to the server, the client reconnects with the server and establishes a new Session Context, passing all existing cookies for the Session Context that is being reconnected. For more details, see section [3.1.5.2.2](#).

3.2 Server Details

3.2.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This specification does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this specification.

Cookies: All cookies returned to the client MUST be saved during the life of the Session Context.

3.2.2 Timers

A keep-alive interval timer sets the time when the server returns a keep-alive response to the client while a request is being processed. The maximum interval is configurable, and the default is set to 15 seconds.

A notification timer triggers the server to complete a **NotificationWait** request after 5 minutes of no event activity on the Session Context. For details about how the server responds to a **NotificationWait** request, see section [3.2.5.5](#).

An idle-time timer measures the time during which the Session Context has no pending requests.

3.2.3 Initialization

None.

3.2.4 Higher-Layer Triggered Events

None.

3.2.5 Message Processing Events and Sequencing Rules

3.2.5.1 Responding to a Connect or Bind Request Type Request

The server issues a response, as specified in section [2.2.2.2](#), to a **Connect** or **Bind** request type request. The server creates a new Session Context and associates it with a session context cookie. If successful, the server's response includes the **Connect** request type success response body, as specified in section [2.2.4.1.2](#), or the **Bind** request type success response body, as specified in section [2.2.5.1.2](#); if unsuccessful, the server's response includes the **Connect** request type failure response body, as specified in section [2.2.4.1.3](#), or the or **Bind** request type failure response body, as specified in section [2.2.5.1.3](#).

The server MUST return the cookie that represents the Session Context as the value of the **Set-Cookie** header field, as specified in section [2.2.3.2.3](#). The names of the cookies are implementation-specific.

The server MUST store the authentication context with the newly created Session Context. The server then MUST validate the authentication context on subsequent requests against the Session Context. If the authentication context differs, the server MUST fail the request with a value of 10 ("Context Not Found" error) in the **X-ResponseCode** header. For details about the **X-ResponseCode** header, see section [2.2.3.3.3](#).

The server MUST insure that the client issues only one request at a time within a Session Context. If the server detects that the client has issued simultaneous requests within a Session Context, the server MUST fail every subsequent request with a value of 15 ("Invalid Sequence" error) in the **X-ResponseCode** header.

3.2.5.2 Responding to All Request Type Requests

The server can respond to all request type requests with a chunked response, as specified in section [2.2.3.2](#). If the entire response is not readily available, the server MUST use the **Transfer-Encoding** header, as specified in section [2.2.4.2.5](#), with a value of "chunked". Chunked transfer coding is specified in [\[RFC2616\]](#) section 3.6.1. The **Transfer-Encoding** header is used instead of the **Content-Length** header field as specified in section [2.2.4.2.1](#). By using "chunked" transfer coding, the server is able to return data to the client while the request is still being processed by the server. It also allows the server to return an amount of data to the client whose length is not determined when the initial response is returned. If the server is able to return the entire response immediately, it can chose to forgo the chunked response.

The response includes all **Set-Cookie** headers as specified in section [2.2.3.2.3](#) associated with the Session Context.

After the request has been authorized, authenticated, parsed, and validated, the server MUST return a **X-ResponseCode** with a value of 0 (zero) to indicate that the request has been accepted. The server MUST respond immediately to a request while the request is being queued and processed by the

server. The initial response includes the **PROCESSING** meta-tag, as specified in section [2.2.6](#). If the server is using the "chunked" transfer coding, it MUST flush this to the client (being careful to make sure it disables any internal Nagle algorithms, as described in [\[RFC896\]](#), that might attempt to buffer response data).

Beyond the initial immediate response, the server MUST also periodically return a keep-alive response to the client to let the client know that the request is still being processed. The server maintains a keep-alive timer as specified in section [3.2.2](#) that, when expired, causes the server to send a keep-alive response to the client. The keep-alive response includes the **PENDING** meta-tag, as specified in section [2.2.6](#). Since the keep-alive interval is configurable or auto-adjusted, the server MUST return the **X-PendingPeriod** header, specified in section [2.2.3.3.5](#), within the immediate response to tell the client the number of milliseconds to be expected between keep-alive responses from the server during the time a request is currently being executed on the server. The default value of the **X-PendingPeriod** header is 15000 for 15 seconds.

After the server finishes processing the request it finishes with the **DONE** meta-tag, as specified in section [2.2.6](#); followed by any additional response headers. The **X-ElapsedTime** and **X-StartTime** are present after the DONE meta-tag, as specified in section [2.2.3.3.9](#) and [2.2.3.3.10](#) respectively. The server will include a **X-ResponseCode** header, as specified in section [2.2.4.3.3](#), if a failure occurs after the initial response is sent. More specifically, this gives the server the ability to later fail the request and return a different value in the **X-ResponseCode** header. The request type response body for the initiating request type will immediately follow any additional headers preceded by a CRLF on an empty line. If an additional **X-ResponseCode** header is returned and if it indicates a failure, then the response body can be empty or can include failure data in a format that is specified by an additional **Content-Type** header as specified in section [2.2.3.2.2](#).

An example of the request and response using the **Execute** request type is described in section [4.2](#).

3.2.5.3 Responding to a PING Request Type

The server responds to a **PING** request type by returning a **PING** request type response, as specified in section [2.2.5.5](#). The server MUST refresh the idle-time timer specified in section [3.2.2](#) associated with the Session Context. Meta-tags can be returned, but no response body is returned.

3.2.5.4 Responding to a Disconnect or Unbind Request Type Request

The server sends a response, as specified in section [2.2.2.2](#), to a **Disconnect** or **Unbind** request type request. The server releases all state information associated with the Session Context and invalidates the associated session context cookie passed in the request. If successful, the server's response includes the **Disconnect** request type success response body, as specified in section [2.2.4.3.2](#), or the **Unbind** request type success response body, as specified in section [2.2.5.2.2](#); if unsuccessful, the server's response includes the **Disconnect** request type failure response body, as specified in section [2.2.4.3.3](#), or the or **Unbind** request type failure response body, as specified in section [2.2.5.2.3](#).

Once the session context cookie has been invalidated by the server, the client cannot use it in subsequent requests. If the client attempts to use an invalid session context cookie in a request, the server MUST fail the request to indicate to the client that the Session Context is not valid.

The server's response includes the **Content-Length** header, as specified in section [2.2.3.2.1](#), if the response is not chunked. All relevant **Set-Cookie** headers, as specified in section [2.2.3.2.3](#), are included in the response even though the session context cookie has been invalidated.

3.2.5.5 Responding to a NotificationWait Request Type Request

The server creates a **NotificationWait** request type response, as specified in section [2.2.3.2](#), including the **NotificationWait** request type response body as specified in section [2.2.5.4.2](#) if the

request was successful, or the response body specified in section [2.2.5.4.3](#) if unsuccessful. This response is not sent until either the current server event completes or the 5-minute maximum time limit expires. The server MUST keep the Session Context alive for the entire duration of the **NotificationWait** request and MUST refresh the Session Context expiration upon completion of the **NotificationWait**.

The response headers include **Set-Cookie** headers, as specified in section [2.2.3.2.3](#), for all cookies related to the Session Context. The response also includes the **Content-Length** header, as specified in section [2.2.3.2.1](#), if the response is not chunked.

3.2.5.6 Reconnecting and Establishing a New Session Context Server

When the connection between client and server is dropped for whatever reason, the client reconnects with the existing Session Context by sending a **Connect** or **Bind** request that includes the existing session cookies saved by the client, as specified in section [2.2.5.1.1](#). If the previous Session Context is still valid on the server, the server MUST destroy it before creating a new Session Context. The server returns a new session context cookie that is associated with a new Session Context. The server MUST ignore a sequence validation cookie passed in the reconnect scenario. The response from the server uses the **Set-Cookie** header, as specified in section [2.2.3.2.3](#), to pass any required cookies to the client. The response passes the **Content-Length** header, as specified in section [2.2.3.2.1](#), if the response is not chunked.

As with any new **Session Context**, the client MUST store all returned cookies and MUST NOT combine the new cookies with cookies from the previous Session Context.

If the Session Context has expired, is no longer valid, or is not valid for the server in which the mailbox currently resides, then the server fails the request with an **X-ResponseCode** value of 10, as specified in section [2.2.3.3.3](#), and the client SHOULD reconnect and establish a new Session Context.

3.2.6 Timer Events

The idle-time timer, as specified in section [3.2.2](#), starts counting when the server has no pending requests for the Session Context. When the idle-time timer reaches the configured time limit, the server destroys the Session Context, deleting all cookies associated with the Session Context.

3.2.7 Other Local Events

None.

4 Protocol Examples

4.1 Establish a New Session Context

In this scenario the client establishes a new Session Context with the server before sending or receiving emails. The client sends a request (section [2.2.3.1](#)) using an **X-RequestType** header field value of **Connect**, as described in section [2.2.4.3.1](#), and includes the **Connect** request type request body as described in section [2.2.5.1.1](#).

Client request

```
POST <Autodiscover-provided endpoint> HTTP/1.1
Host: <URL of the host server>
Content-Length: <length of REQUEST BODY>
Content-Type: application/mapi-http
X-RequestType: Connect
X-ClientInfo: <opaque string>
X-RequestId: <unique identifier>
X-ClientApplication: <client version>

<REQUEST BODY>
```

The server processes the request and returns a response, as described in section [2.2.3.2](#), that includes the session context cookie that identifies the new Session Context, and the **Connect** request type success response body, as described in section [2.2.5.1.2](#).

Server response

```
HTTP/1.1 200 OK
Content-Length: <length of META-TAGS, ADDITIONAL HEADERS and RESPONSE BODY>
Content-Type: application/mapi-http
Set-Cookie: <session context cookie>=<opaque string>
Set-Cookie: <request sequence cookie>=<opaque string>
X-PendingPeriod: 15000
X-RequestType: Connect
X-RequestId: <unique identifier>
X-ResponseCode: 0
X-ClientInfo: <opaque string>
X-ServerApplication: <server version>
X-ExpirationInfo: <milliseconds>

PROCESSING<CLRF>
DONE<CRLF>
X-ResponseCode: 0
X-ElapsedTime: <milliseconds>
X-StartTime: <date/time>
<CRLF>
<RESPONSE BODY>
```

4.2 Issue ROP Commands to the Server

In this scenario the client sends a request, as described in section [2.2.3.1](#), containing ROPs to the server using the **Execute** request type, as described in section [2.2.4.3.1](#), including a <REQUEST BODY> as described in section [2.2.5.2.1](#). As described in section [3.1.5.2](#), the request includes all the cookies related to the Session Context that the client has saved.

Client request

```
POST <Autodiscover-provided endpoint> HTTP/1.1
Host: <URL of the host server>
Content-Length: <length of REQUEST BODY>
Content-Type: application/mapi-http
Cookie: <session context cookie>=<opaque string>
Cookie: <return sequence cookie>=<opaque string>
X-RequestType: Execute
X-ClientInfo: <opaque string>
X-RequestId: <unique identifier>
X-ClientApplication: <client version>

<REQUEST BODY>
```

The response to an **Execute** request type is "chunked", as described in section [3.2.5.2](#). The initial response contains the **PROCESSING** meta-tag, as described in section [2.2.6](#). Depending on how long the processing takes, the initial response is followed by interim "keep-alive" responses containing the **PENDING** meta-tag. When the processing is completed, the final chunk contains the **DONE** meta-tag; the **X-ResponseCode** value, as described in section [2.2.4.3.3](#), for the completed response; and the **Execute** request type request body.

Server response

```
HTTP/1.1 200 OK
Transfer-Encoding: chunked
Content-Type: application/mapi-http
Cookie: MapiContext=<opaque string>
Cookie: MapiSequence=<opaque string>
X-PendingPeriod: 15000
X-RequestType: Execute
X-RequestId: <unique identifier>
X-ResponseCode: 0
X-ClientInfo: <opaque string>
X-ServerApplication: <server version>
X-ExpirationInfo: <milliseconds>
<CRLF>
C<CRLF>
PROCESSING<CRLF>
<CRLF>
```

Every 15 seconds, as indicated by the value of the **X-PendingPeriod** header described in section [2.2.4.3.5](#), the server returns another keep-alive chunk:

```
9<CRLF>
PENDING<CRLF>
<CRLF>
```

When the request finally completes, the server returns the **DONE** meta-tag, followed by the <RESPONSE BODY>. The final character is "0", which is the last-chunk indicator, as described in [\[RFC2616\]](#) section 3.6.1.

```
?<CRLF>
DONE<CRLF>
X-ResponseCode: 0<CRLF>
X-ElapsedTime: <milliseconds>
X-StartTime: <date/time>
<CRLF>
<RESPONSE BODY><CRLF>
<CRLF>
0<CRLF>
<CRLF>
```

4.3 Refresh an Idle Session Context

This scenario describes refreshing an idle Session Context. To keep the server from timing out the Session Context, the client issues a **PING** request type, as described in section [2.2.5.5](#). Client creation of the request is described in section [3.1.5.3](#). Server handling of the response is described in section [3.2.5.3](#).

Client request

```
POST <Autodiscover-provided endpoint> HTTP/1.1
Host: <URL of the host server>
Content-Length: 0
Content-Type: application/mapi-http
Cookie: <session context cookie>=<opaque string>
Cookie: <return sequence cookie>=<opaque string>
X-RequestType: PING
X-ClientInfo: <opaque string>
X-RequestId: <unique identifier>
X-ClientApplication: <client version>
```

Server response

```
HTTP/1.1 200 OK
Content-Length: <length of META-TAGS, ADDITIONAL HEADERS>
Content-Type: application/mapi-http
X-RequestType: PING
X-RequestId: <unique identifier>
X-ResponseCode: 0
X-ClientInfo: <opaque string>
X-ServerApplication: <server version>
X-ExpirationInfo: <milliseconds>

PROCESSING<CRLF>
DONE<CRLF>
X-ResponseCode: 0<CRLF>
X-ElapsedTime: <milliseconds>
X-StartTime: <date/time>
<CRLF>
```

4.4 Re-Establish a Timed-Out Connection to the Server

This scenario describes re-establishing a timed-out Session Context. This is similar to the process of establishing a new Session Context as described in section [3.1.5.1](#), but **Cookie** headers, as described in section [2.2.4.2.4](#), are passed with the session context cookie associated with the expired Session Context. New session context cookies are passed back in the response for the re-established **Session Context** using the **Set-Cookie** header, as described in section [2.2.4.2.3](#).

Client request

```
POST <Autodiscover-provided endpoint> HTTP/1.1
Host: <URL of the host server>
Content-Length: <length of REQUEST BODY>
Content-Type: application/mapi-http
Cookie: <session context cookie>=<opaque string>
Cookie: <request sequence cookie>=<opaque string>
X-RequestType: Connect
X-ClientInfo: <opaque string>
X-RequestId: <unique identifier>
X-ClientApplication: <client version>
```

<REQUEST BODY>

Server response

```
HTTP/1.1 200 OK
Content-Length: <length of META-TAGS, ADDITIONAL HEADERS and RESPONSE BODY>
Content-Type: application/mapi-http
Set-Cookie: <session context cookie>=<new opaque string>
Set-Cookie: <request sequence cookie>=<new opaque string>
X-RequestType: Connect
X-RequestId: <unique identifier>
X-ResponseCode: 0
X-ClientInfo: <opaque string>
X-ServerApplication: <server version>
X-ExpirationInfo: <milliseconds>
<CRLF>
PROCESSING<CRLF>
DONE<CRLF>
X-ResponseCode: 0<CRLF>
X-ElapsedTime: <milliseconds>
X-StartTime: <date/time>
<CRLF>
<RESPONSE BODY>
```

4.5 Disconnect from the Server

This scenario describes disconnecting from server. The client passes the session context cookie to the server as described in section [3.1.5.4](#). The server responds as described in section [3.2.5.4](#).

Client request

```
POST <Autodiscover-provided endpoint> HTTP/1.1
Host: <URL of the host server>
Content-Length: <length of REQUEST BODY>
Content-Type: application/mapi-http
Cookie: <session context cookie>=<opaque string>
Cookie: <request sequence cookie>=<opaque string>
X-RequestType: Disconnect
X-ClientInfo: <opaque string>
X-RequestId: <unique identifier>
X-ClientApplication: <client version>
```

< REQUEST BODY>

Server response

```
HTTP/1.1 200 OK
Content-Length: <length of META-TAGS, ADDITIONAL HEADERS and RESPONSE BODY>
Content-Type: application/mapi-http
X-RequestType: Disconnect
X-RequestId: <unique identifier>
X-ResponseCode: 0
X-ClientInfo: <opaque string>
X-ServerApplication: <server version>
X-ExpirationInfo: <milliseconds>
<CRLF>
PROCESSING<CRLF>
DONE<CRLF>
X-ResponseCode: 0<CRLF>
X-ElapsedTime: <milliseconds>
```

X-StartTime: <date/time>
<CRLF>
<RESPONSE BODY>

Preliminary

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

Preliminary

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Microsoft Exchange Server 2013 Service Pack 1 (SP1)
- Microsoft Outlook 2013 Service Pack 1 (SP1)
- Microsoft Outlook 2016 Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

Preliminary

7 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
6 Appendix A: Product Behavior	Updated list of supported products.	Y	Content updated due to protocol revision.

Preliminary

8 Index

A

Abstract data model

[client](#) 82

[server](#) 85

[Applicability](#) 13

C

[Capability negotiation](#) 13

[Change tracking](#) 96

Client

[abstract data model](#) 82

[higher-layer triggered events](#) 82

[initialization](#) 82

[message processing](#) 82

[other local events](#) 85

[sequencing rules](#) 82

[timer events](#) 85

[timers](#) 82

[Common Data Types message](#) 14

D

Data model - abstract

[client](#) 82

[server](#) 85

[Disconnect from the server example](#) 92

E

[Establish a new session context example](#) 89

Examples

[disconnect from the server](#) 92

[establish a new session context](#) 89

[issue ROP commands to the server](#) 89

[re-establish a timed-out connection to the server](#)

91

[refresh an idle session context](#) 91

F

[Fields - vendor-extensible](#) 13

G

[Glossary](#) 8

H

[Header Fields message](#) 20

Higher-layer triggered events

[client](#) 82

[server](#) 86

I

[Implementer - security considerations](#) 94

[Index of security parameters](#) 94

[Informative references](#) 10

Initialization

[client](#) 82

[server](#) 86

[Introduction](#) 8

[Issue ROP commands to the server example](#) 89

M

Message processing

[client](#) 82

Messages

[Common Data Types](#) 14

[Header Fields](#) 20

[PING Request Type](#) 81

[POST Method](#) 18

[Request Types for Address Book Server Endpoint](#)

33

[Request Types for Mailbox Server Endpoint](#) 24

[Response Meta-Tags](#) 81

[transport](#) 14

N

[Normative references](#) 10

O

Other local events

[client](#) 85

[server](#) 88

[Overview \(synopsis\)](#) 11

P

[Parameters - security index](#) 94

[PING Request Type message](#) 81

[POST Method message](#) 18

[Preconditions](#) 13

[Prerequisites](#) 13

[Product behavior](#) 95

R

[Re-establish a timed-out connection to the server](#)

[example](#) 91

References

[informative](#) 10

[normative](#) 10

[Refresh an idle session context example](#) 91

[Relationship to other protocols](#) 12

[Request Types for Address Book Server Endpoint](#)

[message](#) 33

[Request Types for Mailbox Server Endpoint message](#)

24

[Response Meta-Tags message](#) 81

S

Security
[implementer considerations](#) 94
[parameter index](#) 94
Sequencing rules
[client](#) 82
Server
[abstract data model](#) 85
[higher-layer triggered events](#) 86
[initialization](#) 86
[other local events](#) 88
[timer events](#) 88
[timers](#) 85
[Standards assignments](#) 13

T

Timer events
[client](#) 85
[server](#) 88
Timers
[client](#) 82
[server](#) 85
[Tracking changes](#) 96
[Transport](#) 14
Triggered events - higher-layer
[client](#) 82
[server](#) 86

V

[Vendor-extensible fields](#) 13
[Versioning](#) 13