

[MS-WSSCFGD3]: Windows SharePoint Services Configuration Database Communications Version 3 Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Revision Summary

Date	Revision History	Revision Class	Comments
01/20/2012	0.1	New	Released new document.
04/11/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.

Table of Contents

1 Introduction	8
1.1 Glossary	8
1.2 References	9
1.2.1 Normative References	9
1.2.2 Informative References	10
1.3 Overview	10
1.3.1 Configuration Object Management	10
1.3.2 File Storage	10
1.3.3 Timer Job Management	10
1.3.4 E-mail-Enabled Lists	11
1.3.5 Pending Distribution Lists	11
1.4 Relationship to Other Protocols	11
1.5 Prerequisites/Preconditions	11
1.6 Applicability Statement	11
1.7 Versioning and Capability Negotiation	12
1.8 Vendor-Extensible Fields	12
1.9 Standards Assignments	12
2 Messages	13
2.1 Transport	13
2.2 Common Data Types	13
2.2.1 Simple Data Types and Enumerations	13
2.2.2 Bit Fields and Flag Structures	13
2.2.2.1 Job Lock Type	13
2.2.2.2 Job Status Type	13
2.2.2.3 Lock Status Type	14
2.2.3 Binary Structures	14
2.2.4 Result Sets	14
2.2.5 Configuration Object Classes	14
2.2.6 Configuration Object Properties	14
2.2.6.1 Timer Job Definition	14
2.2.6.2 E-Mail-Enabled List	15
2.2.6.3 Pending Distribution List	15
2.2.7 Tables and Views	16
2.2.8 XML Structures	16
3 Protocol Details	17
3.1 Server Details	17
3.1.1 Abstract Data Model	17
3.1.1.1 Configuration Object Management	17
3.1.1.2 Timer Job Management	18
3.1.1.3 E-Mail-Enabled Lists	19
3.1.1.4 Pending Distribution Lists	19
3.1.2 Timers	19
3.1.3 Initialization	19
3.1.4 Higher-Layer Triggered Events	19
3.1.5 Message Processing Events and Sequencing Rules	19
3.1.5.1 proc_AddTimerJobHistory	19
3.1.5.2 proc_AddTimerLockForJob	20
3.1.5.3 proc_AddTimerTargetInstance	21

3.1.5.4	proc_ClearProductVersions.....	22
3.1.5.5	proc_CompleteTimerRunningJob.....	22
3.1.5.6	proc_DeleteAllMarkedTimerLocks.....	23
3.1.5.7	proc_DeleteAllTimerLocksAndRunningJobs.....	23
3.1.5.8	proc_DeleteOldTimerJobHistory.....	24
3.1.5.9	proc_DeleteScheduledJob.....	25
3.1.5.10	proc_DeleteTimerLockForJob.....	25
3.1.5.11	proc_DeleteTimerRunningJobs.....	26
3.1.5.12	proc_DeleteTimerTargetInstance.....	27
3.1.5.13	proc_DeleteTimerTargetInstances.....	27
3.1.5.14	proc_dropClass.....	28
3.1.5.14.1	DropClass Result Set.....	28
3.1.5.15	proc_dropEmailEnabledList.....	29
3.1.5.16	proc_dropEmailEnabledListByAlias.....	29
3.1.5.17	proc_dropEmailEnabledListsByWeb.....	29
3.1.5.18	proc_DropObject.....	30
3.1.5.19	proc_dropPendingDistributionList.....	30
3.1.5.20	proc_DropSiteMap.....	31
3.1.5.21	proc_getDeletedEmailAliases.....	31
3.1.5.21.1	DeletedEmailAliases Result Set.....	32
3.1.5.22	proc_GetDependentObjectsByBaseClass.....	32
3.1.5.22.1	Dependent Object Ids Result Set.....	32
3.1.5.23	proc_getEmailEnabledListByAlias.....	33
3.1.5.23.1	EmailEnabledListByAlias Result Set.....	33
3.1.5.24	proc_getFile.....	33
3.1.5.24.1	File Result Set.....	34
3.1.5.25	proc_getNewObjects.....	34
3.1.5.25.1	Last Update Result Set.....	34
3.1.5.25.2	Modified Objects Result Set.....	35
3.1.5.25.3	Dependencies Result Set.....	35
3.1.5.25.4	Tombstones Result Set.....	35
3.1.5.26	proc_getPendingDistributionListsSinceVersion.....	36
3.1.5.26.1	PendingDistrubutionLists Result Set.....	36
3.1.5.27	proc_GetProductVersions.....	37
3.1.5.27.1	Get Product Versions Result Set.....	37
3.1.5.28	proc_getSiteBestMatch.....	38
3.1.5.29	proc_getSiteCount.....	40
3.1.5.29.1	SiteCount Result Set.....	40
3.1.5.30	proc_GetSiteIdOfHostHeaderSite.....	40
3.1.5.30.1	ID Result Set.....	41
3.1.5.31	proc_getSiteIds.....	41
3.1.5.31.1	Get Site Ids Result Set.....	41
3.1.5.32	proc_getSiteNames.....	41
3.1.5.32.1	Path Result Set.....	42
3.1.5.33	proc_getSiteSubscriptionsInContentDB.....	43
3.1.5.33.1	Get Site Subscriptions In Content DB Result Set.....	43
3.1.5.34	proc_getSiteSubscriptionsInWebApplication.....	44
3.1.5.34.1	Get Site Subscriptions in Web Application Result Set.....	44
3.1.5.35	proc_getSiteSubscriptionSiteIdsInContentDatabase.....	44
3.1.5.35.1	Get Site Subscription Site IDs in content Database Result Set.....	45
3.1.5.36	proc_getSiteSubscriptionSiteIdsInWebApplication.....	45
3.1.5.36.1	Get Site Subscription Site Ids In Web Application Result Set.....	45
3.1.5.37	proc_getSubscriptionIds.....	46

3.1.5.37.1	Get Subscription Ids Result Set	46
3.1.5.38	proc_getSiteSubset	46
3.1.5.38.1	Site Result Set	47
3.1.5.39	proc_getTemplate	47
3.1.5.39.1	Template Result Set	48
3.1.5.40	proc_GetTimerJobHistory	48
3.1.5.40.1	Timer Job History Result Set	49
3.1.5.41	proc_GetTimerJobLastRunTime	50
3.1.5.42	proc_GetTimerRunningJobs	50
3.1.5.42.1	Job Status Result Set	51
3.1.5.43	proc_GetTimerScheduledJobs	52
3.1.5.43.1	Timer Scheduled Job Result Set	52
3.1.5.44	proc_GetTimerTargetInstance	53
3.1.5.45	proc_GetTimerTargetInstanceState	53
3.1.5.45.1	Timer Target Instance State Result Set	54
3.1.5.46	proc_markForDeletionEmailEnabledList	54
3.1.5.47	proc_markForDeletionEmailEnabledListsBySite	55
3.1.5.48	proc_markForDeletionEmailEnabledListsByWeb	55
3.1.5.49	proc_putClass	55
3.1.5.50	proc_putDependency	56
3.1.5.51	proc_putDistributionListToDelete	56
3.1.5.52	proc_putEmailEnabledList	57
3.1.5.53	proc_putFileSegment	58
3.1.5.54	proc_putObject	58
3.1.5.55	proc_putObjectTVP	60
3.1.5.56	proc_putPendingDistributionList	62
3.1.5.56.1	PutPendingDistributionList Result Set	62
3.1.5.57	proc_putSiteMap	62
3.1.5.57.1	SiteId Result Set	64
3.1.5.58	proc_RefreshAllTimerLocks	64
3.1.5.59	proc_RegisterProductVersion	64
3.1.5.60	proc_renameSiteMap	65
3.1.5.61	proc_ScheduleTimerJob	66
3.1.5.62	proc_setSubscription	67
3.1.5.63	proc_SetAppSiteDomainPrefix	67
3.1.5.64	proc_SiteExists	68
3.1.5.65	proc_StartTimerRunningJob	68
3.1.5.66	proc_UpdateTimerRunningJobProgress	69
3.1.5.67	proc_UpdateTimerRunningJobStatus	70
3.1.5.68	proc_UpdateTimerRunningJobTarget	71
3.1.5.69	proc_UpdateTimerTargetInstanceState	71
3.1.5.70	proc_hideSiteMap	72
3.1.5.71	proc_unhideSiteMap	72
3.1.5.72	proc_dropSiteMap2	73
3.1.5.73	proc_getDeletedSitesByUrl	73
3.1.5.73.1	Site Result Set	74
3.1.5.74	proc_getDeletedSitesByQuery	74
3.1.5.74.1	Site Result Set	75
3.1.5.75	proc_getDeletedSitesBySiteId	76
3.1.5.75.1	Site Result Set	77
3.1.5.76	proc_getDeletedSite	78
3.1.5.76.1	Site Result Set	78
3.1.5.77	proc_putDeletedSiteMap	79

3.1.5.78	proc_getEvalSites	80
3.1.5.78.1	Site Result Set	81
3.1.5.79	proc_setSourceSiteId	82
3.1.5.80	proc_insertCacheConfigEntry	82
3.1.5.81	proc_deleteCacheConfigEntry	82
3.1.5.82	proc_deleteCacheConfigEntries	83
3.1.5.83	proc_getCacheClusterConfigSchemaVersion	83
3.1.5.83.1	proc_getCacheClusterConfigSchemaVersion.ResultSet	84
3.1.5.84	proc_getCacheClusterConfigUtcTime	84
3.1.5.85	proc_getCacheConfigEntry	84
3.1.5.85.1	proc_getCacheConfigEntry.ResultSet	84
3.1.5.86	proc_getCacheConfigEntries	85
3.1.5.86.1	proc_getCacheConfigEntries.ResultSet	85
3.1.5.87	proc_updateCacheConfigEntry	86
3.1.5.88	proc_getSiteIdAndZoneOfHostHeaderSite	86
3.1.5.88.1	IdAndZone Result Set	87
3.1.5.89	proc_addUrlToSite	87
3.1.5.90	proc_setZoneForUrl	88
3.1.5.91	proc_removeUrlFromSite	89
3.1.5.92	proc_getUrlsForSite	89
3.1.5.92.1	SiteUrls Result Set	90
3.1.5.93	proc_addUrlToDeletedSite	90
3.1.5.94	proc_SetUrlZoneForDeletedSite	91
3.1.5.95	proc_getManagedPathSite	91
3.1.5.95.1	ManagedPathSite Result Set	92
3.1.5.96	proc_getSiteMap	93
3.1.5.96.1	SiteMap Result Set	93
3.1.5.97	proc_getSiteMapById	94
3.1.5.97.1	SiteMapById Result Set	94
3.1.6	Timer Events	95
3.1.7	Other Local Events	96

4	Protocol Examples	97
4.1	Delete E-mail-Enabled Lists from a Site Collection	97
4.1.1	Mark E-mail-Enabled Lists as Deleted	97
4.1.2	Retrieve E-mail Aliases Marked as Deleted	97
4.1.3	Remove E-Mail-Enabled Lists	97
4.2	Pending Distribution Lists	98
4.2.1	Add a Pending Distribution List	98
4.2.2	Retrieve Pending Distribution Lists	98
4.2.3	Remove a Pending Distribution List	99
4.3	Execution of a Job Instance	99
4.3.1	Acquire a Content Database Lock	99
4.3.2	Associate a Target Instance with a Job Definition	99
4.3.3	Schedule a Job Instance	100
4.3.4	Start a Job Instance	100
4.3.5	Update Job Progress	101
4.3.6	Add a Job History Entry	101
4.3.7	Process Additional Target Instances	101
4.3.8	Complete a Job Instance	101
4.4	File Storage and Retrieval	102
4.4.1	Store a File	102
4.4.2	Retrieve a File	102

4.5 Site Subscription Retrieval103
4.5.1 Retrieve Site Subscriptions103
4.5.2 Retrieve Site Collections.....104

5 Security..... 106
5.1 Security Considerations for Implementers.....106
5.2 Index of Security Parameters106

6 Appendix A: Product Behavior 107

7 Change Tracking..... 108

8 Index 109

Preliminary

1 Introduction

The Windows SharePoint Services: Configuration Database Communications Protocol specifies the communications needed for one or more clients to share configuration settings by storing those settings in a central location.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

Active Directory
class
GUID
Hypertext Transfer Protocol (HTTP)
Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)
object
path
Security Support Provider Interface (SSPI)
service

The following terms are defined in [\[MS-OFCGLOS\]](#):

app site domain identifier
app web domain identifier
application server
back-end database server
class identifier (CLSID)
configuration database
configuration object
configuration object identifier
content database
content database lock
datetime
distribution list
e-mail alias
e-mail enabled list
empty GUID
farm
front-end Web server
host header
host header site identifier
job definition
job instance
job lock
list
list identifier
permission level
request identifier
result set
return code

row version
schema version
server-relative URL
site
site collection
site collection identifier
site identifier
site subscription
site subscription identifier
site template
SQL authentication
stored procedure
store-relative form
Structured Query Language (SQL)
subscription
subsite
target instance
timer service
Transact-Structured Query Language (T-SQL)
Uniform Resource Locator (URL)
upgrade evaluation site collection
Web application
Windows Installer (.msi) file

The following terms are specific to this document:

subscription name identifier: The name associated with a given tenancy in a multi-tenant environment.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[Iseminger] Microsoft Corporation, "SQL Server 2000 Architecture and XML/Internet Support", Volume 1 of Microsoft SQL Server 2000 Reference Library, Microsoft Press, 2001, ISBN 0-7356-1280-3, <http://www.microsoft.com/mspress/books/5001.aspx>

[MSDN-TSQL-Ref] Microsoft Corporation, "Transact-SQL Reference", [http://msdn.microsoft.com/en-us/library/ms189826\(SQL.90\).aspx](http://msdn.microsoft.com/en-us/library/ms189826(SQL.90).aspx)

[MS-TDS] Microsoft Corporation, "[Tabular Data Stream Protocol Specification](#)".

[MS-WSSFO2] Microsoft Corporation, "[Windows SharePoint Services \(WSS\): File Operations Database Communications Version 2 Protocol Specification](#)".

[MS-WSSFO3] Microsoft Corporation, "[Windows SharePoint Services \(WSS\): File Operations Database Communications Version 3 Protocol Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[MS-WSSCADM2] Microsoft Corporation, "[Windows SharePoint Services Content Database Administrative Communications Version 2 Protocol Specification](#)".

1.3 Overview

Running a distributed **service** on multiple protocol clients requires all of the protocol clients to be configured identically. Otherwise, protocol clients could unintentionally produce different results given the same input. For example, if incoming **Hypertext Transfer Protocol (HTTP)** requests are distributed randomly between several **front-end Web servers**, it is essential that all of those servers are configured to listen on the same ports and respond with the same content for a specified **URL**. One way of ensuring consistency is to store the configuration data for the service in a central location. This approach has several additional benefits including support for dynamic configurations and the ability to manage a service from a central location.

This protocol specifies the communications between a computer or set of computers running one or more services and a **back-end database server** in which the configuration data for the services are stored. The clients of this protocol are computers running services. The protocol server is a device holding the configuration data in what will be known as the **configuration database**.

1.3.1 Configuration Object Management

Much of this protocol is concerned with the communications needed to store, retrieve, update, and perform other operations on **configuration objects**. Configuration objects are a mechanism of encapsulating groups of application settings.

1.3.2 File Storage

Some services require the same set of files to be present on all protocol clients. To support this requirement, this protocol specifies a second interface specifying the communications between protocol clients and protocol servers required to store and retrieve files used in the operation of the service.

1.3.3 Timer Job Management

When a service is executing on multiple protocol clients, it becomes necessary to develop a mechanism of distributing certain tasks across those computers. This protocol specifies a mechanism of distributing these tasks by using a **timer service** that runs on all protocol clients connected to a configuration database.

1.3.4 E-mail-Enabled Lists

Some services need to store data in a **list (1)** that is identified by an **e-mail alias**. This protocol provides a mechanism of accomplishing this by maintaining a mapping from an e-mail alias to a specific list (1).

1.3.5 Pending Distribution Lists

Some **permission levels** have an associated **distribution list**. If a service is required to manipulate a distribution list but the operation it is performing requires approval, the service needs a mechanism for determining when that operation has been approved. This protocol provides a mechanism of accomplishing this by maintaining a collection of permission levels whose associated distribution lists have an operation pending.

1.4 Relationship to Other Protocols

This protocol relies on [\[MS-TDS\]](#) as its transport protocol to call **stored procedures** to manipulate configuration objects and files stored in the configuration database by way of **result sets** and **return codes**.

This relationship is illustrated in the following diagram:

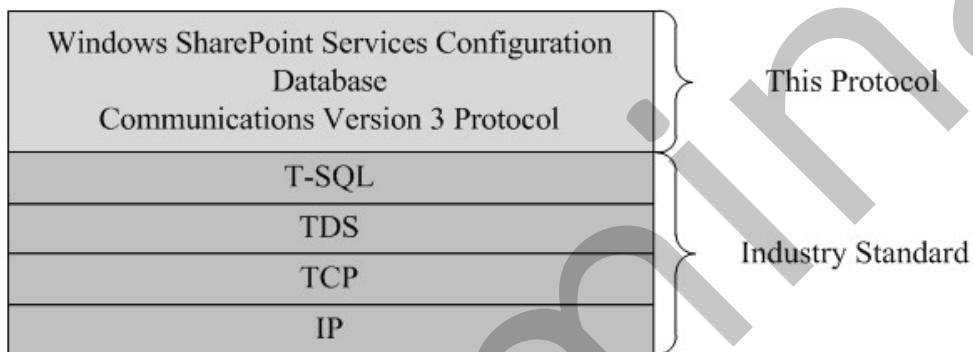


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

The operations described by this protocol operate between a protocol client and a back-end database server. The protocol client is expected to know the location and connection information for the databases.

This protocol requires that the protocol client has appropriate permissions to call the stored procedures stored on the back-end database server.

1.6 Applicability Statement

This protocol is only applicable to **application servers** when they communicate to the configuration database to manipulate configuration objects or files stored there.

1.7 Versioning and Capability Negotiation

- **Security and Authentication Methods:** This protocol supports the **Security Support Provider Interface (SSPI)** and **SQL authentication** with the protocol server role specified in [\[MS-TDS\]](#).

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

Preliminary

2 Messages

2.1 Transport

[MS-TDS] is the transport protocol used to call the stored procedures, query **SQL** views or SQL tables and return result sets and return codes.

2.2 Common Data Types

This section contains common definitions used by this protocol.

2.2.1 Simple Data Types and Enumerations

None.

2.2.2 Bit Fields and Flag Structures

2.2.2.1 Job Lock Type

The Job Lock Type is an integer value which indicates which type of locking a **job definition** uses. The value MUST be in the following table:

Value	Description
0	None The job definition does not use locking between protocol clients.
1	content database Only one job instance is permitted to process a content database at any one time.
2	Job Only one job instance for the job definition is permitted to execute at any one time.

2.2.2.2 Job Status Type

The Job Status Type is an integer value which indicates the execution status of a job instance. The value MUST be in the following table:

Value	Description
0	The job instance has been scheduled.
1	The job instance has been initialized and is currently executing.
2	The job instance was successfully executed.
3	An error occurred while executing the job instance.
4	An error occurred during execution, but the job instance has been scheduled to retry the execution.
5	The job instance was interrupted before execution could complete and is not currently scheduled for another execution.
6	The job instance is in the process of pausing.

Value	Description
7	The job instance has been paused.

2.2.2.3 Lock Status Type

The Lock Status Type is an integer value which indicates the status of a **job lock** or **content database lock**. The value returned MUST be included in the following table:

Value	Description
0	The status of the lock is unknown.
1	The lock is currently held by another protocol client.
2	The lock is held by the specified protocol client.
3	An expired lock held by another protocol client was overwritten and the lock has been acquired by the specified protocol client.
4	An unexpected failure occurred while retrieving the state of the lock.

2.2.3 Binary Structures

None.

2.2.4 Result Sets

None.

2.2.5 Configuration Object Classes

The following configuration object **class identifiers (CLSID)** are used during the execution of this protocol in addition to the configuration object class identifiers (CLSID) specified in [\[MS-WSSFO2\]](#) section 2.2.6.1.1 [MS-WSSFO2].

Class	Class Identifier (CLSID)
Job Definition	3F9F635F-0036-42fe-9C2D-3284162732DB
Service	DACA2A15-B9B5-43da-BEA3-6B75FBE3A883

2.2.6 Configuration Object Properties

The properties of the following configuration objects are used throughout this protocol.

2.2.6.1 Timer Job Definition

The timer job definition configuration object stores information needed to manage job instances. The parent of a timer job definition MUST be a configuration object with a class identifier (CLSID) of the service or the **class** derived from the service as specified in Section [2.2.5](#) or a **Web application (1)** as specified in in [\[MS-WSSFO2\]](#) section 2.2.6.1.1.

Property	XPath Query	Description
Server	/object/flld[attribute::name='m_Server']	If the value returned by this XPath query is not null or empty, it MUST be the identifier of a configuration object. The configuration object MUST have the server class identifier (CLSID) specified in in [MS-WSSFO2] section 2.2.6.1.1. The execution of job instances for the job definition MUST execute only on the protocol client identified by the associated protocol server configuration object.
Lock Type	/object/flld[attribute::name='m_LockType']	A string value used to specify the job lock type used by a job definition.
Title	/object/flld[attribute::name='m_Title']	The string value used as a descriptive title for job definition.

2.2.6.2 E-Mail-Enabled List

An **e-mail enabled list** maintains information about the assignment of an e-mail alias to a list (1) and whether that e-mail alias has been marked for future deletion. An e-mail enabled list can also maintain information about a distribution list which has been marked for future deletion.

An e-mail enabled list is a complex type with the following fields, specified in T-SQL format:

```
Alias          nvarchar(128) NOT NULL
SiteId        uniqueidentifier NOT NULL
WebId         uniqueidentifier NOT NULL
ListId        uniqueidentifier NOT NULL
Deleted       bit NOT NULL DEFAULT((0))
```

Alias: The e-mail alias of the list (1) or distribution list. The alias of an e-mail enabled list is used to identify a single list (1) or a single distribution list. As such, it MUST be different from the aliases of all other e-mail enabled lists in the configuration database.

SiteId: The **site collection identifier** of the **site collection** containing the list (1), if any, or the **empty GUID** if the alias belongs to a distribution list.

WebId: The **site identifier** of the **site (2)** containing the list (1), if any, or the empty GUID if the alias belongs to a distribution list.

ListId: The **list identifier** of the list (1), if any, or the empty GUID if the alias belongs to a distribution list.

Deleted: This value is 1 if the e-mail alias has been marked for future deletion, and 0 otherwise.

2.2.6.3 Pending Distribution List

A pending distribution list encapsulates information about a distribution list which has an operation pending approval. It is a complex type with the following fields, specified in T-SQL format:

```
SiteId        uniqueidentifier NOT NULL
WebId         uniqueidentifier NOT NULL
```

GroupName	nvarchar(255) NOT NULL
ModifiedBy	nvarchar(255) NOT NULL
Version	rowversion

SiteId: The site collection identifier of the site collection containing the permission level.

WebId: The site identifier of the site (2) containing the permission level.

GroupName: A string containing the name of the permission level.

ModifiedBy: A string containing the user name of the user who last performed an operation on the distribution list.

Version: A **row version** used to identify when this distribution list last had an operation pending.

2.2.7 Tables and Views

None.

2.2.8 XML Structures

None.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 Server Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

3.1.1.1 Configuration Object Management

This protocol specifies the following types of operations used to manage configuration objects, which are specified in [\[MS-WSSFO2\]](#) section 2.2.5.1.

Configuration Object Creation, Update and Deletion

The server must maintain a list (1) of configuration objects. A service can store its settings on the protocol server by putting the settings in a new set of configuration objects. The configuration objects belonging to the service can then be passed to the stored procedures specified in this protocol to add them to the list (1) on the protocol server. Later, if the settings for the service change, its configuration objects can be updated. Finally, a service can remove its configuration objects from the protocol server when they are no longer needed.

Class Registration

To enable different services to distinguish their configuration objects from those of other services, each configuration object has a class. Before a service adds a configuration object to the configuration database, it first ensures that the class of the configuration object has been added to the list (1) of classes, which must be maintained by the server.

Dependency Tracking

The server must maintain a list (1) of dependencies between configuration objects. By defining dependencies between configuration objects, a service can ensure that the object of the dependency is not deleted. In addition, this protocol provides a mechanism to quickly find all of a configuration object's dependencies.

File Storage

Most of the stored procedures used to retrieve configuration objects from the server retrieve the configuration objects' properties. Retrieving properties can reduce the efficiency of storing a large amount of data in configuration object properties, especially if those properties are rarely needed. To address this, the protocol server must maintain a list (1) of large binary structures. This protocol specifies the stored procedures that can be used by a service to store and retrieve these large binary structures.

3.1.1.2 Timer Job Management

As in many services, the timer service stores settings in configuration objects on the protocol server. One of the primary classes of configuration object used by the timer service is a job definition. A job definition stores information about a task that the timer service is expected to perform on the protocol client. To deal with the complexity of coordinating job definitions executing on multiple protocol clients, this protocol specifies additional stored procedures used by the timer service to manage the creation, execution and removal of job definitions. These stored procedures can be categorized as follows:

Job Scheduling

A scheduled job is a record that indicates when a job instance will be run by a protocol client. The protocol client creates a scheduled job entry for each job instance when it is scheduled for execution.

Job Prerequisites

A job definition can optionally require a content database lock or job lock. The protocol client is responsible for acquiring and maintaining the lease of these locks. Both types of locks are valid for any job instance executed on the protocol client which holds the lock. Using one of these locks ensures that a single job instance for a job definition processes the locked resources. A job lock is specific to one job definition. However, multiple job definitions can require the use of the same content database lock. In this case, multiple job definitions requiring a content database lock can execute concurrently on the same protocol client which holds the lock.

The second type of prerequisite a job definition may use is a **target instance**. A job instance can process several different resources during a single execution. A target instance provides a way to keep track of the job instance's execution progress.

Locks and target instances must be created before the job instance executes.

Job Execution

A job instance represents a single execution of a job definition on a protocol client. A single job definition may have multiple job instances executing concurrently, each on a different protocol client.

A content database job has one target instance for each content database. The job can be executed on multiple protocol clients concurrently if each protocol client has acquired one or more content database locks. For example, assume a protocol client has three content database locks. A single job instance is executed, and it handles each of the three content databases sequentially.

When a job is started the protocol client indicates how many target instances the job instance is scheduled to process and keeps a counter which indicates how many target instances have been finished.

Job Status

A protocol client may query the status of a job instance execution.

Job History

After a job instance has been run, the protocol client creates a record of the execution. The job history entries provide information about the execution of a job instance. A list (1) of job instances run by a protocol client in the past can be obtained by retrieving these job history entries.

3.1.1.3 E-Mail-Enabled Lists

The server must maintain a list (1) of e-mail enabled lists. A service may use this by storing a mapping from an e-mail alias to a list identifier, site identifier and site collection identifier. Later, when the service receives incoming e-mail, it can look up the recipient's e-mail alias using the stored procedures specified in this protocol. If the e-mail alias is found, the service can update the associated list (1) with the contents of the e-mail.

3.1.1.4 Pending Distribution Lists

The server must maintain a list (1) of pending distribution lists. This may be used by a service which synchronizes the members of a permission level and a group maintained by an external user management system. When an operation such as renaming a permission level, modifying its description or creating an external group occurs which requires the service to update the external user management system, the external system can reply that the operation has been accepted pending approval, in which case the service temporarily stores information about the operation on the protocol server. There can be only one operation that's pending per permission level. Later, the service iterates over all of the entries in the pending distribution list's list (1) on the protocol server and queries the external system to determine whether the job has finished. Once the job has finished or been rejected, the service removes the operation entry from the list (1).

3.1.2 Timers

An execution timeout timer on the protocol server governs the execution time for requests from protocol clients. The amount of time is specified by a timeout value that is configured on the protocol server for all connections.

3.1.3 Initialization

A connection that uses the underlying protocol layers that are specified in Section 1.4, Relationship to Other Protocols, MUST be established before using this protocol as specified in [\[MS-TDS\]](#).

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

The T-SQL syntax for each stored procedure and result set and the variables they are composed of, is specified in the [\[MSDN-TSQL-Ref\]](#) protocol. In the T-SQL syntax, the variable name is followed by the type of the variable which can optionally have a length value in brackets and can optionally have a default value indicated by an equals sign followed by the default value.

3.1.5.1 `proc_AddTimerJobHistory`

The `proc_AddTimerJobHistory` stored procedure is called to record the processing of a target instance during the execution of a job instance. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_AddTimerJobHistory (
    @ServiceId          uniqueidentifier,
    @WebApplicationId   uniqueidentifier,
    @WebApplicationName nvarchar(255),
    @JobId              uniqueidentifier,
    @JobTitle           nvarchar(255),
```

```

@ServerId                uniqueidentifier,
@ServerName              nvarchar(128),
@Status                  int,
@StartTime               datetime,
@EndTime                datetime,
@DatabaseName           nvarchar(128),
@ErrorMessage           nvarchar(1000),
@RequestGuid            uniqueidentifier = null OUTPUT
);

```

@ServiceId: The **configuration object identifier** of the service associated with the job definition.

@WebApplicationId: The configuration object identifier of the Web application associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@WebApplicationName: The name of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@JobId: The configuration object identifier of the job definition.

@JobTitle: The title of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance was run.

@ServerName: The name of the protocol client where the job instance was run.

@Status: The Job Status Type of the job instance.

@StartTime: The **datetime** value when the job instance began running.

@EndTime: The datetime value when the job instance was finished.

@DatabaseName: The name of the processed database when a job instance uses a content database lock, otherwise NULL.

@ErrorMessage: The error message associated with an error that occurred while running the job instance, otherwise NULL.

@RequestGuid: The optional **request identifier** for the current request.

Return Code Values: The **proc_AddTimerJobHistory** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_AddTimerJobHistory** stored procedure MUST NOT return a result set.

3.1.5.2 proc_AddTimerLockForJob

The **proc_AddTimerLockForJob** stored procedure is called to request a job lock for the specified protocol client and job definition. The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_AddTimerLockForJob(
@JobId                uniqueidentifier,
@ServerId             uniqueidentifier,
@LockTimeout          int,
@LockStatus           int OUTPUT,
@LockExpiredServerId uniqueidentifier OUTPUT,
@RequestGuid         uniqueidentifier = NULL OUTPUT
)

```

);

@JobId: The configuration object identifier of the job definition for which a job lock is requested.

@ServerId: The configuration object identifier of the protocol client requesting the job lock.

@LockTimeout: The maximum age in minutes of an existing job lock before it is considered expired.

@LockStatus: A **Lock Status Type** which returns the status of the requested job lock. The valid values of this type are specified in section [2.2.2.3](#). The output variable **@LockStatus** MUST be 2 if the requesting protocol client successfully acquires a lock for a new **JobId** or if the requesting protocol client already holds the lock for the specified **JobId**, whether it has expired or not.

@LockExpiredServerId: The configuration object identifier of the protocol client that holds an expired job lock which is overwritten. The output variable **@LockExpiredServerId** MUST be the identifier of the protocol client which previously held the lock if the return value in **@LockStatus** is equal to 3 and the lock is not marked for deletion. Otherwise the output variable **@LockExpiredServerId** MUST be NULL.

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The **proc_AddTimerLockForJob** stored procedure returns an integer return code which MUST be in the following table:

Value	Description
0	Successful execution.
167	An error occurred while retrieving the state of the job lock.

Result Set: The **proc_AddTimerLockForJob** stored procedure MUST NOT return a result set.

3.1.5.3 proc_AddTimerTargetInstance

The **proc_AddTimerTargetInstance** stored procedure is called to associate a job definition with a target instance. This allows the job definition to be executed on that target instance. The type of target instances depends on the **Job Lock Type** specified by a job definition:

Job Lock Type	Target Instance
None	A target instance for each protocol server where the service associated with the job definition has been provisioned.
Job	One target instance for the job definition.
Content Database	A target instance for each content database contained in the Web application (1) referenced by the job definition.

The **proc_AddTimerTargetInstance** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_AddTimerTargetInstance (
```

```

@JobId                uniqueidentifier,
@TargetInstanceId     uniqueidentifier,
@RequestGuid          uniqueidentifier = NULL OUTPUT
);

```

@JobId: The configuration object identifier of the job definition for which a job lock is requested.

@TargetInstanceId: The configuration object identifier of a target instance associated with the job definition.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_AddTimerTargetInstance** stored procedure returns an integer return code which MUST be in the following table:

Value	Description
0	The specified job definition exists.
31	The specified job definition does not exist, and so wasn't associated with the specified target instance.

Result Set: The **proc_AddTimerTargetInstance** stored procedure MUST NOT return a result set.

3.1.5.4 proc_ClearProductVersions

The **proc_ClearProductVersions** stored procedure is called to remove all saved information about the installations on a server in the **farm**. The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_ClearProductVersions (
    @ServerId          uniqueidentifier
);

```

@ServerId: Remove all installation information for the protocol client with this configuration object identifier.

Return Values: The **proc_ClearProductVersions** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_ClearProductVersions** stored procedure MUST NOT return a result set.

3.1.5.5 proc_CompleteTimerRunningJob

The **proc_CompleteTimerRunningJob** stored procedure is called by the protocol client after a job instance completes. The **proc_CompleteTimerRunningJob** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_CompleteTimerRunningJob (
    @ServiceId        uniqueidentifier,
    @VirtualServerId  uniqueidentifier,
    @JobId             uniqueidentifier,
    @ServerId         uniqueidentifier,
    @Status            int,
);

```

```

    @RequestGuid      uniqueidentifier = NULL OUTPUT
);

```

@ServiceId: The configuration object identifier of the service associated with the job definition.

@VirtualServerId: The configuration object identifier of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@JobId: The configuration object identifier of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance was executed.

@Status: The Job Status Type of the job instance. If the **@Status** parameter equals 6 or 7 then the stored procedure MUST update the Job Status Type for the job instance. Otherwise the running job instance MUST be removed.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_CompleteTimerRunningJob** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_CompleteTimerRunningJob** stored procedure MUST NOT return a result set.

3.1.5.6 **proc_DeleteAllMarkedTimerLocks**

The **proc_DeleteAllMarkedTimerLocks** stored procedure is called to delete all expired job locks marked for deletion. The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_DeleteAllMarkedTimerLocks(
    @LockTimeout      int,
    @RequestGuid      uniqueidentifier = NULL OUTPUT
);

```

@LockTimeout: The maximum age in minutes of an existing job lock before this stored procedure considers the lock to have expired.

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The **proc_DeleteAllMarkedTimerLocks** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DeleteAllMarkedTimerLocks** stored procedure MUST NOT return a result set.

3.1.5.7 **proc_DeleteAllTimerLocksAndRunningJobs**

The **proc_DeleteAllTimerLocksAndRunningJobs** stored procedure is called to delete job locks marked for deletion and job instances for a specified protocol client. The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_DeleteAllTimerLocksAndRunningJobs (

```

```

@ServerId          uniqueidentifier,
@KeepPauseJobs    bit,
@RequestGuid       uniqueidentifier = NULL OUTPUT
);

```

@ServerId: The configuration object identifier of the protocol client holding the job lock(s) to be deleted.

@KeepPauseJobs: A flag which indicates whether to delete job instances that are pausing or have been paused as indicated by the Job Status Type. The value is a bit and MUST be in the following table:

Value	Description
0	Delete all job instances for the specified protocol client.
1	Job instances with current Job Status Type equal to 6 MUST be set to Job Status Type 7 and MUST not be deleted. Job instances with current Job Status Type equal to 7 MUST not be deleted. All remaining Job instances for the specified protocol client MUST be deleted.

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The **proc_DeleteAllTimerLocksAndRunningJobs** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DeleteAllTimerLocksAndRunningJobs** stored procedure MUST NOT return a result set.

3.1.5.8 proc_DeleteOldTimerJobHistory

The **proc_DeleteOldTimerJobHistory** stored procedure is called to delete the record of job instances run before the specified date and time. The stored procedure is specified using T-SQL syntax, as specified by the following T-SQL syntax.

```

PROCEDURE proc_DeleteOldTimerJobHistory (
    @DeleteBeforeDate    datetime,
    @RequestGuid         uniqueidentifier = NULL OUTPUT
);

```

@DeleteBeforeDate: Job instances older than this datetime value MUST be deleted.

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The **proc_DeleteOldTimerJobHistory** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DeleteOldTimerJobHistory** stored procedure MUST NOT return a result set.

3.1.5.9 proc_DeleteScheduledJob

The **proc_DeleteScheduledJob** stored procedure is called to delete the records of job instances scheduled to run in the future. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_DeleteScheduledJob(  
    @ServerId    uniqueidentifier,  
    @JobId       uniqueidentifier,  
    @RequestGuid uniqueidentifier = NULL OUTPUT  
);
```

@ServerId: The optional configuration object identifier of the protocol client where the job instance is executed.

@JobId: The optional configuration object identifier of the job definition.

The scheduled job instances deleted vary depending on the **@ServerId** and **@JobId** parameters as follows:

@ServerId	@JobId	Action
NULL	NULL	All records for scheduled job instances MUST be deleted.
Valid identifier	NULL	All records for scheduled job instances matching the @ServerId parameter MUST be deleted.
NULL	Valid identifier	All records for scheduled job instances matching the @JobId parameter MUST be deleted.
Valid identifier	Valid identifier	The scheduled job instance for the specified @JobId and @ServerId MUST be deleted.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_DeleteScheduledJob** stored procedure MUST return an integer result code of 0.

Result Set: The **proc_DeleteScheduledJob** stored procedure MUST NOT return a result set.

3.1.5.10 proc_DeleteTimerLockForJob

The **proc_DeleteTimerLockForJob** stored procedure is called to delete a job lock for a specified job definition if the **@ServerId** parameter matches the protocol client which holds the lock or if the **@ServerId** parameter is NULL. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_DeleteTimerLockForJob(  
    @JobId       uniqueidentifier,  
    @ServerId    uniqueidentifier,  
    @MarkOnly    bit = 1,  
    @RequestGuid uniqueidentifier = NULL OUTPUT  
);
```

@JobId: The configuration object identifier of the job definition for which a job lock is being deleted.

@ServerId: The optional configuration object identifier of a protocol client. If NULL, every job lock matching the specified job definition MUST be deleted. Otherwise only the job lock for the specified protocol client MUST be deleted.

@MarkOnly: A flag which indicates whether to delete the job lock or to just mark it for deletion at a later time. The value is a bit and MUST be in the following table:

Value	Description
0	Delete job lock entry from the database.
1 (default value)	Mark the job lock for deletion and keep the entry in the database.

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The **proc_DeleteTimerLockForJob** stored procedure returns an integer return code which MUST be in the following table:

Value	Description
0	A job lock was deleted.
31	No job locks were deleted.

Result Set: The **proc_DeleteTimerLockForJob** stored procedure MUST NOT return a result set.

3.1.5.11 proc_DeleteTimerRunningJobs

The **proc_DeleteTimerRunningJobs** stored procedure is called to delete a set of job instances for the specified job definition. The **proc_DeleteTimerRunningJobs** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_DeleteTimerRunningJobs (  
    @ServiceId           uniqueidentifier,  
    @VirtualServerId    uniqueidentifier,  
    @JobId               uniqueidentifier,  
    @ServerId           uniqueidentifier = NULL,  
    @RequestGuid        uniqueidentifier = NULL OUTPUT  
);
```

@ServiceId: The configuration object identifier of the service associated with the job definition.

@VirtualServerId: The configuration object identifier of the Web application (1) associated with the job definition. This parameter MUST be NULL when the specified job definition is associated only with a service.

@JobId: The configuration object identifier of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance is being executed. The default value is NULL, which indicates that the job instances for the specified job definition will be deleted for all protocol clients.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_DeleteTimerRunningJobs** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DeleteTimerRunningJobs** stored procedure MUST not return a result set.

3.1.5.12 **proc_DeleteTimerTargetInstance**

The **proc_DeleteTimerTargetInstance** stored procedure is called to disassociate job definitions from a target instance. Disassociation means that a job definition will no longer be executed on a target instance. The **proc_DeleteTimerTargetInstance** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_DeleteTimerTargetInstance (
    @JobId          uniqueidentifier,
    @TargetInstanceId uniqueidentifier,
    @Exists         bit OUTPUT,
    @RequestGuid    uniqueidentifier = NULL OUTPUT
);
```

@JobId: The configuration object identifier of a job definition. If the **@JobId** parameter is NULL then all job definitions MUST be disassociated with the target instance specified by the **@TargetInstanceId** parameter.

@TargetInstanceId: The configuration object identifier of a target instance associated with the job definition.

@Exists: A bit value indicating whether the specified job definition has any target instances still associated with it after the input target instance is disassociated. The value returned MUST be in the following table:

Value	Description
0	The job definition has no target instances associated with it.
1	The job definition still has some target instances associated with it.

@RequestGuid: The optional request identifier for the current request.

Return Values: **proc_DeleteTimerTargetInstance** returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DeleteTimerTargetInstance** stored procedure MUST NOT return a result set.

3.1.5.13 **proc_DeleteTimerTargetInstances**

The **proc_DeleteTimerTargetInstances** stored procedure is called to disassociate a job definition from all of its target instances. The **proc_DeleteTimerTargetInstances** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_DeleteTimerTargetInstances (
    @JobId          uniqueidentifier,
    @RequestGuid    uniqueidentifier = NULL OUTPUT
);
```

@JobId: The configuration object identifier of a job definition.

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DeleteTimerTargetInstances** stored procedure MUST NOT return a result set.

3.1.5.14 **proc_dropClass**

The **proc_dropClass** stored procedure is called to remove a class and all configuration objects related to that class from the configuration database. The configuration database MUST remove any classes that have a class identifier (CLSID) equal to **@ClassId** or a **BaseClassId** equal to the class identifier (CLSID) of a class removed by **proc_dropClass**. The configuration database MUST remove any configuration objects with a class identifier (CLSID) equal to **@ClassId**.

The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_dropClass (  
    @ClassId uniqueidentifier,  
    @RequestGuid uniqueidentifier = NULL OUTPUT  
);
```

@ClassId: The class identifier (CLSID) of the class.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure MUST return an integer result code of 0.

Result Set: The **proc_dropClass** stored procedure MUST return a single result set, as specified in section [3.1.5.14.1](#).

3.1.5.14.1 **DropClass Result Set**

The **DropClass** result set MUST contain the statistics about the classes and **objects** removed by the stored procedure. The **DropClass** result set is specified by the following T-SQL syntax.

```
NumClasses int,  
NumObjectsBefore int,  
NumObjectsAfter int;
```

NumClasses: The count of all the classes removed, including the classes that have a class identifier (CLSID) equal to **@ClassId** and all classes that have a **BaseClassId** equal to the class identifier (CLSID) of the class removed by **proc_dropClass**.

NumObjectsBefore: The count of all objects in the configuration database before the execution of the stored procedure.

NumObjectsAfter: The count of all objects in the configuration database after the execution of the stored procedure.

3.1.5.15 **proc_dropEmailEnabledList**

The **proc_dropEmailEnabledList** stored procedure is called to remove an e-mail enabled list with the specified site collection identifier, site identifier and list identifier, which is not marked for deletion, from the e-mail enabled list collection. The **proc_dropEmailEnabledList** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_dropEmailEnabledList(  
    @SiteId          uniqueidentifier,  
    @WebId           uniqueidentifier,  
    @ListId          uniqueidentifier,  
    @RequestGuid     uniqueidentifier = NULL OUTPUT  
);
```

@SiteId: The site collection identifier of the site collection which contains the list (1).

@WebId: The site identifier of the site (2) which contains the list (1).

@ListId: The list identifier of the list (1) to remove from the e-mail enabled list collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_dropEmailEnabledList** stored procedure MUST NOT return any result sets.

3.1.5.16 **proc_dropEmailEnabledListByAlias**

The **proc_dropEmailEnabledListByAlias** stored procedure is called to remove an e-mail enabled list with the specified alias from the e-mail enabled list collection. The **proc_dropEmailEnabledListByAlias** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_dropEmailEnabledListByAlias(  
    @Alias           nvarchar(128),  
    @RequestGuid     uniqueidentifier = NULL OUTPUT  
);
```

@Alias: The e-mail alias of the e-mail enabled list.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_dropEmailEnabledListByAlias** stored procedure MUST NOT return any result sets.

3.1.5.17 **proc_dropEmailEnabledListsByWeb**

The **proc_dropEmailEnabledListsByWeb** stored procedure is called to remove all e-mail enabled list items with the specified site collection identifier and site identifier and not marked for deletion. The **proc_dropEmailEnabledListsByWeb** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_dropEmailEnabledListsByWeb(  
    @SiteId          uniqueidentifier,
```

```

    @WebId          uniqueidentifier,
    @RequestGuid    uniqueidentifier = NULL OUTPUT
);

```

@SiteId: The site collection identifier of the site collection which contains the site (2).

@WebId: The site identifier of the site (2) from which to remove all e-mail enabled lists in the e-mail enabled list collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which **MUST** be 0.

The stored procedure **MUST NOT** return any result sets.

3.1.5.18 `proc_DropObject`

The **`proc_DropObject`** stored procedure is called to remove a configuration object from the configuration database. The configuration database **MUST** prevent a configuration object from being deleted if another configuration object depends on it by returning an **Error** with **Number** 547 as specified in [\[MS-TDS\]](#) section 2.2.7.9. The configuration database **MUST** remove a configuration object when its parent is removed.

The **`proc_DropObject`** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_DropObject(
    @Id          uniqueidentifier,
    @RequestGuid uniqueidentifier = NULL OUTPUT
);

```

@Id: The configuration object identifier of the configuration object to be removed.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **`proc_DropObject`** stored procedure **MUST** return an integer return code that is listed in the following table:

Value	Description
0	Successful execution.
1	The configuration object identified by @Id was not found in the configuration database.

Result Set: The **`proc_DropObject`** stored procedure **MUST NOT** return a result set.

3.1.5.19 `proc_dropPendingDistributionList`

The **`proc_dropPendingDistributionList`** stored procedure is called to remove a distribution list belonging to a permission level from the pending distribution lists set (section [1.3.5](#)). The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_dropPendingDistributionList(
    @SiteId      uniqueidentifier,
    @WebId       uniqueidentifier,

```

```

    @GroupName          nvarchar(255),
    @RequestGuid        uniqueidentifier = NULL OUTPUT
);

```

@SiteId: The site collection identifier of the site collection to which the permission level belongs.

@WebId: The site identifier of the site (2) to which the permission level belongs.

@GroupName: The name of the permission level whose associated distribution list is to be removed from the pending distribution lists set (section [1.3.5](#)).

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The stored procedure **proc_dropPendingDistributionList** MUST NOT return any result sets.

3.1.5.20 proc_DropSiteMap

The **proc_DropSiteMap** stored procedure is called to delete a reference to a site collection. **proc_DropSiteMap** is specified by the following T-SQL syntax.

```

PROCEDURE proc_DropSiteMap (
    @Id                uniqueidentifier,
    @RequestGuid        uniqueidentifier = NULL OUTPUT
);

```

@Id: The site collection identifier of the site collection whose reference is being deleted.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_DropSiteMap** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_DropSiteMap** stored procedure MUST NOT return a result set.

3.1.5.21 proc_getDeletedEmailAliases

The **proc_getDeletedEmailAliases** stored procedure is called to return the e-mail aliases of e-mail enabled lists and distribution lists which have been marked as deleted. The **proc_getDeletedEmailAliases** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_getDeletedEmailAliases (
    @RequestGuid        uniqueidentifier = NULL OUTPUT
);

```

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_getDeletedEmailAliases** stored procedure MUST return a single result set, as specified in section [3.1.5.21.1](#).

3.1.5.21.1 DeletedEmailAliases Result Set

The **DeletedEmailAliases** result set MUST contain all elements in the collection of e-mail enabled list elements which have been marked for deletion. The **DeletedEmailAliases** result set is specified by the following T-SQL syntax.

```
Alias          nvarchar(128),
ListId         uniqueidentifier;
```

Alias: The alias of the e-mail enabled list.

ListId: The list identifier of the e-mail enabled list or the empty GUID if the alias belongs to a distribution list.

3.1.5.22 proc_GetDependentObjectsByBaseClass

The **proc_GetDependentObjectsByBaseClass** stored procedure is called to retrieve a list (1) of configuration objects which depend on a specified configuration object and are in the inheritance hierarchy of the specified class. The **proc_GetDependentObjectsByBaseClass** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetDependentObjectsByBaseClass (
    @BaseClassId      uniqueidentifier,
    @DependeeId       uniqueidentifier,
    @RequestGuid      uniqueidentifier = NULL OUTPUT
);
```

@BaseClassId: The configuration object identifier of the class at the root of the inheritance hierarchy of the classes of the returned configuration objects.

@DependeeId: The configuration object identifier of the configuration object whose dependents are to be retrieved.

@RequestGuid: The optional request identifier for the current request

Return Values: The **proc_GetDependentObjectsByBaseClass** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

The **proc_GetDependentObjectsByBaseClass** stored procedure MUST return a single result set as specified in section [3.1.5.22.1](#).

3.1.5.22.1 Dependent Object Ids Result Set

The **Dependent Object Ids** result set returns a set of configuration object identifiers which depend on the specified configuration object and which have classes in the inheritance hierarchy of the specified class. The **Object Ids** result set MUST be returned. The **Object Ids** result set MUST return 1 or more rows if there are configuration objects that match the input parameters, otherwise, it MUST return 0 rows. The **Object Ids** result set is specified by the following T-SQL syntax.

```
Id             uniqueidentifier;
```

Id: The configuration object identifier of a configuration object.

3.1.5.23 proc_getEmailEnabledListByAlias

The **proc_getEmailEnabledListByAlias** stored procedure is called to search the e-mail enabled list collection, across all site (2) elements and site collection elements, and return a result set of all non-deleted e-mail enabled list elements with the specified e-mail alias.

The **proc_getEmailEnabledListByAlias** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getEmailEnabledListByAlias (  
    @Alias          nvarchar(128),  
    @RequestGuid   uniqueidentifier = NULL OUTPUT  
);
```

@Alias: The e-mail alias of the e-mail enabled list to retrieve.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The stored procedure **proc_getEmailEnabledListByAlias** MUST return 1 result set as specified in section [3.1.5.23.1](#).

3.1.5.23.1 EmailEnabledListByAlias Result Set

The **EmailEnabledByAlias** result set MUST contain all rows in the e-mail enabled list collection with e-mail alias equal to **@Alias**, and which have not been deleted. The **EmailEnabledListByAlias** result set is specified by the following T-SQL syntax.

```
SiteId          uniqueidentifier,  
WebId           uniqueidentifier,  
ListId         uniqueidentifier;
```

SiteId: The site collection identifier of the site collection containing the e-mail enabled list.

WebId: The site identifier of the site (2) containing the e-mail enabled list.

ListId: The list identifier of the e-mail enabled list.

3.1.5.24 proc_getFile

The **proc_getFile** stored procedure is called to retrieve a file from the configuration database. The **proc_getFile** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getFile(  
    @ObjectId      uniqueidentifier,  
    @RequestGuid   uniqueidentifier = NULL OUTPUT  
);
```

@ObjectId: The configuration object identifier associated with the file to be retrieved.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getFile** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

The **proc_getFile** stored procedure MUST return a single result set as specified in section [3.1.5.24.1](#).

3.1.5.24.1 File Result Set

File Result Set returns the file referred to by **@ObjectId**. The file result set MUST be returned and MUST contain only one row when **@ObjectId** corresponds to the **GUID** of a file in the database. When **@ObjectId** does not correspond to the GUID of a file in the database, the file result set MUST be returned and MUST contain 0 rows. The file result set is specified by the following T-SQL syntax.

```
FileImage      image
```

FileImage: Contains the file referred to by the **@ObjectId** parameter.

3.1.5.25 proc_getNewObjects

The **proc_getNewObjects** stored procedure is called to retrieve new, changed, and deleted configuration objects whose configuration object version is greater than the value of **@NewestCachedVersion** as well as other configuration objects which depend on them. The **proc_getNewObjects** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getNewObjects(  
    @NewestCachedVersion    rowversion,  
    @RequestGuid            uniqueidentifier = NULL OUTPUT  
);
```

@NewestCachedVersion: The lowest, non-inclusive configuration object version of configuration objects sought.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getNewObjects** stored procedure returns an integer return code which MUST be listed in the following table:

Value	Description
0	Successful execution.
1	@NewestCachedVersion is greater than the highest configuration object version.

If no configuration objects have a configuration object version greater than **@NewestCachedVersion**, the **proc_getNewObjects** stored procedure MUST NOT return any result sets. Otherwise, the **proc_getNewObjects** stored procedure MUST return exactly four result sets in the order as specified in section [3.1.5.25.1](#) through section [3.1.5.25.4](#).

3.1.5.25.1 Last Update Result Set

The **LastUpdate** result set returns a version number greater than the maximum configuration object version used in the configuration database. The **LastUpdate** result set MUST contain 1 row specified by the following T-SQL syntax.

Version rowversion,

Version: A row version value that MUST be greater than the maximum configuration object version used in the configuration database.

3.1.5.25.2 Modified Objects Result Set

The Modified Objects result set returns configuration objects with configuration object version greater than **@NewestCachedVersion**. If no configuration objects have been created or modified after **@NewestCachedVersion**, the **Objects** result set MUST NOT contain rows. If configuration objects have been modified after **@NewestCachedVersion**, the **Objects** result set MUST contain 1 or more rows. The **Objects** result set is specified by the following T-SQL syntax.

```
Id                    uniqueidentifier,  
ParentId            uniqueidentifier,  
ClassId             uniqueidentifier,  
Name                nvarchar(128),  
Status              int,  
Version             rowversion,  
Properties          ntext;
```

Id: Contains the identifier of the configuration object.

ParentId: Contains the parent identifier of the configuration object.

ClassId: Contains the class identifier (CLSID) of the configuration object.

Name: Contains the name of the configuration object. It MUST NOT be NULL.

Status: Contains the status of the configuration object.

Version: Contains the version of the configuration object. This value MUST be greater than **@NewestCachedVersion**.

Properties: Contains the properties of the configuration object. **Properties** MUST NOT be NULL.

3.1.5.25.3 Dependencies Result Set

The **Dependencies** result set returns identifiers of configuration objects which depend on configuration objects from the **Modified Objects** result set. The **Dependencies** result set MUST return zero or more rows.

The **Dependencies** result set is specified by the following T-SQL syntax.

```
DependantId        uniqueidentifier;
```

DependantId: Contains the configuration object identifier of the dependent configuration object.

3.1.5.25.4 Tombstones Result Set

The **Tombstones result set** returns the identifiers of configuration objects which have been deleted after **@NewestCachedVersion**. The **Tombstones** result set MUST return 0 or more rows.

The **Tombstones result set** is specified by the following T-SQL syntax.

```
Id          uniqueidentifier,  
Version     rowversion;
```

Id: Contains the identifier of the deleted configuration object.

Version: Contains the version of the deleted configuration object. This value MUST be greater than **@NewestCachedVersion**.

3.1.5.26 **proc_getPendingDistributionListsSinceVersion**

The **proc_getPendingDistributionListsSinceVersion** stored procedure is called to get all distribution lists which have an operation pending whose row version is greater than **@Version** parameter. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getPendingDistributionListsSinceVersion(  
    @Version          rowversion,  
    @RequestGuid      uniqueidentifier = NULL OUTPUT  
);
```

@Version: The row version which forms the exclusive lower bound of the result set. If **@Version** is equal to 0, the server will return all the distribution lists pending approval.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

The stored procedure MUST return 1 result set:

3.1.5.26.1 **PendingDistrubutionLists Result Set**

The **PendingDistributionLists** result set returns a set of distribution lists marked as requiring approval. The **PendingDistributionLists** result set MUST contain each distribution list that has an operation pending whose row version is greater than the **@Version** parameter value. The **PendingDistributionLists** result set is specified by the following T-SQL syntax.

```
SiteId      uniqueidentifier,  
WebId       uniqueidentifier,  
GroupName   nvarchar(255),  
{Version}   bigint;
```

SiteId: The site collection identifier of the site collection to which the distribution list belongs.

WebId: The site identifier of the site (2) to which the distribution list belongs.

GroupName: The name of the permission level whose associated distribution list has an operation pending.

{Version}: The row version of the distribution list.

3.1.5.27 proc_GetProductVersions

The **proc_GetProductVersions** stored procedure is called to retrieve information about all installations on the farm. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetProductVersions (  
);
```

Return values:

The **proc_GetProductVersions** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Sets:

The **proc_GetProductVersions** stored procedure MUST return a single result set as specified in section [3.1.5.27.1](#).

3.1.5.27.1 Get Product Versions Result Set

The **Get Product Versions Result Set** returns all the saved information about the installed products on the farm. The **Get Product Versions Result Set** MUST contain one row for each update installation, as well as one row for each installation that can be patched.

ServerId	uniqueidentifier,
Product	nvarchar(1023),
Version	nvarchar(64),
PatchableUnit	nvarchar(1023),
PatchableUnitName	nvarchar(1023),
PatchName	nvarchar(1023),
PatchUrl	nvarchar(260),
Flags	int,
CustomData	ntext;

ServerId: The configuration object identifier of the front-end Web server or application server where the installation was performed.

Product: The name of the product that includes this installation.

Version: The version of the installation. The version number is in the following format:

```
major.minor[.build[.revision]]
```

Where *major*, *minor*, *build*, and *revision* fields are integers and *build* and *revision* are optional.

PatchableUnit: If this row represents a **Windows Installer (.msi) file** installation, this MUST contain the **ProductCode** stored in the Windows Installer (.msi) file. If this row represents a third party product that can be subdivided into individual units for patching, this MUST contain a unique identifier for the individual unit. If this row represents a third party product that cannot be subdivided into individual units for patching, this MUST be NULL.

PatchableUnitName: If this row represents a Windows Installer (.msi) file installation, this MUST contain the **ProductName** stored in the Windows Installer (.msi) file. If this row represents a piece of software that can be subdivided into individual units for patching, this MUST contain a display

name for the individual unit. If this row represents a piece of software that cannot be subdivided into individual units for patching, this MUST be NULL.

PatchName: If this row represents an installed software patch, this MUST contain a display name for the software patch. Otherwise, this MUST be NULL.

PatchUrl: If this row represents installed software patch and there is a URL associated with the software patch, this MUST contain the URL. Otherwise, this MUST be NULL.

Flags: Bit flags containing information about the state of the installation. It MUST contain the sum of zero or more values from the following table:

Value	Description
1	This installation is required on all servers in the farm.
2	An optional upgrade is available for this server because of the installation state detected.
4	A required upgrade must be performed on this server because of the installation state detected.

CustomData: This column MUST be NULL.

3.1.5.28 `proc_getSiteBestMatch`

The `proc_getSiteBestMatch` stored procedure is called to search for the best matched site collection from the specified criteria. The `proc_getSiteBestMatch` stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_getSiteBestMatch(
    @DatabaseId          uniqueidentifier = NULL,
    @ApplicationId       uniqueidentifier = NULL,
    @PathSearch          nvarchar(128),
    @BestMatchOffsetScope int = 0,
    @CollectionType      int,
    @BestMatchSiteId     uniqueidentifier output,
    @BestMatchDatabaseId uniqueidentifier output,
    @BestMatchApplicationId uniqueidentifier output,
    @BestMatchOffset     int output,
    @RequestGuid         uniqueidentifier = NULL OUTPUT
);

```

@DatabaseId: Contains the configuration object identifier of the content database to search for the best matched site collection.

@ApplicationId: Contains the configuration object identifier of the Web application (1) to search for the best matched site collection.

@PathSearch: Contains the prefix of a **server-relative URL** to search for. This parameter MUST NOT be NULL.

@BestMatchOffsetScope: Specifies the scope when calculating the value of **@BestMatchOffset** for a site collection. The value MUST be listed in the following table:

Value	Description
0	No limit.

Value	Description
1	Include site collections belonging to the same Web application (1) as the best matched site collection.
2	Include site collections belonging to the same content database as the best matched site collections.

@CollectionType: Contains the type of site collections for the best matched site collection. The value MUST be specified and MUST be a value listed in the following table:

Value	Description
0	All site collections.
1	Only site collections which do redirect to other site collections.
2	Only site collections which do not redirect to other site collections.
3	Only site collections that have been upgraded.

@BestMatchSiteId: Return the site collection identifier of the best matched site collection with respect to the value of **@CollectionType** or return **NULL** if no matches are found. If **@DatabaseId** is **NULL**, it MUST return the site collection identifier of the best matched site collection across all content databases. If **@DatabaseId** corresponds to the configuration object identifier of a content database, then it MUST return the site collection identifier of the best matched site collection within that content database. If **@ApplicationId** is **NULL**, it MUST return the site collection identifier of the best matched site collection across all Web applications (1). If **@ApplicationId** corresponds to the configuration object identifier of a content database, then it MUST return the site collection identifier of the best matched site collection within that Web application (1).

@BestMatchDatabaseId: The configuration object identifier of the content database containing the best matched site collection.

@BestMatchApplicationId: The configuration object identifier of the Web application (1) containing the best matched site collection.

@BestMatchOffset: If a match is found, this parameter MUST return the total number of site collections that precede the best-matched site collection's server-relative URL with respect to the value of **@CollectionType** in alphabetical order and with respect to the collation of the content database. If **@BestMatchOffsetScope** is 0, **@BestMatchOffset** MUST include the number of site collections that precede the best-matched site collection's server-relative URL across all Web applications (1) and all content databases. If **@BestMatchOffsetScope** is 1, **@BestMatchOffset** MUST include the number of site collections which precede the best-matched site collection's server-relative URL across the Web applications (1) identified by **@BestMatchApplicationId**. If **@BestMatchOffsetScope** is 2, **@BestMatchOffset** MUST include the number of site collections that precede the best-matched site collection's server-relative URL across the content databases identified by **@BestMatchDatabaseId**. If matches are not found, this parameter MUST return 0.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getSiteBestMatch** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_getSiteBestMatch** stored procedure MUST NOT return a result set.

3.1.5.29 proc_getSiteCount

The **proc_getSiteCount** stored procedure is called to retrieve the number of site collections in the specified content database. The **proc_getSiteCount** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteCount (
    @DatabaseId    uniqueidentifier = NULL,
    @RequestGuid   uniqueidentifier = NULL OUTPUT
);
```

@DatabaseId: Contains the configuration object identifier of the content database whose sites are counted.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getSiteCount** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

The **proc_getSiteCount** stored procedure MUST return a single result set as specified in section [3.1.5.29.1](#).

3.1.5.29.1 SiteCount Result Set

The **SiteCount** result set MUST return the number of site collections in the content database identified by **@DatabaseId** and MUST return exactly 1 row. If **@DatabaseId** is NULL, it MUST return the total number of site collections in all content databases. The **SiteCount** result set is specified by the following T-SQL syntax.

```
sitecount    int;
```

sitecount: Contains the count of the number of site collections in the content database(s) identified by **@DatabaseId**. If no content database with a configuration object identifier matching **@DatabaseId** is found in the configuration database, the value of sitecount MUST be 0.

3.1.5.30 proc_GetSiteIdOfHostHeaderSite

The **proc_GetSiteIdOfHostHeaderSite** stored procedure is called to get the site collection identifier of the site collection represented by the specified **host header site identifier**. The **proc_GetSiteIdOfHostHeaderSite** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetSiteIdOfHostHeaderSite (
    @HostHeader    nvarchar(128),
    @RequestGuid   uniqueidentifier = NULL OUTPUT
);
```

@HostHeader: The **host header** for the site collection to be returned.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_GetSiteIdOfHostHeaderSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

The **proc_GetSiteIdOfHostHeaderSite** stored procedure MUST return 1 result set as specified in section [3.1.5.30.1](#).

3.1.5.30.1 ID Result Set

The **ID** result set returns the site collection identifier of the site collection when the host header site identifier of that site collection matches the value of **@HostHeader**. The **ID** result set MUST be returned and MUST contain one row when the host header site identifier of a site collection matches the value of **@HostHeader**. When **@HostHeader** does not match any host header site identifiers, The **ID** result set MUST be returned and MUST contain 0 rows. The **ID** result set is specified by the following T-SQL syntax.

```
Id          uniqueidentifier
```

Id: Contains the site collection identifier with a host header site identifier matching **@HostHeader**.

3.1.5.31 proc_getSiteIds

The **proc_getSiteIds** stored procedure is called to get a list (1) of site collection identifiers that correspond to site collections in a **site subscription**. The **proc_getSiteIds** stored procedure is specified by the following T-SQL syntax,

```
PROCEDURE proc_getSiteIds (  
    @SubscriptionId  uniqueidentifier,  
    @RequestGuid     uniqueidentifier = NULL OUTPUT  
);
```

@SubscriptionId: Contains the identifier of the site subscription. This value MUST NOT be NULL.

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_getSiteIds** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Sets: This stored procedure MUST return 1 result set as specified in section [3.1.5.31.1](#).

3.1.5.31.1 Get Site Ids Result Set

The **Site Ids** result set returns the set of site collection identifiers that correspond to site collections in a single site subscription. The **Site Ids** result set MUST be returned, and MUST contain one result for each site collection contained in the site subscription identified by the value of **@SubscriptionId**.

```
Id          uniqueidentifier;
```

Id: Contains the site collection identifier. This value MUST NOT be NULL.

3.1.5.32 proc_getSiteNames

The **proc_getSiteNames** stored procedure is called to retrieve server-relative URLs of all the site collections within a container. The **proc_getSiteNames** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_getSiteNames(
    @ContainerId        uniqueidentifier,
    @ContainerType      int,
    @CollectionType     int,
    @RequestGuid        uniqueidentifier = NULL OUTPUT
);

```

@ContainerId: Contains the configuration object identifier of the container from which site collections are retrieved. This value **MUST** correspond to the configuration object identifier of a content database or Web application (1).

@ContainerType: Specifies the type of the container from which site collections are retrieved. The value **MUST** be listed in the following table.

Value	Description
0	Indicates that the protocol server MUST return the server-relative URLs of all site collections in the Web application (1) where @ContainerId matches the configuration object identifier of the configuration object.
1	Indicates that the protocol server MUST return the server-relative URLs of all site collections in the content database where @ContainerId matches the configuration object identifier of the configuration object.

@CollectionType: Specifies the types of site collections to be retrieved from the container. The value **MUST** be listed in the following table:

Value	Description
0	All site collections.
1	Only site collections which redirect to other site collections.
2	Only site collections which do not redirect to other site collections.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getSiteNames** stored procedure returns an integer return code which **MUST** be 0, which indicates successful execution.

The **proc_getSiteNames** stored procedure **MUST** return a single result set as specified in section [3.1.5.32.1](#).

3.1.5.32.1 Path Result Set

The **Path** result set returns the server-relative URLs of all the site collections in a container. The **Path** result set **MUST** be returned if 1 or more site collections match the values of **@ContainerId**, **@ContainerType**, and **@CollectionType**. If no site collections are found that match the values of **@ContainerId**, **@ContainerType**, and **@CollectionType**, the **Path** result set **MUST** be returned and **MUST** contain 0 rows.

The **Path** result set is specified by the following T-SQL syntax.

```

Path                nvarchar(128),
HostHeaderIsSiteName bit,

```

Pairing tinyint;

Path: Contains the server-relative URL for the site collection.

HostHeaderIsSiteName: Indicates whether the site collection being stored uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

Pairing: Contains the URL scheme for the site collection. This parameter MUST be one of the values in the following table.

Value	Description
2	The URL scheme for the site collection is HTTP.
3	The URL scheme for the site collection is HTTPS .

3.1.5.33 proc_getSiteSubscriptionsInContentDB

The **proc_getSiteSubscriptionsInContentDB** stored procedure is called to get a list (1) of site subscriptions that have site collections in a single content database. The **proc_getSiteSubscriptionsInContentDB** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteSubscriptionsInContentDB (  
    @ContentDatabaseId    uniqueidentifier,  
    @RequestGuid          uniqueidentifier = NULL OUTPUT  
);
```

@ContentDatabaseId: Contains the configuration object identifier of a content database.

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_getSiteSubscriptionsInContentDB** stored procedure returns an integer return code which MUST be 0.

Result Sets:

This stored procedure MUST return one result set as specified in section [3.1.5.33.1](#).

3.1.5.33.1 Get Site Subscriptions In Content DB Result Set

The **Get Site Subscriptions In Content DB** result set returns a set of unique **site subscription identifiers**. The result set MUST contain one result for each unique site subscription identifier present on a site collection in the content database referenced by **@ContentDatabaseId**.

SubscriptionId uniqueidentifier

SubscriptionId: The unique identifier of the site subscription. This value MUST NOT be NULL.

3.1.5.34 **proc_getSiteSubscriptionsInWebApplication**

The **proc_GetSiteSubscriptionsInWebApplication** is called to get a list (1) of site subscriptions that have site collections in a single Web application. The **proc_getSiteSubscriptionsInWebApplication** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteSubscriptionsInWebApplication (  
    @WebApplicationId    uniqueidentifier,  
    @RequestGuid         uniqueidentifier = NULL OUTPUT  
);
```

@WebApplicationId: Contains the configuration object identifier of a Web application (1).

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_getSiteSubscriptionsInWebApplication** stored procedure returns an integer return code which MUST be 0.

Result Sets:

This stored procedure MUST return 1 result set as specified in section [3.1.5.34.1](#).

3.1.5.34.1 **Get Site Subscriptions in Web Application Result Set**

The **Get Site Subscriptions in Web Application** result set returns a set of unique site subscription identifiers. The result set MUST contain one result for each unique site subscription identifier present on a site collection in the Web application (1) referenced by **@WebApplicationId**.

```
SubscriptionId uniqueidentifier
```

SubscriptionId: The unique identifier of the site subscription. This value MUST NOT be NULL.

3.1.5.35 **proc_getSiteSubscriptionSiteIdsInContentDatabase**

The **proc_getSiteSubscriptionSiteIdsInContentDatabase** stored procedure is called to get a list (1) of site collection identifiers that represent site collections contained in a single site subscription and content database. The **proc_getSiteSubscriptionSiteIdsInContentDatabase** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteSubscriptionSiteIdsInContentDatabase (  
    @ContentDatabaseId    uniqueidentifier,  
    @SubscriptionId       uniqueidentifier,  
    @RequestGuid         uniqueidentifier = NULL OUTPUT  
);
```

@ContentDatabaseId: Contains the configuration object identifier of a content database. This value MUST NOT be NULL.

@SubscriptionId: Contains the unique identifier of a site subscription. This value MUST NOT be NULL.

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_getSiteSubscriptionIdsInContentDatabase** stored procedure returns an integer return code which MUST be 0.

Result Sets: This stored procedure MUST return 1 result set as specified in section [3.1.5.35.1](#).

3.1.5.35.1 Get Site Subscription Site IDs in content Database Result Set

The **Get Site Subscription Site Ids in Content Database** result set returns a set of unique site collection identifiers. The result set MUST contain one result for each site collection in the content database referenced by **@ContentDatabaseId** and whose site subscription identifier is **@SubscriptionId**.

Id uniqueidentifier

Id: Contains the site collection identifier. This value MUST NOT be NULL.

3.1.5.36 proc_getSiteSubscriptionSiteIdsInWebApplication

The **proc_getSiteSubscriptionSiteIdsInWebApplication** stored procedure is called to get a list (1) of site collection identifiers that represent site collections contained in a single site subscription and Web application (1). The **proc_getSiteSubscriptionSiteIdsInWebApplication** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteSubscriptionSiteIdsInWebApplication (
    @WebApplicationId    uniqueidentifier,
    @SubscriptionId      uniqueidentifier,
    @RequestGuid        uniqueidentifier = NULL OUTPUT
);
```

@WebApplicationId: Contains the configuration object identifier of a Web application (1). This value MUST NOT be NULL.

@SubscriptionId: Contains the unique identifier of a site subscription. This value MUST NOT be NULL.

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_getSiteSubscriptionSiteIdsInWebApplication** stored procedure returns an integer return code which MUST be 0.

Result Sets:

This stored procedure MUST return one result set as specified in section [3.1.5.36.1](#).

3.1.5.36.1 Get Site Subscription Site Ids In Web Application Result Set

The **Get Site Subscription Site Ids In Web Application** result set returns a set of unique site collection identifiers. The result set MUST contain one result for each site collection in the Web application (1) referenced by **@WebApplicationId** and whose site subscription identifier is **@SubscriptionId**.

Id uniqueidentifier

Id: Contains the site collection identifier. This value MUST NOT be NULL.

3.1.5.37 **proc_getSubscriptionIds**

The **proc_getSubscriptionIds** stored procedure is called to get a list (1) of site subscription identifiers in the farm. The **proc_getSubscriptionIds** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSubscriptionIds (  
    @RequestGuid        uniqueidentifier = NULL OUTPUT  
);
```

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_getSubscriptionIds** stored procedure returns an integer return code which MUST be 0.

Result Sets:

This stored procedure MUST return one result set as specified in section [3.1.5.37.1](#).

3.1.5.37.1 **Get Subscription Ids Result Set**

The **Get Subscription Ids** result set returns a list (1) of site subscription identifiers in the farm. The result set MUST contain one result per site subscription identifier.

SubscriptionId uniqueidentifier

SubscriptionId: Contains the site subscription identifier. This value MUST NOT be NULL.

3.1.5.38 **proc_getSiteSubset**

The **proc_getSiteSubset** stored procedure is called to retrieve the site collections within a Web application (1) or within a content database. The **proc_getSiteSubset** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteSubset (  
    @DatabaseId        uniqueidentifier = NULL,  
    @ApplicationId     uniqueidentifier = NULL,  
    @PageSize          int,  
    @StartRow          int,  
    @SortDirection    nvarchar(4),  
    @CollectionType    int  
);
```

@DatabaseId: The configuration object identifier of a content database. . If **@DatabaseId** is NULL, it refers all the site collections in all content databases.

@ApplicationId: The configuration object identifier of a Web application (1). If **@ApplicationId** is NULL, it refers all the site collections in all Web applications (1).

@PageSize: The number of rows to be returned at a time.

@StartRow: The index of the starting row from which the data will be retrieved.

@SortDirection: The order in which the data is sorted. The value MUST be listed in the following table:

Value	Description
DESC	Data will be returned in descending order according to identifier.
ASC	Data will be returned in ascending order according to identifier.

@CollectionType: Contains the type of site collections. The value MUST be listed in the following table:

Value	Description
0	All site collections.
1	Only site collections which redirect to other site collections.
2	Only site collections which do not redirect to other site collections.
3	Only site collections which have been upgraded.

Return Values: This stored procedure MUST return 0 upon completion.

Result Set: The **proc_getSiteSubset** stored procedure MUST return a single result set as specified in section [3.1.5.38.1](#).

3.1.5.38.1 Site Result Set

The **Site** result set returns the site collections identified by **@CollectionType**, **@DatabaseId**, and **@ApplicationId**. The number of rows in the **Site** result set MUST NOT be greater than the value of **@PageSize**. If there are no site collections in the content database identified by **CollectionType**, **@DatabaseId** and **@ApplicationId**, the **Site** result set MUST be returned and MUST NOT contain any rows.

The **Site** result set is specified by the following T-SQL syntax.

```
Id          uniqueidentifier,  
Path        nvarchar(128);
```

Id: The identifier of the site collection.

Path: The **store-relative form** URL for the site collection.

3.1.5.39 proc_getTemplate

The **proc_getTemplate** stored procedure is called to retrieve the content of a **site template**. The **proc_getTemplate** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getTemplate(  
    @ObjId          uniqueidentifier = NULL,
```

```

    @RequestGuid    uniqueidentifier = NULL OUTPUT
);

```

@ObjId: The configuration object identifier of the site template whose content is being retrieved.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_gettemplate** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

The **proc_getTemplate** stored procedure MUST return a single result set as specified in section [3.1.5.39.1](#).

3.1.5.39.1 Template Result Set

The **Template** result set MUST be returned and it MUST contain 0 or more rows. When **@ObjId** is NULL, the **Template** result set MUST be returned and it MUST contain 1 row for each site template stored in the configuration database. When **@ObjId** is not NULL and matches the configuration object identifier of an existing site template, the **Template** result set MUST be returned and it MUST contain 1 row. When **@ObjId** is not NULL and does not match the configuration object identifier of an existing site template, the **Template** result set MUST be returned and MUST contain 0 rows.

The **Template** result set is specified by the following T-SQL syntax.

```

    FileImage      image

```

FileImage: MUST contain the contents of the site template referred to by **@ObjId**.

3.1.5.40 proc_GetTimerJobHistory

The **proc_GetTimerJobHistory** stored procedure returns a set of job history entries. The parameters **@ServiceId**, **@WebApplicationId**, **@ServerId**, **@JobId**, and **@JobStatus** act as filters. If any one of these parameters is NULL, then the **proc_GetTimerJobHistory** stored procedure ignores that parameter when building the result set of job history entries. The **proc_GetTimerJobHistory** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_GetTimerJobHistory (
    @ServiceId      uniqueidentifier,
    @WebApplicationId uniqueidentifier,
    @ServerId       uniqueidentifier,
    @JobId          uniqueidentifier,
    @JobStatus      int = NULL,
    @MaximumId     bigint,
    @MinimumId     bigint,
    @MaximumRows    int,
    @RequestGuid    uniqueidentifier = NULL OUTPUT
);

```

@ServiceId: The optional configuration object identifier of a service. If not NULL, the result set entries MUST be associated with the specified service.

@WebApplicationId: The optional configuration object identifier of a Web application (1). If not NULL, the result set entries MUST be associated with the specified Web application (1).

@ServerId: The optional configuration object identifier of a protocol client. If not NULL, the result set entries MUST be associated with the specified protocol client.

@JobId: The optional configuration object identifier of a job definition. If not NULL, the result set entries MUST be associated with the specified job definition.

@JobStatus: The optional Job Status Type of a finished job instance. If not NULL, the result set entries MUST match the specified Job Status Type.

@MaximumId: The maximum value of a job history entry identifier to be returned in the **Timer Job History** result set.

@MinimumId: The minimum value of a job history entry identifier to be returned in the **Timer Job History** result set.

@MaximumRows: The maximum number of rows to be returned in the **Timer Job History** result set.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_GetTimerJobHistory** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_GetTimerJobHistory** stored procedure MUST return a single **Timer Job History** result set. The result set contains 0 or more rows and is specified in section [3.1.5.40.1](#).

3.1.5.40.1 Timer Job History Result Set

The **Timer Job History** result set returns a list (1) of job history entries. The **Job History** result set MUST contain one row for each job history entry and is specified by the following T-SQL syntax.

Id	bigint,
JobId	uniqueidentifier,
JobTitle	nvarchar(255),
WebApplicationId	uniqueidentifier,
WebApplicationName	nvarchar(255),
ServiceId	uniqueidentifier,
ServerId	uniqueidentifier,
ServerName	nvarchar(128),
Status	int,
StartTime	datetime,
EndTime	datetime,
DatabaseName	nvarchar(128),
ErrorMessage	nvarchar(1000);

Id: The SQL identity column value created when the job history entry was added.

JobId: The configuration object identifier of the job definition.

JobTitle: The title of the job definition.

WebApplicationId: The configuration object identifier of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

WebApplicationName: The name of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

ServiceId: The configuration object identifier of the service associated with the job definition.

ServerId: The configuration object identifier of the protocol client where the job instance was run.

ServerName: The name of the protocol client where the job instance was run.

Status: The Job Status Type of the job instance.

StartTime: The datetime value when the job instance began running.

EndTime: The datetime value when the job instance stopped running.

DatabaseName: The name of the database processed when a job instance uses a content database lock, otherwise NULL.

ErrorMessage: The error message associated with an error that occurred while running the job instance, otherwise NULL.

3.1.5.41 **proc_GetTimerJobLastRunTime**

The **proc_GetTimerJobLastRunTime** stored procedure is called to get the last time a job instance was executed for the specified job definition. The **proc_GetTimerJobLastRunTime** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetTimerJobLastRunTime (
    @JobId                uniqueidentifier,
    @LastRunTime          datetime = NULL OUTPUT,
    @RequestGuid          uniqueidentifier = NULL OUTPUT
);
```

@JobId: The configuration object identifier of the job definition.

@LastRunTime: Output value. If the function succeeds, the value is the last time a job instance was executed for the specified job definition. Otherwise, the value MUST be ignored and is NULL.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_GetTimerJobLastRunTime** stored procedure MUST not return a result set.

3.1.5.42 **proc_GetTimerRunningJobs**

The **proc_GetTimerRunningJobs** stored procedure returns a set of running job status entries for a service, Web application (1), protocol client, or job definition. The **proc_GetTimerRunningJobs** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetTimerRunningJobs (
    @ServiceId            uniqueidentifier,
    @WebApplicationId     uniqueidentifier,
    @ServerId             uniqueidentifier,
    @JobId                uniqueidentifier,
    @RequestGuid          uniqueidentifier = NULL OUTPUT
);
```

@ServiceId: The optional configuration object identifier of a service. If not NULL, the result set entries MUST be associated with the specified service.

@WebApplicationId: The optional configuration object identifier of a Web application (1). If not NULL, the result set entries MUST be associated with the specified Web application (1).

@ServerId: The optional configuration object identifier of a protocol client. If not NULL, the result set entries MUST be associated with the specified protocol client.

@JobId: The optional configuration object identifier of a job definition. If not NULL, the result set entries MUST be associated with the specified job definition.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_GetTimerRunningJobs** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_GetTimerRunningJobs** stored procedure MUST return a single **Job Status** result set. The result set contains 0 or more rows and is specified in section [3.1.5.42.1](#).

3.1.5.42.1 Job Status Result Set

The **Job Status** result set returns an unordered list (1) of job status entries. The **Job Status** result set MUST contain one row for each job status entry and is specified by the following T-SQL syntax.

```
ServiceId                uniqueidentifier,  
VirtualServerId          uniqueidentifier,  
JobId                    uniqueidentifier,  
JobTitle                  nvarchar(255),  
ServerId                  uniqueidentifier,  
Status                    int,  
StartTime                 datetime,  
CurrentTarget             int,  
TargetCount               int,  
CurrentTargetPercentDone int;
```

ServiceId: The configuration object identifier of the service associated with the job definition.

VirtualServerId: The configuration object identifier of the Web application (1). This parameter MUST be NULL if the job definition is not associated with a Web application (1).

JobId: The configuration object identifier of the job definition.

JobTitle: The title of the job definition.

ServerId: The configuration object identifier of the protocol client where the job instance is executed.

Status: The Job Status Type of the job instance.

StartTime: The datetime value when the job instance began execution.

CurrentTarget: The number of target instances that have been processed.

TargetCount: The total number of target instances the job instance is scheduled to process.

CurrentTargetPercentDone: The percentage of processing finished for the current target instance. If it is unknown NULL must be returned. Otherwise, the value returned MUST be an integer between "0" and "100" including the bounds.

3.1.5.43 **proc_GetTimerScheduledJobs**

The **proc_GetTimerScheduledJobs** stored procedure returns a set of scheduled job entries for a service, Web application (1), protocol client or job definition. The **proc_GetTimerScheduledJobs** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetTimerScheduledJobs (  
    @ServiceId           uniqueidentifier,  
    @WebApplicationId    uniqueidentifier,  
    @ServerId            uniqueidentifier,  
    @JobId               uniqueidentifier,  
    @StartRow            int,  
    @MaximumRows         int,  
    @RequestGuid         uniqueidentifier = NULL OUTPUT  
);
```

@ServiceId: The optional configuration object identifier of a service. If not NULL, the result set entries MUST be associated with the specified service.

@WebApplicationId: The optional configuration object identifier of a Web application (1). If not NULL, the result set entries MUST be associated with the specified Web application (1).

@ServerId: The optional configuration object identifier of a protocol client. If not NULL, the result set entries MUST be associated with the specified protocol client.

@JobId: The optional configuration object identifier of a job definition. If not NULL, the result set entries MUST be associated with the specified job definition.

@StartRow: Contains the index of the starting row from which the data will be retrieved.

@MaximumRows: The maximum number of scheduled job entries that can be included in the **Timer Scheduled Job** result set.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_GetTimerScheduledJobs** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_GetTimerScheduledJobs** stored procedure MUST return a single **Timer Scheduled Job** result set. The result set contains 0 or more rows and is specified in section [3.1.5.43.1](#).

3.1.5.43.1 **Timer Scheduled Job Result Set**

The **Timer Scheduled Job** result set returns a list (1) of scheduled job entries. The list (1) MUST be sorted by the StartTime in ascending order. The **Scheduled Job** result set MUST contain one row for each scheduled job and is specified by the following T-SQL syntax.

```
ServiceId           uniqueidentifier,  
WebApplicationId    uniqueidentifier,  
ServerId            uniqueidentifier,  
JobId               uniqueidentifier,
```

StartTime datetime;

ServiceId: The configuration object identifier of the service.

WebApplicationId: The configuration object identifier of the Web application (1). This MUST be NULL if the job definition is not associated with a Web application (1).

ServerId: The configuration object identifier of the protocol client where the job instance will be run.

JobId: The configuration object identifier of the job definition.

StartTime: The datetime value when the job instance is scheduled to run.

3.1.5.44 **proc_GetTimerTargetInstance**

The **proc_GetTimerTargetInstance** stored procedure is called to determine if the specified target instance exists for a job definition. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetTimerTargetInstance (
    @JobId                    uniqueidentifier,
    @TargetInstanceId        uniqueidentifier,
    @Exists                  bit        OUTPUT,
    @RequestGuid             uniqueidentifier = NULL OUTPUT
);
```

@JobId: The optional configuration object identifier of a job definition.

@TargetInstanceId: The optional GUID of a target instance.

@Exists: A bit indicating whether the specified target instance exists.

The value returned MUST be in the following table:

@Exists Value	Description
0	A target instance does not exist.
1	A target instance exists.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_GetTimerTargetInstance** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The stored procedure MUST NOT return a result set.

3.1.5.45 **proc_GetTimerTargetInstanceState**

The **proc_GetTimerTargetInstanceState** stored procedure returns the target instance state for the specified target instance and job definition. The **proc_GetTimerTargetInstanceState** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_GetTimerTargetInstanceState (
```

```

    @JobId      uniqueidentifier,
    @TargetInstanceId  uniqueidentifier,
    @RequestGuid  uniqueidentifier = NULL OUTPUT
);

```

@JobId: The configuration object identifier of a job definition.

@TargetInstanceId: The GUID of a target instance.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_GetTimerTargetInstanceState** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: This stored procedure MUST return **Timer Target Instance State** result set as defined in section [3.1.5.45.1](#).

3.1.5.45.1 Timer Target Instance State Result Set

Timer Target Instance State result set returns the target instance state for a target instance and job definition. The result set MUST contain 1 row if a target instance for the specified job definition exists, otherwise the result set MUST contain 0 rows. The **Timer Target Instance State** result set is specified by the following T-SQL syntax.

```

State varbinary(max);

```

State: Binary state data for a target instance and job definition.

3.1.5.46 proc_markForDeletionEmailEnabledList

The **proc_markForDeletionEmailEnabledList** stored procedure is called to mark the e-mail enabled list with the specified site collection identifier, site identifier, and list identifier as deleted. The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_markForDeletionEmailEnabledList(
    @SiteId      uniqueidentifier,
    @WebId       uniqueidentifier,
    @ListId      uniqueidentifier,
    @RequestGuid uniqueidentifier = NULL OUTPUT
);

```

@SiteId: The site collection identifier of the site collection containing the e-mail enabled list item to be marked for deletion.

@WebId: The site identifier of the site (2) containing the e-mail enabled list item to delete.

@ListId: The list identifier of the e-mail enabled list item to delete.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_markForDeletionEmailEnabledList** stored procedure MUST NOT return any result sets.

3.1.5.47 **proc_markForDeletionEmailEnabledListsBySite**

The **proc_markForDeletionEmailEnabledListsBySite** stored procedure is called to mark all e-mail enabled list items with the specified site collection identifier as deleted. The **proc_markForDeletionEmailEnabledListsBySite** is specified by the following T-SQL syntax.

```
PROCEDURE proc_markForDeletionEmailEnabledListsBySite(  
    @SiteId            uniqueidentifier,  
    @RequestGuid      uniqueidentifier = NULL OUTPUT  
);
```

@SiteId: The site collection identifier of the site collection containing the e-mail enabled list items to be marked for deletion.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_markForDeletionEmailEnabledListsBySite** stored procedure MUST NOT return any result sets.

3.1.5.48 **proc_markForDeletionEmailEnabledListsByWeb**

The **proc_markForDeletionEmailEnabledListsByWeb** stored procedure is called to mark all e-mail enabled list items with the specified site collection identifier and site identifier as deleted. The **proc_markForDeletionEmailEnabledListsByWeb** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_markForDeletionEmailEnabledListsByWeb(  
    @SiteId            uniqueidentifier,  
    @WebId             uniqueidentifier,  
    @RequestGuid      uniqueidentifier = NULL OUTPUT  
);
```

@SiteId: The site collection identifier of the site collection containing the e-mail enabled list items to be marked for deletion.

@WebId: The site identifier of the site (2) containing the e-mail enabled list items to delete.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_markForDeletionEmailEnabledListsByWeb** stored procedure MUST NOT return any result sets.

3.1.5.49 **proc_putClass**

The **proc_putClass** stored procedure is called to store a class. The **proc_putClass** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_putClass(  
    @Id                uniqueidentifier,  
    @BaseClassId       uniqueidentifier,  
    @FullName          nvarchar(256),
```

```

    @RequestGuid    uniqueidentifier = NULL OUTPUT
);

```

@Id: Contains the class identifier (CLSID) of the class.

@BaseClassId: Contains the BaseClassId of the class.

@FullName: Contains an identifier that can be used by an application to associate a class identifier (CLSID) with a human- or computer-readable string. **@FullName** MUST be specified and MUST NOT be DBNull.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putClass** stored procedure returns an integer return code which MUST be listed in the following table:

Value	Description
0	Successful execution.
1	The class information of the GUID associated with @BaseClassId was not found.

Result Set: The **proc_putClass** stored procedure MUST NOT return any result sets.

3.1.5.50 proc_putDependency

The **proc_putDependency** stored procedure is called to store a dependency between two configuration objects. The **proc_putDependency** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_putDependency(
    @ObjectId        uniqueidentifier,
    @DependantId     uniqueidentifier,
    @RequestGuid     uniqueidentifier = NULL OUTPUT
);

```

@ObjectId: The identifier of the configuration object that depends on the configuration object that is referenced by **@DependantId**. The value MUST be defined in the configuration database, or the server MUST return an exception.

@DependantId: The identifier of the configuration object on which the configuration object referenced by **@ObjectId** depends. The value MUST be defined in the configuration database, or the server MUST return an exception.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putDependency** stored procedure returns an integer return code which MUST be 0, which represents successful execution.

Result Set: The **proc_putDependency** stored procedure MUST NOT return a result set.

3.1.5.51 proc_putDistributionListToDelete

The **proc_putDistributionListToDelete** stored procedure is called to mark a distribution list as deleted. The stored procedure is specified by the following T-SQL syntax.


```

PROCEDURE proc_putDistributionListToDelete(
    @Alias          nvarchar(128),
    @RequestGuid    uniqueidentifier = NULL OUTPUT
);

```

@Alias: The e-mail alias of the distribution list to be marked as deleted.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

Result Set: The **proc_putDistributionListToDelete** stored procedure MUST NOT return any result sets.

3.1.5.52 proc_putEmailEnabledList

The **proc_putEmailEnabledList** stored procedure is called to add an existing list (1) to the e-mail enabled list collection, or to update the e-mail alias of an existing list (1) in the e-mail enabled list collection. The **proc_putEmailEnabledList** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_putEmailEnabledList(
    @Alias          nvarchar(128),
    @SiteId         uniqueidentifier,
    @WebId          uniqueidentifier,
    @ListId         uniqueidentifier,
    @RequestGuid    uniqueidentifier = NULL OUTPUT
);

```

@Alias: The new or existing e-mail alias of the e-mail enabled list. It MUST NOT be NULL.

@SiteId: The site collection identifier of the site collection containing the site (2). It MUST NOT be NULL.

@WebId: The site identifier of the site (2) containing the list (1). It MUST NOT be NULL.

@ListId: The list identifier of the list (1). If the list (1) specified by the **@SiteId** parameter, **@WebId** parameter and **@ListId** parameter is already in the e-mail enabled list collection, this stored procedure updates the e-mail alias of this e-mail enabled list to match the **@Alias** parameter. If the list (1) specified by the **@SiteId** parameter, **@WebId** parameter and **@ListId** parameter is not an e-mail enabled list, it will be added to the e-mail enabled list collection using the specified **@Alias** parameter for e-mail address. It MUST NOT be NULL.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putEmailEnabledList** stored procedure MUST return an integer return code which is specified in the following table.

Value	Description
0	Successful execution.
1	Error: The specified e-mail alias is already in use in the e-mail enabled list collection.

Result Set: The **proc_putEmailEnabledList** stored procedure MUST NOT return any result sets.

3.1.5.53 proc_putFileSegment

The **proc_putFileSegment** stored procedure is called to write a byte range of a file. The **proc_putFileSegment** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_putFileSegment (  
    @ObjectId      uniqueidentifier,  
    @Bytes         varbinary(max),  
    @Offset        int,  
    @RequestGuid   uniqueidentifier = NULL OUTPUT  
)
```

@ObjectId: The identifier of the file being stored.

@Bytes: The actual data being written at the location referenced by **@Offset** in the file being stored.

@Offset: The value that determines the relative location of the start of the file in bytes. This **MUST** be set to 0 the first time the stored procedure is called with a new **@ObjectId** value.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putFileSegment** stored procedure returns an integer return code which **MUST** be listed in the following table.

Value	Description
0	Successful execution.
1	The file identified by @ObjectId was not found and @Offset was greater than 0.
2	The file write operation failed.

The **proc_putFileSegment** stored procedure **MUST NOT** return a result set.

3.1.5.54 proc_putObject

The **proc_putObject** stored procedure is called to store new or update existing configuration objects. The **proc_putObject** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_putObject (  
    @Id            uniqueidentifier,  
    @ParentId     uniqueidentifier,  
    @ClassId      uniqueidentifier,  
    @Name         nvarchar(128),  
    @Status       int,  
    @Version      rowversion,  
    @Properties    ntext,  
    @AutoResolveMissingTypes bit,  
    @ExistingObject uniqueidentifier output,  
    @NewVersion   rowversion output,  
    @RequestGuid   uniqueidentifier = NULL OUTPUT  
)
```

@Id: The identifier of the configuration object being stored. If a new configuration object is being stored, the protocol client MUST generate a new configuration object identifier and pass its value in this parameter. If an existing configuration object is being updated, the value of this parameter MUST correspond to a configuration object which has already been stored in the database.

@ParentId: The **ParentId**, as defined in [\[MS-WSSFO2\]](#) section 2.2.6.1.4, of the configuration object. The value of this parameter MUST correspond to the identifier of a configuration object which has been previously stored in the database.

@ClassId: The class identifier (CLSID) of the configuration object.

@Name: The name of the configuration object.

@Status: The status of the configuration object.

@Version: The version of the configuration object. If a new configuration object is being stored in this database for the first time, the protocol client MUST pass DBNull for the value of **@Version**. Otherwise, the protocol client MUST pass the value of **version** returned from the previous call of the **proc_getObject** stored procedure as specified in [\[MS-WSSFO2\]](#) section 3.1.5.35 or the **proc_getNewObjects** stored procedure which was used to obtain the configuration object being updated.

@Properties: The properties of the configuration object.

@AutoResolveMissingTypes: This parameter MUST be ignored by the server.

@ExistingObject: If the protocol client passes DBNull as the value of **@Version** and the configuration database already contains a configuration object with the specified name, parent, and class identifier (CLSID) but with a different identifier, the protocol server MUST set **@ExistingObject** to the identifier of the configuration object. Otherwise, the protocol server MUST NOT change the value of **@ExistingObject**.

@NewVersion: Upon successful execution of the **proc_putObject** stored procedure, the protocol server MUST set **@Version** to a new, higher configuration object version.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putObject** stored procedure returns an integer return code which MUST be listed in the following table:

Value	Description
0	Successful execution.
1	Returned if the protocol client passed in value other than DBNull for @Version , but a configuration object with the specified identifier was not found.
2	Returned if a GUID value is passed to @ClassId without having been previously passed to the @Id parameter of the proc_putClass stored procedure.
3	Returned if a failure occurs when trying to create a new configuration object.
4	Returned when the caller tries to update an existing configuration object with a version value that is different than what is referenced by @Version .
5	Returned if a failure occurs when updating an existing configuration object.
6	Returned if a failure occurs when setting the value of @NewVersion .

Value	Description
8	Returned when the proc_putObject stored procedure is called with @Version set to DBNull, @Id set to a new GUID, and with @ClassId , @ParentId , and @Name set to values matching the class identifier (CLSID), ParentId, and name values of a configuration object that is already in the configuration database.
9	Returned when @Version is DBNull and @Id matches the identifier of an existing configuration object.

Result Set: The **proc_putObject** stored procedure MUST NOT return a result set.

3.1.5.55 proc_putObjectTVP

The **proc_putObjectTVP** stored procedure is called to store new or update existing configuration objects. The **proc_putObjectTVP** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_putObjectTVP (
    @Id                uniqueidentifier,
    @ParentId          uniqueidentifier,
    @ClassId           uniqueidentifier,
    @Name              nvarchar(128),
    @Status            int,
    @Version           rowversion,
    @Properties         ntext,
    @AutoResolveMissingTypes bit,
    @DependencyIdData  tvpArrayOfGuids READONLY,
    @ExistingObject    uniqueidentifier output,
    @NewVersion        rowversion output,
    @PutObjectReturnValue int OUTPUT,
    @PutDepReturnValue int OUTPUT,
    @RequestGuid       uniqueidentifier = NULL OUTPUT
);

```

@Id: The identifier of the configuration object being stored. If a new configuration object is being stored, the protocol client MUST generate a new configuration object identifier and pass its value in this parameter. If an existing configuration object is being updated, the value of this parameter MUST correspond to a configuration object which has already been stored in the database.

@ParentId: The **ParentId**, as defined in [\[MS-WSSFO2\]](#) section 2.2.6.1.4, of the configuration object. The value of this parameter MUST correspond to the identifier of a configuration object which has been previously stored in the database.

@ClassId: The class identifier (CLSID) of the configuration object.

@Name: The name of the configuration object.

@Status: The status of the configuration object.

@Version: The version of the configuration object. If a new configuration object is being stored in this database for the first time, the protocol client MUST pass DBNull for the value of **@Version**. Otherwise, the protocol client MUST pass the value of **version** returned from the previous call of the **proc_getObject** stored procedure as specified in [\[MS-WSSFO2\]](#) section 3.1.5.35 or the **proc_getNewObjects** stored procedure which was used to obtain the configuration object being updated.

@Properties: The properties of the configuration object.

@AutoResolveMissingTypes: This parameter MUST be ignored by the server.

@DependencyIdData: The `tvArrayOfGuids` table type as defined in [\[MS-WSSFO3\]](#) section 2.2.8.1 containing the list (1) of identifiers of the configuration objects which are dependent on the object being stored.

@ExistingObject: If the protocol client passes `DBNull` as the value of **@Version** and the configuration database already contains a configuration object with the specified name, parent, and class identifier (CLSID) but with a different identifier, the protocol server MUST set

@ExistingObject to the identifier of the configuration object. Otherwise, the protocol server MUST NOT change the value of **@ExistingObject**.

@NewVersion: Upon successful execution of the `proc_putObject` stored procedure, the protocol server MUST set **@Version** to a new, higher configuration object version.

@PutObjectReturnValue: The return code which MUST be listed in the following table:

Value	Description
0	Successful execution.
1	Returned if the protocol client passed in value other than <code>DBNull</code> for @Version , but a configuration object with the specified identifier was not found.
2	Returned if a GUID value is passed to @ClassId without having been previously passed to the @Id parameter of the <code>proc_putClass</code> stored procedure.
3	Returned if a failure occurs when trying to create a new configuration object.
4	Returned when the caller tries to update an existing configuration object with a version value that is different than what is referenced by @Version .
5	Returned if a failure occurs when updating an existing configuration object.
6	Returned if a failure occurs when setting the value of @NewVersion .
8	Returned when the <code>proc_putObject</code> stored procedure is called with @Version set to <code>DBNull</code> , @Id set to a new GUID, and with @ClassId , @ParentId , and @Name set to values matching the class identifier (CLSID), <code>ParentId</code> , and name values of a configuration object that is already in the configuration database.
9	Returned when @Version is <code>DBNull</code> and @Id matches the identifier of an existing configuration object.

@PutDepReturnValue: An integer value which MUST be 0.

@RequestGuid: The optional request identifier for the current request.

Return Values: The `proc_putObjectTVP` stored procedure returns an integer return code which MUST be 0.

Result Set: The `proc_putObjectTVP` stored procedure MUST NOT return a result set.

3.1.5.56 proc_putPendingDistributionList

The **proc_putPendingDistributionList** stored procedure is called to add a distribution list which has an operation pending to the pending distribution lists set (section [1.3.5](#)). The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_putPendingDistributionList (
    @SiteId          uniqueidentifier,
    @WebId           uniqueidentifier,
    @GroupName       nvarchar(255),
    @ModifiedBy      nvarchar(255),
    @RequestGuid     uniqueidentifier = NULL OUTPUT
);
```

@SiteId: The site collection identifier of the site collection to which the distribution list belongs.

@WebId: The site identifier of the site (2) to which the distribution list belongs.

@GroupName: The string name of the permission level of the distribution list.

@ModifiedBy: The string name containing the login name of the user whose distribution list operation is pending.

@RequestGuid: The optional request identifier for the current request.

Return Values: The stored procedure returns an integer return code which MUST be 0.

The **proc_putPendingDistributionList** stored procedure MUST return a single result set as specified in section [3.1.5.56.1](#).

3.1.5.56.1 PutPendingDistributionList Result Set

The **PutPendingDistributionList** result set MUST be returned and MUST contain only 1 row when **@SiteId**, **@WebId** and **@GroupName** corresponds to a distribution list which has an operation pending. If no such list exists, the **PutPendingDistributionList** result set MUST contain 0 rows. The **PutPendingDistributionList** result set is specified by the following T-SQL syntax.

```
{PendingListRegistered}          int
```

{PendingListRegistered}: MUST contain the value 0 if the result set has 1 row.

3.1.5.57 proc_putSiteMap

The **proc_putSiteMap** stored procedure is called to create a new reference to a site collection. The **proc_putSiteMap** stored procedure is specified by the following **T-SQL** syntax.

```
PROCEDURE proc_putSiteMap(
    @ApplicationId          uniqueidentifier,
    @DatabaseId            uniqueidentifier,
    @SiteId                uniqueidentifier,
    @SubscriptionId        uniqueidentifier,
    @Path                  nvarchar(128),
    @Pairing               tinyint,
    @RedirectUrl           nvarchar(512),
```

```

@HostHeaderIsSiteName    bit,
@SubscriptionName        nvarchar(48),
@AppSiteDomainId        varchar(8),
@CurrentDatabaseSiteCount int OUTPUT,
@RequestGuid            uniqueidentifier = NULL OUTPUT
);

```

@ApplicationId: Contains the configuration object identifier of the Web application (1) which contains the site collection with the site collection identifier equal to **@SiteId**.

@DatabaseId: Contains the configuration object identifier of the content database which contains the site collection identifier equal to **@SiteId**.

@SiteId: The site collection identifier of the site collection containing the site (2).

@SubscriptionId: Contains the site subscription identifier.

@Path: If **@HostHeaderIsSiteName** has a value of 1, then **@Path** MUST contain the host header site identifier for the site collection. Otherwise, **@Path** MUST contain the server-relative URL for the site collection. This parameter MUST NOT be NULL.

@Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

@RedirectUrl: Contains the server-relative URL for the site collection to redirect to. This parameter MUST be specified when **@Pairing** is set to 1.

@HostHeaderIsSiteName: Indicates whether the site collection being stored uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

@SubscriptionName: The name of the implementation-specific **subscription** for the requested site collection.

@AppSiteDomainId: The **app site domain identifier**.

@CurrentDatabaseSiteCount: Returns the number of the site collections in the same content database as identified by **@DatabaseId**. If the **proc_putSiteMap** stored procedure executes successfully, **@CurrentDatabaseSiteCount** MUST contain the total number of site collections in the content database, otherwise, **@CurrentDatabaseSiteCount** MUST contain the input parameter's original value.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putSiteMap** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: If the **proc_putSiteMap** stored procedure fails, it MUST NOT return a result set. If **proc_putSiteMap** executes successfully, it MUST return a result set with a single row as specified in section [3.1.5.57.1](#).

3.1.5.57.1 SiteId Result Set

SiteId result set returns the GUID of the new site collection. The **SiteId** result set is specified by the following T-SQL syntax.

```
{SiteId}          uniqueidentifier;
```

{SiteId}: Contains the value of **@SiteId**.

3.1.5.58 proc_RefreshAllTimerLocks

The **proc_RefreshAllTimerLocks** stored procedure is called to renew the lease on all job locks held by a specified protocol client. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_RefreshAllTimerLocks(  
    @ServerId          uniqueidentifier,  
    @RequestGuid       uniqueidentifier = NULL OUTPUT  
);
```

@ServerId: The configuration object identifier of the protocol client holding the job lock(s).

@RequestGuid: The optional request identifier for the current request.

Return Code Values:

The **proc_RefreshAllTimerLocks** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_RefreshAllTimerLocks** stored procedure MUST NOT return a result set.

3.1.5.59 proc_RegisterProductVersion

The **proc_RegisterProductVersion** stored procedure is called to save information about an installation on the farm. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_RegisterProductVersion (  
    @ServerId          uniqueidentifier,  
    @Product           nvarchar(1023),  
    @Version           nvarchar(64),  
    @PatchableUnit     nvarchar(1023) = NULL,  
    @PatchableUnitName nvarchar(1023) = NULL,  
    @PatchName         nvarchar(1023) = NULL,  
    @PatchUrl          nvarchar(260) = NULL,  
    @Flags             int = NULL,  
    @CustomData        nvarchar(max) = NULL  
);
```


@ServerId: The configuration object identifier of the client where the installation was performed.

@Product: The name of the product that includes this installation.

@Version: The version of the installation. The version number is in the following format:

```
major.minor[.build[.revision]]
```

Where *major*, *minor*, *build*, and *revision* fields are integers and *build* and *revision* are optional.

@PatchableUnit: If this stored procedure is called for Windows Installer (.msi) file installations, this MUST contain the **ProductCode** stored in the Windows Installer (.msi) file. If this stored procedure is called for third party products that can be subdivided into individual units for patching, this MUST contain a unique identifier for the individual unit.

@PatchableUnitName: If this stored procedure is called for Windows Installer (.msi) file installations, this MUST contain the **ProductName** stored in the Windows Installer (.msi) file. If this stored procedure is called for third party products that can be subdivided into individual units for patching, this MUST contain a display name for the individual unit.

@PatchName: If this stored procedure is being called for an installed patch, this MUST contain a display name for the patch.

@PatchUrl: If this stored procedure is being called for an installed patch and there is a URL associated with the patch, this MUST contain the URL.

@Flags: Bit flags containing information about the state of the installation. It MUST contain the sum of zero or more values from the following table:

Value	Description
1	This installation is required on all servers in the farm.
2	An optional upgrade is available for this server because the installation state detected.
4	A required upgrade must be performed on this server because the installation state detected.

@CustomData: This is reserved and MUST be NULL.

Return values:

The **proc_RegisterProductVersion** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_RegisterProductVersion** stored procedure MUST NOT return a result set.

3.1.5.60 proc_renameSiteMap

The **proc_renameSiteMap** stored procedure is called to update the host header site identifier for the specified site collection. The **proc_renameSiteMap** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_renameSiteMap(  
    @SiteId                uniqueidentifier,  
    @Path                  nvarchar(128),  
    @HostHeaderSiteUrlScheme tinyint
```

);

@SiteId: Contains the site collection identifier of the site collection to be updated. The site collection referenced by **@SiteId** MUST use a host header site identifier. This parameter MUST NOT be NULL.

@Path: Contains the host header site identifier for the site collection. This parameter MUST NOT be NULL.

@HostHeaderSiteUrlScheme: Contains the URL scheme for the site collection.

This parameter MUST be one of the values in the following table.

Value	Description
2	The URL scheme for the site collection is HTTP.
3	The URL scheme for the site collection is HTTPS.

Return Values: The **proc_renameSiteMap** stored procedure MUST return an integer return code which MUST be 0.

Result Set: The **proc_renameSiteMap** stored procedure MUST NOT return a result set.

3.1.5.61 **proc_ScheduleTimerJob**

The **proc_ScheduleTimerJob** stored procedure is called to create a scheduled job for the specified protocol client. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_ScheduleTimerJob (  
    @ServiceId          uniqueidentifier,  
    @WebApplicationId  uniqueidentifier,  
    @ServerId          uniqueidentifier,  
    @JobId             uniqueidentifier,  
    @StartTime         datetime,  
    @RequestGuid       uniqueidentifier = NULL OUTPUT  
);
```

@ServiceId: The configuration object identifier of the service associated with the job definition. This parameter MUST NOT be NULL.

@WebApplicationId: The configuration object identifier of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@ServerId: The configuration object identifier of the protocol client where the job instance is scheduled to run.

@JobId: The configuration object identifier of the job definition.

@StartTime: The datetime value when the job instance is scheduled to run.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_ScheduleTimerJob** stored procedure returns an integer return code which MUST be in the following table:

Value	Description
0	Successful execution.
31	If the specified job instance cannot be scheduled.

3.1.5.62 proc_setSubscription

The **proc_setSubscription** stored procedure is called to set the site subscription identifier of a site collection.

The T-SQL syntax for the stored procedure is as follows.

```
PROCEDURE proc_setSubscription (
    @SiteId          uniqueidentifier,
    @SubscriptionId  uniqueidentifier,
    @RequestGuid     uniqueidentifier = NULL OUTPUT
);
```

@SiteId: The site collection identifier of the site collection. This value MUST NOT be NULL.

@SubscriptionId: The identifier of the site subscription.

@RequestGuid: The optional request identifier for the current request.

Return values: The **proc_setSubscription** stored procedure returns an integer return code that MUST be 0.

3.1.5.63 proc_SetAppSiteDomainPrefix

The **proc_SetAppSiteDomainPrefix** stored procedure is called to set the **subscription name identifier** and app site domain identifier associated with a site collection.

The T-SQL syntax for the stored procedure is as follows.

```
PROCEDURE proc_SetAppSiteDomainPrefix (
    @SiteId          uniqueidentifier,
    @SubscriptionName nvarchar(48),
    @AppSiteDomainId varchar(8),
    @ExistingSubscriptionName nvarchar(48) OUTPUT,
    @ExistingAppSiteDomainId varchar(8) OUTPUT,
    @RequestGuid     uniqueidentifier = NULL OUTPUT
);
```

@SiteId: The site collection identifier of the site collection. This value MUST NOT be NULL.

@SubscriptionName: The site subscription name of the implementation-specific subscription for the requested site collection.

@AppSiteDomainId: The app site domain identifier.

@ExistingSubscriptionName: If a non-NULL, zero length site subscription name already exists for the requested site collection, then this parameter will be set to the existing site subscription name and the site subscription name will not be set to the **@SubscriptionName** parameter.

@ExistingAppSiteDomainId: If a non-NULL, zero length app site domain identifier already exists for the requested site collection, then this parameter will be set to the existing app site domain identifier and the app site domain identifier will not be set to the **@AppSiteDomainId** parameter.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_SetAppSiteDomainPrefix** stored procedure returns an integer return code which MUST be in the following table.

Value	Description
0	Successful execution.
2	A site collection identifier matching parameter @SiteId does not exist.

Result Set: The **proc_SetAppSiteDomainPrefix** stored procedure MUST NOT return a result set

3.1.5.64 proc_SiteExists

The **proc_SiteExists** stored procedure is called to determine if the configuration database contains a reference to a site collection with a given site collection identifier.

The T-SQL syntax for the stored procedure is as follows.

```
PROCEDURE proc_SiteExists (  
    @SiteId        uniqueidentifier  
    @RequestGuid   uniqueidentifier = NULL OUTPUT  
);
```

@SiteId: The site collection identifier of the site collection for which the configuration database will be searched.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: An integer which MUST be one of the following values.

Value	Description
1	The configuration database contains a reference to a site collection with a site collection identifier equal to @SiteId .
0	The configuration database does not contain a reference to a site collection with a site collection identifier equal to @SiteId .

Result Set: The **proc_SiteExists** stored procedure MUST NOT return a result set.

3.1.5.65 proc_StartTimerRunningJob

The **proc_StartTimerRunningJob** stored procedure is called to mark a job instance as started. The **proc_StartTimerRunningJob** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_StartTimerRunningJob (  
    @ServiceId      uniqueidentifier,  
    @VirtualServerId uniqueidentifier,  
    @JobId          uniqueidentifier,
```

```

@JobTitle          nvarchar(255),
@ServerId          uniqueidentifier,
@TargetCount       int,
@CurrentTarget     int OUTPUT,
@RequestGuid       uniqueidentifier = NULL OUTPUT
);

```

@ServiceId: The configuration object identifier of the service associated with the job definition.

@VirtualServerId: The configuration object identifier of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@JobId: The configuration object identifier of the job definition.

@JobTitle: The title of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance will be executed.

@TargetCount: The number of target instances the job instance is scheduled to process.

@CurrentTarget: The number of target instances that have been processed. An existing running job can be retrieved using the **proc_GetTimerRunningJobs** stored procedure and specifying the provided **@ServiceId**, **@VirtualServerId**, **@JobId**, **@ServerId**, and **@RequestGuid** parameters. If a running job exists and the Status property from the Job Status Result Set is '7' and the TargetCount equals the **@TargetCount** parameter then **@CurrentTarget** MUST return the CurrentTarget value from the Job Status result set. Otherwise it MUST return 0.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_StartTimerRunningJob** stored procedure returns an integer return code which MUST be in the following table.

Value	Description
0	Successful execution.
31	If the specified job instance cannot be started

Result Set: The **proc_StartTimerRunningJob** stored procedure MUST not return a result set.

3.1.5.66 proc_UpdateTimerRunningJobProgress

The **proc_UpdateTimerRunningJobProgress** stored procedure is called to update the progress of the specified job instance. The **proc_UpdateTimerRunningJobProgress** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_UpdateTimerRunningJobProgress (
@ServiceId          uniqueidentifier,
@VirtualServerId    uniqueidentifier,
@JobId              uniqueidentifier,
@ServerId           uniqueidentifier,
@CurrentTargetPercentDone int,
@RequestGuid        uniqueidentifier = NULL OUTPUT
);

```

@ServiceId: The configuration object identifier of the service associated with the job definition.

@VirtualServerId: The configuration object identifier of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@JobId: The configuration object identifier of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance is running.

@CurrentTargetPercentDone: The percentage of processing that has been finished by the job instance. If it is unknown, the value MUST be NULL. Otherwise, the value MUST be between "0" and "100" including the bounds.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_UpdateTimerRunningJobProgress** stored procedure returns an integer return code which MUST be in the following table.

Value	Description
0	Successful execution.
31	If there are no updates to the progress of the specified job instance.

Result Set: The **proc_UpdateTimerRunningJobProgress** stored procedure MUST not return a result set.

3.1.5.67 **proc_UpdateTimerRunningJobStatus**

The **proc_UpdateTimerRunningJobStatus** stored procedure is called to update the status of the specified running job instance. The **proc_UpdateTimerRunningJobStatus** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_UpdateTimerRunningJobStatus (  
    @JobId          uniqueidentifier,  
    @ServerId       uniqueidentifier,  
    @NewStatus      int,  
    @OldStatus      int,  
    @RequestGuid    uniqueidentifier = NULL OUTPUT  
);
```

@JobId: The configuration object identifier of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance is running.

@NewStatus: The new Job Status Type for the job instance.

@OldStatus: The existing Job Status Type of the running job instance. If NULL, the existing Job Status Type of the running job instance MUST be updated to the value specified in the **@NewStatus** parameter. Otherwise, the existing Job Status Type of the running job MUST only be updated when the Job Status Type matches the value of the **@OldStatus** parameter.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_UpdateTimerRunningJobStatus** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_UpdateTimerRunningJobStatus** stored procedure MUST NOT return a result set.

3.1.5.68 **proc_UpdateTimerRunningJobTarget**

The **proc_UpdateTimerRunningJobTarget** stored procedure is called to update the running target instance for the specified job instance. The **proc_UpdateTimerRunningJobTarget** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_UpdateTimerRunningJobTarget (  
    @ServiceId          nuniqueidentifier,  
    @VirtualServerId    uniqueidentifier,  
    @JobId              uniqueidentifier,  
    @ServerId           uniqueidentifier,  
    @CurrentTarget      int,  
    @RequestGuid        uniqueidentifier = NULL OUTPUT  
);
```

@ServiceId: The configuration object identifier of the service associated with the job definition.

@VirtualServerId: The configuration object identifier of the Web application (1) associated with the job definition. This MUST be NULL when the job definition is associated only with a service.

@JobId: The configuration object identifier of the job definition.

@ServerId: The configuration object identifier of the protocol client where the job instance is being executed.

@CurrentTarget: The number of target instances that have been processed.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_UpdateTimerRunningJobTarget** stored procedure returns an integer return code which MUST be in the following table.

Value	Description
0	Successful execution.
31	If there are no updates to the target instance of the specified job instance.

Result Set: The **proc_UpdateTimerRunningJobTarget** stored procedure MUST not return a result set.

3.1.5.69 **proc_UpdateTimerTargetInstanceState**

The **proc_UpdateTimerTargetInstanceState** stored procedure is called to update the target instance state for the specified job definition and target instance. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_UpdateTimerTargetInstanceState (  
    @JobId              uniqueidentifier,
```

```

    @TargetInstanceId    uniqueidentifier,
    @State               varbinary(max),
    @RequestGuid        uniqueidentifier = NULL OUTPUT
);

```

@JobId: The configuration object identifier of a job definition.

@TargetInstanceId: The configuration object identifier of a target instance.

@State: The binary state data for a target instance and job definition.

@RequestGuid: The optional request identifier for the current request.

Return Code Values: The **proc_UpdateTimerTargetInstanceState** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: This stored procedure MUST not return a result set.

3.1.5.70 proc_hideSiteMap

The **3.1.5.68proc_hideSiteMap** stored procedure is called to mark a reference to a site collection **proc_hideSiteMap** for deletion, as specified by the following T-SQL syntax.

```

PROCEDURE proc_hideSiteMap (
    @Id                uniqueidentifier,
    @DatabaseId        uniqueidentifier,
    @RequestGuid       uniqueidentifier = NULL OUTPUT
);

```

@Id: The site collection identifier of the site collection whose reference is being marked for deletion.

@DatabaseId: Contains the configuration object identifier of the content database that contains the site collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_hideSiteMap** stored procedure returns an integer return code that MUST be 0, indicating a successful execution.

Result Set: The **proc_hideSiteMap** stored procedure MUST NOT return a result set.

3.1.5.71 proc_unhideSiteMap

The **proc_unhideSiteMap** stored procedure is called to unmark a reference to a site collection. **proc_unhideSiteMap** for deletion. The stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_unhideSiteMap (
    @Id                uniqueidentifier,
    @DatabaseId        uniqueidentifier,
    @RequestGuid       uniqueidentifier = NULL OUTPUT
);

```


@Id: The site collection identifier of the site collection whose reference is being unmarked for deletion.

@DatabaseId: Contains the configuration object identifier of the content database that contains the site collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_unhideSiteMap** stored procedure returns an integer return code that MUST be 0, indicating a successful execution.

Result Set: The **proc_unhideSiteMap** stored procedure MUST NOT return a result set.

3.1.5.72 **proc_dropSiteMap2**

The **proc_dropSiteMap2** stored procedure is called to delete a reference to a site collection. **proc_dropSiteMap2**. The stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_dropSiteMap2 (  
    @Id                uniqueidentifier,  
    @DatabaseId        uniqueidentifier,  
    @RequestGuid       uniqueidentifier = NULL OUTPUT  
);
```

@Id: The site collection identifier of the site collection whose reference is being deleted.

@DatabaseId: Contains the configuration object identifier of the content database that contains the site collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_dropSiteMap2** stored procedure returns an integer return code that MUST be 0, indicating a successful execution.

Result Set: The **proc_dropSiteMap2** stored procedure MUST NOT return a result set.

3.1.5.73 **proc_getDeletedSitesByUrl**

The **proc_getDeletedSitesByUrl** stored procedure is called to return information about site collections that have been marked for deletion. The **proc_getDeletedSitesByUrl** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getDeletedSitesByUrl (  
    @ApplicationId     uniqueidentifier,  
    @Path              nvarchar(128),  
    @RowLimit          int,  
    @RequestGuid       uniqueidentifier = NULL OUTPUT  
);
```

@ApplicationId: Contains the configuration object identifier of the Web application (1).

@Path: Contains the prefix of a server-relative URL of the site collection. This parameter MUST NOT be NULL.

@RowLimit: The maximum number of rows to return.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getDeletedSitesByUrl** stored procedure returns an integer return code that MUST be 0, indicating a successful execution.

Result Set: The **proc_getDeletedSitesByUrl** stored procedure MUST return a single result set as specified in section [3.1.5.73.1](#).

3.1.5.73.1 Site Result Set

The **Site** result set returns the site collections identified by **@ApplicationId** and **@Path**. The number of rows in the **Site** result set MUST NOT be greater than the value of **@RowLimit**. If there are no site collections in the content database identified by **@ApplicationId** and **@Path**, the **Site** result set MUST be returned and MUST NOT contain any rows.

The **Site** result set is specified by the following T-SQL syntax.

```
Id                uniqueidentifier,  
SubscriptionId   uniqueidentifier,  
DatabaseId       uniqueidentifier,  
DeletionTime     datetime,  
HostHeaderIsSiteName bit,  
Pairing          tinyint;
```

Id: The identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

DatabaseId: The configuration object identifier of the content database.

DeletionTime: The date and time that the site collection was marked for deletion.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

3.1.5.74 proc_getDeletedSitesByQuery

The **proc_getDeletedSitesByQuery** stored procedure is called to return information about a set of site collections that have been marked for deletion. The members of the set are determined by the

query parameters. The **proc_getDeletedSitesByQuery** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getDeletedSitesByQuery (  
  @ApplicationId      uniqueidentifier,  
  @SubscriptionId    uniqueidentifier,  
  @PathLike          nvarchar(256),  
  @DeletionTimeFrom  datetime,  
  @DeletionTimeTo    datetime,  
  @SiteId            uniqueidentifier,  
  @RowLimit          int,  
  @RequestGuid       uniqueidentifier = NULL OUTPUT  
);
```

@ApplicationId: Contains the configuration object identifier of the Web application (1).

@SubscriptionId: The identifier of the site subscription. If this is a null value, do not use this parameter for selecting the result set of site collections.

@PathLike: Contains the prefix of a server-relative URL of the site collections being queried for. If this is a null value, do not use this parameter for selecting the result set of site collections.

@DeletionTimeFrom: One end of the range for the dates and times of the site collections that are marked for deletion and being queried.

@DeletionTimeTo: The other end of the range for the dates and times of the site collections that are marked for deletion and being queried.

@SiteId: The site collection identifier of the site collection being queried.

@RowLimit: The maximum number of rows to return.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getDeletedSitesByQuery** stored procedure returns an integer return code which MUST be 0, indicating a successful execution.

Result Set: The **proc_getDeletedSitesByQuery** stored procedure MUST return a single result set specified in section [3.1.5.74.1](#).

3.1.5.74.1 Site Result Set

The **Site** result set returns the site collections identified by **@ApplicationId**, **@SubscriptionId**, **@PathLike**, **@DeletionTimeFrom**, **@DeletionTimeTo**, and **@SiteId**. If **@SubscriptionId** is null, it must not be used to identify the site collections. If **@PathLike** is null, it must not be used to identify the site collections. The number of rows in the **Site** result set MUST NOT be greater than the value of **@RowLimit**. If there are no site collections in the content database identified by the query parameters, the **Site** result set MUST be returned and MUST NOT contain any rows.

The **Site** result set is specified by the following T-SQL syntax.

```
Id                uniqueidentifier,  
SubscriptionId    uniqueidentifier,  
DatabaseId        uniqueidentifier,  
DeletionTime      datetime,  
Path              nvarchar(128),
```

```
HostHeaderIsSiteName bit,
Pairing                tinyint;
```

Id: The identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

DatabaseId: the configuration object identifier of the content database.

DeletionTime: the date and time that the site collection was marked for deletion.

Path: the server-relative URL of the site collection.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

3.1.5.75 `proc_getDeletedSitesBySiteId`

The `proc_getDeletedSitesBySiteId` stored procedure is called to return information about a set of site collections that have been marked for deletion. The members of the set are determined by the query parameters. The `proc_getDeletedSitesBySiteId` stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getDeletedSitesBySiteId (
  @ApplicationId    uniqueidentifier,
  @SiteId           uniqueidentifier,
  @RowLimit         int,
  @RequestGuid      uniqueidentifier = NULL OUTPUT
);
```

@ApplicationId: Contains the configuration object identifier of the Web application (1).

@SiteId: The site collection identifier of the site collection being queried.

@RowLimit: The maximum number of rows to return.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getDeletedSitesBySiteId** stored procedure returns an integer return code that MUST be 0, indicating a successful execution.

Result Set: The **proc_getDeletedSitesBySiteId** stored procedure MUST return a single result set specified in section [3.1.5.75.1](#).

3.1.5.75.1 Site Result Set

The **Site** result set returns the site collections identified by **@ApplicationId** and **@SiteId**. The number of rows in the **Site** result set MUST NOT be greater than the value of **@RowLimit**. If there are no site collections in the content database identified by **@ApplicationId** and **@SiteId**, the **Site** result set MUST be returned and MUST NOT contain any rows.

The **Site** result set is specified by the following T-SQL syntax.

```
Id                uniqueidentifier,
SubscriptionId    uniqueidentifier,
DatabaseId        uniqueidentifier,
DeletionTime      datetime,
Path              nvarchar(128),
HostHeaderIsSiteName bit,
Pairing           tinyint;
```

Id: The identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

DatabaseId: the configuration object identifier of the content database.

DeletionTime: the date and time that the site collection was marked for deletion.

Path: the server-relative URL of the site collection.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

3.1.5.76 proc_getDeletedSite

The **proc_getDeletedSite** stored procedure is called to return information about a site collection which have been marked for deletion. The **proc_getDeletedSite** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getDeletedSite (  
  @ApplicationId    uniqueidentifier,  
  @DatabaseId      uniqueidentifier,  
  @SiteId          uniqueidentifier,  
  @RequestGuid     uniqueidentifier = NULL OUTPUT  
);
```

@ApplicationId: Contains the configuration object identifier of the Web application (1).

@DatabaseId: the configuration object identifier of the content database.

@SiteId: The site collection identifier of the site collection being queried.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getDeletedSite** stored procedure returns an integer return code that MUST be 0, indicating a successful execution.

Result Set: The **proc_getDeletedSite** stored procedure MUST return a single result set specified in section [3.1.5.76.1](#).

3.1.5.76.1 Site Result Set

The **Site** result set returns the site collection identified by **@ApplicationId**, **@DatabaseId** and **@SiteId**. The number of rows in the **Site** result set MUST be 1 or 0. If there are no site collections in the content database identified by **@ApplicationId**, **@DatabaseId** and **@SiteId**, the **Site** result set MUST be returned and MUST NOT contain any rows.

The **Site** result set is specified by the following T-SQL syntax.

```
Id                uniqueidentifier,  
SubscriptionId   uniqueidentifier,  
DatabaseId       uniqueidentifier,  
DeletionTime     datetime,  
Path             nvarchar(128),  
HostHeaderIsSiteName bit,  
Pairing          tinyint;
```

Id: The identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

DatabaseId: the configuration object identifier of the content database.

DeletionTime: the date and time that the site collection was marked for deletion.

Path: the server-relative URL of the site collection.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter **MUST** be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter **MUST** be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

3.1.5.77 `proc_putDeletedSiteMap`

The **`proc_putDeletedSiteMap`** stored procedure is called to create a new reference to a site collection that is marked for deletion. The **`proc_putDeletedSiteMap`** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_putDeletedSiteMap (
    @ApplicationId          uniqueidentifier,
    @DatabaseId            uniqueidentifier,
    @SiteId                uniqueidentifier,
    @SubscriptionId        uniqueidentifier,
    @Path                  nvarchar(128),
    @Pairing               tinyint,
    @RedirectUrl           nvarchar(512),
    @HostHeaderIsSiteName bit,
    @DeletionTime          datetime,
    @SubscriptionName      nvarchar(48),
    @AppSiteDomainId      varchar(8),
    @RequestGuid           uniqueidentifier = NULL OUTPUT
);

```

@ApplicationId: Specifies the configuration object identifier of the Web application (1) that contains the site collection with the site collection identifier equal to **@SiteId**.

@DatabaseId: Specifies the configuration object identifier of the content database that contains the site collection identifier equal to **@SiteId**.

@SiteId: The site collection identifier of the site collection containing the site (2).

@SubscriptionId: Specifies the site subscription identifier.

@Path: If **@HostHeaderIsSiteName** has a value of 1, then **@Path** **MUST** contain the host header site identifier for the site collection. Otherwise, **@Path** **MUST** contain the server-relative URL for the site collection. This parameter **MUST NOT** be NULL.

@Pairing: Indicates whether the site collection was upgraded from previous version. This parameter **MUST** be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

@RedirectUrl: Contains the server-relative URL for the site collection to redirect to. This parameter MUST be specified when **@Pairing** is set to 1.

@HostHeaderIsSiteName: Indicates whether the site collection being stored uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

@DeletionTime: the date and time the site collection was marked for deletion.

@SubscriptionName: The name of the implementation-specific subscription for the requested site collection.

@AppSiteDomainId: The app site domain identifier.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_putDeletedSiteMap** stored procedure returns an integer return code that MUST be a value listed in the following table.

Value	Description
0	Successful execution.
1	New marked for deletion site collection reference was not added successfully.

Result Set: The **proc_putDeletedSiteMap** stored procedure MUST NOT return a result set.

3.1.5.78 proc_getEvalSites

The **proc_getEvalSites** stored procedure is called to return information about a set of **upgrade evaluation site collections**. The members of the set are determined by the query parameters. The **proc_getEvalSites** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_getEvalSites (
    @ApplicationId          uniqueidentifier,
    @SubscriptionId        uniqueidentifier,
    @RequestGuid           uniqueidentifier = NULL OUTPUT
);

```

@ApplicationId: Contains the configuration object identifier of the Web application (1).

@SubscriptionId: The identifier of the site subscription. If this is a null value, do not use this parameter for selecting the result set of site collections.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getEvalSites** stored procedure returns an integer return code which MUST be 0, indicating a successful execution.

Result Set: The **proc_getEvalSites** stored procedure MUST return a single result set specified in section [3.1.5.78.1](#).

3.1.5.78.1 Site Result Set

The **Site** result set returns the upgrade evaluation site collections identified by **@ApplicationId**, **@SubscriptionId**. If **@SubscriptionId** is null, it must not be used to identify the site collections. If there are no upgrade evaluation site collections in the content database identified by the query parameters, the **Site** result set MUST be returned and MUST NOT contain any rows.

The **Site** result set is specified by the following T-SQL syntax.

```
ApplicationId      uniqueidentifier,  
DatabaseId        uniqueidentifier,  
Id                uniqueidentifier,  
SubscriptionId    uniqueidentifier,  
Path              nvarchar(128),  
RedirectUrl       nvarchar(512),  
Pairing           tinyint,  
HostHeaderIsSiteName bit;
```

ApplicationId: Contains the configuration object identifier of the Web application (1).

DatabaseId: the configuration object identifier of the content database.

Id: The identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

Path: the server-relative URL of the site collection.

RedirectUrl: Contains the server-relative URL for the site collection to redirect to.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

3.1.5.79 `proc_setSourceSiteId`

The **`proc_setSourceSiteId`** stored procedure is called to set source site collection identifier of an upgrade evaluation site collection. The source site collection identifier and upgrade evaluation site collection are specified by query parameters. The **`proc_setSourceSiteId`** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_setSourceSiteId (  
    @SiteId                uniqueidentifier,  
    @SourSiteId            uniqueidentifier,  
    @RequestGuid           uniqueidentifier = NULL OUTPUT  
);
```

@SiteId: The site collection identifier of the upgrade evaluation site collection whose source site collection identifier is being set.

@SourceSiteId: The site collection identifier of the site collection using which the upgrade evaluation site collection was created.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **`proc_setSourceSiteId`** stored procedure returns an integer return code which MUST be 0, indicating a successful execution.

Result Set: The **`proc_setSourceSiteId`** stored procedure MUST NOT return a result set.

3.1.5.80 `proc_insertCacheConfigEntry`

The **`proc_insertCacheConfigEntry`** stored procedure is called to add a cache cluster config entry, as specified by the following T-SQL syntax.

```
PROCEDURE dbo.proc_insertCacheConfigEntry (  
    @key NVARCHAR(320),  
    @type NVARCHAR(64),  
    @version BIGINT,  
    @data VARBINARY(MAX)  
);
```

@key: The key of the cache cluster config entry.

@type: The type of the cache cluster config entry.

@version: The version of the cache cluster config entry.

@data: The binary state data of the cache cluster config entry.

Return Values: The **`proc_insertCacheConfigEntry`** stored procedure MUST return an integer return code of 0.

Result Set: The **`proc_insertCacheConfigEntry`** stored procedure MUST NOT return a result set.

3.1.5.81 `proc_deleteCacheConfigEntry`

The **`proc_deleteCacheConfigEntry`** stored procedure is called to delete a cache cluster config entry, as specified by the following T-SQL syntax.

```

PROCEDURE dbo.proc_deleteCacheConfigEntry (
    @key NVARCHAR(320),
    @type NVARCHAR(64),
    @version BIGINT,
);

```

@key: The key of the cache cluster config entry.

@type: The type of the cache cluster config entry.

@version: The version of the cache cluster config entry. If greater than 0, the entry can only be deleted if the existing version matches the version specified. If less than or equal to 0, the deletion should be performed regardless of the existing version.

Return Values: The **proc_deleteCacheConfigEntry** stored procedure MUST return an integer return code of 0 if the entry is deleted.

The **proc_deleteCacheConfigEntry** stored procedure MUST return an integer return code of 1 if the entry is not deleted.

Result Set: The **proc_deleteCacheConfigEntry** stored procedure MUST NOT return a result set.

3.1.5.82 proc_deleteCacheConfigEntries

The **proc_deleteCacheConfigEntries** stored procedure is called to delete a set of cache cluster config entry for the given *@type*, as specified by the following T-SQL syntax.

```

PROCEDURE dbo.proc_deleteCacheConfigEntries (
    @type NVARCHAR(64)
);

```

@type: The type of the cache cluster config entry.

Return Values: The **proc_deleteCacheConfigEntries** stored procedure MUST return an integer return code of 0.

Result Set: The **proc_deleteCacheConfigEntries** stored procedure MUST NOT return a result set.

3.1.5.83 proc_getCacheClusterConfigSchemaVersion

The **proc_getCacheClusterConfigSchemaVersion** stored procedure is called to get the **schema version** of the cache cluster, as specified by the following T-SQL syntax.

```

PROCEDURE dbo.proc_getCacheClusterConfigSchemaVersion(
);

```

Return Values: The **proc_getCacheClusterConfigSchemaVersion** stored procedure MUST return an integer return code of 0.

Result Set: The **proc_getCacheClusterConfigSchemaVersion** stored procedure MUST return a single result set as specified in section [3.1.5.83.1](#).

3.1.5.83.1 **proc_getCacheClusterConfigSchemaVersion.ResultSet**

The **proc_getCacheClusterConfigSchemaVersion** result set MUST be returned and MUST NOT contain any rows more than one row, result set is defined as follows

@Major: Major version of schema as integer.

@Minor: Minor version of schema as integer.

@Build: Build version of schema as integer.

@Revision: Revision of schema as integer.

3.1.5.84 **proc_getCacheClusterConfigUtcTime**

The **proc_getCacheClusterConfigUtcTime** stored procedure is called to get the current configuration database timestamp as a datetime value, as specified by the following T-SQL syntax.

```
PROCEDURE dbo.proc_getCacheClusterConfigUtcTime (  
    @serverTime datetime output  
);
```

@serverTime: output value. configuration database current time as a datetime value,

Return Values: The **proc_getCacheClusterConfigUtcTime** stored procedure MUST return an integer return code of 0.

Result Set: The **proc_getCacheClusterConfigUtcTime** stored procedure MUST return a result set with a single row containing the current time at the server.

3.1.5.85 **proc_getCacheConfigEntry**

The **proc_getCacheConfigEntry** stored procedure is called to retrieve a cache cluster config entry from the configuration database. The **proc_getCacheConfigEntry** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getCacheConfigEntry(  
    @key    NVARCHAR(320),  
    @type   NVARCHAR(64)  
);
```

@key: The key of cache cluster config entry to be retrieved.

@type: The type of cache cluster config entry to be retrieved.

Return Values: The **proc_getCacheConfigEntry** stored procedure MUST return an integer return code of 0.

The **proc_getCacheConfigEntry** stored procedure MUST return a single result set as specified in section [3.1.5.85.1](#).

3.1.5.85.1 **proc_getCacheConfigEntry.ResultSet**

Proc_getCacheConfigEntry.ResultSet returns the cache cluster config entry referred to by *@key* and *@type*. The result set MUST be returned and MUST contain only 1 row when *@key* and *@type*

correspond to the key and type of a cache cluster config entry in the database. When *@key* and *@type* do not correspond to cache cluster config entry in the database, the result set MUST be returned and MUST contain 0 rows. The file result set is specified by the following T-SQL syntax.

CurrentVersion	BIGINT
Value	VARBINARY (MAX)

CurrentVersion : Contains version of the cache cluster config entry referred to by the *@key* and *@type* parameters.

Value: Contains the binary state of the cache cluster config entry referred to by the *@key* and *@type* parameters.

3.1.5.86 `proc_getCacheConfigEntries`

The `proc_getCacheConfigEntries` stored procedure is called to retrieve a set of cache cluster config entry from the configuration database. The `proc_getCacheConfigEntry` stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getCacheConfigEntries(  
    @type NVARCHAR(64)  
);
```

@type: The type of cache cluster config entry to be retrieved.

Return Values: The `proc_getCacheConfigEntries` stored procedure MUST return an integer return code of 0.

The `proc_getCacheConfigEntries` stored procedure MUST return a single result set as specified in section [3.1.5.86.1](#).

3.1.5.86.1 `proc_getCacheConfigEntries.ResultSet`

Proc_getCacheConfigEntries.ResultSet returns a set of cache cluster config entry referred to by *@type*. The result set MUST be returned when *@type* corresponds to the type of a cache cluster config entry in the database. When *@type* does not correspond any cache cluster config entries in the database, the result set MUST be returned and MUST contain 0 rows. The file result set is specified by the following T-SQL syntax.

EntryKey	NVARCHAR(360)
CurrentVersion	BIGINT
Value	VARBINARY (MAX)

EntryKey : Contains key of the cache cluster config entry referred to by the *@type* parameter.

CurrentVersion : Contains version of the cache cluster config entry referred to by the *@type* parameter.

Value: Contains the binary state of the cache cluster config entry referred to by the *@type* parameter.

3.1.5.87 proc_updateCacheConfigEntry

The **proc_updateCacheConfigEntry** stored procedure is called to update a cache cluster config entry in the configuration database. The **proc_updateCacheConfigEntry** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_updateCacheConfigEntry(  
    @key NVARCHAR(320),  
    @type NVARCHAR(64),  
    @version BIGINT,  
    @data VARBINARY(MAX)  
);
```

@key: The key of the cache cluster config entry.

@type: The type of the cache cluster config entry.

@version: The version of the cache cluster config entry. If greater than 0, the entry can only be updated if the existing version matches the version specified. If less than or equal to 0, the update should be performed regardless of the existing version.

@data: The binary state of the cache cluster config entry.

Return Values: The **proc_updateCacheConfigEntry** stored procedure MUST return an integer return code of 0 if an entry is updated. The **proc_updateCacheConfigEntry** stored procedure MUST return an integer return code of 1 if the entry is not updated.

Result Set: The **proc_updateCacheConfigEntry** stored procedure MUST NOT return a result set.

3.1.5.88 proc_getSiteIdAndZoneOfHostHeaderSite

The **proc_getSiteIdAndZoneOfHostHeaderSite** stored procedure is called to return site collection identifier and zone of the site collection represented by the specified host header and path and URL scheme. The **proc_getSiteIdAndZoneOfHostHeaderSite** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteIdAndZoneOfHostHeaderSite(  
    @HostAndPath nvarchar(128),  
    @Scheme tinyint,  
    @RequestGuid uniqueidentifier = NULL OUTPUT  
);
```

@HostAndPath: The host header and path for the site collection to be returned.

@Scheme: The URL scheme for the site collection to be returned.

Value	Description
2	The URL scheme for the site collection is HTTP.
3	The URL scheme for the site collection is HTTPS.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getSiteIdAndZoneOfHostHeaderSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_getSiteIdAndZoneOfHostHeaderSite** stored procedure MUST return a single result set, as specified in section [3.1.5.88.1](#).

3.1.5.88.1 IdAndZone Result Set

The **IDAndZone** result set returns the site collection identifier and zone of the site collection when the host header and path of that site collection matches the value of **@HostHeader** and the URL scheme of that site collection matches the value of **@Scheme**. The **IDAndZone** result set MUST be returned and MUST contain one row when both the host header and path and URL scheme of a site collection matches the value of **@HostHeader** and **@Scheme**. When no matching site collection exists, The **IDAndZone** result set MUST be returned and MUST contain 0 rows. The **IDAndZone** result set is specified by the following T-SQL syntax.

```
SiteId          uniqueidentifier,  
UrlZone        tinyint;
```

SiteId: Contains the site collection identifier of the matching site collection.

UrlZone: Contains the zone of the matching site collection. This parameter MUST be one of the values in the following table.

Value	Description
0	The default zone.
1	The intranet zone.
2	The internet zone.
3	The custom zone.
4	The extranet zone.

3.1.5.89 proc_addUrlToSite

The **proc_addUrlToSite** stored procedure is called to add a URL and zone mapping for a site collection specified by its site collection identifier. The new URL for a site collection consists of host header and path and URL scheme. The **proc_addUrlToSite** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_addUrlToSite(  
    @SiteId          uniqueidentifier,  
    @HostAndPath     nvarchar(128),  
    @HostHeaderSiteUrlScheme tinyint,  
    @UrlZone         tinyint  
);
```

@SiteId: The site collection identifier for the site collection.

@HostAndPath: The host header and path part of the URL to add.

@HostHeaderSiteUrlScheme: The URL scheme part of the URL to add.

Value	Description
2	The URL scheme for the site collection is HTTP.
3	The URL scheme for the site collection is HTTPS.

@UrlZone: The zone for the URL to add.

Value	Description
0	The default zone.
1	The intranet zone.
2	The internet zone.
3	The custom zone.
4	The extranet zone.

Return Values: The **proc_addUrlToSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_addUrlToSite** stored procedure MUST NOT return a result set.

3.1.5.90 proc_setZoneForUrl

The **proc_setZoneForUrl** stored procedure is called to set the zone in a URL-zone mapping for a site collection specified by its site collection identifier. The URL-zone mapping for the site collection is identified by the combination of host header and path and URL scheme. The **proc_setZoneForUrl** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_setZoneForUrl (
    @SiteId                uniqueidentifier,
    @HostAndPath           nvarchar(128),
    @HostHeaderSiteUrlScheme tinyint,
    @UrlZone               tinyint
);
```

@SiteId: The site collection identifier for the site collection.

@HostAndPath: The host header and path part of the URL.

@HostHeaderSiteUrlScheme: The URL scheme part of the URL.

Value	Description
2	The URL scheme for the site collection is HTTP.
3	The URL scheme for the site collection is HTTPS.

@UrlZone: The zone to set to for the URL.

Value	Description
0	The default zone.
1	The intranet zone.
2	The internet zone.
3	The custom zone.
4	The extranet zone.

Return Values: The **proc_setZoneForUrl** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_setZoneForUrl** stored procedure MUST NOT return a result set.

3.1.5.91 proc_removeUrlFromSite

The **proc_removeUrlFromSite** stored procedure is called to remove a URL-zone mapping for a site collection specified by its site collection identifier. The URL-zone mapping for the site collection is identified by the combination of host header and path and URL scheme. The **proc_removeUrlFromSite** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_removeUrlFromSite(
    @SiteId          uniqueidentifier,
    @HostAndPath     nvarchar(128),
    @HostHeaderSiteUrlScheme tinyint
);
```

@SiteId: The site collection identifier for the site collection.

@HostAndPath: The host header and path part of the URL.

@HostHeaderSiteUrlScheme: The URL scheme part of the URL.

Value	Description
2	The URL scheme for the site collection is HTTP.
3	The URL scheme for the site collection is HTTPS.

Return Values: The **proc_removeUrlFromSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_removeUrlFromSite** stored procedure MUST NOT return a result set.

3.1.5.92 proc_getUrlsForSite

The **proc_getUrlsForSite** stored procedure is called to return the list of all URL-zone mapping for a site collection specified by its site collection identifier. The **proc_getUrlsForSite** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getUrlsForSite(
    @SiteId          uniqueidentifier,
```

```

        @RequestGuid uniqueidentifier = NULL OUTPUT
    )

```

@SiteId: The site collection identifier for the site collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getUrlsForSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_getUrlsForSite** stored procedure MUST return a single result set, as specified in section [3.1.5.92.1](#).

3.1.5.92.1 SiteUrls Result Set

The **SiteUrls** result set returns all URL-zone mappings for a site collection specified by its site collection identifier **@SiteId**. The **SiteUrls** result set MUST be returned and MUST contain one or more rows of URL-zone mapping when the site collection identifier matches the value of **@SiteId**. When no matching mapping for the site collection exists, the **SiteUrls** result set MUST be returned and MUST contain 0 rows. The **SiteUrls** result set is specified by the following T-SQL syntax.

```

HostAndPath    nvarchar(128),
Scheme         tinyint,
UrlZone       tinyint;

```

HostAndPath: Contains the host header and path part of the URL in a URL-zone mapping.

Scheme: Contains the scheme part of the URL in a URL-zone mapping.

UrlZone: Contains the zone in a URL-zone mapping. This parameter MUST be one of the values in the following table.

Value	Description
0	The default zone.
1	The intranet zone.
2	The internet zone.
3	The custom zone.
4	The extranet zone.

3.1.5.93 proc_addUrlToDeletedSite

The **proc_addUrlToDeletedSite** stored procedure is called to add a URL and zone mapping for a site collection has been marked for deletion. The new URL for a site collection consists of host header and path and URL scheme. The **proc_addUrlToDeletedSite** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_addUrlToDeletedSite (
    @SiteId                uniqueidentifier,
    @HostAndPath           nvarchar(128),

```

```

        @HostHeaderSiteUrlScheme tinyint,
        @UrlZone                 tinyint,
        @DatabaseId              uniqueidentifier
    );

```

@SiteId: The site collection identifier for the site collection.

@HostAndPath: The host header and path part of the URL to add.

@HostHeaderSiteUrlScheme: The URL scheme part of the URL to add.

@UrlZone: The zone for the URL to add.

@DatabaseId: The database identifier for the Content Database which stores the site collection.

Return Values: The **proc_addUrlToDeletedSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_addUrlToDeletedSite** stored procedure MUST NOT return a result set.

3.1.5.94 proc_SetUrlZoneForDeletedSite

The **proc_setUrlZoneForDeletedSite** stored procedure is called to set the zone in a URL-zone mapping for a site collection that has been marked for deletion. The URL-zone mapping for the site collection is identified by the combination of host header and path and URL scheme. The **proc_setUrlZoneForDeletedSite** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_SetUrlZoneForDeletedSite (
    @SiteId                uniqueidentifier,
    @HostAndPath           nvarchar(128),
    @HostHeaderSiteUrlScheme tinyint,
    @UrlZone               tinyint,
    @DatabaseId            uniqueidentifier
);

```

@SiteId: The site collection identifier for the site collection.

@HostAndPath: The host header and path part of the URL.

@HostHeaderSiteUrlScheme: The URL scheme part of the URL.

@UrlZone: The zone to set to for the URL.

@DatabaseId: The database identifier for the Content Database which stores the site collection.

Return Values: The **proc_setUrlZoneForDeletedSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_setUrlZoneForDeletedSite** stored procedure MUST NOT return a result set.

3.1.5.95 proc_getManagedPathSite

The **proc_getManagedPathSite** stored procedure is called to return lookup information for all the managed path host header site collections whose host header identifier matches a root site host header specified. The **proc_getManagedPathSite** stored procedure is specified by the following T-SQL syntax.

```

PROCEDURE proc_getManagedPathSite
(
    @RootHostHeader    nvarchar(128),
    @RequestGuid       uniqueidentifier = NULL OUTPUT
)

```

@RootHostHeader: The host header which all returning managed path host header site collections must match.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getManagedPathSite** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_getManagedPathSite** stored procedure MUST return a single result set, as specified in section [3.1.5.95.1](#).

3.1.5.95.1 ManagedPathSite Result Set

The **ManagedPathSite** result set returns lookup information for all the managed path host header site collections whose host header identifier matches a root site host header specified. The **ManagedPathSite** result set MUST be returned and MUST contain one or more rows of lookup information for all the managed path host header site collections whose host header starts with the value of **@RootHostHeader**. When no matching managed path host header site collections exists, the **ManagedPathSite** result set MUST be returned and MUST contain 0 rows. The **ManagedPathSite** result set is specified by the following T-SQL syntax

```

ApplicationId          uniqueidentifier,
DatabaseId             uniqueidentifier,
Id                     uniqueidentifier,
SubscriptionId         uniqueidentifier,
Path                   nvarchar(128),
RedirectUrl            nvarchar(512),
Pairing                tinyint,
HostHeaderIsSiteName  bit,
SubscriptionName       nvarchar(48),
AppSiteDomainId       varchar(6);

```

ApplicationId: The configuration object identifier of the Web application for the site collection.

DatabaseId: The configuration object identifier of the content database for the site collection.

Id: The site collection identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

Path: the server-relative URL of the site collection.

RedirectUrl: Contains the server-relative URL for the site collection to redirect to.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

SubscriptionName: a series of characters uniquely identifying the implementation-specific site subscription for a site collection.

AppSiteDomainId: 6 hexadecimal number value used in conjunction with a site subscription name and an **app web domain identifier** to determine a particular host header for a **subsite**.

3.1.5.96 proc_getSiteMap

The **proc_getSiteMap** stored procedure is called to return lookup information for a site collections specified by a host header identifier within a web application. The **proc_getSiteMap** stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteMap(
    @ApplicationId    uniqueidentifier,
    @Path             nvarchar(128),
    @RequestGuid     uniqueidentifier = NULL OUTPUT
)
```

@ApplicationId: Contains the configuration object identifier of the web application from which to search for the site collection.

@Path: the server-relative URL of the site collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The **proc_getSiteMap** stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The **proc_getSiteMap** stored procedure MUST return a single result set, as specified in section [3.1.5.96.1](#).

3.1.5.96.1 SiteMap Result Set

The **SiteMap** result set returns lookup information for the site collection specified by a given **path** within a web application. The **SiteMap** result set MUST be returned and MUST contain one row of lookup information for the site collections whose path matches the value of **@Path**. When no matching site collection exists, the **SiteMap** result set MUST be returned and MUST contain 0 rows. The **SiteMapBy** result set is specified by the following T-SQL syntax.

```
Id                uniqueidentifier,
```

SubscriptionId	uniqueidentifier,
DatabaseId	uniqueidentifier,
RedirectUrl	nvarchar(512),
Pairing	tinyint,
SubscriptionName	nvarchar(48),
AppSiteDomainId	varchar(6);

Id: The site collection identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

DatabaseId: The configuration object identifier of the content database for the site collection.

RedirectUrl: Contains the server-relative URL for the site collection to redirect to.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

SubscriptionName: a series of characters uniquely identifying the implementation-specific site subscription for a site collection.

AppSiteDomainId: 6 hexadecimal number value used in conjunction with a site subscription name and an app web domain identifier to determine a particular host header for a subsite.

3.1.5.97 `proc_getSiteMapById`

The `proc_getSiteMapById` stored procedure is called to return lookup information for a site collection specified by a given host header identifier. The `proc_getSiteMapById` stored procedure is specified by the following T-SQL syntax.

```
PROCEDURE proc_getSiteMapById(
    @SiteId          uniqueidentifier,
    @RequestGuid    uniqueidentifier = NULL OUTPUT
)
```

@SiteId: The site collection identifier of the site collection.

@RequestGuid: The optional request identifier for the current request.

Return Values: The `proc_getSiteMapById` stored procedure returns an integer return code which MUST be 0, which indicates successful execution.

Result Set: The `proc_getSiteMapById` stored procedure MUST return a single result set, as specified in section [3.1.5.97.1](#).

3.1.5.97.1 `SiteMapById` Result Set

The `SiteMapById` result set returns lookup information for the site collection specified by a given host header identifier. The `SiteMapById` result set MUST be returned and MUST contain one row of

lookup information for the site collections whose site collection identifier matches the value of **@SiteId**. When no matching site collection exists, the **SiteMapById** result set MUST be returned and MUST contain 0 rows. The **SiteMapById** result set is specified by the following T-SQL syntax.

```

ApplicationId          uniqueidentifier,
DatabaseId             uniqueidentifier,
Id                     uniqueidentifier,
SubscriptionId         uniqueidentifier,
Path                   nvarchar(128),
RedirectUrl            nvarchar(512),
Pairing                tinyint,
HostHeaderIsSiteName  bit,
SubscriptionName       nvarchar(48),
AppSiteDomainId       varchar(6);

```

ApplicationId: The configuration object identifier of the Web application for the site collection.

DatabaseId: The configuration object identifier of the content database for the site collection.

Id: The site collection identifier of the site collection.

SubscriptionId: The identifier of the site subscription.

Path: the server-relative URL of the site collection.

RedirectUrl: Contains the server-relative URL for the site collection to redirect to.

Pairing: Indicates whether the site collection was upgraded from previous version. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection was NOT upgraded from the previous version.
1	This site collection was upgraded from the previous version.

HostHeaderIsSiteName: Indicates whether the site collection uses a host header site identifier. This parameter MUST be one of the values in the following table.

Value	Description
0	This site collection does NOT use a host header site identifier.
1	This site collection does use a host header site identifier.

SubscriptionName: a series of characters uniquely identifying the implementation-specific site subscription for a site collection.

AppSiteDomainId: 6 hexadecimal number value used in conjunction with a site subscription name and an app web domain identifier to determine a particular host header for a subsite.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

Preliminary

4 Protocol Examples

4.1 Delete E-mail-Enabled Lists from a Site Collection

If protocol client adds e-mail aliases to an **Active Directory** when they become associated with SharePoint lists (1), then it needs to remove those e-mail aliases when they are no longer in use. When many e-mail aliases are involved, this can be a time consuming operation, so the protocol server tracks e-mail aliases which are no longer mapped to lists (1), but which still need to be removed from the Active Directory. This example illustrates the protocol operations needed to remove all of the e-mail aliases used by e-mail enabled lists (1) within a specified site collection. An existing connection to the configuration database using lower-level protocols is assumed.

4.1.1 Mark E-mail-Enabled Lists as Deleted

The example begins by marking all of the e-mail enabled lists for a specified site collection as deleted by calling the **proc_markForDeletionEmailEnabledListsBySite** stored procedure with the specified site collection identifier.



Figure 2: Marking the e-mail enabled lists as deleted

4.1.2 Retrieve E-mail Aliases Marked as Deleted

The e-mail aliases marked for deletion are retrieved at a later time by calling the **proc_getDeletedEmailAliases** stored procedure.

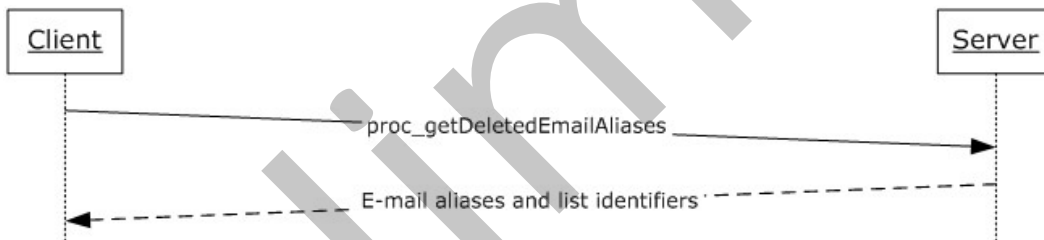


Figure 3: Retrieving the e-mail aliases marked as deleted

This call returns e-mail aliases and list identifiers for all of the e-mailed aliases which have been marked for deletion. The protocol client can then perform any actions needed to remove these e-mail aliases from the Active Directory.

4.1.3 Remove E-Mail-Enabled Lists

Once a specified e-mail alias has been deleted from the Active Directory, the e-mail enabled list is removed from the configuration database by calling the **proc_dropEmailEnabledListByAlias** stored procedure with its e-mail alias. Each e-mail alias removed requires a separate call.



Figure 4: Removing the e-mail enabled lists

4.2 Pending Distribution Lists

Creation of distribution lists associated with permission levels can require approval, and the protocol server stores the list (1) of permission levels whose associated distribution lists are still pending approval so that the protocol client can periodically check for that approval. An existing connection to the configuration database using lower-level protocols is assumed.

4.2.1 Add a Pending Distribution List

When creation of a distribution list associated with a permission level requires approval, the client adds it to the list (1) of distribution lists with an operation pending by calling **proc_putPendingDistributionList** with the site collection identifier, site identifier, name of the permission level, and name of the user who has requested creation of the distribution list, along with an optional request identifier.

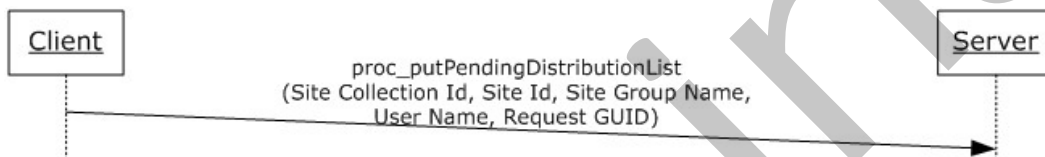


Figure 5: Adding a pending distribution list

4.2.2 Retrieve Pending Distribution Lists

When the protocol client is ready to check for approval of its pending distribution lists, it retrieves the list (1) of permission levels whose distribution lists require approval by calling the **proc_getPendingDistributionListsSinceVersion** stored procedure with row version equal to 0. This returns all of the distribution lists pending approval, along with their row versions.

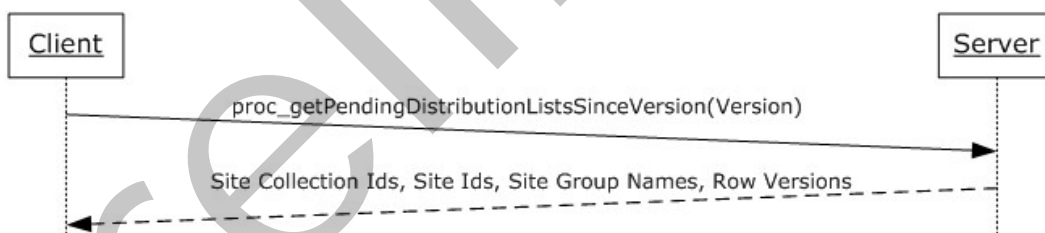


Figure 6: Retrieving the pending distribution lists

If the groups returned by this call have not yet been given approval, the protocol client can continue to check for approval, and it can request pending distribution lists which were added since the last time it retrieved the list (1) by calling the **proc_getPendingDistributionListsSinceVersion** stored procedure with the largest row version previously returned to it.

4.2.3 Remove a Pending Distribution List

Once creation of the distribution list associated with a permission level is no longer pending, the protocol client removes the distribution list from the list (1) of pending distribution lists by calling the **proc_dropPendingDistribution** stored procedure.

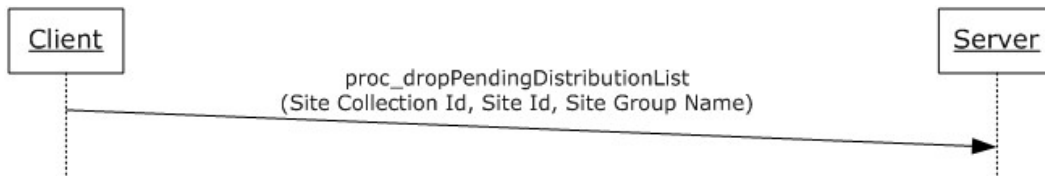


Figure 7: Removing the pending distribution lists

4.3 Execution of a Job Instance

This example illustrates the sequence of operations performed for a job instance, which is the execution of a job definition on one protocol client. In this example, the parent of the job definition is a Web application (1) with three content databases.

4.3.1 Acquire a Content Database Lock

Our example job definition requires content database locks to ensure that only a single protocol client processes a content database at any one time. Multiple job instances for a job definition may execute concurrently on different clients if each protocol client has obtained different content database locks. A protocol client may attempt to obtain a content database lock by calling the **proc_GetTimerLock** stored procedure with server identifier and time in minutes of the lock before it will be considered expired, as described in [\[MS-WSSCADM2\]](#).

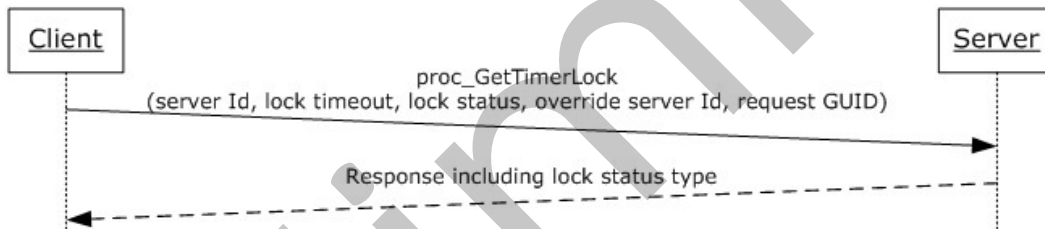


Figure 8: Acquiring locks

The lock status type indicates whether the protocol client successfully acquires the content database lock. For this example, the protocol client was able to successfully obtain locks for two of the three content databases specified by the Web application (1) associated with the job definition.

4.3.2 Associate a Target Instance with a Job Definition

A job instance can process several different resources during a single execution. A target instance provides a way to keep track of the job instance's execution progress. In our example, the job definition targets three content databases and the protocol client has obtained content database locks for two of those content databases. The job instance processes those two content databases during a single execution. A target instance for each content database can be associated with a job definition by calling the **proc_AddTimerTargetInstance** stored procedure with the job identifier and target instance identifier.

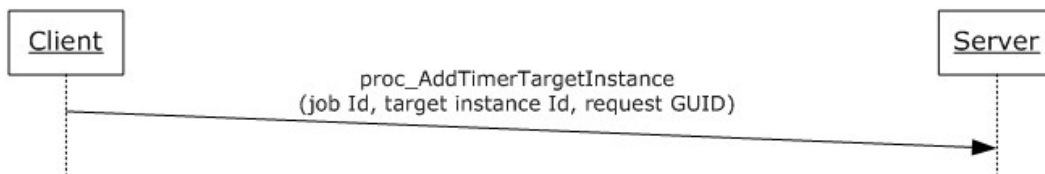


Figure 9: Target instances

4.3.3 Schedule a Job Instance

A schedule job instance is created to indicate when the protocol client will execute a job instance. To create the scheduled job instance, the protocol client calls the **proc_ScheduleTimerJob** stored procedure with the service identifier, web application identifier, server identifier, job definition identifier and scheduled start time.

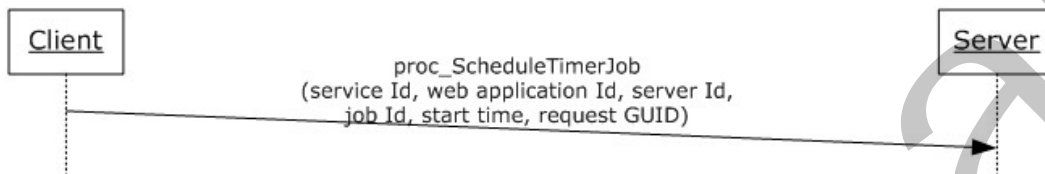


Figure 10: Scheduling a Job Instance

4.3.4 Start a Job Instance

When a job is marked as started using the **proc_StartTimerRunningJob** stored procedure, the **TargetCount** indicates how many target instances the job instance is scheduled to process. The **CurrentTarget** is a counter which indicates how many target instances have been processed. In our example, the protocol client has acquired two content database locks and processes two content databases represented by target instances. So initially the **proc_StartTimerRunningJob** stored procedure is called with **TargetCount = 2**.



Figure 11: Starting a job instance

If the job instance will not be run again in the future, then the protocol client deletes the scheduled job instance by calling **proc_DeleteScheduledJob** stored procedure with server identifier and job definition identifier:

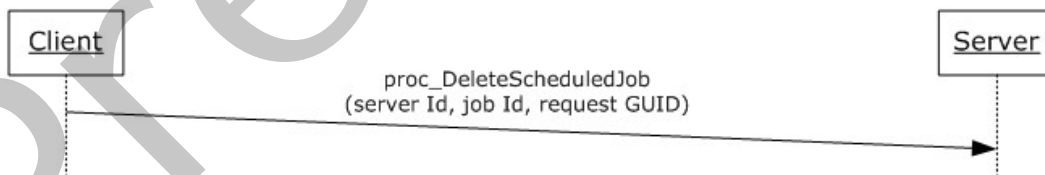


Figure 12: Deleting Scheduled Job

4.3.5 Update Job Progress

While the protocol client is processing each content database, progress can be reported as a percentage of the current target that has been processed. To update the current progress, the protocol client can periodically call the **proc_UpdateTimerRunningJobProgress** stored procedure.

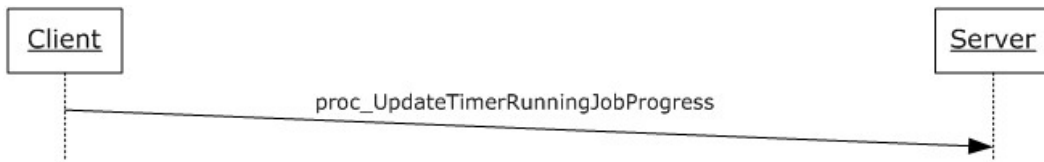


Figure 13: Updating job progress

4.3.6 Add a Job History Entry

After each target instance has been processed by the job instance, a job history entry should be created by calling **proc_AddTimerJobHistory** stored procedure.



Figure 14: Adding Job Instance History

4.3.7 Process Additional Target Instances

In our example, the protocol client has acquired two content database locks. Once the protocol client has finished processing a content database, processing may begin on the subsequent content database. To begin processing the next content database, the protocol client can call the **proc_UpdateTimerRunningJobTarget** stored procedure.



Figure 15: Processing additional target instances

4.3.8 Complete a Job Instance

Once the protocol client has finished processing the two content databases, the job instance may be finished by calling the **proc_CompleteTimerRunningJob** stored procedure with service identifier, web application identifier associated with the job definition, job definition identifier, server identifier and job status type of the job instance.

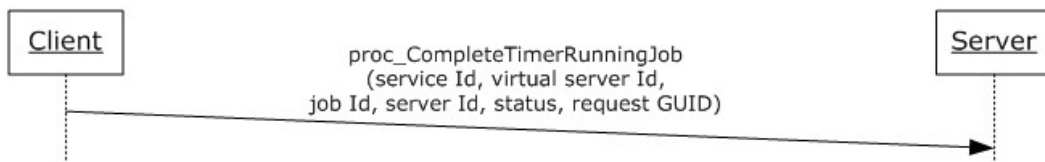


Figure 16: Completing a job instance

4.4 File Storage and Retrieval

This example follows the sequence of calls need to store and retrieve a file from the configuration database. This is useful for files that are very large and might benefit from the ability to stream a segment of the file into or out of the database without needed to hold the entire file contents in memory.

4.4.1 Store a File

File Storage is a multi-step operation which begins when the protocol client passes the GUID of an existing configuration object to the **proc_putFileSegment** stored procedure, along with some of the contents of the file and the offset of the location in the file to which are writing. In this example, the entire file is updated, so the **@Offset** parameter for the first call to **proc_putFileSegment** is 0. The file being stored in this example is 75000 bytes. To illustrate the behavior, the value of the **@Bytes** parameter in the first call to **proc_putFileSegment** contains the first 50000 bytes of the file.

To store the remaining 25000 bytes of the file, the **proc_putFileSegment** stored procedure is called again. This time, the last 25000 bytes of the file are passed in **@Bytes** and the **@Offset** is 50000.

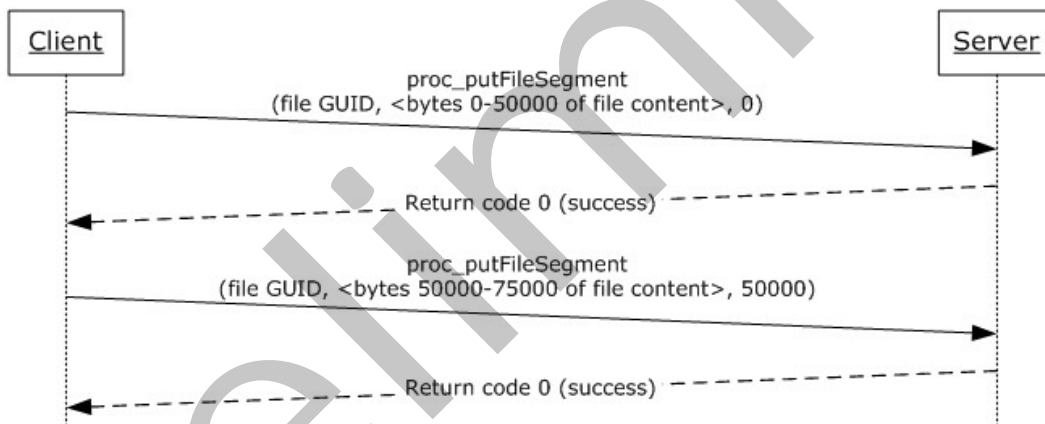


Figure 17: File storage

4.4.2 Retrieve a File

Once a file has been stored in the configuration database, its contents can be returned by a simple call to the **proc_getFile** stored procedure. The same GUID used during the call to the **proc_putFileSegment** stored procedure to store the file is used here to retrieve the contents of that file.

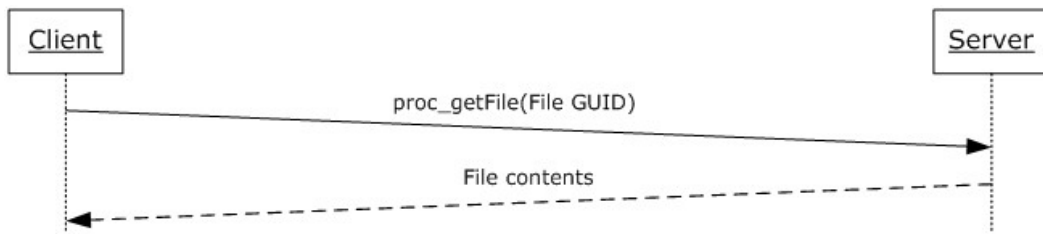


Figure 18: File retrieval

4.5 Site Subscription Retrieval

This example follows the sequence of calls needed to retrieve site subscriptions on a farm, or in a given Web application (1) or content database on a protocol server. Using the retrieved site subscription identifier this example follows with the calls needed to find all site collections in a farm, or given Web application (1) or content database that belong to the specified site subscription. An existing site subscription with one or more associated site collections is assumed.

4.5.1 Retrieve Site Subscriptions

The protocol client retrieves a list (1) of site subscriptions in a farm by calling the **proc_getSubscriptionIds** stored procedure. This returns the list (1) of site subscriptions in a farm.

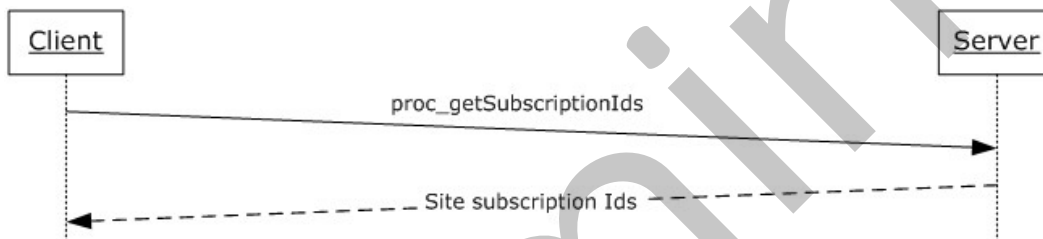


Figure 19: proc_getSubscriptionIds

The protocol client can also retrieve a list (1) of site subscriptions in a Web application (1) on the protocol server by calling the **proc_getSiteSubscriptionsInWebApplication** stored procedure. This returns a list (1) of site subscriptions that have site collections in the Web application (1).

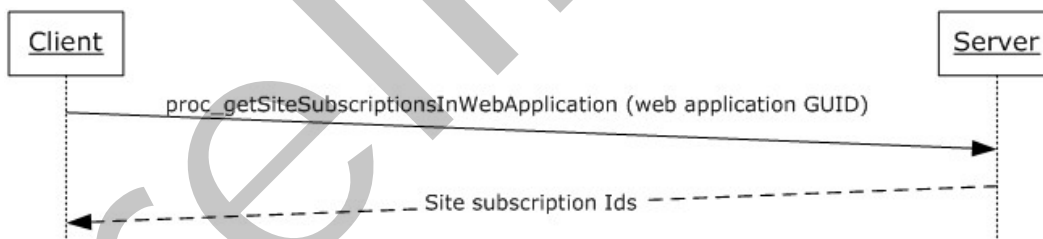


Figure 20: proc_getSiteSubscriptionsInWebApplication

The protocol client can also retrieve a list (1) of site subscriptions in a content database on the protocol server by calling the **proc_getSiteSubscriptionsInContentDatabase** stored procedure. This returns a list (1) of site subscriptions with site collections in the content database.

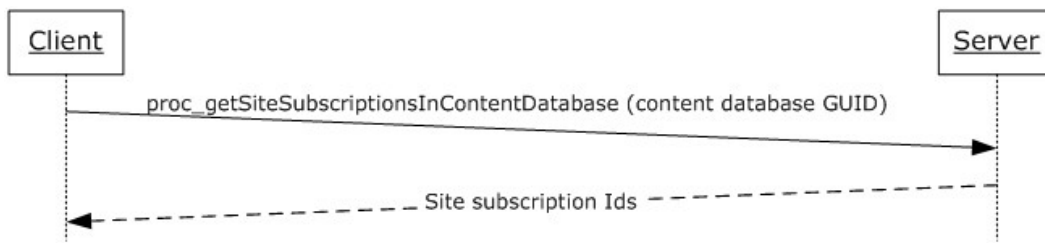


Figure 21: proc_getSiteSubscriptionsInContentDatabase

4.5.2 Retrieve Site Collections

Once the list (1) of site subscription identifiers are retrieved for a Farm, they can be used to retrieve all site collections associated with a site subscription in a farm by calling the **proc_getSiteIds** stored procedure. This returns a list (1) of site collection identifiers for the given site subscription in the entire farm.

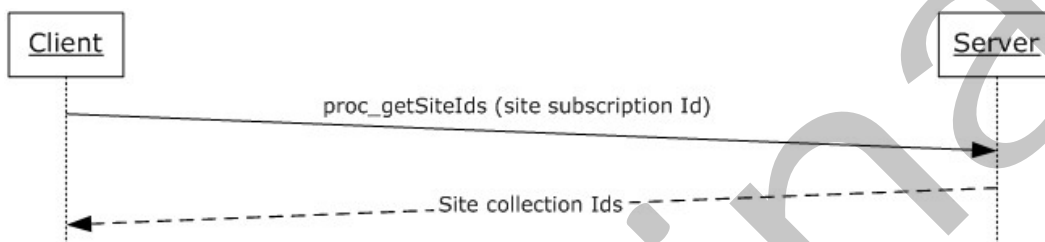


Figure 22: proc_getSiteIds

The list (1) of site subscription identifiers can also be used to retrieve all site collections in a site subscription contained in a Web application (1) by calling the **proc_getSiteSubscriptionSiteIdsInWebApplication** stored procedure. This returns a list (1) of site collection identifiers for the given site subscription in the given Web application (1).

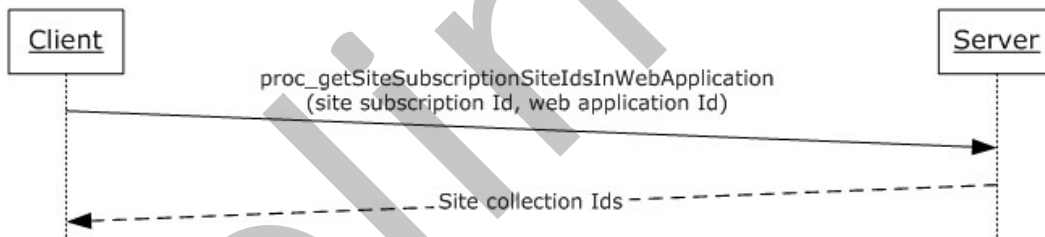


Figure 23: proc_getSiteSubscriptionSiteIdsInWebApplication

The list (1) of site subscription identifiers can also be used to retrieve all site collections in a site subscription contained in a content database by calling the **proc_getSiteSubscriptionSiteIdsInContentDatabase** stored procedures. This returns a list (1) of site collection identifiers for the given site subscription in the given content database.

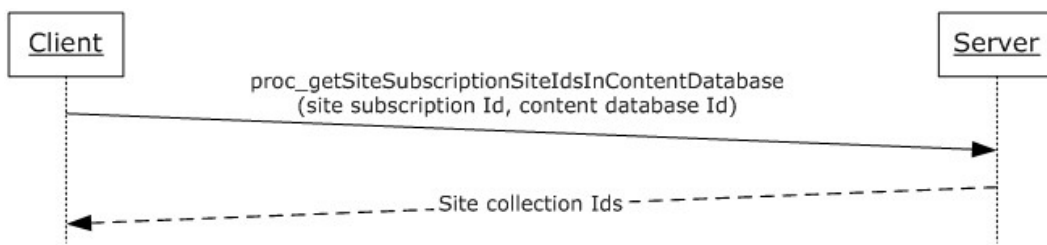


Figure 24: `proc_getSiteSubscriptionSiteIdsInContentDatabase`

Preliminary

5 Security

5.1 Security Considerations for Implementers

Interactions with SQL are susceptible to tampering and other forms of security risks. Implementers are advised to sanitize input parameters for stored procedures before invoking the stored procedure.

5.2 Index of Security Parameters

None.

Preliminary

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® SharePoint® Foundation 2013 Preview
- Microsoft® SQL Server® 2008 R2 SP1
- Microsoft® SQL Server® 2012

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

7 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

Preliminary

8 Index

A

Abstract data model
 [server](#) 17
[Acquire a content database lock example](#) 99
[Add a job history entry example](#) 101
[Add a pending distribution list example](#) 98
[Applicability](#) 11
[Associate a target instance with a job definition example](#) 99

B

[Binary structures - overview](#) 14
Bit fields
 [job lock type](#) 13
 [job status type](#) 13
 [lock status type](#) 14

C

[Capability negotiation](#) 12
[Change tracking](#) 108
Classes
 [configuration object](#) 14
Client
 [overview](#) 17
Common data types
 [overview](#) 13
[Complete a job instance example](#) 101
[Configuration object classes](#) 14
[Configuration object management](#) 10
 [server](#) 17
[Configuration object properties](#) 14

D

Data model - abstract
 [server](#) 17
Data types
 [common](#) 13
Data types - simple
 [overview](#) 13
Deletion of e-mail-enabled lists from a site collection example
 [mark lists as deleted](#) 97
 [overview](#) 97
 [remove e-mail enabled lists](#) 97
 [retrieve e-mail aliases marked as deleted](#) 97

E

[E-mail-enabled list](#) 15
[E-mail-enabled lists](#) 11
 [server](#) 19
Events
 [local - server](#) 96
 [timer - server](#) 95
Examples

[acquire a content database lock](#) 99
[add a job history entry](#) 101
[add a pending distribution list](#) 98
[associate a target instance with a job definition](#) 99
[complete a job instance](#) 101
[delete e-mail-enabled lists from a site collection](#) 97
[execute a job instance](#) 99
[mark e-mail enabled lists as deleted](#) 97
[monitor pending distribution lists](#) 98
[process additional target instances](#) 101
[remove a pending distribution list](#) 99
[remove e-mail-enabled lists](#) 97
[retrieve a file](#) 102
[retrieve e-mail aliases marked as deleted](#) 97
[retrieve pending distribution lists](#) 98
[retrieve site collections](#) 104
retrieve site subscriptions ([section 4.5](#) 103, [section 4.5.1](#) 103)
[schedule a job instance](#) 100
[start a job instance](#) 100
[store a file](#) 102
[store and retrieve files](#) 102
[update job progress](#) 101
Execution of a job instance example
 [acquire a content database lock](#) 99
 [add a job history entry](#) 101
 [associate a target instance with a job definition](#) 99
 [complete a job instance](#) 101
 [overview](#) 99
 [process additional target instances](#) 101
 [schedule a job instance](#) 100
 [start a job instance](#) 100
 [update job progress](#) 101

F

[Fields - vendor-extensible](#) 12
[File retrieval example](#) 102
[File storage](#) 10
File storage and retrieval example
 [overview](#) 102
 [retrieve a file](#) 102
 [store a file](#) 102
[File storage example](#) 102
Flag structures
 [job lock type bit field](#) 13
 [job status type bit field](#) 13
 [lock status type bit field](#) 14

G

[Glossary](#) 8

H

Higher-layer triggered events

[server](#) 19

I

[Implementer - security considerations](#) 106

[Index of security parameters](#) 106

[Informative references](#) 10

Initialization

[server](#) 19

[Introduction](#) 8

J

[Job lock type bit field](#) 13

[Job status type bit field](#) 13

L

Local events

[server](#) 96

[Lock status type bit field](#) 14

M

[Mark e-mail-enabled lists as deleted example](#) 97

Message processing

[server](#) 19

Messages

[binary structures](#) 14

[common data types](#) 13

[enumerations](#) 13

[job lock type bit field](#) 13

[job status type bit field](#) 13

[lock status type bit field](#) 14

[result sets](#) 14

[simple data types](#) 13

[table structures](#) 16

[transport](#) 13

[view structures](#) 16

[XML structures](#) 16

Methods

[proc_AddTimerJobHistory](#) 19

[proc_AddTimerLockForJob](#) 20

[proc_AddTimerTargetInstance](#) 21

[proc_addUrlToDeletedSite](#) 90

[proc_addUrlToSite](#) 87

[proc_ClearProductVersions](#) 22

[proc_CompleteTimerRunningJob](#) 22

[proc_DeleteAllMarkedTimerLocks](#) 23

[proc_DeleteAllTimerLocksAndRunningJobs](#) 23

[proc_deleteCacheConfigEntries](#) 83

[proc_deleteCacheConfigEntry](#) 82

[proc_DeleteOldTimerJobHistory](#) 24

[proc_DeleteScheduledJob](#) 25

[proc_DeleteTimerLockForJob](#) 25

[proc_DeleteTimerRunningJobs](#) 26

[proc_DeleteTimerTargetInstance](#) 27

[proc_DeleteTimerTargetInstances](#) 27

[proc_dropClass](#) 28

[proc_dropEmailEnabledList](#) 29

[proc_dropEmailEnabledListByAlias](#) 29

[proc_dropEmailEnabledListsByWeb](#) 29

[proc_DropObject](#) 30

[proc_dropPendingDistributionList](#) 30

[proc_DropSiteMap](#) 31

[proc_dropSiteMap2](#) 73

[proc_getCacheClusterConfigSchemaVersion](#) 83

[proc_getCacheClusterConfigUtcTime](#) 84

[proc_getCacheConfigEntries](#) 85

[proc_getCacheConfigEntry](#) 84

[proc_getDeletedEmailAliases](#) 31

[proc_getDeletedSite](#) 78

[proc_getDeletedSitesByQuery](#) 74

[proc_getDeletedSitesBySiteId](#) 76

[proc_getDeletedSitesByUrl](#) 73

[proc_GetDependentObjectsByBaseClass](#) 32

[proc_getEmailEnabledListByAlias](#) 33

[proc_getEvalSites](#) 80

[proc_getFile](#) 33

[proc_getManagedPathSite](#) 91

[proc_getNewObjects](#) 34

[proc_getPendingDistributionListsSinceVersion](#) 36

[proc_GetProductVersions](#) 37

[proc_getSiteBestMatch](#) 38

[proc_getSiteCount](#) 40

[proc_getSiteIdAndZoneOfHostHeaderSite](#) 86

[proc_GetSiteIdOfHostHeaderSite](#) 40

[proc_getSiteIds](#) 41

[proc_getSiteMap](#) 93

[proc_getSiteMapById](#) 94

[proc_getSiteNames](#) 41

[proc_getSiteSubscriptionsInContentDB](#) 43

[proc_getSiteSubscriptionsInWebApplication](#) 44

[proc_getSiteSubscriptionSiteIdsInContentDatabase](#) 44

[proc_getSiteSubscriptionSiteIdsInWebApplication](#) 45

[proc_getSiteSubset](#) 46

[proc_getSubscriptionIds](#) 46

[proc_getTemplate](#) 47

[proc_GetTimerJobHistory](#) 48

[proc_GetTimerJobLastRunTime](#) 50

[proc_GetTimerRunningJobs](#) 50

[proc_GetTimerScheduledJobs](#) 52

[proc_GetTimerTargetInstance](#) 53

[proc_GetTimerTargetInstanceState](#) 53

[proc_getUrlsForSite](#) 89

[proc_hideSiteMap](#) 72

[proc_insertCacheConfigEntry](#) 82

[proc_markForDeletionEmailEnabledList](#) 54

[proc_markForDeletionEmailEnabledListsBySite](#) 55

[proc_markForDeletionEmailEnabledListsByWeb](#) 55

[proc_putClass](#) 55

[proc_putDeletedSiteMap](#) 79

[proc_putDependency](#) 56

[proc_putDistributionListToDelete](#) 56

[proc_putEmailEnabledList](#) 57

[proc_putFileSegment](#) 58

[proc_putObject](#) 58

[proc_putObjectTVP](#) 60

[proc_putPendingDistributionList](#) 62

[proc_putSiteMap](#) 62

[proc_RefreshAllTimerLocks](#) 64
[proc_RegisterProductVersion](#) 64
[proc_removeUrlFromSite](#) 89
[proc_renameSiteMap](#) 65
[proc_ScheduleTimerJob](#) 66
[proc_SetAppSiteDomainPrefix](#) 67
[proc_setSourceSiteId](#) 82
[proc_setSubscription](#) 67
[proc_SetUrlZoneForDeletedSite](#) 91
[proc_setZoneForUrl](#) 88
[proc_SiteExists](#) 68
[proc_StartTimerRunningJob](#) 68
[proc_unhideSiteMap](#) 72
[proc_updateCacheConfigEntry](#) 86
[proc_UpdateTimerRunningJobProgress](#) 69
[proc_UpdateTimerRunningJobStatus](#) 70
[proc_UpdateTimerRunningJobTarget](#) 71
[proc_UpdateTimerTargetInstanceState](#) 71

N

[Normative references](#) 9

O

[Overview \(synopsis\)](#) 10

P

[Parameters - security index](#) 106
[Pending distribution list](#) 15
 Pending distribution list example
 [add a pending distribution list](#) 98
 [overview](#) 98
 [remove a pending distribution list](#) 99
 [retrieve pending distribution lists](#) 98
[Pending distribution lists](#) 11
 [server](#) 19
[Preconditions](#) 11
[Prerequisites](#) 11
[proc_AddTimerJobHistory method](#) 19
[proc_AddTimerLockForJob method](#) 20
[proc_AddTimerTargetInstance method](#) 21
[proc_addUrlToDeletedSite method](#) 90
[proc_addUrlToSite method](#) 87
[proc_ClearProductVersions method](#) 22
[proc_CompleteTimerRunningJob method](#) 22
[proc_DeleteAllMarkedTimerLocks method](#) 23
[proc_DeleteAllTimerLocksAndRunningJobs method](#) 23
[proc_deleteCacheConfigEntries method](#) 83
[proc_deleteCacheConfigEntry method](#) 82
[proc_DeleteOldTimerJobHistory method](#) 24
[proc_DeleteScheduledJob method](#) 25
[proc_DeleteTimerLockForJob method](#) 25
[proc_DeleteTimerRunningJobs method](#) 26
[proc_DeleteTimerTargetInstance method](#) 27
[proc_DeleteTimerTargetInstances method](#) 27
[proc_dropClass method](#) 28
[proc_dropEmailEnabledList method](#) 29
[proc_dropEmailEnabledListByAlias method](#) 29
[proc_dropEmailEnabledListsByWeb method](#) 29

[proc_DropObject method](#) 30
[proc_dropPendingDistributionList method](#) 30
[proc_DropSiteMap method](#) 31
[proc_dropSiteMap2 method](#) 73
[proc_getCacheClusterConfigSchemaVersion method](#) 83
[proc_getCacheClusterConfigUtcTime method](#) 84
[proc_getCacheConfigEntries method](#) 85
[proc_getCacheConfigEntry method](#) 84
[proc_getDeletedEmailAliases method](#) 31
[proc_getDeletedSite method](#) 78
[proc_getDeletedSitesByQuery method](#) 74
[proc_getDeletedSitesBySiteId method](#) 76
[proc_getDeletedSitesByUrl method](#) 73
[proc_GetDependentObjectsByBaseClass method](#) 32
[proc_getEmailEnabledListByAlias method](#) 33
[proc_getEvalSites method](#) 80
[proc_getFile method](#) 33
[proc_getManagedPathSite method](#) 91
[proc_getNewObjects method](#) 34
[proc_getPendingDistributionListsSinceVersion method](#) 36
[proc_GetProductVersions method](#) 37
[proc_getSiteBestMatch method](#) 38
[proc_getSiteCount method](#) 40
[proc_getSiteIdAndZoneOfHostHeaderSite method](#) 86
[proc_GetSiteIdOfHostHeaderSite method](#) 40
[proc_getSiteIds method](#) 41
[proc_getSiteMap method](#) 93
[proc_getSiteMapById method](#) 94
[proc_getSiteNames method](#) 41
[proc_getSiteSubscriptionsInContentDB method](#) 43
[proc_getSiteSubscriptionsInWebApplication method](#) 44
[proc_getSiteSubscriptionSiteIdsInContentDatabase method](#) 44
[proc_getSiteSubscriptionSiteIdsInWebApplication method](#) 45
[proc_getSiteSubset method](#) 46
[proc_getSubscriptionIds method](#) 46
[proc_getTemplate method](#) 47
[proc_GetTimerJobHistory method](#) 48
[proc_GetTimerJobLastRunTime method](#) 50
[proc_GetTimerRunningJobs method](#) 50
[proc_GetTimerScheduledJobs method](#) 52
[proc_GetTimerTargetInstance method](#) 53
[proc_GetTimerTargetInstanceState method](#) 53
[proc_getUrlsForSite method](#) 89
[proc_hideSiteMap method](#) 72
[proc_insertCacheConfigEntry method](#) 82
[proc_markForDeletionEmailEnabledList method](#) 54
[proc_markForDeletionEmailEnabledListsBySite method](#) 55
[proc_markForDeletionEmailEnabledListsByWeb method](#) 55
[proc_putClass method](#) 55
[proc_putDeletedSiteMap method](#) 79
[proc_putDependency method](#) 56
[proc_putDistributionListToDelete method](#) 56
[proc_putEmailEnabledList method](#) 57

- [proc_putFileSegment_method](#) 58
- [proc_putObject_method](#) 58
- [proc_putObjectTVP_method](#) 60
- [proc_putPendingDistributionList_method](#) 62
- [proc_putSiteMap_method](#) 62
- [proc_RefreshAllTimerLocks_method](#) 64
- [proc_RegisterProductVersion_method](#) 64
- [proc_removeUrlFromSite_method](#) 89
- [proc_renameSiteMap_method](#) 65
- [proc_ScheduleTimerJob_method](#) 66
- [proc_SetAppSiteDomainPrefix_method](#) 67
- [proc_setSourceSiteId_method](#) 82
- [proc_setSubscription_method](#) 67
- [proc_SetUrlZoneForDeletedSite_method](#) 91
- [proc_setZoneForUrl_method](#) 88
- [proc_SiteExists_method](#) 68
- [proc_StartTimerRunningJob_method](#) 68
- [proc_unhideSiteMap_method](#) 72
- [proc_updateCacheConfigEntry_method](#) 86
- [proc_UpdateTimerRunningJobProgress_method](#) 69
- [proc_UpdateTimerRunningJobStatus_method](#) 70
- [proc_UpdateTimerRunningJobTarget_method](#) 71
- [proc_UpdateTimerTargetInstanceState_method](#) 71
- [Process additional target instances example](#) 101
- [Product behavior](#) 107

Properties
[configuration object](#) 14

R

- [References](#) 9
 - [informative](#) 10
 - [normative](#) 9
- [Relationship to other protocols](#) 11
- [Remove a pending distribution list example](#) 99
- [Remove e-mail-enabled lists example](#) 97
- [Result sets - overview](#) 14
- [Retrieve a file example](#) 102
- [Retrieve e-mail aliases marked as deleted example](#) 97
- [Retrieve pending distribution lists example](#) 98
- [Retrieve site collections example](#) 104
- [Retrieve site subscriptions example](#) 103

S

- [Schedule a job instance example](#) 100
- Security
 - [implementer considerations](#) 106
 - [parameter index](#) 106
- Sequencing rules
 - [server](#) 19
- Server
 - [abstract data model](#) 17
 - [configuration object management](#) 17
 - [e-mail-enabled lists](#) 19
 - [higher-layer triggered events](#) 19
 - [initialization](#) 19
 - [local events](#) 96
 - [message processing](#) 19
 - [overview](#) 17
 - [pending distribution lists](#) 19

- [proc_AddTimerJobHistory_method](#) 19
- [proc_AddTimerLockForJob_method](#) 20
- [proc_AddTimerTargetInstance_method](#) 21
- [proc_addUrlToDeletedSite_method](#) 90
- [proc_addUrlToSite_method](#) 87
- [proc_ClearProductVersions_method](#) 22
- [proc_CompleteTimerRunningJob_method](#) 22
- [proc_DeleteAllMarkedTimerLocks_method](#) 23
- [proc_DeleteAllTimerLocksAndRunningJobs_method](#) 23
- [proc_deleteCacheConfigEntries_method](#) 83
- [proc_deleteCacheConfigEntry_method](#) 82
- [proc_DeleteOldTimerJobHistory_method](#) 24
- [proc_DeleteScheduledJob_method](#) 25
- [proc_DeleteTimerLockForJob_method](#) 25
- [proc_DeleteTimerRunningJobs_method](#) 26
- [proc_DeleteTimerTargetInstance_method](#) 27
- [proc_DeleteTimerTargetInstances_method](#) 27
- [proc_dropClass_method](#) 28
- [proc_dropEmailEnabledList_method](#) 29
- [proc_dropEmailEnabledListByAlias_method](#) 29
- [proc_dropEmailEnabledListsByWeb_method](#) 29
- [proc_DropObject_method](#) 30
- [proc_dropPendingDistributionList_method](#) 30
- [proc_DropSiteMap_method](#) 31
- [proc_dropSiteMap2_method](#) 73
- [proc_getCacheClusterConfigSchemaVersion_method](#) 83
- [proc_getCacheClusterConfigUtcTime_method](#) 84
- [proc_getCacheConfigEntries_method](#) 85
- [proc_getCacheConfigEntry_method](#) 84
- [proc_getDeletedEmailAliases_method](#) 31
- [proc_getDeletedSite_method](#) 78
- [proc_getDeletedSitesByQuery_method](#) 74
- [proc_getDeletedSitesBySiteId_method](#) 76
- [proc_getDeletedSitesByUrl_method](#) 73
- [proc_GetDependentObjectsByBaseClass_method](#) 32
- [proc_getEmailEnabledListByAlias_method](#) 33
- [proc_getEvalSites_method](#) 80
- [proc_getFile_method](#) 33
- [proc_getManagedPathSite_method](#) 91
- [proc_getNewObjects_method](#) 34
- [proc_getPendingDistributionListsSinceVersion_method](#) 36
- [proc_GetProductVersions_method](#) 37
- [proc_getSiteBestMatch_method](#) 38
- [proc_getSiteCount_method](#) 40
- [proc_getSiteIdAndZoneOfHostHeaderSite_method](#) 86
- [proc_GetSiteIdOfHostHeaderSite_method](#) 40
- [proc_getSiteIds_method](#) 41
- [proc_getSiteMap_method](#) 93
- [proc_getSiteMapById_method](#) 94
- [proc_getSiteNames_method](#) 41
- [proc_getSiteSubscriptionsInContentDB_method](#) 43
- [proc_getSiteSubscriptionsInWebApplication_method](#) 44
- [proc_getSiteSubscriptionSiteIdsInContentDatabase_method](#) 44

[proc_getSiteSubscriptionSiteIdsInWebApplication method](#) 45
[proc_getSiteSubset method](#) 46
[proc_getSubscriptionIds method](#) 46
[proc_getTemplate method](#) 47
[proc_GetTimerJobHistory method](#) 48
[proc_GetTimerJobLastRunTime method](#) 50
[proc_GetTimerRunningJobs method](#) 50
[proc_GetTimerScheduledJobs method](#) 52
[proc_GetTimerTargetInstance method](#) 53
[proc_GetTimerTargetInstanceState method](#) 53
[proc_getUrlsForSite method](#) 89
[proc_hideSiteMap method](#) 72
[proc_insertCacheConfigEntry method](#) 82
[proc_markForDeletionEmailEnabledList method](#) 54
[proc_markForDeletionEmailEnabledListsBySite method](#) 55
[proc_markForDeletionEmailEnabledListsByWeb method](#) 55
[proc_putClass method](#) 55
[proc_putDeletedSiteMap method](#) 79
[proc_putDependency method](#) 56
[proc_putDistributionListToDelete method](#) 56
[proc_putEmailEnabledList method](#) 57
[proc_putFileSegment method](#) 58
[proc_putObject method](#) 58
[proc_putObjectTVP method](#) 60
[proc_putPendingDistributionList method](#) 62
[proc_putSiteMap method](#) 62
[proc_RefreshAllTimerLocks method](#) 64
[proc_RegisterProductVersion method](#) 64
[proc_removeUrlFromSite method](#) 89
[proc_renameSiteMap method](#) 65
[proc_ScheduleTimerJob method](#) 66
[proc_SetAppSiteDomainPrefix method](#) 67
[proc_setSourceSiteId method](#) 82
[proc_setSubscription method](#) 67
[proc_SetUrlZoneForDeletedSite method](#) 91
[proc_setZoneForUrl method](#) 88
[proc_SiteExists method](#) 68
[proc_StartTimerRunningJob method](#) 68
[proc_unhideSiteMap method](#) 72
[proc_updateCacheConfigEntry method](#) 86
[proc_UpdateTimerRunningJobProgress method](#) 69
[proc_UpdateTimerRunningJobStatus method](#) 70
[proc_UpdateTimerRunningJobTarget method](#) 71
[proc_UpdateTimerTargetInstanceState method](#) 71
[sequencing rules](#) 19
[timer events](#) 95
[timer job management](#) 18
[timers](#) 19
Simple data types
[overview](#) 13
Site subscription retrieval example
[overview](#) 103
[retrieve site collections](#) 104
[retrieve site subscriptions](#) 103
[Standards assignments](#) 12
[Start a job instance example](#) 100
[Store a file example](#) 102
Structures
[binary](#) 14
[table and view](#) 16
[XML](#) 16
T
[Table structures - overview](#) 16
Timer events
[server](#) 95
[Timer job definition](#) 14
[Timer job management](#) 10
[server](#) 18
Timers
[server](#) 19
[Tracking changes](#) 108
[Transport](#) 13
Triggered events - higher-layer
[server](#) 19
U
[Update job progress example](#) 101
V
[Vendor-extensible fields](#) 12
[Versioning](#) 12
[View structures - overview](#) 16
X
[XML structures](#) 16