

# [MS-AADT]:

## Access Application Design Time Protocol

---

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
1/20/2012	0.1	New	Released new document.
4/11/2012	0.1	None	No changes to the meaning, language, or formatting of the technical content.
7/16/2012	0.1	None	No changes to the meaning, language, or formatting of the technical content.
9/12/2012	0.1	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2012	1.0	Major	Significantly changed the technical content.
2/11/2013	1.1	Minor	Clarified the meaning of the technical content.
7/30/2013	1.1	None	No changes to the meaning, language, or formatting of the technical content.
11/18/2013	1.1	None	No changes to the meaning, language, or formatting of the technical content.
2/10/2014	1.1	None	No changes to the meaning, language, or formatting of the technical content.
4/30/2014	1.2	Minor	Clarified the meaning of the technical content.
7/31/2014	1.2	None	No changes to the meaning, language, or formatting of the technical content.
10/30/2014	1.2	None	No changes to the meaning, language, or formatting of the technical content.
2/26/2016	2.0	Major	Significantly changed the technical content.

# Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>10</b>
1.1	Glossary .....	10
1.2	References .....	12
1.2.1	Normative References .....	12
1.2.2	Informative References .....	13
1.3	Overview .....	13
1.4	Relationship to Other Protocols .....	14
1.5	Prerequisites/Preconditions .....	14
1.6	Applicability Statement .....	14
1.7	Versioning and Capability Negotiation .....	14
1.8	Vendor-Extensible Fields .....	15
1.9	Standards Assignments.....	15
<b>2</b>	<b>Messages.....</b>	<b>16</b>
2.1	Transport .....	16
2.2	Common Message Syntax .....	16
2.2.1	Namespaces .....	16
2.2.2	Messages.....	16
2.2.3	Elements .....	17
2.2.4	Complex Types.....	17
2.2.4.1	AccessObject.....	18
2.2.4.2	AccessObjectIdentity .....	19
2.2.4.3	AccessObjectList .....	19
2.2.4.4	AccessStorageObject .....	19
2.2.4.5	ConnectivityStatusInformation.....	20
2.2.4.6	DataMacro .....	20
2.2.4.7	FirewallRule.....	20
2.2.4.8	Form .....	20
2.2.4.9	LinkedTable.....	21
2.2.4.10	NavBarSettingsObject.....	21
2.2.4.11	ObjectIdentityList .....	21
2.2.4.12	Query .....	21
2.2.4.13	ServiceError .....	22
2.2.4.14	ServiceParameters .....	22
2.2.4.15	ServiceResult .....	22
2.2.4.16	ServiceWarning .....	23
2.2.4.17	Table.....	23
2.2.4.18	UIMacro .....	23
2.2.5	Simple Types .....	23
2.2.5.1	AccessObjectType .....	24
2.2.5.2	ConnectivityPermissionLevel.....	25
2.2.5.3	DeleteFirewallRulesOption .....	25
2.2.5.4	guid .....	26
2.2.5.5	PackagingOption .....	26
2.2.6	Attributes .....	27
2.2.7	Groups .....	27
2.2.8	Attribute Groups.....	27
2.2.9	Faults.....	27
2.2.9.1	SOAP Faults .....	27
2.2.9.2	Service Errors.....	27
2.2.9.3	Service Warnings .....	27
<b>3</b>	<b>Protocol Details.....</b>	<b>28</b>
3.1	Server Details.....	28
3.1.1	Abstract Data Model.....	28

3.1.2	Timers .....	28
3.1.3	Initialization .....	28
3.1.4	Message Processing Events and Sequencing Rules .....	28
3.1.4.1	CreateAccessObject.....	30
3.1.4.1.1	Messages .....	30
3.1.4.1.1.1	CreateAccessObjectSoapIn.....	31
3.1.4.1.1.2	CreateAccessObjectSoapOut.....	31
3.1.4.1.2	Elements .....	31
3.1.4.1.2.1	CreateAccessObject.....	31
3.1.4.1.2.2	CreateAccessObjectResponse .....	31
3.1.4.1.3	Complex Types .....	32
3.1.4.1.3.1	CreateParameters .....	32
3.1.4.1.3.2	CreateResult .....	32
3.1.4.1.3.3	ParameterObjectList.....	33
3.1.4.1.3.4	ParameterObject.....	33
3.1.4.1.4	Simple Types .....	34
3.1.4.1.5	Attributes .....	34
3.1.4.1.6	Groups.....	34
3.1.4.1.7	Attribute Groups.....	34
3.1.4.2	CreatePackage.....	34
3.1.4.2.1	Messages .....	35
3.1.4.2.1.1	CreatePackageSoapIn.....	35
3.1.4.2.1.2	CreatePackageSoapOut .....	35
3.1.4.2.2	Elements .....	35
3.1.4.2.2.1	CreatePackage .....	36
3.1.4.2.2.2	CreatePackageResponse .....	36
3.1.4.2.3	Complex Types .....	36
3.1.4.2.3.1	CreatePackageParameters.....	36
3.1.4.2.3.2	CreatePackageResult.....	37
3.1.4.2.4	Simple Types .....	37
3.1.4.2.5	Attributes .....	37
3.1.4.2.6	Groups.....	37
3.1.4.2.7	Attribute Groups.....	38
3.1.4.3	GetAccessObject .....	38
3.1.4.3.1	Messages .....	38
3.1.4.3.1.1	GetAccessObjectSoapIn .....	38
3.1.4.3.1.2	GetAccessObjectSoapOut .....	38
3.1.4.3.2	Elements .....	39
3.1.4.3.2.1	GetAccessObject .....	39
3.1.4.3.2.2	GetAccessObjectResponse.....	39
3.1.4.3.3	Complex Types .....	39
3.1.4.3.3.1	GetParameters .....	39
3.1.4.3.3.2	GetResult.....	40
3.1.4.3.4	Simple Types .....	40
3.1.4.3.5	Attributes .....	40
3.1.4.3.6	Groups.....	40
3.1.4.3.7	Attribute Groups.....	40
3.1.4.4	GetApplicationInformation.....	41
3.1.4.4.1	Messages .....	41
3.1.4.4.1.1	GetApplicationInformationSoapIn.....	41
3.1.4.4.1.2	GetApplicationInformationSoapOut .....	41
3.1.4.4.2	Elements .....	41
3.1.4.4.2.1	GetApplicationInformation.....	42
3.1.4.4.2.2	GetApplicationInformationResponse .....	42
3.1.4.4.3	Complex Types .....	42
3.1.4.4.3.1	GetApplicationInformationParameters.....	43
3.1.4.4.3.2	GetAppInfoResult.....	43
3.1.4.4.3.3	Collation .....	45

3.1.4.4.3.4	ProtocolVersionList.....	46
3.1.4.4.3.5	IDList.....	46
3.1.4.4.4	Simple Types.....	47
3.1.4.4.5	Attributes.....	47
3.1.4.4.6	Groups.....	47
3.1.4.4.7	Attribute Groups.....	47
3.1.4.5	GetLinkedTableInformation.....	47
3.1.4.5.1	Messages.....	47
3.1.4.5.1.1	GetLinkedTableInformationSoapIn.....	47
3.1.4.5.1.2	GetLinkedTableInformationSoapOut.....	48
3.1.4.5.2	Elements.....	48
3.1.4.5.2.1	GetLinkedTableInformation.....	48
3.1.4.5.2.2	GetLinkedTableInformationResponse.....	48
3.1.4.5.3	Complex Types.....	49
3.1.4.5.3.1	GetLinkedTableInformationParameters.....	49
3.1.4.5.3.2	GetLinkedTableInformationResult.....	49
3.1.4.5.4	Simple Types.....	50
3.1.4.5.5	Attributes.....	50
3.1.4.5.6	Groups.....	50
3.1.4.5.7	Attribute Groups.....	50
3.1.4.6	RenameAccessObject.....	50
3.1.4.6.1	Messages.....	51
3.1.4.6.1.1	RenameAccessObjectSoapIn.....	51
3.1.4.6.1.2	RenameAccessObjectSoapOut.....	51
3.1.4.6.2	Elements.....	51
3.1.4.6.2.1	RenameAccessObject.....	51
3.1.4.6.2.2	RenameAccessObjectResponse.....	52
3.1.4.6.3	Complex Types.....	52
3.1.4.6.3.1	RenameParameters.....	52
3.1.4.6.3.2	RenameResult.....	53
3.1.4.6.4	Simple Types.....	54
3.1.4.6.5	Attributes.....	54
3.1.4.6.6	Groups.....	54
3.1.4.6.7	Attribute Groups.....	54
3.1.4.7	SetDataMacroTracing.....	54
3.1.4.7.1	Messages.....	55
3.1.4.7.1.1	SetDataMacroTracingSoapIn.....	55
3.1.4.7.1.2	SetDataMacroTracingSoapOut.....	55
3.1.4.7.2	Elements.....	55
3.1.4.7.2.1	SetDataMacroTracing.....	55
3.1.4.7.2.2	SetDataMacroTracingResponse.....	56
3.1.4.7.3	Complex Types.....	56
3.1.4.7.3.1	SetDataMacroTracingParameters.....	56
3.1.4.7.3.2	SetDataMacroTracingResult.....	57
3.1.4.7.4	Simple Types.....	57
3.1.4.7.5	Attributes.....	57
3.1.4.7.6	Groups.....	57
3.1.4.7.7	Attribute Groups.....	57
3.1.4.8	UpdateAccessObject.....	57
3.1.4.8.1	Messages.....	58
3.1.4.8.1.1	UpdateAccessObjectSoapIn.....	58
3.1.4.8.1.2	UpdateAccessObjectSoapOut.....	58
3.1.4.8.2	Elements.....	58
3.1.4.8.2.1	UpdateAccessObject.....	59
3.1.4.8.2.2	UpdateAccessObjectResponse.....	59
3.1.4.8.3	Complex Types.....	59
3.1.4.8.3.1	UpdateParameters.....	59
3.1.4.8.3.2	UpdateResult.....	61

3.1.4.8.4	Simple Types .....	61
3.1.4.8.5	Attributes .....	61
3.1.4.8.6	Groups .....	61
3.1.4.8.7	Attribute Groups.....	62
3.1.4.9	DeleteAccessObject .....	62
3.1.4.9.1	Messages .....	62
3.1.4.9.1.1	DeleteAccessObjectSoapIn .....	62
3.1.4.9.1.2	DeleteAccessObjectSoapOut .....	63
3.1.4.9.2	Elements .....	63
3.1.4.9.2.1	DeleteAccessObject .....	63
3.1.4.9.2.2	DeleteAccessObjectResponse .....	63
3.1.4.9.3	Complex Types .....	63
3.1.4.9.3.1	DeleteParameters .....	64
3.1.4.9.3.2	DeleteResult.....	64
3.1.4.9.4	Simple Types .....	65
3.1.4.9.5	Attributes .....	65
3.1.4.9.6	Groups.....	65
3.1.4.9.7	Attribute Groups.....	65
3.1.4.10	AddFirewallRule .....	65
3.1.4.10.1	Messages .....	65
3.1.4.10.1.1	AddFirewallRuleSoapIn .....	66
3.1.4.10.1.2	AddFirewallRuleSoapOut .....	66
3.1.4.10.2	Elements .....	66
3.1.4.10.2.1	AddFirewallRule .....	66
3.1.4.10.2.2	AddFirewallRuleResponse.....	66
3.1.4.10.3	Complex Types .....	67
3.1.4.10.3.1	AddFirewallRuleParameters .....	67
3.1.4.10.3.2	AddFirewallRuleResult .....	67
3.1.4.10.4	Simple Types .....	68
3.1.4.10.5	Attributes .....	68
3.1.4.10.6	Groups.....	68
3.1.4.10.7	Attribute Groups.....	68
3.1.4.11	DeleteFirewallRules .....	68
3.1.4.11.1	Messages .....	69
3.1.4.11.1.1	DeleteFirewallRulesSoapIn .....	69
3.1.4.11.1.2	DeleteFirewallRulesSoapOut .....	69
3.1.4.11.2	Elements.....	69
3.1.4.11.2.1	DeleteFirewallRules .....	69
3.1.4.11.2.2	DeleteFirewallRulesResponse.....	70
3.1.4.11.3	Complex Types .....	70
3.1.4.11.3.1	DeleteFirewallRulesParameters .....	70
3.1.4.11.3.2	FirewallRulesList .....	71
3.1.4.11.3.3	DeleteFirewallRulesResult .....	71
3.1.4.11.4	Simple Types .....	71
3.1.4.11.5	Attributes .....	71
3.1.4.11.6	Groups.....	72
3.1.4.11.7	Attribute Groups.....	72
3.1.4.12	GetDataConnectivity.....	72
3.1.4.12.1	Messages .....	72
3.1.4.12.1.1	GetDataConnectivitySoapIn.....	72
3.1.4.12.1.2	GetDataConnectivitySoapOut .....	73
3.1.4.12.2	Elements .....	73
3.1.4.12.2.1	GetDataConnectivity .....	73
3.1.4.12.2.2	GetDataConnectivityResponse .....	73
3.1.4.12.3	Complex Types .....	73
3.1.4.12.3.1	GetDataConnectivityParameters.....	74
3.1.4.12.3.2	GetDataConnectivityResult .....	74
3.1.4.12.4	Simple Types .....	75

3.1.4.12.5	Attributes .....	75
3.1.4.12.6	Groups.....	75
3.1.4.12.7	Attribute Groups.....	75
3.1.4.13	GetDataConnectivityStatus.....	75
3.1.4.13.1	Messages .....	75
3.1.4.13.1.1	GetDataConnectivityStatusSoapIn.....	76
3.1.4.13.1.2	GetDataConnectivityStatusSoapOut .....	76
3.1.4.13.2	Elements .....	76
3.1.4.13.2.1	GetDataConnectivityStatus.....	76
3.1.4.13.2.2	GetDataConnectivityStatusResponse .....	76
3.1.4.13.3	Complex Types .....	77
3.1.4.13.3.1	GetDataConnectivityStatusParameters.....	77
3.1.4.13.3.2	GetDataConnectivityStatusResult .....	77
3.1.4.13.3.3	ArrayOfConnectivityStatusInformation .....	78
3.1.4.13.4	Simple Types .....	78
3.1.4.13.5	Attributes .....	78
3.1.4.13.6	Groups.....	78
3.1.4.13.7	Attribute Groups.....	78
3.1.4.14	GetFirewallRules .....	78
3.1.4.14.1	Messages .....	79
3.1.4.14.1.1	GetFirewallRulesSoapIn .....	79
3.1.4.14.1.2	GetFirewallRulesSoapOut .....	79
3.1.4.14.2	Elements.....	79
3.1.4.14.2.1	GetFirewallRules .....	80
3.1.4.14.2.2	GetFirewallRulesResponse.....	80
3.1.4.14.3	Complex Types .....	80
3.1.4.14.3.1	GetFirewallRulesParameters .....	80
3.1.4.14.3.2	GetFirewallRulesResult .....	81
3.1.4.14.3.3	ArrayOfFirewallRule.....	81
3.1.4.14.4	Simple Types .....	81
3.1.4.14.5	Attributes .....	82
3.1.4.14.6	Groups.....	82
3.1.4.14.7	Attribute Groups.....	82
3.1.4.15	ImportData .....	82
3.1.4.15.1	Messages .....	82
3.1.4.15.1.1	ImportDataSoapIn .....	82
3.1.4.15.1.2	ImportDataSoapOut.....	83
3.1.4.15.2	Elements.....	83
3.1.4.15.2.1	ImportData .....	83
3.1.4.15.2.2	ImportDataResponse.....	83
3.1.4.15.3	Complex Types .....	83
3.1.4.15.3.1	ImportDataParameters .....	84
3.1.4.15.3.2	ImportDataResult .....	85
3.1.4.15.4	Simple Types .....	85
3.1.4.15.5	Attributes .....	85
3.1.4.15.6	Groups.....	85
3.1.4.15.7	Attribute Groups.....	86
3.1.4.16	RefreshLinkedTableInformation.....	86
3.1.4.16.1	Messages .....	86
3.1.4.16.1.1	RefreshLinkedTableInformationSoapIn.....	86
3.1.4.16.1.2	RefreshLinkedTableInformationSoapOut .....	87
3.1.4.16.2	Elements.....	87
3.1.4.16.2.1	RefreshLinkedTableInformation.....	87
3.1.4.16.2.2	RefreshLinkedTableInformationResponse .....	87
3.1.4.16.3	Complex Types .....	88
3.1.4.16.3.1	RefreshLinkedTableInformationParameters.....	88
3.1.4.16.3.2	RefreshLinkedTableInformationResult .....	88
3.1.4.16.4	Simple Types .....	89

3.1.4.16.5	Attributes .....	89
3.1.4.16.6	Groups.....	89
3.1.4.16.7	Attribute Groups.....	89
3.1.4.17	SetDataConnectivityStatus .....	89
3.1.4.17.1	Messages .....	89
3.1.4.17.1.1	SetDataConnectivityStatusSoapIn .....	90
3.1.4.17.1.2	SetDataConnectivityStatusSoapOut.....	90
3.1.4.17.2	Elements .....	90
3.1.4.17.2.1	SetDataConnectivityStatus .....	90
3.1.4.17.2.2	SetDataConnectivityStatusResponse .....	90
3.1.4.17.3	Complex Types .....	91
3.1.4.17.3.1	SetDataConnectivityStatusParameters.....	91
3.1.4.17.3.2	SetDataConnectivityStatusResult .....	92
3.1.4.17.4	Simple Types .....	92
3.1.4.17.5	Attributes .....	92
3.1.4.17.6	Groups.....	92
3.1.4.17.7	Attribute Groups.....	92
3.1.4.18	GetPackage .....	92
3.1.4.18.1	Messages .....	93
3.1.4.18.1.1	GetPackageSoapIn .....	93
3.1.4.18.1.2	GetPackageSoapOut.....	93
3.1.4.18.2	Elements.....	93
3.1.4.18.2.1	GetPackage.....	93
3.1.4.18.2.2	GetPackageResponse .....	94
3.1.4.18.3	Complex Types .....	94
3.1.4.18.3.1	GetPackageParameters.....	94
3.1.4.18.3.2	GetPackageResult .....	95
3.1.4.18.4	Simple Types .....	95
3.1.4.18.4.1	PackageStatus.....	95
3.1.4.18.5	Attributes .....	96
3.1.4.18.6	Groups.....	96
3.1.4.18.7	Attribute Groups.....	96
3.1.4.19	SetObjectReadOnly .....	96
3.1.4.19.1	Messages .....	96
3.1.4.19.1.1	SetObjectReadOnlySoapIn .....	97
3.1.4.19.1.2	SetObjectReadOnlySoapOut .....	97
3.1.4.19.2	Elements.....	97
3.1.4.19.2.1	SetObjectReadOnly .....	97
3.1.4.19.2.2	SetObjectReadOnlyResponse.....	97
3.1.4.19.3	Complex Types .....	98
3.1.4.19.3.1	SetObjectReadOnlyParameters .....	98
3.1.4.19.3.2	SetObjectReadOnlyResult .....	98
3.1.4.19.4	Simple Types .....	99
3.1.4.19.5	Attributes .....	99
3.1.4.19.6	Groups.....	99
3.1.4.19.7	Attribute Groups.....	99
3.1.5	Timer Events.....	99
3.1.6	Other Local Events.....	99
<b>4</b>	<b>Protocol Examples.....</b>	<b>100</b>
4.1	Use CreateAccessObject to create a Table in a database application .....	100
4.2	Use UpdateAccessObject to update a Table in a database application.....	101
4.3	Use GetApplicationInformation to retrieve information about a database application from the protocol server .....	104
<b>5</b>	<b>Security.....</b>	<b>106</b>
5.1	Security Considerations for Implementers .....	106
5.2	Index of Security Parameters .....	106



<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>107</b>
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>131</b>
<b>8</b>	<b>Change Tracking.....</b>	<b>132</b>
<b>9</b>	<b>Index.....</b>	<b>134</b>

# 1 Introduction

The Access Application Design Time Protocol enables a protocol client to modify the behavior of **database applications** and to create, modify, and delete objects in such applications.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

## 1.1 Glossary

This document uses the following terms:

**base64 encoding:** A binary-to-text encoding scheme whereby an arbitrary sequence of bytes is converted to a sequence of printable ASCII characters, as described in [\[RFC4648\]](#).

**Boolean:** An operation or expression that can be evaluated only as either true or false.

**collation:** A set of rules that determines how data is compared, ordered, and presented.

**culture name:** A part of a language identification tagging system, as described in [\[RFC1766\]](#). Culture names adhere to the format "<languagecode2>-<country/regioncode2>." If a two-letter language code is not available, a three-letter code that is derived from [\[ISO-639\]](#) is used.

**curly braced GUID string:** The string representation of a 128-bit globally unique identifier (GUID) using the form {XXXXXXXX-XXXX-XXXX-XXXX-XXXXXXXXXXXX}, where X denotes a hexadecimal digit. The string representation between the enclosing braces is the standard representation of a GUID as described in [\[RFC4122\]](#) section 3. Unlike a GUIDString, a curly braced GUID string includes enclosing braces.

**database application:** A set of objects, including tables, queries, forms, reports, macros, and code modules, that are stored in a database structure.

**endpoint:** A communication port that is exposed by an application server for a specific shared service and to which messages can be addressed.

**field:** An element or attribute (1) in a data source that can contain data.

**firewall rule:** A group of settings that specify which connections are allowed into and out of a client computer.

**GUIDString:** A GUID in the form of an ASCII or Unicode string, consisting of one group of 8 hexadecimal digits, followed by three groups of 4 hexadecimal digits each, followed by one group of 12 hexadecimal digits. It is the standard representation of a GUID, as described in [\[RFC4122\]](#) section 3. For example, "6B29FC40-CA47-1067-B31D-00DD010662DA". Unlike a curly braced GUID string, a GUIDString is not enclosed in braces.

**HTTP POST:** An HTTP method, as described in [\[RFC2616\]](#).

**Hypertext Transfer Protocol (HTTP):** An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

**Hypertext Transfer Protocol Secure (HTTPS):** An extension of HTTP that securely encrypts and decrypts web page requests. In some older protocols, "Hypertext Transfer Protocol over Secure Sockets Layer" is still used (Secure Sockets Layer has been deprecated). For more information, see [\[SSL3\]](#) and [\[RFC5246\]](#).

**IPv4 address in string format:** A string representation of an IPv4 address in dotted-decimal notation, as described in [\[RFC1123\]](#) section 2.1.

**IPv6 address in string format:** A string representation of an IPv6 address, as described in [\[RFC4291\]](#) section 2.2.

**permission:** A rule that is associated with an object and that regulates which users can gain access to the object and in what manner. See also rights.

**site:** A group of related pages and data within a SharePoint site collection. The structure and content of a site is based on a site definition. Also referred to as SharePoint site and web site.

**SOAP:** A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses XML technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [\[SOAP1.2-1/2003\]](#).

**SOAP action:** The HTTP request header field used to indicate the intent of the **SOAP** request, using a **URI** value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

**SOAP body:** A container for the payload data being delivered by a SOAP message to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

**SOAP fault:** A container for error and status information within a SOAP message. See [\[SOAP1.2-1/2007\]](#) section 5.4 for more information.

**SOAP fault code:** The algorithmic mechanism for identifying a **SOAP fault**. See [\[SOAP1.2-1/2007\]](#) section 5.6 for more information.

**surrogate pair:** A pair of 16-bit Unicode encoding values that, together, represent a single 32-bit character, as described in [\[ISO-10646\]](#). For more information about surrogate pairs and combining character sequences, see the Unicode Standard in [\[UNICODE\]](#).

**token:** A word in an item or a search query that translates into a meaningful word or number in written text. A token is the smallest textual unit that can be matched in a search query. Examples include "cat", "AB14", or "42".

**Uniform Resource Identifier (URI):** A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [\[RFC3986\]](#).

**Uniform Resource Locator (URL):** A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

**Web Services Description Language (WSDL):** An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

**WSDL message:** An abstract, typed definition of the data that is communicated during a **WSDL operation** [\[WSDL\]](#). Also, an element that describes the data being exchanged between web service providers and clients.

**WSDL operation:** A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

**XML namespace:** A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [\[XMLNS-2ED\]](#).

**XML namespace prefix:** An abbreviated form of an **XML namespace**, as described in [\[XML\]](#).

**XML schema:** A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by XML itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[ISO/IEC-29500-1] International Organization for Standardization, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 1: Fundamentals and Markup Language Reference", ISO/IEC 29500-1:2008, [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=51463](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=51463)

[ISO/IEC-29500-2] International Organization for Standardization, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 2: Open Packaging Conventions", ISO/IEC 29500-2:2008, [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=51459](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=51459)

[MC-CSDL] Microsoft Corporation, "[Conceptual Schema Definition File Format](#)".

[MS-ADR] Microsoft Corporation, "[Access Services Data Run Time Protocol](#)".

[MS-ASDT] Microsoft Corporation, "[Access Server Design Time Protocol](#)".

[MS-AXL2] Microsoft Corporation, "[Access Application Transfer Data Structure Version 2](#)".

[MS-CSOMSPT] Microsoft Corporation, "[SharePoint Client-Side Object Model Protocol](#)".

[MSDN-TSQL-Ref] Microsoft Corporation, "Transact-SQL Reference", SQL Server 2005 Books Online (November 2008), [http://msdn.microsoft.com/en-us/library/ms189826\(SQL.90\).aspx](http://msdn.microsoft.com/en-us/library/ms189826(SQL.90).aspx)

[RFC1123] Braden, R., "Requirements for Internet Hosts - Application and Support", RFC 1123, October 1989, <http://www.ietf.org/rfc/rfc1123.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

- [RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>
- [RFC4291] Hinden, R. and Deering, S., "IP Version 6 Addressing Architecture", RFC 4291, February 2006, <http://www.ietf.org/rfc/rfc4291.txt>
- [RFC4646] Phillips, A., and Davis, M., Eds., "Tags for Identifying Languages", BCP 47, RFC 4646, September 2006, <http://www.rfc-editor.org/rfc/rfc4646.txt>
- [RFC4648] Josefsson, S., "The Base16, Base32, and Base64 Data Encodings", RFC 4648, October 2006, <http://www.rfc-editor.org/rfc/rfc4648.txt>
- [SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>
- [SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>
- [SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>
- [VersionDefinition-SPAIM] Microsoft Corporation, "VersionDefinition simpleType (SharePoint Add-in Manifest)", <https://msdn.microsoft.com/en-us/library/office/jj583346.aspx>
- [WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>
- [XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>
- [XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>
- [XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>
- [XSD1.1-1] Gao, S., Sperberg-McQueen, C.M., and Thompson, H.S., Eds., "W3C XML Schema Definition Language (XSD) 1.1 Part 1: Structures", W3C Working Draft, December 2009, <http://www.w3.org/TR/2009/WD-xmlschema11-1-20091203/>

### 1.2.2 Informative References

None.


### 1.3 Overview

This protocol enables a protocol client to create, modify, and delete objects in a database application on a protocol server. Additionally, this protocol enables a protocol client to:

- Obtain information about a database application on a protocol server or the objects in that application.
- Set some behaviors for a database application on a protocol server.
- Obtain a package that describes the entire database application on a protocol server.

## 1.4 Relationship to Other Protocols

This protocol uses **SOAP** over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram:

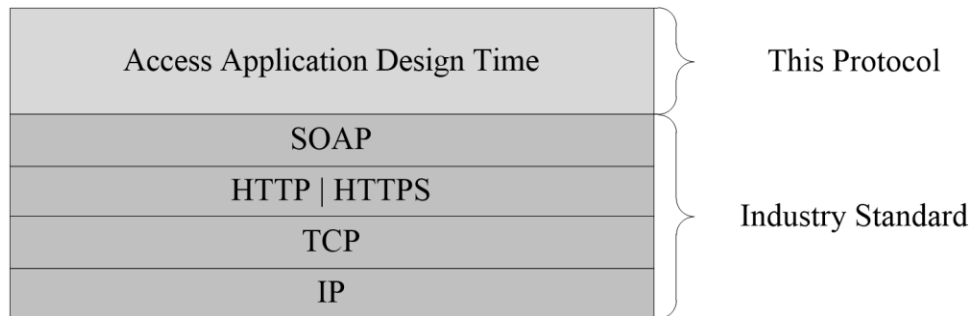

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

This protocol operates against a **site** that is identified by a URI that is known by protocol clients. The protocol server **endpoint** is formed by appending `"/_vti_bin/acscvc/ApplicationDesignService.asmx "` to the **URI** of the site, for example:

`http://www.example.com/Repository/_vti_bin/acscvc/ApplicationDesignService.asmx`

This protocol assumes that authentication has been performed by the underlying protocols.

## 1.6 Applicability Statement

This protocol is applicable in the following scenarios:

- Creation, modification, and deletion of objects in a database application.
- Querying a protocol server for information about a database application or the objects in it.
- Setting some behaviors for a database application.
- Creation of packages that describe a database application.

In all cases, this protocol interacts with database applications that were created using [\[MS-ASDT\]](#).

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol can be implemented by using transports that support sending SOAP version 1.2 messages, as specified by section [2.1](#).
- **Protocol Versions:** Some messages in this protocol are versioned. Those messages require a **ProtocolVersion** attribute in the request from the protocol client. If a **ProtocolVersion** attribute is not required by the client request, then the message is not versioned.
- **Capability Negotiation:** When calling **GetApplicationInformation**, the protocol client sends a list of **Access Services Protocol Versions** ([\[MS-ASDT\]](#) section 3.1.1.1) that it supports, as specified by **ProtocolVersionOptions** attribute (section [3.1.4.4.3.1](#)). The protocol server selects a protocol version and communicates this selection back to the client, as specified by **ProtocolVersion** attribute (section [3.1.4.4.3.2](#)). Alternatively, a protocol client retrieves the

**Access Services Protocol Versions** that the protocol server supports by calling **GetServerInformation**, as specified by [MS-ASDT] section 3.1.4.2.

## **1.8 Vendor-Extensible Fields**

None.

## **1.9 Standards Assignments**

None.

## 2 Messages

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null and present.

### 2.1 Transport

Messages MUST be transported by using SOAP version 1.2, as specified in [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#), or SOAP version 1.1, as specified in [\[SOAP1.1\]](#), over HTTP, as specified in [\[RFC2616\]](#), or HTTPS, as specified in [\[RFC2818\]](#).

### 2.2 Common Message Syntax

This section contains common definitions used by this protocol. The syntax of the definitions uses **XML schema** as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **WSDL** as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
http	<a href="http://schemas.xmlsoap.org/wsd/http/">http://schemas.xmlsoap.org/wsd/http/</a>	<a href="#">[RFC2616]</a>
s1	<a href="http://microsoft.com/wsd/types/">http://microsoft.com/wsd/types/</a>	
soap	<a href="http://schemas.xmlsoap.org/wsd/soap/">http://schemas.xmlsoap.org/wsd/soap/</a>	<a href="#">[SOAP1.1]</a>
soap12	<a href="http://schemas.xmlsoap.org/wsd/soap12/">http://schemas.xmlsoap.org/wsd/soap12/</a>	<a href="#">[SOAP1.2/1]</a> <a href="#">[SOAP1.2/2]</a>
tns	<a href="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/ApplicationDesignService">http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/ApplicationDesignService</a>	
wsd	<a href="http://schemas.xmlsoap.org/wsd/">http://schemas.xmlsoap.org/wsd/</a>	<a href="#">[WSDL]</a>
xs	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a> <a href="#">[XMLSCHEMA2]</a>

#### 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.



## 2.2.3 Elements

This specification does not define any common XML schema element definitions.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
<b>AccessObject</b>	Specifies information about an object in a database application.
<b>AccessObjectIdentity</b>	Specifies an <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) and its version in a database application.
<b>AccessObjectList</b>	Specifies an array of complex type <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) in a database application.
<b>AccessStorageObject</b>	An <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) used by some messages in this protocol.
<b>ConnectivityStatusInformation</b>	This complex type specifies if a login having permissions specified by <b>Permission</b> element has been enabled or disabled on the database application.
<b>DataMacro</b>	An <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) used by some messages in this protocol.
<b>FirewallRule</b>	Specifies a <b>firewall rule</b> to be added to a database application. Only after the firewall rule has been added, will users whose IP address falls within the inclusive range of <b>StartIPAddress</b> and <b>EndIPAddress</b> be able to connect to the database application directly.
<b>Form</b>	An <b>AccessStorageObject</b> (section <a href="#">2.2.4.4</a> ) used by some messages in this protocol.
<b>LinkedTable</b>	An <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) used by some messages in this protocol.
<b>NavBarSettingsObject</b>	Type a brief description for the Complex Type. This text will also appear in the summary table.
<b>ObjectIdentityList</b>	Specifies an array of complex type <b>AccessObjectIdentity</b> (section <a href="#">2.2.4.2</a> ) in a database application.
<b>Query</b>	An <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) used by some messages in this protocol.
<b>ServiceError</b>	Specifies an error on the protocol server that is not a <b>SOAP fault</b> . For more information, see section <a href="#">2.2.9.2</a> .
<b>ServiceParameters</b>	The base complex type extended by all input messages defined in this protocol.
<b>ServiceResult</b>	The base complex type extended by all response messages defined in this protocol.
<b>ServiceWarning</b>	Specifies additional information as part of a successful response from the protocol server. For more information, see section <a href="#">2.2.9.3</a> .
<b>Table</b>	An <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) used by some messages in this protocol.
<b>UIMacro</b>	An <b>AccessStorageObject</b> (section <a href="#">2.2.4.4</a> ) used by some messages in this protocol.

## 2.2.4.1 AccessObject

### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies information about an object in a database application.

```
<xs:complexType name="AccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="ParentId" nillable="true" type="xs:int"/>
    <xs:element minOccurs="1" maxOccurs="1" name="Definition" nillable="true">
      <xs:complexType mixed="true">
        <xs:sequence>
          <xs:any/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
  <xs:attribute name="ID" type="xs:int" use="required"/>
  <xs:attribute name="Name" type="xs:string"/>
  <xs:attribute name="ObjectType" type="tns:AccessObjectType" use="required"/>
  <xs:attribute name="Description" type="xs:string"/>
  <xs:attribute name="Version" type="xs:string"/>
</xs:complexType>
```

**ParentId:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the identifier of the parent object of this object. If not nil, **MUST** be the same value as the **ID** of another object in the database application. **MUST** be nil ([XSD1.1-1] section 2.7.2) if the object does not have a parent object.

**Definition:** This element specifies the definition of the object. The contents of this element **MUST** correspond to the **ObjectType** of this object, as specified in the following table.

Value of <b>ObjectType</b> attribute	Contents of Definition element
Table	<b>MUST</b> be a <b>Schema</b> element, as specified by [MC-CSDL] section 2.1.1. <b>MUST</b> include the annotations specified by [MS-AXL2] section 2.1.1.
Query	<b>MUST</b> be a <b>Query</b> element, as specified by [MS-AXL2] section 2.2.1.1.
DataMacro	<b>MUST</b> be a <b>DataMacro</b> element, as specified by [MS-AXL2] section 2.2.1.14.
Form	<b>MUST</b> be a <b>FormDef</b> element, as specified by [MS-AXL2] section 2.2.1.12.
UIMacro	<b>MUST</b> be a <b>UserInterfaceMacro</b> element, as specified by [MS-AXL2] section 2.2.1.5.
LinkedTable	<b>MUST</b> be a <b>Schema</b> element, as specified by [MC-CSDL] section 2.1.1. <b>MUST</b> include the annotations specified by [MS-AXL2] section 2.1.1.

**ID:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the identifier of the object. **MUST** be a unique value among all objects within the database application.

**Name:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the object. **MUST** conform to **ST\_ObjectName** ([MS-AXL2] section 2.2.4.1).

**ObjectType:** An **AccessObjectType** (section [2.2.5.1](#)) that specifies the type of the object. MUST be one of "Table", "Query", "DataMacro", "Form", "UIMacro", or "LinkedTable".

**Description:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a description of the object.

**Version:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the version of the object.

#### 2.2.4.2 AccessObjectIdentity

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies an **AccessObject** (section [2.2.4.1](#)) and its version in a database application.

```
<xs:complexType name="AccessObjectIdentity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:attribute name="ID" type="xs:int" use="required"/>
  <xs:attribute name="Version" type="xs:string"/>
</xs:complexType>
```

**ID:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the identifier of the object. MUST be a unique value among all objects within the database application.

**Version:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the version of the object.

#### 2.2.4.3 AccessObjectList

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies an array of complex type **AccessObject** (section [2.2.4.1](#)) in a database application.

```
<xs:complexType name="AccessObjectList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessObject"
      type="tns:AccessObject"/>
  </xs:sequence>
</xs:complexType>
```

**AccessObject:** An **AccessObject** (section 2.2.4.1) that specifies an object in a database application.

#### 2.2.4.4 AccessStorageObject

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

An **AccessObject** (section [2.2.4.1](#)) used by some messages in this protocol.

```
<xs:complexType name="AccessStorageObject" abstract="true"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
```

## 2.2.4.5 ConnectivityStatusInformation

### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

This complex type specifies if a login having permissions specified by **Permission** element has been enabled or disabled on the database application.

```
<xs:complexType name="ConnectivityStatusInformation"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel" use="required"/>
  <xs:attribute name="IsEnabled" type="xs:boolean" use="required"/>
</xs:complexType>
```

**Permission:** Specifies the **permission** level for the logins, as specified in section [2.2.5.2](#).

**IsEnabled: True** if the login with permissions specified by **Permission** exists on the database application and is enabled. **False** if the login does not exist or is disabled.

## 2.2.4.6 DataMacro

### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

An **AccessObject** (section [2.2.4.1](#)) used by some messages in this protocol.

```
<xs:complexType name="DataMacro" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
```

## 2.2.4.7 FirewallRule

### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

Specifies a firewall rule to be added to a database application. Only after the firewall rule has been added, will users whose IP address falls within the inclusive range of **StartIPAddress** and **EndIPAddress** be able to connect to the database application directly.

```
<xs:complexType name="FirewallRule" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:attribute name="StartIPAddress" type="xs:string"/>
  <xs:attribute name="EndIPAddress" type="xs:string"/>
</xs:complexType>
```

**StartIPAddress:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the starting IP address for the firewall rule range. MUST be an **IPv4 address in string format**.

**EndIPAddress:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the ending IP address for the firewall rule range. MUST be an IPv4 address in string format.

## 2.2.4.8 Form

### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

An **AccessStorageObject** (section [2.2.4.4](#)) used by some messages in this protocol.

```
<xs:complexType name="Form" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessStorageObject"/>
  </xs:complexContent>
</xs:complexType>
```

### 2.2.4.9 LinkedTable

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

An **AccessObject** (section [2.2.4.1](#)) used by some messages in this protocol.

```
<xs:complexType name="LinkedTable" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
```

### 2.2.4.10 NavBarSettingsObject

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

```
<xs:complexType name="NavBarSettingsObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
```

### 2.2.4.11 ObjectIdentityList

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies an array of complex type **AccessObjectIdentity** (section [2.2.4.2](#)) in a database application.

```
<xs:complexType name="ObjectIdentityList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ObjectIdentity"
      type="tns:AccessObjectIdentity"/>
  </xs:sequence>
</xs:complexType>
```

**ObjectIdentity:** An **AccessObjectIdentity** (section [2.2.4.2](#)) that specifies an object and its version in a database application.

### 2.2.4.12 Query

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

An **AccessObject** (section [2.2.4.1](#)) used by some messages in this protocol.

```

<xs:complexType name="Query" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>

```

### 2.2.4.13 ServiceError

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies an error on the protocol server that is not a SOAP fault. For more information, see section [2.2.9.2](#).

```

<xs:complexType name="ServiceError" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:attribute name="Code" type="xs:string"/>
  <xs:attribute name="Message" type="xs:string"/>
  <xs:attribute name="CorrelationId" type="xs:string"/>
  <xs:attribute name="Timestamp" type="xs:string"/>
</xs:complexType>

```

**Code:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier of the error, similar to a **SOAP fault code**. MUST be one of the values specified by section 2.2.9.2.

**Message:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a message that corresponds to the **Code**. The value of this message is implementation-dependent.

**CorrelationId:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the unique identifier of the request message that was sent as input to the protocol operation.

**Timestamp:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the date and time at which the error occurred.

### 2.2.4.14 ServiceParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The base complex type extended by all input messages defined in this protocol.

```

<xs:complexType name="ServiceParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema"/>

```

### 2.2.4.15 ServiceResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The base complex type extended by all response messages defined in this protocol.

```

<xs:complexType name="ServiceResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="Warning" nillable="true"
type="tns:ServiceWarning"/>
  </xs:sequence>
</xs:complexType>

```

**Warning:** A **ServiceWarning** (section [2.2.4.15](#)) that specifies additional information that accompanies the response. For more information, see section [2.2.9.3](#). If there are no warnings, this element MUST be nil ([\[XSD1.1-1\]](#) section 2.7.2).

#### 2.2.4.16 ServiceWarning

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies additional information as part of a successful response from the protocol server. For more information, see section [2.2.9.3](#).

```
<xs:complexType name="ServiceWarning" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:attribute name="Code" type="xs:string"/>
  <xs:attribute name="Message" type="xs:string"/>
</xs:complexType>
```

**Code:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for the warning, similar to a SOAP fault code. Its value is implementation-specific.

**Message:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a message that corresponds to the **Code**. Its value is implementation-specific.

#### 2.2.4.17 Table

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

An **AccessObject** (section [2.2.4.1](#)) used by some messages in this protocol.

```
<xs:complexType name="Table" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
```

#### 2.2.4.18 UIMacro

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

An **AccessStorageObject** (section [2.2.4.4](#)) used by some messages in this protocol.

```
<xs:complexType name="UIMacro" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessStorageObject"/>
  </xs:complexContent>
</xs:complexType>
```

### 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
<b>AccessObjectType</b>	A string ( <a href="#">[XMLSCHEMA2]</a> section 3.2.1) that specifies the type of an object in a database application.
<b>ConnectivityPermissionLevel</b>	Specifies the permission level of a login that is used to connect to the database application directly.
<b>DeleteFirewallRulesOption</b>	Specifies how the <b>FirewallRule</b> (section <a href="#">2.2.4.7</a> ) on the database application are deleted.
<b>guid</b>	Specifies a <b>GUIDString</b> .
<b>PackagingOption</b>	Specifies the type of package to be created by the <b>CreatePackage</b> operation (section <a href="#">3.1.4.2</a> ).

### 2.2.5.1 AccessObjectType

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

A string ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the type of an object in a database application.

```
<xs:simpleType name="AccessObjectType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unknown"/>
    <xs:enumeration value="Table"/>
    <xs:enumeration value="Query"/>
    <xs:enumeration value="DataMacro"/>
    <xs:enumeration value="Form"/>
    <xs:enumeration value="UIMacro"/>
    <xs:enumeration value="Report"/>
    <xs:enumeration value="Image"/>
    <xs:enumeration value="NavigationPane"/>
    <xs:enumeration value="AccessProperties"/>
    <xs:enumeration value="ApplicationVersion"/>
    <xs:enumeration value="ApplicationLogic"/>
    <xs:enumeration value="ApplicationStyle"/>
    <xs:enumeration value="LinkedTable"/>
    <xs:enumeration value="EmbeddedExpression"/>
    <xs:enumeration value="LinkedQuery"/>
    <xs:enumeration value="NavBarSettings"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **AccessObjectType** simple type.

Value	Meaning
Unknown	The object type is not specified.
Table	The object is a table ( <a href="#">[MS-AXL2]</a> section 2.1.1).
Query	The object is a query ( <a href="#">[MS-AXL2]</a> section 2.1.3).
DataMacro	The object is a data macro ( <a href="#">[MS-AXL2]</a> section 2.2.1.14).
Form	The object is a form ( <a href="#">[MS-AXL2]</a> section 2.2.1.12).
UIMacro	The object is a user interface macro ( <a href="#">[MS-AXL2]</a> section 2.1.2.1).



Value	Meaning
Report	This value MUST NOT be used.
Image	This value MUST NOT be used.
NavigationPane	This value MUST NOT be used.
AccessProperties	This value MUST NOT be used.
ApplicationVersion	This value MUST NOT be used.
ApplicationLogic	This value MUST NOT be used.
ApplicationStyle	This value MUST NOT be used.
LinkedTable	The object is a linked table ([MS-AXL2] section 2.1.1.6).
EmbeddedExpression	This value MUST NOT be used.
LinkedQuery	This value MUST NOT be used.
NavBarSettings	This value MUST NOT be used.

### 2.2.5.2 ConnectivityPermissionLevel

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the permission level of a login that is used to connect to the database application directly.

```
<xs:simpleType name="ConnectivityPermissionLevel"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Reader"/>
    <xs:enumeration value="Writer"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **ConnectivityPermissionLevel** simple type.

Value	Meaning
Reader	With this permission level, the login has only read permission to the database application
Writer	With this permission level, the login has read and write permissions to the database application.

### 2.2.5.3 DeleteFirewallRulesOption

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies how the **FirewallRule** (section [2.2.4.7](#)) on the database application are deleted.

```
<xs:simpleType name="DeleteFirewallRulesOption" xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

<xs:restriction base="xs:string">
  <xs:enumeration value="Specified"/>
  <xs:enumeration value="All"/>
</xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **DeleteFirewallRulesOption** simple type.

Value	Meaning
Specified	Only the given firewall rules are deleted from the database application.
All	All the firewall rules are deleted from the database application.

#### 2.2.5.4 guid

**Namespace:** <http://microsoft.com/wsdl/types/>

Specifies a GUIDString.

```

<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:pattern value="[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}"/>
  </xs:restriction>
</xs:simpleType>

```

#### 2.2.5.5 PackagingOption

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the type of package to be created by the **CreatePackage** operation (section [3.1.4.2](#)).

```

<xs:simpleType name="PackagingOption" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="New"/>
    <xs:enumeration value="Snapshot"/>
    <xs:enumeration value="Deployment"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **PackagingOption** simple type.

Value	Meaning
New	Specifies the protocol server should create a default package for the database application.
Snapshot	Specifies the package created should include all data from the database application.
Deployment	Specifies the package should be created with the given version and locked state.

## 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

## 2.2.7 Groups

This specification does not define any common XML schema group definitions.

## 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

## 2.2.9 Faults

In the event of an application error, the protocol server **MUST** either return a **ServiceError** element (section [2.2.4.12](#)) as part of its response to a request from the protocol client, as specified by the operations in section [3.1.4](#), or return a SOAP fault ([\[SOAP1.2/1\]](#) section 5.4) instead of the response specified by the operation.

### 2.2.9.1 SOAP Faults

The **Value** element ([\[SOAP1.2/1\]](#) section 5.4.1.3) of the **Subcode** element ([\[SOAP1.2/1\]](#) section 5.4.1.2) of the SOAP fault ([\[SOAP1.2/1\]](#) section 5.4) **MUST** be one of the fault identifiers specified by [\[MS-ADR\]](#) section 2.2.9.

### 2.2.9.2 Service Errors

The **Code** attribute of the **ServiceError** element (section [2.2.4.12](#)) **MUST** be one of the fault identifiers specified by [\[MS-ADR\]](#) section 2.2.9. The **Message** attribute **SHOULD** contain a meaningful error message, but its actual value is implementation-dependent.

### 2.2.9.3 Service Warnings

The protocol server **MAY** return a **ServiceWarning** element (section [2.2.4.15](#)) with the **nil** attribute set to "true" as part of a response specified by an operation in section [3.1.4](#). The response **MAY** contain both a **ServiceWarning** and a **ServiceError** that are not **nil** ([\[XSD1.1-1\]](#) section 2.7.2). The protocol client **SHOULD** treat responses that contain a **nil ServiceError** element and a non-**nil ServiceWarning** element as successful and **MAY** take action based on the attributes of the **ServiceWarning**.<1>

## 3 Protocol Details

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, and **present**.

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls that are made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret Hypertext Transfer Protocol (HTTP) status codes that are returned by the protocol server as specified in [\[RFC2616\]](#), section 10.

This protocol allows protocol servers to notify protocol clients of application-level faults by using SOAP faults. Except where otherwise specified, these SOAP faults are not significant for interoperability and protocol clients can interpret them in an implementation-specific manner.

This protocol allows protocol servers to perform implementation-specific authorization checks and to notify protocol clients of authorization faults by using either HTTP status codes or SOAP faults, as specified previously in this section.

### 3.1 Server Details

#### 3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The protocol server retrieves and updates objects of the database application along with the metadata about the objects and the database application based on the requests from the client.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

Operation	Description
<b>AddFirewallRule</b>	This operation adds a <b>FirewallRule</b> (section <a href="#">2.2.4.7</a> ) to the database application. The protocol client MUST call this operation only if the <b>IsDataConnectivitySupported</b> and <b>IsFirewallRestricted</b> elements of the <b>GetAppInfoResult</b> (section <a href="#">3.1.4.4.3.2</a> ) in the response body of a

Operation	Description
	previous call to <b>GetApplicationInformation</b> operation (section <a href="#">3.1.4.4</a> ) are "true".
<b>CreateAccessObject</b>	This operation triggers the creation of specified objects in a database application.
<b>CreatePackage</b>	This operation triggers creation of a package that represents a database application, including its objects and data. The package can be retrieved by using the <b>GetPackage</b> operation (section <a href="#">3.1.4.18</a> ).
<b>DeleteAccessObject</b>	This operation triggers the deletion of an object in a database application.
<b>DeleteFirewallRules</b>	This operation deletes firewall rules from the database application. These rules MUST have been previously added by the <b>AddFirewallRule</b> operation (section <a href="#">3.1.4.10</a> ). The protocol client MUST call this operation only if the <b>IsDataConnectivitySupported</b> and <b>IsFirewallRestricted</b> attributes of the <b>GetAppInfoResult</b> (section 3.1.4.4.3.2) in the response body of a previous call to <b>GetApplicationInformation</b> operation (section 3.1.4.4) are "true".
<b>GetAccessObject</b>	The <b>GetAccessObject</b> operation triggers retrieval of the requested object from a database application.
<b>GetApplicationInformation</b>	This operation retrieves information about a database application from the protocol server.
<b>GetDataConnectivity</b>	This operation gets information about a login in the database application, which is used to connect to the database application directly. The protocol client MUST call this operation only if the <b>IsDataConnectivitySupported</b> element of the <b>GetAppInfoResult</b> (section 3.1.4.4.3.2) in the response body of a previous call to <b>GetApplicationInformation</b> operation (section 3.1.4.4) is "true".
<b>GetDataConnectivityStatus</b>	This operation gets status information about logins in the database application, which are used to connect to the database application directly. The protocol client MUST call this operation only if the <b>IsDataConnectivitySupported</b> element of the <b>GetAppInfoResult</b> (section 3.1.4.4.3.2) in the response body of a previous call to <b>GetApplicationInformation</b> operation (section 3.1.4.4) is "true".
<b>GetFirewallRules</b>	This operation gets all the <b>FirewallRules</b> (section 2.2.4.7) present in the database application. The protocol client MUST call this operation only if the <b>IsDataConnectivitySupported</b> and <b>IsFirewallRestricted</b> elements of the <b>GetAppInfoResult</b> (section 3.1.4.4.3.2) in the response body of a previous call to <b>GetApplicationInformation</b> operation (section 3.1.4.4) are "true".
<b>GetLinkedTableInformation</b>	The <b>GetLinkedTableInformation</b> operation creates a new <b>linked table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) in a database application in the protocol server, and returns the definition of the created <b>linked table</b> to the protocol client.
<b>GetPackage</b>	This operation retrieves a package that represents a database application, including its objects and data.
<b>ImportData</b>	The <b>ImportData</b> operation triggers importing data into a table in a database application.
<b>RefreshLinkedTableInformation</b>	This operation refreshes an existing <b>linked table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) in a database application on the protocol server. The protocol server uses the <b>ID</b> attribute in the <b>RefreshLinkedTableInformationParameters</b> (section <a href="#">3.1.4.16.3.1</a> ) element to identify the <b>linked table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) in the

Operation	Description
	database application, updates its definition from the source of the <b>linked table</b> ([MS-AXL2] section 2.1.1.6), and returns the updated definition to the protocol client.
<b>RenameAccessObject</b>	The <b>RenameAccessObject</b> operation changes the name of an object in a database application and updates the definition of dependent objects with the new name of the renamed object.
<b>SetDataConnectivityStatus</b>	This operation enables or disables a login in the database application, which is used to connect to the database application directly. The protocol client <b>MUST</b> call this operation only if the <b>IsDataConnectivitySupported</b> element of the <b>GetAppInfoResult</b> (section 3.1.4.4.3.2) in the response body of a previous call to <b>GetApplicationInformation</b> operation (section 3.1.4.4) is "true".
<b>SetDataMacroTracing</b>	This operation sets the data macro ([MS-AXL2] section 2.1.2.2) tracing option in a database application to determine whether the protocol server allows logging the execution of a data macro ([MS-AXL2] section 2.1.2.2)
<b>SetObjectReadOnly</b>	The <b>SetObjectReadOnly</b> operation sets whether an <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) is read-only.
<b>UpdateAccessObject</b>	The <b>UpdateAccessObject</b> operation updates an object in a database application.

### 3.1.4.1 CreateAccessObject

This operation triggers the creation of specified objects in a database application.

The following is the WSDL port type specification of the **CreateAccessObject WSDL operation**.

```
<wsdl:operation name="CreateAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:CreateAccessObjectSoapIn"/>
  <wsdl:output message="tns:CreateAccessObjectSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **CreateAccessObjectSoapIn** (section [3.1.4.1.1.1](#)) request message and the protocol server responds with a **CreateAccessObjectSoapOut** (section [3.1.4.1.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server **MUST** respond with a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server **MUST** respond with a **CreateAccessObjectSoapOut** response message that contains information about the newly created object, as specified by **CreateResult** (section [3.1.4.1.3.2](#)).

#### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>CreateAccessObjectSoapIn</b>	The request WSDL message for the <b>CreateAccessObject</b> WSDL operation.

Message	Description
<b>CreateAccessObjectSoapOut</b>	The response WSDL message for the <b>CreateAccessObject</b> WSDL operation.

### 3.1.4.1.1.1 CreateAccessObjectSoapIn

The request WSDL message for the **CreateAccessObject** WSDL operation.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/CreateAccessObject
```

The **SOAP body** contains the **CreateAccessObject** element.

### 3.1.4.1.1.2 CreateAccessObjectSoapOut

The response WSDL message for the **CreateAccessObject** WSDL operation.

The SOAP body contains the **CreateAccessObjectResponse** element.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>CreateAccessObject</b>	The input data for the <b>CreateAccessObject</b> WSDL operation.
<b>CreateAccessObjectResponse</b>	The result data for the <b>CreateAccessObject</b> WSDL operation.

### 3.1.4.1.2.1 CreateAccessObject

The **CreateAccessObject** element specifies the input data for the **CreateAccessObject** WSDL operation.

```
<xs:element name="CreateAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters" type="tns:CreateParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **CreateParameters** element (section [3.1.4.1.3.1](#)) that specifies the information that the protocol server needs to create the specified objects. **MUST** be present.

### 3.1.4.1.2.2 CreateAccessObjectResponse

The **CreateAccessObjectResponse** element specifies the result data for the **CreateAccessObject** WSDL operation.

```

<xs:element name="CreateAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="CreateAccessObjectResult"
type="tns:CreateResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**CreateAccessObjectResult:** A **CreateResult** element (section [3.1.4.1.3.2](#)) that specifies information about the newly created objects for the protocol client to use. **MUST** be present.

### 3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>CreateParameters</b>	Specifies information needed by the protocol server to create objects.
<b>CreateResult</b>	Specifies objects created by the protocol server.
<b>ParameterObject</b>	Specifies information about an object that is to be created.
<b>ParameterObjectList</b>	Specifies objects to be created.

#### 3.1.4.1.3.1 CreateParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the information that the protocol server needs to create the specified objects in a database application.

```

<xs:complexType name="CreateParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="ParameterObjects"
type="tns:ParameterObjectList"/>
      </xs:sequence>
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**ParameterObjects:** Specifies the objects to be created. **MUST** be present.

**ProtocolVersion:** An **Access Services Protocol Version token** ([\[MS-ASDT\]](#) section 3.1.1.1). **MUST** be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). **MUST** be present.

#### 3.1.4.1.3.2 CreateResult



**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the object and possible dependent object or objects that were created in response to the request from the protocol client.

```
<xs:complexType name="CreateResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Objects" type="tns:AccessObjectList"/>
        <xs:element minOccurs="1" maxOccurs="1" name="RefreshRequired" type="xs:boolean"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Objects:** An **AccessObjectList** (section [2.2.4.3](#)) element that specifies the object or objects that were created by the protocol server. **MUST** be present.

**RefreshRequired:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the protocol client **SHOULD** refresh its cached definitions of the objects specified by the **Objects** element.

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server while creating an object. If the operation succeeded in creating all the objects, this element **MUST** be nil.

### 3.1.4.1.3.3 ParameterObjectList

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies an array of objects that are to be created in a database application.

```
<xs:complexType name="ParameterObjectList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterObject"
type="tns:ParameterObject"/>
  </xs:sequence>
</xs:complexType>
```

**ParameterObject:** Specifies information about an object that is to be created. **MUST** be present.

### 3.1.4.1.3.4 ParameterObject

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the information that the protocol server needs to create an object.

```
<xs:complexType name="ParameterObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="1" name="Body">
      <xs:complexType mixed="true">
        <xs:sequence>
          <xs:any/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

```

    </xs:element>
  </xs:sequence>
  <xs:attribute name="Name" type="xs:string"/>
  <xs:attribute name="Description" type="xs:string"/>
  <xs:attribute name="ObjectType" type="tns:AccessObjectType" use="required"/>
</xs:complexType>

```

**Body:** Specifies the definition of the object to create. The contents of **Body** depend on **ObjectType**, as specified in the following table. MUST be present.

Value of ObjectType Attribute	Contents of Body Element
Table	MUST be a <b>Schema</b> element, as specified by [MC-CSDL] section 2.1.1. MUST include the annotations specified by [MS-AXL2] section 2.1.1.
Query	MUST be a <b>Query</b> element, as specified by [MS-AXL2] section 2.2.1.1.
Form	MUST be a <b>FormDef</b> element, as specified by [MS-AXL2] section 2.2.1.12.
DataMacro	MUST be a <b>DataMacro</b> element, as specified by [MS-AXL2] section 2.2.1.14.
UIMacro	MUST be a <b>UserInterfaceMacro</b> element, as specified by [MS-AXL2] section 2.2.1.5.

**Name:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the object to create. MUST be present.

**Description:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a description of the object to create.

**ObjectType:** An **AccessObjectType** (section 2.2.5.1) that specifies the type of object to create. MUST be one of the following values: **Table**, **Query**, **Form**, **DataMacro** or **UIMacro**.

#### 3.1.4.1.4 Simple Types

None.

#### 3.1.4.1.5 Attributes

None.

#### 3.1.4.1.6 Groups

None.

#### 3.1.4.1.7 Attribute Groups

None.

### 3.1.4.2 CreatePackage

This operation triggers creation of a package that represents a database application, including its objects and data. The package can be retrieved by using the **GetPackage** operation (section 3.1.4.18).

The following is the WSDL port type specification of the **CreatePackage** WSDL operation.

```

<wsdl:operation name="CreatePackage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:CreatePackageSoapIn"/>
  <wsdl:output message="tns:CreatePackageSoapOut"/>
</wsdl:operation>

```

The protocol client sends a **CreatePackageSoapIn** (section [3.1.4.2.1.1](#)) request message and the protocol server responds with a **CreatePackageSoapOut** (section [3.1.4.2.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **CreatePackageSoapOut** response message that contains an identifier that can be used to retrieve the package.

### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>CreatePackageSoapIn</b>	The request WSDL message for the <b>CreatePackage</b> WSDL operation.
<b>CreatePackageSoapOut</b>	The response WSDL message for the <b>CreatePackage</b> WSDL operation.

#### 3.1.4.2.1.1 CreatePackageSoapIn

The request WSDL message for the **CreatePackage** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/CreatePackage

```

The SOAP body contains the **CreatePackage** element.

#### 3.1.4.2.1.2 CreatePackageSoapOut

The response WSDL message for the **CreatePackage** WSDL operation.

The SOAP body contains the **CreatePackageResponse** element.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>CreatePackage</b>	The input data for the <b>CreatePackage</b> WSDL operation.
<b>CreatePackageResponse</b>	The result data for the <b>CreatePackage</b> WSDL operation.

### 3.1.4.2.2.1 CreatePackage

The **CreatePackage** element specifies the input data for the **CreatePackage** WSDL operation.

```
<xs:element name="CreatePackage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:CreatePackageParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **CreatePackageParameters** element (section [3.1.4.2.3.1](#)) that specifies the information the protocol server needs to create a package. **MUST** be present.

### 3.1.4.2.2.2 CreatePackageResponse

The **CreatePackageResponse** element specifies the result data for the **CreatePackage** WSDL operation.

```
<xs:element name="CreatePackageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="CreatePackageResult"
type="tns:CreatePackageResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**CreatePackageResult:** A **CreatePackageResult** element (section [3.1.4.2.3.2](#)) that contains an identifier of a package. **MUST** be present.

### 3.1.4.2.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>CreatePackageParameters</b>	Specifies information about the package.
<b>CreatePackageResult</b>	Contains the identifier of the requested package.

#### 3.1.4.2.3.1 CreatePackageParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the information that the protocol server needs to create the package.

```
<xs:complexType name="CreatePackageParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="Title" type="xs:string"/>
      <xs:attribute name="Data" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

    <xs:attribute name="AppVersion" type="xs:string"/>
    <xs:attribute name="IsLocked" type="xs:boolean" use="required"/>
    <xs:attribute name="Option" type="tns:PackagingOption" use="required"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

**ProtocolVersion:** An **Access Services Protocol Version** token ([\[MS-ASDT\]](#) section 3.1.1.1). **ProtocolVersion** MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** element (section [3.1.4.4.3.2](#)). MUST be present.

**Title:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the title of the package. MUST be present. If the value of **Option** is deployment, this value MUST be stored in the database application.

**Data:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether to include the data of the database application in the package.

**AppVersion:** A **VersionDefinition** ([\[VersionDefinition-SPAIM\]](#)) that specifies the version of the package. If the value of **Option** is deployment, this value MUST be stored in the database application. Otherwise, it MUST be ignored.

**IsLocked:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether to prevent customization of the package. If the value of **Option** is deployment, this value MUST be stored in the database application. Otherwise, it MUST be ignored.

**Option:** A **PackagingOption** (section [2.2.5.5](#)) that specifies the type of package to be created.

### 3.1.4.2.3.2 CreatePackageResult

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies an identifier that the protocol client can use with the **GetPackage** operation (section [3.1.4.18](#)) to poll the protocol server and retrieve the created package.

```

<xs:complexType name="CreatePackageResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="PackageId" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**PackageId:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the identifier of a package that can be retrieved from the protocol server. MUST be present.

### 3.1.4.2.4 Simple Types

None.

### 3.1.4.2.5 Attributes

None.

### 3.1.4.2.6 Groups

None.

### 3.1.4.2.7 Attribute Groups

None.

### 3.1.4.3 GetAccessObject

The **GetAccessObject** operation triggers retrieval of the requested object from a database application.

The following is the WSDL port type specification of the **GetAccessObject** WSDL operation.

```
<wsdl:operation name="GetAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetAccessObjectSoapIn"/>
  <wsdl:output message="tns:GetAccessObjectSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **GetAccessObjectSoapIn** (section [3.1.4.3.1.1](#)) request message and the protocol server responds with a **GetAccessObjectSoapOut** (section [3.1.4.3.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **GetAccessObjectSoapOut** response message that contains information about the requested object.

#### 3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetAccessObjectSoapIn</b>	The request WSDL message for the <b>GetAccessObject</b> WSDL operation.
<b>GetAccessObjectSoapOut</b>	The response WSDL message for the <b>GetAccessObject</b> WSDL operation.

##### 3.1.4.3.1.1 GetAccessObjectSoapIn

The request WSDL message for the **GetAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/GetAccessObject
```

The SOAP body contains the **GetAccessObject** element.

##### 3.1.4.3.1.2 GetAccessObjectSoapOut

The response WSDL message for the **GetAccessObject** WSDL operation.

The SOAP body contains the **GetAccessObjectResponse** element.

### 3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetAccessObject</b>	The input data for the <b>GetAccessObject</b> WSDL operation.
<b>GetAccessObjectResponse</b>	The result data for the <b>GetAccessObject</b> WSDL operation.

#### 3.1.4.3.2.1 GetAccessObject

The **GetAccessObject** element specifies the input data for the **GetAccessObject** WSDL operation.

```
<xs:element name="GetAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters" type="tns:GetParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetParameters** element (section [3.1.4.3.3.1](#)) that specifies the information that the protocol server needs to retrieve an object. MUST be present.

#### 3.1.4.3.2.2 GetAccessObjectResponse

The **GetAccessObjectResponse** element specifies the result data for the **GetAccessObject** WSDL operation.

```
<xs:element name="GetAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetAccessObjectResult"
type="tns:GetResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetAccessObjectResult:** A **GetResult** element (section [3.1.4.3.3.2](#)) that specifies information about the requested object for the protocol client to use. MUST be present.

### 3.1.4.3.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>GetParameters</b>	Specifies an object to retrieve.
<b>GetResult</b>	Specifies an object.

#### 3.1.4.3.3.1 GetParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies information that the protocol server needs to retrieve an object.

```
<xs:complexType name="GetParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="ID" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** token ([\[MS-ASDT\]](#) section 3.1.1.1). **ProtocolVersion** MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** element (section [3.1.4.4.3.2](#)). MUST be present.

**ID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the identifier of the object to be retrieved. **ID** MUST be the same value as the **ID** attribute of one of the **AccessObject** elements returned by the protocol server for a call to **GetApplicationInformation** (section 3.1.4.4) in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element.

### 3.1.4.3.3.2 GetResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The **GetResult** complex type specifies information about the requested object and possible dependent objects in the database application.

```
<xs:complexType name="GetResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Objects" type="tns:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Objects:** An **AccessObjectList** (section [2.2.4.3](#)) element that specifies information about one or more objects in the database application. MUST be present.

### 3.1.4.3.4 Simple Types

None.

### 3.1.4.3.5 Attributes

None.

### 3.1.4.3.6 Groups

None.

### 3.1.4.3.7 Attribute Groups



None.

### 3.1.4.4 GetApplicationInformation

This operation retrieves information about a database application from the protocol server.

The following is the WSDL port type specification of the **GetApplicationInformation** WSDL operation.

```
<wsdl:operation name="GetApplicationInformation"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetApplicationInformationSoapIn"/>
  <wsdl:output message="tns:GetApplicationInformationSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **GetApplicationInformationSoapIn** (section [3.1.4.4.1.1](#)) request message and the protocol server responds with a **GetApplicationInformationSoapOut** (section [3.1.4.4.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **GetApplicationInformationSoapOut** response message that contains information about the requested database application.

#### 3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetApplicationInformationSoapIn</b>	The request WSDL message for the <b>GetApplicationInformation</b> WSDL operation.
<b>GetApplicationInformationSoapOut</b>	The response WSDL message for the <b>GetApplicationInformation</b> WSDL operation.

##### 3.1.4.4.1.1 GetApplicationInformationSoapIn

The request WSDL message for the **GetApplicationInformation** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/GetApplicationInformation
```

The SOAP body contains the **GetApplicationInformation** element.

##### 3.1.4.4.1.2 GetApplicationInformationSoapOut

The response WSDL message for the **GetApplicationInformation** WSDL operation.

The SOAP body contains the **GetApplicationInformationResponse** element.

#### 3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetApplicationInformation</b>	The input data for the <b>GetApplicationInformation</b> WSDL operation.
<b>GetApplicationInformationResponse</b>	The result data for the <b>GetApplicationInformation</b> WSDL operation.

### 3.1.4.4.2.1 GetApplicationInformation

The **GetApplicationInformation** element specifies the input data for the **GetApplicationInformation** WSDL operation.

```
<xs:element name="GetApplicationInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetApplicationInformationParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetApplicationInformationParameters** element (section [3.1.4.4.3.1](#)) that specifies the information that the protocol server needs to identify and retrieve a database application. **MUST** be present.

### 3.1.4.4.2.2 GetApplicationInformationResponse

The **GetApplicationInformationResponse** element specifies the result data for the **GetApplicationInformation** WSDL operation.

```
<xs:element name="GetApplicationInformationResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetApplicationInformationResult"
type="tns:GetAppInfoResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetApplicationInformationResult:** A **GetAppInfoResult** element (section [3.1.4.4.3.2](#)) that specifies information about the requested database application. **MUST** be present.

### 3.1.4.4.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>Collation</b>	Specifies <b>collation</b> information about the backend database.
<b>GetAppInfoResult</b>	Specifies information about the requested application.
<b>GetApplicationInformationParameters</b>	Specifies the application about which the protocol client is

Complex type	Description
	requesting information.
<b>IDList</b>	Specifies a list of objects in an application.
<b>ProtocolVersionList</b>	Specifies a list of protocol versions.

### 3.1.4.4.3.1 GetApplicationInformationParameters

#### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

Specifies the information that the protocol server needs to identify and retrieve a database application.

```
<xs:complexType name="GetApplicationInformationParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="ProtocolVersionOptions"
type="tns:ProtocolVersionList"/>
        <xs:element minOccurs="0" maxOccurs="1" name="KnownObjects"
type="tns:ObjectIdentityList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersionOptions:** A **ProtocolVersionList** (section [3.1.4.4.3.4](#)) that specifies all protocol versions that the protocol client will accept. **MUST** be present.

**KnownObjects:** An **ObjectIdentityList** (section [2.2.4.10](#)) that specifies all objects in the database application about which the protocol client has already retrieved information. **MUST** be present. If the protocol client has not retrieved information about any objects, then this element **MUST NOT** have any child elements. The **Version** attribute of each **AccessObjectIdentity** (section [2.2.4.2](#)) element that is a child of **KnownObjects** contains the most recent version token for that object that was received by the protocol client from a call to **GetApplicationInformation** (section [3.1.4.4](#)), **CreateAccessObject** (section [3.1.4.1](#)), or **UpdateAccessObject** (section [3.1.4.8](#)).

### 3.1.4.4.3.2 GetAppInfoResult

#### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

Specifies information about a database application.

```
<xs:complexType name="GetAppInfoResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Collation" type="tns:Collation"/>
        <xs:element minOccurs="0" maxOccurs="1" name="NewObjects"
type="tns:AccessObjectList"/>
        <xs:element minOccurs="0" maxOccurs="1" name="UpdatedObjects"
type="tns:AccessObjectList"/>
        <xs:element minOccurs="0" maxOccurs="1" name="DeletedObjects" type="tns:IDList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

</xs:sequence>
<xs:attribute name="ProtocolVersion" type="xs:string"/>
<xs:attribute name="Name" type="xs:string"/>
<xs:attribute name="AlternateUrl" type="xs:string"/>
<xs:attribute name="Title" type="xs:string"/>
<xs:attribute name="DatabaseName" type="xs:string"/>
<xs:attribute name="DataServerName" type="xs:string"/>
<xs:attribute name="ApplicationCulture" type="xs:string"/>
<xs:attribute name="RequestIPAddress" type="xs:string"/>
<xs:attribute name="IsDataMacroTracingOn" type="xs:boolean" use="required"/>
<xs:attribute name="IsUserConnectionAllowed" type="xs:boolean" use="required"/>
<xs:attribute name="IsFirewallRestricted" type="xs:boolean" use="required"/>
<xs:attribute name="IsDataConnectivitySupported" type="xs:boolean" use="required"/>
<xs:attribute name="IsSendEmailSupported" type="xs:boolean" use="required"/>
<xs:attribute name="PackageAppTitle" type="xs:string"/>
<xs:attribute name="PackageAppVersion" type="xs:string"/>
<xs:attribute name="PackageIsLocked" type="xs:boolean" use="required"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**Collation:** A **Collation** (section [3.1.4.4.3.3](#)) element that specifies collation information about the backend database specified by **DatabaseName** and **DataServerName**. MUST be present.

**NewObjects:** An **AccessObjectList** (section [2.2.4.3](#)) element that fully specifies a set of objects. MUST be present. This list MUST include all objects in the application that were not present in the **KnownObjects** element of the **GetApplicationInformationParameters** that was sent in the request from the protocol client. If there are no objects in the application that were not present in **KnownObjects**, then this element MUST NOT have child elements.

**UpdatedObjects:** An **AccessObjectList** (section [2.2.4.3](#)) element that fully specifies a set of objects. MUST be present. This list MUST include all objects in the application that were present in the **KnownObjects** of the **GetApplicationInformationParameters** that was sent in the request from the protocol client, but which had a different version than the protocol client specified in the **Version** attribute of the **ObjectIdentity** element that had the same **ID**. If there are no objects in the application that were present in **KnownObjects** but now have a different version, then this element MUST NOT have child elements.

**DeletedObjects:** An **IDList** (section [3.1.4.4.3.5](#)) element that specifies a set of objects. MUST be present. This list MUST include all objects that were present in the **KnownObjects** of the **GetApplicationInformationParameters** (section [3.1.4.4.3.1](#)) that was sent in the request from the protocol client, but which are not present in the protocol server. If all objects in the application that were present in **KnownObjects** are also present in the protocol server, then this element MUST NOT have child elements.

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1) token that specifies the best match between the versions supported by the protocol client and the version of the application on the protocol server, as determined by the protocol server implementation. MUST be one of the values in the **ProtocolVersionOptions** of the **GetApplicationInformationParameters** that is sent with the request from the protocol client. MUST also be one of the values that would be returned by the protocol server from a call to **GetServerInformation** ([\[MS-ASDT\]](#) section 3.1.4.2) in the **AcceptedProtocolVersions** of a **GetServerInfoResult** ([\[MS-ASDT\]](#) section 3.1.4.2.3.1). MUST be present.

**Name:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies the name of the application. MUST be present.

**AlternateUrl:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies an alternate **Uniform Resource Locator (URL)** for accessing the application. MUST be present.

**Title:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the title of the application. MUST be present.

**DatabaseName:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the name of the backend database that contains the application. The database is located on the server specified by **DataServerName**. MUST be present.

**DataServerName:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the name of the server on which the database specified by **DatabaseName** resides. MUST be present.

**ApplicationCulture:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the **culture name** of the application. MUST be formatted as specified by [\[RFC4646\]](#). MUST be present.

**RequestIPAddress:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the IP address from which the protocol server received the **GetApplicationInformation** request. MUST be either an **IPv6 address in string format** ([\[RFC4291\]](#) section 2.2) or an IPv4 address in string format ([\[RFC1123\]](#) section 2.1). MUST be present.

**IsDataMacroTracingOn:** A **boolean** ([XMLSCHEMA2] section 3.2.2) attribute that specifies whether data macro tracing (section [3.1.4.7](#)) is enabled in the application. MUST be present.

**IsUserConnectionAllowed:** A **boolean** ([XMLSCHEMA2] section 3.2.2) attribute. MUST be present. MUST be ignored.

**IsFirewallRestricted:** A **boolean** ([XMLSCHEMA2] section 3.2.2) attribute that specifies whether connections to the application are restricted by a firewall on the server. MUST be present.

**IsDataConnectivitySupported:** A **boolean** ([XMLSCHEMA2] section 3.2.2) attribute that specifies whether external connections to the application are enabled. MUST be present.

**IsSendEmailSupported:** A **boolean** ([XMLSCHEMA2] section 3.2.2) attribute that specifies whether the SendEmail data macro action is enabled in the application. MUST be present.

**PackageAppTitle:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the title of the application package. MUST be present. If **CreatePackage** (section [3.1.4.2](#)) has been called on this application with **Option** deployment, this MUST be the **Title** value stored during the most recent call of that type. Otherwise, it MUST be empty.

**PackageAppVersion:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the version of the application package. MUST be present. If **CreatePackage** (section [3.1.4.2](#)) has been called on this application with **Option** deployment, this MUST be the **AppVersion** value stored during the most recent call of that type. Otherwise, it MUST be empty.

**PackageIsLocked:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether customization of the application package is disabled. MUST be present. If **CreatePackage** (section [3.1.4.2](#)) has been called on this application with **Option** deployment, this MUST be the **IsLocked** value stored during the most recent call of that type. Otherwise, it MUST be false.

### 3.1.4.4.3.3 Collation

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specified by [\[MS-ASDT\]](#) section 3.1.4.1.3.2.

```
<xs:complexType name="Collation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:attribute name="Culture" type="xs:string"/>
  <xs:attribute name="CaseSensitive" type="xs:boolean"/>
  <xs:attribute name="AccentSensitive" type="xs:boolean"/>
  <xs:attribute name="KanaSensitive" type="xs:boolean"/>
  <xs:attribute name="WidthSensitive" type="xs:boolean"/>
</xs:complexType>
```

```
<xs:attribute name="UseSupplementaryCharacters" type="xs:boolean" use="required"/>
</xs:complexType>
```

**Culture:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the culture name of the collation. MUST be formatted as specified by [RFC4646]. MUST be present.

**CaseSensitive:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the collation distinguishes between uppercase and lowercase letters. If not specified, the protocol server uses the default value appropriate for **Culture**.

**AccentSensitive:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the collation distinguishes between characters with accents and those without. If not specified, the protocol server uses the default value appropriate for **Culture**.

**KanaSensitive:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the collation distinguishes between the two types of Japanese kana characters: hiragana and katakana. If not specified, the protocol server uses the default value appropriate for **Culture**.

**WidthSensitive:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the collation distinguishes between single-byte characters and the same characters when they are represented as double-byte characters. If not specified, the protocol server uses the default value appropriate for **Culture**.

**UseSupplementaryCharacters:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the collation uses **surrogate pairs**.

#### 3.1.4.4.3.4 ProtocolVersionList

**Namespace:**

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

A sequence of **Access Services Protocol Version** elements ([MS-ASDT] section 3.1.1.1).

```
<xs:complexType name="ProtocolVersionList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ProtocolVersion" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**ProtocolVersion:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies an **Access Services Protocol Version** ([MS-ASDT] section 3.1.1.1). MUST be present.

#### 3.1.4.4.3.5 IDList

**Namespace:**

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

A sequence of object identifiers.

```
<xs:complexType name="IDList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ID" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

**ID:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the unique identifier of an object.

#### 3.1.4.4.4 Simple Types

None.

#### 3.1.4.4.5 Attributes

None.

#### 3.1.4.4.6 Groups

None.

#### 3.1.4.4.7 Attribute Groups

None.

#### 3.1.4.5 GetLinkedTableInformation

The **GetLinkedTableInformation** operation creates a new **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) in a database application in the protocol server, and returns the definition of the created **linked table** to the protocol client.

The following is the WSDL port type specification of the **GetLinkedTableInformation** WSDL operation.

```
<wsdl:operation name="GetLinkedTableInformation"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetLinkedTableInformationSoapIn"/>
  <wsdl:output message="tns:GetLinkedTableInformationSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **GetLinkedTableInformationSoapIn** request message (section [3.1.4.5.1.1](#)) and the protocol server responds with a **GetLinkedTableInformationSoapOut** response message (section [3.1.4.5.1.2](#)) as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **GetLinkedTableInformationSoapOut** response message that contains information about the requested **linked table**.

#### 3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetLinkedTableInformationSoapIn</b>	The request WSDL message for the <b>GetLinkedTableInformation</b> WSDL operation.
<b>GetLinkedTableInformationSoapOut</b>	The response WSDL message for the <b>GetLinkedTableInformation</b> WSDL operation.

#### 3.1.4.5.1.1 GetLinkedTableInformationSoapIn

The request WSDL message for the **GetLinkedTableInformation** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/GetLinkedTableInformation
```

The SOAP body contains the **GetLinkedTableInformation** element.

### 3.1.4.5.1.2 GetLinkedTableInformationSoapOut

The response WSDL message for the **GetLinkedTableInformation** WSDL operation.

The SOAP body contains the **GetLinkedTableInformationResponse** element.

### 3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetLinkedTableInformation</b>	The input data for the <b>GetLinkedTableInformation</b> WSDL operation.
<b>GetLinkedTableInformationResponse</b>	The result data for the <b>GetLinkedTableInformation</b> WSDL operation.

#### 3.1.4.5.2.1 GetLinkedTableInformation

The **GetLinkedTableInformation** element specifies the input data for the **GetLinkedTableInformation** WSDL operation.

```
<xs:element name="GetLinkedTableInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetLinkedTableInformationParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetLinkedTableInformationParameters** complex type (section [3.1.4.5.3.1](#)) that specifies the source of the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6). This element **MUST** be present.

#### 3.1.4.5.2.2 GetLinkedTableInformationResponse

The **GetLinkedTableInformationResponse** element specifies the result data for the **GetLinkedTableInformation** WSDL operation.

```
<xs:element name="GetLinkedTableInformationResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetLinkedTableInformationResult"
type="tns:GetLinkedTableInformationResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```



```

    </xs:complexType>
  </xs:element>

```

**GetLinkedTableInformationResult:** A **GetLinkedTableInformationResult** complex type (section [3.1.4.5.3.2](#)) that specifies information about the created **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6). This element **MUST** be present.

### 3.1.4.5.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>GetLinkedTableInformationParameters</b>	Specifies a <b>linked table</b> about which to retrieve information.
<b>GetLinkedTableInformationResult</b>	Specifies information about a <b>linked table</b> .

#### 3.1.4.5.3.1 GetLinkedTableInformationParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The **GetLinkedTableInformationParameters** complex type specifies information about the source of the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) that needs to be created in the database application.

```

<xs:complexType name="GetLinkedTableInformationParameters"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="ListID" xmlns:s1="http://microsoft.com/wsdl/types/" type="s1:guid"
        use="required"/>
      <xs:attribute name="SiteUrl" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**ProtocolVersion:** An **Access Services Protocol Version** token ([\[MS-ASDT\]](#) section 3.1.1.1). This element **MUST** be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** complex type (section [3.1.4.4.3.2](#)). This element **MUST** be present.

**ListID:** A **curly braced GUID string** that identifies the **linked table** that needs to be created in the database application. This element **MUST** be present.

**SiteUrl:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the Uniform Resource Locator (URL) of the site on which the specified **linked table** is located. This element **MUST** be present.

#### 3.1.4.5.3.2 GetLinkedTableInformationResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The **GetLinkedTableInformationResult** complex type specifies the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) created on the protocol server.

```

<xs:complexType name="GetLinkedTableInformationResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Objects" type="tns:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**Objects:** An **AccessObjectList** complex type (section [2.2.4.3](#)) that contains the **linked table**. This element **MUST** be present, and **MUST** contain exactly one **AccessObject** complex type (section [2.2.4.1](#)), and the **ObjectType** of that element **MUST** be "LinkedTable".

#### 3.1.4.5.4 Simple Types

None.

#### 3.1.4.5.5 Attributes

None.

#### 3.1.4.5.6 Groups

None.

#### 3.1.4.5.7 Attribute Groups

None.

#### 3.1.4.6 RenameAccessObject

The **RenameAccessObject** operation changes the name of an object in a database application and updates the definition of dependent objects with the new name of the renamed object.

The following is the WSDL port type specification of the **RenameAccessObject** WSDL operation.

```

<wsdl:operation name="RenameAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:RenameAccessObjectSoapIn"/>
  <wsdl:output message="tns:RenameAccessObjectSoapOut"/>
</wsdl:operation>

```

The protocol client sends a **RenameAccessObjectSoapIn** request message (section [3.1.4.6.1.1](#)) and the protocol server responds with a **RenameAccessObjectSoapOut** response message (section [3.1.4.6.1.2](#)) as follows:

- If the **ObjectVersion** attribute specified in the **RenameParameters** complex type (section [3.1.4.6.3.1](#)) does not match the version token on the protocol server for the object being renamed, the protocol server **MUST NOT** rename the object and **MUST** respond with a **RenameAccessObjectSoapOut** response message that contains the current definition of the object and a **ServiceError** complex type (section [2.2.4.12](#)) with a **Code** value of "WebService\_ObjectSaveConflict".
- If any of the dependent objects of the object being renamed is listed in the **OpenObjects** attribute specified in the **RenameParameters**, the protocol server **MUST NOT** rename the object and **MUST** respond with an **RenameAccessObjectSoapOut** response message that contains the

current definition of the object and a **ServiceError** with a **Code** value of "AccessRenameException\_OpenDependentObjects".

- If an error occurs on the protocol server during this operation, the protocol server MUST send a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **RenameAccessObjectSoapOut** response message that contains the specified information about the renamed object.

### 3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>RenameAccessObjectSoapIn</b>	The request WSDL message for the <b>RenameAccessObject</b> WSDL operation.
<b>RenameAccessObjectSoapOut</b>	The response WSDL message for the <b>RenameAccessObject</b> WSDL operation.

#### 3.1.4.6.1.1 RenameAccessObjectSoapIn

The request WSDL message for the **RenameAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/RenameAccessObject
```

The SOAP body contains the **RenameAccessObject** element.

#### 3.1.4.6.1.2 RenameAccessObjectSoapOut

The response WSDL message for the **RenameAccessObject** WSDL operation.

The SOAP body contains the **RenameAccessObjectResponse** element.

### 3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>RenameAccessObject</b>	The input data for the <b>RenameAccessObject</b> WSDL operation.
<b>RenameAccessObjectResponse</b>	The result data for the <b>RenameAccessObject</b> WSDL operation.

#### 3.1.4.6.2.1 RenameAccessObject

The **RenameAccessObject** element specifies the input data for the **RenameAccessObject** WSDL operation.

```
<xs:element name="RenameAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>
```

```

    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters" type="tns:RenameParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameters:** A **RenameParameters** complex type (section [3.1.4.6.3.1](#)) that specifies the information that the protocol server needs to rename an object. This element **MUST** be present.

### 3.1.4.6.2.2 RenameAccessObjectResponse

The **RenameAccessObjectResponse** element specifies the result data for the **RenameAccessObject** WSDL operation.

```

<xs:element name="RenameAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="RenameAccessObjectResult"
type="tns:RenameResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**RenameAccessObjectResult:** A **RenameResult** complex type (section [3.1.4.6.3.2](#)) that specifies information about the object that was requested to be renamed by the protocol client. This element **MUST** be present.

### 3.1.4.6.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>RenameParameters</b>	Specifies the object to rename and its new name.
<b>RenameResult</b>	Specifies the renamed object.

#### 3.1.4.6.3.1 RenameParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The **RenameParameters** complex type specifies the information that the protocol server needs to rename an object.

```

<xs:complexType name="RenameParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="KnownObjects"
type="tns:ObjectIdentityList"/>
        <xs:element minOccurs="0" maxOccurs="1" name="OpenObjects"
type="tns:ObjectIdentityList"/>
      </xs:sequence>
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="ID" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

    <xs:attribute name="ObjectVersion" type="xs:string"/>
    <xs:attribute name="Name" type="xs:string"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

**KnownObjects:** An **ObjectIdentityList** complex type (section [2.2.4.10](#)) that specifies all objects in the database application about which the protocol client has already retrieved information. This element **MUST** be present. If the protocol client has not retrieved information about any objects, this element **MUST NOT** have any child elements. The **Version** attribute of each **AccessObjectIdentity** complex type (section [2.2.4.2](#)) that is a child of **KnownObjects** contains the most recent version token for that object that was received by the protocol client from a call to **GetApplicationInformation** (section [3.1.4.4](#)), **CreateAccessObject** (section [3.1.4.1](#)), or **UpdateAccessObject** (section [3.1.4.8](#)).

**OpenObjects:** An **ObjectIdentityList** that specifies all objects in the database application that are opened for editing on the protocol client. This element **MUST** be present. If the protocol client has not retrieved information about any objects or if the protocol client does have any objects opened for editing, this element **MUST NOT** have any child elements. The **Version** attribute of each **AccessObjectIdentity** that is a child of **KnownObjects** contains the most recent version token for that object that was received by the protocol client from a call to **GetApplicationInformation**, **CreateAccessObject**, or **UpdateAccessObject**.

**ProtocolVersion:** An **Access Services Protocol Version** token ([\[MS-ASDT\]](#) section 3.1.1.1). **ProtocolVersion** **MUST** be the same value that the protocol server returns from a call to **GetApplicationInformation** in the **ProtocolVersion** element of the **GetAppInfoResult** complex type (section [3.1.4.4.3.2](#)). This element **MUST** be present.

**ID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the identifier of the object to be renamed. **ID** **MUST** be the same value as the **ID** attribute of one of the **AccessObject** complex types (section [2.2.4.1](#)) that would be returned from a call to **GetApplicationInformation** in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult**.

**ObjectVersion:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies the latest version of the object that the protocol client has cached. This element **MUST** be present. The protocol server **MUST** return an error unless this is the same value as the **ObjectVersion** attribute of the **AccessObject** that would be returned from a call to **GetApplicationInformation** in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult**, where the **ID** of the **AccessObject** is the same as the **ID** of this element.

**Name:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies the new name of the object to be renamed. This element **MUST** be present.

### 3.1.4.6.3.2 RenameResult

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The **RenameResult** complex type specifies information about the object that was requested to be renamed by the protocol client.

```

<xs:complexType name="RenameResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="AccessObject" type="tns:AccessObject"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
          type="tns:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        <xs:element minOccurs="1" maxOccurs="1" name="UpdatedObjects" nillable="true"
type="tns:AccessObjectList"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**AccessObject:** If the rename operation succeeded, this element specifies an **AccessObject** complex type (section [2.2.4.1](#)) that is the object that has been renamed. If the rename operation failed because the **ObjectVersion** attribute specified in the **RenameParameters** complex type (section [3.1.4.6.3.1](#)) does not match the version token on the protocol server, this element specifies an **AccessObject** that contains the current definition of the indicated object on the protocol server. This element **MUST** be present.

**Error:** A **ServiceError** complex type (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the rename operation succeeded, this element **MUST** be nil.

**UpdatedObjects:** An **AccessObjectList** complex type (section [2.2.4.3](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies the objects whose definition were updated with the new name of the renamed object by the protocol server. If the rename operation did not succeed, this element **MUST** be nil.

### 3.1.4.6.4 Simple Types

None.

### 3.1.4.6.5 Attributes

None.

### 3.1.4.6.6 Groups

None.

### 3.1.4.6.7 Attribute Groups

None.

### 3.1.4.7 SetDataMacroTracing

This operation sets the data macro ([\[MS-AXL2\]](#) section 2.1.2.2) tracing option in a database application to determine whether the protocol server allows logging the execution of a data macro ([\[MS-AXL2\]](#) section 2.1.2.2)

The following is the WSDL port type specification of the **SetDataMacroTracing** WSDL operation.

```

<wsdl:operation name="SetDataMacroTracing" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
    <wsdl:input message="tns:SetDataMacroTracingSoapIn"/>
    <wsdl:output message="tns:SetDataMacroTracingSoapOut"/>
</wsdl:operation>

```

The protocol client sends a **SetDataMacroTracingSoapIn** (section [3.1.4.7.1.1](#)) request message and the protocol server responds with a **SetDataMacroTracingSoapOut** (section [3.1.4.7.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server **MUST** respond with a SOAP fault, as specified in section [2.2.9.1](#).

- Otherwise, the protocol server MUST respond with a **SetDataMacroTracingSoapOut** response message that contains the information about the data macro tracing option.

### 3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SetDataMacroTracingSoapIn</b>	The request WSDL message for the <b>SetDataMacroTracing</b> WSDL operation.
<b>SetDataMacroTracingSoapOut</b>	The response WSDL message for the <b>SetDataMacroTracing</b> WSDL operation.

#### 3.1.4.7.1.1 SetDataMacroTracingSoapIn

The request WSDL message for the **SetDataMacroTracing** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/SetDataMacroTracing
```

The SOAP body contains the **SetDataMacroTracing** element.

#### 3.1.4.7.1.2 SetDataMacroTracingSoapOut

The response WSDL message for the **SetDataMacroTracing** WSDL operation.

The SOAP body contains the **SetDataMacroTracingResponse** element.

### 3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SetDataMacroTracing</b>	The input data for the <b>SetDataMacroTracing</b> WSDL operation.
<b>SetDataMacroTracingResponse</b>	The result data for the <b>SetDataMacroTracing</b> WSDL operation.

#### 3.1.4.7.2.1 SetDataMacroTracing

The **SetDataMacroTracing** element specifies the input data for the **SetDataMacroTracing** WSDL operation.

```
<xs:element name="SetDataMacroTracing" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:SetDataMacroTracingParameters"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

**parameters:** A **SetDataMacroTracingParameters** element (section [3.1.4.7.3.1](#)) that specifies the information that the protocol server needs to set the data macro tracing option. MUST be present.

### 3.1.4.7.2.2 SetDataMacroTracingResponse

The **SetDataMacroTracingResponse** element specifies the result data for the **SetDataMacroTracing** WSDL operation.

```
<xs:element name="SetDataMacroTracingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" maxOccurs="1" name="SetDataMacroTracingResult"  
type="tns:SetDataMacroTracingResult"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

**SetDataMacroTracingResult:** A **SetDataMacroTracingResult** element (section [3.1.4.7.3.2](#)) that specifies the data macro tracing option. MUST be present.

### 3.1.4.7.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>SetDataMacroTracingParameters</b>	Specifies the data macro tracing option to set.
<b>SetDataMacroTracingResult</b>	Indicates whether the data macro tracing option is on or off.

#### 3.1.4.7.3.1 SetDataMacroTracingParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the information that the protocol server needs to set the data macro tracing option.

```
<xs:complexType name="SetDataMacroTracingParameters"  
xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexContent mixed="false">  
    <xs:extension base="tns:ServiceParameters">  
      <xs:attribute name="ProtocolVersion" type="xs:string"/>  
      <xs:attribute name="TurnTracingOn" type="xs:boolean" use="required"/>  
    </xs:extension>  
  </xs:complexContent>  
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST be present.



**TurnTracingOn:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether to turn on data macro tracing option.

### 3.1.4.7.3.2 SetDataMacroTracingResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Contains the current data macro tracing option after the request from the protocol client is made.

```
<xs:complexType name="SetDataMacroTracingResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:attribute name="IsTracingOn" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**IsTracingOn:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the data macro tracing option is on.

### 3.1.4.7.4 Simple Types

None.

### 3.1.4.7.5 Attributes

None.

### 3.1.4.7.6 Groups

None.

### 3.1.4.7.7 Attribute Groups

None.

### 3.1.4.8 UpdateAccessObject

The **UpdateAccessObject** operation updates an object in a database application.

The following is the WSDL port type specification of the **UpdateAccessObject** WSDL operation.

```
<wsdl:operation name="UpdateAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:UpdateAccessObjectSoapIn"/>
  <wsdl:output message="tns:UpdateAccessObjectSoapOut"/>
</wsdl:operation>
```

The protocol client sends an **UpdateAccessObjectSoapIn** request message (section [3.1.4.8.1.1](#)) and the protocol server responds with an **UpdateAccessObjectSoapOut** response message (section [3.1.4.8.1.2](#)) as follows:

- If the **ObjectVersion** attribute specified in the **UpdateParameters** complex type (section [3.1.4.8.3.1](#)) does not match the version token on the protocol server for the object being updated, the protocol server MUST NOT update the object and MUST respond with an **UpdateAccessObjectSoapOut** response message that contains the current definition of the

object and a **ServiceError** complex type (section [2.2.4.12](#)) with a **Code** value of "WebService\_ObjectSaveConflict".

- If any of the dependent objects of the object being updated are listed in the **OpenObjects** attribute specified in the **UpdateParameters**, the protocol server MUST NOT update the object and MUST respond with an **UpdateAccessObjectSoapOut** response message that contains the current definition of the object and a **ServiceError** element with a **Code** value of "AccessUpdateException\_OpenDependentObjects".
- If an error occurs on the protocol server during this operation, the protocol server MUST respond with either a SOAP fault, as specified by section [2.2.9.1](#) or a **Service Error**.
- Otherwise, the protocol server MUST respond with an **UpdateAccessObjectSoapOut** response message that contains information about the newly created object, as specified by **UpdateResult** (section [3.1.4.8.3.2](#)).

### 3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>UpdateAccessObjectSoapIn</b>	The request WSDL message for the <b>UpdateAccessObject</b> WSDL operation.
<b>UpdateAccessObjectSoapOut</b>	The response WSDL message for the <b>UpdateAccessObject</b> WSDL operation.

#### 3.1.4.8.1.1 UpdateAccessObjectSoapIn

The request WSDL message for the **UpdateAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/UpdateAccessObject
```

The SOAP body contains the **UpdateAccessObject** element.

#### 3.1.4.8.1.2 UpdateAccessObjectSoapOut

The response WSDL message for the **UpdateAccessObject** WSDL operation.

The SOAP body contains the **UpdateAccessObjectResponse** element.

### 3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>UpdateAccessObject</b>	The input data for the <b>UpdateAccessObject</b> WSDL operation.
<b>UpdateAccessObjectResponse</b>	The result data for the <b>UpdateAccessObject</b> WSDL operation.

### 3.1.4.8.2.1 UpdateAccessObject

The **UpdateAccessObject** element specifies the input data for the **UpdateAccessObject** WSDL operation.

```
<xs:element name="UpdateAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters" type="tns:UpdateParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** An **UpdateParameters** complex type (section [3.1.4.8.3.1](#)) that specifies information needed by the protocol server to update an object. This element **MUST** be present.

### 3.1.4.8.2.2 UpdateAccessObjectResponse

The **UpdateAccessObjectResponse** element specifies the result data for the **UpdateAccessObject** WSDL operation.

```
<xs:element name="UpdateAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="UpdateAccessObjectResult"
type="tns:UpdateResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**UpdateAccessObjectResult:** An **UpdateResult** complex type (section [3.1.4.8.3.2](#)) that specifies information about the updated object. This element **MUST** be present.

### 3.1.4.8.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>UpdateParameters</b>	Specifies which object the protocol client wants to update and the requested update.
<b>UpdateResult</b>	Specifies information about the updated object.

#### 3.1.4.8.3.1 UpdateParameters

**Namespace:**

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

The **UpdateParameters** complex type specifies the information that the protocol server needs to update an object.

```
<xs:complexType name="UpdateParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
```

```

<xs:element minOccurs="0" maxOccurs="1" name="Body">
  <xs:complexType mixed="true">
    <xs:sequence>
      <xs:any/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element minOccurs="0" maxOccurs="1" name="KnownObjects"
type="tns:ObjectIdentityList"/>
<xs:element minOccurs="0" maxOccurs="1" name="OpenObjects"
type="tns:ObjectIdentityList"/>
</xs:sequence>
<xs:attribute name="ProtocolVersion" type="xs:string"/>
<xs:attribute name="ID" type="xs:int" use="required"/>
<xs:attribute name="ObjectVersion" type="xs:string"/>
<xs:attribute name="Description" type="xs:string"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**Body:** Specifies an updated definition of an object. The contents of **Body** depend on the value of the **ObjectType** attribute of this element, as specified in the following table. This element MUST be present.

Value of ObjectType Attribute	Contents of Body Element
Table	MUST be a <b>Schema</b> element, as specified by [MC-CSDL] section 2.1.1. MUST include the annotations specified by [MS-AXL2] section 2.1.1.
Query	MUST be a <b>Query</b> element, as specified by [MS-AXL2] section 2.2.1.1.
Form	MUST be a <b>FormDef</b> element, as specified by [MS-AXL2] section 2.2.1.12.
DataMacro	MUST be a <b>DataMacro</b> element, as specified by [MS-AXL2] section 2.2.1.14.
UIMacro	MUST be a <b>UserInterfaceMacro</b> element, as specified by [MS-AXL2] section 2.2.1.5.

**KnownObjects:** An **ObjectIdentityList** complex type (section 2.2.4.10) that specifies all objects in the database application about which the protocol client has already retrieved information. This element MUST be present. If the protocol client has not retrieved information about any objects, this element MUST NOT have any child elements. The **Version** attribute of each **AccessObjectIdentity** complex type (section 2.2.4.2) that is a child of **KnownObjects** contains the most recent version token for that object that was received by the protocol client from a call to **GetApplicationInformation** (section 3.1.4.4), **CreateAccessObject** (section 3.1.4.1), or **UpdateAccessObject** (section 3.1.4.8).

**OpenObjects:** An **ObjectIdentityList** that specifies all objects in the database application which are opened for editing on the protocol client. This element MUST be present. If the protocol client has not retrieved information about any objects or if the protocol client does have any objects opened for editing, this element MUST NOT have any child elements. The **Version** attribute of each **AccessObjectIdentity** that is a child of **KnownObjects** contains the most recent version token for that object that was received by the protocol client from a call to **GetApplicationInformation**, **CreateAccessObject**, or **UpdateAccessObject**.

**ProtocolVersion:** An **Access Services Protocol Version** token ([MS-ASDT] section 3.1.1.1). This element MUST be the same value that the protocol server returns from a call to

**GetApplicationInformation** in the **ProtocolVersion** element of the **GetAppInfoResult** complex type (section [3.1.4.4.3.2](#)). This element MUST be present.

**ID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the unique identifier of the object to be updated. The element MUST be the same as the **ID** attribute of one of the **AccessObject** complex types (section [2.2.4.1](#)) that would be returned from a call to **GetApplicationInformation** in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult**.

**ObjectVersion:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies the latest version of the object that the protocol client has cached. This element MUST be present. The protocol server MUST return an error unless this is the same value as the **ObjectVersion** attribute of the **AccessObject** that would be returned from a call to **GetApplicationInformation** in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element, where the **ID** of the **AccessObject** is the same as the **ID** of this element.

**Description:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a description of the object. This description can be different from or the same as the existing description of the object.

### 3.1.4.8.3.2 UpdateResult

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The **UpdateResult** complex type specifies the updated object and possible dependent object, or objects that were updated in response to the request from the protocol client.

```
<xs:complexType name="UpdateResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Objects" type="tns:AccessObjectList"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
        <xs:element minOccurs="1" maxOccurs="1" name="RefreshRequired" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Objects:** An **AccessObjectList** complex type (section [2.2.4.3](#)) that specifies the object or objects that were updated by the protocol server.

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that specifies an error that occurred on the protocol server. If the update operation succeeded, this element MUST be nil ([\[XSD1.1-1\]](#) section 2.7.2). If this element is not nil, then the **Objects** list MUST contain the latest version of the object specified in the **ID** attribute of the **UpdateParameters** complex type (section [3.1.4.8.3.1](#)).

**RefreshRequired:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the protocol client SHOULD refresh its cached definitions of the objects specified by the **Objects** element.

### 3.1.4.8.4 Simple Types

None.

### 3.1.4.8.5 Attributes

None.

### 3.1.4.8.6 Groups

None.

### 3.1.4.8.7 Attribute Groups

None.

### 3.1.4.9 DeleteAccessObject

This operation triggers the deletion of an object in a database application.

The following is the WSDL port type specification of the **DeleteAccessObject** WSDL operation.

```
<wsdl:operation name="DeleteAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:DeleteAccessObjectSoapIn"/>
  <wsdl:output message="tns:DeleteAccessObjectSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **DeleteAccessObjectSoapIn** (section [3.1.4.9.1.1](#)) request message and the protocol server responds with a **DeleteAccessObjectSoapOut** (section [3.1.4.9.1.2](#)) response message as follows:

- If the **ObjectVersion** attribute specified in the **DeleteParameters** element (section [3.1.4.9.3.1](#)) does not match the version token on the protocol server for the object being deleted, the protocol server MUST NOT delete the object and MUST respond with a **DeleteAccessObjectSoapOut** response message that contains the current definition of the object and a **ServiceError** element (section [2.2.4.12](#)) with a **Code** value of "WebService\_ObjectSaveConflict".
- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **DeleteAccessObjectSoapOut** response message that contains information about the deleted object.

#### 3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>DeleteAccessObjectSoapIn</b>	The request WSDL message for the <b>DeleteAccessObject</b> WSDL operation.
<b>DeleteAccessObjectSoapOut</b>	The response WSDL message for the <b>DeleteAccessObject</b> WSDL operation.

##### 3.1.4.9.1.1 DeleteAccessObjectSoapIn

The request WSDL message for the **DeleteAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/DeleteAccessObject
```

The SOAP body contains the **DeleteAccessObject** element.

### 3.1.4.9.1.2 DeleteAccessObjectSoapOut

The response WSDL message for the **DeleteAccessObject** WSDL operation.

The SOAP body contains the **DeleteAccessObjectResponse** element.

### 3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>DeleteAccessObject</b>	The input data for the <b>DeleteAccessObject</b> WSDL operation.
<b>DeleteAccessObjectResponse</b>	The result data for the <b>DeleteAccessObject</b> WSDL operation.

#### 3.1.4.9.2.1 DeleteAccessObject

The **DeleteAccessObject** element specifies the input data for the **DeleteAccessObject** WSDL operation.

```
<xs:element name="DeleteAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters" type="tns:DeleteParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **DeleteParameters** element (section [3.1.4.9.3.1](#)) that specifies the object to delete. MUST be present.

#### 3.1.4.9.2.2 DeleteAccessObjectResponse

The **DeleteAccessObjectResponse** element specifies the result data for the **DeleteAccessObject** WSDL operation.

```
<xs:element name="DeleteAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="DeleteAccessObjectResult"
type="tns:DeleteResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**DeleteAccessObjectResult:** A **DeleteResult** element (section [3.1.4.9.3.2](#)) that specifies the result of the delete operation. MUST be present.

### 3.1.4.9.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>DeleteParameters</b>	Specifies the object to delete.
<b>DeleteResult</b>	Specifies the result of the delete operation.

### 3.1.4.9.3.1 DeleteParameters

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the information that the protocol server needs to delete an object.

```
<xs:complexType name="DeleteParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="ID" type="xs:int" use="required"/>
      <xs:attribute name="ObjectVersion" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST be present.

**ID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the unique identifier of the object to be deleted. MUST be the same as the **ID** attribute of one of the **AccessObject** elements that would be returned from a call to **GetApplicationInformation** (section 3.1.4.4) in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element.

**ObjectVersion:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies the latest version of the object that the protocol client has cached. MUST be present. The protocol server MUST return an error unless this is the same value as the **ObjectVersion** attribute of the **AccessObject** (section [2.2.4.1](#)) element that would be returned from a call to **GetApplicationInformation** (section 3.1.4.4) in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element, where the **ID** of the **AccessObject** is the same as the **ID** of this element.

### 3.1.4.9.3.2 DeleteResult

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the result of the delete operation.

```
<xs:complexType name="DeleteResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
        <xs:element minOccurs="0" maxOccurs="1" name="AccessObject" type="tns:AccessObject"/>
      </xs:sequence>
      <xs:attribute name="ID" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```



</xs:complexType>

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that specifies an error that occurred on the protocol server. If the delete operation succeeded, this element MUST be nil ([\[XSD1.1-1\]](#) section 2.7.2) and the **AccessObject** element MUST NOT be present. If this element is not nil, then the **Objects** list MUST contain the latest version of the object specified in the **ID** attribute of the **DeleteParameters** (section [3.1.4.9.3.1](#)) element..

**AccessObject:** An **AccessObject** element (section [2.2.4.1](#)) that specifies an object.

**ID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the identifier of the object. MUST be the same as the **ID** attribute of the **DeleteParameters** element from the request.

### 3.1.4.9.4 Simple Types

None.

### 3.1.4.9.5 Attributes

None.

### 3.1.4.9.6 Groups

None.

### 3.1.4.9.7 Attribute Groups

None.

## 3.1.4.10 AddFirewallRule

This operation adds a **FirewallRule** (section [2.2.4.7](#)) to the database application. The protocol client MUST call this operation only if the **IsDataConnectivitySupported** and **IsFirewallRestricted** elements of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)) in the response body of a previous call to **GetApplicationInformation** operation (section [3.1.4.4](#)) are "true".

The following is the WSDL port type specification of the **AddFirewallRule** WSDL operation.

```
<wsdl:operation name="AddFirewallRule" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:AddFirewallRuleSoapIn"/>
  <wsdl:output message="tns:AddFirewallRuleSoapOut"/>
</wsdl:operation>
```

The protocol client sends an **AddFirewallRuleSoapIn** (section [3.1.4.10.1.1](#)) request message and the protocol server responds with an **AddFirewallRuleSoapOut** (section [3.1.4.10.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#), or a **Service Error**, as specified in section [2.2.9.2](#).
- Otherwise, the protocol server MUST respond with an **AddFirewallRuleSoapOut** response message that contains information about the **FirewallRule** (section [2.2.4.7](#)) that was added to the database application.

### 3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>AddFirewallRuleSoapIn</b>	The request WSDL message for the <b>AddFirewallRule</b> WSDL operation.
<b>AddFirewallRuleSoapOut</b>	The response WSDL message for the <b>AddFirewallRule</b> WSDL operation.

#### 3.1.4.10.1.1 AddFirewallRuleSoapIn

The request WSDL message for the **AddFirewallRule** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/AddFirewallRule
```

The SOAP body contains the **AddFirewallRule** element.

#### 3.1.4.10.1.2 AddFirewallRuleSoapOut

The response WSDL message for the **AddFirewallRule** WSDL operation.

The SOAP body contains the **AddFirewallRuleResponse** element.

#### 3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>AddFirewallRule</b>	The input data for the <b>AddFirewallRule</b> WSDL operation.
<b>AddFirewallRuleResponse</b>	The result data for the <b>AddFirewallRule</b> WSDL operation.

#### 3.1.4.10.2.1 AddFirewallRule

The **AddFirewallRule** element specifies the input data for the **AddFirewallRule** WSDL operation.

```
<xs:element name="AddFirewallRule" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"  
type="tns:AddFirewallRuleParameters"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

**parameters:** An **AddFirewallRuleParameters** complex type, as specified in section [3.1.4.10.3.1](#). MUST be present.

#### 3.1.4.10.2.2 AddFirewallRuleResponse

The **AddFirewallRuleResponse** element specifies the result data for the **AddFirewallRule** WSDL operation.

```
<xs:element name="AddFirewallRuleResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="AddFirewallRuleResult"
type="tns:AddFirewallRuleResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**AddFirewallRuleResult:** An **AddFirewallRuleResult** complex type, as specified in section [3.1.4.10.3.2](#). MUST be present.

### 3.1.4.10.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>AddFirewallRuleParameters</b>	See section <a href="#">3.1.4.10.3.1</a> .
<b>AddFirewallRuleResult</b>	See section <a href="#">3.1.4.10.3.2</a> .

#### 3.1.4.10.3.1 AddFirewallRuleParameters

##### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **AddFirewallRule** protocol operation.

```
<xs:complexType name="AddFirewallRuleParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="StartIPAddress" type="xs:string"/>
      <xs:attribute name="EndIPAddress" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)).

**StartIPAddress:** The starting IP address as specified in **StartIPAddress** element of **FirewallRule** (section [2.2.4.7](#)).

**EndIPAddress:** The ending IP address as specified in **EndIPAddress** element of **FirewallRule** (section [2.2.4.7](#)).

#### 3.1.4.10.3.2 AddFirewallRuleResult

##### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the result data of the **AddFirewallRule** protocol operation.

```
<xs:complexType name="AddFirewallRuleResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
      <xs:attribute name="RuleName" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element MUST be nil.

**RuleName:** A unique name generated by the protocol server for the **FirewallRule** (section [2.2.4.7](#)) which was added to the database application.

#### 3.1.4.10.4 Simple Types

None.

#### 3.1.4.10.5 Attributes

None.

#### 3.1.4.10.6 Groups

None.

#### 3.1.4.10.7 Attribute Groups

None.

#### 3.1.4.11 DeleteFirewallRules

This operation deletes firewall rules from the database application. These rules MUST have been previously added by the **AddFirewallRule** operation (section [3.1.4.10](#)). The protocol client MUST call this operation only if the **IsDataConnectivitySupported** and **IsFirewallRestricted** attributes of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)) in the response body of a previous call to **GetApplicationInformation** operation (section [3.1.4.4](#)) are "true".

The following is the WSDL port type specification of the **DeleteFirewallRules** WSDL operation.

```
<wsdl:operation name="DeleteFirewallRules" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:DeleteFirewallRulesSoapIn"/>
  <wsdl:output message="tns:DeleteFirewallRulesSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **DeleteFirewallRulesSoapIn** (section [3.1.4.11.1.1](#)) request message and the protocol server responds with a **DeleteFirewallRulesSoapOut** (section [3.1.4.11.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#).

- Otherwise, the protocol server MUST delete firewall rules and respond with a **DeleteFirewallRulesSoapOut** response message.

### 3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>DeleteFirewallRulesSoapIn</b>	The request WSDL message for the <b>DeleteFirewallRules</b> WSDL operation.
<b>DeleteFirewallRulesSoapOut</b>	The response WSDL message for the <b>DeleteFirewallRules</b> WSDL operation.

#### 3.1.4.11.1.1 DeleteFirewallRulesSoapIn

The request WSDL message for the **DeleteFirewallRules** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/DeleteFirewallRules
```

The SOAP body contains the **DeleteFirewallRules** element.

#### 3.1.4.11.1.2 DeleteFirewallRulesSoapOut

The response WSDL message for the **DeleteFirewallRules** WSDL operation.

The SOAP body contains the **DeleteFirewallRulesResponse** element.

### 3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>DeleteFirewallRules</b>	The input data for the <b>DeleteFirewallRules</b> WSDL operation.
<b>DeleteFirewallRulesResponse</b>	The result data for the <b>DeleteFirewallRules</b> WSDL operation.

#### 3.1.4.11.2.1 DeleteFirewallRules

The **DeleteFirewallRules** element specifies the input data for the **DeleteFirewallRules** WSDL operation.

```
<xs:element name="DeleteFirewallRules" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:DeleteFirewallRulesParameters"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

**parameters:** A **DeleteFirewallRulesParameters** (section [3.1.4.11.3.1](#)) that specifies the firewall rules to be deleted from the database application. MUST be present.

### 3.1.4.11.2.2 DeleteFirewallRulesResponse

The **DeleteFirewallRulesResponse** element specifies the result data for the **DeleteFirewallRules** WSDL operation.

```
<xs:element name="DeleteFirewallRulesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="DeleteFirewallRulesResult"
type="tns:DeleteFirewallRulesResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**DeleteFirewallRulesResult:** A **DeleteFirewallRulesResult** (section [3.1.4.11.3.3](#)) that specifies whether the operation succeeded. MUST be present.

### 3.1.4.11.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>DeleteFirewallRulesParameters</b>	Specifies the firewall rules to be deleted.
<b>DeleteFirewallRulesResult</b>	Specifies whether an error occurred on the protocol server during the operation.
<b>FirewallRulesList</b>	Specifies a list of firewall rules.

#### 3.1.4.11.3.1 DeleteFirewallRulesParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **DeleteFirewallRules** protocol operation.

```
<xs:complexType name="DeleteFirewallRulesParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="SpecifiedFirewallRules"
type="tns:FirewallRulesList"/>
      </xs:sequence>
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="DeleteOption" type="tns:DeleteFirewallRulesOption" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**SpecifiedFirewallRules:** A **FirewallRulesList** (section [3.1.4.11.3.2](#)) that specifies the firewall rules to be deleted from the database application. MUST be present if the value of **DeleteOption** is **Specified**.

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)).

**DeleteOption:** A **DeleteFirewallRulesOption** (section [2.2.5.3](#)). If the value of **DeleteOption** is **Specified**, then all the firewall rules specified by **SpecifiedFirewallRules** are deleted from the database application. If the **DeleteOption** is **All**, then all the **FirewallRules** are deleted from the database application.

### 3.1.4.11.3.2 FirewallRulesList

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies a collection of firewall rules.

```
<xs:complexType name="FirewallRulesList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FirewallRule"
      type="tns:FirewallRule"/>
  </xs:sequence>
</xs:complexType>
```

**FirewallRule:** A **FirewallRule** ([2.2.4.7](#)) that specifies a range of IP addresses from which users can connect directly to a back-end database.

### 3.1.4.11.3.3 DeleteFirewallRulesResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the result data of the **DeleteFirewallRules** protocol operation.

```
<xs:complexType name="DeleteFirewallRulesResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
          type="tns:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element MUST be nil.

### 3.1.4.11.4 Simple Types

None.

### 3.1.4.11.5 Attributes

None.

### 3.1.4.11.6 Groups

None.

### 3.1.4.11.7 Attribute Groups

None.

## 3.1.4.12 GetDataConnectivity

This operation gets information about a login in the database application, which is used to connect to the database application directly. The protocol client **MUST** call this operation only if the **IsDataConnectivitySupported** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)) in the response body of a previous call to **GetApplicationInformation** operation (section [3.1.4.4](#)) is "true".

The following is the WSDL port type specification of the **GetDataConnectivity** WSDL operation.

```
<wsdl:operation name="GetDataConnectivity" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetDataConnectivitySoapIn"/>
  <wsdl:output message="tns:GetDataConnectivitySoapOut"/>
</wsdl:operation>
```

The protocol client sends a **GetDataConnectivitySoapIn** (section [3.1.4.12.1.1](#)) request message and the protocol server responds with a **GetDataConnectivitySoapOut** (section [3.1.4.12.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server **MUST** respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server **MUST** respond with a **GetDataConnectivitySoapOut** response message that contains information about the requested login in the database application.

### 3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetDataConnectivitySoapIn</b>	The request WSDL message for the <b>GetDataConnectivity</b> WSDL operation.
<b>GetDataConnectivitySoapOut</b>	The response WSDL message for the <b>GetDataConnectivity</b> WSDL operation.

#### 3.1.4.12.1.1 GetDataConnectivitySoapIn

The request WSDL message for the **GetDataConnectivity** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/GetDataConnectivity
```

The SOAP body contains the **GetDataConnectivity** element.



### 3.1.4.12.1.2 GetDataConnectivitySoapOut

The response WSDL message for the **GetDataConnectivity** WSDL operation.

The SOAP body contains the **GetDataConnectivityResponse** element.

### 3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetDataConnectivity</b>	The input data for the <b>GetDataConnectivity</b> WSDL operation.
<b>GetDataConnectivityResponse</b>	The result data for the <b>GetDataConnectivity</b> WSDL operation.

#### 3.1.4.12.2.1 GetDataConnectivity

The **GetDataConnectivity** element specifies the input data for the **GetDataConnectivity** WSDL operation.

```
<xs:element name="GetDataConnectivity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetDataConnectivityParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetDataConnectivityParameter**, as specified by section [3.1.4.12.3.1](#).

#### 3.1.4.12.2.2 GetDataConnectivityResponse

The **GetDataConnectivityResponse** element specifies the result data for the **GetDataConnectivity** WSDL operation.

```
<xs:element name="GetDataConnectivityResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetDataConnectivityResult"
type="tns:GetDataConnectivityResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetDataConnectivityResult:** A **GetDataConnectivityResult**, as specified by section [3.1.4.12.3.2](#)

### 3.1.4.12.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>GetDataConnectivityParameters</b>	See section <a href="#">3.1.4.13.3.1</a> .

Complex type	Description
<b>GetDataConnectivityResult</b>	See section <a href="#">3.1.4.13.3.2</a> .

### 3.1.4.12.3.1 GetDataConnectivityParameters

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **GetDataConnectivity** protocol operation.

```
<xs:complexType name="GetDataConnectivityParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)).

**Permission:** A **ConnectivityPermissionLevel**, as specified by section [2.2.5.2](#). MUST be present.

### 3.1.4.12.3.2 GetDataConnectivityResult

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

The result data for the **GetDataConnectivity** WSDL operation.

```
<xs:complexType name="GetDataConnectivityResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
      <xs:attribute name="UserName" type="xs:string"/>
      <xs:attribute name="Password" type="xs:string"/>
      <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element MUST be nil.

**UserName:** Specifies the username for the logging in the database application. MUST be present.

**Password:** Specifies the password for the username. MUST be present.

**Permission:** A **ConnectivityPermissionLevel**, as specified by section [2.2.5.2](#). Specifies the permission level of the login. MUST be present.

### 3.1.4.12.4 Simple Types

None.

### 3.1.4.12.5 Attributes

None.

### 3.1.4.12.6 Groups

None.

### 3.1.4.12.7 Attribute Groups

None.

## 3.1.4.13 GetDataConnectivityStatus

This operation gets status information about logins in the database application, which are used to connect to the database application directly. The protocol client MUST call this operation only if the **IsDataConnectivitySupported** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)) in the response body of a previous call to **GetApplicationInformation** operation (section [3.1.4.4](#)) is "true".

The following is the WSDL port type specification of the **GetDataConnectivityStatus** WSDL operation.

```
<wsdl:operation name="GetDataConnectivityStatus"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetDataConnectivityStatusSoapIn"/>
  <wsdl:output message="tns:GetDataConnectivityStatusSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **GetDataConnectivityStatusSoapIn** (section [3.1.4.13.1.1](#)) request message and the protocol server responds with a **GetDataConnectivityStatusSoapOut** (section [3.1.4.13.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **GetDataConnectivityStatusSoapOut** response message that contains status information about logins in the database application.

### 3.1.4.13.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetDataConnectivityStatusSoapIn</b>	The request WSDL message for the <b>GetDataConnectivityStatus</b> WSDL operation.
<b>GetDataConnectivityStatusSoapOut</b>	The response WSDL message for the <b>GetDataConnectivityStatus</b> WSDL operation.

### 3.1.4.13.1.1 GetDataConnectivityStatusSoapIn

The request WSDL message for the **GetDataConnectivityStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/GetDataConnectivityStatus
```

The SOAP body contains the **GetDataConnectivityStatus** element.

### 3.1.4.13.1.2 GetDataConnectivityStatusSoapOut

The response WSDL message for the **GetDataConnectivityStatus** WSDL operation.

The SOAP body contains the **GetDataConnectivityStatusResponse** element.

### 3.1.4.13.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetDataConnectivityStatus</b>	The input data for the <b>GetDataConnectivityStatus</b> WSDL operation.
<b>GetDataConnectivityStatusResponse</b>	The result data for the <b>GetDataConnectivityStatus</b> WSDL operation.

#### 3.1.4.13.2.1 GetDataConnectivityStatus

The **GetDataConnectivityStatus** element specifies the input data for the **GetDataConnectivityStatus** WSDL operation.

```
<xs:element name="GetDataConnectivityStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetDataConnectivityStatusParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetDataConnectivityStatusParameters** complex type as specified in section [3.1.4.13.3.1](#). MUST be present.

#### 3.1.4.13.2.2 GetDataConnectivityStatusResponse

The **GetDataConnectivityStatusResponse** element specifies the result data for the **GetDataConnectivityStatus** WSDL operation.

```
<xs:element name="GetDataConnectivityStatusResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetDataConnectivityStatusResult"
type="tns:GetDataConnectivityStatusResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

    </xs:complexType>
  </xs:element>

```

**GetDataConnectivityStatusResult:** A **GetDataConnectivityStatusResult** complex type, as specified in section [3.1.4.13.3.2](#). MUST be present.

### 3.1.4.13.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfConnectivityStatusInformation</b>	See section <a href="#">3.1.4.13.3.3</a> .
<b>GetDataConnectivityStatusParameters</b>	See section <a href="#">3.1.4.13.3.1</a> .
<b>GetDataConnectivityStatusResult</b>	See section <a href="#">3.1.4.13.3.2</a> .

#### 3.1.4.13.3.1 GetDataConnectivityStatusParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **GetDataConnectivityStatus** protocol operation.

```

<xs:complexType name="GetDataConnectivityStatusParameters"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST be present.

#### 3.1.4.13.3.2 GetDataConnectivityStatusResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the result data of the **GetDataConnectivityStatus** protocol operation.

```

<xs:complexType name="GetDataConnectivityStatusResult"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="StatusInformations"
          type="tns:ArrayOfConnectivityStatusInformation"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
          type="tns:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```
</xs:extension>
</xs:complexContent>
</xs:complexType>
```

**StatusInformations:** An **ArrayOfConnectivityStatusInformation** complex type, as specified by section [3.1.4.13.3.3](#). MUST be present.

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element MUST be nil.

### 3.1.4.13.3.3 ArrayOfConnectivityStatusInformation

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type is a collection of **ConnectivityStatusInformation** (section [2.2.4.5](#)), which specifies the status of a login used to connect to the database application directly.

```
<xs:complexType name="ArrayOfConnectivityStatusInformation"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ConnectivityStatusInformation"
nillable="true" type="tns:ConnectivityStatusInformation"/>
  </xs:sequence>
</xs:complexType>
```

**ConnectivityStatusInformation:** A **ConnectivityStatusInformation** complex type, as specified in section 2.2.4.5. MUST be present.

### 3.1.4.13.4 Simple Types

None.

### 3.1.4.13.5 Attributes

None.

### 3.1.4.13.6 Groups

None.

### 3.1.4.13.7 Attribute Groups

None.

### 3.1.4.14 GetFirewallRules

This operation gets all the **FirewallRules** (section [2.2.4.7](#)) present in the database application. The protocol client MUST call this operation only if the **IsDataConnectivitySupported** and **IsFirewallRestricted** elements of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)) in the response body of a previous call to **GetApplicationInformation** operation (section [3.1.4.4](#)) are "true".

The following is the WSDL port type specification of the **GetFirewallRules** WSDL operation.

```
<wsdl:operation name="GetFirewallRules" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetFirewallRulesSoapIn"/>
```

```
<wsdl:output message="tns:GetFirewallRulesSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **GetFirewallRulesSoapIn** (section [3.1.4.14.1.1](#)) request message and the protocol server responds with a **GetFirewallRulesSoapOut** (section [3.1.4.14.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **GetFirewallRulesSoapOut** response message that contains information about the all the **FirewallRules** (section 2.2.4.7) present in the database application.

### 3.1.4.14.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetFirewallRulesSoapIn</b>	The request WSDL message for the <b>GetFirewallRules</b> WSDL operation.
<b>GetFirewallRulesSoapOut</b>	The response WSDL message for the <b>GetFirewallRules</b> WSDL operation.

#### 3.1.4.14.1.1 GetFirewallRulesSoapIn

The request WSDL message for the **GetFirewallRules** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/ApplicationDesignService/GetFirewallRules
```

The SOAP body contains the **GetFirewallRules** element.

#### 3.1.4.14.1.2 GetFirewallRulesSoapOut

The response WSDL message for the **GetFirewallRules** WSDL operation.

The SOAP body contains the **GetFirewallRulesResponse** element.

### 3.1.4.14.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetFirewallRules</b>	The input data for the <b>GetFirewallRules</b> WSDL operation.
<b>GetFirewallRulesResponse</b>	The result data for the <b>GetFirewallRules</b> WSDL operation.

### 3.1.4.14.2.1 GetFirewallRules

The **GetFirewallRules** element specifies the input data for the **GetFirewallRules** WSDL operation.

```
<xs:element name="GetFirewallRules" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetFirewallRulesParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetFirewallRulesParameters**, as specified by section [3.1.4.14.3.1](#). MUST be present.

### 3.1.4.14.2.2 GetFirewallRulesResponse

The **GetFirewallRulesResponse** element specifies the result data for the **GetFirewallRules** WSDL operation.

```
<xs:element name="GetFirewallRulesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetFirewallRulesResult"
type="tns:GetFirewallRulesResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetFirewallRulesResult:** A **GetFirewallRulesResult**, as specified by section [3.1.4.14.3.2](#). MUST be present.

### 3.1.4.14.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfFirewallRule</b>	See section <a href="#">3.1.4.14.3.3</a> .
<b>GetFirewallRulesParameters</b>	See section <a href="#">3.1.4.14.3.1</a>
<b>GetFirewallRulesResult</b>	See section <a href="#">3.1.4.14.3.2</a> .

#### 3.1.4.14.3.1 GetFirewallRulesParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **GetFirewallRules** protocol operation.

```
<xs:complexType name="GetFirewallRulesParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
```



```

    <xs:attribute name="ProtocolVersion" type="xs:string"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST be present.

### 3.1.4.14.3.2 GetFirewallRulesResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the result data for the **GetFirewallRulesParameters** protocol operation.

The result data specifies the information about all the **FirewallRules** (section [2.2.4.7](#)) present in the database application.

```

<xs:complexType name="GetFirewallRulesResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="FirewallRules"
type="tns:ArrayOfFirewallRule"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**FirewallRules:** An **ArrayOfFirewallRule** complex type, as specified by section [3.1.4.14.3.3](#).

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element MUST be nil.

### 3.1.4.14.3.3 ArrayOfFirewallRule

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies a collection of **FirewallRules** (section [2.2.4.7](#)).

```

<xs:complexType name="ArrayOfFirewallRule" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FirewallRule" nillable="true"
type="tns:FirewallRule"/>
  </xs:sequence>
</xs:complexType>

```

**FirewallRule:** A **FirewallRule** complex type, as specified by section [2.2.4.7](#).

### 3.1.4.14.4 Simple Types

None.

### 3.1.4.14.5 Attributes

None.

### 3.1.4.14.6 Groups

None.

### 3.1.4.14.7 Attribute Groups

None.

## 3.1.4.15 ImportData

The **ImportData** operation triggers importing data into a table in a database application.

The following is the WSDL port type specification of the **ImportData** WSDL operation.

```
<wsdl:operation name="ImportData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:ImportDataSoapIn"/>
  <wsdl:output message="tns:ImportDataSoapOut"/>
</wsdl:operation>
```

The protocol client sends an **ImportDataSoapIn** (section [3.1.4.15.1.1](#)) request message and the protocol server responds with an **ImportDataSoapOut** (section [3.1.4.15.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, then the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with an **ImportDataSoapOut** response message that contains the number of rows inserted into the specified table.

### 3.1.4.15.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>ImportDataSoapIn</b>	The request WSDL message for the <b>ImportData</b> WSDL operation.
<b>ImportDataSoapOut</b>	The response WSDL message for the <b>ImportData</b> WSDL operation.

#### 3.1.4.15.1.1 ImportDataSoapIn

The request WSDL message for the **ImportData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/ImportData
```

The SOAP body contains the **ImportData** element.

### 3.1.4.15.1.2 ImportDataSoapOut

The response WSDL message for the **ImportData** WSDL operation.

The SOAP body contains the **ImportDataResponse** element.

### 3.1.4.15.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>ImportData</b>	The input data for the <b>ImportData</b> WSDL operation.
<b>ImportDataResponse</b>	The result data for the <b>ImportData</b> WSDL operation.

#### 3.1.4.15.2.1 ImportData

The **ImportData** element specifies the input data for the **ImportData** WSDL operation.

```
<xs:element name="ImportData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:ImportDataParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** An **ImportDataParameters** element (section [3.1.4.15.3.1](#)) that specifies the information that the protocol server needs to import. This element **MUST** be present.

#### 3.1.4.15.2.2 ImportDataResponse

The **ImportDataResponse** element specifies the result data for the **ImportData** WSDL operation.

```
<xs:element name="ImportDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="ImportDataResult"
type="tns:ImportDataResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**ImportDataResult:** An **ImportDataResult** element (section [3.1.4.15.3.2](#)) that specifies the result of the **ImportData** operation. **MUST** be present.

### 3.1.4.15.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ImportDataParameters</b>	Specifies data to import into a table.

Complex type	Description
<b>ImportDataResult</b>	Specifies the result of the import operation.

### 3.1.4.15.3.1 ImportDataParameters

#### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

Specifies the information that the protocol server needs to import data into a table.

```
<xs:complexType name="ImportDataParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Body">
          <xs:complexType mixed="true">
            <xs:sequence>
              <xs:any/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="Version" type="xs:string"/>
      <xs:attribute name="TargetObjectID" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Body:** MUST contain the XML (as defined in this section) that contains the full definition of the **fields** in the table specified by **TargetObjectID** and the data that will be imported into that table. MUST contain one **ColumnSpecification** element and one **Rows** element. MUST be present.

The **ColumnSpecification** element MUST contain one **Column** element for each field in the table specified by **TargetObjectID**. The **Column** element MUST contain the string attributes **Target**, **Name** and **Type**. The **Target** attribute specifies the name of the field. The **Name** attribute specifies an auto-generated string to refer to that field later and it SHOULD start with "C" postfixed by the number that denotes the order of the field, beginning with 0. The **Type** attribute specifies the type of the field and MUST be one of the following values.

Value	Meaning
Text	A <b>string</b> value up to 4000 characters in length.
Number	A <b>floating-point number</b> .
Yes/No	A <b>Boolean</b> value.
Currency	A monetary value.
Date/Time	A <b>datetime</b> value.
LongText	A <b>string</b> value up to max storage size specified in nvarchar <a href="#">[MSDN-TSQL-Ref]</a> data type.
Integer	An <b>integer</b> value.
Hyperlink	A hyperlink value.

The **Rows** element MUST contain one **R** element for each record that will be inserted into the table specified by **TargetObjectID**. The **R** element MUST contain one element for each field value that is not empty. The name of the element that specifies that field value MUST be same as the **Name** attribute of a **Column** element from the **ColumnSpecification** element. The value for this element MUST be the string representation of data in culture invariant format.

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST be present.

**Version:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) attribute that specifies the latest version of the object that the protocol client has cached. MUST be present. The protocol server MUST return an error unless this is the same value as the **ObjectVersion** attribute of the **AccessObject** (section [2.2.4.1](#)) element that would be returned from a call to **GetApplicationInformation** (section 3.1.4.4) in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element, where the **ID** of the **AccessObject** is the same as the **ID** of this element.

**TargetObjectID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the identifier of the table into which the protocol server imports data. **TargetObjectID** MUST be the same value as the **ID** attribute of one of the **AccessObject** elements returned by the protocol server for a call to **GetApplicationInformation** (section 3.1.4.4) in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element.

### 3.1.4.15.3.2 ImportDataResult

#### Namespace:

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the result of the import data operation.

```
<xs:complexType name="ImportDataResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
          type="tns:ServiceError"/>
      </xs:sequence>
      <xs:attribute name="RowsProcessed" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the import data operation succeeded, this element MUST be nil.

**RowsProcessed:** Specifies the number of rows that was imported into table in response to the request from the protocol client.

### 3.1.4.15.4 Simple Types

None.

### 3.1.4.15.5 Attributes

None.

### 3.1.4.15.6 Groups

None.

### 3.1.4.15.7 Attribute Groups

None.

### 3.1.4.16 RefreshLinkedTableInformation

This operation refreshes an existing **linked table** ([MS-AXL2] section 2.1.1.6) in a database application on the protocol server. The protocol server uses the **ID** attribute in the **RefreshLinkedTableInformationParameters** (section 3.1.4.16.3.1) element to identify the **linked table** ([MS-AXL2] section 2.1.1.6) in the database application, updates its definition from the source of the **linked table** ([MS-AXL2] section 2.1.1.6), and returns the updated definition to the protocol client.

The following is the WSDL port type specification of the **RefreshLinkedTableInformation** WSDL operation.

```
<wsdl:operation name="RefreshLinkedTableInformation"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:RefreshLinkedTableInformationSoapIn"/>
  <wsdl:output message="tns:RefreshLinkedTableInformationSoapOut"/>
</wsdl:operation>
```

The protocol client sends a **RefreshLinkedTableInformationSoapIn** (section 3.1.4.16.1.1) request message and the protocol server responds with a **RefreshLinkedTableInformationSoapOut** (section 3.1.4.16.1.2) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section 2.2.9.1.
- Otherwise, the protocol server MUST respond with a **RefreshLinkedTableInformationSoapOut** response message that contains information about the requested **linked table** ([MS-AXL2] section 2.1.1.6).

#### 3.1.4.16.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>RefreshLinkedTableInformationSoapIn</b>	The request WSDL message for the <b>RefreshLinkedTableInformation</b> WSDL operation.
<b>RefreshLinkedTableInformationSoapOut</b>	The response WSDL message for the <b>RefreshLinkedTableInformation</b> WSDL operation.

##### 3.1.4.16.1.1 RefreshLinkedTableInformationSoapIn

The request WSDL message for the **RefreshLinkedTableInformation** WSDL operation.

The SOAP action value is:

The SOAP body contains the **RefreshLinkedTableInformation** element.

### 3.1.4.16.1.2 RefreshLinkedTableInformationSoapOut

The response WSDL message for the **RefreshLinkedTableInformation** WSDL operation.

The SOAP body contains the **RefreshLinkedTableInformationResponse** element.

### 3.1.4.16.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>RefreshLinkedTableInformation</b>	The input data for the <b>RefreshLinkedTableInformation</b> WSDL operation.
<b>RefreshLinkedTableInformationResponse</b>	The result data for the <b>RefreshLinkedTableInformation</b> WSDL operation.

#### 3.1.4.16.2.1 RefreshLinkedTableInformation

The **RefreshLinkedTableInformation** element specifies the input data for the **RefreshLinkedTableInformation** WSDL operation.

```
<xs:element name="RefreshLinkedTableInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:RefreshLinkedTableInformationParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **RefreshLinkedTableInformationParameters** (section [3.1.4.16.3.1](#)) element that specifies the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) about which to retrieve information. MUST be present.

#### 3.1.4.16.2.2 RefreshLinkedTableInformationResponse

The **RefreshLinkedTableInformationResponse** element specifies the result data for the **RefreshLinkedTableInformation** WSDL operation.

```
<xs:element name="RefreshLinkedTableInformationResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="RefreshLinkedTableInformationResult"
type="tns:RefreshLinkedTableInformationResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**RefreshLinkedTableInformationResult:** A **RefreshLinkedTableInformationResult** (section [3.1.4.16.3.2](#)) element that specifies information about the requested **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6). MUST be present.

### 3.1.4.16.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>RefreshLinkedTableInformationParameters</b>	Specifies a table about which to retrieve information.
<b>RefreshLinkedTableInformationResult</b>	Specifies information about a table.

#### 3.1.4.16.3.1 RefreshLinkedTableInformationParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies information that identifies the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) about which the protocol client is requesting information.

```
<xs:complexType name="RefreshLinkedTableInformationParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="ID" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** token ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST be present.

**ID:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) attribute that specifies the identifier of the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) to be retrieved. **ID** MUST be the same value as the **ID** attribute of one of the **AccessObject** elements with **ObjectType** as "LinkedTable" that would be returned from a call to **GetApplicationInformation** message (section 3.1.4.4) in the **NewObjects** or **UpdatedObjects** elements of the **GetAppInfoResult** element.

#### 3.1.4.16.3.2 RefreshLinkedTableInformationResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the table about which the protocol client requested information.

```
<xs:complexType name="RefreshLinkedTableInformationResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Objects" type="tns:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```



```

    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

**Objects:** An **AccessObjectList** (section [2.2.4.3](#)) that contains the information about the requested **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6). **MUST** be present. **MUST** contain exactly one **AccessObject** element, and the **ObjectType** of that element **MUST** be "LinkedTable".

#### 3.1.4.16.4 Simple Types

None.

#### 3.1.4.16.5 Attributes

None.

#### 3.1.4.16.6 Groups

None.

#### 3.1.4.16.7 Attribute Groups

None.

### 3.1.4.17 SetDataConnectivityStatus

This operation enables or disables a login in the database application, which is used to connect to the database application directly. The protocol client **MUST** call this operation only if the **IsDataConnectivitySupported** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)) in the response body of a previous call to **GetApplicationInformation** operation (section [3.1.4.4](#)) is "true".

The following is the WSDL port type specification of the **SetDataConnectivityStatus** WSDL operation.

```

<wsdl:operation name="SetDataConnectivityStatus"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:SetDataConnectivityStatusSoapIn"/>
  <wsdl:output message="tns:SetDataConnectivityStatusSoapOut"/>
</wsdl:operation>

```

The protocol client sends a **SetDataConnectivityStatusSoapIn** (section [3.1.4.17.1.1](#)) request message and the protocol server responds with a **SetDataConnectivityStatusSoapOut** (section [3.1.4.17.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server **MUST** respond with a SOAP fault, as specified in section [2.2.9.1](#).
- Otherwise, the protocol server **MUST** respond with a **SetDataConnectivityStatusSoapOut** response message that contains information about the login which was enabled or disabled by the protocol operation.

#### 3.1.4.17.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SetDataConnectivityStatusSoapIn</b>	The request WSDL message for the <b>SetDataConnectivityStatus</b> WSDL operation.
<b>SetDataConnectivityStatusSoapOut</b>	The response WSDL message for the <b>SetDataConnectivityStatus</b> WSDL operation.

### 3.1.4.17.1.1 SetDataConnectivityStatusSoapIn

The request WSDL message for the **SetDataConnectivityStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/SetDataConnectivityStatus
```

The SOAP body contains the **SetDataConnectivityStatus** element.

### 3.1.4.17.1.2 SetDataConnectivityStatusSoapOut

The response WSDL message for the **SetDataConnectivityStatus** WSDL operation.

The SOAP body contains the **SetDataConnectivityStatusResponse** element.

### 3.1.4.17.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SetDataConnectivityStatus</b>	The input data for the <b>SetDataConnectivityStatus</b> WSDL operation.
<b>SetDataConnectivityStatusResponse</b>	The result data for the <b>SetDataConnectivityStatus</b> WSDL operation.

### 3.1.4.17.2.1 SetDataConnectivityStatus

The **SetDataConnectivityStatus** element specifies the input data for the **SetDataConnectivityStatus** WSDL operation.

```
<xs:element name="SetDataConnectivityStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:SetDataConnectivityStatusParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **SetDataConnectivityStatusParameters** (section [3.1.4.17.3.1](#)) that specifies the permission level of a login and whether it is to be enabled or disabled. **MUST** be present.

### 3.1.4.17.2.2 SetDataConnectivityStatusResponse

The **SetDataConnectivityStatusResponse** element specifies the result data for the **SetDataConnectivityStatus** WSDL operation.

```
<xs:element name="SetDataConnectivityStatusResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="SetDataConnectivityStatusResult"
        type="tns:SetDataConnectivityStatusResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**SetDataConnectivityStatusResult:** A **SetDataConnectivityStatusResult** (section [3.1.4.17.3.2](#)) that specifies whether enabling or disabling of the login with requested permission level was successful. **MUST** be present.

### 3.1.4.17.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>SetDataConnectivityStatusParameters</b>	See section <a href="#">3.1.4.17.3.1</a> .
<b>SetDataConnectivityStatusResult</b>	See section <a href="#">3.1.4.17.3.2</a> .

#### 3.1.4.17.3.1 SetDataConnectivityStatusParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **SetDataConnectivityStatus** protocol operation.

```
<xs:complexType name="SetDataConnectivityStatusParameters"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel" use="required"/>
      <xs:attribute name="IsEnabled" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). **MUST** be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). **MUST** Be present.

**Permission:** A **ConnectivityPermissionLevel** (section [2.2.5.2](#)) that specifies the permission level of the logins on the database application. **MUST** be present.

**IsEnabled:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the login is to be enabled or disabled. If the value of this element is "true", a login with permissions specified by **Permission** is enabled on the database application. If the value is "false", the login is disabled.

### 3.1.4.17.3.2 SetDataConnectivityStatusResult

#### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService

This complex type specifies the result data for the **SetDataConnectivityStatus** protocol operation.

The result data contains information about the login which is enabled or disabled by the protocol server during the execution of this operation.

```
<xs:complexType name="SetDataConnectivityStatusResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="ConnectivityStatusInformation"
type="tns:ConnectivityStatusInformation"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ConnectivityStatusInformation:** A **ConnectivityStatusInformation** (section [2.2.4.5](#)) that specifies information about the login, its permission level and if it is enabled or disabled. MUST be present.

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element MUST be nil.

### 3.1.4.17.4 Simple Types

None.

### 3.1.4.17.5 Attributes

None.

### 3.1.4.17.6 Groups

None.

### 3.1.4.17.7 Attribute Groups

None.

### 3.1.4.18 GetPackage

This operation retrieves a package that represents a database application, including its objects and data.

The following is the WSDL port type specification of the **GetPackage** WSDL operation.

```
<wsdl:operation name="GetPackage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:GetPackageSoapIn"/>
  <wsdl:output message="tns:GetPackageSoapOut"/>
</wsdl:operation>
```

</wsdl:operation>

The protocol client sends a **GetPackageSoapIn** (section [3.1.4.18.1.1](#)) request message and the protocol server responds with a **GetPackageSoapOut** (section [3.1.4.18.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **GetPackageSoapOut** response message that contains the package.

### 3.1.4.18.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetPackageSoapIn</b>	The request WSDL message for the <b>GetPackage</b> WSDL operation.
<b>GetPackageSoapOut</b>	The response WSDL message for the <b>GetPackage</b> WSDL operation.

#### 3.1.4.18.1.1 GetPackageSoapIn

The request WSDL message for the **GetPackage** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/ApplicationDesignService/GetPackage
```

The SOAP body contains the **GetPackage** element.

#### 3.1.4.18.1.2 GetPackageSoapOut

The response WSDL message for the **GetPackage** WSDL operation.

The SOAP body contains the **GetPackageResponse** element.

### 3.1.4.18.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetPackage</b>	The input data for the <b>GetPackage</b> WSDL operation.
<b>GetPackageResponse</b>	The result data for the <b>GetPackage</b> WSDL operation.

#### 3.1.4.18.2.1 GetPackage

The **GetPackage** element specifies the input data for the **GetPackage** WSDL operation.

```
<xs:element name="GetPackage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetPackageParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **GetPackageParameters** element (section [3.1.4.18.3.1](#)) that specifies the identifier of the package to retrieve. MUST be present.

### 3.1.4.18.2.2 GetPackageResponse

The **GetPackageResponse** element specifies the result data for the **GetPackage** WSDL operation.

```
<xs:element name="GetPackageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetPackageResult"
type="tns:GetPackageResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetPackageResult:** A **GetPackageResult** element (section [3.1.4.18.3.2](#)) that contains the package. MUST be present.

### 3.1.4.18.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>GetPackageParameters</b>	Specifies the identifier of the package that the protocol client is requesting.
<b>GetPackageResult</b>	Specifies the status of the package and contains the created package.

#### 3.1.4.18.3.1 GetPackageParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the identifier of the package for the protocol server to retrieve.

```
<xs:complexType name="GetPackageParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="PackageId" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** An **Access Services Protocol Version** token ([\[MS-ASDT\]](#) section 3.1.1.1). **ProtocolVersion** MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** element (section [3.1.4.4.3.2](#)). MUST be present.

**PackageId:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the identifier of the package requested by the protocol client. MUST be present.

### 3.1.4.18.3.2 GetPackageResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the status of the package specified by the **GetPackageParameters** (section [3.1.4.18.3.1](#)) element in the request from the protocol client and, if the package has been created, contains the package.

```
<xs:complexType name="GetPackageResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Status" type="tns:PackageStatus"/>
        <xs:element minOccurs="0" maxOccurs="1" name="Data" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Status:** A **PackageStatus** (section [3.1.4.18.4.1](#)) element that specifies whether the package has been created.

**Data:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the package. MUST NOT be present if the value of **Status** is **Creating**. MUST be present if the value of **Status** is **Created**. If present, MUST be a representation of a ZIP archive encoded with **base64 encoding**, as specified by [\[RFC4648\]](#) section 4. The ZIP archive, when decoded, MUST conform to the Open Packaging Conventions as specified by [\[ISO/IEC-29500-2\]](#) and the further packaging restrictions specified by [\[ISO/IEC-29500-1\]](#) section 9 and as specified by [\[MS-CSOMSPT\]](#) section 3.2.5.237.

### 3.1.4.18.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
<b>PackageStatus</b>	Specifies the status of a package that was requested by a protocol client.

#### 3.1.4.18.4.1 PackageStatus

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

Specifies the status of a package that was requested by a protocol client.

```
<xs:simpleType name="PackageStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Creating"/>
  </xs:restriction>
</xs:simpleType>
```

```

    <xs:enumeration value="Created"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **PackageStatus** simple type.

Value	Meaning
Creating	The protocol server is still creating the package.
Created	The protocol server has finished creating the package.

### 3.1.4.18.5 Attributes

None.

### 3.1.4.18.6 Groups

None.

### 3.1.4.18.7 Attribute Groups

None.

### 3.1.4.19 SetObjectReadOnly

The **SetObjectReadOnly** operation sets whether an **AccessObject** (section [2.2.4.1](#)) is read-only.

The following is the WSDL port type specification of the **SetObjectReadOnly** WSDL operation.

```

<wsdl:operation name="SetObjectReadOnly" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="tns:SetObjectReadOnlySoapIn"/>
  <wsdl:output message="tns:SetObjectReadOnlySoapOut"/>
</wsdl:operation>

```

The protocol client sends a **SetObjectReadOnlySoapIn** (section [3.1.4.19.1.1](#)) request message and the protocol server responds with a **SetObjectReadOnlySoapOut** (section [3.1.4.19.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9.1](#).
- Otherwise, the protocol server MUST respond with a **SetObjectReadOnlySoapOut** response message that contains information about whether or not the object was made read-only by the protocol operation.

### 3.1.4.19.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SetObjectReadOnlySoapIn</b>	The request WSDL message for the <b>SetObjectReadOnly</b> WSDL operation.



Message	Description
<b>SetObjectReadOnlySoapOut</b>	The response WSDL message for the <b>SetObjectReadOnly</b> WSDL operation.

### 3.1.4.19.1.1 SetObjectReadOnlySoapIn

The request WSDL message for the **SetObjectReadOnly** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService/SetObjectReadOnly
```

The SOAP body contains the **SetObjectReadOnly** element.

### 3.1.4.19.1.2 SetObjectReadOnlySoapOut

The response WSDL message for the **SetObjectReadOnly** WSDL operation.

The SOAP body contains the **SetObjectReadOnlyResponse** element.

## 3.1.4.19.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SetObjectReadOnly</b>	The input data for the <b>SetObjectReadOnly</b> WSDL operation.
<b>SetObjectReadOnlyResponse</b>	The result data for the <b>SetObjectReadOnly</b> WSDL operation.

### 3.1.4.19.2.1 SetObjectReadOnly

The **SetObjectReadOnly** element specifies the input data for the **SetObjectReadOnly** WSDL operation.

```
<xs:element name="SetObjectReadOnly" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:SetObjectReadOnlyParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameters:** A **SetObjectReadOnlyParameters** (section [3.1.4.19.3.1](#)) that specifies the object and whether it is to be read-only. MUST be present.

### 3.1.4.19.2.2 SetObjectReadOnlyResponse

The **SetObjectReadOnlyResponse** element specifies the result data for the **SetObjectReadOnly** WSDL operation.

```

<xs:element name="SetObjectReadOnlyResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="SetObjectReadOnlyResult"
type="tns:SetObjectReadOnlyResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**SetObjectReadOnlyResult:** A **SetObjectReadOnlyResult** (section [3.1.4.19.3.2](#)) that specifies whether the operation was successful. MUST be present.

### 3.1.4.19.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>SetObjectReadOnlyParameters</b>	See section <a href="#">3.1.4.19.3.1</a>
<b>SetObjectReadOnlyResult</b>	See section <a href="#">3.1.4.19.3.2</a>

#### 3.1.4.19.3.1 SetObjectReadOnlyParameters

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the input data for the **SetObjectReadOnly** protocol operation.

```

<xs:complexType name="SetObjectReadOnlyParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="ObjectName" type="xs:string"/>
      <xs:attribute name="MarkReadOnly" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.4](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.4.3.2](#)). MUST Be present.

**ObjectName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of an **AccessObject** (section [2.2.4.1](#)) to act upon.

**MarkReadOnly:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether to mark the object read-only.

#### 3.1.4.19.3.2 SetObjectReadOnlyResult

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService>

This complex type specifies the result data for the **SetObjectReadOnly** protocol operation.

The result data contains information about whether or not the object was made read only by the protocol server during the execution of this operation.

```
<xs:complexType name="SetObjectReadOnlyResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
      <xs:attribute name="IsReadOnly" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** A **ServiceError** element (section [2.2.4.12](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element **MUST** be nil.

**IsReadOnly:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the object is read-only.

#### **3.1.4.19.4 Simple Types**

None.

#### **3.1.4.19.5 Attributes**

None.

#### **3.1.4.19.6 Groups**

None.

#### **3.1.4.19.7 Attribute Groups**

None.

#### **3.1.5 Timer Events**

None.

#### **3.1.6 Other Local Events**

None.

## 4 Protocol Examples

### 4.1 Use CreateAccessObject to create a Table in a database application

This example describes how to use **CreateAccessObject**, as described in section [3.1.4.1](#), to create a Table in a database application.

The protocol client sends the following message to the protocol server using an **HTTP POST** to [http://www.example.com/exampleapplication/\\_vti\\_bin/acscvc/ApplicationDesignService.asmx](http://www.example.com/exampleapplication/_vti_bin/acscvc/ApplicationDesignService.asmx) to create a table. In this example, the protocol client requests the creation of a table called "Contacts" with an "ID" field, a "First Name" field, a "Last Name" field, and a "Phone" field. The **Body** element, as defined in section [3.1.4.1.3.1](#), contains the schema for the table.

```
<?xml version="1.0" encoding="UTF-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:soap12="http://www.w3.org/2003/05/soap-
envelope">
  <soap12:Body>
    <CreateAccessObject
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/ApplicationDesig
nService">
      <parameters ProtocolVersion="15.0.24.0" Name="Contacts" Description=""
ObjectType="Table">
        <Body>
          <Schema Namespace="Access.Store"
xmlns="http://schemas.microsoft.com/ado/2008/09/edm"
xmlns:axl="http://schemas.microsoft.com/office/accessservices/2010/12/application">
            <EntityContainer Name="AccessStoreContainer">
              <EntityType Name="Contacts" EntityType="Access.Store.Contacts"/>
            </EntityContainer>
            <EntityType Name="Contacts">
              <Key>
                <PropertyRef Name="ID"/>
              </Key>
              <Property Name="ID" Type="Int32" axl:StoreGeneratedPattern="Identity"
Nullable="false"/>
              <Property Name="First Name" Type="String" Unicode="true"
axl:TextType="SingleLine" MaxLength="220"/>
              <Property Name="Last Name" Type="String" Unicode="true"
axl:TextType="SingleLine" MaxLength="220"/>
              <Property Name="Phone" Type="String" Unicode="true" axl:TextType="SingleLine"
MaxLength="220"/>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterInsert"/>
              </axl:EventDataMacro>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterUpdate"/>
              </axl:EventDataMacro>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterDelete"/>
              </axl:EventDataMacro>
            </EntityType>
          </Schema>
        </Body>
      </parameters>
    </CreateAccessObject>
  </soap12:Body>
</soap12:Envelope>
```

The protocol server responds with the following message:

```
<?xml version="1.0" encoding="utf-8"?>
```

```

<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <CreateAccessObjectResponse
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService">
      <CreateAccessObjectResult>
        <Warning xsi:nil="true" />
        <Objects>
          <AccessObject xsi:type="Table" ID="2" Name="Contacts" ObjectType="Table"
Description="" Version="2011-11-17T02:18:56.4500000">
            <ParentId xsi:nil="true" />
            <Definition>
              <Schema Namespace="Access.Store"
xmlns="http://schemas.microsoft.com/ado/2008/09/edm"
xmlns:axl="http://schemas.microsoft.com/office/accessservices/2010/12/application">
                <EntityContainer Name="AccessStoreContainer">
                  <EntitySet Name="Contacts" EntityType="Access.Store.Contacts"/>
                </EntityContainer>
                <EntityType Name="Contacts">
                  <Key>
                    <PropertyRef Name="ID"/>
                  </Key>
                  <Property Name="ID" Type="Int32" axl:ObjectId="ID" Nullable="false"
axl:StoreGeneratedPattern="Identity"/>
                  <Property Name="First Name" Type="String" axl:ObjectId="First Name"
Unicode="true" axl:TextType="SingleLine" MaxLength="220"/>
                  <Property Name="Last Name" Type="String" axl:ObjectId="Last Name"
Unicode="true" axl:TextType="SingleLine" MaxLength="220"/>
                  <Property Name="Phone" Type="String" axl:ObjectId="Phone" Unicode="true"
axl:TextType="SingleLine" MaxLength="220"/>
                  <axl:EventDataMacro>
                    <axl:DataMacro Event="AfterInsert"/>
                  </axl:EventDataMacro>
                  <axl:EventDataMacro>
                    <axl:DataMacro Event="AfterUpdate"/>
                  </axl:EventDataMacro>
                  <axl:EventDataMacro>
                    <axl:DataMacro Event="AfterDelete"/>
                  </axl:EventDataMacro>
                </EntityType>
              </Schema>
            </Definition>
          </AccessObject>
        </Objects>
        <RefreshRequired>>false</RefreshRequired>
      </CreateAccessObjectResult>
    </CreateAccessObjectResponse>
  </soap:Body>
</soap:Envelope>

```

In this example, the protocol server responds with an **AccessObject**, as defined in section [2.2.4.1](#). The **ID** attribute uniquely identifies this object within the database application. The **Version** attribute uniquely identifies this version of the object. The **Definition** element contains the schema for the table that was created by the protocol server. The **ID** and **Version** are used by the protocol client when it sends an **UpdateAccessObject** request, as described in section [3.1.4.8](#). See section [4.2](#) for an example of **UpdateAccessObject**.

## 4.2 Use UpdateAccessObject to update a Table in a database application

This example describes how to use **UpdateAccessObject**, as described in section [3.1.4.8](#), to update a table in a database application.

The protocol client sends the following message to the protocol server using an HTTP POST to [http://www.example.com/exampleapplication/\\_vti\\_bin/accsvc/ApplicationDesignService.asmx](http://www.example.com/exampleapplication/_vti_bin/accsvc/ApplicationDesignService.asmx) to update the table. In this example, the protocol client requests the update of a table named "Contacts". The protocol client is adding a "Birthday" field to the Contacts table.

The **ID** attribute equals the "2", which is the identity of this object on the protocol server. The **ObjectVersion** attribute contains the version of this object. **ID** and **ObjectVersion** are returned by the protocol server as part of the response to requests such as **CreateAccessObject**, **GetAccessObject**, or **GetApplicationInformation**. An example of **CreateAccessObject** can be found in section [4.1](#).

The element **Body**, as defined in section [3.1.4.8.3.1](#), contains the schema for the table including the new "Birthday" field. The **axl:ObjectId** attribute is used to uniquely identify the fields within this table. Existing fields such as "First Name" include an **axl:ObjectId** attribute, and new fields such as "Birthday" do not. The **axl:ObjectId** attribute is returned as part of the response to requests such as **CreateAccessObject**, **GetAccessObject**, or **GetApplicationInformation**.

```
<?xml version="1.0" encoding="UTF-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:soap12="http://www.w3.org/2003/05/soap-
envelope">
  <soap12:Body>
    <UpdateAccessObject
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesig
nService">
      <parameters ProtocolVersion="15.0.24.0" ID="2" ObjectVersion="2011-11-
17T02:18:56.4500000" Name="Contacts" Description="">
        <Body>
          <Schema Namespace="Access.Store"
xmlns="http://schemas.microsoft.com/ado/2008/09/edm"
xmlns:axl="http://schemas.microsoft.com/office/accessservices/2010/12/application">
            <EntityContainer Name="AccessStoreContainer">
              <EntitySet Name="Contacts" EntityType="Access.Store.Contacts"/>
            </EntityContainer>
            <EntityType Name="Contacts">
              <Key>
                <PropertyRef Name="ID"/>
              </Key>
              <Property Name="ID" Type="Int32" axl:StoreGeneratedPattern="Identity"
axl:ObjectId="ID" Nullable="false"/>
              <Property Name="First Name" Type="String" Unicode="true"
axl:TextType="SingleLine" axl:ObjectId="First Name" MaxLength="220"/>
              <Property Name="Last Name" Type="String" Unicode="true"
axl:TextType="SingleLine" axl:ObjectId="Last Name" MaxLength="220"/>
              <Property Name="Phone" Type="String" Unicode="true" axl:TextType="SingleLine"
axl:ObjectId="Phone" MaxLength="220"/>
              <Property Name="Birthday" Type="DateTime" axl:UnderlyingType="Date"
axl:Format="Short Date"/>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterInsert"/>
              </axl:EventDataMacro>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterUpdate"/>
              </axl:EventDataMacro>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterDelete"/>
              </axl:EventDataMacro>
            </EntityType>
          </Schema>
        </Body>
      </parameters>
    </UpdateAccessObject>
  </soap12:Body>
</soap12:Envelope>
```

The protocol server responds with the following message:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <UpdateAccessObjectResponse
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/ApplicationDesignService">
      <UpdateAccessObjectResult>
        <Warning xsi:nil="true" />
        <Objects>
          <AccessObject xsi:type="Table" ID="2" Name="Contacts" ObjectType="Table"
Description="" Version="2011-11-17T02:28:41.7300000">
            <ParentId xsi:nil="true" />
            <Definition>
              <Schema Namespace="Access.Store"
xmlns="http://schemas.microsoft.com/ado/2008/09/edm"
xmlns:axl="http://schemas.microsoft.com/office/accessservices/2010/12/application">
                <EntityContainer Name="AccessStoreContainer">
                  <EntitySet Name="Contacts" EntityType="Access.Store.Contacts"/>
                </EntityContainer>
                <EntityType Name="Contacts">
                  <Key>
                    <PropertyRef Name="ID"/>
                  </Key>
                  <Property Name="ID" Type="Int32" axl:ObjectId="ID" Nullable="false"
axl:StoreGeneratedPattern="Identity"/>
                  <Property Name="First Name" Type="String" axl:ObjectId="First Name"
Unicode="true" axl:TextType="SingleLine" MaxLength="220"/>
                  <Property Name="Last Name" Type="String" axl:ObjectId="Last Name"
Unicode="true" axl:TextType="SingleLine" MaxLength="220"/>
                  <Property Name="Phone" Type="String" axl:ObjectId="Phone" Unicode="true"
axl:TextType="SingleLine" MaxLength="220"/>
                  <Property Name="Birthday" Type="DateTime" axl:ObjectId="Birthday"
axl:UnderlyingType="Date" axl:Format="Short Date"/>
                  <axl:EventDataMacro>
                    <axl:DataMacro Event="AfterInsert"/>
                  </axl:EventDataMacro>
                  <axl:EventDataMacro>
                    <axl:DataMacro Event="AfterUpdate"/>
                  </axl:EventDataMacro>
                  <axl:EventDataMacro>
                    <axl:DataMacro Event="AfterDelete"/>
                  </axl:EventDataMacro>
                </EntityType>
              </Schema>
            </Definition>
          </AccessObject>
        </Objects>
        <Error xsi:nil="true" />
        <RefreshRequired>>false</RefreshRequired>
      </UpdateAccessObjectResult>
    </UpdateAccessObjectResponse>
  </soap:Body>
</soap:Envelope>
```

In this example, the protocol server responds with an **AccessObject**, as defined in section [2.2.4.1](#). The **Version** attribute is updated to reflect the latest version of the object. The **Definition** element contains the updated schema for the table. Notice that the Birthday field now has an **axl:ObjectId** attribute.

### 4.3 Use `GetApplicationInformation` to retrieve information about a database application from the protocol server

This example describes how to use `GetApplicationInformation`, as described in section [3.1.4.4](#), to retrieve the information about a database application from the protocol server.

The protocol client sends the following message to the protocol server using an HTTP POST to `http://www.example.com/exampleapplication/_vti_bin/accsvc/ApplicationDesignService.asmx` to retrieve information about the database application. In this example, the protocol client has previously retrieved information about the database application, so the **KnownObjects** element in the message includes the list of objects that have previously been retrieved. For each of these objects, an **ObjectIdentity** element with an **ID** and **Version** attribute are included in the message. **ID** and **Version** are returned by the protocol server as part of the response to requests such as **CreateAccessObject**, **GetAccessObject**, or **GetApplicationInformation**.

```
<?xml version="1.0" encoding="UTF-8"?>
<soap12:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:soap12="http://www.w3.org/2003/05/soap-
envelope">
  <soap12:Body>
    <GetApplicationInformation
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesig
nService">
      <parameters>
        <ProtocolVersionOptions>
          <ProtocolVersion>15.0.24.0</ProtocolVersion>
        </ProtocolVersionOptions>
        <KnownObjects>
          <ObjectIdentity ID="2" Version="2011-11-17T06:08:49.4330000" />
          <ObjectIdentity ID="1" Version="2011-11-17T06:08:11.2030000" />
          <ObjectIdentity ID="4" Version="2011-11-17T06:10:46.6058200" />
          <ObjectIdentity ID="3" Version="2011-11-17T06:10:45.5433200" />
        </KnownObjects>
      </parameters>
    </GetApplicationInformation>
  </soap12:Body>
</soap12:Envelope>
```

The protocol server responds with the following message:

```
<?xml version="1.0" encoding="utf-8"?><soap:Envelope
xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetApplicationInformationResponse
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationD
esignService">
      <GetApplicationInformationResult ProtocolVersion="15.0.24.0"
Name="exampleapplication" DatabaseName="ACCESS_EF43A3CE7B8F4250824F39A2E0DBF3C5"
DataServerName="example.com" ApplicationCulture="en-US"
RequestIPAddress="2001:4898:0:fff:0:5efe:172.18.168.80" IsDataMacroTracingOn="false"
IsFirewallRestricted="true" IsDataConnectivitySupported="false">
        <Warning xsi:nil="true" />
        <Collation Culture="en-US" CaseSensitive="false" AccentSensitive="true"
KanaSensitive="true" WidthSensitive="true" UseSupplementaryCharacters="true" />
        <NewObjects>
          <AccessObject xsi:type="Form" ID="5" Name="Contacts PreviewDatasheet"
ObjectType="Form" Description="" Version="2011-11-17T06:10:47.6526950">
            <ParentId xsi:nil="true" />
            <Definition>
              <FormDef
xmlns="http://schemas.microsoft.com/office/accessservices/2010/12/application">
                <Html>
```



```

        &lt;?xml version="1.0" encoding="UTF-8"?&gt;
        . . . . . content omitted from the example . . . . .
        &lt;/html&gt;
    </Html>
</FormDef>
</Definition>
</AccessObject>
    <AccessObject xsi:type="Form" ID="6" Name="_AppHomeForm" ObjectType="Form"
Description="" Version="2011-11-17T06:11:54.6683200">
    <ParentId xsi:nil="true" />
    <Definition>
    <FormDef
xmlns="http://schemas.microsoft.com/office/accessservices/2010/12/application">
    <Html>
        &lt;?xml version="1.0" encoding="UTF-8"?&gt;
        . . . . . content omitted from the example . . . . .
        &lt;/html&gt;
    </Html>
    </FormDef>
    </Definition>
</AccessObject>
</NewObjects>
<UpdatedObjects />
<DeletedObjects />
</GetApplicationInformationResult>
</GetApplicationInformationResponse>
</soap:Body>
</soap:Envelope>

```

In this example, the protocol server responds with additional information about the application. There are two forms that the protocol client had not retrieved information about previously, so the **NewObjects** element contains an **AccessObject** element (as defined in section [2.2.4.1](#)) for each of those Form objects. The **Definition** element of each **AccessObject** element contains the definition of the form (in the preceding example SOAP message, the declaration of each form has been omitted to aid the clarity of the example).

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.

## 6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdl:definitions xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"
xmlns:http="http://schemas.xmlsoap.org/wsdl/http/"
xmlns:sl="http://microsoft.com/wsdl/types/"
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService">
      <xs:import namespace="http://microsoft.com/wsdl/types/" />
      <xs:element name="GetApplicationInformation">
        <xs:complexType>
          <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetApplicationInformationParameters" />
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:complexType name="GetApplicationInformationParameters">
        <xs:complexContent mixed="false">
          <xs:extension base="tns:ServiceParameters">
            <xs:sequence>
              <xs:element minOccurs="0" maxOccurs="1" name="ProtocolVersionOptions"
type="tns:ProtocolVersionList" />
              <xs:element minOccurs="0" maxOccurs="1" name="KnownObjects"
type="tns:ObjectIdentityList" />
            </xs:sequence>
          </xs:extension>
        </xs:complexContent>
      </xs:complexType>
      <xs:complexType name="ServiceParameters">
        <xs:complexType name="ProtocolVersionList">
          <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="unbounded" name="ProtocolVersion"
type="xs:string" />
          </xs:sequence>
        </xs:complexType>
      </xs:complexType>
      <xs:complexType name="ObjectIdentityList">
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="unbounded" name="ObjectIdentity"
type="tns:AccessObjectIdentity" />
        </xs:sequence>
      </xs:complexType>
      <xs:complexType name="AccessObjectIdentity">
        <xs:attribute name="ID" type="xs:int" use="required" />
        <xs:attribute name="Version" type="xs:string" />
      </xs:complexType>
      <xs:element name="GetApplicationInformationResponse">
        <xs:complexType>
          <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="GetApplicationInformationResult"
type="tns:GetAppInfoResult" />
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:complexType name="GetAppInfoResult">
        <xs:complexContent mixed="false">
          <xs:extension base="tns:ServiceResult">
            <xs:sequence>
```

```

        <xs:element minOccurs="0" maxOccurs="1" name="Collation" type="tns:Collation"/>
        <xs:element minOccurs="0" maxOccurs="1" name="NewObjects"
type="tns:AccessObjectList"/>
        <xs:element minOccurs="0" maxOccurs="1" name="UpdatedObjects"
type="tns:AccessObjectList"/>
        <xs:element minOccurs="0" maxOccurs="1" name="DeletedObjects"
type="tns:IDList"/>
    </xs:sequence>
    <xs:attribute name="ProtocolVersion" type="xs:string"/>
    <xs:attribute name="Name" type="xs:string"/>
    <xs:attribute name="AlternateUrl" type="xs:string"/>
    <xs:attribute name="Title" type="xs:string"/>
    <xs:attribute name="DatabaseName" type="xs:string"/>
    <xs:attribute name="DataServerName" type="xs:string"/>
    <xs:attribute name="ApplicationCulture" type="xs:string"/>
    <xs:attribute name="RequestIPAddress" type="xs:string"/>
    <xs:attribute name="IsDataMacroTracingOn" type="xs:boolean" use="required"/>
    <xs:attribute name="IsUserConnectionAllowed" type="xs:boolean" use="required"/>
    <xs:attribute name="IsFirewallRestricted" type="xs:boolean" use="required"/>
    <xs:attribute name="IsDataConnectivitySupported" type="xs:boolean"
use="required"/>
    <xs:attribute name="IsSendEmailSupported" type="xs:boolean" use="required"/>
    <xs:attribute name="PackageAppTitle" type="xs:string"/>
    <xs:attribute name="PackageAppVersion" type="xs:string"/>
    <xs:attribute name="PackageIsLocked" type="xs:boolean" use="required"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="ServiceResult">
    <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Warning" nillable="true"
type="tns:ServiceWarning"/>
    </xs:sequence>
</xs:complexType>
<xs:complexType name="ServiceWarning">
    <xs:attribute name="Code" type="xs:string"/>
    <xs:attribute name="Message" type="xs:string"/>
</xs:complexType>
<xs:complexType name="Collation">
    <xs:attribute name="Culture" type="xs:string"/>
    <xs:attribute name="CaseSensitive" type="xs:boolean"/>
    <xs:attribute name="AccentSensitive" type="xs:boolean"/>
    <xs:attribute name="KanaSensitive" type="xs:boolean"/>
    <xs:attribute name="WidthSensitive" type="xs:boolean"/>
    <xs:attribute name="UseSupplementaryCharacters" type="xs:boolean" use="required"/>
</xs:complexType>
<xs:complexType name="AccessObjectList">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessObject"
type="tns:AccessObject"/>
    </xs:sequence>
</xs:complexType>
<xs:complexType name="AccessObject">
    <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="ParentId" nillable="true"
type="xs:int"/>
        <xs:element minOccurs="1" maxOccurs="1" name="Definition" nillable="true">
            <xs:complexType mixed="true">
                <xs:sequence>
                    <xs:any/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
    <xs:attribute name="ID" type="xs:int" use="required"/>
    <xs:attribute name="Name" type="xs:string"/>
    <xs:attribute name="ObjectType" type="tns:AccessObjectType" use="required"/>
    <xs:attribute name="Description" type="xs:string"/>
    <xs:attribute name="Version" type="xs:string"/>

```

```

</xs:complexType>
<xs:simpleType name="AccessObjectType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unknown"/>
    <xs:enumeration value="Table"/>
    <xs:enumeration value="Query"/>
    <xs:enumeration value="DataMacro"/>
    <xs:enumeration value="Form"/>
    <xs:enumeration value="UIMacro"/>
    <xs:enumeration value="Report"/>
    <xs:enumeration value="Image"/>
    <xs:enumeration value="NavigationPane"/>
    <xs:enumeration value="AccessProperties"/>
    <xs:enumeration value="ApplicationVersion"/>
    <xs:enumeration value="ApplicationLogic"/>
    <xs:enumeration value="ApplicationStyle"/>
    <xs:enumeration value="LinkedTable"/>
    <xs:enumeration value="EmbeddedExpression"/>
    <xs:enumeration value="LinkedQuery"/>
    <xs:enumeration value="NavBarSettings"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="NavBarSettingsObject">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="LinkedTable">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="DataMacro">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="Query">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="Table">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="AccessStorageObject" abstract="true">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="Form">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessStorageObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="UIMacro">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessStorageObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="EmbeddedExpression">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:AccessStorageObject"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="IDList">
  <xs:sequence>

```

```

        <xs:element minOccurs="0" maxOccurs="unbounded" name="ID" type="xs:int"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="GetAccessObject">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="ID" type="xs:int" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetAccessObjectResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="GetAccessObjectResult"
type="tns:GetResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Objects"
type="tns:AccessObjectList"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CreateAccessObject">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:CreateParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="CreateParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="ParameterObjects"
type="tns:ParameterObjectList"/>
            </xs:sequence>
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="ParameterObjectList">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterObject"
type="tns:ParameterObject"/>
    </xs:sequence>
</xs:complexType>
<xs:complexType name="ParameterObject">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="Body">
            <xs:complexType mixed="true">
                <xs:sequence>
                    <xs:any/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>

```

```

        </xs:complexType>
    </xs:element>
</xs:sequence>
<xs:attribute name="Name" type="xs:string"/>
<xs:attribute name="Description" type="xs:string"/>
<xs:attribute name="ObjectType" type="tns:AccessObjectType" use="required"/>
</xs:complexType>
<xs:element name="CreateAccessObjectResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="CreateAccessObjectResult"
type="tns:CreateResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="CreateResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Objects"
type="tns:AccessObjectList"/>
                <xs:element minOccurs="1" maxOccurs="1" name="RefreshRequired"
type="xs:boolean"/>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="ServiceError">
    <xs:attribute name="Code" type="xs:string"/>
    <xs:attribute name="Message" type="xs:string"/>
    <xs:attribute name="CorrelationId" type="xs:string"/>
    <xs:attribute name="Timestamp" type="xs:string"/>
</xs:complexType>
<xs:element name="RenameAccessObject">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:RenameParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="RenameParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="KnownObjects"
type="tns:ObjectIdentityList"/>
                <xs:element minOccurs="0" maxOccurs="1" name="OpenObjects"
type="tns:ObjectIdentityList"/>
            </xs:sequence>
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="ID" type="xs:int" use="required"/>
            <xs:attribute name="ObjectVersion" type="xs:string"/>
            <xs:attribute name="Name" type="xs:string"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
</xs:complexType>
<xs:element name="RenameAccessObjectResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="RenameAccessObjectResult"
type="tns:RenameResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="RenameResult">
    <xs:complexContent mixed="false">

```

```

        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="AccessObject"
type="tns:AccessObject"/>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
                <xs:element minOccurs="1" maxOccurs="1" name="UpdatedObjects" nillable="true"
type="tns:AccessObjectList"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateAccessObject">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:UpdateParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="UpdateParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Body">
                    <xs:complexType mixed="true">
                        <xs:sequence>
                            <xs:any/>
                        </xs:sequence>
                    </xs:complexType>
                </xs:element>
                <xs:element minOccurs="0" maxOccurs="1" name="KnownObjects"
type="tns:ObjectIdentityList"/>
                <xs:element minOccurs="0" maxOccurs="1" name="OpenObjects"
type="tns:ObjectIdentityList"/>
            </xs:sequence>
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="ID" type="xs:int" use="required"/>
            <xs:attribute name="ObjectVersion" type="xs:string"/>
            <xs:attribute name="Description" type="xs:string"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateAccessObjectResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="UpdateAccessObjectResult"
type="tns:UpdateResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="UpdateResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Objects"
type="tns:AccessObjectList"/>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
                <xs:element minOccurs="1" maxOccurs="1" name="RefreshRequired"
type="xs:boolean"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteAccessObject">
    <xs:complexType>
        <xs:sequence>

```



```

        <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:DeleteParameters"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:complexType name="DeleteParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="ID" type="xs:int" use="required"/>
            <xs:attribute name="ObjectVersion" type="xs:string"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteAccessObjectResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="DeleteAccessObjectResult"
type="tns:DeleteResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="DeleteResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
                <xs:element minOccurs="0" maxOccurs="1" name="AccessObject"
type="tns:AccessObject"/>
            </xs:sequence>
            <xs:attribute name="ID" type="xs:int" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CreatePackage">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:CreatePackageParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="CreatePackageParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="Title" type="xs:string"/>
            <xs:attribute name="Data" type="xs:boolean" use="required"/>
            <xs:attribute name="AppVersion" type="xs:string"/>
            <xs:attribute name="IsLocked" type="xs:boolean" use="required"/>
            <xs:attribute name="Option" type="tns:PackagingOption" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:simpleType name="PackagingOption">
    <xs:restriction base="xs:string">
        <xs:enumeration value="New"/>
        <xs:enumeration value="Snapshot"/>
        <xs:enumeration value="Deployment"/>
    </xs:restriction>
</xs:simpleType>
<xs:element name="CreatePackageResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="CreatePackageResult"
type="tns:CreatePackageResult"/>
        </xs:sequence>
    </xs:complexType>

```

```

</xs:element>
<xs:complexType name="CreatePackageResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="PackageId" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetPackage">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetPackageParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:complexType name="GetPackageParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="PackageId" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetPackageResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="GetPackageResult"
type="tns:GetPackageResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:complexType name="GetPackageResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Status"
type="tns:PackageStatus"/>
        <xs:element minOccurs="0" maxOccurs="1" name="Data" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="PackageStatus">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Creating"/>
    <xs:enumeration value="Created"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SetDataMacroTracing">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:SetDataMacroTracingParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:complexType name="SetDataMacroTracingParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="TurnTracingOn" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="SetDataMacroTracingResponse">
  <xs:complexType>

```

```

        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="SetDataMacroTracingResult"
type="tns:SetDataMacroTracingResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="SetDataMacroTracingResult">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
          <xs:attribute name="IsTracingOn" type="xs:boolean" use="required"/>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="SetObjectReadOnly">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:SetObjectReadOnlyParameters"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="SetObjectReadOnlyParameters">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
          <xs:attribute name="ProtocolVersion" type="xs:string"/>
          <xs:attribute name="ObjectName" type="xs:string"/>
          <xs:attribute name="MarkReadOnly" type="xs:boolean" use="required"/>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="SetObjectReadOnlyResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="SetObjectReadOnlyResult"
type="tns:SetObjectReadOnlyResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="SetObjectReadOnlyResult">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
          <xs:sequence>
            <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
          </xs:sequence>
          <xs:attribute name="IsReadOnly" type="xs:boolean" use="required"/>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="GetLinkedTableInformation">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetLinkedTableInformationParameters"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetLinkedTableInformationParameters">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
          <xs:attribute name="ProtocolVersion" type="xs:string"/>
          <xs:attribute name="ListID" type="sl:guid" use="required"/>
          <xs:attribute name="SiteUrl" type="xs:string"/>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="GetLinkedTableInformationResponse">
      <xs:complexType>
        <xs:sequence>

```

```

        <xs:element minOccurs="0" maxOccurs="1" name="GetLinkedTableInformationResult"
type="tns:GetLinkedTableInformationResult"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:complexType name="GetLinkedTableInformationResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Objects"
type="tns:AccessObjectList"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="RefreshLinkedTableInformation">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:RefreshLinkedTableInformationParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="RefreshLinkedTableInformationParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="ID" type="xs:int" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="RefreshLinkedTableInformationResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1"
name="RefreshLinkedTableInformationResult" type="tns:RefreshLinkedTableInformationResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="RefreshLinkedTableInformationResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Objects"
type="tns:AccessObjectList"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="ImportData">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:ImportDataParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="ImportDataParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="Body">
                    <xs:complexType mixed="true">
                        <xs:sequence>
                            <xs:any/>
                        </xs:sequence>
                    </xs:complexType>
                </xs:element>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
</xs:sequence>

```

```

        <xs:attribute name="ProtocolVersion" type="xs:string"/>
        <xs:attribute name="Version" type="xs:string"/>
        <xs:attribute name="TargetObjectID" type="xs:int" use="required"/>
    </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="ImportDataResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="ImportDataResult"
type="tns:ImportDataResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="ImportDataResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
            </xs:sequence>
            <xs:attribute name="RowsProcessed" type="xs:int" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SetDataConnectivityStatus">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:SetDataConnectivityStatusParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="SetDataConnectivityStatusParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
            <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel"
use="required"/>
            <xs:attribute name="IsEnabled" type="xs:boolean" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:simpleType name="ConnectivityPermissionLevel">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Reader"/>
        <xs:enumeration value="Writer"/>
    </xs:restriction>
</xs:simpleType>
<xs:element name="SetDataConnectivityStatusResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="SetDataConnectivityStatusResult"
type="tns:SetDataConnectivityStatusResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="SetDataConnectivityStatusResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="ConnectivityStatusInformation"
type="tns:ConnectivityStatusInformation"/>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

```

    <xs:complexType name="ConnectivityStatusInformation">
      <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel"
use="required"/>
      <xs:attribute name="IsEnabled" type="xs:boolean" use="required"/>
    </xs:complexType>
    <xs:element name="GetDataConnectivityStatus">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetDataConnectivityStatusParameters"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetDataConnectivityStatusParameters">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
          <xs:attribute name="ProtocolVersion" type="xs:string"/>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="GetDataConnectivityStatusResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="GetDataConnectivityStatusResult"
type="tns:GetDataConnectivityStatusResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetDataConnectivityStatusResult">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
          <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="StatusInformations"
type="tns:ArrayOfConnectivityStatusInformation"/>
            <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
          </xs:sequence>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:complexType name="ArrayOfConnectivityStatusInformation">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded"
name="ConnectivityStatusInformation" nillable="true"
type="tns:ConnectivityStatusInformation"/>
      </xs:sequence>
    </xs:complexType>
    <xs:element name="GetDataConnectivity">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetDataConnectivityParameters"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetDataConnectivityParameters">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
          <xs:attribute name="ProtocolVersion" type="xs:string"/>
          <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel"
use="required"/>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="GetDataConnectivityResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" maxOccurs="1" name="GetDataConnectivityResult"
type="tns:GetDataConnectivityResult"/>

```

```

        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetDataConnectivityResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
            </xs:sequence>
            <xs:attribute name="UserName" type="xs:string"/>
            <xs:attribute name="Password" type="xs:string"/>
            <xs:attribute name="Permission" type="tns:ConnectivityPermissionLevel"
use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetFirewallRules">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:GetFirewallRulesParameters"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetFirewallRulesParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceParameters">
            <xs:attribute name="ProtocolVersion" type="xs:string"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetFirewallRulesResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="GetFirewallRulesResult"
type="tns:GetFirewallRulesResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetFirewallRulesResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" maxOccurs="1" name="FirewallRules"
type="tns:ArrayOfFirewallRule"/>
                <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="ArrayOfFirewallRule">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="FirewallRule" nillable="true"
type="tns:FirewallRule"/>
    </xs:sequence>
</xs:complexType>
<xs:complexType name="FirewallRule">
    <xs:attribute name="StartIPAddress" type="xs:string"/>
    <xs:attribute name="EndIPAddress" type="xs:string"/>
</xs:complexType>
<xs:element name="AddFirewallRule">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns:AddFirewallRuleParameters"/>
        </xs:sequence>
    </xs:complexType>

```

```

</xs:element>
<xs:complexType name="AddFirewallRuleParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="StartIPAddress" type="xs:string"/>
      <xs:attribute name="EndIPAddress" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AddFirewallRuleResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="AddFirewallRuleResult"
type="tns:AddFirewallRuleResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:complexType name="AddFirewallRuleResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
      </xs:sequence>
      <xs:attribute name="RuleName" type="xs:string"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteFirewallRules">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="parameters"
type="tns>DeleteFirewallRulesParameters"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:complexType name="DeleteFirewallRulesParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="1" name="SpecifiedFirewallRules"
type="tns:FirewallRulesList"/>
      </xs:sequence>
      <xs:attribute name="ProtocolVersion" type="xs:string"/>
      <xs:attribute name="DeleteOption" type="tns>DeleteFirewallRulesOption"
use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="FirewallRulesList">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FirewallRule"
type="tns:FirewallRule"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="DeleteFirewallRulesOption">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Specified"/>
    <xs:enumeration value="All"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="DeleteFirewallRulesResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="1" name="DeleteFirewallRulesResult"
type="tns>DeleteFirewallRulesResult"/>
    </xs:sequence>
  </xs:complexType>

```



```

    </xs:element>
    <xs:complexType name="DeleteFirewallRulesResult">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:ServiceResult">
          <xs:sequence>
            <xs:element minOccurs="1" maxOccurs="1" name="Error" nillable="true"
type="tns:ServiceError"/>
          </xs:sequence>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
  </xs:schema>
  <xs:schema elementFormDefault="qualified"
targetNamespace="http://microsoft.com/wsdl/types/">
    <xs:simpleType name="guid">
      <xs:restriction base="xs:string">
        <xs:pattern value="[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-
9a-fA-F]{12}"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:schema>
</wsdl:types>
<wsdl:portType name="ApplicationDesignServiceSoap">
  <wsdl:operation name="GetApplicationInformation">
    <wsdl:input message="tns:GetApplicationInformationSoapIn"/>
    <wsdl:output message="tns:GetApplicationInformationSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="GetAccessObject">
    <wsdl:input message="tns:GetAccessObjectSoapIn"/>
    <wsdl:output message="tns:GetAccessObjectSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="CreateAccessObject">
    <wsdl:input message="tns:CreateAccessObjectSoapIn"/>
    <wsdl:output message="tns:CreateAccessObjectSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="RenameAccessObject">
    <wsdl:input message="tns:RenameAccessObjectSoapIn"/>
    <wsdl:output message="tns:RenameAccessObjectSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="UpdateAccessObject">
    <wsdl:input message="tns:UpdateAccessObjectSoapIn"/>
    <wsdl:output message="tns:UpdateAccessObjectSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="DeleteAccessObject">
    <wsdl:input message="tns>DeleteAccessObjectSoapIn"/>
    <wsdl:output message="tns>DeleteAccessObjectSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="CreatePackage">
    <wsdl:input message="tns:CreatePackageSoapIn"/>
    <wsdl:output message="tns:CreatePackageSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="GetPackage">
    <wsdl:input message="tns:GetPackageSoapIn"/>
    <wsdl:output message="tns:GetPackageSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="SetDataMacroTracing">
    <wsdl:input message="tns:SetDataMacroTracingSoapIn"/>
    <wsdl:output message="tns:SetDataMacroTracingSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="SetObjectReadOnly">
    <wsdl:input message="tns:SetObjectReadOnlySoapIn"/>
    <wsdl:output message="tns:SetObjectReadOnlySoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="GetLinkedTableInformation">
    <wsdl:input message="tns:GetLinkedTableInformationSoapIn"/>
    <wsdl:output message="tns:GetLinkedTableInformationSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="RefreshLinkedTableInformation">
    <wsdl:input message="tns:RefreshLinkedTableInformationSoapIn"/>
  </wsdl:operation>

```

```

        <wsdl:output message="tns:RefreshLinkedTableInformationSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="ImportData">
        <wsdl:input message="tns:ImportDataSoapIn"/>
        <wsdl:output message="tns:ImportDataSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="SetDataConnectivityStatus">
        <wsdl:input message="tns:SetDataConnectivityStatusSoapIn"/>
        <wsdl:output message="tns:SetDataConnectivityStatusSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="GetDataConnectivityStatus">
        <wsdl:input message="tns:GetDataConnectivityStatusSoapIn"/>
        <wsdl:output message="tns:GetDataConnectivityStatusSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="GetDataConnectivity">
        <wsdl:input message="tns:GetDataConnectivitySoapIn"/>
        <wsdl:output message="tns:GetDataConnectivitySoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="GetFirewallRules">
        <wsdl:input message="tns:GetFirewallRulesSoapIn"/>
        <wsdl:output message="tns:GetFirewallRulesSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="AddFirewallRule">
        <wsdl:input message="tns:AddFirewallRuleSoapIn"/>
        <wsdl:output message="tns:AddFirewallRuleSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteFirewallRules">
        <wsdl:input message="tns>DeleteFirewallRulesSoapIn"/>
        <wsdl:output message="tns>DeleteFirewallRulesSoapOut"/>
    </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ApplicationDesignServiceSoap" type="tns:ApplicationDesignServiceSoap">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="GetApplicationInformation">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/Application
DesignService/GetApplicationInformation" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/Application
DesignService/GetAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="CreateAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/Application
DesignService/CreateAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RenameAccessObject">

```

```

    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/RenameAccessObject" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateAccessObject">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/UpdateAccessObject" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="DeleteAccessObject">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/DeleteAccessObject" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CreatePackage">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/CreatePackage" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetPackage">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetPackage" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SetDataMacroTracing">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/SetDataMacroTracing" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SetObjectReadOnly">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/SetObjectReadOnly" style="document"/>

```

```

    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetLinkedTableInformation">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetLinkedTableInformation" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="RefreshLinkedTableInformation">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/RefreshLinkedTableInformation" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="ImportData">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/ImportData" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SetDataConnectivityStatus">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/SetDataConnectivityStatus" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetDataConnectivityStatus">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetDataConnectivityStatus" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetDataConnectivity">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetDataConnectivity" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>

```

```

        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetFirewallRules">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetFirewallRules" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddFirewallRule">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/AddFirewallRule" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="DeleteFirewallRules">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/DeleteFirewallRules" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
</wsdl:binding>
<wsdl:binding name="ApplicationDesignServiceSoap12"
type="tns:ApplicationDesignServiceSoap">
    <soap12:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="GetApplicationInformation">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetApplicationInformation" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetAccessObject">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetAccessObject" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="CreateAccessObject">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/CreateAccessObject" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
    </wsdl:operation>

```

```

        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RenameAccessObject">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/RenameAccessObject" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateAccessObject">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/UpdateAccessObject" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="DeleteAccessObject">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/DeleteAccessObject" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="CreatePackage">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/CreatePackage" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetPackage">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetPackage" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="SetDataMacroTracing">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/SetDataMacroTracing" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>

```

```

        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="SetObjectReadOnly">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/SetObjectReadOnly" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetLinkedTableInformation">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetLinkedTableInformation" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RefreshLinkedTableInformation">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/RefreshLinkedTableInformation" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="ImportData">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/ImportData" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="SetDataConnectivityStatus">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/SetDataConnectivityStatus" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetDataConnectivityStatus">
        <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetDataConnectivityStatus" style="document"/>
        <wsdl:input>
            <soap12:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetDataConnectivity">

```

```

    <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetDataConnectivity" style="document"/>
    <wsdl:input>
        <soap12:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
    <wsdl:operation name="GetFirewallRules">
    <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/GetFirewallRules" style="document"/>
    <wsdl:input>
        <soap12:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
    <wsdl:operation name="AddFirewallRule">
    <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/AddFirewallRule" style="document"/>
    <wsdl:input>
        <soap12:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
    <wsdl:operation name="DeleteFirewallRules">
    <soap12:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Application
DesignService/DeleteFirewallRules" style="document"/>
    <wsdl:input>
        <soap12:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
</wsdl:binding>
<wsdl:message name="AddFirewallRuleSoapIn">
    <wsdl:part name="parameters" element="tns:AddFirewallRule"/>
</wsdl:message>
<wsdl:message name="AddFirewallRuleSoapOut">
    <wsdl:part name="parameters" element="tns:AddFirewallRuleResponse"/>
</wsdl:message>
<wsdl:message name="CreateAccessObjectSoapIn">
    <wsdl:part name="parameters" element="tns:CreateAccessObject"/>
</wsdl:message>
<wsdl:message name="CreateAccessObjectSoapOut">
    <wsdl:part name="parameters" element="tns:CreateAccessObjectResponse"/>
</wsdl:message>
<wsdl:message name="CreatePackageSoapIn">
    <wsdl:part name="parameters" element="tns:CreatePackage"/>
</wsdl:message>
<wsdl:message name="CreatePackageSoapOut">
    <wsdl:part name="parameters" element="tns:CreatePackageResponse"/>
</wsdl:message>
<wsdl:message name="DeleteAccessObjectSoapIn">
    <wsdl:part name="parameters" element="tns>DeleteAccessObject"/>
</wsdl:message>
<wsdl:message name="DeleteAccessObjectSoapOut">
    <wsdl:part name="parameters" element="tns>DeleteAccessObjectResponse"/>
</wsdl:message>
<wsdl:message name="DeleteFirewallRulesSoapIn">

```



```

    <wsdl:part name="parameters" element="tns:DeleteFirewallRules"/>
</wsdl:message>
<wsdl:message name="DeleteFirewallRulesSoapOut">
    <wsdl:part name="parameters" element="tns:DeleteFirewallRulesResponse"/>
</wsdl:message>
<wsdl:message name="GetAccessObjectSoapIn">
    <wsdl:part name="parameters" element="tns:GetAccessObject"/>
</wsdl:message>
<wsdl:message name="GetAccessObjectSoapOut">
    <wsdl:part name="parameters" element="tns:GetAccessObjectResponse"/>
</wsdl:message>
<wsdl:message name="GetApplicationInformationSoapIn">
    <wsdl:part name="parameters" element="tns:GetApplicationInformation"/>
</wsdl:message>
<wsdl:message name="GetApplicationInformationSoapOut">
    <wsdl:part name="parameters" element="tns:GetApplicationInformationResponse"/>
</wsdl:message>
<wsdl:message name="GetDataConnectivitySoapIn">
    <wsdl:part name="parameters" element="tns:GetDataConnectivity"/>
</wsdl:message>
<wsdl:message name="GetDataConnectivitySoapOut">
    <wsdl:part name="parameters" element="tns:GetDataConnectivityResponse"/>
</wsdl:message>
<wsdl:message name="GetDataConnectivityStatusSoapIn">
    <wsdl:part name="parameters" element="tns:GetDataConnectivityStatus"/>
</wsdl:message>
<wsdl:message name="GetDataConnectivityStatusSoapOut">
    <wsdl:part name="parameters" element="tns:GetDataConnectivityStatusResponse"/>
</wsdl:message>
<wsdl:message name="GetFirewallRulesSoapIn">
    <wsdl:part name="parameters" element="tns:GetFirewallRules"/>
</wsdl:message>
<wsdl:message name="GetFirewallRulesSoapOut">
    <wsdl:part name="parameters" element="tns:GetFirewallRulesResponse"/>
</wsdl:message>
<wsdl:message name="GetLinkedTableInformationSoapIn">
    <wsdl:part name="parameters" element="tns:GetLinkedTableInformation"/>
</wsdl:message>
<wsdl:message name="GetLinkedTableInformationSoapOut">
    <wsdl:part name="parameters" element="tns:GetLinkedTableInformationResponse"/>
</wsdl:message>
<wsdl:message name="GetPackageSoapIn">
    <wsdl:part name="parameters" element="tns:GetPackage"/>
</wsdl:message>
<wsdl:message name="GetPackageSoapOut">
    <wsdl:part name="parameters" element="tns:GetPackageResponse"/>
</wsdl:message>
<wsdl:message name="ImportDataSoapIn">
    <wsdl:part name="parameters" element="tns:ImportData"/>
</wsdl:message>
<wsdl:message name="ImportDataSoapOut">
    <wsdl:part name="parameters" element="tns:ImportDataResponse"/>
</wsdl:message>
<wsdl:message name="RefreshLinkedTableInformationSoapIn">
    <wsdl:part name="parameters" element="tns:RefreshLinkedTableInformation"/>
</wsdl:message>
<wsdl:message name="RefreshLinkedTableInformationSoapOut">
    <wsdl:part name="parameters" element="tns:RefreshLinkedTableInformationResponse"/>
</wsdl:message>
<wsdl:message name="RenameAccessObjectSoapIn">
    <wsdl:part name="parameters" element="tns:RenameAccessObject"/>
</wsdl:message>
<wsdl:message name="RenameAccessObjectSoapOut">
    <wsdl:part name="parameters" element="tns:RenameAccessObjectResponse"/>
</wsdl:message>
<wsdl:message name="SetDataConnectivityStatusSoapIn">
    <wsdl:part name="parameters" element="tns:SetDataConnectivityStatus"/>
</wsdl:message>
<wsdl:message name="SetDataConnectivityStatusSoapOut">

```

```
<wsdl:part name="parameters" element="tns:SetDataConnectivityStatusResponse"/>
</wsdl:message>
<wsdl:message name="SetDataMacroTracingSoapIn">
  <wsdl:part name="parameters" element="tns:SetDataMacroTracing"/>
</wsdl:message>
<wsdl:message name="SetDataMacroTracingSoapOut">
  <wsdl:part name="parameters" element="tns:SetDataMacroTracingResponse"/>
</wsdl:message>
<wsdl:message name="SetObjectReadOnlySoapIn">
  <wsdl:part name="parameters" element="tns:SetObjectReadOnly"/>
</wsdl:message>
<wsdl:message name="SetObjectReadOnlySoapOut">
  <wsdl:part name="parameters" element="tns:SetObjectReadOnlyResponse"/>
</wsdl:message>
<wsdl:message name="UpdateAccessObjectSoapIn">
  <wsdl:part name="parameters" element="tns:UpdateAccessObject"/>
</wsdl:message>
<wsdl:message name="UpdateAccessObjectSoapOut">
  <wsdl:part name="parameters" element="tns:UpdateAccessObjectResponse"/>
</wsdl:message>
</wsdl:definitions>
```

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Microsoft Access 2013
- Microsoft SharePoint Server 2013
- Microsoft Access 2016
- Microsoft SharePoint Server 2016

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.9.3](#): Microsoft Access Services does not specify Service Warnings in SharePoint Server 2013.

## 8 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">Z</a> Appendix B: Product Behavior	Updated list of supported products.	Y	Content updated due to protocol revision.
7 Appendix B: Product Behavior	Updated list of supported products.	Y	Content updated due to protocol revision.

## 9 Index

### A

Abstract data model  
  [server](#) 28  
[AccessObject complex type](#) 18  
[AccessObjectIdentity complex type](#) 19  
[AccessObjectList complex type](#) 19  
[AccessObjectType simple type](#) 24  
[AccessStorageObject complex type](#) 19  
[Applicability](#) 14  
[Attribute groups](#) 27  
[Attributes](#) 27

### C

[Capability negotiation](#) 14  
[Change tracking](#) 132  
[Complex types](#) 17  
  [AccessObject](#) 18  
  [AccessObjectIdentity](#) 19  
  [AccessObjectList](#) 19  
  [AccessStorageObject](#) 19  
  [ConnectivityStatusInformation](#) 20  
  [DataMacro](#) 20  
  [FirewallRule](#) 20  
  [Form](#) 20  
  [LinkedTable](#) 21  
  [NavBarSettingsObject](#) 21  
  [ObjectIdentityList](#) 21  
  [Query](#) 21  
  [ServiceError](#) 22  
  [ServiceParameters](#) 22  
  [ServiceResult](#) 22  
  [ServiceWarning](#) 23  
  [Table](#) 23  
  [UIMacro](#) 23  
[ConnectivityPermissionLevel simple type](#) 25  
[ConnectivityStatusInformation complex type](#) 20

### D

Data model - abstract  
  [server](#) 28  
[DataMacro complex type](#) 20  
[DeleteFirewallRulesOption simple type](#) 25

### E

Events  
  [local - server](#) 99  
  [timer - server](#) 99  
Examples  
  [use CreateAccessObject to create a table in a database application](#) 100  
  [use GetApplicationInformation to retrieve information about a database application from the protocol server](#) 104  
  [use UpdateAccessObject to update a table in a database application](#) 101

### F

[Faults](#) 27  
[Fields - vendor-extensible](#) 15  
[FirewallRule complex type](#) 20  
[Form complex type](#) 20  
[Full WSDL](#) 107

### G

[Glossary](#) 10  
[Groups](#) 27  
[guid simple type](#) 26

### I

[Implementer - security considerations](#) 106  
[Index of security parameters](#) 106  
[Informative references](#) 13  
Initialization  
  [server](#) 28  
[Introduction](#) 10

### L

[LinkedTable complex type](#) 21  
Local events  
  [server](#) 99

### M

Message processing  
  [server](#) 28  
Messages  
  [AccessObject complex type](#) 18  
  [AccessObjectIdentity complex type](#) 19  
  [AccessObjectList complex type](#) 19  
  [AccessObjectType simple type](#) 24  
  [AccessStorageObject complex type](#) 19  
  [attribute groups](#) 27  
  [attributes](#) 27  
  [complex types](#) 17  
  [ConnectivityPermissionLevel simple type](#) 25  
  [ConnectivityStatusInformation complex type](#) 20  
  [DataMacro complex type](#) 20  
  [DeleteFirewallRulesOption simple type](#) 25  
  [elements](#) 17  
  [enumerated](#) 16  
  [faults](#) 27  
  [FirewallRule complex type](#) 20  
  [Form complex type](#) 20  
  [groups](#) 27  
  [guid simple type](#) 26  
  [LinkedTable complex type](#) 21  
  [namespaces](#) 16  
  [NavBarSettingsObject complex type](#) 21  
  [ObjectIdentityList complex type](#) 21  
  [PackagingOption simple type](#) 26  
  [Query complex type](#) 21  
  [ServiceError complex type](#) 22  
  [ServiceParameters complex type](#) 22  
  [ServiceResult complex type](#) 22

- [ServiceWarning complex type](#) 23
- [simple types](#) 23
- [syntax](#) 16
- [Table complex type](#) 23
- [transport](#) 16
- [UIMacro complex type](#) 23

**N**

- [Namespaces](#) 16
- [NavBarSettingsObject complex type](#) 21
- [Normative references](#) 12

**O**

- [ObjectIdentityList complex type](#) 21
- Operations
  - [AddFirewallRule](#) 65
  - [CreateAccessObject](#) 30
  - [CreatePackage](#) 34
  - [DeleteAccessObject](#) 62
  - [DeleteFirewallRules](#) 68
  - [GetAccessObject](#) 38
  - [GetApplicationInformation](#) 41
  - [GetDataConnectivity](#) 72
  - [GetDataConnectivityStatus](#) 75
  - [GetFirewallRules](#) 78
  - [GetLinkedTableInformation](#) 47
  - [GetPackage](#) 92
  - [ImportData](#) 82
  - [RefreshLinkedTableInformation](#) 86
  - [RenameAccessObject](#) 50
  - [SetDataConnectivityStatus](#) 89
  - [SetDataMacroTracing](#) 54
  - [SetObjectReadOnly](#) 96
  - [UpdateAccessObject](#) 57
- [Overview \(synopsis\)](#) 13

**P**

- [PackagingOption simple type](#) 26
- [Parameters - security index](#) 106
- [Preconditions](#) 14
- [Prerequisites](#) 14
- [Product behavior](#) 131
- Protocol Details
  - [overview](#) 28

**Q**

- [Query complex type](#) 21

**R**

- [References](#) 12
  - [informative](#) 13
  - [normative](#) 12
- [Relationship to other protocols](#) 14

**S**

- Security
  - [implementer considerations](#) 106
  - [parameter index](#) 106

- Sequencing rules
  - [server](#) 28
- Server
  - [abstract data model](#) 28
  - [AddFirewallRule operation](#) 65
  - [CreateAccessObject operation](#) 30
  - [CreatePackage operation](#) 34
  - [DeleteAccessObject operation](#) 62
  - [DeleteFirewallRules operation](#) 68
  - [GetAccessObject operation](#) 38
  - [GetApplicationInformation operation](#) 41
  - [GetDataConnectivity operation](#) 72
  - [GetDataConnectivityStatus operation](#) 75
  - [GetFirewallRules operation](#) 78
  - [GetLinkedTableInformation operation](#) 47
  - [GetPackage operation](#) 92
  - [ImportData operation](#) 82
  - [initialization](#) 28
  - [local events](#) 99
  - [message processing](#) 28
  - [RefreshLinkedTableInformation operation](#) 86
  - [RenameAccessObject operation](#) 50
  - [sequencing rules](#) 28
  - [SetDataConnectivityStatus operation](#) 89
  - [SetDataMacroTracing operation](#) 54
  - [SetObjectReadOnly operation](#) 96
  - [timer events](#) 99
  - [timers](#) 28
  - [UpdateAccessObject operation](#) 57
- [ServiceError complex type](#) 22
- [ServiceParameters complex type](#) 22
- [ServiceResult complex type](#) 22
- [ServiceWarning complex type](#) 23
- [Simple types](#) 23
  - [AccessObjectType](#) 24
  - [ConnectivityPermissionLevel](#) 25
  - [DeleteFirewallRulesOption](#) 25
  - [guid](#) 26
  - [PackagingOption](#) 26
- [Standards assignments](#) 15
- Syntax
  - [messages - overview](#) 16

**T**

- [Table complex type](#) 23
- Timer events
  - [server](#) 99
- Timers
  - [server](#) 28
- [Tracking changes](#) 132
- [Transport](#) 16
- Types
  - [complex](#) 17
  - [simple](#) 23

**U**

- [UIMacro complex type](#) 23
- [Use CreateAccessObject to create a table in a database application example](#) 100
- [Use GetApplicationInformation to retrieve information about a database application from the protocol server example](#) 104

[Use UpdateAccessObject to update a table in a database application example](#) 101

## **V**

[Vendor-extensible fields](#) 15

[Versioning](#) 14

## **W**

[WSDL](#) 107