

## [MS-ADR2]:

# Access Services Data Run Time Protocol Version 2

---

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

| Date      | Revision History | Revision Class | Comments               |
|-----------|------------------|----------------|------------------------|
| 2/26/2016 | 1.0              | New            | Released new document. |

# Table of Contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Introduction .....</b>                   | <b>21</b> |
| 1.1      | Glossary .....                              | 21        |
| 1.2      | References .....                            | 26        |
| 1.2.1    | Normative References .....                  | 26        |
| 1.2.2    | Informative References .....                | 28        |
| 1.3      | Overview .....                              | 28        |
| 1.3.1    | Session-based Protocol.....                 | 28        |
| 1.3.2    | Protocol Operations.....                    | 28        |
| 1.4      | Relationship to Other Protocols .....       | 28        |
| 1.5      | Prerequisites/Preconditions .....           | 29        |
| 1.6      | Applicability Statement .....               | 29        |
| 1.7      | Versioning and Capability Negotiation ..... | 29        |
| 1.8      | Vendor-Extensible Fields .....              | 30        |
| 1.9      | Standards Assignments.....                  | 30        |
| <b>2</b> | <b>Messages.....</b>                        | <b>31</b> |
| 2.1      | Transport.....                              | 31        |
| 2.2      | Common Message Syntax .....                 | 31        |
| 2.2.1    | Namespaces .....                            | 31        |
| 2.2.2    | Messages.....                               | 32        |
| 2.2.3    | Elements .....                              | 32        |
| 2.2.4    | Complex Types.....                          | 32        |
| 2.2.4.1  | AccessServerMessage.....                    | 36        |
| 2.2.4.2  | ArrayOfKeyValuePair .....                   | 37        |
| 2.2.4.3  | CommandParameter.....                       | 37        |
| 2.2.4.4  | CommandResult .....                         | 38        |
| 2.2.4.5  | KeyValuePair .....                          | 39        |
| 2.2.4.6  | ServerHealthInformation.....                | 40        |
| 2.2.4.7  | ArrayOfanyType.....                         | 40        |
| 2.2.4.8  | FilterInfo.....                             | 40        |
| 2.2.4.9  | DatabaseContext .....                       | 41        |
| 2.2.4.10 | NetworkCredential .....                     | 42        |
| 2.2.4.11 | ProvisionedDatabaseContext .....            | 43        |
| 2.2.4.12 | SecureString .....                          | 43        |
| 2.2.4.13 | ServerContext .....                         | 44        |
| 2.2.4.14 | ArrayOfKeyValueOfstringstring .....         | 44        |
| 2.2.4.15 | DatabaseProviderMessage.....                | 44        |
| 2.2.4.16 | ArrayOfFieldSchema .....                    | 45        |
| 2.2.4.17 | ArrayOfint .....                            | 45        |
| 2.2.4.18 | ArrayOfParameterValue .....                 | 46        |
| 2.2.4.19 | ArrayOfstring.....                          | 46        |
| 2.2.4.20 | ClientMessage .....                         | 46        |
| 2.2.4.21 | Expression .....                            | 47        |
| 2.2.4.22 | FieldSchema.....                            | 47        |
| 2.2.4.23 | ParameterValue .....                        | 50        |
| 2.2.4.24 | AccessObject.....                           | 51        |
| 2.2.4.25 | AccessObjectIdentity .....                  | 52        |
| 2.2.4.26 | AccessObjectList .....                      | 52        |
| 2.2.4.27 | AccessProperties .....                      | 52        |
| 2.2.4.28 | AccessStorageObject.....                    | 53        |
| 2.2.4.29 | AppsForOfficeSettings.....                  | 53        |
| 2.2.4.30 | ArrayOfAccessObject .....                   | 54        |
| 2.2.4.31 | ArrayOfAccessObjectIdentity .....           | 54        |
| 2.2.4.32 | ArrayOfArrayOfKeyValuePair.....             | 54        |
| 2.2.4.33 | ArrayOfArrayOfstring.....                   | 55        |

|          |  |            |
|----------|--|------------|
| 2.2.4.34 | ArrayOfFirewallRule.....                   | 55         |
| 2.2.4.35 | ArrayOfKeyValueOfstringColumnb1rtN9t ..... | 55         |
| 2.2.4.36 | CollationInfo.....                         | 56         |
| 2.2.4.37 | Column.....                                | 57         |
| 2.2.4.38 | ColumnLookup.....                          | 58         |
| 2.2.4.39 | ColumnValue .....                          | 58         |
| 2.2.4.40 | ConnectivityStatusInformation.....         | 59         |
| 2.2.4.41 | DataMacro .....                            | 59         |
| 2.2.4.42 | EmbeddedExpression.....                    | 59         |
| 2.2.4.43 | ExtendedAttributes.....                    | 60         |
| 2.2.4.44 | FieldList .....                            | 60         |
| 2.2.4.45 | FirewallRule.....                          | 60         |
| 2.2.4.46 | Form .....                                 | 61         |
| 2.2.4.47 | LinkedTable.....                           | 61         |
| 2.2.4.48 | ObjectIdentityList .....                   | 61         |
| 2.2.4.49 | Query .....                                | 62         |
| 2.2.4.50 | RequestApplication.....                    | 62         |
| 2.2.4.51 | RequestContext .....                       | 64         |
| 2.2.4.52 | RequestUser.....                           | 64         |
| 2.2.4.53 | ServiceError .....                         | 65         |
| 2.2.4.54 | ServiceParameters .....                    | 65         |
| 2.2.4.55 | ServiceResult .....                        | 66         |
| 2.2.4.56 | ServiceWarning .....                       | 66         |
| 2.2.4.57 | Table.....                                 | 66         |
| 2.2.4.58 | UIMacro.....                               | 67         |
| 2.2.4.59 | AddFirewallRuleResult.....                 | 67         |
| 2.2.5    | Simple Types .....                         | 67         |
| 2.2.5.1  | AccessObjectType .....                     | 68         |
| 2.2.5.2  | AccessServerMessageButtons .....           | 69         |
| 2.2.5.3  | AccessServerMessageId .....                | 70         |
| 2.2.5.4  | AccessServerMessageSeverity .....          | 85         |
| 2.2.5.5  | AccessServerMessageType .....              | 86         |
| 2.2.5.6  | AnonymousAccessMode .....                  | 86         |
| 2.2.5.7  | CacheCommands .....                        | 87         |
| 2.2.5.8  | ClientMessageID .....                      | 88         |
| 2.2.5.9  | ConnectivityPermissionLevel.....           | 94         |
| 2.2.5.10 | DatabaseProviderError.....                 | 94         |
| 2.2.5.11 | guid .....                                 | 94         |
| 2.2.5.12 | LookupType.....                            | 95         |
| 2.2.5.13 | PackageSource .....                        | 95         |
| 2.2.5.14 | ServerStateFlags .....                     | 96         |
| 2.2.5.15 | SortType.....                              | 96         |
| 2.2.5.16 | SqlAuthenticationMode .....                | 97         |
| 2.2.5.17 | UserRole.....                              | 97         |
| 2.2.6    | Attributes .....                           | 98         |
| 2.2.7    | Groups .....                               | 98         |
| 2.2.8    | Attribute Groups.....                      | 98         |
| 2.2.9    | Faults.....                                | 98         |
| 2.2.9.1  | Common Fault Identifiers.....              | 99         |
| 2.2.9.2  | Runtime Fault Identifiers.....             | 99         |
| 2.2.9.3  | Sql Fault Identifiers.....                 | 99         |
| 2.2.9.4  | Design Time Fault Identifiers .....        | 102        |
| <b>3</b> | <b>Protocol Details.....</b>               | <b>106</b> |
| 3.1      | Server Details.....                        | 106        |
| 3.1.1    | Abstract Data Model.....                   | 106        |
| 3.1.1.1  | Common Terms .....                         | 106        |
| 3.1.1.2  | SessionIdentifier .....                    | 107        |

|             |  |     |
|-------------|--|-----|
| 3.1.2       | Timers .....   | 108 |
| 3.1.3       | Initialization .....                                     | 108 |
| 3.1.4       | Message Processing Events and Sequencing Rules .....     | 108 |
| 3.1.4.1     | CloseSession .....                                       | 111 |
| 3.1.4.1.1   | Messages .....   | 112 |
| 3.1.4.1.1.1 | IAccessServiceSoap_CloseSession_InputMessage .....       | 112 |
| 3.1.4.1.1.2 | IAccessServiceSoap_CloseSession_OutputMessage .....      | 112 |
| 3.1.4.1.2   | Elements .....   | 113 |
| 3.1.4.1.2.1 | CloseSession .....                                       | 113 |
| 3.1.4.1.2.2 | CloseSessionResponse .....                               | 113 |
| 3.1.4.1.3   | Complex Types .....                                      | 113 |
| 3.1.4.1.4   | Simple Types .....                                       | 113 |
| 3.1.4.1.5   | Attributes .....   | 113 |
| 3.1.4.1.6   | Groups .....   | 114 |
| 3.1.4.1.7   | Attribute Groups .....                                   | 114 |
| 3.1.4.2     | DeleteData .....   | 114 |
| 3.1.4.2.1   | Messages .....   | 114 |
| 3.1.4.2.1.1 | IAccessServiceSoap_DeleteData_InputMessage .....         | 115 |
| 3.1.4.2.1.2 | IAccessServiceSoap_DeleteData_OutputMessage .....        | 115 |
| 3.1.4.2.2   | Elements .....   | 115 |
| 3.1.4.2.2.1 | DeleteData .....   | 115 |
| 3.1.4.2.2.2 | DeleteDataResponse .....                                 | 116 |
| 3.1.4.2.3   | Complex Types .....                                      | 116 |
| 3.1.4.2.4   | Simple Types .....                                       | 116 |
| 3.1.4.2.5   | Attributes .....   | 116 |
| 3.1.4.2.6   | Groups .....   | 116 |
| 3.1.4.2.7   | Attribute Groups .....                                   | 117 |
| 3.1.4.3     | FixupRow .....   | 117 |
| 3.1.4.3.1   | Messages .....   | 117 |
| 3.1.4.3.1.1 | IAccessServiceSoap_FixupRow_InputMessage .....           | 118 |
| 3.1.4.3.1.2 | IAccessServiceSoap_FixupRow_OutputMessage .....          | 118 |
| 3.1.4.3.2   | Elements .....   | 118 |
| 3.1.4.3.2.1 | FixupRow .....   | 118 |
| 3.1.4.3.2.2 | FixupRowResponse .....                                   | 119 |
| 3.1.4.3.3   | Complex Types .....                                      | 119 |
| 3.1.4.3.4   | Simple Types .....                                       | 120 |
| 3.1.4.3.5   | Attributes .....   | 120 |
| 3.1.4.3.6   | Groups .....   | 120 |
| 3.1.4.3.7   | Attribute Groups .....                                   | 120 |
| 3.1.4.4     | GetData .....  | 120 |
| 3.1.4.4.1   | Messages .....   | 121 |
| 3.1.4.4.1.1 | IAccessServiceSoap_GetData_InputMessage .....            | 121 |
| 3.1.4.4.1.2 | IAccessServiceSoap_GetData_OutputMessage .....           | 121 |
| 3.1.4.4.2   | Elements .....   | 121 |
| 3.1.4.4.2.1 | GetData .....  | 122 |
| 3.1.4.4.2.2 | GetDataResponse .....                                    | 123 |
| 3.1.4.4.3   | Complex Types .....                                      | 123 |
| 3.1.4.4.4   | Simple Types .....                                       | 123 |
| 3.1.4.4.5   | Attributes .....   | 123 |
| 3.1.4.4.6   | Groups .....   | 124 |
| 3.1.4.4.7   | Attribute Groups .....                                   | 124 |
| 3.1.4.5     | GetDistinctValues .....                                  | 124 |
| 3.1.4.5.1   | Messages .....   | 124 |
| 3.1.4.5.1.1 | IAccessServiceSoap_GetDistinctValues_InputMessage .....  | 125 |
| 3.1.4.5.1.2 | IAccessServiceSoap_GetDistinctValues_OutputMessage ..... | 125 |
| 3.1.4.5.2   | Elements .....   | 125 |
| 3.1.4.5.2.1 | GetDistinctValues .....                                  | 125 |
| 3.1.4.5.2.2 | GetDistinctValuesResponse .....                          | 126 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.5.3    | Complex Types .....                                    | 126 |
| 3.1.4.5.4    | Simple Types .....                                     | 127 |
| 3.1.4.5.5    | Attributes .....                                       | 127 |
| 3.1.4.5.6    | Groups .....   | 127 |
| 3.1.4.5.7    | Attribute Groups.....                                  | 127 |
| 3.1.4.6      | GetHealthScore .....                                   | 127 |
| 3.1.4.6.1    | Messages .....   | 127 |
| 3.1.4.6.1.1  | IAccessServiceSoap_GetHealthScore_InputMessage.....    | 128 |
| 3.1.4.6.1.2  | IAccessServiceSoap_GetHealthScore_OutputMessage.....   | 128 |
| 3.1.4.6.2    | Elements .....   | 128 |
| 3.1.4.6.2.1  | GetHealthScore .....                                   | 128 |
| 3.1.4.6.2.2  | GetHealthScoreResponse .....                           | 128 |
| 3.1.4.6.3    | Complex Types .....                                    | 129 |
| 3.1.4.6.4    | Simple Types .....                                     | 129 |
| 3.1.4.6.5    | Attributes .....                                       | 129 |
| 3.1.4.6.6    | Groups .....   | 129 |
| 3.1.4.6.7    | Attribute Groups.....                                  | 129 |
| 3.1.4.7      | GetObjectSchema .....                                  | 129 |
| 3.1.4.7.1    | Messages .....   | 130 |
| 3.1.4.7.1.1  | IAccessServiceSoap_GetObjectSchema_InputMessage .....  | 130 |
| 3.1.4.7.1.2  | IAccessServiceSoap_GetObjectSchema_OutputMessage ..... | 130 |
| 3.1.4.7.2    | Elements .....   | 130 |
| 3.1.4.7.2.1  | GetObjectSchema .....                                  | 131 |
| 3.1.4.7.2.2  | GetObjectSchemaResponse.....                           | 131 |
| 3.1.4.7.3    | Complex Types .....                                    | 131 |
| 3.1.4.7.4    | Simple Types .....                                     | 131 |
| 3.1.4.7.5    | Attributes .....                                       | 131 |
| 3.1.4.7.6    | Groups .....   | 132 |
| 3.1.4.7.7    | Attribute Groups.....                                  | 132 |
| 3.1.4.8      | InsertData .....                                       | 132 |
| 3.1.4.8.1    | Messages .....   | 133 |
| 3.1.4.8.1.1  | IAccessServiceSoap_InsertData_InputMessage.....        | 133 |
| 3.1.4.8.1.2  | IAccessServiceSoap_InsertData_OutputMessage .....      | 133 |
| 3.1.4.8.2    | Elements .....   | 133 |
| 3.1.4.8.2.1  | InsertData .....                                       | 133 |
| 3.1.4.8.2.2  | InsertDataResponse .....                               | 134 |
| 3.1.4.8.3    | Complex Types .....                                    | 135 |
| 3.1.4.8.4    | Simple Types .....                                     | 135 |
| 3.1.4.8.5    | Attributes .....                                       | 135 |
| 3.1.4.8.6    | Groups .....   | 135 |
| 3.1.4.8.7    | Attribute Groups.....                                  | 135 |
| 3.1.4.9      | OpenResultSet.....                                     | 135 |
| 3.1.4.9.1    | Messages .....   | 136 |
| 3.1.4.9.1.1  | IAccessServiceSoap_OpenResultSet_InputMessage.....     | 137 |
| 3.1.4.9.1.2  | IAccessServiceSoap_OpenResultSet_OutputMessage.....    | 137 |
| 3.1.4.9.2    | Elements .....   | 137 |
| 3.1.4.9.2.1  | OpenResultSet.....                                     | 137 |
| 3.1.4.9.2.2  | OpenResultSetResponse .....                            | 138 |
| 3.1.4.9.3    | Complex Types .....                                    | 139 |
| 3.1.4.9.4    | Simple Types .....                                     | 139 |
| 3.1.4.9.5    | Attributes .....                                       | 139 |
| 3.1.4.9.6    | Groups .....   | 139 |
| 3.1.4.9.7    | Attribute Groups.....                                  | 139 |
| 3.1.4.10     | OpenSession .....                                      | 139 |
| 3.1.4.10.1   | Messages .....   | 140 |
| 3.1.4.10.1.1 | IAccessServiceSoap_OpenSession_InputMessage .....      | 140 |
| 3.1.4.10.1.2 | IAccessServiceSoap_OpenSession_OutputMessage .....     | 140 |
| 3.1.4.10.2   | Elements .....   | 141 |

|              |   |     |
|--------------|---|-----|
| 3.1.4.10.2.1 | OpenSession .....   | 141 |
| 3.1.4.10.2.2 | OpenSessionResponse .....                                 | 141 |
| 3.1.4.10.3   | Complex Types .....                                       | 142 |
| 3.1.4.10.3.1 | CultureCommandParameter .....                             | 142 |
| 3.1.4.10.4   | Simple Types .....  | 144 |
| 3.1.4.10.5   | Attributes .....  | 144 |
| 3.1.4.10.6   | Groups .....  | 144 |
| 3.1.4.10.7   | Attribute Groups .....                                    | 144 |
| 3.1.4.11     | UpdateData .....  | 144 |
| 3.1.4.11.1   | Messages .....  | 145 |
| 3.1.4.11.1.1 | IAccessServiceSoap_UpdateData_InputMessage .....          | 146 |
| 3.1.4.11.1.2 | IAccessServiceSoap_UpdateData_OutputMessage .....         | 146 |
| 3.1.4.11.2   | Elements .....  | 146 |
| 3.1.4.11.2.1 | UpdateData .....  | 146 |
| 3.1.4.11.2.2 | UpdateDataResponse .....                                  | 148 |
| 3.1.4.11.3   | Complex Types .....                                       | 148 |
| 3.1.4.11.4   | Simple Types .....  | 148 |
| 3.1.4.11.5   | Attributes .....  | 148 |
| 3.1.4.11.6   | Groups .....  | 148 |
| 3.1.4.11.7   | Attribute Groups .....                                    | 148 |
| 3.1.4.12     | AddFirewallRule .....                                     | 149 |
| 3.1.4.12.1   | Messages .....  | 149 |
| 3.1.4.12.1.1 | IAccessServiceSoap_AddFirewallRule_InputMessage .....     | 149 |
| 3.1.4.12.1.2 | IAccessServiceSoap_AddFirewallRule_OutputMessage .....    | 150 |
| 3.1.4.12.2   | Elements .....  | 150 |
| 3.1.4.12.2.1 | AddFirewallRule .....                                     | 150 |
| 3.1.4.12.2.2 | AddFirewallRuleResponse .....                             | 150 |
| 3.1.4.12.3   | Complex Types .....                                       | 151 |
| 3.1.4.12.3.1 | AddFirewallRuleParameters .....                           | 151 |
| 3.1.4.12.4   | Simple Types .....  | 151 |
| 3.1.4.12.5   | Attributes .....  | 152 |
| 3.1.4.12.6   | Groups .....  | 152 |
| 3.1.4.12.7   | Attribute Groups .....                                    | 152 |
| 3.1.4.13     | CreateAccessObject .....                                  | 152 |
| 3.1.4.13.1   | Messages .....  | 152 |
| 3.1.4.13.1.1 | IAccessServiceSoap_CreateAccessObject_InputMessage .....  | 153 |
| 3.1.4.13.1.2 | IAccessServiceSoap_CreateAccessObject_OutputMessage ..... | 153 |
| 3.1.4.13.2   | Elements .....  | 153 |
| 3.1.4.13.2.1 | CreateAccessObject .....                                  | 153 |
| 3.1.4.13.2.2 | CreateAccessObjectResponse .....                          | 154 |
| 3.1.4.13.3   | Complex Types .....                                       | 154 |
| 3.1.4.13.3.1 | ArrayOfParameterObject .....                              | 154 |
| 3.1.4.13.3.2 | CreateParameters .....                                    | 155 |
| 3.1.4.13.3.3 | CreateResult .....  | 155 |
| 3.1.4.13.3.4 | ParameterObject .....                                     | 156 |
| 3.1.4.13.3.5 | ParameterObjectList .....                                 | 156 |
| 3.1.4.13.4   | Simple Types .....  | 156 |
| 3.1.4.13.5   | Attributes .....  | 156 |
| 3.1.4.13.6   | Groups .....  | 156 |
| 3.1.4.13.7   | Attribute Groups .....                                    | 157 |
| 3.1.4.14     | CreatePackage .....                                       | 157 |
| 3.1.4.14.1   | Messages .....  | 157 |
| 3.1.4.14.1.1 | IAccessServiceSoap_CreatePackage_InputMessage .....       | 158 |
| 3.1.4.14.1.2 | IAccessServiceSoap_CreatePackage_OutputMessage .....      | 158 |
| 3.1.4.14.2   | Elements .....  | 158 |
| 3.1.4.14.2.1 | CreatePackage .....                                       | 158 |
| 3.1.4.14.2.2 | CreatePackageResponse .....                               | 158 |
| 3.1.4.14.3   | Complex Types .....                                       | 159 |

|              |   |     |
|--------------|---|-----|
| 3.1.4.14.3.1 | CreatePackageParameters.....                                    | 159 |
| 3.1.4.14.3.2 | CreatePackageResult.....  | 160 |
| 3.1.4.14.4   | Simple Types.....   | 160 |
| 3.1.4.14.4.1 | PackagingOption.....  | 160 |
| 3.1.4.14.5   | Attributes.....   | 161 |
| 3.1.4.14.6   | Groups.....   | 161 |
| 3.1.4.14.7   | Attribute Groups.....   | 161 |
| 3.1.4.15     | DeleteAccessObject.....   | 161 |
| 3.1.4.15.1   | Messages.....   | 162 |
| 3.1.4.15.1.1 | IAccessServiceSoap_DeleteAccessObject_InputMessage.....         | 162 |
| 3.1.4.15.1.2 | IAccessServiceSoap_DeleteAccessObject_OutputMessage.....        | 162 |
| 3.1.4.15.2   | Elements.....   | 162 |
| 3.1.4.15.2.1 | DeleteAccessObject.....   | 162 |
| 3.1.4.15.2.2 | DeleteAccessObjectResponse.....                                 | 163 |
| 3.1.4.15.3   | Complex Types.....  | 163 |
| 3.1.4.15.3.1 | DeleteParameters.....   | 163 |
| 3.1.4.15.3.2 | DeleteResult.....   | 164 |
| 3.1.4.15.4   | Simple Types.....   | 164 |
| 3.1.4.15.5   | Attributes.....   | 164 |
| 3.1.4.15.6   | Groups.....   | 165 |
| 3.1.4.15.7   | Attribute Groups.....   | 165 |
| 3.1.4.16     | DeleteFirewallRules.....  | 165 |
| 3.1.4.16.1   | Messages.....   | 165 |
| 3.1.4.16.1.1 | IAccessServiceSoap_DeleteFirewallRules_InputMessage.....        | 166 |
| 3.1.4.16.1.2 | IAccessServiceSoap_DeleteFirewallRules_OutputMessage.....       | 166 |
| 3.1.4.16.2   | Elements.....   | 166 |
| 3.1.4.16.2.1 | DeleteFirewallRules.....  | 166 |
| 3.1.4.16.2.2 | DeleteFirewallRulesResponse.....                                | 167 |
| 3.1.4.16.3   | Complex Types.....  | 167 |
| 3.1.4.16.3.1 | DeleteFirewallRulesParameters.....                              | 167 |
| 3.1.4.16.3.2 | DeleteFirewallRulesResult.....                                  | 168 |
| 3.1.4.16.3.3 | FirewallRulesList.....  | 168 |
| 3.1.4.16.4   | Simple Types.....   | 168 |
| 3.1.4.16.4.1 | DeleteFirewallRulesOption.....                                  | 169 |
| 3.1.4.16.5   | Attributes.....   | 169 |
| 3.1.4.16.6   | Groups.....   | 169 |
| 3.1.4.16.7   | Attribute Groups.....   | 169 |
| 3.1.4.17     | GetAccessObject.....  | 169 |
| 3.1.4.17.1   | Messages.....   | 170 |
| 3.1.4.17.1.1 | IAccessServiceSoap_GetAccessObject_InputMessage.....            | 170 |
| 3.1.4.17.1.2 | IAccessServiceSoap_GetAccessObject_OutputMessage.....           | 170 |
| 3.1.4.17.2   | Elements.....   | 170 |
| 3.1.4.17.2.1 | GetAccessObject.....  | 171 |
| 3.1.4.17.2.2 | GetAccessObjectResponse.....                                    | 171 |
| 3.1.4.17.3   | Complex Types.....  | 171 |
| 3.1.4.17.3.1 | GetParameters.....  | 172 |
| 3.1.4.17.3.2 | GetResult.....  | 172 |
| 3.1.4.17.4   | Simple Types.....   | 172 |
| 3.1.4.17.5   | Attributes.....   | 173 |
| 3.1.4.17.6   | Groups.....   | 173 |
| 3.1.4.17.7   | Attribute Groups.....   | 173 |
| 3.1.4.18     | GetApplicationInformation.....                                  | 173 |
| 3.1.4.18.1   | Messages.....   | 173 |
| 3.1.4.18.1.1 | IAccessServiceSoap_GetApplicationInformation_InputMessage.....  | 174 |
| 3.1.4.18.1.2 | IAccessServiceSoap_GetApplicationInformation_OutputMessage..... | 174 |
| 3.1.4.18.2   | Elements.....   | 174 |
| 3.1.4.18.2.1 | GetApplicationInformation.....                                  | 174 |
| 3.1.4.18.2.2 | GetApplicationInformationResponse.....                          | 175 |



|              |  |     |
|--------------|--|-----|
| 3.1.4.18.3   | Complex Types .....  | 175 |
| 3.1.4.18.3.1 | GetAppInfoResult.....  | 175 |
| 3.1.4.18.3.2 | GetApplicationInformationParameters.....                         | 177 |
| 3.1.4.18.3.3 | IDList .....   | 177 |
| 3.1.4.18.3.4 | ProtocolVersionList.....   | 178 |
| 3.1.4.18.4   | Simple Types .....   | 178 |
| 3.1.4.18.5   | Attributes .....   | 178 |
| 3.1.4.18.6   | Groups.....  | 178 |
| 3.1.4.18.7   | Attribute Groups.....  | 178 |
| 3.1.4.19     | GetDataConnectivity.....   | 178 |
| 3.1.4.19.1   | Messages .....   | 179 |
| 3.1.4.19.1.1 | IAccessServiceSoap_GetDataConnectivity_InputMessage.....         | 179 |
| 3.1.4.19.1.2 | IAccessServiceSoap_GetDataConnectivity_OutputMessage.....        | 179 |
| 3.1.4.19.2   | Elements.....  | 179 |
| 3.1.4.19.2.1 | GetDataConnectivity .....  | 180 |
| 3.1.4.19.2.2 | GetDataConnectivityResponse .....                                | 180 |
| 3.1.4.19.3   | Complex Types .....  | 181 |
| 3.1.4.19.3.1 | GetDataConnectivityParameters.....                               | 181 |
| 3.1.4.19.3.2 | GetDataConnectivityResult .....                                  | 181 |
| 3.1.4.19.4   | Simple Types .....   | 182 |
| 3.1.4.19.5   | Attributes .....   | 182 |
| 3.1.4.19.6   | Groups.....  | 182 |
| 3.1.4.19.7   | Attribute Groups.....  | 182 |
| 3.1.4.20     | GetDataConnectivityStatus.....                                   | 182 |
| 3.1.4.20.1   | Messages .....   | 183 |
| 3.1.4.20.1.1 | IAccessServiceSoap_GetDataConnectivityStatus_InputMessage.....   | 183 |
| 3.1.4.20.1.2 | IAccessServiceSoap_GetDataConnectivityStatus_OutputMessage.....  | 183 |
| 3.1.4.20.2   | Elements.....  | 183 |
| 3.1.4.20.2.1 | GetDataConnectivityStatus.....                                   | 184 |
| 3.1.4.20.2.2 | GetDataConnectivityStatusResponse .....                          | 184 |
| 3.1.4.20.3   | Complex Types .....  | 184 |
| 3.1.4.20.3.1 | ArrayOfConnectivityStatusInformation.....                        | 185 |
| 3.1.4.20.3.2 | GetDataConnectivityStatusParameters.....                         | 185 |
| 3.1.4.20.3.3 | GetDataConnectivityStatusResult .....                            | 185 |
| 3.1.4.20.4   | Simple Types .....   | 186 |
| 3.1.4.20.5   | Attributes .....   | 186 |
| 3.1.4.20.6   | Groups.....  | 186 |
| 3.1.4.20.7   | Attribute Groups.....  | 186 |
| 3.1.4.21     | GetFirewallRules .....   | 186 |
| 3.1.4.21.1   | Messages .....   | 187 |
| 3.1.4.21.1.1 | IAccessServiceSoap_GetFirewallRules_InputMessage .....           | 187 |
| 3.1.4.21.1.2 | IAccessServiceSoap_GetFirewallRules_OutputMessage .....          | 187 |
| 3.1.4.21.2   | Elements.....  | 187 |
| 3.1.4.21.2.1 | GetFirewallRules .....   | 187 |
| 3.1.4.21.2.2 | GetFirewallRulesResponse.....                                    | 188 |
| 3.1.4.21.3   | Complex Types .....  | 188 |
| 3.1.4.21.3.1 | GetFirewallRulesParameters .....                                 | 189 |
| 3.1.4.21.3.2 | GetFirewallRulesResult .....                                     | 189 |
| 3.1.4.21.4   | Simple Types .....   | 189 |
| 3.1.4.21.5   | Attributes .....   | 189 |
| 3.1.4.21.6   | Groups.....  | 190 |
| 3.1.4.21.7   | Attribute Groups.....  | 190 |
| 3.1.4.22     | GetLinkedTableInformation .....                                  | 190 |
| 3.1.4.22.1   | Messages .....   | 191 |
| 3.1.4.22.1.1 | IAccessServiceSoap_GetLinkedTableInformation_InputMessage .....  | 191 |
| 3.1.4.22.1.2 | IAccessServiceSoap_GetLinkedTableInformation_OutputMessage ..... | 191 |
| 3.1.4.22.2   | Elements.....  | 191 |
| 3.1.4.22.2.1 | GetLinkedTableInformation .....                                  | 192 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.22.2.2 | GetLinkedTableInformationResponse .....                          | 192 |
| 3.1.4.22.3   | Complex Types .....  | 193 |
| 3.1.4.22.3.1 | GetLinkedTableInformationParameters .....                        | 193 |
| 3.1.4.22.3.2 | GetLinkedTableInformationResult.....                             | 193 |
| 3.1.4.22.4   | Simple Types .....   | 194 |
| 3.1.4.22.5   | Attributes .....   | 194 |
| 3.1.4.22.6   | Groups.....  | 194 |
| 3.1.4.22.7   | Attribute Groups.....  | 194 |
| 3.1.4.23     | ImportData .....   | 194 |
| 3.1.4.23.1   | Messages .....   | 195 |
| 3.1.4.23.1.1 | IAccessServiceSoap_ImportData_InputMessage .....                 | 195 |
| 3.1.4.23.1.2 | IAccessServiceSoap_ImportData_OutputMessage .....                | 195 |
| 3.1.4.23.2   | Elements.....  | 195 |
| 3.1.4.23.2.1 | ImportData .....   | 195 |
| 3.1.4.23.2.2 | ImportDataResponse.....  | 196 |
| 3.1.4.23.3   | Complex Types .....  | 196 |
| 3.1.4.23.3.1 | ImportDataParameters .....                                       | 196 |
| 3.1.4.23.3.2 | ImportDataResult .....   | 197 |
| 3.1.4.23.4   | Simple Types .....   | 197 |
| 3.1.4.23.5   | Attributes .....   | 197 |
| 3.1.4.23.6   | Groups.....  | 197 |
| 3.1.4.23.7   | Attribute Groups.....  | 198 |
| 3.1.4.24     | RefreshLinkedTableInformation.....                               | 198 |
| 3.1.4.24.1   | Messages .....   | 198 |
| 3.1.4.24.1.1 | IAccessServiceSoap_RefreshLinkedTableInformation_InputMessage    | 199 |
| 3.1.4.24.1.2 | IAccessServiceSoap_RefreshLinkedTableInformation_OutputMessage   | 199 |
| 3.1.4.24.2   | Elements.....  | 199 |
| 3.1.4.24.2.1 | RefreshLinkedTableInformation.....                               | 199 |
| 3.1.4.24.2.2 | RefreshLinkedTableInformationResponse .....                      | 200 |
| 3.1.4.24.3   | Complex Types .....  | 200 |
| 3.1.4.24.3.1 | RefreshLinkedTableInformationParameters.....                     | 200 |
| 3.1.4.24.3.2 | RefreshLinkedTableInformationResult .....                        | 201 |
| 3.1.4.24.4   | Simple Types .....   | 201 |
| 3.1.4.24.5   | Attributes .....   | 201 |
| 3.1.4.24.6   | Groups.....  | 201 |
| 3.1.4.24.7   | Attribute Groups.....  | 201 |
| 3.1.4.25     | RenameAccessObject.....  | 202 |
| 3.1.4.25.1   | Messages .....   | 202 |
| 3.1.4.25.1.1 | IAccessServiceSoap_RenameAccessObject_InputMessage.....          | 202 |
| 3.1.4.25.1.2 | IAccessServiceSoap_RenameAccessObject_OutputMessage.....         | 203 |
| 3.1.4.25.2   | Elements.....  | 203 |
| 3.1.4.25.2.1 | RenameAccessObject .....   | 203 |
| 3.1.4.25.2.2 | RenameAccessObjectResponse .....                                 | 203 |
| 3.1.4.25.3   | Complex Types .....  | 204 |
| 3.1.4.25.3.1 | RenameParameters.....  | 204 |
| 3.1.4.25.3.2 | RenameResult .....   | 205 |
| 3.1.4.25.4   | Simple Types .....   | 205 |
| 3.1.4.25.5   | Attributes .....   | 205 |
| 3.1.4.25.6   | Groups.....  | 205 |
| 3.1.4.25.7   | Attribute Groups.....  | 205 |
| 3.1.4.26     | SetDataConnectivityStatus .....                                  | 205 |
| 3.1.4.26.1   | Messages .....   | 206 |
| 3.1.4.26.1.1 | IAccessServiceSoap_SetDataConnectivityStatus_InputMessage .....  | 206 |
| 3.1.4.26.1.2 | IAccessServiceSoap_SetDataConnectivityStatus_OutputMessage ..... | 207 |
| 3.1.4.26.2   | Elements.....  | 207 |
| 3.1.4.26.2.1 | SetDataConnectivityStatus.....                                   | 207 |
| 3.1.4.26.2.2 | SetDataConnectivityStatusResponse .....                          | 207 |

|              |   |     |
|--------------|---|-----|
| 3.1.4.26.3   | Complex Types .....                                       | 208 |
| 3.1.4.26.3.1 | SetDataConnectivityStatusParameters.....                  | 208 |
| 3.1.4.26.3.2 | SetDataConnectivityStatusResult .....                     | 208 |
| 3.1.4.26.4   | Simple Types .....  | 209 |
| 3.1.4.26.5   | Attributes .....  | 209 |
| 3.1.4.26.6   | Groups.....   | 209 |
| 3.1.4.26.7   | Attribute Groups.....                                     | 209 |
| 3.1.4.27     | SetDataMacroTracing .....                                 | 209 |
| 3.1.4.27.1   | Messages .....  | 210 |
| 3.1.4.27.1.1 | IAccessServiceSoap_SetDataMacroTracing_InputMessage.....  | 210 |
| 3.1.4.27.1.2 | IAccessServiceSoap_SetDataMacroTracing_OutputMessage..... | 210 |
| 3.1.4.27.2   | Elements.....   | 210 |
| 3.1.4.27.2.1 | SetDataMacroTracing .....                                 | 211 |
| 3.1.4.27.2.2 | SetDataMacroTracingResponse .....                         | 211 |
| 3.1.4.27.3   | Complex Types .....                                       | 212 |
| 3.1.4.27.3.1 | SetDataMacroTracingParameters .....                       | 212 |
| 3.1.4.27.3.2 | SetDataMacroTracingResult.....                            | 212 |
| 3.1.4.27.4   | Simple Types .....  | 213 |
| 3.1.4.27.5   | Attributes .....  | 213 |
| 3.1.4.27.6   | Groups.....   | 213 |
| 3.1.4.27.7   | Attribute Groups.....                                     | 213 |
| 3.1.4.28     | UpdateAccessObject .....                                  | 213 |
| 3.1.4.28.1   | Messages .....  | 213 |
| 3.1.4.28.1.1 | IAccessServiceSoap_UpdateAccessObject_InputMessage .....  | 214 |
| 3.1.4.28.1.2 | IAccessServiceSoap_UpdateAccessObject_OutputMessage ..... | 214 |
| 3.1.4.28.2   | Elements.....   | 214 |
| 3.1.4.28.2.1 | UpdateAccessObject.....                                   | 214 |
| 3.1.4.28.2.2 | UpdateAccessObjectResponse.....                           | 215 |
| 3.1.4.28.3   | Complex Types .....                                       | 215 |
| 3.1.4.28.3.1 | UpdateParameters .....                                    | 215 |
| 3.1.4.28.3.2 | UpdateResult.....   | 216 |
| 3.1.4.28.4   | Simple Types .....  | 216 |
| 3.1.4.28.5   | Attributes .....  | 217 |
| 3.1.4.28.6   | Groups.....   | 217 |
| 3.1.4.28.7   | Attribute Groups.....                                     | 217 |
| 3.1.4.29     | CheckCopyStatus .....                                     | 217 |
| 3.1.4.29.1   | Messages .....  | 217 |
| 3.1.4.29.1.1 | IAccessServiceSoap_CheckCopyStatus_InputMessage .....     | 218 |
| 3.1.4.29.1.2 | IAccessServiceSoap_CheckCopyStatus_OutputMessage .....    | 218 |
| 3.1.4.29.2   | Elements.....   | 218 |
| 3.1.4.29.2.1 | CheckCopyStatus.....                                      | 218 |
| 3.1.4.29.2.2 | CheckCopyStatusResponse .....                             | 219 |
| 3.1.4.29.3   | Complex Types .....                                       | 219 |
| 3.1.4.29.4   | Simple Types .....  | 219 |
| 3.1.4.29.5   | Attributes .....  | 219 |
| 3.1.4.29.6   | Groups.....   | 219 |
| 3.1.4.29.7   | Attribute Groups.....                                     | 219 |
| 3.1.4.30     | CopyDatabase .....  | 219 |
| 3.1.4.30.1   | Messages .....  | 220 |
| 3.1.4.30.1.1 | IAccessServiceSoap_CopyDatabase_InputMessage .....        | 220 |
| 3.1.4.30.1.2 | IAccessServiceSoap_CopyDatabase_OutputMessage .....       | 221 |
| 3.1.4.30.2   | Elements.....   | 221 |
| 3.1.4.30.2.1 | CopyDatabase .....  | 221 |
| 3.1.4.30.2.2 | CopyDatabaseResponse.....                                 | 221 |
| 3.1.4.30.3   | Complex Types .....                                       | 222 |
| 3.1.4.30.4   | Simple Types .....  | 222 |
| 3.1.4.30.5   | Attributes .....  | 222 |
| 3.1.4.30.6   | Groups.....   | 222 |

|              |   |     |
|--------------|---|-----|
| 3.1.4.30.7   | Attribute Groups.....   | 222 |
| 3.1.4.31     | DatabaseExists .....  | 222 |
| 3.1.4.31.1   | Messages .....  | 223 |
| 3.1.4.31.1.1 | IAccessServiceSoap_DatabaseExists_InputMessage .....                | 223 |
| 3.1.4.31.1.2 | IAccessServiceSoap_DatabaseExists_OutputMessage .....               | 223 |
| 3.1.4.31.2   | Elements .....  | 223 |
| 3.1.4.31.2.1 | DatabaseExists .....  | 223 |
| 3.1.4.31.2.2 | DatabaseExistsResponse.....   | 224 |
| 3.1.4.31.3   | Complex Types .....   | 224 |
| 3.1.4.31.4   | Simple Types .....  | 224 |
| 3.1.4.31.5   | Attributes .....  | 224 |
| 3.1.4.31.6   | Groups.....   | 224 |
| 3.1.4.31.7   | Attribute Groups.....   | 224 |
| 3.1.4.32     | ExecuteDacIncrementalUpgrade .....                                  | 225 |
| 3.1.4.32.1   | Messages .....  | 225 |
| 3.1.4.32.1.1 | IAccessServiceSoap_ExecuteDacIncrementalUpgrade_InputMessage.....   | 225 |
| 3.1.4.32.1.2 | IAccessServiceSoap_ExecuteDacIncrementalUpgrade_OutputMessage ..... | 226 |
| 3.1.4.32.2   | Elements .....  | 226 |
| 3.1.4.32.2.1 | ExecuteDacIncrementalUpgrade .....                                  | 226 |
| 3.1.4.32.2.2 | ExecuteDacIncrementalUpgradeResponse .....                          | 227 |
| 3.1.4.32.3   | Complex Types .....   | 227 |
| 3.1.4.32.4   | Simple Types .....  | 227 |
| 3.1.4.32.5   | Attributes .....  | 227 |
| 3.1.4.32.6   | Groups.....   | 227 |
| 3.1.4.32.7   | Attribute Groups.....   | 227 |
| 3.1.4.33     | GetAvailableServer.....   | 227 |
| 3.1.4.33.1   | Messages .....  | 228 |
| 3.1.4.33.1.1 | IAccessServiceSoap_GetAvailableServer_InputMessage.....             | 228 |
| 3.1.4.33.1.2 | IAccessServiceSoap_GetAvailableServer_OutputMessage.....            | 228 |
| 3.1.4.33.2   | Elements .....  | 228 |
| 3.1.4.33.2.1 | GetAvailableServer.....   | 229 |
| 3.1.4.33.2.2 | GetAvailableServerResponse .....                                    | 229 |
| 3.1.4.33.3   | Complex Types .....   | 230 |
| 3.1.4.33.4   | Simple Types .....  | 230 |
| 3.1.4.33.5   | Attributes .....  | 230 |
| 3.1.4.33.6   | Groups.....   | 230 |
| 3.1.4.33.7   | Attribute Groups.....   | 230 |
| 3.1.4.34     | GetPackage .....  | 230 |
| 3.1.4.34.1   | Messages .....  | 231 |
| 3.1.4.34.1.1 | IAccessServiceSoap_GetPackage_InputMessage .....                    | 231 |
| 3.1.4.34.1.2 | IAccessServiceSoap_GetPackage_OutputMessage .....                   | 231 |
| 3.1.4.34.2   | Elements.....   | 231 |
| 3.1.4.34.2.1 | GetPackage.....   | 231 |
| 3.1.4.34.2.2 | GetPackageResponse .....  | 232 |
| 3.1.4.34.3   | Complex Types .....   | 232 |
| 3.1.4.34.3.1 | GetPackageParameters.....   | 232 |
| 3.1.4.34.3.2 | GetPackageResult .....  | 233 |
| 3.1.4.34.4   | Simple Types .....  | 233 |
| 3.1.4.34.4.1 | PackageStatus.....  | 233 |
| 3.1.4.34.5   | Attributes .....  | 234 |
| 3.1.4.34.6   | Groups.....   | 234 |
| 3.1.4.34.7   | Attribute Groups.....   | 234 |
| 3.1.4.35     | GetServerName .....   | 234 |
| 3.1.4.35.1   | Messages .....  | 235 |
| 3.1.4.35.1.1 | IAccessServiceSoap_GetServerName_InputMessage .....                 | 235 |
| 3.1.4.35.1.2 | IAccessServiceSoap_GetServerName_OutputMessage .....                | 235 |
| 3.1.4.35.2   | Elements .....  | 235 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.35.2.1 | GetServerName .....  | 235 |
| 3.1.4.35.2.2 | GetServerNameResponse .....                                | 236 |
| 3.1.4.35.3   | Complex Types .....  | 236 |
| 3.1.4.35.4   | Simple Types .....   | 236 |
| 3.1.4.35.5   | Attributes .....   | 236 |
| 3.1.4.35.6   | Groups .....   | 236 |
| 3.1.4.35.7   | Attribute Groups .....                                     | 236 |
| 3.1.4.36     | ProvisionDatabase .....                                    | 237 |
| 3.1.4.36.1   | Messages .....   | 237 |
| 3.1.4.36.1.1 | IAccessServiceSoap_ProvisionDatabase_InputMessage .....    | 237 |
| 3.1.4.36.1.2 | IAccessServiceSoap_ProvisionDatabase_OutputMessage .....   | 238 |
| 3.1.4.36.2   | Elements .....   | 238 |
| 3.1.4.36.2.1 | ProvisionDatabase .....                                    | 238 |
| 3.1.4.36.2.2 | ProvisionDatabaseResponse .....                            | 238 |
| 3.1.4.36.3   | Complex Types .....  | 239 |
| 3.1.4.36.4   | Simple Types .....   | 239 |
| 3.1.4.36.5   | Attributes .....   | 239 |
| 3.1.4.36.6   | Groups .....   | 239 |
| 3.1.4.36.7   | Attribute Groups .....                                     | 239 |
| 3.1.4.37     | RenameDatabase .....                                       | 239 |
| 3.1.4.37.1   | Messages .....   | 240 |
| 3.1.4.37.1.1 | IAccessServiceSoap_RenameDatabase_InputMessage .....       | 240 |
| 3.1.4.37.1.2 | IAccessServiceSoap_RenameDatabase_OutputMessage .....      | 240 |
| 3.1.4.37.2   | Elements .....   | 240 |
| 3.1.4.37.2.1 | RenameDatabase .....                                       | 241 |
| 3.1.4.37.2.2 | RenameDatabaseResponse .....                               | 241 |
| 3.1.4.37.3   | Complex Types .....  | 241 |
| 3.1.4.37.4   | Simple Types .....   | 241 |
| 3.1.4.37.5   | Attributes .....   | 242 |
| 3.1.4.37.6   | Groups .....   | 242 |
| 3.1.4.37.7   | Attribute Groups .....                                     | 242 |
| 3.1.4.38     | SetReadWrite .....   | 242 |
| 3.1.4.38.1   | Messages .....   | 242 |
| 3.1.4.38.1.1 | IAccessServiceSoap_SetReadWrite_InputMessage .....         | 243 |
| 3.1.4.38.1.2 | IAccessServiceSoap_SetReadWrite_OutputMessage .....        | 243 |
| 3.1.4.38.2   | Elements .....   | 243 |
| 3.1.4.38.2.1 | SetReadWrite .....   | 243 |
| 3.1.4.38.2.2 | SetReadWriteResponse .....                                 | 244 |
| 3.1.4.38.3   | Complex Types .....  | 244 |
| 3.1.4.38.4   | Simple Types .....   | 244 |
| 3.1.4.38.4.1 | DatabaseReadWriteState .....                               | 244 |
| 3.1.4.38.5   | Attributes .....   | 245 |
| 3.1.4.38.6   | Groups .....   | 245 |
| 3.1.4.38.7   | Attribute Groups .....                                     | 245 |
| 3.1.4.39     | UnprovisionDatabase .....                                  | 245 |
| 3.1.4.39.1   | Messages .....   | 245 |
| 3.1.4.39.1.1 | IAccessServiceSoap_UnprovisionDatabase_InputMessage .....  | 246 |
| 3.1.4.39.1.2 | IAccessServiceSoap_UnprovisionDatabase_OutputMessage ..... | 246 |
| 3.1.4.39.2   | Elements .....   | 246 |
| 3.1.4.39.2.1 | UnprovisionDatabase .....                                  | 246 |
| 3.1.4.39.2.2 | UnprovisionDatabaseResponse .....                          | 247 |
| 3.1.4.39.3   | Complex Types .....  | 247 |
| 3.1.4.39.4   | Simple Types .....   | 247 |
| 3.1.4.39.5   | Attributes .....   | 247 |
| 3.1.4.39.6   | Groups .....   | 247 |
| 3.1.4.39.7   | Attribute Groups .....                                     | 247 |
| 3.1.4.40     | GetAutoSumValues .....                                     | 247 |
| 3.1.4.40.1   | Messages .....   | 248 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.40.1.1 | IAccessServiceSoap_GetAutoSumValues_InputMessage.....                | 248 |
| 3.1.4.40.1.2 | IAccessServiceSoap_GetAutoSumValues_OutputMessage .....              | 249 |
| 3.1.4.40.2   | Elements.....  | 249 |
| 3.1.4.40.2.1 | GetAutoSumValues .....   | 249 |
| 3.1.4.40.2.2 | GetAutoSumValuesResponse .....                                       | 250 |
| 3.1.4.40.3   | Complex Types .....  | 250 |
| 3.1.4.40.4   | Simple Types .....   | 250 |
| 3.1.4.40.5   | Attributes .....   | 250 |
| 3.1.4.40.6   | Groups.....  | 250 |
| 3.1.4.40.7   | Attribute Groups.....  | 250 |
| 3.1.4.41     | GetSearchData .....  | 250 |
| 3.1.4.41.1   | Messages .....   | 251 |
| 3.1.4.41.1.1 | IAccessServiceSoap_GetSearchData_InputMessage .....                  | 251 |
| 3.1.4.41.1.2 | IAccessServiceSoap_GetSearchData_OutputMessage .....                 | 251 |
| 3.1.4.41.2   | Elements.....  | 252 |
| 3.1.4.41.2.1 | GetSearchData .....  | 252 |
| 3.1.4.41.2.2 | GetSearchDataResponse.....   | 253 |
| 3.1.4.41.3   | Complex Types .....  | 253 |
| 3.1.4.41.4   | Simple Types .....   | 253 |
| 3.1.4.41.5   | Attributes .....   | 253 |
| 3.1.4.41.6   | Groups.....  | 253 |
| 3.1.4.41.7   | Attribute Groups.....  | 254 |
| 3.1.4.42     | RunDataMacro .....   | 254 |
| 3.1.4.42.1   | Messages .....   | 254 |
| 3.1.4.42.1.1 | IAccessServiceSoap_RunDataMacro_InputMessage .....                   | 254 |
| 3.1.4.42.1.2 | IAccessServiceSoap_RunDataMacro_OutputMessage .....                  | 255 |
| 3.1.4.42.2   | Elements.....  | 255 |
| 3.1.4.42.2.1 | RunDataMacro .....   | 255 |
| 3.1.4.42.2.2 | RunDataMacroResponse.....  | 255 |
| 3.1.4.42.3   | Complex Types .....  | 256 |
| 3.1.4.42.3.1 | DataMacroInstance .....  | 256 |
| 3.1.4.42.4   | Simple Types .....   | 256 |
| 3.1.4.42.5   | Attributes .....   | 256 |
| 3.1.4.42.6   | Groups.....  | 257 |
| 3.1.4.42.7   | Attribute Groups.....  | 257 |
| 3.1.4.43     | GetFormDefinitionAndRecordSet .....                                  | 257 |
| 3.1.4.43.1   | Messages .....   | 258 |
| 3.1.4.43.1.1 | IAccessServiceSoap_GetFormDefinitionAndRecordSet_InputMessage.....   | 258 |
| 3.1.4.43.1.2 | IAccessServiceSoap_GetFormDefinitionAndRecordSet_OutputMessage ..... | 258 |
| 3.1.4.43.2   | Elements.....  | 258 |
| 3.1.4.43.2.1 | GetFormDefinitionAndRecordSet .....                                  | 258 |
| 3.1.4.43.2.2 | GetFormDefinitionAndRecordSetResponse.....                           | 259 |
| 3.1.4.43.3   | Complex Types .....  | 260 |
| 3.1.4.43.3.1 | ArrayOfArrayOfAnyType .....  | 261 |
| 3.1.4.43.3.2 | ArrayOfArrayOfArrayOfstring .....                                    | 261 |
| 3.1.4.43.3.3 | ArrayOfArrayOfFormatInfo .....                                       | 261 |
| 3.1.4.43.3.4 | ArrayOfFormatInfo .....  | 262 |
| 3.1.4.43.3.5 | ArrayOfRecordStatus.....   | 262 |
| 3.1.4.43.3.6 | FormatInfo.....  | 262 |
| 3.1.4.43.3.7 | PagingInfo .....   | 263 |
| 3.1.4.43.3.8 | Recordset .....  | 263 |
| 3.1.4.43.3.9 | SharedDataBaseInfo .....   | 264 |
| 3.1.4.43.4   | Simple Types .....   | 266 |
| 3.1.4.43.4.1 | RecordStatus.....  | 266 |
| 3.1.4.43.5   | Attributes .....   | 267 |
| 3.1.4.43.6   | Groups.....  | 267 |
| 3.1.4.43.7   | Attribute Groups.....  | 267 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.44     | GetUIMacroJavascript   | 267 |
| 3.1.4.44.1   | Messages   | 268 |
| 3.1.4.44.1.1 | IAccessServiceSoap_GetUIMacroJavascript_InputMessage         | 268 |
| 3.1.4.44.1.2 | IAccessServiceSoap_GetUIMacroJavascript_OutputMessage        | 268 |
| 3.1.4.44.2   | Elements   | 268 |
| 3.1.4.44.2.1 | GetUIMacroJavascript   | 268 |
| 3.1.4.44.2.2 | GetUIMacroJavascriptResponse                                 | 269 |
| 3.1.4.44.3   | Complex Types  | 269 |
| 3.1.4.44.4   | Simple Types   | 269 |
| 3.1.4.44.5   | Attributes   | 269 |
| 3.1.4.44.6   | Groups   | 269 |
| 3.1.4.44.7   | Attribute Groups   | 269 |
| 3.1.4.45     | SetEnableDisableDatabase                                     | 269 |
| 3.1.4.45.1   | Messages   | 270 |
| 3.1.4.45.1.1 | IAccessServiceSoap_SetEnableDisableDatabase_InputMessage     | 270 |
| 3.1.4.45.1.2 | IAccessServiceSoap_SetEnableDisableDatabase_OutputMessage    | 271 |
| 3.1.4.45.2   | Elements   | 271 |
| 3.1.4.45.2.1 | SetEnableDisableDatabase                                     | 271 |
| 3.1.4.45.2.2 | SetEnableDisableDatabaseResponse                             | 271 |
| 3.1.4.45.3   | Complex Types  | 272 |
| 3.1.4.45.4   | Simple Types   | 272 |
| 3.1.4.45.4.1 | DatabaseEnableDisableState                                   | 272 |
| 3.1.4.45.5   | Attributes   | 272 |
| 3.1.4.45.6   | Groups   | 272 |
| 3.1.4.45.7   | Attribute Groups   | 272 |
| 3.1.4.46     | UpdateDatabaseConfiguration                                  | 273 |
| 3.1.4.46.1   | Messages   | 273 |
| 3.1.4.46.1.1 | IAccessServiceSoap_UpdateDatabaseConfiguration_InputMessage  | 273 |
| 3.1.4.46.1.2 | IAccessServiceSoap_UpdateDatabaseConfiguration_OutputMessage | 274 |
| 3.1.4.46.2   | Elements   | 274 |
| 3.1.4.46.2.1 | UpdateDatabaseConfiguration                                  | 274 |
| 3.1.4.46.2.2 | UpdateDatabaseConfigurationResponse                          | 274 |
| 3.1.4.46.3   | Complex Types  | 275 |
| 3.1.4.46.4   | Simple Types   | 275 |
| 3.1.4.46.5   | Attributes   | 275 |
| 3.1.4.46.6   | Groups   | 275 |
| 3.1.4.46.7   | Attribute Groups   | 275 |
| 3.1.4.47     | CloseResultSet   | 275 |
| 3.1.4.47.1   | Messages   | 276 |
| 3.1.4.47.1.1 | IAccessServiceSoap_CloseResultSet_InputMessage               | 276 |
| 3.1.4.47.1.2 | IAccessServiceSoap_CloseResultSet_OutputMessage              | 276 |
| 3.1.4.47.2   | Elements   | 276 |
| 3.1.4.47.2.1 | CloseResultSet   | 277 |
| 3.1.4.47.2.2 | CloseResultSetResponse                                       | 277 |
| 3.1.4.47.3   | Complex Types  | 277 |
| 3.1.4.47.4   | Simple Types   | 277 |
| 3.1.4.47.5   | Attributes   | 277 |
| 3.1.4.47.6   | Groups   | 277 |
| 3.1.4.47.7   | Attribute Groups   | 278 |
| 3.1.4.48     | DeleteAllData  | 278 |
| 3.1.4.48.1   | Messages   | 278 |
| 3.1.4.48.1.1 | IAccessServiceSoap_DeleteAllData_InputMessage                | 278 |
| 3.1.4.48.1.2 | IAccessServiceSoap_DeleteAllData_OutputMessage               | 279 |
| 3.1.4.48.2   | Elements   | 279 |
| 3.1.4.48.2.1 | DeleteAllData  | 279 |
| 3.1.4.48.2.2 | DeleteAllDataResponse  | 279 |
| 3.1.4.48.3   | Complex Types  | 280 |
| 3.1.4.48.4   | Simple Types   | 280 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.48.5   | Attributes .....   | 280 |
| 3.1.4.48.6   | Groups.....  | 280 |
| 3.1.4.48.7   | Attribute Groups.....  | 280 |
| 3.1.4.49     | DeleteDataNoCache.....   | 280 |
| 3.1.4.49.1   | Messages .....   | 281 |
| 3.1.4.49.1.1 | IAccessServiceSoap_DeleteDataNoCache_InputMessage.....             | 281 |
| 3.1.4.49.1.2 | IAccessServiceSoap_DeleteDataNoCache_OutputMessage.....            | 281 |
| 3.1.4.49.2   | Elements .....   | 281 |
| 3.1.4.49.2.1 | DeleteDataNoCache .....  | 282 |
| 3.1.4.49.2.2 | DeleteDataNoCacheResponse .....                                    | 282 |
| 3.1.4.49.3   | Complex Types .....  | 283 |
| 3.1.4.49.4   | Simple Types .....   | 283 |
| 3.1.4.49.5   | Attributes .....   | 283 |
| 3.1.4.49.6   | Groups.....  | 283 |
| 3.1.4.49.7   | Attribute Groups.....  | 283 |
| 3.1.4.50     | FixupRowNoCache.....   | 283 |
| 3.1.4.50.1   | Messages .....   | 284 |
| 3.1.4.50.1.1 | IAccessServiceSoap_FixupRowNoCache_InputMessage .....              | 284 |
| 3.1.4.50.1.2 | IAccessServiceSoap_FixupRowNoCache_OutputMessage.....              | 284 |
| 3.1.4.50.2   | Elements.....  | 284 |
| 3.1.4.50.2.1 | FixupRowNoCache.....   | 284 |
| 3.1.4.50.2.2 | FixupRowNoCacheResponse .....                                      | 286 |
| 3.1.4.50.3   | Complex Types .....  | 286 |
| 3.1.4.50.4   | Simple Types .....   | 286 |
| 3.1.4.50.5   | Attributes .....   | 286 |
| 3.1.4.50.6   | Groups.....  | 286 |
| 3.1.4.50.7   | Attribute Groups.....  | 286 |
| 3.1.4.51     | GetApplicationNotifications .....                                  | 286 |
| 3.1.4.51.1   | Messages .....   | 287 |
| 3.1.4.51.1.1 | IAccessServiceSoap_GetApplicationNotifications_InputMessage .....  | 287 |
| 3.1.4.51.1.2 | IAccessServiceSoap_GetApplicationNotifications_OutputMessage ..... | 288 |
| 3.1.4.51.2   | Elements.....  | 288 |
| 3.1.4.51.2.1 | GetApplicationNotifications.....                                   | 288 |
| 3.1.4.51.2.2 | GetApplicationNotificationsResponse .....                          | 288 |
| 3.1.4.51.3   | Complex Types .....  | 289 |
| 3.1.4.51.3.1 | ArrayOfMessageSeverity .....                                       | 289 |
| 3.1.4.51.3.2 | ArrayOfNotification.....   | 289 |
| 3.1.4.51.3.3 | Notification .....   | 290 |
| 3.1.4.51.4   | Simple Types .....   | 290 |
| 3.1.4.51.4.1 | MessageSeverity.....   | 290 |
| 3.1.4.51.5   | Attributes .....   | 291 |
| 3.1.4.51.6   | Groups.....  | 291 |
| 3.1.4.51.7   | Attribute Groups.....  | 291 |
| 3.1.4.52     | GetHostProperties .....  | 291 |
| 3.1.4.52.1   | Messages .....   | 291 |
| 3.1.4.52.1.1 | IAccessServiceSoap_GetHostProperties_InputMessage .....            | 292 |
| 3.1.4.52.1.2 | IAccessServiceSoap_GetHostProperties_OutputMessage .....           | 292 |
| 3.1.4.52.2   | Elements.....  | 292 |
| 3.1.4.52.2.1 | GetHostProperties.....   | 292 |
| 3.1.4.52.2.2 | GetHostPropertiesResponse.....                                     | 293 |
| 3.1.4.52.3   | Complex Types .....  | 294 |
| 3.1.4.52.4   | Simple Types .....   | 294 |
| 3.1.4.52.5   | Attributes .....   | 294 |
| 3.1.4.52.6   | Groups.....  | 294 |
| 3.1.4.52.7   | Attribute Groups.....  | 294 |
| 3.1.4.53     | GetNewDatabaseCollation .....                                      | 294 |
| 3.1.4.53.1   | Messages .....   | 295 |
| 3.1.4.53.1.1 | IAccessServiceSoap_GetNewDatabaseCollation_InputMessage .....      | 295 |



|              |   |          |
|--------------|---|----------|
| 3.1.4.53.1.2 | IAccessServiceSoap_GetNewDatabaseCollation_OutputMessage  | .....295 |
| 3.1.4.53.2   | Elements  | .....295 |
| 3.1.4.53.2.1 | GetNewDatabaseCollation                                   | .....296 |
| 3.1.4.53.2.2 | GetNewDatabaseCollationResponse                           | .....296 |
| 3.1.4.53.3   | Complex Types   | .....297 |
| 3.1.4.53.4   | Simple Types  | .....297 |
| 3.1.4.53.5   | Attributes  | .....297 |
| 3.1.4.53.6   | Groups  | .....297 |
| 3.1.4.53.7   | Attribute Groups  | .....297 |
| 3.1.4.54     | GetOfficeAppSettings                                      | .....297 |
| 3.1.4.54.1   | Messages  | .....297 |
| 3.1.4.54.1.1 | IAccessServiceSoap_GetOfficeAppSettings_InputMessage      | .....298 |
| 3.1.4.54.1.2 | IAccessServiceSoap_GetOfficeAppSettings_OutputMessage     | .....298 |
| 3.1.4.54.2   | Elements  | .....298 |
| 3.1.4.54.2.1 | GetOfficeAppSettings                                      | .....298 |
| 3.1.4.54.2.2 | GetOfficeAppSettingsResponse                              | .....299 |
| 3.1.4.54.3   | Complex Types   | .....299 |
| 3.1.4.54.4   | Simple Types  | .....299 |
| 3.1.4.54.5   | Attributes  | .....299 |
| 3.1.4.54.6   | Groups  | .....299 |
| 3.1.4.54.7   | Attribute Groups  | .....299 |
| 3.1.4.55     | GetReservedDatabase                                       | .....300 |
| 3.1.4.55.1   | Messages  | .....300 |
| 3.1.4.55.1.1 | IAccessServiceSoap_GetReservedDatabase_InputMessage       | .....300 |
| 3.1.4.55.1.2 | IAccessServiceSoap_GetReservedDatabase_OutputMessage      | .....301 |
| 3.1.4.55.2   | Elements  | .....301 |
| 3.1.4.55.2.1 | GetReservedDatabase                                       | .....301 |
| 3.1.4.55.2.2 | GetReservedDatabaseResponse                               | .....301 |
| 3.1.4.55.3   | Complex Types   | .....302 |
| 3.1.4.55.4   | Simple Types  | .....302 |
| 3.1.4.55.5   | Attributes  | .....302 |
| 3.1.4.55.6   | Groups  | .....302 |
| 3.1.4.55.7   | Attribute Groups  | .....302 |
| 3.1.4.56     | InsertAppForOfficeInForm                                  | .....302 |
| 3.1.4.56.1   | Messages  | .....303 |
| 3.1.4.56.1.1 | IAccessServiceSoap_InsertAppForOfficeInForm_InputMessage  | .....303 |
| 3.1.4.56.1.2 | IAccessServiceSoap_InsertAppForOfficeInForm_OutputMessage | .....303 |
| 3.1.4.56.2   | Elements  | .....303 |
| 3.1.4.56.2.1 | InsertAppForOfficeInForm                                  | .....304 |
| 3.1.4.56.2.2 | InsertAppForOfficeInFormResponse                          | .....304 |
| 3.1.4.56.3   | Complex Types   | .....305 |
| 3.1.4.56.3.1 | InsertAppsForOfficeInfo                                   | .....305 |
| 3.1.4.56.4   | Simple Types  | .....306 |
| 3.1.4.56.5   | Attributes  | .....306 |
| 3.1.4.56.6   | Groups  | .....306 |
| 3.1.4.56.7   | Attribute Groups  | .....306 |
| 3.1.4.57     | InsertDataNoCache   | .....306 |
| 3.1.4.57.1   | Messages  | .....307 |
| 3.1.4.57.1.1 | IAccessServiceSoap_InsertDataNoCache_InputMessage         | .....307 |
| 3.1.4.57.1.2 | IAccessServiceSoap_InsertDataNoCache_OutputMessage        | .....307 |
| 3.1.4.57.2   | Elements  | .....307 |
| 3.1.4.57.2.1 | InsertDataNoCache   | .....307 |
| 3.1.4.57.2.2 | InsertDataNoCacheResponse                                 | .....309 |
| 3.1.4.57.3   | Complex Types   | .....309 |
| 3.1.4.57.4   | Simple Types  | .....309 |
| 3.1.4.57.5   | Attributes  | .....309 |
| 3.1.4.57.6   | Groups  | .....309 |
| 3.1.4.57.7   | Attribute Groups  | .....309 |

|              |  |     |
|--------------|--|-----|
| 3.1.4.58     | RecycleDatabase.....                                     | 309 |
| 3.1.4.58.1   | Messages .....   | 310 |
| 3.1.4.58.1.1 | IAccessServiceSoap_RecycleDatabase_InputMessage .....    | 310 |
| 3.1.4.58.1.2 | IAccessServiceSoap_RecycleDatabase_OutputMessage .....   | 310 |
| 3.1.4.58.2   | Elements .....   | 311 |
| 3.1.4.58.2.1 | RecycleDatabase.....                                     | 311 |
| 3.1.4.58.2.2 | RecycleDatabaseResponse .....                            | 311 |
| 3.1.4.58.3   | Complex Types .....                                      | 311 |
| 3.1.4.58.4   | Simple Types .....                                       | 312 |
| 3.1.4.58.5   | Attributes .....   | 312 |
| 3.1.4.58.6   | Groups.....  | 312 |
| 3.1.4.58.7   | Attribute Groups.....                                    | 312 |
| 3.1.4.59     | RestoreDatabase.....                                     | 312 |
| 3.1.4.59.1   | Messages .....   | 312 |
| 3.1.4.59.1.1 | IAccessServiceSoap_RestoreDatabase_InputMessage.....     | 313 |
| 3.1.4.59.1.2 | IAccessServiceSoap_RestoreDatabase_OutputMessage.....    | 313 |
| 3.1.4.59.2   | Elements .....   | 313 |
| 3.1.4.59.2.1 | RestoreDatabase .....                                    | 313 |
| 3.1.4.59.2.2 | RestoreDatabaseResponse .....                            | 314 |
| 3.1.4.59.3   | Complex Types .....                                      | 314 |
| 3.1.4.59.4   | Simple Types .....                                       | 314 |
| 3.1.4.59.5   | Attributes .....   | 314 |
| 3.1.4.59.6   | Groups.....  | 314 |
| 3.1.4.59.7   | Attribute Groups.....                                    | 314 |
| 3.1.4.60     | RetrieveImage.....                                       | 314 |
| 3.1.4.60.1   | Messages .....   | 315 |
| 3.1.4.60.1.1 | IAccessServiceSoap_RetrieveImage_InputMessage .....      | 315 |
| 3.1.4.60.1.2 | IAccessServiceSoap_RetrieveImage_OutputMessage .....     | 315 |
| 3.1.4.60.2   | Elements .....   | 315 |
| 3.1.4.60.2.1 | RetrieveImage.....                                       | 316 |
| 3.1.4.60.2.2 | RetrieveImageResponse .....                              | 316 |
| 3.1.4.60.3   | Complex Types .....                                      | 317 |
| 3.1.4.60.4   | Simple Types .....                                       | 317 |
| 3.1.4.60.5   | Attributes .....   | 317 |
| 3.1.4.60.6   | Groups.....  | 317 |
| 3.1.4.60.7   | Attribute Groups.....                                    | 317 |
| 3.1.4.61     | SelectDataNoCache .....                                  | 317 |
| 3.1.4.61.1   | Messages .....   | 318 |
| 3.1.4.61.1.1 | IAccessServiceSoap_SelectDataNoCache_InputMessage .....  | 318 |
| 3.1.4.61.1.2 | IAccessServiceSoap_SelectDataNoCache_OutputMessage ..... | 319 |
| 3.1.4.61.2   | Elements .....   | 319 |
| 3.1.4.61.2.1 | SelectDataNoCache.....                                   | 319 |
| 3.1.4.61.2.2 | SelectDataNoCacheResponse.....                           | 320 |
| 3.1.4.61.3   | Complex Types .....                                      | 321 |
| 3.1.4.61.4   | Simple Types .....                                       | 321 |
| 3.1.4.61.5   | Attributes .....   | 321 |
| 3.1.4.61.6   | Groups.....  | 321 |
| 3.1.4.61.7   | Attribute Groups.....                                    | 321 |
| 3.1.4.62     | SetObjectReadOnly .....                                  | 321 |
| 3.1.4.62.1   | Messages .....   | 322 |
| 3.1.4.62.1.1 | IAccessServiceSoap_SetObjectReadOnly_InputMessage .....  | 322 |
| 3.1.4.62.1.2 | IAccessServiceSoap_SetObjectReadOnly_OutputMessage ..... | 322 |
| 3.1.4.62.2   | Elements .....   | 322 |
| 3.1.4.62.2.1 | SetObjectReadOnly .....                                  | 323 |
| 3.1.4.62.2.2 | SetObjectReadOnlyResponse .....                          | 323 |
| 3.1.4.62.3   | Complex Types .....                                      | 324 |
| 3.1.4.62.3.1 | SetObjectReadOnlyParameters .....                        | 324 |
| 3.1.4.62.3.2 | SetObjectReadOnlyResult .....                            | 324 |

|              |   |     |
|--------------|---|-----|
| 3.1.4.62.4   | Simple Types .....  | 325 |
| 3.1.4.62.5   | Attributes .....  | 325 |
| 3.1.4.62.6   | Groups .....  | 325 |
| 3.1.4.62.7   | Attribute Groups .....                                      | 325 |
| 3.1.4.63     | SetOfficeAppSettings .....                                  | 325 |
| 3.1.4.63.1   | Messages .....  | 326 |
| 3.1.4.63.1.1 | IAccessServiceSoap_SetOfficeAppSettings_InputMessage .....  | 326 |
| 3.1.4.63.1.2 | IAccessServiceSoap_SetOfficeAppSettings_OutputMessage ..... | 326 |
| 3.1.4.63.2   | Elements .....  | 326 |
| 3.1.4.63.2.1 | SetOfficeAppSettings .....                                  | 326 |
| 3.1.4.63.2.2 | SetOfficeAppSettingsResponse .....                          | 327 |
| 3.1.4.63.3   | Complex Types .....   | 327 |
| 3.1.4.63.4   | Simple Types .....  | 327 |
| 3.1.4.63.5   | Attributes .....  | 327 |
| 3.1.4.63.6   | Groups .....  | 328 |
| 3.1.4.63.7   | Attribute Groups .....                                      | 328 |
| 3.1.4.64     | UpdateDataNoCache .....                                     | 328 |
| 3.1.4.64.1   | Messages .....  | 329 |
| 3.1.4.64.1.1 | IAccessServiceSoap_UpdateDataNoCache_InputMessage .....     | 329 |
| 3.1.4.64.1.2 | IAccessServiceSoap_UpdateDataNoCache_OutputMessage .....    | 329 |
| 3.1.4.64.2   | Elements .....  | 329 |
| 3.1.4.64.2.1 | UpdateDataNoCache .....                                     | 329 |
| 3.1.4.64.2.2 | UpdateDataNoCacheResponse .....                             | 331 |
| 3.1.4.64.3   | Complex Types .....   | 332 |
| 3.1.4.64.4   | Simple Types .....  | 332 |
| 3.1.4.64.5   | Attributes .....  | 332 |
| 3.1.4.64.6   | Groups .....  | 332 |
| 3.1.4.64.7   | Attribute Groups .....                                      | 332 |
| 3.1.4.65     | UpdateImage .....   | 332 |
| 3.1.4.65.1   | Messages .....  | 333 |
| 3.1.4.65.1.1 | IAccessServiceSoap_UpdateImage_InputMessage .....           | 333 |
| 3.1.4.65.1.2 | IAccessServiceSoap_UpdateImage_OutputMessage .....          | 333 |
| 3.1.4.65.2   | Elements .....  | 333 |
| 3.1.4.65.2.1 | UpdateImage .....   | 333 |
| 3.1.4.65.2.2 | UpdateImageResponse .....                                   | 334 |
| 3.1.4.65.3   | Complex Types .....   | 334 |
| 3.1.4.65.4   | Simple Types .....  | 335 |
| 3.1.4.65.5   | Attributes .....  | 335 |
| 3.1.4.65.6   | Groups .....  | 335 |
| 3.1.4.65.7   | Attribute Groups .....                                      | 335 |
| 3.1.4.66     | OpenFirewallForUser .....                                   | 335 |
| 3.1.4.66.1   | Messages .....  | 335 |
| 3.1.4.66.1.1 | IAccessServiceSoap_OpenFirewallForUser_InputMessage .....   | 336 |
| 3.1.4.66.1.2 | IAccessServiceSoap_OpenFirewallForUser_OutputMessage .....  | 336 |
| 3.1.4.66.2   | Elements .....  | 336 |
| 3.1.4.66.2.1 | OpenFirewallForUser .....                                   | 336 |
| 3.1.4.66.2.2 | OpenFirewallForUserResponse .....                           | 337 |
| 3.1.4.66.3   | Complex Types .....   | 337 |
| 3.1.4.66.3.1 | OpenFirewallForUserParameters .....                         | 337 |
| 3.1.4.66.4   | Simple Types .....  | 338 |
| 3.1.4.66.5   | Attributes .....  | 338 |
| 3.1.4.66.6   | Groups .....  | 338 |
| 3.1.4.66.7   | Attribute Groups .....                                      | 338 |
| 3.1.5        | Timer Events .....  | 338 |
| 3.1.5.1      | Session Timeout .....                                       | 338 |
| 3.1.6        | Other Local Events .....                                    | 338 |
| 3.2          | Client Details .....  | 338 |

|           |  |            |
|-----------|--|------------|
| <b>4</b>  | <b>Protocol Examples</b>   | <b>340</b> |
| 4.1       | CreateAccessObject   | 340        |
| 4.2       | CreateApplication  | 342        |
| 4.3       | DeleteData   | 343        |
| 4.4       | UpdateData   | 344        |
| 4.5       | OpenResultSet  | 345        |
| <b>5</b>  | <b>Security</b>  | <b>348</b> |
| 5.1       | Security Considerations for Implementers   | 348        |
| 5.2       | Index of Security Parameters   | 348        |
| <b>6</b>  | <b>Appendix A: Full WSDL</b>   | <b>349</b> |
| <b>7</b>  | <b>Appendix B: Full XML Schema</b>   | <b>390</b> |
| 7.1       | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services</a> Schema   | 390        |
| 7.2       | <a href="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/">http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/</a> Schema | 396        |
| 7.3       | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database</a> Schema                                   | 424        |
| 7.4       | <a href="http://schemas.microsoft.com/2003/10/Serialization/Arrays">http://schemas.microsoft.com/2003/10/Serialization/Arrays</a> Schema   | 426        |
| 7.5       | <a href="http://schemas.microsoft.com/2003/10/Serialization/">http://schemas.microsoft.com/2003/10/Serialization/</a> Schema   | 427        |
| 7.6       | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data</a> Schema   | 428        |
| 7.7       | <a href="http://schemas.datacontract.org/2004/07/System.Data">http://schemas.datacontract.org/2004/07/System.Data</a> Schema   | 429        |
| 7.8       | <a href="http://schemas.datacontract.org/2004/07/System.Globalization">http://schemas.datacontract.org/2004/07/System.Globalization</a> Schema   | 430        |
| 7.9       | <a href="http://schemas.datacontract.org/2004/07/System.Net">http://schemas.datacontract.org/2004/07/System.Net</a> Schema   | 434        |
| 7.10      | <a href="http://schemas.datacontract.org/2004/07/System.Security">http://schemas.datacontract.org/2004/07/System.Security</a> Schema   | 435        |
| 7.11      | <a href="http://schemas.datacontract.org/2004/07/System">http://schemas.datacontract.org/2004/07/System</a> Schema   | 435        |
| 7.12      | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design</a> Schema                                       | 436        |
| 7.13      | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design</a> Schema                                       | 437        |
| 7.14      | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService</a> Schema                               | 439        |
| 7.15      | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient</a> Schema   | 449        |
| <b>8</b>  | <b>Appendix C: Product Behavior</b>  | <b>455</b> |
| <b>9</b>  | <b>Change Tracking</b>   | <b>456</b> |
| <b>10</b> | <b>Index</b>   | <b>457</b> |

# 1 Introduction

The Access Services Data Run Time Protocol enables a protocol client to execute and monitor tasks on a **database application**.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

## 1.1 Glossary

This document uses the following terms:

**absolute URL:** The full Internet address of a page or other World Wide Web resource. The absolute URL includes a protocol, such as "http," a network location, and an optional path and file name — for example, <http://www.treyresearch.net/>.

**account:** A collection of data and settings for a SharePoint Workspace or Groove identity that represents a user. This includes shared spaces, messages, and preferences that are associated with a user's identity. An account can reside on one or more devices.

**alert:** A message that is passed to a protocol client to notify it when specific criteria are met.

**app:** See web application (1).

**app instance:** An instantiation of an **app** on a specific site.

**app package:** An implementation-specific file that specifies an **app**.

**Augmented Backus-Naur Form (ABNF):** A modified version of Backus-Naur Form (BNF), commonly used by Internet specifications. ABNF notation balances compactness and simplicity with reasonable representational power. ABNF differs from standard BNF in its definitions and uses of naming rules, repetition, alternatives, order-independence, and value ranges. For more information, see [\[RFC5234\]](#).

**authenticated user:** A built-in security group specified in [\[MS-WSO\]](#) whose members include all users that can be authenticated by a computer.

**authentication:** The act of proving an identity to a server while providing key material that binds the identity to subsequent communications.

**base64 encoding:** A binary-to-text encoding scheme whereby an arbitrary sequence of bytes is converted to a sequence of printable ASCII characters, as described in [\[RFC4648\]](#).

**caption:** One or more characters that can be used as a label for display purposes or as an identifier.

**collation:** A set of rules that determines how data is compared, ordered, and presented.

**column:** See **field (2)**.

**computed column:** A non-persistent column that is generated from other data.

**computed field:** A field that can perform data manipulation and display functions by using the contents of other fields.

**control button:** A button in the user interface.

**credential:** Previously established, **authentication** data that is used by a security principal to establish its own identity. When used in reference to the Netlogon Protocol, it is the data that is stored in the NETLOGON\_CREDENTIAL structure.

**culture name:** A part of a language identification tagging system, as described in [\[RFC1766\]](#). Culture names adhere to the format "<languagecode2>-<country/regioncode2>." If a two-letter language code is not available, a three-letter code that is derived from [\[ISO-639\]](#) is used.

**data culture:** The language that is used to specify number formatting for data.

**data type:** A property of a field that defines the kind of data that is stored in the field, or defines the kind of data returned by an expression when the expression is evaluated.

**database application:** A set of objects, including tables, queries, forms, reports, macros, and code modules, that are stored in a database structure.

**database instance:** A database that has a unique set of services that can have unique settings.

**domain:** A set of users and computers sharing a common namespace and management infrastructure. At least one computer member of the set must act as a domain controller (DC) and host a member list that identifies all members of the domain, as well as optionally hosting the Active Directory service. The domain controller provides **authentication** of members, creating a unit of trust for its members. Each domain has an identifier that is shared among its members. For more information, see [\[MS-AUTHSOD\]](#) section 1.1.1.5 and [\[MS-ADTS\]](#).

**email address:** A string that identifies a user and enables the user to receive Internet messages.

**expression:** A combination of operators, symbols, constants, literal values, functions, names of fields or **columns**, controls, and properties that evaluates to a single value.

**fallback data culture:** A data culture that is selected through an algorithm as a substitute for a data culture that is not installed or is otherwise unavailable.

**field:** (1) An element or attribute (1) in a data source that can contain data.

(2) A discrete unit of a record that has a name, a data type, and a value.

**firewall rule:** A group of settings that specify which connections are allowed into and out of a client computer.

**form:** A structured document with controls and spaces that are reserved for entering and displaying information. Forms can contain special coding for actions such as submitting and querying data.

**fully qualified URL:** A URL that includes a protocol scheme name, a host name, optionally a port number, a path, optionally a search part, and optionally a fragment identifier, as described in [\[RFC2616\]](#).

**gallery:** A library that is used to store a collection of site resources, such as Web Parts, list templates, and site templates.

**globally unique identifier (GUID):** A term used interchangeably with universally unique identifier (UUID) in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms described in [\[RFC4122\]](#) or [\[C706\]](#) must be used for generating the **GUID**. See also universally unique identifier (UUID).

**Help topic identifier:** A unique identifier for an article that contains Help content.

**host data language:** The **data culture** of a site.

**HTTP POST:** An HTTP method, as described in [\[RFC2616\]](#).

**Hypertext Markup Language (HTML):** An application of the Standard Generalized Markup Language (SGML) that uses tags to mark elements in a document, as described in [\[HTML\]](#).

**Hypertext Transfer Protocol (HTTP):** An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

**Hypertext Transfer Protocol Secure (HTTPS):** An extension of HTTP that securely encrypts and decrypts web page requests. In some older protocols, "Hypertext Transfer Protocol over Secure Sockets Layer" is still used (Secure Sockets Layer has been deprecated). For more information, see [\[SSL3\]](#) and [\[RFC5246\]](#).

**IPv4 address in string format:** A string representation of an IPv4 address in dotted-decimal notation, as described in [\[RFC1123\]](#) section 2.1.

**key value pair (KVP):** A set of two linked data items: a key that is an identifier for some data item, and a value that is a value associated with the data item for the identifier represented by the key.

**language code identifier (LCID):** A 32-bit number that identifies the user interface human language dialect or variation that is supported by an application or a client computer.

**locale:** An identifier, as specified in [\[MS-LCID\]](#), that specifies preferences related to language. These preferences indicate how dates and times are to be formatted, how items are to be sorted alphabetically, how strings are to be compared, and so on.

**login name:** A string that is used to identify a user or entity to an operating system, directory service, or distributed system. For example, in Windows-integrated authentication, a login name uses the form "DOMAIN\username".

**object model:** A collection of object-oriented APIs that represent data structures and are designed to promote software interoperability.

**owner:** A security principal (2) who has the requisite permission to manage a security group.

**permission:** A rule that is associated with an object and that regulates which users can gain access to the object and in what manner. See also rights.

**primary key:** A field or set of fields that uniquely identifies each record in a table. A primary key cannot contain a null value.

**query:** A formalized instruction to a data source to either extract data or perform a specified action. A query can be in the form of a query expression, a method-based query, or a combination of the two. The data source can be in different forms, such as a relational database, XML document, or in-memory object. See also search query.

**record:** A group of related **fields (2)**, which are sometimes referred to as columns, of information that are treated as a unit. Also referred to as row.

**result set:** A list of records that results from running a stored procedure or query, or applying a filter. The structure and content of the data in a result set varies according to the implementation.

**root element:** The top-level element in an XML document. It contains all other elements and is not contained by any other element, as described in [\[XML\]](#).

**row:** A collection of **columns** that contains property values that describe a single item in a set of items that match the restriction (1) specified in a query.

**Secure Store Service (SSS):** A service that is used to store credentials for a user or a group of users. It enables applications, typically on behalf of a user, to authenticate and gain access to resources. Users can retrieve only their own credentials from the secure store.

**Security Support Provider Interface (SSPI):** A Windows-specific API implementation that provides the means for connected applications to call one of several security providers to establish authenticated connections and to exchange data securely over those connections. This is the Windows equivalent of Generic Security Services (GSS)-API, and the two families of APIs are on-the-wire compatible.

**server-relative URL:** A relative URL that does not specify a scheme or host, and assumes a base URI of the root of the host, as described in [\[RFC3986\]](#).

**session:** A representation of application data in system memory. It is used to maintain state for application data that is being manipulated or monitored on a protocol server by a user.

**session identifier:** A key that enables an application to make reference to a session.

**site:** A group of related pages and data within a SharePoint site collection. The structure and content of a site is based on a site definition. Also referred to as SharePoint site and web site.

**site collection:** A set of websites (1) that are in the same content database, have the same owner, and share administration settings. A site collection can be identified by a **GUID** or the **URL** of the top-level site for the site collection. Each site collection contains a top-level site, can contain one or more subsites, and can have a shared navigational structure.

**site identifier:** A GUID that is used to identify a site in a **site collection**.

**site subscription identifier:** A GUID that is used to identify a site subscription.

**SOAP:** A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses **XML** technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [\[SOAP1.2-1/2003\]](#).

**SOAP action:** The HTTP request header field used to indicate the intent of the **SOAP** request, using a **URI** value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

**SOAP body:** A container for the payload data being delivered by a SOAP message to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

**SOAP fault:** A container for error and status information within a SOAP message. See [\[SOAP1.2-1/2007\]](#) section 5.4 for more information.

**SOAP fault detail:** A string containing a human-readable explanation of a **SOAP fault**, which is not intended for algorithmic processing. See [\[SOAP1.2-1/2007\]](#) section 5.4.5 for more information.

**SOAP header:** A mechanism for implementing extensions to a SOAP message in a decentralized manner without prior agreement between the communicating parties. See [\[SOAP1.2-1/2007\]](#) section 5.2 for more information.

**SQL authentication:** One of two mechanisms for validating attempts to connect to instances of SQL Server. In SQL authentication, users specify a SQL Server login name and password when they connect. The SQL Server instance ensures that the login name and password combination are valid before permitting the connection to succeed.

**SQL collation name:** A string that specifies the collation name for a SQL Server collation.



**state changing:** A type of operation that changes the state of a session.

**Status-Code:** A 3-digit integer result code in an HTTP response message, as described in [RFC2616].

**string:** A structure that represents a set of characters ([\[MC-NBFX\]](#) section 2.1.3).

**Structured Query Language (SQL):** A database query and programming language that is widely used for accessing, querying, updating, and managing data in relational database systems.

**surrogate pair:** A pair of 16-bit Unicode encoding values that, together, represent a single 32-bit character, as described in [\[ISO-10646\]](#). For more information about surrogate pairs and combining character sequences, see the Unicode Standard in [\[UNICODE\]](#).

**table:** (1) A list (2) that is defined in a workbook.

(2) A two-dimensional object in a relational database that stores data in rows and columns.

**time zone:** A geographical area that observes the same local time. The local time has a positive, zero, or negative offset from Coordinated Universal Time (UTC). The offset can be different during standard time and daylight saving time.

**time zone bias:** The positive, zero, or negative offset in minutes from Coordinated Universal Time (UTC). For example, Middle European Time (MET, GMT+01:00) has a time zone bias of "-60" because it is one hour ahead of UTC. Pacific Standard Time (PST, GMT-08:00) has a time zone bias of "+480" because it is eight hours behind UTC.

**time zone daylight bias:** The positive, zero, or negative offset in minutes that is added to the time zone bias during daylight saving time. For example, daylight saving time advances the clock by one hour. The time zone daylight bias is set to "-60".

**time zone daylight date:** The date and time when the change from standard time to daylight saving time occurs.

**time zone standard bias:** A positive, zero, or negative offset in minutes that is added to the time zone bias outside daylight saving time.

**time zone standard date:** The date and time when the change from daylight saving time to standard time occurs.

**UI culture:** The language that is used to display strings and graphical elements in a user interface.

**Uniform Resource Identifier (URI):** A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [RFC3986].

**Uniform Resource Locator (URL):** A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

**user display name:** A user profile property that contains the preferred name of a user. See also display name.

**user name:** A unique name that identifies a specific user account. The user name of an account is unique among the other group names and user names within its own domain or workgroup.

**web application identifier:** A GUID that identifies a web application.

**Web Services Description Language (WSDL):** An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint.

Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

**WSDL message:** An abstract, typed definition of the data that is communicated during a **WSDL operation** [[WSDL](#)]. Also, an element that describes the data being exchanged between web service providers and clients.

**WSDL operation:** A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

**XML:** The Extensible Markup Language, as described in [[XML1.0](#)].

**XML element:** An **XML** structure that typically consists of a start tag, an end tag, and the information between those tags. Elements can have attributes (1) and can contain other elements.

**XML namespace:** A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [[XMLNS-2ED](#)].

**XML namespace prefix:** An abbreviated form of an **XML namespace**, as described in [XML].

**XML schema:** A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by **XML** itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [[RFC2119](#)]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[MC-CSDL] Microsoft Corporation, "[Conceptual Schema Definition File Format](#)".

[MS-AADT] Microsoft Corporation, "[Access Application Design Time Protocol](#)".

[MS-ART] Microsoft Corporation, "[Access Run Time Protocol](#)".

[MS-ASDT] Microsoft Corporation, "[Access Server Design Time Protocol](#)".

[MS-AXL2] Microsoft Corporation, "[Access Application Transfer Data Structure Version 2](#)".

[MS-DACPAC] Microsoft Corporation, "[Data-Tier Application Schema File Format](#)".

[MS-DSDIFFGRAM] Microsoft Corporation, "[SharePoint Web Services: DataSet DiffGram Structure](#)".

[MS-OWEXML] Microsoft Corporation, "[Office Web Extensibility Extensions to Office Open XML Structure Specification](#)".

[MS-SPSTWS] Microsoft Corporation, "[SharePoint Security Token Service Web Service Protocol](#)".

[MSDN-.NETFrameWrk] Microsoft Corporation, ".NET Framework", <http://msdn.microsoft.com/en-us/netframework/default.aspx>

[MSDN-TSQL-Reference-2011] Microsoft Corporation, "Transact-SQL Reference (Database Engine)", TSQL 2011, [http://msdn.microsoft.com/en-us/library/bb510741\(SQL.110\).aspx](http://msdn.microsoft.com/en-us/library/bb510741(SQL.110).aspx)

[RFC1766] Alvestrand, H., "Tags for the Identification of Languages", RFC 1766, March 1995, <http://www.ietf.org/rfc/rfc1766.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2234] Crocker, D. and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", RFC 2234, November 1997, <http://www.ietf.org/rfc/rfc2234.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC3339] Klyne, G. and Newman, C., "Date and Time on the Internet: Timestamps", RFC 3339, July 2002, <http://www.ietf.org/rfc/rfc3339.txt>

[RFC4646] Phillips, A., and Davis, M., Eds., "Tags for Identifying Languages", BCP 47, RFC 4646, September 2006, <http://www.rfc-editor.org/rfc/rfc4646.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

[XML] World Wide Web Consortium, "Extensible Markup Language (XML) 1.0 (Fourth Edition)", W3C Recommendation 16 August 2006, edited in place 29 September 2006, <http://www.w3.org/TR/2006/REC-xml-20060816/>

[XSD1.1-1] Gao, S., Sperberg-McQueen, C.M., and Thompson, H.S., Eds., "W3C XML Schema Definition Language (XSD) 1.1 Part 1: Structures", W3C Working Draft, December 2009, <http://www.w3.org/TR/2009/WD-xmlschema11-1-20091203/>

## 1.2.2 Informative References

None.

## 1.3 Overview

This protocol is used for managing data maintained by a protocol server, which provides access to a protocol client that renders the data provided by the protocol server. The communication is always initiated by the protocol client using different operations, the functionality of which is outlined in section [1.3.2](#). A typical scenario for this protocol is opening a **result set** and updating data.

### 1.3.1 Session-based Protocol

The protocol is **session** based and uses a unique **session identifier**. This session identifier is generated when a new session is created and is used thereafter to refer to that particular session.

- Multiple sessions can exist at the same time.
- Result sets are not shared across sessions.
- Sessions can be created and closed independently.


### 1.3.2 Protocol Operations

The protocol provides the following sets of functionality:

- Creation, modification, and deletion of objects in a database application.
- Querying a protocol server for information about a database application or the objects in it.
- Setting some behaviors for a database application.
- Creation of packages that describe a database application
- Creating and enabling logins on the database application, which enable connecting to the database application directly.
- Creating and managing databases that are used to store data in database applications.
- Creating, reading, updating and deleting data from the database application.
- Getting information about the protocol server.

## 1.4 Relationship to Other Protocols

This Protocol uses **SOAP** over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram:

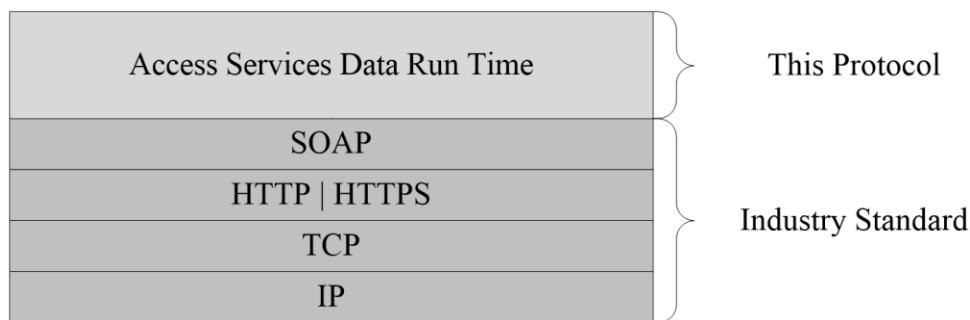

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

This protocol operates against a protocol server that exposes one or more endpoint (4) **URIs** that are known by protocol clients. The endpoint (4) URI of the protocol server and the transport that is used by the protocol server are either known by the protocol client or obtained by using the discovery mechanism that is described in [\[MS-SPTWS\]](#).

The protocol client obtains the requisite ApplicationClassId and ApplicationVersion values and the endpoint (4) URI of the protocol server that provides the discovery mechanism, as described in [\[MS-SPTWS\]](#), by means that are independent of either protocol.

This protocol requires the protocol client to have permission to call the methods on the protocol server.

The protocol client implements the token-based security mechanisms that are required by the protocol server and related security protocols, as described in [\[MS-SPSTWS\]](#).

## 1.6 Applicability Statement

This protocol is applicable for the following scenarios:

- Creation, modification, and deletion of objects in a database application.
- Querying a protocol server for information about a database application or the objects in it.
- Setting some behaviors for a database application.
- Creation of packages that describe a database application
- Creating and enabling logins on the database application, which enable connecting to the database application directly.
- Creating and managing databases that are used to store data in database applications.
- Managing sessions between protocol client and protocol server.
- Creating, reading, updating, or deleting data on the protocol server.
- Monitoring the health of the protocol server.

## 1.7 Versioning and Capability Negotiation

This protocol can be implemented by using transports that support sending Simple Object Access Protocol (SOAP) messages, as specified in section [2.1](#).

## **1.8 Vendor-Extensible Fields**

None.

## **1.9 Standards Assignments**

None.

## 2 Messages

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the protocol. The **WSDL** in this specification matches the **WSDL** that shipped with the product and provides a base description of the schema. The text that introduces the WSDL specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null** and **present**.

### 2.1 Transport

Protocol servers **MUST** support SOAP over HTTP, as specified in [\[RFC2616\]](#), or SOAP over HTTPS, as specified in [\[RFC2818\]](#).

All protocol messages **MUST** be transported by using HTTP or HTTPS bindings at the transport level.

Protocol messages **MUST** be formatted as specified by either [\[SOAP1.1\]](#) section 4 or [\[SOAP1.2/1\]](#) section 5. Protocol server faults **MUST** be returned by using either an HTTP **Status-Code**, as specified by [\[RFC2616\]](#) section 10, or **SOAP faults**, as specified by either [\[SOAP1.1\]](#) section 4.4 or [\[SOAP1.2/1\]](#) section 5.4.

If the **HTTPS** transport is used, a server certificate **MUST** be deployed.

This protocol **MAY** transmit an additional **SOAP header**, the **ServiceContext** header, as specified by [\[MS-SPSTWS\]](#) section 2.2.4.1.

This protocol does not define any means for activating a protocol server or protocol client. The protocol server **MUST** be configured and begin listening in an implementation-specific way. In addition, the protocol client **MUST** know the format and transport that is used by the protocol server, for example, the SOAP format over the HTTP transport.

### 2.2 Common Message Syntax

This section contains common definitions used by this protocol. The syntax of the definitions uses an **XML schema** as defined by [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and the **WSDL** as defined by [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

| Prefix | Namespace URI   | Reference |
|--------|---|-----------|
| q1     | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services</a> |           |
| q2     | <a href="http://schemas.datacontract.org/2004/07/System.Net">http://schemas.datacontract.org/2004/07/System.Net</a>   |           |
| q3     | <a href="http://schemas.microsoft.com/2003/10/Serialization/Arrays">http://schemas.microsoft.com/2003/10/Serialization/Arrays</a>                               |           |
| q4     | <a href="http://schemas.datacontract.org/2004/07/System">http://schemas.datacontract.org/2004/07/System</a>   |           |
| q5     | <a href="http://schemas.datacontract.org/2004/07/System.Data">http://schemas.datacontract.org/2004/07/System.Data</a>   |           |
| q6     | <a href="http://schemas.datacontract.org/2004/07/System.Globalization">http://schemas.datacontract.org/2004/07/System.Globalization</a>                         |           |

| Prefix | Namespace URI   | Reference  |
|--------|---|--|
| q7     | http://schemas.datacontract.org/2004/07/System.Security   |  |
| ser    | http://schemas.microsoft.com/2003/10/Serialization/   |  |
| soap   | http://schemas.xmlsoap.org/wsdl/soap/   | <a href="#">[SOAP1.1]</a>                                    |
| tns    | http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/        |  |
| tns1   | http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data                             |  |
| tns2   | http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database                         |  |
| tns3   | http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema                    |  |
| tns4   | http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design                           |  |
| tns5   | http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService                       |  |
| tns6   | http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient                              |  |
| tns7   | http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/Imports |  |
| wsaw   | http://www.w3.org/2006/05/addressing/wsdl   |  |
| wsdl   | http://schemas.xmlsoap.org/wsdl/  | <a href="#">[WSDL]</a>                                       |
| xs     | http://www.w3.org/2001/XMLSchema  | <a href="#">[XMLSCHEMA1]</a><br><a href="#">[XMLSCHEMA2]</a> |

## 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

## 2.2.3 Elements

This specification does not define any common XML schema element definitions.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

| Complex type                | Description   |
|-----------------------------|---|
| <b>AccessObject</b>         | The complex type <b>AccessObject</b> specifies information about an object in a database application. |
| <b>AccessObjectIdentity</b> | The <b>AccessObjectIdentity</b> complex type specifies an   |



| Complex type                                | Description   |
|---|---|
|   | <b>AccessObject</b> (section <a href="#">2.2.4.28</a> ) and its version in a database application.  |
| <b>AccessObjectList</b>                     | The complex type <b>AccessObjectList</b> specifies an array of complex type <b>AccessObject</b> (section <a href="#">2.2.4.1</a> ) in a database application.   |
| <b>AccessProperties</b>                     | The <b>AccessProperties</b> complex type contains information about the properties associated with a <b>Column</b> (section <a href="#">2.2.4.45</a> ).   |
| <b>AccessServerMessage</b>                  | The <b>AccessServerMessage</b> complex type contains information about an <b>alert</b> .  |
| <b>AccessStorageObject</b>                  | The complex type <b>AccessStorageObject</b> specifies an <b>AccessObject</b> (section <a href="#">2.2.4.28</a> ) used by some messages in this protocol.  |
| <b>AddFirewallRuleResult</b>                | The <b>AddFirewallRuleResult</b> complex type specifies the result data of the <b>AddFirewallRule</b> protocol operation.   |
| <b>AppsForOfficeSettings</b>                | The <b>AppsForOfficeSettings</b> complex type is used to return the settings of the Office Add-ins ( <a href="#">[MS-OWEXML]</a> section 1.3.1).  |
| <b>ArrayOfAccessObject</b>                  | This complex type specifies an array of <b>AccessObject</b> elements.   |
| <b>ArrayOfAccessObjectIdentity</b>          | This complex type specifies an array of <b>AccessObjectIdentity</b> elements.   |
| <b>ArrayOfanyType</b>                       | Specifies a set of <b>anyType</b> elements.   |
| <b>ArrayOfArrayOfKeyValuePair</b>           | This complex type specifies an array of <b>ArrayOfKeyValuePair</b> (section <a href="#">2.2.4.44</a> ) elements.  |
| <b>ArrayOfArrayOfstring</b>                 | This complex type specifies an array of <b>ArrayOfString</b> elements.  |
| <b>ArrayOfFieldSchema</b>                   | The <b>ArrayOfFieldSchema</b> complex type is a collection of <b>fields (2)</b> of a <b>Source</b> (section <a href="#">3.1.1.1</a> ).  |
| <b>ArrayOfFirewallRule</b>                  | This complex type specifies an array of <b>FirewallRule</b> elements.   |
| <b>ArrayOfint</b>                           | The <b>ArrayOfInt</b> complex type is a collection of <b>int</b> ( <a href="#">[XMLSCHEMA2]</a> section 3.3.17) values.   |
| <b>ArrayOfKeyValueOfstringColumnb1rtN9t</b> | This complex type specifies an array of <b>KeyValueOfstringColumn</b> elements.   |
| <b>ArrayOfKeyValueOfstringstring</b>        | Specifies a collection of properties and their values.  |
| <b>ArrayOfKeyValuePair</b>                  | An array of <b>KeyValuePair</b> elements.   |
| <b>ArrayOfParameterValue</b>                | Specifies a set of values of input parameters to pass to a <b>Data Macro</b> ( <a href="#">[MS-AXL2]</a> section 2.1.2.2) or <b>UI Macro</b> ( <a href="#">[MS-AXL2]</a> section 2.1.2.1) upon execution. |
| <b>ArrayOfstring</b>                        | The <b>ArrayOfString</b> complex type is a collection of <b>string</b> ( <a href="#">[XMLSCHEMA2]</a> section 3.2.1) values.  |
| <b>ClientMessage</b>                        | Specifies an error or informative message to return to the protocol server.   |
| <b>CollationInfo</b>                        | <b>CollationInfo</b> specifies the collation information.   |

| Complex type                         | Description   |
|--------------------------------------|---|
| <b>Column</b>                        | Specifies properties of a <b>Table</b> (section <a href="#">2.2.4.57</a> ) column.  |
| <b>ColumnLookup</b>                  | This complex type specifies properties that define a lookup column type.  |
| <b>ColumnValue</b>                   | The <b>ColumnValue</b> complex type specifies that value of a column in the database application.   |
| <b>CommandParameter</b>              | The <b>CommandParameter</b> complex type is an input parameter used by some protocol server operations.<br>The following applies to <b>CommandParameter</b> , unless extended or overridden by an operation specification:  |
| <b>CommandResult</b>                 | The <b>CommandResult</b> complex type is an operation response message used by all protocol server operations.<br>The following applies to the <b>CommandResult</b> complex type, unless extended or overridden by an operation specification:  |
| <b>ConnectivityStatusInformation</b> | The <b>ConnectivityStatusInformation</b> complex type specifies whether a login having permissions specified by the <b>Permission</b> element has been enabled or disabled on the database application.   |
| <b>DatabaseContext</b>               | Specifies metadata about a database.  |
| <b>DatabaseProviderMessage</b>       | Specifies an error condition that occurred during communication between the protocol server and a database server.  |
| <b>DataMacro</b>                     | The <b>DataMacro</b> complex type is an <b>AccessObject</b> (section 2.2.4.28) of type <b>DataMacro</b> which represents data validation logic, product logic and business logic in a data application.   |
| <b>EmbeddedExpression</b>            | The <b>EmbeddedExpression</b> complex type is an <b>AccessStorageObject</b> (section <a href="#">2.2.4.32</a> ) that specifies a set of <b>expressions</b> .  |
| <b>Expression</b>                    | Specifies an <b>expression</b> .  |
| <b>ExtendedAttributes</b>            | The <b>ExtendedAttributes</b> complex type contains additional properties for <b>Column</b> (section <a href="#">2.2.4.52</a> ) and <b>Table</b> (section 2.2.4.57) elements.   |
| <b>FieldList</b>                     | The complex type <b>FieldList</b> specifies a collection of fields.   |
| <b>FieldSchema</b>                   | The type <b>FieldSchema</b> stores all metadata information about a field (2) of a <b>Source</b> (section 3.1.1.1).   |
| <b>FilterInfo</b>                    | Specifies how to filter a result set. The <b>Expression</b> and <b>Text</b> elements are complementary ways of filtering the result set. If both <b>Expression</b> and <b>Text</b> are specified by the protocol client and are not empty, the result set MUST only contain those <b>rows</b> that meet the conditions specified by both the <b>Expression</b> and <b>Text</b> elements. If only one of the <b>Expression</b> and <b>Text</b> elements is specified and non-empty, the result set MUST be filtered to only those rows that meet the conditions specified by that element. If both the <b>Expression</b> and <b>Text</b> elements are empty or not specified, then all rows from the result set MUST be returned by the protocol server. |
| <b>FirewallRule</b>                  | The complex type <b>FirewallRule</b> specifies a <b>firewall rule</b> to be added to a database application. After the firewall rule has been added, those users whose IP address falls within the inclusive  |

| Complex type                      | Description  |
|-----------------------------------|--|
|                                   | range of <b>StartIPAddress</b> and <b>EndIPAddress</b> be able to connect to the database application directly.  |
| <b>Form</b>                       | The complex type <b>Form</b> is an <b>AccessStorageObject</b> (section 2.2.4.32) which specifies an <b>AccessObject</b> (section 2.2.4.28) of type <b>Form</b> that allow users of an application to display and manipulate data in underlying data structures.                    |
| <b>KeyValuePair</b>               | The <b>KeyValuePair</b> complex type is used as a container for a key and its associated value.  |
| <b>LinkedTable</b>                | The <b>LinkedTable</b> complex type is an <b>AccessObject</b> (section 2.2.4.28) of type <b>LinkedTable</b> that specifies tables in a database application whose table structure alone is stored in the back-end database while the table data is stored in an external location. |
| <b>NetworkCredential</b>          | Specifies <b>credentials</b> for password-based <b>authentication</b> schemes.   |
| <b>ObjectIdentityList</b>         | The <b>ObjectIdentityList</b> complex type specifies an array of <b>AccessObjectIdentity</b> (section <a href="#">2.2.4.29</a> ) elements in a database application.   |
| <b>ParameterValue</b>             | Specifies the value of a parameter to pass to a Data Macro ([MS-AXL2] section 2.1.2.2) or UI Macro ([MS-AXL2] section 2.1.2.1) upon execution.   |
| <b>ProvisionedDatabaseContext</b> | Specifies information about a database after its creation.   |
| <b>Query</b>                      | The <b>Query</b> complex type is an <b>AccessObject</b> (section 2.2.4.28) of type <b>Query</b> that is used in a database application for combining, filtering, sorting and grouping of data.   |
| <b>RequestApplication</b>         | This complex type specifies properties of a database application.  |
| <b>RequestContext</b>             | The <b>RequestContext</b> complex type specifies contextual information for a given request message to the protocol server about the database application database.  |
| <b>RequestUser</b>                | The <b>RequestUser</b> complex type contains information about the current user.   |
| <b>SecureString</b>               | Specifies an empty element.  |
| <b>ServerContext</b>              | Specifies information about a server on which databases are located.   |
| <b>ServerHealthInformation</b>    | The <b>ServerHealthInformation</b> complex type contains information about the health of the protocol server.  |
| <b>ServiceError</b>               | The <b>ServiceError</b> complex type specifies an error on the protocol server that is not a SOAP fault. For more information, see <a href="#">[MS-AADT]</a> section 2.2.9.2.  |
| <b>ServiceParameters</b>          | The <b>ServiceParameters</b> base complex type is extended by all input messages defined in this protocol.   |
| <b>ServiceResult</b>              | The <b>ServiceResult</b> base complex type is extended by all response messages defined in this protocol.  |
| <b>ServiceWarning</b>             | The complex type <b>ServiceWarning</b> specifies additional information as part of a successful response from the protocol   |

| Complex type   | Description  |
|----------------|--|
|                | server. For more information, see [MS-AADT] section 2.2.9.3.   |
| <b>Table</b>   | The complex type <b>Table</b> is an <b>AccessObject</b> (section 2.2.4.22) of type <b>Table</b> which specifies a data structure that organizes data as rows and <b>columns</b> .  |
| <b>UIMacro</b> | The complex type <b>UIMacro</b> is an <b>AccessStorageObject</b> (section 2.2.4.32) that specifies an <b>AccessObject</b> (section 2.2.4.28) of type <b>UIMacro</b> that are command routines that respond to user interaction and change the state of the UI. |

### 2.2.4.1 AccessServerMessage

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services

The **AccessServerMessage** complex type contains information about an alert.

```
<xs:complexType name="AccessServerMessage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Buttons" type="q1:AccessServerMessageButtons"/>
    <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="DataDictionary" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
    <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ErrorNumber" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="ExtendedDescription" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="HealthInformation" nillable="true"
type="q1:ServerHealthInformation"/>
    <xs:element minOccurs="0" name="HelpDisplayText" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="HelpTopicId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Id" type="q1:AccessServerMessageId"/>
    <xs:element minOccurs="0" name="MessageType" type="q1:AccessServerMessageType"/>
    <xs:element minOccurs="0" name="RequestCorrelationId" type="ser:guid"/>
    <xs:element minOccurs="0" name="Severity" type="q1:AccessServerMessageSeverity"/>
    <xs:element minOccurs="0" name="Timestamp" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
```

**Buttons:** An **AccessServerMessageButtons** (section 2.2.5.1) that specifies the **control buttons** of the alert. **MUST** be present.

**Caption:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **caption** of the alert. **MUST** be present.

**DataDictionary:** An **ArrayOfKeyValueOfstringstring** (section 2.2.4.17) that specifies additional properties of the alert.

**Description:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the description of the alert. **MUST** be present. **MUST NOT** be empty.

**ErrorNumber:** **MUST NOT** be used.

**ExtendedDescription:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the extended description of the alert. **MUST NOT** be used.

**HealthInformation:** A **ServerHealthInformation** (section 2.2.4.6) that specifies the health information of the protocol server. **MUST** be present.

**HelpDisplayText:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a description of the help topic. MUST be present.

**HelpTopicId:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **Help topic identifier**.

**Id:** An **AccessServerMessageId** (section [2.2.5.2](#)) that specifies the identifier of the alert. MUST be present.

**MessageType:** An **AccessServerMessageType** (section [2.2.5.4](#)) that specifies the type of the alert. MUST be present.

**RequestCorrelationId:** A **guid** (section [2.2.5.8](#)) that specifies the unique identifier of the request message to the protocol server that triggered the alert.

**Severity:** An **AccessServerMessageSeverity** (section [2.2.5.3](#)) that specifies the severity of the alert. MUST be present.

**Timestamp:** A **dateTime** ([XMLSCHEMA2] section 3.2.7) that specifies the date and time at which the alert occurred.

#### 2.2.4.2 ArrayOfKeyValuePair

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

An array of **KeyValuePair** elements.

```
<xs:complexType name="ArrayOfKeyValuePair" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="KeyValuePair"
type="tns1:KeyValuePair"/>
  </xs:sequence>
</xs:complexType>
```

**KeyValuePair:** A **KeyValuePair** (section [2.2.4.5](#)) that specifies a key and its associated value. Each **KeyValuePair** in the **ArrayOfKeyValuePair** element MUST have a unique value in its **Key** element.

#### 2.2.4.3 CommandParameter

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/>

The **CommandParameter** complex type is an input parameter used by some protocol server operations.

The following applies to **CommandParameter**, unless extended or overridden by an operation specification:

```
<xs:complexType name="CommandParameter" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AppPrincipalIdentifier" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="CompleteResponseTimeout" type="xs:int"/>
    <xs:element minOccurs="0" name="CorrelationId" type="ser:guid"/>
    <xs:element minOccurs="0" name="ProtocolClientId" nillable="true" type="xs:string"/>
    <xs:element
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
minOccurs="0" name="RequestContext" nillable="true" type="q1:RequestContext"/>
    <xs:element minOccurs="0" name="RequestId" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

```

    <xs:element minOccurs="0" name="RequestSiteId" type="ser:guid"/>
    <xs:element minOccurs="0" name="StateId" type="xs:int"/>
    <xs:element minOccurs="0" name="UserFriendlyDisplayName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="WorkbookId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Zone" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**AppPrincipalIdentifier:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a security context for the database application. This element **MUST** be present.

**CompleteResponseTimeout:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the amount of time, in milliseconds, to wait when executing the operation before departing from it. The value **MUST** be zero, which means that no amount of wait time has been specified.

**CorrelationId:** A **guid** (section 2.2.5.8) that uniquely identifies the request message that is sent as input to a protocol operation. This element **MUST** be present.

**ProtocolClientId:** The protocol server **SHOULD** ignore this element and set it to empty.

**RequestContext:** A complex type (see section 2.2.4.51) that specifies contextual information for a given request message to the protocol server.

**RequestId:** **MUST NOT** be present.

**RequestSiteId:** A **guid** (section 2.2.5.8) that specifies the **site identifier**. This element **MUST** be present.

**StateId:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies a unique identifier for the state of a session. The value **MUST** be -1.

**UserFriendlyDisplayName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **user display name**. This element **MUST** be present.

**WorkbookId:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the session identifier that is returned in the **sessionId** of the **OpenSessionResponse** element (section 3.1.4.11.2.2).

- If present, it **MUST NOT** be empty, and it **MUST** be as specified in section 3.1.1.2.

For all operations other than **OpenSession** (section 3.1.4.11), this element **MUST** be present and **MUST** have a value that was obtained from a previous call to an **OpenSession** operation.

**Zone:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the network zone from which the request originated. This element **MUST** be present.

#### 2.2.4.4 CommandResult

##### Namespace:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/

The **CommandResult** complex type is an operation response message used by all protocol server operations.

The following applies to the **CommandResult** complex type, unless extended or overridden by an operation specification:

```

<xs:complexType name="CommandResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>

```

```

    <xs:element minOccurs="0" name="EditSessionHasMultipleCollaborationUsers"
type="xs:boolean"/>
    <xs:element minOccurs="0" name="EditSessionIsDirty" type="xs:boolean"/>
    <xs:element
xmlns:ql="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
minOccurs="0" name="HealthInformation" nillable="true" type="ql:ServerHealthInformation"/>
    <xs:element minOccurs="0" name="RequestId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SpreadsheetData" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StateId" type="xs:int"/>
    <xs:element minOccurs="0" name="TransientEditSessionToken" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**EditSessionHasMultipleCollaborationUsers:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the current session has more than one user. MUST be "false".

**EditSessionIsDirty:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the current session has any unsaved changes. MUST be "false".

**HealthInformation:** A **ServerHealthInformation** (section 2.2.4.6) that specifies the health information of the protocol server.

**RequestId:** MUST NOT be used.

**SpreadsheetData:** MUST NOT be used.

**StateId:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the unique identifier for the state of a session. MUST be zero (0).

**TransientEditSessionToken:** MUST NOT be used.

#### 2.2.4.5 KeyValuePair

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data

The **KeyValuePair** complex type is used as a container for a key and its associated value.

```

<xs:complexType name="KeyValuePair" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element name="Key" nillable="true" type="xs:anyType"/>
    <xs:element name="Value" nillable="true" type="xs:anyType"/>
  </xs:sequence>
</xs:complexType>

```

**Key:** Specifies a value that uniquely identifies the **KeyValuePair** within a collection. MUST be present. MUST be of type **string** ([XMLSCHEMA2] section 3.2.1) or **int** ([XMLSCHEMA2] section 3.3.17).

**Value:** Data associated with a given **Key**, which can have any value as long as the document remains well formed, as specified in [XML] section 2. MUST be present. MUST be formatted in the **data culture** of the session.

#### 2.2.4.6 ServerHealthInformation

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services

The **ServerHealthInformation** complex type contains information about the health of the protocol server.

```
<xs:complexType name="ServerHealthInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="HealthScore" type="xs:float"/>
    <xs:element minOccurs="0" name="StateFlags" type="q1:ServerStateFlags"/>
  </xs:sequence>
</xs:complexType>
```

**HealthScore:** A **float** ([\[XMLSCHEMA2\]](#) section 3.2.4) that gives an indication of the health of the protocol server. It is a value that specifies the server performance health ranging between 0 and 100, wherein a score of 0 specifies excellent server health and a score of 100 specifies very poor server health. **MUST** be present.

**StateFlags:** A **ServerStateFlags** (section [2.2.5.17](#)) that specifies the state of the protocol server. **MUST** be present. **MUST** contain zero or more values from **ServerStateFlags**.

### 2.2.4.7 ArrayOfanyType

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

Specifies a set of **anyType** elements.

```
<xs:complexType name="ArrayOfanyType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="anyType" nillable="true"
type="xs:anyType"/>
  </xs:sequence>
</xs:complexType>
```

**anyType:** An element of any arbitrary object type.

### 2.2.4.8 FilterInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

Specifies how to filter a result set. The **Expression** and **Text** elements are complementary ways of filtering the result set. If both **Expression** and **Text** are specified by the protocol client and are not empty, the result set **MUST** only contain those rows that meet the conditions specified by both the **Expression** and **Text** elements. If only one of the **Expression** and **Text** elements is specified and non-empty, the result set **MUST** be filtered to only those rows that meet the conditions specified by that element. If both the **Expression** and **Text** elements are empty or not specified, then all rows from the result set **MUST** be returned by the protocol server.

```
<xs:complexType name="FilterInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Culture" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Expression" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Fields" nillable="true" type="tns6:FieldList"/>
    <xs:element minOccurs="0" name="Text" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**Culture:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the **culture name** of the **collation** used to interpret any numbers, dates, or times specified in the **Text** element. **MUST** be formatted as specified by [\[RFC4646\]](#).

**Expression:** A **CT\_Expression** ([\[MS-AXL2\]](#) section 2.2.3.1) that specifies conditions requested to be satisfied for every row of the result set.



**Fields:** A **FieldList** (section [2.2.4.51](#)) that specifies which fields (2) in the result set are used when filtering using the **Text** element.

**Text:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies zero or more search terms requested to be present in every row of the result set in any of the fields (2) specified by the **Fields** element. This element is further specified as follows:

- Multiple search terms **MUST** be separated by one or more space characters.
- Search terms that contain a space character **MUST** be enclosed in double-quotes.
- Search terms that are immediately preceded with the name of a field (2) specified by the **Fields** element followed by a colon (':') character (with no intervening space characters) are requested to be present in that specific field (2) in every row of the result set. Fields (2) specified as such that contain spaces **MUST** be surrounded by double-quotes.

If this element is specified and non-empty, the **Fields** and **Culture** elements **MUST** be specified and non-empty.

### 2.2.4.9 DatabaseContext

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies metadata about a database.

```
<xs:complexType name="DatabaseContext" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AppInstanceId" type="ser:guid"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AppProperties" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
    <xs:element minOccurs="0" name="AppTitle" nillable="true" type="xs:string"/>
    <xs:element xmlns:q4="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="AppVersion" nillable="true" type="q4:Version"/>
    <xs:element minOccurs="0" name="Collation" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DacId" type="ser:guid"/>
    <xs:element minOccurs="0" name="DatabaseName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DatabaseSize" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="InstallationLocaleId" type="xs:int"/>
    <xs:element minOccurs="0" name="PackageSource" type="tns2:PackageSource"/>
    <xs:element minOccurs="0" name="PackageType" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ProductId" type="ser:guid"/>
    <xs:element minOccurs="0" name="Reserved" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Server" nillable="true" type="tns2:ServerContext"/>
    <xs:element minOccurs="0" name="SiteId" type="ser:guid"/>
    <xs:element minOccurs="0" name="SiteSubscriptionId" type="ser:guid"/>
    <xs:element minOccurs="0" name="TimeZone" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**AppInstanceId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for an **app instance**.

**AppProperties:** An **ArrayOfKeyValueOfstringstring** (section [2.2.4.14](#)). **MUST** be ignored.

**AppTitle:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the title of the application. **MUST** be present. **MUST** be the same as the **PackageAppTitle** returned in **GetAppInfoResult** (section [3.1.4.20.3.1](#)).

**AppVersion:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the version of the application package. **MUST** be present. **MUST** be the same as the **PackageAppVersion** returned in **GetAppInfoResult** (section [3.1.4.20.3.1](#)).

**Collation:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the collation of the database.

**DacId:** A **guid** (section 2.2.5.8) that specifies an identifier for the contents of the database. MUST be present. MUST remain the same for any **app package** created by **CreatePackage** (section 3.1.4.16) with **Option** (section 3.1.4.16.3.1) deployment or snapshot.

**DatabaseName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the database. MUST be present.

**DatabaseSize:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the maximum size of the database application.

**InstallationLocaleId:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the **language code identifier (LCID)** of the language to be used while creating the full-text index on the database application if the protocol server supports full-text indexes.

**PackageSource:** A **PackageSource** (section 2.2.5.9) that specifies where the package containing the database originated.

**PackageType:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the type of package containing the database. MUST be present. If the value of **PackageIsLocked** returned in **GetAppInfoResult** (section 3.1.4.20.3.1) is true, the value MUST be "AccessLocked". Otherwise, the value MUST be "Access".

**ProductId:** A **guid** (section 2.2.5.8) that specifies an identifier for the app. MUST be present. MUST remain the same for any app package created by **CreatePackage** (section 3.1.4.16) with **Option** (section 3.1.4.16.3.1) deployment or snapshot.

**Reserved:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the database is reserved. MUST be ignored.

**Server:** A **ServerContext** (section 2.2.4.16) that specifies information about the server on which the database is located. MUST be present.

**SiteId:** A **guid** (section 2.2.5.8) that specifies a site identifier.

**SiteSubscriptionId:** A **guid** (section 2.2.5.8) that specifies a **site subscription identifier**.

**TimeZone:** A **string** ([XMLSCHEMA2] section 3.2.1) time zone identifier that specifies the time zone information of the database application.

## 2.2.4.10 NetworkCredential

**Namespace:** http://schemas.datacontract.org/2004/07/System.Net

Specifies credentials for password-based authentication schemes.

```
<xs:complexType name="NetworkCredential" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Domain" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Password" nillable="true" type="xs:string"/>
    <xs:element xmlns:q7="http://schemas.datacontract.org/2004/07/System.Security"
minOccurs="0" name="SecurePassword" nillable="true" type="q7:SecureString"/>
    <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**Domain:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **domain** or computer name that verifies the credentials. MUST be present.

**Password:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the password for the user name associated with the credentials. MUST be present.

**SecurePassword:** A **SecureString** (section [2.2.4.15](#)) that specifies an empty element. MUST be present.

**UserName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **user name** associated with the credentials. MUST be present.

#### 2.2.4.11 ProvisionedDatabaseContext

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies information about a database after its creation.

```
<xs:complexType name="ProvisionedDatabaseContext"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AccessAccount" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DatabaseContext" nillable="true"
type="tns2:DatabaseContext"/>
    <xs:element xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net" minOccurs="0"
name="DboCredential" nillable="true" type="q2:NetworkCredential"/>
    <xs:element xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net" minOccurs="0"
name="LoginCredential" nillable="true" type="q2:NetworkCredential"/>
    <xs:element minOccurs="0" name="LoginPassword" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Password" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**AccessAccount:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the user name under which the process hosting the protocol server is being run. MUST be present.

**DatabaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database. MUST be present.

**DboCredential:** A **NetworkCredential** (section [2.2.4.13](#)) that specifies the credentials necessary to access the **owner account** on the database.

**LoginCredential:** A **NetworkCredential** (section [2.2.4.13](#)) that specifies the credentials necessary to access the customized account on the database.

**LoginPassword:** A **string** ([XMLSCHEMA2] section 3.2.1) that overrides the password of the user name specified by **LoginCredential**.

**Password:** A **string** ([XMLSCHEMA2] section 3.2.1) that overrides the password of the user name specified by **DboCredential**.

#### 2.2.4.12 SecureString

**Namespace:** <http://schemas.datacontract.org/2004/07/System.Security>

Specifies an empty element.

```
<xs:complexType name="SecureString" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence/>
</xs:complexType>
```

### 2.2.4.13 ServerContext

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies information about a server on which databases are located.

```
<xs:complexType name="ServerContext" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net" minOccurs="0"
name="MasterCredential" nillable="true" type="q2:NetworkCredential"/>
    <xs:element minOccurs="0" name="ServerReferenceId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
```

**MasterCredential:** A **NetworkCredential** (section [2.2.4.13](#)) that specifies credentials to be used when executing commands on this particular database server.

**ServerReferenceId:** A **guid** (section [2.2.5.8](#)) that specifies a value that is used as a handle to this particular database server.

### 2.2.4.14 ArrayOfKeyValueOfstringstring

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

Specifies a collection of properties and their values.

```
<xs:complexType name="ArrayOfKeyValueOfstringstring"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="KeyValueOfstringstring">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Key" nillable="true" type="xs:string"/>
          <xs:element name="Value" nillable="true" type="xs:string"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

**KeyValueOfstringstring:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) based name/value property pair.

**KeyValueOfstringstring.Key:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of a property.

**KeyValueOfstringstring.Value:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the value of the property specified by **KeyValueOfstringstring.Key**.

### 2.2.4.15 DatabaseProviderMessage

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

Specifies an error condition that occurred during communication between the protocol server and a database server.

```
<xs:complexType name="DatabaseProviderMessage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
```

```

    <xs:element
      xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
      " minOccurs="0" name="Error" type="tns2:DatabaseProviderError"/>
    <xs:element minOccurs="0" name="HealthInformation" nillable="true"
      type="ql:ServerHealthInformation"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OriginalStackTrace" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**Error:** A **DatabaseProviderError** (section [2.2.5.7](#)) that specifies the type of error that occurred.

**HealthInformation:** A **ServerHealthInformation** (section [2.2.4.6](#)) element that specifies the health information of the protocol server.

**Message:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies information about the error that occurred.

**OriginalStackTrace:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies where the error was encountered in the protocol server's source code. The protocol client SHOULD add this information to a log file, but otherwise does not use it.

#### 2.2.4.16 ArrayOfFieldSchema

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

The **ArrayOfFieldSchema** complex type is a collection of fields (2) of a **Source** (section [3.1.1.1](#)).

```

<xs:complexType name="ArrayOfFieldSchema" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FieldSchema" nillable="true"
      type="tns6:FieldSchema"/>
  </xs:sequence>
</xs:complexType>

```

**FieldSchema:** A **FieldSchema** (section [2.2.4.25](#)) that specifies metadata information about a **field (3)** of a **Source** (section 3.1.1.1). At least one **FieldSchema** MUST be present.

#### 2.2.4.17 ArrayOfint

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

The **ArrayOfInt** complex type is a collection of **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) values.

```

<xs:complexType name="ArrayOfint" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="int" type="xs:int"/>
  </xs:sequence>
</xs:complexType>

```

**int:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies an integer.

#### 2.2.4.18 ArrayOfParameterValue

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

Specifies a set of values of input parameters to pass to a **Data Macro** ([\[MS-AXL2\]](#) section 2.1.2.2) or **UI Macro** ([\[MS-AXL2\]](#) section 2.1.2.1) upon execution.

```
<xs:complexType name="ArrayOfParameterValue" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterValue" nillable="true"
type="tns6:ParameterValue"/>
  </xs:sequence>
</xs:complexType>
```

**ParameterValue:** A **ParameterValue** (section [2.2.4.26](#)) that specifies the value for a parameter to a **Data Macro** or a **UI Macro**.

#### 2.2.4.19 ArrayOfstring

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

The **ArrayOfString** complex type is a collection of **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) values.

```
<xs:complexType name="ArrayOfstring" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**string:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a string value.

#### 2.2.4.20 ClientMessage

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

Specifies an error or informative message to return to the protocol server.

```
<xs:complexType name="ClientMessage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Context" nillable="true" type="q3:ArrayOfanyType"/>
    <xs:element minOccurs="0" name="MessageID" type="tns6:ClientMessageID"/>
  </xs:sequence>
</xs:complexType>
```

**Context:** An **ArrayOfAnyType** (section [2.2.4.9](#)) that specifies context information about the message. If the string assumed to be associated with the **MessageID** contains numbered placeholders, that is, a number surrounded by `{}` characters, the protocol server **MUST** include a contextual string for each different placeholder, such that the first **anyType** subelement corresponds to the placeholder `"{0}"`, the second **anyType** subelement corresponds to the placeholder `"{1}"`, and so on. The protocol server assumes that the protocol client replaces each placeholder with a string that represents the value of the corresponding **anyType** subelement.

**MessageID:** A **ClientMessageID** (section [2.2.5.6](#)) that specifies an identifier that the protocol server assumes is associated with a string.

#### 2.2.4.21 Expression

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

Specifies an **expression**.

```
<xs:complexType name="Expression" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="ExpressionScript" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OriginalExpression" nillable="true" type="xs:string"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Properties" nillable="true" type="q3:ArrayOfanyType"/>
    <xs:element minOccurs="0" name="ReferencesFunction" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ServerExpression" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
```

**ExpressionScript:** A **string** ([**XMLSCHEMA2**] section 3.2.1) that specifies the **JSON** representation of an **expression**. MUST be specified. The value MUST conform to the following **ABNF** grammar ([**RFC5234**]):

```
ExpressionScript =
"Access.AccessApplication.GenerateAxlFromJson({{'Type':'FunctionCall','Value':'" function-name
"', 'Arguments':[" argument-list "]}})"
argument-list = argument / (argument "," argument-list)
argument = "{{'Type':'" argument-name "', 'Value':'" argument-value "'}}"
```

**function-name** specifies the name of a function. MUST be a valid value for the **Name** attribute of **CT\_FunctionCall**, as specified by [[MS-AXL2](#)] section 2.2.3.46.

**argument-name** specifies the name of an argument to the function. MUST be a valid value for the **Name** attribute specified by [[MS-AXL2](#)] section 2.2.5.2.

**argument-value** specifies the value of an argument.

**OriginalExpression:** A **string** ([**XMLSCHEMA2**] section 3.2.1) that specifies the **expression** exactly as the user entered it. MUST be omitted if the **expression** did not originate from user input.

**Properties:** An **ArrayOfAnyType** (section [2.2.4.9](#)). MUST be ignored.

**ReferencesFunction:** A **string** ([**XMLSCHEMA2**] section 3.2.1) that specifies the name of a function. MUST match **function-name** in **ExpressionScript**.

**ServerExpression:** A **boolean** ([**XMLSCHEMA2**] section 3.2.2) that specifies whether the **expression** is to be evaluated by the protocol server.

## 2.2.4.22 FieldSchema

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

The type **FieldSchema** stores all metadata information about a field (2) of a **Source** (section [3.1.1.1](#)).

```
<xs:complexType name="FieldSchema" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AllowMultipleValues" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ColumnName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CurrencyLocal" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CurrencySymbol" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DataSource" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DataType" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

```

    <xs:element minOccurs="0" name="DecimalPlaces" type="xs:int"/>
    <xs:element minOccurs="0" name="DefaultExpression" nillable="true"
type="tns6:Expression"/>
    <xs:element minOccurs="0" name="DefaultValue" nillable="true" type="xs:string"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="DependentFields" nillable="true" type="q3:ArrayOfint"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="ExtendedAttributes" nillable="true"
type="q3:ArrayOfKeyValueOfstringstring"/>
    <xs:element minOccurs="0" name="FormatString" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="IsKey" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsTableQueryLookup" type="xs:boolean"/>
    <xs:element minOccurs="0" name="KeyIndex" type="xs:int"/>
    <xs:element minOccurs="0" name="LookupBoundField" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupCurrencySymbol" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupDecimalPlaces" type="xs:int"/>
    <xs:element minOccurs="0" name="LookupDisplayField" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupFormatString" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupSortType" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupSource" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupValueList" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="MaxLength" type="xs:int"/>
    <xs:element minOccurs="0" name="ObjectId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ReadOnly" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Required" type="xs:boolean"/>
    <xs:element minOccurs="0" name="SourceObject" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="TextType" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ValidationMessage" nillable="true"
type="tns6:ClientMessage"/>
    <xs:element minOccurs="0" name="ValidationScript" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**AllowMultipleValues:** MUST NOT be used.

**Caption:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the author-provided display name of the **field (3)**.

**ColumnName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the **field (3)**. MUST be present.

**CurrencyLocal:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **locale** used for formatting currency in the **field (3)**.

**CurrencySymbol:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the currency symbol of the **field (3)**. MUST be present.

**DataSource:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the **Source** (section 3.1.1.1) the **field (3)** belongs to when this **FieldSchema** element appears inside of a **RelatedFieldInfos** element of a **Recordset** (section [3.1.4.45.3.8](#)).

**DataType:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **data type** of the **field (3)**. MUST be present. MUST be one of the following values.

- "Bit" ([MSDN-TSQL-Reference-2011])
- "Decimal" ([MSDN-TSQL-Reference-2011])
- "Float" ([MSDN-TSQL-Reference-2011])
- "Int" ([MSDN-TSQL-Reference-2011])
- "NVarChar" ([MSDN-TSQL-Reference-2011])



- "VarBinary" ([MSDN-TSQL-Reference-2011])
- "Variant" ([MSDN-TSQL-Reference-2011])
- "DateTime2" ([MSDN-TSQL-Reference-2011])

**DecimalPlaces:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the number of decimal places of the **field (3)**. MUST NOT be used.

**DefaultExpression:** An **Expression** (section [2.2.4.24](#)) that specifies the default value of the **field (2)**. MUST be empty.

**DefaultValue:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the default value of the **field (3)**. The value MUST be in the same data type as specified by **DataType**. MUST be present.

**DependentFields:** An **ArrayOfInt** (section [2.2.4.20](#)) that specifies the indices of all **fields (3)** that are dependent on this **field (3)**. MUST be present.

**ExtendedAttributes:**

**FormatString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the format string of the **field (3)**. MUST be present. MUST be one of the following values:

- "General Number" ([MS-AXL2] section 2.2.4.13)
- "Currency" ([MS-AXL2] section 2.2.4.13)
- "Fixed" ([MS-AXL2] section 2.2.4.13)
- "Standard" ([MS-AXL2] section 2.2.4.13)
- "Percent" ([MS-AXL2] section 2.2.4.13)
- "General Date" ([MS-AXL2] section 2.2.4.13)
- "Long Date" ([MS-AXL2] section 2.2.4.13)
- "Short Date" ([MS-AXL2] section 2.2.4.13)
- "Long Time" ([MS-AXL2] section 2.2.4.13)
- "Short Date" ([MS-AXL2] section 2.2.4.13)

**IsKey:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the **field (3)** is a **primary key**.

**IsTableQueryLookup:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether this **field (3)** is a **lookup field**.

**KeyIndex:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the index of the **primary key field (3)**. MUST be -1.

**LookupBoundField:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **BoundColumn** ([MS-AXL2] section 2.2.2.5) of this **field (3)**. MUST be used only if this **field (3)** is a **lookup field**.

**LookupCurrencySymbol:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the currency symbol of the **LookupDisplayField**. MUST be used only if this **field (2)** is a **lookup field**.

**LookupDecimalPlaces:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the number of decimal places of the **LookupDisplayField**. MUST NOT be used.

**LookupDisplayField:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **DisplayColumn** ([MS-AXL2] section 2.2.2.10) of this **field (3)**. MUST be used only if this **field (3)** is a **lookup field**.

**LookupFormatString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the format string of the **LookupDisplayField**. MUST be used only if this **field (3)** is a **lookup field**. MUST be one of the values allowed for **FormatString**.

**LookupSortType:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the sort order of **LookupDisplayField**. MUST be used only if this **field (3)** is a **lookup field**. MUST be either "ascending" or "descending".

**LookupSource:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **ReferencedTable** ([MS-AXL2] section 2.2.2.16) of this **field (3)**. MUST be used only if this **field (3)** is a **lookup field**.

**LookupValueList:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a list of values that this **field (3)** can have. The values are separated by a comma in this string. MUST be used only if this **field (3)** is a **lookup field**. MUST be used only if **LookupSource** is empty or not present.

**MaxLength:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the maximum size of the **field (3)**. If **DataType** is "NVarChar", the size is in characters, otherwise the size is in bytes. A value of -1 specifies that the **field (3)** does not have a maximum length.

**ObjectId:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies an identifier for the **field (3)**. MUST be present.

**ReadOnly:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the data in the **field (3)** is read-only. A value of "true" specifies that the data cannot be changed.

**Required:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the **field (3)** is required to have data. A value of "false" specifies that the **field (3)** can contain NULL values.

**SourceObject:** MUST NOT be used.

**TextType:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the text type of the **field (3)**. MUST NOT be present if **DataType** is not "Nvarchar"; otherwise, MUST be one of the following values:

- "SingleLine" ([MS-AXL2] section 2.2.4.8)
- "MultiLine" ([MS-AXL2] section 2.2.4.8)
- "HyperLink"([MS-AXL2] section 2.2.4.8)

**ValidationMessage:** A **ClientMessage** (section [2.2.4.23](#)) that specifies an error or informative message returned by the protocol server. MUST be present.

**ValidationScript:** MUST NOT be used.

## 2.2.4.23 ParameterValue

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient

Specifies the value of a parameter to pass to a Data Macro ([\[MS-AXL2\] section 2.1.2.2](#)) or UI Macro ([\[MS-AXL2\] section 2.1.2.1](#)) upon execution.

```
<xs:complexType name="ParameterValue" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="IsDate" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Value" nillable="true" type="xs:anyType"/>
  </xs:sequence>
```

</xs:complexType>

**IsDate:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the value specified by **Value** represents a date. If true, the value specified by **Value** must be in a format specified by [ISO-8601].

**Name:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of a parameter to a Data Macro or UI Macro being executed. MUST be present.

**Value:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the value of a parameter to a Data Macro or UI Macro being executed. MUST be present.

#### 2.2.4.24 AccessObject

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design

The complex type **AccessObject** specifies information about an object in a database application.

```
<xs:complexType name="AccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="DefinitionNodeString" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ID" type="xs:int"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element
      xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
      minOccurs="0" name="ObjectType" type="q1:AccessObjectType"/>
    <xs:element minOccurs="0" name="ParentId" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**DefinitionNodeString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the definition of the object. The contents MUST correspond to the **ObjectType** of this object, as specified in the following table.

| Value of ObjectType attribute | Contents of Definition element   |
|-------------------------------|--|
| Table                         | MUST be a <b>Schema</b> element, as specified by [MC-CSDL] section 2.1.1. MUST include the annotations specified by [MS-AXL2] section 2.1.1. |
| Query                         | MUST be a <b>Query</b> element, as specified by [MS-AXL2] section 2.2.1.1.   |
| DataMacro                     | MUST be a <b>DataMacro</b> element, as specified by [MS-AXL2] section 2.2.1.14.  |
| Form                          | MUST be a <b>FormDef</b> element, as specified by [MS-AXL2] section 2.2.1.12.  |
| UIMacro                       | MUST be a <b>UserInterfaceMacro</b> element, as specified by [MS-AXL2] section 2.2.1.5.  |
| LinkedTable                   | MUST be a <b>Schema</b> element, as specified by [MC-CSDL] section 2.1.1. MUST include the annotations specified by [MS-AXL2] section 2.1.1. |

**Description:** See **Description** ([MS-AADT] section 2.2.4.1).

**ID:** See **ID** ([MS-AADT] section 2.2.4.1).

**Name:** See **Name** ([MS-AADT] section 2.2.4.1).

**ObjectType:** An **AccessObjectType** (section [2.2.5.1](#)) that specifies the type of the object. MUST be one of "Table", "Query", "DataMacro", "Form", "UIMacro", or "LinkedTable".

**ParentId:** See **ParentId** ([MS-AADT] section 2.2.4.1).

**Version:** See **Version** ([MS-AADT] section 2.2.4.1).

### 2.2.4.25 AccessObjectIdentity

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The **AccessObjectIdentity** complex type specifies an **AccessObject** (section [2.2.4.28](#)) and its version in a database application.

```
<xs:complexType name="AccessObjectIdentity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="ID" type="xs:int"/>
    <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**ID:** See **ID** ([MS-AADT] section 2.2.4.2).

**Version:** See **Version** ([MS-AADT] section 2.2.4.2).

### 2.2.4.26 AccessObjectList

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The complex type **AccessObjectList** specifies an array of complex type **AccessObject** (section [2.2.4.1](#)) in a database application.

```
<xs:complexType name="AccessObjectList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
      minOccurs="0" name="AccessObjects" nillable="true" type="tns4:ArrayOfAccessObject"/>
  </xs:sequence>
</xs:complexType>
```

**AccessObjects:** An **ArrayOfAccessObject** (section [2.2.4.34](#)) element.

### 2.2.4.27 AccessProperties

**Namespace:**

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema>

The **AccessProperties** complex type contains information about the properties associated with a **Column** (section [2.2.4.45](#)).

```
<xs:complexType name="AccessProperties" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AllowMultipleValues" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CurrencyLocale" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CurrencySymbol" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

```

    <xs:element minOccurs="0" name="Format" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Lookup" nillable="true" type="tns3:ColumnLookup"/>
    <xs:element minOccurs="0" name="TextType" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**AllowMultipleValues:** Specifies whether a field allows multiple values.

**Caption:** Specifies the author-provided display name of the **Column** (section 2.2.4.45).

**CurrencyLocale:** Specifies the locale used for formatting currency in the **Column** (section 2.2.4.45).

**CurrencySymbol:** Specifies the symbol used for currency in the **Column** (section 2.2.4.45).

**Format:** Specifies the presentation format of values in the **Column** (section 2.2.4.45).

**Lookup:** Specifies that the value is a **Lookup** (section [2.2.5.15](#)).

**TextType:** Specifies that text in the **Column** (section 2.2.4.45) is single or multiple lines.

### 2.2.4.28 AccessStorageObject

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The complex type **AccessStorageObject** specifies an **AccessObject** (section [2.2.4.28](#)) used by some messages in this protocol.

```

<xs:complexType name="AccessStorageObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

### 2.2.4.29 AppsForOfficeSettings

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

The **AppsForOfficeSettings** complex type is used to return the settings of the Office Add-ins ([\[MS-OWEXML\]](#) section 1.3.1).

```

<xs:complexType name="AppsForOfficeSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="Bindings" nillable="true" type="q3:ArrayOfArrayOfstring"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="PropertyKeys" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="PropertyValues" nillable="true" type="q3:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>

```

**Bindings:** An **ArrayOfArrayOfstring** (section [2.2.4.33](#)) that binds the Office Add-ins ([\[MS-OWEXML\]](#) section 1.3.1) to the DataSource. The binding consists an array of count of bindings and each of those has an array of the name of the binding, its type and column names. Name is a **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a name for the binding. Type is a **string**

([XMLSCHEMA2] section 3.2.1) that MUST be set to value "TableBinding". Column names are **string** ([XMLSCHEMA2] section 3.2.1) that specify a column name in the result set.

**PropertyKeys:** An **ArrayOfstring** (section [2.2.4.22](#)) that specifies the names of the properties. The key at a given index in **PropertyKeys** forms a key-value pair with the value at the same index in **PropertyValues**. This key-value pair corresponds to an instance of a **CT\_OsfWebExtensionProperty** ([MS-OWEXML] section 2.2.1) where the "key" represents the name attribute and the "value" represents value attribute.

**PropertyValues:** An **ArrayOfstring** (section [2.2.4.22](#)) that specifies the values of the properties The key at a given index in **PropertyKeys** forms a key-value pair with the value at the same index in **PropertyValues**. This key-value pair corresponds to an instance of a **CT\_OsfWebExtensionProperty** ([MS-OWEXML] section 2.2.1) where the "key" represents the name attribute and the "value" represents value attribute.

### 2.2.4.30 ArrayOfAccessObject

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

This complex type specifies an array of **AccessObject** elements.

```
<xs:complexType name="ArrayOfAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessObject" nillable="true"
type="tns4:AccessObject"/>
  </xs:sequence>
</xs:complexType>
```

**AccessObject:** An **AccessObject** (section [2.2.4.28](#)) that specifies properties in a database application.

### 2.2.4.31 ArrayOfAccessObjectIdentity

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

This complex type specifies an array of **AccessObjectIdentity** elements.

```
<xs:complexType name="ArrayOfAccessObjectIdentity"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessObjectIdentity"
nillable="true" type="tns4:AccessObjectIdentity"/>
  </xs:sequence>
</xs:complexType>
```

**AccessObjectIdentity:** An **AccessObjectIdentity** (section [2.2.4.29](#)) that specifies an **AccessObject** (section [2.2.4.28](#)) and its version in a database application.

### 2.2.4.32 ArrayOfArrayOfKeyValuePair

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

This complex type specifies an array of **ArrayOfKeyValuePair**(section [2.2.4.44](#)) elements.

```
<xs:complexType name="ArrayOfArrayOfKeyValuePair"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
```

```

    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfKeyValuePair"
nillable="true" type="tns1:ArrayOfKeyValuePair"/>
  </xs:sequence>
</xs:complexType>

```

**ArrayOfKeyValuePair:** An array of **key value pair (KVP)**.

### 2.2.4.33 ArrayOfArrayOfstring

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

This complex type specifies an array of **ArrayOfString** elements.

```

<xs:complexType name="ArrayOfArrayOfstring" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfstring" nillable="true"
type="q3:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>

```

**ArrayOfstring:** An **ArrayOfstring** (section [2.2.4.22](#)) element that specifies an array of strings.

### 2.2.4.34 ArrayOfFirewallRule

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

This complex type specifies an array of **FirewallRule** elements.

```

<xs:complexType name="ArrayOfFirewallRule" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FirewallRule" nillable="true"
type="tns1:FirewallRule"/>
  </xs:sequence>
</xs:complexType>

```

**FirewallRule:** A **FirewallRule** (section [2.2.4.67](#)) element that specifies a firewall rule to be added to a database application.

### 2.2.4.35 ArrayOfKeyValueOfstringColumnneb1rtN9t

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

This complex type specifies an array of **KeyValueOfstringColumn** elements.

```

<xs:complexType name="ArrayOfKeyValueOfstringColumnneb1rtN9t"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="KeyValueOfstringColumnneb1rtN9t">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Key" nillable="true" type="xs:string"/>
          <xs:element
xmlns:tns3="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.S
chema" name="Value" nillable="true" type="tns3:Column"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>

```

</xs:complexType>

**KeyValueOfstringColumnb1rtN9t:** A key value pair (KVP) of **string** and **Column** (section [2.2.4.52](#)) elements.

**KeyValueOfstringColumnb1rtN9t.Key:** The key field of the **KeyValueOfstringColumnb1rtN9t** element.

**KeyValueOfstringColumnb1rtN9t.Value:** The value field of the **KeyValueOfstringColumnb1rtN9t** element.

### 2.2.4.36 CollationInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

**CollationInfo** specifies the collation information.

```
<xs:complexType name="CollationInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="CultureName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="IsAccentSensitive" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsAccentSensitiveSpecified" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsCaseSensitive" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsCaseSensitiveSpecified" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsKanaSensitive" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsKanaSensitiveSpecified" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsWidthSensitive" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsWidthSensitiveSpecified" type="xs:boolean"/>
    <xs:element minOccurs="0" name="SupportsSupplementaryCharacters" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
```

**CultureName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the culture name of the collation. MUST be formatted as specified by [\[RFC4646\]](#). MUST be present.

**IsAccentSensitive:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the collation distinguishes between characters with accents and those without. If omitted, the protocol server uses a default selection based on the **Culture** attribute.

**IsAccentSensitiveSpecified:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that indicates whether accent sensitivity is specified or not.

**IsCaseSensitive:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the collation distinguishes between uppercase and lowercase letters. If omitted, the protocol server uses a default selection based on the **Culture** attribute.

**IsCaseSensitiveSpecified:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that indicates whether case sensitivity is specified or not.

**IsKanaSensitive:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the collation distinguishes between the two types of Japanese kana characters: hiragana and katakana. If omitted, the protocol server uses a default selection based on the **Culture** attribute.

**IsKanaSensitiveSpecified:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that indicates whether kana-type sensitivity is specified or not.

**IsWidthSensitive:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the collation distinguishes between single-byte characters and the same characters when they are represented as



double-byte characters. If omitted, the protocol server uses a default selection based on the **Culture** attribute.

**IsWidthSensitiveSpecified:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that indicates whether width sensitivity is specified or not.

**SupportsSupplementaryCharacters:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the collation uses **surrogate pairs**.

### 2.2.4.37 Column

#### Namespace:

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema>

Specifies properties of a **Table** (section [2.2.4.57](#)) column.

```
<xs:complexType name="Column" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DefaultValue" nillable="true" type="tns3:ColumnValue"/>
    <xs:element minOccurs="0" name="ExtendedAttributes" nillable="true"
type="tns3:ExtendedAttributes"/>
    <xs:element minOccurs="0" name="ID" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="IsDependent" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsIdentity" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsNullable" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsPrimaryKey" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IsUser" type="xs:boolean"/>
    <xs:element minOccurs="0" name="MaxLength" type="xs:int"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Properties" nillable="true"
type="tns3:AccessProperties"/>
    <xs:element minOccurs="0" name="RequiredConstraintExist" type="xs:boolean"/>
    <xs:element xmlns:q5="http://schemas.datacontract.org/2004/07/System.Data" minOccurs="0"
name="SqlType" type="q5:SqlDbType"/>
    <xs:element minOccurs="0" name="SqlUdt" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**Caption:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the caption for the column.

**DefaultValue:** A **ColumnValue** (section [2.2.4.54](#)) that specifies the default value for the column.

**ExtendedAttributes:** An **ExtendedAttributes** (section [2.2.4.43](#)) that specifies additional properties.

**ID:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the unique identifier for the column. **MUST** be present.

**IsDependent:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the column has dependencies that would prevent it from being updated.

**IsIdentity:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the column is an identity column for the **table (2)**.

**IsNullable:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the column can contain a null value.

**IsPrimaryKey:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the column is a **primary key**.

**IsUser:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the column's type is for a user data type.

**MaxLength:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the maximum length in characters for a text column.

**Name:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the column.

**Properties:** An **AccessProperties** (section [2.2.4.31](#)) that specifies additional properties of the column.

**RequiredConstraintExist:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the column must contain a value.

**SqlDbType:** A **SqlDbType** ([\[MSDN-.NETFrameWrk\]](#)) that specifies the type of the column in the database.

**SqlUdt:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a user-defined **SQL** data type for the column.

### 2.2.4.38 ColumnLookup

**Namespace:**

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema>

This complex type specifies properties that define a lookup column type.

```
<xs:complexType name="ColumnLookup" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="BoundColumn" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DisplayColumn" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LookupType" type="tns3:LookupType"/>
    <xs:element minOccurs="0" name="ReferencedTable" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SortType" type="tns3:SortType"/>
    <xs:element minOccurs="0" name="Values" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**BoundColumn:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the column in the **ReferencedTable** from which to lookup values. **MUST** be present if the **LookupType** is **TableOrQuery**.

**DisplayColumn:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the column in the **ReferencedTable** from which to get display values for the lookup. **MAY** be present if the **LookupType** is **TableOrQuery**.

**LookupType:** A **LookupType** (section [2.2.5.15](#)) that specifies the type of lookup. **MUST** be present.

**ReferencedTable:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the table to look up values from. **MUST** be present if the **LookupType** is **TableOrQuery**.

**SortType:** A **SortType** (section [2.2.5.19](#)) that specifies the sort order of values in the lookup.

**Values:** A **string** ([XMLSCHEMA2] section 3.2.1) value provided by the protocol client. **MUST** be present if the **LookupType** is **ValueList**.

### 2.2.4.39 ColumnValue

**Namespace:**

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema>

The **ColumnValue** complex type specifies that value of a column in the database application.

```

<xs:complexType name="ColumnValue" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Value" nillable="true" type="xs:anyType"/>
  </xs:sequence>
</xs:complexType>

```

**Value:** The value of the column.

#### 2.2.4.40 ConnectivityStatusInformation

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

The **ConnectivityStatusInformation** complex type specifies whether a login having permissions specified by the **Permission** element has been enabled or disabled on the database application.

```

<xs:complexType name="ConnectivityStatusInformation"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="IsEnabled" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
  </xs:sequence>
</xs:complexType>

```

**IsEnabled:** See **IsEnabled** ([\[MS-AADT\]](#) section 2.2.4.5).

**Permission:** Specifies the **permission** level for the logins as specified in section [2.2.5.9](#).

#### 2.2.4.41 DataMacro

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The **DataMacro** complex type is an **AccessObject** (section [2.2.4.28](#)) of type **DataMacro** which represents data validation logic, product logic and business logic in a data application.

The **DefinitionNodeString** (section 2.2.4.28) child element of this type MUST be a string ([\[XMLSCHEMA2\]](#) section 3.2.1) containing zero or more Data Macros ([\[MS-AXL2\]](#) section 1.3.3) elements.

```

<xs:complexType name="DataMacro" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

#### 2.2.4.42 EmbeddedExpression

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The **EmbeddedExpression** complex type is an **AccessStorageObject** (section [2.2.4.32](#)) that specifies a set of expressions.

The **DefinitionNodeString** (section [2.2.4.28](#)) child element of this type MUST be a **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) containing zero or more **Expression** ([\[MS-AXL2\]](#) section 2.2.1.10) elements.

```

<xs:complexType name="EmbeddedExpression" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessStorageObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

#### 2.2.4.43 ExtendedAttributes

##### Namespace:

http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema

The **ExtendedAttributes** complex type contains additional properties for **Column** (section [2.2.4.52](#)) and **Table** (section [2.2.4.57](#)) elements.

```

<xs:complexType name="ExtendedAttributes" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="Attributes" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
  </xs:sequence>
</xs:complexType>

```

**Attributes:** An **ArrayOfKeyValueOfstringstring** (section [2.2.4.17](#)) that specifies the collection of additional attributes represented by key value pairs (KVP) mapping a string attribute name to a string value.

#### 2.2.4.44 FieldList

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient

The complex type **FieldList** specifies a collection of fields.

```

<xs:complexType name="FieldList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="List" nillable="true" type="q3:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>

```

**List:** An **ArrayOfstring** (section [2.2.4.22](#)) that specifies the name of the fields(2).

#### 2.2.4.45 FirewallRule

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data

The complex type **FirewallRule** specifies a firewall rule to be added to a database application. After the firewall rule has been added, those users whose IP address falls within the inclusive range of **StartIPAddress** and **EndIPAddress** be able to connect to the database application directly.

```

<xs:complexType name="FirewallRule" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="EndIPAddress" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StartIPAddress" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**EndIPAddress:** See **EndIPAddress** ([\[MS-AADT\]](#) section 2.2.4.7).

**StartIPAddress:** See **StartIPAddress** ([\[MS-AADT\]](#) section 2.2.4.7).

#### 2.2.4.46 Form

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The complex type **Form** is an **AccessStorageObject** (section [2.2.4.32](#)) which specifies an **AccessObject** (section [2.2.4.28](#)) of type **Form** that allow users of an application to display and manipulate data in underlying data structures.

```
<xs:complexType name="Form" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessStorageObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

#### 2.2.4.47 LinkedTable

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The **LinkedTable** complex type is an **AccessObject** (section [2.2.4.28](#)) of type **LinkedTable** that specifies tables in a database application whose table structure alone is stored in the back-end database while the table data is stored in an external location.

The **DefinitionNodeString** (section [2.2.4.28](#)) child element of this type MUST be a string ([\[XMLSCHEMA2\]](#) section 3.2.1) containing zero or more Linked Tables ([\[MS-AXL2\]](#) section 2.1.1.6) elements.

```
<xs:complexType name="LinkedTable" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

#### 2.2.4.48 ObjectIdentityList

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ObjectIdentityList** complex type specifies an array of **AccessObjectIdentity** (section [2.2.4.29](#)) elements in a database application.

```
<xs:complexType name="ObjectIdentityList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
      minOccurs="0" name="ObjectIdentities" nillable="true"
      type="tns4:ArrayOfAccessObjectIdentity"/>
  </xs:sequence>
</xs:complexType>
```

**ObjectIdentities:** An **ArrayOfAccessObjectIdentity** (section [2.2.4.35](#)).

## 2.2.4.49 Query

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The **Query** complex type is an **AccessObject** (section 2.2.4.28) of type **Query** that is used in a database application for combining, filtering, sorting and grouping of data.

The **DefinitionNodeString** (section 2.2.4.28) child element of this type **MUST** be a string ([XMLSCHEMA2] section 3.2.1) containing zero or more Queries ([MS-AXL2] section 1.3.2) elements.

```
<xs:complexType name="Query" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

## 2.2.4.50 RequestApplication

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

This complex type specifies properties of a database application.

```
<xs:complexType name="RequestApplication" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AlternateUrlString" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ApplicationSecretId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CachedAnonymousAccessMode" nillable="true"
type="q1:AnonymousAccessMode"/>
    <xs:element minOccurs="0" name="CultureLcid" type="xs:int"/>
    <xs:element minOccurs="0" name="DatabaseName" nillable="true" type="xs:string"/>
    <xs:element xmlns:q6="http://schemas.datacontract.org/2004/07/System.Globalization"
minOccurs="0" name="DateTimeFormatInfo" nillable="true" type="q6:DateTimeFormatInfo"/>
    <xs:element minOccurs="0" name="Id" type="ser:guid"/>
    <xs:element minOccurs="0" name="LastAccessedDate" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="LayoutsFolder" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="LocaleId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ReadOnly" type="xs:boolean"/>
    <xs:element minOccurs="0" name="ServerReferenceId" type="ser:guid"/>
    <xs:element minOccurs="0" name="ServerRelativeUrlString" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="SiteId" type="ser:guid"/>
    <xs:element minOccurs="0" name="StaticPageBaseUrlString" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="StorageState" nillable="true" type="xs:string"/>
    <xs:element xmlns:q4="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="TimeZoneInfo" nillable="true" type="q4:TimeZoneInfo"/>
    <xs:element minOccurs="0" name="Title" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="UIVersion" type="xs:int"/>
    <xs:element minOccurs="0" name="UiCultureLcid" type="xs:int"/>
    <xs:element minOccurs="0" name="UrlString" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="UserLocaleId" type="xs:unsignedInt"/>
  </xs:sequence>
</xs:complexType>
```

**AlternateUrlString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies an alternate **Uniform Resource Locator (URL)** for accessing the application. **MUST** be present.

**ApplicationSecretId:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the target application identifier for obtaining credentials from the **Secure Store Service (SSS)**. **MUST** be present.

**CachedAnonymousAccessMode:** An **AnonymousAccessMode** (section [2.2.5.6](#)) specifying the anonymous access mode cached for the application.

**CultureLcid:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the default language code identifier (LCID) for the application. MUST be present.

**DatabaseName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the backend database that contains the application. MUST be present.

**DateTimeFormatInfo:** A **DateTimeFormatInfo** ([\[MSDN-.NETFrameWrk\]](#)) containing culture-specific information about the format of date and time values for the application. MUST be present.

**Id:** The **web application identifier** for the application. MUST be present.

**LastAccessedDate:** A **dateTime** ([XMLSCHEMA2] section 3.2.7) representing the date on which the application's database was last accessed.

**LayoutsFolder:** A **string** ([XMLSCHEMA2] section 3.2.1) representing the layouts folder for the application's **site collection**.

**LocaleId:** An **unsignedInt** ([XMLSCHEMA2] section 3.3.22) that specifies the default language code identifier (LCID) for the application data culture. MUST be present.

**Name:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the application. MUST be present.

**ReadOnly:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the site collection is read-only, locked, and unavailable for write access.

**ServerReferenceId:** A **guid** (section [2.2.5.8](#)) that represents the reference identifier of the server where the application database is located.

**ServerRelativeUrlString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **server-relative URL** for the application. MUST be present.

**SiteId:** The site identifier for the application. MUST be present.

**StaticPageBaseUrlString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the server-relative URL that is the base URL for static pages. MUST be present.

**StorageState:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the current storage state of the database application. MUST be one of the following values.

| Value                 | Meaning                                     |
|-----------------------|---|
| Undefined             | Storage state is unknown.                   |
| ExcludedFromArchiving | Must not be archived.                       |
| Active                | Must not be archived, because it is active. |
| Cold                  | Can be archived.                            |
| Archiving             | In the process of being archived.           |
| Deleting              | In the process of being deleted.            |
| Archived              | Archived successfully.                      |
| Restoring             | Was archived and is being restored.         |
| Restored              | Restored successfully.                      |

| Value                       | Meaning   |
|-----------------------------|---|
| NonArchivableAppType        | Not an archivable application type.               |
| ExternalConnectivityEnabled | Application has external connectivity enabled.    |
| ArchivalSizeLimitExceeded   | Application has exceeded the archival size limit. |

**TimeZoneInfo:** A **TimeZoneInfo** ([MSDN-.NETFrameWrk]) specifying the time zone of the application. MUST be present.

**Title:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the title of the application. MUST be present.

**UIVersion:** An **int** ([XMLSCHEMA2] section 3.3.17) representing the current version number of the application's user interface.

**UiCultureLcid:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the default language code identifier (LCID) for the application's **UI culture**. MUST be present.

**UriString:** A **string** ([XMLSCHEMA2] section 3.2.1) attribute that specifies the **absolute URL** for the application. MUST be present.

**UserLocaleId:** An **unsignedInt** ([XMLSCHEMA2] section 3.3.22) that specifies the default language code identifier (LCID) representing the current user's culture setting. MUST be present.

#### 2.2.4.51 RequestContext

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services

The **RequestContext** complex type specifies contextual information for a given request message to the protocol server about the database application database.

```
<xs:complexType name="RequestContext" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element name="RequestApplication" nillable="true" type="q1:RequestApplication"/>
    <xs:element minOccurs="0" name="RequestUriString" nillable="true" type="xs:string"/>
    <xs:element name="RequestUser" nillable="true" type="q1:RequestUser"/>
  </xs:sequence>
</xs:complexType>
```

**RequestApplication:** A **RequestApplication** (section [2.2.4.50](#)) that specifies properties of the database application.

**RequestUriString:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **fully qualified URL** to the database application. MUST be present.

**RequestUser:** The current user as a **RequestUser** (section [2.2.4.52](#)). MUST be present.

#### 2.2.4.52 RequestUser

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services

The **RequestUser** complex type contains information about the current user.

```
<xs:complexType name="RequestUser" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
```



```

<xs:element minOccurs="0" name="AuthenticatedRole" type="q1:UserRole"/>
<xs:element minOccurs="0" name="Email" nillable="true" type="xs:string"/>
<xs:element minOccurs="0" name="IsAuthenticated" type="xs:boolean"/>
<xs:element minOccurs="0" name="LoginName" nillable="true" type="xs:string"/>
<xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
</xs:sequence>
</xs:complexType>

```

**AuthenticatedRole:** A **UserRole** (section [2.2.5.17](#)) that specifies the role of the current user. **MUST** be present.

**Email:** The **email address** of the current user. **MUST** be present.

**IsAuthenticated:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) specifying whether the current user is an **authenticated user**. **MUST** be present.

**LoginName:** The **login name** of the current user. **MUST** be defined.

**Name:** The name of the current user. **MUST** be present.

### 2.2.4.53 ServiceError

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ServiceError** complex type specifies an error on the protocol server that is not a SOAP fault. For more information, see [\[MS-AADT\]](#) section 2.2.9.2.

```

<xs:complexType name="ServiceError" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Code" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CorrelationId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Timestamp" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**Code:** A **Code** ([\[MS-AADT\]](#) section 2.2.4.12).

**CorrelationId:** A **CorrelationId** ([\[MS-AADT\]](#) section 2.2.4.12).

**Message:** A **Message** ([\[MS-AADT\]](#) section 2.2.4.12).

**Timestamp:** A **Timestamp** ([\[MS-AADT\]](#) section 2.2.4.12).

### 2.2.4.54 ServiceParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ServiceParameters** base complex type is extended by all input messages defined in this protocol.

```

<xs:complexType name="ServiceParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence/>
</xs:complexType>

```

## 2.2.4.55 ServiceResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ServiceResult** base complex type is extended by all response messages defined in this protocol.

```
<xs:complexType name="ServiceResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Warning" nillable="true" type="tns5:ServiceWarning"/>
  </xs:sequence>
</xs:complexType>
```

**Warning:** A **ServiceWarning** (section [2.2.4.56](#)) that specifies additional information that accompanies the response. For more information, see [\[MS-AADT\]](#) section 2.2.9.3. If there are no warnings, this element **MUST** be nil ([\[XSD1.1-1\]](#) section 2.7.2).

## 2.2.4.56 ServiceWarning

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The complex type **ServiceWarning** specifies additional information as part of a successful response from the protocol server. For more information, see [\[MS-AADT\]](#) section 2.2.9.3.

```
<xs:complexType name="ServiceWarning" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Code" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**Code:** A **Code** ([\[MS-AADT\]](#) section 2.2.4.15).

**Message:** A **Message** ([\[MS-AADT\]](#) section 2.2.4.15).

## 2.2.4.57 Table

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The complex type **Table** is an **AccessObject** (section [2.2.4.22](#)) of type **Table** which specifies a data structure that organizes data as rows and columns.

The **DefinitionNodeString** (section [2.2.4.28](#)) child element of this type **MUST** be a string ([\[XMLSCHEMA2\]](#) section 3.2.1) containing zero or more **Tables** ([\[MS-AXL2\]](#) section 1.3.1) elements.

```
<xs:complexType name="Table" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence>
        <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
          minOccurs="0" name="Columns" nillable="true"
          type="q3:ArrayOfKeyValueOfstringColumnb1rtN9t"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Columns:** An **ArrayOfKeyValueOfStringColumn** (see section [2.2.4.43](#))

## 2.2.4.58 UIMacro

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

The complex type **UIMacro** is an **AccessStorageObject** (section [2.2.4.32](#)) that specifies an **AccessObject** (section [2.2.4.28](#)) of type **UIMacro** that are command routines that respond to user interaction and change the state of the UI.

The **DefinitionNodeString** (section [2.2.4.28](#)) child element of this type **MUST** be a string ([\[XMLSCHEMA2\]](#) section 3.2.1) containing zero or more UI Macros ([\[MS-AXL2\]](#) section 1.3.2) elements.

```
<xs:complexType name="UIMacro" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessStorageObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

## 2.2.4.59 AddFirewallRuleResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **AddFirewallRuleResult** complex type specifies the result data of the **AddFirewallRule** protocol operation.

```
<xs:complexType name="AddFirewallRuleResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="RuleName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.10.3.2).

**RuleName:** See description of See description of **RuleName** ([\[MS-AADT\]](#) section 3.1.4.10.3.2).

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

| Simple type                       | Description   |
|-----------------------------------|---|
| <b>AccessObjectType</b>           | The <b>AccessObjectType</b> simple type is a string ( <a href="#">[XMLSCHEMA2]</a> section 3.2.1) that specifies the type of an object in a database application. |
| <b>AccessServerMessageButtons</b> | <b>AccessServerMessageButtons</b> specifies the control buttons associated with an alert that the protocol server returns to the protocol client.                 |
| <b>AccessServerMessageId</b>      | The <b>AccessServerMessageId</b> type is an enumeration of alerts returned from the protocol server.  |

| Simple type                        | Description  |
|------------------------------------|--|
| <b>AccessServerMessageSeverity</b> | <b>AccessServerMessageSeverity</b> specifies the severity of the alert that the protocol server returns to the protocol client.  |
| <b>AccessServerMessageType</b>     | <b>AccessServerMessageType</b> specifies the type of alert that the protocol server returns to the protocol client.  |
| <b>AnonymousAccessMode</b>         | <b>AnonymousAccessMode</b> specifies the anonymous access modes of a database application.   |
| <b>CacheCommands</b>               | The <b>CacheCommands</b> simple type is a list of enumeration values specifying operations to perform on the <b>result set</b> . If multiple values are specified, all of the specified operations <b>MUST</b> be performed, except for combinations prohibited by the table following the schema. |
| <b>ClientMessageID</b>             | The <b>ClientMessageID</b> simple type is a list of enumeration values specifying a message identifier.  |
| <b>ConnectivityPermissionLevel</b> | Specifies a connectivity permission level to a <b>database instance</b>  |
| <b>DatabaseProviderError</b>       | Specifies the type of error condition that occurred during communication between the protocol server and a database server.  |
| <b>LookupType</b>                  | Specifies the type of lookup for a field.  |
| <b>PackageSource</b>               | Specifies where a database package originated.   |
| <b>ServerStateFlags</b>            | <b>ServerStateFlags</b> specifies the state of the protocol server.  |
| <b>SortType</b>                    | Specifies the sort order of values in a lookup field   |
| <b>SqlAuthenticationMode</b>       | Specifies a desired mode of authentication to the database server.   |
| <b>UserRole</b>                    | Specifies the role for the user with respect to the database application.  |

### 2.2.5.1 AccessObjectType

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services

The **AccessObjectType** simple type is a string ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the type of an object in a database application.

```
<xs:simpleType name="AccessObjectType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unknown"/>
    <xs:enumeration value="Table"/>
    <xs:enumeration value="Query"/>
    <xs:enumeration value="DataMacro"/>
    <xs:enumeration value="Form"/>
    <xs:enumeration value="UIMacro"/>
    <xs:enumeration value="Report"/>
    <xs:enumeration value="Image"/>
    <xs:enumeration value="NavigationPane"/>
    <xs:enumeration value="AccessProperties"/>
    <xs:enumeration value="ApplicationVersion"/>
    <xs:enumeration value="ApplicationLogic"/>
    <xs:enumeration value="ApplicationStyle"/>
    <xs:enumeration value="LinkedTable"/>
    <xs:enumeration value="EmbeddedExpression"/>
    <xs:enumeration value="LinkedQuery"/>
    <xs:enumeration value="NavBarSettings"/>
  </xs:restriction>
</xs:simpleType>
```

```

    </xs:restriction>
  </xs:simpleType>

```

The following table specifies the allowable values for the **AccessObjectType** simple type.

| Value              | Meaning                       |
|--------------------|-------------------------------|
| Unknown            | See [MS-AADT] section 2.2.5.1 |
| Table              | See [MS-AADT] section 2.2.5.1 |
| Query              | See [MS-AADT] section 2.2.5.1 |
| DataMacro          | See [MS-AADT] section 2.2.5.1 |
| Form               | See [MS-AADT] section 2.2.5.1 |
| UIMacro            | See [MS-AADT] section 2.2.5.1 |
| Report             | See [MS-AADT] section 2.2.5.1 |
| Image              | See [MS-AADT] section 2.2.5.1 |
| NavigationPane     | See [MS-AADT] section 2.2.5.1 |
| AccessProperties   | See [MS-AADT] section 2.2.5.1 |
| ApplicationVersion | See [MS-AADT] section 2.2.5.1 |
| ApplicationLogic   | See [MS-AADT] section 2.2.5.1 |
| ApplicationStyle   | See [MS-AADT] section 2.2.5.1 |
| LinkedTable        | See [MS-AADT] section 2.2.5.1 |
| EmbeddedExpression | See [MS-AADT] section 2.2.5.1 |
| LinkedQuery        | See [MS-AADT] section 2.2.5.1 |
| NavBarSettings     | This value MUST NOT be used.  |

## 2.2.5.2 AccessServerMessageButtons

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services

**AccessServerMessageButtons** specifies the control buttons associated with an alert that the protocol server returns to the protocol client.

```

<xs:simpleType name="AccessServerMessageButtons" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="OK"/>
        <xs:enumeration value="Cancel"/>
        <xs:enumeration value="Yes"/>
        <xs:enumeration value="No"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>

```

</xs:simpleType>

The following table specifies the allowable values for the **AccessServerMessageButtons** simple type.

| Value  | Meaning               |
|--------|-----------------------|
| None   | MUST NOT be used.     |
| OK     | An OK control button. |
| Cancel | MUST NOT be used.     |
| Yes    | MUST NOT be used.     |
| No     | MUST NOT be used.     |

### 2.2.5.3 AccessServerMessageId

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

The **AccessServerMessageId** type is an enumeration of alerts returned from the protocol server.

```
<xs:simpleType name="AccessServerMessageId" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Blank"/>
    <xs:enumeration value="InternalError"/>
    <xs:enumeration value="ManagementUIInternalError"/>
    <xs:enumeration value="ServerUnreachable"/>
    <xs:enumeration value="InvalidValueForField"/>
    <xs:enumeration value="GetRecordsPermissionsFailure"/>
    <xs:enumeration value="WriteRecordsPermissionsFailure"/>
    <xs:enumeration value="NotMemberOfRole"/>
    <xs:enumeration value="ServerReadOnly"/>
    <xs:enumeration value="MaxSessionsPerUserExceeded"/>
    <xs:enumeration value="RetryError"/>
    <xs:enumeration value="MaxRequestDurationExceeded"/>
    <xs:enumeration value="ProductExpired"/>
    <xs:enumeration value="NewWorkbookSessionTimeout"/>
    <xs:enumeration value="GregorianCalendarHelperException"/>
    <xs:enumeration value="DataException_CacheOperationInvalid"/>
    <xs:enumeration value="DataException_InvalidPageNumber"/>
    <xs:enumeration value="DataException_ConflictsEncounteredWhileUpdatingData"/>
    <xs:enumeration value="DataException_DeleteConflict"/>
    <xs:enumeration value="DataException_QueryParametersNotSupplied"/>
    <xs:enumeration value="DataException_GenericError"/>
    <xs:enumeration value="DataException_CacheFailureAfterSuccessfulCommit"/>
    <xs:enumeration value="ExternalData_InvalidSource"/>
    <xs:enumeration value="ExternalData_InvalidSite"/>
    <xs:enumeration value="ExternalData_ComponentMissing"/>
    <xs:enumeration value="ExternalData_SourceAccessDenied"/>
    <xs:enumeration value="ExternalData_TooMuchData"/>
    <xs:enumeration value="ExternalData_TooManyWildcards"/>
    <xs:enumeration value="ExternalData_ParametersNotSupported"/>
    <xs:enumeration value="ExternalData_IncompatibleCulture"/>
    <xs:enumeration value="ExternalData_RefreshDataSource"/>
    <xs:enumeration value="ExternalData_DuplicateColumns"/>
    <xs:enumeration value="ExternalData_LoadUserProfileDisabled"/>
    <xs:enumeration value="DataConnectivity_FunctionalityDisabled"/>
    <xs:enumeration value="DataConnectivity_AllIPsNotSupported"/>
    <xs:enumeration value="DataConnectivity_IPRangeNotSupported"/>
    <xs:enumeration value="DataConnectivity_IPv6NotSupported"/>
  </xs:restriction>
</xs:simpleType>
```

```

<xs:enumeration value="DataConnectivity_FirewallRuleLimitExceeded"/>
<xs:enumeration value="DataConnectivity_NoUserConnectionAllowed"/>
<xs:enumeration value="InvalidArgument"/>
<xs:enumeration value="NullArgument"/>
<xs:enumeration value="WebService_ObjectNotFound"/>
<xs:enumeration value="WebService_InvalidId"/>
<xs:enumeration value="WebService_ObjectSaveConflict"/>
<xs:enumeration value="WebService_ObjectModifiedExternally"/>
<xs:enumeration value="WebService_DeleteApplicationWithSubwebs"/>
<xs:enumeration value="WebService_SiteDoesNotExist"/>
<xs:enumeration value="WebService_InvalidApplicationEndPoint"/>
<xs:enumeration value="WebService_GetServerInformation_SiteDoesNotExist"/>
<xs:enumeration value="WebService_CreateApplication_SiteDoesNotExist"/>
<xs:enumeration value="WebService_UnsupportedCulture"/>
<xs:enumeration value="WebService_MustBeAuthorToDesign"/>
<xs:enumeration value="WebService_ConflictingOperationInProgress"/>
<xs:enumeration value="ObjectAlreadyExists"/>
<xs:enumeration value="AccessServicesDisabled"/>
<xs:enumeration value="TableException_CsdlDefinitionNotSupported"/>
<xs:enumeration value="TableException_DuplicateColumnName"/>
<xs:enumeration value="TableException_InvalidColumn"/>
<xs:enumeration value="TableException_InvalidFieldInExpression"/>
<xs:enumeration value="TableException_InvalidObjectInExpression"/>
<xs:enumeration value="TableException_InvalidComputedColumnExpression"/>
<xs:enumeration value="TableException_InvalidComputedColumnType"/>
<xs:enumeration value="TableException_InvalidRequiredImageColumn"/>
<xs:enumeration value="TableException_InvalidCheckConstraintExpression"/>
<xs:enumeration value="TableException_TooManyIndexes"/>
<xs:enumeration value="QueryException_AmbiguousSourceNamesProvided"/>
<xs:enumeration value="QueryException_InvalidSourceNamesProvided"/>
<xs:enumeration value="QueryException_AmbiguousAliasProvided"/>
<xs:enumeration value="QueryException_InvalidObjectName"/>
<xs:enumeration value="QueryException_AmbiguousJoins"/>
<xs:enumeration value="QueryException_GenericAXLValidation"/>
<xs:enumeration value="QueryException_OutputNotInGroupsOrPartOfAggregate"/>
<xs:enumeration value="QueryException_ParameterTypeMismatch"/>
<xs:enumeration value="QueryException_OrderNotInOutputs"/>
<xs:enumeration value="OrderingException_InvalidSpecification"/>
<xs:enumeration value="OrderingException_InvalidColumnName"/>
<xs:enumeration value="MacroCompilationException_InvalidAxl"/>
<xs:enumeration value="MacroCompilationException_InvalidAction"/>
<xs:enumeration value="MacroCompilationException_InvalidEventName"/>
<xs:enumeration value="MacroCompilationException_RequiredArgumentMissing"/>
<xs:enumeration value="MacroCompilationException_ArgumentValueNotSpecified"/>
<xs:enumeration value="MacroCompilationException_InvalidActionArgument"/>
<xs:enumeration value="MacroCompilationException_MissingDataMacroParameter"/>
<xs:enumeration value="MacroCompilationException_InvalidParameter"/>
<xs:enumeration value="MacroCompilationException_InvalidQueryParameter"/>
<xs:enumeration value="MacroCompilationException_MacroCallStackDepthExceeded"/>
<xs:enumeration value="MacroCompilationException_VariableNameCollision"/>
<xs:enumeration value="MacroCompilationException_EmptyConditionalBlock"/>
<xs:enumeration value="MacroCompilationException_EmptyLookupRecordBlock"/>
<xs:enumeration value="MacroCompilationException_UpdateOnDeletedRecord"/>
<xs:enumeration value="MacroCompilationException_UpdateRecordInNDM"/>
<xs:enumeration value="MacroCompilationException_UpdateOnReadOnlyQuery"/>
<xs:enumeration value="MacroCompilationException_UpdateOnReadOnlyField"/>
<xs:enumeration value="MacroCompilationException_InvalidAlias"/>
<xs:enumeration value="MacroCompilationException_InvalidIdentifier"/>
<xs:enumeration value="MacroCompilationException_InvalidVariableName"/>
<xs:enumeration value="DatabaseStorage_RestoreInProgress"/>
<xs:enumeration value="DatabaseStorage_RestoreError"/>
<xs:enumeration value="UnsupportedDatabaseCollation"/>
<xs:enumeration value="NoDatabaseServersAvailableForCreate"/>
<xs:enumeration value="NoSQLAuthDatabaseServersAvailableForCreate"/>
<xs:enumeration value="ExpressionBooleanBitMismatch"/>
<xs:enumeration value="NoApplicationDatabaseInformation"/>
<xs:enumeration value="DatabaseServerLoginFailed"/>
<xs:enumeration value="SettingValidationFailed"/>
<xs:enumeration value="SettingApplicationNameNotFound"/>

```

```

<xs:enumeration value="SettingApplicationIdNotFound"/>
<xs:enumeration value="SettingApplicationProxyNameNotFound"/>
<xs:enumeration value="ProvisioningGenericFailure"/>
<xs:enumeration value="ProvisioningApplicationAlreadyExists"/>
<xs:enumeration value="ProvisioningException_InstallationTimeout"/>
<xs:enumeration value="ProvisioningSecureStoreIsRequiredAndMissing"/>
<xs:enumeration value="ProvisioningAccessServicesNotSupportedBySite"/>
<xs:enumeration value="FormException_GenericAXLValidation"/>
<xs:enumeration value="UnrecognizedVersion"/>
<xs:enumeration value="UpgradeFailed"/>
<xs:enumeration value="AnotherUpgradeInProgress"/>
<xs:enumeration value="ServerNotCompatibleWithClient"/>
<xs:enumeration value="AppNotCompatibleWithClient"/>
<xs:enumeration value="AppNotCompatibleWithServer"/>
<xs:enumeration value="TemplateNotCompatible"/>
<xs:enumeration value="TemplateSizeExceeded"/>
<xs:enumeration value="TemplateImageSizeExceeded"/>
<xs:enumeration value="TemplateImageTypeUnsupported"/>
<xs:enumeration value="TemplateFailedToExtractApp"/>
<xs:enumeration value="TemplateFailedToParseVersion"/>
<xs:enumeration value="TemplateUnsupportedOrDependencies"/>
<xs:enumeration value="ValidateApplicationException_InvalidUserObjectDefinition"/>
<xs:enumeration value="ValidateApplicationException_InvalidEventDatamacroDefinition"/>
<xs:enumeration value="AccessSqlException_GenericError"/>
<xs:enumeration value="AccessSqlException_CalculationCannotbeStored"/>
<xs:enumeration value="AccessSqlException_ObjectNotFound"/>
<xs:enumeration value="AccessSqlException_PermissionDenied"/>
<xs:enumeration value="AccessSqlException_DuplicateConstraintValue"/>
<xs:enumeration value="AccessSqlException_NoQueryParameters"/>
<xs:enumeration value="AccessSqlException_FieldNoValue"/>
<xs:enumeration value="AccessSqlException_FieldNoValueDesignTime"/>
<xs:enumeration value="AccessSqlException_InvalidFieldName"/>
<xs:enumeration value="AccessSqlException_InvalidObjectName"/>
<xs:enumeration value="AccessSqlException_ObjectAlreadyExists"/>
<xs:enumeration value="AccessSqlException_MissingExpressionInAggregateFunction"/>
<xs:enumeration value="AccessSqlException_DataTypeConversionMismatch"/>
<xs:enumeration value="AccessSqlException_InvalidLengthParameter"/>
<xs:enumeration value="AccessSqlException_IncompatibleTypeChange_TableSave"/>
<xs:enumeration value="AccessSqlException_IncompatibleDataChange_TableSave"/>
<xs:enumeration value="AccessSqlException_ErrorMessage"/>
<xs:enumeration value="AccessSqlException_SqlConnectionTimeout"/>
<xs:enumeration value="AccessSqlException_SqlConnectionTimeoutDuringInsert"/>
<xs:enumeration value="AccessSqlException_SqlError102"/>
<xs:enumeration value="AccessSqlException_SqlError107"/>
<xs:enumeration value="AccessSqlException_SqlError128"/>
<xs:enumeration value="AccessSqlException_SqlError130"/>
<xs:enumeration value="AccessSqlException_SqlError192"/>
<xs:enumeration value="AccessSqlException_SqlError201"/>
<xs:enumeration value="AccessSqlException_SqlError206"/>
<xs:enumeration value="AccessSqlException_SqlError209"/>
<xs:enumeration value="AccessSqlException_SqlError214"/>
<xs:enumeration value="AccessSqlException_SqlError217"/>
<xs:enumeration value="AccessSqlException_SqlError229"/>
<xs:enumeration value="AccessSqlException_SqlError241"/>
<xs:enumeration value="AccessSqlException_SqlError245"/>
<xs:enumeration value="AccessSqlException_SqlError256"/>
<xs:enumeration value="AccessSqlException_SqlError257"/>
<xs:enumeration value="AccessSqlException_SqlError260"/>
<xs:enumeration value="AccessSqlException_SqlError271"/>
<xs:enumeration value="AccessSqlException_SqlError289"/>
<xs:enumeration value="AccessSqlException_SqlError402"/>
<xs:enumeration value="AccessSqlException_SqlError403"/>
<xs:enumeration value="AccessSqlException_SqlError421"/>
<xs:enumeration value="AccessSqlException_SqlError535"/>
<xs:enumeration value="AccessSqlException_SqlError542"/>
<xs:enumeration value="AccessSqlException_SqlError547_CheckConstraint_Runtime"/>
<xs:enumeration value="AccessSqlException_SqlError547_CheckConstraint_Design_Table"/>
<xs:enumeration value="AccessSqlException_SqlError547_CheckConstraint_Design_Column"/>
<xs:enumeration value="AccessSqlException_SqlError547_ForeignKey_RuntimeInsertUpdate"/>

```



```

<xs:enumeration value="AccessSqlException_SqlError547_ForeignKey_RuntimeDelete"/>
<xs:enumeration value="AccessSqlException_SqlError547_ForeignKey_Design"/>
<xs:enumeration value="AccessSqlException_SqlError1004"/>
<xs:enumeration value="AccessSqlException_SqlError1715"/>
<xs:enumeration value="AccessSqlException_SqlError1759"/>
<xs:enumeration value="AccessSqlException_SqlError1765"/>
<xs:enumeration value="AccessSqlException_SqlError1778"/>
<xs:enumeration value="AccessSqlException_SqlError1785"/>
<xs:enumeration value="AccessSqlException_SqlError1919"/>
<xs:enumeration value="AccessSqlException_SqlError2114"/>
<xs:enumeration value="AccessSqlException_SqlError2364"/>
<xs:enumeration value="AccessSqlException_SqlError2365"/>
<xs:enumeration value="AccessSqlException_SqlError2812"/>
<xs:enumeration value="AccessSqlException_SqlError3250"/>
<xs:enumeration value="AccessSqlException_SqlError3623"/>
<xs:enumeration value="AccessSqlException_SqlError3726"/>
<xs:enumeration value="AccessSqlException_SqlError3906"/>
<xs:enumeration value="AccessSqlException_SqlError4121"/>
<xs:enumeration value="AccessSqlException_SqlError4145"/>
<xs:enumeration value="AccessSqlException_SqlError4405"/>
<xs:enumeration value="AccessSqlException_SqlError4429"/>
<xs:enumeration value="AccessSqlException_SqlError4506"/>
<xs:enumeration value="AccessSqlException_SqlError4511"/>
<xs:enumeration value="AccessSqlException_SqlError4901"/>
<xs:enumeration value="AccessSqlException_SqlError4922"/>
<xs:enumeration value="AccessSqlException_SqlError4924"/>
<xs:enumeration value="AccessSqlException_SqlError5074"/>
<xs:enumeration value="AccessSqlException_SqlError7704"/>
<xs:enumeration value="AccessSqlException_SqlError8114"/>
<xs:enumeration value="AccessSqlException_SqlError8115"/>
<xs:enumeration value="AccessSqlException_SqlError8116"/>
<xs:enumeration value="AccessSqlException_SqlError8117"/>
<xs:enumeration value="AccessSqlException_SqlError8134"/>
<xs:enumeration value="AccessSqlException_SqlError8152"/>
<xs:enumeration value="AccessSqlException_SqlError9810"/>
<xs:enumeration value="AccessSqlException_SqlError17142"/>
<xs:enumeration value="AccessSqlException_SqlError40544"/>
<xs:enumeration value="AccessSqlException_SqlError40682"/>
<xs:enumeration value="AccessSqlException_CustomError50001"/>
<xs:enumeration value="AccessSqlException_CustomError50003"/>
<xs:enumeration value="AccessSqlException_CustomError50005"/>
<xs:enumeration value="AccessSqlException_CustomError50010"/>
<xs:enumeration value="OpenDependentObjects"/>
<xs:enumeration value="AccessRenameException_ObjectRenameDisallowed"/>
<xs:enumeration value="AccessRenameException_OnDeployNameTaken"/>
<xs:enumeration value="AccessFeature_OnDeployMacroUnsupported"/>
<xs:enumeration value="MacroCompilationException_ParametersDisallowedInOnDeploy"/>
<xs:enumeration value="AccessEditedAppCantUpgrade"/>
<xs:enumeration value="OpenDependentObjectsForUpdate"/>
</xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **AccessServerMessageId** simple type.

| Value                     | Meaning  |
|---------------------------|--|
| Blank                     | MUST NOT be used.                                      |
| InternalError             | An internal error has occurred on the protocol server. |
| ManagementUIInternalError | MUST NOT be used.                                      |
| ServerUnreachable         | The server is unreachable.                             |
| InvalidValueForField      | MUST NOT be used.                                      |

| Value   | Meaning  |
|---|--|
| GetRecordsPermissionsFailure                        | The user does not have permissions to view the requested <b>record</b> .   |
| WriteRecordsPermissionsFailure                      | The user does not have permissions to create or edit the requested record.   |
| NotMemberOfRole                                     | The user credentials failed to be authenticated by the protocol server.  |
| ServerReadOnly                                      | The database application is read-only.   |
| MaxSessionsPerUserExceeded                          | The protocol operation cannot be finished because the protocol client has exceeded the maximum number of sessions allowed on the protocol server.                                |
| RetryError  | The protocol server is unable to process the request.  |
| MaxRequestDurationExceeded                          | The request exceeded the amount of time allowed. It has been canceled.   |
| ProductExpired                                      | The trial period for the protocol has expired.   |
| NewWorkbookSessionTimeout                           | The session has timed out.   |
| GregorianCalendarHelperException                    | A request was made against the protocol server with a non-Gregorian calendar.  |
| DataException_CacheOperationInvalid                 | MUST NOT be used.  |
| DataException_InvalidPageNumber                     | MUST NOT be used.  |
| DataException_ConflictsEncounteredWhileUpdatingData | MUST NOT be used.  |
| DataException_DeleteConflict                        | MUST NOT be used.  |
| DataException_QueryParametersNotSupplied            | The parameters required in the <b>Source</b> (section <a href="#">3.1.1.1</a> ) are not supplied as input elements to the operation.   |
| DataException_GenericError                          | An internal error occurred on the server and data changes could not be saved.  |
| DataException_CacheFailureAfterSuccessfulCommit     | Data changes were saved, but an internal error occurred on the server after that.  |
| ExternalData_InvalidSource                          | The protocol server cannot find the <b>Linked Table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) to which the protocol client is trying to connect.                          |
| ExternalData_InvalidSite                            | The protocol server cannot connect to the site specified by the protocol client.   |
| ExternalData_ComponentMissing                       | The protocol server cannot connect to the <b>Linked Table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) because a required component is not installed on the protocol server. |
| ExternalData_SourceAccessDenied                     | The protocol server cannot connect to the <b>Linked Table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) because access was denied.  |
| ExternalData_TooMuchData                            | The protocol server cannot complete the protocol   |

| Value                                      | Meaning   |
|--|---|
|  | operation because the query retrieved in too many results.  |
| ExternalData_TooManyWildcards              | The protocol server cannot complete the protocol operation because the query contained too many wildcard characters.  |
| ExternalData_ParametersNotSupported        | The protocol server cannot complete the protocol operation because the query contained unsupported parameters.  |
| ExternalData_IncompatibleCulture           | The protocol server cannot connect to a <b>Linked Table</b> ([MS-AXL2] section 2.1.1.6) because it uses a different data culture than the database application.           |
| ExternalData_RefreshDataSource             | The protocol server cannot complete the protocol operation because the definition of the <b>Linked Table</b> ([MS-AXL2] section 2.1.1.6) has been updated externally.     |
| ExternalData_DuplicateColumns              | The protocol server cannot complete the protocol operation because the definition of the <b>Linked Table</b> ([MS-AXL2] section 2.1.1.6) contains duplicate column names. |
| ExternalData_LoadUserProfileDisabled       | The protocol server is not configured correctly.  |
| DataConnectivity_FunctionalityDisabled     | MUST NOT be used.   |
| DataConnectivity_AllIPsNotSupported        | MUST NOT be used.   |
| DataConnectivity_IPRangeNotSupported       | MUST NOT be used.   |
| DataConnectivity_IPv6NotSupported          | MUST NOT be used.   |
| DataConnectivity_FirewallRuleLimitExceeded | MUST NOT be used.   |
| DataConnectivity_NoUserConnectionAllowed   | MUST NOT be used.   |
| InvalidArgument                            | An invalid argument was passed as an input element to the protocol operation.   |
| NullArgument                               | MUST NOT be used.   |
| WebService_ObjectNotFound                  | The protocol server cannot find the object requested.   |
| WebService_InvalidId                       | An invalid argument was passed as input to the protocol server.   |
| WebService_ObjectSaveConflict              | The protocol server cannot save the object because someone else has made changes to it using this protocol message.   |
| WebService_ObjectModifiedExternally        | The protocol server cannot save the object because someone else has made changes to it using an external tool without using this protocol message.                        |
| WebService_DeleteApplicationWithSubwebs    | The protocol server cannot delete an application that has sub <b>sites</b> .  |
| WebService_SiteDoesNotExist                | The site identified by the URI in the request   |

| Value  | Meaning  |
|--|--|
|  | message from the protocol client does not exist.   |
| WebService_InvalidApplicationEndPoint            | The site identified by the URI in the request message from the protocol client is not a valid location for an application.                       |
| WebService_GetServerInformation_SiteDoesNotExist | The URI for the site specified by the protocol client in the <b>GetServerInformation</b> ([MS-ASDT] section 3.1.4.2) request message is invalid. |
| WebService_CreateApplication_SiteDoesNotExist    | The protocol server cannot create a new database application at the site identified by the URI in the request message.                           |
| WebService_UnsupportedCulture                    | The requested language is not supported by the protocol server.  |
| WebService_MustBeAuthorToDesign                  | MUST NOT be used.  |
| WebService_ConflictingOperationInProgress        | The request failed because the protocol server is currently saving the changes from another operation in the same application.                   |
| ObjectAlreadyExists                              | The user operation to add/modify an object results in the violation of a primary key constraint on the protocol server.                          |
| AccessServicesDisabled                           | The feature used by the operation is disabled on the protocol server.  |
| TableException_CsdIDefinitionNotSupported        | An internal error occurred on the protocol server while saving a <b>table</b> ([MS-AXL2] section 2.1.1).   |
| TableException_DuplicateColumnName               | Duplicate field (2) names provided while creating a <b>table</b> ([MS-AXL2] section 2.1.1).  |
| TableException_InvalidColumn                     | Invalid field (2) provided while creating a <b>table</b> ([MS-AXL2] section 2.1.1).  |
| TableException_InvalidFieldInExpression          | Invalid field (2) was referenced in an <b>expression</b> ([MS-AXL2] section 2.2.1.10) while creating a <b>table</b> ([MS-AXL2] section 2.1.1).   |
| TableException_InvalidObjectInExpression         | Invalid object was referenced in an <b>expression</b> ([MS-AXL2] section 2.2.1.10) while creating a <b>table</b> ([MS-AXL2] section 2.1.1).      |
| TableException_InvalidComputedColumnExpression   | The <b>expression</b> ([MS-AXL2] section 2.2.1.10) in a computed column is not valid.  |
| TableException_InvalidComputedColumnType         | The evaluated type of a computed column is not valid.  |
| TableException_InvalidRequiredImageColumn        | An Image type column with "Required" property is not valid.  |
| TableException_InvalidCheckConstraintExpression  | One or more fields (2) referenced in an <b>expression</b> ([MS-AXL2] section 2.2.1.10) could not be found.                                       |
| TableException_TooManyIndexes                    | The number of indexes has exceeded the maximum allowed in the <b>table</b> ([MS-AXL2] section 2.1.1).  |

| Value   | Meaning  |
|---|--|
| QueryException_AmbiguousSourceNamesProvided         | Duplicate <b>Source</b> (section 3.1.1.1) names provided while creating a <b>Named Query</b> (section 3.1.1.1).  |
| QueryException_InvalidSourceNamesProvided           | Invalid <b>Source</b> (section 3.1.1.1) names provided while creating a <b>Named Query</b> (section 3.1.1.1).  |
| QueryException_AmbiguousAliasProvided               | Duplicate field (2) names provided while creating a <b>Named Query</b> (section 3.1.1.1).  |
| QueryException_InvalidObjectName                    | MUST NOT be used.  |
| QueryException_AmbiguousJoins                       | <b>Named Query</b> (section 3.1.1.1) cannot be saved because the protocol server cannot determine which <b>CT_Join</b> ([MS-AXL2] section 2.2.3.10) is to be performed first.  |
| QueryException_GenericAXLValidation                 | <b>Named Query</b> (section 3.1.1.1) cannot be saved because it failed validation.   |
| QueryException_OutputNotInGroupsOrPartOfAggregate   | <b>Named Query</b> (section 3.1.1.1) cannot be saved because one of the fields (2) is not part of an aggregate function.   |
| QueryException_ParameterTypeMismatch                | <b>Named Query</b> (section 3.1.1.1) cannot be saved because one of the <b>CT_Parameters</b> ([MS-AXL2] section 2.2.3.12) has an invalid data type.  |
| QueryException_OrderNotInOutputs                    | <b>Named Query</b> (section 3.1.1.1) cannot be saved because one of the fields (2) referenced in <b>CT_Order</b> ([MS-AXL2] section 2.2.3.2) or <b>CT_OrderExpression</b> ([MS-AXL2] section 2.2.3.71) is not in <b>CT_Results</b> ([MS-AXL2] section 2.2.3.9) |
| OrderingException_InvalidSpecification              | Invalid <b>sortExpression</b> is supplied as an input element in <b>OpenResultSet</b> (section 3.1.4.10.2.1)   |
| OrderingException_InvalidColumnName                 | MUST NOT be used.  |
| MacroCompilationException_InvalidAxl                | The Data Macro ([MS-AXL2] section 2.1.2.2) or UI Macro ([MS-AXL2] section 2.1.2.1) compilation failed because of invalid AXL ([MS-AXL2]).  |
| MacroCompilationException_InvalidAction             | The action specified is invalid.   |
| MacroCompilationException_InvalidEventName          | The event attribute is invalid.  |
| MacroCompilationException_RequiredArgumentMissing   | A required argument is not present for a Macro action.   |
| MacroCompilationException_ArgumentValueNotSpecified | A value is not specified for a given argument.   |
| MacroCompilationException_InvalidActionArgument     | The value of a given argument is not valid.  |
| MacroCompilationException_MissingDataMacroParameter | The protocol server could not execute the Macro because either an input or an output parameter was not supplied.   |
| MacroCompilationException_InvalidParameter          | The name of an input parameter is not valid.   |
| MacroCompilationException_InvalidQueryParameter     | The protocol server could not save the Macro because the parameters supplied do not match with the <b>Named Query</b> (section 3.1.1.1)  |

| Value   | Meaning   |
|---|---|
|   | definition.   |
| MacroCompilationException_MacroCallStackDepthExceeded | The number of nesting macros exceeds the limit.   |
| MacroCompilationException_VariableNameCollision       | A local variable or return variable is using the same name as a previously defined variable or parameter.   |
| MacroCompilationException_EmptyConditionalBlock       | A conditional block does not contain any actionable statements. Here a conditional block means an <b>If</b> block, <b>Else</b> block, or <b>ElseIf</b> block. |
| MacroCompilationException_EmptyLookupRecordBlock      | A <b>LookupRecord</b> ([MS-AXL2] section 2.2.3.24) block does not contain any actionable statements.  |
| MacroCompilationException_UpdateOnDeletedRecord       | An <b>EditRecord</b> ([MS-AXL2] section 2.2.3.28) or <b>DeleteRecord</b> ([MS-AXL2] section 2.2.5.1.4) is operating against a record that no longer exists.   |
| MacroCompilationException_UpdateRecordInNDM           | An action <b>EditRecord</b> ([MS-AXL2] section 2.2.3.28) is used at the root level of a <b>Named Data Macro</b> as specified by [MS-AXL2] section 2.1.2.2.    |
| MacroCompilationException_UpdateOnReadOnlyQuery       | The protocol server could not save the Macro because the protocol server could not determine a primary key to use in a Query.                                 |
| MacroCompilationException_UpdateOnReadOnlyField       | The protocol server could not save the Macro because a field being edited is read-only.   |
| MacroCompilationException_InvalidAlias                | The alias specified is not valid.   |
| MacroCompilationException_InvalidIdentifier           | The identifier specified is not valid.  |
| MacroCompilationException_InvalidVariableName         | A local variable or return variable name uses an invalid prefix or violates the naming rules.   |
| DatabaseStorage_RestoreInProgress                     | MUST NOT be used.   |
| DatabaseStorage_RestoreError                          | The protocol server failed to restore the database from an archived state.  |
| UnsupportedDatabaseCollation                          | The database application collation is not supported.  |
| NoDatabaseServersAvailableForCreate                   | No database servers are available for create.   |
| NoSQLAuthDatabaseServersAvailableForCreate            | No database servers where <b>SqlAuthenticationMode</b> (section <a href="#">2.2.5.19</a> ) value is "SqlServerAuth" are available for create.                 |
| ExpressionBooleanBitMismatch                          | MUST NOT be used.   |
| NoApplicationDatabaseInformation                      | MUST NOT be used.   |
| DatabaseServerLoginFailed                             | The protocol server was unable to log in to the database server.  |
| SettingValidationFailed                               | MUST NOT be used.   |
| SettingApplicationNameNotFound                        | MUST NOT be used.   |
| SettingApplicationIdNotFound                          | MUST NOT be used.   |

| Value  | Meaning   |
|--|---|
| SettingApplicationProxyNameNotFound                          | MUST NOT be used.   |
| ProvisioningGenericFailure                                   | MUST NOT be used.   |
| ProvisioningApplicationAlreadyExists                         | The protocol server cannot save the database application because another database application with the same name already exists.      |
| ProvisioningException_InstallationTimeout                    | The protocol server timed out while waiting for the database application creation to finish.  |
| ProvisioningSecureStoreIsRequiredAndMissing                  | MUST NOT be used.   |
| ProvisioningAccessServicesNotSupportedBySite                 | The protocol server could not create the database application because a template it needs is not available.                           |
| FormException_GenericAXLValidation                           | Form object([MS-AXL2] section 2.2.1.12)definition is invalid.   |
| UnrecognizedVersion  | The protocol server does not recognize the version of the application the protocol client is trying to open.                          |
| UpgradeFailed  | The protocol server failed to upgrade the application to the latest version.  |
| AnotherUpgradeInProgress                                     | MUST NOT be used.   |
| ServerNotCompatibleWithClient                                | The protocol server is not compatible with the version of the protocol client.  |
| AppNotCompatibleWithClient                                   | The database application is not compatible with the version of the protocol client.   |
| AppNotCompatibleWithServer                                   | The database application to which the protocol client is trying to connect is not compatible with the version of the protocol server. |
| TemplateNotCompatible  | MUST NOT be used.   |
| TemplateSizeExceeded   | MUST NOT be used.   |
| TemplateImageSizeExceeded                                    | MUST NOT be used.   |
| TemplateImageTypeUnsupported                                 | MUST NOT be used.   |
| TemplateFailedToExtractApp                                   | The protocol server failed to create the package.   |
| TemplateFailedToParseVersion                                 | The protocol server failed to create the package because the version specified has an incorrect format.                               |
| TemplateUnsupportedOrDependencies                            | The protocol server failed to create a package because it has unsupported objects or some objects are missing dependencies.           |
| ValidateApplicationException_InvalidUserObjectDefinition     | The database application contains one or more objects with an invalid definition.   |
| ValidateApplicationException_InvalidEventDatamacroDefinition | The database application contains one or more Macros with an invalid definition.  |

| Value   | Meaning   |
|---|---|
| AccessSqlException_GenericError                         | The protocol server encountered an error.   |
| AccessSqlException_CalculationCannotbeStored            | A calculation on the protocol server resulted in a value that cannot be stored because of an overflow error or an out-of-range value when converting from one data type to another.   |
| AccessSqlException_ObjectNotFound                       | The protocol server cannot find the object.   |
| AccessSqlException_PermissionDenied                     | The protocol client does not have sufficient permissions on the site (2) to create or install an <b>app</b> .   |
| AccessSqlException_DuplicateConstraintValue             | The changes requested by the protocol client on the <b>table</b> ([MS-AXL2] section 2.1.1) were not successful because they would create duplicate values in the <b>index</b> ([MS-AXL2] section 2.1.1.3), primary key, or other constraints.   |
| AccessSqlException_NoQueryParameters                    | Parameters were not supplied for a <b>query</b> ([MS-AXL2] section 1.3.4).  |
| AccessSqlException_FieldNoValue                         | A field (2) is empty but is expecting a value.  |
| AccessSqlException_FieldNoValueDesignTime               | Existing data violates the new setting for a field (2). Values <b>MUST</b> be filled in for all records in the field (3) before it can be made to accept only non-null values.  |
| AccessSqlException_InvalidFieldName                     | Invalid field (2) name.   |
| AccessSqlException_InvalidObjectName                    | Invalid object name.  |
| AccessSqlException_ObjectAlreadyExists                  | There is already an object with the same name in the database application.  |
| AccessSqlException_MissingExpressionInAggregateFunction | The <b>query</b> ([MS-AXL2] section 1.3.4) that the protocol client is trying to run does not include an <b>expression</b> ([MS-AXL2] section 2.2.1.10) as part of an aggregate function ([MS-AXL2] section 2.1.3.1).   |
| AccessSqlException_DataTypeConversionMismatch           | The protocol server can throw one of three <b>AccessServerMessageIDs</b> ( <b>AccessSqlException_DataTypeConversionMismatch</b> , <b>AccessSqlException_SqlError8114</b> as specified by section <a href="#">2.2.5.2</a> , or <b>AccessSqlException_SqlError245</b> as specified by section 2.2.5.2) when it fails to convert data from the current data type to the required data type. Which error will be thrown is implementation-specific. |
| AccessSqlException_InvalidLengthParameter               | The protocol server cannot store the result of a function because the value of the function's length parameter isn't valid.   |
| AccessSqlException_IncompatibleTypeChange_TableSave     | The protocol server cannot convert the type of an existing column to the specified type.  |
| AccessSqlException_IncompatibleDataChange_TableSave     | The protocol server cannot convert the data in an existing column to the specified type.  |



| Value   | Meaning  |
|---|--|
| AccessSqlException_ErrorMessage                     | The client operation resulted in the violation of a custom validation rule specified by the user and a custom user-specified message is associated with the validation rule failure.   |
| AccessSqlException_SqlConnectionTimeout             | The protocol server timed out while communicating with the database application.   |
| AccessSqlException_SqlConnectionTimeoutDuringInsert | The protocol server timed out while communicating with the database application during an insert operation.  |
| AccessSqlException_SqlError102                      | The protocol server cannot evaluate an <b>expression</b> ([MS-AXL2] section 2.2.1.10) because of a syntax error.   |
| AccessSqlException_SqlError107                      | A prefix does not match with the name of a <b>table</b> ([MS-AXL2] section 2.1.1) or an <b>alias</b> used in the <b>query</b> ([MS-AXL2] section 1.3.4).   |
| AccessSqlException_SqlError128                      | Field (2) names are not permitted in this context.   |
| AccessSqlException_SqlError130                      | The protocol server cannot perform an aggregate function on an <b>expression</b> ([MS-AXL2] section 2.2.1.10) that contains an aggregate ([MS-AXL2] section 2.1.3.1) or a <b>sub-query</b> ([MS-AXL2] section 2.2.1.1).  |
| AccessSqlException_SqlError192                      | The scale MUST be less than or equal to the precision.   |
| AccessSqlException_SqlError201                      | An expected parameter was not supplied.  |
| AccessSqlException_SqlError206                      | The protocol server cannot evaluate an <b>expression</b> ([MS-AXL2] section 2.2.1.10) because the operand data types aren't compatible with each other with respect to the operator in the expression.   |
| AccessSqlException_SqlError209                      | Ambiguous field (2) name encountered.  |
| AccessSqlException_SqlError214                      | Type conversion error in a parameter.  |
| AccessSqlException_SqlError217                      | The <b>data macro</b> ([MS-AXL2] section 2.1.2.2) was stopped because an endless loop was detected.  |
| AccessSqlException_SqlError229                      | The protocol client does not have sufficient permissions to perform the action on an object in the database application. This error occurs if the user attempts an action, such as executing a stored procedure, or reading or modifying a table, for which the user does not have the appropriate privileges. |
| AccessSqlException_SqlError241                      | One or more strings could not be converted to the Date/Time data type.   |
| AccessSqlException_SqlError245                      | The protocol server can throw one of three <b>AccessServerMessageIDs</b> ( <b>AccessSqlException_DataTypeConversionMismatch</b> as specified by section 2.2.5.2, <b>AccessSqlException_SqlError8114</b> as specified by section 2.2.5.2, or  |

| Value  | Meaning  |
|--|--|
|  | <b>AccessSqlException_SqlError245</b> ) when it fails to convert data from the current data type to the required data type. Which error will be thrown is implementation-specific.   |
| AccessSqlException_SqlError256                               | The protocol server cannot use the specified data with the function because the data type is not Text ([MS-AXL2] section 2.2.4.6) or Yes/No ([MS-AXL2] section 2.2.4.6).   |
| AccessSqlException_SqlError257                               | The protocol server can throw either <b>AccessSqlException_SqlError257</b> or <b>AccessSqlException_SqlError260</b> as specified by section 2.2.5.2 when it cannot implicitly convert the data from the current data type to the required data type as part of the operation. Which error will be thrown is implementation-specific. |
| AccessSqlException_SqlError260                               | The protocol server can throw either <b>AccessSqlException_SqlError257</b> as specified by section 2.2.5.2 or <b>AccessSqlException_SqlError260</b> when it cannot implicitly convert the data from the current data type to the required data type as part of the operation. Which error will be thrown is implementation-specific. |
| AccessSqlException_SqlError271                               | The protocol server cannot update a field (2) because it is read-only.   |
| AccessSqlException_SqlError289                               | A function cannot create a value of type <b>Date</b> , <b>Time</b> , or <b>DateWithTime</b> because some of the arguments have invalid values. <b>Date</b> is the SQL date type, <b>Time</b> is the SQL time type and <b>DateWithTime</b> is the SQL datetime2 type.   |
| AccessSqlException_SqlError402                               | The protocol server cannot evaluate an <b>expression</b> ([MS-AXL2] section 2.2.1.10) because the operand data types are not compatible with the operator in the expression.   |
| AccessSqlException_SqlError403                               | The protocol server cannot evaluate an <b>expression</b> ([MS-AXL2] section 2.2.1.10) because it contains an operator that does not work with the supplied data type.  |
| AccessSqlException_SqlError421                               | Invalid data type for field (2) in a <b>DISTINCT query</b> ([MS-AXL2] section 1.3.4).  |
| AccessSqlException_SqlError535                               | The difference between two date values is too large to be stored.  |
| AccessSqlException_SqlError542                               | A date calculation has resulted in a year value greater than 9999, which is too large to store.  |
| AccessSqlException_SqlError547_CheckConstraint_Runtime       | One or more values are prohibited by a <b>check constraint</b> ([MS-AXL2] section 2.1.1.1).  |
| AccessSqlException_SqlError547_CheckConstraint_Design_Table  | Existing data violates a new record <b>check constraint</b> ([MS-AXL2] section 2.1.1.1).   |
| AccessSqlException_SqlError547_CheckConstraint_Design_Column | Existing data violates a new <b>check constraint</b> ([MS-AXL2] section 2.1.1.1) for a field (2).  |

| Value   | Meaning   |
|---|---|
| AccessSqlException_SqlError547_ForeignKey_RuntimeInsertUpdate | You cannot add or change a record because a related record is required in a <b>table</b> ([MS-AXL2] section 2.1.1).   |
| AccessSqlException_SqlError547_ForeignKey_RuntimeDelete       | A record cannot be deleted or changed because a <b>table</b> ([MS-AXL2] section 2.1.1) contains related records.  |
| AccessSqlException_SqlError547_ForeignKey_Design              | Existing data in a <b>table</b> ([MS-AXL2] section 2.1.1) violates referential integrity rules.   |
| AccessSqlException_SqlError1004                               | A prefix is invalid because there is no <b>table</b> ([MS-AXL2] section 2.1.1) name or alias specified in the <b>query</b> ([MS-AXL2] section 1.3.4).         |
| AccessSqlException_SqlError1715                               | The protocol server cannot create a relationship with cascade update or delete on a calculated field (2).   |
| AccessSqlException_SqlError1759                               | <b>Computed fields</b> cannot reference other computed fields in the <b>expression</b> ([MS-AXL2] section 2.2.1.10) property.                                 |
| AccessSqlException_SqlError1765                               | Cascade updates are not supported for relationships on computed fields.   |
| AccessSqlException_SqlError1778                               | Relationship MUST be between fields (2) of the same data type, and MUST include the same number of fields (2) in each <b>table</b> ([MS-AXL2] section 2.1.1). |
| AccessSqlException_SqlError1785                               | Cannot create cascading relationship on a <b>table</b> ([MS-AXL2] section 2.1.1) as it will cause a circular cascade relationship.                            |
| AccessSqlException_SqlError1919                               | A field (2) in a <b>table</b> ([MS-AXL2] section 2.1.1) cannot be used in an <b>index</b> ([MS-AXL2] section 2.1.1.3).  |
| AccessSqlException_SqlError2114                               | The column cannot be used in an SQL IF UPDATE clause, because it is a <b>computed column</b> .  |
| AccessSqlException_SqlError2364                               | The protocol server cannot automatically convert values from the current data type to the required data type in a criteria expression.                        |
| AccessSqlException_SqlError2365                               | The protocol server cannot convert a value from the current data type to the required data type in a criteria expression.                                     |
| AccessSqlException_SqlError2812                               | The protocol server cannot find a <b>data macro</b> ([MS-AXL2] section 2.1.2.2).  |
| AccessSqlException_SqlError3250                               | The value of a parameter is outside of the range the protocol server expects.   |
| AccessSqlException_SqlError3623                               | The protocol server cannot evaluate an expression because of a floating point error or an expression argument value that is not valid.                        |
| AccessSqlException_SqlError3726                               | The protocol server cannot delete an object because it is included in a relationship.   |

| Value                           | Meaning  |
|---------------------------------|--|
| AccessSqlException_SqlError3906 | The protocol server is currently read-only and some operations are not allowed.  |
| AccessSqlException_SqlError4121 | The protocol server cannot find the specified column (1) or expression, or the specified name is ambiguous.  |
| AccessSqlException_SqlError4145 | The protocol server is expecting a Boolean condition.  |
| AccessSqlException_SqlError4405 | Update or delete for a <b>query</b> ([MS-AXL2] section 1.3.4) failed because the change would affect more than one base <b>table</b> ([MS-AXL2] section 2.1.1).  |
| AccessSqlException_SqlError4429 | The <b>query</b> ([MS-AXL2] section 1.3.4) contains a self-reference.  |
| AccessSqlException_SqlError4506 | An output alias is used more than once.  |
| AccessSqlException_SqlError4511 | Cannot create a <b>query</b> ([MS-AXL2] section 1.3.4) because no alias was specified for a field (2).   |
| AccessSqlException_SqlError4901 | The protocol server cannot add the field (2) because the table contains data and the field (3) is required but does not have a default value.  |
| AccessSqlException_SqlError4922 | The protocol server cannot save the changes because one or more objects reference the field (2).   |
| AccessSqlException_SqlError4924 | A field (2) does not exist in a <b>table</b> ([MS-AXL2] section 2.1.1).  |
| AccessSqlException_SqlError5074 | The protocol server cannot save the changes because the object being updated is dependent on another object.   |
| AccessSqlException_SqlError7704 | The protocol server cannot use the specified value because its data type is not valid for the operation.   |
| AccessSqlException_SqlError8114 | The protocol server can throw one of three <b>AccessServerMessageIDs</b> ( <b>AccessSqlException_DataTypeConversionMismatch</b> as specified by section 2.2.5.2, <b>AccessSqlException_SqlError8114</b> , or <b>AccessSqlException_SqlError245</b> as specified by section 2.2.5.2) when it fails to convert data from the current data type to the required data type. Which error will be thrown is implementation-specific. |
| AccessSqlException_SqlError8115 | While converting a value from one data type to another, the protocol server produced a value that cannot be stored.  |
| AccessSqlException_SqlError8116 | One of the arguments to a function has an incorrect data type.   |
| AccessSqlException_SqlError8117 | The protocol server cannot evaluate an <b>expression</b> ([MS-AXL2] section 2.2.1.10) because a value's data type is not compatible with its operator.   |

| Value  | Meaning  |
|--|--|
| AccessSqlException_SqlError8134                          | Division by zero.  |
| AccessSqlException_SqlError8152                          | String or binary data which would be truncated.  |
| AccessSqlException_SqlError9810                          | The protocol server cannot use a date part function. A date part function returns an integer that represents the specified date part of the specified date, such as the year, month, or day of the specified date. |
| AccessSqlException_SqlError17142                         | The database service is unavailable.   |
| AccessSqlException_SqlError40544                         | The database application has reached its maximum size limit.   |
| AccessSqlException_SqlError40682                         | The database application is read-only.   |
| AccessSqlException_CustomError50001                      | Circular reference resulted in an error.   |
| AccessSqlException_CustomError50003                      | A specified data source does not exist.  |
| AccessSqlException_CustomError50005                      | The protocol server cannot delete the object because it was modified by another user.  |
| AccessSqlException_CustomError50010                      | Sorry, some other user has already modified settings for this Office App. Please refresh your browser and try again.   |
| OpenDependentObjects                                     | Some dependent objects opened in the protocol client and cannot be updated on the protocol server.   |
| AccessRenameException_ObjectRenameDisallowed             | The object cannot be renamed.  |
| AccessRenameException_OnDeployNameTaken                  | MUST NOT be used.  |
| AccessFeature_OnDeployMacroUnsupported                   | MUST NOT be used.  |
| MacroCompilationException_ParametersDisallowedInOnDeploy | MUST NOT be used.  |
| AccessEditedAppCantUpgrade                               | The database application cannot be upgraded because it has been edited on this site, and an upgrade will cause those changes to be lost.   |
| OpenDependentObjectsForUpdate                            | Some dependent objects are opened in the protocol client and cannot be updated on the protocol server.   |

#### 2.2.5.4 AccessServerMessageSeverity

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

**AccessServerMessageSeverity** specifies the severity of the alert that the protocol server returns to the protocol client.

```
<xs:simpleType name="AccessServerMessageSeverity"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
```

```

    <xs:enumeration value="Error"/>
    <xs:enumeration value="Warning"/>
    <xs:enumeration value="Information"/>
    <xs:enumeration value="Progress"/>
    <xs:enumeration value="GettingStarted"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **AccessServerMessageSeverity** simple type.

| Value          | Meaning   |
|----------------|---|
| Error          | The alert indicates that an error occurred.                         |
| Warning        | MUST NOT be used.   |
| Information    | The alert indicates that information is being sent from the server. |
| Progress       | MUST NOT be used.   |
| GettingStarted | MUST NOT be used.   |

### 2.2.5.5 AccessServerMessageType

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

**AccessServerMessageType** specifies the type of alert that the protocol server returns to the protocol client.

```

<xs:simpleType name="AccessServerMessageType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Alert"/>
    <xs:enumeration value="Status"/>
    <xs:enumeration value="Confirmation"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **AccessServerMessageType** simple type.

| Value        | Meaning                                 |
|--------------|---|
| Alert        | The server message is an alert message. |
| Status       | The server message is a status message. |
| Confirmation | MUST NOT be used.                       |

### 2.2.5.6 AnonymousAccessMode

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

**AnonymousAccessMode** specifies the anonymous access modes of a database application.

```

<xs:simpleType name="AnonymousAccessMode" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="ReadOnly"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **AnonymousAccessMode** simple type.

| Value    | Meaning  |
|----------|--|
| None     | Specifies that the database application is not accessible by an anonymous user.                      |
| ReadOnly | Specifies that the database application is accessible by an anonymous user for read operations only. |

### 2.2.5.7 CacheCommands

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data

The **CacheCommands** simple type is a list of enumeration values specifying operations to perform on the **result set**. If multiple values are specified, all of the specified operations **MUST** be performed, except for combinations prohibited by the table following the schema.

```

<xs:simpleType name="CacheCommands" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="RefreshData"/>
        <xs:enumeration value="ApplyFilter"/>
        <xs:enumeration value="ClearFilter"/>
        <xs:enumeration value="ApplySort"/>
        <xs:enumeration value="RetrieveImage"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>

```

The following table specifies the allowable values for the **CacheCommands** simple type.

| Value         | Meaning  |
|---------------|--|
| RefreshData   | Refreshes the row specified by the <b>startRowIndex</b> element (section <a href="#">3.1.4.4.2.1</a> ) from <b>Source</b> (section <a href="#">3.1.1.1</a> ) which was previously supplied as an input element to the <b>GetObjectSchema</b> operation (section <a href="#">3.1.4.7</a> ) that created the <b>result set</b> . |
| ApplyFilter   | Filters the <b>result set</b> as specified in the <b>filter</b> element (section <a href="#">3.1.4.4.2.1</a> ). The <b>ApplyFilter</b> value <b>MUST NOT</b> be present if <b>ClearFilter</b> is present.  |
| ClearFilter   | Removes any filtering applied to the <b>result set</b> . The <b>ClearFilter</b> value <b>MUST NOT</b> be present if <b>ApplyFilter</b> is present.   |
| ApplySort     | Sorts the result set as specified by the <b>sortExpression</b> element (section <a href="#">3.1.4.4.2.1</a> ).   |
| RetrieveImage | Returns the row specified by the <b>startRowIndex</b> element (section <a href="#">3.1.4.4.2.1</a> ) from the <b>result set</b> . The row <b>MUST</b> have only the <b>fields (3)</b> from the <b>result set</b> that contains image data.   |

## 2.2.5.8 ClientMessageID

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient

The **ClientMessageID** simple type is a list of enumeration values specifying a message identifier.

For each identifier except **None**, the protocol server assumes that the protocol client associates a string with each message identifier that is similar to the corresponding entry in the table following the schema.

```
<xs:simpleType name="ClientMessageID" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="PassthroughMessage"/>
    <xs:enumeration value="WebServiceUnavailableMessage"/>
    <xs:enumeration value="WebServiceCanceledMessage"/>
    <xs:enumeration value="DataMacroStopWaiting"/>
    <xs:enumeration value="GenericError"/>
    <xs:enumeration value="NotifyRecordUpdated"/>
    <xs:enumeration value="NotifyRecordsDeleted"/>
    <xs:enumeration value="NotifyCannotDelete"/>
    <xs:enumeration value="NotifyCannotSave"/>
    <xs:enumeration value="NotifyCannotSaveDescription"/>
    <xs:enumeration value="SubFormNestingLimitExceededError"/>
    <xs:enumeration value="DivisionByZero"/>
    <xs:enumeration value="TypeMismatch"/>
    <xs:enumeration value="NoCurrentRecord"/>
    <xs:enumeration value="RecordNotUpdatable"/>
    <xs:enumeration value="WhereConditionTooLong"/>
    <xs:enumeration value="InvalidArgument"/>
    <xs:enumeration value="InvalidContainerControlName"/>
    <xs:enumeration value="ActionArgumentNotFound"/>
    <xs:enumeration value="FormCannotClose"/>
    <xs:enumeration value="AttachmentMustSave"/>
    <xs:enumeration value="InvalidExpression"/>
    <xs:enumeration value="AttachmentUploadSucceed"/>
    <xs:enumeration value="AttachmentDeleted"/>
    <xs:enumeration value="FormOrReportNotBound"/>
    <xs:enumeration value="InvalidPropertyOrMethod"/>
    <xs:enumeration value="InvalidUrl"/>
    <xs:enumeration value="UserInterfaceMacroLoadFailure"/>
    <xs:enumeration value="CannotFindMacroObject"/>
    <xs:enumeration value="CannotGoToSpecifiedRecord"/>
    <xs:enumeration value="InvalidConditionExpression"/>
    <xs:enumeration value="CannotGoToSubformOrTabPage"/>
    <xs:enumeration value="InvalidControl"/>
    <xs:enumeration value="CannotFocusOnControl"/>
    <xs:enumeration value="InvalidControlValue"/>
    <xs:enumeration value="NoControlName"/>
    <xs:enumeration value="CannotFindErrorHandlerMacro"/>
    <xs:enumeration value="InvalidSetPropertyControl"/>
    <xs:enumeration value="LocalVarNameNotSpecified"/>
    <xs:enumeration value="LocalVarExpressionNotSpecified"/>
    <xs:enumeration value="LocalVariableNameInvalid"/>
    <xs:enumeration value="TempVarNameNotSpecified"/>
    <xs:enumeration value="TempVariableNameInvalid"/>
    <xs:enumeration value="CommandNotAvailable"/>
    <xs:enumeration value="ExpressionErrorCannotSet"/>
    <xs:enumeration value="TooManyRunMacros"/>
    <xs:enumeration value="InvalidBrowseToPathArgument"/>
    <xs:enumeration value="InvalidObjectReference"/>
    <xs:enumeration value="FormNotFoundRep"/>
    <xs:enumeration value="ControlDoesNotSupportRequery"/>
    <xs:enumeration value="ReadOnlyNote"/>
    <xs:enumeration value="TooMuchParameterData"/>
    <xs:enumeration value="OperationNotSupportedOnSubReports"/>
    <xs:enumeration value="InvalidPropertyValue"/>
  </xs:restriction>
</xs:simpleType>
```



```

<xs:enumeration value="AutocompleteWaitingForValidationMessage"/>
<xs:enumeration value="AutocompleteInvalidDataMessage"/>
<xs:enumeration value="TooManyTermsInFilter"/>
<xs:enumeration value="InvalidValueForFieldMessage"/>
<xs:enumeration value="InvalidValueForControlMessage"/>
<xs:enumeration value="ImageUploadFailureNotificationMessage"/>
<xs:enumeration value="NoResultsFromFilter"/>
<xs:enumeration value="ErrorRetrievingDataForComboBoxMessage"/>
<xs:enumeration value="ExpressionImplicitConversionInvalid"/>
<xs:enumeration value="InvalidSetPropertyInViewMode"/>
<xs:enumeration value="ErrorRetrievingDataForAutoSum"/>
<xs:enumeration value="ExpressionImplicitConversionFailed"/>
<xs:enumeration value="ExpressionArithmeticBadDataType"/>
<xs:enumeration value="ExpressionOverflow"/>
<xs:enumeration value="ExpressionDivisionByZero"/>
<xs:enumeration value="ExpressionSqrtNegativeArgument"/>
<xs:enumeration value="ExpressionLeftRightNegativeArgument"/>
<xs:enumeration value="ExpressionSubstringNullFirstArgument"/>
<xs:enumeration value="ExpressionSubstringInvalidThirdArgument"/>
<xs:enumeration value="ExpressionDatePartUsedOnTime"/>
<xs:enumeration value="ExpressionTimePartUsedOnDate"/>
<xs:enumeration value="ExpressionIfNullFirstArgument"/>
<xs:enumeration value="InvalidControlReferenceError"/>
<xs:enumeration value="RequiredFieldIsEmpty"/>
<xs:enumeration value="InvalidDateValue"/>
<xs:enumeration value="InvalidNumberValue"/>
<xs:enumeration value="InvalidSetPropertyValue"/>
<xs:enumeration value="ValueExceedsMaximumLength"/>
<xs:enumeration value="InvalidChangeViewTable"/>
<xs:enumeration value="MaxNumberOfPopupsReached"/>
<xs:enumeration value="NoServerReferenceFoundInWhereConditionError"/>
<xs:enumeration value="ExpressionIllegalDateTime"/>
<xs:enumeration value="LoadingMessage"/>
<xs:enumeration value="ExpressionCircularReference"/>
<xs:enumeration value="NoBoundValueForDisplayText"/>
<xs:enumeration value="InvalidControlsAreNotUpdatable"/>
<xs:enumeration value="UserLogonNameDeprecated"/>
<xs:enumeration value="AllowUserConnectionSuccess"/>
<xs:enumeration value="AllowUserConnectionFireRuleExists"/>
<xs:enumeration value="AgaveInsertErrorInForm"/>
<xs:enumeration value="InvalidWholeNumberValue"/>
<xs:enumeration value="AgaveInsertErrorInEditMode"/>
<xs:enumeration value="AgaveInsertErrorInAppWithNoViews"/>
<xs:enumeration value="InvalidEmailValue"/>
<xs:enumeration value="InvalidPhoneValue"/>
<xs:enumeration value="AlchemyPreviewNotAvailableForEmptyApp"/>
<xs:enumeration value="CannotEditViewInWebDesigner"/>
<xs:enumeration value="CannotEditViewInClientDesigner"/>
</xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **ClientMessageID** simple type.

| Value                        | Meaning   |
|------------------------------|---|
| None                         | No message.   |
| PassthroughMessage           | "{0}"   |
| WebServiceUnavailableMessage | "This service is not currently available."              |
| WebServiceCanceledMessage    | "The operation was canceled."                           |
| DataMacroStopWaiting         | "The operation will continue to run in the background." |
| GenericError                 | "An error occurred."                                    |

| <b>Value</b>                     | <b>Meaning</b>   |
|----------------------------------|--|
| NotifyRecordUpdated              | "Changes saved."   |
| NotifyRecordsDeleted             | "Item(s) deleted."   |
| NotifyCannotDelete               | "Rows cannot be deleted while other changes are still processing."   |
| NotifyCannotSave                 | "Record not saved."  |
| NotifyCannotSaveDescription      | "Hang on, we can't save until you fix the problems below."   |
| SubFormNestingLimitExceededError | "Parts of this form cannot be displayed because the form uses more than seven levels of nested subforms."            |
| DivisionByZero                   | "Division by zero."  |
| TypeMismatch                     | "Type mismatch."   |
| NoCurrentRecord                  | "No current record."   |
| RecordNotUpdatable               | "Record cannot be updated."  |
| WhereConditionTooLong            | "This form could not be loaded. The OpenForm macro action failed because the Where Condition argument was too long." |
| InvalidArgument                  | "Invalid argument '{0}'."  |
| InvalidContainerControlName      | "The '{0}' action requires a valid control name that corresponds to a subform or subreport."                         |
| ActionArgumentNotFound           | "The action or method requires an argument: {0}"   |
| FormCannotClose                  | "You can't save this record at this time."   |
| AttachmentMustSave               | "You must save this record before adding any attachments."   |
| InvalidExpression                | "Invalid expression."  |
| AttachmentUploadSucceed          | "The file has been successfully uploaded."   |
| AttachmentDeleted                | "File deleted."  |
| FormOrReportNotBound             | "The action or method is not valid because the form or report is not bound to a table or query."                     |
| InvalidPropertyOrMethod          | "Sorry, you found a glitch."   |
| InvalidUrl                       | "The webpage cannot be displayed. The hyperlink may be invalid."   |
| UserInterfaceMacroLoadFailure    | "The macro '{0}' is not available."  |
| CannotFindMacroObject            | "Cannot find the object '{0}'."  |
| CannotGoToSpecifiedRecord        | "You cannot go to the specified record. You may be on the last record."  |
| InvalidConditionExpression       | "Invalid condition expression."  |
| CannotGoToSubformOrTabPage       | "The GoToControl macro action cannot be used to go to a subform control or tab page in Web forms."                   |
| InvalidControl                   | "There is no field named '{0}' in the current record."   |

| <b>Value</b>                            | <b>Meaning</b>   |
|---|--|
| CannotFocusOnControl                    | "Can't move the focus to the control '{0}'."   |
| InvalidControlValue                     | "The value you entered isn't valid for this field."  |
| NoControlName                           | "The action or method requires a Control Name argument."   |
| CannotFindErrorHandlingMacro            | "Can't find the macro '{0}' in the macro group '{1}'."   |
| InvalidSetPropertyControl               | "The control name '{0}' is misspelled or refers to a control that doesn't exist."  |
| LocalVarNameNotSpecified                | "You must specify a name for the local variable."  |
| LocalVarExpressionNotSpecified          | "You must specify a value for the local variable."   |
| LocalVariableNameInvalid                | "Local variable names must be less than or equal to 64 characters in length, may not start with an equal sign or a space, and may not contain any of the following characters: CR, LF or TAB: .![]/\:*? "<> #{}%~&." |
| TempVarNameNotSpecified                 | "You must specify a name for the temporary variable."  |
| TempVariableNameInvalid                 | "The name of this TempVar is too long. TempVar names must be less than 256 characters."  |
| CommandNotAvailable                     | "The command or action isn't currently available: {0}."  |
| ExpressionErrorCannotSet                | "You can't assign a value to this object."   |
| TooManyRunMacros                        | "Macros can only be called 19 times. Your macro contains one or more RunMacro actions that calls a macro more than 19 times. Use an If block to stop the macro after it has been run 19 times."                      |
| InvalidBrowseToPathArgument             | "The BrowseTo macro action contains an invalid Path argument. The Path argument must be of the form: MainForm1.Subform1 > Form1.Subform1."   |
| InvalidObjectReference                  | "The object doesn't contain the object '{0}'."   |
| FormNotFoundRep                         | "The report name '{0}' you entered in either the property sheet or macro is misspelled or refers to a report that doesn't exist."  |
| ControlDoesNotSupportRequery            | "The Requery action can't be used on the control '{0}'."   |
| ReadOnlyNote                            | "This field cannot be edited because the underlying field '{0}' is read-only."   |
| TooMuchParameterData                    | "You have exceeded the amount of parameter data that can be passed to the report."   |
| OperationNotSupportedOnSubReports       | "The '{0}' action failed because the referenced control contains a report object. {0} on subform controls can only be used when they contain form objects."  |
| InvalidPropertyValue                    | "'{0}' is an invalid value for property {1}. The valid values for this property are: {2}."   |
| AutocompleteWaitingForValidationMessage | "Validating Data..."   |
| AutocompleteInvalidDataMessage          | "Invalid Data"   |

| <b>Value</b>                            | <b>Meaning</b>  |
|---|---|
| TooManyTermsInFilter                    | "Your search is too complex. The results may show more data than you intended."   |
| InvalidValueForFieldMessage             | "The value that you entered is not valid for the {0} field."  |
| InvalidValueForControlMessage           | "The value that you entered is not valid for the {0} control."  |
| ImageUploadFailureNotificationMessage   | "Record saved, but image failed to upload: {0}"   |
| NoResultsFromFilter                     | "No matches found."   |
| ErrorRetrievingDataForComboBoxMessage   | "Failure retrieving option data for ComboBox/Autocomplete."   |
| ExpressionImplicitConversionInvalid     | "An expression contains an implicit conversion from one data type to another, but that conversion is invalid."          |
| InvalidSetPropertyInViewMode            | "Enter edit mode before modifying any data (that is, controls bound to data)."  |
| ErrorRetrievingDataForAutoSum           | "Failure retrieving data for calculation"   |
| ExpressionImplicitConversionFailed      | "The expression contains a valid implicit conversion from one data type to another, but the value cannot be converted." |
| ExpressionArithmeticBadDataType         | "The expression is using an arithmetic operator with an invalid data type for the operator."                            |
| ExpressionOverflow                      | "The expression resulted in an overflow because the value is too large for the resulting data type."                    |
| ExpressionDivisionByZero                | "The expression resulted in a division by zero."  |
| ExpressionSqrtNegativeArgument          | "The SQRT() function (Square Root) cannot be used with a negative argument."  |
| ExpressionLeftRightNegativeArgument     | "The LEFT() and RIGHT() functions cannot be used with a negative argument."   |
| ExpressionSubstringNullFirstArgument    | "The SUBSTRING() function cannot use a NULL value as its first argument."   |
| ExpressionSubstringInvalidThirdArgument | "The SUBSTRING() function cannot use a negative value as its third argument."   |
| ExpressionDatePartUsedOnTime            | "A date part such as DAY or MONTH cannot be used on a non-date value (such as a TIME value)."                           |
| ExpressionTimePartUsedOnDate            | "A date part such as HOUR or MINUTE cannot be used on a non-time value (such as a DATE value)."                         |
| ExpressionIIfNullFirstArgument          | "The function IIF() cannot use a NULL value as its first argument."   |
| InvalidControlReferenceError            | "Error: Invalid control reference."   |
| RequiredFieldIsEmpty                    | "You must enter a value into this field."   |
| InvalidDateValue                        | "You may only enter dates or times into this field."  |
| InvalidNumberValue                      | "You may only enter dates or times into this field."  |
| InvalidSetPropertyValue                 | "Sorry, we weren't able to complete the macro action due to an unusable value."   |

| Value                                       | Meaning   |
|---|---|
| ValueExceedsMaximumLength                   | "You can't enter more than {0} letters or numbers into this field."   |
| InvalidChangeViewTable                      | "Sorry, we couldn't find table '{0}' to complete this Change View action. Please double check the table name and try again."  |
| MaxNumberOfPopupsReached                    | "Sorry, the maximum number of popups has been reached."   |
| NoServerReferenceFoundInWhereConditionError | "Where clauses must contain at least one field reference that includes the table name. For example, "Contacts.Email". You may have specified the field name without a table name, which will resolve to the field's current value." |
| ExpressionIllegalDateTime                   | "The calculated value is illegal due to a daylight saving time shift on this date."   |
| LoadingMessage                              | "Loading..."  |
| ExpressionCircularReference                 | "There is a circular reference between the controls on this view. If you are the app developer, please remove the circular reference -- whether it's a control that refers to itself or two controls that refer to each other."     |
| NoBoundValueForDisplayText                  | "Please retry finding the value."   |
| InvalidControlsAreNotUpdatable              | "It looks like there is a problem with your app. It's likely that there's a required field on this view that's been hidden or disabled. To fix this, try enabling or unhiding the controls on this view."                           |
| UserLogonNameDeprecated                     | "The UserLoginName function has been deprecated. Please use the UserEmailAddress or UserDisplayName functions instead."   |
| AllowUserConnectionSuccess                  | "Success! Your location is enabled. Changes might take up to 5 minutes to take effect."   |
| AllowUserConnectionFireRuleExists           | "Your location is already enabled."   |
| AgaveInsertErrorInForm                      | "You can't add Apps for Office in this form."   |
| InvalidWholeNumberValue                     | "You may only enter whole numbers into this field."   |
| AgaveInsertErrorInEditMode                  | "You can't add Apps for Office in edit mode."   |
| AgaveInsertErrorInAppWithNoViews            | "You can't add Apps for Office without first creating a view."  |
| InvalidEmailValue                           | "Please enter a valid email address."   |
| InvalidPhoneValue                           | "Please enter a valid phone number."  |
| AlchemyPreviewNotAvailableForEmptyApp       | MUST NOT be used.   |
| CannotEditViewInWebDesigner                 | MUST NOT be used.   |
| CannotEditViewInClientDesigner              | MUST NOT be used.   |

### 2.2.5.9 ConnectivityPermissionLevel

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

Specifies a connectivity permission level to a database instance

```
<xs:simpleType name="ConnectivityPermissionLevel"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Reader"/>
    <xs:enumeration value="Writer"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **ConnectivityPermissionLevel** simple type.

| Value  | Meaning  |
|--------|--|
| Reader | Specifies that read operations are allowed from the database instance. |
| Writer | Specifies that write operations are allowed to the database instance.  |

### 2.2.5.10 DatabaseProviderError

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies the type of error condition that occurred during communication between the protocol server and a database server.

```
<xs:simpleType name="DatabaseProviderError" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="UndefinedError"/>
    <xs:enumeration value="ServiceContextError"/>
    <xs:enumeration value="InvalidArgument"/>
    <xs:enumeration value="NotSupported"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **DatabaseProviderError** simple type.

| Value               | Meaning   |
|---------------------|---|
| UndefinedError      | Specifies an error that does not fall into any category specified by the other <b>DatabaseProviderError</b> values. |
| ServiceContextError | Specifies that context information about the service is missing.  |
| InvalidArgument     | Specifies that an invalid value for an argument was given.  |
| NotSupported        | Specifies that the requested operation is not supported by the database server.                                     |

### 2.2.5.11 guid

**Namespace:** <http://microsoft.com/wsdl/types/>

The **guid** type specifies a **GUID** value.

```
<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

    <xs:restriction base="xs:string">
      <xs:pattern value="[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}"/>
    </xs:restriction>
  </xs:simpleType>

```

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/>

The **guid** type specifies a GUID value.

```

<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
  </xs:restriction>
</xs:simpleType>

```

### 2.2.5.12 LookupType

**Namespace:**

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema>

Specifies the type of lookup for a field.

```

<xs:simpleType name="LookupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="TableOrQuery"/>
    <xs:enumeration value="ValueList"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **LookupType** simple type.

| Value        | Meaning  |
|--------------|--|
| None         | Specifies that the field is not a lookup.                                      |
| TableOrQuery | Specifies that the field's values are from another table or query.             |
| ValueList    | Specifies that the field's values are from a list in the database application. |

### 2.2.5.13 PackageSource

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies where a database package originated.

```

<xs:simpleType name="PackageSource" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="InvalidSource"/>
    <xs:enumeration value="Marketplace"/>
    <xs:enumeration value="CorporateCatalog"/>
    <xs:enumeration value="DeveloperSite"/>
    <xs:enumeration value="ObjectModel"/>
    <xs:enumeration value="RemoteObjectModel"/>
  </xs:restriction>
</xs:simpleType>

```

```

</xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **PackageSource** simple type.

| Value             | Meaning  |
|-------------------|--|
| InvalidSource     | Specifies an internal error. SHOULD NOT be used.   |
| Marketplace       | Specifies that the package came from the SharePoint Marketplace.   |
| CorporateCatalog  | Specifies that the package came from the corporate <b>gallery</b> .  |
| DeveloperSite     | Specifies that the package came from the Developer Site. A Developer Site is one type of SharePoint template, intended as a site for developers to build, test and publish apps (2). |
| ObjectModel       | Specifies that the package was loaded via the <b>object model</b> .  |
| RemoteObjectModel | Specifies that the package was uploaded via the client-side object model ( <a href="#">[MS-CSOMSPT]</a> ).   |

#### 2.2.5.14 ServerStateFlags

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

**ServerStateFlags** specifies the state of the protocol server.

```

<xs:simpleType name="ServerStateFlags" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="Probation"/>
        <xs:enumeration value="ShuttingDown"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>

```

The following table specifies the allowable values for the **ServerStateFlags** simple type.

| Value        | Meaning                               |
|--------------|---------------------------------------|
| None         | MUST NOT be used.                     |
| Probation    | MUST NOT be used.                     |
| ShuttingDown | The protocol server is shutting down. |

#### 2.2.5.15 SortType

**Namespace:**

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema>

Specifies the sort order of values in a lookup field



```

<xs:simpleType name="SortType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="NoSort"/>
    <xs:enumeration value="SortAscending"/>
    <xs:enumeration value="SortDescending"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **SortType** simple type.

| Value          | Meaning   |
|----------------|---|
| NoSort         | Specifies that values MUST not be sorted.                 |
| SortAscending  | Specifies that values MUST be sorted in ascending order.  |
| SortDescending | Specifies that values MUST be sorted in descending order. |

### 2.2.5.16 SqlAuthenticationMode

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies a desired mode of authentication to the database server.

```

<xs:simpleType name="SqlAuthenticationMode" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="SqlServerAuth"/>
    <xs:enumeration value="SqlServerAuthOrWindowsAuth"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **SqlAuthenticationMode** simple type.

| Value                      | Meaning  |
|----------------------------|--|
| SqlServerAuth              | Specifies that authentication to the database server will be done using <b>SQL authentication</b> .  |
| SqlServerAuthOrWindowsAuth | Specifies that authentication to the database server will be done either with SQL authentication or with the <b>Security Support Provider Interface (SSPI)</b> . |

### 2.2.5.17 UserRole

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services>

Specifies the role for the user with respect to the database application.

```

<xs:simpleType name="UserRole" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unauthorized"/>
    <xs:enumeration value="Reader"/>
    <xs:enumeration value="Writer"/>
    <xs:enumeration value="Author"/>
  </xs:restriction>
</xs:simpleType>

```

```
</xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **UserRole** simple type.

| Value        | Meaning   |
|--------------|---|
| Unauthorized | Specifies that the user has no access privileges to the database application. |
| Reader       | Specifies that the user can read from the database application.               |
| Writer       | Specifies that the user can write to the database application.                |
| Author       | Specifies that the user can author the database application.                  |

## 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

## 2.2.7 Groups

This specification does not define any common XML schema group definitions.

## 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

## 2.2.9 Faults

In the event of an application error, the protocol server MUST return either a SOAP fault ([\[SOAP1.2/1\] section 5.4](#)), or a **ServiceError** ([\[MS-AADT\] section 2.2.4.12](#)) as a response to the operation.

For SOAP faults:

- The protocol client MUST ignore all elements of the SOAP fault except the **Detail** element ([\[SOAP1.2/1\] section 5.4.5](#)).
- The SOAP fault **Detail** element ([\[SOAP1.2/1\] section 5.4.5](#)) MUST contain the protocol server alert specified by [section 2.2.4.1](#).

When returning a SOAP fault ([\[SOAP1.2/1\] section 5.4](#)) or a **ServiceError** ([\[MS-AADT\] section 2.2.4.12](#)) as a response, the protocol server MUST return a **fault identifier** ([section 2.2.5.2](#)) in the response either as the **Value** element ([\[SOAP1.2/1\] section 5.4.1.3](#)) inside a **Subcode** element ([\[SOAP1.2/1\] section 5.4.1.2](#)) of the SOAP fault ([\[SOAP1.2/1\] section 5.4](#)), or as the **Code** attribute in a **ServiceError** ([\[MS-AADT\] section 2.2.4.12](#)).

The different **fault identifiers** ([section 2.2.5.2](#)) returned by the protocol server are grouped as Common Fault Identifiers, Runtime Fault Identifiers, Sql Fault Identifiers and Design Time Fault Identifiers. These fault identifiers along with information about the corresponding error encountered by the protocol server are listed in the following sub-sections.

### 2.2.9.1 Common Fault Identifiers

The following is the list of common fault identifiers, as specified by [section 2.2.5.2](#).

- WriteRecordsPermissionsFailure
- GetRecordsPermissionsFailure
- InternalError
- NotMemberOfRole
- MaxSessionsPerUserExceeded
- RetryError
- MaxRequestDurationExceeded
- ProductExpired
- NewWorkbookSessionTimeout
- ExternalData\_TooMuchData

### **2.2.9.2 Runtime Fault Identifiers**

The following is the list of runtime fault identifiers, as specified by section [2.2.5.2](#).

- DataException\_QueryParametersNotSupplied
- ExternalData\_InvalidSource
- DataException\_GenericError
- DataException\_CacheFailureAfterSuccessfulCommit
- ExternalData\_ComponentMissing
- ExternalData\_TooManyWildcards
- ExternalData\_ParametersNotSupported
- GetRecordsPermissionsFailure
- WriteRecordsPermissionsFailure

### **2.2.9.3 Sql Fault Identifiers**

The following is the list of Sql fault identifiers, as specified by section [2.2.5.2](#).

- AccessSqlException\_GenericError
- AccessSqlException\_CalculationCannotbeStored
- AccessSqlException\_ObjectNotFound
- AccessSqlException\_PermissionDenied
- AccessSqlException\_DuplicateConstraintValue
- AccessSqlException\_NoQueryParameters
- AccessSqlException\_FieldNoValue
- AccessSqlException\_FieldNoValueDesignTime

- AccessSqlException\_InvalidFieldName
- AccessSqlException\_InvalidObjectName
- AccessSqlException\_ObjectAlreadyExists
- AccessSqlException\_MissingExpressionInAggregateFunction
- AccessSqlException\_DataTypeConversionMismatch
- AccessSqlException\_InvalidLengthParameter
- AccessSqlException\_IncompatibleTypeChange\_TableSave
- AccessSqlException\_IncompatibleDataChange\_TableSave
- AccessSqlException\_ErrorMessage
- AccessSqlException\_SqlConnectionTimeout
- AccessSqlException\_SqlError102
- AccessSqlException\_SqlError107
- AccessSqlException\_SqlError128
- AccessSqlException\_SqlError130
- AccessSqlException\_SqlError192
- AccessSqlException\_SqlError201
- AccessSqlException\_SqlError206
- AccessSqlException\_SqlError209
- AccessSqlException\_SqlError214
- AccessSqlException\_SqlError217
- AccessSqlException\_SqlError229
- AccessSqlException\_SqlError241
- AccessSqlException\_SqlError245
- AccessSqlException\_SqlError256
- AccessSqlException\_SqlError257
- AccessSqlException\_SqlError260
- AccessSqlException\_SqlError271
- AccessSqlException\_SqlError289
- AccessSqlException\_SqlError402
- AccessSqlException\_SqlError403
- AccessSqlException\_SqlError421
- AccessSqlException\_SqlError535

- AccessSqlException\_SqlError542
- AccessSqlException\_SqlError547\_CheckConstraint\_Runtime
- AccessSqlException\_SqlError547\_CheckConstraint\_Design\_Table
- AccessSqlException\_SqlError547\_CheckConstraint\_Design\_Column
- AccessSqlException\_SqlError547\_ForeignKey\_RuntimeInsertUpdate
- AccessSqlException\_SqlError547\_ForeignKey\_RuntimeDelete
- AccessSqlException\_SqlError547\_ForeignKey\_Design
- AccessSqlException\_SqlError1004
- AccessSqlException\_SqlError1715
- AccessSqlException\_SqlError1759
- AccessSqlException\_SqlError1765
- AccessSqlException\_SqlError1778
- AccessSqlException\_SqlError1785
- AccessSqlException\_SqlError1919
- AccessSqlException\_SqlError2364
- AccessSqlException\_SqlError2365
- AccessSqlException\_SqlError2812
- AccessSqlException\_SqlError3250
- AccessSqlException\_SqlError3623
- AccessSqlException\_SqlError3726
- AccessSqlException\_SqlError3906
- TableException\_InvalidFieldInExpression
- AccessSqlException\_SqlError4121
- AccessSqlException\_SqlError4145
- AccessSqlException\_SqlError4405
- AccessSqlException\_SqlError4506
- AccessSqlException\_SqlError4511
- AccessSqlException\_SqlError4901
- AccessSqlException\_SqlError4922
- AccessSqlException\_SqlError4924
- AccessSqlException\_SqlError5074
- AccessSqlException\_SqlError7704

- AccessSqlException\_SqlError8114
- AccessSqlException\_SqlError8115
- AccessSqlException\_SqlError8116
- AccessSqlException\_SqlError8117
- AccessSqlException\_SqlError8134
- AccessSqlException\_SqlError8152
- AccessSqlException\_SqlError9810
- AccessSqlException\_SqlError17142
- AccessSqlException\_SqlError40682
- AccessSqlException\_CustomError50001
- AccessSqlException\_CustomError50003
- AccessSqlException\_CustomError50005

#### **2.2.9.4 Design Time Fault Identifiers**

The following is the list of Design time fault identifiers, as specified by section [2.2.5.2](#).

- AccessServicesDisabled
- AppNotCompatibleWithClient
- AppNotCompatibleWithServer
- ExternalData\_SourceAccessDenied
- ExternalData\_InvalidSite
- ExternalData\_InvalidSource
- FormException\_GenericAXLValidation
- InvalidArgument
- MacroCompilationException\_ArgumentValueNotSpecified
- MacroCompilationException\_EmptyConditionalBlock
- MacroCompilationException\_EmptyLookupRecordBlock
- MacroCompilationException\_InvalidAction
- MacroCompilationException\_InvalidActionArgument
- MacroCompilationException\_MissingDataMacroParameter
- MacroCompilationException\_InvalidAlias
- MacroCompilationException\_InvalidAxl
- MacroCompilationException\_InvalidEventName

- MacroCompilationException\_InvalidIdentifier
- MacroCompilationException\_InvalidParameter
- MacroCompilationException\_InvalidQueryParameter
- MacroCompilationException\_InvalidVariableName
- MacroCompilationException\_MacroCallStackDepthExceeded
- MacroCompilationException\_RequiredArgumentMissing
- MacroCompilationException\_UpdateOnDeletedRecord
- MacroCompilationException\_UpdateRecordInNDM
- MacroCompilationException\_UpdateOnReadOnlyQuery
- MacroCompilationException\_UpdateOnReadOnlyField
- MacroCompilationException\_VariableNameCollision
- NoDatabaseServersAvailableForCreate
- NoSQLAuthDatabaseServersAvailableForCreate
- NotMemberOfRole
- ObjectAlreadyExists
- ProvisioningAccessServicesNotSupportedBySite
- ProvisioningApplicationAlreadyExists
- ProvisioningException\_InstallationTimeout
- QueryException\_AmbiguousAliasProvided
- QueryException\_AmbiguousJoins
- QueryException\_AmbiguousSourceNamesProvided
- QueryException\_GenericAXLValidation
- QueryException\_InvalidObjectName
- QueryException\_InvalidSourceNamesProvided
- QueryException\_OrderNotInOutputs
- QueryException\_OutputNotInGroupsOrPartOfAggregate
- QueryException\_ParameterTypeMismatch
- ServerNotCompatibleWithClient
- ServerReadOnly
- TableException\_CsdlDefinitionNotSupported
- TableException\_DuplicateColumnName
- TableException\_InvalidColumn

- TableException\_InvalidObjectInExpression
- TableException\_InvalidComputedColumnExpression
- TableException\_InvalidComputedColumnType
- TableException\_InvalidRequiredImageColumn
- TableException\_InvalidCheckConstraintExpression
- UnrecognizedVersion
- UnsupportedDatabaseCollation
- WebService\_CreateApplication\_SiteDoesNotExist
- WebService\_DeleteApplicationWithSubwebs
- WebService\_GetServerInformation\_SiteDoesNotExist
- WebService\_InvalidApplicationEndPoint
- WebService\_InvalidId
- WebService\_ObjectModifiedExternally
- WebService\_ObjectNotFound
- WebService\_ObjectSaveConflict
- WebService\_SetApplicationProperties\_SetThemePermissionsFailure
- WebService\_SiteDoesNotExist
- WebService\_UnsupportedCulture
- WebService\_ConflictingOperationInProgress
- TemplateNotCompatible
- TemplateSizeExceeded
- TemplateImageSizeExceeded
- TemplateImageTypeUnsupported
- TemplateFailedToExtractApp
- TemplateUnsupportedOrDependencies
- ValidateApplicationException\_InvalidUserObjectDefinition
- ValidateApplicationException\_InvalidEventDatamacroDefinition
- GetRecordsPermissionsFailure
- WriteRecordsPermissionsFailure
- OpenDependentObjects
- OpenDependentObjectsForUpdate



## 3 Protocol Details

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, and **present**.

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls that are made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret Hypertext Transfer Protocol (HTTP) status codes that are returned by the protocol server as specified in [\[RFC2616\]](#), section 10.

This protocol allows protocol servers to notify protocol clients of application-level faults by using SOAP faults. Except where otherwise specified, these SOAP faults are not significant for interoperability and protocol clients can interpret them in an implementation-specific manner.

This protocol allows protocol servers to perform implementation-specific authorization checks and to notify protocol clients of authorization faults by using either HTTP status codes or SOAP faults, as specified previously in this section.

### 3.1 Server Details

#### 3.1.1 Abstract Data Model

##### 3.1.1.1 Common Terms

The following terms are common amongst all protocol operations.

**Session:** An entity that gives context to operations working against application data. A session is associated with one or more result sets, which can be modified by **state changing** operations.

**Request:** An entity that represents a running request on the protocol server.

**Named Query:** An entity stored in the database application representing a **CT\_Query** element, as specified in [\[MS-AXL2\]](#) section 2.2.3.18. The **Name** attribute of the element MUST be specified.

**Source:** A table or a **Named Query** in the database application. One or more **Sources** MUST be referenced in a **CT\_Query** element.

**Updatable Source:** The **Source** in a database application against which insert, update, and delete data operations are applied.

- If a **Source** is a table, it is an **Updatable Source**.
- For a **Named Query** based on a single **Source**, that query is updatable, as long as the **Source** is updatable, and the query includes the primary key of the **Source**.
- For queries with more than one **Source** to be updatable, the **Sources** in the query MUST be connected by joins. Each join is specified by a **CT\_Join** element, as specified in [\[MS-AXL2\]](#) section 2.2.3.10. For the join, call the **Source** specified in the **Left** attribute  $S_L$ , the **Source** specified in the **Right** attribute  $S_R$ , the property specified in the **LeftProperty** attribute  $P_L$ , the property specified in the **RightProperty** attribute  $P_R$ , and the join type specified in the **Type** attribute  $T$ . For the query to be updatable, a property MUST be part of exactly one **CT\_Join** element.

If a graph is defined by considering each **Source** as a node, and each **CT\_Join** as an edge between its **Sources**  $S_L$  and  $S_R$ , then the graph:

- MUST be fully connected.
- MUST be acyclic.
- MUST NOT have more than one edge between two given nodes.

For each **CT\_Join**,  $S_L$  is updatable in relation to  $S_R$  if all of the following conditions hold:

- T is "Inner" or "Left Outer."
- $P_R$  is a primary key field.
- $P_L$  is not a primary key field.

$S_R$  is updatable in relation to  $S_L$  if all of the following conditions hold:

- T is "Inner" or "Right Outer."
- $P_L$  is a primary key field.
- $P_R$  is not a primary key field.

Otherwise,  $S_R$  is not updatable in relation to  $S_L$  and  $S_L$  is not updatable in relation to  $S_R$ .

The query is updatable, if there exists a **Source** that is updatable in relation to all of the **Sources** that it is connected to in the graph for the query. Because the graph is fully connected and acyclic, there is exactly one of these **Sources**. Only the fields (2) from this **Source** are updatable.

**Result Set:** A set of rows that results from running a query specified by a **Source**. Rows SHOULD satisfy the **filter** and **restriction** criteria which are input elements in **OpenResultSet** (section [3.1.4.10.2.1](#)), and SHOULD be sorted according to the **sortExpression** which is an input element in **OpenResultSet** (section 3.1.4.10.2.1).

A protocol client requests a subset of the rows in a result set by specifying a starting index and a maximum row count to return. The row indices are consecutive integer values starting at zero and ending at one less than the total number of rows, or maximum row count, whichever is smaller

### 3.1.1.2 SessionIdentifier

A **string** ([XMLSCHEMA2] section 3.2.1) that uniquely identifies a session on the protocol server and also contains information about the session.

The **SessionIdentifier** MUST have the following layout:

(Numeric values in parts 1, 3, 5, 6, 8, 10, 12, and 14 MUST follow the **int** ([XMLSCHEMA2] section 3.3.17) type representation)

**Part 1:** MUST be the value "1", followed by a period (".").

**Part 2:** MUST be "V".

**Part 3:** The number of characters in part 4, followed by a period (".").

**Part 4:** A unique **string** ([XMLSCHEMA2] section 3.2.1). MUST be greater than or equal to 20 and less than or equal to 32647 characters long.

**Part 5:** The sum of the number of characters in parts 6-11, followed by a period (".").

**Part 6:** The number of characters in part 7, followed by a period (".").

**Part 7:** The UI culture of the session. A language tag, as specified in [\[RFC1766\]](#) Section 2.

**Part 8:** The number of characters in part 9, followed by a period (".").

**Part 9:** The data culture of the session. A language tag, as specified in [\[RFC1766\]](#) Section 2.

**Part 10:** The number of characters in part 11, followed by a period (".").

**Part 11:** The **time zone** of the session, as specified in **CultureCommandParameter** complex type (section [3.1.4.11.3.1](#)).

**Part 12:** The number of characters in part 13, followed by a period (".").

**Part 13:** MUST be equal to the value of **RequestSiteId** passed in *parameter*, in the **OpenSession** operation (section [3.1.4.11.2.1](#)).

**Part 14:** MUST be the value "1", followed by a period (".").

**Part 15:** MUST be "U".

### 3.1.2 Timers

The **Session Timeout** timer measures the time remaining before a session times out.

### 3.1.3 Initialization

None.

### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

| Operation                 | Description  |
|---------------------------|--|
| <b>AddFirewallRule</b>    | This operation adds a <b>FirewallRule</b> ( <a href="#">[MS-AADT]</a> section 2.2.4.7) to the database application.  |
| <b>CheckCopyStatus</b>    | This operation retrieves the status of a <b>CopyDatabase</b> operation (section <a href="#">3.1.4.32</a> ).  |
| <b>CloseResultSet</b>     | This operation closes the given result set.  |
| <b>CloseSession</b>       | The <b>CloseSession</b> operation closes a session on the protocol server.   |
| <b>CopyDatabase</b>       | This operation instructs the protocol server to begin copying a database.  |
| <b>CreateAccessObject</b> | This operation triggers the creation of an object in a database application.   |
| <b>CreatePackage</b>      | This operation triggers creation of a package that represents a database application, including its objects and data. The package can be retrieved by using the <b>GetPackage</b> operation (section <a href="#">3.1.4.36</a> ). |
| <b>DatabaseExists</b>     | This operation is used to determine whether or not a database exists on the protocol server.   |
| <b>DeleteAccessObject</b> | This operation triggers deletion of an object in a database application.   |
| <b>DeleteAllData</b>      | This operation deletes all records data from a given source.   |

| Operation                            | Description   |
|--------------------------------------|---|
| <b>DeleteData</b>                    | This operation deletes a record from a table in the database application and also deletes the corresponding row from the result set.  |
| <b>DeleteDataNoCache</b>             | This operation deletes a record from a table in the database application and also deletes the corresponding row from the result set.  |
| <b>DeleteFirewallRules</b>           | This operation deletes the <b>FirewallRules</b> ([MS-AADT] section 2.2.4.7) from the database application. These <b>FirewallRules</b> MUST have been previously added by the <b>AddFirewallRule</b> operation (section <a href="#">3.1.4.13</a> ).  |
| <b>ExecuteDacIncrementalUpgrade</b>  | Instructs the protocol server to update the contents of a database.   |
| <b>FixupRow</b>                      | This operation returns the results of performing a hypothetical update on the result set.   |
| <b>FixupRowNoCache</b>               | This operation returns the results of performing a hypothetical update on the result set.   |
| <b>GetAccessObject</b>               | This operation triggers retrieval of the requested object from a database application.  |
| <b>GetApplicationInformation</b>     | This operation retrieves information about a database application from the protocol server.   |
| <b>GetApplicationNotifications</b>   | This operation is used to get the list of notifications (if any) that could be relevant for the application.  |
| <b>GetAutoSumValues</b>              | The <b>GetAutoSumValues</b> operation retrieves the result of applying aggregate functions specified by <b>autoSumFunctions</b> (section <a href="#">3.1.4.42.2.1</a> ) on fields (2) specified by <b>autoSumFields</b> (section <a href="#">3.1.4.42.2.1</a> ). The fields (2) MUST belong to the <b>Source</b> (section <a href="#">3.1.1</a> ) specified by the <b>source</b> input element (section <a href="#">3.1.4.42.2.1</a> ). |
| <b>GetAvailableServer</b>            | This operation returns an available database server on which new databases can be created using a given mode of authentication with a given package source.   |
| <b>GetData</b>                       | This operation performs sort, filter, and synchronization operations on rows in the result set, and returns a subset of those rows.   |
| <b>GetDataConnectivity</b>           | This operation retrieves information about a login in the database application, which is used to connect to the database application directly.  |
| <b>GetDataConnectivityStatus</b>     | This operation retrieves status information about logins in the database application, which are used to connect to the database application directly.   |
| <b>GetDistinctValues</b>             | This operation returns a single column from a result set with duplicate values removed.   |
| <b>GetFirewallRules</b>              | This operation retrieves all the <b>FirewallRules</b> (section <a href="#">2.2.4.67</a> ) present in the database application.  |
| <b>GetFormDefinitionAndRecordSet</b> | This operation retrieves the form definition ([MS-AXL2] section 2.2.1.12) of a <b>form</b> and then opens a result set for the <b>RecordSource</b> specified in the form definition ([MS-AXL2] section 2.2.3.81) and returns a <b>RecordSet</b> (section <a href="#">3.1.4.45.3.8</a> ) that contains the subset of rows from the result set.   |
| <b>GetHealthScore</b>                | This operation returns information about the health of the protocol server.   |
| <b>GetHostProperties</b>             | This operation retrieves the Application Host Properties.   |
| <b>GetLinkedTableInformation</b>     | This operation retrieves information from the protocol server about a table in a database application.  |

| Operation                            | Description   |
|--------------------------------------|---|
| <b>GetNewDatabaseCollation</b>       | This operation retrieves the <b>SQL collation name</b> for the specified collation information.   |
| <b>GetObjectSchema</b>               | The <b>GetObjectSchema</b> operation retrieves metadata information of a <b>Source</b> (section <a href="#">3.1.1.1</a> ) in a database application, and returns the information to a protocol client.  |
| <b>GetOfficeAppSettings</b>          | This operation is used to get the Office Add-ins ( <a href="#">[MS-OWEXML]</a> section 1.3.1) bindings and custom app settings on each load.  |
| <b>GetPackage</b>                    | This operation retrieves a package that represents a database application, including its objects and data.  |
| <b>GetReservedDatabase</b>           | This operation retrieves an available reserved database. A reserved database is a pre-created database on a server.   |
| <b>GetSearchData</b>                 | This operation retrieves records from <b>Source</b> (section 3.1.1.1), specified by <b>source</b> (section <a href="#">3.1.4.43.2.1</a> ), which is an input element to the protocol operation.   |
| <b>GetServerName</b>                 | Retrieves the name of a database server associated with a given handle.   |
| <b>GetUIMacroJavascript</b>          | The <b>GetUIMacroJavascript</b> protocol operation retrieves the definition for a <b>UI macro</b> ( <a href="#">[MS-AXL2]</a> section 1.3.2).   |
| <b>ImportData</b>                    | This operation triggers importing data into a table in a database application.  |
| <b>InsertAppForOfficeInForm</b>      | This operation updates the form definition to insert <b>Office Add-ins</b> ( <a href="#">[MS-OWEXML]</a> section 1.3.1).  |
| <b>InsertData</b>                    | This operation inserts one or more records into a table in the database application and also inserts the corresponding rows into the result set.  |
| <b>InsertDataNoCache</b>             | This operation inserts one or more records into a table in the database application and also inserts the corresponding rows into the result set.  |
| <b>OpenFirewallForUser</b>           | This operation adds a <b>FirewallRule</b> ( <a href="#">[MS-AADT]</a> section 2.2.4.7) to the database application for a single IP address.   |
| <b>OpenResultSet</b>                 | This operation opens a result set for the given <b>Source</b> (section 3.1.1.1) and returns a subset of rows from the result set.   |
| <b>OpenSession</b>                   | This operation creates a new session.   |
| <b>ProvisionDatabase</b>             | Instructs the protocol server to create a new database.   |
| <b>RecycleDatabase</b>               | This operation deletes a database in a manner that allows the database to be restored.  |
| <b>RefreshLinkedTableInformation</b> | This operation refreshes an existing <b>linked table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) in a database application on the protocol server. The protocol server uses the <b>ID</b> attribute in the <b>RefreshLinkedTableInformationParameters</b> (section <a href="#">3.1.4.26.3.1</a> ) element to identify the <b>linked table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6) in the database application, updates its definition from the source of the <b>linked table</b> ( <a href="#">[MS-AXL2]</a> section 2.1.1.6), and returns the updated definition to the protocol client. |
| <b>RenameAccessObject</b>            | This operation changes the name of an object in a database application.   |
| <b>RenameDatabase</b>                | Changes the name of a database.   |

| Operation                          | Description   |
|------------------------------------|---|
| <b>RestoreDatabase</b>             | This operation restores a previously recycled database.   |
| <b>RetrieveImage</b>               | The <b>RetrieveImage</b> protocol operation retrieves image data for a field (2).   |
| <b>RunDataMacro</b>                | Instructs the protocol server to execute a <b>Data Macro</b> ([MS-AXL2] section 2.1.2.2).   |
| <b>SelectDataNoCache</b>           | This operation returns a subset of rows from the given <b>Source</b> (section 3.1.1.1).   |
| <b>SetDataConnectivityStatus</b>   | This operation enables or disables a login in the database application, which is used to connect to the database application directly.  |
| <b>SetDataMacroTracing</b>         | This operation sets the data macro tracing option in a database application.  |
| <b>SetEnableDisableDatabase</b>    | Instructs the protocol server to toggle a database between the enabled and disabled states.   |
| <b>SetObjectReadOnly</b>           | The <b>SetObjectReadOnly</b> operation sets whether an <b>AccessObject</b> (section 2.2.4.28) is read-only.   |
| <b>SetOfficeAppSettings</b>        | This operation is used to persist the field bindings and custom app settings, such as color and size, for the particular <b>Office Add-in</b> ([MS-OWEXML] section 1.3.1). This is a per Office Add-in setting, so two users who have permissions to change these settings can overwrite each other's settings. |
| <b>SetReadWrite</b>                | Instructs the protocol server to toggle a database between read-only and read-write states.   |
| <b>UnprovisionDatabase</b>         | Instructs the protocol server to delete a database.   |
| <b>UpdateAccessObject</b>          | This operation updates an object in a database application.   |
| <b>UpdateData</b>                  | This operation updates a record in an <b>Updatable Source</b> (section 3.1.1.1) in the database application and also updates the row in the result set.   |
| <b>UpdateDatabaseConfiguration</b> | Updates the maximum size of the database application.   |
| <b>UpdateDataNoCache</b>           | This operation updates a record in an <b>Updatable Source</b> (section 3.1.1.1) in the database application and also updates the row in the result set.   |
| <b>UpdateImage</b>                 | The <b>UpdateImage</b> protocol operation stores image data for a field (2).  |

### 3.1.4.1 CloseSession

The **CloseSession** operation closes a session on the protocol server.

The following is the WSDL port type specification of the **CloseSession WSDL operation**.

```
<wsdl:operation name="CloseSession" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseSession"
    message="tns:IAccessServiceSoap CloseSession InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

    <wsdl:output
      wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseSessionResponse"
      message="tns:IAccessServiceSoap_CloseSession_OutputMessage"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
      wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseSessionAccessServerMessageFault"
      name="AccessServerMessageFault"
      message="tns:IAccessServiceSoap_CloseSession_AccessServerMessageFault_FaultMessage"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_CloseSession\_InputMessage** (section [3.1.4.1.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_CloseSession\_OutputMessage** (section [3.1.4.1.1.2](#)) response message as follows:

- The protocol server closes the session specified in the **WorkbookId** element in the **parameter** element in the **CloseSession** element (section [3.1.4.1.2.1](#)) and returns back the **CloseSessionResponse** element (section [3.1.4.1.2.2](#)).
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) MUST be one of the values specified in section [2.2.9.1](#).

### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_CloseSession_InputMessage</b>  | The request WSDL message for the <b>CloseSession</b> WSDL operation.  |
| <b>IAccessServiceSoap_CloseSession_OutputMessage</b> | The response WSDL message for the <b>CloseSession</b> WSDL operation. |

#### 3.1.4.1.1.1 IAccessServiceSoap\_CloseSession\_InputMessage

The request WSDL message for the **CloseSession** WSDL operation.

The **SOAP action** value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseSession

```

The **SOAP body** contains the **CloseSession** element.

#### 3.1.4.1.1.2 IAccessServiceSoap\_CloseSession\_OutputMessage

The response WSDL message for the **CloseSession** WSDL operation.

The SOAP body contains the **CloseSessionResponse** element.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                     | Description   |
|-----------------------------|---|
| <b>CloseSession</b>         | The input data for the <b>CloseSession</b> WSDL operation.  |
| <b>CloseSessionResponse</b> | The result data for the <b>CloseSession</b> WSDL operation. |

#### 3.1.4.1.2.1 CloseSession

The **CloseSession** element specifies the input data for the **CloseSession** WSDL operation.

```
<xs:element name="CloseSession" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.1.2.2 CloseSessionResponse

The **CloseSessionResponse** element specifies the result data for the **CloseSession** WSDL operation.

```
<xs:element name="CloseSessionResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CloseSessionResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**CloseSessionResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

#### 3.1.4.1.3 Complex Types

None.

#### 3.1.4.1.4 Simple Types

None.

#### 3.1.4.1.5 Attributes



None.

### 3.1.4.1.6 Groups

None.

### 3.1.4.1.7 Attribute Groups

None.

### 3.1.4.2 DeleteData

This operation deletes a record from a table in the database application and also deletes the corresponding row from the result set.

The following is the WSDL port type specification of the **DeleteData** WSDL operation.

```
<wsdl:operation name="DeleteData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteData"
    message="tns:IAccessServiceSoap_DeleteData_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteDataResponse"
    message="tns:IAccessServiceSoap_DeleteData_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteDataAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_DeleteData_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_DeleteData\_InputMessage** (section [3.1.4.2.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_DeleteData\_OutputMessage** (section [3.1.4.2.1.2](#)) response message as follows:

- The protocol server deletes from the **Updatable Source** (section [3.1.1.1](#)) the record that has a primary key equal to the **Key** element of the first **KeyValuePair** in the **keys** element in the **DeleteData** element (section [3.1.4.2.2.1](#)).
- If the record is successfully deleted, then the protocol server also deletes from the result set the row with a primary key equal to primary key of the deleted record.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) MUST be one of the values specified in either section [2.2.9.1](#), section [2.2.9.2](#) or section [2.2.9.3](#).

#### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_DeleteData_InputMessage</b>  | The request WSDL message for the <b>DeleteData</b> WSDL operation.  |
| <b>IAccessServiceSoap_DeleteData_OutputMessage</b> | The response WSDL message for the <b>DeleteData</b> WSDL operation. |

### 3.1.4.2.1.1 IAccessServiceSoap\_DeleteData\_InputMessage

The request WSDL message for the **DeleteData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteData
```

The SOAP body contains the **DeleteData** element.

### 3.1.4.2.1.2 IAccessServiceSoap\_DeleteData\_OutputMessage

The response WSDL message for the **DeleteData** WSDL operation.

The SOAP body contains the **DeleteDataResponse** element.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                   | Description   |
|---------------------------|---|
| <b>DeleteData</b>         | The input data for the <b>DeleteData</b> WSDL operation.  |
| <b>DeleteDataResponse</b> | The result data for the <b>DeleteData</b> WSDL operation. |

#### 3.1.4.2.2.1 DeleteData

The **DeleteData** element specifies the input data for the **DeleteData** WSDL operation.

```
<xs:element name="DeleteData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```

</xs:element>

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

**keys:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the record to delete.

- MUST be present and MUST contain exactly one **KeyValuePair** (section [2.2.4.5](#)).
- The **Key** element of the **KeyValuePair** MUST be of type **xs:int** and MUST be a primary key for a record in the table.
- The **Value** element of the **KeyValuePair** MUST be ignored.

**oldValues:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the fields (2) and their original values in the record identified by **keys** element. MUST be present and MUST contain at least one **KeyValuePair** (section [2.2.4.5](#)). SHOULD be ignored by the protocol server.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.2.2 DeleteDataResponse

The **DeleteDataResponse** element specifies the result data for the **DeleteData** WSDL operation.

```
<xs:element name="DeleteDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="DeleteDataResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="recordsDeleted" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**DeleteDataResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**recordsDeleted:** MUST be 1.

### 3.1.4.2.3 Complex Types

None.

### 3.1.4.2.4 Simple Types

None.

### 3.1.4.2.5 Attributes

None.

### 3.1.4.2.6 Groups

None.

### 3.1.4.2.7 Attribute Groups

None.

### 3.1.4.3 FixupRow

This operation returns the results of performing a hypothetical update on the result set.

The following is the WSDL port type specification of the **FixupRow** WSDL operation.

```
<wsdl:operation name="FixupRow" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/FixupRow"
    message="tns:IAccessServiceSoap_FixupRow_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/FixupRowResponse"
    message="tns:IAccessServiceSoap_FixupRow_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/FixupRowAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_FixupRow_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_FixupRow\_InputMessage** (section [3.1.4.3.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_FixupRow\_OutputMessage** (section [3.1.4.3.1.2](#)) response message as follows:

- The protocol server retrieves a copy of a row from the database application using the **Updatable Source** (section [3.1.1.1](#)), which was previously supplied as the **source** input element to **GetObjectSchema** Operation (section [3.1.4.7.2.1](#)) and the given **key**, and updates the columns specified in **values** in the copy. Neither the database application nor the result set are modified. If the update succeeds, the protocol server returns the updated values of all columns in the row.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one of the common fault identifiers specified in section [2.2.9.1](#) or one of the Sql fault identifiers specified in section [2.2.9.3](#).

#### 3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_FixupRow_InputMessage</b>  | The request WSDL message for the <b>FixupRow</b> WSDL operation.  |
| <b>IAccessServiceSoap_FixupRow_OutputMessage</b> | The response WSDL message for the <b>FixupRow</b> WSDL operation. |

### 3.1.4.3.1.1 IAccessServiceSoap\_FixupRow\_InputMessage

The request WSDL message for the **FixupRow** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/FixupRow
```

The SOAP body contains the **FixupRow** element.

### 3.1.4.3.1.2 IAccessServiceSoap\_FixupRow\_OutputMessage

The response WSDL message for the **FixupRow** WSDL operation.

The SOAP body contains the **FixupRowResponse** element.

### 3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                 | Description   |
|-------------------------|---|
| <b>FixupRow</b>         | The input data for the <b>FixupRow</b> WSDL operation.  |
| <b>FixupRowResponse</b> | The result data for the <b>FixupRow</b> WSDL operation. |

#### 3.1.4.3.2.1 FixupRow

The **FixupRow** element specifies the input data for the **FixupRow** WSDL operation.

```
<xs:element name="FixupRow" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

**keys:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the row to operate on. MUST be present. MUST contain exactly one **KeyValuePair** (section [2.2.4.5](#)). The **Key** element of the **KeyValuePair** MUST contain a primary key value for a row in the result set.

**values:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the fields (2) and their new values which are to be used for the hypothetical update of the record identified by **keys** element. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the data for that column in the row.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section 2.2.4.5).
- For each **KeyValuePair**:
  - The **Key** element MUST be equal to the name of a column in the result set.
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([XMLSCHEMA2] section 2.6.2) attribute set to "true" or have the **type** ([XMLSCHEMA2] section 2.6.1) attribute set to one of the following:
    - **boolean** ([XMLSCHEMA2] section 3.2.2)
    - **datetime** ([XMLSCHEMA2] section 3.2.7)
    - **string** ([XMLSCHEMA2] section 3.2.1)
    - **int** ([XMLSCHEMA2] section 3.3.17)
    - **decimal** ([XMLSCHEMA2] section 3.2.3)
    - **double** ([XMLSCHEMA2] section 3.2.5)

**userCookieId:** A **guid** (section 2.2.5.8) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.3.2.2 FixupRowResponse

The **FixupRowResponse** element specifies the result data for the **FixupRow** WSDL operation.

```
<xs:element name="FixupRowResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="FixupRowResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**FixupRowResult:** A **CommandResult**, as specified in section 2.2.4.4. MUST be present.

**tableXml:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies **XML** containing the content of the returned row, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section 3.1.4.10.2.2).

**totalRowCount:** MUST be "1".

### 3.1.4.3.3 Complex Types

None.

#### 3.1.4.3.4 Simple Types

None.

#### 3.1.4.3.5 Attributes

None.

#### 3.1.4.3.6 Groups

None.

#### 3.1.4.3.7 Attribute Groups

None.

#### 3.1.4.4 GetData

This operation performs sort, filter, and synchronization operations on rows in the result set, and returns a subset of those rows.

The following is the WSDL port type specification of the **GetData** WSDL operation.

```
<wsdl:operation name="GetData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetData"
    message="tns:IAccessServiceSoap_GetData_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetDataResponse"
    message="tns:IAccessServiceSoap_GetData_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetDataAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetData_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetData\_InputMessage** (section [3.1.4.4.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetData\_OutputMessage** (section [3.1.4.4.1.2](#)) response message as follows:

- The protocol server first executes any actions specified by the **cacheCommands** input element (section [3.1.4.4.2.1](#)), and refreshes the result set according to the **cacheCommands** values specified in section [2.2.5.5](#). Next, the protocol server returns a subset of the rows in the result set, as specified by the **startRowIndex** and **maximumRows** input elements (section [3.1.4.4.2.1](#)).
- The subset of rows returned is specified by **startRowIndex** and **maximumRows** as follows:
  - **maximumRows** MUST be greater than zero . If it is less than or equal to zero, a SOAP fault is returned, as specified in section [2.2.9](#).

- If the **RetrieveImage** value is specified for **cacheCommands**, then the protocol server returns a single row specified by the **startRowIndex** from the result set. The row MUST have only fields (2) from the result set that contain image data.
- If the **maximumRows** element is greater than zero and **startRowIndex** + **maximumRows** exceeds the number of rows in the result set, the protocol server returns all rows in the result set with indices greater than or equal to **startRowIndex**.
- Otherwise, the protocol server returns all rows in the result set with indices starting at **startRowIndex** and ending at **startRowIndex** + **maximumRows** -1.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section 2.2.9. The **Id** element of the **AccessServerMessage** (section 2.2.4.1) MUST be one of the values specified in section 2.2.9.1, or section 2.2.9.3, or one of the values from the following table.

| Identifier                                    | Description          |
|---|----------------------|
| <b>OrderingException_InvalidSpecification</b> | See section 2.2.5.2. |
| <b>OrderingException_InvalidColumnName</b>    | See section 2.2.5.2. |

### 3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetData_InputMessage</b>  | The request WSDL message for the <b>GetData</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetData_OutputMessage</b> | The response WSDL message for the <b>GetData</b> WSDL operation. |

#### 3.1.4.4.1.1 IAccessServiceSoap\_GetData\_InputMessage

The request WSDL message for the **GetData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetData
```

The SOAP body contains the **GetData** element.

#### 3.1.4.4.1.2 IAccessServiceSoap\_GetData\_OutputMessage

The response WSDL message for the **GetData** WSDL operation.

The SOAP body contains the **GetDataResponse** element.

### 3.1.4.4.2 Elements



The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                | Description  |
|------------------------|--|
| <b>GetData</b>         | The input data for the <b>GetData</b> WSDL operation.  |
| <b>GetDataResponse</b> | The result data for the <b>GetData</b> WSDL operation. |

### 3.1.4.4.2.1 GetData

The **GetData** element specifies the input data for the **GetData** WSDL operation.

```
<xs:element name="GetData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="startRowIndex" type="xs:int"/>
      <xs:element minOccurs="0" name="rowKey" type="xs:int"/>
      <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="cacheCommands" type="tns1:CacheCommands"/>
      <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified by section [2.2.4.3](#). MUST be present.

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

**startRowIndex:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the index of the first row to return from the result set.

- MUST be nonnegative.
- MUST be less than the total number of rows in the result set.

**rowKey:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the value of the primary key of a record from the result set. The protocol server uses this value to identify the record from the result set, which needs to be refreshed.

- If **cacheCommands** contains **RefreshData**, MUST NOT be less than zero.

**maximumRows:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the maximum number of rows to return.

- MUST be greater than zero.
- If **cacheCommands** contains **RetrieveImage**, MUST be "1".
- If **cacheCommands** contains **RefreshData**, MUST be "1".

**cacheCommands:** A **CacheCommands** (section [2.2.5.5](#)) that specifies a list of actions to perform on the result set. If both **ApplyFilter** and **ClearFilter** are specified, the protocol server MUST return a SOAP fault, as specified by section [3.1.4.4](#).

**sortExpression:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the sort order to apply to the result set. If **cacheCommands** contains **ApplySort**:

- MUST be present.
- MUST contain a **CT\_AdHocOrdering**, as specified by [\[MS-AXL2\]](#) section 2.2.3.5.

The protocol server MUST ignore this element if **cacheCommands** does not contain **ApplySort**.

**filter:** A **FilterInfo** (section [2.2.4.10](#)) that specifies the filter criteria to apply to the result set. The protocol server MUST ignore this element if **cacheCommands** does not contain **ApplyFilter**.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. MUST be present. SHOULD be ignored by the protocol server.

### 3.1.4.4.2 GetDataResponse

The **GetDataResponse** element specifies the result data for the **GetData** WSDL operation.

```
<xs:element name="GetDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetDataResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="aggregateValues" nillable="true" type="q3:ArrayOfanyType"/>
      <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetDataResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**tableXml:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies XML containing the content of the returned rows, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section [3.1.4.10.2.2](#)).

**aggregateValues:** MUST NOT be used.

**totalRowCount:** A **int** ([XMLSCHEMA2] section 3.3.17) that specifies the number of rows in the **Source** (section [3.1.1.1](#)), which was previously supplied as an input element to **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

### 3.1.4.4.3 Complex Types

None.

### 3.1.4.4.4 Simple Types

None.

### 3.1.4.4.5 Attributes

None.

### 3.1.4.4.6 Groups

None.

### 3.1.4.4.7 Attribute Groups

None.

### 3.1.4.5 GetDistinctValues

This operation returns a single column from a result set with duplicate values removed.

The following is the WSDL port type specification of the **GetDistinctValues** WSDL operation.

```
<wsdl:operation name="GetDistinctValues" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDistinctValues"
    message="tns:IAccessServiceSoap_GetDistinctValues_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDistinctValuesResponse"
    message="tns:IAccessServiceSoap_GetDistinctValues_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDistinctValuesAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetDistinctValues_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetDistinctValues\_InputMessage** (section [3.1.4.5.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetDistinctValues\_OutputMessage** (section [3.1.4.5.1.2](#)) response message as follows:

- The protocol server returns a table consisting of a single column. Each row of the table contains a distinct value from the column specified by **columnName** in the result set specified by **source** in the **GetDistinctValues** element (section [3.1.4.5.2.1](#)).
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one of the values specified in section [2.2.9.1](#) or section [2.2.9.3](#).

#### 3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetDistinctValues_InputMessage</b>  | The request WSDL message for the <b>GetDistinctValues</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetDistinctValues_OutputMessage</b> | The response WSDL message for the <b>GetDistinctValues</b> WSDL operation. |

### 3.1.4.5.1.1 IAccessServiceSoap\_GetDistinctValues\_InputMessage

The request WSDL message for the **GetDistinctValues** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDistinctValues
```

The SOAP body contains the **GetDistinctValues** element.

### 3.1.4.5.1.2 IAccessServiceSoap\_GetDistinctValues\_OutputMessage

The response WSDL message for the **GetDistinctValues** WSDL operation.

The SOAP body contains the **GetDistinctValuesResponse** element.

### 3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>GetDistinctValues</b>         | The input data for the <b>GetDistinctValues</b> WSDL operation.  |
| <b>GetDistinctValuesResponse</b> | The result data for the <b>GetDistinctValues</b> WSDL operation. |

#### 3.1.4.5.2.1 GetDistinctValues

The **GetDistinctValues** element specifies the input data for the **GetDistinctValues** WSDL operation.

```
<xs:element name="GetDistinctValues" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="sourceName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="columnName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
      <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="fields" nillable="true" type="tns6:FieldList"/>
      <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**sourceName:** Specifies the table or query in the database application to select from.

**columnName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the column to return values from. MUST be present. MUST be the name of a column in the result set identified by **moniker**.

**maximumRows:** A **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the maximum number of values to return. Zero means that there is no limit on the number of values to return. MUST NOT be less than zero.

**fields:** Specifies the **FieldList** (section [2.2.4.51](#)) for which to get data from the database application.

**restriction:** Specifies a filter for values in the database application.

**sortExpression:** This element MUST be ignored.

**filter:** This element specifies a **FilterInfo** (section [2.2.4.8](#)) used by some messages in the protocol.

**queryParameters:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the set of values for each **CT\_Parameter** ([\[MS-AXL2\]](#) section 2.2.3.12) required in the **Source**. One value MUST be present for every **CT\_Parameter** defined in the **Source**.

- The **Key** element of each of the **KeyValuePairs** (section [2.2.4.5](#)) in **queryParameters** matches the **Name** element of the **CT\_Parameter**.
- The **Value** element of each of the **KeyValuePairs** specifies the value of the **Expression** element of the **CT\_ParameterValue** ([\[MS-AXL2\]](#) section 2.2.3.16) in the correct data type.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.5.2.2 GetDistinctValuesResponse

The **GetDistinctValuesResponse** element specifies the result data for the **GetDistinctValues** WSDL operation.

```
<xs:element name="GetDistinctValuesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetDistinctValuesResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetDistinctValuesResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**tableXml:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the XML containing the content of the returned rows, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section [3.1.4.10.2.2](#)).

### 3.1.4.5.3 Complex Types

None.

### 3.1.4.5.4 Simple Types

None.

### 3.1.4.5.5 Attributes

None.

### 3.1.4.5.6 Groups

None.

### 3.1.4.5.7 Attribute Groups

None.

### 3.1.4.6 GetHealthScore

This operation returns information about the health of the protocol server.

The following is the WSDL port type specification of the **GetHealthScore** WSDL operation.

```
<wsdl:operation name="GetHealthScore" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHealthScore"
    message="tns:IAccessServiceSoap_GetHealthScore_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHealthScoreResponse"
    message="tns:IAccessServiceSoap_GetHealthScore_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHealthScoreAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetHealthScore_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetHealthScore\_InputMessage** (section [3.1.4.6.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetHealthScore\_OutputMessage** (section [3.1.4.6.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response. The **SOAP fault detail** MUST contain an **AccessServerMessage**, as specified by section [2.2.4.1](#), whose **Id** element MUST be Internal Error (section [2.2.5.2](#)).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetHealthScore\_OutputMessage** response message that contains information about the health of the protocol server.

#### 3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetHealthScore_InputMessage</b>  | The request WSDL message for the <b>GetHealthScore</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetHealthScore_OutputMessage</b> | The response WSDL message for the <b>GetHealthScore</b> WSDL operation. |

### 3.1.4.6.1.1 IAccessServiceSoap\_GetHealthScore\_InputMessage

The request WSDL message for the **GetHealthScore** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHealthScore
```

The SOAP body contains the **GetHealthScore** element.

### 3.1.4.6.1.2 IAccessServiceSoap\_GetHealthScore\_OutputMessage

The response WSDL message for the **GetHealthScore** WSDL operation.

The SOAP body contains the **GetHealthScoreResponse** element.

### 3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                       | Description   |
|-------------------------------|---|
| <b>GetHealthScore</b>         | The input data for the <b>GetHealthScore</b> WSDL operation.  |
| <b>GetHealthScoreResponse</b> | The result data for the <b>GetHealthScore</b> WSDL operation. |

#### 3.1.4.6.2.1 GetHealthScore

The **GetHealthScore** element specifies the input data for the **GetHealthScore** WSDL operation.

```
<xs:element name="GetHealthScore" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

#### 3.1.4.6.2.2 GetHealthScoreResponse

The **GetHealthScoreResponse** element specifies the result data for the **GetHealthScore** WSDL operation.

```
<xs:element name="GetHealthScoreResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element
      xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
      InternalService/" minOccurs="0" name="GetHealthScoreResult" nillable="true"
      type="tns:CommandResult"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**GetHealthScoreResult:** A **CommandResult**, as specified by section [2.2.4.4](#). MUST be present. The **HealthInformation** element of the **CommandResult** MUST be present.

### 3.1.4.6.3 Complex Types

None.

### 3.1.4.6.4 Simple Types

None.

### 3.1.4.6.5 Attributes

None.

### 3.1.4.6.6 Groups

None.

### 3.1.4.6.7 Attribute Groups

None.

### 3.1.4.7 GetObjectSchema

The **GetObjectSchema** operation retrieves metadata information of a **Source** (section [3.1.1.1](#)) in a database application, and returns the information to a protocol client.

The following is the WSDL port type specification of the **GetObjectSchema** WSDL operation.

```

<wsdl:operation name="GetObjectSchema" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetObjectSchema"
    message="tns:IAccessServiceSoap_GetObjectSchema_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetObjectSchemaResponse"
    message="tns:IAccessServiceSoap_GetObjectSchema_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetObjectSchemaAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetObjectSchema_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetObjectSchema\_InputMessage** (section [3.1.4.7.1.1](#)) request message and the protocol server responds with an



**IAccessServiceSoap\_GetObjectSchema\_OutputMessage** (section [3.1.4.7.1.2](#)) response message as follows:

- The protocol server retrieves information about all fields (2) of the **Source** in the database application. The information is returned in **FieldSchema** elements, as specified by section [2.2.4.25](#).
- This operation will create a new result set for a session, which was created during the operation **OpenSession** (section [3.1.4.11](#)).
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one of the values specified in section [2.2.9.1](#), or section [2.2.9.3](#).

### 3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetObjectSchema_InputMessage</b>  | The request WSDL message for the <b>GetObjectSchema</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetObjectSchema_OutputMessage</b> | The response WSDL message for the <b>GetObjectSchema</b> WSDL operation. |

#### 3.1.4.7.1.1 IAccessServiceSoap\_GetObjectSchema\_InputMessage

The request WSDL message for the **GetObjectSchema** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetObjectSchema
```

The SOAP body contains the **GetObjectSchema** element.

#### 3.1.4.7.1.2 IAccessServiceSoap\_GetObjectSchema\_OutputMessage

The response WSDL message for the **GetObjectSchema** WSDL operation.

The SOAP body contains the **GetObjectSchemaResponse** element.

### 3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>GetObjectSchema</b>         | The input data for the <b>GetObjectSchema</b> WSDL operation.  |
| <b>GetObjectSchemaResponse</b> | The result data for the <b>GetObjectSchema</b> WSDL operation. |

### 3.1.4.7.2.1 GetObjectSchema

The **GetObjectSchema** element specifies the input data for the **GetObjectSchema** WSDL operation.

```
<xs:element name="GetObjectSchema" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified by section [2.2.4.3](#). The **parameter** element MUST be present.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the **Source** (section [3.1.1.1](#)) for which metadata is to be retrieved. The **Source** element MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.7.2.2 GetObjectSchemaResponse

The **GetObjectSchemaResponse** element specifies the result data for the **GetObjectSchema** WSDL operation.

```
<xs:element name="GetObjectSchemaResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetObjectSchemaResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="fieldSchemas" nillable="true" type="tns6:ArrayOfFieldSchema"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetObjectSchemaResult:** A **CommandResult**, as specified by section [2.2.4.4](#). MUST be present.

**fieldSchemas:** An **ArrayOfFieldSchema** (section [2.2.4.19](#)) that specifies the metadata information about fields (2) of the **source** input element (section [3.1.4.7.2.1](#)). MUST be present.

### 3.1.4.7.3 Complex Types

None.

### 3.1.4.7.4 Simple Types

None.

### 3.1.4.7.5 Attributes

None.

### 3.1.4.7.6 Groups

None.

### 3.1.4.7.7 Attribute Groups

None.

### 3.1.4.8 InsertData

This operation inserts one or more records into a table in the database application and also inserts the corresponding rows into the result set.

The following is the WSDL port type specification of the **InsertData** WSDL operation.

```
<wsdl:operation name="InsertData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertData"
    message="tns:IAccessServiceSoap_InsertData_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertDataResponse"
    message="tns:IAccessServiceSoap_InsertData_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertDataAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_InsertData_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_InsertData\_InputMessage** (section [3.1.4.8.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_InsertData\_OutputMessage** (section [3.1.4.8.1.2](#)) response message as follows:

- The protocol server adds one or more new records into the **Updatable Source** of the database application (section [3.1.1](#)) with the fields (2) of the records filled in as specified by the **values** element in the **InsertData** element (section [3.1.4.8.2.1](#)).
- If the records were successfully inserted, the protocol server retrieves the inserted records from the database application and adds corresponding rows to the result set where the primary key of each row is equal to the primary key of that record, and with its columns filled in as specified by the corresponding columns of the retrieved record. The protocol server then returns the newly added rows to the protocol client.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified by section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one of the values specified by section [2.2.9.1](#), one of the values specified by section [2.2.9.3](#), or one of the values specified in the following table.

| Identifier                     | Description                           |
|--------------------------------|---------------------------------------|
| WriteRecordsPermissionsFailure | See section <a href="#">2.2.5.2</a> . |

### 3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_InsertData_InputMessage</b>  | The request WSDL message for the <b>InsertData</b> WSDL operation.  |
| <b>IAccessServiceSoap_InsertData_OutputMessage</b> | The response WSDL message for the <b>InsertData</b> WSDL operation. |

#### 3.1.4.8.1.1 IAccessServiceSoap\_InsertData\_InputMessage

The request WSDL message for the **InsertData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertData
```

The SOAP body contains the **InsertData** element.

#### 3.1.4.8.1.2 IAccessServiceSoap\_InsertData\_OutputMessage

The response WSDL message for the **InsertData** WSDL operation.

The SOAP body contains the **InsertDataResponse** element.

### 3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                   | Description   |
|---------------------------|---|
| <b>InsertData</b>         | The input data for the <b>InsertData</b> WSDL operation.  |
| <b>InsertDataResponse</b> | The result data for the <b>InsertData</b> WSDL operation. |

#### 3.1.4.8.2.1 InsertData

The **InsertData** element specifies the input data for the **InsertData** WSDL operation.

```
<xs:element name="InsertData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

    <xs:element
      xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
      minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

**values:** An **ArrayOfArrayOfKeyValuePair** (section [2.2.4.32](#)) that specifies which records need to be inserted into the database application. Each **ArrayOfKeyValuePair** (section [2.2.4.2](#)) element of the **ArrayOfArrayOfKeyValuePair** specifies the fields (2) and their new values which are to be inserted in a new record. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the data for that column in the new row.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section [2.2.4.5](#)).
- For each **KeyValuePair**:
  - The **Key** element MUST be equal to the name of a column in the result set.
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([\[XMLSCHEMA2\]](#) section 2.6.2) attribute set to "true" or have the **type** ([\[XMLSCHEMA2\]](#) section 2.6.1) attribute set to one of the following:
    - **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2)
    - **datetime** ([\[XMLSCHEMA2\]](#) section 3.2.7)
    - **string** ([\[XMLSCHEMA2\]](#) section 3.2.1)
    - **int** ([\[XMLSCHEMA2\]](#) section 3.3.17)
    - **decimal** ([\[XMLSCHEMA2\]](#) section 3.2.3)
    - **double** ([\[XMLSCHEMA2\]](#) section 3.2.5)

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. MUST be present. SHOULD be ignored by the protocol server.

### 3.1.4.8.2.2 InsertDataResponse

The **InsertDataResponse** element specifies the result data for the **InsertData** WSDL operation.

```

<xs:element name="InsertDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/"
        minOccurs="0" name="InsertDataResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="insertedRowsXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>

```

</xs:element>

**InsertDataResult:** A **CommandResult**, as specified by section [2.2.4.4](#). MUST be present.

**insertedRowsXml:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the XML containing the content of the returned rows, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section [3.1.4.10.2.2](#)).

### 3.1.4.8.3 Complex Types

None.

### 3.1.4.8.4 Simple Types

None.

### 3.1.4.8.5 Attributes

None.

### 3.1.4.8.6 Groups

None.

### 3.1.4.8.7 Attribute Groups

None.

### 3.1.4.9 OpenResultSet

This operation opens a result set for the given **Source** (section [3.1.1.1](#)) and returns a subset of rows from the result set.

The following is the WSDL port type specification of the **OpenResultSet** WSDL operation.

```
<wsdl:operation name="OpenResultSet" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenResultSet"
    message="tns:IAccessServiceSoap_OpenResultSet_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenResultSetResponse"
    message="tns:IAccessServiceSoap_OpenResultSet_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenResultSetAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_OpenResultSet_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_OpenResultSet\_InputMessage** (section [3.1.4.10.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_OpenResultSet\_OutputMessage** (section [3.1.4.10.1.2](#)) response message as follows:

- The protocol server retrieves data from the given **Source** of the database application, which was previously supplied as an input element to the **GetObjectSchema** (section [3.1.4.7.2.1](#)) operation. Only the fields (2) that are specified by **fields** input element in section [3.1.4.10.2.1](#) are retrieved. The data is filtered according to the **filter** and **restriction** input elements (section 3.1.4.10.2.1). The protocol server also sorts the data according to expressions defined by the **sortExpression** input element (section 3.1.4.10.2.1).
- The protocol server stores the data in a result set identified by the **source** input element (section 3.1.4.10.2.1) within the session identified by the **WorkbookId** element of the **parameter** input element (section 3.1.4.10.2.1) in the request message.
- The protocol server returns a subset of rows specified by **startRowIndex** and **maximumRows** input elements (section 3.1.4.10.2.1) as follows:
  - **maximumRows** MUST be greater than zero ("0"). If it is less than or equal to zero, a SOAP fault is returned, as specified in section [2.2.9](#).
  - If the **maximumRows** element is greater than zero and if the sum of **startRowIndex** and **maximumRows** exceeds the number of rows in the result set, the protocol server returns all rows in the result set with indices greater than or equal to **startRowIndex**.
  - Otherwise, the protocol server returns all rows in the result set with indices starting at **startRowIndex** and ending at the sum of **startRowIndex** and **maximumRows** minus 1.
- The protocol server calculates the total number of rows in **Source** that satisfy the **filter** and **restriction** conditions, and returns this row count as the **totalRowCount** output element (section [3.1.4.10.2.2](#)).
- If the **retrieveExactRowCount** input element (section 3.1.4.10.2.1) is "true", the protocol server returns the exact number of total row count and if the **retrieveExactRowCount** input element is "false", the protocol server returns an approximate number of total row count in the **totalRowCount** output element.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section 2.2.9. The **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) MUST be one of the values specified in section [2.2.9.1](#), one of the values specified in section [2.2.9.2](#), one of the values specified in section [2.2.9.3](#), or one of the values in the following table.

| Identifier                             | Description                           |
|--|---------------------------------------|
| GetRecordsPermissionsFailure           | See section <a href="#">2.2.5.2</a> . |
| OrderingException_InvalidSpecification | See section 2.2.5.2.                  |
| OrderingException_InvalidColumnName    | See section 2.2.5.2.                  |

### 3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_OpenResultSet_InputMessage</b>  | The request WSDL message for the <b>OpenResultSet</b> WSDL operation.  |
| <b>IAccessServiceSoap_OpenResultSet_OutputMessage</b> | The response WSDL message for the <b>OpenResultSet</b> WSDL operation. |

### 3.1.4.9.1.1 IAccessServiceSoap\_OpenResultSet\_InputMessage

The request WSDL message for the **OpenResultSet** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenResultSet
```

The SOAP body contains the **OpenResultSet** element.

### 3.1.4.9.1.2 IAccessServiceSoap\_OpenResultSet\_OutputMessage

The response WSDL message for the **OpenResultSet** WSDL operation.

The SOAP body contains the **OpenResultSetResponse** element.

### 3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                      | Description  |
|------------------------------|--|
| <b>OpenResultSet</b>         | The input data for the <b>OpenResultSet</b> WSDL operation.  |
| <b>OpenResultSetResponse</b> | The result data for the <b>OpenResultSet</b> WSDL operation. |

#### 3.1.4.9.2.1 OpenResultSet

The **OpenResultSet** element specifies the input data for the **OpenResultSet** WSDL operation.

```
<xs:element name="OpenResultSet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="fields" nillable="true" type="tns6:FieldList"/>
      <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="startRowIndex" type="xs:int"/>
      <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
      <xs:element minOccurs="0" name="retrieveExactRowCount" type="xs:boolean"/>
      <xs:element minOccurs="0" name="stateless" type="xs:boolean"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```



</xs:element>

**parameter:** A **CommandParameter**, as specified by section [2.2.4.3](#). MUST be present.

**fields:** A **FieldList** (section [2.2.4.51](#)) that specifies the fields (2) of the **Source** (section [3.1.1.1](#)), which was previously supplied as an input element to the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)), for which data is to be retrieved.

**restriction:** A **string** representing a **CT\_Expression** ([MS-AXL2] section 2.2.3.1) that specifies a restriction expression to be applied to the result set. Only rows in the **Source** that return "true" for this restriction expression are included in the result set.

**queryParameters:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the set of values for each **CT\_Parameter** ([MS-AXL2] section 2.2.3.12) required in the **Source**. One value MUST be present for every **CT\_Parameter** defined in the **Source**.

- The **Key** element of each of the **KeyValuePairs** (section [2.2.4.5](#)) in **queryParameters** matches the **Name** element of the **CT\_Parameter**.
- The **Value** element of each of the **KeyValuePairs** specifies the value of the **Expression** element of the **CT\_ParameterValue** ([MS-AXL2] section 2.2.3.16) in the correct data type.

**sortExpression:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the sort order to apply when the protocol server retrieves data from the database application. If present and not empty, MUST contain an **Ordering** element, as specified by [MS-AXL2] section 2.2.1.2.

**filter:** A **FilterInfo** (section [2.2.4.10](#)) that specifies how the result set is to be filtered.

**source:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies an identifier for a result set. MUST be present. MUST contain an identifier that was previously supplied during the session as the **source** element for the input to the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

**startRowIndex:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the index of the first row to return from the result set.

- MUST be nonnegative.
- MUST be zero to specify the first row.
- MUST be less than the number of rows in the result set.

**maximumRows:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the maximum number of rows to return. MUST be non-negative.

**retrieveExactRowCount:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the protocol server will return the exact row count in the **totalRowCount** element of **OpenResultSetResponse** (section [3.1.4.10.2.2](#)).

**stateless:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether to cache the requested data or not.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.9.2.2 OpenResultSetResponse

The **OpenResultSetResponse** element specifies the result data for the **OpenResultSet** WSDL operation.

```

<xs:element name="OpenResultSetResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="OpenResultSetResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**OpenResultSetResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**tableXml:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies XML containing the returned rows.

- MUST be present.
- MUST be a **DiffGram**, as specified by [\[MS-DSDIFFGRAM\]](#).
- The **root element** MUST be named "DataTable".

Each child of the "DocumentElement" child of the "Diffgram" child of the "DataTable" element MUST be named "Data".

**totalRowCount:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the total number of rows in the **Source** (section [3.1.1.1](#)), which was previously supplied as an input element in the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

### 3.1.4.9.3 Complex Types

None.

### 3.1.4.9.4 Simple Types

None.

### 3.1.4.9.5 Attributes

None.

### 3.1.4.9.6 Groups

None.

### 3.1.4.9.7 Attribute Groups

None.

### 3.1.4.10 OpenSession

This operation creates a new session.

The following is the WSDL port type specification of the **OpenSession** WSDL operation.

```

<wsdl:operation name="OpenSession" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/OpenSession"
    message="tns:IAccessServiceSoap_OpenSession_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/OpenSessionResponse"
    message="tns:IAccessServiceSoap_OpenSession_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/OpenSessionAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_OpenSession_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_OpenSession\_InputMessage** (section [3.1.4.11.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_OpenSession\_OutputMessage** (section [3.1.4.11.1.2](#)) response message as follows:

- If the operation succeeds, the protocol server MUST return the **SessionIdentifier** (section [3.1.1.2](#)) for the newly created session in the response message to be used in any future operations against the newly created session. This **SessionIdentifier** MUST be returned in the **sessionId** element of the **OpenSessionResponse** element (section [3.1.4.11.2.2](#)).
- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).

### 3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_OpenSession_InputMessage</b>  | The request WSDL message for the <b>OpenSession</b> WSDL operation.  |
| <b>IAccessServiceSoap_OpenSession_OutputMessage</b> | The response WSDL message for the <b>OpenSession</b> WSDL operation. |

#### 3.1.4.10.1.1 IAccessServiceSoap\_OpenSession\_InputMessage

The request WSDL message for the **OpenSession** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalSer
vice/IAccessServiceSoap/OpenSession

```

The SOAP body contains the **OpenSession** element.

#### 3.1.4.10.1.2 IAccessServiceSoap\_OpenSession\_OutputMessage

The response WSDL message for the **OpenSession** WSDL operation.

The SOAP body contains the **OpenSessionResponse** element.

### 3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                    | Description  |
|----------------------------|--|
| <b>OpenSession</b>         | The input data for the <b>OpenSession</b> WSDL operation.  |
| <b>OpenSessionResponse</b> | The result data for the <b>OpenSession</b> WSDL operation. |

#### 3.1.4.10.2.1 OpenSession

The **OpenSession** element specifies the input data for the **OpenSession** WSDL operation.

```
<xs:element name="OpenSession" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="cultureParameter" nillable="true"
        type="tns:CultureCommandParameter"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified by section [2.2.4.3](#). MUST be present.

**cultureParameter:** A **CultureCommandParameter** (section [3.1.4.11.3.1](#)) that specifies UI culture, data culture, and **host data language** related information of the newly created session. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.10.2.2 OpenSessionResponse

The **OpenSessionResponse** element specifies the result data for the **OpenSession** WSDL operation.

```
<xs:element name="OpenSessionResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="OpenSessionResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="sessionId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**OpenSessionResult:** A **CommandResult**, as specified by section [2.2.4.4](#). MUST be present.

**sessionId:** A **SessionIdentifier** (section [3.1.1.2](#)) that specifies the session identifier of the newly created session. MUST be present.

### 3.1.4.10.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                   | Description                                |
|--------------------------------|--|
| <b>CultureCommandParameter</b> | See section <a href="#">3.1.4.11.3.1</a> . |

#### 3.1.4.10.3.1 CultureCommandParameter

**Namespace:**

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/>

The **CultureCommandParameter** complex type is used to specify UI culture, data culture, and host data language related information when creating a new session.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="CultureCommandParameter" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="DataCultureName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SharePointDataCultureName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="TimeZoneSerialization" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="UICultureName" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**DataCultureName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a language tag, as specified in [\[RFC1766\]](#), section 2, that specifies the data culture. The **DataCultureName** element:

- MUST be present.
- MUST NOT be empty.
- MUST NOT be longer than 32,768 characters.

The protocol server uses **SharePointDataCultureName** as a **fallback data culture** if **DataCultureName** is not supported.

**SharePointDataCultureName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a language tag, as specified in [\[RFC1766\]](#), section 2, that specifies the host data language. The **SharePointDataCultureName** element:

- MUST be present.
- MUST NOT be longer than 32,768 characters.

**TimeZoneSerialization:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the time zone of the session. The **TimeZoneSerialization** element:

- MUST be present.
- MUST be exactly 73 characters long.
- MUST have the following layout, which is specified using Augmented Backus-Naur Form (ABNF), as specified in [\[RFC2234\]](#):

| <b>TimeZone</b> | <b>=</b> | <b>Bias "#" StandardDate "#" StandardBias "#" DaylightDate "#" DaylightBias</b> |
|-----------------|----------|---|
| Bias            | =        | "+"\"-" 4DIGIT  |
| StandardDate    | =        | Date %d84 Time  |
| StandardBias    | =        | "+"\"-" 4DIGIT  |
| DaylightDate    | =        | Date %d84 Time  |
| DaylightBias    | =        | "+"\"-" 4DIGIT  |
| Date            | =        | Year "-" Month "-" DayOfWeek "-" Day  |
| Time            | =        | Hour ":" Minute ":" Second ":" Millisecond                                      |
| Year            | =        | 4DIGIT  |
| Month           | =        | 2DIGIT ; 01-12  |
| DayOfWeek       | =        | 2DIGIT ; 00-06 (Sunday-Saturday)  |
| Day             | =        | 2DIGIT ; 01-31  |
| Hour            | =        | 2DIGIT ; 00-23  |
| Minute          | =        | 2DIGIT ; 00-59  |
| Second          | =        | 2DIGIT ; 00-59  |
| Millisecond     | =        | 4DIGIT  |

The following restrictions MUST apply to the **TimeZoneSerialization** element:

- **Bias** MUST be the **time zone bias**.
- **StandardDate** MUST be the **time zone standard date**.
- **StandardBias** MUST be the **time zone standard bias**.
- **DaylightDate** MUST be the **time zone daylight date**.
- **DaylightBias** MUST be the **time zone daylight bias**.
- **Month** MUST be date-month, as specified in [\[RFC3339\]](#).
- **Day** MUST be date-mday, as specified in [\[RFC3339\]](#).
- **Hour** MUST be time-hour, as specified in [\[RFC3339\]](#).

- **Minute** MUST time-minute, as specified in [RFC3339].
- **Second** MUST be time-second, as specified in [RFC3339].

**DayOfWeek** MUST have one of the values in the following table.

| Value | Meaning   |
|-------|-----------|
| 00    | Sunday    |
| 01    | Monday    |
| 02    | Tuesday   |
| 03    | Wednesday |
| 04    | Thursday  |
| 05    | Friday    |
| 06    | Saturday  |

**UICultureName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies a language tag, as specified in [RFC1766], section 2, that specifies the UI culture. The **UICultureName** element:

- MUST be present.
- MUST NOT be empty.
- MUST NOT be longer than 32,768 characters.
- If the language represented by **UICultureName** is not supported on the protocol server, the protocol server SHOULD fall back to some other supported language which is implementation-specific.

#### 3.1.4.10.4 Simple Types

None.

#### 3.1.4.10.5 Attributes

None.

#### 3.1.4.10.6 Groups

None.

#### 3.1.4.10.7 Attribute Groups

None.

#### 3.1.4.11 UpdateData

This operation updates a record in an **Updatable Source** (section [3.1.1.1](#)) in the database application and also updates the row in the result set.

The following is the WSDL port type specification of the **UpdateData** WSDL operation.

```

<wsdl:operation name="UpdateData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/UpdateData"
    message="tns:IAccessServiceSoap_UpdateData_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/UpdateDataResponse"
    message="tns:IAccessServiceSoap_UpdateData_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/UpdateDataAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_UpdateData_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_UpdateData\_InputMessage** (section [3.1.4.12.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_UpdateData\_OutputMessage** (section [3.1.4.12.1.2](#)) response message as follows:

- The protocol server attempts to update the record in the **Updatable Source**, as specified in section 3.1.1.1, which has a primary key equal to the **Key** element of the first **KeyValuePair** (section [2.2.4.5](#)) of the **keys** input element (section [3.1.4.12.2.1](#)).
- If the columns in the result set specified by the **Key** elements of the **KeyValuePair** elements of the **oldValues** element (section 3.1.4.12.2.1) contain data different from what is specified by the respective **Value** elements of the **KeyValuePair** elements of the **oldValues**, a SOAP fault MUST be returned.
- If the record was successfully updated, the protocol server retrieves the updated record from the database application and updates the row in result set with a primary key equal to the primary key of the updated record with its columns filled in as specified by the corresponding columns of the retrieved record. The protocol server then returns the updated row to the protocol client.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) MUST be one of the values specified in section [2.2.9.1](#), or one of the values specified in section [2.2.9.2](#), or one of the values specified in section [2.2.9.3](#), or one of the values specified in the following table.

| Identifier  | Description                           |
|---|---------------------------------------|
| WriteRecordsPermissionsFailure                      | See section <a href="#">2.2.5.2</a> . |
| DataException_ConflictsEncounteredWhileUpdatingData | See section <a href="#">2.2.5.2</a> . |
| DataException_DeleteConflict                        | See section <a href="#">2.2.5.2</a> . |

### 3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.



| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_UpdateData_InputMessage</b>  | The request WSDL message for the <b>UpdateData</b> WSDL operation.  |
| <b>IAccessServiceSoap_UpdateData_OutputMessage</b> | The response WSDL message for the <b>UpdateData</b> WSDL operation. |

### 3.1.4.11.1.1 IAccessServiceSoap\_UpdateData\_InputMessage

The request WSDL message for the **UpdateData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateData
```

The SOAP body contains the **UpdateData** element.

### 3.1.4.11.1.2 IAccessServiceSoap\_UpdateData\_OutputMessage

The response WSDL message for the **UpdateData** WSDL operation.

The SOAP body contains the **UpdateDataResponse** element.

### 3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                   | Description   |
|---------------------------|---|
| <b>UpdateData</b>         | The input data for the <b>UpdateData</b> WSDL operation.  |
| <b>UpdateDataResponse</b> | The result data for the <b>UpdateData</b> WSDL operation. |

### 3.1.4.11.2.1 UpdateData

The **UpdateData** element specifies the input data for the **UpdateData** WSDL operation.

```
<xs:element name="UpdateData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
    

```

```
<xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

**keys:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the row to update.

- MUST be present, and MUST contain exactly one **KeyValuePair**.

The **Key** element of the **KeyValuePair** MUST contain a primary key value for a row in the result set.

**values:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the fields (2) and their new values which are to be inserted in the record identified by **keys** element. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the data for that column in the row.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section [2.2.4.5](#)).
- For each **KeyValuePair**:
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([\[XMLSCHEMA2\] section 2.6.2](#)) attribute set to "true" or have the **type** ([\[XMLSCHEMA2\] section 2.6.1](#)) attribute set to one of the following:
    - **boolean** ([\[XMLSCHEMA2\] section 3.2.2](#))
    - **datetime** ([\[XMLSCHEMA2\] section 3.2.7](#))
    - **string** ([\[XMLSCHEMA2\] section 3.2.1](#))
    - **int** ([\[XMLSCHEMA2\] section 3.3.17](#))
    - **decimal** ([\[XMLSCHEMA2\] section 3.2.3](#))
    - **double** ([\[XMLSCHEMA2\] section 3.2.5](#))

**oldValues:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the fields (2) and their original values in the record identified by **keys** element. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the value of the column in the row prior to the update operation.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section [2.2.4.5](#)).
- For each **KeyValuePair**:
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([\[XMLSCHEMA2\] section 2.6.2](#)) attribute set to "true" or have the **type** ([\[XMLSCHEMA2\] section 2.6.1](#)) attribute set to one of the following:

- **boolean** ([XMLSCHEMA2] section 3.2.2)
- **datetime** ([XMLSCHEMA2] section 3.2.7)
- **string** ([XMLSCHEMA2] section 3.2.1)
- **int** ([XMLSCHEMA2] section 3.3.17)
- **decimal** ([XMLSCHEMA2] section 3.2.3)
- **double** ([XMLSCHEMA2] section 3.2.5)

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.11.2.2 UpdateDataResponse

The **UpdateDataResponse** element specifies the result data for the **UpdateData** WSDL operation.

```
<xs:element name="UpdateDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateDataResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="updatedTableXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**UpdateDataResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**updatedTableXml:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the XML containing the content of the returned row, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section [3.1.4.10.2.2](#)).

#### 3.1.4.11.3 Complex Types

None.

#### 3.1.4.11.4 Simple Types

None.

#### 3.1.4.11.5 Attributes

None.

#### 3.1.4.11.6 Groups

None.

#### 3.1.4.11.7 Attribute Groups

None.

### 3.1.4.12 AddFirewallRule

This operation adds a **FirewallRule** ([MS-AADT] section 2.2.4.7) to the database application.

The following is the WSDL port type specification of the **AddFirewallRule** WSDL operation.

```
<wsdl:operation name="AddFirewallRule" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/AddFirewallRule"
    message="tns:IAccessServiceSoap_AddFirewallRule_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/AddFirewallRuleResponse"
    message="tns:IAccessServiceSoap_AddFirewallRule_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/AddFirewallRuleAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_AddFirewallRule_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_AddFirewallRule\_InputMessage** (section 3.1.4.13.1.1) request message and the protocol server responds with an **IAccessServiceSoap\_AddFirewallRule\_OutputMessage** (section 3.1.4.13.1.2) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section 2.2.9.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_AddFirewallRule\_OutputMessage** response message that contains information about the **FirewallRule** ([MS-AADT] section 2.2.4.7) which was added to the database application.

#### 3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_AddFirewallRule_InputMessage</b>  | The request WSDL message for the <b>AddFirewallRule</b> WSDL operation.  |
| <b>IAccessServiceSoap_AddFirewallRule_OutputMessage</b> | The response WSDL message for the <b>AddFirewallRule</b> WSDL operation. |

##### 3.1.4.12.1.1 IAccessServiceSoap\_AddFirewallRule\_InputMessage

The request WSDL message for the **AddFirewallRule** WSDL operation.

The SOAP action value is:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/AddFirewallRule

The SOAP body contains the **AddFirewallRule** element.

### 3.1.4.12.1.2 IAccessServiceSoap\_AddFirewallRule\_OutputMessage

The response WSDL message for the **AddFirewallRule** WSDL operation.

The SOAP body contains the **AddFirewallRuleResponse** element.

### 3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>AddFirewallRule</b>         | The input data for the <b>AddFirewallRule</b> WSDL operation.  |
| <b>AddFirewallRuleResponse</b> | The result data for the <b>AddFirewallRule</b> WSDL operation. |

#### 3.1.4.12.2.1 AddFirewallRule

The **AddFirewallRule** element specifies the input data for the **AddFirewallRule** WSDL operation.

```
<xs:element name="AddFirewallRule" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:AddFirewallRuleParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** An **AddFirewallRuleParameters** (section [3.1.4.13.3.1](#)) that specifies the IP range for which **FirewallRules** ([\[MS-AADT\]](#) section 2.2.4.7) are to be created in the database application. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.12.2.2 AddFirewallRuleResponse

The **AddFirewallRuleResponse** element specifies the result data for the **AddFirewallRule** WSDL operation.

```
<xs:element name="AddFirewallRuleResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
```

```

    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="AddFirewallRuleResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:AddFirewallRuleResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**AddFirewallRuleResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** An **AddFirewallRuleResult** (section [2.2.4.59](#)) that specifies the **FirewallRule** ([\[MS-AADT\]](#) section 2.2.4.7) name if adding **FirewallRule** in database application was successful. MUST be present.

### 3.1.4.12.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                     | Description                                |
|----------------------------------|--|
| <b>AddFirewallRuleParameters</b> | See section <a href="#">3.1.4.13.3.1</a> . |

#### 3.1.4.12.3.1 AddFirewallRuleParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **AddFirewallRuleParameters** complex type specifies the input data for the **AddFirewallRule** protocol operation.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="AddFirewallRuleParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="EndIPAddress" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="StartIPAddress" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**EndIPAddress:** See description of **EndIPAddress** ([\[MS-AADT\]](#) section 3.1.4.10.3.1)

**ProtocolVersion:** See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.10.3.1)

**StartIPAddress:** See description of **StartIPAddress** ([\[MS-AADT\]](#) section 3.1.4.10.3.1)

### 3.1.4.12.4 Simple Types

None.

### 3.1.4.12.5 Attributes

None.

### 3.1.4.12.6 Groups

None.

### 3.1.4.12.7 Attribute Groups

None.

### 3.1.4.13 CreateAccessObject

This operation triggers the creation of an object in a database application.

The following is the WSDL port type specification of the **CreateAccessObject** WSDL operation.

```
<wsdl:operation name="CreateAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreateAccessObject"
    message="tns:IAccessServiceSoap_CreateAccessObject_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreateAccessObjectResponse"
    message="tns:IAccessServiceSoap_CreateAccessObject_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreateAccessObjectAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_CreateAccessObject_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_CreateAccessObject\_InputMessage** (section [3.1.4.14.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_CreateAccessObject\_OutputMessage** (section [3.1.4.14.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_CreateAccessObject\_OutputMessage** response message that contains information about the newly created object, as specified by **CreateResult** (section [3.1.4.14.3.3](#)).

#### 3.1.4.13.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description  |
|--|--|
| <b>IAccessServiceSoap_CreateAccessObject_InputMessage</b>  | The request WSDL message for the <b>CreateAccessObject</b> WSDL operation. |
| <b>IAccessServiceSoap_CreateAccessObject_OutputMessage</b> | The response WSDL message for the  |

| Message | Description                               |
|---------|---|
|         | <b>CreateAccessObject</b> WSDL operation. |

### 3.1.4.13.1.1 IAccessServiceSoap\_CreateAccessObject\_InputMessage

The request WSDL message for the **CreateAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreateAccessObject
```

The SOAP body contains the **CreateAccessObject** element.

### 3.1.4.13.1.2 IAccessServiceSoap\_CreateAccessObject\_OutputMessage

The response WSDL message for the **CreateAccessObject** WSDL operation.

The SOAP body contains the **CreateAccessObjectResponse** element.

### 3.1.4.13.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                           | Description   |
|-----------------------------------|---|
| <b>CreateAccessObject</b>         | The input data for the <b>CreateAccessObject</b> WSDL operation.  |
| <b>CreateAccessObjectResponse</b> | The result data for the <b>CreateAccessObject</b> WSDL operation. |

#### 3.1.4.13.2.1 CreateAccessObject

The **CreateAccessObject** element specifies the input data for the **CreateAccessObject** WSDL operation.

```
<xs:element name="CreateAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:CreateParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.



**parameters:** A **CreateParameters** (section [3.1.4.14.3.2](#)) that specifies the information that the protocol server needs to create an object. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation.

### 3.1.4.13.2 CreateAccessObjectResponse

The **CreateAccessObjectResponse** element specifies the result data for the **CreateAccessObject** WSDL operation.

```
<xs:element name="CreateAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="CreateAccessObjectResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:CreateResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**CreateAccessObjectResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **CreateResult** element (section [3.1.4.14.3.3](#)) that specifies information about a newly created object for the protocol client to use.

### 3.1.4.13.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                  | Description  |
|-------------------------------|--|
| <b>ArrayOfParameterObject</b> | A collection of <b>ParameterObject</b> .                               |
| <b>CreateParameters</b>       | Specifies information needed by the protocol server to create objects. |
| <b>CreateResult</b>           | Specifies objects created by the protocol server.                      |
| <b>ParameterObject</b>        | Specifies information about an object that is to be created.           |
| <b>ParameterObjectList</b>    | Specifies objects to be created.                                       |

#### 3.1.4.13.3.1 ArrayOfParameterObject

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

This complex type is a collection of **ParameterObject** (section [3.1.4.14.3.4](#)), which specifies information needed by the protocol server to create objects.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfParameterObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
```

```

    <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterObject" nillable="true"
type="tns5:ParameterObject"/>
  </xs:sequence>
</xs:complexType>

```

**ParameterObject:** A **ParameterObject** complex type, as specified in section 3.1.4.14.3.4. MUST be present.

### 3.1.4.13.3.2 CreateParameters

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **CreateParameters** complex type specifies the information that the protocol server needs to create the specified objects in a database application.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="CreateParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ParameterObjects" nillable="true"
type="tns5:ParameterObjectList"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**ParameterObjects:** Specifies the objects to be created. MUST be present.

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.1.3.1)

### 3.1.4.13.3.3 CreateResult

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **CreateResult** complex type specifies the object and possible dependent object or objects that were created in response to the request from the protocol client.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="CreateResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
        <xs:element minOccurs="0" name="RefreshRequired" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.1.3.2)

**Objects:** MUST be present. See description of **Objects** ([\[MS-AADT\]](#) section 3.1.4.1.3.2)

**RefreshRequired:** See description of **RefreshRequired** ([MS-AADT] section 3.1.4.1.3.2)

### 3.1.4.13.3.4 ParameterObject

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **ParameterObject** complex type specifies the information that the protocol server needs to create an object.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ParameterObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="BodyString" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element
      xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
      minOccurs="0" name="ObjectType" type="q1:AccessObjectType"/>
  </xs:sequence>
</xs:complexType>
```

**BodyString:** A **string** ([XMLSCHEMA2] section 3.2.1) that represents the **XML element** defining the object to create, as described by the **Body** element of **ParameterObject** ([MS-AADT] section 3.1.4.1.3.4).

**Description:** See description of **Description** ([MS-AADT] section 3.1.4.1.3.4)

**Name:** MUST be present. See description of **Name** ([MS-AADT] section 3.1.4.1.3.4)

**ObjectType:** See description of **ObjectType** ([MS-AADT] section 3.1.4.1.3.4)

### 3.1.4.13.3.5 ParameterObjectList

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **ParameterObjectList** complex type specifies an array of objects that are to be created in a database application.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ParameterObjectList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="ParameterObjects" nillable="true"
      type="tns5:ArrayOfParameterObject"/>
  </xs:sequence>
</xs:complexType>
```

**ParameterObjects:** Specifies information about objects to be created. MUST be present.

### 3.1.4.13.4 Simple Types

None.

### 3.1.4.13.5 Attributes

None.

### 3.1.4.13.6 Groups

None.

### 3.1.4.13.7 Attribute Groups

None.

### 3.1.4.14 CreatePackage

This operation triggers creation of a package that represents a database application, including its objects and data. The package can be retrieved by using the **GetPackage** operation (section [3.1.4.36](#)).

The following is the WSDL port type specification of the **CreatePackage** WSDL operation.

```
<wsdl:operation name="CreatePackage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreatePackage"
    message="tns:IAccessServiceSoap_CreatePackage_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreatePackageResponse"
    message="tns:IAccessServiceSoap_CreatePackage_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreatePackageAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_CreatePackage_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_CreatePackage\_InputMessage** (section [3.1.4.16.1.1](#)) request message and the protocol server responds with a **IAccessServiceSoap\_CreatePackage\_OutputMessage** (section [3.1.4.16.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_CreatePackage\_OutputMessage** response message that contains an identifier that can be used to retrieve the package.

#### 3.1.4.14.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_CreatePackage_InputMessage</b>  | The request WSDL message for the <b>CreatePackage</b> WSDL operation.  |
| <b>IAccessServiceSoap_CreatePackage_OutputMessage</b> | The response WSDL message for the <b>CreatePackage</b> WSDL operation. |

### 3.1.4.14.1.1 IAccessServiceSoap\_CreatePackage\_InputMessage

The request WSDL message for the **CreatePackage** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreatePackage
```

The SOAP body contains the **CreatePackage** element.

### 3.1.4.14.1.2 IAccessServiceSoap\_CreatePackage\_OutputMessage

The response WSDL message for the **CreatePackage** WSDL operation.

The SOAP body contains the **CreatePackageResponse** element.

### 3.1.4.14.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                      | Description  |
|------------------------------|--|
| <b>CreatePackage</b>         | The input data for the <b>CreatePackage</b> WSDL operation.  |
| <b>CreatePackageResponse</b> | The result data for the <b>CreatePackage</b> WSDL operation. |

#### 3.1.4.14.2.1 CreatePackage

The **CreatePackage** element specifies the input data for the **CreatePackage** WSDL operation.

```
<xs:element name="CreatePackage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:CreatePackageParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **CreatePackageParameters** element (section [3.1.4.16.3.1](#)) that specifies the information the protocol server needs to create a package. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.14.2.2 CreatePackageResponse

The **CreatePackageResponse** element specifies the result data for the **CreatePackage** WSDL operation.

```
<xs:element name="CreatePackageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="CreatePackageResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:CreatePackageResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**CreatePackageResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **CreatePackageResult** element (section [3.1.4.16.3.2](#)) that contains an identifier of a package.

### 3.1.4.14.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                   | Description                                       |
|--------------------------------|---|
| <b>CreatePackageParameters</b> | Specifies information about the package.          |
| <b>CreatePackageResult</b>     | Contains the identifier of the requested package. |

#### 3.1.4.14.3.1 CreatePackageParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **CreatePackageParameters** complex type specifies the information that the protocol server needs to create the package.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="CreatePackageParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="AppVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Data" type="xs:boolean"/>
        <xs:element minOccurs="0" name="IsLocked" type="xs:boolean"/>
      </xs:sequence>
      <xs:element
        xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
        minOccurs="0" name="Option" type="tns4:PackagingOption"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Title" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**AppVersion:** See description of **AppVersion** ([\[MS-AADT\]](#) section 3.1.4.2.3.1)

**Data:** See description of **Data** ([MS-AADT] section 3.1.4.2.3.1)

**IsLocked:** See description of **IsLocked** ([MS-AADT] section 3.1.4.2.3.1)

**Option:** See description of **Option** ([MS-AADT] section 3.1.4.2.3.1)

**ProtocolVersion:** See description of **ProtocolVersion** ([MS-AADT] section 3.1.4.2.3.1)

**Title:** MUST be present. See description of **Title** ([MS-AADT] section 3.1.4.2.3.1)

### 3.1.4.14.3.2 CreatePackageResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **CreatePackageResult** complex type specifies an identifier that the protocol client can use with the **GetPackage** operation (section [3.1.4.18](#)) to poll the protocol server and retrieve the created package.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="CreatePackageResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="PackageId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**PackageId:** MUST be present. See description of **PackageId** ([\[MS-AADT\]](#) section 3.1.4.2.3.2)

### 3.1.4.14.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type            | Description                                |
|------------------------|--|
| <b>PackagingOption</b> | See section <a href="#">3.1.4.16.4.1</a> . |

#### 3.1.4.14.4.1 PackagingOption

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design>

Specifies the type of package to be created by the **CreatePackage** operation (section [3.1.4.16](#)).

Optional: Type a detailed description for the Simple Type.

```
<xs:simpleType name="PackagingOption" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="New"/>
    <xs:enumeration value="Snapshot"/>
    <xs:enumeration value="Deployment"/>
  </xs:restriction>
</xs:simpleType>
```

</xs:simpleType>

The following table specifies the allowable values for the **PackagingOption** simple type.

| Value      | Meaning   |
|------------|---|
| New        | Specifies a package for a new database application.         |
| Snapshot   | Specifies a snapshot of an existing database application.   |
| Deployment | Specifies a deployment of an existing database application. |

#### 3.1.4.14.5 Attributes

None.

#### 3.1.4.14.6 Groups

None.

#### 3.1.4.14.7 Attribute Groups

None.

#### 3.1.4.15 DeleteAccessObject

This operation triggers deletion of an object in a database application.

The following is the WSDL port type specification of the **DeleteAccessObject** WSDL operation.

```
<wsdl:operation name="DeleteAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteAccessObject"
    message="tns:IAccessServiceSoap_DeleteAccessObject_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteAccessObjectResponse"
    message="tns:IAccessServiceSoap_DeleteAccessObject_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteAccessObjectAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_DeleteAccessObject_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_DeleteAccessObject\_InputMessage** (section [3.1.4.17.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_DeleteAccessObject\_OutputMessage** (section [3.1.4.17.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).



- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_DeleteAccessObject\_OutputMessage** response message that contains information about the deleted object.

### 3.1.4.15.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_DeleteAccessObject_InputMessage</b>  | The request WSDL message for the <b>DeleteAccessObject</b> WSDL operation.  |
| <b>IAccessServiceSoap_DeleteAccessObject_OutputMessage</b> | The response WSDL message for the <b>DeleteAccessObject</b> WSDL operation. |

#### 3.1.4.15.1.1 IAccessServiceSoap\_DeleteAccessObject\_InputMessage

The request WSDL message for the **DeleteAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteAccessObject
```

The SOAP body contains the **DeleteAccessObject** element.

#### 3.1.4.15.1.2 IAccessServiceSoap\_DeleteAccessObject\_OutputMessage

The response WSDL message for the **DeleteAccessObject** WSDL operation.

The SOAP body contains the **DeleteAccessObjectResponse** element.

### 3.1.4.15.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                           | Description   |
|-----------------------------------|---|
| <b>DeleteAccessObject</b>         | The input data for the <b>DeleteAccessObject</b> WSDL operation.  |
| <b>DeleteAccessObjectResponse</b> | The result data for the <b>DeleteAccessObject</b> WSDL operation. |

#### 3.1.4.15.2.1 DeleteAccessObject

The **DeleteAccessObject** element specifies the input data for the **DeleteAccessObject** WSDL operation.

```
<xs:element name="DeleteAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
```

```

InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
  <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:DeleteParameters"/>
  <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **DeleteParameters** element (section [3.1.4.17.3.1](#)) that specifies the object to delete. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.15.2.2 DeleteAccessObjectResponse

The **DeleteAccessObjectResponse** element specifies the result data for the **DeleteAccessObject** WSDL operation.

```

<xs:element name="DeleteAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="DeleteAccessObjectResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5>DeleteResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**DeleteAccessObjectResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **DeleteResult** element (section [3.1.4.17.3.2](#)) that specifies the result of the delete operation.

### 3.1.4.15.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type            | Description                                   |
|-------------------------|---|
| <b>DeleteParameters</b> | Specifies the object to delete.               |
| <b>DeleteResult</b>     | Specifies the result of the delete operation. |

#### 3.1.4.15.3.1 DeleteParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **DeleteParameters** complex type specifies the information that the protocol server needs to delete an object.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="DeleteParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="ObjectVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ID:** See description of **ID** ([\[MS-AADT\]](#) section 3.1.4.9.3.1).

**ObjectVersion:** See description of **ObjectVersion** ([\[MS-AADT\]](#) section 3.1.4.9.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.9.3.1).

### 3.1.4.15.3.2 DeleteResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **DeleteResult** complex type specifies the result of the delete operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="DeleteResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element
          xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
          minOccurs="0" name="Object" nillable="true" type="tns4:AccessObject"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.9.3.2).

**ID:** See description of **ID** ([\[MS-AADT\]](#) section 3.1.4.9.3.2).

**Object:** See description of **AccessObject** ([\[MS-AADT\]](#) section 3.1.4.9.3.2).

### 3.1.4.15.4 Simple Types

None.

### 3.1.4.15.5 Attributes

None.

### 3.1.4.15.6 Groups

None.

### 3.1.4.15.7 Attribute Groups

None.

### 3.1.4.16 DeleteFirewallRules

This operation deletes the **FirewallRules** ([\[MS-AADT\]](#) section 2.2.4.7) from the database application. These **FirewallRules** MUST have been previously added by the **AddFirewallRule** operation (section [3.1.4.13](#)).

The following is the WSDL port type specification of the **DeleteFirewallRules** WSDL operation.

```
<wsdl:operation name="DeleteFirewallRules" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteFirewallRules"
    message="tns:IAccessServiceSoap_DeleteFirewallRules_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteFirewallRulesResponse"
    message="tns:IAccessServiceSoap_DeleteFirewallRules_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteFirewallRulesAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_DeleteFirewallRules_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_DeleteFirewallRules\_InputMessage** (section [3.1.4.18.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_DeleteFirewallRules\_OutputMessage** (section [3.1.4.18.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_DeleteFirewallRules\_OutputMessage** response message.

#### 3.1.4.16.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_DeleteFirewallRules_InputMessage</b>  | The request WSDL message for the <b>DeleteFirewallRules</b> WSDL operation.  |
| <b>IAccessServiceSoap_DeleteFirewallRules_OutputMessage</b> | The response WSDL message for the <b>DeleteFirewallRules</b> WSDL operation. |

### 3.1.4.16.1.1 IAccessServiceSoap\_DeleteFirewallRules\_InputMessage

The request WSDL message for the **DeleteFirewallRules** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteFirewallRules
```

The SOAP body contains the **DeleteFirewallRules** element.

### 3.1.4.16.1.2 IAccessServiceSoap\_DeleteFirewallRules\_OutputMessage

The response WSDL message for the **DeleteFirewallRules** WSDL operation.

The SOAP body contains the **DeleteFirewallRulesResponse** element.

## 3.1.4.16.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                            | Description  |
|------------------------------------|--|
| <b>DeleteFirewallRules</b>         | The input data for the <b>DeleteFirewallRules</b> WSDL operation.  |
| <b>DeleteFirewallRulesResponse</b> | The result data for the <b>DeleteFirewallRules</b> WSDL operation. |

### 3.1.4.16.2.1 DeleteFirewallRules

The **DeleteFirewallRules** element specifies the input data for the **DeleteFirewallRules** WSDL operation.

```
<xs:element name="DeleteFirewallRules" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
        type="tns5>DeleteFirewallRulesParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **DeleteFirewallRulesParameters** ([\[MS-AADT\]](#) section 3.1.4.11.3.1) that specifies which **FirewallRules** ([\[MS-AADT\]](#) section 2.2.4.7) in the database application are to be deleted. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.16.2.2 DeleteFirewallRulesResponse

The **DeleteFirewallRulesResponse** element specifies the result data for the **DeleteFirewallRules** WSDL operation.

```
<xs:element name="DeleteFirewallRulesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="DeleteFirewallRulesResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:DeleteFirewallRulesResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**DeleteFirewallRulesResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **DeleteFirewallRulesResult** ([\[MS-AADT\]](#) section 3.1.4.11.3.3) that specifies if deletion of **FirewallRules** ([\[MS-AADT\]](#) section 2.2.4.7) in the database application was successful. MUST be present.

### 3.1.4.16.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                         | Description  |
|--------------------------------------|--|
| <b>DeleteFirewallRulesParameters</b> | Specifies the firewall rules to be deleted.                                      |
| <b>DeleteFirewallRulesResult</b>     | Specifies whether an error occurred on the protocol server during the operation. |
| <b>FirewallRulesList</b>             | Specifies a list of firewall rules.  |

#### 3.1.4.16.3.1 DeleteFirewallRulesParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **DeleteFirewallRulesParameters** complex type specifies the input data for the **DeleteFirewallRules** protocol operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="DeleteFirewallRulesParameters"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element
          xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
          minOccurs="0" name="DeleteOption" type="tns1:DeleteFirewallRulesOption"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SpecifiedFirewallRules" nillable="true"
          type="tns5:FirewallRulesList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

**DeleteOption:** See description of **DeleteOption** ([\[MS-AADT\]](#) section 3.1.4.11.3.1).

**ProtocolVersion:** See description of **ProtocolVersion** ([MS-AADT] section 3.1.4.11.3.1).

**SpecifiedFirewallRules:** See description of **SpecifiedFirewallRules** ([MS-AADT] section 3.1.4.11.3.1).

### 3.1.4.16.3.2 DeleteFirewallRulesResult

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **DeleteFirewallRulesResult** complex type specifies the result data of the **DeleteFirewallRules** protocol operation.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="DeleteFirewallRulesResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.11.3.3).

### 3.1.4.16.3.3 FirewallRulesList

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **FirewallRulesList** complex type specifies a collection of firewall rules.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="FirewallRulesList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
      minOccurs="0" name="RulesList" nillable="true" type="tns1:ArrayOfFirewallRule"/>
  </xs:sequence>
</xs:complexType>

```

**RulesList:** An **ArrayOfFirewallRule** (section [2.2.4.41](#)) that specifies information about firewall rules to be deleted. **MUST** be present.

### 3.1.4.16.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type                      | Description  |
|----------------------------------|--|
| <b>DeleteFirewallRulesOption</b> | Specifies how the <b>FirewallRule</b> (section <a href="#">2.2.4.67</a> ) on the database application are deleted. |

### 3.1.4.16.4.1 DeleteFirewallRulesOption

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

Specifies how the **FirewallRule** (section [2.2.4.67](#)) on the database application are deleted.

Optional: Type a detailed description for the Simple Type.

```
<xs:simpleType name="DeleteFirewallRulesOption" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Specified"/>
    <xs:enumeration value="All"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **DeleteFirewallRulesOption** simple type.

| Value     | Meaning  |
|-----------|--|
| Specified | Only the given firewall rules are deleted from the database application. |
| All       | All the firewall rules are deleted from the database application.        |

### 3.1.4.16.5 Attributes

None.

### 3.1.4.16.6 Groups

None.

### 3.1.4.16.7 Attribute Groups

None.

### 3.1.4.17 GetAccessObject

This operation triggers retrieval of the requested object from a database application.

The following is the WSDL port type specification of the **GetAccessObject** WSDL operation.

```
<wsdl:operation name="GetAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAccessObject"
    message="tns:IAccessServiceSoap_GetAccessObject_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAccessObject"
    message="tns:IAccessServiceSoap_GetAccessObject_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```



```

erInternalService/IAccessServiceSoap/GetAccessObjectResponse"
message="tns:IAccessServiceSoap GetAccessObject OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAccessObjectAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap GetAccessObject AccessServerMessageFault FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetAccessObject\_InputMessage** (section [3.1.4.19.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetAccessObject\_OutputMessage** (section [3.1.4.19.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetAccessObject\_OutputMessage** response message that contains information about the requested object.

### 3.1.4.17.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetAccessObject_InputMessage</b>  | The request WSDL message for the <b>GetAccessObject</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetAccessObject_OutputMessage</b> | The response WSDL message for the <b>GetAccessObject</b> WSDL operation. |

#### 3.1.4.17.1.1 IAccessServiceSoap\_GetAccessObject\_InputMessage

The request WSDL message for the **GetAccessObject** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalSer
vice/IAccessServiceSoap/GetAccessObject

```

The SOAP body contains the **GetAccessObject** element.

#### 3.1.4.17.1.2 IAccessServiceSoap\_GetAccessObject\_OutputMessage

The response WSDL message for the **GetAccessObject** WSDL operation.

The SOAP body contains the **GetAccessObjectResponse** element.

### 3.1.4.17.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>GetAccessObject</b>         | The input data for the <b>GetAccessObject</b> WSDL operation.  |
| <b>GetAccessObjectResponse</b> | The result data for the <b>GetAccessObject</b> WSDL operation. |

### 3.1.4.17.2.1 GetAccessObject

The **GetAccessObject** element specifies the input data for the **GetAccessObject** WSDL operation.

```
<xs:element name="GetAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true" type="tns5:GetParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **GetParameters** element (section [3.1.4.19.3.1](#)) that specifies the information that the protocol server needs to retrieve an object. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.17.2.2 GetAccessObjectResponse

The **GetAccessObjectResponse** element specifies the result data for the **GetAccessObject** WSDL operation.

```
<xs:element name="GetAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetAccessObjectResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:GetResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetAccessObjectResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetResult** element (section [3.1.4.19.3.2](#)) that specifies information about the requested object for the protocol client to use.

### 3.1.4.17.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type         | Description                       |
|----------------------|-----------------------------------|
| <b>GetParameters</b> | Specifies and object to retrieve. |
| <b>GetResult</b>     | Specifies an object.              |

### 3.1.4.17.3.1 GetParameters

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **GetParameters** complex type specifies information that the protocol server needs to retrieve an object.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ID:** See description of **ID** ([\[MS-AADT\]](#) section 3.1.4.3.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.3.3.1).

### 3.1.4.17.3.2 GetResult

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **GetResult** complex type specifies information about the requested object and possible dependent objects in the database application.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Objects" nillable="true"
          type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Objects:** MUST be present. See description of **Objects** ([\[MS-AADT\]](#) section 3.1.4.3.3.2).

### 3.1.4.17.4 Simple Types

None.

### 3.1.4.17.5 Attributes

None.

### 3.1.4.17.6 Groups

None.

### 3.1.4.17.7 Attribute Groups

None.

## 3.1.4.18 GetApplicationInformation

This operation retrieves information about a database application from the protocol server.

The following is the WSDL port type specification of the **GetApplicationInformation** WSDL operation.

```
<wsdl:operation name="GetApplicationInformation"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationInformation"
message="tns:IAccessServiceSoap_GetApplicationInformation_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationInformationResponse"
message="tns:IAccessServiceSoap_GetApplicationInformation_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationInformationAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetApplicationInformation_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetApplicationInformation\_InputMessage** (section [3.1.4.20.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetApplicationInformation\_OutputMessage** (section [3.1.4.20.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetApplicationInformation\_OutputMessage** response message that contains information about the requested database application.

### 3.1.4.18.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetApplicationInformation_InputMessage</b>  | The request WSDL message for the <b>GetApplicationInformation</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetApplicationInformation_OutputMessage</b> | The response WSDL message for the <b>GetApplicationInformation</b> WSDL operation. |

### 3.1.4.18.1.1 IAccessServiceSoap\_GetApplicationInformation\_InputMessage

The request WSDL message for the **GetApplicationInformation** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationInformation
```

The SOAP body contains the **GetApplicationInformation** element.

### 3.1.4.18.1.2 IAccessServiceSoap\_GetApplicationInformation\_OutputMessage

The response WSDL message for the **GetApplicationInformation** WSDL operation.

The SOAP body contains the **GetApplicationInformationResponse** element.

## 3.1.4.18.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                  | Description  |
|--|--|
| <b>GetApplicationInformation</b>         | The input data for the <b>GetApplicationInformation</b> WSDL operation.  |
| <b>GetApplicationInformationResponse</b> | The result data for the <b>GetApplicationInformation</b> WSDL operation. |

### 3.1.4.18.2.1 GetApplicationInformation

The **GetApplicationInformation** element specifies the input data for the **GetApplicationInformation** WSDL operation.

```
<xs:element name="GetApplicationInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
        type="tns5:GetApplicationInformationParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **GetApplicationInformationParameters** element (section [3.1.4.20.3.2](#)) that specifies the information that the protocol server needs to identify and retrieve a database application. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.18.2.2 GetApplicationInformationResponse

The **GetApplicationInformationResponse** element specifies the result data for the **GetApplicationInformation** WSDL operation.

```
<xs:element name="GetApplicationInformationResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetApplicationInformationResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:GetAppInfoResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetApplicationInformationResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetAppInfoResult** element (section [3.1.4.20.3.1](#)) that specifies information about the requested database application.

### 3.1.4.18.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                               | Description  |
|--|--|
| <b>GetAppInfoResult</b>                    | Specifies information about the requested application.                               |
| <b>GetApplicationInformationParameters</b> | Specifies the application about which the protocol client is requesting information. |
| <b>IDList</b>                              | Specifies a list of objects in an application.                                       |
| <b>ProtocolVersionList</b>                 | Specifies a list of protocol versions.   |

#### 3.1.4.18.3.1 GetAppInfoResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetAppInfoResult** complex type specifies information about a database application.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetAppInfoResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="AlternateUrl" nillable="true" type="xs:string"/>
        <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="Collation" nillable="true" type="tns2:CollationInfo"/>
        <xs:element minOccurs="0" name="Culture" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="DataServerName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="DatabaseName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="DeletedObjects" nillable="true" type="tns5:IDList"/>
        <xs:element minOccurs="0" name="IsDataConnectivitySupported" type="xs:boolean"/>
        <xs:element minOccurs="0" name="IsDataMacroTracingOn" type="xs:boolean"/>
        <xs:element minOccurs="0" name="IsFirewallRestricted" type="xs:boolean"/>
        <xs:element minOccurs="0" name="IsSendEmailSupported" type="xs:boolean"/>
        <xs:element minOccurs="0" name="IsUserConnectionAllowed" type="xs:boolean"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="NewObjects" nillable="true"
type="tns5:AccessObjectList"/>
        <xs:element minOccurs="0" name="PackageAppTitle" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="PackageAppVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="PackageIsLocked" type="xs:boolean"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="RequestIPAddress" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Title" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="UpdatedObjects" nillable="true"
type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**AlternateUrl:** MUST be present. See description of **AlternateUrl** ([MS-AADT] section 3.1.4.4.3.2).

**Collation:** A **CollationInfo** (section [2.2.4.51](#)) element that specifies collation information about the backend database specified by **DatabaseName** and **DataServerName**. MUST be present.

**Culture:** MUST be present. See description of **ApplicationCulture** ([MS-AADT] section 3.1.4.4.3.2).

**DataServerName:** MUST be present. See description of **DataServerName** ([MS-AADT] section 3.1.4.4.3.2).

**DatabaseName:** MUST be present. See description of **DatabaseName** ([MS-AADT] section 3.1.4.4.3.2).

**DeletedObjects:** See description of **DeletedObjects** ([MS-AADT] section 3.1.4.4.3.2).

**IsDataConnectivitySupported:** MUST be present. See description of **IsDataConnectivitySupported** ([MS-AADT] section 3.1.4.4.3.2).

**IsDataMacroTracingOn:** MUST be present. See description of **IsDataMacroTracingOn** ([MS-AADT] section 3.1.4.4.3.2).

**IsFirewallRestricted:** MUST be present. See description of **IsFirewallRestricted** ([MS-AADT] section 3.1.4.4.3.2).

**IsSendEmailSupported:** MUST be present. See description of **IsSendEmailSupported** ([MS-AADT] section 3.1.4.4.3.2).

**IsUserConnectionAllowed:** See description of **IsUserConnectionAllowed** ([MS-AADT] section 3.1.4.4.3.2).

**Name:** MUST be present. See description of **Name** ([MS-AADT] section 3.1.4.4.3.2).

**NewObjects:** See description of **NewObjects** ([MS-AADT] section 3.1.4.4.3.2).

**PackageAppTitle:** MUST be present. See description of **PackageAppTitle** ([MS-AADT] section 3.1.4.4.3.2).

**PackageAppVersion:** MUST be present. See description of **PackageAppVersion** ([MS-AADT] section 3.1.4.4.3.2).

**PackageIsLocked:** MUST be present. See description of **PackageIsLocked** ([MS-AADT] section 3.1.4.4.3.2).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([MS-AADT] section 3.1.4.4.3.2).

**RequestIPAddress:** MUST be present. See description of **RequestIPAddress** ([MS-AADT] section 3.1.4.4.3.2).

**Title:** MUST be present. See description of **Title** ([MS-AADT] section 3.1.4.4.3.2).

**UpdatedObjects:** See description of **UpdatedObjects** ([MS-AADT] section 3.1.4.4.3.2).

### 3.1.4.18.3.2 GetApplicationInformationParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetApplicationInformationParameters** complex type specifies the information that the protocol server needs to identify and retrieve a database application.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetApplicationInformationParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="KnownObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ProtocolVersionOptions" nillable="true"
type="tns5:ProtocolVersionList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**KnownObjects:** See description of **KnownObjects** ([\[MS-AADT\]](#) section 3.1.4.4.3.1).

**ProtocolVersionOptions:** See description of **ProtocolVersionOptions** ([MS-AADT] section 3.1.4.4.3.1).

### 3.1.4.18.3.3 IDList

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **IDList** complex type specifies a list of objects in the database application.

Optional: Type a detailed description for the Complex Type.



```

<xs:complexType name="IDList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="IDs" nillable="true" type="q3:ArrayOfint"/>
  </xs:sequence>
</xs:complexType>

```

**IDs:** An **ArrayOfint** (section [2.2.4.42](#)) that specifies a collection of object identifiers. MUST be present.

### 3.1.4.18.3.4 ProtocolVersionList

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ProtocolVersionList** specifies a collection of Access Services Protocol Version elements ([\[MS-ASDT\]](#) section 3.1.1.1).

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="ProtocolVersionList" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="Versions" nillable="true" type="q3:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>

```

**Versions:** An **ArrayOfstring** (section [2.2.4.46](#)) that specifies a collection of protocol versions. MUST be present.

### 3.1.4.18.4 Simple Types

None.

### 3.1.4.18.5 Attributes

None.

### 3.1.4.18.6 Groups

None.

### 3.1.4.18.7 Attribute Groups

None.

### 3.1.4.19 GetDataConnectivity

This operation retrieves information about a login in the database application, which is used to connect to the database application directly.

The following is the WSDL port type specification of the **GetDataConnectivity** WSDL operation.

```

<wsdl:operation name="GetDataConnectivity" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivity"
    message="tns:IAccessServiceSoap GetDataConnectivity InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityResponse"
message="tns:IAccessServiceSoap_GetDataConnectivity_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetDataConnectivity_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetDataConnectivity\_InputMessage** (section [3.1.4.21.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetDataConnectivity\_OutputMessage** (section [3.1.4.21.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetDataConnectivity\_OutputMessage** response message that contains information about the requested login in the database application.

### 3.1.4.19.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetDataConnectivity_InputMessage</b>  | The request WSDL message for the <b>GetDataConnectivity</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetDataConnectivity_OutputMessage</b> | The response WSDL message for the <b>GetDataConnectivity</b> WSDL operation. |

#### 3.1.4.19.1.1 IAccessServiceSoap\_GetDataConnectivity\_InputMessage

The request WSDL message for the **GetDataConnectivity** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivity

```

The SOAP body contains the **GetDataConnectivity** element.

#### 3.1.4.19.1.2 IAccessServiceSoap\_GetDataConnectivity\_OutputMessage

The response WSDL message for the **GetDataConnectivity** WSDL operation.

The SOAP body contains the **GetDataConnectivityResponse** element.

### 3.1.4.19.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                            | Description  |
|------------------------------------|--|
| <b>GetDataConnectivity</b>         | The input data for the <b>GetDataConnectivity</b> WSDL operation.  |
| <b>GetDataConnectivityResponse</b> | The result data for the <b>GetDataConnectivity</b> WSDL operation. |

### 3.1.4.19.2.1 GetDataConnectivity

The **GetDataConnectivity** element specifies the input data for the **GetDataConnectivity** WSDL operation.

```
<xs:element name="GetDataConnectivity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true"
        type="tns5:GetDataConnectivityParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **GetDataConnectivityParameters** (section [3.1.4.21.3.1](#)) that specifies permission level for a login in the database application, whose information is requested from the protocol server.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.19.2.2 GetDataConnectivityResponse

The **GetDataConnectivityResponse** element specifies the result data for the **GetDataConnectivity** WSDL operation.

```
<xs:element name="GetDataConnectivityResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetDataConnectivityResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:GetDataConnectivityResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetDataConnectivityResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetDataConnectivityResult** (section [3.1.4.21.3.2](#)) that specifies information about the login in the database application with the requested permission level. Information such as login name and password are returned.

### 3.1.4.19.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                         | Description                                |
|--------------------------------------|--|
| <b>GetDataConnectivityParameters</b> | See section <a href="#">3.1.4.21.3.1</a> . |
| <b>GetDataConnectivityResult</b>     | See section <a href="#">3.1.4.21.3.2</a> . |

#### 3.1.4.19.3.1 GetDataConnectivityParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetDataConnectivityParameters** type specifies the input data for the **GetDataConnectivity** protocol operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetDataConnectivityParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Permission:** MUST be present. See description of **Permission** ([\[MS-AADT\]](#) section 3.1.4.12.3.1).

**ProtocolVersion:** See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.12.3.1).

#### 3.1.4.19.3.2 GetDataConnectivityResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetDataConnectivityResult** complex type specifies result data for the **GetDataConnectivity** WSDL operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetDataConnectivityResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="Password" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

    <xs:element
      xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
      minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
    <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**Error:** See description of **Error** ([MS-AADT] section 3.1.4.12.3.2).

**Password:** MUST be present. See description of **Password** ([MS-AADT] section 3.1.4.12.3.2).

**Permission:** MUST be present. See description of **Permission** ([MS-AADT] section 3.1.4.12.3.2).

**UserName:** MUST be present. See description of **UserName** ([MS-AADT] section 3.1.4.12.3.2).

### 3.1.4.19.4 Simple Types

None.

### 3.1.4.19.5 Attributes

None.

### 3.1.4.19.6 Groups

None.

### 3.1.4.19.7 Attribute Groups

None.

## 3.1.4.20 GetDataConnectivityStatus

This operation retrieves status information about logins in the database application, which are used to connect to the database application directly.

The following is the WSDL port type specification of the **GetDataConnectivityStatus** WSDL operation.

```

<wsdl:operation name="GetDataConnectivityStatus"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityStatus"
    message="tns:IAccessServiceSoap_GetDataConnectivityStatus_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityStatusResponse"
    message="tns:IAccessServiceSoap_GetDataConnectivityStatus_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityStatusAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetDataConnectivityStatus_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetDataConnectivityStatus\_InputMessage** (section [3.1.4.22.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetDataConnectivityStatus\_OutputMessage** (section [3.1.4.22.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetDataConnectivityStatus\_OutputMessage** response message that contains status information about logins in the database application.

### 3.1.4.20.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetDataConnectivityStatus_InputMessage</b>  | The request WSDL message for the <b>GetDataConnectivityStatus</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetDataConnectivityStatus_OutputMessage</b> | The response WSDL message for the <b>GetDataConnectivityStatus</b> WSDL operation. |

#### 3.1.4.20.1.1 IAccessServiceSoap\_GetDataConnectivityStatus\_InputMessage

The request WSDL message for the **GetDataConnectivityStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityStatus
```

The SOAP body contains the **GetDataConnectivityStatus** element.

#### 3.1.4.20.1.2 IAccessServiceSoap\_GetDataConnectivityStatus\_OutputMessage

The response WSDL message for the **GetDataConnectivityStatus** WSDL operation.

The SOAP body contains the **GetDataConnectivityStatusResponse** element.

### 3.1.4.20.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                  | Description  |
|--|--|
| <b>GetDataConnectivityStatus</b>         | The input data for the <b>GetDataConnectivityStatus</b> WSDL operation.  |
| <b>GetDataConnectivityStatusResponse</b> | The result data for the <b>GetDataConnectivityStatus</b> WSDL operation. |

### 3.1.4.20.2.1 GetDataConnectivityStatus

The **GetDataConnectivityStatus** element specifies the input data for the **GetDataConnectivityStatus** WSDL operation.

```
<xs:element name="GetDataConnectivityStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true"
        type="tns5:GetDataConnectivityStatusParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **GetDataConnectivityStatusParameters** (section [3.1.4.22.3.2](#)) that specifies input data for the **GetDataConnectivityStatus** protocol operation. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.20.2.2 GetDataConnectivityStatusResponse

The **GetDataConnectivityStatusResponse** element specifies the result data for the **GetDataConnectivityStatus** WSDL operation.

```
<xs:element name="GetDataConnectivityStatusResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetDataConnectivityStatusResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:GetDataConnectivityStatusResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetDataConnectivityStatusResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetDataConnectivityStatusResult** (section [3.1.4.22.3.3](#)) that specifies information about all the logins in database application, and whether they are enabled or disabled. MUST be present.

### 3.1.4.20.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                                | Description                                |
|---|--|
| <b>ArrayOfConnectivityStatusInformation</b> | See section <a href="#">3.1.4.22.3.1</a> . |
| <b>GetDataConnectivityStatusParameters</b>  | See section <a href="#">3.1.4.22.3.2</a> . |
| <b>GetDataConnectivityStatusResult</b>      | See section <a href="#">3.1.4.22.3.3</a> . |

### 3.1.4.20.3.1 ArrayOfConnectivityStatusInformation

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

This complex type is a collection of **ConnectivityStatusInformation** (section [2.2.4.55](#)) which specifies the status of a login used to connect to the database application directly.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfConnectivityStatusInformation"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ConnectivityStatusInformation"
nillable="true" type="tns1:ConnectivityStatusInformation"/>
  </xs:sequence>
</xs:complexType>
```

**ConnectivityStatusInformation:** A ConnectivityStatusInformation complex type, as specified in section 2.2.4.55. MUST be present.

### 3.1.4.20.3.2 GetDataConnectivityStatusParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetDataConnectivityStatusParameters** complex type specifies the input data for the **GetDataConnectivityStatus** protocol operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetDataConnectivityStatusParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.13.3.1).

### 3.1.4.20.3.3 GetDataConnectivityStatusResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetDataConnectivityStatusResult** complex type specifies the result data of the **GetDataConnectivityStatus** protocol operation.



Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetDataConnectivityStatusResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="StatusInformations" nillable="true"
type="tns1:ArrayOfConnectivityStatusInformation"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.13.3.2).

**StatusInformations:** See description of **StatusInformations** ([MS-AADT] section 3.1.4.13.3.2).

#### 3.1.4.20.4 Simple Types

None.

#### 3.1.4.20.5 Attributes

None.

#### 3.1.4.20.6 Groups

None.

#### 3.1.4.20.7 Attribute Groups

None.

#### 3.1.4.21 GetFirewallRules

This operation retrieves all the **FirewallRules** (section [2.2.4.67](#)) present in the database application.

The following is the WSDL port type specification of the **GetFirewallRules** WSDL operation.

```
<wsdl:operation name="GetFirewallRules" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFirewallRules"
message="tns:IAccessServiceSoap_GetFirewallRules_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFirewallRulesResponse"
message="tns:IAccessServiceSoap_GetFirewallRules_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFirewallRulesAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetFirewallRules_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetFirewallRules\_InputMessage** (section [3.1.4.23.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetFirewallRules\_OutputMessage** (section [3.1.4.23.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetFirewallRules\_OutputMessage** response message that contains information about all of the **FirewallRules** (section 2.2.4.67) that are present in the database application.

### 3.1.4.21.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetFirewallRules_InputMessage</b>  | The request WSDL message for the <b>GetFirewallRules</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetFirewallRules_OutputMessage</b> | The response WSDL message for the <b>GetFirewallRules</b> WSDL operation. |

#### 3.1.4.21.1.1 IAccessServiceSoap\_GetFirewallRules\_InputMessage

The request WSDL message for the **GetFirewallRules** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetFirewallRules
```

The SOAP body contains the **GetFirewallRules** element.

#### 3.1.4.21.1.2 IAccessServiceSoap\_GetFirewallRules\_OutputMessage

The response WSDL message for the **GetFirewallRules** WSDL operation.

The SOAP body contains the **GetFirewallRulesResponse** element.

### 3.1.4.21.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                         | Description   |
|---------------------------------|---|
| <b>GetFirewallRules</b>         | The input data for the <b>GetFirewallRules</b> WSDL operation.  |
| <b>GetFirewallRulesResponse</b> | The result data for the <b>GetFirewallRules</b> WSDL operation. |

#### 3.1.4.21.2.1 GetFirewallRules

The **GetFirewallRules** element specifies the input data for the **GetFirewallRules** WSDL operation.

```
<xs:element name="GetFirewallRules" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true" type="tns5:GetFirewallRulesParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **GetFirewallRulesParameters** (section [3.1.4.23.3.1](#)) that specifies input data for the **GetFirewallRules** protocol operation.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.21.2.2 GetFirewallRulesResponse

The **GetFirewallRulesResponse** element specifies the result data for the **GetFirewallRules** WSDL operation.

```
<xs:element name="GetFirewallRulesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetFirewallRulesResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:GetFirewallRulesResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetFirewallRulesResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetFirewallRulesResult** (section [3.1.4.23.3.2](#)) that specifies the information about all the **FirewallRules** (section [2.2.4.67](#)) present in the database application. MUST be present.

### 3.1.4.21.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                      | Description                                |
|-----------------------------------|--|
| <b>GetFirewallRulesParameters</b> | See section <a href="#">3.1.4.23.3.1</a> . |
| <b>GetFirewallRulesResult</b>     | See section <a href="#">3.1.4.23.3.2</a>   |

### 3.1.4.21.3.1 GetFirewallRulesParameters

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **GetFirewallRulesParameters** complex type specifies the input data for the **GetFirewallRules** protocol operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetFirewallRulesParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.14.3.1).

### 3.1.4.21.3.2 GetFirewallRulesResult

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **GetFirewallRulesResult** complex type specifies the result data for the **GetFirewallRules** protocol operation.

The result data specifies the information about all the **FirewallRules** (section [2.2.4.67](#)) present in the database application.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetFirewallRulesResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="FirewallRules" nillable="true" type="tns1:ArrayOfFirewallRule"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.14.3.2).

**FirewallRules:** An **ArrayOfFirewallRule** complex type, as specified by section [2.2.4.41](#).

### 3.1.4.21.4 Simple Types

None.

### 3.1.4.21.5 Attributes

None.

### 3.1.4.21.6 Groups

None.

### 3.1.4.21.7 Attribute Groups

None.

## 3.1.4.22 GetLinkedTableInformation

This operation retrieves information from the protocol server about a table in a database application.

The following is the WSDL port type specification of the **GetLinkedTableInformation** WSDL operation.

```
<wsdl:operation name="GetLinkedTableInformation"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetLinkedTableInformation"
message="tns:IAccessServiceSoap_GetLinkedTableInformation_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetLinkedTableInformationResponse"
message="tns:IAccessServiceSoap_GetLinkedTableInformation_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetLinkedTableInformationAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetLinkedTableInformation_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetLinkedTableInformation\_InputMessage** (section [3.1.4.24.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetLinkedTableInformation\_OutputMessage** (section [3.1.4.24.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_GetLinkedTableInformation\_OutputMessage** response message that contains information about the requested table.

The protocol client MUST have successfully finished an authentication handshake process for the protocol server to process the request from the protocol client. Otherwise, the request **IAccessServiceSoap\_GetLinkedTableInformation\_InputMessage** (section [3.1.4.24.1.1](#)) message from the client triggers the authentication handshake process, which works as follows:

1. If the protocol client has not successfully finished an authentication handshake process yet for the table object specified in the message, the protocol server returns a HTTP response with status code 403 and an authentication URL in the value for X-AuthorizeUrl in the response header.
2. The protocol client will then have to first send a HTTP request to the URL specified in the X-AuthorizeUrl and authenticate itself using its credentials. This process authenticates the protocol client for accessing the data source of the linked table.

3. Upon successful authentication of the protocol client credentials, the protocol server's response will prompt for a confirmation from the protocol client on whether the protocol client intends to access the specified data source on the protocol server. The protocol client MUST confirm that it intends to access the data source.
4. An action from the protocol client to allow access to the data source will trigger an **HTTP POST** message with the value *ctl00\$PlaceholderMain\$BtnAllow* for the `__EVENTTARGET` property to the protocol server and the protocol server will return a HTTP response with status code 302 and the value *access:AuthRequestComplete*, without any errors in the response header. This indicates a successful handshake process completion between the protocol client and the protocol server.
5. On the other hand, an action from the protocol client to deny access to the data source will send a HTTP POST message with the value *ctl00\$PlaceholderMain\$BtnDeny* for the `__EVENTTARGET` property server and the protocol server will return a HTTP response with status code 302 and the value *access:AuthRequestComplete* with *error=Access Denied* in the response header. This indicates that the protocol client and the protocol server did not successfully complete the authentication handshake process.

### 3.1.4.22.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetLinkedTableInformation_InputMessage</b>  | The request WSDL message for the <b>GetLinkedTableInformation</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetLinkedTableInformation_OutputMessage</b> | The response WSDL message for the <b>GetLinkedTableInformation</b> WSDL operation. |

#### 3.1.4.22.1.1 IAccessServiceSoap\_GetLinkedTableInformation\_InputMessage

The request WSDL message for the **GetLinkedTableInformation** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServerInternalService/IAccessServiceSoap/GetLinkedTableInformation
```

The SOAP body contains the **GetLinkedTableInformation** element.

#### 3.1.4.22.1.2 IAccessServiceSoap\_GetLinkedTableInformation\_OutputMessage

The response WSDL message for the **GetLinkedTableInformation** WSDL operation.

The SOAP body contains the **GetLinkedTableInformationResponse** element.

### 3.1.4.22.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                  | Description  |
|--|--|
| <b>GetLinkedTableInformation</b>         | The input data for the <b>GetLinkedTableInformation</b> WSDL operation.  |
| <b>GetLinkedTableInformationResponse</b> | The result data for the <b>GetLinkedTableInformation</b> WSDL operation. |

### 3.1.4.22.2.1 GetLinkedTableInformation

The **GetLinkedTableInformation** element specifies the input data for the **GetLinkedTableInformation** WSDL operation.

```
<xs:element name="GetLinkedTableInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
        type="tns5:GetLinkedTableInformationParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **GetLinkedTableInformationParameters** (section [3.1.4.24.3.1](#)) element that specifies the table about which to retrieve information. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.22.2.2 GetLinkedTableInformationResponse

The **GetLinkedTableInformationResponse** element specifies the result data for the **GetLinkedTableInformation** WSDL operation.

```
<xs:element name="GetLinkedTableInformationResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="GetLinkedTableInformationResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:GetLinkedTableInformationResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetLinkedTableInformationResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetLinkedTableInformationResult** (section [3.1.4.24.3.2](#)) element that specifies information about the requested table.

### 3.1.4.22.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                               | Description  |
|--|--|
| <b>GetLinkedTableInformationParameters</b> | Specifies a <b>linked table</b> about which to retrieve information. |
| <b>GetLinkedTableInformationResult</b>     | Specifies information about a <b>linked table</b> .                  |

#### 3.1.4.22.3.1 GetLinkedTableInformationParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetLinkedTableInformationParameters** complex type specifies information about the source of the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) that needs to be created in the database application.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetLinkedTableInformationParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ListID" type="ser:guid"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SiteUrl" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ListID:** MUST be present. See description of **ListID** ([\[MS-AADT\]](#) section 3.1.4.5.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.5.3.1).

**SiteUrl:** MUST be present. See description of **SiteUrl** ([\[MS-AADT\]](#) section 3.1.4.5.3.1).

#### 3.1.4.22.3.2 GetLinkedTableInformationResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetLinkedTableInformationResult** complex type specifies the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) created on the protocol server.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetLinkedTableInformationResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
```



```

        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**Objects:** See description of **Objects** ([\[MS-AADT\]](#) section 3.1.4.5.3.2).

### 3.1.4.22.4 Simple Types

None.

### 3.1.4.22.5 Attributes

None.

### 3.1.4.22.6 Groups

None.

### 3.1.4.22.7 Attribute Groups

None.

## 3.1.4.23 ImportData

This operation triggers importing data into a table in a database application.

The following is the WSDL port type specification of the **ImportData** WSDL operation.

```

<wsdl:operation name="ImportData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ImportData"
message="tns:IAccessServiceSoap_ImportData_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ImportDataResponse"
message="tns:IAccessServiceSoap_ImportData_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ImportDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_ImportData_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_ImportData\_InputMessage** (section [3.1.4.25.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_ImportData\_OutputMessage** (section [3.1.4.25.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).

- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_ImportData\_OutputMessage** response message that contains the number of rows inserted into the specified table.

### 3.1.4.23.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_ImportData_InputMessage</b>  | The request WSDL message for the <b>ImportData</b> WSDL operation.  |
| <b>IAccessServiceSoap_ImportData_OutputMessage</b> | The response WSDL message for the <b>ImportData</b> WSDL operation. |

#### 3.1.4.23.1.1 IAccessServiceSoap\_ImportData\_InputMessage

The request WSDL message for the **ImportData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ImportData
```

The SOAP body contains the **ImportData** element.

#### 3.1.4.23.1.2 IAccessServiceSoap\_ImportData\_OutputMessage

The response WSDL message for the **ImportData** WSDL operation.

The SOAP body contains the **ImportDataResponse** element.

### 3.1.4.23.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                   | Description   |
|---------------------------|---|
| <b>ImportData</b>         | The input data for the <b>ImportData</b> WSDL operation.  |
| <b>ImportDataResponse</b> | The result data for the <b>ImportData</b> WSDL operation. |

#### 3.1.4.23.2.1 ImportData

The **ImportData** element specifies the input data for the **ImportData** WSDL operation.

```
<xs:element name="ImportData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
```

```

InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
  <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:ImportDataParameters"/>
  <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>

```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** An **ImportDataParameters** element (section [3.1.4.25.3.1](#)) that specifies the information that the protocol server needs to import data.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.23.2 ImportDataResponse

The **ImportDataResponse** element specifies the result data for the **ImportData** WSDL operation.

```

<xs:element name="ImportDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="ImportDataResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:ImportDataResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**ImportDataResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** An **ImportDataResult** element (section [3.1.4.25.3.2](#)) that specifies the result of the import data operation.

### 3.1.4.23.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                | Description                                   |
|-----------------------------|---|
| <b>ImportDataParameters</b> | Specifies data to import into a table.        |
| <b>ImportDataResult</b>     | Specifies the result of the import operation. |

#### 3.1.4.23.3.1 ImportDataParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ImportDataParameters** complex type specifies the information that the protocol server needs to import data into a table.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ImportDataParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="BodyString" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="TargetObjectID" type="xs:int"/>
        <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**BodyString:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) representing the XML, as defined by the **Body** element of **ImportDataParameters** ([\[MS-AADT\]](#) section 3.1.4.15.3.1), that contains the full definition of the fields (1) in the table specified by **TargetObjectID** and the data that will be imported into that table. **MUST** be present.

**ProtocolVersion:** **MUST** be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.15.3.1).

**TargetObjectID:** See description of **TargetObjectID** ([\[MS-AADT\]](#) section 3.1.4.15.3.1).

**Version:** See description of **Version** ([\[MS-AADT\]](#) section 3.1.4.15.3.1).

### 3.1.4.23.3.2 ImportDataResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **ImportDataResult** complex type specifies the result of the import data operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ImportDataResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="RowsProcessed" type="xs:int"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.15.3.2).

**RowsProcessed:** See description of **RowsProcessed** ([\[MS-AADT\]](#) section 3.1.4.15.3.2).

### 3.1.4.23.4 Simple Types

None.

### 3.1.4.23.5 Attributes

None.

### 3.1.4.23.6 Groups

None.

### 3.1.4.23.7 Attribute Groups

None.

### 3.1.4.24 RefreshLinkedTableInformation

This operation refreshes an existing **linked table** ([MS-AXL2] section 2.1.1.6) in a database application on the protocol server. The protocol server uses the **ID** attribute in the **RefreshLinkedTableInformationParameters** (section 3.1.4.26.3.1) element to identify the **linked table** ([MS-AXL2] section 2.1.1.6) in the database application, updates its definition from the source of the **linked table** ([MS-AXL2] section 2.1.1.6), and returns the updated definition to the protocol client.

The following is the WSDL port type specification of the **RefreshLinkedTableInformation** WSDL operation.

```
<wsdl:operation name="RefreshLinkedTableInformation"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RefreshLinkedTableInformation"
    message="tns:IAccessServiceSoap_RefreshLinkedTableInformation_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RefreshLinkedTableInformationResponse"
    message="tns:IAccessServiceSoap RefreshLinkedTableInformation OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RefreshLinkedTableInformationAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap RefreshLinkedTableInformation AccessServerMessageFault FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_RefreshLinkedTableInformation\_InputMessage** (section 3.1.4.26.1.1) request message and the protocol server responds with an **IAccessServiceSoap\_RefreshLinkedTableInformation\_OutputMessage** (section 3.1.4.26.1.2) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server **MUST** respond with a SOAP fault, as specified by section 2.2.9.
- Otherwise, the protocol server **MUST** respond with an **IAccessServiceSoap\_RefreshLinkedTableInformation\_OutputMessage** response message that contains information about the requested table.

### 3.1.4.24.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description                      |
|--|----------------------------------|
| <b>IAccessServiceSoap_RefreshLinkedTableInformation_InputMessage</b> | The request WSDL message for the |

| Message   | Description  |
|---|--|
|   | <b>RefreshLinkedTableInformation</b> WSDL operation.                                   |
| <b>IAccessServiceSoap_RefreshLinkedTableInformation_OutputMessage</b> | The response WSDL message for the <b>RefreshLinkedTableInformation</b> WSDL operation. |

### 3.1.4.24.1.1 IAccessServiceSoap\_RefreshLinkedTableInformation\_InputMessage

The request WSDL message for the **RefreshLinkedTableInformation** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RefreshLinkedTableInformation
```

The SOAP body contains the **RefreshLinkedTableInformation** element.

### 3.1.4.24.1.2 IAccessServiceSoap\_RefreshLinkedTableInformation\_OutputMessage

The response WSDL message for the **RefreshLinkedTableInformation** WSDL operation.

The SOAP body contains the **RefreshLinkedTableInformationResponse** element.

### 3.1.4.24.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                      | Description  |
|--|--|
| <b>RefreshLinkedTableInformation</b>         | The input data for the <b>RefreshLinkedTableInformation</b> WSDL operation.  |
| <b>RefreshLinkedTableInformationResponse</b> | The result data for the <b>RefreshLinkedTableInformation</b> WSDL operation. |

#### 3.1.4.24.2.1 RefreshLinkedTableInformation

The **RefreshLinkedTableInformation** element specifies the input data for the **RefreshLinkedTableInformation** WSDL operation.

```
<xs:element name="RefreshLinkedTableInformation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
        type="tns5:RefreshLinkedTableInformationParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    
```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **RefreshLinkedTableInformationParameters** (section [3.1.4.26.3.1](#)) element that specifies the table for which to retrieve information. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.24.2 RefreshLinkedTableInformationResponse

The **RefreshLinkedTableInformationResponse** element specifies the result data for the **RefreshLinkedTableInformation** WSDL operation.

```

<xs:element name="RefreshLinkedTableInformationResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="RefreshLinkedTableInformationResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService"
        minOccurs="0" name="result" nillable="true"
        type="tns5:RefreshLinkedTableInformationResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**RefreshLinkedTableInformationResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **RefreshLinkedTableInformationResult** (section [3.1.4.26.3.2](#)) element that specifies information about the requested table. MUST be present.

### 3.1.4.24.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                                   | Description  |
|--|--|
| <b>RefreshLinkedTableInformationParameters</b> | Specifies a table about which to retrieve information. |
| <b>RefreshLinkedTableInformationResult</b>     | Specifies information about a table.                   |

#### 3.1.4.24.3.1 RefreshLinkedTableInformationParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **RefreshLinkedTableInformationParameters** complex type specifies information that identifies the **linked table** ([\[MS-AXL2\]](#) section 2.1.1.6) about which the protocol client is requesting information.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="RefreshLinkedTableInformationParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ID:** See description of **ID** ([\[MS-AADT\]](#) section 3.1.4.16.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.16.3.1).

### 3.1.4.24.3.2 RefreshLinkedTableInformationResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **RefreshLinkedTableInformationResult** complex type specifies the table about which the protocol client requested information.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="RefreshLinkedTableInformationResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Objects:** MUST be present. See description of **Objects** ([\[MS-AADT\]](#) section 3.1.4.16.3.2).

#### 3.1.4.24.4 Simple Types

None.

#### 3.1.4.24.5 Attributes

None.

#### 3.1.4.24.6 Groups

None.

#### 3.1.4.24.7 Attribute Groups

None.



### 3.1.4.25 RenameAccessObject

This operation changes the name of an object in a database application.

The following is the WSDL port type specification of the **RenameAccessObject** WSDL operation.

```
<wsdl:operation name="RenameAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameAccessObject"
    message="tns:IAccessServiceSoap_RenameAccessObject_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameAccessObjectResponse"
    message="tns:IAccessServiceSoap_RenameAccessObject_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameAccessObjectAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_RenameAccessObject_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_RenameAccessObject\_InputMessage** (section [3.1.4.27.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_RenameAccessObject\_OutputMessage** (section [3.1.4.27.1.2](#)) response message as follows:

- If the **ObjectVersion** attribute specified in the **parameters** element in the **RenameAccessObject** element (section [3.1.4.27.2.1](#)) does not match the version token on the protocol server for the object being renamed, the protocol server MUST respond with a **IAccessServiceSoap\_RenameAccessObject\_OutputMessage** response message that contains the current definition of the indicated object and a **ServiceError** element as specified by [\[MS-AADT\]](#) section 2.2.4.12, and MUST NOT rename the object.
- If an error occurs on the protocol server during this operation, the protocol server MUST send a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_RenameAccessObject\_OutputMessage** response message that contains the specified information about the renamed object.

#### 3.1.4.25.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_RenameAccessObject_InputMessage</b>  | The request WSDL message for the <b>RenameAccessObject</b> WSDL operation.  |
| <b>IAccessServiceSoap_RenameAccessObject_OutputMessage</b> | The response WSDL message for the <b>RenameAccessObject</b> WSDL operation. |

##### 3.1.4.25.1.1 IAccessServiceSoap\_RenameAccessObject\_InputMessage

The request WSDL message for the **RenameAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameAccessObject
```

The SOAP body contains the **RenameAccessObject** element.

### 3.1.4.25.1.2 IAccessServiceSoap\_RenameAccessObject\_OutputMessage

The response WSDL message for the **RenameAccessObject** WSDL operation.

The SOAP body contains the **RenameAccessObjectResponse** element.

### 3.1.4.25.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                           | Description   |
|-----------------------------------|---|
| <b>RenameAccessObject</b>         | The input data for the <b>RenameAccessObject</b> WSDL operation.  |
| <b>RenameAccessObjectResponse</b> | The result data for the <b>RenameAccessObject</b> WSDL operation. |

### 3.1.4.25.2.1 RenameAccessObject

The **RenameAccessObject** element specifies the input data for the **RenameAccessObject** WSDL operation.

```
<xs:element name="RenameAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:RenameParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **RenameParameters** element (section [3.1.4.27.3.1](#)) that specifies the information that the protocol server needs to rename an object. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.25.2.2 RenameAccessObjectResponse

The **RenameAccessObjectResponse** element specifies the result data for the **RenameAccessObject** WSDL operation.

```

<xs:element name="RenameAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="RenameAccessObjectResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:RenameResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**RenameAccessObjectResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **RenameResult** element (section [3.1.4.27.3.2](#)) that specifies information about a renamed object for the protocol client to use.

### 3.1.4.25.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type            | Description                                      |
|-------------------------|--|
| <b>RenameParameters</b> | Specifies the object to rename and its new name. |
| <b>RenameResult</b>     | Specifies the renamed object.                    |

#### 3.1.4.25.3.1 RenameParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **RenameParameters** complex type specifies the information that the protocol server needs to rename an object.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="RenameParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="KnownObjects" nillable="true"
          type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ObjectVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="OpenObjects" nillable="true"
          type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**ID:** See description of **ID** ([\[MS-AADT\] section 3.1.4.6.3.1](#)).

**KnownObjects:** See description of **KnownObjects** ([\[MS-AADT\] section 3.1.4.6.3.1](#)).

**Name:** MUST be present. See description of **Name** ([MS-AADT] section 3.1.4.6.3.1).

**ObjectVersion:** See description of **ObjectVersion** ([MS-AADT] section 3.1.4.6.3.1).

**OpenObjects:** See description of **OpenObjects** ([MS-AADT] section 3.1.4.6.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([MS-AADT] section 3.1.4.6.3.1).

### 3.1.4.25.3.2 RenameResult

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

Type a brief description for the Complex Type.

The **RenameResult** complex type specifies information about the object that was requested to be renamed by the protocol client.

```
<xs:complexType name="RenameResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element
          xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
          minOccurs="0" name="Object" nillable="true" type="tns4:AccessObject"/>
        <xs:element minOccurs="0" name="UpdatedObjects" nillable="true"
          type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Error:** See description of **Error** ([MS-AADT] section 3.1.4.6.3.2).

**Object:** See description of **AccessObject** ([MS-AADT] section 3.1.4.6.3.2).

**UpdatedObjects:** See description of **UpdatedObjects** ([MS-AADT] section 3.1.4.6.3.2).

### 3.1.4.25.4 Simple Types

None.

### 3.1.4.25.5 Attributes

None.

### 3.1.4.25.6 Groups

None.

### 3.1.4.25.7 Attribute Groups

None.

### 3.1.4.26 SetDataConnectivityStatus

This operation enables or disables a login in the database application, which is used to connect to the database application directly.

The following is the WSDL port type specification of the **SetDataConnectivityStatus** WSDL operation.

```
<wsdl:operation name="SetDataConnectivityStatus"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetDataConnectivityStatus"
message="tns:IAccessServiceSoap_SetDataConnectivityStatus_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetDataConnectivityStatusResponse"
message="tns:IAccessServiceSoap_SetDataConnectivityStatus_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetDataConnectivityStatusAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SetDataConnectivityStatus_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_SetDataConnectivityStatus\_InputMessage** (section [3.1.4.28.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_SetDataConnectivityStatus\_OutputMessage** (section [3.1.4.28.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_SetDataConnectivityStatus\_OutputMessage** response message that contains information about the login which was enabled or disabled by the protocol operation.

### 3.1.4.26.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_SetDataConnectivityStatus_InputMessage</b>  | The request WSDL message for the <b>SetDataConnectivityStatus</b> WSDL operation.  |
| <b>IAccessServiceSoap_SetDataConnectivityStatus_OutputMessage</b> | The response WSDL message for the <b>SetDataConnectivityStatus</b> WSDL operation. |

#### 3.1.4.26.1.1 IAccessServiceSoap\_SetDataConnectivityStatus\_InputMessage

The request WSDL message for the **SetDataConnectivityStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetDataConnectivityStatus
```

The SOAP body contains the **SetDataConnectivityStatus** element.

### 3.1.4.26.1.2 IAccessServiceSoap\_SetDataConnectivityStatus\_OutputMessage

The response WSDL message for the **SetDataConnectivityStatus** WSDL operation.

The SOAP body contains the **SetDataConnectivityStatusResponse** element.

### 3.1.4.26.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                  | Description  |
|--|--|
| <b>SetDataConnectivityStatus</b>         | The input data for the <b>SetDataConnectivityStatus</b> WSDL operation.  |
| <b>SetDataConnectivityStatusResponse</b> | The result data for the <b>SetDataConnectivityStatus</b> WSDL operation. |

#### 3.1.4.26.2.1 SetDataConnectivityStatus

The **SetDataConnectivityStatus** element specifies the input data for the **SetDataConnectivityStatus** WSDL operation.

```
<xs:element name="SetDataConnectivityStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true"
        type="tns5:SetDataConnectivityStatusParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **SetDataConnectivityStatusParameters** (section [3.1.4.28.3.1](#)) that specifies the permission level of a login and whether it is to be enabled or disabled. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.26.2.2 SetDataConnectivityStatusResponse

The **SetDataConnectivityStatusResponse** element specifies the result data for the **SetDataConnectivityStatus** WSDL operation.

```
<xs:element name="SetDataConnectivityStatusResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
```

```

InternalService/" minOccurs="0" name="SetDataConnectivityStatusResult" nillable="true"
type="tns:CommandResult"/>
  <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:SetDataConnectivityStatusResult"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**SetDataConnectivityStatusResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **SetDataConnectivityStatusResult** (section [3.1.4.28.3.2](#)) that specifies whether enabling or disabling of the login with requested permission level was successful. MUST be present.

### 3.1.4.26.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                               | Description                                |
|--|--|
| <b>SetDataConnectivityStatusParameters</b> | See section <a href="#">3.1.4.28.3.1</a> . |
| <b>SetDataConnectivityStatusResult</b>     | See section <a href="#">3.1.4.28.3.2</a> . |

#### 3.1.4.26.3.1 SetDataConnectivityStatusParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **SetDataConnectivityStatusParameters** complex type specifies the input data for the **SetDataConnectivityStatus** protocol operation.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="SetDataConnectivityStatusParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="IsEnabled" type="xs:boolean"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**IsEnabled:** See description of **IsEnabled** ([\[MS-AADT\]](#) section 3.1.4.17.3.1).

**Permission:** MUST be present. See description of **Permission** ([\[MS-AADT\]](#) section 3.1.4.17.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.17.3.1).

#### 3.1.4.26.3.2 SetDataConnectivityStatusResult

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService

The **SetDataConnectivityStatusResult** complex type specifies the result data for the **SetDataConnectivityStatus** protocol operation.

The result data contains information about the login which is enabled or disabled by the protocol server during the execution of this operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="SetDataConnectivityStatusResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="ConnectivityStatusInformation" nillable="true"
type="tns1:ConnectivityStatusInformation"/>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ConnectivityStatusInformation:** MUST be present. See description of **ConnectivityStatusInformation** ([\[MS-AADT\]](#) section 3.1.4.17.3.2).

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.17.3.2).

### 3.1.4.26.4 Simple Types

None.

### 3.1.4.26.5 Attributes

None.

### 3.1.4.26.6 Groups

None.

### 3.1.4.26.7 Attribute Groups

None.

### 3.1.4.27 SetDataMacroTracing

This operation sets the data macro tracing option in a database application.

The following is the WSDL port type specification of the **SetDataMacroTracing** WSDL operation.

```
<wsdl:operation name="SetDataMacroTracing" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataMacroTracing"
message="tns:IAccessServiceSoap SetDataMacroTracing InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
```



```

erInternalService/IAccessServiceSoap/SetDataMacroTracingResponse"
message="tns:IAccessServiceSoap SetDataMacroTracing OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataMacroTracingAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap SetDataMacroTracing AccessServerMessageFault FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_SetDataMacroTracing\_InputMessage** (section [3.1.4.29.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_SetDataMacroTracing\_OutputMessage** (section [3.1.4.29.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_SetDataMacroTracing\_OutputMessage** response message that contains the information about the data macro tracing option.

### 3.1.4.27.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_SetDataMacroTracing_InputMessage</b>  | The request WSDL message for the <b>SetDataMacroTracing</b> WSDL operation.  |
| <b>IAccessServiceSoap_SetDataMacroTracing_OutputMessage</b> | The response WSDL message for the <b>SetDataMacroTracing</b> WSDL operation. |

#### 3.1.4.27.1.1 IAccessServiceSoap\_SetDataMacroTracing\_InputMessage

The request WSDL message for the **SetDataMacroTracing** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalSer
vice/IAccessServiceSoap/SetDataMacroTracing

```

The SOAP body contains the **SetDataMacroTracing** element.

#### 3.1.4.27.1.2 IAccessServiceSoap\_SetDataMacroTracing\_OutputMessage

The response WSDL message for the **SetDataMacroTracing** WSDL operation.

The SOAP body contains the **SetDataMacroTracingResponse** element.

### 3.1.4.27.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                            | Description  |
|------------------------------------|--|
| <b>SetDataMacroTracing</b>         | The input data for the <b>SetDataMacroTracing</b> WSDL operation.  |
| <b>SetDataMacroTracingResponse</b> | The result data for the <b>SetDataMacroTracing</b> WSDL operation. |

### 3.1.4.27.2.1 SetDataMacroTracing

The **SetDataMacroTracing** element specifies the input data for the **SetDataMacroTracing** WSDL operation.

```
<xs:element name="SetDataMacroTracing" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true"
        type="tns5:SetDataMacroTracingParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **SetDataMacroTracingParameters** element (section [3.1.4.29.3.1](#)) that specifies the information that the protocol server needs to set the data macro tracing option.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.27.2.2 SetDataMacroTracingResponse

The **SetDataMacroTracingResponse** element specifies the result data for the **SetDataMacroTracing** WSDL operation.

```
<xs:element name="SetDataMacroTracingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="SetDataMacroTracingResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:SetDataMacroTracingResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**SetDataMacroTracingResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **SetDataMacroTracingResult** element (section [3.1.4.29.3.2](#)) that specifies information about the data macro tracing option for the protocol client to use.

### 3.1.4.27.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                         | Description   |
|--------------------------------------|---|
| <b>SetDataMacroTracingParameters</b> | Specifies the data macro tracing option to set.               |
| <b>SetDataMacroTracingResult</b>     | Indicates whether the data macro tracing option is on or off. |

#### 3.1.4.27.3.1 SetDataMacroTracingParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **SetDataMacroTracingParameters** complex type specifies the information that the protocol server needs to set the data macro tracing option.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="SetDataMacroTracingParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="TurnTracingOn" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.7.3.1).

**TurnTracingOn:** See description of **TurnTracingOn** ([\[MS-AADT\]](#) section 3.1.4.7.3.1).

#### 3.1.4.27.3.2 SetDataMacroTracingResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **SetDataMacroTracingResult** complex type contains the current data macro tracing option after the request from the protocol client is made.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="SetDataMacroTracingResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="IsTracingOn" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**IsTracingOn:** See description of **IsTracingOn** ([\[MS-AADT\]](#) section 3.1.4.7.3.2).

### 3.1.4.27.4 Simple Types

None.

### 3.1.4.27.5 Attributes

None.

### 3.1.4.27.6 Groups

None.

### 3.1.4.27.7 Attribute Groups

None.

## 3.1.4.28 UpdateAccessObject

This operation updates an object in a database application.

The following is the WSDL port type specification of the **UpdateAccessObject** WSDL operation.

```
<wsdl:operation name="UpdateAccessObject" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateAccessObject"
    message="tns:IAccessServiceSoap_UpdateAccessObject_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateAccessObjectResponse"
    message="tns:IAccessServiceSoap_UpdateAccessObject_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateAccessObjectAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_UpdateAccessObject_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_UpdateAccessObject\_InputMessage** (section [3.1.4.30.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_UpdateAccessObject\_OutputMessage** (section [3.1.4.30.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with either a SOAP fault, as specified by section [2.2.9](#), or a **ServiceError**, as specified by [\[MS-AADT\]](#) section 2.2.4.12.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_UpdateAccessObject\_OutputMessage** response message that contains information about the updated object.

### 3.1.4.28.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_UpdateAccessObject_InputMessage</b>  | The request WSDL message for the <b>UpdateAccessObject</b> WSDL operation.  |
| <b>IAccessServiceSoap_UpdateAccessObject_OutputMessage</b> | The response WSDL message for the <b>UpdateAccessObject</b> WSDL operation. |

### 3.1.4.28.1.1 IAccessServiceSoap\_UpdateAccessObject\_InputMessage

The request WSDL message for the **UpdateAccessObject** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateAccessObject
```

The SOAP body contains the **UpdateAccessObject** element.

### 3.1.4.28.1.2 IAccessServiceSoap\_UpdateAccessObject\_OutputMessage

The response WSDL message for the **UpdateAccessObject** WSDL operation.

The SOAP body contains the **UpdateAccessObjectResponse** element.

## 3.1.4.28.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                           | Description   |
|-----------------------------------|---|
| <b>UpdateAccessObject</b>         | The input data for the <b>UpdateAccessObject</b> WSDL operation.  |
| <b>UpdateAccessObjectResponse</b> | The result data for the <b>UpdateAccessObject</b> WSDL operation. |

### 3.1.4.28.2.1 UpdateAccessObject

The **UpdateAccessObject** element specifies the input data for the **UpdateAccessObject** WSDL operation.

```
<xs:element name="UpdateAccessObject" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:UpdateParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** An **UpdateParameters** (section [3.1.4.30.3.1](#)) element that specifies information needed by the protocol server to update an object.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.28.2.2 UpdateAccessObjectResponse

The **UpdateAccessObjectResponse** element specifies the result data for the **UpdateAccessObject** WSDL operation.

```
<xs:element name="UpdateAccessObjectResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="UpdateAccessObjectResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService"
        minOccurs="0" name="result" nillable="true" type="tns5:UpdateResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**UpdateAccessObjectResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** An **UpdateResult** (section [3.1.4.30.3.2](#)) element that specifies information about the updated object.

### 3.1.4.28.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type            | Description  |
|-------------------------|--|
| <b>UpdateParameters</b> | Specifies which object the protocol client wants to update and the requested update. |
| <b>UpdateResult</b>     | Specifies information about the updated object.                                      |

#### 3.1.4.28.3.1 UpdateParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **UpdateParameters** complex type specifies the information that the protocol server needs to update an object.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="UpdateParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="BodyString" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="KnownObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ObjectVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="OpenObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**BodyString:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that represents the XML element defining the object to create, as described by the **Body** element of **UpdateParameters** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

**Description:** See description of **Description** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

**ID:** See description of **ID** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

**KnownObjects:** See description of **KnownObjects** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

**ObjectVersion:** See description of **ObjectVersion** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

**OpenObjects:** See description of **OpenObjects** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.8.3.1).

### 3.1.4.28.3.2 UpdateResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **UpdateResult** complex type specifies the updated object and possible dependent object, or objects that were updated in response to the request from the protocol client.

Optional: Type a detailed description for the Complex Type.

```

<xs:complexType name="UpdateResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
        <xs:element minOccurs="0" name="RefreshRequired" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**Error:** See description of **Error** ([\[MS-AADT\]](#) section 3.1.4.8.3.2).

**Objects:** See description of **Objects** ([\[MS-AADT\]](#) section 3.1.4.8.3.2).

**RefreshRequired:** See description of **RefreshRequired** ([\[MS-AADT\]](#) section 3.1.4.8.3.2).

### 3.1.4.28.4 Simple Types

None.

### 3.1.4.28.5 Attributes

None.

### 3.1.4.28.6 Groups

None.

### 3.1.4.28.7 Attribute Groups

None.

### 3.1.4.29 CheckCopyStatus

This operation retrieves the status of a **CopyDatabase** operation (section [3.1.4.32](#)).

The following is the WSDL port type specification of the **CheckCopyStatus** WSDL operation.

```
<wsdl:operation name="CheckCopyStatus" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CheckCopyStatus"
    message="tns:IAccessServiceSoap_CheckCopyStatus_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CheckCopyStatusResponse"
    message="tns:IAccessServiceSoap_CheckCopyStatus_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CheckCopyStatusDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_CheckCopyStatus_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_CheckCopyStatus\_InputMessage** (section [3.1.4.31.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_CheckCopyStatus\_OutputMessage** (section [3.1.4.31.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_CheckCopyStatus\_OutputMessage** response message that contains the status of the copy operation.

#### 3.1.4.29.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description   |
|---|---|
| <b>IAccessServiceSoap_CheckCopyStatus_InputMessage</b>  | The request WSDL message for the <b>CheckCopyStatus</b> WSDL operation. |
| <b>IAccessServiceSoap_CheckCopyStatus_OutputMessage</b> | The response WSDL message for the                                       |



| Message | Description                            |
|---------|--|
|         | <b>CheckCopyStatus</b> WSDL operation. |

### 3.1.4.29.1.1 IAccessServiceSoap\_CheckCopyStatus\_InputMessage

The request WSDL message for the **CheckCopyStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CheckCopyStatus
```

The SOAP body contains the **CheckCopyStatus** element.

### 3.1.4.29.1.2 IAccessServiceSoap\_CheckCopyStatus\_OutputMessage

The response WSDL message for the **CheckCopyStatus** WSDL operation.

The SOAP body contains the **CheckCopyStatusResponse** element.

## 3.1.4.29.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>CheckCopyStatus</b>         | The input data for the <b>CheckCopyStatus</b> WSDL operation.  |
| <b>CheckCopyStatusResponse</b> | The result data for the <b>CheckCopyStatus</b> WSDL operation. |

### 3.1.4.29.2.1 CheckCopyStatus

The **CheckCopyStatus** element specifies the input data for the **CheckCopyStatus** WSDL operation.

```
<xs:element name="CheckCopyStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
        minOccurs="0" name="sourceDatabase" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
        minOccurs="0" name="destinationDatabase" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**sourceDatabase:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the source database being copied. MUST match the **originalDatabaseContext** element of the **CopyDatabase** (section [3.1.4.32.2.1](#)) element supplied to an earlier **CopyDatabase** (section [3.1.4.32](#)) operation. MUST be present.

**destinationDatabase:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the copy of the database being created. MUST match the **DatabaseContext** element of the **provisionedDatabaseContext** element of the **CopyDatabaseResponse** (section [3.1.4.32.2.2](#)) element returned by an earlier **CopyDatabase** (section [3.1.4.32](#)) operation called with the **originalDatabaseContext** of the **CopyDatabase** (section [3.1.4.32.2.1](#)) element matching the **sourceDatabase** element. MUST be present.

### 3.1.4.29.2.2 CheckCopyStatusResponse

The **CheckCopyStatusResponse** element specifies the result data for the **CheckCopyStatus** WSDL operation.

```
<xs:element name="CheckCopyStatusResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CheckCopyStatusResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="copyStatus" type="xs:unsignedByte"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**CheckCopyStatusResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**copyStatus:** An **unsignedByte** ([\[XMLSCHEMA2\]](#) section 3.3.24) that specifies the completion percentage of the copy operation. MUST have a value between 0 and 100, inclusive.

### 3.1.4.29.3 Complex Types

None.

### 3.1.4.29.4 Simple Types

None.

### 3.1.4.29.5 Attributes

None.

### 3.1.4.29.6 Groups

None.

### 3.1.4.29.7 Attribute Groups

None.

### 3.1.4.30 CopyDatabase

This operation instructs the protocol server to begin copying a database.

The following is the WSDL port type specification of the **CopyDatabase** WSDL operation.

```
<wsdl:operation name="CopyDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CopyDatabase"
    message="tns:IAccessServiceSoap_CopyDatabase_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CopyDatabaseResponse"
    message="tns:IAccessServiceSoap_CopyDatabase_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CopyDatabaseDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_CopyDatabase_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_CopyDatabase\_InputMessage** (section [3.1.4.32.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_CopyDatabase\_OutputMessage** (section [3.1.4.32.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_CopyDatabase\_OutputMessage** response message that contains information about the copied database.

### 3.1.4.30.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_CopyDatabase_InputMessage</b>  | The request WSDL message for the <b>CopyDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_CopyDatabase_OutputMessage</b> | The response WSDL message for the <b>CopyDatabase</b> WSDL operation. |

#### 3.1.4.30.1.1 IAccessServiceSoap\_CopyDatabase\_InputMessage

The request WSDL message for the **CopyDatabase** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CopyDatabase
```

The SOAP body contains the **CopyDatabase** element.

### 3.1.4.30.1.2 IAccessServiceSoap\_CopyDatabase\_OutputMessage

The response WSDL message for the **CopyDatabase** WSDL operation.

The SOAP body contains the **CopyDatabaseResponse** element.

### 3.1.4.30.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                     | Description   |
|-----------------------------|---|
| <b>CopyDatabase</b>         | The input data for the <b>CopyDatabase</b> WSDL operation.  |
| <b>CopyDatabaseResponse</b> | The result data for the <b>CopyDatabase</b> WSDL operation. |

#### 3.1.4.30.2.1 CopyDatabase

The **CopyDatabase** element specifies the input data for the **CopyDatabase** WSDL operation.

```
<xs:element name="CopyDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="originalDatabaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="copyDatabaseName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**originalDatabaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies the database to copy. MUST be present.

**copyDatabaseName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the copy of the database. MUST be present.

#### 3.1.4.30.2.2 CopyDatabaseResponse

The **CopyDatabaseResponse** element specifies the result data for the **CopyDatabase** WSDL operation.

```
<xs:element name="CopyDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="CopyDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="provisionedDatabaseContext" nillable="true"
        type="tns2:ProvisionedDatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**CopyDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**provisionedDatabaseContext:** A **ProvisionedDatabaseContext** (section [2.2.4.14](#)) that specifies information about the copy of the database being created. MUST be present.

### 3.1.4.30.3 Complex Types

None.

### 3.1.4.30.4 Simple Types

None.

### 3.1.4.30.5 Attributes

None.

### 3.1.4.30.6 Groups

None.

### 3.1.4.30.7 Attribute Groups

None.

### 3.1.4.31 DatabaseExists

This operation is used to determine whether or not a database exists on the protocol server.

The following is the WSDL port type specification of the **DatabaseExists** WSDL operation.

```

<wsdl:operation name="DatabaseExists" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DatabaseExists"
    message="tns:IAccessServiceSoap_DatabaseExists_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DatabaseExistsResponse"
    message="tns:IAccessServiceSoap_DatabaseExists_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DatabaseExistsDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_DatabaseExists_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_DatabaseExists\_InputMessage** (section [3.1.4.33.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_DatabaseExists\_OutputMessage** (section [3.1.4.33.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_DatabaseExists\_OutputMessage** response message that contains information regarding the existence of the database.

### 3.1.4.31.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_DatabaseExists_InputMessage</b>  | The request WSDL message for the <b>DatabaseExists</b> WSDL operation.  |
| <b>IAccessServiceSoap_DatabaseExists_OutputMessage</b> | The response WSDL message for the <b>DatabaseExists</b> WSDL operation. |

#### 3.1.4.31.1.1 IAccessServiceSoap\_DatabaseExists\_InputMessage

The request WSDL message for the **DatabaseExists** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DatabaseExists
```

The SOAP body contains the **DatabaseExists** element.

#### 3.1.4.31.1.2 IAccessServiceSoap\_DatabaseExists\_OutputMessage

The response WSDL message for the **DatabaseExists** WSDL operation.

The SOAP body contains the **DatabaseExistsResponse** element.

### 3.1.4.31.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                       | Description   |
|-------------------------------|---|
| <b>DatabaseExists</b>         | The input data for the <b>DatabaseExists</b> WSDL operation.  |
| <b>DatabaseExistsResponse</b> | The result data for the <b>DatabaseExists</b> WSDL operation. |

#### 3.1.4.31.2.1 DatabaseExists

The **DatabaseExists** element specifies the input data for the **DatabaseExists** WSDL operation.

```
<xs:element name="DatabaseExists" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element
      xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
      InternalService/" minOccurs="0" name="commandParameter" nillable="true"
      type="tns:CommandParameter"/>
    <xs:element
      xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
      " minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database whose existence is to be checked. MUST be present.

### 3.1.4.31.2 DatabaseExistsResponse

The **DatabaseExistsResponse** element specifies the result data for the **DatabaseExists** WSDL operation.

```

<xs:element name="DatabaseExistsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="DatabaseExistsResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="exists" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**DatabaseExistsResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**exists:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the database that is specified by the **databaseContext** element of the **DatabaseExists** element (section [3.1.4.33.2.1](#)) in the request exists.

#### 3.1.4.31.3 Complex Types

None.

#### 3.1.4.31.4 Simple Types

None.

#### 3.1.4.31.5 Attributes

None.

#### 3.1.4.31.6 Groups

None.

#### 3.1.4.31.7 Attribute Groups

None.

### 3.1.4.32 ExecuteDacIncrementalUpgrade

Instructs the protocol server to update the contents of a database.

The following is the WSDL port type specification of the **ExecuteDacIncrementalUpgrade** WSDL operation.

```
<wsdl:operation name="ExecuteDacIncrementalUpgrade"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgrade"
message="tns:IAccessServiceSoap_ExecuteDacIncrementalUpgrade_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgradeResponse"
message="tns:IAccessServiceSoap_ExecuteDacIncrementalUpgrade_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgradeDatabaseProviderMessageFault
" name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_ExecuteDacIncrementalUpgrade_DatabaseProviderMessageFault_Fau
ltMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_ExecuteDacIncrementalUpgrade\_InputMessage** (section [3.1.4.34.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_ExecuteDacIncrementalUpgrade\_OutputMessage** (section [3.1.4.34.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_ExecuteDacIncrementalUpgrade\_OutputMessage** response message.

#### 3.1.4.32.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_ExecuteDacIncrementalUpgrade_InputMessage</b>  | The request WSDL message for the <b>ExecuteDacIncrementalUpgrade</b> WSDL operation.  |
| <b>IAccessServiceSoap_ExecuteDacIncrementalUpgrade_OutputMessage</b> | The response WSDL message for the <b>ExecuteDacIncrementalUpgrade</b> WSDL operation. |

##### 3.1.4.32.1.1 IAccessServiceSoap\_ExecuteDacIncrementalUpgrade\_InputMessage

The request WSDL message for the **ExecuteDacIncrementalUpgrade** WSDL operation.



The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServerInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgrade
```

The SOAP body contains the **ExecuteDacIncrementalUpgrade** element.

### 3.1.4.32.1.2 IAccessServiceSoap\_ExecuteDacIncrementalUpgrade\_OutputMessage

The response WSDL message for the **ExecuteDacIncrementalUpgrade** WSDL operation.

The SOAP body contains the **ExecuteDacIncrementalUpgradeResponse** element.

### 3.1.4.32.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                     | Description   |
|---|---|
| <b>ExecuteDacIncrementalUpgrade</b>         | The input data for the <b>ExecuteDacIncrementalUpgrade</b> WSDL operation.  |
| <b>ExecuteDacIncrementalUpgradeResponse</b> | The result data for the <b>ExecuteDacIncrementalUpgrade</b> WSDL operation. |

#### 3.1.4.32.2.1 ExecuteDacIncrementalUpgrade

The **ExecuteDacIncrementalUpgrade** element specifies the input data for the **ExecuteDacIncrementalUpgrade** WSDL operation.

```
<xs:element name="ExecuteDacIncrementalUpgrade" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="loginName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="encodedDac" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to update. MUST be present.

**loginName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies a database login to grant access to the updated database. If not specified, the protocol server will not grant any additional access to the updated database.

**encodedDac:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies updated contents for the database specified by the **databaseContext** element. The format of this **string** is a **base64**

**encoding** of a data-tier application schema and data file, as specified by [\[MS-DACPAC\]](#). MUST be present.

### 3.1.4.32.2 ExecuteDacIncrementalUpgradeResponse

The **ExecuteDacIncrementalUpgradeResponse** element specifies the result data for the **ExecuteDacIncrementalUpgrade** WSDL operation.

```
<xs:element name="ExecuteDacIncrementalUpgradeResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="ExecuteDacIncrementalUpgradeResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**ExecuteDacIncrementalUpgradeResult: A CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.32.3 Complex Types

None.

### 3.1.4.32.4 Simple Types

None.

### 3.1.4.32.5 Attributes

None.

### 3.1.4.32.6 Groups

None.

### 3.1.4.32.7 Attribute Groups

None.

### 3.1.4.33 GetAvailableServer

This operation returns an available database server on which new databases can be created using a given mode of authentication with a given package source.

The following is the WSDL port type specification of the **GetAvailableServer** WSDL operation.

```
<wsdl:operation name="GetAvailableServer" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAvailableServer"
message="tns:IAccessServiceSoap GetAvailableServer InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAvailableServerResponse"
```

```

message="tns:IAccessServiceSoap_GetAvailableServer_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAvailableServerDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_GetAvailableServer_DatabaseProviderMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetAvailableServer\_InputMessage** (section [3.1.4.35.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetAvailableServer\_OutputMessage** (section [3.1.4.35.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_GetAvailableServer\_OutputMessage** response message that contains information about an available server.

### 3.1.4.33.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetAvailableServer_InputMessage</b>  | The request WSDL message for the <b>GetAvailableServer</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetAvailableServer_OutputMessage</b> | The response WSDL message for the <b>GetAvailableServer</b> WSDL operation. |

#### 3.1.4.33.1.1 IAccessServiceSoap\_GetAvailableServer\_InputMessage

The request WSDL message for the **GetAvailableServer** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAvailableServer

```

The SOAP body contains the **GetAvailableServer** element.

#### 3.1.4.33.1.2 IAccessServiceSoap\_GetAvailableServer\_OutputMessage

The response WSDL message for the **GetAvailableServer** WSDL operation.

The SOAP body contains the **GetAvailableServerResponse** element.

### 3.1.4.33.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                           | Description   |
|-----------------------------------|---|
| <b>GetAvailableServer</b>         | The input data for the <b>GetAvailableServer</b> WSDL operation.  |
| <b>GetAvailableServerResponse</b> | The result data for the <b>GetAvailableServer</b> WSDL operation. |

### 3.1.4.33.2.1 GetAvailableServer

The **GetAvailableServer** element specifies the input data for the **GetAvailableServer** WSDL operation.

```
<xs:element name="GetAvailableServer" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="authMode" type="tns2:SqlAuthenticationMode"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="packageSource" type="tns2:PackageSource"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**authMode:** A **SqlAuthenticationMode** (section [2.2.5.19](#)) that specifies a requirement that the database server specified in the response to the **GetAvailableServer** operation MUST support that particular mode of authentication.

**packageSource:** A **PackageSource** (section [2.2.5.9](#)) that specifies a requirement that the database server specified in the response to the **GetAvailableServer** operation MUST support packages from that origin.

### 3.1.4.33.2.2 GetAvailableServerResponse

The **GetAvailableServerResponse** element specifies the result data for the **GetAvailableServer** WSDL operation.

```
<xs:element name="GetAvailableServerResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetAvailableServerResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="serverContext" nillable="true" type="tns2:ServerContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetAvailableServerResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**serverContext:** A **ServerContext** (section [2.2.4.16](#)) that specifies a server that can be used successfully in the **Server** element of the **databaseContext** element of the **ProvisionDatabase** element (section [3.1.4.38.2.1](#)) in a future call to **ProvisionDatabase** (section [3.1.4.38](#)). MUST be present.

### 3.1.4.33.3 Complex Types

None.

### 3.1.4.33.4 Simple Types

None.

### 3.1.4.33.5 Attributes

None.

### 3.1.4.33.6 Groups

None.

### 3.1.4.33.7 Attribute Groups

None.

## 3.1.4.34 GetPackage

This operation retrieves a package that represents a database application, including its objects and data.

The following is the WSDL port type specification of the **GetPackage** WSDL operation.

```
<wsdl:operation name="GetPackage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetPackage"
    message="tns:IAccessServiceSoap_GetPackage_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetPackageResponse"
    message="tns:IAccessServiceSoap_GetPackage_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetPackageAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetPackage_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetPackage\_InputMessage** (section [3.1.4.36.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetPackage\_OutputMessage** (section [3.1.4.36.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).

- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_GetPackage\_OutputMessage** response message that contains the package.

### 3.1.4.34.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetPackage_InputMessage</b>  | The request WSDL message for the <b>GetPackage</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetPackage_OutputMessage</b> | The response WSDL message for the <b>GetPackage</b> WSDL operation. |

#### 3.1.4.34.1.1 IAccessServiceSoap\_GetPackage\_InputMessage

The request WSDL message for the **GetPackage** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetPackage
```

The SOAP body contains the **GetPackage** element.

#### 3.1.4.34.1.2 IAccessServiceSoap\_GetPackage\_OutputMessage

The response WSDL message for the **GetPackage** WSDL operation.

The SOAP body contains the **GetPackageResponse** element.

### 3.1.4.34.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                   | Description   |
|---------------------------|---|
| <b>GetPackage</b>         | The input data for the <b>GetPackage</b> WSDL operation.  |
| <b>GetPackageResponse</b> | The result data for the <b>GetPackage</b> WSDL operation. |

#### 3.1.4.34.2.1 GetPackage

The **GetPackage** element specifies the input data for the **GetPackage** WSDL operation.

```
<xs:element name="GetPackage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
```

```

InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
  <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="packageParams" nillable="true" type="tns5:GetPackageParameters"/>
  <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>

```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**packageParams:** A **GetPackageParameters** (section [3.1.4.36.3.1](#)) that specifies the identifier of the package to retrieve. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.34.2.2 GetPackageResponse

The **GetPackageResponse** element specifies the result data for the **GetPackage** WSDL operation.

```

<xs:element name="GetPackageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="GetPackageResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:GetPackageResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**GetPackageResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **GetPackageResult** element (section [3.1.4.36.3.2](#)) that contains the package. MUST be present.

### 3.1.4.34.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                | Description   |
|-----------------------------|---|
| <b>GetPackageParameters</b> | Specifies the identifier of the package that the protocol client is requesting. |
| <b>GetPackageResult</b>     | Specifies the status of the package and contains the created package.           |

#### 3.1.4.34.3.1 GetPackageParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetPackageParameters** complex type specifies the identifier of the package for the protocol server to retrieve.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetPackageParameters" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="PackageId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**PackageId:** MUST be present. See description of **PackageId** ([\[MS-AADT\]](#) section 3.1.4.18.3.1).

**ProtocolVersion:** MUST be present. See description of **ProtocolVersion** ([\[MS-AADT\]](#) section 3.1.4.18.3.1).

### 3.1.4.34.3.2 GetPackageResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **GetPackageResult** complex type specifies the status of the package specified by the **GetPackageParameters** (section [3.1.4.36.3.1](#)) element in the request from the protocol client and, if the package has been created, contains the package.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="GetPackageResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Data" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Status" type="tns5:PackageStatus"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**Data:** See description of **Data** ([\[MS-AADT\]](#) section 3.1.4.18.3.2).

**Status:** See description of **Status** ([\[MS-AADT\]](#) section 3.1.4.18.3.2).

### 3.1.4.34.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type          | Description  |
|----------------------|--|
| <b>PackageStatus</b> | Specifies the status of a package that was requested by a protocol client. |

#### 3.1.4.34.4.1 PackageStatus

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

Specifies the status of a package that was requested by a protocol client.



Optional: Type a detailed description for the Simple Type.

```
<xs:simpleType name="PackageStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Creating"/>
    <xs:enumeration value="Created"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **PackageStatus** simple type.

| Value    | Meaning  |
|----------|--|
| Creating | The protocol server is still creating the package.     |
| Created  | The protocol server has finished creating the package. |

#### 3.1.4.34.5 Attributes

None.

#### 3.1.4.34.6 Groups

None.

#### 3.1.4.34.7 Attribute Groups

None.

#### 3.1.4.35 GetServerName

Retrieves the name of a database server associated with a given handle.

The following is the WSDL port type specification of the **GetServerName** WSDL operation.

```
<wsdl:operation name="GetServerName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetServerName"
    message="tns:IAccessServiceSoap_GetServerName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetServerNameResponse"
    message="tns:IAccessServiceSoap_GetServerName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/GetServerNameDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_GetServerName_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetServerName\_InputMessage** (section [3.1.4.37.1.1](#)) request message and the protocol server responds with an

**IAccessServiceSoap\_GetServerName\_OutputMessage** (section [3.1.4.37.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_GetServerName\_OutputMessage** response message that contains the name of the server requested.

### 3.1.4.35.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetServerName_InputMessage</b>  | The request WSDL message for the <b>GetServerName</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetServerName_OutputMessage</b> | The response WSDL message for the <b>GetServerName</b> WSDL operation. |

#### 3.1.4.35.1.1 IAccessServiceSoap\_GetServerName\_InputMessage

The request WSDL message for the **GetServerName** WSDL operation.

The SOAP action value is:

`http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetServerName`

The SOAP body contains the **GetServerName** element.

#### 3.1.4.35.1.2 IAccessServiceSoap\_GetServerName\_OutputMessage

The response WSDL message for the **GetServerName** WSDL operation.

The SOAP body contains the **GetServerNameResponse** element.

### 3.1.4.35.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                      | Description  |
|------------------------------|--|
| <b>GetServerName</b>         | The input data for the <b>GetServerName</b> WSDL operation.  |
| <b>GetServerNameResponse</b> | The result data for the <b>GetServerName</b> WSDL operation. |

#### 3.1.4.35.2.1 GetServerName

The **GetServerName** element specifies the input data for the **GetServerName** WSDL operation.

```

<xs:element name="GetServerName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="serverReferenceId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**serverReferenceId:** A **guid** (section [2.2.5.8](#)) that specifies a value that is used as a handle to a database server, as appears in the **ServerReferenceId** element of a **ServerContext** element (section [2.2.4.16](#)).

### 3.1.4.35.2.2 GetServerNameResponse

The **GetServerNameResponse** element specifies the result data for the **GetServerName** WSDL operation.

```

<xs:element name="GetServerNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetServerNameResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="serverName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**GetServerNameResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**serverName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the database server corresponding to the **serverReferenceId** of the **GetServerName** element (section [3.1.4.37.2.1](#)) in the request to this operation. MUST be present.

### 3.1.4.35.3 Complex Types

None.

### 3.1.4.35.4 Simple Types

None.

### 3.1.4.35.5 Attributes

None.

### 3.1.4.35.6 Groups

None.

### 3.1.4.35.7 Attribute Groups

None.

### 3.1.4.36 ProvisionDatabase

Instructs the protocol server to create a new database.

The following is the WSDL port type specification of the **ProvisionDatabase** WSDL operation.

```
<wsdl:operation name="ProvisionDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ProvisionDatabase"
    message="tns:IAccessServiceSoap_ProvisionDatabase_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ProvisionDatabaseResponse"
    message="tns:IAccessServiceSoap_ProvisionDatabase_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ProvisionDatabaseDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_ProvisionDatabase_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_ProvisionDatabase\_InputMessage** (section [3.1.4.38.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_ProvisionDatabase\_OutputMessage** (section [3.1.4.38.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_ProvisionDatabase\_OutputMessage** response message that contains information about the newly created database.

#### 3.1.4.36.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_ProvisionDatabase_InputMessage</b>  | The request WSDL message for the <b>ProvisionDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_ProvisionDatabase_OutputMessage</b> | The response WSDL message for the <b>ProvisionDatabase</b> WSDL operation. |

#### 3.1.4.36.1.1 IAccessServiceSoap\_ProvisionDatabase\_InputMessage

The request WSDL message for the **ProvisionDatabase** WSDL operation.

The SOAP action value is:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ProvisionDatabase

The SOAP body contains the **ProvisionDatabase** element.

### 3.1.4.36.1.2 IAccessServiceSoap\_ProvisionDatabase\_OutputMessage

The response WSDL message for the **ProvisionDatabase** WSDL operation.

The SOAP body contains the **ProvisionDatabaseResponse** element.

### 3.1.4.36.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>ProvisionDatabase</b>         | The input data for the <b>ProvisionDatabase</b> WSDL operation.  |
| <b>ProvisionDatabaseResponse</b> | The result data for the <b>ProvisionDatabase</b> WSDL operation. |

#### 3.1.4.36.2.1 ProvisionDatabase

The **ProvisionDatabase** element specifies the input data for the **ProvisionDatabase** WSDL operation.

```
<xs:element name="ProvisionDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="encodedDac" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to create. The **ServerContext** (section [2.2.4.16](#)) specified by the **Server** element of **databaseContext** MUST be a value returned by a call to **GetAvailableServer** (section [3.1.4.35](#)). MUST be present.

**encodedDac:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the contents of the database to create. The format of this **string** is a base64 encoding of a data-tier application schema and data file as specified by [\[MS-DACPAC\]](#). MUST be present.

#### 3.1.4.36.2.2 ProvisionDatabaseResponse

The **ProvisionDatabaseResponse** element specifies the result data for the **ProvisionDatabase** WSDL operation.

```

<xs:element name="ProvisionDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="ProvisionDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="provisionedDatabaseContext" nillable="true"
        type="tns2:ProvisionedDatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**ProvisionDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**provisionedDatabaseContext:** A **ProvisionedDatabaseContext** (section [2.2.4.14](#)) that specifies information about the database created. MUST be present. If the **PackageType** element of the **DatabaseContext** element of **ProvisionedDatabaseContext** is "Access", then no permissions are associated with the **DboCredential** element of the **ProvisionedDatabaseContext**.

### 3.1.4.36.3 Complex Types

None.

### 3.1.4.36.4 Simple Types

None.

### 3.1.4.36.5 Attributes

None.

### 3.1.4.36.6 Groups

None.

### 3.1.4.36.7 Attribute Groups

None.

### 3.1.4.37 RenameDatabase

Changes the name of a database.

The following is the WSDL port type specification of the **RenameDatabase** WSDL operation.

```

<wsdl:operation name="RenameDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/RenameDatabase"
    message="tns:IAccessServiceSoap_RenameDatabase_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/RenameDatabaseResponse"
    message="tns:IAccessServiceSoap_RenameDatabase_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

    <wsdl:fault
      wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameDatabaseDatabaseProviderMessageFault"
      name="DatabaseProviderMessageFault"
      message="tns:IAccessServiceSoap_RenameDatabase_DatabaseProviderMessageFault_FaultMessage"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_RenameDatabase\_InputMessage** (section [3.1.4.39.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_RenameDatabase\_OutputMessage** (section [3.1.4.39.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_RenameDatabase\_OutputMessage** response message.

### 3.1.4.37.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_RenameDatabase_InputMessage</b>  | The request WSDL message for the <b>RenameDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_RenameDatabase_OutputMessage</b> | The response WSDL message for the <b>RenameDatabase</b> WSDL operation. |

#### 3.1.4.37.1.1 IAccessServiceSoap\_RenameDatabase\_InputMessage

The request WSDL message for the **RenameDatabase** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameDatabase

```

The SOAP body contains the **RenameDatabase** element.

#### 3.1.4.37.1.2 IAccessServiceSoap\_RenameDatabase\_OutputMessage

The response WSDL message for the **RenameDatabase** WSDL operation.

The SOAP body contains the **RenameDatabaseResponse** element.

### 3.1.4.37.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                       | Description   |
|-------------------------------|---|
| <b>RenameDatabase</b>         | The input data for the <b>RenameDatabase</b> WSDL operation.  |
| <b>RenameDatabaseResponse</b> | The result data for the <b>RenameDatabase</b> WSDL operation. |

### 3.1.4.37.2.1 RenameDatabase

The **RenameDatabase** element specifies the input data for the **RenameDatabase** WSDL operation.

```
<xs:element name="RenameDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="newDatabaseName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to rename. MUST be present.

**newDatabaseName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the new name to give the database specified by the **databaseContext** element. MUST be present.

### 3.1.4.37.2.2 RenameDatabaseResponse

The **RenameDatabaseResponse** element specifies the result data for the **RenameDatabase** WSDL operation.

```
<xs:element name="RenameDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="RenameDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**RenameDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.37.3 Complex Types

None.

### 3.1.4.37.4 Simple Types



None.

### 3.1.4.37.5 Attributes

None.

### 3.1.4.37.6 Groups

None.

### 3.1.4.37.7 Attribute Groups

None.

### 3.1.4.38 SetReadWrite

Instructs the protocol server to toggle a database between read-only and read-write states.

The following is the WSDL port type specification of the **SetReadWrite** WSDL operation.

```
<wsdl:operation name="SetReadWrite" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetReadWrite"
    message="tns:IAccessServiceSoap_SetReadWrite_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetReadWriteResponse"
    message="tns:IAccessServiceSoap_SetReadWrite_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetReadWriteDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_SetReadWrite_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_SetReadWrite\_InputMessage** (section [3.1.4.40.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_SetReadWrite\_OutputMessage** (section [3.1.4.40.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_SetReadWrite\_OutputMessage** response message.

#### 3.1.4.38.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_SetReadWrite_InputMessage</b> | The request WSDL message for the <b>SetReadWrite</b> WSDL operation. |

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_SetReadWrite_OutputMessage</b> | The response WSDL message for the <b>SetReadWrite</b> WSDL operation. |

### 3.1.4.38.1.1 IAccessServiceSoap\_SetReadWrite\_InputMessage

The request WSDL message for the **SetReadWrite** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetReadWrite
```

The SOAP body contains the **SetReadWrite** element.

### 3.1.4.38.1.2 IAccessServiceSoap\_SetReadWrite\_OutputMessage

The response WSDL message for the **SetReadWrite** WSDL operation.

The SOAP body contains the **SetReadWriteResponse** element.

## 3.1.4.38.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                     | Description   |
|-----------------------------|---|
| <b>SetReadWrite</b>         | The input data for the <b>SetReadWrite</b> WSDL operation.  |
| <b>SetReadWriteResponse</b> | The result data for the <b>SetReadWrite</b> WSDL operation. |

### 3.1.4.38.2.1 SetReadWrite

The **SetReadWrite** element specifies the input data for the **SetReadWrite** WSDL operation.

```
<xs:element name="SetReadWrite" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="readWrite" type="tns2:DatabaseReadWriteState"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). **MUST** be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database for which to toggle the read-only/read-write state. MUST be present.

**readWrite:** A **DatabaseReadWriteState** (section [3.1.4.38.4.1](#)) that specifies whether to set the database specified by the **databaseContext** element to read-only or read-write state.

### 3.1.4.38.2.2 SetReadWriteResponse

The **SetReadWriteResponse** element specifies the result data for the **SetReadWrite** WSDL operation.

```
<xs:element name="SetReadWriteResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="SetReadWriteResult" nillable="true"
        type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**SetReadWriteResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.38.3 Complex Types

None.

### 3.1.4.38.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type                   | Description   |
|-------------------------------|---|
| <b>DatabaseReadWriteState</b> | Specifies whether a database is to be set to read-only or read-write state. |

#### 3.1.4.38.4.1 DatabaseReadWriteState

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies whether a database is to be set in read-only or read-write mode.

Optional: Type a detailed description for the Simple Type.

```
<xs:simpleType name="DatabaseReadWriteState" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Read"/>
    <xs:enumeration value="ReadWrite"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **DatabaseReadWriteState** simple type.

| Value | Meaning  |
|-------|--|
| Read  | Specifies that the database is to be set to read-only state. |

| Value     | Meaning   |
|-----------|---|
| ReadWrite | Specifies that the database is to be set to read-write state. |

### 3.1.4.38.5 Attributes

None.

### 3.1.4.38.6 Groups

None.

### 3.1.4.38.7 Attribute Groups

None.

### 3.1.4.39 UnprovisionDatabase

Instructs the protocol server to delete a database.

The following is the WSDL port type specification of the **UnprovisionDatabase** WSDL operation.

```
<wsdl:operation name="UnprovisionDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UnprovisionDatabase"
    message="tns:IAccessServiceSoap_UnprovisionDatabase_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UnprovisionDatabaseResponse"
    message="tns:IAccessServiceSoap_UnprovisionDatabase_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UnprovisionDatabaseDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_UnprovisionDatabase_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_UnprovisionDatabase\_InputMessage** (section [3.1.4.41.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_UnprovisionDatabase\_OutputMessage** (section [3.1.4.41.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_UnprovisionDatabase\_OutputMessage** response message.

#### 3.1.4.39.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_UnprovisionDatabase_InputMessage</b>  | The request WSDL message for the <b>UnprovisionDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_UnprovisionDatabase_OutputMessage</b> | The response WSDL message for the <b>UnprovisionDatabase</b> WSDL operation. |

### 3.1.4.39.1.1 IAccessServiceSoap\_UnprovisionDatabase\_InputMessage

The request WSDL message for the **UnprovisionDatabase** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UnprovisionDatabase
```

The SOAP body contains the **UnprovisionDatabase** element.

### 3.1.4.39.1.2 IAccessServiceSoap\_UnprovisionDatabase\_OutputMessage

The response WSDL message for the **UnprovisionDatabase** WSDL operation.

The SOAP body contains the **UnprovisionDatabaseResponse** element.

## 3.1.4.39.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                            | Description  |
|------------------------------------|--|
| <b>UnprovisionDatabase</b>         | The input data for the <b>UnprovisionDatabase</b> WSDL operation.  |
| <b>UnprovisionDatabaseResponse</b> | The result data for the <b>UnprovisionDatabase</b> WSDL operation. |

### 3.1.4.39.2.1 UnprovisionDatabase

The **UnprovisionDatabase** element specifies the input data for the **UnprovisionDatabase** WSDL operation.

```
<xs:element name="UnprovisionDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="dropLogin" type="xs:boolean"/>
      <xs:element minOccurs="0" name="cutoffDate" nillable="true" type="xs:dateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to delete. MUST be present.

**dropLogin:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether the protocol client is requesting the protocol server to also delete the account used for accessing the database specified by **databaseContext**.

**cutoffDate:** A **dateTime** ([XMLSCHEMA2] section 3.2.7) that specifies the date to determine the database history to retain for the database specified by **databaseContext**.

### 3.1.4.39.2 UnprovisionDatabaseResponse

The **UnprovisionDatabaseResponse** element specifies the result data for the **UnprovisionDatabase** WSDL operation.

```
<xs:element name="UnprovisionDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="UnprovisionDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**UnprovisionDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.39.3 Complex Types

None.

### 3.1.4.39.4 Simple Types

None.

### 3.1.4.39.5 Attributes

None.

### 3.1.4.39.6 Groups

None.

### 3.1.4.39.7 Attribute Groups

None.

### 3.1.4.40 GetAutoSumValues

The **GetAutoSumValues** operation retrieves the result of applying aggregate functions specified by **autoSumFunctions** (section [3.1.4.42.2.1](#)) on fields (2) specified by **autoSumFields** (section [3.1.4.42.2.1](#)). The fields (2) MUST belong to the **Source** (section [3.1.1](#)) specified by the **source** input element (section [3.1.4.42.2.1](#)).

The following is the WSDL port type specification of the **GetAutoSumValues** WSDL operation.

```

<wsdl:operation name="GetAutoSumValues" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAutoSumValues"
    message="tns:IAccessServiceSoap_GetAutoSumValues_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAutoSumValuesResponse"
    message="tns:IAccessServiceSoap_GetAutoSumValues_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAutoSumValuesAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetAutoSumValues_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetAutoSumValues\_InputMessage** (section [3.1.4.42.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetAutoSumValues\_OutputMessage** (section [3.1.4.42.1.2](#)) response message as follows:

- The protocol server retrieves the result of aggregate functions specified by **autoSumFunctions** (section 3.1.4.42.2.1) when applied to the fields (2) specified by the **autoSumFields** (section 3.1.4.42.2.1).
- Exactly one row is returned to the protocol client.
- The number of values in the row MUST be equal to the number of **autoSumFunctions** (section 3.1.4.42.2.1).
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one of the values specified in section [2.2.9.1](#), section [2.2.9.2](#) or section [2.2.9.3](#).

### 3.1.4.40.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetAutoSumValues_InputMessage</b>  | The request WSDL message for the <b>GetAutoSumValues</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetAutoSumValues_OutputMessage</b> | The response WSDL message for the <b>GetAutoSumValues</b> WSDL operation. |

#### 3.1.4.40.1.1 IAccessServiceSoap\_GetAutoSumValues\_InputMessage

The request WSDL message for the **GetAutoSumValues** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAutoSumValues

```

The SOAP body contains the **GetAutoSumValues** element.

### 3.1.4.40.1.2 IAccessServiceSoap\_GetAutoSumValues\_OutputMessage

The response WSDL message for the **GetAutoSumValues** WSDL operation.

The SOAP body contains the **GetAutoSumValuesResponse** element.

### 3.1.4.40.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                         | Description   |
|---------------------------------|---|
| <b>GetAutoSumValues</b>         | The input data for the <b>GetAutoSumValues</b> WSDL operation.  |
| <b>GetAutoSumValuesResponse</b> | The result data for the <b>GetAutoSumValues</b> WSDL operation. |

### 3.1.4.40.2.1 GetAutoSumValues

The **GetAutoSumValues** element specifies the input data for the **GetAutoSumValues** WSDL operation.

```
<xs:element name="GetAutoSumValues" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="autoSumFields" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="autoSumFunctions" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a result set. MUST be present. MUST contain an identifier that was previously supplied during the session as the **source** element for the input to the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

**autoSumFields:** An **ArrayOfstring** (section [2.2.4.46](#)) that specifies the names of fields (2) for which the protocol server applies the **autoSumFunctions**. MUST be present. MUST contain at least one element.

**autoSumFunctions:** An **ArrayOfstring** (section [2.2.4.46](#)) that specifies the aggregate functions to be applied to the **autoSumFields**. MUST be present. The number of elements in **autoSumFunctions** MUST be exactly equal to the number of elements in the **autoSumFields**.

**restriction:** A **CT\_Expression** ([\[MS-AXL2\]](#) section 2.2.3.1) that specifies a restriction expression to be applied while calculating the aggregate results. Only rows in the **Source** that return "true" for this restriction expression are included while calculating the aggregate result.



**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. MUST be present. SHOULD be ignored by the protocol server.

### 3.1.4.40.2.2 GetAutoSumValuesResponse

The **GetAutoSumValuesResponse** element specifies the result data for the **GetAutoSumValues** WSDL operation.

```
<xs:element name="GetAutoSumValuesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="GetAutoSumValuesResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="values" nillable="true" type="q3:ArrayOfanyType"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetAutoSumValuesResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**values:** An **ArrayOfanyType** (section [2.2.4.36](#)) that specifies the result of aggregate functions specified by **autoSumFunctions** (section [3.1.4.42.2.1](#)) when applied to the fields (2) specified by the **autoSumFields** (section [3.1.4.42.2.1](#)). The number of values MUST be equal to the number of **autoSumFunctions** (section [3.1.4.42.2.1](#)).

### 3.1.4.40.3 Complex Types

None.

### 3.1.4.40.4 Simple Types

None.

### 3.1.4.40.5 Attributes

None.

### 3.1.4.40.6 Groups

None.

### 3.1.4.40.7 Attribute Groups

None.

### 3.1.4.41 GetSearchData

This operation retrieves records from **Source** (section [3.1.1.1](#)), specified by **source** (section [3.1.4.43.2.1](#)), which is an input element to the protocol operation.

The following is the WSDL port type specification of the **GetSearchData** WSDL operation.

```
<wsdl:operation name="GetSearchData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetSearchData"
  >
```

```

message="tns:IAccessServiceSoap_GetSearchData_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetSearchDataResponse"
message="tns:IAccessServiceSoap_GetSearchData_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetSearchDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetSearchData_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetSearchData\_InputMessage** (section 3.1.4.43.2.1) request message and the protocol server responds with an **IAccessServiceSoap\_GetSearchData\_OutputMessage** (section 3.1.4.43.2.2) response message as follows:

- A maximum of **maxResults** (section 3.1.4.43.2.1) records are retrieved.
- In each record, the combination of values of fields (2) specified by **primaryDisplayField** (section 3.1.4.43.2.1) and **SecondaryDisplayField** (section 3.1.4.43.2.1) MUST be distinct.
- Only records where the value of the field (2), specified by **primaryDisplayField**, contains the **userInput** element (section 3.1.4.43.2.1) are retrieved.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section 2.2.9. The **Id** element of the **AccessServerMessage** MUST be one of the values specified in section 2.2.9.1 or section 2.2.9.2.

### 3.1.4.41.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetSearchData_InputMessage</b>  | The request WSDL message for the <b>GetSearchData</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetSearchData_OutputMessage</b> | The response WSDL message for the <b>GetSearchData</b> WSDL operation. |

#### 3.1.4.41.1.1 IAccessServiceSoap\_GetSearchData\_InputMessage

The request WSDL message for the **GetSearchData** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalSer
vice/IAccessServiceSoap/GetSearchData

```

The SOAP body contains the **GetSearchData** element.

#### 3.1.4.41.1.2 IAccessServiceSoap\_GetSearchData\_OutputMessage

The response WSDL message for the **GetSearchData** WSDL operation.

The SOAP body contains the **GetSearchDataResponse** element.

### 3.1.4.41.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                      | Description  |
|------------------------------|--|
| <b>GetSearchData</b>         | The input data for the <b>GetSearchData</b> WSDL operation.  |
| <b>GetSearchDataResponse</b> | The result data for the <b>GetSearchData</b> WSDL operation. |

#### 3.1.4.41.2.1 GetSearchData

The **GetSearchData** element specifies the input data for the **GetSearchData** WSDL operation.

```
<xs:element name="GetSearchData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="boundField" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="primaryDisplayField" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="secondaryDisplayField" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="primaryLookupDisplayField" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="secondaryLookupDisplayField" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="maxResults" type="xs:int"/>
      <xs:element minOccurs="0" name="userInput" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a result set. MUST be present. MUST contain an identifier that was previously supplied during the session as the **source** element for the input to the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

**boundField:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the primary key field (2) in **Source** .

**primaryDisplayField:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of a primary field (2) in **source**. The values of **primaryDisplayField** in the response MUST contain the **userInput**.

**secondaryDisplayField:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of a secondary field (2) in **source**. The combination of values of the primary field (**primaryDisplayField** or **primaryLookupDisplayField**) and **secondaryDisplayField** in the response MUST be distinct.

**primaryLookupDisplayField:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name, source, bound field, and display field of a primary field (2), of type lookup, in **source**, delimited by the ":" character. The values of **primaryDisplayLookupField** in the response MUST contain the **userInput**.

**secondaryLookupDisplayField:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name, source, bound field, and display field of a secondary field (2), of type lookup, in **source**, delimited by the ":" character. The combination of values of the primary field (**primaryDisplayField** or **primaryLookupDisplayField**) and **secondaryLookupDisplayField** in the response MUST be distinct.

**maxResults:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the maximum number of records to be retrieved from the database application.

**userInput:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the text, which is used for searching records.

**userCookieId:** A **guid** (section 2.2.5.8) that specifies an identifier for the operation. MUST be present. SHOULD be ignored by the protocol server.

### 3.1.4.41.2.2 GetSearchDataResponse

The **GetSearchDataResponse** element specifies the result data for the **GetSearchData** WSDL operation.

```
<xs:element name="GetSearchDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetSearchDataResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetSearchDataResult:** A **CommandResult**, as specified in section 2.2.4.4. MUST be present.

**tableXml:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the XML containing the content of the returned rows, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section 3.1.4.10.2.2)..

### 3.1.4.41.3 Complex Types

None.

### 3.1.4.41.4 Simple Types

None.

### 3.1.4.41.5 Attributes

None.

### 3.1.4.41.6 Groups

None.

### 3.1.4.41.7 Attribute Groups

None.

### 3.1.4.42 RunDataMacro

Instructs the protocol server to execute a **Data Macro** ([\[MS-AXL2\]](#) section 2.1.2.2).

The following is the WSDL port type specification of the **RunDataMacro** WSDL operation.

```
<wsdl:operation name="RunDataMacro" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/RunDataMacro"
    message="tns:IAccessServiceSoap_RunDataMacro_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/RunDataMacroResponse"
    message="tns:IAccessServiceSoap_RunDataMacro_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/RunDataMacroAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_RunDataMacro_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_RunDataMacro\_InputMessage** (section [3.1.4.44.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_RunDataMacro\_OutputMessage** (section [3.1.4.44.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_RunDataMacro\_OutputMessage** response message.

### 3.1.4.42.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_RunDataMacro_InputMessage</b>  | The request WSDL message for the <b>RunDataMacro</b> WSDL operation.  |
| <b>IAccessServiceSoap_RunDataMacro_OutputMessage</b> | The response WSDL message for the <b>RunDataMacro</b> WSDL operation. |

#### 3.1.4.42.1.1 IAccessServiceSoap\_RunDataMacro\_InputMessage

The request WSDL message for the **RunDataMacro** WSDL operation.

The SOAP action value is:

The SOAP body contains the **RunDataMacro** element.

### 3.1.4.42.1.2 IAccessServiceSoap\_RunDataMacro\_OutputMessage

The response WSDL message for the **RunDataMacro** WSDL operation.

The SOAP body contains the **RunDataMacroResponse** element.

### 3.1.4.42.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                     | Description   |
|-----------------------------|---|
| <b>RunDataMacro</b>         | The input data for the <b>RunDataMacro</b> WSDL operation.  |
| <b>RunDataMacroResponse</b> | The result data for the <b>RunDataMacro</b> WSDL operation. |

#### 3.1.4.42.2.1 RunDataMacro

The **RunDataMacro** element specifies the input data for the **RunDataMacro** WSDL operation.

```
<xs:element name="RunDataMacro" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="macroName" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="parameterValues" nillable="true" type="tns6:ArrayOfParameterValue"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**macroName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that that specifies the name of a **Data Macro** ([\[MS-AXL2\]](#) section 2.1.2.2) to execute. MUST be present.

**parameterValues:** An **ArrayOfParameterValue** (section [2.2.4.21](#)) that specifies input values of parameters to pass to a Data Macro. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.42.2.2 RunDataMacroResponse

The **RunDataMacroResponse** element specifies the result data for the **RunDataMacro** WSDL operation.

```

<xs:element name="RunDataMacroResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RunDataMacroResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="dataMacroInstance" nillable="true" type="tns1:DataMacroInstance"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**RunDataMacroResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**dataMacroInstance:** A **DataMacroInstance** (section [3.1.4.44.3.1](#)) that specifies results from executing a Data Macro. MUST be present.

### 3.1.4.42.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type             | Description                                    |
|--------------------------|--|
| <b>DataMacroInstance</b> | Specifies results from executing a Data Macro. |

#### 3.1.4.42.3.1 DataMacroInstance

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data>

Specifies results from executing a Data Macro.

```

<xs:complexType name="DataMacroInstance" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element name="_x003C_ReturnVars_x003E_k__BackingField" nillable="true"
type="tns1:ArrayOfKeyValuePair"/>
    <xs:element name="_x003C_SessionId_x003E_k__BackingField" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

**\_x003C\_ReturnVars\_x003E\_k\_\_BackingField:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the values of output parameters after executing a Data Macro. MUST be present.

**\_x003C\_SessionId\_x003E\_k\_\_BackingField:** A **SessionIdentifier** (section [3.1.1.2](#)) that specifies the session identifier of the session in which the Data Macro was run. MUST be present.

#### 3.1.4.42.4 Simple Types

None.

#### 3.1.4.42.5 Attributes

None.

### 3.1.4.42.6 Groups

None.

### 3.1.4.42.7 Attribute Groups

None.

### 3.1.4.43 GetFormDefinitionAndRecordSet

This operation retrieves the form definition ([\[MS-AXL2\]](#) section 2.2.1.12) of a form and then opens a result set for the **RecordSource** specified in the form definition ([\[MS-AXL2\]](#) section 2.2.3.81) and returns a **RecordSet** (section [3.1.4.45.3.8](#)) that contains the subset of rows from the result set.

The following is the WSDL port type specification of the **GetFormDefinitionAndRecordSet** WSDL operation.

```
<wsdl:operation name="GetFormDefinitionAndRecordSet"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSet"
    message="tns:IAccessServiceSoap_GetFormDefinitionAndRecordSet_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSetResponse"
    message="tns:IAccessServiceSoap_GetFormDefinitionAndRecordSet_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSetAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetFormDefinitionAndRecordSet_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an

**IAccessServiceSoap\_GetFormDefinitionAndRecordSet\_InputMessage** (section [3.1.4.45.1.1](#)) request message and the protocol server responds with an

**IAccessServiceSoap\_GetFormDefinitionAndRecordSet\_OutputMessage** (section [3.1.4.45.1.2](#)) response message as follows:

- The protocol server retrieves data from the table or **query** in the database application, specified by the **RecordSource** element of the Form Definition. The data is filtered according to the **restriction** input element (section [3.1.4.45.2.1](#)). The protocol server also sorts the data according to expressions defined by the **sortExpression** input element section 3.1.4.45.2.1.
- The protocol server stores the data in a result set identified by the **RecordSource** within the session identified by the **WorkbookId** element of the **parameter** input element (section 3.1.4.45.1.1) in the request message.
- The protocol server returns a **Recordset** (section 3.1.4.45.3.8) that contains a subset of rows from the result set as follows:
  - A maximum of 50 rows are returned in the **Recordset**.
  - The **FieldSchema** (section [2.2.4.25](#)) of all the fields (2) of the **Source** are returned in the **Fields** element of the **Recordset**.



- The protocol server calculates the total number of rows in **Source** and returns this row count as the **TotalRows** element of the **PagingInfo** (section [3.1.4.45.3.7](#)), which is an element that is returned as part of the **Recordset**.

### 3.1.4.43.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetFormDefinitionAndRecordSet_InputMessage</b>  | The request WSDL message for the <b>GetFormDefinitionAndRecordSet</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetFormDefinitionAndRecordSet_OutputMessage</b> | The response WSDL message for the <b>GetFormDefinitionAndRecordSet</b> WSDL operation. |

#### 3.1.4.43.1.1 IAccessServiceSoap\_GetFormDefinitionAndRecordSet\_InputMessage

The request WSDL message for the **GetFormDefinitionAndRecordSet** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSet
```

The SOAP body contains the **GetFormDefinitionAndRecordSet** element.

#### 3.1.4.43.1.2 IAccessServiceSoap\_GetFormDefinitionAndRecordSet\_OutputMessage

The response WSDL message for the **GetFormDefinitionAndRecordSet** WSDL operation.

The SOAP body contains the **GetFormDefinitionAndRecordSetResponse** element.

### 3.1.4.43.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                      | Description  |
|--|--|
| <b>GetFormDefinitionAndRecordSet</b>         | The input data for the <b>GetFormDefinitionAndRecordSet</b> WSDL operation.  |
| <b>GetFormDefinitionAndRecordSetResponse</b> | The result data for the <b>GetFormDefinitionAndRecordSet</b> WSDL operation. |

#### 3.1.4.43.2.1 GetFormDefinitionAndRecordSet

The **GetFormDefinitionAndRecordSet** element specifies the input data for the **GetFormDefinitionAndRecordSet** WSDL operation.

```

<xs:element name="GetFormDefinitionAndRecordSet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="includeDataSourceNames" type="xs:boolean"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="parameterValues" nillable="true" type="tns6:ArrayOfParameterValue"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameter:** A **CommandParameter**, as specified by section [2.2.4.3](#). MUST be present.

**formName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the form for which **FormDef** ([\[MS-AXL2\]](#) section 2.2.1.12) is requested.

**restriction:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that is same as the **restriction** input element to the **OpenResultSet** operation (section [3.1.4.10.2.1](#)).

**sortExpression:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that is same as the **sortExpression** input element to the **OpenResultSet** operation (section 3.1.4.10.2.1).

**includeDataSourceNames:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the **GetFormDefinitionAndRecordSetResponse** (section [3.1.4.45.2.2](#)) for this operation should include a list of names of **Tables** (section [2.2.4.79](#)) and **Queries** (section [2.2.4.71](#)) in the database application.

**parameterValues:** An **ArrayOfParameterValue** (section [2.2.4.21](#)) that specifies the set of values for each **CT\_Parameter** ([\[MS-AXL2\]](#) section 2.2.3.12) required in the **Source**. One value MUST be present for every **CT\_Parameter** defined in the **Source**.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.43.2.2 GetFormDefinitionAndRecordSetResponse

The **GetFormDefinitionAndRecordSetResponse** element specifies the result data for the **GetFormDefinitionAndRecordSet** WSDL operation.

```

<xs:element name="GetFormDefinitionAndRecordSetResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetFormDefinitionAndRecordSetResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="recordset" nillable="true" type="tns6:Recordset"/>
      <xs:element minOccurs="0" name="formDefinition" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="sharedDatabaseInfo" nillable="true" type="tns6:SharedDataBaseInfo"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    <xs:element xmlns:g3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="dataSourceNames" nillable="true" type="g3:ArrayOfstring"/>
    <xs:element minOccurs="0" name="newImageStorage" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**GetFormDefinitionAndRecordSetResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**recordset:** A **Recordset** as specified in section [3.1.4.45.3.1](#). MUST be present.

**formDefinition:** A **FormDef** ([\[MS-AXL2\]](#) section 2.2.1.12) that specifies the **Hypertext Markup Language (HTML)** definition of the form specified by the input element **formName** (section [3.1.4.45.2.1](#)). MUST be present.

**sharedDatabaseInfo:** A **SharedDatabaseInfo** as specified in section [3.1.4.43.3.9](#). MUST be present.

**dataSourceNames:** An **ArrayOfstring** (section [2.2.4.22](#)) that specifies a list of names of **Tables** (section [2.2.4.79](#)) and **Queries** (section [2.2.4.71](#)) in the database application. MUST be present if **includeDataSourceNames** was true in the **GetFormDefinitionAndRecordSet** (section [3.1.4.45.2.1](#)) for this operation

**newImageStorage:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether images in this database application use the updated image storage schema. MUST be present.

### 3.1.4.43.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                       | Description  |
|------------------------------------|--|
| <b>ArrayOfArrayOfanyType</b>       | A collection of <b>ArrayOfanyType</b> (section <a href="#">2.2.4.36</a> ) elements. See section <a href="#">3.1.4.45.3.12</a> for more details.  |
| <b>ArrayOfArrayOfArrayOfstring</b> | A collection of <b>ArrayOfArrayOfstring</b> (section <a href="#">2.2.4.33</a> ) elements. See section <a href="#">3.1.4.45.3.13</a> for more details.  |
| <b>ArrayOfArrayOfFormatInfo</b>    | A collection of <b>ArrayOfFormatInfo</b> (section <a href="#">3.1.4.45.3.4</a> ) elements. See section <a href="#">3.1.4.45.3.7</a> for more details.  |
| <b>ArrayOfFormatInfo</b>           | A collection of <b>FormatInfo</b> (section <a href="#">3.1.4.45.3.6</a> ) elements. See section <a href="#">3.1.4.45.3.8</a> for more details.   |
| <b>ArrayOfRecordStatus</b>         | A collection of <b>RecordStatus</b> (section <a href="#">3.1.4.45.4.1</a> ) elements. See section <a href="#">3.1.4.45.3.3</a> for more details.   |
| <b>FormatInfo</b>                  | A complex type that specifies the format of a field (2) in a <b>Source</b> (section <a href="#">3.1.1.1</a> ). See section <a href="#">3.1.4.45.3.9</a> for more details.  |
| <b>PagingInfo</b>                  | A complex type that contains information about the <b>Page</b> ( <a href="#">[MS-ART]</a> section 3.1.1) which is a subset of rows from result set that are returned in the <b>RecordSet</b> . See section 3.1.4.45.3.1 for more details.  |
| <b>Recordset</b>                   | A complex type that is returned as output of this protocol operation. It contains rows from the result set, <b>FieldSchema</b> (section <a href="#">2.2.4.25</a> ) information for all fields (2) and <b>PagingInfo</b> (section 3.1.4.45.3.7), <b>FormatInfo</b> (section 3.1.4.45.3.9) types. See section 3.1.4.45.3.1 for more details. |

| Complex type              | Description  |
|---------------------------|--|
| <b>SharedDataBaseInfo</b> | A complex type that specifies the <b>Source</b> (section 3.1.1.1), the <b>FieldSchema</b> of all fields (2) from the <b>Source</b> , the sort order and the restriction conditions of the rows in the result set. See section 3.1.4.43.3.9 for more details. |

### 3.1.4.43.3.1 ArrayOfArrayOfanyType

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

A collection of **ArrayOfanyType** (section [2.2.4.36](#)) elements.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfArrayOfanyType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfanyType" nillable="true"
type="q3:ArrayOfanyType"/>
  </xs:sequence>
</xs:complexType>
```

**ArrayOfanyType:** An **ArrayOfanyType** complex type, as specified by section 2.2.4.36.

### 3.1.4.43.3.2 ArrayOfArrayOfArrayofstring

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

A collection of **ArrayOfArrayofstring** (section [2.2.4.33](#)) elements.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfArrayOfArrayofstring"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfArrayofstring"
nillable="true" type="q3:ArrayOfArrayofstring"/>
  </xs:sequence>
</xs:complexType>
```

**ArrayOfArrayofstring:** An **ArrayOfArrayofstring**, as specified by section [2.2.4.38](#).

### 3.1.4.43.3.3 ArrayOfArrayOfFormatInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

A collection of **ArrayOfFormatInfo** (section [3.1.4.45.3.4](#)) elements.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfArrayOfFormatInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfFormatInfo" nillable="true"
type="tns6:ArrayOfFormatInfo"/>
  </xs:sequence>
</xs:complexType>
```

**ArrayOfFormatInfo:** An **ArrayOfFormatInfo** as specified by section [3.1.4.45.3.8](#).

#### 3.1.4.43.3.4 ArrayOfFormatInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

A collection of **FormatInfo** (section [3.1.4.45.3.6](#)) elements.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfFormatInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FormatInfo" nillable="true"
type="tns6:FormatInfo"/>
  </xs:sequence>
</xs:complexType>
```

**FormatInfo:** A **FormatInfo** as specified by section [3.1.4.45.3.9](#).

#### 3.1.4.43.3.5 ArrayOfRecordStatus

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

A collection of **RecordStatus** (section [3.1.4.45.4.1](#)).

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfRecordStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="RecordStatus"
type="tns6:RecordStatus"/>
  </xs:sequence>
</xs:complexType>
```

**RecordStatus:** A **RecordStatus** as specified by section [3.1.4.45.4.1](#).

#### 3.1.4.43.3.6 FormatInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

A **FormatInfo** ([\[MS-ART\]](#) section 2.2.1.6) that specifies the format for a field (2) of a **Source** (section [3.1.1](#)).

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="FormatInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Currency" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Format" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Precision" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

**Currency:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) as specified by [\[MS-ART\]](#) section 2.2.1.6.

**Format:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) as specified by [\[MS-ART\]](#) section 2.2.1.6.

**Precision:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) as specified by [\[MS-ART\]](#) section 2.2.1.6.

### 3.1.4.43.3.7 PagingInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

A **PagingInfo** ([\[MS-ART\]](#) section 2.2.1.7) that specifies the information about a subset of rows from the result set.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="PagingInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
      minOccurs="0" name="CacheCommands" type="tns1:CacheCommands"/>
    <xs:element minOccurs="0" name="CacheId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DefaultFormSortExpression" nillable="true"
      type="xs:string"/>
    <xs:element minOccurs="0" name="Filter" nillable="true" type="tns6:FilterInfo"/>
    <xs:element minOccurs="0" name="FirstRow" type="xs:int"/>
    <xs:element minOccurs="0" name="PageSize" type="xs:int"/>
    <xs:element minOccurs="0" name="RetrieveExactRowCount" type="xs:boolean"/>
    <xs:element minOccurs="0" name="RowKey" type="xs:int"/>
    <xs:element minOccurs="0" name="SessionId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SortExpression" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="TotalRows" type="xs:int"/>
    <xs:element minOccurs="0" name="UseCache" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
```

**CacheCommands:** A **CacheCommands** (section [2.2.5.5](#)) that specifies the operations to be performed on the result set.

**CacheId:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that uniquely identifies the result set in the cache.

**DefaultFormSortExpression:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that describes a **SortExpression** (as specified by [\[MS-ART\]](#) section 2.2.1.7) that specifies the default sort order for the form.

**Filter:** A **FilterInfo** (section [2.2.4.10](#)) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**FirstRow:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**PageSize:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**RetrieveExactRowCount:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**RowKey:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**SessionId:** A **SessionId** (section [3.1.1.2](#)) that specifies a unique identifier for the current session.

**SortExpression:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**TotalRows:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) as specified by [\[MS-ART\]](#) section 2.2.1.7.

**UseCache:** MUST NOT be used.

### 3.1.4.43.3.8 Recordset

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

A complex type as specified by [MS-ART] section 2.2.1.9. **Recordset** is output by the **GetFormDefinitionAndRecordset** protocol operation (section 3.1.4.45) and it is used to send the rows of data from a given **Source** (section 3.1.1), **FieldSchema** (section 2.2.4.25) information of all fields (2) in the **Source**, **PagingInfo** (section 3.1.4.45.3.7) of the rows in the result set and **FormatInfo** (section 3.1.4.45.3.6) of the fields (2) in the **Source**.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="Recordset" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AnonymousCanInsert" type="xs:boolean"/>
    <xs:element minOccurs="0" name="AnonymousCanRead" type="xs:boolean"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AutoSumValues" nillable="true" type="q3:ArrayOfanyType"/>
    <xs:element minOccurs="0" name="Fields" nillable="true" type="tns6:ArrayOfFieldSchema"/>
    <xs:element minOccurs="0" name="FormatInfos" nillable="true"
type="tns6:ArrayOfArrayOfFormatInfo"/>
    <xs:element minOccurs="0" name="IsAnonymous" type="xs:boolean"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Localized" nillable="true" type="q3:ArrayOfArrayOfArrayOfstring"/>
    <xs:element minOccurs="0" name="Paging" nillable="true" type="tns6:PagingInfo"/>
    <xs:element minOccurs="0" name="RecordStatuses" nillable="true"
type="tns6:ArrayOfRecordStatus"/>
    <xs:element minOccurs="0" name="RelatedFieldInfos" nillable="true"
type="tns6:ArrayOfFieldSchema"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Values" nillable="true" type="q3:ArrayOfArrayOfanyType"/>
  </xs:sequence>
</xs:complexType>
```

**AnonymousCanInsert:** MUST NOT be used.

**AnonymousCanRead:** MUST NOT be used.

**AutoSumValues:** MUST NOT be used.

**Fields:** An **ArrayOfFieldSchema** (section 2.2.4.19) that specifies schema information for each field (2) in the **Source**.

**FormatInfos:** An **ArrayOfArrayOfFormatInfos** (section 3.1.4.45.3.7) that specifies the format information of each field (2) in the **Source**.

**IsAnonymous:** MUST NOT be used.

**Localized:** An **ArrayOfArrayOfArrayOfstring** (section 2.2.4.33) as specified by [MS-ART] section 2.2.1.9.

**Paging:** A **PagingInfo** (section 3.1.4.45.3.7) that specifies information about the subset of rows in a result set.

**RecordStatuses:** MUST NOT be used.

**RelatedFieldInfos:** An **ArrayOfFieldSchema** (section 2.2.4.19) that specifies schema information for each field (2) in the source **Source**.

**Values:** An **ArrayOfArrayOfanyType** (section 3.1.4.45.3.12) as specified by [MS-ART] section 2.2.1.9.

### 3.1.4.43.3.9 SharedDataBaseInfo

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient

A **SharedDataBaseInfo** ([\[MS-ART\]](#) section 2.2.1.12) that specifies the **Source** (section [3.1.1.1](#)), the **FieldSchema** of all fields (2) from the **Source**, the sort order, and the restriction conditions of the rows in the result set

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="SharedDataBaseInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AllowAdditions" type="xs:boolean"/>
    <xs:element minOccurs="0" name="AllowDeletions" type="xs:boolean"/>
    <xs:element minOccurs="0" name="AllowEdits" type="xs:boolean"/>
    <xs:element minOccurs="0" name="AppForOfficeId" nillable="true" type="xs:string"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AutoSumFields" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AutoSumFunctions" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element minOccurs="0" name="CacheId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DataEntry" type="xs:boolean"/>
    <xs:element minOccurs="0" name="DoNotPrefetchImages" type="xs:boolean"/>
    <xs:element minOccurs="0" name="FetchDisplayFields" type="xs:boolean"/>
    <xs:element minOccurs="0" name="FetchKeyFields" type="xs:boolean"/>
    <xs:element minOccurs="0" name="FetchSchema" type="xs:boolean"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="FieldNames" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element minOccurs="0" name="FormatInfos" nillable="true"
type="tns6:ArrayOfArrayOfFormatInfo"/>
    <xs:element minOccurs="0" name="InitialPage" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="NewImageStorage" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Ordering" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ParameterValues" nillable="true"
type="tns6:ArrayOfParameterValue"/>
    <xs:element minOccurs="0" name="Restriction" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SelectCommand" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SessionId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Stateless" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
```

**AllowAdditions:** MUST NOT be used.

**AllowDeletions:** MUST NOT be used.

**AllowEdits:** MUST NOT be used.

**AppForOfficeId:** MUST NOT be used.

**AutoSumFields:** An **ArrayOfString** (section [2.2.4.22](#)) as specified by [\[MS-ART\]](#) section 2.2.1.12.

**AutoSumFunctions:** **AutoSumFields:** An **ArrayOfString** (section 2.2.4.22) as specified by [\[MS-ART\]](#) section 2.2.1.12.

**CacheId:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that uniquely identifies the result set in the cache.

**DataEntry:** MUST NOT be used.

**DoNotPrefetchImages:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) as specified by [\[MS-ART\]](#) section 2.2.1.12.

**FetchDisplayFields:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) as specified by [\[MS-ART\]](#) section 2.2.1.12.

**FetchKeyFields:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) as specified by [\[MS-ART\]](#) section 2.2.1.12.



**FetchSchema:** A **boolean** ([XMLSCHEMA2] section 3.2.2) as specified by [MS-ART] section 2.2.1.12.

**FieldNames:** An **ArrayOfString** (section 2.2.4.22) as specified by [MS-ART] section 2.2.1.12.

**FormatInfos:** An **ArrayOfArrayOfFormatInfos** (section [3.1.4.45.3.7](#)) as specified by [MS-ART] section 2.2.1.12.

**InitialPage:** MUST NOT be used.

**NewImageStorage:** A **boolean** ([XMLSCHEMA2] section 3.2.2) that specifies whether images in this database application use the updated image storage schema.

**Ordering:** A **string** ([XMLSCHEMA2] section 3.2.1) as specified by [MS-ART] section 2.2.1.12.

**ParameterValues:** An **ArrayOfParameterValue** (section [2.2.4.21](#)) as specified by [MS-ART] section 2.2.1.12.

**Restriction:** A **CT\_Expression** ([\[MS-AXL2\]](#) section 2.2.3.1) as specified by [MS-ART] section 2.2.1.12.

**SelectCommand:** A **string** ([XMLSCHEMA2] section 3.2.1) as specified by [MS-ART] section 2.2.1.12.

**SessionId:** A **SessionId** (section [3.1.1.2](#)) that specifies a unique identifier for the current session.

**Stateless:** MUST NOT be used.

### 3.1.4.43.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type         | Description       |
|---------------------|-------------------|
| <b>RecordStatus</b> | MUST NOT be used. |

#### 3.1.4.43.4.1 RecordStatus

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

MUST NOT be used.

Optional: Type a detailed description for the Simple Type.

```
<xs:simpleType name="RecordStatus" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Normal"/>
    <xs:enumeration value="Deleted"/>
    <xs:enumeration value="Error"/>
    <xs:enumeration value="Fixup"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **RecordStatus** simple type.

| Value   | Meaning           |
|---------|-------------------|
| Normal  | MUST NOT be used. |
| Deleted | MUST NOT be used. |
| Error   | MUST NOT be used. |
| Fixup   | MUST NOT be used. |

### 3.1.4.43.5 Attributes

None.

### 3.1.4.43.6 Groups

None.

### 3.1.4.43.7 Attribute Groups

None.

### 3.1.4.44 GetUIMacroJavascript

The **GetUIMacroJavascript** protocol operation retrieves the definition for a **UI macro** ([\[MS-AXL2\]](#) section 1.3.2).

The following is the WSDL port type specification of the **GetUIMacroJavascript** WSDL operation.

```
<wsdl:operation name="GetUIMacroJavascript" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascript"
    message="tns:IAccessServiceSoap_GetUIMacroJavascript_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascriptResponse"
    message="tns:IAccessServiceSoap_GetUIMacroJavascript_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascriptAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetUIMacroJavascript_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetUIMacroJavascript\_InputMessage** (section [3.1.4.46.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetUIMacroJavascript\_OutputMessage** (section [3.1.4.46.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetUIMacroJavascript\_OutputMessage** response message.

### 3.1.4.44.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetUIMacroJavascript_InputMessage</b>  | The request WSDL message for the <b>GetUIMacroJavascript</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetUIMacroJavascript_OutputMessage</b> | The response WSDL message for the <b>GetUIMacroJavascript</b> WSDL operation. |

#### 3.1.4.44.1.1 IAccessServiceSoap\_GetUIMacroJavascript\_InputMessage

The request WSDL message for the **GetUIMacroJavascript** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascript
```

The SOAP body contains the **GetUIMacroJavascript** element.

#### 3.1.4.44.1.2 IAccessServiceSoap\_GetUIMacroJavascript\_OutputMessage

The response WSDL message for the **GetUIMacroJavascript** WSDL operation.

The SOAP body contains the **GetUIMacroJavascriptResponse** element.

### 3.1.4.44.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                             | Description   |
|-------------------------------------|---|
| <b>GetUIMacroJavascript</b>         | The input data for the <b>GetUIMacroJavascript</b> WSDL operation.  |
| <b>GetUIMacroJavascriptResponse</b> | The result data for the <b>GetUIMacroJavascript</b> WSDL operation. |

#### 3.1.4.44.2.1 GetUIMacroJavascript

The **GetUIMacroJavascript** element specifies the input data for the **GetUIMacroJavascript** WSDL operation.

```
<xs:element name="GetUIMacroJavascript" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="macroName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**macroName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the UI macro for which to retrieve the definition. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.44.2.2 GetUIMacroJavascriptResponse

The **GetUIMacroJavascriptResponse** element specifies the result data for the **GetUIMacroJavascript** WSDL operation.

```
<xs:element name="GetUIMacroJavascriptResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetUIMacroJavascriptResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="javascript" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetUIMacroJavascriptResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**javascript:** A **base64Binary** ([\[XMLSCHEMA2\]](#) section 3.2.16) that specifies the definition for the UI macro.

### 3.1.4.44.3 Complex Types

None.

### 3.1.4.44.4 Simple Types

None.

### 3.1.4.44.5 Attributes

None.

### 3.1.4.44.6 Groups

None.

### 3.1.4.44.7 Attribute Groups

None.

### 3.1.4.45 SetEnableDisableDatabase

Instructs the protocol server to toggle a database between the enabled and disabled states.

The following is the WSDL port type specification of the **SetEnableDisableDatabase** WSDL operation.

```
<wsdl:operation name="SetEnableDisableDatabase"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetEnableDisableDatabase"
message="tns:IAccessServiceSoap_SetEnableDisableDatabase_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetEnableDisableDatabaseResponse"
message="tns:IAccessServiceSoap_SetEnableDisableDatabase_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetEnableDisableDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_SetEnableDisableDatabase_DatabaseProviderMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_SetEnableDisableDatabase\_InputMessage** (section [3.1.4.47.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_SetEnableDisableDatabase\_OutputMessage** (section [3.1.4.47.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_SetEnableDisableDatabase\_OutputMessage** response message.

### 3.1.4.45.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_SetEnableDisableDatabase_InputMessage</b>  | The request WSDL message for the <b>SetEnableDisableDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_SetEnableDisableDatabase_OutputMessage</b> | The response WSDL message for the <b>SetEnableDisableDatabase</b> WSDL operation. |

#### 3.1.4.45.1.1 IAccessServiceSoap\_SetEnableDisableDatabase\_InputMessage

The request WSDL message for the **SetEnableDisableDatabase** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetEnableDisableDatabase
```

The SOAP body contains the **SetEnableDisableDatabase** element.

### 3.1.4.45.1.2 IAccessServiceSoap\_SetEnableDisableDatabase\_OutputMessage

The response WSDL message for the **SetEnableDisableDatabase** WSDL operation.

The SOAP body contains the **SetEnableDisableDatabaseResponse** element.

### 3.1.4.45.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                 | Description   |
|---|---|
| <b>SetEnableDisableDatabase</b>         | The input data for the <b>SetEnableDisableDatabase</b> WSDL operation.  |
| <b>SetEnableDisableDatabaseResponse</b> | The result data for the <b>SetEnableDisableDatabase</b> WSDL operation. |

#### 3.1.4.45.2.1 SetEnableDisableDatabase

The **SetEnableDisableDatabase** element specifies the input data for the **SetEnableDisableDatabase** WSDL operation.

```
<xs:element name="SetEnableDisableDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="enableDisable" type="tns2:DatabaseEnableDisableState"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database for which to toggle the enabled/disabled state. MUST be present.

**enableDisable:** A **DatabaseEnableDisableState** (section [3.1.4.45.4.1](#)) that specifies whether to set the database specified by the **databaseContext** element to the enabled or disabled state.

#### 3.1.4.45.2.2 SetEnableDisableDatabaseResponse

The **SetEnableDisableDatabaseResponse** element specifies the result data for the **SetEnableDisableDatabase** WSDL operation.

```
<xs:element name="SetEnableDisableDatabaseResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="SetEnableDisableDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**SetEnableDisableDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.45.3 Complex Types

None.

### 3.1.4.45.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type                       | Description   |
|-----------------------------------|---|
| <b>DatabaseEnableDisableState</b> | Specifies whether a database is to be set to the enabled or disabled state. |

#### 3.1.4.45.4.1 DatabaseEnableDisableState

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database>

Specifies whether a database is to be set to the enabled or disabled state.

Optional: Type a detailed description for the Simple Type.

```

<xs:simpleType name="DatabaseEnableDisableState" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Enable"/>
    <xs:enumeration value="Disable"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **DatabaseEnableDisableState** simple type.

| Value   | Meaning   |
|---------|---|
| Enable  | Specifies that the database is to be set to the enabled state.  |
| Disable | Specifies that the database is to be set to the disabled state. |

### 3.1.4.45.5 Attributes

None.

### 3.1.4.45.6 Groups

None.

### 3.1.4.45.7 Attribute Groups

None.

### 3.1.4.46 UpdateDatabaseConfiguration

Updates the maximum size of the database application.

The following is the WSDL port type specification of the **UpdateDatabaseConfiguration** WSDL operation.

```
<wsdl:operation name="UpdateDatabaseConfiguration"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDatabaseConfiguration"
message="tns:IAccessServiceSoap_UpdateDatabaseConfiguration_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDatabaseConfigurationResponse"
message="tns:IAccessServiceSoap_UpdateDatabaseConfiguration_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDatabaseConfigurationDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_UpdateDatabaseConfiguration_DatabaseProviderMessageFault_Faul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_UpdateDatabaseConfiguration\_InputMessage** (section [3.1.4.48.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_UpdateDatabaseConfiguration\_OutputMessage** (section [3.1.4.48.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).

Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_UpdateDatabaseConfiguration\_OutputMessage** (section [3.1.4.48.1.2](#)) response message.

#### 3.1.4.46.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_UpdateDatabaseConfiguration_InputMessage</b>  | The request WSDL message for the <b>UpdateDatabaseConfiguration</b> WSDL operation.  |
| <b>IAccessServiceSoap_UpdateDatabaseConfiguration_OutputMessage</b> | The response WSDL message for the <b>UpdateDatabaseConfiguration</b> WSDL operation. |

#### 3.1.4.46.1.1 IAccessServiceSoap\_UpdateDatabaseConfiguration\_InputMessage



The request WSDL message for the **UpdateDatabaseConfiguration** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDatabaseConfiguration
```

The SOAP body contains the **UpdateDatabaseConfiguration** element.

### 3.1.4.46.1.2 IAccessServiceSoap\_UpdateDatabaseConfiguration\_OutputMessage

The response WSDL message for the **UpdateDatabaseConfiguration** WSDL operation.

The SOAP body contains the **UpdateDatabaseConfigurationResponse** element.

### 3.1.4.46.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                    | Description  |
|--|--|
| <b>UpdateDatabaseConfiguration</b>         | The input data for the <b>UpdateDatabaseConfiguration</b> WSDL operation.  |
| <b>UpdateDatabaseConfigurationResponse</b> | The result data for the <b>UpdateDatabaseConfiguration</b> WSDL operation. |

#### 3.1.4.46.2.1 UpdateDatabaseConfiguration

The **UpdateDatabaseConfiguration** element specifies the input data for the **UpdateDatabaseConfiguration** WSDL operation.

```
<xs:element name="UpdateDatabaseConfiguration" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="databaseSize" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to delete. MUST be present.

**databaseSize:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the new maximum size of the database application.

#### 3.1.4.46.2.2 UpdateDatabaseConfigurationResponse

The **UpdateDatabaseConfigurationResponse** element specifies the result data for the **UpdateDatabaseConfiguration** WSDL operation.

```
<xs:element name="UpdateDatabaseConfigurationResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateDatabaseConfigurationResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**UpdateDatabaseConfigurationResult:** A **CommandResult**, as specified in section [2.2.4.4](#). **MUST** be present.

### 3.1.4.46.3 Complex Types

None.

### 3.1.4.46.4 Simple Types

None.

### 3.1.4.46.5 Attributes

None.

### 3.1.4.46.6 Groups

None.

### 3.1.4.46.7 Attribute Groups

None.

### 3.1.4.47 CloseResultSet

This operation closes the given result set.

The following is the WSDL port type specification of the **CloseResultSet** WSDL operation.

```
<wsdl:operation name="CloseResultSet" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CloseResultSet"
message="tns:IAccessServiceSoap CloseResultSet InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CloseResultSetResponse"
message="tns:IAccessServiceSoap_CloseResultSet_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CloseResultSetAccessServerMessageFault"
name="AccessServerMessageFault"
```

```

message="tns:IAccessServiceSoap_CloseResultSet_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_CloseResultSet\_InputMessage** (section [3.1.4.57.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_CloseResultSet\_OutputMessage** (section [3.1.4.57.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_CloseResultSet\_OutputMessage** response message.

### 3.1.4.47.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_CloseResultSet_InputMessage</b>  | The request WSDL message for the <b>CloseResultSet</b> WSDL operation.  |
| <b>IAccessServiceSoap_CloseResultSet_OutputMessage</b> | The response WSDL message for the <b>CloseResultSet</b> WSDL operation. |

#### 3.1.4.47.1.1 IAccessServiceSoap\_CloseResultSet\_InputMessage

The request WSDL message for the **CloseResultSet** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseResultSet

```

The SOAP body contains the **CloseResultSet** element.

#### 3.1.4.47.1.2 IAccessServiceSoap\_CloseResultSet\_OutputMessage

The response WSDL message for the **CloseResultSet** WSDL operation.

The SOAP body contains the **CloseResultSetResponse** element.

### 3.1.4.47.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                       | Description   |
|-------------------------------|---|
| <b>CloseResultSet</b>         | The input data for the <b>CloseResultSet</b> WSDL operation.  |
| <b>CloseResultSetResponse</b> | The result data for the <b>CloseResultSet</b> WSDL operation. |

### 3.1.4.47.2.1 CloseResultSet

The **CloseResultSet** element specifies the input data for the **CloseResultSet** WSDL operation.

```
<xs:element name="CloseResultSet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**cacheId:** **cacheId** uniquely identifies a result set in the cache.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.47.2.2 CloseResultSetResponse

The **CloseResultSetResponse** element specifies the result data for the **CloseResultSet** WSDL operation.

```
<xs:element name="CloseResultSetResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CloseResultSetResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**CloseResultSetResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.47.3 Complex Types

None.

### 3.1.4.47.4 Simple Types

None.

### 3.1.4.47.5 Attributes

None.

### 3.1.4.47.6 Groups

None.

### 3.1.4.47.7 Attribute Groups

None.

### 3.1.4.48 DeleteAllData

This operation deletes all records data from a given source.

The following is the WSDL port type specification of the **DeleteAllData** WSDL operation.

```
<wsdl:operation name="DeleteAllData" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DeleteAllData"
    message="tns:IAccessServiceSoap DeleteAllData InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DeleteAllDataResponse"
    message="tns:IAccessServiceSoap_DeleteAllData_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DeleteAllDataAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_DeleteAllData_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_DeleteAllData\_InputMessage** (section [3.1.4.50.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_DeleteAllData\_OutputMessage** (section [3.1.4.50.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_DeleteAllData\_OutputMessage** (section [3.1.4.50.1.2](#)) response message.

### 3.1.4.48.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_DeleteAllData_InputMessage</b>  | The request WSDL message for the <b>DeleteAllData</b> WSDL operation.  |
| <b>IAccessServiceSoap_DeleteAllData_OutputMessage</b> | The response WSDL message for the <b>DeleteAllData</b> WSDL operation. |

#### 3.1.4.48.1.1 IAccessServiceSoap\_DeleteAllData\_InputMessage

The request WSDL message for the **DeleteAllData** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteAllData
```

The SOAP body contains the **DeleteAllData** element.

### 3.1.4.48.1.2 IAccessServiceSoap\_DeleteAllData\_OutputMessage

The response WSDL message for the **DeleteAllData** WSDL operation.

The SOAP body contains the **DeleteAllDataResponse** element.

### 3.1.4.48.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                      | Description  |
|------------------------------|--|
| <b>DeleteAllData</b>         | The input data for the <b>DeleteAllData</b> WSDL operation.  |
| <b>DeleteAllDataResponse</b> | The result data for the <b>DeleteAllData</b> WSDL operation. |

#### 3.1.4.48.2.1 DeleteAllData

The **DeleteAllData** element specifies the input data for the **DeleteAllData** WSDL operation.

```
<xs:element name="DeleteAllData" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** **source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a result set. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

#### 3.1.4.48.2.2 DeleteAllDataResponse

The **DeleteAllDataResponse** element specifies the result data for the **DeleteAllData** WSDL operation.

```
<xs:element name="DeleteAllDataResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element
      xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
      InternalService/" minOccurs="0" name="DeleteAllDataResult" nillable="true"
      type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="recordsDeleted" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**DeleteAllDataResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**recordsDeleted:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the number of records that are deleted.

### 3.1.4.48.3 Complex Types

None.

### 3.1.4.48.4 Simple Types

None.

### 3.1.4.48.5 Attributes

None.

### 3.1.4.48.6 Groups

None.

### 3.1.4.48.7 Attribute Groups

None.

### 3.1.4.49 DeleteDataNoCache

This operation deletes a record from a table in the database application and also deletes the corresponding row from the result set.

The following is the WSDL port type specification of the **DeleteDataNoCache** WSDL operation.

```

<wsdl:operation name="DeleteDataNoCache" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DeleteDataNoCache"
    message="tns:IAccessServiceSoap_DeleteDataNoCache_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DeleteDataNoCacheResponse"
    message="tns:IAccessServiceSoap_DeleteDataNoCache_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/DeleteDataNoCacheAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_DeleteDataNoCache_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_DeleteDataNoCache\_InputMessage** (section [3.1.4.51.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_DeleteDataNoCache\_OutputMessage** (section [3.1.4.51.1.2](#)) response message as follows:

- The protocol server deletes from the **Updatable Source** (section [3.1.1.1](#)) the record that has a primary key equal to the **Key** element of the first **KeyValuePair** in the **keys** element in the **DeleteDataNoCache** element (section [3.1.4.51.2.1](#)).
- If the record is successfully deleted, then the protocol server also deletes from the result set the row with a primary key equal to primary key of the deleted record.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) MUST be one of the values specified in either section [2.2.9.1](#), section [2.2.9.2](#) or section [2.2.9.3](#).

### 3.1.4.49.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_DeleteDataNoCache_InputMessage</b>  | The request WSDL message for the <b>DeleteDataNoCache</b> WSDL operation.  |
| <b>IAccessServiceSoap_DeleteDataNoCache_OutputMessage</b> | The response WSDL message for the <b>DeleteDataNoCache</b> WSDL operation. |

#### 3.1.4.49.1.1 IAccessServiceSoap\_DeleteDataNoCache\_InputMessage

The request WSDL message for the **DeleteDataNoCache** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteDataNoCache
```

The SOAP body contains the **DeleteDataNoCache** element.

#### 3.1.4.49.1.2 IAccessServiceSoap\_DeleteDataNoCache\_OutputMessage

The response WSDL message for the **DeleteDataNoCache** WSDL operation.

The SOAP body contains the **DeleteDataNoCacheResponse** element.

### 3.1.4.49.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>DeleteDataNoCache</b>         | The input data for the <b>DeleteDataNoCache</b> WSDL operation.  |
| <b>DeleteDataNoCacheResponse</b> | The result data for the <b>DeleteDataNoCache</b> WSDL operation. |



### 3.1.4.49.2.1 DeleteDataNoCache

The **DeleteDataNoCache** element specifies the input data for the **DeleteDataNoCache** WSDL operation.

```
<xs:element name="DeleteDataNoCache" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a **result set**. MUST be present.

**keys:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the record to delete.

- MUST be present and MUST contain exactly one **KeyValuePair** (section [2.2.4.5](#)).
- The **Key** element of the **KeyValuePair** MUST be of type **xs:int** and MUST be a primary key for a record in the table.
- The **Value** element of the **KeyValuePair** MUST be ignored.

**oldValues:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the fields (2) and their original values in the record identified by **keys** element. MUST be present and MUST contain at least one **KeyValuePair** (section 2.2.4.5). SHOULD be ignored by the protocol server.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. MUST be present. SHOULD be ignored by the protocol server.

### 3.1.4.49.2.2 DeleteDataNoCacheResponse

The **DeleteDataNoCacheResponse** element specifies the result data for the **DeleteDataNoCache** WSDL operation.

```
<xs:element name="DeleteDataNoCacheResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="DeleteDataNoCacheResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="recordsDeleted" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
```

</xs:element>

**DeleteDataNoCacheResult:** A **CommandResult**, as specified by section [2.2.4.4](#). MUST be present.

**recordsDeleted:** MUST be 1.

### 3.1.4.49.3 Complex Types

None.

### 3.1.4.49.4 Simple Types

None.

### 3.1.4.49.5 Attributes

None.

### 3.1.4.49.6 Groups

None.

### 3.1.4.49.7 Attribute Groups

None.

## 3.1.4.50 FixupRowNoCache

This operation returns the results of performing a hypothetical update on the result set.

The following is the WSDL port type specification of the **FixupRowNoCache** WSDL operation.

```
<wsdl:operation name="FixupRowNoCache" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/FixupRowNoCache"
    message="tns:IAccessServiceSoap_FixupRowNoCache_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/FixupRowNoCacheResponse"
    message="tns:IAccessServiceSoap_FixupRowNoCache_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/FixupRowNoCacheAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_FixupRowNoCache_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_FixupRowNoCache\_InputMessage** (section [3.1.4.52.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_FixupRowNoCache\_OutputMessage** (section [3.1.4.52.1.2](#)) response message as follows:

- The protocol server retrieves a copy of a row from the database application using the **Updatable Source** (section [3.1.1.1](#)), which was previously supplied as the **source** input element to

**GetObjectSchema** Operation (section [3.1.4.7.2.1](#)) and the given **key**, and updates the columns specified in **values** in the copy. Neither the database application nor the result set are modified. If the update succeeds, the protocol server returns the updated values of all columns in the row.

- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one of the common fault identifiers specified in section [2.2.9.1](#) or one of the Sql fault identifiers specified in section [2.2.9.3](#).

### 3.1.4.50.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_FixupRowNoCache_InputMessage</b>  | The request WSDL message for the <b>FixupRowNoCache</b> WSDL operation.  |
| <b>IAccessServiceSoap_FixupRowNoCache_OutputMessage</b> | The response WSDL message for the <b>FixupRowNoCache</b> WSDL operation. |

#### 3.1.4.50.1.1 IAccessServiceSoap\_FixupRowNoCache\_InputMessage

The request WSDL message for the **FixupRowNoCache** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/Webservices/AccessServerInternalService/IAccessServiceSoap/FixupRowNoCache
```

The SOAP body contains the **FixupRowNoCache** element.

#### 3.1.4.50.1.2 IAccessServiceSoap\_FixupRowNoCache\_OutputMessage

The response WSDL message for the **FixupRowNoCache** WSDL operation.

The SOAP body contains the **FixupRowNoCacheResponse** element.

### 3.1.4.50.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>FixupRowNoCache</b>         | The input data for the <b>FixupRowNoCache</b> WSDL operation.  |
| <b>FixupRowNoCacheResponse</b> | The result data for the <b>FixupRowNoCache</b> WSDL operation. |

#### 3.1.4.50.2.1 FixupRowNoCache

The **FixupRowNoCache** element specifies the input data for the **FixupRowNoCache** WSDL operation.

```

<xs:element name="FixupRowNoCache" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a **result set**. MUST be present.

**keys:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the row to operate on. MUST be present. MUST contain exactly one **KeyValuePair** (section [2.2.4.5](#)). The **Key** element of the **KeyValuePair** MUST contain a primary key value for a row in the result set.

**values:** An **ArrayOfArrayOfKeyValuePair** (section [2.2.4.32](#)) that specifies which records need to be inserted into the database application. Each **ArrayOfKeyValuePair** (section 2.2.4.2) element of the **ArrayOfArrayOfKeyValuePair** specifies the fields (2) and their new values which are to be inserted in a new record. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the data for that column in the new row.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section 2.2.4.5).
- For each **KeyValuePair**:
  - The **Key** element MUST be equal to the name of a column in the result set.
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([\[XMLSCHEMA2\]](#) section 2.6.2) attribute set to "true" or have the **type** ([\[XMLSCHEMA2\]](#) section 2.6.1) attribute set to one of the following:
    - **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2)
    - **datetime** ([\[XMLSCHEMA2\]](#) section 3.2.7)
    - **string** ([\[XMLSCHEMA2\]](#) section 3.2.1)
    - **int** ([\[XMLSCHEMA2\]](#) section 3.3.17)
    - **decimal** ([\[XMLSCHEMA2\]](#) section 3.2.3)

**double** ([\[XMLSCHEMA2\]](#) section 3.2.5)

**queryParameters:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the set of values for each **CT\_Parameter** ([\[MS-AXL2\]](#) section 2.2.3.12) required in the Source. One value **MUST** be present for every **CT\_Parameter** defined in the Source.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. **MUST** be present. **SHOULD** be ignored by the protocol server.

### 3.1.4.50.2.2 FixupRowNoCacheResponse

The **FixupRowNoCacheResponse** element specifies the result data for the **FixupRowNoCache** WSDL operation.

```
<xs:element name="FixupRowNoCacheResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="FixupRowNoCacheResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**FixupRowNoCacheResult:** A **CommandResult**, as specified by section [2.2.4.4](#). **MUST** be present.

**tableXml:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies XML containing the content of the returned row, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section [3.1.4.10.2.2](#)).

**totalRowCount:** **MUST** be "1".

### 3.1.4.50.3 Complex Types

None.

### 3.1.4.50.4 Simple Types

None.

### 3.1.4.50.5 Attributes

None.

### 3.1.4.50.6 Groups

None.

### 3.1.4.50.7 Attribute Groups

None.

### 3.1.4.51 GetApplicationNotifications

This operation is used to get the list of notifications (if any) that could be relevant for the application.

The following is the WSDL port type specification of the **GetApplicationNotifications** WSDL operation.

```

<wsdl:operation name="GetApplicationNotifications"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationNotifications"
message="tns:IAccessServiceSoap GetApplicationNotifications InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationNotificationsResponse"
message="tns:IAccessServiceSoap GetApplicationNotifications OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationNotificationsAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap GetApplicationNotifications AccessServerMessageFault FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetApplicationNofications\_InputMessage** (section [3.1.4.53.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetApplicationNotifications\_OutputMessage** (section [3.1.4.53.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetApplicationNotifications\_OutputMessage** response message that contains information about the **notifications**.

### 3.1.4.51.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetApplicationNotifications_InputMessage</b>  | The request WSDL message for the <b>GetApplicationNotifications</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetApplicationNotifications_OutputMessage</b> | The response WSDL message for the <b>GetApplicationNotifications</b> WSDL operation. |

#### 3.1.4.51.1.1 IAccessServiceSoap\_GetApplicationNotifications\_InputMessage

The request WSDL message for the **GetApplicationNotifications** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationNotifications

```

The SOAP body contains the **GetApplicationNotifications** element.

### 3.1.4.51.1.2 IAccessServiceSoap\_GetApplicationNotifications\_OutputMessage

The response WSDL message for the **GetApplicationNotifications** WSDL operation.

The SOAP body contains the **GetApplicationNotificationsResponse** element.

#### 3.1.4.51.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                    | Description  |
|--|--|
| <b>GetApplicationNotifications</b>         | The input data for the <b>GetApplicationNotifications</b> WSDL operation.  |
| <b>GetApplicationNotificationsResponse</b> | The result data for the <b>GetApplicationNotifications</b> WSDL operation. |

#### 3.1.4.51.2.1 GetApplicationNotifications

The **GetApplicationNotifications** element specifies the input data for the **GetApplicationNotifications** WSDL operation.

```
<xs:element name="GetApplicationNotifications" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="param" nillable="true" type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="severities" nillable="true" type="tns6:ArrayOfMessageSeverity"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**param:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**severities:** An **ArrayOfMessageSeverity** (section [3.1.4.53.3.1](#)) containing different kinds of **MessageSeverity** that indicate the level or severity of notifications that should be included in the response. Only the notifications that match the specified severities will be included.

#### 3.1.4.51.2.2 GetApplicationNotificationsResponse

The **GetApplicationNotificationsResponse** element specifies the result data for the **GetApplicationNotifications** WSDL operation.

```
<xs:element name="GetApplicationNotificationsResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetApplicationNotificationsResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="notifications" nillable="true" type="tns6:ArrayOfNotification"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

**GetApplicationNotificationsResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**notifications:** An **ArrayOfNotification** (section [3.1.4.53.3.2](#)) containing **Notification** (section [3.1.4.53.3.3](#)) that match the severities specified in the input parameter.

### 3.1.4.51.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                  | Description                              |
|-------------------------------|--|
| <b>ArrayOfMessageSeverity</b> | See section <a href="#">3.1.4.53.3.1</a> |
| <b>ArrayOfNotification</b>    | See section <a href="#">3.1.4.53.3.2</a> |
| <b>Notification</b>           | See section <a href="#">3.1.4.53.3.3</a> |

#### 3.1.4.51.3.1 ArrayOfMessageSeverity

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

An array containing the list of severities for notifications.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfMessageSeverity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="MessageSeverity"
      type="tns6:MessageSeverity"/>
  </xs:sequence>
</xs:complexType>
```

**MessageSeverity:** See section [3.1.4.53.4.1](#).

#### 3.1.4.51.3.2 ArrayOfNotification

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

An array or a list containing the list notifications.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="ArrayOfNotification" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="Notification" nillable="true"
      type="tns6:Notification"/>
  </xs:sequence>
</xs:complexType>
```

**Notification:** See section [3.1.4.53.3.3](#).



### 3.1.4.51.3.3 Notification

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient

Represents a notification object.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="Notification" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="HelpLink" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Severity" type="tns6:MessageSeverity"/>
  </xs:sequence>
</xs:complexType>
```

**HelpLink:** A **string** ([XMLSCHEMA2] section 3.2.1) which is a help link for the type of notification.

**Message:** A **string** ([XMLSCHEMA2] section 3.2.1) containing the description about the notification.

**Severity:** **MessageSeverity** (section [3.1.4.53.4.1](#)) that specifies the level or severity of the notification.

### 3.1.4.51.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type            | Description                              |
|------------------------|--|
| <b>MessageSeverity</b> | See section <a href="#">3.1.4.53.4.1</a> |

#### 3.1.4.51.4.1 MessageSeverity

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient

Represents the severity of the notification message.

Optional: Type a detailed description for the Simple Type.

```
<xs:simpleType name="MessageSeverity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Info"/>
    <xs:enumeration value="Warn"/>
    <xs:enumeration value="Error"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **MessageSeverity** simple type.

| Value | Meaning                                      |
|-------|--|
| Info  | Indicates the notification is informational. |
| Warn  | Indicates the notification is a warning.     |
| Error | Indicates the notification is an error.      |

### 3.1.4.51.5 Attributes

None.

### 3.1.4.51.6 Groups

None.

### 3.1.4.51.7 Attribute Groups

None.

## 3.1.4.52 GetHostProperties

This operation retrieves the Application Host Properties.

The following is the WSDL port type specification of the **GetHostProperties** WSDL operation.

```
<wsdl:operation name="GetHostProperties" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHostProperties"
    message="tns:IAccessServiceSoap_GetHostProperties_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHostPropertiesResponse"
    message="tns:IAccessServiceSoap_GetHostProperties_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHostPropertiesAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetHostProperties_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetHostProperties\_InputMessage** (section [3.1.4.54.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetHostProperties\_OutputMessage** (section [3.1.4.54.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetHostProperties\_OutputMessage** (section [3.1.4.54.1.2](#)) response message.

### 3.1.4.52.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description                      |
|--|----------------------------------|
| <b>IAccessServiceSoap_GetHostProperties_InputMessage</b> | The request WSDL message for the |

| Message   | Description  |
|---|--|
|   | <b>GetHostProperties</b> WSDL operation.                                   |
| <b>IAccessServiceSoap_GetHostProperties_OutputMessage</b> | The response WSDL message for the <b>GetHostProperties</b> WSDL operation. |

### 3.1.4.52.1.1 IAccessServiceSoap\_GetHostProperties\_InputMessage

The request WSDL message for the **GetHostProperties** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHostProperties
```

The SOAP body contains the **GetHostProperties** element.

### 3.1.4.52.1.2 IAccessServiceSoap\_GetHostProperties\_OutputMessage

The response WSDL message for the **GetHostProperties** WSDL operation.

The SOAP body contains the **GetHostPropertiesResponse** element.

## 3.1.4.52.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>GetHostProperties</b>         | The input data for the <b>GetHostProperties</b> WSDL operation.  |
| <b>GetHostPropertiesResponse</b> | The result data for the <b>GetHostProperties</b> WSDL operation. |

### 3.1.4.52.2.1 GetHostProperties

The **GetHostProperties** element specifies the input data for the **GetHostProperties** WSDL operation.

```
<xs:element name="GetHostProperties" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.52.2.2 GetHostPropertiesResponse

The **GetHostPropertiesResponse** element specifies the result data for the **GetHostProperties** WSDL operation.

```
<xs:element name="GetHostPropertiesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetHostPropertiesResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="properties" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetHostPropertiesResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**properties:** An **ArrayOfKeyValueOfstringstring** (section [2.2.4.17](#)) that specifies properties of the database application. Each **Key** element specifies the name of a property, and the corresponding **Value** element contains the **string** ([XMLSCHEMA2](#) section 3.2.1) value of that property.

- MUST be present.
- MUST contain the following pairs of **Key** and **Value** elements:

| Key                  | Value   |
|----------------------|---|
| "SiteId"             | MUST match the value of <b>SiteId</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the database application.  |
| "SiteSubscriptionId" | MUST match the value of <b>SiteSubscriptionId</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the database application.  |
| "AppInstanceId"      | MUST match the value of <b>AppInstanceId</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the database application.   |
| "PackageSource"      | MUST match the value of <b>PackageSource</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the database application.   |
| "IsLocked"           | MUST be "true", if the value of <b>PackageType</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the database application is "AccessLocked". Otherwise, MUST be "false". |
| "ProductId"          | MUST match the value of <b>ProductId</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the database application.   |
| "DacId"              | MUST match the value of <b>DacId</b> in the <b>DatabaseContext</b> (section <a href="#">2.2.4.9</a> ) for the   |

| Key              | Value  |
|------------------|--|
|                  | database application.  |
| "PackageVersion" | MUST match the value of <b>AppVersion</b> in the <b>DatabaseContext</b> (section 2.2.4.9) for the database application.  |
| "PackageTitle"   | MUST match the value of <b>AppTitle</b> in the <b>DatabaseContext</b> (section 2.2.4.9) for the database application.  |
| "PackageType"    | MUST have value "Access" or "AccessLocked". If <b>CreatePackage</b> ( <a href="#">[MS-AADT]</a> section 3.1.4.2) has been called on this application with <b>Option</b> deployment, this MUST be "AccessLocked" if the <b>IsLocked</b> value stored during the most recent call of that type is true, and MUST be "Access", if it is false. Otherwise, it MAY be either value. |

### 3.1.4.52.3 Complex Types

None.

### 3.1.4.52.4 Simple Types

None.

### 3.1.4.52.5 Attributes

None.

### 3.1.4.52.6 Groups

None.

### 3.1.4.52.7 Attribute Groups

None.

### 3.1.4.53 GetNewDatabaseCollation

This operation retrieves the SQL collation name for the specified collation information.

The following is the WSDL port type specification of the **GetNewDatabaseCollation** WSDL operation.

```
<wsdl:operation name="GetNewDatabaseCollation" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetNewDatabaseCollation"
    message="tns:IAccessServiceSoap_GetNewDatabaseCollation_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetNewDatabaseCollationResponse"
    message="tns:IAccessServiceSoap_GetNewDatabaseCollation_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

    <wsdl:fault
      wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetNewDatabaseCollationAccessServerMessageFault"
      name="AccessServerMessageFault"
      message="tns:IAccessServiceSoap_GetNewDatabaseCollation_AccessServerMessageFault_FaultMessage"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_GetNewDatabaseCollation\_InputMessage** (section [3.1.4.55.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetNewDatabaseCollation\_OutputMessage** (section [3.1.4.55.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetNewDatabaseCollation\_OutputMessage** response message that contains information about the requested object.

### 3.1.4.53.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetNewDatabaseCollation_InputMessage</b>  | The request WSDL message for the <b>GetNewDatabaseCollation</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetNewDatabaseCollation_OutputMessage</b> | The response WSDL message for the <b>GetNewDatabaseCollation</b> WSDL operation. |

#### 3.1.4.53.1.1 IAccessServiceSoap\_GetNewDatabaseCollation\_InputMessage

The request WSDL message for the **GetNewDatabaseCollation** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetNewDatabaseCollation

```

The SOAP body contains the **GetNewDatabaseCollation** element.

#### 3.1.4.53.1.2 IAccessServiceSoap\_GetNewDatabaseCollation\_OutputMessage

The response WSDL message for the **GetNewDatabaseCollation** WSDL operation.

The SOAP body contains the **GetNewDatabaseCollationResponse** element.

### 3.1.4.53.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                | Description  |
|--|--|
| <b>GetNewDatabaseCollation</b>         | The input data for the <b>GetNewDatabaseCollation</b> WSDL operation.  |
| <b>GetNewDatabaseCollationResponse</b> | The result data for the <b>GetNewDatabaseCollation</b> WSDL operation. |

### 3.1.4.53.2.1 GetNewDatabaseCollation

The **GetNewDatabaseCollation** element specifies the input data for the **GetNewDatabaseCollation** WSDL operation.

```
<xs:element name="GetNewDatabaseCollation" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="collation" nillable="true" type="tns2:CollationInfo"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**collation:** A **CollationInfo** (section [2.2.4.51](#)) that specifies the collation of the database. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.53.2.2 GetNewDatabaseCollationResponse

The **GetNewDatabaseCollationResponse** element specifies the result data for the **GetNewDatabaseCollation** WSDL operation.

```
<xs:element name="GetNewDatabaseCollationResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetNewDatabaseCollationResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="collationName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetNewDatabaseCollationResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**collationName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the SQL collation name for the database.

### 3.1.4.53.3 Complex Types

None.

### 3.1.4.53.4 Simple Types

None.

### 3.1.4.53.5 Attributes

None.

### 3.1.4.53.6 Groups

None.

### 3.1.4.53.7 Attribute Groups

None.

### 3.1.4.54 GetOfficeAppSettings

This operation is used to get the Office Add-ins ([\[MS-OWEXML\]](#) section 1.3.1) bindings and custom app settings on each load.

The following is the WSDL port type specification of the **GetOfficeAppSettings** WSDL operation.

```
<wsdl:operation name="GetOfficeAppSettings" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettings"
    message="tns:IAccessServiceSoap_GetOfficeAppSettings_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettingsResponse"
    message="tns:IAccessServiceSoap_GetOfficeAppSettings_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettingsAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_GetOfficeAppSettings_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetOfficeAppSettings\_InputMessage** (section [3.1.4.56.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetOfficeAppSettings\_OutputMessage** (section [3.1.4.56.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetOfficeAppSettings\_OutputMessage** response message.

### 3.1.4.54.1 Messages



The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_GetOfficeAppSettings_InputMessage</b>  | The request WSDL message for the <b>GetOfficeAppSettings</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetOfficeAppSettings_OutputMessage</b> | The response WSDL message for the <b>GetOfficeAppSettings</b> WSDL operation. |

### 3.1.4.54.1.1 IAccessServiceSoap\_GetOfficeAppSettings\_InputMessage

The request WSDL message for the **GetOfficeAppSettings** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettings
```

The SOAP body contains the **GetOfficeAppSettings** element.

### 3.1.4.54.1.2 IAccessServiceSoap\_GetOfficeAppSettings\_OutputMessage

The response WSDL message for the **GetOfficeAppSettings** WSDL operation.

The SOAP body contains the **GetOfficeAppSettingsResponse** element.

### 3.1.4.54.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                             | Description   |
|-------------------------------------|---|
| <b>GetOfficeAppSettings</b>         | The input data for the <b>GetOfficeAppSettings</b> WSDL operation.  |
| <b>GetOfficeAppSettingsResponse</b> | The result data for the <b>GetOfficeAppSettings</b> WSDL operation. |

### 3.1.4.54.2.1 GetOfficeAppSettings

The **GetOfficeAppSettings** element specifies the input data for the **GetOfficeAppSettings** WSDL operation.

```
<xs:element name="GetOfficeAppSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="officeAppIds" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```

</xs:element>

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**formName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the form to which the Office Add-in ([\[MS-OWEXML\]](#) section 1.3.1) belongs.

**officeAppIds:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the instance ID of the Office Add-in ([\[MS-OWEXML\]](#) section 1.3.1). It can be retrieved from the **FormDef** ([\[MS-AXL2\]](#) section 2.2.1.12) by searching the Hypertext Markup Language (HTML) response for the value of the attribute "data-moa-agaveid" belonging to a "div" element with a "data-moa-type" attribute having a value of "access.appforoffice".

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.54.2.2 GetOfficeAppSettingsResponse

The **GetOfficeAppSettingsResponse** element specifies the result data for the **GetOfficeAppSettings** WSDL operation.

```
<xs:element name="GetOfficeAppSettingsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetOfficeAppSettingsResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="appsForOfficeSettings" nillable="true"
        type="tns6:AppsForOfficeSettings"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GetOfficeAppSettingsResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**appsForOfficeSettings:** An **AppsForOfficeSettings**, as specified in section [2.2.4.33](#).

### 3.1.4.54.3 Complex Types

None.

### 3.1.4.54.4 Simple Types

None.

### 3.1.4.54.5 Attributes

None.

### 3.1.4.54.6 Groups

None.

### 3.1.4.54.7 Attribute Groups

None.

### 3.1.4.55 GetReservedDatabase

This operation retrieves an available reserved database. A reserved database is a pre-created database on a server.

The following is the WSDL port type specification of the **GetReservedDatabase** WSDL operation.

```
<wsdl:operation name="GetReservedDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetReservedDatabase"
    message="tns:IAccessServiceSoap_GetReservedDatabase_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetReservedDatabaseResponse"
    message="tns:IAccessServiceSoap_GetReservedDatabase_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetReservedDatabaseDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_GetReservedDatabase_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_GetReservedDatabase\_InputMessage** (section [3.1.4.57.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_GetReservedDatabase\_OutputMessage** (section [3.1.4.57.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_GetReservedDatabase\_OutputMessage** response message.

#### 3.1.4.55.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_GetReservedDatabase_InputMessage</b>  | The request WSDL message for the <b>GetReservedDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_GetReservedDatabase_OutputMessage</b> | The response WSDL message for the <b>GetReservedDatabase</b> WSDL operation. |

#### 3.1.4.55.1.1 IAccessServiceSoap\_GetReservedDatabase\_InputMessage

The request WSDL message for the **GetReservedDatabase** WSDL operation.

The SOAP action value is:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetReservedDatabase

The SOAP body contains the **GetReservedDatabase** element.

### 3.1.4.55.1.2 IAccessServiceSoap\_GetReservedDatabase\_OutputMessage

The response WSDL message for the **GetReservedDatabase** WSDL operation.

The SOAP body contains the **GetReservedDatabaseResponse** element.

### 3.1.4.55.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                            | Description  |
|------------------------------------|--|
| <b>GetReservedDatabase</b>         | The input data for the <b>GetReservedDatabase</b> WSDL operation.  |
| <b>GetReservedDatabaseResponse</b> | The result data for the <b>GetReservedDatabase</b> WSDL operation. |

#### 3.1.4.55.2.1 GetReservedDatabase

The **GetReservedDatabase** element specifies the input data for the **GetReservedDatabase** WSDL operation.

```
<xs:element name="GetReservedDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="authMode" type="tns2:SqlAuthenticationMode"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="packageSource" type="tns2:PackageSource"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**authMode:** A **SqlAuthenticationMode** (section [2.2.5.19](#)) that specifies a requirement that the database server specified in the response to the **GetAvailableServer** operation MUST support that particular mode of authentication.

**packageSource:** A **PackageSource** (section [2.2.5.9](#)) that specifies a requirement that the database server specified in the response to the **GetAvailableServer** operation MUST support packages from that origin.

#### 3.1.4.55.2.2 GetReservedDatabaseResponse

The **GetReservedDatabaseResponse** element specifies the result data for the **GetReservedDatabase** WSDL operation.

```

<xs:element name="GetReservedDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetReservedDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
        " minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**GetReservedDatabaseResult: RenameDatabaseResult: A CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**databaseContext: A DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database.

### 3.1.4.55.3 Complex Types

None.

### 3.1.4.55.4 Simple Types

None.

### 3.1.4.55.5 Attributes

None.

### 3.1.4.55.6 Groups

None.

### 3.1.4.55.7 Attribute Groups

None.

## 3.1.4.56 InsertAppForOfficeInForm

This operation updates the form definition to insert **Office Add-ins** ([\[MS-OWEXML\]](#) section 1.3.1).

The following is the WSDL port type specification of the **InsertAppForOfficeInForm** WSDL operation.

```

<wsdl:operation name="InsertAppForOfficeInForm"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/InsertAppForOfficeInForm"
    message="tns:IAccessServiceSoap_InsertAppForOfficeInForm_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
    erInternalService/IAccessServiceSoap/InsertAppForOfficeInFormResponse"
    message="tns:IAccessServiceSoap_InsertAppForOfficeInForm_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

    <wsdl:fault
      wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertAppForOfficeInFormAccessServerMessageFault"
      name="AccessServerMessageFault"
      message="tns:IAccessServiceSoap_InsertAppForOfficeInForm_AccessServerMessageFault_FaultMessage"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_InsertAppForOfficeInForm\_InputMessage** (section [3.1.4.56.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_InsertAppForOfficeInForm\_OutputMessage** (section [3.1.4.56.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_InsertAppForOfficeInForm\_OutputMessage** response message.

### 3.1.4.56.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_InsertAppForOfficeInForm_InputMessage</b>  | The request WSDL message for the <b>InsertAppForOfficeInForm</b> WSDL operation.  |
| <b>IAccessServiceSoap_InsertAppForOfficeInForm_OutputMessage</b> | The response WSDL message for the <b>InsertAppForOfficeInForm</b> WSDL operation. |

#### 3.1.4.56.1.1 IAccessServiceSoap\_InsertAppForOfficeInForm\_InputMessage

The request WSDL message for the **InsertAppForOfficeInForm** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertAppForOfficeInForm

```

The SOAP body contains the **InsertAppForOfficeInForm** element.

#### 3.1.4.56.1.2 IAccessServiceSoap\_InsertAppForOfficeInForm\_OutputMessage

The response WSDL message for the **InsertAppForOfficeInForm** WSDL operation.

The SOAP body contains the **InsertAppForOfficeInFormResponse** element.

### 3.1.4.56.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                 | Description   |
|---|---|
| <b>InsertAppForOfficeInForm</b>         | The input data for the <b>InsertAppForOfficeInForm</b> WSDL operation.  |
| <b>InsertAppForOfficeInFormResponse</b> | The result data for the <b>InsertAppForOfficeInForm</b> WSDL operation. |

### 3.1.4.56.2.1 InsertAppForOfficeInForm

The **InsertAppForOfficeInForm** element specifies the input data for the **InsertAppForOfficeInForm** WSDL operation.

```
<xs:element name="InsertAppForOfficeInForm" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="insertAppsForOfficeInfo" nillable="true"
type="tns6:InsertAppsForOfficeInfo"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**formName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the form to which the Office Add-in ([\[MS-OWEXML\]](#) section 1.3.1) belongs.

**insertAppsForOfficeInfo:** A complex type as specified in section [3.1.4.58.3.1](#).

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.56.2.2 InsertAppForOfficeInFormResponse

The **InsertAppForOfficeInFormResponse** element specifies the result data for the **InsertAppForOfficeInForm** WSDL operation.

```
<xs:element name="InsertAppForOfficeInFormResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="InsertAppForOfficeInFormResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="formDefinition" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**InsertAppForOfficeInFormResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**formDefinition:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the updated Form definition.

### 3.1.4.56.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                   | Description                              |
|--------------------------------|--|
| <b>InsertAppsForOfficeInfo</b> | See section <a href="#">3.1.4.58.3.1</a> |

#### 3.1.4.56.3.1 InsertAppsForOfficeInfo

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient>

**InsertAppsForOfficeInfo** complex type specifies the information needed to insert an **Office Add-in** ([MS-OWEXML] section 1.3.1) into a form.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="InsertAppsForOfficeInfo" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AppVersion" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="AssetId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="AssetStoreId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CurrentStoreType" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Height" type="xs:int"/>
    <xs:element minOccurs="0" name="Id" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StoreId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="TargetType" type="xs:int"/>
    <xs:element minOccurs="0" name="Width" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

**AppVersion:** A **string** ([XMLSCHEMA2] section 3.2.1) specified as **version** in [MS-OWEXML] section 2.2.5

**AssetId:** A **string** attribute ([XMLSCHEMA2] section 3.2.1) that specifies the Id of the Office Add-in

**AssetStoreId:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the Id of the of the marketplace where the Office Add-in is stored.

**CurrentStoreType:** A **string** ([XMLSCHEMA2] section 3.2.1) specified as **storeType** attribute in [MS-OWEXML] section 2.2.5.

**Height:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the height of the inserted Office Add-in.

**Id:** A **string** ([XMLSCHEMA2] section 3.2.1) specified as **id** attribute in [MS-OWEXML] section 2.2.5

**StoreId:** A **string** ([XMLSCHEMA2] section 3.2.1) specified as **store** attribute in [MS-OWEXML] section 2.2.5.

**TargetType:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the target type of the Office Add-in in the form.

**Width:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the width of the inserted Office Add-in.



#### 3.1.4.56.4 Simple Types

None.

#### 3.1.4.56.5 Attributes

None.

#### 3.1.4.56.6 Groups

None.

#### 3.1.4.56.7 Attribute Groups

None.

#### 3.1.4.57 InsertDataNoCache

This operation inserts one or more records into a table in the database application and also inserts the corresponding rows into the result set.

The following is the WSDL port type specification of the **InsertDataNoCache** WSDL operation.

```
<wsdl:operation name="InsertDataNoCache" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertDataNoCache"
    message="tns:IAccessServiceSoap_InsertDataNoCache_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertDataNoCacheResponse"
    message="tns:IAccessServiceSoap_InsertDataNoCache_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertDataNoCacheAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_InsertDataNoCache_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_InsertDataNoCache\_InputMessage** (section [3.1.4.59.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_InsertDataNoCache\_OutputMessage** (section [3.1.4.59.1.2](#)) response message as follows:

- The protocol server adds one or more new records into the **Updatable Source** of the database application (section [3.1.1](#)) with the fields (2) of the records filled in as specified by the **values** element in the **InsertDataNoCache** element (section [3.1.4.59.2.1](#)).
- If the records were successfully inserted, the protocol server retrieves the inserted records from the database application and adds corresponding rows to the result set where the primary key of each row is equal to the primary key of that record, and with its columns filled in as specified by the corresponding columns of the retrieved record. The protocol server then returns the newly added rows to the protocol client.

In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified by section [2.2.9](#). The **Id** element of the **AccessServerMessage** MUST be one

of the values specified by section [2.2.9.1](#), one of the values specified by section [2.2.9.3](#), or one of the values specified in the following table.

| Identifier                     | Description                           |
|--------------------------------|---------------------------------------|
| WriteRecordsPermissionsFailure | See section <a href="#">2.2.5.2</a> . |

### 3.1.4.57.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_InsertDataNoCache_InputMessage</b>  | The request WSDL message for the <b>InsertDataNoCache</b> WSDL operation.  |
| <b>IAccessServiceSoap_InsertDataNoCache_OutputMessage</b> | The response WSDL message for the <b>InsertDataNoCache</b> WSDL operation. |

#### 3.1.4.57.1.1 IAccessServiceSoap\_InsertDataNoCache\_InputMessage

The request WSDL message for the **InsertDataNoCache** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertDataNoCache
```

The SOAP body contains the **InsertDataNoCache** element.

#### 3.1.4.57.1.2 IAccessServiceSoap\_InsertDataNoCache\_OutputMessage

The response WSDL message for the **InsertDataNoCache** WSDL operation.

The SOAP body contains the **InsertDataNoCacheResponse** element.

### 3.1.4.57.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>InsertDataNoCache</b>         | The input data for the <b>InsertDataNoCache</b> WSDL operation.  |
| <b>InsertDataNoCacheResponse</b> | The result data for the <b>InsertDataNoCache</b> WSDL operation. |

#### 3.1.4.57.2.1 InsertDataNoCache

The **InsertDataNoCache** element specifies the input data for the **InsertDataNoCache** WSDL operation.

```

<xs:element name="InsertDataNoCache" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfArrayOfKeyValuePair"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="fields" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies an identifier for a result set. MUST be present.

**values:** An **ArrayOfArrayOfKeyValuePair** (section [2.2.4.32](#)) that specifies which records need to be inserted into the database application. Each **ArrayOfKeyValuePair** (section [2.2.4.2](#)) element of the **ArrayOfArrayOfKeyValuePair** specifies the fields (2) and their new values which are to be inserted in a new record. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the data for that column in the new row.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section [2.2.4.5](#)).
- For each **KeyValuePair**:
  - The **Key** element MUST be equal to the name of a column in the result set.
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([XMLSCHEMA2] section 2.6.2) attribute set to "true" or have the **type** ([XMLSCHEMA2] section 2.6.1) attribute set to one of the following:
    - **boolean** ([XMLSCHEMA2] section 3.2.2)
    - **datetime** ([XMLSCHEMA2] section 3.2.7)
    - **string** ([XMLSCHEMA2] section 3.2.1)
    - **int** ([XMLSCHEMA2] section 3.3.17)
    - **decimal** ([XMLSCHEMA2] section 3.2.3)

**double** ([XMLSCHEMA2] section 3.2.5)

**fields:** A **FieldList** (section [2.2.4.51](#)) that specifies the **fields (3)** of the **Source** (section 3.1.1.1), which was previously supplied as an input element to the **InsertDataNoCache** operation, for which data is to be inserted into.

**queryParameters:** An `ArrayOfKeyValuePair` (section 2.2.4.2) that specifies the set of values for each `CT_Parameter` ([MS-AXL2] section 2.2.3.12) required in the Source. One value **MUST** be present for every `CT_Parameter` defined in the Source.

**userCookieId:** A **guid** (section 2.2.5.8) that specifies an identifier for the operation. **MUST** be present. **SHOULD** be ignored by the protocol server.

### 3.1.4.57.2.2 InsertDataNoCacheResponse

The **InsertDataNoCacheResponse** element specifies the result data for the **InsertDataNoCache** WSDL operation.

```
<xs:element name="InsertDataNoCacheResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="InsertDataNoCacheResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="insertedRowsXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**InsertDataNoCacheResult:** A **CommandResult**, as specified by section 2.2.4.4. **MUST** be present.

**insertedRowsXml:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the XML containing the content of the returned rows, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section 3.1.4.10.2.2).

### 3.1.4.57.3 Complex Types

None.

### 3.1.4.57.4 Simple Types

None.

### 3.1.4.57.5 Attributes

None.

### 3.1.4.57.6 Groups

None.

### 3.1.4.57.7 Attribute Groups

None.

### 3.1.4.58 RecycleDatabase

This operation deletes a database in a manner that allows the database to be restored.

The following is the WSDL port type specification of the **RecycleDatabase** WSDL operation.

```
<wsdl:operation name="RecycleDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RecycleDatabase"
message="tns:IAccessServiceSoap_RecycleDatabase_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RecycleDatabaseResponse"
message="tns:IAccessServiceSoap_RecycleDatabase_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RecycleDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_RecycleDatabase_DatabaseProviderMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_RecycleDatabase\_InputMessage** (section [3.1.4.39.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_RecycleDatabase\_OutputMessage** (section [3.1.4.39.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_RecycleDatabase\_OutputMessage** response message.

### 3.1.4.58.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_RecycleDatabase_InputMessage</b>  | The request WSDL message for the <b>RecycleDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_RecycleDatabase_OutputMessage</b> | The response WSDL message for the <b>RecycleDatabase</b> WSDL operation. |

#### 3.1.4.58.1.1 IAccessServiceSoap\_RecycleDatabase\_InputMessage

The request WSDL message for the **RecycleDatabase** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalSer
vice/IAccessServiceSoap/RecycleDatabase

```

The SOAP body contains the **RecycleDatabase** element.

#### 3.1.4.58.1.2 IAccessServiceSoap\_RecycleDatabase\_OutputMessage

The response WSDL message for the **RecycleDatabase** WSDL operation.

The SOAP body contains the **RecycleDatabaseResponse** element.

### 3.1.4.58.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>RecycleDatabase</b>         | The input data for the <b>RecycleDatabase</b> WSDL operation.  |
| <b>RecycleDatabaseResponse</b> | The result data for the <b>RecycleDatabase</b> WSDL operation. |

#### 3.1.4.58.2.1 RecycleDatabase

The **RecycleDatabase** element specifies the input data for the **RecycleDatabase** WSDL operation.

```
<xs:element name="RecycleDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to recycle. MUST be present.

#### 3.1.4.58.2.2 RecycleDatabaseResponse

The **RecycleDatabaseResponse** element specifies the result data for the **RecycleDatabase** WSDL operation.

```
<xs:element name="RecycleDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RecycleDatabaseResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**RecycleDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.58.3 Complex Types

None.

### 3.1.4.58.4 Simple Types

None.

### 3.1.4.58.5 Attributes

None.

### 3.1.4.58.6 Groups

None.

### 3.1.4.58.7 Attribute Groups

None.

### 3.1.4.59 RestoreDatabase

This operation restores a previously recycled database.

The following is the WSDL port type specification of the **RestoreDatabase** WSDL operation.

```
<wsdl:operation name="RestoreDatabase" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RestoreDatabase"
    message="tns:IAccessServiceSoap_RestoreDatabase_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RestoreDatabaseResponse"
    message="tns:IAccessServiceSoap_RestoreDatabase_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RestoreDatabaseDatabaseProviderMessageFault"
    name="DatabaseProviderMessageFault"
    message="tns:IAccessServiceSoap_RestoreDatabase_DatabaseProviderMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_RestoreDatabase\_InputMessage** (section [3.1.4.39.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_RestoreDatabase\_OutputMessage** (section [3.1.4.39.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_RestoreDatabase\_OutputMessage** response message.

### 3.1.4.59.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_RestoreDatabase_InputMessage</b>  | The request WSDL message for the <b>RestoreDatabase</b> WSDL operation.  |
| <b>IAccessServiceSoap_RestoreDatabase_OutputMessage</b> | The response WSDL message for the <b>RestoreDatabase</b> WSDL operation. |

### 3.1.4.59.1.1 IAccessServiceSoap\_RestoreDatabase\_InputMessage

The request WSDL message for the **RestoreDatabase** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RestoreDatabase
```

The SOAP body contains the **RestoreDatabase** element.

### 3.1.4.59.1.2 IAccessServiceSoap\_RestoreDatabase\_OutputMessage

The response WSDL message for the **RestoreDatabase** WSDL operation.

The SOAP body contains the **RestoreDatabaseResponse** element.

## 3.1.4.59.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                        | Description  |
|--------------------------------|--|
| <b>RestoreDatabase</b>         | The input data for the <b>RestoreDatabase</b> WSDL operation.  |
| <b>RestoreDatabaseResponse</b> | The result data for the <b>RestoreDatabase</b> WSDL operation. |

### 3.1.4.59.2.1 RestoreDatabase

The **RestoreDatabase** element specifies the input data for the **RestoreDatabase** WSDL operation.

```
<xs:element name="RestoreDatabase" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.



**databaseContext:** A **DatabaseContext** (section [2.2.4.11](#)) that specifies information about the database to rename. The **DatabaseName** element of the **DatabaseContext** MUST specify the name of a database that was previously recycled and MUST specify a valid **ServerContext** (section [2.2.4.13](#)). MUST be present.

### 3.1.4.59.2 RestoreDatabaseResponse

The **RestoreDatabaseResponse** element specifies the result data for the **RestoreDatabase** WSDL operation.

```
<xs:element name="RestoreDatabaseResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="RestoreDatabaseResult" nillable="true"
        type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**RestoreDatabaseResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.59.3 Complex Types

None.

### 3.1.4.59.4 Simple Types

None.

### 3.1.4.59.5 Attributes

None.

### 3.1.4.59.6 Groups

None.

### 3.1.4.59.7 Attribute Groups

None.

### 3.1.4.60 RetrieveImage

The **RetrieveImage** protocol operation retrieves image data for a field (2).

The following is the WSDL port type specification of the **RetrieveImage** WSDL operation.

```
<wsdl:operation name="RetrieveImage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RetrieveImage"
    message="tns:IAccessServiceSoap_RetrieveImage_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RetrieveImageResponse"
  </wsdl:output>
</wsdl:operation>
```

```

message="tns:IAccessServiceSoap_RetrieveImage_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RetrieveImageAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_RetrieveImage_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_RetrieveImage\_InputMessage** (section [3.1.4.62.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_RetrieveImage\_OutputMessage** (section [3.1.4.62.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_RetrieveImage\_OutputMessage** response message that contains the image data.

### 3.1.4.60.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_RetrieveImage_InputMessage</b>  | The request WSDL message for the <b>RetrieveImage</b> WSDL operation.  |
| <b>IAccessServiceSoap_RetrieveImage_OutputMessage</b> | The response WSDL message for the <b>RetrieveImage</b> WSDL operation. |

#### 3.1.4.60.1.1 IAccessServiceSoap\_RetrieveImage\_InputMessage

The request WSDL message for the **RetrieveImage** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RetrieveImage

```

The SOAP body contains the **RetrieveImage** element.

#### 3.1.4.60.1.2 IAccessServiceSoap\_RetrieveImage\_OutputMessage

The response WSDL message for the **RetrieveImage** WSDL operation.

The SOAP body contains the **RetrieveImageResponse** element.

### 3.1.4.60.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                      | Description  |
|------------------------------|--|
| <b>RetrieveImage</b>         | The input data for the <b>RetrieveImage</b> WSDL operation.  |
| <b>RetrieveImageResponse</b> | The result data for the <b>RetrieveImage</b> WSDL operation. |

### 3.1.4.60.2.1 RetrieveImage

The **RetrieveImage** element specifies the input data for the **RetrieveImage** WSDL operation.

```
<xs:element name="RetrieveImage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="recordSource" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="fieldName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="imageId" type="xs:int"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**recordSource:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the **Source** (section [3.1.1.1](#)) for which the image is to be retrieved. MUST be present.

**fieldName:** A **string** ([XMLSCHEMA2] section 3.2.1) that specifies the name of the field (2) for which the image is to be retrieved. MUST be present.

**imageId:** An **int** ([XMLSCHEMA2] section 3.3.17) that specifies the identifier of the image to be retrieved. MUST be present and MUST correspond to the result of an **UpdateImage** (section [3.1.4.67](#)) operation.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.60.2.2 RetrieveImageResponse

The **RetrieveImageResponse** element specifies the result data for the **RetrieveImage** WSDL operation.

```
<xs:element name="RetrieveImageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RetrieveImageResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="imageValue" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**RetrieveImageResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**imageValue:** A **base64Binary** ([\[XMLSCHEMA2\]](#) section 3.2.16) that specifies the image data.

### 3.1.4.60.3 Complex Types

None.

### 3.1.4.60.4 Simple Types

None.

### 3.1.4.60.5 Attributes

None.

### 3.1.4.60.6 Groups

None.

### 3.1.4.60.7 Attribute Groups

None.

### 3.1.4.61 SelectDataNoCache

This operation returns a subset of rows from the given **Source** (section 3.1.1.1).

The following is the WSDL port type specification of the **SelectDataNoCache** WSDL operation.

```
<wsdl:operation name="SelectDataNoCache" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SelectDataNoCache"
    message="tns:IAccessServiceSoap_SelectDataNoCache_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SelectDataNoCacheResponse"
    message="tns:IAccessServiceSoap_SelectDataNoCache_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SelectDataNoCacheAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_SelectDataNoCache_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_SelectDataNoCache\_InputMessage** (section [3.1.4.63.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_SelectDataNoCache\_OutputMessage** (section [3.1.4.63.1.2](#)) response message as follows:

- The protocol server retrieves data from the given **Source** of the database application, which was previously supplied as an input element to the **GetObjectSchema** (section [3.1.4.7.2.1](#)) operation. Only the fields (2) that are specified by **fields** input element in section [3.1.4.63.2.1](#) are retrieved. The data is filtered according to the **filter** and **restriction** input elements (section 3.1.4.63.2.1). The protocol server also sorts the data according to expressions defined by the **sortExpression** input element (section 3.1.4.63.2.1).

- The protocol server stores the data in a result set identified by the **source** input element (section 3.1.4.63.2.1) within the session identified by the **WorkbookId** element of the **parameter** input element (section 3.1.4.63.2.1) in the request message.
- The protocol server returns a subset of rows specified by **startRowIndex** and **maximumRows** input elements (section 3.1.4.63.2.1) as follows:
  - **maximumRows** MUST be greater than zero ("0"). If it is less than or equal to zero, a SOAP fault is returned, as specified in section 2.2.9.
  - If the **maximumRows** element is greater than zero and if the sum of **startRowIndex** and **maximumRows** exceeds the number of rows in the result set, the protocol server returns all rows in the result set with indices greater than or equal to **startRowIndex**.
  - Otherwise, the protocol server returns all rows in the result set with indices starting at **startRowIndex** and ending at the sum of **startRowIndex** and **maximumRows** minus 1.
- The protocol server calculates the total number of rows in **Source** that satisfy the **filter** and **restriction** conditions, and returns this row count as the **totalRowCount** output element (section 3.1.4.63.2.2).
- If the **retrieveExactRowCount** input element (section 3.1.4.63.2.1) is "true", the protocol server returns the exact total row count and if the **retrieveExactRowCount** input element is "false", the protocol server returns an approximate total row count in the **totalRowCount** output element.
- In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section 2.2.9. The **Id** element of the **AccessServerMessage** (section 2.2.4.1) MUST be one of the values specified in section 2.2.9.1, one of the values specified in section 2.2.9.2, one of the values specified in section 2.2.9.3, or one of the values in the following table.

| Identifier                             | Description          |
|--|----------------------|
| GetRecordsPermissionsFailure           | See section 2.2.5.2. |
| OrderingException_InvalidSpecification | See section 2.2.5.2. |
| OrderingException_InvalidColumnName    | See section 2.2.5.2. |

### 3.1.4.61.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_SelectDataNoCache_InputMessage</b>  | The request WSDL message for the <b>SelectDataNoCache</b> WSDL operation.  |
| <b>IAccessServiceSoap_SelectDataNoCache_OutputMessage</b> | The response WSDL message for the <b>SelectDataNoCache</b> WSDL operation. |

#### 3.1.4.61.1.1 IAccessServiceSoap\_SelectDataNoCache\_InputMessage

The request WSDL message for the **SelectDataNoCache** WSDL operation.

The SOAP action value is:

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SelectDataNoCache

The SOAP body contains the **SelectDataNoCache** element.

### 3.1.4.61.1.2 IAccessServiceSoap\_SelectDataNoCache\_OutputMessage

The response WSDL message for the **SelectDataNoCache** WSDL operation.

The SOAP body contains the **SelectDataNoCacheResponse** element.

### 3.1.4.61.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>SelectDataNoCache</b>         | The input data for the <b>SelectDataNoCache</b> WSDL operation.  |
| <b>SelectDataNoCacheResponse</b> | The result data for the <b>SelectDataNoCache</b> WSDL operation. |

#### 3.1.4.61.2.1 SelectDataNoCache

The **SelectDataNoCache** element specifies the input data for the **SelectDataNoCache** WSDL operation.

```
<xs:element name="SelectDataNoCache" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="fields" nillable="true" type="tns6:FieldList"/>
        <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
        <xs:element
          xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
          minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
          <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
          <xs:element
            xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
            minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
            <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="startRowIndex" type="xs:int"/>
            <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
            <xs:element minOccurs="0" name="refreshData" type="xs:boolean"/>
            <xs:element minOccurs="0" name="retrieveExactRowCount" type="xs:boolean"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
```

**parameter:** A **CommandParameter**, as specified by section [2.2.4.3](#). MUST be present.

**fields:** A **FieldList** (section [2.2.4.51](#)) that specifies the fields (2) of the **Source** (section [3.1.1.1](#)), which was previously supplied as an input element to the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)), for which data is to be retrieved.

**restriction:** A **string** representing a **CT\_Expression** ([\[MS-AXL2\]](#) section 2.2.3.1) that specifies a restriction expression to be applied to the result set. Only rows in the **Source** that return "true" for this restriction expression are included in the result set.

**queryParameters:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the set of values for each **CT\_Parameter** ([\[MS-AXL2\]](#) section 2.2.3.12) required in the **Source**. One value MUST be present for every **CT\_Parameter** defined in the **Source**.

- The **Key** element of each of the **KeyValuePairs** (section [2.2.4.5](#)) in **queryParameters** matches the **Name** element of the **CT\_Parameter**.
- The **Value** element of each of the **KeyValuePairs** specifies the value of the **Expression** element of the **CT\_ParameterValue** ([\[MS-AXL2\]](#) section 2.2.3.16) in the correct data type.

**sortExpression:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the sort order to apply when the protocol server retrieves data from the database application. If present and not empty, MUST contain an **Ordering** element, as specified by [\[MS-AXL2\]](#) section 2.2.1.2.

**filter:** A **FilterInfo** (section [2.2.4.10](#)) that specifies how the result set is to be filtered.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a result set. MUST be present. MUST contain an identifier that was previously supplied during the session as the **source** element for the input to the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

**startRowIndex:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the index of the first row to return from the result set.

- MUST be nonnegative.
- MUST be zero to specify the first row.

MUST be less than the number of rows in the result set.

**maximumRows:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the maximum number of rows to return. MUST be non-negative.

**refreshData:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the protocol server will execute the RefreshData operation and retrieve a single row.

**retrieveExactRowCount:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the protocol server will return the exact row count in the **totalRowCount** element of **SelectDataNoCacheResponse** (section [3.1.4.63.2.2](#)).

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.61.2.2 SelectDataNoCacheResponse

The **SelectDataNoCacheResponse** element specifies the result data for the **SelectDataNoCache** WSDL operation.

```
<xs:element name="SelectDataNoCacheResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
```

```

InternalService/" minOccurs="0" name="SelectDataNoCacheResult" nillable="true"
type="tns:CommandResult"/>
  <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
</xs:sequence>
</xs:complexType>
</xs:element>

```

**SelectDataNoCacheResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**tableXml:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies XML containing the returned rows.

- MUST be present.
- MUST be a **DiffGram**, as specified by [\[MS-DSDIFFGRAM\]](#).
- The root element MUST be named "DataTable".

Each child of the "DocumentElement" child of the "Diffgram" child of the "DataTable" element MUST be named "Data".

**totalRowCount:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the total number of rows in the **Source** (section [3.1.1.1](#)), which was previously supplied as an input element in the **GetObjectSchema** operation (section [3.1.4.7.2.1](#)).

### 3.1.4.61.3 Complex Types

None.

### 3.1.4.61.4 Simple Types

None.

### 3.1.4.61.5 Attributes

None.

### 3.1.4.61.6 Groups

None.

### 3.1.4.61.7 Attribute Groups

None.

### 3.1.4.62 SetObjectReadOnly

The **SetObjectReadOnly** operation sets whether an **AccessObject** (section [2.2.4.28](#)) is read-only.

The following is the WSDL port type specification of the **SetObjectReadOnly** WSDL operation.

```

<wsdl:operation name="SetObjectReadOnly" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetObjectReadOnly"
message="tns:IAccessServiceSoap_SetObjectReadOnly_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetObjectReadOnlyResponse"

```



```

message="tns:IAccessServiceSoap_SetObjectReadOnly_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetObjectReadOnlyAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SetObjectReadOnly_AccessServerMessageFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **IAccessServiceSoap\_SetObjectReadOnly\_InputMessage** (section [3.1.4.64.1.1](#)) request message and the protocol server responds with a **IAccessServiceSoap\_SetObjectReadOnly\_OutputMessage** (section [3.1.4.64.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified by section [2.2.9](#).
- Otherwise, the protocol server MUST respond with a **IAccessServiceSoap\_SetObjectReadOnly\_OutputMessage** response message that contains information about whether or not the object was made read-only by the protocol operation.

### 3.1.4.62.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_SetObjectReadOnly_InputMessage</b>  | The request WSDL message for the <b>SetObjectReadOnly</b> WSDL operation.  |
| <b>IAccessServiceSoap_SetObjectReadOnly_OutputMessage</b> | The response WSDL message for the <b>SetObjectReadOnly</b> WSDL operation. |

#### 3.1.4.62.1.1 IAccessServiceSoap\_SetObjectReadOnly\_InputMessage

The request WSDL message for the **SetObjectReadOnly** WSDL operation.

The SOAP action value is:

```

http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetObjectReadOnly

```

The SOAP body contains the **SetObjectReadOnly** element.

#### 3.1.4.62.1.2 IAccessServiceSoap\_SetObjectReadOnly\_OutputMessage

The response WSDL message for the **SetObjectReadOnly** WSDL operation.

The SOAP body contains the **SetObjectReadOnlyResponse** element.

### 3.1.4.62.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>SetObjectReadOnly</b>         | The input data for the <b>SetObjectReadOnly</b> WSDL operation.  |
| <b>SetObjectReadOnlyResponse</b> | The result data for the <b>SetObjectReadOnly</b> WSDL operation. |

### 3.1.4.62.2.1 SetObjectReadOnly

The **SetObjectReadOnly** element specifies the input data for the **SetObjectReadOnly** WSDL operation.

```
<xs:element name="SetObjectReadOnly" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="parameters" nillable="true" type="tns5:SetObjectReadOnlyParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** A **SetObjectReadOnlyParameters** (section [3.1.4.64.3.1](#)) that specifies the object and whether it is to be read-only. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.62.2.2 SetObjectReadOnlyResponse

The **SetObjectReadOnlyResponse** element specifies the result data for the **SetObjectReadOnly** WSDL operation.

```
<xs:element name="SetObjectReadOnlyResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="SetObjectReadOnlyResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
        ce" minOccurs="0" name="result" nillable="true" type="tns5:SetObjectReadOnlyResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**SetObjectReadOnlyResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** A **SetObjectReadOnlyResult** (section [3.1.4.64.3.2](#)) that specifies whether the operation was successful. MUST be present.

### 3.1.4.62.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                       | Description                              |
|------------------------------------|--|
| <b>SetObjectReadOnlyParameters</b> | See section <a href="#">3.1.4.64.3.1</a> |
| <b>SetObjectReadOnlyResult</b>     | See section <a href="#">3.1.4.64.3.2</a> |

#### 3.1.4.62.3.1 SetObjectReadOnlyParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

This complex type specifies the input data for the **SetObjectReadOnly** protocol operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="SetObjectReadOnlyParameters"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="MarkReadOnly" type="xs:boolean"/>
        <xs:element minOccurs="0" name="ObjectName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

**MarkReadOnly:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether to mark the object read-only.

**ObjectName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of an **AccessObject** (section [2.2.4.28](#)) to act upon.

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.20](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.20.3.1](#)). MUST Be present.

#### 3.1.4.62.3.2 SetObjectReadOnlyResult

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

This complex type specifies the result data for the **SetObjectReadOnly** protocol operation.

The result data contains information about whether or not the object was made read only by the protocol server during the execution of this operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="SetObjectReadOnlyResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
```

```

    <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
    <xs:element minOccurs="0" name="IsReadOnly" type="xs:boolean"/>
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**Error:** A **ServiceError** element (section [2.2.4.53](#)) that, if not nil ([\[XSD1.1-1\]](#) section 2.7.2), specifies an error that occurred on the protocol server. If the protocol operation succeeded, this element **MUST** be nil.

**IsReadOnly:** A **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2) that specifies whether the object is read-only.

#### 3.1.4.62.4 Simple Types

None.

#### 3.1.4.62.5 Attributes

None.

#### 3.1.4.62.6 Groups

None.

#### 3.1.4.62.7 Attribute Groups

None.

### 3.1.4.63 SetOfficeAppSettings

This operation is used to persist the field bindings and custom app settings, such as color and size, for the particular **Office Add-in** ([\[MS-OWEXML\]](#) section 1.3.1). This is a per Office Add-in setting, so two users who have permissions to change these settings can overwrite each other's settings.

The following is the WSDL port type specification of the **SetOfficeAppSettings** WSDL operation.

```

<wsdl:operation name="SetOfficeAppSettings" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input>
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettings"
    message="tns:IAccessServiceSoap_SetOfficeAppSettings_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output>
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettingsResponse"
    message="tns:IAccessServiceSoap_SetOfficeAppSettings_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault>
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettingsAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_SetOfficeAppSettings_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_SetOfficeAppSettings\_InputMessage** (section [3.1.4.65.1.1](#)) request message and the protocol server responds with an

**IAccessServiceSoap\_SetOfficeAppSettings\_OutputMessage** (section [3.1.4.65.1.2](#)) response message as follows:

- In the event of an application error on the protocol server during this operation, the protocol server MUST return a SOAP fault response.
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_SetOfficeAppSettings\_OutputMessage** response message that contains information about the health of the protocol server.

### 3.1.4.63.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message  | Description   |
|--|---|
| <b>IAccessServiceSoap_SetOfficeAppSettings_InputMessage</b>  | The request WSDL message for the <b>SetOfficeAppSettings</b> WSDL operation.  |
| <b>IAccessServiceSoap_SetOfficeAppSettings_OutputMessage</b> | The response WSDL message for the <b>SetOfficeAppSettings</b> WSDL operation. |

#### 3.1.4.63.1.1 IAccessServiceSoap\_SetOfficeAppSettings\_InputMessage

The request WSDL message for the **SetOfficeAppSettings** WSDL operation.

The SOAP action value is:

`http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettings`

The SOAP body contains the **SetOfficeAppSettings** element.

#### 3.1.4.63.1.2 IAccessServiceSoap\_SetOfficeAppSettings\_OutputMessage

The response WSDL message for the **SetOfficeAppSettings** WSDL operation.

The SOAP body contains the **SetOfficeAppSettingsResponse** element.

### 3.1.4.63.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                             | Description   |
|-------------------------------------|---|
| <b>SetOfficeAppSettings</b>         | The input data for the <b>SetOfficeAppSettings</b> WSDL operation.  |
| <b>SetOfficeAppSettingsResponse</b> | The result data for the <b>SetOfficeAppSettings</b> WSDL operation. |

#### 3.1.4.63.2.1 SetOfficeAppSettings

The **SetOfficeAppSettings** element specifies the input data for the **SetOfficeAppSettings** WSDL operation.

```

<xs:element name="SetOfficeAppSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="officeAppId" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="newOfficeAppSettings" nillable="true" type="tns6:AppsForOfficeSettings"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**formName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the form to which the Office Add-in ([\[MS-OWEXML\]](#) section 1.3.1) belongs.

**officeAppId:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the instance ID of the Office Add-in. It can be retrieved from the **FormDef** ([\[MS-AXL2\]](#) section 2.2.1.12) by searching the Hypertext Markup Language (HTML) response for the value of the attribute "data-moa-agaveid" belonging to a "div" element with a "data-moa-type" attribute having a value of "access.appforoffice".

**newOfficeAppSettings:** An **AppsForOfficeSettings**, as specified in section [2.2.4.29](#).

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server

### 3.1.4.63.2 SetOfficeAppSettingsResponse

The **SetOfficeAppSettingsResponse** element specifies the result data for the **SetOfficeAppSettings** WSDL operation.

```

<xs:element name="SetOfficeAppSettingsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="SetOfficeAppSettingsResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**SetOfficeAppSettingsResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

### 3.1.4.63.3 Complex Types

None.

### 3.1.4.63.4 Simple Types

None.

### 3.1.4.63.5 Attributes

None.

### 3.1.4.63.6 Groups

None.

### 3.1.4.63.7 Attribute Groups

None.

### 3.1.4.64 UpdateDataNoCache

This operation updates a record in an **Updatable Source** (section [3.1.1.1](#)) in the database application and also updates the row in the result set.

The following is the WSDL port type specification of the **UpdateDataNoCache** WSDL operation.

```
<wsdl:operation name="UpdateDataNoCache" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDataNoCache"
    message="tns:IAccessServiceSoap_UpdateDataNoCache_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDataNoCacheResponse"
    message="tns:IAccessServiceSoap_UpdateDataNoCache_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDataNoCacheAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_UpdateDataNoCache_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_UpdateDataNoCache\_InputMessage** (section [3.1.4.66.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_UpdateDataNoCache\_OutputMessage** (section [3.1.4.66.1.2](#)) response message as follows:

- The protocol server attempts to update the record in the **Updatable Source**, as specified in section 3.1.1.1, which has a primary key equal to the **Key** element of the first **KeyValuePair** (section [2.2.4.5](#)) of the **keys** input element (section [3.1.4.66.2.1](#)).
- If the columns in the result set specified by the **Key** elements of the **KeyValuePair** elements of the **oldValues** element (section 3.1.4.66.2.1) contain data different than what is specified by the respective **Value** elements of the **KeyValuePair** elements of the **oldValues**, a SOAP fault MUST be returned.
- If the record was successfully updated, the protocol server retrieves the updated record from the database application and updates the row in result set with a primary key equal to the primary key of the updated record with its columns filled in as specified by the corresponding columns of the retrieved record. The protocol server then returns the updated row to the protocol client.

In the event of an application error on the protocol server during this operation, a SOAP fault is returned, as specified in section [2.2.9](#). The **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) MUST be one of the values specified in section [2.2.9.1](#), or one of the values specified in section [2.2.9.2](#), or one of the values specified in section [2.2.9.3](#), or one of the values specified in the following table.

| Identifier  | Description                           |
|---|---------------------------------------|
| WriteRecordsPermissionsFailure                      | See section <a href="#">2.2.5.2</a> . |
| DataException_ConflictsEncounteredWhileUpdatingData | See section 2.2.5.2.                  |
| DataException_DeleteConflict                        | See section 2.2.5.2.                  |

### 3.1.4.64.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_UpdateDataNoCache_InputMessage</b>  | The request WSDL message for the <b>UpdateDataNoCache</b> WSDL operation.  |
| <b>IAccessServiceSoap_UpdateDataNoCache_OutputMessage</b> | The response WSDL message for the <b>UpdateDataNoCache</b> WSDL operation. |

#### 3.1.4.64.1.1 IAccessServiceSoap\_UpdateDataNoCache\_InputMessage

The request WSDL message for the **UpdateDataNoCache** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDataNoCache
```

The SOAP body contains the **UpdateDataNoCache** element.

#### 3.1.4.64.1.2 IAccessServiceSoap\_UpdateDataNoCache\_OutputMessage

The response WSDL message for the **UpdateDataNoCache** WSDL operation.

The SOAP body contains the **UpdateDataNoCacheResponse** element.

### 3.1.4.64.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                          | Description  |
|----------------------------------|--|
| <b>UpdateDataNoCache</b>         | The input data for the <b>UpdateDataNoCache</b> WSDL operation.  |
| <b>UpdateDataNoCacheResponse</b> | The result data for the <b>UpdateDataNoCache</b> WSDL operation. |

#### 3.1.4.64.2.1 UpdateDataNoCache



The **UpdateDataNoCache** element specifies the input data for the **UpdateDataNoCache** WSDL operation.

```
<xs:element name="UpdateDataNoCache" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="fields" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**source:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies an identifier for a result set. MUST be present.

**keys:** An **ArrayOfKeyValuePair** (section [2.2.4.2](#)) that specifies the row to update.

- MUST be present, and MUST contain exactly one **KeyValuePair**.

The **Key** element of the **KeyValuePair** MUST contain a primary key value for a row in the result set

**values:** An **ArrayOfArrayOfKeyValuePair** (section [2.2.4.32](#)) that specifies which records need to be inserted into the database application. Each **ArrayOfKeyValuePair** (section 2.2.4.2) element of the **ArrayOfArrayOfKeyValuePair** specifies the fields (2) and their new values which are to be inserted in a new record. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the data for that column in the new row.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section [2.2.4.5](#)).
- For each **KeyValuePair**:
  - The **Key** element MUST be equal to the name of a column in the result set.
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([\[XMLSCHEMA2\]](#) section 2.6.2) attribute set to "true" or have the **type** ([\[XMLSCHEMA2\]](#) section 2.6.1) attribute set to one of the following:
    - **boolean** ([\[XMLSCHEMA2\]](#) section 3.2.2)

- **datetime** ([XMLSCHEMA2] section 3.2.7)
- **string** ([XMLSCHEMA2] section 3.2.1)
- **int** ([XMLSCHEMA2] section 3.3.17)
- **decimal** ([XMLSCHEMA2] section 3.2.3)

**double** ([XMLSCHEMA2] section 3.2.5)

**oldValues:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the fields (2) and their original values in the record identified by **keys** element. Each **Key** element specifies the name of a column in the result set, and the corresponding **Value** element contains the value of the column in the row prior to the update operation.

- MUST be present.
- MUST contain at least one **KeyValuePair** (section 2.2.4.5).
- For each **KeyValuePair**:
  - The **Value** element MUST be the correct data type for the column in the result set.
  - The **Value** element MUST either be empty and with the **nil** ([XMLSCHEMA2] section 2.6.2) attribute set to "true" or have the **type** ([XMLSCHEMA2] section 2.6.1) attribute set to one of the following:
    - **boolean** ([XMLSCHEMA2] section 3.2.2)
    - **datetime** ([XMLSCHEMA2] section 3.2.7)
    - **string** ([XMLSCHEMA2] section 3.2.1)
    - **int** ([XMLSCHEMA2] section 3.3.17)
    - **decimal** ([XMLSCHEMA2] section 3.2.3)

**double** ([XMLSCHEMA2] section 3.2.5)

**fields:** A **FieldList** (section [2.2.4.51](#)) that specifies the **fields (3)** of the **Source** (section 3.1.1.1), which was previously supplied as an input element to the **InsertDataNoCache** operation, for which data is to be inserted into.

**queryParameters:** An **ArrayOfKeyValuePair** (section 2.2.4.2) that specifies the set of values for each **CT\_Parameter** ([MS-AXL2] section 2.2.3.12) required in the **Source**. One value MUST be present for every **CT\_Parameter** defined in the **Source**.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. MUST be present. SHOULD be ignored by the protocol server.

### 3.1.4.64.2.2 UpdateDataNoCacheResponse

The **UpdateDataNoCacheResponse** element specifies the result data for the **UpdateDataNoCache** WSDL operation.

```
<xs:element name="UpdateDataNoCacheResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="UpdateDataNoCacheResult" nillable="true"
        type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

        <xs:element minOccurs="0" name="updatedTableXml" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:complexType>
</xs:element>

```

**UpdateDataNoCacheResult:** A **CommandResult**, as specified by section [2.2.4.4](#). MUST be present.

**updatedTableXml:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the XML containing the content of the returned row, as specified for the **tableXml** element of the **OpenResultSetResponse** element (section [3.1.4.10.2.2](#)).

### 3.1.4.64.3 Complex Types

None.

### 3.1.4.64.4 Simple Types

None.

### 3.1.4.64.5 Attributes

None.

### 3.1.4.64.6 Groups

None.

### 3.1.4.64.7 Attribute Groups

None.

### 3.1.4.65 UpdateImage

The **UpdateImage** protocol operation stores image data for a field (2).

The following is the WSDL port type specification of the **UpdateImage** WSDL operation.

```

<wsdl:operation name="UpdateImage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateImage"
    message="tns:IAccessServiceSoap_UpdateImage_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateImageResponse"
    message="tns:IAccessServiceSoap_UpdateImage_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateImageAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_UpdateImage_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **IAccessServiceSoap\_UpdateImage\_InputMessage** (section [3.1.4.67.1.1](#)) request message and the protocol server responds with an

**IAccessServiceSoap\_UpdateImage\_OutputMessage** (section [3.1.4.67.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_UpdateImage\_OutputMessage** response message that contains an identifier corresponding to the stored image.

### 3.1.4.65.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_UpdateImage_InputMessage</b>  | The request WSDL message for the <b>UpdateImage</b> WSDL operation.  |
| <b>IAccessServiceSoap_UpdateImage_OutputMessage</b> | The response WSDL message for the <b>UpdateImage</b> WSDL operation. |

#### 3.1.4.65.1.1 IAccessServiceSoap\_UpdateImage\_InputMessage

The request WSDL message for the **UpdateImage** WSDL operation.

The SOAP action value is:

`http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateImage`

The SOAP body contains the **UpdateImage** element.

#### 3.1.4.65.1.2 IAccessServiceSoap\_UpdateImage\_OutputMessage

The response WSDL message for the **UpdateImage** WSDL operation.

The SOAP body contains the **UpdateImageResponse** element.

### 3.1.4.65.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                    | Description  |
|----------------------------|--|
| <b>UpdateImage</b>         | The input data for the <b>UpdateImage</b> WSDL operation.  |
| <b>UpdateImageResponse</b> | The result data for the <b>UpdateImage</b> WSDL operation. |

#### 3.1.4.65.2.1 UpdateImage

The **UpdateImage** element specifies the input data for the **UpdateImage** WSDL operation.

```

<xs:element name="UpdateImage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="recordSource" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="fieldName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="imageId" type="xs:int"/>
      <xs:element minOccurs="0" name="newImageValue" nillable="true" type="xs:base64Binary"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**parameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**recordSource:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the **Source** (section [3.1.1.1](#)) for which the image is to be stored. MUST be present.

**fieldName:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies the name of the field (2) for which the image is to be stored. MUST be present.

**imageId:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the identifier of a previously stored image that is to be replaced by this operation. MUST be less than or equal to zero, if no image is to be replaced.

**newImageValue:** A **base64Binary** ([\[XMLSCHEMA2\]](#) section 3.2.16) that specifies the image data to be stored. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.65.2.2 UpdateImageResponse

The **UpdateImageResponse** element specifies the result data for the **UpdateImage** WSDL operation.

```

<xs:element name="UpdateImageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateImageResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="newimageId" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**UpdateImageResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**newimageId:** An **int** ([\[XMLSCHEMA2\]](#) section 3.3.17) that specifies the identifier of the stored image.

### 3.1.4.65.3 Complex Types

None.

### 3.1.4.65.4 Simple Types

None.

### 3.1.4.65.5 Attributes

None.

### 3.1.4.65.6 Groups

None.

### 3.1.4.65.7 Attribute Groups

None.

## 3.1.4.66 OpenFirewallForUser

This operation adds a **FirewallRule** ([\[MS-AADT\]](#) section 2.2.4.7) to the database application for a single IP address.

The following is the WSDL port type specification of the **OpenFirewallForUser** WSDL operation.

```
<wsdl:operation name="OpenFirewallForUser" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenFirewallForUser"
    message="tns:IAccessServiceSoap_OpenFirewallForUser_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenFirewallForUserResponse"
    message="tns:IAccessServiceSoap_OpenFirewallForUser_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenFirewallForUserAccessServerMessageFault"
    name="AccessServerMessageFault"
    message="tns:IAccessServiceSoap_OpenFirewallForUser_AccessServerMessageFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **IAccessServiceSoap\_OpenFirewallForUser\_InputMessage** (section [3.1.4.66.1.1](#)) request message and the protocol server responds with an **IAccessServiceSoap\_OpenFirewallForUser\_OutputMessage** (section [3.1.4.66.1.2](#)) response message as follows:

- If an error occurs on the protocol server during this operation, the protocol server MUST respond with a SOAP fault, as specified in section [2.2.9](#).
- Otherwise, the protocol server MUST respond with an **IAccessServiceSoap\_OpenFirewallForUser\_OutputMessage** response message that contains information about the **FirewallRule** ([\[MS-AADT\]](#) section 2.2.4.7) which was added to the database application.

### 3.1.4.66.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message   | Description  |
|---|--|
| <b>IAccessServiceSoap_OpenFirewallForUser_InputMessage</b>  | The request WSDL message for the <b>OpenFirewallForUser</b> WSDL operation.  |
| <b>IAccessServiceSoap_OpenFirewallForUser_OutputMessage</b> | The response WSDL message for the <b>OpenFirewallForUser</b> WSDL operation. |

### 3.1.4.66.1.1 IAccessServiceSoap\_OpenFirewallForUser\_InputMessage

The request WSDL message for the **OpenFirewallForUser** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenFirewallForUser
```

The SOAP body contains the **OpenFirewallForUser** element.

### 3.1.4.66.1.2 IAccessServiceSoap\_OpenFirewallForUser\_OutputMessage

The response WSDL message for the **OpenFirewallForUser** WSDL operation.

The SOAP body contains the **OpenFirewallForUserResponse** element.

## 3.1.4.66.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                            | Description  |
|------------------------------------|--|
| <b>OpenFirewallForUser</b>         | The input data for the <b>OpenFirewallForUser</b> WSDL operation.  |
| <b>OpenFirewallForUserResponse</b> | The result data for the <b>OpenFirewallForUser</b> WSDL operation. |

### 3.1.4.66.2.1 OpenFirewallForUser

The **OpenFirewallForUser** element specifies the input data for the **OpenFirewallForUser** WSDL operation.

```
<xs:element name="OpenFirewallForUser" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
        type="tns5:OpenFirewallForUserParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**commandParameter:** A **CommandParameter**, as specified in section [2.2.4.3](#). MUST be present.

**parameters:** An **OpenFirewallForUserParameters** (section [3.1.4.66.3.1](#)) that specifies the IP address for which a **FirewallRule** ([\[MS-AADT\]](#) section 2.2.4.7) is to be created in the database application. MUST be present.

**userCookieId:** A **guid** (section [2.2.5.8](#)) that specifies an identifier for the operation. SHOULD be ignored by the protocol server.

### 3.1.4.66.2.2 OpenFirewallForUserResponse

The **OpenFirewallForUserResponse** element specifies the result data for the **OpenFirewallForUser** WSDL operation.

```
<xs:element name="OpenFirewallForUserResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="OpenFirewallForUserResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService"
        minOccurs="0" name="result" nillable="true" type="tns5:AddFirewallRuleResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**OpenFirewallForUserResult:** A **CommandResult**, as specified in section [2.2.4.4](#). MUST be present.

**result:** An **AddFirewallRuleResult** (section [2.2.4.59](#)) that specifies the **FirewallRule** ([\[MS-AADT\]](#) section 2.2.4.7) name if adding **FirewallRule** in database application was successful. MUST be present.

### 3.1.4.66.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                         | Description                              |
|--------------------------------------|--|
| <b>OpenFirewallForUserParameters</b> | See section <a href="#">3.1.4.66.3.1</a> |

#### 3.1.4.66.3.1 OpenFirewallForUserParameters

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService>

The **OpenFirewallForUserParameters** complex type specifies the input data for the **OpenFirewallForUser** protocol operation.

Optional: Type a detailed description for the Complex Type.

```
<xs:complexType name="OpenFirewallForUserParameters"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
```



```

        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="UserIPAddress" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

**ProtocolVersion:** An **Access Services Protocol Version** ([\[MS-ASDT\]](#) section 3.1.1.1). MUST be the same value that the protocol server returns from a call to **GetApplicationInformation** (section [3.1.4.18](#)) in the **ProtocolVersion** element of the **GetAppInfoResult** (section [3.1.4.18.3.1](#)).

**UserIPAddress:** A **string** ([\[XMLSCHEMA2\]](#) section 3.2.1) that specifies both the starting and ending IP address for the **FirewallRule** ([\[MS-AADT\]](#) section 2.2.4.7) range. MUST be an **IPv4 address in string format**.

#### 3.1.4.66.4 Simple Types

None.

#### 3.1.4.66.5 Attributes

None.

#### 3.1.4.66.6 Groups

None.

#### 3.1.4.66.7 Attribute Groups

None.

### 3.1.5 Timer Events

#### 3.1.5.1 Session Timeout

The **Session Timeout** event completes a request for a timed out session with a SOAP fault, as specified in section [2.2.9](#), with the value of the **Id** element of the **AccessServerMessage** (section [2.2.4.1](#)) set to **NewWorkbookSessionTimeout** as specified by section [2.2.5.2](#).

#### 3.1.6 Other Local Events

None.

## 3.2 Client Details

For any of the **Runtime protocol operations** (section [3.1.1](#)), the client side of this protocol needs to call the **OpenSession** operation (section [3.1.4.11](#)) and **GetObjectSchema** operation (section [3.1.4.7](#)) before calling any other runtime protocol operation. The **OpenSession** operation creates a new session on the protocol server and assigns a **sessionId** (section [3.1.4.11.2.2](#)) to the newly created session. The **GetObjectSchema** operation creates a new result set on the current session and assigns a unique **moniker** (section [3.1.4.7.2.1](#)) for the result set. The protocol client can then call any other runtime operation using the **moniker** and the **sessionId** elements to ensure that actions are performed on the same result set. If the protocol client wants to query data from any other **Source** (section [3.1.1.1](#)) in the database application, it does not need to call **OpenSession** operation again. However, it MUST call **GetObjectSchema** operation with the object name passed in the **source** input

element. This operation will create another result set in the same session and assign a new **moniker** to it.

## 4 Protocol Examples

### 4.1 CreateAccessObject

In this scenario, the protocol client calls the CreateAccessObject method on a protocol server named "server.example.com". This example creates a table object.

```
<CreateAccessObject
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/">

  <commandParameter>
    <WorkbookId>1.V22.72Qgf8kLDWFQtfg3MdByr90.5.en-US5.en-US73.+0480#0000-11-00-
01T02:00:00:0000#+0000#0000-03-00-02T02:00:00:0000#-006036.00000000-0000-0000-0000-
00000000000001.U</WorkbookId>
    <StateId>-1</StateId>
    <ProtocolClientId>
    </ProtocolClientId>
    <UserFriendlyDisplayName>DOMAIN\username</UserFriendlyDisplayName>
    <Zone>Default</Zone>
    <RequestSiteId>8b777e1b-3d99-43fb-9813-392ab88b4206</RequestSiteId>
    <CorrelationId>00000000-0000-0000-0000-000000000000</CorrelationId>
    <CompleteResponseTimeout>0</CompleteResponseTimeout>
  </commandParameter>
  <container>http://server.example.com</container>
  <parameters ProtocolVersion="15.0.24.0" Name="Client" Description=""
ObjectType="Table">
    <Body>
      <Schema Namespace="Access.Store"
xmlns="http://schemas.microsoft.com/ado/2008/09/edm"
xmlns:axl="http://schemas.microsoft.com/office/accessservices/2010/12/application">
        <EntityContainer Name="AccessStoreContainer">
          <EntitySet Name="Client" EntityType="Access.Store.Client">
            </EntitySet>
          </EntityContainer>
          <EntityType Name="Client">
            <Key>
              <PropertyRef Name="ID">
                </PropertyRef>
            </Key>
            <Property Name="ID" Type="Int32" axl:StoreGeneratedPattern="Identity"
Nullable="false">
            </Property>
            <Property Name="Client Name" Type="String" Unicode="true"
axl:TextType="SingleLine" MaxLength="220">
            </Property>
            <axl:EventDataMacro>
              <axl:DataMacro Event="AfterInsert">
                </axl:DataMacro>
            </axl:EventDataMacro>
            <axl:EventDataMacro>
              <axl:DataMacro Event="AfterUpdate">
                </axl:DataMacro>
            </axl:EventDataMacro>
            <axl:EventDataMacro>
              <axl:DataMacro Event="AfterDelete">
                </axl:DataMacro>
            </axl:EventDataMacro>
          </EntityType>
        </Schema>
      </Body>
    </parameters>
    <userCookieId>00000002-bd62-1a4f-f9dd-84489ab2aa55</userCookieId>
```

```
</CreateAccessObject>
```

The protocol server responds with the following message:

```
<CreateAccessObjectResponse
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ApplicationDesignService">
  <CreateAccessObjectResult>
    <StateId
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</StateId>
    <HealthInformation
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">
      <StateFlags>
        </StateFlags>
      <HealthScore>0</HealthScore>
    </HealthInformation>
    <SecondsBeforeNextPoll
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</SecondsBeforeNextPoll>
    <EditSessionIsDirty
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionIsDirty>
    <EditSessionHasMultipleCollaborationUsers
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionHasMultipleCollaborationUsers>
  </CreateAccessObjectResult>
  <result>
    <Warning xsi:nil="true" />
    <Objects>
      <AccessObject xsi:type="Table" ID="2" Name="Client" ObjectType="Table" Description=""
Version="2011-11-17T02:18:56.4500000">
        <ParentId xsi:nil="true" />
        <Definition>
          <Schema Namespace="Access.Store"
xmlns="http://schemas.microsoft.com/ado/2008/09/edm"
xmlns:axl="http://schemas.microsoft.com/office/accessservices/2010/12/application">
            <EntityContainer Name="AccessStoreContainer">
              <EntityType Name="Client" EntityType="Access.Store.Client"/>
            </EntityContainer>
            <EntityType Name="Client">
              <Key>
                <PropertyRef Name="ID"/>
              </Key>
              <Property Name="ID" Type="Int32" axl:ObjectId="ID" Nullable="false"
axl:StoreGeneratedPattern="Identity"/>
              <Property Name="Client Name" Type="String" axl:ObjectId="First Name"
Unicode="true" axl:TextType="SingleLine" MaxLength="220"/>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterInsert"/>
              </axl:EventDataMacro>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterUpdate"/>
              </axl:EventDataMacro>
              <axl:EventDataMacro>
                <axl:DataMacro Event="AfterDelete"/>
              </axl:EventDataMacro>
            </EntityType>
          </Schema>
        </Definition>
      </AccessObject>
    </Objects>
    <RefreshRequired>>false</RefreshRequired>
  </result>
</CreateAccessObjectResponse>
```

## 4.2 CreateApplication

In this scenario, the protocol client calls the CreateApplication method on a protocol server named "server.example.com". This example creates an application.

```
<CreateApplication
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/">
  <commandParameter>
    <WorkbookId>1.V22.733tjtt6yJkqysQEa3ecIj90.5.en-US5.en-US73.+0480#0000-11-00-01T02:00:00:0000#+0000#0000-03-00-02T02:00:00:0000#-006036.00000000-0000-0000-0000-0000000000001.U</WorkbookId>
    <StateId>-1</StateId>
    <ProtocolClientId>
    </ProtocolClientId>
    <UserFriendlyDisplayName>DOMAIN\username</UserFriendlyDisplayName>
    <Zone>Default</Zone>
    <RequestSiteId>8b777e1b-3d99-43fb-9813-392ab88b4206</RequestSiteId>
    <CorrelationId>00000000-0000-0000-0000-000000000000</CorrelationId>
    <CompleteResponseTimeout>0</CompleteResponseTimeout>
  </commandParameter>
  <container>http://server.example.com</container>
  <parameters Name="231">
    <Collation Culture="en-US" CaseSensitive="false" AccentSensitive="true" KanaSensitive="false" WidthSensitive="false" UseSupplementaryCharacters="false">
    </Collation>
    <ProtocolVersionOptions>
      <ProtocolVersion>15.0.24.0</ProtocolVersion>
    </ProtocolVersionOptions>
  </parameters>
  <userCookieId>00000000-0000-0000-0000-000000000000</userCookieId>
</CreateApplication>
```

The protocol server responds with the following message:

```
<CreateApplicationResponse
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/ServerDesignService">
  <CreateApplicationResult>
    <StateId
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</StateId>
    <HealthInformation
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">
      <StateFlags>
      </StateFlags>
      <HealthScore>0</HealthScore>
    </HealthInformation>
    <EditSessionIsDirty
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionIsDirty>
    <EditSessionHasMultipleCollaborationUsers
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionHasMultipleCollaborationUsers>
  </CreateApplicationResult>
  <result ProtocolVersion="15.0.24.0">
    <ApplicationUrl>http://www.example.com/exampleapplication</ApplicationUrl>
  </result>
</CreateApplicationResponse>
```

### 4.3 DeleteData

In this scenario, the protocol client calls the DeleteData method on a protocol server. This example deletes a record from a table.

```
<DeleteData
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/">
  <parameter>
    <WorkbookId>1.V22.70H0556qa6XWR/hYIBvZ3T90.5.en-US5.en-US73.+0480#0000-11-00-01T02:00:00:0000#+0000#0000-03-00-02T02:00:00:0000#-006036.00000000-0000-0000-0000-0000000000001.U</WorkbookId>
    <StateId>-1</StateId>
    <ProtocolClientId>
    </ProtocolClientId>
    <UserFriendlyDisplayName>DOMAIN\username</UserFriendlyDisplayName>
    <Zone>Default</Zone>
    <RequestSiteId>8b777e1b-3d99-43fb-9813-392ab88b4206</RequestSiteId>
    <CorrelationId>00000000-0000-0000-0000-000000000000</CorrelationId>
    <CompleteResponseTimeout>0</CompleteResponseTimeout>
  </parameter>
  <moniker>Default</moniker>
  <keys>
    <KeyValuePair>
      <Key xsi:type="xsd:int">1</Key>
      <Value>
      </Value>
    </KeyValuePair>
  </keys>
  <oldValues>
    <KeyValuePair>
      <Key xsi:type="xsd:string">Task Title</Key>
      <Value xsi:type="xsd:string">Title3</Value>
    </KeyValuePair>
    <KeyValuePair>
      <Key xsi:type="xsd:string">Employee</Key>
      <Value xsi:nil="true">
      </Value>
    </KeyValuePair>
  </oldValues>
  <userCookieId>00000003-b006-31b4-f9dd-84489ab2aa55</userCookieId>
</DeleteData>
```

The protocol server responds with the following message:

```
<DeleteDataResponse
xmlns="http://schemas.microsoft.com/office/Access/Server/WebServices/AccessServerInternalService/">
  <DeleteDataResult>
    <StateId
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</StateId>
    <HealthInformation
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">
      <StateFlags>
      </StateFlags>
      <HealthScore>0</HealthScore>
    </HealthInformation>
    <SecondsBeforeNextPoll
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</SecondsBeforeNextPoll>
    <EditSessionIsDirty
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionIsDirty>
```

```

    <EditSessionHasMultipleCollaborationUsers
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">false</EditSessionHasMultipleCollaborationUsers>
  </DeleteDataResult>
  <recordsDeleted>1</recordsDeleted>
</DeleteDataResponse>

```

## 4.4 UpdateData

In this scenario, the protocol client calls the UpdateData method on a protocol server to update a record in a table:

```

<UpdateData
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/">
  <parameter>
    <WorkbookId>1.V22.70H0556qa6XWR/hYIBvZ3T90.5.en-US5.en-US73.+0480#0000-11-00-01T02:00:0000#+0000#0000-03-00-02T02:00:00000000#-006036.00000000-0000-0000-0000-000000000000001.U</WorkbookId>
    <StateId>-1</StateId>
    <ProtocolClientId>
    </ProtocolClientId>
    <UserFriendlyDisplayName>DOMAIN\username</UserFriendlyDisplayName>
    <Zone>Default</Zone>
    <RequestSiteId>8b777e1b-3d99-43fb-9813-392ab88b4206</RequestSiteId>
    <CorrelationId>00000000-0000-0000-0000-000000000000</CorrelationId>
    <CompleteResponseTimeout>0</CompleteResponseTimeout>
  </parameter>
  <moniker>Default</moniker>
  <keys>
    <KeyValuePair>
      <Key xsi:type="xsd:int">1</Key>
      <Value>
      </Value>
    </KeyValuePair>
  </keys>
  <values>
    <KeyValuePair>
      <Key xsi:type="xsd:string">Task Title</Key>
      <Value xsi:type="xsd:string">Title3</Value>
    </KeyValuePair>
  </values>
  <oldValues>
    <KeyValuePair>
      <Key xsi:type="xsd:string">Task Title</Key>
      <Value xsi:type="xsd:string">Title2</Value>
    </KeyValuePair>
  </oldValues>
  <userCookieId>00000003-b006-31b4-f9dd-84489ab2aa55</userCookieId>
</UpdateData>

```

The protocol server responds with the following message:

```

<UpdateDataResponse
xmlns="http://schemas.microsoft.com/office/Access/Server/WebServices/AccessServerInternalService/">
  <UpdateDataResult>
    <StateId
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</StateId>

```

```

    <HealthInformation
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">
    <StateFlags>
    </StateFlags>
    <HealthScore>0</HealthScore>
  </HealthInformation>
  <SecondsBeforeNextPoll
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">0</SecondsBeforeNextPoll>
  <EditSessionIsDirty
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionIsDirty>
  <EditSessionHasMultipleCollaborationUsers
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalService/">>false</EditSessionHasMultipleCollaborationUsers>
  </UpdateDataResult>
  <updatedTableXml>
    <DataTable>
      <xs:schema id="Tasks" xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns=""
xmlns:msdata="urn:schemas-microsoft-com:xml-msdata">
        <xs:element name="Tasks" msdata:IsDataSet="true" msdata:MainDataTable="Data"
msdata:UseCurrentLocale="true">
          <xs:complexType>
            <xs:choice minOccurs="0" maxOccurs="unbounded">
              <xs:element name="Data">
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="ID" type="xs:int"></xs:element>
                    <xs:element name="Task Title" type="xs:string"
minOccurs="0"></xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
            </xs:choice>
          </xs:complexType>
          <xs:unique name="Constraint1" msdata:PrimaryKey="true">
            <xs:selector xpath="."/></xs:selector>
            <xs:field xpath="ID"></xs:field>
          </xs:unique>
        </xs:element>
      </xs:schema>
      <diffgr:diffgram xmlns:diffgr="urn:schemas-microsoft-com:xml-diffgram-v1"
xmlns:msdata="urn:schemas-microsoft-com:xml-msdata">
        <DocumentElement xmlns="">
          <Data diffgr:id="Data1" msdata:rowOrder="0" diffgr:hasChanges="updated">
            <ID>1</ID>
            <Task Title>Title3</TaskTitle>
          </Data>
        </DocumentElement>
      </diffgr:diffgram>
    </DataTable>
  </updatedTableXml>
</UpdateDataResponse>

```

## 4.5 OpenResultSet

In this scenario, the protocol client calls the OpenResultSet method on a protocol server with the following message to open a set of data from a table:

```

<OpenResultSet
xmlns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/">
  <parameter>

```



```

    <WorkbookId>1.V22.70H0556qa6XWR/hYIBvZ3T90.5.en-US5.en-US73.+0480#0000-11-00-
01T02:00:00:0000#+0000#0000-03-00-02T02:00:00:0000#+006036.00000000-0000-0000-0000-
0000000000001.U</WorkbookId>
    <StateId>-1</StateId>
    <ProtocolClientId>
    </ProtocolClientId>
    <UserFriendlyDisplayName>DOMAIN\username</UserFriendlyDisplayName>
    <Zone>Default</Zone>
    <RequestSiteId>8b777e1b-3d99-43fb-9813-392ab88b4206</RequestSiteId>
    <CorrelationId>00000000-0000-0000-0000-000000000000</CorrelationId>
    <CompleteResponseTimeout>0</CompleteResponseTimeout>
  </parameter>
  <queryParameters>
  </queryParameters>
  <sortExpression>&lt;Ordering
xmlns="http://schemas.microsoft.com/office/accessservices/2010/12/application" &gt;&lt;Order
Name="Task Title" Direction="Ascending" /&gt;&lt;/Ordering&gt;</sortExpression>
  <moniker>Default</moniker>
  <startRowIndex>0</startRowIndex>
  <maximumRows>200</maximumRows>
  <autoResync>true</autoResync>
  <userCookieId>00000003-b006-31b4-f9dd-84489ab2aa55</userCookieId>
</OpenResultSet>

```

The protocol server responds with the following message:

```

<OpenResultSetResponse
xmlns="http://schemas.microsoft.com/office/Access/Server/WebServices/AccessServerInternalServ
ice/">
  <OpenResultSetResult>
    <StateId
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalServic
e/">0</StateId>
    <HealthInformation
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalServic
e/">
      <StateFlags></StateFlags>
      <HealthScore>0</HealthScore>
    </HealthInformation>
    <SecondsBeforeNextPoll
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalServic
e/">0</SecondsBeforeNextPoll>
    <EditSessionIsDirty
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalServic
e/">>false</EditSessionIsDirty>
    <EditSessionHasMultipleUsers
xmlns="http://schemas.microsoft.com/office/Excel/Server/WebServices/ExcelServerInternalServic
e/">>false</EditSessionHasMultipleUsers>
  </OpenResultSetResult>
  <tableXml>
    <DataTable>
      <xs:schema id="Tasks" xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns=""
xmlns:msdata="urn:schemas-microsoft-com:xml-msdata">
        <xs:element name="Tasks" msdata:IsDataSet="true" msdata:MainDataTable="Data"
msdata:UseCurrentLocale="true">
          <xs:complexType>
            <xs:choice minOccurs="0" maxOccurs="unbounded">
              <xs:element name="Data">
                <xs:complexType>
                  <xs:sequence>
                    <xs:element name="ID" type="xs:int"></xs:element>
                    <xs:element name="Task Title" type="xs:string" minOccurs="0"></xs:element>
                  </xs:sequence>
                </xs:complexType>
              </xs:element>
            </xs:choice>
          </xs:complexType>
          <xs:unique name="Constraint1" msdata:PrimaryKey="true">

```

```
        <xs:selector xpath="./Data"></xs:selector>
        <xs:field xpath="ID"></xs:field>
    </xs:unique>
</xs:element>
</xs:schema>
<diffgr:diffgram xmlns:diffgr="urn:schemas-microsoft-com:xml-diffgram-v1"
xmlns:msdata="urn:schemas-microsoft-com:xml-msdata">
    <DocumentElement xmlns="">
        <Data diffgr:id="Data1" msdata:rowOrder="0" diffgr:hasChanges="inserted">
            <ID>1</ID>
            <Task Title>First Task</TaskTitle>
        </Data>
    </DocumentElement>
</diffgr:diffgram>
</DataTable>
</tableXml>
<totalRowCount>1</totalRowCount>
</OpenResultSetResponse>
```

## **5 Security**

### **5.1 Security Considerations for Implementers**

In addition to the security considerations applicable to the underlying protocols, there are security risks associated with exposing session identifiers. If the session identifier is exposed, it is possible for an attacker to read information from, or modify data in, a session on the protocol server. An implementer of this protocol needs to consider keeping session identifiers protected. There could be some cases where it is desirable to expose the session identifier, however, an implementer is to use caution in how they expose session identifiers and consider the security risks.

### **5.2 Index of Security Parameters**

None.

## 6 Appendix A: Full WSDL

Type a summary of the applicable WSDLs

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdl:definitions xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
targetNamespace="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Access
ServerInternalService/" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xs:schema
xmlns:tns7="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/Imports"
targetNamespace="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/Access
ServerInternalService/Imports">
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Sc
hema"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServic
e"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Data"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Globalization"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Net"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Security"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService"/>
    </xs:schema>
  </wsdl:types>
  <wsdl:portType name="IAccessServiceSoap">
    <wsdl:operation name="GetHealthScore">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetHealthScore"
message="tns:IAccessServiceSoap_GetHealthScore_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetHealthScoreResponse"
message="tns:IAccessServiceSoap_GetHealthScore_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetHealthScoreAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetHealthScore_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="OpenSession">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
```

```

erInternalService/IAccessServiceSoap/OpenSession"
message="tns:IAccessServiceSoap_OpenSession_InputMessage"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenSessionResponse"
message="tns:IAccessServiceSoap_OpenSession_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenSessionAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_OpenSession_AccessServerMessageFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="CloseSession">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CloseSession"
message="tns:IAccessServiceSoap_CloseSession_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CloseSessionResponse"
message="tns:IAccessServiceSoap_CloseSession_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CloseSessionAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_CloseSession_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetObjectSchema">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetObjectSchema"
message="tns:IAccessServiceSoap_GetObjectSchema_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetObjectSchemaResponse"
message="tns:IAccessServiceSoap_GetObjectSchema_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetObjectSchemaAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetObjectSchema_AccessServerMessageFault_FaultMessage"/>
      </wsdl:operation>
      <wsdl:operation name="GetFormDefinitionAndRecordSet">
        <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSet"
message="tns:IAccessServiceSoap_GetFormDefinitionAndRecordSet_InputMessage"/>
        <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSetResponse"
message="tns:IAccessServiceSoap_GetFormDefinitionAndRecordSet_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSetAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetFormDefinitionAndRecordSet_AccessServerMessageFault_FaultM
essage"/>
        </wsdl:operation>
        <wsdl:operation name="GetHostProperties">
          <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetHostProperties"
message="tns:IAccessServiceSoap_GetHostProperties_InputMessage"/>
          <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetHostPropertiesResponse"
message="tns:IAccessServiceSoap_GetHostProperties_OutputMessage"/>
          <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetHostPropertiesAccessServerMessageFault"

```

```

name="AccessServerMessageFault"
message="tns:IAccessServiceSoap GetHostProperties AccessServerMessageFault FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="GetApplicationNotifications">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetApplicationNotifications"
message="tns:IAccessServiceSoap GetApplicationNotifications InputMessage"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetApplicationNotificationsResponse"
message="tns:IAccessServiceSoap_GetApplicationNotifications_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetApplicationNotificationsAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetApplicationNotifications_AccessServerMessageFault_FaultMes
sage"/>
  </wsdl:operation>
<wsdl:operation name="OpenResultSet">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenResultSet"
message="tns:IAccessServiceSoap_OpenResultSet_InputMessage"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenResultSetResponse"
message="tns:IAccessServiceSoap_OpenResultSet_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenResultSetAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_OpenResultSet_AccessServerMessageFault_FaultMessage"/>
  </wsdl:operation>
<wsdl:operation name="GetData">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetData"
message="tns:IAccessServiceSoap GetData InputMessage"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataResponse"
message="tns:IAccessServiceSoap_GetData_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetData_AccessServerMessageFault_FaultMessage"/>
  </wsdl:operation>
<wsdl:operation name="SelectDataNoCache">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SelectDataNoCache"
message="tns:IAccessServiceSoap_SelectDataNoCache_InputMessage"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SelectDataNoCacheResponse"
message="tns:IAccessServiceSoap_SelectDataNoCache_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SelectDataNoCacheAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SelectDataNoCache_AccessServerMessageFault_FaultMessage"/>
  </wsdl:operation>
<wsdl:operation name="InsertData">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertData"
message="tns:IAccessServiceSoap_InsertData_InputMessage"/>

```

```

    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertDataResponse"
message="tns:IAccessServiceSoap_InsertData_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_InsertData_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="InsertDataNoCache">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertDataNoCache"
message="tns:IAccessServiceSoap_InsertDataNoCache_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertDataNoCacheResponse"
message="tns:IAccessServiceSoap_InsertDataNoCache_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertDataNoCacheAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_InsertDataNoCache_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="UpdateData">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateData"
message="tns:IAccessServiceSoap_UpdateData_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDataResponse"
message="tns:IAccessServiceSoap_UpdateData_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_UpdateData_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="UpdateImage">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateImage"
message="tns:IAccessServiceSoap_UpdateImage_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateImageResponse"
message="tns:IAccessServiceSoap_UpdateImage_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateImageAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_UpdateImage_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="RetrieveImage">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RetrieveImage"
message="tns:IAccessServiceSoap_RetrieveImage_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RetrieveImageResponse"
message="tns:IAccessServiceSoap_RetrieveImage_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RetrieveImageAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_RetrieveImage_AccessServerMessageFault_FaultMessage"/>

```

```

    </wsdl:operation>
    <wsdl:operation name="UpdateDataNoCache">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDataNoCache"
message="tns:IAccessServiceSoap_UpdateDataNoCache_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDataNoCacheResponse"
message="tns:IAccessServiceSoap_UpdateDataNoCache_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateDataNoCacheAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_UpdateDataNoCache_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="FixupRow">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/FixupRow"
message="tns:IAccessServiceSoap_FixupRow_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/FixupRowResponse"
message="tns:IAccessServiceSoap_FixupRow_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/FixupRowAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_FixupRow_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="FixupRowNoCache">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/FixupRowNoCache"
message="tns:IAccessServiceSoap_FixupRowNoCache_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/FixupRowNoCacheResponse"
message="tns:IAccessServiceSoap_FixupRowNoCache_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/FixupRowNoCacheAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_FixupRowNoCache_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteData">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteData"
message="tns:IAccessServiceSoap_DeleteData_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteDataResponse"
message="tns:IAccessServiceSoap_DeleteData_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_DeleteData_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteDataNoCache">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteDataNoCache"
message="tns:IAccessServiceSoap_DeleteDataNoCache_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ

```



```

erInternalService/IAccessServiceSoap/DeleteDataNoCacheResponse"
message="tns:IAccessServiceSoap DeleteDataNoCache OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteDataNoCacheAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_DeleteDataNoCache_AccessServerMessageFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="DeleteAllData">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteAllData"
message="tns:IAccessServiceSoap_DeleteAllData_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteAllDataResponse"
message="tns:IAccessServiceSoap_DeleteAllData_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteAllDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap DeleteAllData AccessServerMessageFault FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetDistinctValues">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDistinctValues"
message="tns:IAccessServiceSoap_GetDistinctValues_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDistinctValuesResponse"
message="tns:IAccessServiceSoap_GetDistinctValues_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDistinctValuesAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetDistinctValues_AccessServerMessageFault_FaultMessage"/>
      </wsdl:operation>
      <wsdl:operation name="GetAutoSumValues">
        <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAutoSumValues"
message="tns:IAccessServiceSoap_GetAutoSumValues_InputMessage"/>
        <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAutoSumValuesResponse"
message="tns:IAccessServiceSoap_GetAutoSumValues_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAutoSumValuesAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap GetAutoSumValues AccessServerMessageFault FaultMessage"/>
        </wsdl:operation>
        <wsdl:operation name="GetSearchData">
          <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetSearchData"
message="tns:IAccessServiceSoap GetSearchData InputMessage"/>
          <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetSearchDataResponse"
message="tns:IAccessServiceSoap GetSearchData OutputMessage"/>
          <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetSearchDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetSearchData_AccessServerMessageFault_FaultMessage"/>
          </wsdl:operation>
          <wsdl:operation name="RunDataMacro">

```

```

    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RunDataMacro"
message="tns:IAccessServiceSoap_RunDataMacro_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RunDataMacroResponse"
message="tns:IAccessServiceSoap_RunDataMacro_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RunDataMacroAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_RunDataMacro_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetUIMacroJavascript">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascript"
message="tns:IAccessServiceSoap_GetUIMacroJavascript_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascriptResponse"
message="tns:IAccessServiceSoap_GetUIMacroJavascript_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascriptAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetUIMacroJavascript_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="CloseResultSet">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseResultSet"
message="tns:IAccessServiceSoap_CloseResultSet_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseResultSetResponse"
message="tns:IAccessServiceSoap_CloseResultSet_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseResultSetAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_CloseResultSet_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetOfficeAppSettings">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettings"
message="tns:IAccessServiceSoap_SetOfficeAppSettings_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettingsResponse"
message="tns:IAccessServiceSoap_SetOfficeAppSettings_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettingsAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SetOfficeAppSettings_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetOfficeAppSettings">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettings"
message="tns:IAccessServiceSoap_GetOfficeAppSettings_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettingsResponse"
message="tns:IAccessServiceSoap_GetOfficeAppSettings_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetOfficeAppSettingsAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetOfficeAppSettings_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="InsertAppForOfficeInForm">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertAppForOfficeInForm"
message="tns:IAccessServiceSoap_InsertAppForOfficeInForm_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertAppForOfficeInFormResponse"
message="tns:IAccessServiceSoap_InsertAppForOfficeInForm_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/InsertAppForOfficeInFormAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_InsertAppForOfficeInForm_AccessServerMessageFault_FaultMessag
e"/>
    </wsdl:operation>
    <wsdl:operation name="GetNewDatabaseCollation">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetNewDatabaseCollation"
message="tns:IAccessServiceSoap_GetNewDatabaseCollation_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetNewDatabaseCollationResponse"
message="tns:IAccessServiceSoap_GetNewDatabaseCollation_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetNewDatabaseCollationAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetNewDatabaseCollation_AccessServerMessageFault_FaultMessag
e"/>
    </wsdl:operation>
    <wsdl:operation name="GetApplicationInformation">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetApplicationInformation"
message="tns:IAccessServiceSoap_GetApplicationInformation_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetApplicationInformationResponse"
message="tns:IAccessServiceSoap_GetApplicationInformation_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetApplicationInformationAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetApplicationInformation_AccessServerMessageFault_FaultMessa
ge"/>
    </wsdl:operation>
    <wsdl:operation name="GetAccessObject">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAccessObject"
message="tns:IAccessServiceSoap_GetAccessObject_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAccessObjectResponse"
message="tns:IAccessServiceSoap_GetAccessObject_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAccessObjectAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetAccessObject_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>

```

```

    <wsdl:operation name="CreateAccessObject">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CreateAccessObject"
message="tns:IAccessServiceSoap_CreateAccessObject_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CreateAccessObjectResponse"
message="tns:IAccessServiceSoap_CreateAccessObject_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CreateAccessObjectAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_CreateAccessObject_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="RenameAccessObject">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RenameAccessObject"
message="tns:IAccessServiceSoap_RenameAccessObject_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RenameAccessObjectResponse"
message="tns:IAccessServiceSoap_RenameAccessObject_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RenameAccessObjectAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_RenameAccessObject_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="UpdateAccessObject">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateAccessObject"
message="tns:IAccessServiceSoap_UpdateAccessObject_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateAccessObjectResponse"
message="tns:IAccessServiceSoap_UpdateAccessObject_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UpdateAccessObjectAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_UpdateAccessObject_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteAccessObject">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteAccessObject"
message="tns:IAccessServiceSoap_DeleteAccessObject_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteAccessObjectResponse"
message="tns:IAccessServiceSoap_DeleteAccessObject_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteAccessObjectAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_DeleteAccessObject_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetDataMacroTracing">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataMacroTracing"
message="tns:IAccessServiceSoap_SetDataMacroTracing_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataMacroTracingResponse"
message="tns:IAccessServiceSoap_SetDataMacroTracing_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataMacroTracingAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SetDataMacroTracing_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetObjectReadOnly">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetObjectReadOnly"
message="tns:IAccessServiceSoap_SetObjectReadOnly_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetObjectReadOnlyResponse"
message="tns:IAccessServiceSoap_SetObjectReadOnly_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetObjectReadOnlyAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SetObjectReadOnly_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetLinkedTableInformation">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetLinkedTableInformation"
message="tns:IAccessServiceSoap_GetLinkedTableInformation_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetLinkedTableInformationResponse"
message="tns:IAccessServiceSoap_GetLinkedTableInformation_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetLinkedTableInformationAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetLinkedTableInformation_AccessServerMessageFault_FaultMessa
ge"/>
    </wsdl:operation>
    <wsdl:operation name="RefreshLinkedTableInformation">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RefreshLinkedTableInformation"
message="tns:IAccessServiceSoap_RefreshLinkedTableInformation_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RefreshLinkedTableInformationResponse"
message="tns:IAccessServiceSoap_RefreshLinkedTableInformation_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RefreshLinkedTableInformationAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_RefreshLinkedTableInformation_AccessServerMessageFault_FaultM
essage"/>
    </wsdl:operation>
    <wsdl:operation name="ImportData">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ImportData"
message="tns:IAccessServiceSoap_ImportData_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ImportDataResponse"
message="tns:IAccessServiceSoap_ImportData_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ImportDataAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_ImportData_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetDataConnectivityStatus">

```

```

    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataConnectivityStatus"
message="tns:IAccessServiceSoap_SetDataConnectivityStatus_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataConnectivityStatusResponse"
message="tns:IAccessServiceSoap_SetDataConnectivityStatus_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetDataConnectivityStatusAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_SetDataConnectivityStatus_AccessServerMessageFault_FaultMessa
ge"/>
    </wsdl:operation>
    <wsdl:operation name="GetDataConnectivityStatus">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataConnectivityStatus"
message="tns:IAccessServiceSoap_GetDataConnectivityStatus_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataConnectivityStatusResponse"
message="tns:IAccessServiceSoap_GetDataConnectivityStatus_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataConnectivityStatusAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetDataConnectivityStatus_AccessServerMessageFault_FaultMessa
ge"/>
    </wsdl:operation>
    <wsdl:operation name="GetDataConnectivity">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataConnectivity"
message="tns:IAccessServiceSoap_GetDataConnectivity_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataConnectivityResponse"
message="tns:IAccessServiceSoap_GetDataConnectivity_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetDataConnectivityAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetDataConnectivity_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetFirewallRules">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFirewallRules"
message="tns:IAccessServiceSoap_GetFirewallRules_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFirewallRulesResponse"
message="tns:IAccessServiceSoap_GetFirewallRules_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetFirewallRulesAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetFirewallRules_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="AddFirewallRule">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/AddFirewallRule"
message="tns:IAccessServiceSoap_AddFirewallRule_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ

```

```

erInternalService/IAccessServiceSoap/AddFirewallRuleResponse"
message="tns:IAccessServiceSoap AddFirewallRule OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/AddFirewallRuleAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_AddFirewallRule_AccessServerMessageFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="OpenFirewallForUser">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenFirewallForUser"
message="tns:IAccessServiceSoap_OpenFirewallForUser_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenFirewallForUserResponse"
message="tns:IAccessServiceSoap_OpenFirewallForUser_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/OpenFirewallForUserAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_OpenFirewallForUser_AccessServerMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteFirewallRules">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteFirewallRules"
message="tns:IAccessServiceSoap_DeleteFirewallRules_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteFirewallRulesResponse"
message="tns:IAccessServiceSoap_DeleteFirewallRules_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DeleteFirewallRulesAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_DeleteFirewallRules_AccessServerMessageFault_FaultMessage"/>
      </wsdl:operation>
      <wsdl:operation name="CreatePackage">
        <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CreatePackage"
message="tns:IAccessServiceSoap_CreatePackage_InputMessage"/>
        <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CreatePackageResponse"
message="tns:IAccessServiceSoap_CreatePackage_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CreatePackageAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_CreatePackage_AccessServerMessageFault_FaultMessage"/>
        </wsdl:operation>
        <wsdl:operation name="GetPackage">
          <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetPackage"
message="tns:IAccessServiceSoap_GetPackage_InputMessage"/>
          <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetPackageResponse"
message="tns:IAccessServiceSoap_GetPackage_OutputMessage"/>
          <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetPackageAccessServerMessageFault"
name="AccessServerMessageFault"
message="tns:IAccessServiceSoap_GetPackage_AccessServerMessageFault_FaultMessage"/>
          </wsdl:operation>
          <wsdl:operation name="GetAvailableServer">

```

```

    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAvailableServer"
message="tns:IAccessServiceSoap_GetAvailableServer_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAvailableServerResponse"
message="tns:IAccessServiceSoap_GetAvailableServer_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetAvailableServerDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_GetAvailableServer_DatabaseProviderMessageFault_FaultMessage"
/>
    </wsdl:operation>
    <wsdl:operation name="GetReservedDatabase">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetReservedDatabase"
message="tns:IAccessServiceSoap_GetReservedDatabase_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetReservedDatabaseResponse"
message="tns:IAccessServiceSoap_GetReservedDatabase_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetReservedDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_GetReservedDatabase_DatabaseProviderMessageFault_FaultMessage"
"/>
    </wsdl:operation>
    <wsdl:operation name="GetServerName">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetServerName"
message="tns:IAccessServiceSoap_GetServerName_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetServerNameResponse"
message="tns:IAccessServiceSoap_GetServerName_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/GetServerNameDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_GetServerName_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="ProvisionDatabase">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ProvisionDatabase"
message="tns:IAccessServiceSoap_ProvisionDatabase_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ProvisionDatabaseResponse"
message="tns:IAccessServiceSoap_ProvisionDatabase_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ProvisionDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_ProvisionDatabase_DatabaseProviderMessageFault_FaultMessage"/
>
    </wsdl:operation>
    <wsdl:operation name="UnprovisionDatabase">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UnprovisionDatabase"
message="tns:IAccessServiceSoap_UnprovisionDatabase_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ

```



```

erInternalService/IAccessServiceSoap/UnprovisionDatabaseResponse"
message="tns:IAccessServiceSoap UnprovisionDatabase OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/UnprovisionDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_UnprovisionDatabase_DatabaseProviderMessageFault_FaultMessage
"/>
  </wsdl:operation>
  <wsdl:operation name="RecycleDatabase">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RecycleDatabase"
message="tns:IAccessServiceSoap RecycleDatabase InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RecycleDatabaseResponse"
message="tns:IAccessServiceSoap_RecycleDatabase_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RecycleDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_RecycleDatabase_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="RestoreDatabase">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RestoreDatabase"
message="tns:IAccessServiceSoap_RestoreDatabase_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RestoreDatabaseResponse"
message="tns:IAccessServiceSoap RestoreDatabase OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RestoreDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_RestoreDatabase_DatabaseProviderMessageFault_FaultMessage"/>
      </wsdl:operation>
      <wsdl:operation name="ExecuteDacIncrementalUpgrade">
        <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgrade"
message="tns:IAccessServiceSoap_ExecuteDacIncrementalUpgrade_InputMessage"/>
        <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgradeResponse"
message="tns:IAccessServiceSoap_ExecuteDacIncrementalUpgrade_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgradeDatabaseProviderMessageFault
" name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_ExecuteDacIncrementalUpgrade_DatabaseProviderMessageFault_Fau
ltMessage"/>
        </wsdl:operation>
        <wsdl:operation name="CopyDatabase">
          <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CopyDatabase"
message="tns:IAccessServiceSoap_CopyDatabase_InputMessage"/>
          <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CopyDatabaseResponse"
message="tns:IAccessServiceSoap CopyDatabase OutputMessage"/>
          <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CopyDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap CopyDatabase DatabaseProviderMessageFault FaultMessage"/>
          </wsdl:operation>

```

```

    <wsdl:operation name="CheckCopyStatus">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CheckCopyStatus"
message="tns:IAccessServiceSoap_CheckCopyStatus_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CheckCopyStatusResponse"
message="tns:IAccessServiceSoap_CheckCopyStatus_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/CheckCopyStatusDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_CheckCopyStatus_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="RenameDatabase">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RenameDatabase"
message="tns:IAccessServiceSoap_RenameDatabase_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RenameDatabaseResponse"
message="tns:IAccessServiceSoap_RenameDatabase_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/RenameDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_RenameDatabase_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DatabaseExists">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DatabaseExists"
message="tns:IAccessServiceSoap_DatabaseExists_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DatabaseExistsResponse"
message="tns:IAccessServiceSoap_DatabaseExists_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/DatabaseExistsDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_DatabaseExists_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetReadWrite">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetReadWrite"
message="tns:IAccessServiceSoap_SetReadWrite_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetReadWriteResponse"
message="tns:IAccessServiceSoap_SetReadWrite_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetReadWriteDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_SetReadWrite_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetEnableDisableDatabase">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetEnableDisableDatabase"
message="tns:IAccessServiceSoap_SetEnableDisableDatabase_InputMessage"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServ
erInternalService/IAccessServiceSoap/SetEnableDisableDatabaseResponse"
message="tns:IAccessServiceSoap_SetEnableDisableDatabase_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetEnableDisableDatabaseDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_SetEnableDisableDatabase_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="UpdateDatabaseConfiguration">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDatabaseConfiguration"
message="tns:IAccessServiceSoap_UpdateDatabaseConfiguration_InputMessage"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDatabaseConfigurationResponse"
message="tns:IAccessServiceSoap_UpdateDatabaseConfiguration_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDatabaseConfigurationDatabaseProviderMessageFault"
name="DatabaseProviderMessageFault"
message="tns:IAccessServiceSoap_UpdateDatabaseConfiguration_DatabaseProviderMessageFault_FaultMessage"/>
    </wsdl:operation>
    </wsdl:portType>
    <wsdl:binding name="DefaultBinding_IAccessServiceSoap" type="tns:IAccessServiceSoap">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="GetHealthScore">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetHealthScore" style="document"/>
    <wsdl:input>
    <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
    <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="OpenSession">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenSession" style="document"/>
    <wsdl:input>
    <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
    <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="CloseSession">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseSession" style="document"/>
    <wsdl:input>
    <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
    <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetObjectSchema">

```

```

    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetObjectSchema" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetFormDefinitionAndRecordSet">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetFormDefinitionAndRecordSet" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetHostProperties">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetHostProperties" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetApplicationNotifications">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetApplicationNotifications" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="OpenResultSet">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/OpenResultSet" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>

```

```

    <wsdl:operation name="GetData">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetData" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="SelectDataNoCache">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/SelectDataNoCache" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="InsertData">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/InsertData" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="InsertDataNoCache">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/InsertDataNoCache" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="UpdateData">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/UpdateData" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>

```

```

</wsdl:operation>
<wsdl:operation name="UpdateImage">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateImage" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RetrieveImage">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RetrieveImage" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="UpdateDataNoCache">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateDataNoCache" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="FixupRow">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/FixupRow" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="FixupRowNoCache">
  <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/FixupRowNoCache" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="AccessServerMessageFault">
    <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>

```

```

        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="DeleteData">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/DeleteData" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="DeleteDataNoCache">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/DeleteDataNoCache" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="DeleteAllData">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/DeleteAllData" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetDistinctValues">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetDistinctValues" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetAutoSumValues">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetAutoSumValues" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">

```

```

        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetSearchData">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetSearchData" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RunDataMacro">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RunDataMacro" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetUIMacroJavascript">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetUIMacroJavascript" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="CloseResultSet">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CloseResultSet" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetOfficeAppSettings">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetOfficeAppSettings" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>

```



```

        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetOfficeAppSettings">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetOfficeAppSettings" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="InsertAppForOfficeInForm">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/InsertAppForOfficeInForm" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetNewDatabaseCollation">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetNewDatabaseCollation" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetApplicationInformation">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetApplicationInformation" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>

```

```

        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="CreateAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreateAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="RenameAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="UpdateAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UpdateAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="DeleteAccessObject">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteAccessObject" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="SetDataMacroTracing">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/SetDataMacroTracing" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>

```

```

        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetObjectReadOnly">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/SetObjectReadOnly" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLinkedTableInformation">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/GetLinkedTableInformation" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RefreshLinkedTableInformation">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/RefreshLinkedTableInformation" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ImportData">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/ImportData" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
        <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetDataConnectivityStatus">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/SetDataConnectivityStatus" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>

```

```

    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
      <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetDataConnectivityStatus">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivityStatus" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
      <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetDataConnectivity">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetDataConnectivity" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
      <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetFirewallRules">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetFirewallRules" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
      <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="AddFirewallRule">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/AddFirewallRule" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessServerMessageFault">
      <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="OpenFirewallForUser">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/OpenFirewallForUser" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>

```

```

        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="DeleteFirewallRules">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/DeleteFirewallRules" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="CreatePackage">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CreatePackage" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetPackage">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetPackage" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="AccessServerMessageFault">
            <soap:fault use="literal" name="AccessServerMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetAvailableServer">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetAvailableServer" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="DatabaseProviderMessageFault">
            <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetReservedDatabase">
        <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetReservedDatabase" style="document"/>
        <wsdl:input>

```

```

        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetServerName">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/GetServerName" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ProvisionDatabase">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ProvisionDatabase" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="UnprovisionDatabase">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/UnprovisionDatabase" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RecycleDatabase">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RecycleDatabase" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RestoreDatabase">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RestoreDatabase" style="document"/>

```

```

    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
      <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="ExecuteDacIncrementalUpgrade">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/ExecuteDacIncrementalUpgrade" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
      <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="CopyDatabase">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CopyDatabase" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
      <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="CheckCopyStatus">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/CheckCopyStatus" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
      <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="RenameDatabase">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/IAccessServiceSoap/RenameDatabase" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
      <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="DatabaseExists">

```

```

    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/DatabaseExists" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetReadWrite">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/SetReadWrite" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetEnableDisableDatabase">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/SetEnableDisableDatabase" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="UpdateDatabaseConfiguration">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServe
rInternalService/IAccessServiceSoap/UpdateDatabaseConfiguration" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="DatabaseProviderMessageFault">
        <soap:fault use="literal" name="DatabaseProviderMessageFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
</wsdl:binding>
<wsdl:message
name="IAccessServiceSoap AddFirewallRule AccessServerMessageFault FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap AddFirewallRule InputMessage">
    <wsdl:part name="parameters" element="tns:AddFirewallRule"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap AddFirewallRule OutputMessage">
    <wsdl:part name="parameters" element="tns:AddFirewallRuleResponse"/>
</wsdl:message>

```



```

    <wsdl:message
name="IAccessServiceSoap_CheckCopyStatus_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CheckCopyStatus_InputMessage">
    <wsdl:part name="parameters" element="tns:CheckCopyStatus"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CheckCopyStatus_OutputMessage">
    <wsdl:part name="parameters" element="tns:CheckCopyStatusResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_CloseResultSet_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CloseResultSet_InputMessage">
    <wsdl:part name="parameters" element="tns:CloseResultSet"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CloseResultSet_OutputMessage">
    <wsdl:part name="parameters" element="tns:CloseResultSetResponse"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CloseSession_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CloseSession_InputMessage">
    <wsdl:part name="parameters" element="tns:CloseSession"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CloseSession_OutputMessage">
    <wsdl:part name="parameters" element="tns:CloseSessionResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_CopyDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CopyDatabase_InputMessage">
    <wsdl:part name="parameters" element="tns:CopyDatabase"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CopyDatabase_OutputMessage">
    <wsdl:part name="parameters" element="tns:CopyDatabaseResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_CreateAccessObject_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CreateAccessObject_InputMessage">
    <wsdl:part name="parameters" element="tns:CreateAccessObject"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CreateAccessObject_OutputMessage">
    <wsdl:part name="parameters" element="tns:CreateAccessObjectResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_CreatePackage_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CreatePackage_InputMessage">
    <wsdl:part name="parameters" element="tns:CreatePackage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_CreatePackage_OutputMessage">

```

```

        <wsdl:part name="parameters" element="tns:CreatePackageResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_DatabaseExists_DatabaseProviderMessageFault_FaultMessage">
        <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DatabaseExists_InputMessage">
        <wsdl:part name="parameters" element="tns:DatabaseExists"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DatabaseExists_OutputMessage">
        <wsdl:part name="parameters" element="tns:DatabaseExistsResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_DeleteAccessObject_AccessServerMessageFault_FaultMessage">
        <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteAccessObject_InputMessage">
        <wsdl:part name="parameters" element="tns>DeleteAccessObject"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteAccessObject_OutputMessage">
        <wsdl:part name="parameters" element="tns>DeleteAccessObjectResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_DeleteAllData_AccessServerMessageFault_FaultMessage">
        <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteAllData_InputMessage">
        <wsdl:part name="parameters" element="tns>DeleteAllData"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteAllData_OutputMessage">
        <wsdl:part name="parameters" element="tns>DeleteAllDataResponse"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteData_AccessServerMessageFault_FaultMessage">
        <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteData_InputMessage">
        <wsdl:part name="parameters" element="tns>DeleteData"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteData_OutputMessage">
        <wsdl:part name="parameters" element="tns>DeleteDataResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_DeleteDataNoCache_AccessServerMessageFault_FaultMessage">
        <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteDataNoCache_InputMessage">
        <wsdl:part name="parameters" element="tns>DeleteDataNoCache"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteDataNoCache_OutputMessage">
        <wsdl:part name="parameters" element="tns>DeleteDataNoCacheResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_DeleteFirewallRules_AccessServerMessageFault_FaultMessage">
        <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_DeleteFirewallRules_InputMessage">
        <wsdl:part name="parameters" element="tns>DeleteFirewallRules"/>

```

```

</wsdl:message>
<wsdl:message name="IAccessServiceSoap_DeleteFirewallRules_OutputMessage">
  <wsdl:part name="parameters" element="tns:DeleteFirewallRulesResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_ExecuteDacIncrementalUpgrade_DatabaseProviderMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_ExecuteDacIncrementalUpgrade_InputMessage">
  <wsdl:part name="parameters" element="tns:ExecuteDacIncrementalUpgrade"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_ExecuteDacIncrementalUpgrade_OutputMessage">
  <wsdl:part name="parameters" element="tns:ExecuteDacIncrementalUpgradeResponse"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_FixupRow_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_FixupRow_InputMessage">
  <wsdl:part name="parameters" element="tns:FixupRow"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_FixupRow_OutputMessage">
  <wsdl:part name="parameters" element="tns:FixupRowResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_FixupRowNoCache_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_FixupRowNoCache_InputMessage">
  <wsdl:part name="parameters" element="tns:FixupRowNoCache"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_FixupRowNoCache_OutputMessage">
  <wsdl:part name="parameters" element="tns:FixupRowNoCacheResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetAccessObject_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetAccessObject_InputMessage">
  <wsdl:part name="parameters" element="tns:GetAccessObject"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetAccessObject_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetAccessObjectResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetApplicationInformation_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetApplicationInformation_InputMessage">
  <wsdl:part name="parameters" element="tns:GetApplicationInformation"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetApplicationInformation_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetApplicationInformationResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetApplicationNotifications_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>

```

```

</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetApplicationNotifications_InputMessage">
  <wsdl:part name="parameters" element="tns:GetApplicationNotifications"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetApplicationNotifications_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetApplicationNotificationsResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetAutoSumValues_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetAutoSumValues_InputMessage">
  <wsdl:part name="parameters" element="tns:GetAutoSumValues"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetAutoSumValues_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetAutoSumValuesResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetAvailableServer_DatabaseProviderMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetAvailableServer_InputMessage">
  <wsdl:part name="parameters" element="tns:GetAvailableServer"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetAvailableServer_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetAvailableServerResponse"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetData_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetData_InputMessage">
  <wsdl:part name="parameters" element="tns:GetData"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetData_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetDataResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetDataConnectivity_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetDataConnectivity_InputMessage">
  <wsdl:part name="parameters" element="tns:GetDataConnectivity"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetDataConnectivity_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetDataConnectivityResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetDataConnectivityStatus_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetDataConnectivityStatus_InputMessage">
  <wsdl:part name="parameters" element="tns:GetDataConnectivityStatus"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetDataConnectivityStatus_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetDataConnectivityStatusResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetDistinctValues_AccessServerMessageFault_FaultMessage">

```

```

    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetDistinctValues_InputMessage">
    <wsdl:part name="parameters" element="tns:GetDistinctValues"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetDistinctValues_OutputMessage">
    <wsdl:part name="parameters" element="tns:GetDistinctValuesResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetFirewallRules_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetFirewallRules_InputMessage">
    <wsdl:part name="parameters" element="tns:GetFirewallRules"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetFirewallRules_OutputMessage">
    <wsdl:part name="parameters" element="tns:GetFirewallRulesResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetFormDefinitionAndRecordSet_AccessServerMessageFault_FaultMessage"
>
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetFormDefinitionAndRecordSet_InputMessage">
    <wsdl:part name="parameters" element="tns:GetFormDefinitionAndRecordSet"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetFormDefinitionAndRecordSet_OutputMessage">
    <wsdl:part name="parameters" element="tns:GetFormDefinitionAndRecordSetResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetHealthScore_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetHealthScore_InputMessage">
    <wsdl:part name="parameters" element="tns:GetHealthScore"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetHealthScore_OutputMessage">
    <wsdl:part name="parameters" element="tns:GetHealthScoreResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetHostProperties_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetHostProperties_InputMessage">
    <wsdl:part name="parameters" element="tns:GetHostProperties"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetHostProperties_OutputMessage">
    <wsdl:part name="parameters" element="tns:GetHostPropertiesResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetLinkedTableInformation_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetLinkedTableInformation_InputMessage">
    <wsdl:part name="parameters" element="tns:GetLinkedTableInformation"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetLinkedTableInformation_OutputMessage">

```

```

    <wsdl:part name="parameters" element="tns:GetLinkedTableInformationResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetNewDatabaseCollation_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetNewDatabaseCollation_InputMessage">
      <wsdl:part name="parameters" element="tns:GetNewDatabaseCollation"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetNewDatabaseCollation_OutputMessage">
      <wsdl:part name="parameters" element="tns:GetNewDatabaseCollationResponse"/>
    </wsdl:message>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetObjectSchema_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetObjectSchema_InputMessage">
      <wsdl:part name="parameters" element="tns:GetObjectSchema"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetObjectSchema_OutputMessage">
      <wsdl:part name="parameters" element="tns:GetObjectSchemaResponse"/>
    </wsdl:message>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetOfficeAppSettings_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetOfficeAppSettings_InputMessage">
      <wsdl:part name="parameters" element="tns:GetOfficeAppSettings"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetOfficeAppSettings_OutputMessage">
      <wsdl:part name="parameters" element="tns:GetOfficeAppSettingsResponse"/>
    </wsdl:message>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_GetPackage_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetPackage_InputMessage">
      <wsdl:part name="parameters" element="tns:GetPackage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetPackage_OutputMessage">
      <wsdl:part name="parameters" element="tns:GetPackageResponse"/>
    </wsdl:message>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetReservedDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetReservedDatabase_InputMessage">
      <wsdl:part name="parameters" element="tns:GetReservedDatabase"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetReservedDatabase_OutputMessage">
      <wsdl:part name="parameters" element="tns:GetReservedDatabaseResponse"/>
    </wsdl:message>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_GetSearchData_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_GetSearchData_InputMessage">
      <wsdl:part name="parameters" element="tns:GetSearchData"/>

```

```

</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetSearchData_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetSearchDataResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetServerName_DatabaseProviderMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetServerName_InputMessage">
  <wsdl:part name="parameters" element="tns:GetServerName"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetServerName_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetServerNameResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_GetUIMacroJavascript_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetUIMacroJavascript_InputMessage">
  <wsdl:part name="parameters" element="tns:GetUIMacroJavascript"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_GetUIMacroJavascript_OutputMessage">
  <wsdl:part name="parameters" element="tns:GetUIMacroJavascriptResponse"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_ImportData_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_ImportData_InputMessage">
  <wsdl:part name="parameters" element="tns:ImportData"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_ImportData_OutputMessage">
  <wsdl:part name="parameters" element="tns:ImportDataResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_InsertAppForOfficeInForm_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_InsertAppForOfficeInForm_InputMessage">
  <wsdl:part name="parameters" element="tns:InsertAppForOfficeInForm"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_InsertAppForOfficeInForm_OutputMessage">
  <wsdl:part name="parameters" element="tns:InsertAppForOfficeInFormResponse"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_InsertData_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_InsertData_InputMessage">
  <wsdl:part name="parameters" element="tns:InsertData"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_InsertData_OutputMessage">
  <wsdl:part name="parameters" element="tns:InsertDataResponse"/>
</wsdl:message>
<wsdl:message
name="IAccessServiceSoap_InsertDataNoCache_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_InsertDataNoCache_InputMessage">

```

```

    <wsdl:part name="parameters" element="tns:InsertDataNoCache"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_InsertDataNoCache_OutputMessage">
    <wsdl:part name="parameters" element="tns:InsertDataNoCacheResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_OpenFirewallForUser_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenFirewallForUser_InputMessage">
    <wsdl:part name="parameters" element="tns:OpenFirewallForUser"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenFirewallForUser_OutputMessage">
    <wsdl:part name="parameters" element="tns:OpenFirewallForUserResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_OpenResultSet_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenResultSet_InputMessage">
    <wsdl:part name="parameters" element="tns:OpenResultSet"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenResultSet_OutputMessage">
    <wsdl:part name="parameters" element="tns:OpenResultSetResponse"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenSession_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenSession_InputMessage">
    <wsdl:part name="parameters" element="tns:OpenSession"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_OpenSession_OutputMessage">
    <wsdl:part name="parameters" element="tns:OpenSessionResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_ProvisionDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_ProvisionDatabase_InputMessage">
    <wsdl:part name="parameters" element="tns:ProvisionDatabase"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_ProvisionDatabase_OutputMessage">
    <wsdl:part name="parameters" element="tns:ProvisionDatabaseResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_RecycleDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_RecycleDatabase_InputMessage">
    <wsdl:part name="parameters" element="tns:RecycleDatabase"/>
  </wsdl:message>
  <wsdl:message name="IAccessServiceSoap_RecycleDatabase_OutputMessage">
    <wsdl:part name="parameters" element="tns:RecycleDatabaseResponse"/>
  </wsdl:message>
  <wsdl:message
name="IAccessServiceSoap_RefreshLinkedTableInformation_AccessServerMessageFault_FaultMessage"
>
  >

```



```

    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RefreshLinkedTableInformation_InputMessage">
    <wsdl:part name="parameters" element="tns:RefreshLinkedTableInformation"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RefreshLinkedTableInformation_OutputMessage">
    <wsdl:part name="parameters" element="tns:RefreshLinkedTableInformationResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_RenameAccessObject_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RenameAccessObject_InputMessage">
    <wsdl:part name="parameters" element="tns:RenameAccessObject"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RenameAccessObject_OutputMessage">
    <wsdl:part name="parameters" element="tns:RenameAccessObjectResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_RenameDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RenameDatabase_InputMessage">
    <wsdl:part name="parameters" element="tns:RenameDatabase"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RenameDatabase_OutputMessage">
    <wsdl:part name="parameters" element="tns:RenameDatabaseResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_RestoreDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RestoreDatabase_InputMessage">
    <wsdl:part name="parameters" element="tns:RestoreDatabase"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RestoreDatabase_OutputMessage">
    <wsdl:part name="parameters" element="tns:RestoreDatabaseResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_RetrieveImage_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RetrieveImage_InputMessage">
    <wsdl:part name="parameters" element="tns:RetrieveImage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RetrieveImage_OutputMessage">
    <wsdl:part name="parameters" element="tns:RetrieveImageResponse"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RunDataMacro_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RunDataMacro_InputMessage">
    <wsdl:part name="parameters" element="tns:RunDataMacro"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_RunDataMacro_OutputMessage">
    <wsdl:part name="parameters" element="tns:RunDataMacroResponse"/>
    </wsdl:message>

```

```

    <wsdl:message
name="IAccessServiceSoap_SelectDataNoCache_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SelectDataNoCache_InputMessage">
    <wsdl:part name="parameters" element="tns:SelectDataNoCache"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SelectDataNoCache_OutputMessage">
    <wsdl:part name="parameters" element="tns:SelectDataNoCacheResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_SetDataConnectivityStatus_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetDataConnectivityStatus InputMessage">
    <wsdl:part name="parameters" element="tns:SetDataConnectivityStatus"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetDataConnectivityStatus_OutputMessage">
    <wsdl:part name="parameters" element="tns:SetDataConnectivityStatusResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_SetDataMacroTracing_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetDataMacroTracing InputMessage">
    <wsdl:part name="parameters" element="tns:SetDataMacroTracing"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetDataMacroTracing OutputMessage">
    <wsdl:part name="parameters" element="tns:SetDataMacroTracingResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_SetEnableDisableDatabase_DatabaseProviderMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetEnableDisableDatabase_InputMessage">
    <wsdl:part name="parameters" element="tns:SetEnableDisableDatabase"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetEnableDisableDatabase OutputMessage">
    <wsdl:part name="parameters" element="tns:SetEnableDisableDatabaseResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_SetObjectReadOnly_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetObjectReadOnly_InputMessage">
    <wsdl:part name="parameters" element="tns:SetObjectReadOnly"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetObjectReadOnly OutputMessage">
    <wsdl:part name="parameters" element="tns:SetObjectReadOnlyResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_SetOfficeAppSettings_AccessServerMessageFault_FaultMessage">
    <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetOfficeAppSettings_InputMessage">
    <wsdl:part name="parameters" element="tns:SetOfficeAppSettings"/>
    </wsdl:message>

```

```

    <wsdl:message name="IAccessServiceSoap_SetOfficeAppSettings_OutputMessage">
      <wsdl:part name="parameters" element="tns:SetOfficeAppSettingsResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_SetReadWrite_DatabaseProviderMessageFault_FaultMessage">
      <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetReadWrite_InputMessage">
      <wsdl:part name="parameters" element="tns:SetReadWrite"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_SetReadWrite_OutputMessage">
      <wsdl:part name="parameters" element="tns:SetReadWriteResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_UnprovisionDatabase DatabaseProviderMessageFault FaultMessage">
      <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UnprovisionDatabase_InputMessage">
      <wsdl:part name="parameters" element="tns:UnprovisionDatabase"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UnprovisionDatabase_OutputMessage">
      <wsdl:part name="parameters" element="tns:UnprovisionDatabaseResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_UpdateAccessObject AccessServerMessageFault FaultMessage">
      <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateAccessObject InputMessage">
      <wsdl:part name="parameters" element="tns:UpdateAccessObject"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateAccessObject_OutputMessage">
      <wsdl:part name="parameters" element="tns:UpdateAccessObjectResponse"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateData AccessServerMessageFault FaultMessage">
      <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateData_InputMessage">
      <wsdl:part name="parameters" element="tns:UpdateData"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateData_OutputMessage">
      <wsdl:part name="parameters" element="tns:UpdateDataResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_UpdateDatabaseConfiguration DatabaseProviderMessageFault FaultMessag
e">
      <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:DatabaseProviderMessage"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateDatabaseConfiguration InputMessage">
      <wsdl:part name="parameters" element="tns:UpdateDatabaseConfiguration"/>
    </wsdl:message>
    <wsdl:message name="IAccessServiceSoap_UpdateDatabaseConfiguration_OutputMessage">
      <wsdl:part name="parameters" element="tns:UpdateDatabaseConfigurationResponse"/>
    </wsdl:message>
    <wsdl:message
name="IAccessServiceSoap_UpdateDataNoCache AccessServerMessageFault FaultMessage">
      <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
    </wsdl:message>

```

```
<wsdl:message name="IAccessServiceSoap_UpdateDataNoCache_InputMessage">
  <wsdl:part name="parameters" element="tns:UpdateDataNoCache"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_UpdateDataNoCache_OutputMessage">
  <wsdl:part name="parameters" element="tns:UpdateDataNoCacheResponse"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_UpdateImage_AccessServerMessageFault_FaultMessage">
  <wsdl:part
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
name="detail" element="q1:AccessServerMessage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_UpdateImage_InputMessage">
  <wsdl:part name="parameters" element="tns:UpdateImage"/>
</wsdl:message>
<wsdl:message name="IAccessServiceSoap_UpdateImage_OutputMessage">
  <wsdl:part name="parameters" element="tns:UpdateImageResponse"/>
</wsdl:message>
</wsdl:definitions>
```

## 7 Appendix B: Full XML Schema

| Schema name   | Prefix | Section              |
|---|--------|----------------------|
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data</a>   | tns1   | <a href="#">7.6</a>  |
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database</a>                                   | tns2   | <a href="#">7.3</a>  |
| <a href="http://schemas.datacontract.org/2004/07/System.Data">http://schemas.datacontract.org/2004/07/System.Data</a>   | q5     | <a href="#">7.7</a>  |
| <a href="http://schemas.datacontract.org/2004/07/System.Globalization">http://schemas.datacontract.org/2004/07/System.Globalization</a>   | q6     | <a href="#">7.8</a>  |
| <a href="http://schemas.datacontract.org/2004/07/System.Net">http://schemas.datacontract.org/2004/07/System.Net</a>   | q2     | <a href="#">7.9</a>  |
| <a href="http://schemas.datacontract.org/2004/07/System.Security">http://schemas.datacontract.org/2004/07/System.Security</a>   | q7     | <a href="#">7.10</a> |
| <a href="http://schemas.datacontract.org/2004/07/System">http://schemas.datacontract.org/2004/07/System</a>   | q4     | <a href="#">7.11</a> |
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema</a>                         | tns3   | <a href="#">7.12</a> |
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design</a>                                       | tns4   | <a href="#">7.13</a> |
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService</a>                               | tns5   | <a href="#">7.14</a> |
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services</a>   | q1     | <a href="#">7.1</a>  |
| <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient</a>   | tns6   | <a href="#">7.15</a> |
| <a href="http://schemas.microsoft.com/2003/10/Serialization/Arrays">http://schemas.microsoft.com/2003/10/Serialization/Arrays</a>   | q3     | <a href="#">7.4</a>  |
| <a href="http://schemas.microsoft.com/2003/10/Serialization/">http://schemas.microsoft.com/2003/10/Serialization/</a>   | ser    | <a href="#">7.5</a>  |
| <a href="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/">http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/</a> | tns    | <a href="#">7.2</a>  |

For ease of implementation, the following sections provide the full XML schema for this protocol.

### 7.1 <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
  xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
  xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ServerHealthInformation">
    <xs:sequence>
      <xs:element minOccurs="0" name="HealthScore" type="xs:float"/>
      <xs:element minOccurs="0" name="StateFlags" type="q1:ServerStateFlags"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ServerHealthInformation" nillable="true"
    type="q1:ServerHealthInformation"/>
</xs:schema>
```

```

<xs:simpleType name="ServerStateFlags">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="Probation"/>
        <xs:enumeration value="ShuttingDown"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
<xs:element name="ServerStateFlags" nillable="true" type="q1:ServerStateFlags"/>
<xs:complexType name="AccessServerMessage">
  <xs:sequence>
    <xs:element minOccurs="0" name="Buttons" type="q1:AccessServerMessageButtons"/>
    <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="DataDictionary" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
    <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ErrorNumber" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="ExtendedDescription" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="HealthInformation" nillable="true"
type="q1:ServerHealthInformation"/>
    <xs:element minOccurs="0" name="HelpDisplayText" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="HelpTopicId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Id" type="q1:AccessServerMessageId"/>
    <xs:element minOccurs="0" name="MessageType" type="q1:AccessServerMessageType"/>
    <xs:element minOccurs="0" name="RequestCorrelationId" type="ser:guid"/>
    <xs:element minOccurs="0" name="Severity" type="q1:AccessServerMessageSeverity"/>
    <xs:element minOccurs="0" name="Timestamp" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="AccessServerMessage" nillable="true" type="q1:AccessServerMessage"/>
<xs:simpleType name="AccessServerMessageButtons">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="OK"/>
        <xs:enumeration value="Cancel"/>
        <xs:enumeration value="Yes"/>
        <xs:enumeration value="No"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
<xs:element name="AccessServerMessageButtons" nillable="true"
type="q1:AccessServerMessageButtons"/>
<xs:simpleType name="AccessServerMessageId">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Blank"/>
    <xs:enumeration value="InternalError"/>
    <xs:enumeration value="ManagementUIInternalError"/>
    <xs:enumeration value="ServerUnreachable"/>
    <xs:enumeration value="InvalidValueForField"/>
    <xs:enumeration value="GetRecordsPermissionsFailure"/>
    <xs:enumeration value="WriteRecordsPermissionsFailure"/>
    <xs:enumeration value="NotMemberOfRole"/>
    <xs:enumeration value="ServerReadOnly"/>
    <xs:enumeration value="MaxSessionsPerUserExceeded"/>
    <xs:enumeration value="RetryError"/>
    <xs:enumeration value="MaxRequestDurationExceeded"/>
    <xs:enumeration value="ProductExpired"/>
    <xs:enumeration value="NewWorkbookSessionTimeout"/>
    <xs:enumeration value="GregorianCalendarHelperException"/>
    <xs:enumeration value="DataException_CacheOperationInvalid"/>
    <xs:enumeration value="DataException_InvalidPageNumber"/>
  </xs:restriction>
</xs:simpleType>

```

```

<xs:enumeration value="DataException_ConflictsEncounteredWhileUpdatingData"/>
<xs:enumeration value="DataException_DeleteConflict"/>
<xs:enumeration value="DataException_QueryParametersNotSupplied"/>
<xs:enumeration value="DataException_GenericError"/>

<xs:enumeration value="DataException_CacheFailureAfterSuccessfulCommit"/>
<xs:enumeration value="ExternalData_InvalidSource"/>
<xs:enumeration value="ExternalData_InvalidSite"/>
<xs:enumeration value="ExternalData_ComponentMissing"/>
<xs:enumeration value="ExternalData_SourceAccessDenied"/>
<xs:enumeration value="ExternalData_TooMuchData"/>
<xs:enumeration value="ExternalData_TooManyWildcards"/>
<xs:enumeration value="ExternalData_ParametersNotSupported"/>
<xs:enumeration value="ExternalData_IncompatibleCulture"/>
<xs:enumeration value="ExternalData_RefreshDataSource"/>
<xs:enumeration value="ExternalData_DuplicateColumns"/>
<xs:enumeration value="ExternalData_LoadUserProfileDisabled"/>
<xs:enumeration value="DataConnectivity_FunctionalityDisabled"/>
<xs:enumeration value="DataConnectivity_AllIPsNotSupported"/>
<xs:enumeration value="DataConnectivity_IPRangeNotSupported"/>
<xs:enumeration value="DataConnectivity_IPv6NotSupported"/>
<xs:enumeration value="DataConnectivity_FirewallRuleLimitExceeded"/>
<xs:enumeration value="DataConnectivity_NoUserConnectionAllowed"/>
<xs:enumeration value="InvalidArgument"/>
<xs:enumeration value="NullArgument"/>
<xs:enumeration value="WebService_ObjectNotFound"/>
<xs:enumeration value="WebService_InvalidId"/>
<xs:enumeration value="WebService_ObjectSaveConflict"/>
<xs:enumeration value="WebService_ObjectModifiedExternally"/>
<xs:enumeration value="WebService_DeleteApplicationWithSubwebs"/>
<xs:enumeration value="WebService_SiteDoesNotExist"/>
<xs:enumeration value="WebService_InvalidApplicationEndPoint"/>
<xs:enumeration value="WebService_GetServerInformation_SiteDoesNotExist"/>
<xs:enumeration value="WebService_CreateApplication_SiteDoesNotExist"/>
<xs:enumeration value="WebService_UnsupportedCulture"/>
<xs:enumeration value="WebService_MustBeAuthorToDesign"/>
<xs:enumeration value="WebService_ConflictingOperationInProgress"/>
<xs:enumeration value="ObjectAlreadyExists"/>
<xs:enumeration value="AccessServicesDisabled"/>
<xs:enumeration value="TableException_CsdlDefinitionNotSupported"/>
<xs:enumeration value="TableException_DuplicateColumnName"/>
<xs:enumeration value="TableException_InvalidColumn"/>
<xs:enumeration value="TableException_InvalidFieldInExpression"/>
<xs:enumeration value="TableException_InvalidObjectInExpression"/>
<xs:enumeration value="TableException_InvalidComputedColumnExpression"/>
<xs:enumeration value="TableException_InvalidComputedColumnType"/>
<xs:enumeration value="TableException_InvalidRequiredImageColumn"/>
<xs:enumeration value="TableException_InvalidCheckConstraintExpression"/>
<xs:enumeration value="TableException_TooManyIndexes"/>
<xs:enumeration value="QueryException_AmbiguousSourceNamesProvided"/>
<xs:enumeration value="QueryException_InvalidSourceNamesProvided"/>
<xs:enumeration value="QueryException_AmbiguousAliasProvided"/>
<xs:enumeration value="QueryException_InvalidObjectName"/>
<xs:enumeration value="QueryException_AmbiguousJoins"/>
<xs:enumeration value="QueryException_GenericAXLValidation"/>
<xs:enumeration value="QueryException_OutputNotInGroupsOrPartOfAggregate"/>
<xs:enumeration value="QueryException_ParameterTypeMismatch"/>
<xs:enumeration value="QueryException_OrderNotInOutputs"/>
<xs:enumeration value="OrderingException_InvalidSpecification"/>
<xs:enumeration value="OrderingException_InvalidColumnName"/>
<xs:enumeration value="MacroCompilationException_InvalidAxl"/>
<xs:enumeration value="MacroCompilationException_InvalidAction"/>
<xs:enumeration value="MacroCompilationException_InvalidEventName"/>
<xs:enumeration value="MacroCompilationException_RequiredArgumentMissing"/>
<xs:enumeration value="MacroCompilationException_ArgumentValueNotSpecified"/>
<xs:enumeration value="MacroCompilationException_InvalidActionArgument"/>
<xs:enumeration value="MacroCompilationException_MissingDataMacroParameter"/>
<xs:enumeration value="MacroCompilationException_InvalidParameter"/>
<xs:enumeration value="MacroCompilationException_InvalidQueryParameter"/>

```

```

<xs:enumeration value="MacroCompilationException_MacroCallStackDepthExceeded"/>
<xs:enumeration value="MacroCompilationException_VariableNameCollision"/>
<xs:enumeration value="MacroCompilationException_EmptyConditionalBlock"/>
<xs:enumeration value="MacroCompilationException_EmptyLookupRecordBlock"/>
<xs:enumeration value="MacroCompilationException_UpdateOnDeletedRecord"/>

<xs:enumeration value="MacroCompilationException_UpdateRecordInNDM"/>
<xs:enumeration value="MacroCompilationException_UpdateOnReadOnlyQuery"/>
<xs:enumeration value="MacroCompilationException_UpdateOnReadOnlyField"/>
<xs:enumeration value="MacroCompilationException_InvalidAlias"/>
<xs:enumeration value="MacroCompilationException_InvalidIdentifier"/>
<xs:enumeration value="MacroCompilationException_InvalidVariableName"/>
<xs:enumeration value="DatabaseStorage_RestoreInProgress"/>
<xs:enumeration value="DatabaseStorage_RestoreError"/>
<xs:enumeration value="UnsupportedDatabaseCollation"/>
<xs:enumeration value="NoDatabaseServersAvailableForCreate"/>
<xs:enumeration value="NoSQLAuthDatabaseServersAvailableForCreate"/>
<xs:enumeration value="ExpressionBooleanBitMismatch"/>
<xs:enumeration value="NoApplicationDatabaseInformation"/>
<xs:enumeration value="DatabaseServerLoginFailed"/>
<xs:enumeration value="SettingValidationFailed"/>
<xs:enumeration value="SettingApplicationNameNotFound"/>
<xs:enumeration value="SettingApplicationIdNotFound"/>
<xs:enumeration value="SettingApplicationProxyNameNotFound"/>
<xs:enumeration value="ProvisioningGenericFailure"/>
<xs:enumeration value="ProvisioningApplicationAlreadyExists"/>
<xs:enumeration value="ProvisioningException_InstallationTimeout"/>
<xs:enumeration value="ProvisioningSecureStoreIsRequiredAndMissing"/>
<xs:enumeration value="ProvisioningAccessServicesNotSupportedBySite"/>
<xs:enumeration value="FormException_GenericAXLValidation"/>
<xs:enumeration value="UnrecognizedVersion"/>
<xs:enumeration value="UpgradeFailed"/>
<xs:enumeration value="AnotherUpgradeInProgress"/>
<xs:enumeration value="ServerNotCompatibleWithClient"/>
<xs:enumeration value="AppNotCompatibleWithClient"/>
<xs:enumeration value="AppNotCompatibleWithServer"/>
<xs:enumeration value="TemplateNotCompatible"/>
<xs:enumeration value="TemplateSizeExceeded"/>
<xs:enumeration value="TemplateImageSizeExceeded"/>
<xs:enumeration value="TemplateImageTypeUnsupported"/>
<xs:enumeration value="TemplateFailedToExtractApp"/>
<xs:enumeration value="TemplateFailedToParseVersion"/>
<xs:enumeration value="TemplateUnsupportedOrDependencies"/>
<xs:enumeration value="ValidateApplicationException_InvalidUserObjectDefinition"/>
<xs:enumeration value="ValidateApplicationException_InvalidEventDatamacroDefinition"/>
<xs:enumeration value="AccessSqlException_GenericError"/>
<xs:enumeration value="AccessSqlException_CalculationCannotbeStored"/>
<xs:enumeration value="AccessSqlException_ObjectNotFound"/>
<xs:enumeration value="AccessSqlException_PermissionDenied"/>
<xs:enumeration value="AccessSqlException_DuplicateConstraintValue"/>
<xs:enumeration value="AccessSqlException_NoQueryParameters"/>
<xs:enumeration value="AccessSqlException_FieldNoValue"/>
<xs:enumeration value="AccessSqlException_FieldNoValueDesignTime"/>
<xs:enumeration value="AccessSqlException_InvalidFieldName"/>
<xs:enumeration value="AccessSqlException_InvalidObjectName"/>
<xs:enumeration value="AccessSqlException_ObjectAlreadyExists"/>
<xs:enumeration value="AccessSqlException_MissingExpressionInAggregateFunction"/>
<xs:enumeration value="AccessSqlException_DataTypeConversionMismatch"/>
<xs:enumeration value="AccessSqlException_InvalidLengthParameter"/>
<xs:enumeration value="AccessSqlException_IncompatibleTypeChange_TableSave"/>
<xs:enumeration value="AccessSqlException_IncompatibleDataChange_TableSave"/>
<xs:enumeration value="AccessSqlException_ErrorMessage"/>
<xs:enumeration value="AccessSqlException_SqlConnectionTimeout"/>
<xs:enumeration value="AccessSqlException_SqlConnectionTimeoutDuringInsert"/>
<xs:enumeration value="AccessSqlException_SqlError102"/>
<xs:enumeration value="AccessSqlException_SqlError107"/>
<xs:enumeration value="AccessSqlException_SqlError128"/>
<xs:enumeration value="AccessSqlException_SqlError130"/>
<xs:enumeration value="AccessSqlException_SqlError192"/>

```



```

<xs:enumeration value="AccessSqlException_SqlError201"/>
<xs:enumeration value="AccessSqlException_SqlError206"/>
<xs:enumeration value="AccessSqlException_SqlError209"/>
<xs:enumeration value="AccessSqlException_SqlError214"/>
<xs:enumeration value="AccessSqlException_SqlError217"/>
<xs:enumeration value="AccessSqlException_SqlError229"/>

<xs:enumeration value="AccessSqlException_SqlError241"/>
<xs:enumeration value="AccessSqlException_SqlError245"/>
<xs:enumeration value="AccessSqlException_SqlError256"/>
<xs:enumeration value="AccessSqlException_SqlError257"/>
<xs:enumeration value="AccessSqlException_SqlError260"/>
<xs:enumeration value="AccessSqlException_SqlError271"/>
<xs:enumeration value="AccessSqlException_SqlError289"/>
<xs:enumeration value="AccessSqlException_SqlError402"/>
<xs:enumeration value="AccessSqlException_SqlError403"/>
<xs:enumeration value="AccessSqlException_SqlError421"/>
<xs:enumeration value="AccessSqlException_SqlError535"/>
<xs:enumeration value="AccessSqlException_SqlError542"/>
<xs:enumeration value="AccessSqlException_SqlError547_CheckConstraint_Runtime"/>
<xs:enumeration value="AccessSqlException_SqlError547_CheckConstraint_Design_Table"/>
<xs:enumeration value="AccessSqlException_SqlError547_CheckConstraint_Design_Column"/>
<xs:enumeration value="AccessSqlException_SqlError547_ForeignKey_RuntimeInsertUpdate"/>
<xs:enumeration value="AccessSqlException_SqlError547_ForeignKey_RuntimeDelete"/>
<xs:enumeration value="AccessSqlException_SqlError547_ForeignKey_Design"/>
<xs:enumeration value="AccessSqlException_SqlError1004"/>
<xs:enumeration value="AccessSqlException_SqlError1715"/>
<xs:enumeration value="AccessSqlException_SqlError1759"/>
<xs:enumeration value="AccessSqlException_SqlError1765"/>
<xs:enumeration value="AccessSqlException_SqlError1778"/>
<xs:enumeration value="AccessSqlException_SqlError1785"/>
<xs:enumeration value="AccessSqlException_SqlError1919"/>
<xs:enumeration value="AccessSqlException_SqlError2114"/>
<xs:enumeration value="AccessSqlException_SqlError2364"/>
<xs:enumeration value="AccessSqlException_SqlError2365"/>
<xs:enumeration value="AccessSqlException_SqlError2812"/>
<xs:enumeration value="AccessSqlException_SqlError3250"/>
<xs:enumeration value="AccessSqlException_SqlError3623"/>
<xs:enumeration value="AccessSqlException_SqlError3726"/>
<xs:enumeration value="AccessSqlException_SqlError3906"/>
<xs:enumeration value="AccessSqlException_SqlError4121"/>
<xs:enumeration value="AccessSqlException_SqlError4145"/>
<xs:enumeration value="AccessSqlException_SqlError4405"/>
<xs:enumeration value="AccessSqlException_SqlError4429"/>
<xs:enumeration value="AccessSqlException_SqlError4506"/>
<xs:enumeration value="AccessSqlException_SqlError4511"/>
<xs:enumeration value="AccessSqlException_SqlError4901"/>
<xs:enumeration value="AccessSqlException_SqlError4922"/>
<xs:enumeration value="AccessSqlException_SqlError4924"/>
<xs:enumeration value="AccessSqlException_SqlError5074"/>
<xs:enumeration value="AccessSqlException_SqlError7704"/>
<xs:enumeration value="AccessSqlException_SqlError8114"/>
<xs:enumeration value="AccessSqlException_SqlError8115"/>
<xs:enumeration value="AccessSqlException_SqlError8116"/>
<xs:enumeration value="AccessSqlException_SqlError8117"/>
<xs:enumeration value="AccessSqlException_SqlError8134"/>
<xs:enumeration value="AccessSqlException_SqlError8152"/>
<xs:enumeration value="AccessSqlException_SqlError9810"/>
<xs:enumeration value="AccessSqlException_SqlError17142"/>
<xs:enumeration value="AccessSqlException_SqlError40544"/>
<xs:enumeration value="AccessSqlException_SqlError40682"/>
<xs:enumeration value="AccessSqlException_CustomError50001"/>
<xs:enumeration value="AccessSqlException_CustomError50003"/>
<xs:enumeration value="AccessSqlException_CustomError50005"/>
<xs:enumeration value="AccessSqlException_CustomError50010"/>
<xs:enumeration value="OpenDependentObjects"/>
<xs:enumeration value="AccessRenameException_ObjectRenameDisallowed"/>
<xs:enumeration value="AccessRenameException_OnDeployNameTaken"/>
<xs:enumeration value="AccessFeature_OnDeployMacroUnsupported"/>

```

```

    <xs:enumeration value="MacroCompilationException_ParametersDisallowedInOnDeploy"/>
    <xs:enumeration value="AccessEditedAppCantUpgrade"/>
    <xs:enumeration value="OpenDependentObjectsForUpdate"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="AccessServerMessageId" nillable="true" type="q1:AccessServerMessageId"/>
<xs:simpleType name="AccessServerMessageType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Alert"/>
    <xs:enumeration value="Status"/>
    <xs:enumeration value="Confirmation"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="AccessServerMessageType" nillable="true"
type="q1:AccessServerMessageType"/>
  <xs:simpleType name="AccessServerMessageSeverity">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Error"/>
      <xs:enumeration value="Warning"/>
      <xs:enumeration value="Information"/>
      <xs:enumeration value="Progress"/>
      <xs:enumeration value="GettingStarted"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="AccessServerMessageSeverity" nillable="true"
type="q1:AccessServerMessageSeverity"/>
  <xs:complexType name="RequestContext">
    <xs:sequence>
      <xs:element name="RequestApplication" nillable="true" type="q1:RequestApplication"/>
      <xs:element minOccurs="0" name="RequestUrlString" nillable="true" type="xs:string"/>
      <xs:element name="RequestUser" nillable="true" type="q1:RequestUser"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="RequestContext" nillable="true" type="q1:RequestContext"/>
  <xs:complexType name="RequestApplication">
    <xs:sequence>
      <xs:element minOccurs="0" name="AlternateUrlString" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ApplicationSecretId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="CachedAnonymousAccessMode" nillable="true"
type="q1:AnonymousAccessMode"/>
      <xs:element minOccurs="0" name="CultureLcid" type="xs:int"/>
      <xs:element minOccurs="0" name="DatabaseName" nillable="true" type="xs:string"/>
      <xs:element xmlns:q6="http://schemas.datacontract.org/2004/07/System.Globalization"
minOccurs="0" name="DateTimeFormatInfo" nillable="true" type="q6:DateTimeFormatInfo"/>
      <xs:element minOccurs="0" name="Id" type="ser:guid"/>
      <xs:element minOccurs="0" name="LastAccessedDate" nillable="true" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="LayoutsFolder" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LocaleId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ReadOnly" type="xs:boolean"/>
      <xs:element minOccurs="0" name="ServerReferenceId" type="ser:guid"/>
      <xs:element minOccurs="0" name="ServerRelativeUrlString" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="SiteId" type="ser:guid"/>
      <xs:element minOccurs="0" name="StaticPageBaseUrlString" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="StorageState" nillable="true" type="xs:string"/>
      <xs:element xmlns:q4="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="TimeZoneInfo" nillable="true" type="q4:TimeZoneInfo"/>
      <xs:element minOccurs="0" name="Title" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="UIVersion" type="xs:int"/>
      <xs:element minOccurs="0" name="UiCultureLcid" type="xs:int"/>
      <xs:element minOccurs="0" name="UrlString" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="UserLocaleId" type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="RequestApplication" nillable="true" type="q1:RequestApplication"/>
  <xs:simpleType name="AnonymousAccessMode">

```

```

    <xs:restriction base="xs:string">
      <xs:enumeration value="None"/>
      <xs:enumeration value="ReadOnly"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="AnonymousAccessMode" nillable="true" type="q1:AnonymousAccessMode"/>
  <xs:complexType name="RequestUser">
    <xs:sequence>
      <xs:element minOccurs="0" name="AuthenticatedRole" type="q1:UserRole"/>
      <xs:element minOccurs="0" name="Email" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="IsAuthenticated" type="xs:boolean"/>
      <xs:element minOccurs="0" name="LoginName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="RequestUser" nillable="true" type="q1:RequestUser"/>
  <xs:simpleType name="UserRole">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Unauthorized"/>
      <xs:enumeration value="Reader"/>
      <xs:enumeration value="Writer"/>
      <xs:enumeration value="Author"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="UserRole" nillable="true" type="q1:UserRole"/>
  <xs:simpleType name="AccessObjectType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Unknown"/>
      <xs:enumeration value="Table"/>
      <xs:enumeration value="Query"/>
      <xs:enumeration value="DataMacro"/>
      <xs:enumeration value="Form"/>
      <xs:enumeration value="UIMacro"/>
      <xs:enumeration value="Report"/>
      <xs:enumeration value="Image"/>
      <xs:enumeration value="NavigationPane"/>
      <xs:enumeration value="AccessProperties"/>
      <xs:enumeration value="ApplicationVersion"/>
      <xs:enumeration value="ApplicationLogic"/>
      <xs:enumeration value="ApplicationStyle"/>
      <xs:enumeration value="LinkedTable"/>
      <xs:enumeration value="EmbeddedExpression"/>
      <xs:enumeration value="LinkedQuery"/>
      <xs:enumeration value="NavBarSettings"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="AccessObjectType" nillable="true" type="q1:AccessObjectType"/>
  <xs:complexType name="DatabaseProviderMessage">
    <xs:sequence>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="Error" type="tns2:DatabaseProviderError"/>
      <xs:element minOccurs="0" name="HealthInformation" nillable="true"
type="q1:ServerHealthInformation"/>
      <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="OriginalStackTrace" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="DatabaseProviderMessage" nillable="true"
type="q1:DatabaseProviderMessage"/>
  <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
/>
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Globalization"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>

```

```
</xs:schema>
```

## 7.2 <http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">

  <xs:element name="GetHealthScore">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetHealthScoreResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
  xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/"
  minOccurs="0" name="GetHealthScoreResult" nillable="true"
  type="tns:CommandResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="CommandResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="EditSessionHasMultipleCollaborationUsers"
  type="xs:boolean"/>
        <xs:element minOccurs="0" name="EditSessionIsDirty" type="xs:boolean"/>
        <xs:element
  xmlns:ql="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
  minOccurs="0" name="HealthInformation" nillable="true" type="ql:ServerHealthInformation"/>
        <xs:element minOccurs="0" name="RequestId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SpreadsheetData" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="StateId" type="xs:int"/>
        <xs:element minOccurs="0" name="TransientEditSessionToken" nillable="true"
  type="xs:string"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="OpenSession">
      <xs:complexType>
        <xs:sequence>
          <xs:element
  xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/"
  minOccurs="0" name="parameter" nillable="true"
  type="tns:CommandParameter"/>
          <xs:element
  xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/"
  minOccurs="0" name="cultureParameter" nillable="true"
  type="tns:CultureCommandParameter"/>
          <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="CommandParameter">
      <xs:sequence>
        <xs:element minOccurs="0" name="AppPrincipalIdentifier" nillable="true"
  type="xs:string"/>
        <xs:element minOccurs="0" name="CompleteResponseTimeout" type="xs:int"/>
        <xs:element minOccurs="0" name="CorrelationId" type="ser:guid"/>
        <xs:element minOccurs="0" name="ProtocolClientId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

```

    <xs:element
xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
minOccurs="0" name="RequestContext" nillable="true" type="q1:RequestContext"/>
    <xs:element minOccurs="0" name="RequestId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="RequestSiteId" type="ser:guid"/>
    <xs:element minOccurs="0" name="StateId" type="xs:int"/>
    <xs:element minOccurs="0" name="UserFriendlyDisplayName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="WorkbookId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Zone" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" name="CommandParameter" nillable="true" type="tns:CommandParameter"/>
  <xs:complexType name="CultureCommandParameter">
    <xs:sequence>
      <xs:element minOccurs="0" name="DataCultureName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="SharePointDataCultureName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="TimeZoneSerialization" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="UICultureName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
<xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" name="CultureCommandParameter" nillable="true"
type="tns:CultureCommandParameter"/>
  <xs:element name="OpenSessionResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="OpenSessionResult" nillable="true"
type="tns:CommandResult"/>
          <xs:element minOccurs="0" name="sessionId" nillable="true" type="xs:string"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="CloseSession">
      <xs:complexType>
        <xs:sequence>
          <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="CloseSessionResponse">
        <xs:complexType>
          <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CloseSessionResult" nillable="true"
type="tns:CommandResult"/>
              </xs:sequence>
            </xs:complexType>
          </xs:element>
          <xs:element name="GetObjectSchema">
            <xs:complexType>
              <xs:sequence>
                <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>

```

```

        <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetObjectSchemaResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetObjectSchemaResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="fieldSchemas" nillable="true" type="tns6:ArrayOfFieldSchema"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetFormDefinitionAndRecordSet">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="includeDataSourceNames" type="xs:boolean"/>
        </xs:sequence>
        <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="parameterValues" nillable="true" type="tns6:ArrayOfParameterValue"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetFormDefinitionAndRecordSetResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetFormDefinitionAndRecordSetResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="recordset" nillable="true" type="tns6:Recordset"/>
            <xs:element minOccurs="0" name="formDefinition" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="sharedDatabaseInfo" nillable="true" type="tns6:SharedDataBaseInfo"/>
            <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="dataSourceNames" nillable="true" type="q3:ArrayOfstring"/>
            <xs:element minOccurs="0" name="newImageStorage" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetHostProperties">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetHostPropertiesResponse">
    <xs:complexType>

```

```

    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetHostPropertiesResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="properties" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetApplicationNotifications">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="param" nillable="true" type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="severities" nillable="true" type="tns6:ArrayOfMessageSeverity"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetApplicationNotificationsResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="GetApplicationNotificationsResult" nillable="true"
        type="tns:CommandResult"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="notifications" nillable="true" type="tns6:ArrayOfNotification"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="OpenResultSet">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
        InternalService/" minOccurs="0" name="parameter" nillable="true"
        type="tns:CommandParameter"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="fields" nillable="true" type="tns6:FieldList"/>
      <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
        minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
        minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="startRowIndex" type="xs:int"/>
      <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
      <xs:element minOccurs="0" name="retrieveExactRowCount" type="xs:boolean"/>
      <xs:element minOccurs="0" name="stateless" type="xs:boolean"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="OpenResultSetResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer

```

```

InternalService/" minOccurs="0" name="OpenResultSetResult" nillable="true"
type="tns:CommandResult"/>
  <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
  <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetData">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="startRowIndex" type="xs:int"/>
        <xs:element minOccurs="0" name="rowKey" type="xs:int"/>
        <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="cacheCommands" type="tns1:CacheCommands"/>
        <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetDataResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetDataResult" nillable="true"
type="tns:CommandResult"/>
          <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
          <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="aggregateValues" nillable="true" type="q3:ArrayOfanyType"/>
          <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="SelectDataNoCache">
      <xs:complexType>
        <xs:sequence>
          <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="fields" nillable="true" type="tns6:FieldList"/>
              <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
              <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
              <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
              <xs:element minOccurs="0" name="startRowIndex" type="xs:int"/>
              <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
              <xs:element minOccurs="0" name="refreshData" type="xs:boolean"/>
              <xs:element minOccurs="0" name="retrieveExactRowCount" type="xs:boolean"/>
              <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

```



```

</xs:element>
<xs:element name="SelectDataNoCacheResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="SelectDataNoCacheResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="InsertData">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="InsertDataResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="InsertDataResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="insertedRowsXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="InsertDataNoCache">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfArrayOfKeyValuePair"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="fields" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="InsertDataNoCacheResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="InsertDataNoCacheResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="insertedRowsXml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="UpdateData">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="UpdateDataResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateDataResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element minOccurs="0" name="updatedTableXml" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="UpdateImage">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element minOccurs="0" name="recordSource" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="fieldName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="imageId" type="xs:int"/>
        <xs:element minOccurs="0" name="newImageValue" nillable="true"
type="xs:base64Binary"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="UpdateImageResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateImageResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element minOccurs="0" name="newimageId" type="xs:int"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="RetrieveImage">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>

```

```

        <xs:element minOccurs="0" name="recordSource" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="fieldName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="imageId" type="xs:int"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="RetrieveImageResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RetrieveImageResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="imageValue" nillable="true" type="xs:base64Binary"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="UpdateDataNoCache">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="fields" nillable="true" type="q3:ArrayOfstring"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="UpdateDataNoCacheResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateDataNoCacheResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="updatedTableXml" nillable="true" type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="FixupRow">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>

```

```

        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="FixupRowResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="FixupRowResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
        </xs:sequence>
    </xs:complexType>

</xs:element>
<xs:element name="FixupRowNoCache">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="values" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="FixupRowNoCacheResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="FixupRowNoCacheResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="totalRowCount" type="xs:int"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="DeleteData">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="DeleteDataResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="DeleteDataResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element minOccurs="0" name="recordsDeleted" type="xs:int"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="DeleteDataNoCache">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="keys" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="oldValues" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="DeleteDataNoCacheResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="DeleteDataNoCacheResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element minOccurs="0" name="recordsDeleted" type="xs:int"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="DeleteAllData">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="DeleteAllDataResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="DeleteAllDataResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element minOccurs="0" name="recordsDeleted" type="xs:int"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetDistinctValues">
    <xs:complexType>
      <xs:sequence>

```

```

        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element minOccurs="0" name="sourceName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="columnName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="maximumRows" type="xs:int"/>
        <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="fields" nillable="true" type="tns6:FieldList"/>
        <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="sortExpression" nillable="true" type="xs:string"/>
        <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="filter" nillable="true" type="tns6:FilterInfo"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="queryParameters" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>

</xs:element>
<xs:element name="GetDistinctValuesResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetDistinctValuesResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAutoSumValues">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
            <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="autoSumFields" nillable="true" type="q3:ArrayOfstring"/>
            <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="autoSumFunctions" nillable="true" type="q3:ArrayOfstring"/>
            <xs:element minOccurs="0" name="restriction" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAutoSumValuesResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetAutoSumValuesResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="values" nillable="true" type="q3:ArrayOfanyType"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetSearchData">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer

```

```

InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
  <xs:element minOccurs="0" name="source" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="boundField" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="primaryDisplayField" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="secondaryDisplayField" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="primaryLookupDisplayField" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="secondaryLookupDisplayField" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="maxResults" type="xs:int"/>
  <xs:element minOccurs="0" name="userInput" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetSearchDataResponse">
  <xs:complexType>
  <xs:sequence>
  <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetSearchDataResult" nillable="true"
type="tns:CommandResult"/>

    <xs:element minOccurs="0" name="tableXml" nillable="true" type="xs:string"/>
  </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="RunDataMacro">
  <xs:complexType>
  <xs:sequence>
  <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
    <xs:element minOccurs="0" name="macroName" nillable="true" type="xs:string"/>
  </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="RunDataMacroResponse">
  <xs:complexType>
  <xs:sequence>
  <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RunDataMacroResult" nillable="true"
type="tns:CommandResult"/>
    <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="dataMacroInstance" nillable="true" type="tns1:DataMacroInstance"/>
  </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetUIMacroJavascript">
  <xs:complexType>
  <xs:sequence>
  <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
    <xs:element minOccurs="0" name="macroName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
  </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    <xs:element name="GetUIMacroJavascriptResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element
            xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
            InternalService/" minOccurs="0" name="GetUIMacroJavascriptResult" nillable="true"
            type="tns:CommandResult"/>
          <xs:element minOccurs="0" name="javascript" nillable="true" type="xs:base64Binary"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="CloseResultSet">
      <xs:complexType>
        <xs:sequence>
          <xs:element
            xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
            InternalService/" minOccurs="0" name="parameter" nillable="true"
            type="tns:CommandParameter"/>
          <xs:element minOccurs="0" name="cacheId" nillable="true" type="xs:string"/>
          <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="CloseResultSetResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element
            xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
            InternalService/" minOccurs="0" name="CloseResultSetResult" nillable="true"
            type="tns:CommandResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="SetOfficeAppSettings">
      <xs:complexType>
        <xs:sequence>
          <xs:element
            xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
            InternalService/" minOccurs="0" name="parameter" nillable="true"
            type="tns:CommandParameter"/>
          <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
          <xs:element minOccurs="0" name="officeAppId" nillable="true" type="xs:string"/>
          <xs:element
            xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
            minOccurs="0" name="newOfficeAppSettings" nillable="true" type="tns6:AppsForOfficeSettings"/>
          <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="SetOfficeAppSettingsResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element
            xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
            InternalService/" minOccurs="0" name="SetOfficeAppSettingsResult" nillable="true"
            type="tns:CommandResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="GetOfficeAppSettings">
      <xs:complexType>
        <xs:sequence>
          <xs:element
            xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
            InternalService/" minOccurs="0" name="parameter" nillable="true"
            type="tns:CommandParameter"/>
          <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
          <xs:element minOccurs="0" name="officeAppIds" nillable="true" type="xs:string"/>

```



```

        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetOfficeAppSettingsResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetOfficeAppSettingsResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="appsForOfficeSettings" nillable="true"
type="tns6:AppsForOfficeSettings"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="InsertAppForOfficeInForm">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="parameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element minOccurs="0" name="formName" nillable="true" type="xs:string"/>
            <xs:element
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
minOccurs="0" name="insertAppsForOfficeInfo" nillable="true"
type="tns6:InsertAppsForOfficeInfo"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="InsertAppForOfficeInFormResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="InsertAppForOfficeInFormResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="formDefinition" nillable="true" type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetNewDatabaseCollation">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="collation" nillable="true" type="tns2:CollationInfo"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetNewDatabaseCollationResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetNewDatabaseCollationResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element minOccurs="0" name="collationName" nillable="true" type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="GetApplicationInformation">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:GetApplicationInformationParameters"/>
          <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="GetApplicationInformationResponse">
      <xs:complexType>
        <xs:sequence>
          <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetApplicationInformationResult" nillable="true"
type="tns:CommandResult"/>
          <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:GetAppInfoResult"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:element name="GetAccessObject">
      <xs:complexType>
        <xs:sequence>
          <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
          <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:GetParameters"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="GetAccessObjectResponse">
        <xs:complexType>
          <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetAccessObjectResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:GetResult"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="CreateAccessObject">
        <xs:complexType>
          <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:CreateParameters"/>
              <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="CreateAccessObjectResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CreateAccessObjectResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:CreateResult"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="RenameAccessObject">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:RenameParameters"/>
          <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  <xs:element name="RenameAccessObjectResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RenameAccessObjectResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:RenameResult"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="UpdateAccessObject">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:UpdateParameters"/>
          <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  <xs:element name="UpdateAccessObjectResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateAccessObjectResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:UpdateResult"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

```

```

</xs:element>
<xs:element name="DeleteAccessObject">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:DeleteParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="DeleteAccessObjectResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="DeleteAccessObjectResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:DeleteResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetDataMacroTracing">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:SetDataMacroTracingParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetDataMacroTracingResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="SetDataMacroTracingResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:SetDataMacroTracingResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetObjectReadOnly">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:SetObjectReadOnlyParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="SetObjectReadOnlyResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="SetObjectReadOnlyResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:SetObjectReadOnlyResult"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetLinkedTableInformation">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:GetLinkedTableInformationParameters"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetLinkedTableInformationResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetLinkedTableInformationResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:GetLinkedTableInformationResult"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="RefreshLinkedTableInformation">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:RefreshLinkedTableInformationParameters"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="RefreshLinkedTableInformationResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RefreshLinkedTableInformationResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi

```

```

ce" minOccurs="0" name="result" nillable="true"
type="tns5:RefreshLinkedTableInformationResult"/>
  </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="ImportData">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:ImportDataParameters"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
<xs:element name="ImportDataResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="ImportDataResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:ImportDataResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetDataConnectivityStatus">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:SetDataConnectivityStatusParameters"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetDataConnectivityStatusResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="SetDataConnectivityStatusResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:SetDataConnectivityStatusResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetDataConnectivityStatus">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi

```

```

ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:GetDataConnectivityStatusParameters"/>
  <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetDataConnectivityStatusResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetDataConnectivityStatusResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:GetDataConnectivityStatusResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetDataConnectivity">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true"
type="tns5:GetDataConnectivityParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetDataConnectivityResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetDataConnectivityResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="result" nillable="true" type="tns5:GetDataConnectivityResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFirewallRules">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServi
ce" minOccurs="0" name="parameters" nillable="true" type="tns5:GetFirewallRulesParameters"/>
      <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFirewallRulesResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetFirewallRulesResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:GetFirewallRulesResult"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="AddFirewallRule">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:AddFirewallRuleParameters"/>
                <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
            </xs:sequence>
        </xs:complexType>
    </xs:element>
    <xs:element name="AddFirewallRuleResponse">
        <xs:complexType>
            <xs:sequence>
                <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="AddFirewallRuleResult" nillable="true"
type="tns:CommandResult"/>
                <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:AddFirewallRuleResult"/>
            </xs:sequence>
        </xs:complexType>
    </xs:element>
    <xs:element name="OpenFirewallForUser">
        <xs:complexType>
            <xs:sequence>
                <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
                <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
type="tns5:OpenFirewallForUserParameters"/>
                    <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
        <xs:element name="OpenFirewallForUserResponse">
            <xs:complexType>
                <xs:sequence>
                    <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="OpenFirewallForUserResult" nillable="true"
type="tns:CommandResult"/>
                    <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:AddFirewallRuleResult"/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
        <xs:element name="DeleteFirewallRules">
            <xs:complexType>
                <xs:sequence>
                    <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
                </xs:sequence>
            </xs:complexType>
        </xs:element>
    </xs:sequence>
</xs:complexType>

```



```

        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true"
type="tns5:DeleteFirewallRulesParameters"/>
        <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="DeleteFirewallRulesResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="DeleteFirewallRulesResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:DeleteFirewallRulesResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="CreatePackage">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="parameters" nillable="true" type="tns5:CreatePackageParameters"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="CreatePackageResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="CreatePackageResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:CreatePackageResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetPackage">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="packageParams" nillable="true" type="tns5:GetPackageParameters"/>
            <xs:element minOccurs="0" name="userCookieId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetPackageResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="GetPackageResult" nillable="true"
type="tns:CommandResult"/>

```

```

        <xs:element
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService" minOccurs="0" name="result" nillable="true" type="tns5:GetPackageResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAvailableServer">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="authMode" type="tns2:SqlAuthenticationMode"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="packageSource" type="tns2:PackageSource"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAvailableServerResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="GetAvailableServerResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="serverContext" nillable="true" type="tns2:ServerContext"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetReservedDatabase">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="authMode" type="tns2:SqlAuthenticationMode"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="packageSource" type="tns2:PackageSource"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetReservedDatabaseResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/" minOccurs="0" name="GetReservedDatabaseResult" nillable="true"
type="tns:CommandResult"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetServerName">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer

```

```

InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
  <xs:element minOccurs="0" name="serverReferenceId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetServerNameResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="GetServerNameResult" nillable="true"
type="tns:CommandResult"/>
        <xs:element minOccurs="0" name="serverName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="ProvisionDatabase">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
          <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
            <xs:element minOccurs="0" name="encodedDac" nillable="true" type="xs:string"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="ProvisionDatabaseResponse">
        <xs:complexType>
          <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="ProvisionDatabaseResult" nillable="true"
type="tns:CommandResult"/>
              <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="provisionedDatabaseContext" nillable="true"
type="tns2:ProvisionedDatabaseContext"/>
            </xs:sequence>
          </xs:complexType>
        </xs:element>
        <xs:element name="UnprovisionDatabase">
          <xs:complexType>
            <xs:sequence>
              <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
                <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
                  <xs:element minOccurs="0" name="dropLogin" type="xs:boolean"/>
                  <xs:element minOccurs="0" name="cutoffDate" nillable="true" type="xs:dateTime"/>
                </xs:sequence>
              </xs:complexType>
            </xs:element>
            <xs:element name="UnprovisionDatabaseResponse">
              <xs:complexType>
                <xs:sequence>
                  <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UnprovisionDatabaseResult" nillable="true"
type="tns:CommandResult"/>
                    </xs:sequence>
                  </xs:complexType>
                </xs:element>
              </xs:complexType>
            </xs:element>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

</xs:element>
<xs:element name="RecycleDatabase">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="RecycleDatabaseResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RecycleDatabaseResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="RestoreDatabase">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="RestoreDatabaseResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="RestoreDatabaseResult" nillable="true"
type="tns:CommandResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ExecuteDacIncrementalUpgrade">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="loginName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="encodedDac" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ExecuteDacIncrementalUpgradeResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer

```

```

InternalService/" minOccurs="0" name="ExecuteDacIncrementalUpgradeResult" nillable="true"
type="tns:CommandResult"/>
  </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="CopyDatabase">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="originalDatabaseContext" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element minOccurs="0" name="copyDatabaseName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CopyDatabaseResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CopyDatabaseResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="provisionedDatabaseContext" nillable="true"
type="tns2:ProvisionedDatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CheckCopyStatus">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="sourceDatabase" nillable="true" type="tns2:DatabaseContext"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="destinationDatabase" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CheckCopyStatusResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="CheckCopyStatusResult" nillable="true"
type="tns:CommandResult"/>
      <xs:element minOccurs="0" name="copyStatus" type="xs:unsignedByte"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="RenameDatabase">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```



```

        <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
        <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
        <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="enableDisable" type="tns2:DatabaseEnableDisableState"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="SetEnableDisableDatabaseResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="SetEnableDisableDatabaseResult" nillable="true"
type="tns:CommandResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="UpdateDatabaseConfiguration">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="commandParameter" nillable="true"
type="tns:CommandParameter"/>
            <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="databaseContext" nillable="true" type="tns2:DatabaseContext"/>
            <xs:element minOccurs="0" name="databaseSize" nillable="true" type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="UpdateDatabaseConfigurationResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServer
InternalService/" minOccurs="0" name="UpdateDatabaseConfigurationResult" nillable="true"
type="tns:CommandResult"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebServic
e"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"/>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
</xs:schema>

```

### 7.3 <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database.Schema>

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="CollationInfo">
    <xs:sequence>
      <xs:element minOccurs="0" name="CultureName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="IsAccentSensitive" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsAccentSensitiveSpecified" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsCaseSensitive" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsCaseSensitiveSpecified" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsKanaSensitive" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsKanaSensitiveSpecified" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsWidthSensitive" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsWidthSensitiveSpecified" type="xs:boolean"/>
      <xs:element minOccurs="0" name="SupportsSupplementaryCharacters" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="CollationInfo" nillable="true" type="tns2:CollationInfo"/>
  <xs:simpleType name="SqlAuthenticationMode">
    <xs:restriction base="xs:string">
      <xs:enumeration value="SqlServerAuth"/>
      <xs:enumeration value="SqlServerAuthOrWindowsAuth"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="SqlAuthenticationMode" nillable="true"
type="tns2:SqlAuthenticationMode"/>
  <xs:simpleType name="PackageSource">
    <xs:restriction base="xs:string">
      <xs:enumeration value="InvalidSource"/>
      <xs:enumeration value="Marketplace"/>
      <xs:enumeration value="CorporateCatalog"/>
      <xs:enumeration value="DeveloperSite"/>
      <xs:enumeration value="ObjectModel"/>
      <xs:enumeration value="RemoteObjectModel"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="PackageSource" nillable="true" type="tns2:PackageSource"/>
  <xs:complexType name="ServerContext">
    <xs:sequence>
      <xs:element xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net" minOccurs="0"
name="MasterCredential" nillable="true" type="q2:NetworkCredential"/>
      <xs:element minOccurs="0" name="ServerReferenceId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ServerContext" nillable="true" type="tns2:ServerContext"/>
  <xs:simpleType name="DatabaseProviderError">
    <xs:restriction base="xs:string">
      <xs:enumeration value="UndefinedError"/>
      <xs:enumeration value="ServiceContextError"/>
      <xs:enumeration value="InvalidArgument"/>
      <xs:enumeration value="NotSupported"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="DatabaseProviderError" nillable="true"
type="tns2:DatabaseProviderError"/>
  <xs:complexType name="DatabaseContext">
    <xs:sequence>
      <xs:element minOccurs="0" name="AppInstanceId" type="ser:guid"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AppProperties" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
      <xs:element minOccurs="0" name="AppTitle" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>

```



```

    <xs:element xmlns:q4="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="AppVersion" nillable="true" type="q4:Version"/>
    <xs:element minOccurs="0" name="Collation" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DacId" type="ser:guid"/>
    <xs:element minOccurs="0" name="DatabaseName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DatabaseSize" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="InstallationLocaleId" type="xs:int"/>
    <xs:element minOccurs="0" name="PackageSource" type="tns2:PackageSource"/>
    <xs:element minOccurs="0" name="PackageType" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ProductId" type="ser:guid"/>
    <xs:element minOccurs="0" name="Reserved" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Server" nillable="true" type="tns2:ServerContext"/>
    <xs:element minOccurs="0" name="SiteId" type="ser:guid"/>
    <xs:element minOccurs="0" name="SiteSubscriptionId" type="ser:guid"/>
    <xs:element minOccurs="0" name="TimeZone" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="DatabaseContext" nillable="true" type="tns2:DatabaseContext"/>
<xs:complexType name="ProvisionedDatabaseContext">
  <xs:sequence>
    <xs:element minOccurs="0" name="AccessAccount" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DatabaseContext" nillable="true"
type="tns2:DatabaseContext"/>
    <xs:element xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net" minOccurs="0"
name="DboCredential" nillable="true" type="q2:NetworkCredential"/>
    <xs:element xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net" minOccurs="0"
name="LoginCredential" nillable="true" type="q2:NetworkCredential"/>
    <xs:element minOccurs="0" name="LoginPassword" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Password" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ProvisionedDatabaseContext" nillable="true"
type="tns2:ProvisionedDatabaseContext"/>
  <xs:simpleType name="DatabaseReadWriteState">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Read"/>
      <xs:enumeration value="ReadWrite"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="DatabaseReadWriteState" nillable="true"
type="tns2:DatabaseReadWriteState"/>
  <xs:simpleType name="DatabaseEnableDisableState">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Enable"/>
      <xs:enumeration value="Disable"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="DatabaseEnableDisableState" nillable="true"
type="tns2:DatabaseEnableDisableState"/>
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Net"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
</xs:schema>

```

## 7.4 http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema"/>
  <xs:complexType name="ArrayOfKeyValueOfstringstring">

```

```

<xs:sequence>
  <xs:element minOccurs="0" maxOccurs="unbounded" name="KeyValueOfstringstring">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="Key" nillable="true" type="xs:string"/>
        <xs:element name="Value" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfKeyValueOfstringstring" nillable="true"
type="q3:ArrayOfKeyValueOfstringstring"/>
<xs:complexType name="ArrayOfstring">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfstring" nillable="true" type="q3:ArrayOfstring"/>
<xs:complexType name="ArrayOfint">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="int" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfint" nillable="true" type="q3:ArrayOfint"/>
<xs:complexType name="ArrayOfanyType">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="anyType" nillable="true"
type="xs:anyType"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfanyType" nillable="true" type="q3:ArrayOfanyType"/>
<xs:complexType name="ArrayOfArrayOfArrayOfstring">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfArrayOfstring"
nillable="true" type="q3:ArrayOfArrayOfstring"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfArrayOfArrayOfstring" nillable="true"
type="q3:ArrayOfArrayOfArrayOfstring"/>
<xs:complexType name="ArrayOfArrayOfstring">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfstring" nillable="true"
type="q3:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfArrayOfstring" nillable="true" type="q3:ArrayOfArrayOfstring"/>
<xs:complexType name="ArrayOfArrayOfanyType">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfanyType" nillable="true"
type="q3:ArrayOfanyType"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfArrayOfanyType" nillable="true" type="q3:ArrayOfArrayOfanyType"/>
<xs:complexType name="ArrayOfKeyValueOfstringColumnblrtN9t">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="KeyValueOfstringColumnblrtN9t">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Key" nillable="true" type="xs:string"/>
          <xs:element
xmlns:tns3="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.S
chema" name="Value" nillable="true" type="tns3:Column"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>

```

```

    </xs:complexType>
    <xs:element name="ArrayOfKeyValueOfstringColumnblrtN9t" nillable="true"
type="q3:ArrayOfKeyValueOfstringColumnblrtN9t"/>
</xs:schema>

```

## 7.5 <http://schemas.microsoft.com/2003/10/Serialization/> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
attributeFormDefault="qualified" elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="anyType" nillable="true" type="xs:anyType"/>
  <xs:element name="anyURI" nillable="true" type="xs:anyURI"/>
  <xs:element name="base64Binary" nillable="true" type="xs:base64Binary"/>
  <xs:element name="boolean" nillable="true" type="xs:boolean"/>
  <xs:element name="byte" nillable="true" type="xs:byte"/>
  <xs:element name="dateTime" nillable="true" type="xs:dateTime"/>
  <xs:element name="decimal" nillable="true" type="xs:decimal"/>
  <xs:element name="double" nillable="true" type="xs:double"/>
  <xs:element name="float" nillable="true" type="xs:float"/>
  <xs:element name="int" nillable="true" type="xs:int"/>
  <xs:element name="long" nillable="true" type="xs:long"/>
  <xs:element name="QName" nillable="true" type="xs:QName"/>
  <xs:element name="short" nillable="true" type="xs:short"/>
  <xs:element name="string" nillable="true" type="xs:string"/>
  <xs:element name="unsignedByte" nillable="true" type="xs:unsignedByte"/>
  <xs:element name="unsignedInt" nillable="true" type="xs:unsignedInt"/>
  <xs:element name="unsignedLong" nillable="true" type="xs:unsignedLong"/>
  <xs:element name="unsignedShort" nillable="true" type="xs:unsignedShort"/>
  <xs:element name="char" nillable="true" type="ser:char"/>
  <xs:simpleType name="char">
    <xs:restriction base="xs:int"/>
  </xs:simpleType>
  <xs:element name="duration" nillable="true" type="ser:duration"/>
  <xs:simpleType name="duration">
    <xs:restriction base="xs:duration">
      <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?"/>
      <xs:minInclusive value="-P10675199DT2H48M5.4775808S"/>
      <xs:maxInclusive value="P10675199DT2H48M5.4775807S"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="guid" nillable="true" type="ser:guid"/>
  <xs:simpleType name="guid">
    <xs:restriction base="xs:string">
      <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:attribute name="FactoryType" type="xs:QName"/>
  <xs:attribute name="Id" type="xs:ID"/>
  <xs:attribute name="Ref" type="xs:IDREF"/>
</xs:schema>

```

## 7.6 <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data> a Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">

```

```

<xs:simpleType name="CacheCommands">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="RefreshData"/>
        <xs:enumeration value="ApplyFilter"/>
        <xs:enumeration value="ClearFilter"/>
        <xs:enumeration value="ApplySort"/>
        <xs:enumeration value="RetrieveImage"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
<xs:element name="CacheCommands" nillable="true" type="tns1:CacheCommands"/>
<xs:complexType name="ArrayOfKeyValuePair">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="KeyValuePair"
type="tns1:KeyValuePair"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfKeyValuePair" nillable="true" type="tns1:ArrayOfKeyValuePair"/>
<xs:complexType name="KeyValuePair">
  <xs:sequence>
    <xs:element name="Key" nillable="true" type="xs:anyType"/>
    <xs:element name="Value" nillable="true" type="xs:anyType"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="KeyValuePair" nillable="true" type="tns1:KeyValuePair"/>
<xs:complexType name="ArrayOfArrayOfKeyValuePair">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfKeyValuePair"
nillable="true" type="tns1:ArrayOfKeyValuePair"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfArrayOfKeyValuePair" nillable="true"
type="tns1:ArrayOfArrayOfKeyValuePair"/>
<xs:complexType name="DataMacroInstance">
  <xs:sequence>
    <xs:element name="_x003C_ReturnVars_x003E_k__BackingField" nillable="true"
type="tns1:ArrayOfKeyValuePair"/>
    <xs:element name="x003C_SessionId_x003E_k__BackingField" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="DataMacroInstance" nillable="true" type="tns1:DataMacroInstance"/>
<xs:simpleType name="ConnectivityPermissionLevel">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Reader"/>
    <xs:enumeration value="Writer"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="ConnectivityPermissionLevel" nillable="true"
type="tns1:ConnectivityPermissionLevel"/>
<xs:complexType name="ConnectivityStatusInformation">
  <xs:sequence>
    <xs:element minOccurs="0" name="IsEnabled" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ConnectivityStatusInformation" nillable="true"
type="tns1:ConnectivityStatusInformation"/>
<xs:complexType name="ArrayOfConnectivityStatusInformation">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ConnectivityStatusInformation"
nillable="true" type="tns1:ConnectivityStatusInformation"/>
  </xs:sequence>
</xs:complexType>

```

```

    <xs:element name="ArrayOfConnectivityStatusInformation" nillable="true"
type="tns1:ArrayOfConnectivityStatusInformation"/>
    <xs:complexType name="ArrayOfFirewallRule">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="FirewallRule" nillable="true"
type="tns1:FirewallRule"/>
      </xs:sequence>
    </xs:complexType>
    <xs:element name="ArrayOfFirewallRule" nillable="true" type="tns1:ArrayOfFirewallRule"/>
    <xs:complexType name="FirewallRule">
      <xs:sequence>
        <xs:element minOccurs="0" name="EndIPAddress" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="StartIPAddress" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
    <xs:element name="FirewallRule" nillable="true" type="tns1:FirewallRule"/>
    <xs:simpleType name="DeleteFirewallRulesOption">
      <xs:restriction base="xs:string">
        <xs:enumeration value="Specified"/>
        <xs:enumeration value="All"/>
      </xs:restriction>
    </xs:simpleType>
    <xs:element name="DeleteFirewallRulesOption" nillable="true"
type="tns1:DeleteFirewallRulesOption"/>
  </xs:schema>

```

## 7.7 <http://schemas.datacontract.org/2004/07/System.Data> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q5="http://schemas.datacontract.org/2004/07/System.Data"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System.Data"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:simpleType name="SqlDbType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="BigInt"/>
      <xs:enumeration value="Binary"/>

      <xs:enumeration value="Bit"/>
      <xs:enumeration value="Char"/>
      <xs:enumeration value="DateTime"/>
      <xs:enumeration value="Decimal"/>
      <xs:enumeration value="Float"/>
      <xs:enumeration value="Image"/>
      <xs:enumeration value="Int"/>
      <xs:enumeration value="Money"/>
      <xs:enumeration value="NChar"/>
      <xs:enumeration value="NText"/>
      <xs:enumeration value="NVarChar"/>
      <xs:enumeration value="Real"/>
      <xs:enumeration value="UniqueIdentifier"/>
      <xs:enumeration value="SmallDateTime"/>
      <xs:enumeration value="SmallInt"/>
      <xs:enumeration value="SmallMoney"/>
      <xs:enumeration value="Text"/>
      <xs:enumeration value="Timestamp"/>
      <xs:enumeration value="TinyInt"/>
      <xs:enumeration value="VarBinary"/>
      <xs:enumeration value="VarChar"/>
      <xs:enumeration value="Variant"/>
      <xs:enumeration value="Xml"/>
      <xs:enumeration value="Udt"/>
      <xs:enumeration value="Structured"/>
      <xs:enumeration value="Date"/>
      <xs:enumeration value="Time"/>
      <xs:enumeration value="DateTime2"/>
    </xs:restriction>
  </xs:simpleType>

```

```

    <xs:enumeration value="DateTimeOffset"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SqlDbType" nillable="true" type="q5:SqlDbType"/>
</xs:schema>

```

## 7.8 <http://schemas.datacontract.org/2004/07/System.Globalization> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q6="http://schemas.datacontract.org/2004/07/System.Globalization"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/System.Globalization"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="DateTimeFormatInfo">
    <xs:sequence>
      <xs:element minOccurs="0" name="CultureID" type="xs:int"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="abbreviatedDayNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="abbreviatedMonthNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="allLongDatePatterns" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="allLongTimePatterns" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="allShortDatePatterns" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="allShortTimePatterns" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="allYearMonthPatterns" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element name="amDesignator" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="bUseCalendarInfo" type="xs:boolean"/>
      <xs:element name="calendar" nillable="true" type="q6:Calendar"/>
      <xs:element name="calendarWeekRule" type="xs:int"/>
      <xs:element minOccurs="0" name="dateSeparator" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="dateTimeOffsetPattern" nillable="true"
        type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="dayNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element name="firstDayOfWeek" type="xs:int"/>
      <xs:element minOccurs="0" name="formatFlags" type="q6:DateTimeFormatFlags"/>
      <xs:element minOccurs="0" name="fullDateTimePattern" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="generalLongTimePattern" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="generalShortTimePattern" nillable="true"
        type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="genitiveMonthNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="leapYearMonthNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element name="longDatePattern" nillable="true" type="xs:string"/>
      <xs:element name="longTimePattern" nillable="true" type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="m_abbrevEnglishEraNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="m_abbrevEraNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="m_dateWords" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        name="m_eraNames" nillable="true" type="q3:ArrayOfstring"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="m_genitiveAbbreviatedMonthNames" nillable="true"
        type="q3:ArrayOfstring"/>
      <xs:element minOccurs="0" name="m_isDefaultCalendar" type="xs:boolean"/>
      <xs:element name="m_isReadOnly" type="xs:boolean"/>
      <xs:element minOccurs="0" name="m_name" nillable="true" type="xs:string"/>
    
```

```

    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="m_superShortDayNames" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element minOccurs="0" name="m_useUserOverride" type="xs:boolean"/>
    <xs:element name="monthDayPattern" nillable="true" type="xs:string"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
name="monthNames" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element minOccurs="0" name="nDataItem" type="xs:int"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
name="optionalCalendars" nillable="true" type="q3:ArrayOfint"/>
    <xs:element name="pmDesignator" nillable="true" type="xs:string"/>
    <xs:element name="shortDatePattern" nillable="true" type="xs:string"/>
    <xs:element name="shortTimePattern" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="timeSeparator" nillable="true" type="xs:string"/>
    <xs:element name="yearMonthPattern" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="DateTimeFormatInfo" nillable="true" type="q6:DateTimeFormatInfo"/>
<xs:complexType name="Calendar">
  <xs:sequence>
    <xs:element name="m_currentEraValue" type="xs:int"/>
    <xs:element minOccurs="0" name="m_isReadOnly" type="xs:boolean"/>
    <xs:element name="twoDigitYearMax" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="Calendar" nillable="true" type="q6:Calendar"/>
<xs:simpleType name="DateTimeFormatFlags">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="UseGenitiveMonth"/>
        <xs:enumeration value="UseLeapYearMonth"/>
        <xs:enumeration value="UseSpacesInMonthNames"/>
        <xs:enumeration value="UseHebrewRule"/>
        <xs:enumeration value="UseSpacesInDayNames"/>
        <xs:enumeration value="UseDigitPrefixInTokens"/>
        <xs:enumeration value="NotInitialized"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>

<xs:element name="DateTimeFormatFlags" nillable="true" type="q6:DateTimeFormatFlags"/>
<xs:complexType name="HebrewCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:Calendar">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="HebrewCalendar" nillable="true" type="q6:HebrewCalendar"/>
<xs:complexType name="KoreanLunisolarCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:EastAsianLunisolarCalendar">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="KoreanLunisolarCalendar" nillable="true"
type="q6:KoreanLunisolarCalendar"/>
<xs:complexType name="EastAsianLunisolarCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:Calendar">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="EastAsianLunisolarCalendar" nillable="true"
type="q6:EastAsianLunisolarCalendar"/>

```

```

<xs:complexType name="PersianCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:Calendar">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="PersianCalendar" nillable="true" type="q6:PersianCalendar"/>
<xs:complexType name="TaiwanCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:Calendar">
      <xs:sequence>
        <xs:element name="helper" nillable="true" type="q6:GregorianCalendarHelper"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="TaiwanCalendar" nillable="true" type="q6:TaiwanCalendar"/>
<xs:complexType name="GregorianCalendarHelper">
  <xs:sequence>
    <xs:element name="m_Cal" nillable="true" type="q6:Calendar"/>
    <xs:element minOccurs="0" name="m_EraInfo" nillable="true" type="q6:ArrayOfEraInfo"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="m_eras" nillable="true" type="q3:ArrayOfint"/>
    <xs:element minOccurs="0" name="m_maxYear" type="xs:int"/>
    <xs:element minOccurs="0" name="m_minDate" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="m_minYear" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="GregorianCalendarHelper" nillable="true"
type="q6:GregorianCalendarHelper"/>
<xs:complexType name="ArrayOfEraInfo">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="EraInfo" nillable="true"
type="q6:EraInfo"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfEraInfo" nillable="true" type="q6:ArrayOfEraInfo"/>
<xs:complexType name="EraInfo">
  <xs:sequence>
    <xs:element minOccurs="0" name="abbrevEraName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="englishEraName" nillable="true" type="xs:string"/>
    <xs:element name="era" type="xs:int"/>
    <xs:element minOccurs="0" name="eraName" nillable="true" type="xs:string"/>
    <xs:element name="maxEraYear" type="xs:int"/>
    <xs:element name="minEraYear" type="xs:int"/>
    <xs:element name="ticks" type="xs:long"/>
    <xs:element name="yearOffset" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="EraInfo" nillable="true" type="q6:EraInfo"/>
<xs:complexType name="TaiwanLunisolarCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:EastAsianLunisolarCalendar">
      <xs:sequence>
        <xs:element name="helper" nillable="true" type="q6:GregorianCalendarHelper"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="TaiwanLunisolarCalendar" nillable="true"
type="q6:TaiwanLunisolarCalendar"/>
<xs:complexType name="ThaiBuddhistCalendar">
  <xs:complexContent mixed="false">
    <xs:extension base="q6:Calendar">
      <xs:sequence>
        <xs:element name="helper" nillable="true" type="q6:GregorianCalendarHelper"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```



```

        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="ThaiBuddhistCalendar" nillable="true" type="q6:ThaiBuddhistCalendar"/>
<xs:complexType name="UmAlQuraCalendar">
    <xs:complexContent mixed="false">
        <xs:extension base="q6:Calendar">
            <xs:sequence/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UmAlQuraCalendar" nillable="true" type="q6:UmAlQuraCalendar"/>
<xs:complexType name="GregorianCalendar">
    <xs:complexContent mixed="false">
        <xs:extension base="q6:Calendar">
            <xs:sequence>
                <xs:element name="m type" type="q6:GregorianCalendarTypes"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GregorianCalendar" nillable="true" type="q6:GregorianCalendar"/>
<xs:simpleType name="GregorianCalendarTypes">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Localized"/>
        <xs:enumeration value="USEnglish"/>
        <xs:enumeration value="MiddleEastFrench"/>
        <xs:enumeration value="Arabic"/>
        <xs:enumeration value="TransliteratedEnglish"/>
        <xs:enumeration value="TransliteratedFrench"/>
    </xs:restriction>
</xs:simpleType>
<xs:element name="GregorianCalendarTypes" nillable="true"
type="q6:GregorianCalendarTypes"/>
<xs:complexType name="HijriCalendar">
    <xs:complexContent mixed="false">
        <xs:extension base="q6:Calendar">
            <xs:sequence>
                <xs:element name="m_HijriAdvance" type="xs:int"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

<xs:element name="HijriCalendar" nillable="true" type="q6:HijriCalendar"/>
<xs:complexType name="JapaneseCalendar">
    <xs:complexContent mixed="false">
        <xs:extension base="q6:Calendar">
            <xs:sequence>
                <xs:element name="helper" nillable="true" type="q6:GregorianCalendarHelper"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="JapaneseCalendar" nillable="true" type="q6:JapaneseCalendar"/>
<xs:complexType name="ChineseLunisolarCalendar">
    <xs:complexContent mixed="false">
        <xs:extension base="q6:EastAsianLunisolarCalendar">
            <xs:sequence/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="ChineseLunisolarCalendar" nillable="true"
type="q6:ChineseLunisolarCalendar"/>
<xs:complexType name="JapaneseLunisolarCalendar">
    <xs:complexContent mixed="false">
        <xs:extension base="q6:EastAsianLunisolarCalendar">
            <xs:sequence>
                <xs:element name="helper" nillable="true" type="q6:GregorianCalendarHelper"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

```

        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="JapaneseLunisolarCalendar" nillable="true"
type="q6:JapaneseLunisolarCalendar"/>
  <xs:complexType name="JulianCalendar">
    <xs:complexContent mixed="false">
      <xs:extension base="q6:Calendar">
        <xs:sequence>
          <xs:element name="MaxYear" type="xs:int"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="JulianCalendar" nillable="true" type="q6:JulianCalendar"/>
  <xs:complexType name="KoreanCalendar">
    <xs:complexContent mixed="false">
      <xs:extension base="q6:Calendar">
        <xs:sequence>
          <xs:element name="helper" nillable="true" type="q6:GregorianCalendarHelper"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="KoreanCalendar" nillable="true" type="q6:KoreanCalendar"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
</xs:schema>

```

## 7.9 http://schemas.datacontract.org/2004/07/System.Net Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q2="http://schemas.datacontract.org/2004/07/System.Net"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System.Net"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System.Security"/>
  <xs:complexType name="NetworkCredential">
    <xs:sequence>
      <xs:element minOccurs="0" name="Domain" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="Password" nillable="true" type="xs:string"/>
      <xs:element xmlns:q7="http://schemas.datacontract.org/2004/07/System.Security"
minOccurs="0" name="SecurePassword" nillable="true" type="q7:SecureString"/>
      <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="NetworkCredential" nillable="true" type="q2:NetworkCredential"/>
</xs:schema>

```

## 7.10 http://schemas.datacontract.org/2004/07/System.Security Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q7="http://schemas.datacontract.org/2004/07/System.Security"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System.Security"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="SecureString">
    <xs:sequence/>
  </xs:complexType>
  <xs:element name="SecureString" nillable="true" type="q7:SecureString"/>
</xs:schema>

```

## 7.11 http://schemas.datacontract.org/2004/07/System Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q4="http://schemas.datacontract.org/2004/07/System"
xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:complexType name="TimeZoneInfo">
    <xs:sequence>
      <xs:any minOccurs="0" maxOccurs="unbounded" namespace="##local"
processContents="skip"/>
    </xs:sequence>
    <xs:attribute ref="ser:FactoryType"/>
  </xs:complexType>
  <xs:element name="TimeZoneInfo" nillable="true" type="q4:TimeZoneInfo"/>
  <xs:complexType name="TimeZoneInfo.AdjustmentRule">
    <xs:sequence>
      <xs:any minOccurs="0" maxOccurs="unbounded" namespace="##local"
processContents="skip"/>
    </xs:sequence>
    <xs:attribute ref="ser:FactoryType"/>
  </xs:complexType>
  <xs:element name="TimeZoneInfo.AdjustmentRule" nillable="true"
type="q4:TimeZoneInfo.AdjustmentRule"/>
  <xs:complexType name="ArrayOfTimeZoneInfo.AdjustmentRule">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="TimeZoneInfo.AdjustmentRule"
nillable="true" type="q4:TimeZoneInfo.AdjustmentRule"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfTimeZoneInfo.AdjustmentRule" nillable="true"
type="q4:ArrayOfTimeZoneInfo.AdjustmentRule"/>
  <xs:complexType name="TimeZoneInfo.TransitionTime">
    <xs:sequence>
      <xs:any minOccurs="0" maxOccurs="unbounded" namespace="##local"
processContents="skip"/>
    </xs:sequence>
    <xs:attribute ref="ser:FactoryType"/>
  </xs:complexType>
  <xs:element name="TimeZoneInfo.TransitionTime" nillable="true"
type="q4:TimeZoneInfo.TransitionTime"/>
  <xs:simpleType name="DayOfWeek">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Sunday"/>
      <xs:enumeration value="Monday"/>
      <xs:enumeration value="Tuesday"/>
      <xs:enumeration value="Wednesday"/>
      <xs:enumeration value="Thursday"/>
      <xs:enumeration value="Friday"/>
      <xs:enumeration value="Saturday"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="DayOfWeek" nillable="true" type="q4:DayOfWeek"/>
  <xs:complexType name="Version">
    <xs:sequence>
      <xs:element name="Build" type="xs:int"/>
      <xs:element name="_Major" type="xs:int"/>
      <xs:element name="Minor" type="xs:int"/>
      <xs:element name="_Revision" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="Version" nillable="true" type="q4:Version"/>
</xs:schema>
```

## 7.12 http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:tns3="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema" elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="Column">
    <xs:sequence>
      <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DefaultValue" nillable="true" type="tns3:ColumnValue"/>
      <xs:element minOccurs="0" name="ExtendedAttributes" nillable="true"
type="tns3:ExtendedAttributes"/>
      <xs:element minOccurs="0" name="ID" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="IsDependent" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsIdentity" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsNullable" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsPrimaryKey" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsUser" type="xs:boolean"/>
      <xs:element minOccurs="0" name="MaxLength" type="xs:int"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="Properties" nillable="true"
type="tns3:AccessProperties"/>
      <xs:element minOccurs="0" name="RequiredConstraintExist" type="xs:boolean"/>
      <xs:element xmlns:q5="http://schemas.datacontract.org/2004/07/System.Data"
minOccurs="0" name="SqlType" type="q5:SqlDbType"/>
      <xs:element minOccurs="0" name="SqlUdt" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="Column" nillable="true" type="tns3:Column"/>
  <xs:complexType name="ColumnValue">
    <xs:sequence>
      <xs:element minOccurs="0" name="Value" nillable="true" type="xs:anyType"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ColumnValue" nillable="true" type="tns3:ColumnValue"/>
  <xs:complexType name="ExtendedAttributes">
    <xs:sequence>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Attributes" nillable="true" type="q3:ArrayOfKeyValueOfstringstring"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ExtendedAttributes" nillable="true" type="tns3:ExtendedAttributes"/>

  <xs:complexType name="AccessProperties">
    <xs:sequence>
      <xs:element minOccurs="0" name="AllowMultipleValues" type="xs:boolean"/>
      <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="CurrencyLocale" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="CurrencySymbol" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="Format" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="Lookup" nillable="true" type="tns3:ColumnLookup"/>
      <xs:element minOccurs="0" name="TextType" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="AccessProperties" nillable="true" type="tns3:AccessProperties"/>
  <xs:complexType name="ColumnLookup">
    <xs:sequence>
      <xs:element minOccurs="0" name="BoundColumn" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DisplayColumn" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LookupType" type="tns3:LookupType"/>
      <xs:element minOccurs="0" name="ReferencedTable" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="SortType" type="tns3:SortType"/>
      <xs:element minOccurs="0" name="Values" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ColumnLookup" nillable="true" type="tns3:ColumnLookup"/>

```

```

<xs:simpleType name="LookupType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="TableOrQuery"/>
    <xs:enumeration value="ValueList"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="LookupType" nillable="true" type="tns3:LookupType"/>
<xs:simpleType name="SortType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="NoSort"/>
    <xs:enumeration value="SortAscending"/>
    <xs:enumeration value="SortDescending"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SortType" nillable="true" type="tns3:SortType"/>
<xs:import namespace="http://schemas.datacontract.org/2004/07/System.Data"/>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
</xs:schema>

```

### 7.13 http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
  xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ArrayOfAccessObjectIdentity">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessObjectIdentity"
        nillable="true" type="tns4:AccessObjectIdentity"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfAccessObjectIdentity" nillable="true"
    type="tns4:ArrayOfAccessObjectIdentity"/>
  <xs:complexType name="AccessObjectIdentity">
    <xs:sequence>
      <xs:element minOccurs="0" name="ID" type="xs:int"/>
      <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="AccessObjectIdentity" nillable="true" type="tns4:AccessObjectIdentity"/>
  <xs:complexType name="ArrayOfAccessObject">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessObject" nillable="true"
        type="tns4:AccessObject"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfAccessObject" nillable="true" type="tns4:ArrayOfAccessObject"/>
  <xs:complexType name="AccessObject">
    <xs:sequence>
      <xs:element minOccurs="0" name="DefinitionNodeString" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ID" type="xs:int"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
        minOccurs="0" name="ObjectType" type="q1:AccessObjectType"/>
      <xs:element minOccurs="0" name="ParentId" nillable="true" type="xs:int"/>
      <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="AccessObject" nillable="true" type="tns4:AccessObject"/>

```

```

<xs:complexType name="Query">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="Query" nillable="true" type="tns4:Query"/>
<xs:complexType name="DataMacro">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DataMacro" nillable="true" type="tns4:DataMacro"/>
<xs:complexType name="EmbeddedExpression">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessStorageObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="EmbeddedExpression" nillable="true" type="tns4:EmbeddedExpression"/>
<xs:complexType name="AccessStorageObject">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AccessStorageObject" nillable="true" type="tns4:AccessStorageObject"/>
<xs:complexType name="NavBarSettingsObject">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="NavBarSettingsObject" nillable="true" type="tns4:NavBarSettingsObject"/>
<xs:complexType name="Form">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessStorageObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="Form" nillable="true" type="tns4:Form"/>
<xs:complexType name="LinkedTable">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="LinkedTable" nillable="true" type="tns4:LinkedTable"/>
<xs:complexType name="Table">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessObject">
      <xs:sequence>
        <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Columns" nillable="true"
type="q3:ArrayOfKeyValueOfstringColumnblrtN9t"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="Table" nillable="true" type="tns4:Table"/>

```

```

<xs:complexType name="UIMacro">
  <xs:complexContent mixed="false">
    <xs:extension base="tns4:AccessStorageObject">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="UIMacro" nillable="true" type="tns4:UIMacro"/>
<xs:simpleType name="PackagingOption">
  <xs:restriction base="xs:string">
    <xs:enumeration value="New"/>
    <xs:enumeration value="Snapshot"/>
    <xs:enumeration value="Deployment"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="PackagingOption" nillable="true" type="tns4:PackagingOption"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"/>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
</xs:schema>

```

## 7.14 http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:tns5="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService"
xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="GetApplicationInformationParameters">
    <xs:complexContent mixed="false">
      <xs:extension base="tns5:ServiceParameters">
        <xs:sequence>
          <xs:element minOccurs="0" name="KnownObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
          <xs:element minOccurs="0" name="ProtocolVersionOptions" nillable="true"
type="tns5:ProtocolVersionList"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetApplicationInformationParameters" nillable="true"
type="tns5:GetApplicationInformationParameters"/>
  <xs:complexType name="ServiceParameters">
    <xs:sequence/>
  </xs:complexType>
  <xs:element name="ServiceParameters" nillable="true" type="tns5:ServiceParameters"/>
  <xs:complexType name="ObjectIdentityList">
    <xs:sequence>
      <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
minOccurs="0" name="ObjectIdentities" nillable="true"
type="tns4:ArrayOfAccessObjectIdentity"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ObjectIdentityList" nillable="true" type="tns5:ObjectIdentityList"/>
  <xs:complexType name="ProtocolVersionList">
    <xs:sequence>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Versions" nillable="true" type="q3:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ProtocolVersionList" nillable="true" type="tns5:ProtocolVersionList"/>
  <xs:complexType name="GetAppInfoResult">

```

```

<xs:complexContent mixed="false">
  <xs:extension base="tns5:ServiceResult">
    <xs:sequence>
      <xs:element minOccurs="0" name="AlternateUrl" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database
" minOccurs="0" name="Collation" nillable="true" type="tns2:CollationInfo"/>
      <xs:element minOccurs="0" name="Culture" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DataServerName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DatabaseName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DeletedObjects" nillable="true"
type="tns5:IDList"/>
      <xs:element minOccurs="0" name="IsDataConnectivitySupported" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsDataMacroTracingOn" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsFirewallRestricted" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsSendEmailSupported" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsUserConnectionAllowed" type="xs:boolean"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="NewObjects" nillable="true"
type="tns5:AccessObjectList"/>
      <xs:element minOccurs="0" name="PackageAppTitle" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="PackageAppVersion" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="PackageIsLocked" type="xs:boolean"/>
      <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="RequestIPAddress" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="Title" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="UpdatedObjects" nillable="true"
type="tns5:AccessObjectList"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="GetAppInfoResult" nillable="true" type="tns5:GetAppInfoResult"/>
<xs:complexType name="ServiceResult">
  <xs:sequence>
    <xs:element minOccurs="0" name="Warning" nillable="true" type="tns5:ServiceWarning"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ServiceResult" nillable="true" type="tns5:ServiceResult"/>
<xs:complexType name="ServiceWarning">
  <xs:sequence>
    <xs:element minOccurs="0" name="Code" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ServiceWarning" nillable="true" type="tns5:ServiceWarning"/>
<xs:complexType name="IDList">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="IDs" nillable="true" type="q3:ArrayOfint"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="IDList" nillable="true" type="tns5:IDList"/>
<xs:complexType name="AccessObjectList">
  <xs:sequence>
    <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
minOccurs="0" name="AccessObjects" nillable="true" type="tns4:ArrayOfAccessObject"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="AccessObjectList" nillable="true" type="tns5:AccessObjectList"/>
<xs:complexType name="GetParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>

```



```

        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="GetParameters" nillable="true" type="tns5:GetParameters"/>
<xs:complexType name="GetResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetResult" nillable="true" type="tns5:GetResult"/>
<xs:complexType name="CreateParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="ParameterObjects" nillable="true"
type="tns5:ParameterObjectList"/>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CreateParameters" nillable="true" type="tns5:CreateParameters"/>
<xs:complexType name="ParameterObjectList">
    <xs:sequence>
        <xs:element minOccurs="0" name="ParameterObjects" nillable="true"
type="tns5:ArrayOfParameterObject"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ParameterObjectList" nillable="true" type="tns5:ParameterObjectList"/>
<xs:complexType name="ArrayOfParameterObject">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterObject" nillable="true"
type="tns5:ParameterObject"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfParameterObject" nillable="true"
type="tns5:ArrayOfParameterObject"/>
<xs:complexType name="ParameterObject">
    <xs:sequence>
        <xs:element minOccurs="0" name="BodyString" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:complexType>
    xmlns:q1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"
    minOccurs="0" name="ObjectType" type="q1:AccessObjectType"/>
</xs:sequence>
</xs:complexType>
<xs:element name="ParameterObject" nillable="true" type="tns5:ParameterObject"/>
<xs:complexType name="CreateResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
                <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
                <xs:element minOccurs="0" name="RefreshRequired" type="xs:boolean"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CreateResult" nillable="true" type="tns5:CreateResult"/>

```

```

<xs:complexType name="ServiceError">
  <xs:sequence>
    <xs:element minOccurs="0" name="Code" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CorrelationId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Timestamp" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ServiceError" nillable="true" type="tns5:ServiceError"/>
<xs:complexType name="RenameParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="KnownObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ObjectVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="OpenObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RenameParameters" nillable="true" type="tns5:RenameParameters"/>
<xs:complexType name="RenameResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
minOccurs="0" name="Object" nillable="true" type="tns4:AccessObject"/>
        <xs:element minOccurs="0" name="UpdatedObjects" nillable="true"
type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RenameResult" nillable="true" type="tns5:RenameResult"/>
<xs:complexType name="UpdateParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="BodyString" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Description" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="KnownObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ObjectVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="OpenObjects" nillable="true"
type="tns5:ObjectIdentityList"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateParameters" nillable="true" type="tns5:UpdateParameters"/>
<xs:complexType name="UpdateResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
        <xs:element minOccurs="0" name="RefreshRequired" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateResult" nillable="true" type="tns5:UpdateResult"/>
<xs:complexType name="DeleteParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="ID" type="xs:int"/>
                <xs:element minOccurs="0" name="ObjectVersion" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteParameters" nillable="true" type="tns5:DeleteParameters"/>
<xs:complexType name="DeleteResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
                <xs:element minOccurs="0" name="ID" type="xs:int"/>
                <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
minOccurs="0" name="Object" nillable="true" type="tns4:AccessObject"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteResult" nillable="true" type="tns5:DeleteResult"/>
<xs:complexType name="SetDataMacroTracingParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="TurnTracingOn" type="xs:boolean"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SetDataMacroTracingParameters" nillable="true"
type="tns5:SetDataMacroTracingParameters"/>
<xs:complexType name="SetDataMacroTracingResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="IsTracingOn" type="xs:boolean"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SetDataMacroTracingResult" nillable="true"
type="tns5:SetDataMacroTracingResult"/>

<xs:complexType name="SetObjectReadOnlyParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="MarkReadOnly" type="xs:boolean"/>
                <xs:element minOccurs="0" name="ObjectName" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SetObjectReadOnlyParameters" nillable="true"
type="tns5:SetObjectReadOnlyParameters"/>
<xs:complexType name="SetObjectReadOnlyResult">
    <xs:complexContent mixed="false">

```

```

    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="IsReadOnly" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="SetObjectReadOnlyResult" nillable="true"
type="tns5:SetObjectReadOnlyResult"/>
<xs:complexType name="GetLinkedTableInformationParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ListID" type="ser:guid"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SiteUrl" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetLinkedTableInformationParameters" nillable="true"
type="tns5:GetLinkedTableInformationParameters"/>
<xs:complexType name="GetLinkedTableInformationResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetLinkedTableInformationResult" nillable="true"
type="tns5:GetLinkedTableInformationResult"/>
<xs:complexType name="RefreshLinkedTableInformationParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ID" type="xs:int"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RefreshLinkedTableInformationParameters" nillable="true"
type="tns5:RefreshLinkedTableInformationParameters"/>
<xs:complexType name="RefreshLinkedTableInformationResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Objects" nillable="true"
type="tns5:AccessObjectList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RefreshLinkedTableInformationResult" nillable="true"
type="tns5:RefreshLinkedTableInformationResult"/>
<xs:complexType name="ImportDataParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="BodyString" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="TargetObjectID" type="xs:int"/>
        <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="ImportDataParameters" nillable="true" type="tns5:ImportDataParameters"/>
<xs:complexType name="ImportDataResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
                <xs:element minOccurs="0" name="RowsProcessed" type="xs:int"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="ImportDataResult" nillable="true" type="tns5:ImportDataResult"/>
<xs:complexType name="SetDataConnectivityStatusParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="IsEnabled" type="xs:boolean"/>
                <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SetDataConnectivityStatusParameters" nillable="true"
type="tns5:SetDataConnectivityStatusParameters"/>
<xs:complexType name="SetDataConnectivityStatusResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="ConnectivityStatusInformation" nillable="true"
type="tns1:ConnectivityStatusInformation"/>
                <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SetDataConnectivityStatusResult" nillable="true"
type="tns5:SetDataConnectivityStatusResult"/>
<xs:complexType name="GetDataConnectivityStatusParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetDataConnectivityStatusParameters" nillable="true"
type="tns5:GetDataConnectivityStatusParameters"/>
<xs:complexType name="GetDataConnectivityStatusResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
                <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="StatusInformations" nillable="true"
type="tns1:ArrayOfConnectivityStatusInformation"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>

```

```

</xs:complexType>
<xs:element name="GetDataConnectivityStatusResult" nillable="true"
type="tns5:GetDataConnectivityStatusResult"/>
<xs:complexType name="GetDataConnectivityParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetDataConnectivityParameters" nillable="true"
type="tns5:GetDataConnectivityParameters"/>
<xs:complexType name="GetDataConnectivityResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="Password" nillable="true" type="xs:string"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="Permission" type="tns1:ConnectivityPermissionLevel"/>
        <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetDataConnectivityResult" nillable="true"
type="tns5:GetDataConnectivityResult"/>
<xs:complexType name="GetFirewallRulesParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetFirewallRulesParameters" nillable="true"
type="tns5:GetFirewallRulesParameters"/>
<xs:complexType name="GetFirewallRulesResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="FirewallRules" nillable="true" type="tns1:ArrayOfFirewallRule"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetFirewallRulesResult" nillable="true"
type="tns5:GetFirewallRulesResult"/>
<xs:complexType name="AddFirewallRuleParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="EndIPAddress" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="StartIPAddress" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>

```

```

</xs:complexType>
<xs:element name="AddFirewallRuleParameters" nillable="true"
type="tns5:AddFirewallRuleParameters"/>
<xs:complexType name="AddFirewallRuleResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
        <xs:element minOccurs="0" name="RuleName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AddFirewallRuleResult" nillable="true"
type="tns5:AddFirewallRuleResult"/>
<xs:complexType name="OpenFirewallForUserParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="UserIPAddress" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="OpenFirewallForUserParameters" nillable="true"
type="tns5:OpenFirewallForUserParameters"/>
<xs:complexType name="DeleteFirewallRulesParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="DeleteOption" type="tns1:DeleteFirewallRulesOption"/>
        <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SpecifiedFirewallRules" nillable="true"
type="tns5:FirewallRulesList"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteFirewallRulesParameters" nillable="true"
type="tns5:DeleteFirewallRulesParameters"/>
<xs:complexType name="FirewallRulesList">
  <xs:sequence>
    <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="RulesList" nillable="true" type="tns1:ArrayOfFirewallRule"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="FirewallRulesList" nillable="true" type="tns5:FirewallRulesList"/>
<xs:complexType name="DeleteFirewallRulesResult">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceResult">
      <xs:sequence>
        <xs:element minOccurs="0" name="Error" nillable="true" type="tns5:ServiceError"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteFirewallRulesResult" nillable="true"
type="tns5:DeleteFirewallRulesResult"/>
<xs:complexType name="CreatePackageParameters">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ServiceParameters">
      <xs:sequence>
        <xs:element minOccurs="0" name="AppVersion" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Data" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        <xs:element minOccurs="0" name="IsLocked" type="xs:boolean"/>
    </xs:element>
    xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"
    minOccurs="0" name="Option" type="tns4:PackagingOption"/>
    <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Title" nillable="true" type="xs:string"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="CreatePackageParameters" nillable="true"
type="tns5:CreatePackageParameters"/>
<xs:complexType name="CreatePackageResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="PackageId" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CreatePackageResult" nillable="true" type="tns5:CreatePackageResult"/>
<xs:complexType name="GetPackageParameters">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceParameters">
            <xs:sequence>
                <xs:element minOccurs="0" name="PackageId" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="ProtocolVersion" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetPackageParameters" nillable="true" type="tns5:GetPackageParameters"/>
<xs:complexType name="GetPackageResult">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:ServiceResult">
            <xs:sequence>
                <xs:element minOccurs="0" name="Data" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="Status" type="tns5:PackageStatus"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetPackageResult" nillable="true" type="tns5:GetPackageResult"/>
<xs:simpleType name="PackageStatus">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Creating"/>
        <xs:enumeration value="Created"/>
    </xs:restriction>
</xs:simpleType>
<xs:element name="PackageStatus" nillable="true" type="tns5:PackageStatus"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database"
/>

    <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design"/>
    <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
    <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
</xs:schema>

```



## 7.15 <http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:tns6="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ArrayOfFieldSchema">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="FieldSchema" nillable="true"
type="tns6:FieldSchema"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfFieldSchema" nillable="true" type="tns6:ArrayOfFieldSchema"/>
  <xs:complexType name="FieldSchema">
    <xs:sequence>
      <xs:element minOccurs="0" name="AllowMultipleValues" type="xs:boolean"/>
      <xs:element minOccurs="0" name="Caption" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ColumnName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="CurrencyLocal" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="CurrencySymbol" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DataSource" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DataType" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="DecimalPlaces" type="xs:int"/>
      <xs:element minOccurs="0" name="DefaultExpression" nillable="true"
type="tns6:Expression"/>
      <xs:element minOccurs="0" name="DefaultValue" nillable="true" type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="DependentFields" nillable="true" type="q3:ArrayOfint"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="ExtendedAttributes" nillable="true"
type="q3:ArrayOfKeyValueOfstringstring"/>
      <xs:element minOccurs="0" name="FormatString" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="IsKey" type="xs:boolean"/>
      <xs:element minOccurs="0" name="IsTableQueryLookup" type="xs:boolean"/>
      <xs:element minOccurs="0" name="KeyIndex" type="xs:int"/>
      <xs:element minOccurs="0" name="LookupBoundField" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LookupCurrencySymbol" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="LookupDecimalPlaces" type="xs:int"/>
      <xs:element minOccurs="0" name="LookupDisplayField" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LookupFormatString" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LookupSortType" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LookupSource" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="LookupValueList" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="MaxLength" type="xs:int"/>
      <xs:element minOccurs="0" name="ObjectId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ReadOnly" type="xs:boolean"/>
      <xs:element minOccurs="0" name="Required" type="xs:boolean"/>
      <xs:element minOccurs="0" name="SourceObject" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="TextType" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ValidationMessage" nillable="true"
type="tns6:ClientMessage"/>
      <xs:element minOccurs="0" name="ValidationScript" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="FieldSchema" nillable="true" type="tns6:FieldSchema"/>
  <xs:complexType name="Expression">
    <xs:sequence>
      <xs:element minOccurs="0" name="ExpressionScript" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="OriginalExpression" nillable="true" type="xs:string"/>
      <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Properties" nillable="true" type="q3:ArrayOfanyType"/>
      <xs:element minOccurs="0" name="ReferencesFunction" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ServerExpression" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>

```

```

</xs:complexType>
<xs:element name="Expression" nillable="true" type="tns6:Expression"/>
<xs:complexType name="ClientMessage">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Context" nillable="true" type="q3:ArrayOfanyType"/>
    <xs:element minOccurs="0" name="MessageID" type="tns6:ClientMessageID"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ClientMessage" nillable="true" type="tns6:ClientMessage"/>
<xs:simpleType name="ClientMessageID">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="PassthroughMessage"/>
    <xs:enumeration value="WebServiceUnavailableMessage"/>
    <xs:enumeration value="WebServiceCanceledMessage"/>
    <xs:enumeration value="DataMacroStopWaiting"/>
    <xs:enumeration value="GenericError"/>
    <xs:enumeration value="NotifyRecordUpdated"/>
    <xs:enumeration value="NotifyRecordsDeleted"/>
    <xs:enumeration value="NotifyCannotDelete"/>
    <xs:enumeration value="NotifyCannotSave"/>
    <xs:enumeration value="NotifyCannotSaveDescription"/>
    <xs:enumeration value="SubFormNestingLimitExceededError"/>
    <xs:enumeration value="DivisionByZero"/>
    <xs:enumeration value="TypeMismatch"/>
    <xs:enumeration value="NoCurrentRecord"/>
    <xs:enumeration value="RecordNotUpdatable"/>
    <xs:enumeration value="WhereConditionTooLong"/>
    <xs:enumeration value="InvalidArgument"/>
    <xs:enumeration value="InvalidContainerControlName"/>
    <xs:enumeration value="ActionArgumentNotFound"/>
    <xs:enumeration value="FormCannotClose"/>
    <xs:enumeration value="AttachmentMustSave"/>
    <xs:enumeration value="InvalidExpression"/>
    <xs:enumeration value="AttachmentUploadSucceed"/>
    <xs:enumeration value="AttachmentDeleted"/>
    <xs:enumeration value="FormOrReportNotBound"/>
    <xs:enumeration value="InvalidPropertyOrMethod"/>
    <xs:enumeration value="InvalidUrl"/>
    <xs:enumeration value="UserInterfaceMacroLoadFailure"/>
    <xs:enumeration value="CannotFindMacroObject"/>
    <xs:enumeration value="CannotGoToSpecifiedRecord"/>
    <xs:enumeration value="InvalidConditionExpression"/>
    <xs:enumeration value="CannotGoToSubFormOrTabPage"/>
    <xs:enumeration value="InvalidControl"/>
    <xs:enumeration value="CannotFocusOnControl"/>
    <xs:enumeration value="InvalidControlValue"/>
    <xs:enumeration value="NoControlName"/>
    <xs:enumeration value="CannotFindErrorHandlerMacro"/>
    <xs:enumeration value="InvalidSetPropertyControl"/>
    <xs:enumeration value="LocalVarNameNotSpecified"/>
    <xs:enumeration value="LocalVarExpressionNotSpecified"/>
    <xs:enumeration value="LocalVariableNameInvalid"/>
    <xs:enumeration value="TempVarNameNotSpecified"/>
    <xs:enumeration value="TempVariableNameInvalid"/>
    <xs:enumeration value="CommandNotAvailable"/>
    <xs:enumeration value="ExpressionErrorCannotSet"/>
    <xs:enumeration value="TooManyRunMacros"/>
    <xs:enumeration value="InvalidBrowseToPathArgument"/>

    <xs:enumeration value="InvalidObjectReference"/>
    <xs:enumeration value="FormNotFoundRep"/>
    <xs:enumeration value="ControlDoesNotSupportRequery"/>
    <xs:enumeration value="ReadOnlyNote"/>
    <xs:enumeration value="TooMuchParameterData"/>
    <xs:enumeration value="OperationNotSupportedOnSubReports"/>
    <xs:enumeration value="InvalidPropertyValue"/>
    <xs:enumeration value="AutocompleteWaitingForValidationMessage"/>
  </xs:restriction>
</xs:simpleType>

```

```

<xs:enumeration value="AutocompleteInvalidDataMessage"/>
<xs:enumeration value="TooManyTermsInFilter"/>
<xs:enumeration value="InvalidValueForFieldMessage"/>
<xs:enumeration value="InvalidValueForControlMessage"/>
<xs:enumeration value="ImageUploadFailureNotificationMessage"/>
<xs:enumeration value="NoResultsFromFilter"/>
<xs:enumeration value="ErrorRetrievingDataForComboBoxMessage"/>
<xs:enumeration value="ExpressionImplicitConversionInvalid"/>
<xs:enumeration value="InvalidSetPropertyInViewMode"/>
<xs:enumeration value="ErrorRetrievingDataForAutoSum"/>
<xs:enumeration value="ExpressionImplicitConversionFailed"/>
<xs:enumeration value="ExpressionArithmeticBadDataType"/>
<xs:enumeration value="ExpressionOverflow"/>
<xs:enumeration value="ExpressionDivisionByZero"/>
<xs:enumeration value="ExpressionSqrtNegativeArgument"/>
<xs:enumeration value="ExpressionLeftRightNegativeArgument"/>
<xs:enumeration value="ExpressionSubstringNullFirstArgument"/>
<xs:enumeration value="ExpressionSubstringInvalidThirdArgument"/>
<xs:enumeration value="ExpressionDatePartUsedOnTime"/>
<xs:enumeration value="ExpressionTimePartUsedOnDate"/>
<xs:enumeration value="ExpressionIIfNullFirstArgument"/>
<xs:enumeration value="InvalidControlReferenceError"/>
<xs:enumeration value="RequiredFieldIsEmpty"/>
<xs:enumeration value="InvalidDateValue"/>
<xs:enumeration value="InvalidNumberValue"/>
<xs:enumeration value="InvalidSetPropertyValue"/>
<xs:enumeration value="ValueExceedsMaximumLength"/>
<xs:enumeration value="InvalidChangeViewTable"/>
<xs:enumeration value="MaxNumberOfPopupsReached"/>
<xs:enumeration value="NoServerReferenceFoundInWhereConditionError"/>
<xs:enumeration value="ExpressionIllegalDateTime"/>
<xs:enumeration value="LoadingMessage"/>
<xs:enumeration value="ExpressionCircularReference"/>
<xs:enumeration value="NoBoundValueForDisplayText"/>
<xs:enumeration value="InvalidControlsAreNotUpdatable"/>
<xs:enumeration value="UserLogonNameDeprecated"/>
<xs:enumeration value="AllowUserConnectionSuccess"/>
<xs:enumeration value="AllowUserConnectionFireRuleExists"/>
<xs:enumeration value="AgaveInsertErrorInForm"/>
<xs:enumeration value="InvalidWholeNumberValue"/>
<xs:enumeration value="AgaveInsertErrorInEditMode"/>
<xs:enumeration value="AgaveInsertErrorInAppWithNoViews"/>
<xs:enumeration value="InvalidEmailValue"/>
<xs:enumeration value="InvalidPhoneValue"/>
<xs:enumeration value="AlchemyPreviewNotAvailableForEmptyApp"/>
<xs:enumeration value="CannotEditViewInWebDesigner"/>
<xs:enumeration value="CannotEditViewInClientDesigner"/>
</xs:restriction>
</xs:simpleType>
<xs:element name="ClientMessageID" nillable="true" type="tns6:ClientMessageID"/>
<xs:complexType name="ArrayOfParameterValue">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterValue" nillable="true"
type="tns6:ParameterValue"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfParameterValue" nillable="true"
type="tns6:ArrayOfParameterValue"/>
<xs:complexType name="ParameterValue">
  <xs:sequence>
    <xs:element minOccurs="0" name="IsDate" type="xs:boolean"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Value" nillable="true" type="xs:anyType"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ParameterValue" nillable="true" type="tns6:ParameterValue"/>
<xs:complexType name="Recordset">
  <xs:sequence>

```

```

    <xs:element minOccurs="0" name="AnonymousCanInsert" type="xs:boolean"/>
    <xs:element minOccurs="0" name="AnonymousCanRead" type="xs:boolean"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AutoSumValues" nillable="true" type="q3:ArrayOfanyType"/>
    <xs:element minOccurs="0" name="Fields" nillable="true"
type="tns6:ArrayOfFieldSchema"/>
    <xs:element minOccurs="0" name="FormatInfos" nillable="true"
type="tns6:ArrayOfArrayOfFormatInfo"/>
    <xs:element minOccurs="0" name="IsAnonymous" type="xs:boolean"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Localized" nillable="true" type="q3:ArrayOfArrayOfArrayOfstring"/>
    <xs:element minOccurs="0" name="Paging" nillable="true" type="tns6:PagingInfo"/>
    <xs:element minOccurs="0" name="RecordStatuses" nillable="true"
type="tns6:ArrayOfRecordStatus"/>
    <xs:element minOccurs="0" name="RelatedFieldInfos" nillable="true"
type="tns6:ArrayOfFieldSchema"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Values" nillable="true" type="q3:ArrayOfArrayOfanyType"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="Recordset" nillable="true" type="tns6:Recordset"/>
<xs:complexType name="ArrayOfArrayOfFormatInfo">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ArrayOfFormatInfo"
nillable="true" type="tns6:ArrayOfFormatInfo"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfArrayOfFormatInfo" nillable="true"
type="tns6:ArrayOfArrayOfFormatInfo"/>
<xs:complexType name="ArrayOfFormatInfo">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FormatInfo" nillable="true"
type="tns6:FormatInfo"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfFormatInfo" nillable="true" type="tns6:ArrayOfFormatInfo"/>
<xs:complexType name="FormatInfo">
  <xs:sequence>
    <xs:element minOccurs="0" name="Currency" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Format" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Precision" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="FormatInfo" nillable="true" type="tns6:FormatInfo"/>
<xs:complexType name="PagingInfo">
  <xs:sequence>
    <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"
minOccurs="0" name="CacheCommands" type="tns1:CacheCommands"/>
    <xs:element minOccurs="0" name="CacheId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DefaultFormSortExpression" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="Filter" nillable="true" type="tns6:FilterInfo"/>
    <xs:element minOccurs="0" name="FirstRow" type="xs:int"/>
    <xs:element minOccurs="0" name="PageSize" type="xs:int"/>
    <xs:element minOccurs="0" name="RetrieveExactRowCount" type="xs:boolean"/>
    <xs:element minOccurs="0" name="RowKey" type="xs:int"/>
    <xs:element minOccurs="0" name="SessionId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="SortExpression" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="TotalRows" type="xs:int"/>
    <xs:element minOccurs="0" name="UseCache" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="PagingInfo" nillable="true" type="tns6:PagingInfo"/>
<xs:complexType name="FilterInfo">
  <xs:sequence>
    <xs:element minOccurs="0" name="Culture" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Expression" nillable="true" type="xs:string"/>
  </xs:sequence>

```

```

        <xs:element minOccurs="0" name="Fields" nillable="true" type="tns6:FieldList"/>
        <xs:element minOccurs="0" name="Text" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="FilterInfo" nillable="true" type="tns6:FilterInfo"/>
<xs:complexType name="FieldList">
    <xs:sequence>
        <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="List" nillable="true" type="q3:ArrayOfstring"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="FieldList" nillable="true" type="tns6:FieldList"/>
<xs:complexType name="ArrayOfRecordStatus">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="RecordStatus"
type="tns6:RecordStatus"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfRecordStatus" nillable="true" type="tns6:ArrayOfRecordStatus"/>
<xs:simpleType name="RecordStatus">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Normal"/>
        <xs:enumeration value="Deleted"/>
        <xs:enumeration value="Error"/>
        <xs:enumeration value="Fixup"/>
    </xs:restriction>
</xs:simpleType>
<xs:element name="RecordStatus" nillable="true" type="tns6:RecordStatus"/>
<xs:complexType name="SharedDataBaseInfo">
    <xs:sequence>
        <xs:element minOccurs="0" name="AllowAdditions" type="xs:boolean"/>
        <xs:element minOccurs="0" name="AllowDeletions" type="xs:boolean"/>
        <xs:element minOccurs="0" name="AllowEdits" type="xs:boolean"/>
        <xs:element minOccurs="0" name="AppForOfficeId" nillable="true" type="xs:string"/>
        <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AutoSumFields" nillable="true" type="q3:ArrayOfstring"/>
        <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="AutoSumFunctions" nillable="true" type="q3:ArrayOfstring"/>
        <xs:element minOccurs="0" name="CacheId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="DataEntry" type="xs:boolean"/>
        <xs:element minOccurs="0" name="DoNotPrefetchImages" type="xs:boolean"/>
        <xs:element minOccurs="0" name="FetchDisplayFields" type="xs:boolean"/>
        <xs:element minOccurs="0" name="FetchKeyFields" type="xs:boolean"/>
        <xs:element minOccurs="0" name="FetchSchema" type="xs:boolean"/>
        <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="FieldNames" nillable="true" type="q3:ArrayOfstring"/>
        <xs:element minOccurs="0" name="FormatInfos" nillable="true"
type="tns6:ArrayOfArrayOfFormatInfo"/>
        <xs:element minOccurs="0" name="InitialPage" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="NewImageStorage" type="xs:boolean"/>
        <xs:element minOccurs="0" name="Ordering" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="ParameterValues" nillable="true"
type="tns6:ArrayOfParameterValue"/>
        <xs:element minOccurs="0" name="Restriction" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SelectCommand" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SessionId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="Stateless" type="xs:boolean"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="SharedDataBaseInfo" nillable="true" type="tns6:SharedDataBaseInfo"/>
<xs:complexType name="ArrayOfMessageSeverity">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="MessageSeverity"
type="tns6:MessageSeverity"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfMessageSeverity" nillable="true"
type="tns6:ArrayOfMessageSeverity"/>

```

```

<xs:simpleType name="MessageSeverity">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Info"/>
    <xs:enumeration value="Warn"/>
    <xs:enumeration value="Error"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="MessageSeverity" nillable="true" type="tns6:MessageSeverity"/>
<xs:complexType name="ArrayOfNotification">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="Notification" nillable="true"
type="tns6:Notification"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfNotification" nillable="true" type="tns6:ArrayOfNotification"/>
<xs:complexType name="Notification">
  <xs:sequence>
    <xs:element minOccurs="0" name="HelpLink" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Severity" type="tns6:MessageSeverity"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="Notification" nillable="true" type="tns6:Notification"/>
<xs:complexType name="AppsForOfficeSettings">
  <xs:sequence>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Bindings" nillable="true" type="q3:ArrayOfArrayOfstring"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="PropertyKeys" nillable="true" type="q3:ArrayOfstring"/>
    <xs:element xmlns:q3="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="PropertyValues" nillable="true" type="q3:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="AppsForOfficeSettings" nillable="true"
type="tns6:AppsForOfficeSettings"/>
<xs:complexType name="InsertAppsForOfficeInfo">
  <xs:sequence>
    <xs:element minOccurs="0" name="AppVersion" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="AssetId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="AssetStoreId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="CurrentStoreType" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="Height" type="xs:int"/>
    <xs:element minOccurs="0" name="Id" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StoreId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="TargetType" type="xs:int"/>
    <xs:element minOccurs="0" name="Width" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="InsertAppsForOfficeInfo" nillable="true"
type="tns6:InsertAppsForOfficeInfo"/>
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data"/>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
</xs:schema>

```

## 8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Microsoft Access 2016
- Microsoft SharePoint Server 2016

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 9 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.



## 10 Index

### A

Abstract data model  
  [server](#) 106  
[AccessObject](#) [complex type](#) 51  
[AccessObjectIdentity](#) [complex type](#) 52  
[AccessObjectList](#) [complex type](#) 52  
[AccessObjectType](#) [simple type](#) 68  
[AccessProperties](#) [complex type](#) 52  
[AccessServerMessage](#) [complex type](#) 36  
[AccessServerMessageButtons](#) [simple type](#) 69  
[AccessServerMessageId](#) [simple type](#) 70  
[AccessServerMessageSeverity](#) [simple type](#) 85  
[AccessServerMessageType](#) [simple type](#) 86  
[AccessStorageObject](#) [complex type](#) 53  
[AddFirewallRuleResult](#) [complex type](#) 67  
[AnonymousAccessMode](#) [simple type](#) 86  
[Applicability](#) 29  
[AppsForOfficeSettings](#) [complex type](#) 53  
[ArrayOfAccessObject](#) [complex type](#) 54  
[ArrayOfAccessObjectIdentity](#) [complex type](#) 54  
[ArrayOfAnyType](#) [complex type](#) 40  
[ArrayOfArrayOfKeyValuePair](#) [complex type](#) 54  
[ArrayOfArrayOfstring](#) [complex type](#) 55  
[ArrayOfFieldSchema](#) [complex type](#) 45  
[ArrayOfFirewallRule](#) [complex type](#) 55  
[ArrayOfInt](#) [complex type](#) 45  
[ArrayOfKeyValueOfstringColumnb1rtN9t](#) [complex type](#) 55  
[ArrayOfKeyValueOfstringstring](#) [complex type](#) 44  
[ArrayOfKeyValuePair](#) [complex type](#) 37  
[ArrayOfParameterValue](#) [complex type](#) 46  
[ArrayOfstring](#) [complex type](#) 46  
[Attribute](#) [groups](#) 98  
[Attributes](#) 98

### C

[CacheCommands](#) [simple type](#) 87  
[Capability](#) [negotiation](#) 29  
[Change](#) [tracking](#) 456  
Client  
  [overview](#) 338  
[ClientMessage](#) [complex type](#) 46  
[ClientMessageID](#) [simple type](#) 88  
[CollationInfo](#) [complex type](#) 56  
[Column](#) [complex type](#) 57  
[ColumnLookup](#) [complex type](#) 58  
[ColumnValue](#) [complex type](#) 58  
[CommandParameter](#) [complex type](#) 37  
[CommandResult](#) [complex type](#) 38  
[Complex types](#) 32  
  [AccessObject](#) 51  
  [AccessObjectIdentity](#) 52  
  [AccessObjectList](#) 52  
  [AccessProperties](#) 52  
  [AccessServerMessage](#) 36  
  [AccessStorageObject](#) 53  
  [AddFirewallRuleResult](#) 67  
  [AppsForOfficeSettings](#) 53  
  [ArrayOfAccessObject](#) 54  
  [ArrayOfAccessObjectIdentity](#) 54

[ArrayOfanyType](#) 40  
[ArrayOfArrayOfKeyValuePair](#) 54  
[ArrayOfArrayOfstring](#) 55  
[ArrayOfFieldSchema](#) 45  
[ArrayOfFirewallRule](#) 55  
[ArrayOfint](#) 45  
[ArrayOfKeyValueOfstringColumnb1rtN9t](#) 55  
[ArrayOfKeyValueOfstringstring](#) 44  
[ArrayOfKeyValuePair](#) 37  
[ArrayOfParameterValue](#) 46  
[ArrayOfstring](#) 46  
[ClientMessage](#) 46  
[CollationInfo](#) 56  
[Column](#) 57  
[ColumnLookup](#) 58  
[ColumnValue](#) 58  
[CommandParameter](#) 37  
[CommandResult](#) 38  
[ConnectivityStatusInformation](#) 59  
[DatabaseContext](#) 41  
[DatabaseProviderMessage](#) 44  
[DataMacro](#) 59  
[EmbeddedExpression](#) 59  
[Expression](#) 47  
[ExtendedAttributes](#) 60  
[FieldList](#) 60  
[FieldSchema](#) 47  
[FilterInfo](#) 40  
[FirewallRule](#) 60  
[Form](#) 61  
[KeyValuePair](#) 39  
[LinkedTable](#) 61  
[NetworkCredential](#) 42  
[ObjectIdentityList](#) 61  
[ParameterValue](#) 50  
[ProvisionedDatabaseContext](#) 43  
[Query](#) 62  
[RequestApplication](#) 62  
[RequestContext](#) 64  
[RequestUser](#) 64  
[SecureString](#) 43  
[ServerContext](#) 44  
[ServerHealthInformation](#) 40  
[ServiceError](#) 65  
[ServiceParameters](#) 65  
[ServiceResult](#) 66  
[ServiceWarning](#) 66  
[Table](#) 66  
[UIMacro](#) 67  
[ConnectivityPermissionLevel](#) [simple type](#) 94  
[ConnectivityStatusInformation](#) [complex type](#) 59  
[CreateAccessObject](#) [example](#) 340  
[CreateApplication](#) [example](#) 342

### D

Data model - abstract  
  [server](#) 106  
[DatabaseContext](#) [complex type](#) 41  
[DatabaseProviderError](#) [simple type](#) 94  
[DatabaseProviderMessage](#) [complex type](#) 44  
[DataMacro](#) [complex type](#) 59

[DeleteData example](#) 343

## E

[EmbeddedExpression complex type](#) 59

Events

[local - server](#) 338

Example

[CreateAccessObject](#) 340

[CreateApplication](#) 342

[DeleteData](#) 343

[OpenResultSet](#) 345

[UpdateData](#) 344

[Expression complex type](#) 47

[ExtendedAttributes complex type](#) 60

## F

[Faults](#) 98

[FieldList complex type](#) 60

[Fields - vendor-extensible](#) 30

[FieldSchema complex type](#) 47

[FilterInfo complex type](#) 40

[FirewallRule complex type](#) 60

[Form complex type](#) 61

[Full WSDL](#) 349

[Full XML schema](#) 390

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Schema> 390

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data.Schema> 428

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database.Schema> 424

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema> 437

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema.Schema> 436

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService.Schema> 439

<http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient.Schema> 449

<http://schemas.datacontract.org/2004/07/System.Schema> 435

<http://schemas.datacontract.org/2004/07/System.Data.Schema> 429

<http://schemas.datacontract.org/2004/07/System.Globalization.Schema> 430

<http://schemas.datacontract.org/2004/07/System.Net.Schema> 434

<http://schemas.datacontract.org/2004/07/System.Security.Schema> 435

<http://schemas.microsoft.com/2003/10/Serialization/Schema> 427

<http://schemas.microsoft.com/2003/10/Serialization/Arrays.Schema> 426

<http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternalService/Schema> 396

## G

[Glossary](#) 21

[Groups](#) 98

[guid simple type](#) 94

## I

[Implementer - security considerations](#) 348

[Index of security parameters](#) 348

[Informative references](#) 28

Initialization

[server](#) 108

[Introduction](#) 21

## K

[KeyValuePair complex type](#) 39

## L

[LinkedTable complex type](#) 61

Local events

[server](#) 338

[LookupType simple type](#) 95

## M

Message processing

[server](#) 108

Messages

[AccessObject complex type](#) 51

[AccessObjectIdentity complex type](#) 52

[AccessObjectList complex type](#) 52

[AccessObjectType simple type](#) 68

[AccessProperties complex type](#) 52

[AccessServerMessage complex type](#) 36

[AccessServerMessageButtons simple type](#) 69

[AccessServerMessageId simple type](#) 70

[AccessServerMessageSeverity simple type](#) 85

[AccessServerMessageType simple type](#) 86

[AccessStorageObject complex type](#) 53

[AddFirewallRuleResult complex type](#) 67

[AnonymousAccessMode simple type](#) 86

[AppsForOfficeSettings complex type](#) 53

[ArrayOfAccessObject complex type](#) 54

[ArrayOfAccessObjectIdentity complex type](#) 54

[ArrayOfanyType complex type](#) 40

[ArrayOfArrayOfKeyValuePair complex type](#) 54

[ArrayOfArrayOfstring complex type](#) 55

[ArrayOfFieldSchema complex type](#) 45

[ArrayOfFirewallRule complex type](#) 55

[ArrayOfint complex type](#) 45

[ArrayOfKeyValueOfstringColumnb1rtN9t complex type](#) 55  
[ArrayOfKeyValueOfstringstring complex type](#) 44  
[ArrayOfKeyValuePair complex type](#) 37  
[ArrayOfParameterValue complex type](#) 46  
[ArrayOfstring complex type](#) 46  
[attribute groups](#) 98  
[attributes](#) 98  
[CacheCommands simple type](#) 87  
[ClientMessage complex type](#) 46  
[ClientMessageID simple type](#) 88  
[CollationInfo complex type](#) 56  
[Column complex type](#) 57  
[ColumnLookup complex type](#) 58  
[ColumnValue complex type](#) 58  
[CommandParameter complex type](#) 37  
[CommandResult complex type](#) 38  
[complex types](#) 32  
[ConnectivityPermissionLevel simple type](#) 94  
[ConnectivityStatusInformation complex type](#) 59  
[DatabaseContext complex type](#) 41  
[DatabaseProviderError simple type](#) 94  
[DatabaseProviderMessage complex type](#) 44  
[DataMacro complex type](#) 59  
[elements](#) 32  
[EmbeddedExpression complex type](#) 59  
[enumerated](#) 32  
[Expression complex type](#) 47  
[ExtendedAttributes complex type](#) 60  
[faults](#) 98  
[FieldList complex type](#) 60  
[FieldSchema complex type](#) 47  
[FilterInfo complex type](#) 40  
[FirewallRule complex type](#) 60  
[Form complex type](#) 61  
[groups](#) 98  
[guid simple type](#) 94  
[KeyValuePair complex type](#) 39  
[LinkedTable complex type](#) 61  
[LookupType simple type](#) 95  
[namespaces](#) 31  
[NetworkCredential complex type](#) 42  
[ObjectIdentityList complex type](#) 61  
[PackageSource simple type](#) 95  
[ParameterValue complex type](#) 50  
[ProvisionedDatabaseContext complex type](#) 43  
[Query complex type](#) 62  
[RequestApplication complex type](#) 62  
[RequestContext complex type](#) 64  
[RequestUser complex type](#) 64  
[SecureString complex type](#) 43  
[ServerContext complex type](#) 44  
[ServerHealthInformation complex type](#) 40  
[ServerStateFlags simple type](#) 96  
[ServiceError complex type](#) 65  
[ServiceParameters complex type](#) 65  
[ServiceResult complex type](#) 66  
[ServiceWarning complex type](#) 66  
[simple types](#) 67  
[SortType simple type](#) 96  
[SqlAuthenticationMode simple type](#) 97  
[syntax](#) 31  
[Table complex type](#) 66  
[transport](#) 31  
[UIMacro complex type](#) 67

[UserRole simple type](#) 97

## N

[Namespaces](#) 31  
[NetworkCredential complex type](#) 42  
[Normative references](#) 26

## O

[ObjectIdentityList complex type](#) 61  
[OpenResultSet example](#) 345  
 Operations
 

- [AddFirewallRule](#) 149
- [CheckCopyStatus](#) 217
- [CloseResultSet](#) 275
- [CloseSession](#) 111
- [CopyDatabase](#) 219
- [CreateAccessObject](#) 152
- [CreatePackage](#) 157
- [DatabaseExists](#) 222
- [DeleteAccessObject](#) 161
- [DeleteAllData](#) 278
- [DeleteData](#) 114
- [DeleteDataNoCache](#) 280
- [DeleteFirewallRules](#) 165
- [ExecuteDacIncrementalUpgrade](#) 225
- [FixupRow](#) 117
- [FixupRowNoCache](#) 283
- [GetAccessObject](#) 169
- [GetApplicationInformation](#) 173
- [GetApplicationNotifications](#) 286
- [GetAutoSumValues](#) 247
- [GetAvailableServer](#) 227
- [GetData](#) 120
- [GetDataConnectivity](#) 178
- [GetDataConnectivityStatus](#) 182
- [GetDistinctValues](#) 124
- [GetFirewallRules](#) 186
- [GetFormDefinitionAndRecordSet](#) 257
- [GetHealthScore](#) 127
- [GetHostProperties](#) 291
- [GetLinkedTableInformation](#) 190
- [GetNewDatabaseCollation](#) 294
- [GetObjectSchema](#) 129
- [GetOfficeAppSettings](#) 297
- [GetPackage](#) 230
- [GetReservedDatabase](#) 300
- [GetSearchData](#) 250
- [GetServerName](#) 234
- [GetUIMacroJavascript](#) 267
- [ImportData](#) 194
- [InsertAppForOfficeInForm](#) 302
- [InsertData](#) 132
- [InsertDataNoCache](#) 306
- [OpenFirewallForUser](#) 335
- [OpenResultSet](#) 135
- [OpenSession](#) 139
- [ProvisionDatabase](#) 237
- [RecycleDatabase](#) 309
- [RefreshLinkedTableInformation](#) 198
- [RenameAccessObject](#) 202
- [RenameDatabase](#) 239
- [RestoreDatabase](#) 312
- [RetrieveImage](#) 314

[RunDataMacro](#) 254  
[SelectDataNoCache](#) 317  
[SetDataConnectivityStatus](#) 205  
[SetDataMacroTracing](#) 209  
[SetEnableDisableDatabase](#) 269  
[SetObjectReadOnly](#) 321  
[SetOfficeAppSettings](#) 325  
[SetReadWrite](#) 242  
[UnprovisionDatabase](#) 245  
[UpdateAccessObject](#) 213  
[UpdateData](#) 144  
[UpdateDatabaseConfiguration](#) 273  
[UpdateDataNoCache](#) 328  
[UpdateImage](#) 332  
[Overview \(synopsis\)](#) 28

**P**

[PackageSource simple type](#) 95  
[Parameters - security index](#) 348  
[ParameterValue complex type](#) 50  
[Preconditions](#) 29  
[Prerequisites](#) 29  
[Product behavior](#) 455  
[Protocol Details](#)  
[overview](#) 106  
[Protocol operations](#) 28  
[ProvisionedDatabaseContext complex type](#) 43

**Q**

[Query complex type](#) 62

**R**

[References](#) 26  
[informative](#) 28  
[normative](#) 26  
[Relationship to other protocols](#) 28  
[RequestApplication complex type](#) 62  
[RequestContext complex type](#) 64  
[RequestUser complex type](#) 64

**S**

[SecureString complex type](#) 43  
[Security](#)  
[implementer considerations](#) 348  
[parameter index](#) 348  
[Sequencing rules](#)  
[server](#) 108  
[Server](#)  
[abstract data model](#) 106  
[AddFirewallRule operation](#) 149  
[CheckCopyStatus operation](#) 217  
[CloseResultSet operation](#) 275  
[CloseSession operation](#) 111  
[CopyDatabase operation](#) 219  
[CreateAccessObject operation](#) 152  
[CreatePackage operation](#) 157  
[DatabaseExists operation](#) 222  
[DeleteAccessObject operation](#) 161  
[DeleteAllData operation](#) 278  
[DeleteData operation](#) 114  
[DeleteDataNoCache operation](#) 280  
[DeleteFirewallRules operation](#) 165  
[ExecuteDaIncrementalUpgrade operation](#) 225  
[FixupRow operation](#) 117  
[FixupRowNoCache operation](#) 283  
[GetAccessObject operation](#) 169  
[GetApplicationInformation operation](#) 173  
[GetApplicationNotifications operation](#) 286  
[GetAutoSumValues operation](#) 247  
[GetAvailableServer operation](#) 227  
[GetData operation](#) 120  
[GetDataConnectivity operation](#) 178  
[GetDataConnectivityStatus operation](#) 182  
[GetDistinctValues operation](#) 124  
[GetFirewallRules operation](#) 186  
[GetFormDefinitionAndRecordSet operation](#) 257  
[GetHealthScore operation](#) 127  
[GetHostProperties operation](#) 291  
[GetLinkedTableInformation operation](#) 190  
[GetNewDatabaseCollation operation](#) 294  
[GetObjectSchema operation](#) 129  
[GetOfficeAppSettings operation](#) 297  
[GetPackage operation](#) 230  
[GetReservedDatabase operation](#) 300  
[GetSearchData operation](#) 250  
[GetServerName operation](#) 234  
[GetUIMacroJavascript operation](#) 267  
[ImportData operation](#) 194  
[initialization](#) 108  
[InsertAppForOfficeInForm operation](#) 302  
[InsertData operation](#) 132  
[InsertDataNoCache operation](#) 306  
[local events](#) 338  
[message processing](#) 108  
[OpenFirewallForUser operation](#) 335  
[OpenResultSet operation](#) 135  
[OpenSession operation](#) 139  
[overview](#) 106  
[ProvisionDatabase operation](#) 237  
[RecycleDatabase operation](#) 309  
[RefreshLinkedTableInformation operation](#) 198  
[RenameAccessObject operation](#) 202  
[RenameDatabase operation](#) 239  
[RestoreDatabase operation](#) 312  
[RetrieveImage operation](#) 314  
[RunDataMacro operation](#) 254  
[SelectDataNoCache operation](#) 317  
[sequencing rules](#) 108  
[session timeout - timer events](#) 338  
[session timeout - timers](#) 108  
[SetDataConnectivityStatus operation](#) 205  
[SetDataMacroTracing operation](#) 209  
[SetEnableDisableDatabase operation](#) 269  
[SetObjectReadOnly operation](#) 321  
[SetOfficeAppSettings operation](#) 325  
[SetReadWrite operation](#) 242  
[timers](#) 108  
[UnprovisionDatabase operation](#) 245  
[UpdateAccessObject operation](#) 213  
[UpdateData operation](#) 144  
[UpdateDatabaseConfiguration operation](#) 273  
[UpdateDataNoCache operation](#) 328  
[UpdateImage operation](#) 332  
[ServerContext complex type](#) 44  
[ServerHealthInformation complex type](#) 40  
[ServerStateFlags simple type](#) 96

|   |     |   |
|---|-----|---|
| <a href="#">ServiceError complex type</a>         | 65  |   |
| <a href="#">ServiceParameters complex type</a>    | 65  | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Data Schema</a>   |
| <a href="#">ServiceResult complex type</a>        | 66  | 428   |
| <a href="#">ServiceWarning complex type</a>       | 66  |   |
| Session timeout – server                          |     | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Database Schema</a>                                     |
| <a href="#">timer events</a>                      | 338 | 424   |
| <a href="#">timers</a>                            | 108 |   |
| <a href="#">Session-based protocol</a>            | 28  |   |
| <a href="#">Simple types</a>                      | 67  | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design Schema</a>   |
| <a href="#">AccessObjectType</a>                  | 68  | 437   |
| <a href="#">AccessServerMessageButtons</a>        | 69  |   |
| <a href="#">AccessServerMessageId</a>             | 70  | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.Design.Schema Schema</a>                           |
| <a href="#">AccessServerMessageSeverity</a>       | 85  | 436   |
| <a href="#">AccessServerMessageType</a>           | 86  |   |
| <a href="#">AnonymousAccessMode</a>               | 86  |   |
| <a href="#">CacheCommands</a>                     | 87  | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services.WebService Schema</a>                                 |
| <a href="#">ClientMessageID</a>                   | 88  | 439   |
| <a href="#">ConnectivityPermissionLevel</a>       | 94  |   |
| <a href="#">DatabaseProviderError</a>             | 94  |   |
| <a href="#">guid</a>                              | 94  |   |
| <a href="#">LookupType</a>                        | 95  | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.SharedClient Schema</a>   |
| <a href="#">PackageSource</a>                     | 95  | 449   |
| <a href="#">ServerStateFlags</a>                  | 96  | <a href="http://schemas.datacontract.org/2004/07/System Schema">http://schemas.datacontract.org/2004/07/System Schema</a>   |
| <a href="#">SortType</a>                          | 96  | 435   |
| <a href="#">SqlAuthenticationMode</a>             | 97  |   |
| <a href="#">UserRole</a>                          | 97  | <a href="http://schemas.datacontract.org/2004/07/System.Data Schema">http://schemas.datacontract.org/2004/07/System.Data Schema</a>   |
| <a href="#">SortType simple type</a>              | 96  | 429   |
| <a href="#">SqlAuthenticationMode simple type</a> | 97  |   |
| <a href="#">Standards assignments</a>             | 30  | <a href="http://schemas.datacontract.org/2004/07/System.Globalization Schema">http://schemas.datacontract.org/2004/07/System.Globalization Schema</a>   |
| Syntax  |     | 430   |
| <a href="#">messages - overview</a>               | 31  | <a href="http://schemas.datacontract.org/2004/07/System.Net Schema">http://schemas.datacontract.org/2004/07/System.Net Schema</a>   |
|   |     | 434   |
| <b>T</b>  |     |   |
| <a href="#">Table complex type</a>                | 66  | <a href="http://schemas.datacontract.org/2004/07/System.Security Schema">http://schemas.datacontract.org/2004/07/System.Security Schema</a>   |
| Timers  |     | 435   |
| <a href="#">server</a>                            | 108 | <a href="http://schemas.microsoft.com/2003/10/Serialization/ Schema">http://schemas.microsoft.com/2003/10/Serialization/ Schema</a>   |
| <a href="#">Tracking changes</a>                  | 456 | 427   |
| <a href="#">Transport</a>                         | 31  |   |
| Types   |     | <a href="http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema">http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema</a>   |
| <a href="#">complex</a>                           | 32  | 426   |
| <a href="#">simple</a>                            | 67  |   |
| <b>U</b>  |     |   |
| <a href="#">UIMacro complex type</a>              | 67  | <a href="http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternal Service/ Schema">http://schemas.microsoft.com/office/Access/2010/11/Server/WebServices/AccessServerInternal Service/ Schema</a> |
| <a href="#">UpdateData example</a>                | 344 | 396   |
| <a href="#">UserRole simple type</a>              | 97  |   |
| <b>V</b>  |     |   |
| <a href="#">Vendor-extensible fields</a>          | 30  |   |
| <a href="#">Versioning</a>                        | 29  |   |
| <b>W</b>  |     |   |
| <a href="#">WSDL</a>                              | 349 |   |
| <b>X</b>  |     |   |
| <a href="#">XML schema</a>                        | 390 |   |
|   |     | <a href="http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services Schema">http://schemas.datacontract.org/2004/07/Microsoft.Office.Access.Services Schema</a>   |
|   |     | 390   |