

# [MS-BDCMP]: Business Data Catalog Metadata Web Service Protocol Specification

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability
06/27/2008	1.0	Major	Revised and edited the technical content
12/12/2008	1.01	Editorial	Revised and edited the technical content
07/13/2009	1.02	Major	Changes made for template compliance
08/28/2009	1.03	Editorial	Revised and edited the technical content
11/06/2009	1.04	Editorial	Revised and edited the technical content
02/19/2010	2.0	Minor	Updated the technical content
03/31/2010	2.01	Editorial	Revised and edited the technical content
04/30/2010	2.02	Editorial	Revised and edited the technical content
06/07/2010	2.03	Editorial	Revised and edited the technical content
06/29/2010	2.04	Editorial	Changed language and formatting in the technical content.
07/23/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
09/27/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	3.0	Major	Significantly changed the technical content.
04/11/2012	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
09/12/2012	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
10/08/2012	3.1	Minor	Clarified the meaning of the technical content.



# Table of Contents

<b>1 Introduction</b>	<b>7</b>
1.1 Glossary	7
1.2 References	8
1.2.1 Normative References	8
1.2.2 Informative References	9
1.3 Overview	9
1.4 Relationship to Other Protocols	9
1.5 Prerequisites/Preconditions	9
1.6 Applicability Statement	10
1.7 Versioning and Capability Negotiation	10
1.8 Vendor-Extensible Fields	10
1.9 Standards Assignments	10
<b>2 Messages</b>	<b>11</b>
2.1 Transport	11
2.2 Common Message Syntax	11
2.2.1 Namespaces	11
2.2.2 Messages	12
2.2.3 Elements	12
2.2.4 Complex Types	12
2.2.4.1 ArrayOfInt	12
2.2.4.2 ArrayOfString	12
2.2.4.3 MethodStruct	12
2.2.5 Simple Types	14
2.2.6 Attributes	14
2.2.7 Groups	14
2.2.8 Attribute Groups	14
2.2.9 Common Data Structures	14
<b>3 Protocol Details</b>	<b>15</b>
3.1 Server Details	15
3.1.1 Abstract Data Model	15
3.1.2 Timers	16
3.1.3 Initialization	16
3.1.4 Message Processing Events and Sequencing Rules	16
3.1.4.1 GetEntitiesForLobSystemInstance	16
3.1.4.1.1 Messages	17
3.1.4.1.1.1 GetEntitiesForLobSystemInstanceSoapIn	17
3.1.4.1.1.2 GetEntitiesForLobSystemInstanceSoapOut	17
3.1.4.1.2 Elements	18
3.1.4.1.2.1 GetEntitiesForLobSystemInstance	18
3.1.4.1.2.2 GetEntitiesForLobSystemInstanceResponse	18
3.1.4.1.3 Complex Types	18
3.1.4.1.3.1 ArrayOfEntityStruct	19
3.1.4.1.3.2 EntityStruct	19
3.1.4.1.4 Simple Types	20
3.1.4.1.5 Attributes	20
3.1.4.1.6 Groups	20
3.1.4.1.7 Attribute Groups	20
3.1.4.2 GetFilterDescriptorsForMethod	20

3.1.4.2.1	Messages .....	21
3.1.4.2.1.1	GetFilterDescriptorsForMethodSoapIn .....	21
3.1.4.2.1.2	GetFilterDescriptorsForMethodSoapOut .....	21
3.1.4.2.2	Elements.....	22
3.1.4.2.2.1	GetFilterDescriptorsForMethod .....	22
3.1.4.2.2.2	GetFilterDescriptorsForMethodResponse .....	22
3.1.4.2.3	Complex Types .....	22
3.1.4.2.3.1	ArrayOfFilterDescriptorStruct .....	23
3.1.4.2.3.2	FilterDescriptorStruct .....	23
3.1.4.2.4	Simple Types.....	24
3.1.4.2.5	Attributes.....	24
3.1.4.2.6	Groups.....	25
3.1.4.2.7	Attribute Groups .....	25
3.1.4.3	GetLobSystemInstances .....	25
3.1.4.3.1	Messages .....	25
3.1.4.3.1.1	GetLobSystemInstancesSoapIn .....	25
3.1.4.3.1.2	GetLobSystemInstancesSoapOut .....	25
3.1.4.3.2	Elements.....	26
3.1.4.3.2.1	GetLobSystemInstances .....	26
3.1.4.3.2.2	GetLobSystemInstancesResponse .....	26
3.1.4.3.3	Complex Types .....	26
3.1.4.3.3.1	ArrayOfLobSystemInstanceStruct .....	27
3.1.4.3.3.2	LobSystemInstanceStruct .....	27
3.1.4.3.4	Simple Types.....	28
3.1.4.3.5	Attributes.....	28
3.1.4.3.6	Groups.....	28
3.1.4.3.7	Attribute Groups .....	28
3.1.4.4	GetMethodForMethodInstance .....	28
3.1.4.4.1	Messages .....	29
3.1.4.4.1.1	GetMethodForMethodInstanceSoapIn .....	29
3.1.4.4.1.2	GetMethodForMethodInstanceSoapOut .....	29
3.1.4.4.2	Elements.....	30
3.1.4.4.2.1	GetMethodForMethodInstance .....	30
3.1.4.4.2.2	GetMethodForMethodInstanceResponse.....	30
3.1.4.4.3	Complex Types .....	30
3.1.4.4.4	Simple Types.....	30
3.1.4.4.5	Attributes.....	31
3.1.4.4.6	Groups.....	31
3.1.4.4.7	Attribute Groups .....	31
3.1.4.5	GetMethodInstancesForEntity .....	31
3.1.4.5.1	Messages .....	31
3.1.4.5.1.1	GetMethodInstancesForEntitySoapIn .....	32
3.1.4.5.1.2	GetMethodInstancesForEntitySoapOut.....	32
3.1.4.5.2	Elements.....	32
3.1.4.5.2.1	GetMethodInstancesForEntity.....	32
3.1.4.5.2.2	GetMethodInstancesForEntityResponse .....	33
3.1.4.5.3	Complex Types .....	33
3.1.4.5.3.1	ArrayOfMethodInstanceStruct .....	33
3.1.4.5.3.2	MethodInstanceStruct .....	33
3.1.4.5.4	Simple Types.....	35
3.1.4.5.4.1	MethodInstanceType.....	35
3.1.4.5.5	Attributes.....	36
3.1.4.5.6	Groups.....	36

3.1.4.5.7	Attribute Groups .....	36
3.1.4.6	GetMethodsForEntity.....	36
3.1.4.6.1	Messages .....	36
3.1.4.6.1.1	GetMethodsForEntitySoapIn.....	37
3.1.4.6.1.2	GetMethodsForEntitySoapOut.....	37
3.1.4.6.2	Elements.....	37
3.1.4.6.2.1	GetMethodsForEntity.....	37
3.1.4.6.2.2	GetMethodsForEntityResponse .....	38
3.1.4.6.3	Complex Types .....	38
3.1.4.6.3.1	ArrayOfMethodStruct .....	38
3.1.4.6.4	Simple Types.....	38
3.1.4.6.5	Attributes.....	38
3.1.4.6.6	Groups.....	38
3.1.4.6.7	Attribute Groups .....	39
3.1.5	Timer Events .....	39
3.1.6	Other Local Events .....	39
<b>4</b>	<b>Protocol Examples.....</b>	<b>40</b>
4.1	Retrieve Methods Containing MethodInstances of Type Finder on an Entity .....	40
4.2	Retrieve FilterDescriptors Contained by a Method That Contains a Particular MethodInstance.....	44
<b>5</b>	<b>Security.....</b>	<b>49</b>
5.1	Security Considerations for Implementers.....	49
5.2	Index of Security Parameters .....	49
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>50</b>
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>58</b>
<b>8</b>	<b>Change Tracking.....</b>	<b>59</b>
<b>9</b>	<b>Index .....</b>	<b>61</b>

# 1 Introduction

This document specifies the Business Data Catalog Metadata Web Service Protocol, which enables a protocol client to retrieve information about interfaces of software systems that store business data and annotations of these interfaces.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**Hypertext Transfer Protocol (HTTP)**  
**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**  
**language code identifier (LCID)**  
**Unicode**

The following terms are defined in [\[MS-OFCGLOS\]](#):

**AccessChecker**  
**business logic**  
**ComparisonFilter**  
**Entity**  
**EntityInstance**  
**FilterDescriptor**  
**Finder**  
**front-end web server**  
**GenericInvoker**  
**IdEnumerator**  
**LastIdFilter**  
**LimitFilter**  
**line-of-business (LOB) system**  
**LobSystem**  
**LobSystemInstance**  
**localized name**  
**metadata model**  
**metadata store**  
**MetadataObject**  
**MetadataObjectId**  
**Method**  
**MethodInstance**  
**RangeFilter**  
**ReturnTypeDescriptor**  
**Scalar**  
**Simple Object Access Protocol (SOAP)**  
**site**  
**SOAP action**  
**SOAP body**  
**SOAP fault**  
**SpecificFinder**  
**Uniform Resource Locator (URL)**  
**ViewAccessor**

**Web Services Description Language (WSDL)**  
**WildcardFilter**  
**WSDL message**  
**XML namespace**  
**XML namespace prefix**  
**XML schema**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[ECMA-335] ECMA International, "Common Language Infrastructure (CLI) Partitions I to VI", ECMA-335, June 2006, <http://www.ecma-international.org/publications/standards/Ecma-335.htm>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>



[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

## 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

## 1.3 Overview


Enterprises have a variety of data stored in various **line-of-business (LOB) systems**. Typically, this data is accessible only through the proprietary programming interface of these software systems. It is desirable to be able to provide access to such data via a set of normalized interfaces so that users do not have to learn system-specific or adapter-specific programming patterns for each software system. To provide such access to data, it is useful to describe or model the LOB systems using a set of **MetadataObjects** and store the resulting **metadata models** in a **metadata store**.

Once a metadata store of metadata models is established, there are many scenarios that require access to metadata models on computers that are not servers. For example, a user may want to browse the catalog of **LobSystems** and the **Entities** in each **LobSystem** available on a **front-end Web server**, but from inside a custom application that is written for a client computer in an enterprise. For this purpose, this protocol provides remote access to a subset of the MetadataObjects over a Web service-based protocol.

## 1.4 Relationship to Other Protocols

This protocol uses the **SOAP** message protocol for formatting request and response messages, as described in [\[SOAP1.1\]](#), [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#). It transmits those messages by using **HTTP**, as described in [\[RFC2616\]](#), or **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#).

The following diagram shows the underlying messaging and transport stack used by the protocol:

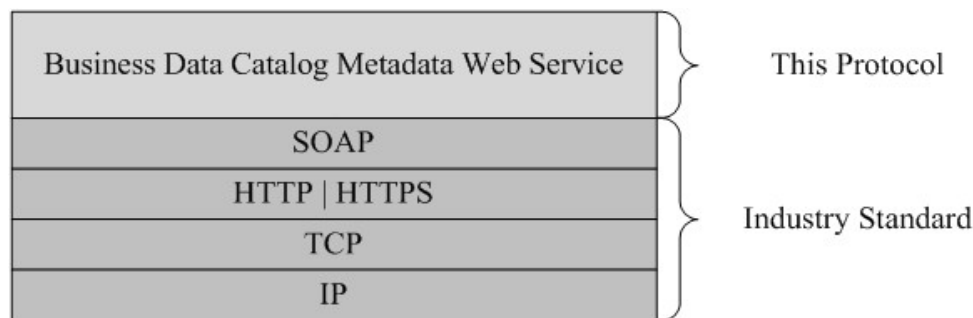

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

This protocol operates against a **site (2)** that is identified by a **URL** that is known by protocol clients. The protocol server endpoint is formed by appending `"/_vti_bin/businessdatacatalog.asmx"`

to the URL of the site, for example  
[http://www.contoso.com/Repository/\\_vti\\_bin/businessdatacatalog.asmx](http://www.contoso.com/Repository/_vti_bin/businessdatacatalog.asmx).

This protocol assumes that authentication has been performed by the underlying protocols.

## 1.6 Applicability Statement

None.

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported transports:** This protocol uses multiple transports with SOAP as specified in section [2.1](#).
- **Localization:** This protocol includes text strings in various messages. Localization considerations for such strings are specified in sections [2.2](#) and [3.1.4](#).

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the protocol. The **WSDL** in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null, and present.

### 2.1 Transport

Protocol servers **MUST** support SOAP over HTTP. Protocol servers **SHOULD** additionally support SOAP over HTTPS for securing communication with protocol clients.

Protocol messages **MUST** be formatted as specified either in [\[SOAP1.1\]](#) section 4 or in [\[SOAP1.2/1\]](#) section 5. Protocol server faults **MUST** be returned either using HTTP status codes as specified in [\[RFC2616\]](#) section 10 or using **SOAP faults** as specified either in [\[SOAP1.1\]](#) section 4.4 or in [\[SOAP1.2/1\]](#) section 5.4.

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and WSDL, as specified in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This protocol specifies and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates an **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/</a>	
s	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a> <a href="#">[XMLSCHEMA2]</a>
soap12	<a href="http://schemas.xmlsoap.org/wsdl/soap12/">http://schemas.xmlsoap.org/wsdl/soap12/</a>	<a href="#">[SOAP1.2/1]</a> <a href="#">[SOAP1.2/2]</a>
(none)	<a href="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/</a>	
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
mime	<a href="http://schemas.xmlsoap.org/wsdl/mime/">http://schemas.xmlsoap.org/wsdl/mime/</a>	<a href="#">[WSDL]</a>
http	<a href="http://schemas.xmlsoap.org/wsdl/http/">http://schemas.xmlsoap.org/wsdl/http/</a>	<a href="#">[WSDL]</a>
tm	<a href="http://microsoft.com/wsdl/mime/textMatching/">http://microsoft.com/wsdl/mime/textMatching/</a>	<a href="#">[WSDL]</a>
soapenc	<a href="http://schemas.xmlsoap.org/soap/encoding/">http://schemas.xmlsoap.org/soap/encoding/</a>	

## 2.2.2 Messages

This specification does not define any common WSDL message definitions.

## 2.2.3 Elements

This specification does not define any common XML schema element definitions.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
<b>ArrayOfInt</b>	This complex type MUST be an array of elements with type integer.
<b>ArrayOfString</b>	This complex type MUST be an array of elements with type string.
<b>MethodStruct</b>	This complex type MUST contain information about a <b>Method</b> .

### 2.2.4.1 ArrayOfInt

The **ArrayOfInt** complex type MUST be an array of elements with type integer and is defined as follows.

```
<s:complexType name="ArrayOfInt">
  <s:sequence>
    <s:element name="int" type="s:int" minOccurs="0" maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**int:** An integer.

### 2.2.4.2 ArrayOfString

The **ArrayOfString** complex type MUST be an array of elements with type string and is defined as follows.

```
<s:complexType name="ArrayOfString">
  <s:sequence>
    <s:element name="string" type="s:string" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**string:** A string, if it is not nil.

### 2.2.4.3 MethodStruct

The **MethodStruct** complex type contains information about a Method. The following are the constraints that this complex type MUST satisfy:

- A **localized name** at any index of the **localizedNames** element of this complex type MUST be in the language represented by the **language code identifier (LCID)** at the same index of the **lcids** element.
- The name of a unit of **business logic (2)<1>** at any index of the **propertyTypes** element of this complex type MUST belong to the property with the name at the same index of the **propertyNames** element.
- A value at any index of the **propertyValues** element of this complex type MUST belong to the Property with the name at the same index of the **propertyNames** element.

This complex type is defined as follows.

```
<s:complexType name="MethodStruct">
  <s:sequence>
    <s:element name="id" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="name" type="s:string" minOccurs="1" maxOccurs="1"/>
    <s:element name="entityId" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="isStatic" type="s:boolean" minOccurs="1" maxOccurs="1"/>
    <s:element name="lcids" type="tns:ArrayOfInt" minOccurs="0" maxOccurs="1"/>
    <s:element name="localizedNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyTypes" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyValues" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
  </s:sequence>
</s:complexType>
```

**id:** The **MetadataObjectId** of the **Method** represented with an element of this complex type. The value of this element MUST be in the range from 1 through 0x7fffffff.

**name:** The name of the **Method** represented with an element of this complex type. This element MUST be present. The value of this element MUST have at least 1, at most 255 **Unicode** characters.

**entityId:** The **MetadataObjectId** of the Entity that the **Method** represented with an element of this complex type is contained by.

**isStatic:** The element MUST identify if the **Method** is static or not. If a **Method** is static, it can be invoked without an **EntityInstance**. If the value is **true**, the **Method** is a static **Method**. If the value is **false**, the **Method** is not a static **Method**.

**lcids:** The list of LCIDs for the localized names in the **localizedNames** element.

**localizedNames:** The list of localized names of the **Method** represented with an element of this complex type. Each localized name string in this list MUST have at least 1, and at most 255 Unicode characters.

**propertyNames:** The names of the **Properties** of **Method** represented with an element of this complex type. Each name string in this list of **Property** names MUST have at least 1, and at most 255 Unicode characters.

**propertyTypes:** The names of units of business logic (2)<2> for the **Properties** of the **Method** represented with an element of this complex type.

**propertyValues:** The values of the **Properties** of the **Method** represented with an element of this complex type.

### **2.2.5 Simple Types**

This specification does not define any common XML schema simple type definitions.

### **2.2.6 Attributes**

This specification does not define any common XML schema attribute definitions.

### **2.2.7 Groups**

This specification does not define any common XML schema group definitions.

### **2.2.8 Attribute Groups**

This specification does not define any common XML schema attribute group definitions.

### **2.2.9 Common Data Structures**

This specification does not define any common XML schema data structures.

## 3 Protocol Details

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, and **present**.

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret HTTP status codes returned by the protocol server as specified in [RFC2616](#) section 10.

This protocol allows protocol servers to notify protocol clients of application-level faults using SOAP faults. Except where specified, these SOAP faults are not significant for interoperability, and protocol clients can interpret them in an implementation-specific manner.

This protocol allows protocol servers to perform implementation-specific authorization checks and notify protocol clients of authorization faults either using HTTP status codes or using SOAP faults as specified previously in this section.

This protocol allows protocol servers to perform implementation-specific localization of text in various messages. Except where specified, the localization of this text is an implementation-specific behavior of the protocol server and not significant for interoperability.

### 3.1 Server Details

#### 3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This specification does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this specification.

The server MUST maintain lists of the following **MetadataObject** types: **LobSystemInstance**, **Method**, **MethodInstance**, **Entity**, and **FilterDescriptor**. The server MUST maintain a set of relationships between these **MetadataObject** types. These relationships are as follows:

- Each **Entity** is contained by an **LobSystem**.
- Each **LobSystemInstance** is contained by an **LobSystem**.
- Each **Method** is contained by an **Entity**.
- Each **MethodInstance** is contained by a **Method**.
- Each **FilterDescriptor** is contained by a **Method**.

The server MUST follow these rules:

- All **LobSystems** contained by the metadata store MUST have unique names.

- All **LobSystemInstances** contained by the **LobSystems** contained by the metadata store MUST have unique names.
- All **Entities** contained by a particular **LobSystem** MUST have unique names.
- All **Methods** contained by a particular **Entity** MUST have unique names.
- All **MethodInstances** contained by all **Methods** contained by a particular **Entity** MUST have unique names.
- All **FilterDescriptors** contained by a particular **Method** MUST have unique names.
- All **MetadataObjectIds** MUST be globally unique.

### 3.1.2 Timers

None.

### 3.1.3 Initialization

None.

### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of WSDL operations as defined by this specification.

Operation	Description
<b>GetEntitiesForLobSystemInstance</b>	Retrieves the <b>Entities</b> contained by an <b>LobSystem</b> containing a particular <b>LobSystemInstance</b> .
<b>GetFilterDescriptorsForMethod</b>	Retrieves the <b>FilterDescriptors</b> contained by a particular <b>Method</b> .
<b>GetLobSystemInstances</b>	Retrieves the <b>LobSystemInstances</b> in the Metadata store.
<b>GetMethodForMethodInstance</b>	Retrieves the <b>Method</b> containing a particular <b>MethodInstance</b> .
<b>GetMethodInstancesForEntity</b>	Retrieves the <b>MethodInstances</b> contained by the <b>Methods</b> contained by a particular <b>Entity</b> .
<b>GetMethodsForEntity</b>	Retrieves the <b>Methods</b> contained by a particular <b>Entity</b> .

#### 3.1.4.1 GetEntitiesForLobSystemInstance

This operation is used to retrieve the **Entities** contained by the **LobSystem** that contains a particular **LobSystemInstance** and is defined as follows.

```
<wsdl:operation name="GetEntitiesForLobSystemInstance">
  <wsdl:input message="GetEntitiesForLobSystemInstanceSoapIn" />
  <wsdl:output message="GetEntitiesForLobSystemInstanceSoapOut" />
</wsdl:operation>
```

The client sends a **GetEntitiesForLobSystemInstanceSoapIn** request message, and the server responds with a **GetEntitiesForLobSystemInstanceSoapOut** response message, as follows:



1. The caller of this operation MUST specify the **MetadataObjectId** of an **LobSystemInstance**.
2. This operation MUST return all **Entities** contained by the **LobSystem** that contains the **LobSystemInstance** specified in the request.

This operation MUST return a SOAP fault in each of the following cases:

- The **MetadataObjectId** provided in the request does not match the **MetadataObjectId** of any of the existing **LobSystemInstances** in the metadata store.
- The **LobSystemInstance** with the **MetadataObjectId** provided in the request violates implementation-specific integrity constraints.
- Any one of the **Entities** to be returned from this operation violates implementation-specific integrity constraints.
- The **MetadataObjectId** value provided in the request is not in the range specified in section [3.1.4.1.2.1](#).

### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetEntitiesForLobSystemInstanceSoapIn</b>	Contains the request for <b>GetEntitiesForLobSystemInstance</b> operation.
<b>GetEntitiesForLobSystemInstanceSoapOut</b>	Contains the response from <b>GetEntitiesForLobSystemInstance</b> operation.

The following **WSDL message** definitions are specific to this operation.

#### 3.1.4.1.1.1 GetEntitiesForLobSystemInstanceSoapIn

This message MUST contain the request for **GetEntitiesForLobSystemInstance** operation.

The **SOAP action** value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetEntitiesForLobSystemInstance
```

The **SOAP body** contains a **GetEntitiesForLobSystemInstance** element. This element MUST contain the **MetadataObjectId** of an **LobSystemInstance** that is contained by the **LobSystem** that the requested **Entities** are contained by.

#### 3.1.4.1.1.2 GetEntitiesForLobSystemInstanceSoapOut

This message MUST contain the response from **GetEntitiesForLobSystemInstance** operation. The name element of all the **Entities** in this message MUST have unique values.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetEntitiesForLobSystemInstance
```

The SOAP body contains a **GetEntitiesForLobSystemInstanceResponse** element. This element MUST contain the list of **Entities** contained by the **LobSystem** that contains the given **LobSystemInstance**.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetEntitiesForLobSystemInstance</b>	The value of this element MUST be the input to <b>GetEntitiesForLobSystemInstance</b> operation.
<b>GetEntitiesForLobSystemInstanceResponse</b>	The value of this element MUST be the response from <b>GetEntitiesForLobSystemInstance</b> operation.

#### 3.1.4.1.2.1 GetEntitiesForLobSystemInstance

The value of this element MUST be the input to **GetEntitiesForLobSystemInstance** operation defined as follows.

```
<s:element name="GetEntitiesForLobSystemInstance">
  <s:complexType>
    <s:sequence>
      <s:element name="lobSystemInstanceId" type="s:unsignedInt"
minOccurs="1" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**lobSystemInstanceId:** The **MetadataObjectId** for the **LobSystemInstance**. The value of this element MUST be in the range from 1 through 0x7fffffff.

#### 3.1.4.1.2.2 GetEntitiesForLobSystemInstanceResponse

The value of this element MUST be the response from **GetEntitiesForLobSystemInstance** operation defined as follows.

```
<s:element name="GetEntitiesForLobSystemInstanceResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetEntitiesForLobSystemInstanceResult"
type="tns:ArrayOfEntityStruct" minOccurs="0" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetEntitiesForLobSystemInstanceResult:** The list of **Entities**. This element MUST be present in the successful response.

### 3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfEntityStruct</b>	An array of elements with type <b>EntityStruct</b> .
<b>EntityStruct</b>	Contains information about <b>Entities</b> .

### 3.1.4.1.3.1 ArrayOfEntityStruct

The **ArrayOfEntityStruct** complex type MUST be an array of elements with type **EntityStruct** defined as follows.

```
<s:complexType name="ArrayOfEntityStruct">
  <s:sequence>
    <s:element name="EntityStruct" type="tns:EntityStruct" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**EntityStruct:** These elements MUST contain information about **Entities**. This element MUST be present in the successful response.

### 3.1.4.1.3.2 EntityStruct

The **EntityStruct** complex type MUST contain information about an **Entity**. The following are the constraints that this complex type MUST satisfy:

- A localized name at any index of the **localizedNames** element of this complex type MUST be in the language represented by the language code identifier (LCID) at the same index of the **lcids** element.
- The name of a unit of business logic (2)<3> at any index of the **propertyTypes** element of this complex type MUST belong to the **Property** with the name at the same index of the **propertyNames** element.
- A value at any index of the **propertyValues** element of this complex type MUST belong to the **Property** with the name at the same index of the **propertyNames** element.

This complex type is defined as follows.

```
<s:complexType name="EntityStruct">
  <s:sequence>
    <s:element name="id" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="name" type="s:string" minOccurs="1" maxOccurs="1"/>
    <s:element name="lcids" type="tns:ArrayOfInt" minOccurs="0" maxOccurs="1"/>
    <s:element name="localizedNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="lobSystemId" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="propertyNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyTypes" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyValues" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
  </s:sequence>
</s:complexType>
```

**id:** The **MetadataObjectId** of the **Entity** represented with an element of this complex type. The value of this element MUST be in the range from 1 through 0xf.

**name:** The name of the **Entity** represented with an element of this type. This element **MUST** be present. The value of this element **MUST** have at least 1, at most 255 Unicode characters.

**lcids:** The list of LCIDs for the localized names in the **localizedNames** element.

**localizedNames:** The list of localized names of the **Entity** represented with an element of this complex type. Each localized name string in this list **MUST** have at least 1, at most 255 Unicode characters.

**lobSystemId:** The **MetadataObjectId** of the **LobSystem** that the **Entity** represented with an element of this complex type is contained by.

**propertyNames:** The names of the **Properties** of the **Entity** represented with an element of this complex type. Each name string in this list of **Property** names **MUST** have at least 1, at most 255 Unicode characters.

**propertyTypes:** The names of units of business logic (2) [<4>](#) for the **Properties** of the **Entity** represented with an element of this complex type.

**propertyValues:** The values of the **Properties** of the **Entity** represented with an element of this complex type.

#### 3.1.4.1.4 Simple Types

None.

#### 3.1.4.1.5 Attributes

None.

#### 3.1.4.1.6 Groups

None.

#### 3.1.4.1.7 Attribute Groups

None.

#### 3.1.4.2 GetFilterDescriptorsForMethod

This operation is used to retrieve the **FilterDescriptors** contained by a particular **Method** and is defined as follows.

```
<wsdl:operation name="GetFilterDescriptorsForMethod">
  <wsdl:input message="GetFilterDescriptorsForMethodSoapIn" />
  <wsdl:output message="GetFilterDescriptorsForMethodSoapOut" />
</wsdl:operation>
```

The client sends a **GetFilterDescriptorsForMethodSoapIn** request message, and the server responds with a **GetFilterDescriptorsForMethodSoapOut** response message, as follows:

1. The caller of this operation **MUST** specify a **Method MetadataObjectId**.

- This operation MUST return all **FilterDescriptors** for which the value could be provided by the callers [<5>](#) contained by the **Method** specified in the request.

This operation MUST return a SOAP fault in each of the following cases:

- The provided **MetadataObjectId** in the request does not match any of the existing **Method MetadataObjectIds** in the metadata store.
- The **Method** with the **MetadataObjectId** provided in the request violates implementation-specific integrity constraints.
- Any one of the **FilterDescriptors** to be returned from this operation violates implementation-specific integrity constraints.
- The **MetadataObjectId** value provided in the request is not in the range specified in section [3.1.4.2.2.1](#).

### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetFilterDescriptorsForMethodSoapIn</b>	Contains the request for <b>GetFilterDescriptorsForMethod</b> operation.
<b>GetFilterDescriptorsForMethodSoapOut</b>	Contains the response from the <b>GetFilterDescriptorsForMethod</b> operation.

#### 3.1.4.2.1.1 GetFilterDescriptorsForMethodSoapIn

This message MUST contain the request for **GetFilterDescriptorsForMethod** operation.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetFilterDescriptorsForMethod
```

The SOAP body contains a **GetFilterDescriptorsForMethod** element. This element MUST contain the **MetadataObjectId** of the **Method** by which the requested **FilterDescriptors** are contained.

#### 3.1.4.2.1.2 GetFilterDescriptorsForMethodSoapOut

This message MUST contain the response from the **GetFilterDescriptorsForMethod** operation. The name element of all the **FilterDescriptors** in this message MUST have unique values.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetFilterDescriptorsForMethod
```

The SOAP body contains a **GetFilterDescriptorsForMethodResponse** element. This element MUST contain the list of **FilterDescriptors** contained by the given **Method**.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetFilterDescriptorsForMethod</b>	The value of this element MUST be the input to <b>GetFilterDescriptorsForMethod</b> operation.
<b>GetFilterDescriptorsForMethodResponse</b>	The value of this element MUST be the response from <b>GetFilterDescriptorsForMethod</b> operation.

#### 3.1.4.2.2.1 GetFilterDescriptorsForMethod

The value of this element MUST be the input to **GetFilterDescriptorsForMethod** operation defined as follows.

```
<s:element name="GetFilterDescriptorsForMethod">
  <s:complexType>
    <s:sequence>      <s:element name="methodId" type="s:unsignedInt" minOccurs="1"
maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**methodId:** The **MetadataObjectId** for the **Method**. The value of this element MUST be in the range from 1 through 0x7fffffff.

#### 3.1.4.2.2.2 GetFilterDescriptorsForMethodResponse

The value of this element MUST be the response from **GetFilterDescriptorsForMethod** operation defined as follows.

```
<s:element name="GetFilterDescriptorsForMethodResponse">
  <s:complexType>
    <s:sequence>      <s:element name="GetFilterDescriptorsForMethodResult"
type="tns:ArrayOfFilterDescriptorStruct" minOccurs="0" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetFilterDescriptorsForMethodResult:** The list of **FilterDescriptors**. This element MUST be present in the successful response.

#### 3.1.4.2.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfFilterDescriptorStruct</b>	An array of elements with type <b>FilterDescriptorStruct</b> .

Complex type	Description
<b>FilterDescriptorStruct</b>	Contains information about a <b>FilterDescriptor</b> .

### 3.1.4.2.3.1 ArrayOfFilterDescriptorStruct

The **ArrayOfFilterDescriptorStruct** complex type MUST be an array of elements with type **FilterDescriptorStruct** defined as follows.

```
<s:complexType name="ArrayOfFilterDescriptorStruct">
  <s:sequence>
    <s:element name="FilterDescriptorStruct" type="tns:FilterDescriptorStruct"
      nillable="true" minOccurs="0" maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**FilterDescriptorStruct:** These elements MUST contain information about **FilterDescriptors**, if they are not nil.

### 3.1.4.2.3.2 FilterDescriptorStruct

The **FilterDescriptorStruct** complex type MUST contain information about a **FilterDescriptor**. The following are the constraints that this complex type MUST satisfy:

- A localized name at any index of the **localizedNames** element of this complex type MUST be in the language represented by the language code identifier (LCID) at the same index of the **lcids** element.
- The name of a unit of business logic (2) [<6>](#) at any index of the **propertyTypes** element of this complex type MUST belong to the **Property** with the name at the same index of the **propertyNames** element.
- A value at any index of the **propertyValues** element of this complex type MUST belong to the **Property** with the name at the same index of the **propertyNames** element.

This complex type is defined as follows.

```
<s:complexType name="FilterDescriptorStruct">
  <s:sequence>
    <s:element name="id" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="name" type="s:string" minOccurs="1" maxOccurs="1"/>
    <s:element name="typeName" type="s:string" minOccurs="1" maxOccurs="1"/>
    <s:element name="methodId" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="lcids" type="tns:ArrayOfInt" minOccurs="0" maxOccurs="1"/>
    <s:element name="localizedNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyTypes" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyValues" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
  </s:sequence>
</s:complexType>
```

**id:** The **MetadataObjectId** of the **FilterDescriptor** represented with an element of this complex type. The value of this element MUST be in the range from 1 through 0x7fffffff.

**name:** The name of the **FilterDescriptor** represented with an element of this complex type. This element MUST be present. The value of this element MUST have at least 1, at most 255 Unicode characters.

**typeName:** The name of the unit of business logic (2)<7> of the **FilterDescriptor** represented with an element of this complex type. This element MUST be present. The value MUST be in the following table.

Value	Description
Microsoft.Office.Server.ApplicationRegistry.Runtime.LimitFilter	Indicates that a <b>FilterDescriptor</b> describes a <b>LimitFilter</b> .
Microsoft.Office.Server.ApplicationRegistry.Runtime.EqualsFilter	Indicates that a <b>FilterDescriptor</b> describes a <b>ComparisonFilter</b> with its comparator set to "==".
Microsoft.Office.Server.ApplicationRegistry.Runtime.WildcardFilter	Indicates that a <b>FilterDescriptor</b> describes a <b>WildcardFilter</b> .
Microsoft.Office.Server.ApplicationRegistry.Runtime.RangeFilter	Indicates that a <b>FilterDescriptor</b> describes a <b>RangeFilter</b> .
Microsoft.Office.Server.ApplicationRegistry.Runtime.LastIdFilter	Indicates that a <b>FilterDescriptor</b> describes a <b>LastIdFilter</b> .
Microsoft.Office.Server.ApplicationRegistry.Runtime.ComparisonFilter	Indicates that a <b>FilterDescriptor</b> describes a <b>ComparisonFilter</b> .

**methodId:** The **MetadataObjectId** of the **Method** that the **FilterDescriptor** represented with an element of this complex type is contained by. The value of this element MUST be in the range 1 through 0x7fffffff.

**lcids:** The list of LCIDs for the localized names in the **localizedNames** element.

**localizedNames:** The list of localized names of the **FilterDescriptor** represented with an element of this complex type. Each localized name string in this list MUST have at least 1, at most 255 Unicode characters.

**propertyNames:** The names of the **Properties** of the **FilterDescriptor** represented with an element of this complex type. Each name string in this list of **Property** names MUST have at least 1, at most 255 Unicode characters.

**propertyTypes:** The names of units of business logic (2)<8> for the **Properties** of the **FilterDescriptor** represented with an element of this complex type.

**propertyValues:** The values of the **Properties** of the **FilterDescriptor** represented with an element of this complex type.

#### 3.1.4.2.4 Simple Types

None.

#### 3.1.4.2.5 Attributes

None.



### 3.1.4.2.6 Groups

None.

### 3.1.4.2.7 Attribute Groups

None.

### 3.1.4.3 GetLobSystemInstances

This operation is used to get all the **LobSystemInstances** in the metadata store and is defined as follows.

```
<wsdl:operation name="GetLobSystemInstances">
  <wsdl:input message="GetLobSystemInstancesSoapIn" />
  <wsdl:output message="GetLobSystemInstancesSoapOut" />
</wsdl:operation>
```

The client sends a **GetLobSystemInstancesSoapIn** request message, and the server responds with a **GetLobSystemInstancesSoapOut** response message.

This operation MUST return all the **LobSystemInstances** in the metadata store.

This operation MUST return a SOAP fault if any of the **LobSystemInstances** to be returned violates implementation-specific integrity constraints.

#### 3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetLobSystemInstancesSoapIn</b>	Contains the request for <b>GetLobSystemInstances</b> operation.
<b>GetLobSystemInstancesSoapOut</b>	Contains the response from <b>GetLobSystemInstances</b> operation.

##### 3.1.4.3.1.1 GetLobSystemInstancesSoapIn

This message MUST contain the request for **GetLobSystemInstances** operation.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetLobSystemInstances
```

The SOAP body contains a **GetLobSystemInstances** element.

##### 3.1.4.3.1.2 GetLobSystemInstancesSoapOut

This message MUST contain the response from **GetLobSystemInstances** operation.

The SOAP action value of the message is defined as follows:

The SOAP body contains a **GetLobSystemInstancesResponse** element. This element MUST contain the list of LobSystemInstances in the metadata store.

### 3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetLobSystemInstances</b>	The value of this element MUST be the input to the <b>GetLobSystemInstances</b> operation.
<b>GetLobSystemInstancesResponse</b>	The value of this element MUST be the response from <b>GetLobSystemInstances</b> operation.

#### 3.1.4.3.2.1 GetLobSystemInstances

The value of this element MUST be the input to **GetLobSystemInstances** operation defined as follows.

```
<s:element name="GetLobSystemInstances">  
  <s:complexType/>  
</s:element>
```

#### 3.1.4.3.2.2 GetLobSystemInstancesResponse

This element MUST be the response from **GetLobSystemInstances** operation defined as follows.

```
<s:element name="GetLobSystemInstancesResponse">  
  <s:complexType>  
    <s:sequence>  
      <s:element name="GetLobSystemInstancesResult"  
type="tns:ArrayOfLobSystemInstanceStruct" minOccurs="0" maxOccurs="1"/>  
    </s:sequence>  
  </s:complexType>  
</s:element>
```

**GetLobSystemInstancesResult:** The list of **LobSystemInstances**. This element MUST be present in the successful response.

#### 3.1.4.3.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfLobSystemInstanceStruct</b>	An array of elements with type <b>LobSystemInstanceStruct</b> (section <a href="#">3.1.4.3.3.2</a> ).

Complex type	Description
<b>LobSystemInstanceStruct</b>	Contains information about an <b>LobSystemInstance</b> .

### 3.1.4.3.3.1 ArrayOfLobSystemInstanceStruct

The **ArrayOfLobSystemInstanceStruct** complex type MUST be an array of elements with type **LobSystemInstanceStruct** (section [3.1.4.3.3.2](#)). This complex type is defined as follows.

```
<s:complexType name="ArrayOfLobSystemInstanceStruct">
  <s:sequence>
    <s:element name="LobSystemInstanceStruct" type="tns:LobSystemInstanceStruct"
      nillable="true" minOccurs="0" maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**LobSystemInstanceStruct:** These elements MUST contain information about **LobSystemInstances**, if they are not nil.

### 3.1.4.3.3.2 LobSystemInstanceStruct

The **LobSystemInstanceStruct** complex type MUST contain the information about an **LobSystemInstance**. This complex type MUST satisfy the following conditions:

- A localized name at any index of the **localizedNames** element of this complex type MUST be in the language represented by the language code identifier (LCID) at the same index of the **lcids** element.
- The name of a unit of business logic (2) [<9>](#) at any index of the **propertyTypes** element of this complex type MUST belong to the Property with the name at the same index of the **propertyNames** element.
- A value at any index of the **propertyValues** element of this complex type MUST belong to the Property with the name at the same index of the **propertyNames** element.

This complex type is defined as follows.

```
<s:complexType name="LobSystemInstanceStruct">
  <s:sequence>
    <s:element name="id" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="name" type="s:string" minOccurs="0" maxOccurs="1"/>
    <s:element name="lcids" type="tns:ArrayOfInt" minOccurs="0" maxOccurs="1"/>
    <s:element name="localizedNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="lobSystemId" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="propertyNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyTypes" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyValues" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
  </s:sequence>
</s:complexType>
```

**id:** The **MetadataObjectId** of the **LobSystemInstance** represented with an element of this complex type. The value of this element MUST be in the range 1 through 0x7fffffff.

**name:** The name of the **LobSystemInstance** represented with an element of this complex type. This element **MUST** be present. The value of this element **MUST** have at least 1, at most 255 Unicode characters.

**lcids:** The list of LCIDs for the localized names in the **localizedNames** element.

**localizedNames:** The list of localized names of the **LobSystemInstance** represented with an element of this complex type. Each localized name string in this list **MUST** have at least 1, and at most 255, Unicode characters.

**lobSystemId:** The **MetadataObjectId** of the **LobSystem** that the **LobSystemInstance** represented with an element of this complex type is contained by. The value of this element **MUST** be in the range from 1 through 0x7fffffff.

**propertyNames:** The names of the **Properties** of the **LobSystemInstance** represented with an element of this complex type. Each name string in this list of **Property** names **MUST** have at least 1, and at most 255, Unicode characters.

**propertyTypes:** The names of units of business logic (2) <10> for the **Properties** of the **LobSystemInstance** represented with an element of this complex type.

**propertyValues:** The values of the **Properties** of the **LobSystemInstance** represented with an element of this complex type.

#### 3.1.4.3.4 Simple Types

None.

#### 3.1.4.3.5 Attributes

None.

#### 3.1.4.3.6 Groups

None.

#### 3.1.4.3.7 Attribute Groups

None.

#### 3.1.4.4 GetMethodForMethodInstance

This operation is used to retrieve the **Method** for a particular **MethodInstance** and is defined as follows.

```
<wsdl:operation name="GetMethodForMethodInstance">
  <wsdl:input message="GetMethodForMethodInstanceSoapIn" />
  <wsdl:output message="GetMethodForMethodInstanceSoapOut" />
</wsdl:operation>
```

The client sends a **GetMethodForMethodInstanceSoapIn** request message, and the server responds with a **GetMethodForMethodInstanceSoapOut** response message, as follows:

1. The caller of this operation **MUST** specify a **MethodInstance MetadataObjectId** and send it in.

2. This operation MUST return the **Method** containing the **MethodInstance** specified in the request.

This operation MUST return a SOAP fault in each of the following cases:

- The provided **MetadataObjectId** in the request does not match any of the existing **Method MetadataObjectIds** in the metadata store.
- The **Method** with the **MetadataObjectId** provided in the request violates implementation-specific integrity constraints.
- The **MethodInstance** to be returned from this operation violates implementation-specific integrity constraints.
- The **MetadataObjectId** value provided in the request is not in the range specified in section [3.1.4.4.2.1](#)

### 3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetMethodForMethodInstanceSoapIn</b>	Contains the request for <b>GetMethodForMethodInstance</b> operation.
<b>GetMethodForMethodInstanceSoapOut</b>	Contains the response from <b>GetMethodForMethodInstance</b> operation.

#### 3.1.4.4.1.1 GetMethodForMethodInstanceSoapIn

This message MUST contain the request for **GetMethodForMethodInstance** operation.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodForMethodInstance
```

The SOAP body contains a **GetMethodForMethodInstance** element. This element MUST contain the **MetadataObjectId** of the **MethodInstance** that the requested **Method** contains.

#### 3.1.4.4.1.2 GetMethodForMethodInstanceSoapOut

This message MUST contain the response from **GetMethodForMethodInstance** operation.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodForMethodInstance
```

The SOAP body contains a **GetMethodForMethodInstanceResponse** element. This element MUST contain the Method containing the given MethodInstance.

### 3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetMethodForMethodInstance</b>	The value of this element MUST be the input to <b>GetMethodForMethodInstance</b> operation.
<b>GetMethodForMethodInstanceResponse</b>	The value of this element MUST be the response from <b>GetMethodForMethodInstance</b> operation.

#### 3.1.4.4.2.1 GetMethodForMethodInstance

The value of this element MUST be the input to **GetMethodForMethodInstance** operation defined as follows.

```
<s:element name="GetMethodForMethodInstance">
  <s:complexType>
    <s:sequence>      <s:element name="methodInstanceId" type="s:unsignedInt" minOccurs="1"
maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**methodInstanceId:** The **MetadataObjectId** for a **MethodInstance**. The value of this element MUST be in the range from 1 through 0x7fffffff.

#### 3.1.4.4.2.2 GetMethodForMethodInstanceResponse

This element contains the response from **GetMethodForMethodInstance** operation defined as follows.

```
<s:element name="GetMethodForMethodInstanceResponse">
  <s:complexType>
    <s:sequence>      <s:element name="GetMethodForMethodInstanceResult"
type="tns:MethodStruct" minOccurs="0" maxOccurs="1"/>
    </s:sequence>  </s:complexType>
</s:element>
```

**GetMethodForMethodInstanceResult:** This element MUST contain information about the Method. This element MUST be present in the successful response.

#### 3.1.4.4.3 Complex Types

None.

#### 3.1.4.4.4 Simple Types

None.

### 3.1.4.4.5 Attributes

None.

### 3.1.4.4.6 Groups

None.

### 3.1.4.4.7 Attribute Groups

None.

## 3.1.4.5 GetMethodInstancesForEntity

This operation is used to retrieve **MethodInstances** contained by the **Methods** contained by a particular **Entity**. This operation is defined as follows.

```
<wsdl:operation name="GetMethodInstancesForEntity">
  <wsdl:input message="GetMethodInstancesForEntitySoapIn" />
  <wsdl:output message="GetMethodInstancesForEntitySoapOut" />
</wsdl:operation>
```

The client sends a **GetMethodInstancesForEntitySoapIn** request message, and the server responds with a **GetMethodInstancesForEntitySoapOut** response message, as follows:

1. The caller of this operation MUST specify an **Entity MetadataObjectId**.
2. This operation MUST return all **MethodInstances** contained by the **Methods** contained by the **Entity** specified in the request.

This operation MUST return a SOAP fault in each of the following cases:

- The provided **MetadataObjectId** in the request does not match any of the existing **Entity MetadataObjectIds** in the metadata store.
- The **Entity** with the **MetadataObjectId** provided in the request violates implementation-specific integrity constraints.
- Any one of the **MethodInstances** to be returned from this operation violates implementation-specific integrity constraints.
- The **MetadataObjectId** value provided in the request is not in the range specified in section [3.1.4.5.2.1](#).

### 3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetMethodInstancesForEntitySoapIn</b>	Contains the request for <b>GetMethodInstancesForEntity</b> operation.
<b>GetMethodInstancesForEntitySoapOut</b>	Contains the response from <b>GetMethodInstancesForEntity</b>

Message	Description
	operation.

### 3.1.4.5.1.1 GetMethodInstancesForEntitySoapIn

This message MUST contain the request for **GetMethodInstancesForEntity** operation.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodInstancesForEntity
```

The SOAP body contains a **GetMethodInstancesForEntity** element. This element MUST contain the **MetadataObjectId** of the **Entity** by which the **Methods** containing the requested **MethodInstances** are contained.

### 3.1.4.5.1.2 GetMethodInstancesForEntitySoapOut

This message MUST contain the response from **GetMethodInstancesForEntity** operation. The **name** element of all the **MethodInstances** in this message MUST have unique values.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodInstancesForEntity
```

The SOAP body contains a **GetMethodInstancesForEntityResponse** element. This element MUST contain the list of **MethodInstances** contained by the **Methods** contained by the given **Entity**.

### 3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetMethodInstancesForEntity</b>	The value of this element MUST be the input to <b>GetMethodInstancesForEntity</b> operation.
<b>GetMethodInstancesForEntityResponse</b>	The value of this element MUST be the response from <b>GetMethodInstancesForEntity</b> operation.

#### 3.1.4.5.2.1 GetMethodInstancesForEntity

The value of this element MUST be the input to **GetMethodInstancesForEntity** operation defined as follows.

```
<s:element name="GetMethodInstancesForEntity">
  <s:complexType>
    <s:sequence base="base" maxOccurs="1" minOccurs="1">
      <s:element name="EntityId" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
```



```
</s:element>
```

**EntityId:** The **MetadataObjectId** for the **Entity**. The value of this element MUST be in range from 1 through 0x7fffffff.

### 3.1.4.5.2.2 GetMethodInstancesForEntityResponse

This element MUST contain the response from **GetMethodInstancesForEntity** operation defined as follows.

```
<s:element name="GetMethodInstancesForEntityResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetMethodInstancesForEntityResult"
        type="tns:ArrayOfMethodInstanceStruct" minOccurs="0" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetMethodInstancesForEntityResult:** The list of **MethodInstances**. This element MUST be present in the successful response.

### 3.1.4.5.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfMethodInstanceStruct</b>	An array of elements with type <b>MethodInstanceStruct</b> .
<b>MethodInstanceStruct</b>	Contains information about an <b>MethodInstance</b> .

#### 3.1.4.5.3.1 ArrayOfMethodInstanceStruct

The **ArrayOfMethodInstanceStruct** complex type MUST be an array of elements with type **MethodInstanceStruct** defined as follows.

```
<s:complexType name="ArrayOfMethodInstanceStruct">
  <s:sequence>
    <s:element name="MethodInstanceStruct" type="tns:MethodInstanceStruct" nillable="true"
      minOccurs="0" maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**MethodInstanceStruct:** These elements' values MUST be information about **MethodInstances**, if they are not nil.

#### 3.1.4.5.3.2 MethodInstanceStruct

The **MethodInstanceStruct** complex type MUST contain information about a **MethodInstance**. The following are the constraints that this complex type MUST satisfy:

- A localized name at any index of the **localizedNames** element of this complex type MUST be in the language represented by the language code identifier (LCID) at the same index of the **lcids** element.
- The name of a unit of business logic (2) <11> at any index of the **propertyTypes** element of this complex type MUST belong to the **Property** with the name at the same index of the **propertyNames** element.
- A value at any index of the **propertyValues** element of this complex type MUST belong to the **Property** with the name at the same index of the **propertyNames** element.

This complex type is defined as follows.

```
<s:complexType name="MethodInstanceStruct">
  <s:sequence>
    <s:element name="id" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="name" type="s:string" minOccurs="1" maxOccurs="1"/>
    <s:element name="methodId" type="s:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <s:element name="returnTypeDescriptorId" type="s:unsignedInt" minOccurs="1"
maxOccurs="1"/>
    <s:element name="methodInstanceType" type="tns:MethodInstanceType" minOccurs="1"
maxOccurs="1"/>
    <s:element name="lcids" type="tns:ArrayOfInt" minOccurs="0" maxOccurs="1"/>
    <s:element name="localizedNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyNames" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyTypes" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
    <s:element name="propertyValues" type="tns:ArrayOfString" minOccurs="0" maxOccurs="1"/>
  </s:sequence>
</s:complexType>
```

**id:** The **MetadataObjectId** of the **MethodInstance** represented with an element of this complex type. The value of this element MUST be in range from 1 through 0x7fffffff.

**name:** The name of the **MethodInstance** represented with an element of this complex type. This element MUST be present. The value of this element MUST have at least 1, at most 255 Unicode characters.

**methodId:** The **MetadataObjectId** of the **Method** that the **MethodInstance** represented with an element of this complex type is contained by. The value of this element MUST be in the range 1 through 0x7fffffff.

**returnTypeDescriptorId:** The **MetadataObjectId** of the **ReturnTypeDescriptor** of the **MethodInstance** represented with an element of this complex type. The value of this element MUST be in the range 1 through 0x7fffffff.

**methodInstanceType:** The **MethodInstance** type of the **MethodInstance** represented with an element of this complex type.

**lcids:** If this element exists, its value MUST be the list of LCIDs for the localized names in the **localizedNames** element.

**localizedNames:** The list of localized names of the **MethodInstance** represented with an element of this complex type. Each localized name string in this list MUST have at least 1, at most 255 Unicode characters.

**propertyNames:** The names of the **Properties** of the **MethodInstance** represented with an element of this complex type. Each name string in this list of **Property** names MUST have at least 1, at most 255 Unicode characters.

**propertyTypes:** The names of units of business logic (2)<12> for the **Properties** of the **MethodInstance** represented with an element of this complex type.

**propertyValues:** The values of the **Properties** of the **MethodInstance** represented with an element of this complex type.

### 3.1.4.5.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
<b>MethodInstanceType</b>	Defines a <b>MethodInstance</b> type.

#### 3.1.4.5.4.1 MethodInstanceType

The **MethodInstanceStruct** simple type MUST define a **MethodInstance** type. This simple type is defined as follows.

```
<s:simpleType name="MethodInstanceType">
  <s:restriction base="s:string">
    <s:enumeration value="Finder"/>
    <s:enumeration value="SpecificFinder"/>
    <s:enumeration value="ViewAccessor"/>
    <s:enumeration value="GenericInvoker"/>
    <s:enumeration value="IdEnumerator"/>
    <s:enumeration value="AccessChecker" />
    <s:enumeration value="Scalar" />
  </s:restriction>
</s:simpleType>
```

The following table defines possible values for this simple type.

Value	Description
Finder	A <b>MethodInstance</b> type of <b>Finder</b> .
SpecificFinder	A <b>MethodInstance</b> type of <b>SpecificFinder</b> .
ViewAccessor	A <b>MethodInstance</b> type of <b>ViewAccessor</b> .
GenericInvoker	A <b>MethodInstance</b> type of <b>GenericInvoker</b> .
IdEnumerator	A <b>MethodInstance</b> type of <b>IdEnumerator</b> .
AccessChecker	A <b>MethodInstance</b> type of <b>AccessChecker</b> .
Scalar	A <b>MethodInstance</b> type of <b>Scalar</b> .

### 3.1.4.5.5 Attributes

None.

### 3.1.4.5.6 Groups

None.

### 3.1.4.5.7 Attribute Groups

None.

## 3.1.4.6 GetMethodsForEntity

This operation is used to retrieve the **Methods** contained by a particular **Entity** and is defined as follows.

```
<wsdl:operation name="GetMethodsForEntity">
  <wsdl:input message="GetMethodsForEntitySoapIn" />
  <wsdl:output message="GetMethodsForEntitySoapOut" />
</wsdl:operation>
```

The client sends a **GetMethodsForEntitySoapIn** request message, and the server responds with a **GetMethodsForEntitySoapOut** response message, as follows:

1. The caller of this operation MUST specify an **Entity MetadataObjectId**.
2. This operation MUST return all **Methods** contained by the **Entity** specified in the request.

This operation MUST return a SOAP fault in each of the following cases:

- The provided **MetadataObjectId** in the request does not match any of the existing **Entity MetadataObjectIds** in the metadata store.
- The **Entity** with the **MetadataObjectId** provided in the request violates implementation-specific integrity constraints.
- Any one of the **Methods** to be returned from this operation violates implementation-specific integrity constraints.
- The **MetadataObjectId** value provided in the request is not in the range specified in section [3.1.4.6.2.1](#).

### 3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetMethodsForEntitySoapIn</b>	Contains the request for <b>GetMethodsForEntity</b> operation.
<b>GetMethodsForEntitySoapOut</b>	Contains the response from <b>GetMethodsForEntity</b> operation.

### 3.1.4.6.1.1 GetMethodsForEntitySoapIn

This message MUST contain the request for **GetMethodsForEntity** operation.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodsForEntity
```

The SOAP body contains a **GetMethodsForEntity** element. This element MUST contain the **MetadataObjectId** of the **Entity** that the requested **Methods** are contained by.

### 3.1.4.6.1.2 GetMethodsForEntitySoapOut

This message MUST contain the response from **GetMethodsForEntity** operation. The **name** element of all the Methods in this message MUST have unique values.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodsForEntity
```

The SOAP body contains a **GetMethodsForEntityResponse** element. This element MUST contain the list of **Methods** contained by the given **Entity**.

### 3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetMethodsForEntity</b>	The value of this element MUST be the input to <b>GetMethodsForEntity</b> operation.
<b>GetMethodsForEntityResponse</b>	The value of this element MUST be the response from <b>GetMethodsForEntityResponse</b> operation.

#### 3.1.4.6.2.1 GetMethodsForEntity

The value of this element MUST be the input to **GetMethodsForEntity** operation defined as follows.

```
<s:element name="GetMethodsForEntity">  
  <s:complexType>  
    <s:sequence          <s:element name="entityId" type="s:unsignedInt" minOccurs="1"  
maxOccurs="1"/>  
    </s:sequence>  
  </s:complexType>  
</s:element>
```

**entityId:** The **MetadataObjectId** of the **Entity**. The value of this element MUST be in the range from 1 through 0x7fffffff.

### 3.1.4.6.2.2 GetMethodsForEntityResponse

This element MUST contain the response from **GetMethodsForEntityResponse** operation defined as follows.

```
<s:element name="GetMethodsForEntityResponse">
  <s:complexType>
    <s:sequence>      <s:element name="GetMethodsForEntityResult"
type="tns:ArrayOfMethodStruct" minOccurs="0" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetMethodsForEntityResult:** The list of **Methods**. This element MUST be present in the successful response.

### 3.1.4.6.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfMethodStruct</b>	An array of elements with type <b>MethodStruct</b> .

#### 3.1.4.6.3.1 ArrayOfMethodStruct

The **ArrayOfMethodStruct** complex type MUST be an array of elements with type **MethodStruct** defined as follows.

```
<s:complexType name="ArrayOfMethodStruct">
  <s:sequence>
    <s:element name="MethodStruct" type="tns:MethodStruct" nillable="true" minOccurs="0"
maxOccurs="unbounded"/>
  </s:sequence>
</s:complexType>
```

**MethodStruct:** These elements MUST contain information about **Methods**, if they are not nil.

#### 3.1.4.6.4 Simple Types

None.

#### 3.1.4.6.5 Attributes

None.

#### 3.1.4.6.6 Groups

None.

### **3.1.4.6.7 Attribute Groups**

None.

### **3.1.5 Timer Events**

None.

### **3.1.6 Other Local Events**

None.

## 4 Protocol Examples

### 4.1 Retrieve Methods Containing MethodInstances of Type Finder on an Entity

In this scenario, the client finds an **Entity** with a name known by the client. This **Entity** is contained by an **LobSystem** that contains an **LobSystemInstance** with a **MetadataObjectId** known by the client. Once the **Entity** is found, the client searches for the **Methods** that contain **MethodInstances** with a **MethodInstance** type **Finder** on this **Entity**.

The following are the steps of this scenario:

1. The client issues a **GetEntitiesForLobSystemInstance** request (section [3.1.4.1.2.1](#)) with the known **MetadataObjectId** of an **LobSystemInstance** to get all the **Entities** contained by the **LobSystem** containing that **LobSystemInstance**.

```
<?xml version="1.0" encoding="utf-8"><soap:Envelope
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"><soap:Body><GetEntitiesForLobSystemInstan
ce
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/"><lobSystemInsta
nceId>190</lobSystemInstanceId></GetEntitiesForLobSystemInstance></soap:Body></soap:En
velope>
```

2. The response to this request contains the name of the **Entities**, as well as other information about them.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetEntitiesForLobSystemInstanceResponse
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/"
  <GetEntitiesForLobSystemInstanceResult>
    <EntityStruct>
      <id>193</id>
      <name>Product</name>
      <lcids>
        <int>0</int>
        <int>1033</int>
        <int>2056</int>
      </lcids>
      <localizedNames>
        <string>Product2</string>
        <string>Product</string>
        <string>Name</string>
      </localizedNames>
      <lobSystemId>190</lobSystemId>
      <propertyNames>
        <string>Title</string>
        <string>DefaultAction</string>
      </propertyNames>
      <propertyTypes>
        <string>System.String</string>
        <string>System.String</string>
      </propertyTypes>
    </EntityStruct>
  </GetEntitiesForLobSystemInstanceResult>
</GetEntitiesForLobSystemInstanceResponse>
</soap:Body>
</soap:Envelope>
```



```

        <propertyValues>
            <string>EnglishProductName</string>
            <string>View Profile</string>
        </propertyValues>
    </EntityStruct>
    <EntityStruct>
        <id>217</id>
        <name>ProductCategory</name>
        <lcids>
            <int>0</int>
            <int>1033</int>
        </lcids>
        <localizedNames>
            <string>ProductCategory</string>
            <string>Product Category</string>
        </localizedNames>
        <lobSystemId>190</lobSystemId>
        <propertyNames>
            <string>Title</string>
            <string>DefaultAction</string>
        </propertyNames>
        <propertyTypes>
            <string>System.String</string>
            <string>System.String</string>
        </propertyTypes>
        <propertyValues>
            <string>EnglishProductCategoryName</string>
            <string>View Profile</string>
        </propertyValues>
    </EntityStruct>
</GetEntitiesForLobSystemInstanceResult>
</GetEntitiesForLobSystemInstanceResponse>
</soap:Body>
</soap:Envelope>

```

3. The client searches for the known name among the **Entities** that are retrieved in step 1, and finds the particular **Entity**.
4. The client issues a **GetMethodInstancesForEntity** request (section [3.1.4.5.2.1](#)) with the **MetadataObjectId** of the **Entity** found in step 2.

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <soap:Body>
        <GetMethodInstancesForEntity
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
            <entityId>193</entityId>
        </GetMethodInstancesForEntity>
    </soap:Body>
</soap:Envelope>

```

5. The response to this request contains the **MethodInstance** types of the **MethodInstances** as well as other information about them.

```
<?xml version="1.0" encoding="utf-8"?>
```

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetMethodInstancesForEntityResponse
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
      <GetMethodInstancesForEntityResult>
        <MethodInstanceStruct>
          <id>212</id>
          <name>ProductGenericInvokerInstance</name>
          <methodId>195</methodId>
          <returnTypeDescriptorId>207</returnTypeDescriptorId>
          <methodInstanceType>GenericInvoker</methodInstanceType>
          <lcids>
            <int>0</int>
            <int>1033</int>
          </lcids>
          <localizedNames>
            <string>name</string>
            <string>genericInvoker</string>
          </localizedNames>
          <propertyNames>
            <string>Title</string>
            <string>Description</string>
          </propertyNames>
          <propertyTypes>
            <string>System.String</string>
            <string>System.String</string>
          </propertyTypes>
          <propertyValues>
            <string>EnglishGenericInvokerInstanceName</string>
            <string>Product GenericInvoker Instance Description</string>
          </propertyValues>
        </MethodInstanceStruct>
        <MethodInstanceStruct>
          <id>214</id>
          <name>ProductFinderInstance</name>
          <methodId>195</methodId>
          <returnTypeDescriptorId>207</returnTypeDescriptorId>
          <methodInstanceType>Finder</methodInstanceType>
          <lcids>
            <int>0</int>
            <int>1033</int>
          </lcids>
          <localizedNames>
            <string>name</string>
            <string>finder</string>
          </localizedNames>
          <propertyNames>
            <string>Title</string>
            <string>Description</string>
          </propertyNames>
          <propertyTypes>
            <string>System.String</string>
            <string>System.String</string>
          </propertyTypes>
          <propertyValues>
            <string>EnglishProductFinderInstanceName</string>
            <string>Product Finder Instance Description</string>
          </propertyValues>
        </MethodInstanceStruct>
      </GetMethodInstancesForEntityResult>
    </GetMethodInstancesForEntityResponse>
  </soap:Body>
</soap:Envelope>

```

```

        </propertyValues>
    </MethodInstanceStruct>
</MethodInstanceStruct>
    <id>215</id>
    <name>ProductSpecificFinderInstance</name>
    <methodId>195</methodId>
    <returnTypeDescriptorId>207</returnTypeDescriptorId>
    <methodInstanceType>SpecificFinder</methodInstanceType>
    <lcids>
        <int>0</int>
        <int>1033</int>
    </lcids>
    <localizedNames>
        <string>name</string>
        <string>specificFinder</string>
    </localizedNames>
    <propertyNames>
        <string>Title</string>
        <string>Description</string>
    </propertyNames>
    <propertyTypes>
        <string>System.String</string>
        <string>System.String</string>
    </propertyTypes>
    <propertyValues>
        <string>EnglishProductSpecificFinderInstanceName</string>
        <string>Product SpecificFinder Instance Description</string>
    </propertyValues>
</MethodInstanceStruct>
</GetMethodInstancesForEntityResult>
</GetMethodInstancesForEntityResponse>
</soap:Body>
</soap:Envelope>

```

6. The client searches for the known **MethodInstance** type among the **MethodInstances** that are retrieved in step 3. As a result of this search, it finds a list of **MethodInstances**.
7. The client issues a **GetMethodForMethodInstance** request (section [3.1.4.4](#)) for the **Finder MethodInstance** in the list found in step 3.

```

<xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <soap:Body>
        <GetMethodForMethodInstance
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/"
        <methodInstanceId>214</methodInstanceId>
        </GetMethodForMethodInstance >
    </soap:Body>
</soap:Envelope>

```

8. The client creates a list of **Method** from the response to the request issued in step 4.

```

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <soap:Body>

```

```

    <GetMethodForMethodInstanceResponse
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
    <GetMethodForMethodInstanceResult>
        <id>195</id>
        <name>GetProducts</name>
        <entityId>193</entityId>
        <isStatic>true</isStatic>
        <lcids><int>0</int>
            <int>1033</int>
        </lcids>
        <localizedNames>
            <string>Product</string>
            <string>Products</string>
        </localizedNames>
        <propertyNames>
            <string>RdbCommandText</string>
            <string>RdbCommandType</string>
        </propertyNames><propertyTypes>
            <string>System.String</string>
            <string>System.Data.CommandType</string>
        </propertyTypes>
        <propertyValues>
            <string>SELECT * FROM DimProduct WHERE (ProductKey >=
@MinProductKey) AND (ProductKey <= @MaxProductKey) AND (EnglishProductName LIKE
@EnglishProductName) AND (EnglishDescription LIKE @EnglishDescription) AND
(Status='Current')</string>
            <string>Text</string>
        </propertyValues>
    </GetMethodForMethodInstanceResult>
</GetMethodForMethodInstanceResponse>
</soap:Body>
</soap:Envelope>

```

## 4.2 Retrieve FilterDescriptors Contained by a Method That Contains a Particular MethodInstance

In this scenario, the client finds a set of **FilterDescriptors** contained by the **Method** that contains a particular **MethodInstance**. This **MethodInstance** has a **MetadataObjectId** known by the client.

The following are the steps of this scenario:

1. The client issues a **GetMethodForMethodInstance** request (section [3.1.4.4](#)) with the known **MetadataObjectId** of a **MethodInstance** to get the **Method** containing the **MethodInstance**.

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <soap:Body>
        <GetMethodForMethodInstance
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
            <methodInstanceId>214</methodInstanceId>
        </GetMethodForMethodInstance >
    </soap:Body>
</soap:Envelope>

```

2. The response to this request contains the **MetadataObjectId** for that **Method** as well as other information about it.

```

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetMethodForMethodInstanceResponse
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
      <GetMethodForMethodInstanceResult>
        <id>195</id>
        <name>GetProducts</name>
        <entityId>193</entityId>
        <isStatic>true</isStatic>
        <lcids>
          <int>0</int>
          <int>1033</int>
        </lcids>
        <localizedNames>
          <string>Product</string>
          <string>Products</string>
        </localizedNames>
        <propertyNames>
          <string>RdbCommandText</string>
          <string>RdbCommandType</string>
        </propertyNames>
        <propertyTypes>
          <string>System.String</string>
          <string>System.Data.CommandType</string>
        </propertyTypes>
        <propertyValues>
          <string>SELECT * FROM DimProduct WHERE (ProductKey >=
@MinProductKey) AND (ProductKey <= @MaxProductKey) AND (EnglishProductName LIKE
@EnglishProductName) AND (EnglishDescription LIKE @EnglishDescription) AND
(Status='Current')</string>
          <string>Text</string>
        </propertyValues>
      </GetMethodForMethodInstanceResult>
    </GetMethodForMethodInstanceResponse>
  </soap:Body>
</soap:Envelope>

```

3. The client issues a **GetFilterDescriptorsForMethod** request (section [3.1.4.2](#)) with the **Method MetadataObjectId** found in step 1.

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetFilterDescriptorsForMethod
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
      <methodId>195</methodId>
    </GetFilterDescriptorsForMethod>
  </soap:Body>
</soap:Envelope>

```

4. The response to this request contains a list of **FilterDescriptors**.

```

<?xml version="1.0" encoding="utf-8"?>

```

```

<soap:Envelope xmlns:soap="http://www.w3.org/2003/05/soap-envelope"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetFilterDescriptorsForMethodResponse
xmlns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
      <GetFilterDescriptorsForMethodResult>
        <FilterDescriptorStruct>
          <id>354</id>
          <name>limitFilter</name>

<typeName>Microsoft.Office.Server.ApplicationRegistry.Runtime.LimitFilter</typeName>
          <methodId>195</methodId>
          <lcids>
            <int>0</int>
            <int>1033</int>
          </lcids>
          <localizedNames>
            <string>name</string>
            <string>key</string>
          </localizedNames>
          <propertyNames>
            <string>limitComparator</string>
          </propertyNames>
          <propertyTypes>
            <string>System.String</string>
          </propertyTypes>
          <propertyValues>
            <string>limit</string>
          </propertyValues>
        </FilterDescriptorStruct>
        <FilterDescriptorStruct>
          <id>355</id>
          <name>WildcardFilter</name>

<typeName>Microsoft.Office.Server.ApplicationRegistry.Runtime.WildcardFilter</typeName
>
          <methodId>195</methodId>
          <lcids>
            <int>0</int>
          </lcids>
          <localizedNames>
            <string>name</string>
          </localizedNames>
          <propertyNames>
            <string>UsedForDisambiguation</string>
          </propertyNames>
          <propertyTypes>
            <string>System.Boolean</string>
          </propertyTypes>
          <propertyValues>
            <string>True</string>
          </propertyValues>
        </FilterDescriptorStruct>
        <FilterDescriptorStruct>
          <id>356</id>
          <name>equalFilter</name>

<typeName>Microsoft.Office.Server.ApplicationRegistry.Runtime.ComparisonFilter</typeNa
me>

```

```

<methodId>195</methodId>
<lcids>
  <int>0</int>
  <int>1033</int>
</lcids>
<localizedNames>
  <string>name</string>
  <string>key</string>
</localizedNames>
<propertyNames>
  <string>UsedForDisambiguation</string>
  <string>Comparator</string>
</propertyNames>
<propertyTypes>
  <string>System.Boolean</string>
  <string>System.String</string>
</propertyTypes>
<propertyValues>
  <string>True</string>
  <string>Equals</string>
</propertyValues>
</FilterDescriptorStruct>
<FilterDescriptorStruct>
  <id>360</id>
  <name>lastIdFilter</name>
</typeName>Microsoft.Office.Server.ApplicationRegistry.Runtime.LastIdFilter</typeName>
<methodId>195</methodId>
<lcids>
  <int>0</int>
  <int>1033</int>
</lcids>
<localizedNames>
  <string>name</string>
  <string>Id</string>
</localizedNames>
<propertyNames>
  <string>lastIdComparator</string>
</propertyNames>
<propertyTypes>
  <string>System.String</string>
</propertyTypes>
<propertyValues>
  <string>lastId</string>
</propertyValues>
</FilterDescriptorStruct>
<FilterDescriptorStruct>
  <id>363</id>
  <name>comparisionFilter</name>
</typeName>Microsoft.Office.Server.ApplicationRegistry.Runtime.ComparisonFilter</typeNa
me>
<methodId>353</methodId>
<lcids>
  <int>0</int>
  <int>1033</int>
</lcids>
<localizedNames>
  <string>name</string>

```

```
        <string>compare</string>
      </localizedNames>
    </propertyNames>
    <propertyNames>
      <string>comparator</string>
    </propertyNames>
    <propertyTypes>
      <string>System.String</string>
    </propertyTypes>
    <propertyValues>
      <string>comparator1</string>
    </propertyValues>
  </FilterDescriptorStruct>
</GetFilterDescriptorsForMethodResult>
</GetFilterDescriptorsForMethodResponse>
</soap:Body>
</soap:Envelope>
```



## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.

## 6 Appendix A: Full WSDL

For ease of implementation, the full WSDL and schema are provided in this appendix.

```
<?xml version="1.0" encoding="utf-8"?>
  <wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
    xmlns:tm="http://microsoft.com/wsdl/mime/textMatching/"
    xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
    xmlns:mime="http://schemas.xmlsoap.org/wsdl/mime/"
    xmlns:tns="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/"
    xmlns:s="http://www.w3.org/2001/XMLSchema"
    xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"
    xmlns:http="http://schemas.xmlsoap.org/wsdl/http/"
    targetNamespace="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/"
    xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
    <wsdl:documentation xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">Business Data Catalog
    Metadata Web Service</wsdl:documentation>
    <wsdl:types>
      <s:schema elementFormDefault="qualified"
        targetNamespace="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/">
        <s:element name="GetLobSystemInstances">
          <s:complexType />
        </s:element>
        <s:element name="GetLobSystemInstancesResponse">
          <s:complexType>
            <s:sequence>
              <s:element minOccurs="0" maxOccurs="1" name="GetLobSystemInstancesResult"
                type="tns:ArrayOfLobSystemInstanceStruct" />
            </s:sequence>
          </s:complexType>
        </s:element>
        <s:complexType name="ArrayOfLobSystemInstanceStruct">
          <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="LobSystemInstanceStruct"
              nillable="true" type="tns:LobSystemInstanceStruct" />
          </s:sequence>
        </s:complexType>
        <s:complexType name="LobSystemInstanceStruct">
          <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="id" type="s:unsignedInt" />
            <s:element minOccurs="0" maxOccurs="1" name="name" type="s:string" />
            <s:element minOccurs="0" maxOccurs="1" name="lcids" type="tns:ArrayOfInt" />
            <s:element minOccurs="0" maxOccurs="1" name="localizedNames"
              type="tns:ArrayOfString" />
            <s:element minOccurs="1" maxOccurs="1" name="lobSystemId" type="s:unsignedInt" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyNames"
              type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyTypes"
              type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyValues"
              type="tns:ArrayOfString" />
          </s:sequence>
        </s:complexType>
        <s:complexType name="ArrayOfInt">
          <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="int" type="s:int" />
          </s:sequence>
        </s:complexType>
        <s:complexType name="ArrayOfString">
```

```

        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="s:string" />
        </s:sequence>
    </s:complexType>
    <s:element name="GetEntitiesForLobSystemInstance">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="1" maxOccurs="1" name="lobSystemInstanceId"
type="s:unsignedInt" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:element name="GetEntitiesForLobSystemInstanceResponse">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="0" maxOccurs="1"
name="GetEntitiesForLobSystemInstanceResult" type="tns:ArrayOfEntityStruct" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:complexType name="ArrayOfEntityStruct">
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="EntityStruct"
nillable="true" type="tns:EntityStruct" />
        </s:sequence>
    </s:complexType>
    <s:complexType name="EntityStruct">
        <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="id" type="s:unsignedInt" />
            <s:element minOccurs="1" maxOccurs="1" name="name" type="s:string" />
            <s:element minOccurs="0" maxOccurs="1" name="lcids" type="tns:ArrayOfInt" />
            <s:element minOccurs="0" maxOccurs="1" name="localizedNames"
type="tns:ArrayOfString" />
            <s:element minOccurs="1" maxOccurs="1" name="lobSystemId" type="s:unsignedInt"
/>
            <s:element minOccurs="0" maxOccurs="1" name="propertyNames"
type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyTypes"
type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyValues"
type="tns:ArrayOfString" />
        </s:sequence>
    </s:complexType>
    <s:element name="GetMethodInstancesForEntity">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="1" maxOccurs="1" name="entityId" type="s:unsignedInt" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:element name="GetMethodInstancesForEntityResponse">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="0" maxOccurs="1"
name="GetMethodInstancesForEntityResult" type="tns:ArrayOfMethodInstanceStruct" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:complexType name="ArrayOfMethodInstanceStruct">

```

```

        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="MethodInstanceStruct"
nillable="true" type="tns:MethodInstanceStruct" />
        </s:sequence>
    </s:complexType>
    <s:complexType name="MethodInstanceStruct">
        <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="id" type="s:unsignedInt" />
            <s:element minOccurs="1" maxOccurs="1" name="name" type="s:string" />
            <s:element minOccurs="1" maxOccurs="1" name="methodId" type="s:unsignedInt" />
            <s:element minOccurs="1" maxOccurs="1" name="returnTypeDescriptorId"
type="s:unsignedInt" />
            <s:element minOccurs="1" maxOccurs="1" name="methodInstanceType"
type="tns:MethodInstanceType" />
            <s:element minOccurs="0" maxOccurs="1" name="lcids" type="tns:ArrayOfInt" />
            <s:element minOccurs="0" maxOccurs="1" name="localizedNames"
type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyNames"
type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyTypes"
type="tns:ArrayOfString" />
            <s:element minOccurs="0" maxOccurs="1" name="propertyValues"
type="tns:ArrayOfString" />
        </s:sequence>
    </s:complexType>
    <s:simpleType name="MethodInstanceType">
        <s:restriction base="s:string">
            <s:enumeration value="Finder" />
            <s:enumeration value="SpecificFinder" />
            <s:enumeration value="ViewAccessor" />
            <s:enumeration value="GenericInvoker" />
            <s:enumeration value="IdEnumerator" />
            <s:enumeration value="AccessChecker" />
            <s:enumeration value="Scalar" />
        </s:restriction>
    </s:simpleType>
    <s:element name="GetMethodsForEntity">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="1" maxOccurs="1" name="entityId" type="s:unsignedInt" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:element name="GetMethodsForEntityResponse">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="0" maxOccurs="1" name="GetMethodsForEntityResult"
type="tns:ArrayOfMethodStruct" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:complexType name="ArrayOfMethodStruct">
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="MethodStruct"
nillable="true" type="tns:MethodStruct" />
        </s:sequence>
    </s:complexType>
    <s:complexType name="MethodStruct">
        <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="id" type="s:unsignedInt" />

```

```

        <s:element minOccurs="1" maxOccurs="1" name="name" type="s:string" />
        <s:element minOccurs="1" maxOccurs="1" name="entityId" type="s:unsignedInt" />
        <s:element minOccurs="1" maxOccurs="1" name="isStatic" type="s:boolean" />
        <s:element minOccurs="0" maxOccurs="1" name="lcids" type="tns:ArrayOfInt" />
        <s:element minOccurs="0" maxOccurs="1" name="localizedNames"
type="tns:ArrayOfString" />
        <s:element minOccurs="0" maxOccurs="1" name="propertyNames"
type="tns:ArrayOfString" />
        <s:element minOccurs="0" maxOccurs="1" name="propertyTypes"
type="tns:ArrayOfString" />
        <s:element minOccurs="0" maxOccurs="1" name="propertyValues"
type="tns:ArrayOfString" />
    </s:sequence>
</s:complexType>
<s:element name="GetMethodForMethodInstance">
    <s:complexType>
        <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="methodInstanceId"
type="s:unsignedInt" />
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="GetMethodForMethodInstanceResponse">
    <s:complexType>
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="1" name="GetMethodForMethodInstanceResult"
type="tns:MethodStruct" />
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="GetFilterDescriptorsForMethod">
    <s:complexType>
        <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="methodId" type="s:unsignedInt" />
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="GetFilterDescriptorsForMethodResponse">
    <s:complexType>
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="1"
name="GetFilterDescriptorsForMethodResult" type="tns:ArrayOfFilterDescriptorStruct" />
        </s:sequence>
    </s:complexType>
</s:element>
    <s:complexType name="ArrayOfFilterDescriptorStruct">
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="FilterDescriptorStruct"
nillable="true" type="tns:FilterDescriptorStruct" />
        </s:sequence>
    </s:complexType>
    <s:complexType name="FilterDescriptorStruct">
        <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="id" type="s:unsignedInt" />
            <s:element minOccurs="1" maxOccurs="1" name="name" type="s:string" />
            <s:element minOccurs="1" maxOccurs="1" name="typeName" type="s:string" />
            <s:element minOccurs="1" maxOccurs="1" name="methodId" type="s:unsignedInt" />
            <s:element minOccurs="0" maxOccurs="1" name="lcids" type="tns:ArrayOfInt" />
            <s:element minOccurs="0" maxOccurs="1" name="localizedNames"
type="tns:ArrayOfString" />

```

```

                <s:element minOccurs="0" maxOccurs="1" name="propertyNames"
type="tns:ArrayOfString" />
                <s:element minOccurs="0" maxOccurs="1" name="propertyTypes"
type="tns:ArrayOfString" />
                <s:element minOccurs="0" maxOccurs="1" name="propertyValues"
type="tns:ArrayOfString" />
            </s:sequence>
        </s:complexType>
    </s:schema>
</wsdl:types>
<wsdl:message name="GetLobSystemInstancesSoapIn">
    <wsdl:part name="parameters" element="tns:GetLobSystemInstances" />
</wsdl:message>
<wsdl:message name="GetLobSystemInstancesSoapOut">
    <wsdl:part name="parameters" element="tns:GetLobSystemInstancesResponse" />
</wsdl:message>
<wsdl:message name="GetEntitiesForLobSystemInstanceSoapIn">
    <wsdl:part name="parameters" element="tns:GetEntitiesForLobSystemInstance" />
</wsdl:message>
<wsdl:message name="GetEntitiesForLobSystemInstanceSoapOut">
    <wsdl:part name="parameters" element="tns:GetEntitiesForLobSystemInstanceResponse" />
</wsdl:message>
<wsdl:message name="GetMethodInstancesForEntitySoapIn">
    <wsdl:part name="parameters" element="tns:GetMethodInstancesForEntity" />
</wsdl:message>
<wsdl:message name="GetMethodInstancesForEntitySoapOut">
    <wsdl:part name="parameters" element="tns:GetMethodInstancesForEntityResponse" />
</wsdl:message>
<wsdl:message name="GetMethodsForEntitySoapIn">
    <wsdl:part name="parameters" element="tns:GetMethodsForEntity" />
</wsdl:message>
<wsdl:message name="GetMethodsForEntitySoapOut">
    <wsdl:part name="parameters" element="tns:GetMethodsForEntityResponse" />
</wsdl:message>
<wsdl:message name="GetMethodForMethodInstanceSoapIn">
    <wsdl:part name="parameters" element="tns:GetMethodForMethodInstance" />
</wsdl:message>
<wsdl:message name="GetMethodForMethodInstanceSoapOut">
    <wsdl:part name="parameters" element="tns:GetMethodForMethodInstanceResponse" />
</wsdl:message>
<wsdl:message name="GetFilterDescriptorsForMethodSoapIn">
    <wsdl:part name="parameters" element="tns:GetFilterDescriptorsForMethod" />
</wsdl:message>
<wsdl:message name="GetFilterDescriptorsForMethodSoapOut">
    <wsdl:part name="parameters" element="tns:GetFilterDescriptorsForMethodResponse" />
</wsdl:message>
<wsdl:portType name="BdcWebServiceSoap">
    <wsdl:operation name="GetLobSystemInstances">
        <wsdl:input message="tns:GetLobSystemInstancesSoapIn" />
        <wsdl:output message="tns:GetLobSystemInstancesSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetEntitiesForLobSystemInstance">
        <wsdl:input message="tns:GetEntitiesForLobSystemInstanceSoapIn" />
        <wsdl:output message="tns:GetEntitiesForLobSystemInstanceSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetMethodInstancesForEntity">
        <wsdl:input message="tns:GetMethodInstancesForEntitySoapIn" />
        <wsdl:output message="tns:GetMethodInstancesForEntitySoapOut" />
    </wsdl:operation>

```

```

<wsdl:operation name="GetMethodsForEntity">
  <wsdl:input message="tns:GetMethodsForEntitySoapIn" />
  <wsdl:output message="tns:GetMethodsForEntitySoapOut" />
</wsdl:operation>
<wsdl:operation name="GetMethodForMethodInstance">
  <wsdl:input message="tns:GetMethodForMethodInstanceSoapIn" />
  <wsdl:output message="tns:GetMethodForMethodInstanceSoapOut" />
</wsdl:operation>
<wsdl:operation name="GetFilterDescriptorsForMethod">
  <wsdl:input message="tns:GetFilterDescriptorsForMethodSoapIn" />
  <wsdl:output message="tns:GetFilterDescriptorsForMethodSoapOut" />
</wsdl:operation>
</wsdl:portType>
<wsdl:binding name="BdcWebServiceSoap" type="tns:BdcWebServiceSoap">
  <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
  <wsdl:operation name="GetLobSystemInstances">
    <soap:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetLobSystemInstanc
es" style="document" />
    <wsdl:input>
      <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" />
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="GetEntitiesForLobSystemInstance">
    <soap:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetEntitiesForLobSy
stemInstance" style="document" />
    <wsdl:input>
      <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" />
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="GetMethodInstancesForEntity">
    <soap:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodInstancesF
orEntity" style="document" />
    <wsdl:input>
      <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" />
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="GetMethodsForEntity">
    <soap:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodsForEntity
" style="document" />
    <wsdl:input>
      <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" />
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="GetMethodForMethodInstance">

```

```

        <soap:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodForMethodI
nstance" style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetFilterDescriptorsForMethod">
        <soap:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetFilterDescriptor
sForMethod" style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
</wsdl:binding>
<wsdl:binding name="BdcWebServiceSoap12" type="tns:BdcWebServiceSoap">
    <soap12:binding transport="http://schemas.xmlsoap.org/soap/http" />
    <wsdl:operation name="GetLobSystemInstances">
        <soap12:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetLobSystemInstanc
es" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetEntitiesForLobSystemInstance">
        <soap12:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetEntitiesForLobSy
stemInstance" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetMethodInstancesForEntity">
        <soap12:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodInstancesF
orEntity" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetMethodsForEntity">

```



```

        <soap12:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodsForEntity
" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetMethodForMethodInstance">
        <soap12:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetMethodForMethodI
nstance" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetFilterDescriptorsForMethod">
        <soap12:operation
soapAction="http://schemas.microsoft.com/OfficeServer/BusinessDataCatalog/GetFilterDescriptor
sForMethod" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Office SharePoint® Server 2007
- Microsoft® SharePoint® Server 2010
- Microsoft® SharePoint® Server 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> [Section 2.2.4.3](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<2> [Section 2.2.4.3](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<3> [Section 3.1.4.1.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<4> [Section 3.1.4.1.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<5> [Section 3.1.4.2](#): This operation can return **FilterDescriptors** of the following types: ComparisonFilter, LastIdFilter, LimitFilter, RangeFilter, WildcardFilter.

<6> [Section 3.1.4.2.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<7> [Section 3.1.4.2.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<8> [Section 3.1.4.2.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<9> [Section 3.1.4.3.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<10> [Section 3.1.4.3.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

<11> [Section 3.1.4.5.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be run by the .NET Framework.

<12> [Section 3.1.4.5.3.2](#): A data type providing business logic that conforms to the [\[ECMA-335\]](#) specification and can be executed by the .NET Framework.

## 8 Change Tracking

This section identifies changes that were made to the [MS-BDCMP] protocol document between the September 2012 and October 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">1.2.1 Normative References</a>	Removed [XML10] and [XMLINFOSET] as normative references.	N	Content removed.
<a href="#">1.3 Overview</a>	Changed the name from 'Protocol Overview (Synopsis)' to 'Overview'.	N	Content updated for template compliance.
<a href="#">3.1.4.3.3.2 LobSystemInstanceStruct</a>	Updated XML definition for the "name" element.	N	Content updated.
<a href="#">4.1 Retrieve Methods Containing MethodInstances of Type Finder on an Entity</a>	Modified the example XML for GetEntitiesForLobSystemInstanceResponse.	N	Content updated.
<a href="#">4.1 Retrieve Methods Containing MethodInstances of Type Finder on an Entity</a>	Modified the example XML for GetMethodInstancesForEntityResponse.	N	New content added.
<a href="#">6 Appendix A: Full WSDL</a>	Modified two elements value in LobSystemInstanceStruct complexType.	N	Content updated.

## 9 Index

### A

Abstract data model  
[server](#) 15  
[Applicability](#) 10  
[ArrayOfInt complex type](#) 12  
[ArrayOfString complex type](#) 12  
[Attribute groups](#) 14  
[Attributes](#) 14

### C

[Capability negotiation](#) 10  
[Change tracking](#) 59  
[Common data structures](#) 14  
[Complex types](#) 12  
    [ArrayOfInt](#) 12  
    [ArrayOfString](#) 12  
    [MethodStruct](#) 12

### D

Data model - abstract  
[server](#) 15

### E

Events  
    [local - server](#) 39  
    [timer - server](#) 39  
Examples  
    [retrieve methods containing MethodInstances of type Finder on an Entity](#) 40  
    [retrieving FilterDescriptors contained by a method that contains a particular MethodInstance](#) 44

### F

[Fields - vendor-extensible](#) 10  
[Full WSDL](#) 50

### G

[Glossary](#) 7  
[Groups](#) 14

### I

[Implementer - security considerations](#) 49  
[Index of security parameters](#) 49  
[Informative references](#) 9  
Initialization  
    [server](#) 16  
[Introduction](#) 7

### L

Local events  
    [server](#) 39

### M

Message processing  
    [server](#) 16  
Messages  
    [ArrayOfInt complex type](#) 12  
    [ArrayOfString complex type](#) 12  
    [attribute groups](#) 14  
    [attributes](#) 14  
    [common data structures](#) 14  
    [complex types](#) 12  
    [elements](#) 12  
    [enumerated](#) 12  
    [groups](#) 14  
    [MethodStruct complex type](#) 12  
    [namespaces](#) 11  
    [simple types](#) 14  
    [syntax](#) 11  
    [transport](#) 11  
    [MethodStruct complex type](#) 12

### N

[Namespaces](#) 11  
[Normative references](#) 8

### O

Operations  
    [GetEntitiesForLobSystemInstance](#) 16  
    [GetFilterDescriptorsForMethod](#) 20  
    [GetLobSystemInstances](#) 25  
    [GetMethodForMethodInstance](#) 28  
    [GetMethodInstancesForEntity](#) 31  
    [GetMethodsForEntity](#) 36  
    [Overview \(synopsis\)](#) 9

### P

[Parameters - security index](#) 49  
[Preconditions](#) 9  
[Prerequisites](#) 9  
[Product behavior](#) 58

### R

[References](#) 8  
    [informative](#) 9  
    [normative](#) 8  
[Relationship to other protocols](#) 9  
[Retrieve FilterDescriptors contained by a method that contains a particular MethodInstance example](#) 44  
[Retrieve methods containing MethodInstances of type Finder on an Entity example](#) 40

## S

### Security

[implementer considerations](#) 49  
[parameter index](#) 49

### Sequencing rules

[server](#) 16

### Server

[abstract data model](#) 15  
[GetEntitiesForLobSystemInstance operation](#) 16  
[GetFilterDescriptorsForMethod operation](#) 20  
[GetLobSystemInstances operation](#) 25  
[GetMethodForMethodInstance operation](#) 28  
[GetMethodInstancesForEntity operation](#) 31  
[GetMethodsForEntity operation](#) 36  
[initialization](#) 16  
[local events](#) 39  
[message processing](#) 16  
[sequencing rules](#) 16  
[timer events](#) 39  
[timers](#) 16  
[Simple types](#) 14  
[Standards assignments](#) 10

### Syntax

[messages - overview](#) 11

## T

### Timer events

[server](#) 39

### Timers

[server](#) 16  
[Tracking changes](#) 59  
[Transport](#) 11

### Types

[complex](#) 12  
[simple](#) 14

## V

[Vendor-extensible fields](#) 10  
[Versioning](#) 10

## W

[WSDL](#) 50