

[MS-BDCRAWPS]: Business Data Connectivity Remote Administration Web Service Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Revision Summary

Date	Revision History	Revision Class	Comments
07/13/2009	0.1	Major	Initial Availability
08/28/2009	0.2	Editorial	Revised and edited the technical content
11/06/2009	0.3	Editorial	Revised and edited the technical content
02/19/2010	1.0	Major	Updated and revised the technical content
03/31/2010	1.01	Editorial	Revised and edited the technical content
04/30/2010	1.02	Editorial	Revised and edited the technical content
06/07/2010	1.03	Editorial	Revised and edited the technical content
06/29/2010	1.04	Editorial	Changed language and formatting in the technical content.
07/23/2010	1.05	Major	Significantly changed the technical content.
09/27/2010	1.05	No change	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	1.06	Major	Significantly changed the technical content.
12/17/2010	1.06	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	1.06	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	1.06	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	2.0	Major	Significantly changed the technical content.

Table of Contents

1 Introduction	39
1.1 Glossary	39
1.2 References	41
1.2.1 Normative References	41
1.2.2 Informative References	42
1.3 Protocol Overview (Synopsis)	42
1.4 Relationship to Other Protocols	43
1.5 Prerequisites/Preconditions	43
1.6 Applicability Statement	43
1.7 Versioning and Capability Negotiation	43
1.8 Vendor-Extensible Fields	44
1.9 Standards Assignments	44
2 Messages	45
2.1 Transport	45
2.2 Common Message Syntax	45
2.2.1 Namespaces	45
2.2.2 Messages	46
2.2.3 Elements	46
2.2.4 Complex Types	46
2.2.4.1 AccessControlEntryStruct	51
2.2.4.2 AccessDeniedException	51
2.2.4.3 AccessDeniedExceptionState	51
2.2.4.4 ActionParameterStruct	52
2.2.4.5 ActionStruct	53
2.2.4.6 AdministrationMetadataCatalogStruct	53
2.2.4.7 ArgumentException	54
2.2.4.8 ArgumentNullException	54
2.2.4.9 ArgumentOutOfRangeException	54
2.2.4.10 ArrayOfAccessControlEntryStruct	54
2.2.4.11 ArrayOfAssociationStruct	55
2.2.4.12 ArrayOfEntityStruct	55
2.2.4.13 ArrayOfLobSystemStruct	55
2.2.4.14 ArrayOfLocalizedNameStruct	56
2.2.4.15 ArrayOfMethodInstanceStruct	56
2.2.4.16 ArrayOfModelStruct	56
2.2.4.17 ArrayOfPropertyStruct	57
2.2.4.18 ArrayOfstring	57
2.2.4.19 ArrayOfTypeDescriptorStruct	57
2.2.4.20 ArrayOfunsignedInt	57
2.2.4.21 AssociationGroupStruct	58
2.2.4.22 AssociationReferenceStruct	59
2.2.4.23 AssociationStruct	60
2.2.4.24 BdcException	61
2.2.4.25 BdcExceptionState	61
2.2.4.26 ComplexValueStruct	61
2.2.4.27 ConcurrentModificationExceptionState	62
2.2.4.28 DataClassStruct	62
2.2.4.29 DefaultValueStruct	63
2.2.4.30 DuplicateMetadataObjectExceptionState	63

2.2.4.31	EntityStruct.....	64
2.2.4.32	ExceededMetadataObjectLimitExceptionState	64
2.2.4.33	Exception.....	65
2.2.4.34	FilterDescriptorStruct	65
2.2.4.35	IdentifierStruct	66
2.2.4.36	InvalidMetadataObjectExceptionState.....	67
2.2.4.37	InvalidMetadataPropertyExceptionState	68
2.2.4.38	InvalidOperationException	68
2.2.4.39	LobSystemInstanceStruct	68
2.2.4.40	LobSystemStruct	69
2.2.4.41	LocalizedNameStruct	69
2.2.4.42	MetadataException.....	69
2.2.4.43	MetadataObjectNotFoundExceptionState	70
2.2.4.44	MetadataObjectStruct.....	71
2.2.4.45	MethodInstanceStruct	71
2.2.4.46	MethodStruct	72
2.2.4.47	ModelStruct.....	73
2.2.4.48	PackageFormatExceptionState.....	73
2.2.4.49	ParameterStruct	73
2.2.4.50	PropertyStruct.....	74
2.2.4.51	ProxyGenerationResult	75
2.2.4.52	SystemException	75
2.2.4.53	TypeDescriptorStruct.....	75
2.2.4.54	Version	79
2.2.5	Simple Types.....	79
2.2.5.1	CacheUsage	80
2.2.5.2	char	80
2.2.5.3	DirectionType.....	81
2.2.5.4	duration	81
2.2.5.5	FilterType	81
2.2.5.6	guid	83
2.2.5.7	MethodInstanceType.....	83
2.2.5.8	PackageContents	85
2.2.5.9	SystemType.....	86
2.2.5.10	TypeDescriptorFlags.....	87
2.2.6	Attributes.....	87
2.2.7	Groups.....	88
2.2.8	Attribute Groups	88
3	Protocol Details.....	89
3.1	Server Details	89
3.1.1	Abstract Data Model	89
3.1.2	Timers	94
3.1.3	Initialization	94
3.1.4	Message Processing Events and Sequencing Rules.....	94
3.1.4.1	Activate.....	112
3.1.4.1.1	Messages	113
3.1.4.1.1.1	BusinessDataCatalogSharedService_Activate_InputMessage	113
3.1.4.1.1.2	BusinessDataCatalogSharedService_Activate_OutputMessage	113
3.1.4.1.2	Elements.....	114
3.1.4.1.2.1	Activate.....	114
3.1.4.1.2.2	ActivateResponse	114
3.1.4.1.3	Complex Types	114

3.1.4.1.4	Simple Types	114
3.1.4.1.5	Attributes	114
3.1.4.1.6	Groups	115
3.1.4.1.7	Attribute Groups	115
3.1.4.2	AddAssociationReferenceToAssociationGroup	115
3.1.4.2.1	Messages	116
3.1.4.2.1.1	BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_InputMessage	117
3.1.4.2.1.2	BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_OutputMessage	117
3.1.4.2.2	Elements	117
3.1.4.2.2.1	AddAssociationReferenceToAssociationGroup	117
3.1.4.2.2.2	AddAssociationReferenceToAssociationGroupResponse	118
3.1.4.2.3	Complex Types	118
3.1.4.2.4	Simple Types	118
3.1.4.2.5	Attributes	118
3.1.4.2.6	Groups	118
3.1.4.2.7	Attribute Groups	118
3.1.4.3	AddEntityToModel	118
3.1.4.3.1	Messages	120
3.1.4.3.1.1	BusinessDataCatalogSharedService_AddEntityToModel_InputMessage	120
3.1.4.3.1.2	BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage	120
3.1.4.3.2	Elements	120
3.1.4.3.2.1	AddEntityToModel	121
3.1.4.3.2.2	AddEntityToModelResponse	121
3.1.4.3.3	Complex Types	121
3.1.4.3.4	Simple Types	121
3.1.4.3.5	Attributes	121
3.1.4.3.6	Groups	121
3.1.4.3.7	Attribute Groups	121
3.1.4.4	BulkSwitchActiveOrValidate	121
3.1.4.4.1	Messages	123
3.1.4.4.1.1	BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage	123
3.1.4.4.1.2	BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage	124
3.1.4.4.2	Elements	124
3.1.4.4.2.1	BulkSwitchActiveOrValidate	124
3.1.4.4.2.2	BulkSwitchActiveOrValidateResponse	124
3.1.4.4.3	Complex Types	125
3.1.4.4.3.1	ArrayOfActivationErrorRecordStruct	125
3.1.4.4.3.2	ActivationErrorRecordStruct	125
3.1.4.4.4	Simple Types	129
3.1.4.4.5	Attributes	130
3.1.4.4.6	Groups	130
3.1.4.4.7	Attribute Groups	130
3.1.4.5	CheckPathInMethodInstances	130

3.1.4.5.1	Messages	131
3.1.4.5.1.1	BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage.....	131
3.1.4.5.1.2	BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage	131
3.1.4.5.2	Elements.....	132
3.1.4.5.2.1	CheckPathInMethodInstances.....	132
3.1.4.5.2.2	CheckPathInMethodInstancesResponse	132
3.1.4.5.3	Complex Types	133
3.1.4.5.4	Simple Types.....	133
3.1.4.5.5	Attributes.....	133
3.1.4.5.6	Groups.....	133
3.1.4.5.7	Attribute Groups	133
3.1.4.6	ClearLocalizedNames	133
3.1.4.6.1	Messages	134
3.1.4.6.1.1	BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage.....	135
3.1.4.6.1.2	BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage	135
3.1.4.6.2	Elements.....	135
3.1.4.6.2.1	ClearLocalizedNames	135
3.1.4.6.2.2	ClearLocalizedNamesResponse	136
3.1.4.6.3	Complex Types	136
3.1.4.6.4	Simple Types.....	136
3.1.4.6.5	Attributes.....	136
3.1.4.6.6	Groups.....	136
3.1.4.6.7	Attribute Groups	136
3.1.4.7	ClearProperties.....	136
3.1.4.7.1	Messages	137
3.1.4.7.1.1	BusinessDataCatalogSharedService_ClearProperties_InputMessage	138
3.1.4.7.1.2	BusinessDataCatalogSharedService_ClearProperties_OutputMessage	138
3.1.4.7.2	Elements.....	138
3.1.4.7.2.1	ClearProperties.....	138
3.1.4.7.2.2	ClearPropertiesResponse	138
3.1.4.7.3	Complex Types	139
3.1.4.7.4	Simple Types.....	139
3.1.4.7.5	Attributes.....	139
3.1.4.7.6	Groups.....	139
3.1.4.7.7	Attribute Groups	139
3.1.4.8	CopyAclAcrossChildren	139
3.1.4.8.1	Messages	140
3.1.4.8.1.1	BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage	141
3.1.4.8.1.2	BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage	141
3.1.4.8.2	Elements.....	141
3.1.4.8.2.1	CopyAclAcrossChildren	141

3.1.4.8.2.2	CopyAclAcrossChildrenResponse.....	142
3.1.4.8.3	Complex Types	142
3.1.4.8.4	Simple Types.....	142
3.1.4.8.5	Attributes.....	142
3.1.4.8.6	Groups.....	142
3.1.4.8.7	Attribute Groups	142
3.1.4.9	CopyAclAcrossChildrenForSetting.....	142
3.1.4.9.1	Messages	144
3.1.4.9.1.1	BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage	144
3.1.4.9.1.2	BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage.....	144
3.1.4.9.2	Elements.....	144
3.1.4.9.2.1	CopyAclAcrossChildrenForSetting.....	145
3.1.4.9.2.2	CopyAclAcrossChildrenForSettingResponse	145
3.1.4.9.3	Complex Types	145
3.1.4.9.4	Simple Types.....	145
3.1.4.9.5	Attributes.....	145
3.1.4.9.6	Groups.....	145
3.1.4.9.7	Attribute Groups	145
3.1.4.10	CopyAclToSetting.....	146
3.1.4.10.1	Messages	147
3.1.4.10.1.1	BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage	147
3.1.4.10.1.2	BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage	147
3.1.4.10.2	Elements.....	147
3.1.4.10.2.1	CopyAclToSetting.....	148
3.1.4.10.2.2	CopyAclToSettingResponse	148
3.1.4.10.3	Complex Types	148
3.1.4.10.4	Simple Types	148
3.1.4.10.5	Attributes.....	148
3.1.4.10.6	Groups.....	148
3.1.4.10.7	Attribute Groups.....	148
3.1.4.11	Deactivate	149
3.1.4.11.1	Messages	150
3.1.4.11.1.1	BusinessDataCatalogSharedService_Deactivate_InputMessage.....	150
3.1.4.11.1.2	BusinessDataCatalogSharedService_Deactivate_OutputMessage.....	150
3.1.4.11.2	Elements.....	151
3.1.4.11.2.1	Deactivate	151
3.1.4.11.2.2	DeactivateResponse	151
3.1.4.11.3	Complex Types	151
3.1.4.11.4	Simple Types	151
3.1.4.11.5	Attributes	151
3.1.4.11.6	Groups.....	152
3.1.4.11.7	Attribute Groups.....	152
3.1.4.12	Delete	152
3.1.4.12.1	Messages	154
3.1.4.12.1.1	BusinessDataCatalogSharedService_Delete_InputMessage.....	154

3.1.4.12.1.2	BusinessDataCatalogSharedService_Delete_OutputMessage.....	154
3.1.4.12.2	Elements.....	155
3.1.4.12.2.1	Delete.....	155
3.1.4.12.2.2	DeleteResponse.....	155
3.1.4.12.3	Complex Types.....	155
3.1.4.12.4	Simple Types.....	155
3.1.4.12.5	Attributes.....	155
3.1.4.12.6	Groups.....	155
3.1.4.12.7	Attribute Groups.....	156
3.1.4.13	DeleteAssociationReferenceFromAssociationGroup.....	156
3.1.4.13.1	Messages.....	157
3.1.4.13.1.1	BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InputMessage.....	158
3.1.4.13.1.2	BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_OutputMessage.....	158
3.1.4.13.2	Elements.....	158
3.1.4.13.2.1	DeleteAssociationReferenceFromAssociationGroup.....	158
3.1.4.13.2.2	DeleteAssociationReferenceFromAssociationGroupResponse.....	159
3.1.4.13.3	Complex Types.....	159
3.1.4.13.4	Simple Types.....	159
3.1.4.13.5	Attributes.....	159
3.1.4.13.6	Groups.....	159
3.1.4.13.7	Attribute Groups.....	159
3.1.4.14	DeleteDefaultValueForTypeDescriptor.....	159
3.1.4.14.1	Messages.....	161
3.1.4.14.1.1	BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InputMessage.....	161
3.1.4.14.1.2	BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_OutputMessage.....	161
3.1.4.14.2	Elements.....	161
3.1.4.14.2.1	DeleteDefaultValueForTypeDescriptor.....	162
3.1.4.14.2.2	DeleteDefaultValueForTypeDescriptorResponse.....	162
3.1.4.14.3	Complex Types.....	162
3.1.4.14.4	Simple Types.....	162
3.1.4.14.5	Attributes.....	162
3.1.4.14.6	Groups.....	163
3.1.4.14.7	Attribute Groups.....	163
3.1.4.15	DeleteNoCascade.....	163
3.1.4.15.1	Messages.....	165
3.1.4.15.1.1	BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage.....	165
3.1.4.15.1.2	BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage.....	166
3.1.4.15.2	Elements.....	166
3.1.4.15.2.1	DeleteNoCascade.....	166
3.1.4.15.2.2	DeleteNoCascadeResponse.....	166
3.1.4.15.3	Complex Types.....	166
3.1.4.15.4	Simple Types.....	166

3.1.4.15.5	Attributes	166
3.1.4.15.6	Groups.....	167
3.1.4.15.7	Attribute Groups.....	167
3.1.4.16	DeleteProxyAssemblyForLobSystem	167
3.1.4.16.1	Messages	168
3.1.4.16.1.1	BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage	168
3.1.4.16.1.2	BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_OutputMessage	169
3.1.4.16.2	Elements	169
3.1.4.16.2.1	DeleteProxyAssemblyForLobSystem	169
3.1.4.16.2.2	DeleteProxyAssemblyForLobSystemResponse	169
3.1.4.16.3	Complex Types	169
3.1.4.16.4	Simple Types	170
3.1.4.16.5	Attributes	170
3.1.4.16.6	Groups.....	170
3.1.4.16.7	Attribute Groups.....	170
3.1.4.17	EntityCreate	170
3.1.4.17.1	Messages	172
3.1.4.17.1.1	BusinessDataCatalogSharedService_EntityCreate_InputMessage	172
3.1.4.17.1.2	BusinessDataCatalogSharedService_EntityCreate_OutputMessage	172
3.1.4.17.2	Elements	172
3.1.4.17.2.1	EntityCreate.....	172
3.1.4.17.2.2	EntityCreateResponse	173
3.1.4.17.3	Complex Types	173
3.1.4.17.4	Simple Types	173
3.1.4.17.5	Attributes	173
3.1.4.17.6	Groups.....	173
3.1.4.17.7	Attribute Groups.....	173
3.1.4.18	ExportPackage.....	173
3.1.4.18.1	Messages	175
3.1.4.18.1.1	BusinessDataCatalogSharedService_ExportPackage_InputMessage	175
3.1.4.18.1.2	BusinessDataCatalogSharedService_ExportPackage_OutputMessage	176
3.1.4.18.2	Elements.....	176
3.1.4.18.2.1	ExportPackage	176
3.1.4.18.2.2	ExportPackageResponse	177
3.1.4.18.3	Complex Types	177
3.1.4.18.4	Simple Types	177
3.1.4.18.5	Attributes	177
3.1.4.18.6	Groups.....	177
3.1.4.18.7	Attribute Groups.....	177
3.1.4.19	GenerateProxyAssemblyForLobSystem	177
3.1.4.19.1	Messages	179
3.1.4.19.1.1	BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage	179
3.1.4.19.1.2	BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage	179
3.1.4.19.2	Elements.....	179
3.1.4.19.2.1	GenerateProxyAssemblyForLobSystem	180

3.1.4.19.2.2	GenerateProxyAssemblyForLobSystemResponse	180
3.1.4.19.3	Complex Types	180
3.1.4.19.4	Simple Types	180
3.1.4.19.5	Attributes	180
3.1.4.19.6	Groups.....	180
3.1.4.19.7	Attribute Groups.....	180
3.1.4.20	GetAccessControlEntries	180
3.1.4.20.1	Messages	182
3.1.4.20.1.1	BusinessDataCatalogSharedService_GetAccessControlEntries_InputM essage	182
3.1.4.20.1.2	BusinessDataCatalogSharedService_GetAccessControlEntries_Output Message	182
3.1.4.20.2	Elements	182
3.1.4.20.2.1	GetAccessControlEntries	183
3.1.4.20.2.2	GetAccessControlEntriesResponse.....	183
3.1.4.20.3	Complex Types	183
3.1.4.20.4	Simple Types	183
3.1.4.20.5	Attributes	184
3.1.4.20.6	Groups.....	184
3.1.4.20.7	Attribute Groups.....	184
3.1.4.21	GetActionById	184
3.1.4.21.1	Messages	185
3.1.4.21.1.1	BusinessDataCatalogSharedService_GetActionById_InputMessage....	185
3.1.4.21.1.2	BusinessDataCatalogSharedService_GetActionById_OutputMessage..	185
3.1.4.21.2	Elements	185
3.1.4.21.2.1	GetActionById	186
3.1.4.21.2.2	GetActionByIdResponse.....	186
3.1.4.21.3	Complex Types	186
3.1.4.21.4	Simple Types	186
3.1.4.21.5	Attributes	187
3.1.4.21.6	Groups.....	187
3.1.4.21.7	Attribute Groups.....	187
3.1.4.22	GetActionParameterById.....	187
3.1.4.22.1	Messages	188
3.1.4.22.1.1	BusinessDataCatalogSharedService_GetActionParameterById_Input Message	188
3.1.4.22.1.2	BusinessDataCatalogSharedService_GetActionParameterById_Outpu tMessage.....	189
3.1.4.22.2	Elements	189
3.1.4.22.2.1	GetActionParameterById.....	189
3.1.4.22.2.2	GetActionParameterByIdResponse	189
3.1.4.22.3	Complex Types	190
3.1.4.22.4	Simple Types	190
3.1.4.22.5	Attributes	190
3.1.4.22.6	Groups.....	190
3.1.4.22.7	Attribute Groups.....	190
3.1.4.23	GetActionParametersForAction.....	190
3.1.4.23.1	Messages	191

3.1.4.23.1.1	BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage.....	191
3.1.4.23.1.2	BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage	192
3.1.4.23.2	Elements	192
3.1.4.23.2.1	GetActionParametersForAction	192
3.1.4.23.2.2	GetActionParametersForActionResponse	192
3.1.4.23.3	Complex Types	193
3.1.4.23.3.1	ArrayOfActionParameterStruct.....	193
3.1.4.23.4	Simple Types	193
3.1.4.23.5	Attributes	193
3.1.4.23.6	Groups.....	193
3.1.4.23.7	Attribute Groups.....	193
3.1.4.24	GetActionsForEntity.....	193
3.1.4.24.1	Messages	195
3.1.4.24.1.1	BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage	195
3.1.4.24.1.2	BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage	195
3.1.4.24.2	Elements	195
3.1.4.24.2.1	GetActionsForEntity	195
3.1.4.24.2.2	GetActionsForEntityResponse	196
3.1.4.24.3	Complex Types	196
3.1.4.24.3.1	ArrayOfActionStruct	196
3.1.4.24.4	Simple Types	197
3.1.4.24.5	Attributes	197
3.1.4.24.6	Groups.....	197
3.1.4.24.7	Attribute Groups.....	197
3.1.4.25	GetAllLocalizedNames.....	197
3.1.4.25.1	Messages	198
3.1.4.25.1.1	BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage	198
3.1.4.25.1.2	BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage	199
3.1.4.25.2	Elements	199
3.1.4.25.2.1	GetAllLocalizedNames	199
3.1.4.25.2.2	GetAllLocalizedNamesResponse	199
3.1.4.25.3	Complex Types	200
3.1.4.25.4	Simple Types	200
3.1.4.25.5	Attributes	200
3.1.4.25.6	Groups.....	200
3.1.4.25.7	Attribute Groups.....	200
3.1.4.26	GetAllLocalizedNamesForMetadataObjectStruct.....	200
3.1.4.26.1	Messages	201
3.1.4.26.1.1	BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_InputMessage	202

3.1.4.26.1.2	BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_OutputMessage	202
3.1.4.26.2	Elements	202
3.1.4.26.2.1	GetAllLocalizedNamesForMetadataObjectStruct.....	202
3.1.4.26.2.2	GetAllLocalizedNamesForMetadataObjectStructResponse	203
3.1.4.26.3	Complex Types	203
3.1.4.26.4	Simple Types	203
3.1.4.26.5	Attributes	204
3.1.4.26.6	Groups.....	204
3.1.4.26.7	Attribute Groups.....	204
3.1.4.27	GetAllPartitionIds.....	204
3.1.4.27.1	Messages	204
3.1.4.27.1.1	BusinessDataCatalogSharedService_GetAllPartitionIds_InputMessage	205
3.1.4.27.1.2	BusinessDataCatalogSharedService_GetAllPartitionIds_OutputMessage	205
3.1.4.27.2	Elements.....	205
3.1.4.27.2.1	GetAllPartitionIds.....	205
3.1.4.27.2.2	GetAllPartitionIdsResponse	205
3.1.4.27.3	Complex Types	206
3.1.4.27.3.1	ArrayOfguid	206
3.1.4.27.4	Simple Types	206
3.1.4.27.5	Attributes	206
3.1.4.27.6	Groups.....	206
3.1.4.27.7	Attribute Groups.....	206
3.1.4.28	GetAllProperties.....	207
3.1.4.28.1	Messages	208
3.1.4.28.1.1	BusinessDataCatalogSharedService_GetAllProperties_InputMessage	208
3.1.4.28.1.2	BusinessDataCatalogSharedService_GetAllProperties_OutputMessage	208
3.1.4.28.2	Elements.....	208
3.1.4.28.2.1	GetAllProperties.....	209
3.1.4.28.2.2	GetAllPropertiesResponse	209
3.1.4.28.3	Complex Types	209
3.1.4.28.4	Simple Types	210
3.1.4.28.5	Attributes	210
3.1.4.28.6	Groups.....	210
3.1.4.28.7	Attribute Groups.....	210
3.1.4.29	GetAllPropertiesForMetadataObjectStruct	210
3.1.4.29.1	Messages	211
3.1.4.29.1.1	BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputMessage	212
3.1.4.29.1.2	BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_OutputMessage	212
3.1.4.29.2	Elements	212
3.1.4.29.2.1	GetAllPropertiesForMetadataObjectStruct.....	212
3.1.4.29.2.2	GetAllPropertiesForMetadataObjectStructResponse	213
3.1.4.29.3	Complex Types	213

3.1.4.29.4	Simple Types	213
3.1.4.29.5	Attributes	213
3.1.4.29.6	Groups.....	213
3.1.4.29.7	Attribute Groups.....	213
3.1.4.30	GetAssociationById	213
3.1.4.30.1	Messages	215
3.1.4.30.1.1	BusinessDataCatalogSharedService_GetAssociationById_InputMessage	215
3.1.4.30.1.2	BusinessDataCatalogSharedService_GetAssociationById_OutputMessage	215
3.1.4.30.2	Elements.....	215
3.1.4.30.2.1	GetAssociationById	215
3.1.4.30.2.2	GetAssociationByIdResponse.....	216
3.1.4.30.3	Complex Types	216
3.1.4.30.4	Simple Types	216
3.1.4.30.5	Attributes	216
3.1.4.30.6	Groups.....	216
3.1.4.30.7	Attribute Groups.....	216
3.1.4.31	GetAssociationGroupById.....	217
3.1.4.31.1	Messages	218
3.1.4.31.1.1	BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage	218
3.1.4.31.1.2	BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage	218
3.1.4.31.2	Elements.....	218
3.1.4.31.2.1	GetAssociationGroupById.....	219
3.1.4.31.2.2	GetAssociationGroupByIdResponse	219
3.1.4.31.3	Complex Types	219
3.1.4.31.4	Simple Types	219
3.1.4.31.5	Attributes	220
3.1.4.31.6	Groups.....	220
3.1.4.31.7	Attribute Groups.....	220
3.1.4.32	GetAssociationGroupsForEntity	220
3.1.4.32.1	Messages	221
3.1.4.32.1.1	BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage	221
3.1.4.32.1.2	BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage	222
3.1.4.32.2	Elements.....	222
3.1.4.32.2.1	GetAssociationGroupsForEntity	222
3.1.4.32.2.2	GetAssociationGroupsForEntityResponse.....	222
3.1.4.32.3	Complex Types	223
3.1.4.32.3.1	ArrayOfAssociationGroupStruct.....	223
3.1.4.32.4	Simple Types	223
3.1.4.32.5	Attributes	223
3.1.4.32.6	Groups.....	223
3.1.4.32.7	Attribute Groups.....	223

3.1.4.33	GetAssociationMembersInRole	223
3.1.4.33.1	Messages	225
3.1.4.33.1.1	BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage	225
3.1.4.33.1.2	BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage	225
3.1.4.33.2	Elements	225
3.1.4.33.2.1	GetAssociationMembersInRole	225
3.1.4.33.2.2	GetAssociationMembersInRoleResponse	226
3.1.4.33.3	Complex Types	226
3.1.4.33.3.1	ArrayOfAssociationMemberStruct	227
3.1.4.33.3.2	AssociationMemberStruct	227
3.1.4.33.4	Simple Types	228
3.1.4.33.5	Attributes	228
3.1.4.33.6	Groups	228
3.1.4.33.7	Attribute Groups	228
3.1.4.34	GetAssociationReferencesForAssociationGroup	228
3.1.4.34.1	Messages	229
3.1.4.34.1.1	BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_InputMessage	230
3.1.4.34.1.2	BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_OutputMessage	230
3.1.4.34.2	Elements	230
3.1.4.34.2.1	GetAssociationReferencesForAssociationGroup	230
3.1.4.34.2.2	GetAssociationReferencesForAssociationGroupResponse	231
3.1.4.34.3	Complex Types	231
3.1.4.34.3.1	ArrayOfAssociationReferenceStruct	231
3.1.4.34.4	Simple Types	231
3.1.4.34.5	Attributes	231
3.1.4.34.6	Groups	232
3.1.4.34.7	Attribute Groups	232
3.1.4.35	GetAssociationsForDataClass	232
3.1.4.35.1	Messages	233
3.1.4.35.1.1	BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage	233
3.1.4.35.1.2	BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage	233
3.1.4.35.2	Elements	234
3.1.4.35.2.1	GetAssociationsForDataClass	234
3.1.4.35.2.2	GetAssociationsForDataClassResponse	234
3.1.4.35.3	Complex Types	234
3.1.4.35.4	Simple Types	235
3.1.4.35.5	Attributes	235
3.1.4.35.6	Groups	235
3.1.4.35.7	Attribute Groups	235
3.1.4.36	GetAssociationsForEntityAndRole	235
3.1.4.36.1	Messages	236

3.1.4.36.1.1	BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InputMessage	236
3.1.4.36.1.2	BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_OutputMessage	237
3.1.4.36.2	Elements	237
3.1.4.36.2.1	GetAssociationsForEntityAndRole	237
3.1.4.36.2.2	GetAssociationsForEntityAndRoleResponse	238
3.1.4.36.3	Complex Types	238
3.1.4.36.4	Simple Types	238
3.1.4.36.5	Attributes	238
3.1.4.36.6	Groups	238
3.1.4.36.7	Attribute Groups	238
3.1.4.37	GetAssociationsForMethod	238
3.1.4.37.1	Messages	240
3.1.4.37.1.1	BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage	240
3.1.4.37.1.2	BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage	240
3.1.4.37.2	Elements	240
3.1.4.37.2.1	GetAssociationsForMethod	241
3.1.4.37.2.2	GetAssociationsForMethodResponse	241
3.1.4.37.3	Complex Types	241
3.1.4.37.4	Simple Types	241
3.1.4.37.5	Attributes	241
3.1.4.37.6	Groups	241
3.1.4.37.7	Attribute Groups	242
3.1.4.38	GetCacheInvalidationRecordsSince	242
3.1.4.38.1	Messages	243
3.1.4.38.1.1	BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InputMessage	243
3.1.4.38.1.2	BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_OutputMessage	243
3.1.4.38.2	Elements	243
3.1.4.38.2.1	GetCacheInvalidationRecordsSince	244
3.1.4.38.2.2	GetCacheInvalidationRecordsSinceResponse	244
3.1.4.38.3	Complex Types	244
3.1.4.38.3.1	ArrayOfCacheInvalidationRecordStruct	244
3.1.4.38.3.2	CacheInvalidationRecordStruct	245
3.1.4.38.4	Simple Types	245
3.1.4.38.5	Attributes	245
3.1.4.38.6	Groups	245
3.1.4.38.7	Attribute Groups	245
3.1.4.39	GetChildTypeDescriptorsForTypeDescriptor	245
3.1.4.39.1	Messages	247
3.1.4.39.1.1	BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_InputMessage	247

3.1.4.39.1.2	BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_OutputMessage	247
3.1.4.39.2	Elements	247
3.1.4.39.2.1	GetChildTypeDescriptorsForTypeDescriptor	248
3.1.4.39.2.2	GetChildTypeDescriptorsForTypeDescriptorResponse	248
3.1.4.39.3	Complex Types	248
3.1.4.39.4	Simple Types	248
3.1.4.39.5	Attributes	249
3.1.4.39.6	Groups	249
3.1.4.39.7	Attribute Groups	249
3.1.4.40	GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor	249
3.1.4.40.1	Messages	250
3.1.4.40.1.1	BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_InputMessage	251
3.1.4.40.1.2	BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_OutputMessage	251
3.1.4.40.2	Elements	251
3.1.4.40.2.1	GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor	251
3.1.4.40.2.2	GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse	252
3.1.4.40.3	Complex Types	252
3.1.4.40.4	Simple Types	252
3.1.4.40.5	Attributes	252
3.1.4.40.6	Groups	252
3.1.4.40.7	Attribute Groups	252
3.1.4.41	GetDataClassById	252
3.1.4.41.1	Messages	253
3.1.4.41.1.1	BusinessDataCatalogSharedService_GetDataClassById_InputMessage	254
3.1.4.41.1.2	BusinessDataCatalogSharedService_GetDataClassById_OutputMessage	254
3.1.4.41.2	Elements	254
3.1.4.41.2.1	GetDataClassById	254
3.1.4.41.2.2	GetDataClassByIdResponse	255
3.1.4.41.3	Complex Types	255
3.1.4.41.4	Simple Types	255
3.1.4.41.5	Attributes	255
3.1.4.41.6	Groups	255
3.1.4.41.7	Attribute Groups	255
3.1.4.42	GetDataClassesForSystem	255
3.1.4.42.1	Messages	257
3.1.4.42.1.1	BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage	257
3.1.4.42.1.2	BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage	257
3.1.4.42.2	Elements	257
3.1.4.42.2.1	GetDataClassesForSystem	257

3.1.4.42.2.2	GetDataClassesForSystemResponse	258
3.1.4.42.3	Complex Types	258
3.1.4.42.3.1	ArrayOfDataClassStruct	258
3.1.4.42.4	Simple Types	259
3.1.4.42.5	Attributes	259
3.1.4.42.6	Groups.....	259
3.1.4.42.7	Attribute Groups.....	259
3.1.4.43	GetDefaultValuesForTypeDescriptor	259
3.1.4.43.1	Messages	260
3.1.4.43.1.1	BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InputMessage	260
3.1.4.43.1.2	BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_OutputMessage	261
3.1.4.43.2	Elements	261
3.1.4.43.2.1	GetDefaultValuesForTypeDescriptor	261
3.1.4.43.2.2	GetDefaultValuesForTypeDescriptorResponse	261
3.1.4.43.3	Complex Types	262
3.1.4.43.3.1	ArrayOfDefaultValueStruct	262
3.1.4.43.4	Simple Types	262
3.1.4.43.5	Attributes	262
3.1.4.43.6	Groups.....	262
3.1.4.43.7	Attribute Groups.....	262
3.1.4.44	GetEntitiesForAssociationAndRole	263
3.1.4.44.1	Messages	264
3.1.4.44.1.1	BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage	264
3.1.4.44.1.2	BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage	264
3.1.4.44.2	Elements	265
3.1.4.44.2.1	GetEntitiesForAssociationAndRole	265
3.1.4.44.2.2	GetEntitiesForAssociationAndRoleResponse	265
3.1.4.44.3	Complex Types	266
3.1.4.44.4	Simple Types	266
3.1.4.44.5	Attributes	266
3.1.4.44.6	Groups.....	266
3.1.4.44.7	Attribute Groups.....	266
3.1.4.45	GetEntitiesForSystem	266
3.1.4.45.1	Messages	267
3.1.4.45.1.1	BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage	268
3.1.4.45.1.2	BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage	268
3.1.4.45.2	Elements	268
3.1.4.45.2.1	GetEntitiesForSystem	268
3.1.4.45.2.2	GetEntitiesForSystemResponse.....	269
3.1.4.45.3	Complex Types	269
3.1.4.45.4	Simple Types	269

3.1.4.45.5	Attributes	269
3.1.4.45.6	Groups.....	269
3.1.4.45.7	Attribute Groups.....	269
3.1.4.46	GetEntitiesLikeNameAndNamespace	269
3.1.4.46.1	Messages	271
3.1.4.46.1.1	BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage	271
3.1.4.46.1.2	BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage	271
3.1.4.46.2	Elements	271
3.1.4.46.2.1	GetEntitiesLikeNameAndNamespace.....	272
3.1.4.46.2.2	GetEntitiesLikeNameAndNamespaceResponse	273
3.1.4.46.3	Complex Types	273
3.1.4.46.4	Simple Types	273
3.1.4.46.5	Attributes	273
3.1.4.46.6	Groups.....	273
3.1.4.46.7	Attribute Groups.....	274
3.1.4.47	GetEntitiesReferencedByModelId.....	274
3.1.4.47.1	Messages	275
3.1.4.47.1.1	BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage.....	275
3.1.4.47.1.2	BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage.....	275
3.1.4.47.2	Elements	275
3.1.4.47.2.1	GetEntitiesReferencedByModelId.....	276
3.1.4.47.2.2	GetEntitiesReferencedByModelIdResponse	276
3.1.4.47.3	Complex Types	277
3.1.4.47.4	Simple Types	277
3.1.4.47.4.1	EntityConstants.EntitiesInModelQuery	277
3.1.4.47.5	Attributes	277
3.1.4.47.6	Groups.....	277
3.1.4.47.7	Attribute Groups.....	277
3.1.4.48	GetEntityById.....	278
3.1.4.48.1	Messages	279
3.1.4.48.1.1	BusinessDataCatalogSharedService_GetEntityById_InputMessage	279
3.1.4.48.1.2	BusinessDataCatalogSharedService_GetEntityById_OutputMessage	279
3.1.4.48.2	Elements	279
3.1.4.48.2.1	GetEntityById.....	279
3.1.4.48.2.2	GetEntityByIdResponse	280
3.1.4.48.3	Complex Types	280
3.1.4.48.4	Simple Types	280
3.1.4.48.5	Attributes	280
3.1.4.48.6	Groups.....	280
3.1.4.48.7	Attribute Groups.....	280
3.1.4.49	GetEntityCount	281
3.1.4.49.1	Messages	282
3.1.4.49.1.1	BusinessDataCatalogSharedService_GetEntityCount_InputMessage	282
3.1.4.49.1.2	BusinessDataCatalogSharedService_GetEntityCount_OutputMessage	282
3.1.4.49.2	Elements	282

3.1.4.49.2.1	GetEntityCount	282
3.1.4.49.2.2	GetEntityCountResponse	283
3.1.4.49.3	Complex Types	283
3.1.4.49.4	Simple Types	283
3.1.4.49.5	Attributes	283
3.1.4.49.6	Groups	283
3.1.4.49.7	Attribute Groups	283
3.1.4.50	GetEntityNameAndNamespacesForAssociationAndRole	283
3.1.4.50.1	Messages	285
3.1.4.50.1.1	BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_InputMessage	285
3.1.4.50.1.2	BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_OutputMessage	285
3.1.4.50.2	Elements	286
3.1.4.50.2.1	GetEntityNameAndNamespacesForAssociationAndRole	286
3.1.4.50.2.2	GetEntityNameAndNamespacesForAssociationAndRoleResponse	286
3.1.4.50.3	Complex Types	287
3.1.4.50.4	Simple Types	287
3.1.4.50.5	Attributes	287
3.1.4.50.6	Groups	287
3.1.4.50.7	Attribute Groups	287
3.1.4.51	GetEntityWithNameAndNamespace	287
3.1.4.51.1	Messages	289
3.1.4.51.1.1	BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage	289
3.1.4.51.1.2	BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage	289
3.1.4.51.2	Elements	289
3.1.4.51.2.1	GetEntityWithNameAndNamespace	290
3.1.4.51.2.2	GetEntityWithNameAndNamespaceResponse	290
3.1.4.51.3	Complex Types	290
3.1.4.51.4	Simple Types	290
3.1.4.51.5	Attributes	290
3.1.4.51.6	Groups	290
3.1.4.51.7	Attribute Groups	291
3.1.4.52	GetEntityWithNameAndNamespaceAndVersion	291
3.1.4.52.1	Messages	292
3.1.4.52.1.1	BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InputMessage	292
3.1.4.52.1.2	BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_OutputMessage	293
3.1.4.52.2	Elements	293
3.1.4.52.2.1	GetEntityWithNameAndNamespaceAndVersion	293
3.1.4.52.2.2	GetEntityWithNameAndNamespaceAndVersionResponse	293
3.1.4.52.3	Complex Types	294
3.1.4.52.4	Simple Types	294
3.1.4.52.5	Attributes	294

3.1.4.52.6	Groups.....	294
3.1.4.52.7	Attribute Groups.....	294
3.1.4.53	GetFieldTypeDescriptorsByMethodInstance	294
3.1.4.53.1	Messages	296
3.1.4.53.1.1	BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage	296
3.1.4.53.1.2	BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_OutputMessage	296
3.1.4.53.2	Elements	297
3.1.4.53.2.1	GetFieldTypeDescriptorsByMethodInstance	297
3.1.4.53.2.2	GetFieldTypeDescriptorsByMethodInstanceResponse	297
3.1.4.53.3	Complex Types	297
3.1.4.53.4	Simple Types	298
3.1.4.53.5	Attributes	298
3.1.4.53.6	Groups.....	298
3.1.4.53.7	Attribute Groups.....	298
3.1.4.54	GetFilterDescriptorById	298
3.1.4.54.1	Messages	299
3.1.4.54.1.1	BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage	299
3.1.4.54.1.2	BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage	300
3.1.4.54.2	Elements	300
3.1.4.54.2.1	GetFilterDescriptorById	300
3.1.4.54.2.2	GetFilterDescriptorByIdResponse	300
3.1.4.54.3	Complex Types	301
3.1.4.54.4	Simple Types	301
3.1.4.54.5	Attributes	301
3.1.4.54.6	Groups.....	301
3.1.4.54.7	Attribute Groups.....	301
3.1.4.55	GetFilterDescriptorsForMethod.....	301
3.1.4.55.1	Messages	302
3.1.4.55.1.1	BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage.....	303
3.1.4.55.1.2	BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage	303
3.1.4.55.2	Elements.....	303
3.1.4.55.2.1	GetFilterDescriptorsForMethod.....	303
3.1.4.55.2.2	GetFilterDescriptorsForMethodResponse	304
3.1.4.55.3	Complex Types	304
3.1.4.55.3.1	ArrayOfFilterDescriptorStruct	304
3.1.4.55.4	Simple Types	304
3.1.4.55.5	Attributes	304
3.1.4.55.6	Groups.....	304
3.1.4.55.7	Attribute Groups.....	305
3.1.4.56	GetIdentifierById	305
3.1.4.56.1	Messages	306

3.1.4.56.1.1	BusinessDataCatalogSharedService_GetIdentifierById_InputMessage	306
3.1.4.56.1.2	BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage	306
3.1.4.56.2	Elements	306
3.1.4.56.2.1	GetIdentifierById	307
3.1.4.56.2.2	GetIdentifierByIdResponse	307
3.1.4.56.3	Complex Types	307
3.1.4.56.4	Simple Types	307
3.1.4.56.5	Attributes	307
3.1.4.56.6	Groups	308
3.1.4.56.7	Attribute Groups	308
3.1.4.57	GetIdentifiersForEntity	308
3.1.4.57.1	Messages	309
3.1.4.57.1.1	BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage	309
3.1.4.57.1.2	BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage	309
3.1.4.57.2	Elements	310
3.1.4.57.2.1	GetIdentifiersForEntity	310
3.1.4.57.2.2	GetIdentifiersForEntityResponse	310
3.1.4.57.3	Complex Types	310
3.1.4.57.3.1	ArrayOfIdentifierStruct	311
3.1.4.57.4	Simple Types	311
3.1.4.57.5	Attributes	311
3.1.4.57.6	Groups	311
3.1.4.57.7	Attribute Groups	311
3.1.4.58	GetImportProgress	311
3.1.4.58.1	Messages	312
3.1.4.58.1.1	BusinessDataCatalogSharedService_GetImportProgress_InputMessage	312
3.1.4.58.1.2	BusinessDataCatalogSharedService_GetImportProgress_OutputMessage	312
3.1.4.58.2	Elements	312
3.1.4.58.2.1	GetImportProgress	312
3.1.4.58.2.2	GetImportProgressResponse	313
3.1.4.58.3	Complex Types	313
3.1.4.58.4	Simple Types	313
3.1.4.58.5	Attributes	313
3.1.4.58.6	Groups	313
3.1.4.58.7	Attribute Groups	313
3.1.4.59	GetLevelForTypeDescriptor	313
3.1.4.59.1	Messages	315
3.1.4.59.1.1	BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage	315

3.1.4.59.1.2	BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage	315
3.1.4.59.2	Elements	316
3.1.4.59.2.1	GetLevelForTypeDescriptor	316
3.1.4.59.2.2	GetLevelForTypeDescriptorResponse	316
3.1.4.59.3	Complex Types	316
3.1.4.59.4	Simple Types	316
3.1.4.59.5	Attributes	317
3.1.4.59.6	Groups	317
3.1.4.59.7	Attribute Groups	317
3.1.4.60	GetLobSystemAllAssembliesBytes	317
3.1.4.60.1	Messages	318
3.1.4.60.1.1	BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InputMessage	318
3.1.4.60.1.2	BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_OutputMessage	319
3.1.4.60.2	Elements	319
3.1.4.60.2.1	GetLobSystemAllAssembliesBytes	319
3.1.4.60.2.2	GetLobSystemAllAssembliesBytesResponse	319
3.1.4.60.3	Complex Types	320
3.1.4.60.3.1	ArrayOfbase64Binary	320
3.1.4.60.4	Simple Types	320
3.1.4.60.5	Attributes	320
3.1.4.60.6	Groups	320
3.1.4.60.7	Attribute Groups	320
3.1.4.61	GetLobSystemById	320
3.1.4.61.1	Messages	322
3.1.4.61.1.1	BusinessDataCatalogSharedService_GetLobSystemById_InputMessage	322
3.1.4.61.1.2	BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage	322
3.1.4.61.2	Elements	322
3.1.4.61.2.1	GetLobSystemById	323
3.1.4.61.2.2	GetLobSystemByIdResponse	323
3.1.4.61.3	Complex Types	323
3.1.4.61.4	Simple Types	323
3.1.4.61.5	Attributes	323
3.1.4.61.6	Groups	324
3.1.4.61.7	Attribute Groups	324
3.1.4.62	GetLobSystemByName	324
3.1.4.62.1	Messages	325
3.1.4.62.1.1	BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage	325
3.1.4.62.1.2	BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage	325
3.1.4.62.2	Elements	326

3.1.4.62.2.1	GetLobSystemByName	326
3.1.4.62.2.2	GetLobSystemByNameResponse	326
3.1.4.62.3	Complex Types	326
3.1.4.62.4	Simple Types	326
3.1.4.62.5	Attributes	327
3.1.4.62.6	Groups.....	327
3.1.4.62.7	Attribute Groups.....	327
3.1.4.63	GetLobSystemDataByLobSystem	327
3.1.4.63.1	Messages	328
3.1.4.63.1.1	BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage	328
3.1.4.63.1.2	BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage.....	329
3.1.4.63.2	Elements	329
3.1.4.63.2.1	GetLobSystemDataByLobSystem	329
3.1.4.63.2.2	GetLobSystemDataByLobSystemResponse	329
3.1.4.63.3	Complex Types	330
3.1.4.63.4	Simple Types	330
3.1.4.63.5	Attributes	330
3.1.4.63.6	Groups.....	330
3.1.4.63.7	Attribute Groups.....	330
3.1.4.64	GetLobSystemInstanceById	330
3.1.4.64.1	Messages	331
3.1.4.64.1.1	BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage	332
3.1.4.64.1.2	BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage	332
3.1.4.64.2	Elements.....	332
3.1.4.64.2.1	GetLobSystemInstanceById	332
3.1.4.64.2.2	GetLobSystemInstanceByIdResponse	333
3.1.4.64.3	Complex Types	333
3.1.4.64.4	Simple Types	333
3.1.4.64.5	Attributes	333
3.1.4.64.6	Groups.....	333
3.1.4.64.7	Attribute Groups.....	333
3.1.4.65	GetLobSystemInstancesForLobSystem.....	333
3.1.4.65.1	Messages	335
3.1.4.65.1.1	BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage	335
3.1.4.65.1.2	BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessage	335
3.1.4.65.2	Elements	335
3.1.4.65.2.1	GetLobSystemInstancesForLobSystem	336
3.1.4.65.2.2	GetLobSystemInstancesForLobSystemResponse	336
3.1.4.65.3	Complex Types	336
3.1.4.65.3.1	ArrayOfLobSystemInstanceStruct	337
3.1.4.65.4	Simple Types	337

3.1.4.65.5	Attributes	337
3.1.4.65.6	Groups.....	337
3.1.4.65.7	Attribute Groups.....	337
3.1.4.66	GetLobSystemProxyAssemblyBytesByLobSystemId	337
3.1.4.66.1	Messages	339
3.1.4.66.1.1	BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBy tesByLobSystemId_InputMessage.....	339
3.1.4.66.1.2	BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBy tesByLobSystemId_OutputMessage	339
3.1.4.66.2	Elements	339
3.1.4.66.2.1	GetLobSystemProxyAssemblyBytesByLobSystemId	340
3.1.4.66.2.2	GetLobSystemProxyAssemblyBytesByLobSystemIdResponse	340
3.1.4.66.3	Complex Types	340
3.1.4.66.4	Simple Types	340
3.1.4.66.5	Attributes	341
3.1.4.66.6	Groups.....	341
3.1.4.66.7	Attribute Groups.....	341
3.1.4.67	GetLobSystemsLikeName.....	341
3.1.4.67.1	Messages	342
3.1.4.67.1.1	BusinessDataCatalogSharedService_GetLobSystemsLikeName_Input Message	342
3.1.4.67.1.2	BusinessDataCatalogSharedService_GetLobSystemsLikeName_Outp utMessage	343
3.1.4.67.2	Elements	343
3.1.4.67.2.1	GetLobSystemsLikeName.....	343
3.1.4.67.2.2	GetLobSystemsLikeNameResponse	344
3.1.4.67.3	Complex Types	344
3.1.4.67.4	Simple Types	344
3.1.4.67.5	Attributes	344
3.1.4.67.6	Groups.....	344
3.1.4.67.7	Attribute Groups.....	344
3.1.4.68	GetLobSystemsReferencedByEntitiesAssociatedWithModel.....	344
3.1.4.68.1	Messages	346
3.1.4.68.1.1	BusinessDataCatalogSharedService_GetLobSystemsReferencedByEnt itiesAssociatedWithModel_InputMessage.....	346
3.1.4.68.1.2	BusinessDataCatalogSharedService_GetLobSystemsReferencedByEnt itiesAssociatedWithModel_OutputMessage	346
3.1.4.68.2	Elements	346
3.1.4.68.2.1	GetLobSystemsReferencedByEntitiesAssociatedWithModel	347
3.1.4.68.2.2	GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse ..	347
3.1.4.68.3	Complex Types	348
3.1.4.68.4	Simple Types	348
3.1.4.68.4.1	LobSystemConstants.LobSystemsInModelQuery	348
3.1.4.68.5	Attributes	348
3.1.4.68.6	Groups.....	348
3.1.4.68.7	Attribute Groups.....	349
3.1.4.69	GetMethodById.....	349

3.1.4.69.1	Messages	350
3.1.4.69.1.1	BusinessDataCatalogSharedService_GetMethodById_InputMessage ..	350
3.1.4.69.1.2	BusinessDataCatalogSharedService_GetMethodById_OutputMessage ..	350
3.1.4.69.2	Elements	350
3.1.4.69.2.1	GetMethodById	351
3.1.4.69.2.2	GetMethodByIdResponse	351
3.1.4.69.3	Complex Types	351
3.1.4.69.4	Simple Types	351
3.1.4.69.5	Attributes	351
3.1.4.69.6	Groups.....	351
3.1.4.69.7	Attribute Groups.....	352
3.1.4.70	GetMethodInstanceById.....	352
3.1.4.70.1	Messages	353
3.1.4.70.1.1	BusinessDataCatalogSharedService_GetMethodInstanceById_InputM essage	353
3.1.4.70.1.2	BusinessDataCatalogSharedService_GetMethodInstanceById_Output Message	353
3.1.4.70.2	Elements	353
3.1.4.70.2.1	GetMethodInstanceById	354
3.1.4.70.2.2	GetMethodInstanceByIdResponse	354
3.1.4.70.3	Complex Types	354
3.1.4.70.4	Simple Types	354
3.1.4.70.5	Attributes	355
3.1.4.70.6	Groups.....	355
3.1.4.70.7	Attribute Groups.....	355
3.1.4.71	GetMethodInstancesForDataClass	355
3.1.4.71.1	Messages	356
3.1.4.71.1.1	BusinessDataCatalogSharedService_GetMethodInstancesForDataClas s_InputMessage	356
3.1.4.71.1.2	BusinessDataCatalogSharedService_GetMethodInstancesForDataClas s_OutputMessage	357
3.1.4.71.2	Elements	357
3.1.4.71.2.1	GetMethodInstancesForDataClass	357
3.1.4.71.2.2	GetMethodInstancesForDataClassResponse	357
3.1.4.71.3	Complex Types	358
3.1.4.71.4	Simple Types	358
3.1.4.71.5	Attributes	358
3.1.4.71.6	Groups.....	358
3.1.4.71.7	Attribute Groups.....	358
3.1.4.72	GetMethodInstancesForMethod	358
3.1.4.72.1	Messages	359
3.1.4.72.1.1	BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ InputMessage	359
3.1.4.72.1.2	BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ OutputMessage	360
3.1.4.72.2	Elements	360

3.1.4.72.2.1	GetMethodInstancesForMethod.....	360
3.1.4.72.2.2	GetMethodInstancesForMethodResponse	360
3.1.4.72.3	Complex Types	361
3.1.4.72.4	Simple Types	361
3.1.4.72.5	Attributes	361
3.1.4.72.6	Groups.....	361
3.1.4.72.7	Attribute Groups.....	361
3.1.4.73	GetMethodsForDataClass	361
3.1.4.73.1	Messages	362
3.1.4.73.1.1	BusinessDataCatalogSharedService_GetMethodsForDataClass_Input Message	363
3.1.4.73.1.2	BusinessDataCatalogSharedService_GetMethodsForDataClass_Outpu tMessage.....	363
3.1.4.73.2	Elements	363
3.1.4.73.2.1	GetMethodsForDataClass	363
3.1.4.73.2.2	GetMethodsForDataClassResponse.....	363
3.1.4.73.3	Complex Types	364
3.1.4.73.3.1	ArrayOfMethodStruct.....	364
3.1.4.73.4	Simple Types	364
3.1.4.73.5	Attributes	364
3.1.4.73.6	Groups.....	364
3.1.4.73.7	Attribute Groups.....	364
3.1.4.74	GetModelById.....	364
3.1.4.74.1	Messages	366
3.1.4.74.1.1	BusinessDataCatalogSharedService_GetModelById_InputMessage	366
3.1.4.74.1.2	BusinessDataCatalogSharedService_GetModelById_OutputMessage ..	366
3.1.4.74.2	Elements.....	366
3.1.4.74.2.1	GetModelById.....	366
3.1.4.74.2.2	GetModelByIdResponse	367
3.1.4.74.3	Complex Types	367
3.1.4.74.4	Simple Types	367
3.1.4.74.5	Attributes	367
3.1.4.74.6	Groups.....	367
3.1.4.74.7	Attribute Groups.....	367
3.1.4.75	GetModelByName	368
3.1.4.75.1	Messages	369
3.1.4.75.1.1	BusinessDataCatalogSharedService_GetModelByName_InputMessag e	369
3.1.4.75.1.2	BusinessDataCatalogSharedService_GetModelByName_OutputMessa ge	369
3.1.4.75.2	Elements.....	369
3.1.4.75.2.1	GetModelByName	370
3.1.4.75.2.2	GetModelByNameResponse	370
3.1.4.75.3	Complex Types	370
3.1.4.75.4	Simple Types	370
3.1.4.75.5	Attributes	370
3.1.4.75.6	Groups.....	370
3.1.4.75.7	Attribute Groups.....	370
3.1.4.76	GetModelsByEntityId	371

3.1.4.76.1	Messages	372
3.1.4.76.1.1	BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage	372
3.1.4.76.1.2	BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage	372
3.1.4.76.2	Elements	372
3.1.4.76.2.1	GetModelsByEntityId	373
3.1.4.76.2.2	GetModelsByEntityIdResponse	373
3.1.4.76.3	Complex Types	373
3.1.4.76.4	Simple Types	373
3.1.4.76.5	Attributes	373
3.1.4.76.6	Groups	373
3.1.4.76.7	Attribute Groups	373
3.1.4.77	GetModelsByName	374
3.1.4.77.1	Messages	375
3.1.4.77.1.1	BusinessDataCatalogSharedService_GetModelsByName_InputMessage	375
3.1.4.77.1.2	BusinessDataCatalogSharedService_GetModelsByName_OutputMessage	375
3.1.4.77.2	Elements	375
3.1.4.77.2.1	GetModelsByName	376
3.1.4.77.2.2	GetModelsByNameResponse	376
3.1.4.77.3	Complex Types	377
3.1.4.77.4	Simple Types	377
3.1.4.77.5	Attributes	377
3.1.4.77.6	Groups	377
3.1.4.77.7	Attribute Groups	377
3.1.4.78	GetParameterById	377
3.1.4.78.1	Messages	378
3.1.4.78.1.1	BusinessDataCatalogSharedService_GetParameterById_InputMessage	378
3.1.4.78.1.2	BusinessDataCatalogSharedService_GetParameterById_OutputMessage	379
3.1.4.78.2	Elements	379
3.1.4.78.2.1	GetParameterById	379
3.1.4.78.2.2	GetParameterByIdResponse	379
3.1.4.78.3	Complex Types	380
3.1.4.78.4	Simple Types	380
3.1.4.78.5	Attributes	380
3.1.4.78.6	Groups	380
3.1.4.78.7	Attribute Groups	380
3.1.4.79	GetParametersForMethod	380
3.1.4.79.1	Messages	381
3.1.4.79.1.1	BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage	382

3.1.4.79.1.2	BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage	382
3.1.4.79.2	Elements	382
3.1.4.79.2.1	GetParametersForMethod	382
3.1.4.79.2.2	GetParametersForMethodResponse	382
3.1.4.79.3	Complex Types	383
3.1.4.79.3.1	ArrayOfParameterStruct	383
3.1.4.79.4	Simple Types	383
3.1.4.79.5	Attributes	383
3.1.4.79.6	Groups	383
3.1.4.79.7	Attribute Groups	383
3.1.4.80	GetRootTypeDescriptorForParameter	383
3.1.4.80.1	Messages	385
3.1.4.80.1.1	BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InputMessage	385
3.1.4.80.1.2	BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_OutputMessage	385
3.1.4.80.2	Elements	385
3.1.4.80.2.1	GetRootTypeDescriptorForParameter	386
3.1.4.80.2.2	GetRootTypeDescriptorForParameterResponse	386
3.1.4.80.3	Complex Types	386
3.1.4.80.4	Simple Types	386
3.1.4.80.5	Attributes	386
3.1.4.80.6	Groups	387
3.1.4.80.7	Attribute Groups	387
3.1.4.81	GetServiceApplicationId	387
3.1.4.81.1	Messages	387
3.1.4.81.1.1	BusinessDataCatalogSharedService_GetServiceApplicationId_InputMessage	387
3.1.4.81.1.2	BusinessDataCatalogSharedService_GetServiceApplicationId_OutputMessage	388
3.1.4.81.2	Elements	388
3.1.4.81.2.1	GetServiceApplicationId	388
3.1.4.81.2.2	GetServiceApplicationIdResponse	388
3.1.4.81.3	Complex Types	388
3.1.4.81.4	Simple Types	389
3.1.4.81.5	Attributes	389
3.1.4.81.6	Groups	389
3.1.4.81.7	Attribute Groups	389
3.1.4.82	GetSystemUtilityTypeNameForLobSystem	389
3.1.4.82.1	Messages	390
3.1.4.82.1.1	BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMessage	390
3.1.4.82.1.2	BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_OutputMessage	391
3.1.4.82.2	Elements	391

3.1.4.82.2.1	GetSystemUtilityTypeNameForLobSystem	391
3.1.4.82.2.2	GetSystemUtilityTypeNameForLobSystemResponse.....	391
3.1.4.82.3	Complex Types	392
3.1.4.82.4	Simple Types	392
3.1.4.82.5	Attributes	392
3.1.4.82.6	Groups.....	392
3.1.4.82.7	Attribute Groups.....	392
3.1.4.83	GetTypeDescriptorById.....	392
3.1.4.83.1	Messages	393
3.1.4.83.1.1	BusinessDataCatalogSharedService_GetTypeDescriptorById_InputM essage	394
3.1.4.83.1.2	BusinessDataCatalogSharedService_GetTypeDescriptorById_Output Message	394
3.1.4.83.2	Elements	394
3.1.4.83.2.1	GetTypeDescriptorById.....	394
3.1.4.83.2.2	GetTypeDescriptorByIdResponse	395
3.1.4.83.3	Complex Types	395
3.1.4.83.4	Simple Types	395
3.1.4.83.5	Attributes	395
3.1.4.83.6	Groups.....	395
3.1.4.83.7	Attribute Groups.....	395
3.1.4.84	GetTypeDescriptorsByNameAndLevelForParameter	395
3.1.4.84.1	Messages	397
3.1.4.84.1.1	BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAnd LevelForParameter_InputMessage	397
3.1.4.84.1.2	BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAnd LevelForParameter_OutputMessage	397
3.1.4.84.2	Elements	397
3.1.4.84.2.1	GetTypeDescriptorsByNameAndLevelForParameter	398
3.1.4.84.2.2	GetTypeDescriptorsByNameAndLevelForParameterResponse	398
3.1.4.84.3	Complex Types	398
3.1.4.84.4	Simple Types	399
3.1.4.84.5	Attributes	399
3.1.4.84.6	Groups.....	399
3.1.4.84.7	Attribute Groups.....	399
3.1.4.85	GetTypeDescriptorsForFilterDescriptor	399
3.1.4.85.1	Messages	400
3.1.4.85.1.1	BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDesc riptor_InputMessage	400
3.1.4.85.1.2	BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDesc riptor_OutputMessage	401
3.1.4.85.2	Elements	401
3.1.4.85.2.1	GetTypeDescriptorsForFilterDescriptor.....	401
3.1.4.85.2.2	GetTypeDescriptorsForFilterDescriptorResponse	401
3.1.4.85.3	Complex Types	402
3.1.4.85.4	Simple Types	402
3.1.4.85.5	Attributes	402

3.1.4.85.6	Groups.....	402
3.1.4.85.7	Attribute Groups.....	402
3.1.4.86	GetTypeReflectorTypeNameForParameter	402
3.1.4.86.1	Messages	403
3.1.4.86.1.1	BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMessage.....	404
3.1.4.86.1.2	BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMessage.....	404
3.1.4.86.2	Elements	404
3.1.4.86.2.1	GetTypeReflectorTypeNameForParameter	404
3.1.4.86.2.2	GetTypeReflectorTypeNameForParameterResponse	405
3.1.4.86.3	Complex Types	405
3.1.4.86.4	Simple Types	405
3.1.4.86.5	Attributes	405
3.1.4.86.6	Groups.....	405
3.1.4.86.7	Attribute Groups.....	405
3.1.4.87	GetXmlSchemaForView.....	405
3.1.4.87.1	Messages	407
3.1.4.87.1.1	BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage	407
3.1.4.87.1.2	BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage	408
3.1.4.87.2	Elements	408
3.1.4.87.2.1	GetXmlSchemaForView.....	408
3.1.4.87.2.2	GetXmlSchemaForViewResponse	408
3.1.4.87.3	Complex Types	410
3.1.4.87.4	Simple Types	410
3.1.4.87.5	Attributes	410
3.1.4.87.6	Groups.....	410
3.1.4.87.7	Attribute Groups.....	410
3.1.4.88	HaveRights	410
3.1.4.88.1	Messages	411
3.1.4.88.1.1	BusinessDataCatalogSharedService_HaveRights_InputMessage	412
3.1.4.88.1.2	BusinessDataCatalogSharedService_HaveRights_OutputMessage.....	412
3.1.4.88.2	Elements.....	412
3.1.4.88.2.1	HaveRights	412
3.1.4.88.2.2	HaveRightsResponse	413
3.1.4.88.3	Complex Types	413
3.1.4.88.4	Simple Types	413
3.1.4.88.4.1	BdcRights	413
3.1.4.88.5	Attributes	414
3.1.4.88.6	Groups.....	414
3.1.4.88.7	Attribute Groups.....	414
3.1.4.89	ImportPackage	414
3.1.4.89.1	Messages	418
3.1.4.89.1.1	BusinessDataCatalogSharedService_ImportPackage_InputMessage... ..	418
3.1.4.89.1.2	BusinessDataCatalogSharedService_ImportPackage_OutputMessage	418
3.1.4.89.2	Elements.....	418
3.1.4.89.2.1	ImportPackage	418

3.1.4.89.2.2	ImportPackageResponse.....	420
3.1.4.89.3	Complex Types	420
3.1.4.89.4	Simple Types	420
3.1.4.89.5	Attributes	420
3.1.4.89.6	Groups.....	420
3.1.4.89.7	Attribute Groups.....	420
3.1.4.90	ImportPackageWithProgress.....	420
3.1.4.90.1	Messages	424
3.1.4.90.1.1	BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage	424
3.1.4.90.1.2	BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage	424
3.1.4.90.2	Elements	425
3.1.4.90.2.1	ImportPackageWithProgress.....	425
3.1.4.90.2.2	ImportPackageWithProgressResponse	426
3.1.4.90.3	Complex Types	427
3.1.4.90.4	Simple Types	427
3.1.4.90.5	Attributes	427
3.1.4.90.6	Groups.....	427
3.1.4.90.7	Attribute Groups.....	427
3.1.4.91	IsMethodInstantiated	427
3.1.4.91.1	Messages	428
3.1.4.91.1.1	BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage	428
3.1.4.91.1.2	BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage	428
3.1.4.91.2	Elements.....	428
3.1.4.91.2.1	IsMethodInstantiated	429
3.1.4.91.2.2	IsMethodInstantiatedResponse	429
3.1.4.91.3	Complex Types	429
3.1.4.91.4	Simple Types	429
3.1.4.91.5	Attributes.....	429
3.1.4.91.6	Groups.....	429
3.1.4.91.7	Attribute Groups.....	430
3.1.4.92	IsParameterReferencedByMethodInstance.....	430
3.1.4.92.1	Messages	431
3.1.4.92.1.1	BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMessage	431
3.1.4.92.1.2	BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMessage	431
3.1.4.92.2	Elements.....	432
3.1.4.92.2.1	IsParameterReferencedByMethodInstance.....	432
3.1.4.92.2.2	IsParameterReferencedByMethodInstanceResponse	432
3.1.4.92.3	Complex Types	433
3.1.4.92.4	Simple Types	433
3.1.4.92.5	Attributes.....	433
3.1.4.92.6	Groups.....	433

3.1.4.92.7	Attribute Groups.....	433
3.1.4.93	MetadataObjectCreate	433
3.1.4.93.1	Messages	439
3.1.4.93.1.1	BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage	440
3.1.4.93.1.2	BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage	440
3.1.4.93.2	Elements	440
3.1.4.93.2.1	MetadataObjectCreate	440
3.1.4.93.2.2	MetadataObjectCreateResponse.....	440
3.1.4.93.3	Complex Types	441
3.1.4.93.4	Simple Types	441
3.1.4.93.5	Attributes	441
3.1.4.93.6	Groups.....	441
3.1.4.93.7	Attribute Groups.....	441
3.1.4.94	MetadataObjectMergeXml	441
3.1.4.94.1	Messages	444
3.1.4.94.1.1	BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage	445
3.1.4.94.1.2	BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage	445
3.1.4.94.2	Elements	445
3.1.4.94.2.1	MetadataObjectMergeXml	445
3.1.4.94.2.2	MetadataObjectMergeXmlResponse	447
3.1.4.94.3	Complex Types	447
3.1.4.94.4	Simple Types	448
3.1.4.94.5	Attributes	448
3.1.4.94.6	Groups.....	448
3.1.4.94.7	Attribute Groups.....	448
3.1.4.95	MetadataObjectReadXml	448
3.1.4.95.1	Messages	454
3.1.4.95.1.1	BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage	454
3.1.4.95.1.2	BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage	454
3.1.4.95.2	Elements	454
3.1.4.95.2.1	MetadataObjectReadXml.....	455
3.1.4.95.2.2	MetadataObjectReadXmlResponse	456
3.1.4.95.3	Complex Types	456
3.1.4.95.4	Simple Types	456
3.1.4.95.5	Attributes	456
3.1.4.95.6	Groups.....	457
3.1.4.95.7	Attribute Groups.....	457
3.1.4.96	MetadataObjectWriteXml	457
3.1.4.96.1	Messages	459

3.1.4.96.1.1	BusinessDataCatalogSharedService_MetadataObjectWriteXml_Input Message	459
3.1.4.96.1.2	BusinessDataCatalogSharedService_MetadataObjectWriteXml_Outpu tMessage	459
3.1.4.96.2	Elements	459
3.1.4.96.2.1	MetadataObjectWriteXml	459
3.1.4.96.2.2	MetadataObjectWriteXmlResponse	460
3.1.4.96.3	Complex Types	462
3.1.4.96.4	Simple Types	462
3.1.4.96.5	Attributes	462
3.1.4.96.6	Groups	462
3.1.4.96.7	Attribute Groups	462
3.1.4.97	ModelReadXml	462
3.1.4.97.1	Messages	467
3.1.4.97.1.1	BusinessDataCatalogSharedService_ModelReadXml_InputMessage ...	467
3.1.4.97.1.2	BusinessDataCatalogSharedService_ModelReadXml_OutputMessage .	467
3.1.4.97.2	Elements	467
3.1.4.97.2.1	ModelReadXml	467
3.1.4.97.2.2	ModelReadXmlResponse	468
3.1.4.97.3	Complex Types	469
3.1.4.97.4	Simple Types	469
3.1.4.97.5	Attributes	469
3.1.4.97.6	Groups	469
3.1.4.97.7	Attribute Groups	469
3.1.4.98	ReadSlicedXml	469
3.1.4.98.1	Messages	470
3.1.4.98.1.1	BusinessDataCatalogSharedService_ReadSlicedXml_InputMessage ...	470
3.1.4.98.1.2	BusinessDataCatalogSharedService_ReadSlicedXml_OutputMessage .	471
3.1.4.98.2	Elements	471
3.1.4.98.2.1	ReadSlicedXml	471
3.1.4.98.2.2	ReadSlicedXmlResponse	471
3.1.4.98.3	Complex Types	472
3.1.4.98.4	Simple Types	472
3.1.4.98.5	Attributes	472
3.1.4.98.6	Groups	472
3.1.4.98.7	Attribute Groups	472
3.1.4.99	RemoveEntityFromModel	472
3.1.4.99.1	Messages	473
3.1.4.99.1.1	BusinessDataCatalogSharedService_RemoveEntityFromModel_Input Message	474
3.1.4.99.1.2	BusinessDataCatalogSharedService_RemoveEntityFromModel_Outpu tMessage	474
3.1.4.99.2	Elements	474
3.1.4.99.2.1	RemoveEntityFromModel	474
3.1.4.99.2.2	RemoveEntityFromModelResponse	475
3.1.4.99.3	Complex Types	475
3.1.4.99.4	Simple Types	475
3.1.4.99.5	Attributes	475
3.1.4.99.6	Groups	475

3.1.4.99.7	Attribute Groups.....	475
3.1.4.100	RemoveLocalizedName	475
3.1.4.100.1	Messages.....	476
3.1.4.100.1.1	BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage	477
3.1.4.100.1.2	BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage	477
3.1.4.100.2	Elements	477
3.1.4.100.2.1	RemoveLocalizedName	477
3.1.4.100.2.2	RemoveLocalizedNameResponse	478
3.1.4.100.3	Complex Types.....	478
3.1.4.100.4	Simple Types	478
3.1.4.100.5	Attributes	478
3.1.4.100.6	Groups	478
3.1.4.100.7	Attribute Groups.....	478
3.1.4.101	RemoveProperty	478
3.1.4.101.1	Messages.....	479
3.1.4.101.1.1	BusinessDataCatalogSharedService_RemoveProperty_InputMessage	480
3.1.4.101.1.2	BusinessDataCatalogSharedService_RemoveProperty_OutputMessage	480
3.1.4.101.2	Elements	480
3.1.4.101.2.1	RemoveProperty	480
3.1.4.101.2.2	RemovePropertyResponse	481
3.1.4.101.3	Complex Types.....	481
3.1.4.101.4	Simple Types	481
3.1.4.101.5	Attributes	481
3.1.4.101.6	Groups	481
3.1.4.101.7	Attribute Groups.....	481
3.1.4.102	SaveLocalizedName.....	481
3.1.4.102.1	Messages.....	482
3.1.4.102.1.1	BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage	483
3.1.4.102.1.2	BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage	483
3.1.4.102.2	Elements	483
3.1.4.102.2.1	SaveLocalizedName.....	483
3.1.4.102.2.2	SaveLocalizedNameResponse	484
3.1.4.102.3	Complex Types.....	484
3.1.4.102.4	Simple Types	484
3.1.4.102.5	Attributes	484
3.1.4.102.6	Groups	484
3.1.4.102.7	Attribute Groups.....	484
3.1.4.103	SaveProperty.....	484
3.1.4.103.1	Messages.....	486
3.1.4.103.1.1	BusinessDataCatalogSharedService_SaveProperty_InputMessage	486
3.1.4.103.1.2	BusinessDataCatalogSharedService_SaveProperty_OutputMessage	486
3.1.4.103.2	Elements	486

3.1.4.103.2.1	SaveProperty.....	486
3.1.4.103.2.2	SavePropertyResponse	487
3.1.4.103.3	Complex Types.....	487
3.1.4.103.4	Simple Types	487
3.1.4.103.5	Attributes	487
3.1.4.103.6	Groups	487
3.1.4.103.7	Attribute Groups.....	487
3.1.4.104	SetAccessControlEntries.....	487
3.1.4.104.1	Messages.....	489
3.1.4.104.1.1	BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage	489
3.1.4.104.1.2	BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage	489
3.1.4.104.2	Elements	489
3.1.4.104.2.1	SetAccessControlEntries.....	490
3.1.4.104.2.2	SetAccessControlEntriesResponse	490
3.1.4.104.3	Complex Types.....	490
3.1.4.104.4	Simple Types	491
3.1.4.104.5	Attributes	491
3.1.4.104.6	Groups	491
3.1.4.104.7	Attribute Groups.....	491
3.1.4.105	SetDefaultActionForEntity	491
3.1.4.105.1	Messages.....	492
3.1.4.105.1.1	BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage	492
3.1.4.105.1.2	BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage	493
3.1.4.105.2	Elements	493
3.1.4.105.2.1	SetDefaultActionForEntity	493
3.1.4.105.2.2	SetDefaultActionForEntityResponse	493
3.1.4.105.3	Complex Types.....	494
3.1.4.105.4	Simple Types	494
3.1.4.105.5	Attributes	494
3.1.4.105.6	Groups	494
3.1.4.105.7	Attribute Groups.....	494
3.1.4.106	SetDefaultValuesForTypeDescriptor	494
3.1.4.106.1	Messages.....	495
3.1.4.106.1.1	BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InputMessage.....	496
3.1.4.106.1.2	BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_OutputMessage.....	496
3.1.4.106.2	Elements	496
3.1.4.106.2.1	SetDefaultValuesForTypeDescriptor	496
3.1.4.106.2.2	SetDefaultValuesForTypeDescriptorResponse.....	497
3.1.4.106.3	Complex Types.....	497
3.1.4.106.4	Simple Types	497
3.1.4.106.5	Attributes	497

3.1.4.106.6	Groups	497
3.1.4.106.7	Attribute Groups	497
3.1.4.107	SetLobSystemDataByLobSystemId	497
3.1.4.107.1	Messages	498
3.1.4.107.1.1	BusinessDataCatalogSharedService_SetLobSystemDataByLobSystem Id_InputMessage	498
3.1.4.107.1.2	BusinessDataCatalogSharedService_SetLobSystemDataByLobSystem Id_OutputMessage	499
3.1.4.107.2	Elements	499
3.1.4.107.2.1	SetLobSystemDataByLobSystemId	499
3.1.4.107.2.2	SetLobSystemDataByLobSystemIdResponse	499
3.1.4.107.3	Complex Types	500
3.1.4.107.4	Simple Types	500
3.1.4.107.5	Attributes	500
3.1.4.107.6	Groups	500
3.1.4.107.7	Attribute Groups	500
3.1.4.108	TypeDescriptorCreate	500
3.1.4.108.1	Messages	502
3.1.4.108.1.1	BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMes sage	503
3.1.4.108.1.2	BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMe ssage	503
3.1.4.108.2	Elements	503
3.1.4.108.2.1	TypeDescriptorCreate	503
3.1.4.108.2.2	TypeDescriptorCreateResponse	504
3.1.4.108.3	Complex Types	504
3.1.4.108.4	Simple Types	504
3.1.4.108.5	Attributes	504
3.1.4.108.6	Groups	504
3.1.4.108.7	Attribute Groups	504
3.1.4.109	TypeDescriptorMergeXml	504
3.1.4.109.1	Messages	506
3.1.4.109.1.1	BusinessDataCatalogSharedService_TypeDescriptorMergeXml_Input Message	506
3.1.4.109.1.2	BusinessDataCatalogSharedService_TypeDescriptorMergeXml_Outpu tMessage	507
3.1.4.109.2	Elements	507
3.1.4.109.2.1	TypeDescriptorMergeXml	507
3.1.4.109.2.2	TypeDescriptorMergeXmlResponse	508
3.1.4.109.3	Complex Types	508
3.1.4.109.4	Simple Types	508
3.1.4.109.5	Attributes	509
3.1.4.109.6	Groups	509
3.1.4.109.7	Attribute Groups	509
3.1.4.110	TypeDescriptorReadXml	509
3.1.4.110.1	Messages	511

3.1.4.110.1.1	BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage	512
3.1.4.110.1.2	BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage	512
3.1.4.110.2	Elements	512
3.1.4.110.2.1	TypeDescriptorReadXml	512
3.1.4.110.2.2	TypeDescriptorReadXmlResponse	513
3.1.4.110.3	Complex Types	514
3.1.4.110.4	Simple Types	514
3.1.4.110.5	Attributes	514
3.1.4.110.6	Groups	514
3.1.4.110.7	Attribute Groups	514
3.1.4.111	Update	514
3.1.4.111.1	Messages	521
3.1.4.111.1.1	BusinessDataCatalogSharedService_Update_InputMessage	521
3.1.4.111.1.2	BusinessDataCatalogSharedService_Update_OutputMessage	521
3.1.4.111.2	Elements	521
3.1.4.111.2.1	Update	522
3.1.4.111.2.2	UpdateResponse	522
3.1.4.111.3	Complex Types	522
3.1.4.111.4	Simple Types	522
3.1.4.111.5	Attributes	522
3.1.4.111.6	Groups	522
3.1.4.111.7	Attribute Groups	523
3.1.4.112	WriteSlicedXml	523
3.1.4.112.1	Messages	524
3.1.4.112.1.1	BusinessDataCatalogSharedService_WriteSlicedXml_InputMessage	524
3.1.4.112.1.2	BusinessDataCatalogSharedService_WriteSlicedXml_OutputMessage	524
3.1.4.112.2	Elements	524
3.1.4.112.2.1	WriteSlicedXml	524
3.1.4.112.2.2	WriteSlicedXmlResponse	525
3.1.4.112.3	Complex Types	525
3.1.4.112.4	Simple Types	525
3.1.4.112.5	Attributes	525
3.1.4.112.6	Groups	525
3.1.4.112.7	Attribute Groups	525
3.1.5	Timer Events	525
3.1.6	Other Local Events	525
4	Protocol Examples	526
4.1	Creating an LobSystem	526
4.2	Setting the Security Information of a MetadataObject	527
4.3	Reading the Security Information of a MetadataObject	529
4.4	Creating an Entity	530
4.5	Activating an Entity	532
4.6	Reading an Entity	534
4.7	Creating Properties for MetadataObjects	535
4.8	Adding Localized Names for MetadataObjects	537
4.9	Updating an Entity	538
4.10	Deleting an Entity	540

5 Security	542
5.1 Security Considerations for Implementers.....	542
5.2 Index of Security Parameters	542
6 Appendix A: Full WSDL	543
7 Appendix B: Full XML Schema	757
7.1 http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure Schema	757
7.2 http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel Schema	758
7.3 http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime Schema ...	760
7.4 Microsoft.BusinessData.SharePoint Schema	760
7.5 http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants Schema.....	761
7.6 Microsoft.SharePoint.BusinessData Schema	761
7.7 http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema	773
7.8 http://schemas.microsoft.com/2003/10/Serialization/ Schema	774
7.9 http://schemas.datacontract.org/2004/07/System Schema	775
7.10 http://www.microsoft.com/Office/2009/BusinessDataCatalog Schema	776
8 Appendix C: Product Behavior	810
9 Change Tracking	818
10 Index	904

1 Introduction

This document specifies the Business Data Connectivity Remote Administration Web Service Protocol. This protocol enables protocol clients to create, store and retrieve information about interfaces of business systems and annotations of these interfaces.

Sections 1.8, 2, and 3 of this specification are normative and contain RFC 2119 language. Sections 1.5 and 1.9 are also normative but cannot contain RFC 2119 language. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

- access control entry (ACE)**
- access control list (ACL)**
- anonymous user**
- Augmented Backus-Naur Form (ABNF)**
- Coordinated Universal Time (UTC)**
- GUID**
- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- language code identifier (LCID)**
- Unicode**
- XML**

The following terms are defined in [\[MS-OFCGLOS\]](#):

- AccessChecker**
- Action**
- ActionParameter**
- ActivityTrackingFilter**
- Association**
- AssociationGroup**
- AssociationNavigator**
- AssociationReference**
- Associator**
- base64 encoding**
- BatchingPositionFilter**
- BatchingTerminationFilter**
- BinarySecurityDescriptorAccessor**
- BulkAssociatedIdEnumerator**
- BulkAssociationNavigator**
- BulkIdEnumerator**
- BulkSpecificFinder**
- Business Logic Module**
- ChangedIdEnumerator**
- ComparisonFilter**
- complex type**
- Creator**
- DataClass**
- DefaultValue**
- DeletedIdEnumerator**
- Deleter**
- Disassociator**

empty GUID
endpoint
Entity
EntityInstance
field
FilterDescriptor
Finder
GenericInvoker
Identifier
IdEnumerator
InputFilter
InputOutputFilter
LastIdFilter
LimitFilter
line-of-business (LOB) system
LobSystem
LobSystemInstance
localized name
metadata store
MetadataCatalog
MetadataModel
MetadataObject
MetadataObjectId
Method
MethodInstance
Model
OutputFilter
PageNumberFilter
Parameter
partition
PasswordCredentialFilter
Property
ReturnTypeDescriptor
root element
root TypeDescriptor
Scalar
security principal
Setting
Simple Object Access Protocol (SOAP)
simple type
SOAP action
SOAP body
SOAP fault
SpecificFinder
SsoTicketFilter
StreamAccessor
TimeStampFilter
TypeDescriptor
TypeReflector
Uniform Resource Identifier (URI)
Uniform Resource Locator (URL)
Updater
UserContextFilter
UserCultureFilter
UsernameCredentialFilter

UserProfileFilter
View
Web service
Web Services Description Language (WSDL)
WildcardFilter
WSDL message
WSDL operation
XML attribute
XML element
XML namespace
XML namespace prefix
XML schema
XML schema definition (XSD)

The following terms are specific to this document:

Open Data Protocol (OData): A web protocol for querying and updating data specified in [MS-ODATA].

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[ECMA-335] ECMA International, "Common Language Infrastructure (CLI) Partitions I to VI", ECMA-335, June 2006, <http://www.ecma-international.org/publications/standards/Ecma-335.htm>

[MS-BDCMFFS] Microsoft Corporation, "[Business Data Connectivity Model File Format Specification](#)".

[MS-NRTP] Microsoft Corporation, "[.NET Remoting: Core Protocol Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC5234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <http://www.rfc-editor.org/rfc/rfc5234.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XML] World Wide Web Consortium, "Extensible Markup Language (XML) 1.0 (Fourth Edition)", W3C Recommendation, August 2006, <http://www.w3.org/TR/2006/REC-xml-20060816/>

[XML10] World Wide Web Consortium, "Extensible Markup Language (XML) 1.0 (Third Edition)", February 2004, <http://www.w3.org/TR/REC-xml>

[XMLINFOSET] World Wide Web Consortium, "XML Information Set (Second Edition)", February 2004, <http://www.w3.org/TR/2004/REC-xml-infoset-20040204>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA0] Fallside, D., Ed. and Walmsley, P., Ed., "XML Schema Part 0: Primer, Second Edition", W3C Recommendation, October 2004, <http://www.w3.org/TR/2004/REC-xmlschema-0-20041028/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MSDN-SharePointSDK] Microsoft Corporation, "SharePoint Products and Technologies SDK: 2010 API Reference (Technical Preview)", July 2009, [http://msdn.microsoft.com/en-us/library/ee557253\(office.14\).aspx](http://msdn.microsoft.com/en-us/library/ee557253(office.14).aspx)

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

1.3 Protocol Overview (Synopsis)

Corporations have a variety of data stored in various **line-of-business (LOB) systems**. Typically, this data is accessible only through the proprietary programming interface of enterprise software systems. It is ideal to provide access to such data through a set of normalized interfaces so that users do not have to learn system-specific or adapter-specific programming patterns for each system.

To facilitate this access, it is possible to store descriptions of the programmatic interface of the LOB systems, such as "get all customers" or "update order information", by using data structures, such as **Methods**, **Parameters**, and **TypeDescriptors**. It is also possible to store information about the LOB systems themselves, such as the server name, connection information, and steps on how to authenticate users, by using data structures, such as **LobSystem** and **LobSystemInstance**.

Methods can be considered to live within an **Entity** representing a business data type, such as a "customer" or an "order". The LOB system interface definitions can then be transformed into normalized, stereotypical operations against Entities, such as "Read-An-Entity-Instance-By-Id", "Read-Entity-Instances" and "Check-Entity-Instance-Permissions" by annotating the LOB system interface descriptions, with the annotations described by data structures, such as **MethodInstance**,

Identifier, **FilterDescriptor**, and **Association**. These data structures, collectively called **MetadataObjects**, can be grouped into related collections called **MetadataModels** that describe a single LOB system. After a store of MetadataModels is made available, a runtime engine can use the store to convert a stereotypical normalized operation requested by an application that uses the protocol client into a LOB system-specific invocation.

This protocol enables a client to create, read, update, and delete MetadataObjects in a **metadata store**. For operations that create or modify MetadataObjects, the protocol server provides validation and diagnostic errors, so that protocol clients can maintain the set of stored MetadataObjects in a state that satisfies certain semantic constraints for MetadataModels.

1.4 Relationship to Other Protocols

This protocol uses the **SOAP** message protocol for formatting request and response messages, as described in [\[SOAP1.1\]](#). It transmits those messages by using **HTTP**, as described in [\[RFC2616\]](#) or Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS), as described in [\[RFC2818\]](#)..

The following diagram shows the underlying messaging and transport stack used by the protocol:

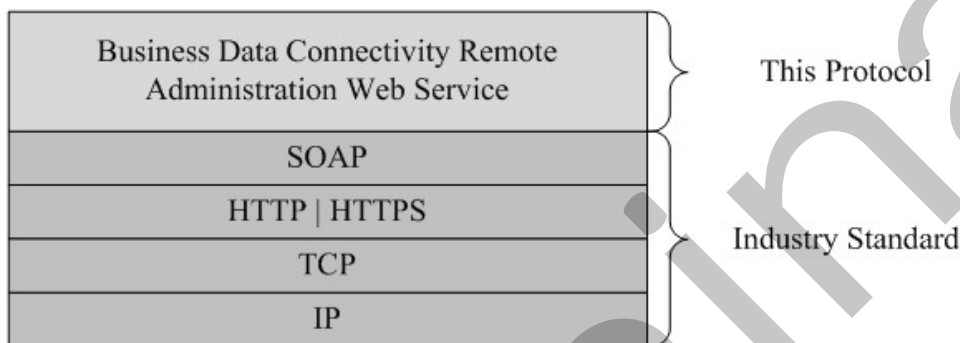


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

This protocol operates against a protocol server that exposes one or more **endpoint (4) URIs** that are known by protocol clients. The endpoint (4) URI of the protocol server and the transport that is used by the protocol server are known by the protocol client.

This protocol assumes that authentication has been performed by the underlying protocols.

1.6 Applicability Statement

This protocol is intended for use by protocol clients and protocol servers that are both connected by high-bandwidth, low-latency network connections.

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol can be implemented by using transports that support sending SOAP (Simple Object Access Protocol) messages, as specified in section [2.1](#).
- **Protocol Versions:** This protocol is not versioned.

Capability Negotiation: This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

Preliminary

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The **WSDL** in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **present**, and **not null**.

2.1 Transport

Protocol servers **MUST** support SOAP over HTTP. Protocol servers **SHOULD** additionally support SOAP over HTTPS to secure communication with protocol clients.

Protocol messages **MUST** be formatted as specified in [\[SOAP1.1\]](#), section 4. Protocol server faults **MUST** be returned using HTTP Status Codes as specified in [\[RFC2616\]](#), section 10, or using **SOAP faults** as specified in [\[SOAP1.1\]](#), section 4.4.

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and WSDL, as specified in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
q1	http://schemas.datacontract.org/2004/07/System	
q6	http://schemas.microsoft.com/2003/10/Serialization/Arrays	
ser	http://schemas.microsoft.com/2003/10/Serialization/	
soap	http://schemas.xmlsoap.org/wsdl/soap/	[SOAP1.1]
tns	http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure	
tns1	http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel	
tns2	http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime	
tns3	Microsoft.BusinessData.SharePoint	
tns4	http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants	
tns5	Microsoft.SharePoint.BusinessData	
tns6	http://www.microsoft.com/Office/2009/BusinessDataCatalog	

Pref ix	Namespace URI	Reference
tns7	http://www.microsoft.com/Office/2009/BusinessDataCatalog/Imports	
wsaw	http://www.w3.org/2006/05/addressing/wsdl	
wsdl	http://schemas.xmlsoap.org/wsdl/	[WSDL]
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEM A1] [XMLSCHEM A2]

2.2.2 Messages

None.

2.2.3 Elements

This specification does not define any common XML Schema element definitions.

2.2.4 Complex Types

The following sections specify the set of common XML Schema complex type definitions defined by this specification. XML Schema complex type definitions that are specific to a particular operation are described with the operation.

The definitions of some complex types in this section make use of **ABNF** representation as specified in [\[RFC5234\]](#).

Complex types designated as error complex types and returned as responses by the protocol server **MUST** be formatted as SOAP Faults, as specified in [\[SOAP1.2/1\]](#), section 5.4.

Code: **MUST** contain a Value subelement, which **MUST** be set to Sender. **MAY** contain a Subcode subelement.

Reason: **MUST** contain a Text sub-element, which **MUST** be ignored by the client.

Detail: **MUST** either contain the error complex type or empty

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex Type	Description
AccessControlEntryStruct	The AccessControlEntryStruct complex type contains information about an access control entry (ACE) .
AccessDeniedException	The AccessDeniedException complex type is an error complex type that contains information about a protocol-server-side error because of a violation of access control on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).

Complex Type	Description
AccessDeniedExceptionState	The AccessDeniedExceptionState complex type is an error complex type that contains information about a protocol-server-side error because of a violation of access control on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
ActionParameterStruct	The ActionParameterStruct complex type contains information about an ActionParameter .
ActionStruct	The ActionStruct complex type contains information about an Action .
AdministrationMetadataCatalogStruct	The AdministrationMetadataCatalogStruct contains information about a MetadataCatalog .
ArgumentException	The ArgumentException complex type is an error complex type that contains information about a protocol-server-side error that occurred because of an argument with an invalid value. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
ArgumentNullException	The ArgumentNullException complex type is an error complex type that contains information about a protocol-server-side error because of a NULL value in an argument which does not accept NULL values. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
ArgumentOutOfRangeException	The ArgumentOutOfRangeException complex type is an error complex type that contains information about a protocol-server-side error because of an argument with a value outside the range of permissible values. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
ArrayOfAccessControlEntryStruct	The ArrayOfAccessControlEntryStruct complex type is a list of complex types, each of which represents an ACE .
ArrayOfAssociationStruct	The ArrayOfAssociationStruct complex type is a list of complex types, each of which represents an Association.
ArrayOfEntityStruct	The ArrayOfEntityStruct complex type is a list of complex types, each of which represents an Entity.
ArrayOfLobSystemStruct	The ArrayOfLobSystemStruct complex type is a list of complex types, each of which represents a LobSystem.
ArrayOfLocalizedNameStruct	The ArrayOfLocalizedNameStruct complex type is a list of complex types, each of which represents a localized name .
ArrayOfMethodInstanceStruct	The ArrayOfMethodInstanceStruct complex type is a list of complex types, each of which represents a MethodInstances.
ArrayOfModelStruct	The ArrayOfModelStruct complex type is a list of complex types, each of which represents a Model .

Complex Type	Description
ArrayOfPropertyStruct	The ArrayOfPropertyStruct complex type is a list of complex types, each of which represents a property.
ArrayOfstring	The ArrayOfString complex type represents a list of xs:string as specified in [XMLSCHEMA2] .
ArrayOfTypeDescriptorStruct	The ArrayOfTypeDescriptorStruct complex type is a list of complex types, each of which represents a TypeDescriptor.
ArrayOfunsignedInt	The ArrayOfunsignedInt complex type represents a list of xs:unsignedInt elements as specified in [XMLSCHEMA2] .
AssociationGroupStruct	The AssociationGroupStruct complex type contains information about an AssociationGroup . Each Association referenced by the AssociationReferences contained by the AssociationGroup is identified by the values in the same index of the lists associationEntityNames , associationEntityNamespaces , associationNames and associationIds .
AssociationReferenceStruct	The AssociationReferenceStruct complex type contains information about an AssociationReference.
AssociationStruct	The AssociationStruct complex type MUST contain information about an Association. A namespace at any index of the sourceEntityNamespaces element of this complex type MUST be the namespace of the Entity which the name at the same index of the sourceEntityNames element belongs to.
BdcException	The BdcException complex type is an error complex type that contains information about a protocol-server-side error encountered during implementation-specific operations or caused by a violation of constraints on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
BdcExceptionState	The BdcExceptionState complex type is an error complex type that contains information about a protocol-server-side error encountered during implementation-specific operations or caused by a violation of constraints on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
ComplexValueStruct	The ComplexValueStruct complex type MUST contain information about data types.
ConcurrentModificationExceptionState	The ConcurrentModificationExceptionState complex type is an error complex type that contains information about a protocol-server-side error because of a concurrent modification of a MetadataObject. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
DataClassStruct	The DataClassStruct complex type MUST contain information about a DataClass .

Complex Type	Description
DefaultValueStruct	The DefaultValueStruct complex type contains details of a DefaultValue of a TypeDescriptor.
DuplicateMetadataObjectExceptionState	The DuplicateMetadataObjectExceptionState complex type is an error complex type that contains information about a protocol-server-side error from a duplication of a MetadataObject. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
EntityStruct	The EntityStruct complex type contains information about an Entity.
ExceededMetadataObjectLimitExceptionState	The ExceededMetadataObjectLimitExceptionState complex type is an error complex type that contains information about a protocol-server-side error because of a MetadataObject exceeding an implementation-specific limit to the number of MetadataObjects it can contain or refer to. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
Exception	The Exception complex type is an error complex type that contains information about a protocol-server-side error. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
FilterDescriptorStruct	The FilterDescriptorStruct complex type contains information about a FilterDescriptor.
IdentifierStruct	The IdentifierStruct complex type contains information about an Identifier.
InvalidMetadataObjectExceptionState	The InvalidMetadataObjectExceptionState complex type is an error complex type that contains information about a protocol-server-side error because a MetadataObject contained invalid attributes. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
InvalidMetadataPropertyExceptionState	The InvalidMetadataPropertyExceptionState complex type is an error complex type that contains information about a protocol-server-side error because an invalid property was detected in the set of properties of a MetadataObject. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
InvalidOperationException	The InvalidOperationException complex type is an error complex type that contains information about a protocol-server-side error because of an attempt to perform an operation that is invalid for the current state of the protocol server. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
LobSystemInstanceStruct	The LobSystemInstanceStruct complex type contains information about a LobSystemInstance.

Complex Type	Description
LobSystemStruct	The LobSystemStruct complex type contains information about a LobSystem.
LocalizedNameStruct	The LocalizedNameStruct complex type contains information about a localized name.
MetadataException	The MetadataException complex type is an error complex type that contains information about a protocol-server-side error because of a syntactic or semantic violation of a MetadataModel constraint in the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
MetadataObjectNotFoundExceptionState	The MetadataObjectNotFoundExceptionState complex type is an error complex type that contains information about a protocol-server-side error because a requested MetadataObject was not found. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
MetadataObjectStruct	This structure contains the attributes of the MetadataObject.
MethodInstanceStruct	The MethodInstanceStruct complex type contains information about a MethodInstance.
MethodStruct	The MethodStruct complex type contains information about a Method.
ModelStruct	The ModelStruct complex type contains information about a Model.
PackageFormatExceptionState	The PackageFormatExceptionState complex type is an error complex type that contains information about a protocol-server-side error because a specified XML does not conform to [MS-BDCMFFS] or the MetadataModel contained within the specified XML conforming to [MS-BDCMFFS] having invalid configuration of MetadataObjects or their attributes. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
ParameterStruct	This structure contains the information about a Parameter.
PropertyStruct	The PropertyStruct complex type contains information about a property.
ProxyGenerationResult	The ProxyGenerationResult complex type contains information about Business Logic Modules<1> .
SystemException	The SystemException complex type is an error complex type that contains information about a protocol-server-side error. The complex type MUST only be included as part of a SOAP fault as specified in Complex Types (section 2.2.4).
TypeDescriptorStruct	The TypeDescriptorStruct complex type contains information about a TypeDescriptor.

Complex Type	Description
Version	The Version complex type MUST contain information about the version of a DataClass.

2.2.4.1 AccessControlEntryStruct

Namespace: Microsoft.SharePoint.BusinessData

The **AccessControlEntryStruct** complex type contains information about an access control entry (ACE).

```
<xs:complexType name="AccessControlEntryStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="principalBinaryForm" nillable="true"
      type="xs:base64Binary"/>
    <xs:element minOccurs="0" name="principalDisplayName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="principalName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="rights" type="xs:unsignedLong"/>
  </xs:sequence>
</xs:complexType>
```

principalBinaryForm: MUST be ignored by the protocol server. MUST be ignored by the protocol client.

principalDisplayName: MUST be ignored by the protocol server. MUST be ignored by the protocol client.

principalName: The name of a security principal. This element MUST be present. The value of this element MUST be as specified for **Principal** element in [\[MS-BDCMFFS\]](#) section 2.1.4.43.

rights: The permissions available to a **security principal** to perform operations on or by using a MetadataObject. This element MUST be present. The value of this element MUST be sum of values of the corresponding rights in the **BdcRights** (section [3.1.4.88.4.1](#)) enumeration type.

2.2.4.2 AccessDeniedException

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure

The **AccessDeniedException** complex type is an error complex type that contains information about a protocol-server-side error because of a violation of access control on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="AccessDeniedException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:BdcException"/>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.3 AccessDeniedExceptionState

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure

The **AccessDeniedExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because of a violation of access control on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="AccessDeniedExceptionState"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:BdcExceptionState">
      <xs:sequence>
        <xs:element minOccurs="0" name="CurrentIdentity" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="SecurableObjectName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="SecurableObjectTypeName" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

CurrentIdentity: The security principal in whose context the protocol client is operating when the violation of access control occurs. This element MUST be present.

SecurableObjectName: The name of the MetadataObject on which the access control violation occurs. This element MUST be present.

SecurableObjectTypeName: The type of MetadataObject on which the access control violation occurs. This element MUST be present.

2.2.4.4 ActionParameterStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ActionParameterStruct** complex type contains information about an ActionParameter.

```
<xs:complexType name="ActionParameterStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="actionId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="index" type="xs:unsignedByte"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

actionId: The **MetadataObjectId** of the Action that contains this ActionParameter. This element MUST be present. The value of this element MUST be in [1, 0x7fffffff] range.

index: The index of the ActionParameter. This index corresponds to the parameter in the command of the Action that contains this ActionParameter. The index values of ActionParameters that are contained by the same Action MUST be greater than or equal to 0, and less than the number of ActionParameters that are contained by the Action. The index values of ActionParameters MUST be unique across all ActionParameters that are contained by the same Action. [<2>](#)

2.2.4.5 ActionStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ActionStruct** complex type contains information about an Action.

```
<xs:complexType name="ActionStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="imageUrl" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="isOpenedInNewWindow" type="xs:boolean"/>
        <xs:element minOccurs="0" name="position" type="xs:unsignedByte"/>
        <xs:element minOccurs="0" name="url" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

entityId: The MetadataObjectId of the Entity that contains the Action. This element MUST be present. The value of this element MUST be in [1, 0x7fffffff] range.

imageUrl: The implementation-specific location of the resource that is used to represent the Action in the user interface. The application that utilizes the protocol client can use the resource in the specified location to represent the Action in the user interface possibly along with the localized name of the Action. This element MUST be present.

isOpenedInNewWindow: A value which specifies whether the results of executing an Action are presented in a new user interface context. The application that utilizes the protocol client can use this value as guidance on creating new user interface context when the Action is executed. This element MUST be present.

position: The order of an Action among the other Actions for an Entity. The application that utilizes the protocol client can use this ordering as guidance in an implementation-specific algorithm that represents the Actions in the user interface. This element MUST be present.

url: The implementation-specific parameterized command associated with the Action. The parameters of the command MUST correspond to ActionParameters of this Action. This element MUST be present.

2.2.4.6 AdministrationMetadataCatalogStruct

Namespace: Microsoft.SharePoint.BusinessData

The **AdministrationMetadataCatalogStruct** contains information about a MetadataCatalog.

```
<xs:complexType name="AdministrationMetadataCatalogStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.7 ArgumentException

Namespace: http://schemas.datacontract.org/2004/07/System

The **ArgumentException** complex type is an error complex type that contains information about a protocol-server-side error that occurred because of an argument with an invalid value. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="ArgumentException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="q1:SystemException"/>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.8 ArgumentNullException

Namespace: http://schemas.datacontract.org/2004/07/System

The **ArgumentNullException** complex type is an error complex type that contains information about a protocol-server-side error because of a NULL value in an argument which does not accept NULL values. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="ArgumentNullException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="q1:ArgumentException"/>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.9 ArgumentOutOfRangeException

Namespace: http://schemas.datacontract.org/2004/07/System

The **ArgumentOutOfRangeException** complex type is an error complex type that contains information about a protocol-server-side error because of an argument with a value outside the range of permissible values. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="ArgumentOutOfRangeException"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="q1:ArgumentException"/>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.10 ArrayOfAccessControlEntryStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfAccessControlEntryStruct** complex type is a list of complex types, each of which represents an ACE.

```

<xs:complexType name="ArrayOfAccessControlEntryStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessControlEntryStruct"
nillable="true" type="tns5:AccessControlEntryStruct"/>
  </xs:sequence>
</xs:complexType>

```

AccessControlEntryStruct: A complex type that represents an ACE.

2.2.4.11 ArrayOfAssociationStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfAssociationStruct** complex type is a list of complex types, each of which represents an Association.

```

<xs:complexType name="ArrayOfAssociationStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationStruct" nillable="true"
type="tns5:AssociationStruct"/>
  </xs:sequence>
</xs:complexType>

```

AssociationStruct: A complex type that represents an Association.

2.2.4.12 ArrayOfEntityStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfEntityStruct** complex type is a list of complex types, each of which represents an Entity.

```

<xs:complexType name="ArrayOfEntityStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="EntityStruct" nillable="true"
type="tns5:EntityStruct"/>
  </xs:sequence>
</xs:complexType>

```

EntityStruct: A complex type that represents an Entity.

2.2.4.13 ArrayOfLobSystemStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfLobSystemStruct** complex type is a list of complex types, each of which represents a LobSystem.

```

<xs:complexType name="ArrayOfLobSystemStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="LobSystemStruct" nillable="true"
type="tns5:LobSystemStruct"/>
  </xs:sequence>

```

```
</xs:complexType>
```

LobSystemStruct: A complex type that represents a LobSystem.

2.2.4.14 ArrayOfLocalizedNameStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfLocalizedNameStruct** complex type is a list of complex types, each of which represents a localized name.

```
<xs:complexType name="ArrayOfLocalizedNameStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="LocalizedNameStruct"
      nillable="true" type="tns5:LocalizedNameStruct"/>
  </xs:sequence>
</xs:complexType>
```

LocalizedNameStruct: A complex type that represents a localized name.

2.2.4.15 ArrayOfMethodInstanceStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfMethodInstanceStruct** complex type is a list of complex types, each of which represents a MethodInstances.

```
<xs:complexType name="ArrayOfMethodInstanceStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="MethodInstanceStruct"
      nillable="true" type="tns5:MethodInstanceStruct"/>
  </xs:sequence>
</xs:complexType>
```

MethodInstanceStruct: A complex type that represents a MethodInstance.

2.2.4.16 ArrayOfModelStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfModelStruct** complex type is a list of complex types, each of which represents a Model.

```
<xs:complexType name="ArrayOfModelStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ModelStruct" nillable="true"
      type="tns5:ModelStruct"/>
  </xs:sequence>
</xs:complexType>
```

ModelStruct: A complex type that represents a Model.

2.2.4.17 ArrayOfPropertyStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfPropertyStruct** complex type is a list of complex types, each of which represents a property.

```
<xs:complexType name="ArrayOfPropertyStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="PropertyStruct" nillable="true"
      type="tns5:PropertyStruct"/>
  </xs:sequence>
</xs:complexType>
```

PropertyStruct: A complex type that represents a Property.

2.2.4.18 ArrayOfString

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

The **ArrayOfString** complex type represents a list of xs:string as specified in [\[XMLSCHEMA2\]](#).

```
<xs:complexType name="ArrayOfstring" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
      type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

string: An element in the list.

2.2.4.19 ArrayOfTypeDescriptorStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfTypeDescriptorStruct** complex type is a list of complex types, each of which represents a TypeDescriptor.

```
<xs:complexType name="ArrayOfTypeDescriptorStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="TypeDescriptorStruct"
      nillable="true" type="tns5:TypeDescriptorStruct"/>
  </xs:sequence>
</xs:complexType>
```

TypeDescriptorStruct: A complex type that represents a TypeDescriptor.

2.2.4.20 ArrayOfunsignedInt

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

The **ArrayOfunsignedInt** complex type represents a list of xs:unsignedInt elements as specified in [\[XMLSCHEMA2\]](#).

```

<xs:complexType name="ArrayOfunsignedInt" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="unsignedInt"
type="xs:unsignedInt"/>
  </xs:sequence>
</xs:complexType>

```

unsignedInt: An element in the list.

2.2.4.21 AssociationGroupStruct

Namespace: Microsoft.SharePoint.BusinessData

The **AssociationGroupStruct** complex type contains information about an AssociationGroup. Each Association referenced by the AssociationReferences contained by the AssociationGroup is identified by the values in the same index of the lists **associationEntityNames**, **associationEntityNamespaces**, **associationNames** and **associationIds**.

```

<xs:complexType name="AssociationGroupStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationEntityNames" nillable="true" type="q6:ArrayOfstring"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationEntityNamespaces" nillable="true" type="q6:ArrayOfstring"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationIds" nillable="true" type="q6:ArrayOfunsignedInt"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationNames" nillable="true" type="q6:ArrayOfstring"/>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

associationEntityNames: A list containing the names of Entities that contain the Associations referenced by the AssociationReferences contained by the AssociationGroup. This element MUST be present. If the corresponding Entity is not active, the value in this list MUST have at least 1, at most 255 **Unicode** characters.

associationEntityNamespaces: A list containing the namespaces of Entities that contain the Associations belonging to the AssociationGroup. This element MUST be present. If the corresponding Entity is not active, the value in this list MUST have at least 1, at most 255 Unicode characters.

associationIds: A list containing the MetadataObjectIds of the Associations referenced by the AssociationReferences contained by the AssociationGroup. This element MUST be present. If the Entity containing the corresponding Association is active, the value in this list SHOULD [<3>](#) be in [1, 0x7fffffff] range. Otherwise, the value MUST be 0.

associationNames: A list of the names of Associations referenced by the AssociationReferences contained by the AssociationGroup. This element MUST be present. If the Entity containing the corresponding Association is not active, the value in this list MUST have at least 1, at most 255 Unicode characters. Otherwise, the value MUST be NULL.

entityId: The MetadataObjectId of the Entity that contains the AssociationGroup. This element MUST be present. The value of this element MUST be in [1, 0x7fffffff] range.

2.2.4.22 AssociationReferenceStruct

Namespace: Microsoft.SharePoint.BusinessData

The **AssociationReferenceStruct** complex type contains information about an AssociationReference.

```
<xs:complexType name="AssociationReferenceStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="_associationName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="_entityName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="_entityNamespace" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="associationGroupObjectVersion" type="xs:int"/>
    <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="id" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="isReverse" type="xs:boolean"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
```

_associationName: The name of the Association referenced by the AssociationReference. This element MUST be present. The name MUST have at least 1, at most 255 Unicode characters.

_entityName: The name of the Entity containing the Association referenced by the AssociationReference. This element MUST be present. The name MUST have at least 1, at most 255 Unicode characters.

_entityNamespace: The namespace of the Entity containing the Association reference by the AssociationReference. This element MUST be present. The namespace MUST have at least 1, at most 255 Unicode characters.

associationGroupId: The MetadataObjectId of the AssociationGroup which contains the AssociationReference. This element MUST be present. The value of this element MUST be in [1, 0x7fffffff] range.

associationGroupObjectVersion: The object version of the AssociationGroup. This element MUST be present.

associationId: The MetadataObjectId of the Association referenced by the AssociationReference. This element MUST be present. The value of this element MUST be in [1, 0x7fffffff] range.

id: The implementation-specific identifier of the AssociationReference. This element MUST be present.

isReverse: A value that specifies whether the source of the referenced Association is the destination of the containing AssociationGroup and the destination of the referenced Association is the source of the containing AssociationGroup. This element MUST be present. The following table describes possible values.

Value	Description
False	The sources of the referenced Association are the sources of the containing AssociationGroup and the destination of the referenced Association is the destination of the containing AssociationGroup.
True	The source of the referenced Association is the destination of the containing AssociationGroup and destination of the referenced Association is the source of the containing AssociationGroup. The referenced Association MUST have only one source.

partitionId: The **empty GUID**.<4>

2.2.4.23 AssociationStruct

Namespace: Microsoft.SharePoint.BusinessData

The **AssociationStruct** complex type MUST contain information about an Association. A namespace at any index of the **sourceEntityNamespaces** element of this complex type MUST be the namespace of the Entity which the name at the same index of the **sourceEntityNames** element belongs to.

```
<xs:complexType name="AssociationStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MethodInstanceStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="destinationEntityName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="destinationEntityNamespace" nillable="true"
type="xs:string"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="sourceEntityNames" nillable="true" type="q6:ArrayOfstring"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="sourceEntityNamespaces" nillable="true" type="q6:ArrayOfstring"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

associationGroupId: The MetadataObjectId of the AssociationGroup which the Association is referenced by. If the Association is referenced by an AssociationGroup, the value of this element MUST be the MetadataObjectId of the referencing AssociationGroup. Otherwise the value of this element MUST be 0. The value of this element MUST be in [0, 0x7fffffff] range. This element MUST be present.

destinationEntityName: The name of the Association destination of the Association. This element MUST be present. The value of this element MUST have at least 1, at most 255 Unicode characters.

destinationEntityNamespace: The namespace of the Association destination of the Association. This element MUST be present. The value of this element MUST have at least 1, at most 255 Unicode characters.

sourceEntityNames: The list of names of the Association sources of the Association. This element MUST be present. This list MUST contain at least one child element. Each name in this list of Association source names MUST have at least 1, at most 255 Unicode characters.

sourceEntityNamespaces: The list of namespaces of the Association sources of the Association. This element MUST be present. This list MUST contain at least one child element. Each namespace in this list of Association source namespaces MUST have at least 1, at most 255 Unicode characters.

2.2.4.24 BdcException

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure

The **BdcException** complex type is an error complex type that contains information about a protocol-server-side error encountered during implementation-specific operations or caused by a violation of constraints on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section 2.2.4).

```
<xs:complexType name="BdcException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:q1="http://schemas.datacontract.org/2004/07/System"
      base="q1:Exception"/>
    </xs:complexContent>
  </xs:complexType>
```

2.2.4.25 BdcExceptionState

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure

The **BdcExceptionState** complex type is an error complex type that contains information about a protocol-server-side error encountered during implementation-specific operations or caused by a violation of constraints on the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section 2.2.4).

```
<xs:complexType name="BdcExceptionState" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="InnerExceptionToStringed" nillable="true"
      type="xs:string"/>
    <xs:element minOccurs="0" name="InnerExceptionTypeFullName" nillable="true"
      type="xs:string"/>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ServerStackTrace" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

InnerExceptionToStringed: The specific cause of the operation failure.

InnerExceptionTypeFullName: A name for the kind of violation that caused this fault. The client MUST ignore this value.

Message: A description of the violation.

ServerStackTrace: An implementation-specific representation of the location on the protocol server where the violation is detected.

2.2.4.26 ComplexValueStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ComplexValueStruct** complex type MUST contain information about data types.

```

<xs:complexType name="ComplexValueStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="needsTypeReflectionResolution" type="xs:boolean"/>
    <xs:element minOccurs="0" name="wcfMarshallableValue" nillable="true" type="xs:anyType"/>
    <xs:element minOccurs="0" name="wcfMarshallableValueAssemblyQualifiedTypeName"
nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="wcfMarshallableValueTypeName" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

needsTypeReflectionResolution: Carries protocol client implementation-specific semantics. The value MUST NOT carry any semantic significance for the protocol server.

wcfMarshallableValue: Carries protocol client implementation-specific semantics. The value MUST NOT carry any semantic significance for the protocol server.

wcfMarshallableValueAssemblyQualifiedTypeName: Carries protocol client implementation-specific semantics. The value MUST NOT carry any semantic significance for the protocol server.

wcfMarshallableValueTypeName: Carries protocol client implementation-specific semantics. The value MUST NOT carry any semantic significance for the protocol server.

2.2.4.27 ConcurrentModificationExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **ConcurrentModificationExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because of a concurrent modification of a **MetadataObject**. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```

<xs:complexType name="ConcurrentModificationExceptionState"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.SharePoint.BusinessData.SharePoint"
base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="MetadataObjectId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

MetadataObjectId: The MetadataObjectId of the MetadataObject that was concurrently modified.

2.2.4.28 DataClassStruct

Namespace: Microsoft.SharePoint.BusinessData

The **DataClassStruct** complex type MUST contain information about a DataClass.

```

<xs:complexType name="DataClassStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">

```

```

<xs:sequence>
  <xs:element minOccurs="0" name="active" type="xs:boolean"/>
  <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
  <xs:element minOccurs="0" name="modelId" type="xs:unsignedInt"/>
  <xs:element minOccurs="0" name="namespace" nillable="true" type="xs:string"/>
  <xs:element xmlns:q1="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="version" nillable="true" type="q1:Version"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

active: A bit which specifies whether the DataClass is active.

lobSystemId: The MetadataObjectId of the LobSystem which contains this DataClass.

modelId: This value MUST be ignored by the protocol client. This value MUST be ignored by the protocol server.

namespace: The namespace of the DataClass.

version: The version of the DataClass.

2.2.4.29 DefaultValueStruct

Namespace: Microsoft.SharePoint.BusinessData

The **DefaultValueStruct** complex type contains details of a DefaultValue of a TypeDescriptor.

```

<xs:complexType name="DefaultValueStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ComplexValueStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="methodName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

methodInstanceId: MetadataObjectId of the MethodInstance with which the DefaultValue is associated. This element MUST be present and the value of this element MUST NOT be NULL.

methodName: The name of the MethodInstance with the specified MetadataObjectId. This element MUST be present. The value of this element MUST have at least 1, at most 255 Unicode characters.

typeDescriptorId: The MetadataObjectId of the TypeDescriptor with which the default value is associated. This element MUST be present and the value of this element MUST NOT be NULL.

2.2.4.30 DuplicateMetadataObjectExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **DuplicateMetadataObjectExceptionState** complex type is an error complex type that contains information about a protocol-server-side error from a duplication of a MetadataObject. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="DuplicateMetadataObjectExceptionState"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="DuplicateFieldName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="DuplicateMetadataObjectName" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

DuplicateFieldName: The name of the attribute of the MetadataObject that was supposed to be unique but was duplicated.

DuplicateMetadataObjectName: The name of the duplicate MetadataObject.

2.2.4.31 EntityStruct

Namespace: Microsoft.SharePoint.BusinessData

The **EntityStruct** complex type contains information about an Entity.

```
<xs:complexType name="EntityStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:DataClassStruct">
      <xs:sequence>
        <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
minOccurs="0" name="cacheUsage" type="tns2:CacheUsage"/>
        <xs:element minOccurs="0" name="description" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="estimatedInstanceCount" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

cacheUsage: The **CacheUsage** (section [2.2.5.1](#)) of the Entity.

description: The description of the Entity. This element SHOULD [<5>](#) be present.

estimatedInstanceCount: The estimated maximum number of instances of the Entity. The value of this element MUST be in [0, 0x7fffffff] range. This element MUST be present.

2.2.4.32 ExceededMetadataObjectLimitExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **ExceededMetadataObjectLimitExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because of a MetadataObject exceeding an implementation-specific limit to the number of MetadataObjects it can contain or refer to. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="ExceededMetadataObjectLimitExceptionState"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
      base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="Limit" type="xs:int"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Limit: The numerical limit that is exceeded.

2.2.4.33 Exception

Namespace: <http://schemas.datacontract.org/2004/07/System>

The **Exception** complex type is an error complex type that contains information about a protocol-server-side error. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="Exception" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:any minOccurs="0" maxOccurs="unbounded" namespace="##local" processContents="skip"/>
  </xs:sequence>
  <xs:attribute ref="ser:FactoryType"/>
</xs:complexType>
```

ser:FactoryType:

2.2.4.34 FilterDescriptorStruct

Namespace: [Microsoft.SharePoint.BusinessData](#)

The **FilterDescriptorStruct** complex type contains information about a FilterDescriptor.

```
<xs:complexType name="FilterDescriptorStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="filterField" nillable="true" type="xs:string"/>
        <xs:element
          xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
          minOccurs="0" name="filterType" type="tns1:FilterType"/>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

</xs:complexType>

filterField: The **field (4)** affected by the FilterDescriptor. The value MUST be a path as specified in [\[MS-BDCMFFS\]](#) section 2.1.5.5.

filterType: The [FilterType \(from namespace http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel\)](#) of a FilterDescriptor.

methodId: The MetadataObjectId of the Method that contains the FilterDescriptor.

2.2.4.35 IdentifierStruct

Namespace: Microsoft.SharePoint.BusinessData

The **IdentifierStruct** complex type contains information about an Identifier.

```
<xs:complexType name="IdentifierStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="ordinalNumber" type="xs:unsignedByte"/>
        <xs:element minOccurs="0" name="typeName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

entityId: The MetadataObjectId of the Entity that contains the Identifier.

ordinalNumber: The sequence number for the Identifier among all Identifiers of an Entity.

typeName: The data type of the value corresponding to the Identifier. The value MUST be in the following table.

Value	Description
System.String	A string of Unicode text.
System.Int16	A number ranging from negative 32768 to positive 32767.
System.Int32	A number ranging from negative 2,147,483,648 to positive 2,147,483,647.
System.Int64	A number ranging from negative 9,223,372,036,854,775,808 to positive 9,223,372,036,854,775,807.
System.UInt16	A number ranging from 0 to 65535.
System.UInt32	A number ranging from 0 to 4,294,967,295.
System.UInt64	A number ranging from 0 to 18,446,744,073,709,551,615.
System.DateTime	A date and time ranging from 12:00:00 midnight, January 1, 1 Anno Domini (Common Era) to 11:59:59 P.M., December 31, 9999 Anno Domini (Common Era), in resolution of 100 nanoseconds.

Value	Description
System.TimeSpan	A duration ranging from negative 10675199 days 2 hours 48 minutes 5 seconds 477 milliseconds 580 microseconds 800 nanoseconds to positive 10675199 days 2 hours 48 minutes 5 seconds 477 milliseconds 580 microseconds 700 nanoseconds, in resolution of 100 nanoseconds.
System.Single	A single precision number ranging from negative 3.402823e38 to 3.402823e38.
System.Double	A double precision number ranging from negative 1.79769313486232e308 to positive 1.79769313486232e308 as well as positive zero, negative zero, positive infinity, negative infinity and NaN.
System.Decimal	A number ranging from negative 79,228,162,514,264,337,593,543,950,335 to positive 79,228,162,514,264,337,593,543,950,335.
System.Char	A Unicode character.
System.Byte	A number ranging from 0 to 255.
System.SByte	A number ranging from negative 128 to positive 127.
System.Guid	A GUID .
System.Boolean	A bit.

2.2.4.36 InvalidMetadataObjectExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **InvalidMetadataObjectExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because a MetadataObject contained invalid attributes. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="InvalidMetadataObjectExceptionState"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tms3="Microsoft.BusinessData.SharePoint"
base="tms3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="InvalidFieldName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="InvalidMetadataObjectId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="InvalidMetadataObjectName" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

InvalidFieldName: The name of the MetadataObject attribute that is invalid.

InvalidMetadataObjectId: The MetadataObjectId of the MetadataObject that has an invalid attribute.

InvalidMetadataObjectName: The name of the MetadataObject that has an invalid attribute.

2.2.4.37 InvalidMetadataPropertyExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **InvalidMetadataPropertyExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because an invalid property was detected in the set of properties of a MetadataObject. The complex type **MUST** only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="InvalidMetadataPropertyExceptionState"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.SharePoint.BusinessData.SharePoint"
      base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="InvalidPropertyName" nillable="true"
          type="xs:string"/>
        <xs:element minOccurs="0" name="MetadataObjectName" nillable="true"
          type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

InvalidPropertyName: The name of the property that is invalid.

MetadataObjectName: The name of the MetadataObject that has an invalid property.

2.2.4.38 InvalidOperationException

Namespace: http://schemas.datacontract.org/2004/07/System

The **InvalidOperationException** complex type is an error complex type that contains information about a protocol-server-side error because of an attempt to perform an operation that is invalid for the current state of the protocol server. The complex type **MUST** only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="InvalidOperationException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="q1:SystemException"/>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.39 LobSystemInstanceStruct

Namespace: Microsoft.SharePoint.BusinessData

The LobSystemInstanceStruct complex type contains information about a LobSystemInstance.

```
<xs:complexType name="LobSystemInstanceStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

lobSystemId: The MetadataObjectId of the LobSystem that contains this LobSystemInstance.

2.2.4.40 LobSystemStruct

Namespace: Microsoft.SharePoint.BusinessData

The **LobSystemStruct** complex type contains information about a LobSystem.

```

<xs:complexType name="LobSystemStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="systemType" type="tns1:SystemType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

```

systemType: The **SystemType** (section [2.2.5.9](#)) of the LobSystem.

2.2.4.41 LocalizedNameStruct

Namespace: Microsoft.SharePoint.BusinessData

The **LocalizedNameStruct** complex type contains information about a localized name.

```

<xs:complexType name="LocalizedNameStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="lcid" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="vlu" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

lcid: The **LCID** representing the locale of the localized name. This element **MUST** be present.

metadataObjectId: The MetadataObjectId of the MetadataObject that contains the localized name. This element **MUST** be present. The value of this element **MUST** be in [1, 0x7fffffff] range. [<6>](#)

settingId: The **Setting** that contains the localized name. This element **MUST** be present.

vlu: The localized name of the MetadataObject in the locale specified with **lcid** element. This element **MUST** be present.

2.2.4.42 MetadataException

Namespace: Microsoft.BusinessData.SharePoint

The **MetadataException** complex type is an error complex type that contains information about a protocol-server-side error because of a syntactic or semantic violation of a MetadataModel constraint in the metadata store. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="MetadataException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="explicitMessage" type="xs:boolean"/>
    <xs:element minOccurs="0" name="innerExceptionToStringed" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="innerExceptionTypeFullName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="message" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="metadataObjectTypeName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="serverStackTrace" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

explicitMessage: An implementation-specific error message detailing the constraint violation.

innerExceptionToStringed: The detailed reason for the error.

innerExceptionTypeFullName: A name for the kind of violation that caused this fault. The client MUST ignore this value.

message: The detailed reason for the error.

metadataObjectTypeName: The type of MetadataObject being accessed when the error occurred.

serverStackTrace: The implementation-specific representation of the location on the server where the error is occurred.

2.2.4.43 MetadataObjectNotFoundExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **MetadataObjectNotFoundExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because a requested MetadataObject was not found. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#)).

```
<xs:complexType name="MetadataObjectNotFoundExceptionState"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="SearchCriteria" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

SearchCriteria: The implementation-specific plain text informative criterion used to search for the MetadataObject.

2.2.4.44 MetadataObjectStruct

Namespace: Microsoft.SharePoint.BusinessData

This structure contains the attributes of the MetadataObject.

```
<xs:complexType name="MetadataObjectStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="id" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="isCached" type="xs:boolean"/>
    <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="objectVersion" type="xs:int"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
```

id: The MetadataObjectId of the MetadataObject, if the MetadataObject already exists in the metadata store. Otherwise, this value MUST be 0. This element MUST be present. The value of this element MUST be in [0, 0x7fffffff] range.

isCached: A value that specifies the frequency of the use of a MetadataObject by the protocol client. Protocol clients can use this as a recommendation as to whether to cache a MetadataObject in memory. Whether the client considers a MetadataObject to be frequently used or not is left to its determination and is outside the scope of this protocol. This element MUST be present. The value MUST be in the following table.

Value	Description
False	The MetadataObject is infrequently used.
True	The MetadataObject is frequently used.

name: The name of the MetadataObject. This element MUST be present. The value of this element MUST have at least 1, at most 255 Unicode characters.

objectVersion: The object version of the MetadataObject. This element MUST be present.

partitionId: The empty GUID.

2.2.4.45 MethodInstanceStruct

Namespace: Microsoft.SharePoint.BusinessData

The **MethodInstanceStruct** complex type contains information about a MethodInstance.

```
<xs:complexType name="MethodInstanceStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="isDefault" type="xs:boolean"/>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
        <xs:element
          xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
          minOccurs="0" name="methodInstanceType" type="tns1:MethodInstanceType"/>
        <xs:element minOccurs="0" name="returnTypeDescriptorId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

isDefault: A value which specifies if the MethodInstance is the default one among the MethodInstances of the same time that are contained by the DataClass that contains this MethodInstance. This element MUST be present. The value MUST be in the following table.

Value	Description
False	The MethodInstance is not the default one.
True	The MethodInstance is the default one.

methodId: The MetadataObjectId of the Method that contains the MethodInstance. This element MUST be present.

methodInstanceType: The type of the MethodInstance. This element MUST be present. The value of this element MUST NOT be NULL. The value MUST be a **methodInstanceType** from the <http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel> namespace.

returnTypeDescriptorId: The MetadataObjectId of the **Return Type Descriptor** of the MethodInstance. This element MUST be present.

2.2.4.46 MethodStruct

Namespace: Microsoft.SharePoint.BusinessData

The **MethodStruct** complex type contains information about a Method.

```

<xs:complexType name="MethodStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="isStatic" type="xs:boolean"/>
        <xs:element minOccurs="0" name="lobName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

entityId: The MetadataObjectId of the Entity that contains the Method. This element MUST be present.

isStatic: A value which specifies if the Method is associated with an **EntityInstance**. This element MUST be present. The value MUST be in the following table.

Value	Description
False	The Method operates in the context of a specific EntityInstance.
True	The Method operates out of the context of a specific EntityInstance.

lobName: The name of the line-of-business (LOB) system operation that is represented by this Method. This element MUST be present. The value of this element MUST NOT be NULL. An application that utilizes the protocol client MUST use this name when calling LOB system operations. For example, an LOB system operation named "GetCus_1" can be represented by a Method with name equal to "Get Customer". The lobName element of this Method needs to be "GetCus_1".

2.2.4.47 ModelStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ModelStruct** complex type contains information about a Model.

```
<xs:complexType name="ModelStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.48 PackageFormatExceptionState

Namespace: Microsoft.SharePoint.BusinessData

The **PackageFormatExceptionState** complex type is an error complex type that contains information about a protocol-server-side error because a specified XML does not conform to [\[MS-BDCMFFS\]](#) or the MetadataModel contained within the specified XML conforming to [\[MS-BDCMFFS\]](#) having invalid configuration of MetadataObjects or their attributes. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section [2.2.4](#))

```
<xs:complexType name="PackageFormatExceptionState"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
      minOccurs="0" name="ParseErrors" nillable="true" type="q6:ArrayOfstring"/>
    <xs:element xmlns:tns3="Microsoft.SharePoint.BusinessData.SharePoint" minOccurs="0"
      name="SerializedInnerSystemException" nillable="true" type="tns3:MetadataException"/>
    <xs:element minOccurs="0" name="ServerStackTrace" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

Message: A description of the error.

ParseErrors: A list of error messages or informational messages about the specified XML.

SerializedInnerSystemException: An implementation-specific representation of additional information about the error.

ServerStackTrace: An implementation-specific representation of the location on the protocol server where the error is occurred.

2.2.4.49 ParameterStruct

Namespace: Microsoft.SharePoint.BusinessData

This structure contains the information about a Parameter.

```
<xs:complexType name="ParameterStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="direction" type="tns1:DirectionType"/>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="ordinalNumber" type="xs:unsignedByte"/>
        <xs:element minOccurs="0" name="rootTypeDescriptorId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

direction: Specifies the direction of the Parameter.

methodId: Specifies the MetadataObjectId of the Parameter.

ordinalNumber: An integer representing the index of the Parameter among all Parameters in the containing Method.

rootTypeDescriptorId: Specifies the MetadataObjectId of the **root TypeDescriptor** of the Parameter.

2.2.4.50 PropertyStruct

Namespace: Microsoft.SharePoint.BusinessData

The **PropertyStruct** complex type contains information about a property.

```
<xs:complexType name="PropertyStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:ComplexValueStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="typeName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

metadataObjectId: The MetadataObjectId of the property.

name: The name of the property. The value MUST be unique among the names of other properties of the containing MetadataObject, within the specified Setting.

settingId: The Setting which contains the property. The value MUST be NULL if the Setting is the default Setting. The value MUST NOT be NULL if the Setting is not the default Setting.

typeName: The implementation-specific name for the data type of the value of the property.

2.2.4.51 ProxyGenerationResult

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime

The **ProxyGenerationResult** complex type contains information about Business Logic Modules<7>.

```
<xs:complexType name="ProxyGenerationResult" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="compiledBytes" nillable="true" type="xs:base64Binary"/>
    <xs:element minOccurs="0" name="fingerprint" nillable="true" type="xs:base64Binary"/>
    <xs:element minOccurs="0" name="sourceCode" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

compiledBytes: The base64 encoded bytes that constitute the Business Logic Modules.

fingerprint: An implementation-specific identifier of the Business Logic Modules. If the bytes that constitute two Business Logic Modules are identical, their fingerprint values MUST also be identical.

sourceCode: The value of this element MUST be NULL. The protocol client and the protocol server MUST ignore this value.

2.2.4.52 SystemException

Namespace: http://schemas.datacontract.org/2004/07/System

The **SystemException** complex type is an error complex type that contains information about a protocol-server-side error. The complex type MUST only be included as part of a SOAP fault as specified in **Complex Types** (section 2.2.4).

```
<xs:complexType name="SystemException" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="q1:Exception"/>
  </xs:complexContent>
</xs:complexType>
```

2.2.4.53 TypeDescriptorStruct

Namespace: Microsoft.SharePoint.BusinessData

The **TypeDescriptorStruct** complex type contains information about a TypeDescriptor.

```
<xs:complexType name="TypeDescriptorStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="associationReferenceEntityName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="associationReferenceEntityNamespace" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="associationReferenceName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="childrenContainRules" type="xs:boolean"/>
        <xs:element minOccurs="0" name="containsFilterDescriptor" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

<xs:element minOccurs="0" name="containsIdentifier" type="xs:boolean"/>
<xs:element minOccurs="0" name="containsReadOnly" type="xs:boolean"/>
<xs:element minOccurs="0" name="filterDescriptorId" type="xs:unsignedInt"/>
<xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="flags" type="tns1:TypeDescriptorFlags"/>
  <xs:element minOccurs="0" name="identifierId" type="xs:unsignedInt"/>
  <xs:element minOccurs="0" name="identifierReferenceEntityName" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="identifierReferenceEntityNamespace" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="identifierReferenceName" nillable="true"
type="xs:string"/>
  <xs:element minOccurs="0" name="lobName" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
  <xs:element minOccurs="0" name="parentTypeDescriptorId" type="xs:unsignedInt"/>
  <xs:element minOccurs="0" name="serializedRules" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="typeName" nillable="true" type="xs:string"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

associationId: The MetadataObjectId of the Association referenced by the TypeDescriptor. If the TypeDescriptor references an Association contained by an active Entity, the value of this element MUST be the MetadataObjectId of the referenced Association. Otherwise the value MUST be 0. The value of this element MUST be in [0, 0x7fffffff] range. This element MUST be present.

associationReferenceEntityName: The name of the Entity that contains the Association referenced by the TypeDescriptor. If the TypeDescriptor references an Association of an Entity that is not active, the value MUST be the name of the Entity that contains the referenced Association. Otherwise this element MUST NOT be present. If the value of this element is not NULL, it MUST have at least 1, at most 255 Unicode characters.

associationReferenceEntityNamespace: The namespace of the Entity that contains the Association referenced by the TypeDescriptor. If the TypeDescriptor references an Association of an Entity that is not active, the value MUST be the namespace of the Entity that contains the referenced Association. Otherwise this element MUST NOT be present. If the value of this element is not NULL, it MUST have at least 1, at most 255 Unicode characters.

associationReferenceName: The name of the Association referenced by the TypeDescriptor. If the TypeDescriptor references an Association of an Entity that is not active, the value MUST be the name of the referenced Association. Otherwise this element MUST NOT be present. If the value of this element is not null, it MUST have at least 1, at most 255 Unicode characters.

childrenContainRules: A value which indicates whether any descendant of the TypeDescriptor has rules. The value MUST be true, if any descendant of the TypeDescriptor has rules, otherwise the value MUST be false. This element MUST be present.

containsFilterDescriptor: A value which indicates whether the TypeDescriptor or any descendant of it has an associated FilterDescriptor. The value MUST be true, if the TypeDescriptor has an associated FilterDescriptor or there is a descendant of this TypeDescriptor which has an associated FilterDescriptor, otherwise the value MUST be false. This element MUST be present.

containsIdentifier: A value which indicates whether the TypeDescriptor or any descendant of it references an Identifier. The value MUST be true, if the TypeDescriptor references an Identifier or

there is a descendant of this TypeDescriptor which references an Identifier, otherwise the value MUST be false. This element MUST be present.

containsReadOnly: A value which indicates whether the TypeDescriptor or any descendant of it has "ReadOnly" flag set. The value MUST be true, if the TypeDescriptor has "ReadOnly" flag set or there is a descendant of this TypeDescriptor which has "ReadOnly" flag set. Otherwise, the value MUST be false. This element MUST be present.

filterDescriptorId: The MetadataObjectId of the FilterDescriptor associated with the TypeDescriptor. If a FilterDescriptor is associated with the TypeDescriptor, the value MUST be the MetadataObjectId of the associated FilterDescriptor. Otherwise the value of this element MUST be 0. The value of this element MUST be in [0, 0x7fffffff] range. This element MUST be present.

flags: The **TypeDescriptorFlags** (section [2.2.5.10](#)) of the TypeDescriptor.

identifierId: The MetadataObjectId of the Identifier referenced by the TypeDescriptor. If the TypeDescriptor references an Identifier of an active Entity, the value MUST be the MetadataObjectId of the referenced Identifier. Otherwise, the value MUST be 0. The value of this element MUST be in [0, 0x7fffffff] range. This element MUST be present.

identifierReferenceEntityName: The name of the Entity that contains the Identifier referenced by the TypeDescriptor. If the TypeDescriptor references an Identifier of an Entity that is not active, the value MUST be the name of the Entity that contains the referenced Identifier. Otherwise this element MUST NOT be present. If the value of this element is not NULL, it MUST have at least 1, at most 255 Unicode characters.

identifierReferenceEntityNamespace: The namespace of the Entity that contains the Identifier referenced by the TypeDescriptor. If the TypeDescriptor references an Identifier of an Entity that is not active, the value MUST be the namespace of the Entity that contains the referenced Identifier. Otherwise this element MUST NOT be present. If the value of this element is not NULL, it MUST have at least 1, at most 255 Unicode characters.

identifierReferenceName: The name of the Identifier referenced by the TypeDescriptor. If the TypeDescriptor references an Identifier of an Entity that is not active, the value MUST be the name of the referenced Identifier. Otherwise this element MUST NOT be present. If the value of this element is not NULL, it MUST have at least 1, at most 255 Unicode characters.

lobName: The name of the data structure that is represented by the TypeDescriptor.

parameterId: The MetadataObjectId of the Parameter that contains the TypeDescriptor.

parentTypeDescriptorId: The MetadataObjectId of the parent TypeDescriptor that contains the TypeDescriptor. If the TypeDescriptor is a root TypeDescriptor, the value MUST be 0. Otherwise the value MUST be the MetadataObjectId of the parent TypeDescriptor that contains the TypeDescriptor. The value of this element MUST be in [0, 0x7fffffff] range. This element MUST be present.

serializedRules: Rules to apply to the values in the data structure corresponding to the TypeDescriptor. If there are no rules to be applied, the value MUST be NULL or empty string (""). If there are rules to be applied, the value MUST be a rules structure. The following is the ABNF notation as specified in [\[RFC5234\]](#) for the rules structure:

```
rules = rule *( %x00 rule)
rule = convertRule / normalizeRule
convertRule = %x54 fromType HTAB toType CRLF Culture
```

```
normalizeRule = %x44 ( local / unspecified / UTC)

UTC = %x42

local = %x43

unspecified = %x44

fromType = AssemblyQualifiedName
toType = AssemblyQualifiedName
```

Culture: Implementation specific<8> name of the culture.

AssemblyQualifiedName: The name of the data type of the value qualified with the module that contains it. The format MUST be as:

```
AssemblyQualifiedName = TypeName %x2C LibraryIdentifier %x2C VersionProperty %x2C
CultureProperty %x2C PublicKeyTokenProperty
```

where **LibraryIdentifier**, **VersionProperty**, **PublicKeyTokenProperty**, and **CultureProperty** are as specified in [\[MS-NRTP\]](#) section 2.2.1.3.

TypeName: The name of the data type of the value.<9> The format is as specified in [\[MS-NRTP\]](#) section 2.2.1.2.

The rules MUST be stored in order from left to right, where the leftmost rule is first to one to run. Occurrence of a convertRule indicates that the protocol client MUST interpret this rule as a cast between fromType and toType. Occurrence of a normalizeRule indicates that the protocol client MUST interpret this rule as converting the time zone of a time value to **UTC** from the time zone specified. The specified time zone values are indicated by values UTC, local, and unspecified, which correspond to UTC time zone, local time zone, and UTC time zone without time zone information respectively.

typeName: The implementation-specific identifier for the data type of the data structure that the TypeDescriptor represents. The value of this element MUST have at least 1 and at most 255 Unicode characters. The value of this element is mapped to a data type by the implementation-specific module associated with the Parameter that contains this TypeDescriptor. The module that can perform the mapping MUST be specified as follows:

- If the Parameter that contains this TypeDescriptor contains a property with name "TypeReflectorTypeName" and type "System.String", the module specified by the identifier represented by the string property value MUST be used. The identifier MUST be the **AssemblyQualifiedName** in the following format described with ABNF notation as specified in [\[RFC5234\]](#):

```
AssemblyQualifiedName = TypeName %x2C LibraryIdentifier %x2C VersionProperty %x2C
CultureProperty %x2C PublicKeyTokenProperty
```

LibraryIdentifier, **VersionProperty**, **PublicKeyTokenProperty**, and **CultureProperty** are as specified in [\[MS-NRTP\]](#) section 2.2.1.3.

TypeName: The name of the data type of the value.<10> The format is as specified in [MS-NRTP], section 2.1.1.1.2.

If the previous condition is not met, and if the LobSystem that contains the DataClass containing the Method of the Parameter that contains this TypeDescriptor has type specified as "Custom", and if the module associated with the LobSystem for the purposes of communicating with the corresponding LOB system, which is identified by the value of the LobSystem contained **Property** with name "SystemUtilityTypeName" and type "System.String", specifies a module for the purpose of mapping value of **typeName** element to a data type, the specified module MUST be used.

If the previous conditions are not met, an implementation-specific<11> module MUST be used.

2.2.4.54 Version

Namespace: http://schemas.datacontract.org/2004/07/System

The **Version** complex type MUST contain information about the version of a DataClass.

```
<xs:complexType name="Version" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element name="_Build" type="xs:int"/>
    <xs:element name="_Major" type="xs:int"/>
    <xs:element name="_Minor" type="xs:int"/>
    <xs:element name="_Revision" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

_Build: The third significant part of the version. The value MUST be non-negative.

_Major: The most significant part of the version. The value MUST be non-negative.

_Minor: The second significant part of the version. The value MUST be non-negative.

_Revision: The fourth and least significant part of the version. The value MUST be non-negative.

2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
CacheUsage	Specifies how the protocol client accesses EntityInstance data to perform create, read, update and delete operations, when this information is not provided explicitly by means that are beyond this protocol specification. If the protocol client does not have the capability to cache EntityInstance data, the protocol client MUST ignore this value.
char	The char simple type represents a Unicode character.
DirectionType	The DirectionType simple type specifies the direction of an argument represented by a Parameter for a line-of-business (LOB) system operation.
duration	The duration simple type represents a duration.

Simple type	Description
FilterType	The FilterType simple type specifies the type of the filter represented by the FilterDescriptor.
guid	The guid simple type represents a GUID.
MethodInstanceType	This simple type contains information about the type of a MethodInstance.
PackageContents	Specifies a subset of the types of the data contained by a MetadataModel.
SystemType	The type of line-of-business (LOB) system that a LobSystem is representing.
TypeDescriptorFlags	The TypeDescriptorFlags simple type contains information about the characteristics of the data stored in a data structure represented by a TypeDescriptor.

2.2.5.1 CacheUsage

Namespace: <http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime>

Specifies how the protocol client accesses EntityInstance data to perform create, read, update and delete operations, when this information is not provided explicitly by means that are beyond this protocol specification. If the protocol client does not have the capability to cache EntityInstance data, the protocol client MUST ignore this value.

```
<xs:simpleType name="CacheUsage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Default"/>
    <xs:enumeration value="Online"/>
    <xs:enumeration value="Cached"/>
    <xs:enumeration value="Offline"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for **CacheUsage**.

Value	Meaning
Default	The protocol client MUST make an implementation-specific choice to use any one of the other behaviors listed in this table based on its capabilities.
Online	The protocol client MUST bypass the EntityInstance data cache for all operations.
Cached	The protocol client MUST use the EntityInstance data cache to perform create, update and delete operations. If the requested data is available in the EntityInstance data cache, protocol client MUST use the data in the cache, otherwise the protocol client MUST bypass the EntityInstance data cache to obtain the data, and put the data to the EntityInstance data cache for later use.
Offline	The protocol client MUST use the EntityInstance data cache to perform create, read, update, and delete operations.

2.2.5.2 char

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/>

The **char** simple type represents a Unicode character.

```
<xs:simpleType name="char" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:int"/>
</xs:simpleType>
```

2.2.5.3 DirectionType

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel

The **DirectionType** simple type specifies the direction of an argument represented by a Parameter for a line-of-business (LOB) system operation.

```
<xs:simpleType name="DirectionType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="In"/>
    <xs:enumeration value="Out"/>
    <xs:enumeration value="InOut"/>
    <xs:enumeration value="Return"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for **DirectionType**.

Value	Meaning
In	The argument is used to send data to the operation before the operation is executed.
Out	The argument is used to retrieve data from the operation after the operation is finished.
InOut	The argument is used to send data to the operation before the operation is starts, and also to retrieve data from the operation after the operation is finished.
Return	The argument is the result of the operation.

2.2.5.4 duration

Namespace: http://schemas.microsoft.com/2003/10/Serialization/

The **duration** simple type represents a duration.

```
<xs:simpleType name="duration" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:duration">
    <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?" />
    <xs:minInclusive value="-P10675199DT2H48M5.4775808S"/>
    <xs:maxInclusive value="P10675199DT2H48M5.4775807S"/>
  </xs:restriction>
</xs:simpleType>
```

2.2.5.5 FilterType

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel

The **FilterType** simple type specifies the type of the filter represented by the FilterDescriptor.

```

<xs:simpleType name="FilterType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Comparison"/>
    <xs:enumeration value="LastId"/>
    <xs:enumeration value="Limit"/>
    <xs:enumeration value="PageNumber"/>
    <xs:enumeration value="Password"/>
    <xs:enumeration value="SsoTicket"/>
    <xs:enumeration value="Timestamp"/>
    <xs:enumeration value="UserContext"/>
    <xs:enumeration value="Username"/>
    <xs:enumeration value="UserProfile"/>
    <xs:enumeration value="Wildcard"/>
    <xs:enumeration value="Input"/>
    <xs:enumeration value="Output"/>
    <xs:enumeration value="InputOutput"/>
    <xs:enumeration value="Batching"/>
    <xs:enumeration value="BatchingTermination"/>
    <xs:enumeration value="UserCulture"/>
    <xs:enumeration value="ActivityId"/>
    <xs:enumeration value="Sorting"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for **FilterType**.

Value	Meaning
Comparison	Indicates that the protocol client MUST interpret the FilterDescriptor as a ComparisonFilter .
LastId	Indicates that the protocol client MUST interpret the FilterDescriptor as a LastIdFilter .
Limit	Indicates that the protocol client MUST interpret the FilterDescriptor as a LimitFilter .
PageNumber	Indicates that the protocol client MUST interpret the FilterDescriptor as a PageNumberFilter .
Password	Indicates that the protocol client MUST interpret the FilterDescriptor as a PasswordCredentialFilter .
SsoTicket	Indicates that the protocol client MUST interpret the FilterDescriptor as a SsoTicketFilter .
Timestamp	Indicates that the protocol client MUST interpret the FilterDescriptor as a TimeStampFilter .
UserContext	Indicates that the protocol client MUST interpret the FilterDescriptor as a UserContextFilter .
Username	Indicates that the protocol client MUST interpret the FilterDescriptor as a UsernameCredentialFilter .
UserProfile	Indicates that the protocol client MUST interpret the FilterDescriptor as a UserProfileFilter .
Wildcard	Indicates that the protocol client MUST interpret the FilterDescriptor as a

Value	Meaning
	WildcardFilter.
Input	Indicates that the protocol client MUST interpret the FilterDescriptor as an InputFilter.
Output	Indicates that the protocol client MUST interpret the FilterDescriptor as an OutputFilter.
InputOutput	Indicates that the protocol client MUST interpret the FilterDescriptor as an InputOutputFilter.
Batching	Indicates that the protocol client MUST interpret the FilterDescriptor as a BatchingPositionFilter.
BatchingTermination	Indicates that the protocol client MUST interpret the FilterDescriptor as a BatchingTerminationFilter.
UserCulture	Indicates that the protocol client MUST interpret the FilterDescriptor as a UserCultureFilter.
ActivityId	Indicates that the protocol client MUST interpret the FilterDescriptor as an ActivityTrackingFilter.
Sorting	Indicates that the protocol client MUST interpret the FilterDescriptor as a SortingFilter.

2.2.5.6 guid

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/>

The **guid** simple type represents a GUID.

```
<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
  </xs:restriction>
</xs:simpleType>
```

2.2.5.7 MethodInstanceType

Namespace: <http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel>

This simple type contains information about the type of a MethodInstance.

```
<xs:simpleType name="MethodInstanceType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Finder"/>
    <xs:enumeration value="SpecificFinder"/>
    <xs:enumeration value="GenericInvoker"/>
    <xs:enumeration value="IdEnumerator"/>
    <xs:enumeration value="Scalar"/>
    <xs:enumeration value="AccessChecker"/>
    <xs:enumeration value="Creator"/>
    <xs:enumeration value="Updater"/>
  </xs:restriction>
</xs:simpleType>
```

```

<xs:enumeration value="Deleter"/>
<xs:enumeration value="ChangedIdEnumerator"/>
<xs:enumeration value="DeletedIdEnumerator"/>
<xs:enumeration value="AssociationNavigator"/>
<xs:enumeration value="Associator"/>
<xs:enumeration value="Disassociator"/>
<xs:enumeration value="StreamAccessor"/>
<xs:enumeration value="BinarySecurityDescriptorAccessor"/>
<xs:enumeration value="BulkSpecificFinder"/>
<xs:enumeration value="BulkAssociatedIdEnumerator"/>
<xs:enumeration value="BulkAssociationNavigator"/>
<xs:enumeration value="BulkIdEnumerator"/>
<xs:enumeration value="EventSubscriber"/>
<xs:enumeration value="EventUnsubscriber"/>
</xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for **MethodInstanceType**.

Value	Meaning
Finder	Indicates that the protocol client MUST interpret the MethodInstance as a Finder .
SpecificFinder	Indicates that the protocol client MUST interpret the MethodInstance as a SpecificFinder .
GenericInvoker	Indicates that the protocol client MUST interpret the MethodInstance as a GenericInvoker .
IdEnumerator	Indicates that the protocol client MUST interpret the MethodInstance as a IdEnumerator .
Scalar	Indicates that the protocol client MUST interpret the MethodInstance as a Scalar .
AccessChecker	Indicates that the protocol client MUST interpret the MethodInstance as a AccessChecker .
Creator	Indicates that the protocol client MUST interpret the MethodInstance as a Creator .
Updater	Indicates that the protocol client MUST interpret the MethodInstance as a Updater .
Deleter	Indicates that the protocol client MUST interpret the MethodInstance as a Deleter .
ChangedIdEnumerator	Indicates that the protocol client MUST interpret the MethodInstance as a ChangedIdEnumerator .
DeletedIdEnumerator	Indicates that the protocol client MUST interpret the MethodInstance as a DeletedIdEnumerator .
AssociationNavigator	Indicates that the protocol client MUST interpret the MethodInstance as a AssociationNavigator .
Associator	Indicates that the protocol client MUST interpret the MethodInstance as a Associator .

Value	Meaning
Disassociator	Indicates that the protocol client MUST interpret the MethodInstance as a Disassociator .
StreamAccessor	Indicates that the protocol client MUST interpret the MethodInstance as a StreamAccessor .
BinarySecurityDescriptorAccessor	Indicates that the protocol client MUST interpret the MethodInstance as a BinarySecurityDescriptorAccessor .
BulkSpecificFinder	Indicates that the protocol client MUST interpret the MethodInstance as a BulkSpecificFinder .
BulkAssociatedIdEnumerator	Indicates that the protocol client MUST interpret the MethodInstance as a BulkAssociatedIdEnumerator .
BulkAssociationNavigator	Indicates that the protocol client MUST interpret the MethodInstance as a BulkAssociationNavigator .
BulkIdEnumerator	Indicates that the protocol client MUST interpret the MethodInstance as a BulkIdEnumerator .
EventSubscriber	Indicates that the protocol client MUST interpret the MethodInstance as a EventSubscriber .
EventUnsubscriber	Indicates that the protocol client MUST interpret the MethodInstance as a EventUnsubscriber .

2.2.5.8 PackageContents

Namespace: Microsoft.SharePoint.BusinessData

Specifies a subset of the types of the data contained by a MetadataModel.

```
<xs:simpleType name="PackageContents" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="Model"/>
        <xs:enumeration value="LocalizedNames"/>
        <xs:enumeration value="Permissions"/>
        <xs:enumeration value="Properties"/>
        <xs:enumeration value="InlineProxies"/>
        <xs:enumeration value="All"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
```

The following table specifies the allowable values for **PackageContents**.

Value	Meaning
None	No data. This value is a composite that indicates that the values Model, LocalizedNames, Permissions, Properties, and InlineProxies were not specified.

Value	Meaning
Model	The MetadataObjects contained by the MetadataModel.
LocalizedNames	The localized names corresponding to the MetadataObjects contained by the MetadataModel.
Permissions	The ACEs corresponding to the MetadataObjects contained by the MetadataModel.
Properties	The Properties corresponding to the MetadataObjects contained by the MetadataModel.
InlineProxies	The Business Logic Modules associated with the LobSystems contained by the MetadataModel.
All	The MetadataObjects contained by the MetadataModel, along with their localized names, Properties, ACEs in addition to the Business Logic Modules associated with the LobSystems contained by the MetadataModel. This value is a composite that indicates that the values Model, LocalizedNames, Permissions, Properties, and InlineProxies were all specified.

2.2.5.9 SystemType

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel

The type of line-of-business (LOB) system that a **LobSystem** is representing.

```
<xs:simpleType name="SystemType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Database"/>
    <xs:enumeration value="WebService"/>
    <xs:enumeration value="Custom"/>
    <xs:enumeration value="Wcf"/>
    <xs:enumeration value="DotNetAssembly"/>
    <xs:enumeration value="OData"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for **SystemType**.

Value	Meaning
Database	The represented LOB system is a database.
WebService	The represented LOB system is a Web service .
Custom	The represented LOB system is a LOB system for which business logic external to the protocol implementation manages the connection and data transfer.
Wcf	The represented LOB system is a service for which the communication address, the binding, and the contract are specified.
DotNetAssembly	The represented LOB system is a Business Logic Module. <12>
OData	The represented LOB system is a OData service that exposes data as per OData protocol.

2.2.5.10 TypeDescriptorFlags

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel

The **TypeDescriptorFlags** simple type contains information about the characteristics of the data stored in a data structure represented by a TypeDescriptor.

```
<xs:simpleType name="TypeDescriptorFlags" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="CreatorField"/>
        <xs:enumeration value="UpdaterField"/>
        <xs:enumeration value="PreUpdaterField"/>
        <xs:enumeration value="IsCollection"/>
        <xs:enumeration value="ReadOnly"/>
        <xs:enumeration value="Significant"/>
        <xs:enumeration value="IsSortInput"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
```

The following table specifies the allowable values for **TypeDescriptorFlags**.

Value	Meaning
None	No flags exist.
CreatorField	This TypeDescriptor MUST be considered as a field (4) for calling a Creator.
UpdaterField	This TypeDescriptor MUST be considered as a field (4) for calling an Updater.
PreUpdaterField	This TypeDescriptor MUST be used to send the latest value received from the line-of-business (LOB) system corresponding to the field (4) with the same name as this TypeDescriptor when calling an Updater.
IsCollection	This TypeDescriptor MUST be interpreted as a collection of data structures.
ReadOnly	The protocol client MUST prevent values in the data structures corresponding to this TypeDescriptor from being modified.
Significant	The protocol client MUST use the values in the data structures corresponding to this TypeDescriptor when comparing values between structures or creating hash codes for comparison. When this flag is not set, The protocol client MUST ignore the values in the data structures corresponding to this TypeDescriptor when comparing values between structures or creating hash codes for comparison.
IsSortInput	This protocol client MUST use the values in the data structure corresponding to this TypeDescriptor as the input for the SortingFilter . When this flag is not set on any TypeDescriptor, the SortingFilter MUST be ignored.

2.2.6 Attributes

This specification does not define any common XML Schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML Schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML Schema attribute group definitions.

Preliminary

3 Protocol Details

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **present**, and **not null**.

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret HTTP status codes returned by the protocol server as specified in [RFC2616](#) section 10.

This protocol allows protocol servers to notify protocol clients of application-level faults using SOAP faults. Except where specified, these SOAP faults are not significant for interoperability, and protocol clients can interpret them in an implementation-specific manner.

This protocol allows protocol servers to perform implementation-specific authorization checks and notify protocol clients of authorization faults either using HTTP status codes or using SOAP faults as specified previously in this section.

3.1 Server Details

All operations consist of a basic request-response pair and the server treats each request as an independent transaction that is unrelated to any previous request.

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

For this protocol the protocol server maintains lists to store the attributes of each of the following data types:

- Access control entry
- Action
- ActionParameter
- Association
- AssociationGroup
- AssociationReference
- Cache Version Stamp
- DataClass

- Entity
- FilterDescriptor
- Identifier
- LobSystem
- LobSystemInstance
- Localized name
- MetadataObject
- Method
- MethodInstance
- Model
- Parameter
- Property
- TypeDescriptor
- DefaultValue

The implementations of the basic **Create**, **Read**, **Update**, and **Delete** stored procedures simply insert, read, update or delete items in each of these lists where the **MetadataObjectId** serves as the primary identifier.

The containment and reference relationships can be captured through additional lists that store the primary identifiers of the related data types.

The attributes and relationships of the types are in the following descriptions.

Property

- Has fields **MetadataObjectId**, **Name**, **SettingId**, and **TypeName**.
- No containment or referential relationships.

Localized name

- Has fields **Lcid**, **MetadataObjectId**, **SettingId**, and **Value**.
- No containment or referential relationships.

Access control entry

- Has fields **PrincipalBinaryForm**, **PrincipalDisplayName**, **PrincipalName**, and **Rights**.
- No containment or referential relationships.

MetadataObject

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, and **PartitionId**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.

Model

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, and **PartitionId**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.
- References zero or more **DataClasses** and zero or more **Entities**.

LobSystem

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, and **SystemType**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, zero or more **DataClasses**, zero or more **Entities**, zero or more **LobSystemInstances**, and zero or more Business Logic Modules.

LobSystemInstance

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, and **PartitionId**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.
- Contained by exactly one **LobSystem**.

DataClass

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **Active**, **LobSystemId**, **ModelId**, **Namespace**, and **Version**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, zero or more **Methods**, and zero or more **MethodInstances**.
- Contained by exactly one **LobSystem**.
- At most one **DataClass** or **Entity** is active across all **DataClasses** and **Entities** that have the same name and namespace.

Entity

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **Active**, **LobSystemId**, **ModelId**, **Namespace**, **CacheUsage**, **Description**, and **EstimatedInstanceCount**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, zero or more **Methods**, zero or more **MethodInstances**, zero or more **Identifiers**, zero or more **Actions**, and zero or more **AssociationGroups**.
- Contained by exactly one **LobSystem**.
- References an **Action** as its default **Action**.
- At most one **DataClass** or **Entity** is active across all **DataClasses** and **Entities** that have the same name and namespace.

Identifier

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **EntityId**, **OrdinalNumber**, and **TypeName**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.

- Contained by exactly one **Entity**.

Method

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **LobName**, **IsStatic**, and **EntityId**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, zero or more **FilterDescriptors**, zero or more **Parameters**, zero or more **MethodInstances**, and zero or more **Associations**.
- Contained by either exactly one **Entity** or exactly one **DataClass**.

MethodInstance

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **MethodId**, **MethodInstanceType**, **ReturnTypeDescriptorId**, and **IsDefault**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.
- References zero or one **TypeDescriptors**.
- Contained by exactly one **Method**.
- Contained by either exactly one **Entity** or exactly one **DataClass**.
- If the **MethodInstance** has a **ReturnTypeDescriptor** the **MethodInstance** references the **TypeDescriptor** that corresponds to the **ReturnTypeDescriptor**. Otherwise, the **MethodInstance** MUST NOT reference any **TypeDescriptors**.
- The **Type** attribute is NOT "AssociationNavigator", "Associator", "Disassociator", "BulkAssociationNavigator", or "BulkAssociatedIdEnumerator".

Association

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **AssociationGroupId**, **DestinationEntityName**, **DestinationEntityNamespace**, **SourceEntityNames**, and **SourceEntityNamespaces**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.
- References zero or one **TypeDescriptors**.
- References two or more **Entities**.
- Contained by exactly one **Method**.
- Contained by either exactly one **Entity** or exactly one **DataClass**.
- If the **Association** has a **ReturnTypeDescriptor**, the **Association** references the **TypeDescriptor** that corresponds to the **ReturnTypeDescriptor**. Otherwise, the **Association** references no **TypeDescriptors**.
- References the **Entity** that corresponds to the destination of the **Association**.
- References the **Entities** that correspond to the sources of the **Association**.
- Does not reference an **Entity** if that **Entity** is not a source or destination for the **Association**.

- The **Type** attribute is "AssociationNavigator," "Associator," "Disassociator," "BulkAssociationNavigator," or "BulkAssociatedIdEnumerator."

Parameter

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **Direction**, **PartitionId**, **MethodId**, **OrdinalNumber**, and **RootTypeDescriptorId**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, and zero or more **TypeDescriptors**.
- Contained by exactly one **Method**.
- If the **Parameter** contains one or more **TypeDescriptors**, exactly one **TypeDescriptor** is not contained by any other **TypeDescriptor**. The **TypeDescriptor** that is not contained by any other **TypeDescriptor** corresponds to the **ReturnTypeDescriptor** of the **Parameter**.

TypeDescriptor

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **AssociationId**, **AssociationReferenceEntityName**, **AssociationReferenceEntityNamespace**, **AssociationReferenceName**, **ChildrenContainRules**, **ContainsFilterDescriptor**, **ContainsIdentifier**, **ContainsReadOnly**, **FilterDescriptorId**, **Flags**, **IdentifierId**, **IdentifierReferenceEntityName**, **IdentifierReferenceEntityNamespace**, **LobName**, **ParameterId**, **ParentTypeDescriptorId**, **SerializedRules**, and **TypeName**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, zero or more **TypeDescriptors**, and zero or more **DefaultValues**.
- References zero or one **Identifiers**, zero or one **Associations**, and zero or one **FilterDescriptors**.
- If the **TypeDescriptor** references a **FilterDescriptor**, that **FilterDescriptor** references the **TypeDescriptor**.
- Contained by exactly one **Parameter** or exactly one **TypeDescriptor**.

FilterDescriptor

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **FilterField**, **FilterType**, and **MethodId**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.
- Contained by exactly one **Method**.
- References one or more **TypeDescriptors**.
- If the **FilterDescriptor** references a **TypeDescriptor**, that **TypeDescriptor** references the **FilterDescriptor**.

DefaultValue

- Has fields named **NeedsTypeReflectionResolution**, **WcfMarshallableValue**, **WcfMarshallableValueAssemblyQualifiedName**, **WcfMarshallableValueTypeAssemblyQualifiedName**, **MethodInstanceId**, **MethodInstanceName**, and **TypeDescriptorId**.
- Contained by exactly one **TypeDescriptor**.

AssociationGroup

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, and **PartitionId**, **AssociationEntityNames**, **AssociationEntityNamespaces**, **AssociationIds**, and **AssociationNames**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, and zero or more **AssociationReferences**.
- Contained by exactly one **Entity**.

AssociationReference

- Has fields named **_associationName**, **_entityName**, **_entityNamespace**, **AssociationGroupId**, **AssociationGroupObjectVersion**, **AssociationId**, **Id**, **IsReverse**, and **PartitionId**.
- References exactly one **Association**.
- Contained by exactly one **AssociationGroup**.

Action

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **EntityId**, **ImageUrl**, **IsOpenedInNewWindow**, **Position**, and **Url**.
- Contains zero or more **Properties**, zero or more localized names, zero or more ACEs, and zero or more **ActionParameters**.
- Contained by exactly one **Entity**.

ActionParameter

- Has fields named **Id**, **Name**, **IsCached**, **Object version**, **PartitionId**, **ActionId**, and **Index**.
- Contains zero or more **Properties**, zero or more localized names, and zero or more ACEs.
- Contained by exactly one **Action**.

Cache Version Stamp

- Has fields named **CacheLine**, **Counter**, **PartitionId**, and **Timestamp**.
- No containment or referential relationships.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The definitions of some operations in this section make use of ABNF representation as specified in [\[RFC5234\]](#).

The specifications of the operations in this section identify the conditions under which the protocol server MUST respond with corresponding error complex types. In addition, if the protocol server encounters an error specific to its implementation, it MAY respond with any fault listed in the WSDL for its operation. The responses MUST be formatted as SOAP faults, using error complex types serialized as specified in section [2.2.4](#). The different error complex types have the following meanings:

Error complex type	Condition
ArgumentException (section 2.2.4.7)	The protocol server encounters an invalid argument value while performing implementation-specific operations.
ArgumentNullException (section 2.2.4.8)	While performing implementation-specific operations, the protocol server encounters a NULL value for an argument that does not accept NULL values.
ArgumentOutOfRangeException (section 2.2.4.9)	The protocol server encounters an argument with a value outside the range of permissible values while performing implementation-specific operations.
BdcExceptionState (section 2.2.4.25)	The protocol server encounters an unrecoverable error while performing implementation-specific operations, or encounters a violation of constraints on the metadata store.
InvalidOperationException (section 2.2.4.38)	The protocol server attempts an implementation-specific operation that is invalid for the current state of the protocol server.
MetadataException (section 2.2.4.42)	The protocol server discovers a violation of a syntactic or semantic constraint on a MetadataModel while performing implementation-specific operations.
PackageFormatExceptionState (section 2.2.4.48)	Within an implementation-specific operation, the protocol server encounters XML that does not conform to the format specified in [MS-BDCMFFS] , or XML conforming to [MS-BDCMFFS] having invalid configuration of MetadataObjects or their attributes.

For the following operations, the protocol client MAY [<13>](#) specify values for a subset of the elements of the complex types that inherit from **MethodInstanceStruct** (section [2.2.4.45](#)), including **MethodObjectStruct** (section [2.2.4.44](#)) itself. The protocol server MUST NOT return a fault for this condition. Unless otherwise specified, the protocol client MUST specify the values of the **Id** and **PartitionId** elements of complex types when used as parameters in the following operations:

- [AddEntityToModel](#)
- [ClearLocalizedNames](#)
- [ClearProperties](#)
- [CopyAclAcrossChildren](#)
- [CopyAclToSetting](#)
- [DeleteNoCascade](#)
- [DeleteProxyAssemblyForLobSystem](#)
- [ExportPackage](#)

- [GetAccessControlEntries](#)
- [GetAllLocalizedNamesForMetadataObjectStruct](#)
- [GetAllPropertiesForMetadataObjectStruct](#)
- [GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor](#)
- [GetFieldTypeDescriptorsByMethodInstance](#)
- [GetLobSystemDataByLobSystem](#)
- [GetTypeReflectorTypeNameForParameter](#)
- [ImportPackage](#)
- [ImportPackageWithProgress](#)
- [MetadataObjectCreate](#)
- [MetadataObjectMergeXml](#)
- [MetadataObjectReadXml](#)
- [MetadataObjectWriteXml](#)
- [ModelReadXml](#)
- [ReadSlicedXml](#)
- [RemoveEntityFromModel](#)
- [RemoveLocalizedName](#)
- [RemoveProperty](#)
- [SaveLocalizedName](#)
- [SaveProperty](#)
- [SetAccessControlEntries](#)
- [SetDefaultActionForEntity](#)
- [TypeDescriptorCreate](#)
- [TypeDescriptorMergeXml](#)
- [TypeDescriptorReadXml](#)

For the operations specified in the following table, the protocol server MUST update the object versions of the corresponding **MetadataObjects** in the metadata store as follows:

- If the object version of the **MetadataObject** is 2147483646, the object version MUST be set to 0.
- Otherwise, the object version MUST be incremented by 1.

Operation	MetadataObjects
Activate	The Entity specified by entityStruct element.
AddAssociationReferenceToAssociationGroup	The AssociationGroup specified by associationGroupStruct element.
BulkSwitchActiveOrValidate	The Entities specified by entityStructs element. <14>
Deactivate	The Entity specified by entityStruct element.
DeleteAssociationReferenceFromAssociationGroup	The AssociationGroup which contains the AssociationReference specified by associationReferenceStruct element.
Update	The MetadataObject specified by the metadataObjectStruct element.

The following table summarizes the list of operations as defined by this specification:

Operation	Description
Activate	This operation is used to set the specified Entity active.
AddAssociationReferenceToAssociationGroup	This operation is used to create the specified AssociationReference in the specified AssociationGroup.
AddEntityToModel	This operation is used to add a reference to the specified Entity to the specified Model.
BulkSwitchActiveOrValidate	This operation is used to change the active version of the specified set of Entities, or validate the specified Entities for the purpose of changing the active versions and identify related errors.
CheckPathInMethodInstances	The CheckPathInMerthodInstances operation retrieves whether the specified path, which conforms to [MS-BDCMFFS] section 2.1.5.5, corresponds to a TypeDescriptor in a View of the MethodInstances of the specified type contained by the specified DataClass, along with the MetadataObjectId of one such MethodInstance , if one exists.
ClearLocalizedNames	This operation is used to remove all localized names of the specified MetadataObject from the specified Setting.
ClearProperties	This operation is used to remove all Properties of the specified MetadataObject from the specified Setting.
CopyAclAcrossChildren	This operation is used to clear the ACEs of the descendent MetadataObjects of a specified MetadataObject , then copy the ACEs of the specified MetadataObject to the descendent

Operation	Description
	<p>MetadataObjects. A given MetadataObject is a descendent of the specified MetadataObject if the MetadataObject that contains the given MetadataObject is also a descendent of the specified MetadataObject, or the MetadataObject is contained by the specified MetadataObject itself.</p> <p>If the specified MetadataObject is a MetadataCatalog, the protocol server MUST NOT change the ACEs of any LobSystem and their descendent MetadataObjects if the security principal (2) in whose context the protocol client is operating is not authorized to edit the LobSystem.</p>
CopyAclAcrossChildrenForSetting	<p>This operation is used to clear the ACEs in a specified Setting on the descendent MetadataObjects of the specified MetadataObject, then copy the ACEs in the specified Setting on the specified MetadataObject to the descendent MetadataObjects. A given MetadataObject is a descendent of the specified MetadataObject if the MetadataObject that contains the given MetadataObject is also a descendent of the specified MetadataObject, or the MetadataObject is contained by the specified MetadataObject itself.</p> <p>If the specified MetadataObject is a MetadataCatalog, the protocol server MUST NOT change the ACEs of any LobSystem and their descendent MetadataObjects if the security principal (2) in whose context the protocol client is operating is not authorized to edit the LobSystem.</p>
CopyAclToSetting	<p>This operation is used to delete the ACEs of the specified non-default Setting and the specified MetadataObject, then copy the ACEs of the default Setting and the specified MetadataObject to the specified Setting and the specified MetadataObject.</p>
Deactivate	<p>This operation is used to set the active version of an Entity as not active.</p>
Delete	<p>This operation is used to delete the specified MetadataObject.</p>
DeleteAssociationReferenceFromAssociationGroup	<p>This operation is used to remove an AssociationReference from an AssociationGroup by deleting the AssociationReference.</p>
DeleteDefaultValueForTypeDescriptor	<p>This operation is used to delete the DefaultValue of the specified TypeDescriptor for the specified MethodInstance.</p>

Operation	Description
DeleteNoCascade	This operation is used to delete the specified MetadataObject without deleting the MetadataObjects it references.
DeleteProxyAssemblyForLobSystem	This operation is used to delete a Business Logic Module<15> associated with the specified LobSystem.
EntityCreate	This operation is used to create an Entity in the specified LobSystem. The operation MUST copy ACEs from the specified LobSystem to the created Entity . If a Model is specified, the operation MUST associate the created Entity with the specified Model . Otherwise the created Entity is not referenced by any Model .
ExportPackage	<p>This operation is used to retrieve an XML representation of the following objects from the metadata store:</p> <ul style="list-style-type: none"> ▪ MetadataObjects contained by the specified MetadataModel along with their Properties, localized names and ACEs, if "Model" value is specified for the packageContents element. The XML MUST conform to [MS-BDCMFFS] section 2.1.4.1. ▪ Localized names, Properties, and ACEs corresponding to MetadataObjects contained by the specified MetadataModel, if "Model" value is not specified for the packageContents element. The XML MUST conform to [MS-BDCMFFS] section 2.2.4.1. <p>If the specified MetadataModel contains LobSystems that the security principal (2) in whose context the protocol client is operating is not authorized to modify, the XML representation returned by this operation MUST NOT contain those LobSystems, and MUST NOT contain other MetadataObjects contained by MetadataObjects that are not contained in the result for this reason.</p>
GenerateProxyAssemblyForLobSystem	This operation is used to force the protocol server to create an implementation-specific Business Logic Module<16> for the specified LobSystem to connect to the line-of-business (LOB) system described by the specified LobSystem . If a Business Logic Module is already available for the specified LobSystem this operation MUST NOT create another Business Logic Module and MUST complete successfully.
GetAccessControlEntries	This operation is used to retrieve the ACEs for the specified MetadataObject from the

Operation	Description
	specified Setting. If there are no ACEs for the specified MetadataObject from the specified Setting and the value of the fallback element is "true", the protocol server MUST retrieve ACEs for the specified MetadataObject from the default Setting .
GetActionById	This operation is used to retrieve the specified Action.
GetActionParameterById	This operation is used to retrieve the specified ActionParameter.
GetActionParametersForAction	This operation is used to retrieve the ActionParameters of the specified Action.
GetActionsForEntity	This operation is used to retrieve the Actions of the specified Entity.
GetAllLocalizedNames	This operation is used to retrieve all localized names of the specified MetadataObject.
GetAllLocalizedNamesForMetadataObjectStruct	This operation is used to retrieve all the localized names of the specified MetadataObject for the specified Setting.
GetAllPartitionIds	This operation is deprecated from the protocol and MUST NOT be called.
GetAllProperties	This operation is used to retrieve all the Properties of the specified MetadataObject and the specified Setting.
GetAllPropertiesForMetadataObjectStruct	This operation is used to retrieve all the Properties of the specified MetadataObject from the specified Setting.
GetAssociationById	This operation is used to retrieve the Association with the specified MetadataObjectId.
GetAssociationGroupById	This operation is used to retrieve the AssociationGroup with the specified MetadataObjectId.
GetAssociationGroupsForEntity	This operation is used to retrieve the AssociationGroups of the Entity with the specified MetadataObjectId.
GetAssociationMembersInRole	This operation is used to retrieve the source or destination Entities of the specified Association.
GetAssociationReferencesForAssociationGroup	This operation is used to retrieve the AssociationReferences contained by the specified AssociationGroup.
GetAssociationsForDataClass	This operation is used to retrieve the Associations that are contained by the

Operation	Description
	specified DataClass.
GetAssociationsForEntityAndRole	This operation is used to retrieve the Associations that references the specified Entity as Association source or Association destination.
GetAssociationsForMethod	This operation is used to retrieve the Associations that are contained by the specified Method.
GetCacheInvalidationRecordsSince	This operation is deprecated from the protocol and MUST NOT <17> be called.
GetChildTypeDescriptorsForTypeDescriptor	This operation is used to retrieve the TypeDescriptors contained by the specified TypeDescriptor .
GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor	This operation is used to retrieve the TypeDescriptors that reference Identifiers and are descendent TypeDescriptors of the specified TypeDescriptor . A given TypeDescriptor is a descendent of the specified TypeDescriptor if the TypeDescriptor that contains the given TypeDescriptor is also a descendent of the specified TypeDescriptor , or the TypeDescriptor is contained by the specified TypeDescriptor itself. <18>
GetDataClassById	This operation is used to retrieve the DataClass with the specified MetadataObjectId.
GetDataClassesForSystem	This operation is used to retrieve DataClasses contained by the specified LobSystem.
GetDefaultValuesForTypeDescriptor	This operation is used to retrieve the DefaultValues of the specified TypeDescriptor.
GetEntitiesForAssociationAndRole	This operation is used to retrieve the Entities performing the role of source or destination for the specified Association.
GetEntitiesForSystem	This operation is used to retrieve Entities of the specified LobSystem.
GetEntitiesLikeNameAndNamespace	This operation is used to retrieve the Entities that match the specified wildcard patterns for name and namespace. An Entity matches the pattern specified by wildcardedName if and only if wildcardedName matches the name of the Entity , or the localized name of the Entity with LCID 0, or the localized name of the Entity with the LCID specified by callerCultureLcid . An Entity matches the pattern specified by wildcardedNamespace if and only if wildcardedNamespace matches the

Operation	Description
	namespace of the Entity .
GetEntitiesReferencedByModelId	This operation is used to retrieve Entities which are referenced by the specified Model.
GetEntityById	This operation is used to retrieve the Entity with the specified MetadataObjectId.
GetEntityCount	This operation retrieves the number of Entity elements that are contained by the specified LobSystem.
GetEntityNameAndNamespacesForAssociationAndRole	This operation is used to retrieve the names and namespaces of Entities which are referenced by the specified Association. Only Entities in the specified association role of source or destination are returned.
GetEntityWithNameAndNamespace	This operation is used to retrieve the active Entity with the specified name and namespace in the specified Partition .
GetEntityWithNameAndNamespaceAndVersion	This operation is used to retrieve the Entity with the specified name, namespace, and version.
GetFieldTypeDescriptorsByMethodInstance	This operation is used to retrieve TypeDescriptors that correspond to fields (4) for the MethodInstance with the specified name on the specified Entity.
GetFilterDescriptorById	This operation is used to retrieve the FilterDescriptor with the specified MetadataObjectId.
GetFilterDescriptorsForMethod	This operation is used to retrieve the FilterDescriptors contained by the specified Method.
GetIdentifierById	This operation is used to retrieve the Identifier with the specified MetadataObjectId.
GetIdentifiersForEntity	This operation is used to retrieve the Identifiers contained by the specified Entity.
GetImportProgress	This operation is used to retrieve the progress of an ImportPackageWithProgress operation, using the unique identifier provided by the client at the creation of the import operation.
GetLevelForTypeDescriptor	This operation retrieves the depth of the specified TypeDescriptor in the TypeDescriptor tree that contains the specified TypeDescriptor . The TypeDescriptor tree for a specified TypeDescriptor consists of the specified TypeDescriptor with depth 0. Any TypeDescriptor that is contained by a TypeDescriptor in the TypeDescriptor tree is also in the tree with depth 1 plus the depth

Operation	Description
	of the containing TypeDescriptor .
GetLobSystemAllAssembliesBytes	This operation is used to retrieve the Business Logic Modules associated with the specified LobSystem, if the systemType element of the specified LobSystem does not have the value "Custom". If the systemType element of the specified LobSystem has the value "Custom", the behavior of this operation is implementation-specific. <19>
GetLobSystemById	This operation retrieves the LobSystem with the specified MetadataObjectId.
GetLobSystemByName	This operation is used to retrieve the specified LobSystem.
GetLobSystemDataByLobSystem	This operation is used to retrieve Business Logic Modules <20> associated with the specified LobSystem.
GetLobSystemInstanceById	This operation is used to retrieve the LobSystemInstance with the specified MetadataObjectId.
GetLobSystemInstancesForLobSystem	This operation is used to retrieve the list of LobSystemInstances of the specified LobSystem. Only the LobSystemInstances that the security principal (2) in whose context the protocol client is operating is authorized to read <21> are returned.
GetLobSystemProxyAssemblyBytesByLobSystemId	This operation is used to retrieve the implementation-specific Business Logic Module <22> associated with the specified LobSystem.
GetLobSystemsLikeName	This operation is used to retrieve the LobSystems that match the specified wildcard pattern that the security principal in whose context the protocol client is operating is authorized to read. <23> A LobSystem matches the wildcard pattern specified by searchLikeName if and only if searchLikeName matches the name of the LobSystem , or the localized name of the LobSystem with LCID 0, or the localized name of the LobSystem with the LCID specified by callerCultureLcid .
GetLobSystemsReferencedByEntitiesAssociatedWithModel	This operation is used to retrieve the LobSystems that the security principal in whose context the protocol client is operating is authorized to read <24> that are referenced by Entities associated with the specified Model.
GetMethodById	This operation is used to retrieve the Method with the specified MetadataObjectId.

Operation	Description
GetMethodInstanceById	This operation is used to retrieve the MethodInstance with the specified MetadataObjectId.
GetMethodInstancesForDataClass	This operation is used to retrieve the MethodInstances contained by the Methods contained by the specified DataClass.
GetMethodInstancesForMethod	This operation is used to retrieve the MethodInstances contained by the specified Method.
GetMethodsForDataClass	This operation is used to retrieve the Methods contained by the specified DataClass.
GetModelById	This operation is used to retrieve the Model with the specified MetadataObjectId.
GetModelByName	This operation is used to retrieve the specified Model.
GetModelsByEntityId	This operation is used to retrieve the Models that reference the specified Entity.
GetModelsByName	This operation is used to retrieve the Models that match the specified wildcard pattern. A Model matches the wildcard pattern specified by wildcardedName if and only if wildcardedName matches the name of the Model , or the localized name of the Model with LCID 0, or the localized name of the Model with the LCID specified by callerCultureLcid .
GetParameterById	This operation is used to retrieve the Parameter with the specified MetadataObjectId.
GetParametersForMethod	This operation is used to retrieve the Parameters of the specified Method.
GetRootTypeDescriptorForParameter	This operation is used to retrieve the root TypeDescriptor of the specified Parameter.
GetServiceApplicationId	This operation is used to retrieve the unique implementation-specific identifier of metadata store.
GetSystemUtilityTypeNameForLobSystem	This operation is used to retrieve the implementation-specific identifier of the module that executes operations in the line-of-business (LOB) system corresponding to the specified LobSystem.
GetTypeDescriptorById	This operation is used to retrieve the TypeDescriptor with the specified MetadataObjectId.
GetTypeDescriptorsByNameAndLevelForParameter	This operation SHOULD <25> retrieve the

Operation	Description
	<p>TypeDescriptors with the specified name and level contained by the specified Parameter. The level of a TypeDescriptor is defined as follows:</p> <ul style="list-style-type: none"> ▪ The level of the root TypeDescriptor is 0. ▪ The level of specified TypeDescriptor is 1 plus the level of the TypeDescriptor containing the specified TypeDescriptor.
GetTypeDescriptorsForFilterDescriptor	<p>This operation is used to retrieve TypeDescriptors referenced by the specified FilterDescriptor.</p>
GetTypeReflectorTypeNameForParameter	<p>This operation is used to retrieve the implementation-specific name of the type of the TypeReflector of the specified Parameter.</p>
GetXmlSchemaForView	<p>This operation is used to retrieve an XML schema definition (XSD) that specifies a data structure that can store the data corresponding to a View that corresponds to the specified MethodInstance. The resulting XSD MUST conform to [XMLSCHEMA1] and [XMLSCHEMA2]. The following types of MethodInstance have a View corresponding to them:</p> <ul style="list-style-type: none"> ▪ SpecificFinder ▪ BulkSpecificFinder ▪ Finder ▪ AssociationNavigator ▪ BulkAssociationNavigator ▪ IdEnumerator ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ BulkIdEnumerator ▪ Creator ▪ Updater <p>The MethodInstances of any other type do not have a View associated with them.</p>
HaveRights	<p>The HaveRights operation retrieves whether the security principal (2) in whose context the protocol client is operating has the specified permission on the specified MetadataObject based on the permissions specified by the</p>

Operation	Description
	<p>ACEs in the specified Setting associated with the specified MetadataObject.</p>
<p>ImportPackage</p>	<p>This operation is used to create the following objects in the metadata store:</p> <ul style="list-style-type: none"> ▪ MetadataObjects contained by the specified MetadataModel along with their Properties, localized names and ACES, if "Model" value is specified for the packageContents element. The MetadataModel MUST be specified as an XML that conforms to [MS-BDCMFFS] section 2.1.4.1. If the MetadataModel contains a LobSystem that has the same name and type as a LobSystem in the metadata store, the LobSystem in the MetadataModel MUST be ignored by the protocol server along with all LobSystemInstances contained by that LobSystem along with Properties, localized names and ACES of the ignored MetadataObjects. If the MetadataModel contains an Entity that has the same name, namespace and version as an Entity in the metadata store, and if the names of the LobSystems that contain these Entities are identical, the Entity in the MetadataModel MUST be ignored by the protocol server along with all MetadataObjects contained by the Entity or other ignored MetadataObjects along with the Properties, localized names, and ACES of the ignored MetadataObjects. ▪ Localized names, Properties, and ACES corresponding to MetadataObjects contained by the specified MetadataModel, if "Model" value is not specified for the packageContents element. The MetadataModel MUST be specified as an XML that conforms to [MS-BDCMFFS] section 2.2.4.1.
<p>ImportPackageWithProgress</p>	<p>This operation is used to create the following objects in the metadata store:</p> <ul style="list-style-type: none"> ▪ MetadataObjects contained by the specified MetadataModel along with their Properties, localized names, and ACES, if "Model" value is specified for the packageContents element. The MetadataModel MUST be specified as an XML that conforms to [MS-BDCMFFS] section 2.1.4.1. If the MetadataModel contains a LobSystem that has the same name and type as a LobSystem in the metadata store, the LobSystem in the MetadataModel MUST be ignored by the protocol server along with all LobSystemInstances contained by

Operation	Description
	<p>that LobSystem along with Properties, localized names and ACEs of the ignored MetadataObjects. If the MetadataModel contains an Entity that has the same name, namespace and version as an Entity in the metadata store, and if the names of the LobSystems that contain these Entities are identical, the Entity in the MetadataModel MUST be ignored by the protocol server along with all MetadataObjects contained by the Entity or other ignored MetadataObjects along with the Properties, localized names, and ACEs of the ignored MetadataObjects.</p> <ul style="list-style-type: none"> Localized names, Properties, and ACEs corresponding to MetadataObjects contained by the specified MetadataModel, if "Model" value is not specified for the packageContents element. The MetadataModel MUST be specified as an XML that conforms to [MS-BDCMFFS] section 2.2.4.1. <p>The protocol server MUST track the progress of this operation with the specified identifier. The protocol client can retrieve the progress of this operation by using GetImportProgress operation with the specified identifier.</p>
IsMethodInstantiated	This operation is used to determine if the specified Method contains at least one MethodInstance.
IsParameterReferencedByMethodInstance	The IsParameterReferencedByMethodInstance operation checks whether the specified Parameter contains any TypeDescriptor that is the ReturnPropertyDescriptor of any MethodInstance contained by the Method containing the Parameter .
MetadataObjectCreate	This operation is used to create a MetadataObject in the metadata store. If the specified MetadataObject is a MetadataCatalog, and another MetadataCatalog with the same Partition as the specified MetadataCatalog already exists, then this operation MUST NOT change the state of the data in the metadata store.
MetadataObjectMergeXml	This operation is used to merge the Properties, localized names, and ACEs contained by the specified MetadataModel into the existing MetadataObjects in the metadata store. The MetadataModel MUST be specified as a Well-Formed External Parsed Entity according to [XML] section 4.3.2 and MUST have one of the following elements as the root element:

Operation	Description
	<ul style="list-style-type: none"> ▪ Action element as specified in [MS-BDCMFFS] section 2.2.4.27. ▪ ActionParameter element as specified in [MS-BDCMFFS] section 2.2.4.29. ▪ Association element as specified in [MS-BDCMFFS] section 2.2.4.30. ▪ AssociationGroup element as specified in [MS-BDCMFFS] section 2.2.4.13 ▪ Entity element as specified in [MS-BDCMFFS] section 2.2.4.11. ▪ FilterDescriptor element as specified in [MS-BDCMFFS] section 2.2.4.19. ▪ Identifier element as specified in [MS-BDCMFFS] section 2.2.4.15. ▪ LobSystem element as specified in [MS-BDCMFFS] section 2.2.4.7. ▪ LobSystemInstance element as specified in [MS-BDCMFFS] section 2.2.4.9. ▪ Method element as specified in [MS-BDCMFFS] section 2.2.4.17. ▪ MethodInstance element as specified in [MS-BDCMFFS] section 2.2.4.21. ▪ Model element as specified in [MS-BDCMFFS] section 2.2.4.1 ▪ Parameter element as specified in [MS-BDCMFFS] section 2.2.4.23.
MetadataObjectReadXml	<p>This operation is used to create MetadataObjects in the metadata store, optionally along with their Properties, localized names, and ACEs, contained by the specified MetadataModel. This operation creates Properties, localized names, and ACEs for default Setting. The MetadataModel MUST be specified as a Well-Formed External Parsed Entity according to [XML] section 4.3.2 and MUST have one of the following elements as the root element:</p> <ul style="list-style-type: none"> ▪ Action element as specified in [MS-BDCMFFS] section 2.1.4.34. ▪ ActionParameter element as specified in [MS-BDCMFFS] section 2.1.4.36. ▪ Association element as specified in [MS-

Operation	Description
	<p>BDCMFFS section 2.1.4.37.</p> <ul style="list-style-type: none"> ▪ AssociationGroup element as specified in [MS-BDCMFFS] section 2.1.4.13. ▪ Entity element as specified in [MS-BDCMFFS] section 2.1.4.11. ▪ Identifier element as specified in [MS-BDCMFFS] section 2.1.4.16. ▪ FilterDescriptor element as specified in [MS-BDCMFFS] section 2.1.4.20. ▪ LobSystem element as specified in [MS-BDCMFFS] section 2.1.4.7. ▪ LobSystemInstance element as specified in [MS-BDCMFFS] section 2.1.4.9. ▪ Method element as specified in [MS-BDCMFFS] section 2.1.4.18. ▪ MethodInstance element as specified in [MS-BDCMFFS] section 2.1.4.22. ▪ Parameter element as specified in [MS-BDCMFFS] section 2.1.4.24.
MetadataObjectWriteXml	<p>The MetadataObjectWriteXml operation is used to retrieve an XML representation of the following objects from the metadata store:</p> <ul style="list-style-type: none"> ▪ MetadataObjects contained by the MetadataModel along with their Properties, localized names, and ACEs, if "Model" value is specified for the packageContents element. The XML MUST conform to [MS-BDCMFFS] section 2.1. ▪ Localized names, Properties, and ACEs corresponding to MetadataObjects contained by the MetadataModel, if "Model" value is not specified for the packageContents element. The XML MUST conform to [MS-BDCMFFS] section 2.2. <p>The MetadataModel used for this operation MUST contain the specified MetadataObject, and other MetadataObjects that are contained by the MetadataModel; it MUST NOT contain any other MetadataObjects.</p> <p>If the specified MetadataModel contains LobSystems that the security principal (2) in whose context the protocol client is operating is not authorized to modify, the XML representation returned by this operation MUST NOT contain those LobSystems, and</p>

Operation	Description
	MUST NOT contain other MetadataObjects contained by MetadataObjects that are not contained in the result for this reason.
ModelReadXml	This operation is used to create MetadataObjects contained by the specified MetadataModel along with their Properties , localized names, and ACEs in the metadata store. The MetadataModel MUST be specified as an XML that conforms to the Business Data Connectivity Model File Format as specified in [MS-BDCMFFS] section 2.1.4.1. If the MetadataModel contains a LobSystem that has the same name and type as a LobSystem in the metadata store, the LobSystem in the MetadataModel MUST be ignored by the protocol server along with all LobSystemInstances contained by that LobSystem and Properties , localized names, and ACEs of the ignored MetadataObjects . If the MetadataModel contains an Entity that has the same name, namespace and version as an Entity in the metadata store, and if the names of the LobSystems that contain these Entities are identical, the Entity in the MetadataModel MUST be ignored by the protocol server along with all MetadataObjects contained by the Entity or other ignored MetadataObjects and the Properties , localized names, and ACEs of the ignored MetadataObjects .
ReadSlicedXml	This operation is deprecated from the protocol and MUST NOT be called.
RemoveEntityFromModel	This operation is used to remove the reference to the specified Entity from the specified Model .
RemoveLocalizedName	This operation is used to remove the localized name with the specified LCID from the specified MetadataObject .
RemoveProperty	This operation is used to remove the specified Property from the specified MetadataObject .
SaveLocalizedName	This operation is used to add or replace a localized name for the specified MetadataObject . If a localized name with the same LCID as the specified LCID already exists for the specified MetadataObject , the protocol server MUST replace the localized name of the specified MetadataObject with the specified localized name.
SaveProperty	This operation is used to add or replace a Property for the specified MetadataObject . If a Property with the same name as the specified Property already exists for the

Operation	Description
	specified MetadataObject , the protocol server MUST replace the Property of the MetadataObject with the specified Property .
SetAccessControlEntries	This operation is used to set an access control list (ACL) to the specified MetadataObject . The protocol server MUST delete all ACEs of the specified MetadataObject for the specified Setting, and then adds the specified ACEs to the specified MetadataObject .
SetDefaultActionForEntity	This operation is used to set the default Action for the specified Entity.
SetDefaultValuesForTypeDescriptor	This operation is used to set the DefaultValue of the TypeDescriptor with the MetadataObjectId specified by the typeDescriptorId element of the specified DefaultValueStruct (section 2.2.4.29) complex type for the MethodInstance with the MetadataObjectId specified by the methodInstanceId element of the specified DefaultValueStruct (section 2.2.4.29).
SetLobSystemDataByLobSystemId	This operation is deprecated from the protocol and MUST NOT be called.
TypeDescriptorCreate	This operation is used to create a TypeDescriptor in the metadata store.
TypeDescriptorMergeXml	This operation is used to merge the Properties and localized names contained by the TypeDescriptors in the specified MetadataModel into an existing TypeDescriptor in the metadata store. The MetadataModel MUST be specified as a Well-Formed External Parsed Entity according to [XML] section 4.3.2 and MUST have as a root element the TypeDescriptor element as specified in [MS-BDCMFFS] section 2.2.4.24.
TypeDescriptorReadXml	This operation is used to create the TypeDescriptors contained by the specified MetadataModel, along with their Properties and localized names, in the metadata store. The MetadataModel MUST be specified as a Well-Formed External Parsed Entity according to [XML] section 4.3.2 and MUST have as a root element the TypeDescriptor element as specified in [MS-BDCMFFS] section 2.1.4.25.
Update	This operation is used to update a MetadataObject in the metadata store.
WriteSlicedXml	This operation is deprecated from the protocol and MUST NOT <26> be called.

3.1.4.1 Activate

This operation is used to set the specified Entity active.

```
<wsdl:operation name="Activate" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Activate" message="tns6:BusinessDataCatalogSharedService_Activate_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateResponse"
    message="tns6:BusinessDataCatalogSharedService_Activate_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivatePackageFormatExceptionStateFault" name="PackageFormatExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_PackageFormatExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ActivateArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Activate_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_Activate_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_Activate_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (1) in whose context the protocol client is operating is not authorized to edit the specified Entity .
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified Entity has been updated by a context other than the one that it has been currently read by. This happens when the specified object version is not equal to the current object version of the Entity . For example, this error can be triggered when one context reads the given Entity , after which another context updates the same Entity , and then the original context tries to update.
InvalidOperationException (section 2.2.4.38)	The operation cannot be performed for one of the following reasons: <ul style="list-style-type: none"> ▪ The specified Entity or another version of the specified Entity is already active. ▪ The protocol server encountered reference errors as specified in section 3.1.4.4.3.2 when performing this operation.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Entity does not exist.

3.1.4.1.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_Activate_InputMessage	The request WSDL message for the Activate WSDL operation .
BusinessDataCatalogSharedService_Activate_OutputMessage	The response WSDL message for the Activate WSDL operation .

3.1.4.1.1.1 BusinessDataCatalogSharedService_Activate_InputMessage

The request WSDL message for the **Activate** WSDL operation.

The **SOAP action** value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Activate
```

The **SOAP body** contains the **Activate** element.

3.1.4.1.1.2 BusinessDataCatalogSharedService_Activate_OutputMessage

The response WSDL message for the **Activate** WSDL operation.

The SOAP body contains the **ActivateResponse** element.

3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
Activate	The input data for the Activate WSDL operation.
ActivateResponse	The result data for the Activate WSDL operation.

3.1.4.1.2.1 Activate

The input data for the **Activate** WSDL operation.

```
<xs:element name="Activate" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityStruct: The specified Entity.

3.1.4.1.2.2 ActivateResponse

The result data for the **Activate** WSDL operation.

```
<xs:element name="ActivateResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="ActivateResult" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

ActivateResult: The activated Entity.

3.1.4.1.3 Complex Types

None.

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 AddAssociationReferenceToAssociationGroup

This operation is used to create the specified AssociationReference in the specified AssociationGroup.

```
<wsdl:operation name="AddAssociationReferenceToAssociationGroup"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroup"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Inpu
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupResponse"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Outp
utMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Meta
dataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Argu
mentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Argu
mentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_BdcE
xceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Inva
lidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupArgumentExceptionFault"
name="ArgumentExceptionFault"
```

```
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_ArgumentExceptionFault_FaultMessage" xmlns:w3="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error Complex Type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to edit the specified AssociationGroup .
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified AssociationGroup has been updated by a context other than the one by which it is currently being read. This happens when the specified object version is not equal to the current object version of the AssociationGroup . For example, this error can be raised when one context reads the AssociationGroup , another context updates the same AssociationGroup , and then the original context tries to update.
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	Another AssociationReference in the specified AssociationGroup references the Association that is referenced by the specified AssociationReference .
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified AssociationGroup already contains the implementation-specific maximum number of AssociationReferences .
InvalidOperationException (section 2.2.4.38)	The operation cannot be performed because Entity containing the AssociationGroup is active.

3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_InputMessage	The request WSDL message for the AddAssociationReferenceToAssociationGroup WSDL operation.
BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_OutputMessage	The response WSDL message for the AddAssociationReferenceToAssociationGroup WSDL operation.

Message	Description
	ciationGroup WSDL operation.

3.1.4.2.1.1

BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_InputMessage

The request WSDL message for the **AddAssociationReferenceToAssociationGroup** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/AddAssociationReferenceToAssociationGroup
```

The SOAP body contains the **AddAssociationReferenceToAssociationGroup** element.

3.1.4.2.1.2

BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_OutputMessage

The response WSDL message for the **AddAssociationReferenceToAssociationGroup** WSDL operation.

The SOAP body contains the **AddAssociationReferenceToAssociationGroupResponse** element.

3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddAssociationReferenceToAssociationGroup	The input data for the AddAssociationReferenceToAssociationGroup WSDL operation.
AddAssociationReferenceToAssociationGroupResponse	The result data for the AddAssociationReferenceToAssociationGroup WSDL operation.

3.1.4.2.2.1 AddAssociationReferenceToAssociationGroup

The input data for the **AddAssociationReferenceToAssociationGroup** WSDL operation.

```
<xs:element name="AddAssociationReferenceToAssociationGroup"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationGroupStruct" nillable="true" type="tns5:AssociationGroupStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationReferenceStruct" nillable="true" type="tns5:AssociationReferenceStruct"/>
    
```

```
</xs:sequence>
</xs:complexType>
</xs:element>
```

associationGroupStruct: The AssociationGroup.

associationReferenceStruct: The AssociationReference.

3.1.4.2.2.2 AddAssociationReferenceToAssociationGroupResponse

The result data for the **AddAssociationReferenceToAssociationGroup** WSDL operation.

```
<xs:element name="AddAssociationReferenceToAssociationGroupResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="AddAssociationReferenceToAssociationGroupResult" nillable="true"
type="tns5:AssociationGroupStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationReferenceStruct" nillable="true" type="tns5:AssociationReferenceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

AddAssociationReferenceToAssociationGroupResult: The AssociationGroup.

associationReferenceStruct: The AssociationReference. [<27>](#)

3.1.4.2.3 Complex Types

None.

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 AddEntityToModel

This operation is used to add a reference to the specified Entity to the specified Model.

```
<wsdl:operation name="AddEntityToModel" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModel"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelResponse"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_InvalidOperationExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_ArgumentNullExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_ArgumentOutOfRangeExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_BdcExceptionStateFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_MetadataExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_ArgumentExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_AddEntityToModel_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to edit the

Error complex type	Condition
	specified Model .
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Model does not exist.
BdcExceptionState (section 2.2.4.25)	The specified Entity does not exist.

3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_AddEntityToModel_InputMessage	The request WSDL message for the AddEntityToModel WSDL operation.
BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage	The response WSDL message for the AddEntityToModel WSDL operation.

3.1.4.3.1.1 BusinessDataCatalogSharedService_AddEntityToModel_InputMessage

The request WSDL message for the **AddEntityToModel** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/AddEntityToModel
```

The SOAP body contains the **AddEntityToModel** element.

3.1.4.3.1.2 BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage

The response WSDL message for the **AddEntityToModel** WSDL operation.

The SOAP body contains the **AddEntityToModelResponse** element.

3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddEntityToModel	The input data for the AddEntityToModel WSDL operation.
AddEntityToModelResponse	The result data for the AddEntityToModel WSDL operation.

3.1.4.3.2.1 AddEntityToModel

The input data for the **AddEntityToModel** WSDL operation.

```
<xs:element name="AddEntityToModel" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

modelStruct: The Model.

entityStruct: The Entity.

3.1.4.3.2.2 AddEntityToModelResponse

The result data for the **AddEntityToModel** WSDL operation.

```
<xs:element name="AddEntityToModelResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.3.3 Complex Types

None.

3.1.4.3.4 Simple Types

None.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 BulkSwitchActiveOrValidate

This operation is used to change the active version of the specified set of Entities, or validate the specified **Entities** for the purpose of changing the active versions and identify related errors.

```

<wsdl:operation name="BulkSwitchActiveOrValidate"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidate"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateResponse"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_BdcExceptionStateFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InvalidOperationExc
eptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_MetadataExcepti
onStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidatePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_PackageFormatExcept
ionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentNullExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentOutOfRangeE
xceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in

Complex Types (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The value of the validate element is "false" and the security principal (1) in whose context the protocol client is operating is not authorized to modify the specified Entities , or the currently active versions of the specified Entities .
ArgumentOutOfRangeException (section 2.2.4.9)	The entityStructs element in BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage has no elements.
ConcurrentModificationExceptionState (section 2.2.4.27)	At least one of the specified Entities has been updated by a context other than the one by which it is currently being read. This happens when the specified object version is not equal to the current object version of the Entity . For example, this error can be triggered when one context reads the given Entity , after which another context updates the same Entity , and then the original context tries to update the same Entity .
InvalidOperationException (section 2.2.4.38)	The operation cannot be performed because the value of the validate element is false and the protocol server encountered reference errors as specified in ActivationErrorRecordStruct (section 3.1.4.4.3.2) when performing this operation.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	One or more of the specified Entities does not exist.

3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage	The request WSDL message for the BulkSwitchActiveOrValidate WSDL operation.
BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage	The response WSDL message for the BulkSwitchActiveOrValidate WSDL operation.

3.1.4.4.1.1

BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage

The request WSDL message for the **BulkSwitchActiveOrValidate** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/BulkSwitchActiveOrValidate>

The SOAP body contains the **BulkSwitchActiveOrValidate** element.

3.1.4.4.1.2

BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage

The response WSDL message for the **BulkSwitchActiveOrValidate** WSDL operation.

The SOAP body contains the **BulkSwitchActiveOrValidateResponse** element.

3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
BulkSwitchActiveOrValidate	The input data for the BulkSwitchActiveOrValidate WSDL operation.
BulkSwitchActiveOrValidateResponse	The result data for the BulkSwitchActiveOrValidate WSDL operation.

3.1.4.4.2.1 BulkSwitchActiveOrValidate

The input data for the **BulkSwitchActiveOrValidate** WSDL operation.

```
<xs:element name="BulkSwitchActiveOrValidate" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStructs" nillable="true" type="tns5:ArrayOfEntityStruct"/>
      <xs:element minOccurs="0" name="validate" type="xs:boolean"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityStructs: The Entities that are to be set active. At least one **Entity** MUST be specified. If the value of the **validate** element is **false** the protocol server MUST set previously active versions of the specified **Entities** as not active upon successful finish of this operation.

validate: This element specifies if the state of the data stored in the protocol server can be changed or not. A value of **false** indicates the protocol server MUST change the active versions of the **Entities**. A value of **true** indicates that the protocol server MUST validate the specified **Entities** for the purpose of changing the active versions and return any associated errors, and the protocol server MUST NOT change the state of the data stored in the protocol server.

modelStruct: The Model to add the specified **Entities** to. If the value of this element is not NULL and the value of the **validate** element is **false**, this operation MUST add all the specified **Entities** to the specified **Model** upon successful operation. [<28>](#)

3.1.4.4.2.2 BulkSwitchActiveOrValidateResponse

The result data for the **BulkSwitchActiveOrValidate** WSDL operation.

```

<xs:element name="BulkSwitchActiveOrValidateResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="BulkSwitchActiveOrValidateResult" nillable="true"
        type="tns5:ArrayOfActivationErrorRecordStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="entityStructs" nillable="true" type="tns5:ArrayOfEntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

BulkSwitchActiveOrValidateResult: The reference errors encountered during the operation. The operation is successful if this element does not contain any reference errors.

entityStructs: This element MUST contain information about Entities that were updated as a result of this operation. The value of this element MUST be ignored if the value of the **validate** element is "true". [<29>](#)

3.1.4.4.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfActivationErrorRecordStruct	Contains reference errors encountered during the operation.
ActivationErrorRecordStruct	Contains information specific to a single reference error.

3.1.4.4.3.1 ArrayOfActivationErrorRecordStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfActivationErrorRecordStruct** complex type contains reference errors encountered during the operation.

```

<xs:complexType name="ArrayOfActivationErrorRecordStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ActivationErrorRecordStruct"
      nillable="true" type="tns5:ActivationErrorRecordStruct"/>
  </xs:sequence>
</xs:complexType>

```

ActivationErrorRecordStruct: A reference error encountered during the operation.

3.1.4.4.3.2 ActivationErrorRecordStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ActivationErrorRecordStruct** complex type contains information about a single reference error encountered during the operation. A reference error indicates a MetadataObject has a reference to an invalid **MetadataObject**, placing the **MetadataObject** that has the reference in

error. The value of the **errorCode** element specifies which **MetadataObject** is in error, and why that **MetadataObject** is in error.

```
<xs:complexType name="ActivationErrorRecordStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="aGAssociationEntityReferenceName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="aGAssociationEntityReferenceNamespace" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="aGAssociationReferenceName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="containingAssociationGroupName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="containingEntityName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="containingEntityNamespace" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="containingEntityVersion" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="containingMethodName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="containingParameterName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="containingTypeDescriptorId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="containingTypeDescriptorName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="errorCode" type="xs:int"/>
    <xs:element minOccurs="0" name="tDAssociationEntityReferenceName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="tDAssociationEntityReferenceNamespace" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="tDAssociationReferenceName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="tDIDEntityReferenceName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="tDIDEntityReferenceNamespace" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="tDIDReferenceName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="tDIDReferenceTypeName" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

aGAssociationEntityReferenceName: The name of the Entity containing the Association referenced by the AssociationReference that is in error.

aGAssociationEntityReferenceNamespace: The namespace of the **Entity** containing the **Association** referenced by the **AssociationReference** that is in error.

aGAssociationReferenceName: The name of the **Association** referenced by the **AssociationReference** that is in error.

containingAssociationGroupName: The name of the AssociationGroup that is in error or contains the **AssociationReference** in error.

containingEntityName: The name of the **Entity** that is in error or contains the MetadataObject in error.

containingEntityNamespace: The namespace of the **Entity** that is in error or contains the **MetadataObject** in error.

containingEntityVersion: The string representation of the version of the **Entity** that is in error or contains the **MetadataObject** in error. Following is the ABNF as specified in [\[RFC5234\]](#) for the **ContainingEntityVersion** structure:

```
ContainingEntityVersion = Major %x2E Minor *1(%x2E Build *1(%x2E Revision))

Major = 1*10DIGIT
Minor = 1*10DIGIT
Build = 1*10DIGIT
Revision = 1*10DIGIT
```

Major MUST be the major version of the **Entity**. Minor MUST be of the **Entity**. Build MUST be of the **Entity**. Revision MUST be of the **Entity**.

containingMethodName: The name of the Method that contains the **MetadataObject** that is in error.

containingParameterName: The name of the Parameter that contains the **MetadataObject** in error.

containingTypeDescriptorId: The **MetadataObjectId** of the **TypeDescriptor** that is in error.

containingTypeDescriptorName: The name of the **TypeDescriptor** that is in error.

errorCode: The error code. The value MUST be listed in the following table.

Value	Description
-1003	A TypeDescriptor is in error because it references an Identifier that doesn't exist in the specified Entity . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , containingMethodName , containingParameterName , containingTypeDescriptorName , containingTypeDescriptorId , tDIDReferenceName , tDIDReferenceTypeName , tDIDEntityReferenceName , and tDIDEntityReferenceNamespace all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-1004	A TypeDescriptor is in error because it references an Association that doesn't exist in the specified Entity . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , containingMethodName , containingParameterName , containingTypeDescriptorName , containingTypeDescriptorId , tDAssociationReferenceName , tDAssociationEntityReferenceName , and tDAssociationEntityReferenceNamespace all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-1005	An Entity is in error because the TypeDescriptors that are contained in the Parameters of its Methods are referencing only non-empty strict subset of Identifiers of an active Entity . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , containingMethodName , tDIDEntityReferenceName , and tDIDEntityReferenceNamespace all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-1008	An AssociationReference is in error because it references an Association that doesn't exist in the specified Entity . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , containingAssociationGroupName , aGAssociationReferenceName , aGAssociationEntityReferenceName , and aGAssociationEntityReferenceNamespace all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.

Value	Description
-1011	An Association is in error because the Entity containing the Association is not contained by the same LobSystem as the destination Entity of the Association . For this error code, ContainingEntityNamespace , ContainingEntityName , ContainingEntityVersion , ContainingMethodName , and AGAssociationReferenceName all MUST NOT be NULL. All other columns MUST be ignored by the protocol client.
-1012	An Association is in error because all of the conditions in the following list are true : <ul style="list-style-type: none"> ▪ The destination Entity of the Association contains MethodInstance, and there exists a TypeDescriptor contained by the Parameter that contains the ReturnPropertyDescriptor of this MethodInstance. ▪ The same TypeDescriptor references an Identifier of a source Entity of the Association. ▪ The same TypeDescriptor references the Association. ▪ The ReturnPropertyDescriptor of the Association has the IsCollection flag not set. Or, all of the conditions in the following list are true : <ul style="list-style-type: none"> ▪ The source Entity of the Association contains a MethodInstance, and there exists a TypeDescriptor contained by the Parameter that contains the ReturnPropertyDescriptor of this MethodInstance. ▪ The same TypeDescriptor references an Identifier of the destination Entity of the Association. ▪ The same TypeDescriptor references the Association. ▪ The ReturnPropertyDescriptor of the Association has the IsCollection flag set. For this error code, ContainingEntityNamespace , ContainingEntityName , ContainingEntityVersion , ContainingMethodName , and AGAssociationReferenceName all MUST NOT be NULL. All other columns MUST be ignored by the protocol client.
-800	An AssociationGroup is in error because all Associations referenced by the AssociationReferences contained by this AssociationGroup with the IsReverse attribute set to false do not have same sources. For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , and containingAssociationGroupName all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-801	An AssociationGroup is in error because one of the following conditions is true : <ul style="list-style-type: none"> ▪ The Entity containing AssociationGroup is not the destination of this AssociationGroup. ▪ The AssociationGroup contains AssociationReferences with IsReverse attribute is set to true, but the AssociationGroup has more than one source. For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , and containingAssociationGroupName all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-802	An AssociationGroup is in error because there is more than one Association which is an Associator or a Disassociator referenced from the AssociationReferences of this AssociationGroup . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , and containingAssociationGroupName all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-803	An AssociationGroup is in error because one of the following conditions is true :

Value	Description
	<ul style="list-style-type: none"> ▪ There are more than one Association which is an BulkAssociatedIdEnumerator referenced from the AssociationReferences of this AssociationGroup with IsReverse attribute is set to false. ▪ There are more Associations that are BulkAssociatedIdEnumerators referenced from the AssociationReferences of this AssociationGroup with IsReverse attribute is set to true, than the number of sources of this AssociationGroup. <p>For this error code, containingEntityNamespace, containingEntityName, containingEntityVersion, and containingAssociationGroupName all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.</p>
-804	An AssociationGroup is in error because it contains an AssociationReference which has IsReverse attribute set to true , but the Association it references is not an AssociationNavigator , a BulkAssociationNavigator or a BulkAssociatedIdEnumerator . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , and containingAssociationGroupName all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.
-805	An Association is in error because it is a BulkAssociationNavigator and it is not referenced from an AssociationReference that is contained in an AssociationGroup which has another AssociationReference that references an Association that is an AssociationNavigator and has the same value for IsReverse . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , containingMethodName , and aGAssociationReferenceName all MUST NOT be NULL. If the Association is referenced from an AssociationReference , containingAssociationGroupName also MUST NOT be NULL; otherwise, it MUST be NULL. Values of all other elements MUST be ignored by the protocol client.
-806	An Association is in error because it is referenced by two or more AssociationReferences . For this error code, containingEntityNamespace , containingEntityName , containingEntityVersion , containingMethodName , and aGAssociationReferenceName all MUST NOT be NULL. Values of all other elements MUST be ignored by the protocol client.

tDAssociationEntityReferenceName: The name of the **Entity** that contains the **Association** referenced by the **TypeDescriptor** that is in error.

tDAssociationEntityReferenceNamespace: The namespace of the **Entity** that contains the **Association** referenced by the **TypeDescriptor** that is in error.

tDAssociationReferenceName: The name of the **Association** referenced by the **TypeDescriptor** that is in error.

tDIDEntityReferenceName: The name of the **Entity** containing the **Identifier** referenced by the **TypeDescriptor** that is in error.

tDIDEntityReferenceNamespace: The namespace of the **Entity** containing the **Identifier** referenced by the **TypeDescriptor** that is in error.

tDIDReferenceName: The name of the **Identifier** referenced by the **TypeDescriptor** that is in error.

tDIDReferenceTypeName: The name of the data type that is represented by the **TypeDescriptor** that is in error.

3.1.4.4.4 Simple Types

None.

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.4.5 CheckPathInMethodInstances

The **CheckPathInMethodInstances** operation retrieves whether the specified path, which conforms to [\[MS-BDCMFFS\]](#) section 2.1.5.5, corresponds to a TypeDescriptor in a View of the MethodInstances of the specified type contained by the specified DataClass, along with the MetadataObjectId of one such **MethodInstance**, if one exists.

```
<wsdl:operation name="CheckPathInMethodInstances"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstances"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesResponse"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_BdcExceptionStateFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_MetadataExceptionSt
ateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_ArgumentExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_ArgumentNullExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage** request message, and the protocol server MUST respond with a

BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage

response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	The specified path did not conform to the specification for TypeDescriptorPathStrings in [MS-BDCMFFS] section 2.1.5.5.
MetadataObjectNotFoundExpectionState (section 2.2.4.43)	The specified DataClass does not exist.

3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage	The request WSDL message for the CheckPathInMethodInstances WSDL operation.
BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage	The response WSDL message for the CheckPathInMethodInstances WSDL operation.

3.1.4.5.1.1

BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage

The request WSDL message for the **CheckPathInMethodInstances** WSDL operation.

The SOAP action value is:

`http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CheckPathInMethodInstances`

The SOAP body contains the **CheckPathInMethodInstances** element.

3.1.4.5.1.2

BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage

The response WSDL message for the **CheckPathInMethodInstances** WSDL operation.

The SOAP body contains the **CheckPathInMethodInstancesResponse** element.

3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
CheckPathInMethodInstances	The input data for the CheckPathInMethodInstances WSDL operation.
CheckPathInMethodInstancesResponse	The result data for the CheckPathInMethodInstances WSDL operation.

3.1.4.5.2.1 CheckPathInMethodInstances

The input data for the **CheckPathInMethodInstances** WSDL operation.

```
<xs:element name="CheckPathInMethodInstances" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="dottedPath" nillable="true" type="xs:string"/>
      <xs:element
        xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
        minOccurs="0" name="type" type="tns1:MethodInstanceType"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

dataClassId: The MetadataObjectId of DataClass that contains the MethodInstances.

dottedPath: The path to the TypeDescriptor from the **TypeDescriptors** contained by the ReturnTypeDescriptor of the **MethodInstance**. The value MUST be a path as specified in [\[MS-BDCMFFS\]](#) section 2.1.5.5.

type: The type of the **MethodInstance** to retrieve.

partitionId: An empty GUID.

3.1.4.5.2.2 CheckPathInMethodInstancesResponse

The result data for the **CheckPathInMethodInstances** WSDL operation.

```
<xs:element name="CheckPathInMethodInstancesResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="CheckPathInMethodInstancesResult" type="xs:boolean"/>
      <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

CheckPathInMethodInstancesResult: If **methodInstanceId** is 0, the value MUST be **false**. Otherwise, the value MUST be **true**.

methodInstanceId: The value MUST be the MetadataObjectId of any of the MethodInstances of the specified type contained by the specified DataClass that has a TypeDescriptor in its View corresponding to the specified path. If the specified **DataClass** contains more than one **MethodInstance** that matches the criteria, which of those **MethodInstances** is returned is determined in an implementation-specific manner. If the specified **DataClass** does not contain a **MethodInstance** that matches the criteria, the value MUST be 0.

3.1.4.5.3 Complex Types

None.

3.1.4.5.4 Simple Types

None.

3.1.4.5.5 Attributes

None.

3.1.4.5.6 Groups

None.

3.1.4.5.7 Attribute Groups

None.

3.1.4.6 ClearLocalizedNames

This operation is used to remove all localized names of the specified MetadataObject from the specified Setting.

```
<wsdl:operation name="ClearLocalizedNames" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearLocalizedNames"
    message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearLocalizedNamesResponse"
    message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearLocalizedNamesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearLocalizedNamesInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.2)	The security principal in whose context the protocol client is operating is not authorized to edit the specified MetadataObject .
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage	The request WSDL message for the ClearLocalizedNames WSDL operation.
BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage	The response WSDL message for the

Message	Description
	ClearLocalizedNames WSDL operation.

3.1.4.6.1.1

BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage

The request WSDL message for the **ClearLocalizedNames** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearLocalizedNames
```

The SOAP body contains the **ClearLocalizedNames** element.

3.1.4.6.1.2

BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage

The response WSDL message for the **ClearLocalizedNames** WSDL operation.

The SOAP body contains the **ClearLocalizedNamesResponse** element.

3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ClearLocalizedNames	The input data for the ClearLocalizedNames WSDL operation.
ClearLocalizedNamesResponse	The result data for the ClearLocalizedNames WSDL operation.

3.1.4.6.2.1 ClearLocalizedNames

The input data for the **ClearLocalizedNames** WSDL operation.

```
<xs:element name="ClearLocalizedNames" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject of which the localized names will be removed. The partition of this **MetadataObject** MUST be the empty GUID.

settingId: The Setting from which to delete the localized names.

3.1.4.6.2 ClearLocalizedNamesResponse

The result data for the **ClearLocalizedNames** WSDL operation.

```
<xs:element name="ClearLocalizedNamesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.6.3 Complex Types

None.

3.1.4.6.4 Simple Types

None.

3.1.4.6.5 Attributes

None.

3.1.4.6.6 Groups

None.

3.1.4.6.7 Attribute Groups

None.

3.1.4.7 ClearProperties

This operation is used to remove all Properties of the specified MetadataObject from the specified Setting.

```
<wsdl:operation name="ClearProperties" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearProperties"
    message="tns6:BusinessDataCatalogSharedService_ClearProperties_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearPropertiesResponse"
    message="tns6:BusinessDataCatalogSharedService_ClearProperties_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearPropertiesArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ClearProperties_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearPropertiesInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
  </wsdl:fault>
</wsdl:operation>
```



```

message="tns6:BusinessDataCatalogSharedService_ClearProperties_InvalidOperationExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_ArgumentNullExceptionFault_Fau
ltMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_MetadataExceptionStateFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_ArgumentExceptionFault_FaultMe
ssage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_BdcExceptionStateFault_FaultMe
ssage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_ClearProperties_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_ClearProperties_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.2)	The security principal (2) in whose context the protocol client is operating is not authorized to edit the specified MetadataObject .
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	The specified MetadataObject does not exist.

3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ClearProperties_InputMessage	The request WSDL message for the ClearProperties WSDL operation.
BusinessDataCatalogSharedService_ClearProperties_OutputMessage	The response WSDL message for the ClearProperties WSDL operation.

3.1.4.7.1.1 BusinessDataCatalogSharedService_ClearProperties_InputMessage

The request WSDL message for the **ClearProperties** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearProperties
```

The SOAP body contains the **ClearProperties** element.

3.1.4.7.1.2 BusinessDataCatalogSharedService_ClearProperties_OutputMessage

The response WSDL message for the **ClearProperties** WSDL operation.

The SOAP body contains the **ClearPropertiesResponse** element.

3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ClearProperties	The input data for the ClearProperties WSDL operation.
ClearPropertiesResponse	The result data for the ClearProperties WSDL operation.

3.1.4.7.2.1 ClearProperties

The input data for the **ClearProperties** WSDL operation.

```
<xs:element name="ClearProperties" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject of which the Properties will be removed.

settingId: The Setting from which to delete the **Properties**.

3.1.4.7.2.2 ClearPropertiesResponse

The result data for the **ClearProperties** WSDL operation.

```
<xs:element name="ClearPropertiesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
```

</xs:element>

3.1.4.7.3 Complex Types

None.

3.1.4.7.4 Simple Types

None.

3.1.4.7.5 Attributes

None.

3.1.4.7.6 Groups

None.

3.1.4.7.7 Attribute Groups

None.

3.1.4.8 CopyAclAcrossChildren

This operation is used to clear the ACEs of the descendent MetadataObjects of a specified **MetadataObject**, then copy the ACEs of the specified **MetadataObject** to the descendent **MetadataObjects**. A given **MetadataObject** is a descendent of the specified **MetadataObject** if the **MetadataObject** that contains the given **MetadataObject** is also a descendent of the specified **MetadataObject**, or the **MetadataObject** is contained by the specified **MetadataObject** itself.

If the specified **MetadataObject** is a MetadataCatalog, the protocol server MUST NOT change the ACEs of any LobSystem and their descendent **MetadataObjects** if the security principal (2) in whose context the protocol client is operating is not authorized to edit the **LobSystem**.

```
<wsdl:operation name="CopyAclAcrossChildren" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildren"
    message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenResponse"
    message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_BdcExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_MetadataExceptionStateFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentExceptionFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentNullExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.2)	The security principal (2) in whose context the protocol client is operating is not authorized to set permissions on the specified MetadataObject .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage	The request WSDL message for the CopyAclAcrossChildren

Message	Description
	WSDL operation.
BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage	The response WSDL message for the CopyAclAcrossChildren WSDL operation.

3.1.4.8.1.1

BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage

The request WSDL message for the **CopyAclAcrossChildren** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildren
```

The SOAP body contains the **CopyAclAcrossChildren** element.

3.1.4.8.1.2

BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage

The response WSDL message for the **CopyAclAcrossChildren** WSDL operation.

The SOAP body contains the **CopyAclAcrossChildrenResponse** element.

3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
CopyAclAcrossChildren	The input data for the CopyAclAcrossChildren WSDL operation.
CopyAclAcrossChildrenResponse	The result data for the CopyAclAcrossChildren WSDL operation.

3.1.4.8.2.1 CopyAclAcrossChildren

The input data for the **CopyAclAcrossChildren** WSDL operation.

```
<xs:element name="CopyAclAcrossChildren" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject.

3.1.4.8.2.2 CopyAclAcrossChildrenResponse

The result data for the **CopyAclAcrossChildren** WSDL operation.

```
<xs:element name="CopyAclAcrossChildrenResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.8.3 Complex Types

None.

3.1.4.8.4 Simple Types

None.

3.1.4.8.5 Attributes

None.

3.1.4.8.6 Groups

None.

3.1.4.8.7 Attribute Groups

None.

3.1.4.9 CopyAclAcrossChildrenForSetting

This operation is used to clear the ACEs in a specified Setting on the descendent MetadataObjects of the specified **MetadataObject**, then copy the ACEs in the specified **Setting** on the specified **MetadataObject** to the descendent **MetadataObjects**. A given **MetadataObject** is a descendent of the specified **MetadataObject** if the **MetadataObject** that contains the given **MetadataObject** is also a descendent of the specified **MetadataObject**, or the **MetadataObject** is contained by the specified **MetadataObject** itself.

If the specified **MetadataObject** is a MetadataCatalog, the protocol server MUST NOT change the ACEs of any LobSystem and their descendent **MetadataObjects** if the security principal (2) in whose context the protocol client is operating is not authorized to edit the **LobSystem**.

```
<wsdl:operation name="CopyAclAcrossChildrenForSetting"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSetting"
    message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingResponse"
    message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InvalidOperati
onExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_BdcExceptionSt
ateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentOutOfR
angeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_MetadataExcept
ionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentNullEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a

BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error Complex Type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to set permissions on the specified MetadataObject .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExceptionState	The specified MetadataObject does not exist.

Error Complex Type	Condition
(section 2.2.4.43)	

3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage	The request WSDL message for the CopyAclAcrossChildrenForSetting WSDL operation.
BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage	The response WSDL message for the CopyAclAcrossChildrenForSetting WSDL operation.

3.1.4.9.1.1

BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage

The request WSDL message for the **CopyAclAcrossChildrenForSetting** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSetting>

The SOAP body contains the **CopyAclAcrossChildrenForSetting** element.

3.1.4.9.1.2

BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage

The response WSDL message for the **CopyAclAcrossChildrenForSetting** WSDL operation.

The SOAP body contains the **CopyAclAcrossChildrenForSettingResponse** element.

3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
CopyAclAcrossChildrenForSetting	The input data for the CopyAclAcrossChildrenForSetting WSDL operation.
CopyAclAcrossChildrenForSettingResponse	The result data for the CopyAclAcrossChildrenForSetting WSDL operation.

3.1.4.9.2.1 CopyAclAcrossChildrenForSetting

The input data for the **CopyAclAcrossChildrenForSetting** WSDL operation.

```
<xs:element name="CopyAclAcrossChildrenForSetting"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject.

settingId: The Setting to copy the ACEs to and from.

3.1.4.9.2.2 CopyAclAcrossChildrenForSettingResponse

The result data for the **CopyAclAcrossChildrenForSetting** WSDL operation.

```
<xs:element name="CopyAclAcrossChildrenForSettingResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.9.3 Complex Types

None.

3.1.4.9.4 Simple Types

None.

3.1.4.9.5 Attributes

None.

3.1.4.9.6 Groups

None.

3.1.4.9.7 Attribute Groups

None.

3.1.4.10 CopyAclToSetting

This operation is used to delete the ACEs of the specified non-default Setting and the specified MetadataObject, then copy the ACEs of the default **Setting** and the specified **MetadataObject** to the specified **Setting** and the specified **MetadataObject**.

```
<wsdl:operation name="CopyAclToSetting" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSetting"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingResponse"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSettingArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error Complex Type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified ACEs.
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist in the metadata store.

3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage	The request WSDL message for the CopyAclToSetting WSDL operation.
BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage	The response WSDL message for the CopyAclToSetting WSDL operation.

3.1.4.10.1.1

BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage

The request WSDL message for the **CopyAclToSetting** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclToSetting
```

The SOAP body contains the **CopyAclToSetting** element.

3.1.4.10.1.2

BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage

The response WSDL message for the **CopyAclToSetting** WSDL operation.

The SOAP body contains the **CopyAclToSettingResponse** element.

3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
CopyAclToSetting	The input data for the CopyAclToSetting WSDL operation.

Element	Description
CopyAclToSettingResponse	The result data for the CopyAclToSetting WSDL operation.

3.1.4.10.2.1 CopyAclToSetting

The input data for the **CopyAclToSetting** WSDL operation.

```
<xs:element name="CopyAclToSetting" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject. The partition (1) of this element MUST be an empty GUID.

settingId: The **Setting** to write the ACEs to.

3.1.4.10.2.2 CopyAclToSettingResponse

The result data for the **CopyAclToSetting** WSDL operation.

```
<xs:element name="CopyAclToSettingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.10.3 Complex Types

None.

3.1.4.10.4 Simple Types

None.

3.1.4.10.5 Attributes

None.

3.1.4.10.6 Groups

None.

3.1.4.10.7 Attribute Groups

None.

3.1.4.11 Deactivate

This operation is used to set the active version of an Entity as not active.

```
<wsdl:operation name="Deactivate" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Deactivate" message="tns6:BusinessDataCatalogSharedService_Deactivate_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateResponse"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivatePackageFormatExceptionStateFault" name="PackageFormatExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_PackageFormatExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeactivateArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Deactivate_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_Deactivate_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_Deactivate_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to edit the specified Entity .
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified Entity has been updated by a context other than the one that it has been currently read by. This happens when the specified object version is not equal to the current object version of the Entity . For example, this error can be triggered when a thread reads the given Entity , after which another thread updates the same Entity , and then the original thread tries to update.
InvalidOperationException (section 2.2.4.38)	One of the following conditions is satisfied: <ul style="list-style-type: none"> This operation cannot be performed because the protocol server encountered reference errors (as specified in section 3.1.4.4.3.2) when performing this operation. This operation cannot be performed because the specified Entity is already not active.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Entity does not exist.

3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_Deactivate_InputMessage	The request WSDL message for the Deactivate WSDL operation.
BusinessDataCatalogSharedService_Deactivate_OutputMessage	The response WSDL message for the Deactivate WSDL operation.

3.1.4.11.1.1 BusinessDataCatalogSharedService_Deactivate_InputMessage

The request WSDL message for the **Deactivate** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Deactivate
```

The SOAP body contains the **Deactivate** element.

3.1.4.11.1.2 BusinessDataCatalogSharedService_Deactivate_OutputMessage

The response WSDL message for the **Deactivate** WSDL operation.

The SOAP body contains the **DeactivateResponse** element.

3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
Deactivate	The input data for the Deactivate WSDL operation.
DeactivateResponse	The result data for the Deactivate WSDL operation.

3.1.4.11.2.1 Deactivate

The input data for the **Deactivate** WSDL operation.

```
<xs:element name="Deactivate" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityStruct: The Entity to set as not active.

3.1.4.11.2.2 DeactivateResponse

The result data for the **Deactivate** WSDL operation.

```
<xs:element name="DeactivateResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="DeactivateResult" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

DeactivateResult: The Entity that was set as not active as a result of this operation.

3.1.4.11.3 Complex Types

None.

3.1.4.11.4 Simple Types

None.

3.1.4.11.5 Attributes

None.

3.1.4.11.6 Groups

None.

3.1.4.11.7 Attribute Groups

None.

3.1.4.12 Delete

This operation is used to delete the specified `MetadataObject`.

```
<wsdl:operation name="Delete" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Delete" message="tns6:BusinessDataCatalogSharedService_Delete_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteResponse"
    message="tns6:BusinessDataCatalogSharedService_Delete_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Delete_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Delete_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Delete_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Delete_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Delete_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Delete_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_Delete_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_Delete_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error Complex Type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject , or the specified MetadataObject is a Model and the security principal (2) in whose context the protocol client is operating is not authorized to modify one or more of the LobSystems which contain one or more Entity referenced by the specified Model.
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified MetadataObject has been updated by a context other than the one that it has been currently read by. This happens when the specified object version is not equal to the current object version of the MetadataObject . For example, this error can be triggered when one context reads the given MetadataObject , after which another context updates the same MetadataObject , and then the original context tries to update the same MetadataObject .
InvalidOperationException (section 2.2.4.38)	One of the following conditions is satisfied: <ul style="list-style-type: none"> ▪ The operation cannot be performed because the specified MetadataObject is an Entity, which, if active, MUST be made not active before being deleted. An attempt was made to make the Entity not active, but, at the time of the attempt, the Entity was no longer active. ▪ The operation cannot be performed because the specified MetadataObject is a FilterDescriptor of type TimeStampFilter and is currently used in a MethodInstance of type ChangedIdEnumerator or DeletedIdEnumerator. ▪ The specified MetadataObject is a LobSystem and it contains at least one Entity. ▪ The operation cannot be performed because the specified MetadataObject is a TypeDescriptor and there exists at least one MethodInstance whose ReturnPropertyDescriptor is the specified TypeDescriptor. ▪ The specified MetadataObject cannot be deleted because it is either an active Entity or the child of an active Entity. ▪ The specified MetadataObject cannot be deleted because it is a LobSystemInstance which does not exist.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

Any Properties that are child objects of the specified **MetadataObject** MUST also be deleted. If the **metadataObjectStruct** element specifies any of the **MetadataObjects** in the following table, the protocol server MUST perform the corresponding actions, in addition to deleting the specified **MetadataObject** from the metadata store.

MetadataObject	Action
Action	Delete all the ActionParameters contained in the specified Action .
Entity	Delete all Actions , Methods, Identifiers and AssociationGroups that are child objects of the specified Entity , as well as all their child objects, in a recursive manner. If the LobSystem that is the parent of this Entity contains no other Entities , also delete the LobSystem , as well as all of LobSystem 's child objects in a recursive manner.
LobSystem	Delete all LobSystemInstances that are child objects of the specified LobSystem .
Method	Delete all MethodInstances , FilterDescriptors and Parameters that are child objects of the specified Method , as well as all their child objects, in a recursive manner.
Model	Delete all LobSystems and Entities that are referenced by the specified Model , as well as all their child objects, in a recursive manner.
Parameter	Delete the root TypeDescriptor of the specified Parameter , as well as all child objects of the root TypeDescriptor , in a recursive manner.
TypeDescriptor	Delete all the TypeDescriptors that are child objects of the specified TypeDescriptor , as well as all their child objects, in a recursive manner.

3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_Delete_InputMessage	The request WSDL message for the Delete WSDL operation.
BusinessDataCatalogSharedService_Delete_OutputMessage	The response WSDL message for the Delete WSDL operation.

3.1.4.12.1.1 BusinessDataCatalogSharedService_Delete_InputMessage

The request WSDL message for the **Delete** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Delete
```

The SOAP body contains the **Delete** element.

3.1.4.12.1.2 BusinessDataCatalogSharedService_Delete_OutputMessage

The response WSDL message for the **Delete** WSDL operation.

The SOAP body contains the **DeleteResponse** element.

3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
Delete	The input data for the Delete WSDL operation.
DeleteResponse	The result data for the Delete WSDL operation.

3.1.4.12.2.1 Delete

The input data for the **Delete** WSDL operation.

```
<xs:element name="Delete" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject which this operation MUST delete.

3.1.4.12.2.2 DeleteResponse

The result data for the **Delete** WSDL operation.

```
<xs:element name="DeleteResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.12.3 Complex Types

None.

3.1.4.12.4 Simple Types

None.

3.1.4.12.5 Attributes

None.

3.1.4.12.6 Groups

None.

3.1.4.12.7 Attribute Groups

None.

3.1.4.13 DeleteAssociationReferenceFromAssociationGroup

This operation is used to remove an AssociationReference from an AssociationGroup by deleting the **AssociationReference**.

```
<wsdl:operation name="DeleteAssociationReferenceFromAssociationGroup"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroup"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupResponse"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroupArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

</wsdl:operation>

The protocol client sends a

BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InputMessage request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	One of the following conditions is satisfied: <ul style="list-style-type: none">▪ The security principal (2) in whose context the protocol client is operating is not authorized to edit the Entity containing the AssociationGroup containing the specified AssociationReference.▪ The identifier of the specified AssociationReference is 0.▪ The specified AssociationReference does not exist.
ArgumentOutOfRangeException (section 2.2.4.9)	The associationGroupId of the specified AssociationReference is 0.
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified AssociationReference has been updated by a context other than the one that it has been currently read by. This happens when the specified object version is not equal to the current object version of the AssociationReference . For example, this error can be triggered when one context reads the given AssociationReference , after which another context updates the same AssociationReference , and then the original context tries to update. <30>
InvalidOperationException (section 2.2.4.38)	The operation cannot be performed because the Entity which contains the AssociationGroup which contains the specified AssociationReference is active. <31>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The AssociationGroup that is specified by the associationGroupId of the specified AssociationReference does not exist.

3.1.4.13.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InputMessage	The request WSDL message for the DeleteAssociationReferenceFromAssociationGroup WSDL operation.
BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_OutputMessage	The response WSDL message for the DeleteAssociationReferenceFromAssociationGroup WSDL operation.

3.1.4.13.1.1

BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InputMessage

The request WSDL message for the **DeleteAssociationReferenceFromAssociationGroup** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteAssociationReferenceFromAssociationGroup>

The SOAP body contains the **DeleteAssociationReferenceFromAssociationGroup** element.

3.1.4.13.1.2

BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_OutputMessage

The response WSDL message for the **DeleteAssociationReferenceFromAssociationGroup** WSDL operation.

The SOAP body contains the **DeleteAssociationReferenceFromAssociationGroupResponse** element.

3.1.4.13.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeleteAssociationReferenceFromAssociationGroup	The input data for the DeleteAssociationReferenceFromAssociationGroup WSDL operation.
DeleteAssociationReferenceFromAssociationGroupResponse	The result data for the DeleteAssociationReferenceFromAssociationGroup WSDL operation.

3.1.4.13.2.1 DeleteAssociationReferenceFromAssociationGroup

The input data for the **DeleteAssociationReferenceFromAssociationGroup** WSDL operation.

```

<xs:element name="DeleteAssociationReferenceFromAssociationGroup"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="associationReferenceStruct" nillable="true" type="tns5:AssociationReferenceStruct"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

associationReferenceStruct: The AssociationReference.

partitionId: An empty GUID.

3.1.4.13.2 DeleteAssociationReferenceFromAssociationGroupResponse

The result data for the **DeleteAssociationReferenceFromAssociationGroup** WSDL operation.

```

<xs:element name="DeleteAssociationReferenceFromAssociationGroupResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>

```

3.1.4.13.3 Complex Types

None.

3.1.4.13.4 Simple Types

None.

3.1.4.13.5 Attributes

None.

3.1.4.13.6 Groups

None.

3.1.4.13.7 Attribute Groups

None.

3.1.4.14 DeleteDefaultValueForTypeDescriptor

This operation is used to delete the DefaultValue of the specified TypeDescriptor for the specified MethodInstance.

```

<wsdl:operation name="DeleteDefaultValueForTypeDescriptor"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">

```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InputMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_OutputMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_MetadataEx
ceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentNu
llExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentOu
tOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_BdcExcepti
onStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InvalidOpe
rationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to edit the Method containing the Parameter containing the specified TypeDescriptor.
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId for the TypeDescriptor or the MethodInstance is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified TypeDescriptor or the specified MethodInstance does not exist.

3.1.4.14.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InputMessage	The request WSDL message for the DeleteDefaultValueForTypeDescriptor WSDL operation.
BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_OutputMessage	The response WSDL message for the DeleteDefaultValueForTypeDescriptor WSDL operation.

3.1.4.14.1.1

BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_Input Message

The request WSDL message for the **DeleteDefaultValueForTypeDescriptor** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteDefaultValueForTypeDescriptor
```

The SOAP body contains the **DeleteDefaultValueForTypeDescriptor** element.

3.1.4.14.1.2

BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_Output Message

The response WSDL message for the **DeleteDefaultValueForTypeDescriptor** WSDL operation.

The SOAP body contains the **DeleteDefaultValueForTypeDescriptorResponse** element.

3.1.4.14.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeleteDefaultValueForTypeDescriptor	The input data for the DeleteDefaultValueForTypeDescriptor WSDL operation.
DeleteDefaultValueForTypeDescriptorResponse	The result data for the DeleteDefaultValueForTypeDescriptor WSDL operation.

3.1.4.14.2.1 DeleteDefaultValueForTypeDescriptor

The input data for the **DeleteDefaultValueForTypeDescriptor** WSDL operation.

```
<xs:element name="DeleteDefaultValueForTypeDescriptor"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

typeDescriptorId: The MetadataObjectId for the TypeDescriptor.

methodInstanceId: The **MetadataObjectId** for the MethodInstance.

partitionId: An empty GUID.

3.1.4.14.2.2 DeleteDefaultValueForTypeDescriptorResponse

The result data for the **DeleteDefaultValueForTypeDescriptor** WSDL operation.

```
<xs:element name="DeleteDefaultValueForTypeDescriptorResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.14.3 Complex Types

None.

3.1.4.14.4 Simple Types

None.

3.1.4.14.5 Attributes

None.

3.1.4.14.6 Groups

None.

3.1.4.14.7 Attribute Groups

None.

3.1.4.15 DeleteNoCascade

This operation is used to delete the specified **MetadataObject** without deleting the **MetadataObjects** it references.

```
<wsdl:operation name="DeleteNoCascade" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascade"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeResponse"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage** request message, and

the protocol server MUST respond with a **BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.2)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject .
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified MetadataObject has been updated by a context other than the one that it has been currently read by. This happens when the specified object version is not equal to the current object version of the MetadataObject . For example, this error can be triggered when one context reads the given MetadataObject , after which another context updates the same MetadataObject , and then the original context tries to update the same MetadataObject .
InvalidOperationException (section 2.2.4.38)	One of the following conditions is satisfied: <ul style="list-style-type: none"> ▪ The operation cannot be performed because the specified MetadataObject is an Entity, which, if active, MUST be made not active before being deleted. An attempt was made to make the Entity not active, but, at the time of the attempt, the Entity was no longer active. ▪ The operation cannot be performed because the specified MetadataObject is a FilterDescriptor of type TimeStampFilter and is currently used in a MethodInstance of type ChangedIdEnumerator or DeletedIdEnumerator. ▪ The specified MetadataObject is a LobSystem and it contains at least one Entity. ▪ The operation cannot be performed because the specified MetadataObject is a TypeDescriptor and there exists at least one MethodInstance whose ReturnPropertyDescriptor is the specified TypeDescriptor. ▪ The specified MetadataObject cannot be deleted because it is either an active Entity or the child of an active Entity. ▪ The specified MetadataObject cannot be deleted because it is a LobSystemInstance which does not exist.
MetadataObjectNotFoundExceptionState	The specified MetadataObject does not exist.

Error complex type	Condition
(section 2.2.4.43)	

Any Properties that are child objects of the specified **MetadataObject** MUST also be deleted. If the **metadataObjectStruct** element specifies any of the **MetadataObjects** in the following table, the protocol server MUST perform the corresponding actions, in addition to deleting the specified **MetadataObject** from the metadata store:

MetadataObject	Action
Action	Delete all the ActionParameters contained in the specified Action .
Entity	Delete all Actions , Methods , Identifiers , and AssociationGroups that are child objects of the specified Entity , as well as all their child objects, in a recursive manner.
LobSystem	Delete all LobSystemInstances that are child objects of the specified LobSystem .
Method	Delete all MethodInstances , FilterDescriptors and Parameters that are child objects of the specified Method , as well as all their child objects, in a recursive manner.
Parameter	Delete the root TypeDescriptor of the specified Parameter , as well as all child objects of the root TypeDescriptor , in a recursive manner.
TypeDescriptor	Delete all the TypeDescriptors that are child objects of the specified TypeDescriptors , as well as all their child objects, in a recursive manner.

3.1.4.15.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage	The request WSDL message for the DeleteNoCascade WSDL operation.
BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage	The response WSDL message for the DeleteNoCascade WSDL operation.

3.1.4.15.1.1 BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage

The request WSDL message for the **DeleteNoCascade** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascade
```

The SOAP body contains the **DeleteNoCascade** element.

3.1.4.15.1.2

BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage

The response WSDL message for the **DeleteNoCascade** WSDL operation.

The SOAP body contains the **DeleteNoCascadeResponse** element.

3.1.4.15.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeleteNoCascade	The input data for the DeleteNoCascade WSDL operation.
DeleteNoCascadeResponse	The result data for the DeleteNoCascade WSDL operation.

3.1.4.15.2.1 DeleteNoCascade

The input data for the **DeleteNoCascade** WSDL operation.

```
<xs:element name="DeleteNoCascade" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject which this operation MUST delete.

3.1.4.15.2.2 DeleteNoCascadeResponse

The result data for the **DeleteNoCascade** WSDL operation.

```
<xs:element name="DeleteNoCascadeResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.15.3 Complex Types

None.

3.1.4.15.4 Simple Types

None.

3.1.4.15.5 Attributes

None.

3.1.4.15.6 Groups

None.

3.1.4.15.7 Attribute Groups

None.

3.1.4.16 DeleteProxyAssemblyForLobSystem

This operation is used to delete a Business Logic Module [<32>](#) associated with the specified LobSystem.

```
<wsdl:operation name="DeleteProxyAssemblyForLobSystem"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystem"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemResponse"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystemBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

</wsdl:operation>

The protocol client sends a

BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_OutputMessage** response message, unless any one of the conditions in the following table is met. If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to edit the specified LobSystem.
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	The specified LobSystem does not exist.

3.1.4.16.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage	The request WSDL message for the DeleteProxyAssemblyForLobSystem WSDL operation.
BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_OutputMessage	The response WSDL message for the DeleteProxyAssemblyForLobSystem WSDL operation.

3.1.4.16.1.1

BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage

The request WSDL message for the **DeleteProxyAssemblyForLobSystem** WSDL operation.

The SOAP action value is:

`http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteProxyAssemblyForLobSystem`

The SOAP body contains the **DeleteProxyAssemblyForLobSystem** element.

3.1.4.16.1.2

BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_Output Message

The response WSDL message for the **DeleteProxyAssemblyForLobSystem** WSDL operation.

The SOAP body contains the **DeleteProxyAssemblyForLobSystemResponse** element.

3.1.4.16.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeleteProxyAssemblyForLobSystem	The input data for the DeleteProxyAssemblyForLobSystem WSDL operation.
DeleteProxyAssemblyForLobSystemResponse	The result data for the DeleteProxyAssemblyForLobSystem WSDL operation.

3.1.4.16.2.1 DeleteProxyAssemblyForLobSystem

The input data for the **DeleteProxyAssemblyForLobSystem** WSDL operation.

```
<xs:element name="DeleteProxyAssemblyForLobSystem"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemStruct: The LobSystem for which the Business Logic Module [<33>](#) will be deleted.

3.1.4.16.2.2 DeleteProxyAssemblyForLobSystemResponse

The result data for the **DeleteProxyAssemblyForLobSystem** WSDL operation.

```
<xs:element name="DeleteProxyAssemblyForLobSystemResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.16.3 Complex Types

None.

3.1.4.16.4 Simple Types

None.

3.1.4.16.5 Attributes

None.

3.1.4.16.6 Groups

None.

3.1.4.16.7 Attribute Groups

None.

3.1.4.17 EntityCreate

This operation is used to create an Entity in the specified LobSystem. The operation MUST copy ACEs from the specified **LobSystem** to the created **Entity**. If a Model is specified, the operation MUST associate the created **Entity** with the specified **Model**. Otherwise the created **Entity** is not referenced by any **Model**.

```
<wsdl:operation name="EntityCreate" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreate"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreateResponse"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreateArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreateBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreatePackageFormatExceptionStateFault"
    name="PackageFormatExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_EntityCreate_PackageFormatExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_ArgumentNullExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_ArgumentOutOfRangeExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_EntityCreate_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_EntityCreate_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the MetadataCatalog in which the Entity is to be created.
ArgumentException (section 2.2.4.7)	At least one of the following is true : <ul style="list-style-type: none"> ▪ The namespace specified for the new Entity is NULL or empty. ▪ The length of the namespace specified for the new Entity is greater than 255 characters. ▪ The name specified for the new Entity is NULL or empty. ▪ The length of the name specified for the new Entity is greater than 255 characters.
ArgumentNullException (section 2.2.4.8)	The version specified for a new Entity is NULL.
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	The Entity with the same name, namespace, version, and partition already exists in the specified LobSystem .
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified LobSystem already contains the implementation-specific maximum number of Entities .
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Model does not exist.

3.1.4.17.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_EntityCreate_InputMessage	The request WSDL message for the EntityCreate WSDL operation.
BusinessDataCatalogSharedService_EntityCreate_OutputMessage	The response WSDL message for the EntityCreate WSDL operation.

3.1.4.17.1.1 BusinessDataCatalogSharedService_EntityCreate_InputMessage

The request WSDL message for the **EntityCreate** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/EntityCreate
```

The SOAP body contains the **EntityCreate** element.

3.1.4.17.1.2 BusinessDataCatalogSharedService_EntityCreate_OutputMessage

The response WSDL message for the **EntityCreate** WSDL operation.

The SOAP body contains the **EntityCreateResponse** element.

3.1.4.17.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
EntityCreate	The input data for the EntityCreate WSDL operation.
EntityCreateResponse	The result data for the EntityCreate WSDL operation.

3.1.4.17.2.1 EntityCreate

The input data for the **EntityCreate** WSDL operation.

```
<xs:element name="EntityCreate" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="rawValues" nillable="true" type="tns5:EntityStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

rawValues: The Entity to be created.

lobSystemStruct: The LobSystem in which the **Entity** will be created.

modelStruct: The Model that references the created **Entity**. If the **Model** is NULL or its MetadataObjectId is 0, the protocol server MUST ignore it. Otherwise the Partition of this **Model** MUST be an empty GUID.

3.1.4.17.2.2 EntityCreateResponse

The result data for the **EntityCreate** WSDL operation.

```
<xs:element name="EntityCreateResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="EntityCreateResult" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

EntityCreateResult: The created Entity.

3.1.4.17.3 Complex Types

None.

3.1.4.17.4 Simple Types

None.

3.1.4.17.5 Attributes

None.

3.1.4.17.6 Groups

None.

3.1.4.17.7 Attribute Groups

None.

3.1.4.18 ExportPackage

This operation is used to retrieve an XML representation of the following objects from the metadata store:

- MetadataObjects contained by the specified MetadataModel along with their Properties, localized names and ACEs, if "Model" value is specified for the **packageContents** element. The XML MUST conform to [\[MS-BDCMFFS\]](#) section 2.1.4.1.

- Localized names, Properties, and ACEs corresponding to **MetadataObjects** contained by the specified **MetadataModel**, if "Model" value is not specified for the **packageContents** element. The XML MUST conform to [\[MS-BDCMFFS\]](#) section 2.2.4.1.

If the specified **MetadataModel** contains LobSystems that the security principal (2) in whose context the protocol client is operating is not authorized to modify, the XML representation returned by this operation MUST NOT contain those **LobSystems**, and MUST NOT contain other **MetadataObjects** contained by **MetadataObjects** that are not contained in the result for this reason.

```
<wsdl:operation name="ExportPackage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackage"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageResponse"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackagePackageFormatExceptionStateFault"
    name="PackageFormatExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_ExportPackage_PackageFormatExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_ExportPackage_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_ExportPackage_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to export<34> the specified Model.
ArgumentException (section 2.2.4.7)	The "InlineProxies" value requires the "Model" value to be also specified for the packageContents element.
ArgumentNullException (section 2.2.4.8)	The specified Model is NULL.
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified Model is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Model or other MetadataObjects to be exported do not exist.

3.1.4.18.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ExportPackage_InputMessage	The request WSDL message for the ExportPackage WSDL operation.
BusinessDataCatalogSharedService_ExportPackage_OutputMessage	The response WSDL message for the ExportPackage WSDL operation.

3.1.4.18.1.1 BusinessDataCatalogSharedService_ExportPackage_InputMessage

The request WSDL message for the **ExportPackage** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackage>

The SOAP body contains the **ExportPackage** element.

3.1.4.18.1.2 BusinessDataCatalogSharedService_ExportPackage_OutputMessage

The response WSDL message for the **ExportPackage** WSDL operation.

The SOAP body contains the **ExportPackageResponse** element.

3.1.4.18.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ExportPackage	The input data for the ExportPackage WSDL operation.
ExportPackageResponse	The result data for the ExportPackage WSDL operation.

3.1.4.18.2.1 ExportPackage

The input data for the **ExportPackage** WSDL operation.

```
<xs:element name="ExportPackage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

modelStruct: The Model.

packageContents: Specifies what kind of data to retrieve for the specified **Model**. If the "Properties" value is specified the protocol server MUST retrieve the Properties for the corresponding MetadataObjects from the specified Setting and if "Model" value is also specified then the protocol server MUST also retrieve **Properties** from the default **Setting** that do not have the same name as the **Properties** in the specified **Setting**. If the "Properties" value is not specified the protocol server MUST ignore **Properties** in the specified MetadataModel. If the "LocalizedNames" value is specified the protocol server MUST retrieve the localized names for the corresponding **MetadataObjects** from the specified **Setting** and if "Model" value is also specified then the protocol server MUST also retrieve localized names from the default **Setting** that do not have the same LCID as the localized names in the specified **Setting**. If the "LocalizedNames" value is not specified the protocol server MUST ignore localized names in the specified **MetadataModel**. If the "Permissions" value is specified the protocol server MUST retrieve the ACEs for the corresponding **MetadataObjects** from the specified **Setting**. If there are no ACEs for the specified **Setting** for a **MetadataObject** and if "Model" value is also specified then the protocol server MUST retrieve ACEs from the default **Setting** for that **MetadataObject**. If the "Permissions" value is not specified the protocol server MUST ignore ACEs in the specified **MetadataModel**.

settingId: The identifier of the **Setting** to use for retrieving **Properties**, localized names and ACEs to export. If **Properties**, localized names, or ACEs are not exported, the protocol server MUST ignore the value of this element.

3.1.4.18.2.2 ExportPackageResponse

The result data for the **ExportPackage** WSDL operation.

```
<xs:element name="ExportPackageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="ExportPackageResult" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

ExportPackageResult: The XML representation conforming to the Business Data Connectivity Model File Format as specified in [\[MS-BDCMFFS\]](#) for the MetadataModel, containing the specified data.

3.1.4.18.3 Complex Types

None.

3.1.4.18.4 Simple Types

None.

3.1.4.18.5 Attributes

None.

3.1.4.18.6 Groups

None.

3.1.4.18.7 Attribute Groups

None.

3.1.4.19 GenerateProxyAssemblyForLobSystem

This operation is used to force the protocol server to create an implementation-specific Business Logic Module [<35>](#) for the specified LobSystem to connect to the line-of-business (LOB) system described by the specified **LobSystem**. If a Business Logic Module is already available for the specified **LobSystem** this operation MUST NOT create another Business Logic Module and MUST complete successfully.

```
<wsdl:operation name="GenerateProxyAssemblyForLobSystem"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystem"
    message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystemResponse"
    message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InvalidOpera
tionExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentNull
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentOutO
fRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_BdcException
StateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_MetadataExce
ptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to edit the specified LobSystem .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified LobSystem is 0.

3.1.4.19.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage	The request WSDL message for the GenerateProxyAssemblyForLobSystem WSDL operation.
BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage	The response WSDL message for the GenerateProxyAssemblyForLobSystem WSDL operation.

3.1.4.19.1.1

BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage

The request WSDL message for the **GenerateProxyAssemblyForLobSystem** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystem>

The SOAP body contains the **GenerateProxyAssemblyForLobSystem** element.

3.1.4.19.1.2

BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage

The response WSDL message for the **GenerateProxyAssemblyForLobSystem** WSDL operation.

The SOAP body contains the **GenerateProxyAssemblyForLobSystemResponse** element.

3.1.4.19.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GenerateProxyAssemblyForLobSystem	The input data for the GenerateProxyAssemblyForLobSystem WSDL operation.
GenerateProxyAssemblyForLobSystemResponse	The result data for the GenerateProxyAssemblyForLobSystem WSDL operation.

3.1.4.19.2.1 GenerateProxyAssemblyForLobSystem

The input data for the **GenerateProxyAssemblyForLobSystem** WSDL operation.

```
<xs:element name="GenerateProxyAssemblyForLobSystem"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemStruct: The LobSystem.

3.1.4.19.2.2 GenerateProxyAssemblyForLobSystemResponse

The result data for the **GenerateProxyAssemblyForLobSystem** WSDL operation.

```
<xs:element name="GenerateProxyAssemblyForLobSystemResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.19.3 Complex Types

None.

3.1.4.19.4 Simple Types

None.

3.1.4.19.5 Attributes

None.

3.1.4.19.6 Groups

None.

3.1.4.19.7 Attribute Groups

None.

3.1.4.20 GetAccessControlEntries

This operation is used to retrieve the ACEs for the specified **MetadataObject** from the specified **Setting**. If there are no ACEs for the specified **MetadataObject** from the specified **Setting** and the value of the **fallback** element is "true", the protocol server MUST retrieve ACEs for the specified **MetadataObject** from the default **Setting**.

```

<wsdl:operation name="GetAccessControlEntries" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntries"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesResponse"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_MetadataExceptionState
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentNullExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentOutOfRangeException
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_BdcExceptionStateFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAccessControlEntriesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_InvalidOperationExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAccessControlEntries_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAccessControlEntries_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.20.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAccessControlEntries_InputMessage	The request WSDL message for the GetAccessControlEntries WSDL operation.
BusinessDataCatalogSharedService_GetAccessControlEntries_OutputMessage	The response WSDL message for the GetAccessControlEntries WSDL operation.

3.1.4.20.1.1

BusinessDataCatalogSharedService_GetAccessControlEntries_InputMessage

The request WSDL message for the **GetAccessControlEntries** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntries
```

The SOAP body contains the **GetAccessControlEntries** element.

3.1.4.20.1.2

BusinessDataCatalogSharedService_GetAccessControlEntries_OutputMessage

The response WSDL message for the **GetAccessControlEntries** WSDL operation.

The SOAP body contains the **GetAccessControlEntriesResponse** element.

3.1.4.20.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAccessControlEntries	The input data for the GetAccessControlEntries WSDL operation.
GetAccessControlEntriesResponse	The result data for the GetAccessControlEntries WSDL operation.

3.1.4.20.2.1 GetAccessControlEntries

The input data for the **GetAccessControlEntries** WSDL operation.

```
<xs:element name="GetAccessControlEntries" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="fallback" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject.

settingId: The Setting to return the ACEs from.

fallback: Specifies whether to retrieve ACEs from the default **Setting** when ACEs do not exist in the specified **Setting**.

3.1.4.20.2.2 GetAccessControlEntriesResponse

The result data for the **GetAccessControlEntries** WSDL operation.

```
<xs:element name="GetAccessControlEntriesResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAccessControlEntriesResult" nillable="true"
type="tns5:ArrayOfAccessControlEntryStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAccessControlEntriesResult: The list of ACEs.

3.1.4.20.3 Complex Types

None.

3.1.4.20.4 Simple Types

None.

3.1.4.20.5 Attributes

None.

3.1.4.20.6 Groups

None.

3.1.4.20.7 Attribute Groups

None.

3.1.4.21 GetActionById

This operation is used to retrieve the specified Action.

```
<wsdl:operation name="GetActionById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionById"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionById_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```


The protocol client sends a **BusinessDataCatalogSharedService_GetActionById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetActionById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Action does not exist and the value of the performErrorCheck element is true .

3.1.4.21.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetActionById_InputMessage	The request WSDL message for the GetActionById WSDL operation.
BusinessDataCatalogSharedService_GetActionById_OutputMessage	The response WSDL message for the GetActionById WSDL operation.

3.1.4.21.1.1 BusinessDataCatalogSharedService_GetActionById_InputMessage

The request WSDL message for the **GetActionById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionById
```

The SOAP body contains the **GetActionById** element.

3.1.4.21.1.2 BusinessDataCatalogSharedService_GetActionById_OutputMessage

The response WSDL message for the **GetActionById** WSDL operation.

The SOAP body contains the **GetActionByIdResponse** element.

3.1.4.21.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetActionById	The input data for the GetActionById WSDL operation.
GetActionByIdResponse	The result data for the GetActionById WSDL operation.

3.1.4.21.2.1 GetActionById

The input data for the **GetActionById** WSDL operation.

```
<xs:element name="GetActionById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="actionId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

actionId: The MetadataObjectId of the Action.

performErrorCheck: The value of this element MUST be ignored if the specified **Action** exists. If the specified **Action** does not exist and value of this element is "false", the protocol server MUST set the value of the **GetActionByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.21.2.2 GetActionByIdResponse

The result data for the **GetActionById** WSDL operation.

```
<xs:element name="GetActionByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionByIdResult" nillable="true" type="tns5:ActionStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetActionByIdResult: The Action.

3.1.4.21.3 Complex Types

None.

3.1.4.21.4 Simple Types

None.

3.1.4.21.5 Attributes

None.

3.1.4.21.6 Groups

None.

3.1.4.21.7 Attribute Groups

None.

3.1.4.22 GetActionParameterById

This operation is used to retrieve the specified ActionParameter.

```
<wsdl:operation name="GetActionParameterById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterById"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

</wsdl:operation>

The protocol client sends a

BusinessDataCatalogSharedService_GetActionParameterById_InputMessage request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetActionParameterById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified ActionParameter does not exist and the value of the performErrorCheck element is true .

3.1.4.22.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetActionParameterById_InputMessage	The request WSDL message for the GetActionParameterById WSDL operation.
BusinessDataCatalogSharedService_GetActionParameterById_OutputMessage	The response WSDL message for the GetActionParameterById WSDL operation.

3.1.4.22.1.1

BusinessDataCatalogSharedService_GetActionParameterById_InputMessage

The request WSDL message for the **GetActionParameterById** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterById>

The SOAP body contains the **GetActionParameterById** element.

3.1.4.22.1.2

BusinessDataCatalogSharedService_GetActionParameterById_OutputMessage

The response WSDL message for the **GetActionParameterById** WSDL operation.

The SOAP body contains the **GetActionParameterByIdResponse** element.

3.1.4.22.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetActionParameterById	The input data for the GetActionParameterById WSDL operation.
GetActionParameterByIdResponse	The result data for the GetActionParameterById WSDL operation.

3.1.4.22.2.1 GetActionParameterById

The input data for the **GetActionParameterById** WSDL operation.

```
<xs:element name="GetActionParameterById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="actionParameterId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

actionParameterId: The MetadataObjectId of the ActionParameter.

performErrorCheck: The value of this element MUST be ignored if the specified **ActionParameter** exists. If the specified **ActionParameter** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetActionParameterByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.22.2.2 GetActionParameterByIdResponse

The result data for the **GetActionParameterById** WSDL operation.

```
<xs:element name="GetActionParameterByIdResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionParameterByIdResult" nillable="true" type="tns5:ActionParameterStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetActionParameterByIdResult: The ActionParameter.

3.1.4.22.3 Complex Types

None.

3.1.4.22.4 Simple Types

None.

3.1.4.22.5 Attributes

None.

3.1.4.22.6 Groups

None.

3.1.4.22.7 Attribute Groups

None.

3.1.4.23 GetActionParametersForAction

This operation is used to retrieve the ActionParameters of the specified Action.

```
<wsdl:operation name="GetActionParametersForAction"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForAction"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionResponse"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentOutOfRang
eExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_BdcExceptionState
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_InvalidOperationE
xceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
```

```

message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_MetadataException
StateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentException
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentNullExcep
tionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.<36>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Action does not exist.<37>

3.1.4.23.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage	The request WSDL message for the GetActionParametersForAction WSDL operation.
BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage	The response WSDL message for the GetActionParametersForAction WSDL operation.

3.1.4.23.1.1

BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage

The request WSDL message for the **GetActionParametersForAction** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParametersForAction
```

The SOAP body contains the **GetActionParametersForAction** element.

3.1.4.23.1.2

BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage

The response WSDL message for the **GetActionParametersForAction** WSDL operation.

The SOAP body contains the **GetActionParametersForActionResponse** element.

3.1.4.23.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetActionParametersForAction	The input data for the GetActionParametersForAction WSDL operation.
GetActionParametersForActionResponse	The result data for the GetActionParametersForAction WSDL operation.

3.1.4.23.2.1 GetActionParametersForAction

The input data for the **GetActionParametersForAction** WSDL operation.

```
<xs:element name="GetActionParametersForAction" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" name="actionId" type="xs:unsignedInt"/>  
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="partitionId" type="ser:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

actionId: The MetadataObjectId of the Action.

partitionId: An empty GUID.

3.1.4.23.2.2 GetActionParametersForActionResponse

The result data for the **GetActionParametersForAction** WSDL operation.

```
<xs:element name="GetActionParametersForActionResponse"  
xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>
```



```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionParametersForActionResult" nillable="true"
type="tns5:ArrayOfActionParameterStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetActionParametersForActionResult: The list of ActionParameters that are contained by the specified Action.

3.1.4.23.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfActionParameterStruct	Contains a list of ActionParameters for an Action.

3.1.4.23.3.1 ArrayOfActionParameterStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfActionParameterStruct** complex type contains a list of ActionParameters.

```

<xs:complexType name="ArrayOfActionParameterStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ActionParameterStruct"
nillable="true" type="tns5:ActionParameterStruct"/>
  </xs:sequence>
</xs:complexType>

```

ActionParameterStruct: An ActionParameter of an Action.

3.1.4.23.4 Simple Types

None.

3.1.4.23.5 Attributes

None.

3.1.4.23.6 Groups

None.

3.1.4.23.7 Attribute Groups

None.

3.1.4.24 GetActionsForEntity

This operation is used to retrieve the Actions of the specified Entity.

```

<wsdl:operation name="GetActionsForEntity" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntity"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_InvalidOperationExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_BdcExceptionStateFault_Fau
ltMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentOutOfRangeExceptionEx
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_MetadataExceptionStateFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentExceptionFault_Fau
ltMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentNullExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.

Error complex type	Condition
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Entity does not exist. <38>

3.1.4.24.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage	The request WSDL message for the GetActionsForEntity WSDL operation.
BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage	The response WSDL message for the GetActionsForEntity WSDL operation.

3.1.4.24.1.1

BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage

The request WSDL message for the **GetActionsForEntity** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionsForEntity
```

The SOAP body contains the **GetActionsForEntity** element.

3.1.4.24.1.2

BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage

The response WSDL message for the **GetActionsForEntity** WSDL operation.

The SOAP body contains the **GetActionsForEntityResponse** element.

3.1.4.24.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetActionsForEntity	The input data for the GetActionsForEntity WSDL operation.
GetActionsForEntityResponse	The result data for the GetActionsForEntity WSDL operation.

3.1.4.24.2.1 GetActionsForEntity

The input data for the **GetActionsForEntity** WSDL operation.

```

<xs:element name="GetActionsForEntity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

entityId: The MetadataObjectId of the Entity.

partitionId: An empty GUID.

3.1.4.24.2.2 GetActionsForEntityResponse

The result data for the **GetActionsForEntity** WSDL operation.

```

<xs:element name="GetActionsForEntityResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionsForEntityResult" nillable="true" type="tns5:ArrayOfActionStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetActionsForEntityResult: The list of Actions that are contained by the specified Entity.

3.1.4.24.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfActionStruct	Contains a list of Actions.

3.1.4.24.3.1 ArrayOfActionStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfActionStruct** complex type contains a list of Actions.

```

<xs:complexType name="ArrayOfActionStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ActionStruct" nillable="true"
type="tns5:ActionStruct"/>
  </xs:sequence>
</xs:complexType>

```

ActionStruct: An **Action** of an Entity.

3.1.4.24.4 Simple Types

None.

3.1.4.24.5 Attributes

None.

3.1.4.24.6 Groups

None.

3.1.4.24.7 Attribute Groups

None.

3.1.4.25 GetAllLocalizedNames

This operation is used to retrieve all localized names of the specified `MetadataObject`.

```
<wsdl:operation name="GetAllLocalizedNames" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNames"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesResponse"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist. <39>

3.1.4.25.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage	The request WSDL message for the GetAllLocalizedNames WSDL operation.
BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage	The response WSDL message for the GetAllLocalizedNames WSDL operation.

3.1.4.25.1.1

BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage

The request WSDL message for the **GetAllLocalizedNames** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNames

```

The SOAP body contains the **GetAllLocalizedNames** element.

3.1.4.25.1.2

BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage

The response WSDL message for the **GetAllLocalizedNames** WSDL operation.

The SOAP body contains the **GetAllLocalizedNamesResponse** element.

3.1.4.25.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAllLocalizedNames	The input data for the GetAllLocalizedNames WSDL operation.
GetAllLocalizedNamesResponse	The result data for the GetAllLocalizedNames WSDL operation.

3.1.4.25.2.1 GetAllLocalizedNames

The input data for the **GetAllLocalizedNames** WSDL operation.

```
<xs:element name="GetAllLocalizedNames" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectId: The MetadataObjectId of the MetadataObject.

partitionId: An empty GUID.

settingId: The Setting to return the localized names from.

merged: A value which specifies whether the default **Setting** is to be considered in the operation in the case where **settingId** parameter is not NULL. The value MUST in the following table.

Value	Description
True	The protocol server MUST include the localized names from the default Setting and the specified Setting . If a localized name for a given LCID exists for both the default Setting and the specified Setting , only the localized name from the specified Setting MUST be returned.
False	The protocol server MUST return the localized names only for the specified Setting .

3.1.4.25.2.2 GetAllLocalizedNamesResponse

The result data for the **GetAllLocalizedNames** WSDL operation.

```

<xs:element name="GetAllLocalizedNamesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAllLocalizedNamesResult" nillable="true" type="tns5:ArrayOfLocalizedNameStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetAllLocalizedNamesResult: The list of localized names of the specified MetadataObject.

3.1.4.25.3 Complex Types

None.

3.1.4.25.4 Simple Types

None.

3.1.4.25.5 Attributes

None.

3.1.4.25.6 Groups

None.

3.1.4.25.7 Attribute Groups

None.

3.1.4.26 GetAllLocalizedNamesForMetadataObjectStruct

This operation is used to retrieve all the localized names of the specified MetadataObject for the specified Setting.

```

<wsdl:operation name="GetAllLocalizedNamesForMetadataObjectStruct"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStruct"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_In
putMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructResponse"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Ou
tputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Ar
gumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```



```

edService/GetAllLocalizedNamesForMetadataObjectStructBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Bd
cExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_In
validOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Me
tadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Ar
gumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Ar
gumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObject_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObject_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExcpetionState (section 2.2.4.43)	The specified MetadataObject does not exist. <40>

3.1.4.26.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_InputMessage	The request WSDL message for the GetAllLocalizedNamesForMetadataObjectStruct WSDL operation.
BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_OutputMessage	The response WSDL message for the GetAllLocalizedNamesForMetadataObjectStruct WSDL operation.

3.1.4.26.1.1

BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_InputMessage

The request WSDL message for the **GetAllLocalizedNamesForMetadataObjectStruct** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesForMetadataObjectStruct
```

The SOAP body contains the **GetAllLocalizedNamesForMetadataObjectStruct** element.

3.1.4.26.1.2

BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_OutputMessage

The response WSDL message for the **GetAllLocalizedNamesForMetadataObjectStruct** WSDL operation.

The SOAP body contains the **GetAllLocalizedNamesForMetadataObjectStructResponse** element.

3.1.4.26.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAllLocalizedNamesForMetadataObjectStruct	The input data for the GetAllLocalizedNamesForMetadataObjectStruct WSDL operation.
GetAllLocalizedNamesForMetadataObjectStructResponse	The result data for the GetAllLocalizedNamesForMetadataObjectStruct WSDL operation.

3.1.4.26.2.1 GetAllLocalizedNamesForMetadataObjectStruct

The input data for the **GetAllLocalizedNamesForMetadataObjectStruct** WSDL operation.

```

<xs:element name="GetAllLocalizedNamesForMetadataObjectStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

metadataObjectStruct: The MetadataObject for which the operation will return the localized names.

settingId: The Setting from which to return the localized names.

merged: A value which specifies whether the default **Setting** is to be considered in the operation in the case where **settingId** parameter is not NULL. The value MUST be in the following table.

Value	Description
True	The protocol server MUST include a localized name from the default Setting in the case where a localized name with the same LCID does not exist for the specified Setting .
False	The protocol server MUST return the localized names only for the specified Setting .

3.1.4.26.2 GetAllLocalizedNamesForMetadataObjectStructResponse

The result data for the **GetAllLocalizedNamesForMetadataObjectStruct** WSDL operation.

```

<xs:element name="GetAllLocalizedNamesForMetadataObjectStructResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetAllLocalizedNamesForMetadataObjectStructResult" nillable="true"
        type="tns5:ArrayOfLocalizedNameStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetAllLocalizedNamesForMetadataObjectStructResult: The list of localized names of the specified MetadataObject.

3.1.4.26.3 Complex Types

None.

3.1.4.26.4 Simple Types

None.

3.1.4.26.5 Attributes

None.

3.1.4.26.6 Groups

None.

3.1.4.26.7 Attribute Groups

None.

3.1.4.27 GetAllPartitionIds

This operation is deprecated from the protocol and MUST NOT be called.

```
<wsdl:operation name="GetAllPartitionIds" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIds"
    message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIdsResponse"
    message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIdsAccessDeniedExceptionFault" name="AccessDeniedExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_AccessDeniedExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIdsInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIdsBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIdsMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

3.1.4.27.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAllPartitionIds_InputMessage	The request WSDL message for

Message	Description
	the GetAllPartitionIds WSDL operation.
BusinessDataCatalogSharedService_GetAllPartitionIds_OutputMessage	The response WSDL message for the GetAllPartitionIds WSDL operation.

3.1.4.27.1.1

BusinessDataCatalogSharedService_GetAllPartitionIds_InputMessage

The request WSDL message for the **GetAllPartitionIds** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIds
```

The SOAP body contains the **GetAllPartitionIds** element.

3.1.4.27.1.2

BusinessDataCatalogSharedService_GetAllPartitionIds_OutputMessage

The response WSDL message for the **GetAllPartitionIds** WSDL operation.

The SOAP body contains the **GetAllPartitionIdsResponse** element.

3.1.4.27.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAllPartitionIds	The input data for the GetAllPartitionIds WSDL operation.
GetAllPartitionIdsResponse	The result data for the GetAllPartitionIds WSDL operation.

3.1.4.27.2.1 GetAllPartitionIds

The input data for the **GetAllPartitionIds** WSDL operation.

```
<xs:element name="GetAllPartitionIds" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.27.2.2 GetAllPartitionIdsResponse

The result data for the **GetAllPartitionIds** WSDL operation.

```

<xs:element name="GetAllPartitionIdsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="GetAllPartitionIdsResult" nillable="true" type="q6:ArrayOfguid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetAllPartitionIdsResult:

3.1.4.27.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfguid	Contains a list of GUID identifiers for partitions (1).

3.1.4.27.3.1 ArrayOfguid

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

A complex type that specifies a list of **GUIDs**.

```

<xs:complexType name="ArrayOfguid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="guid" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>

```

guid: The identifier of a partition (1).

3.1.4.27.4 Simple Types

None.

3.1.4.27.5 Attributes

None.

3.1.4.27.6 Groups

None.

3.1.4.27.7 Attribute Groups

None.

3.1.4.28 GetAllProperties

This operation is used to retrieve all the Properties of the specified MetadataObject and the specified Setting.

```
<wsdl:operation name="GetAllProperties" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllProperties"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesResponse"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAllProperties_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetAllProperties_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAllProperties_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject , and the specified MetadataObject is a LobSystem or LobSystemInstance.
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.28.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAllProperties_InputMessage	The request WSDL message for the GetAllProperties WSDL operation.
BusinessDataCatalogSharedService_GetAllProperties_OutputMessage	The response WSDL message for the GetAllProperties WSDL operation.

3.1.4.28.1.1 BusinessDataCatalogSharedService_GetAllProperties_InputMessage

The request WSDL message for the **GetAllProperties** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllProperties
```

The SOAP body contains the **GetAllProperties** element.

3.1.4.28.1.2

BusinessDataCatalogSharedService_GetAllProperties_OutputMessage

The response WSDL message for the **GetAllProperties** WSDL operation.

The SOAP body contains the **GetAllPropertiesResponse** element.

3.1.4.28.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAllProperties	The input data for the GetAllProperties WSDL operation.

Element	Description
GetAllPropertiesResponse	The result data for the GetAllProperties WSDL operation.

3.1.4.28.2.1 GetAllProperties

The input data for the **GetAllProperties** WSDL operation.

```
<xs:element name="GetAllProperties" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectId: The MetadataObjectId for the MetadataObject.

partitionId: An empty GUID.

settingId: The Setting to return the Properties from.

merged: A flag which MUST be ignored if no **Setting** is specified. If a **Setting** is specified, the value of this element MUST be **true** for the **Properties** in the default **Setting** to be returned in addition to the properties in the specified **Setting**; otherwise, the value MUST be **false**. If the value is **true**, a **Setting** is specified and a **Property** with the same name is found in both the specified **Setting** and the default **Setting**. In this case, the **Property** from the specified **Setting** MUST be retrieved and the **Property** from the default **Setting** MUST be ignored.

3.1.4.28.2.2 GetAllPropertiesResponse

The result data for the **GetAllProperties** WSDL operation.

```
<xs:element name="GetAllPropertiesResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAllPropertiesResult" nillable="true" type="tns5:ArrayOfPropertyStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAllPropertiesResult: The list of **Properties**.

3.1.4.28.3 Complex Types

None.

3.1.4.28.4 Simple Types

None.

3.1.4.28.5 Attributes

None.

3.1.4.28.6 Groups

None.

3.1.4.28.7 Attribute Groups

None.

3.1.4.29 GetAllPropertiesForMetadataObjectStruct

This operation is used to retrieve all the Properties of the specified MetadataObject from the specified Setting.

```
<wsdl:operation name="GetAllPropertiesForMetadataObjectStruct"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStruct"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructResponse"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Output
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_BdcExc
eptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Argume
ntNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Argume
ntOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Argume
ntExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/GetAllPropertiesForMetadataObjectStructInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesForMetadataObjectStructMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject , and the specified MetadataObject is a LobSystem or LobSystemInstance .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.29.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputMessage	The request WSDL message for the GetAllPropertiesForMetadataObjectStruct WSDL operation.
BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_OutputMessage	The response WSDL message for the GetAllPropertiesForMetadataObjectStruct WSDL operation.

3.1.4.29.1.1

BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputMessage

The request WSDL message for the **GetAllPropertiesForMetadataObjectStruct** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesForMetadataObjectStruct
```

The SOAP body contains the **GetAllPropertiesForMetadataObjectStruct** element.

3.1.4.29.1.2

BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_OutputMessage

The response WSDL message for the **GetAllPropertiesForMetadataObjectStruct** WSDL operation.

The SOAP body contains the **GetAllPropertiesForMetadataObjectStructResponse** element.

3.1.4.29.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAllPropertiesForMetadataObjectStruct	The input data for the GetAllPropertiesForMetadataObjectStruct WSDL operation.
GetAllPropertiesForMetadataObjectStructResponse	The result data for the GetAllPropertiesForMetadataObjectStruct WSDL operation.

3.1.4.29.2.1 GetAllPropertiesForMetadataObjectStruct

The input data for the **GetAllPropertiesForMetadataObjectStruct** WSDL operation.

```
<xs:element name="GetAllPropertiesForMetadataObjectStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject. The partition of this **MetadataObject** MUST be an empty GUID.

settingId: The Setting to return the Properties from.

merged: A flag which MUST be ignored if no **Setting** is specified. If a **Setting** is specified, the value of this element MUST be **true** for the **Properties** in the default **Setting** to be returned in addition to the properties in the specified **Setting**; otherwise, the value MUST be **false**. If the value is **true**, a **Setting** is specified and a **Property** with the same name is found in both the specified **Setting** and the default **Setting**. In this case, the **Property** from the specified **Setting** MUST be retrieved and the Property from the default **Setting** MUST be ignored.

3.1.4.29.2.2 GetAllPropertiesForMetadataObjectStructResponse

The result data for the **GetAllPropertiesForMetadataObjectStruct** WSDL operation.

```
<xs:element name="GetAllPropertiesForMetadataObjectStructResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetAllPropertiesForMetadataObjectStructResult" nillable="true"
        type="tns5:ArrayOfPropertyStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAllPropertiesForMetadataObjectStructResult: The list of Properties.

3.1.4.29.3 Complex Types

None.

3.1.4.29.4 Simple Types

None.

3.1.4.29.5 Attributes

None.

3.1.4.29.6 Groups

None.

3.1.4.29.7 Attribute Groups

None.

3.1.4.30 GetAssociationById

This operation is used to retrieve the Association with the specified MetadataObjectId.

```
<wsdl:operation name="GetAssociationById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationById"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_ArgumentNullExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_ArgumentOutOfRangeException
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_BdcExceptionStateFault_Faul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_InvalidOperationExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_MetadataExceptionStateFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_ArgumentExceptionFault_Faul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.

Error complex type	Condition
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An Association with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.30.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationById_InputMessage	The request WSDL message for the GetAssociationById WSDL operation.
BusinessDataCatalogSharedService_GetAssociationById_OutputMessage	The response WSDL message for the GetAssociationById WSDL operation.

3.1.4.30.1.1

BusinessDataCatalogSharedService_GetAssociationById_InputMessage

The request WSDL message for the **GetAssociationById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationById
```

The SOAP body contains the **GetAssociationById** element.

3.1.4.30.1.2

BusinessDataCatalogSharedService_GetAssociationById_OutputMessage

The response WSDL message for the **GetAssociationById** WSDL operation.

The SOAP body contains the **GetAssociationByIdResponse** element.

3.1.4.30.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationById	The input data for the GetAssociationById WSDL operation.
GetAssociationByIdResponse	The result data for the GetAssociationById WSDL operation.

3.1.4.30.2.1 GetAssociationById

The input data for the **GetAssociationById** WSDL operation.

```
<xs:element name="GetAssociationById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

associationId: The MetadataObjectId of the Association.

performErrorCheck: The value of this element MUST be ignored if an **Association** with the specified **MetadataObjectId** exists. If an **Association** with the specified **MetadataObjectId** does not exist and the value of this element is **false**, the protocol server MUST set the value of the **GetAssociationByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.30.2 GetAssociationByIdResponse

The result data for the **GetAssociationById** WSDL operation.

```
<xs:element name="GetAssociationByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationByIdResult" nillable="true" type="tns5:AssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationByIdResult: The Association.

3.1.4.30.3 Complex Types

None.

3.1.4.30.4 Simple Types

None.

3.1.4.30.5 Attributes

None.

3.1.4.30.6 Groups

None.

3.1.4.30.7 Attribute Groups

None.

3.1.4.31 GetAssociationGroupById

This operation is used to retrieve the AssociationGroup with the specified MetadataObjectId.

```
<wsdl:operation name="GetAssociationGroupById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupById"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupByIdArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section [2.2.4](#)). If more than one error condition is encountered, the protocol

server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An AssociationGroup with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.31.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage	The request WSDL message for the GetAssociationGroupById WSDL operation.
BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage	The response WSDL message for the GetAssociationGroupById WSDL operation.

3.1.4.31.1.1

BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage

The request WSDL message for the **GetAssociationGroupById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupById
```

The SOAP body contains the **GetAssociationGroupById** element.

3.1.4.31.1.2

BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage

The response WSDL message for the **GetAssociationGroupById** WSDL operation.

The SOAP body contains the **GetAssociationGroupByIdResponse** element.

3.1.4.31.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationGroupById	The input data for the GetAssociationGroupById WSDL operation.
GetAssociationGroupByIdResponse	The result data for the GetAssociationGroupById WSDL operation.

3.1.4.31.2.1 GetAssociationGroupById

The input data for the **GetAssociationGroupById** WSDL operation.

```
<xs:element name="GetAssociationGroupById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

associationGroupId: The MetadataObjectId for the AssociationGroup.

performErrorCheck: The value of this element MUST be ignored if an **AssociationGroup** with the specified **MetadataObjectId** exists. If and **AssociationGroup** with the specified **MetadataObjectId** does not exist and the value of this element is **false**, the protocol server MUST set the value of the **GetAssociationGroupByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.31.2.2 GetAssociationGroupByIdResponse

The result data for the **GetAssociationGroupById** WSDL operation.

```
<xs:element name="GetAssociationGroupByIdResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationGroupByIdResult" nillable="true" type="tns5:AssociationGroupStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationGroupByIdResult: The AssociationGroup.

3.1.4.31.3 Complex Types

None.

3.1.4.31.4 Simple Types

None.

3.1.4.31.5 Attributes

None.

3.1.4.31.6 Groups

None.

3.1.4.31.7 Attribute Groups

None.

3.1.4.32 GetAssociationGroupsForEntity

This operation is used to retrieve the AssociationGroups of the Entity with the specified MetadataObjectId.

```
<wsdl:operation name="GetAssociationGroupsForEntity"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntity"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentNullExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentOutOfRan
geExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InvalidOperatio
nExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_MetadataExceptio
nStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
```

```

message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.<41>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An Entity with the specified MetadataObjectId does not exist.<42>

3.1.4.32.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage	The request WSDL message for the GetAssociationGroupsForEntity WSDL operation.
BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage	The response WSDL message for the GetAssociationGroupsForEntity WSDL operation.

3.1.4.32.1.1

BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage

The request WSDL message for the **GetAssociationGroupsForEntity** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationGroupsForEntity

```

The SOAP body contains the **GetAssociationGroupsForEntity** element.

3.1.4.32.1.2

BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage

The response WSDL message for the **GetAssociationGroupsForEntity** WSDL operation.

The SOAP body contains the **GetAssociationGroupsForEntityResponse** element.

3.1.4.32.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationGroupsForEntity	The input data for the GetAssociationGroupsForEntity WSDL operation.
GetAssociationGroupsForEntityResponse	The result data for the GetAssociationGroupsForEntity WSDL operation.

3.1.4.32.2.1 GetAssociationGroupsForEntity

The input data for the **GetAssociationGroupsForEntity** WSDL operation.

```
<xs:element name="GetAssociationGroupsForEntity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityId: The MetadataObjectId for the Entity.

partitionId: The empty GUID.

3.1.4.32.2.2 GetAssociationGroupsForEntityResponse

The result data for the **GetAssociationGroupsForEntity** WSDL operation.

```
<xs:element name="GetAssociationGroupsForEntityResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetAssociationGroupsForEntityResult" nillable="true"
        type="tns5:ArrayOfAssociationGroupStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationGroupsForEntityResult: The list of AssociationGroups.

3.1.4.32.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfAssociationGroupStruct	Contains a list of AssociationGroups.

3.1.4.32.3.1 ArrayOfAssociationGroupStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfAssociationGroupStruct** complex type contains a list of AssociationGroups.

```
<xs:complexType name="ArrayOfAssociationGroupStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationGroupStruct"
nillable="true" type="tns5:AssociationGroupStruct"/>
  </xs:sequence>
</xs:complexType>
```

AssociationGroupStruct: An **AssociationGroup**.

3.1.4.32.4 Simple Types

None.

3.1.4.32.5 Attributes

None.

3.1.4.32.6 Groups

None.

3.1.4.32.7 Attribute Groups

None.

3.1.4.33 GetAssociationMembersInRole

This operation is used to retrieve the source or destination Entities of the specified Association.

```
<wsdl:operation name="GetAssociationMembersInRole"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRole"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleResponse"/>
```

```

message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentOutOfRangeException
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentNullExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_BdcExceptionStateF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_InvalidOperationEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_MetadataExceptionS
tateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is set to zero, or the value of the role parameter is not zero or 1.
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	The specified Association does not exist, or does not refer to any Entities .

3.1.4.33.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage	The request WSDL message for the GetAssociationMembersInRole WSDL operation.
BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage	The response WSDL message for the GetAssociationMembersInRole WSDL operation.

3.1.4.33.1.1

BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage

The request WSDL message for the **GetAssociationMembersInRole** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationMembersInRole
```

The SOAP body contains the **GetAssociationMembersInRole** element.

3.1.4.33.1.2

BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage

The response WSDL message for the **GetAssociationMembersInRole** WSDL operation.

The SOAP body contains the **GetAssociationMembersInRoleResponse** element.

3.1.4.33.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationMembersInRole	The input data for the GetAssociationMembersInRole WSDL operation.
GetAssociationMembersInRoleResponse	The result data for the GetAssociationMembersInRole WSDL operation.

3.1.4.33.2.1 GetAssociationMembersInRole

The input data for the **GetAssociationMembersInRole** WSDL operation.

```

<xs:element name="GetAssociationMembersInRole" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

associationId: The MetadataObjectId for the Association.

role: A bit that specifies whether to return source or destination Entities from the Association. The following table describes possible values.

Value	Description
0	Only source Entities are returned.
1	Only destination Entities are returned.

partitionId: An empty GUID.

3.1.4.33.2.2 GetAssociationMembersInRoleResponse

The result data for the **GetAssociationMembersInRole** WSDL operation.

```

<xs:element name="GetAssociationMembersInRoleResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationMembersInRoleResult" nillable="true"
type="tns5:ArrayOfAssociationMemberStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetAssociationMembersInRoleResult: The list of source or destination Entities.

3.1.4.33.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfAssociationMemberStruct	Contains a list of relationships between Entities and Associations.
AssociationMemberStruct	Contains information about a specific relationship of an Entity and Association.

3.1.4.33.3.1 ArrayOfAssociationMemberStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfAssociationMemberStruct** complex type contains a list of relationships between Entities and Associations.

```
<xs:complexType name="ArrayOfAssociationMemberStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationMemberStruct"
      nillable="true" type="tns5:AssociationMemberStruct"/>
  </xs:sequence>
</xs:complexType>
```

AssociationMemberStruct: Contains information about the relationship between an Entity and an Association.

3.1.4.33.3.2 AssociationMemberStruct

Namespace: Microsoft.SharePoint.BusinessData

The **AssociationMemberStruct** complex type contains information about the relationship between an Entity and an Association.

```
<xs:complexType name="AssociationMemberStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="_entityName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="_entityNamespace" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
    <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
  </xs:sequence>
</xs:complexType>
```

_entityName: The name of the **Entity** that is referenced by the **Association**. If the **Entity** is active the value MUST be NULL. Otherwise, the value MUST have at least 1, at most 255 Unicode characters.

_entityNamespace: The namespace of the **Entity** that is referenced by the **Association**. If the **Entity** is active the value MUST be NULL. Otherwise, the value MUST have at least 1, at most 255 Unicode characters.

associationId: The **MetadataObjectId** of the **Association** referencing the **Entity**. The value of this element MUST be in [1, 0x7fffffff] range.

entityId: The **MetadataObjectId** of the **Entity** that is referenced by the **Association**. If the **Entity** is active, the value MUST be in [1, 0x7fffffff] range. Otherwise, the value MUST be 0.

partitionId: An empty GUID.

role: Specifies whether the **Entity** is a source or the destination of the **Association**. The value of this element MUST be present in the following table.

Value	Description
0	The Entity is a source of the Association .
1	The Entity is the destination of the Association .

3.1.4.33.4 Simple Types

None.

3.1.4.33.5 Attributes

None.

3.1.4.33.6 Groups

None.

3.1.4.33.7 Attribute Groups

None.

3.1.4.34 GetAssociationReferencesForAssociationGroup

This operation is used to retrieve the AssociationReferences contained by the specified AssociationGroup.

```
<wsdl:operation name="GetAssociationReferencesForAssociationGroup"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroup"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_In
putMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ou
tputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ar
gumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ar
gumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Bd
cExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_In
validOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Me
tadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ar
gumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified AssociationGroup does not exist. <43>

3.1.4.34.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_InputMessage	The request WSDL message for the GetAssociationReferencesForAssociationGroup WSDL operation.
BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_OutputMessage	The response WSDL message for the GetAssociationReferencesForAssociationGroup WSDL operation.

3.1.4.34.1.1

BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_InputMessage

The request WSDL message for the **GetAssociationReferencesForAssociationGroup** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationReferencesForAssociationGroup
```

The SOAP body contains the **GetAssociationReferencesForAssociationGroup** element.

3.1.4.34.1.2

BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_OutputMessage

The response WSDL message for the **GetAssociationReferencesForAssociationGroup** WSDL operation.

The SOAP body contains the **GetAssociationReferencesForAssociationGroupResponse** element.

3.1.4.34.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationReferencesForAssociationGroup	The input data for the GetAssociationReferencesForAssociationGroup WSDL operation.
GetAssociationReferencesForAssociationGroupResponse	The result data for the GetAssociationReferencesForAssociationGroup WSDL operation.

3.1.4.34.2.1 GetAssociationReferencesForAssociationGroup

The input data for the **GetAssociationReferencesForAssociationGroup** WSDL operation.

```
<xs:element name="GetAssociationReferencesForAssociationGroup"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

associationGroupId: The MetadataObjectId for the AssociationGroup.

partitionId: An empty GUID.

3.1.4.34.2 GetAssociationReferencesForAssociationGroupResponse

The result data for the **GetAssociationReferencesForAssociationGroup** WSDL operation.

```
<xs:element name="GetAssociationReferencesForAssociationGroupResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationReferencesForAssociationGroupResult" nillable="true"
type="tns5:ArrayOfAssociationReferenceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationReferencesForAssociationGroupResult: The list of AssociationReferences. The Partition of each **AssociationReference** in the list MUST be an empty GUID.

3.1.4.34.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfAssociationReferenceStruct	Contains a list of AssociationReferences.

3.1.4.34.3.1 ArrayOfAssociationReferenceStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfAssociationReferenceStruct** complex type a list of AssociationReferences.

```
<xs:complexType name="ArrayOfAssociationReferenceStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationReferenceStruct"
nillable="true" type="tns5:AssociationReferenceStruct"/>
  </xs:sequence>
</xs:complexType>
```

AssociationReferenceStruct: An AssociationReference.

3.1.4.34.4 Simple Types

None.

3.1.4.34.5 Attributes

None.

3.1.4.34.6 Groups

None.

3.1.4.34.7 Attribute Groups

None.

3.1.4.35 GetAssociationsForDataClass

This operation is used to retrieve the Associations that are contained by the specified DataClass.

```
<wsdl:operation name="GetAssociationsForDataClass"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClass"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentNullExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_MetadataExceptionS
tateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentOutOfRange
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_BdcExceptionStateF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_InvalidOperati
onExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```


The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified DataClass does not exist. <44>

3.1.4.35.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage	The request WSDL message for the GetAssociationsForDataClass WSDL operation.
BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage	The response WSDL message for the GetAssociationsForDataClass WSDL operation.

3.1.4.35.1.1

BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage

The request WSDL message for the **GetAssociationsForDataClass** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForDataClass>

The SOAP body contains the **GetAssociationsForDataClass** element.

3.1.4.35.1.2

BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage

The response WSDL message for the **GetAssociationsForDataClass** WSDL operation.

The SOAP body contains the **GetAssociationsForDataClassResponse** element.

3.1.4.35.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationsForDataClass	The input data for the GetAssociationsForDataClass WSDL operation.
GetAssociationsForDataClassResponse	The result data for the GetAssociationsForDataClass WSDL operation.

3.1.4.35.2.1 GetAssociationsForDataClass

The input data for the **GetAssociationsForDataClass** WSDL operation.

```
<xs:element name="GetAssociationsForDataClass" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

dataClassId: The MetadataObjectId of the DataClass. The value of this element MUST be in [1, 0x7fffffff] range.

partitionId: An empty GUID.

3.1.4.35.2.2 GetAssociationsForDataClassResponse

The result data for the **GetAssociationsForDataClass** WSDL operation.

```
<xs:element name="GetAssociationsForDataClassResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationsForDataClassResult" nillable="true"
type="tns5:ArrayOfAssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationsForDataClassResult: The list of Associations.

3.1.4.35.3 Complex Types

None.

3.1.4.35.4 Simple Types

None.

3.1.4.35.5 Attributes

None.

3.1.4.35.6 Groups

None.

3.1.4.35.7 Attribute Groups

None.

3.1.4.36 GetAssociationsForEntityAndRole

This operation is used to retrieve the Associations that references the specified Entity as **Association** source or **Association** destination.

```
<wsdl:operation name="GetAssociationsForEntityAndRole"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRole"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRoleResponse"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRoleInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRoleArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRoleArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRoleBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForEntityAndRoleMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>
```

```

name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_MetadataExcept
ionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST return with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is set to zero, or the role parameter is not set to zero or 1.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Entity does not exist. <45>

3.1.4.36.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_Inpu tMessage	The request WSDL message for the GetAssociationsForEntityAndRole WSDL operation.
BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_Out putMessage	The response WSDL message for the GetAssociationsForEntityAndRole WSDL operation.

3.1.4.36.1.1

BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InputMes sage

The request WSDL message for the **GetAssociationsForEntityAndRole** WSDL operation.

The SOAP action value is:

The SOAP body contains the **GetAssociationsForEntityAndRole** element.

3.1.4.36.1.2

BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_OutputMessage

The response WSDL message for the **GetAssociationsForEntityAndRole** WSDL operation.

The SOAP body contains the **GetAssociationsForEntityAndRoleResponse** element.

3.1.4.36.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationsForEntityAndRole	The input data for the GetAssociationsForEntityAndRole WSDL operation.
GetAssociationsForEntityAndRoleResponse	The result data for the GetAssociationsForEntityAndRole WSDL operation.

3.1.4.36.2.1 GetAssociationsForEntityAndRole

The input data for the **GetAssociationsForEntityAndRole** WSDL operation.

```
<xs:element name="GetAssociationsForEntityAndRole"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityId: The MetadataObjectId of the Entity.

role: Specifies whether the Entity is a source or the destination of the Association. The value of this element MUST be in the following table.

Value	Description
0	The Entity is a source of the Association .
1	The Entity is the destination of the Association .

activeOnly: Specifies whether to include the **Associations** that reference **Entities** those are not active in the result. For the purposes of this operation, an **Association** is considered to reference an **Entity** when that **Entity** is a source or the destination of the **Association**, or when the **Entity** contains the **Association**. The value of this parameter MUST be in the following table.

Value	Description
True	Return all Associations that match the search criteria.
False	Return Associations that match the search criteria only if they do not reference an Entity that is not active.

partitionId: An empty GUID.

3.1.4.36.2.2 GetAssociationsForEntityAndRoleResponse

The result data for the **GetAssociationsForEntityAndRole** WSDL operation.

```
<xs:element name="GetAssociationsForEntityAndRoleResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationsForEntityAndRoleResult" nillable="true"
type="tns5:ArrayOfAssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationsForEntityAndRoleResult: The list of Associations.

3.1.4.36.3 Complex Types

None.

3.1.4.36.4 Simple Types

None.

3.1.4.36.5 Attributes

None.

3.1.4.36.6 Groups

None.

3.1.4.36.7 Attribute Groups

None.

3.1.4.37 GetAssociationsForMethod

This operation is used to retrieve the Associations that are contained by the specified Method.

```

<wsdl:operation name="GetAssociationsForMethod"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethod"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentNullException
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentOutOfRangeExc
eptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_MetadataExceptionStat
eFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_BdcExceptionStateFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_InvalidOperationExcep
tionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Method does not exist.<46>

3.1.4.37.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage	The request WSDL message for the GetAssociationsForMethod WSDL operation.
BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage	The response WSDL message for the GetAssociationsForMethod WSDL operation.

3.1.4.37.1.1

BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage

The request WSDL message for the **GetAssociationsForMethod** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationsForMethod
```

The SOAP body contains the **GetAssociationsForMethod** element.

3.1.4.37.1.2

BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage

The response WSDL message for the **GetAssociationsForMethod** WSDL operation.

The SOAP body contains the **GetAssociationsForMethodResponse** element.

3.1.4.37.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetAssociationsForMethod	The input data for the GetAssociationsForMethod WSDL operation.
GetAssociationsForMethodResponse	The result data for the GetAssociationsForMethod WSDL

Element	Description
	operation.

3.1.4.37.2.1 GetAssociationsForMethod

The input data for the **GetAssociationsForMethod** WSDL operation.

```
<xs:element name="GetAssociationsForMethod" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodId: The MetadataObjectId of the Method. The value of this element MUST be in [1, 0x7fffffff] range.

partitionId: The empty GUID.

3.1.4.37.2.2 GetAssociationsForMethodResponse

The result data for the **GetAssociationsForMethod** WSDL operation.

```
<xs:element name="GetAssociationsForMethodResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationsForMethodResult" nillable="true" type="tns5:ArrayOfAssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetAssociationsForMethodResult: The list of Associations.

3.1.4.37.3 Complex Types

None.

3.1.4.37.4 Simple Types

None.

3.1.4.37.5 Attributes

None.

3.1.4.37.6 Groups

None.

3.1.4.37.7 Attribute Groups

None.

3.1.4.38 GetCacheInvalidationRecordsSince

This operation is deprecated from the protocol and MUST NOT [<47>](#) be called.

```
<wsdl:operation name="GetCacheInvalidationRecordsSince"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSince"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceResponse"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_MetadataExcep
tionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceAccessDeniedExceptionFault"
name="AccessDeniedExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_AccessDeniedE
xceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_BdcExceptionS
tateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InvalidOperat
ionExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSincePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_PackageFormat
ExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentExcep
tionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentNullE
xceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentOutOf
RangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

3.1.4.38.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InputMessage	The request WSDL message for the GetCacheInvalidationRecordsSince WSDL operation.
BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_OutputMessage	The response WSDL message for the GetCacheInvalidationRecordsSince WSDL operation.

3.1.4.38.1.1

BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InputMessage

The request WSDL message for the **GetCacheInvalidationRecordsSince** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Get
CacheInvalidationRecordsSince

```

The SOAP body contains the **GetCacheInvalidationRecordsSince** element.

3.1.4.38.1.2

BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_OutputMessage

The response WSDL message for the **GetCacheInvalidationRecordsSince** WSDL operation.

The SOAP body contains the **GetCacheInvalidationRecordsSinceResponse** element.

3.1.4.38.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetCacheInvalidationRecordsSince	The input data for the

Element	Description
	GetCacheInvalidationRecordsSince WSDL operation.
GetCacheInvalidationRecordsSinceResponse	The result data for the GetCacheInvalidationRecordsSince WSDL operation.

3.1.4.38.2.1 GetCacheInvalidationRecordsSince

The input data for the **GetCacheInvalidationRecordsSince** WSDL operation.

```
<xs:element name="GetCacheInvalidationRecordsSince"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dateTime" type="xs:dateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

dateTime:

3.1.4.38.2.2 GetCacheInvalidationRecordsSinceResponse

The result data for the **GetCacheInvalidationRecordsSince** WSDL operation.

```
<xs:element name="GetCacheInvalidationRecordsSinceResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetCacheInvalidationRecordsSinceResult" nillable="true"
        type="tns5:ArrayOfCacheInvalidationRecordStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetCacheInvalidationRecordsSinceResult:

3.1.4.38.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfCacheInvalidationRecordStruct	Contains a cache version stamps.
CacheInvalidationRecordStruct	Contains information about the version stamps for the cache.

3.1.4.38.3.1 ArrayOfCacheInvalidationRecordStruct

Namespace: Microsoft.SharePoint.BusinessData

```
<xs:complexType name="ArrayOfCacheInvalidationRecordStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="CacheInvalidationRecordStruct"
nillable="true" type="tns5:CacheInvalidationRecordStruct"/>
  </xs:sequence>
</xs:complexType>
```

CacheInvalidationRecordStruct:

3.1.4.38.3.2 CacheInvalidationRecordStruct

Namespace: Microsoft.SharePoint.BusinessData

```
<xs:complexType name="CacheInvalidationRecordStruct"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="cacheLine" type="xs:long"/>
    <xs:element minOccurs="0" name="counter" type="xs:int"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
    <xs:element minOccurs="0" name="timestamp" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
```

cacheLine:

counter:

partitionId:

timestamp:

3.1.4.38.4 Simple Types

None.

3.1.4.38.5 Attributes

None.

3.1.4.38.6 Groups

None.

3.1.4.38.7 Attribute Groups

None.

3.1.4.39 GetChildTypeDescriptorsForTypeDescriptor

This operation is used to retrieve the TypeDescriptors contained by the specified **TypeDescriptor**.

```
<wsdl:operation name="GetChildTypeDescriptorsForTypeDescriptor"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Input
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Outpu
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Argum
entOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Argum
entNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_BdcEx
ceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Inval
idOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Metad
ataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Argum
entExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified TypeDescriptor does not exist. <48>

3.1.4.39.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_InputMessage	The request WSDL message for the GetChildTypeDescriptorsForTypeDescriptor WSDL operation.
BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_OutputMessage	The response WSDL message for the GetChildTypeDescriptorsForTypeDescriptor WSDL operation.

3.1.4.39.1.1

BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_InputMessage

The request WSDL message for the **GetChildTypeDescriptorsForTypeDescriptor** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsForTypeDescriptor
```

The SOAP body contains the **GetChildTypeDescriptorsForTypeDescriptor** element.

3.1.4.39.1.2

BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_OutputMessage

The response WSDL message for the **GetChildTypeDescriptorsForTypeDescriptor** WSDL operation.

The SOAP body contains the **GetChildTypeDescriptorsForTypeDescriptorResponse** element.

3.1.4.39.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetChildTypeDescriptorsForTypeDescriptor	The input data for the

Element	Description
	GetChildTypeDescriptorsForTypeDescriptor WSDL operation.
GetChildTypeDescriptorsForTypeDescriptorResponse	The result data for the GetChildTypeDescriptorsForTypeDescriptor WSDL operation.

3.1.4.39.2.1 GetChildTypeDescriptorsForTypeDescriptor

The input data for the **GetChildTypeDescriptorsForTypeDescriptor** WSDL operation.

```
<xs:element name="GetChildTypeDescriptorsForTypeDescriptor"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="parentTypeDescriptorId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

parentTypeDescriptorId: The MetadataObjectId for the TypeDescriptor.

partitionId: An empty GUID.

3.1.4.39.2.2 GetChildTypeDescriptorsForTypeDescriptorResponse

The result data for the **GetChildTypeDescriptorsForTypeDescriptor** WSDL operation.

```
<xs:element name="GetChildTypeDescriptorsForTypeDescriptorResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetChildTypeDescriptorsForTypeDescriptorResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetChildTypeDescriptorsForTypeDescriptorResult: The list of TypeDescriptors.

3.1.4.39.3 Complex Types

None.

3.1.4.39.4 Simple Types

None.

3.1.4.39.5 Attributes

None.

3.1.4.39.6 Groups

None.

3.1.4.39.7 Attribute Groups

None.

3.1.4.40 GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor

This operation is used to retrieve the TypeDescriptors that reference Identifiers and are descendent **TypeDescriptors** of the specified **TypeDescriptor**. A given **TypeDescriptor** is a descendent of the specified **TypeDescriptor** if the **TypeDescriptor** that contains the given **TypeDescriptor** is also a descendent of the specified **TypeDescriptor**, or the **TypeDescriptor** is contained by the specified **TypeDescriptor** itself. [<49>](#)

```
<wsdl:operation name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_InputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_OutputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorArgumentOutOfRangeExceptionF
ault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_ArgumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorInvalidOperationExceptionFau
lt" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeD
escriptor_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a

BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_InputMessage request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified TypeDescriptor is 0. <50>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified TypeDescriptor does not exist. <51>

3.1.4.40.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_InputMessage	The request WSDL message for the GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor WSDL operation.
BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_OutputMessage	The response WSDL message for the GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor WSDL operation.

3.1.4.40.1.1

BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_InputMessage

The request WSDL message for the **GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor
```

The SOAP body contains the **GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor** element.

3.1.4.40.1.2

BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_OutputMessage

The response WSDL message for the **GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor** WSDL operation.

The SOAP body contains the **GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse** element.

3.1.4.40.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor	The input data for the GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor WSDL operation.
GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse	The result data for the GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor WSDL operation.

3.1.4.40.2.1 GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor

The input data for the **GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor** WSDL operation.

```
<xs:element name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="typeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

typeDescriptorStruct: The TypeDescriptor.

3.1.4.40.2.2 GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse

The result data for the **GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor** WSDL operation.

```
<xs:element name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResult" nillable="true"
        type="tns5:ArrayOfTypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResult: The list of TypeDescriptors.

3.1.4.40.3 Complex Types

None.

3.1.4.40.4 Simple Types

None.

3.1.4.40.5 Attributes

None.

3.1.4.40.6 Groups

None.

3.1.4.40.7 Attribute Groups

None.

3.1.4.41 GetDataClassById

This operation is used to retrieve the DataClass with the specified MetadataObjectId.

```
<wsdl:operation name="GetDataClassById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassById"
    message="tns6:BusinessDataCatalogSharedService_GetDataClassById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetDataClassById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_InvalidOperationExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_BdcExceptionStateFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_MetadataExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_ArgumentExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_ArgumentNullExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_ArgumentOutOfRangeExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetDataClassById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetDataClassById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	A DataClass with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.41.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetDataClassById_InputMessage	The request WSDL message for the GetDataClassById WSDL operation.
BusinessDataCatalogSharedService_GetDataClassById_OutputMessage	The response WSDL message for the GetDataClassById WSDL operation.

3.1.4.41.1.1

BusinessDataCatalogSharedService_GetDataClassById_InputMessage

The request WSDL message for the **GetDataClassById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassById
```

The SOAP body contains the **GetDataClassById** element.

3.1.4.41.1.2

BusinessDataCatalogSharedService_GetDataClassById_OutputMessage

The response WSDL message for the **GetDataClassById** WSDL operation.

The SOAP body contains the **GetDataClassByIdResponse** element.

3.1.4.41.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetDataClassById	The input data for the GetDataClassById WSDL operation.
GetDataClassByIdResponse	The result data for the GetDataClassById WSDL operation.

3.1.4.41.2.1 GetDataClassById

The input data for the **GetDataClassById** WSDL operation.

```
<xs:element name="GetDataClassById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

dataClassId: The MetadataObjectId of the DataClass.

performErrorCheck: The value of this element MUST be ignored if a **DataClass** with the specified **MetadataObjectId** exists. If a **DataClass** with the specified **MetadataObjectId** does not exist and the value of this element is **false**, the protocol server MUST set the value of the **GetDataClassByIdResult** element to NULL.

partitionId: The empty GUID.

3.1.4.41.2.2 GetDataClassByIdResponse

The result data for the **GetDataClassById** WSDL operation.

```
<xs:element name="GetDataClassByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetDataClassByIdResult" nillable="true" type="tns5:DataClassStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetDataClassByIdResult: The DataClass.

3.1.4.41.3 Complex Types

None.

3.1.4.41.4 Simple Types

None.

3.1.4.41.5 Attributes

None.

3.1.4.41.6 Groups

None.

3.1.4.41.7 Attribute Groups

None.

3.1.4.42 GetDataClassesForSystem

This operation is used to retrieve DataClasses contained by the specified LobSystem.

```
<wsdl:operation name="GetDataClassesForSystem" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassesForSystem"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentOutOfRangeExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_InvalidOperationExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_MetadataExceptionState
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentNullExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_BdcExceptionStateFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends **BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified LobSystem does not exist.<52>

3.1.4.42.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage	The request WSDL message for the GetDataClassesForSystem WSDL operation.
BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage	The response WSDL message for the GetDataClassesForSystem WSDL operation.

3.1.4.42.1.1

BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage

The request WSDL message for the **GetDataClassesForSystem** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassesForSystem
```

The SOAP body contains the **GetDataClassesForSystem** element.

3.1.4.42.1.2

BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage

The response WSDL message for the **GetDataClassesForSystem** WSDL operation.

The SOAP body contains the **GetDataClassesForSystemResponse** element.

3.1.4.42.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetDataClassesForSystem	The input data for the GetDataClassesForSystem WSDL operation.
GetDataClassesForSystemResponse	The result data for the GetDataClassesForSystem WSDL operation.

3.1.4.42.2.1 GetDataClassesForSystem

The input data for the **GetDataClassesForSystem** WSDL operation.

```
<xs:element name="GetDataClassesForSystem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

<xs:complexType>
  <xs:sequence>
    <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
    <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

lobSystemId: The MetadataObjectId of the LobSystem.

activeOnly: Which DataClasses to return. If the value is **true**, only the active **DataClasses** MUST be returned. Otherwise, this operation MUST return **DataClasses** contained by the specified LobSystem, regardless of their active status.

partitionId: The empty GUID.

3.1.4.42.2 GetDataClassesForSystemResponse

The result data for the **GetDataClassesForSystem** WSDL operation.

```

<xs:element name="GetDataClassesForSystemResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetDataClassesForSystemResult" nillable="true" type="tns5:ArrayOfDataClassStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetDataClassesForSystemResult: The list of DataClasses.

3.1.4.42.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfDataClassStruct	Contains a list of DataClasses.

3.1.4.42.3.1 ArrayOfDataClassStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfDataClassStruct** complex type is a list DataClasses.

```

<xs:complexType name="ArrayOfDataClassStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="DataClassStruct" nillable="true"
type="tns5:DataClassStruct"/>
  </xs:sequence>

```

</xs:complexType>

DataClassStruct: A DataClass.

3.1.4.42.4 Simple Types

None.

3.1.4.42.5 Attributes

None.

3.1.4.42.6 Groups

None.

3.1.4.42.7 Attribute Groups

None.

3.1.4.43 GetDefaultValuesForTypeDescriptor

This operation is used to retrieve the DefaultValues of the specified TypeDescriptor.

```
<wsdl:operation name="GetDefaultValuesForTypeDescriptor"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptor"
    message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptorResponse"
    message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptorArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptorArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptorInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptorMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
```

```

message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_MetadataExce
ptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_BdcException
StateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A TypeDescriptor with specified MetadataObjectId does not exist.

3.1.4.43.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_I nputMessage	The request WSDL message for the GetDefaultValuesForTypeDescriptor WSDL operation.
BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ OutputMessage	The response WSDL message for the GetDefaultValuesForTypeDescriptor WSDL operation.

3.1.4.43.1.1

BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InputM essage

The request WSDL message for the **GetDefaultValuesForTypeDescriptor** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDefaultValuesForTypeDescriptor
```

The SOAP body contains the **GetDefaultValuesForTypeDescriptor** element.

3.1.4.43.1.2

BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_Output Message

The response WSDL message for the **GetDefaultValuesForTypeDescriptor** WSDL operation.

The SOAP body contains the **GetDefaultValuesForTypeDescriptorResponse** element.

3.1.4.43.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetDefaultValuesForTypeDescriptor	The input data for the GetDefaultValuesForTypeDescriptor WSDL operation.
GetDefaultValuesForTypeDescriptorResponse	The result data for the GetDefaultValuesForTypeDescriptor WSDL operation.

3.1.4.43.2.1 GetDefaultValuesForTypeDescriptor

The input data for the **GetDefaultValuesForTypeDescriptor** WSDL operation.

```
<xs:element name="GetDefaultValuesForTypeDescriptor"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

typeDescriptorId: The MetadataObjectId for the TypeDescriptor.

partitionId: An empty GUID.

3.1.4.43.2.2 GetDefaultValuesForTypeDescriptorResponse

The result data for the **GetDefaultValuesForTypeDescriptor** WSDL operation.

```
<xs:element name="GetDefaultValuesForTypeDescriptorResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
```

```

<xs:sequence>
  <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetDefaultValuesForTypeDescriptorResult" nillable="true"
type="tns5:ArrayOfDefaultValueStruct"/>
</xs:sequence>
</xs:complexType>
</xs:element>

```

GetDefaultValuesForTypeDescriptorResult: The DefaultValues of the specified TypeDescriptor.

3.1.4.43.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfDefaultValueStruct	Contains a list of DefaultValues.

3.1.4.43.3.1 ArrayOfDefaultValueStruct

Namespace: Microsoft.SharePoint.BusinessData

A complex type that specifies a list of DefaultValues.

```

<xs:complexType name="ArrayOfDefaultValueStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="DefaultValueStruct" nillable="true"
type="tns5:DefaultValueStruct"/>
  </xs:sequence>
</xs:complexType>

```

DefaultValueStruct: A DefaultValue.

3.1.4.43.4 Simple Types

None.

3.1.4.43.5 Attributes

None.

3.1.4.43.6 Groups

None.

3.1.4.43.7 Attribute Groups

None.

3.1.4.44 GetEntitiesForAssociationAndRole

This operation is used to retrieve the Entities performing the role of source or destination for the specified Association.

```
<wsdl:operation name="GetEntitiesForAssociationAndRole"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRole"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	One of the following conditions applies: <ul style="list-style-type: none"> The specified MetadataObjectId is 0. The role parameter is not set to zero or 1. <53>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Association does not exist. <54>

3.1.4.44.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage	The request WSDL message for the GetEntitiesForAssociationAndRole WSDL operation.
BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage	The response WSDL message for the GetEntitiesForAssociationAndRole WSDL operation.

3.1.4.44.1.1

BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage

The request WSDL message for the **GetEntitiesForAssociationAndRole** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForAssociationAndRole
```

The SOAP body contains the **GetEntitiesForAssociationAndRole** element.

3.1.4.44.1.2

BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage

The response WSDL message for the **GetEntitiesForAssociationAndRole** WSDL operation.

The SOAP body contains the **GetEntitiesForAssociationAndRoleResponse** element.

3.1.4.44.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntitiesForAssociationAndRole	The input data for the GetEntitiesForAssociationAndRole WSDL operation.
GetEntitiesForAssociationAndRoleResponse	The result data for the GetEntitiesForAssociationAndRole WSDL operation.

3.1.4.44.2.1 GetEntitiesForAssociationAndRole

The input data for the **GetEntitiesForAssociationAndRole** WSDL operation.

```
<xs:element name="GetEntitiesForAssociationAndRole"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

associationId: The MetadataObjectId of the Association.

role: Specifies what Entities to be returned. Its value MUST be in the following table.

Value	Description
0	The Entities are sources of the Association .
1	The Entities are destinations of the Association .

activeOnly: This element MUST contain the information about what **Entities** to be returned. If its value is **true**, the returned **Entities** MUST be all active. Otherwise, this operation MUST return **Entities** regardless of the active status.

partitionId: An empty GUID.

3.1.4.44.2.2 GetEntitiesForAssociationAndRoleResponse

The result data for the **GetEntitiesForAssociationAndRole** WSDL operation.

```
<xs:element name="GetEntitiesForAssociationAndRoleResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesForAssociationAndRoleResult" nillable="true"
type="tns5:ArrayOfEntityStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetEntitiesForAssociationAndRoleResult: The list of Entities.

3.1.4.44.3 Complex Types

None.

3.1.4.44.4 Simple Types

None.

3.1.4.44.5 Attributes

None.

3.1.4.44.6 Groups

None.

3.1.4.44.7 Attribute Groups

None.

3.1.4.45 GetEntitiesForSystem

This operation is used to retrieve Entities of the specified LobSystem.

```

<wsdl:operation name="GetEntitiesForSystem" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystem"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_BdcExceptionStateFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetEntitiesForSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_InvalidOperationException
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_MetadataExceptionStateFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentNullExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified LobSystem does not exist. <55>

3.1.4.45.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage	The request WSDL message for the GetEntitiesForSystem WSDL operation.
BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage	The response WSDL message for the GetEntitiesForSystem WSDL operation.

3.1.4.45.1.1

BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage

The request WSDL message for the **GetEntitiesForSystem** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesForSystem
```

The SOAP body contains the **GetEntitiesForSystem** element.

3.1.4.45.1.2

BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage

The response WSDL message for the **GetEntitiesForSystem** WSDL operation.

The SOAP body contains the **GetEntitiesForSystemResponse** element.

3.1.4.45.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntitiesForSystem	The input data for the GetEntitiesForSystem WSDL operation.
GetEntitiesForSystemResponse	The result data for the GetEntitiesForSystem WSDL operation.

3.1.4.45.2.1 GetEntitiesForSystem

The input data for the **GetEntitiesForSystem** WSDL operation.

```
<xs:element name="GetEntitiesForSystem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemId: The MetadataObjectId of the LobSystem.

activeOnly: This element MUST contain the information about what Entities to be returned. If its value is true, the returned **Entities** MUST be all active. Otherwise, this operation MUST return **Entities** regardless of the active status.

partitionId: An empty GUID.

3.1.4.45.2.2 GetEntitiesForSystemResponse

The result data for the **GetEntitiesForSystem** WSDL operation.

```
<xs:element name="GetEntitiesForSystemResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesForSystemResult" nillable="true" type="tns5:ArrayOfEntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetEntitiesForSystemResult: The list of Entities.

3.1.4.45.3 Complex Types

None.

3.1.4.45.4 Simple Types

None.

3.1.4.45.5 Attributes

None.

3.1.4.45.6 Groups

None.

3.1.4.45.7 Attribute Groups

None.

3.1.4.46 GetEntitiesLikeNameAndNamespace

This operation is used to retrieve the Entities that match the specified wildcard patterns for name and namespace.

An **Entity** matches the pattern specified by **wildcardedName** if and only if **wildcardedName** matches the name of the **Entity**, or the localized name of the **Entity** with LCID 0, or the localized name of the **Entity** with the LCID specified by **callerCultureLcid**.

An **Entity** matches the pattern specified by **wildcardedNamespace** if and only if **wildcardedNamespace** matches the namespace of the **Entity**.

```
<wsdl:operation name="GetEntitiesLikeNameAndNamespace"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespace"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/GetEntitiesLikeNameAndNamespaceResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentOutOfR
angeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InvalidOperati
onExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_MetadataExcepti
onStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentNullEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_BdcExceptionSt
ateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The length of the wildcardedName exceeds 255 characters. ▪ The length of the wildcardedNamespace exceeds 255 characters.

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ The specified wildcardedName is invalid. ▪ The specified wildcardedNamespace is invalid.

3.1.4.46.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage	The request WSDL message for the GetEntitiesLikeNameAndNamespace WSDL operation.
BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage	The response WSDL message for the GetEntitiesLikeNameAndNamespace WSDL operation.

3.1.4.46.1.1

BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage

The request WSDL message for the **GetEntitiesLikeNameAndNamespace** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesLikeNameAndNamespace>

The SOAP body contains the **GetEntitiesLikeNameAndNamespace** element.

3.1.4.46.1.2

BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage

The response WSDL message for the **GetEntitiesLikeNameAndNamespace** WSDL operation.

The SOAP body contains the **GetEntitiesLikeNameAndNamespaceResponse** element.

3.1.4.46.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntitiesLikeNameAndNamespace	The input data for the GetEntitiesLikeNameAndNamespace WSDL operation.

Element	Description
GetEntitiesLikeNameAndNamespaceResponse	The result data for the GetEntitiesLikeNameAndNamespace WSDL operation.

3.1.4.46.2.1 GetEntitiesLikeNameAndNamespace

The input data for the **GetEntitiesLikeNameAndNamespace** WSDL operation.

```
<xs:element name="GetEntitiesLikeNameAndNamespace"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="wildcardedNamespace" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="wildcardedName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

wildcardedNamespace: The wildcard pattern to be used to retrieve the Entities whose namespace matches the wildcard pattern.

Following is the ABNF for the **wildcardedNamespace**:

```
wildcardedNamespace = 1 * (Literal / Escape / Wildcard)
Literal = %x00-29 / %x2B-5B / %x5D-FF
Wildcard = %x2A
Escape = EscapeBackSlash / EscapeWildcard
EscapeBackSlash = %x5C %x5C
EscapeWildcard = %x5C %x2A
```

The protocol server **MUST** match the namespace of the **Entities** with the value of **wildcardedNamespace** when the **EscapeBackSlash**, **EscapeWildcard**, and **Wildcard** rules are changed as follows:

```
EscapeBackSlash = %x5C
EscapeWildcard = %x2A
Wildcard = *(%x00-FF)
```

wildcardedName: The wildcard pattern to be used to retrieve the **Entities** whose name or localized name matches the wildcard pattern.

Following is the ABNF for the **wildcardedName**:

```
wildcardedName = 1 * (Literal / Escape / Wildcard)
Literal = %x00-29 / %x2B-5B / %x5D-FF
Wildcard = %x2A
Escape = EscapeBackSlash / EscapeWildcard
EscapeBackSlash = %x5C %x5C
```


EscapeWildcard = %x5C %x2A

The protocol server MUST match the name or localized name of the **Entities** with the value of **wildcardedName** when the **EscapeBackSlash**, **EscapeWildcard**, and **Wildcard** rules are changed as follows:

```
EscapeBackSlash = %x5C
EscapeWildcard = %x2A
Wildcard = *(%x00-FF)
```

callerCultureLcid: The LCID representing the locale to be used when retrieving the LobSystems.

activeOnly: This element MUST contain the information about what **Entities** to be returned. If its value is true, the returned **Entities** MUST be all active. Otherwise, this operation MUST return **Entities** regardless of the active status.

partitionId: An empty GUID.

3.1.4.46.2.2 GetEntitiesLikeNameAndNamespaceResponse

The result data for the **GetEntitiesLikeNameAndNamespace** WSDL operation.

```
<xs:element name="GetEntitiesLikeNameAndNamespaceResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetEntitiesLikeNameAndNamespaceResult" nillable="true"
        type="tns5:ArrayOfEntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetEntitiesLikeNameAndNamespaceResult: The list of Entities.

3.1.4.46.3 Complex Types

None.

3.1.4.46.4 Simple Types

None.

3.1.4.46.5 Attributes

None.

3.1.4.46.6 Groups

None.

3.1.4.46.7 Attribute Groups

None.

3.1.4.47 GetEntitiesReferencedByModelId

This operation is used to retrieve Entities which are referenced by the specified Model.

```
<wsdl:operation name="GetEntitiesReferencedByModelId"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelId"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a

BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage

request message, and the protocol server MUST respond with a

BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage

response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Model does not exist.<56>

3.1.4.47.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage	The request WSDL message for the GetEntitiesReferencedByModelId WSDL operation.
BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage	The response WSDL message for the GetEntitiesReferencedByModelId WSDL operation.

3.1.4.47.1.1

BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage

The request WSDL message for the **GetEntitiesReferencedByModelId** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelId
```

The SOAP body contains the **GetEntitiesReferencedByModelId** element.

3.1.4.47.1.2

BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage

The response WSDL message for the **GetEntitiesReferencedByModelId** WSDL operation.

The SOAP body contains the **GetEntitiesReferencedByModelIdResponse** element.

3.1.4.47.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntitiesReferencedByModelId	The input data for the GetEntitiesReferencedByModelId WSDL operation.
GetEntitiesReferencedByModelIdResponse	The result data for the GetEntitiesReferencedByModelId WSDL operation.

3.1.4.47.2.1 GetEntitiesReferencedByModelId

The input data for the **GetEntitiesReferencedByModelId** WSDL operation.

```
<xs:element name="GetEntitiesReferencedByModelId"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
      <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Adminis
tration.Client.Constants" minOccurs="0" name="mode"
type="tns4:EntityConstants.EntitiesInModelQuery"/>
      <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectId: The MetadataObjectId of the Model.

mode: Specifies which Entities to be returned. The value of this element is specified in section [3.1.4.47.4.1](#).

activeOnly: This element MUST contain the information about what **Entities** to be returned. If its value is true, the returned **Entities** MUST be all active. Otherwise, this operation MUST return **Entities** regardless of the active status.

partitionId: An empty GUID.

3.1.4.47.2.2 GetEntitiesReferencedByModelIdResponse

The result data for the **GetEntitiesReferencedByModelId** WSDL operation.

```
<xs:element name="GetEntitiesReferencedByModelIdResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesReferencedByModelIdResult" nillable="true" type="tns5:ArrayOfEntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetEntitiesReferencedByModelIdResult: The list of Entities.

3.1.4.47.3 Complex Types

None.

3.1.4.47.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
EntityConstants.EntitiesInModelQuery	Contains a list of Entities to be returned.

3.1.4.47.4.1 EntityConstants.EntitiesInModelQuery

Namespace:

http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants

Specifies which Entities to be returned.

```
<xs:simpleType name="EntityConstants.EntitiesInModelQuery"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="AllEntitiesInModel"/>
    <xs:enumeration value="OwnedEntitiesInModel"/>
    <xs:enumeration value="SharedEntitiesInModel"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for **EntityConstants.EntitiesInModelQuery**.

Value	Meaning
AllEntitiesInModel	Return all Entities referenced by the specified Model.
OwnedEntitiesInModel	Returned Entities MUST be referenced only in the specified Model .
SharedEntitiesInModel	Returned Entities MUST be referenced in the specified Model and in other Models .

3.1.4.47.5 Attributes

None.

3.1.4.47.6 Groups

None.

3.1.4.47.7 Attribute Groups

None.

3.1.4.48 GetEntityById

This operation is used to retrieve the Entity with the specified MetadataObjectId.

```
<wsdl:operation name="GetEntityById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityById"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityByIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityById_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntityById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntityById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An Entity with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.48.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntityById_InputMessage	The request WSDL message for the GetEntityById WSDL operation.
BusinessDataCatalogSharedService_GetEntityById_OutputMessage	The response WSDL message for the GetEntityById WSDL operation.

3.1.4.48.1.1 BusinessDataCatalogSharedService_GetEntityById_InputMessage

The request WSDL message for the **GetEntityById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityById
```

The SOAP body contains the **GetEntityById** element.

3.1.4.48.1.2 BusinessDataCatalogSharedService_GetEntityById_OutputMessage

The response WSDL message for the **GetEntityById** WSDL operation.

The SOAP body contains the **GetEntityByIdResponse** element.

3.1.4.48.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntityById	The input data for the GetEntityById WSDL operation.
GetEntityByIdResponse	The result data for the GetEntityById WSDL operation.

3.1.4.48.2.1 GetEntityById

The input data for the **GetEntityById** WSDL operation.

```

<xs:element name="GetEntityById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

entityId: The MetadataObjectId of the Entity.

performErrorCheck: The value of this element MUST be ignored if an **Entity** with the specified MetadataObjectId exists. If an **Entity** with the specified **MetadataObjectId** does not exist and the value of this element is false, the protocol server MUST set the value of the **GetEntityByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.48.2 GetEntityByIdResponse

The result data for the **GetEntityById** WSDL operation.

```

<xs:element name="GetEntityByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntityByIdResult" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetEntityByIdResult: The Entity.

3.1.4.48.3 Complex Types

None.

3.1.4.48.4 Simple Types

None.

3.1.4.48.5 Attributes

None.

3.1.4.48.6 Groups

None.

3.1.4.48.7 Attribute Groups

None.

3.1.4.49 GetEntityCount

This operation retrieves the number of Entity elements that are contained by the specified LobSystem.

```
<wsdl:operation name="GetEntityCount" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCount"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountResponse"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetEntityCount_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntityCount_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntityCount_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is set to zero. <57>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified LobSystem does not exist. <58>

3.1.4.49.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntityCount_InputMessage	The request WSDL message for the GetEntityCount WSDL operation.
BusinessDataCatalogSharedService_GetEntityCount_OutputMessage	The response WSDL message for the GetEntityCount WSDL operation.

3.1.4.49.1.1 BusinessDataCatalogSharedService_GetEntityCount_InputMessage

The request WSDL message for the **GetEntityCount** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCount
```

The SOAP body contains the **GetEntityCount** element.

3.1.4.49.1.2 BusinessDataCatalogSharedService_GetEntityCount_OutputMessage

The response WSDL message for the **GetEntityCount** WSDL operation.

The SOAP body contains the **GetEntityCountResponse** element.

3.1.4.49.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntityCount	The input data for the GetEntityCount WSDL operation.
GetEntityCountResponse	The result data for the GetEntityCount WSDL operation.

3.1.4.49.2.1 GetEntityCount

The input data for the **GetEntityCount** WSDL operation.

```

<xs:element name="GetEntityCount" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

lobSystemId: The MetadataObjectId of the LobSystem.

partitionId: An empty GUID.

3.1.4.49.2.2 GetEntityCountResponse

The result data for the **GetEntityCount** WSDL operation.

```

<xs:element name="GetEntityCountResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetEntityCountResult" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetEntityCountResult: The number of Entity elements contained by the specified LobSystem.

3.1.4.49.3 Complex Types

None.

3.1.4.49.4 Simple Types

None.

3.1.4.49.5 Attributes

None.

3.1.4.49.6 Groups

None.

3.1.4.49.7 Attribute Groups

None.

3.1.4.50 GetEntityNameAndNamespacesForAssociationAndRole

This operation is used to retrieve the names and namespaces of Entities which are referenced by the specified Association. Only **Entities** in the specified association **role** of source or destination are returned.

```

<wsdl:operation name="GetEntityNameAndNamespacesForAssociationAndRole"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRole"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_InputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_OutputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_ArgumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with at most one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Association does not exist. <59>

3.1.4.50.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_InputMessage	The request WSDL message for the GetEntityNameAndNamespacesForAssociationAndRole WSDL operation.
BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_OutputMessage	The response WSDL message for the GetEntityNameAndNamespacesForAssociationAndRole WSDL operation.

3.1.4.50.1.1

BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_InputMessage

The request WSDL message for the **GetEntityNameAndNamespacesForAssociationAndRole** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityNameAndNamespacesForAssociationAndRole
```

The SOAP body contains the **GetEntityNameAndNamespacesForAssociationAndRole** element.

3.1.4.50.1.2

BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_OutputMessage

The response WSDL message for the **GetEntityNameAndNamespacesForAssociationAndRole** WSDL operation.

The SOAP body contains the **GetEntityNameAndNamespacesForAssociationAndRoleResponse** element.

3.1.4.50.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntityNameAndNamespacesForAssociationAndRole	The input data for the GetEntityNameAndNamespacesForAssociationAndRole WSDL operation.
GetEntityNameAndNamespacesForAssociationAndRole Response	The result data for the GetEntityNameAndNamespacesForAssociationAndRole WSDL operation.

3.1.4.50.2.1 GetEntityNameAndNamespacesForAssociationAndRole

The input data for the **GetEntityNameAndNamespacesForAssociationAndRole** WSDL operation.

```
<xs:element name="GetEntityNameAndNamespacesForAssociationAndRole"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

associationId: The MetadataObjectId of the Association for which the Entity information is to be returned.

role: A bit which specifies whether to return information for the **Entities** that are referenced as **Association** source or **Association** destination by the specified **Association**. The value of this parameter MUST be listed in the following table.

Possible parameter values:

Value	Description
0	Return information for Entities that are referenced as Association source by the specified Association .
1	Return information for Entities that are referenced as Association destination by the specified Association .

partitionId: An empty GUID.

3.1.4.50.2.2 GetEntityNameAndNamespacesForAssociationAndRoleResponse

The result data for the **GetEntityNameAndNamespacesForAssociationAndRole** WSDL operation.

```

<xs:element name="GetEntityNameAndNamespacesForAssociationAndRoleResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="namespaces" nillable="true" type="q6:ArrayOfstring"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="names" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

namespaces: The namespaces of the Entities that are referenced by the specified Association in the specified role of source or destination.

names: The names of the **Entities** that are referenced by the specified **Association** in the specified role of source or destination. The order of these names **MUST** correspond to the order of **namespaces**, so that the nth name and the nth namespace together describe the name and namespace of a single **Entity**.

3.1.4.50.3 Complex Types

None.

3.1.4.50.4 Simple Types

None.

3.1.4.50.5 Attributes

None.

3.1.4.50.6 Groups

None.

3.1.4.50.7 Attribute Groups

None.

3.1.4.51 GetEntityWithNameAndNamespace

This operation is used to retrieve the active Entity with the specified name and namespace in the specified Partition.

```

<wsdl:operation name="GetEntityWithNameAndNamespace"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespace"
    message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceResponse"

```

```

message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InvalidOperation
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_BdcExceptionStat
eFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_MetadataExceptio
nStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentNullExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentOutOfRan
geExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified namespace length exceeds 255 characters. ▪ The specified name length exceeds 255 characters.
MetadataObjectNotFoundExceptionState	An active Entity with the specified namespace and

Error complex type	Condition
(section 2.2.4.43)	name does not exist in the specified Partition.

3.1.4.51.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage	The request WSDL message for the GetEntityWithNameAndNamespace WSDL operation.
BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage	The response WSDL message for the GetEntityWithNameAndNamespace WSDL operation.

3.1.4.51.1.1

BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage

The request WSDL message for the **GetEntityWithNameAndNamespace** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespace
```

The SOAP body contains the **GetEntityWithNameAndNamespace** element.

3.1.4.51.1.2

BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage

The response WSDL message for the **GetEntityWithNameAndNamespace** WSDL operation.

The SOAP body contains the **GetEntityWithNameAndNamespaceResponse** element.

3.1.4.51.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntityWithNameAndNamespace	The input data for the GetEntityWithNameAndNamespace WSDL operation.
GetEntityWithNameAndNamespaceResponse	The result data for the GetEntityWithNameAndNamespace WSDL operation.

3.1.4.51.2.1 GetEntityWithNameAndNamespace

The input data for the **GetEntityWithNameAndNamespace** WSDL operation.

```
<xs:element name="GetEntityWithNameAndNamespace" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="namespace" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

namespace: The namespace of the Entity to be returned.

name: The name of the **Entity** to be returned.

partitionId: An empty GUID.

3.1.4.51.2.2 GetEntityWithNameAndNamespaceResponse

The result data for the **GetEntityWithNameAndNamespace** WSDL operation.

```
<xs:element name="GetEntityWithNameAndNamespaceResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntityWithNameAndNamespaceResult" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetEntityWithNameAndNamespaceResult: The Entity.

3.1.4.51.3 Complex Types

None.

3.1.4.51.4 Simple Types

None.

3.1.4.51.5 Attributes

None.

3.1.4.51.6 Groups

None.

3.1.4.51.7 Attribute Groups

None.

3.1.4.52 GetEntityWithNameAndNamespaceAndVersion

This operation is used to retrieve the Entity with the specified name, namespace, and version.

```
<wsdl:operation name="GetEntityWithNameAndNamespaceAndVersion"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersion"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_OutputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersionArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a

BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Input

Message request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified namespace length exceeds 255 characters. ▪ The specified name length exceeds 255 characters.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An Entity with the specified namespace and name and version does not exist in the specified Partition.

3.1.4.52.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InputMessage	The request WSDL message for the GetEntityWithNameAndNamespaceAndVersion WSDL operation.
BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_OutputMessage	The response WSDL message for the GetEntityWithNameAndNamespaceAndVersion WSDL operation.

3.1.4.52.1.1

BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InputMessage

The request WSDL message for the **GetEntityWithNameAndNamespaceAndVersion** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityWithNameAndNamespaceAndVersion
```

The SOAP body contains the **GetEntityWithNameAndNamespaceAndVersion** element.

3.1.4.52.1.2

BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_OutputMessage

The response WSDL message for the **GetEntityWithNameAndNamespaceAndVersion** WSDL operation.

The SOAP body contains the **GetEntityWithNameAndNamespaceAndVersionResponse** element.

3.1.4.52.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetEntityWithNameAndNamespaceAndVersion	The input data for the GetEntityWithNameAndNamespaceAndVersion WSDL operation.
GetEntityWithNameAndNamespaceAndVersionResponse	The result data for the GetEntityWithNameAndNamespaceAndVersion WSDL operation.

3.1.4.52.2.1 GetEntityWithNameAndNamespaceAndVersion

The input data for the **GetEntityWithNameAndNamespaceAndVersion** WSDL operation.

```
<xs:element name="GetEntityWithNameAndNamespaceAndVersion"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="namespace" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element xmlns:q1="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="version" nillable="true" type="q1:Version"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

namespace: The namespace of the Entity to be returned.

name: The name of the **Entity** to be returned.

version: The version of the **Entity** to be returned.

partitionId: An empty GUID.

3.1.4.52.2.2 GetEntityWithNameAndNamespaceAndVersionResponse

The result data for the **GetEntityWithNameAndNamespaceAndVersion** WSDL operation.

```

<xs:element name="GetEntityWithNameAndNamespaceAndVersionResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetEntityWithNameAndNamespaceAndVersionResult" nillable="true"
        type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetEntityWithNameAndNamespaceAndVersionResult: The Entity.

3.1.4.52.3 Complex Types

None.

3.1.4.52.4 Simple Types

None.

3.1.4.52.5 Attributes

None.

3.1.4.52.6 Groups

None.

3.1.4.52.7 Attribute Groups

None.

3.1.4.53 GetFieldTypeDescriptorsByMethodInstance

This operation is used to retrieve TypeDescriptors that correspond to fields (4) for the MethodInstance with the specified name on the specified Entity.

```

<wsdl:operation name="GetFieldTypeDescriptorsByMethodInstance"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFieldTypeDescriptorsByMethodInstance"
    message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFieldTypeDescriptorsByMethodInstanceResponse"
    message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFieldTypeDescriptorsByMethodInstanceArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Argume
ntExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_BdcExc
eptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Invali
dOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Metada
taExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Argume
ntNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
InvalidOperationException (section 2.2.4.38)	<p>The MethodInstanceType of the MethodInstance with the specified name on the specified Entity is not equal to any one of the following:</p> <ul style="list-style-type: none"> ▪ Finder ▪ SpecificFinder ▪ IdEnumerator ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ BulkSpecificFinder ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ Creator ▪ Updater
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A MethodInstance with the specified name does not exist on the specified Entity .

3.1.4.53.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage	The request WSDL message for the GetFieldTypeDescriptorsByMethodInstance WSDL operation.
BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_OutputMessage	The response WSDL message for the GetFieldTypeDescriptorsByMethodInstance WSDL operation.

3.1.4.53.1.1

BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage

The request WSDL message for the **GetFieldTypeDescriptorsByMethodInstance** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFieldTypeDescriptorsByMethodInstance>

The SOAP body contains the **GetFieldTypeDescriptorsByMethodInstance** element.

3.1.4.53.1.2

BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_OutputMessage

The response WSDL message for the **GetFieldTypeDescriptorsByMethodInstance** WSDL operation.

The SOAP body contains the **GetFieldTypeDescriptorsByMethodInstanceResponse** element.

3.1.4.53.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetFieldTypeDescriptorsByMethodInstance	The input data for the GetFieldTypeDescriptorsByMethodInstance WSDL operation.
GetFieldTypeDescriptorsByMethodInstanceResponse	The result data for the GetFieldTypeDescriptorsByMethodInstance WSDL operation.

3.1.4.53.2.1 GetFieldTypeDescriptorsByMethodInstance

The input data for the **GetFieldTypeDescriptorsByMethodInstance** WSDL operation.

```
<xs:element name="GetFieldTypeDescriptorsByMethodInstance"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodName" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodName: The name of the MethodInstance.

entityStruct: The Entity.

3.1.4.53.2.2 GetFieldTypeDescriptorsByMethodInstanceResponse

The result data for the **GetFieldTypeDescriptorsByMethodInstance** WSDL operation.

```
<xs:element name="GetFieldTypeDescriptorsByMethodInstanceResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetFieldTypeDescriptorsByMethodInstanceResult" nillable="true"
        type="tns5:ArrayOfPropertyDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetFieldTypeDescriptorsByMethodInstanceResult: The list of TypeDescriptors.

3.1.4.53.3 Complex Types

None.

3.1.4.53.4 Simple Types

None.

3.1.4.53.5 Attributes

None.

3.1.4.53.6 Groups

None.

3.1.4.53.7 Attribute Groups

None.

3.1.4.54 GetFilterDescriptorById

This operation is used to retrieve the FilterDescriptor with the specified MetadataObjectId.

```
<wsdl:operation name="GetFilterDescriptorById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorById"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorByIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorByIdBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorByIdArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentOutOfRangeExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A FilterDescriptor with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.54.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage	The request WSDL message for the GetFilterDescriptorById WSDL operation.
BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage	The response WSDL message for the GetFilterDescriptorById WSDL operation.

3.1.4.54.1.1

BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage

The request WSDL message for the **GetFilterDescriptorById** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Get
FilterDescriptorById

```

The SOAP body contains the **GetFilterDescriptorById** element.

3.1.4.54.1.2

BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage

The response WSDL message for the **GetFilterDescriptorById** WSDL operation.

The SOAP body contains the **GetFilterDescriptorByIdResponse** element.

3.1.4.54.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetFilterDescriptorById	The input data for the GetFilterDescriptorById WSDL operation.
GetFilterDescriptorByIdResponse	The result data for the GetFilterDescriptorById WSDL operation.

3.1.4.54.2.1 GetFilterDescriptorById

The input data for the **GetFilterDescriptorById** WSDL operation.

```
<xs:element name="GetFilterDescriptorById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="filterDescriptorId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

filterDescriptorId: The MetadataObjectId of the FilterDescriptor.

performErrorCheck: The value of this element MUST be ignored if a **FilterDescriptor** with the specified **MetadataObjectId** exists. If a **FilterDescriptor** with the specified **MetadataObjectId** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetFilterDescriptorByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.54.2.2 GetFilterDescriptorByIdResponse

The result data for the **GetFilterDescriptorById** WSDL operation.

```
<xs:element name="GetFilterDescriptorByIdResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetFilterDescriptorByIdResult" nillable="true" type="tns5:FilterDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

GetFilterDescriptorByIdResult: The FilterDescriptor that was returned.

3.1.4.54.3 Complex Types

None.

3.1.4.54.4 Simple Types

None.

3.1.4.54.5 Attributes

None.

3.1.4.54.6 Groups

None.

3.1.4.54.7 Attribute Groups

None.

3.1.4.55 GetFilterDescriptorsForMethod

This operation is used to retrieve the FilterDescriptors contained by the specified Method.

```
<wsdl:operation name="GetFilterDescriptorsForMethod"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethod"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_MetadataExceptio
nStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_BdcExceptionStat
eFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InvalidOperatio
nExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentNullExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentOutOfRan
geExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the Method is 0. <60>
MetadataObjectNotFoundExpectionState (section 2.2.4.43)	A Method with the specified MetadataObjectId does not exist. <61>

3.1.4.55.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage	The request WSDL message for the GetFilterDescriptorsForMethod WSDL operation.
BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage	The response WSDL message for the GetFilterDescriptorsForMethod WSDL operation.

3.1.4.55.1.1

BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage

The request WSDL message for the **GetFilterDescriptorsForMethod** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFilterDescriptorsForMethod
```

The SOAP body contains the **GetFilterDescriptorsForMethod** element.

3.1.4.55.1.2

BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage

The response WSDL message for the **GetFilterDescriptorsForMethod** WSDL operation.

The SOAP body contains the **GetFilterDescriptorsForMethodResponse** element.

3.1.4.55.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetFilterDescriptorsForMethod	The input data for the GetFilterDescriptorsForMethod WSDL operation.
GetFilterDescriptorsForMethodResponse	The result data for the GetFilterDescriptorsForMethod WSDL operation.

3.1.4.55.2.1 GetFilterDescriptorsForMethod

The input data for the **GetFilterDescriptorsForMethod** WSDL operation.

```
<xs:element name="GetFilterDescriptorsForMethod" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>  
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="partitionId" type="ser:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

methodId: The MetadataObjectId of the Method for which the FilterDescriptors are obtained.

partitionId: An empty GUID.

3.1.4.55.2 GetFilterDescriptorsForMethodResponse

The result data for the **GetFilterDescriptorsForMethod** WSDL operation.

```
<xs:element name="GetFilterDescriptorsForMethodResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetFilterDescriptorsForMethodResult" nillable="true"
        type="tns5:ArrayOfFilterDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetFilterDescriptorsForMethodResult: The list of FilterDescriptors.

3.1.4.55.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfFilterDescriptorStruct	Contains a list of FilterDescriptors.

3.1.4.55.3.1 ArrayOfFilterDescriptorStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfFilterDescriptorStruct** complex type contains a list of FilterDescriptors.

```
<xs:complexType name="ArrayOfFilterDescriptorStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="FilterDescriptorStruct"
      nillable="true" type="tns5:FilterDescriptorStruct"/>
  </xs:sequence>
</xs:complexType>
```

FilterDescriptorStruct: A FilterDescriptor of a Method.

3.1.4.55.4 Simple Types

None.

3.1.4.55.5 Attributes

None.

3.1.4.55.6 Groups

None.

3.1.4.55.7 Attribute Groups

None.

3.1.4.56 GetIdentifierById

This operation is used to retrieve the Identifier with the specified MetadataObjectId.

```
<wsdl:operation name="GetIdentifierById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierById"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierByIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetIdentifierById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section

[2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An Identifier with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.56.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetIdentifierById_InputMessage	The request WSDL message for the GetIdentifierById WSDL operation.
BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage	The response WSDL message for the GetIdentifierById WSDL operation.

3.1.4.56.1.1

BusinessDataCatalogSharedService_GetIdentifierById_InputMessage

The request WSDL message for the **GetIdentifierById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifierById
```

The SOAP body contains the **GetIdentifierById** element.

3.1.4.56.1.2

BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage

The response WSDL message for the **GetIdentifierById** WSDL operation.

The SOAP body contains the **GetIdentifierByIdResponse** element.

3.1.4.56.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetIdentifierById	The input data for the GetIdentifierById WSDL operation.

Element	Description
GetIdentifierByIdResponse	The result data for the GetIdentifierById WSDL operation.

3.1.4.56.2.1 GetIdentifierById

The input data for the **GetIdentifierById** WSDL operation.

```
<xs:element name="GetIdentifierById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="identifierId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

identifierId: The MetadataObjectId of the Identifier.

performErrorCheck: The value of this element MUST be ignored if an **Identifier** with the specified **MetadataObjectId** exists. If an **Identifier** with the specified **MetadataObjectId** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetIdentifierByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.56.2.2 GetIdentifierByIdResponse

The result data for the **GetIdentifierById** WSDL operation.

```
<xs:element name="GetIdentifierByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetIdentifierByIdResult" nillable="true" type="tns5:IdentifierStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetIdentifierByIdResult: The Identifier that was returned.

3.1.4.56.3 Complex Types

None.

3.1.4.56.4 Simple Types

None.

3.1.4.56.5 Attributes

None.

3.1.4.56.6 Groups

None.

3.1.4.56.7 Attribute Groups

None.

3.1.4.57 GetIdentifiersForEntity

This operation is used to retrieve the Identifiers contained by the specified Entity.

```
<wsdl:operation name="GetIdentifiersForEntity" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntity"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityResponse"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntityArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage** request

message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the Entity is 0. <62>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	An Entity with the specified MetadataObjectId does not exist. <63>

3.1.4.57.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage	The request WSDL message for the GetIdentifiersForEntity WSDL operation.
BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage	The response WSDL message for the GetIdentifiersForEntity WSDL operation.

3.1.4.57.1.1

BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage

The request WSDL message for the **GetIdentifiersForEntity** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetIdentifiersForEntity
```

The SOAP body contains the **GetIdentifiersForEntity** element.

3.1.4.57.1.2

BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage

The response WSDL message for the **GetIdentifiersForEntity** WSDL operation.

The SOAP body contains the **GetIdentifiersForEntityResponse** element.

3.1.4.57.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetIdentifiersForEntity	The input data for the GetIdentifiersForEntity WSDL operation.
GetIdentifiersForEntityResponse	The result data for the GetIdentifiersForEntity WSDL operation.

3.1.4.57.2.1 GetIdentifiersForEntity

The input data for the **GetIdentifiersForEntity** WSDL operation.

```
<xs:element name="GetIdentifiersForEntity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityId: The MetadataObjectId of the Entity for which the Identifiers are obtained.

partitionId: An empty GUID.

3.1.4.57.2.2 GetIdentifiersForEntityResponse

The result data for the **GetIdentifiersForEntity** WSDL operation.

```
<xs:element name="GetIdentifiersForEntityResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetIdentifiersForEntityResult" nillable="true" type="tns5:ArrayOfIdentifierStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetIdentifiersForEntityResult: The list of Identifiers.

3.1.4.57.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfIdentifierStruct	Contains a list of Identifiers.

3.1.4.57.3.1 ArrayOfIdentifierStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfIdentifierStruct** complex type contains a list of Identifiers.

```
<xs:complexType name="ArrayOfIdentifierStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="IdentifierStruct" nillable="true"
      type="tns5:IdentifierStruct"/>
  </xs:sequence>
</xs:complexType>
```

IdentifierStruct: An Identifier of an Entity.

3.1.4.57.4 Simple Types

None.

3.1.4.57.5 Attributes

None.

3.1.4.57.6 Groups

None.

3.1.4.57.7 Attribute Groups

None.

3.1.4.58 GetImportProgress

This operation is used to retrieve the progress of an [ImportPackageWithProgress](#) operation, using the unique identifier provided by the client at the creation of the import operation.

```
<wsdl:operation name="GetImportProgress" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetImportProgress"
    message="tns6:BusinessDataCatalogSharedService_GetImportProgress_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetImportProgressResponse"
    message="tns6:BusinessDataCatalogSharedService_GetImportProgress_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetImportProgress_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetImportProgress_OutputMessage** response message.

3.1.4.58.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetImportProgress_InputMessage	The request WSDL message for the GetImportProgress WSDL operation.
BusinessDataCatalogSharedService_GetImportProgress_OutputMessage	The response WSDL message for the GetImportProgress WSDL operation.

3.1.4.58.1.1

BusinessDataCatalogSharedService_GetImportProgress_InputMessage

The request WSDL message for the **GetImportProgress** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetImportProgress
```

The SOAP body contains the **GetImportProgress** element.

3.1.4.58.1.2

BusinessDataCatalogSharedService_GetImportProgress_OutputMessage

The response WSDL message for the **GetImportProgress** WSDL operation.

The SOAP body contains the **GetImportProgressResponse** element.

3.1.4.58.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetImportProgress	The input data for the GetImportProgress WSDL operation.
GetImportProgressResponse	The result data for the GetImportProgress WSDL operation.

3.1.4.58.2.1 GetImportProgress

The input data for the **GetImportProgress** WSDL operation.

```
<xs:element name="GetImportProgress" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"  
        minOccurs="0" name="jobId" type="ser:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```



```
<xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
</xs:element>
```

jobId: The identifier of the import operation for which the progress is to be retrieved.

partitionId: An empty GUID.

3.1.4.58.2 GetImportProgressResponse

The result data for the **GetImportProgress** WSDL operation.

```
<xs:element name="GetImportProgressResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetImportProgressResult" type="xs:double"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetImportProgressResult: The fraction of the operation that is finished. The value MUST be between 0 and 1 inclusive. The value MUST be 0 if **jobId** is not recognized as a current import job.

3.1.4.58.3 Complex Types

None.

3.1.4.58.4 Simple Types

None.

3.1.4.58.5 Attributes

None.

3.1.4.58.6 Groups

None.

3.1.4.58.7 Attribute Groups

None.

3.1.4.59 GetLevelForTypeDescriptor

This operation retrieves the depth of the specified **TypeDescriptor** in the **TypeDescriptor** tree that contains the specified **TypeDescriptor**. The **TypeDescriptor** tree for a specified **TypeDescriptor** consists of the specified **TypeDescriptor** with depth 0. Any **TypeDescriptor** that is contained by a **TypeDescriptor** in the **TypeDescriptor** tree is also in the tree with depth 1 plus the depth of the containing **TypeDescriptor**.

```

<wsdl:operation name="GetLevelForTypeDescriptor"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_MetadataExceptionSta
teFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentOutOfRangeEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_BdcExceptionStateFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InvalidOperationExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentNullExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified TypeDescriptor is 0. <64>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified TypeDescriptor does not exist. <65> ▪ The specified TypeDescriptor is not the root of the TypeDescriptor tree and the parent of the specified TypeDescriptor does not exist. ▪ An ancestor of the specified TypeDescriptor is not the root of the TypeDescriptor tree that contains the specified TypeDescriptor and the parent of the ancestor does not exist.

3.1.4.59.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage	The request WSDL message for the GetLevelForTypeDescriptor WSDL operation.
BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage	The response WSDL message for the GetLevelForTypeDescriptor WSDL operation.

3.1.4.59.1.1

BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage

The request WSDL message for the **GetLevelForTypeDescriptor** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLevelForTypeDescriptor>

The SOAP body contains the **GetLevelForTypeDescriptor** element.

3.1.4.59.1.2

BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage

The response WSDL message for the **GetLevelForTypeDescriptor** WSDL operation.

The SOAP body contains the **GetLevelForTypeDescriptorResponse** element.

3.1.4.59.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLevelForTypeDescriptor	The input data for the GetLevelForTypeDescriptor WSDL operation.
GetLevelForTypeDescriptorResponse	The result data for the GetLevelForTypeDescriptor WSDL operation.

3.1.4.59.2.1 GetLevelForTypeDescriptor

The input data for the **GetLevelForTypeDescriptor** WSDL operation.

```
<xs:element name="GetLevelForTypeDescriptor" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="typeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

typeDescriptorStruct: The TypeDescriptor.

3.1.4.59.2.2 GetLevelForTypeDescriptorResponse

The result data for the **GetLevelForTypeDescriptor** WSDL operation.

```
<xs:element name="GetLevelForTypeDescriptorResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetLevelForTypeDescriptorResult"
type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLevelForTypeDescriptorResult: The depth of the specified TypeDescriptor in the **TypeDescriptor** tree that contains the **TypeDescriptor**.

3.1.4.59.3 Complex Types

None.

3.1.4.59.4 Simple Types

None.

3.1.4.59.5 Attributes

None.

3.1.4.59.6 Groups

None.

3.1.4.59.7 Attribute Groups

None.

3.1.4.60 GetLobSystemAllAssembliesBytes

This operation is used to retrieve the Business Logic Modules associated with the specified LobSystem, if the systemType element of the specified **LobSystem** does not have the value "Custom". If the systemType element of the specified **LobSystem** has the value "Custom", the behavior of this operation is implementation-specific. [<66>](#)

```
<wsdl:operation name="GetLobSystemAllAssembliesBytes"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytes"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentNullExc
eptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentOutOfRa
ngeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_BdcExceptionSta
teFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InvalidOperatio
nExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_MetadataExcepti
onStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemAllAssembliesBytesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to read the specified LobSystem . <67>
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified LobSystem is 0.

3.1.4.60.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_Inp utMessage	The request WSDL message for the GetLobSystemAllAssemblies Bytes WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_Out putMessage	The response WSDL message for the GetLobSystemAllAssemblies Bytes WSDL operation.

3.1.4.60.1.1 BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InputMes sage

The request WSDL message for the **GetLobSystemAllAssembliesBytes** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Get
LobSystemAllAssembliesBytes

```

The SOAP body contains the **GetLobSystemAllAssembliesBytes** element.

3.1.4.60.1.2

BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_OutputMessage

The response WSDL message for the **GetLobSystemAllAssembliesBytes** WSDL operation.

The SOAP body contains the **GetLobSystemAllAssembliesBytesResponse** element.

3.1.4.60.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemAllAssembliesBytes	The input data for the GetLobSystemAllAssembliesBytes WSDL operation.
GetLobSystemAllAssembliesBytesResponse	The result data for the GetLobSystemAllAssembliesBytes WSDL operation.

3.1.4.60.2.1 GetLobSystemAllAssembliesBytes

The input data for the **GetLobSystemAllAssembliesBytes** WSDL operation.

```
<xs:element name="GetLobSystemAllAssembliesBytes"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemStruct: The LobSystem.

3.1.4.60.2.2 GetLobSystemAllAssembliesBytesResponse

The result data for the **GetLobSystemAllAssembliesBytes** WSDL operation.

```
<xs:element name="GetLobSystemAllAssembliesBytesResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="GetLobSystemAllAssembliesBytesResult" nillable="true"
        type="q6:ArrayOfbase64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemAllAssembliesBytesResult: The list of Business Logic Modules. If the specified LobSystem is not associated with any Business Logic Module, this element MUST NOT be present.

3.1.4.60.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfbase64Binary	Contains an array of elements, each containing encoded data.

3.1.4.60.3.1 ArrayOfbase64Binary

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

The **ArrayOfbase64Binary** complex type MUST be an array of elements, where each element contains data encoded with **base64 encoding**.

```
<xs:complexType name="ArrayOfbase64Binary" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="base64Binary" nillable="true"
      type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>
```

base64Binary: Data encoded with base64 encoding.

3.1.4.60.4 Simple Types

None.

3.1.4.60.5 Attributes

None.

3.1.4.60.6 Groups

None.

3.1.4.60.7 Attribute Groups

None.

3.1.4.61 GetLobSystemById

This operation retrieves the LobSystem with the specified MetadataObjectId.

```
<wsdl:operation name="GetLobSystemById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
    edService/GetLobSystemById"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```



```

<wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_ArgumentOutOfRangeExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_InvalidOperationExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_MetadataExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_ArgumentExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_ArgumentNullExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_BdcExceptionStateFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage** response message, unless any one of the conditions in the following table is met. If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The security principal (2) in whose context the protocol client is operating is not authorized to modify the LobSystem with the specified MetadataObjectId. ▪ A LobSystem with the specified MetadataObjectId does not exist and the value of the

Error complex type	Condition
	performErrorCheck element is "false".<68>
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExeptionState (section 2.2.4.43)	A LobSystem with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.61.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemById_InputMessage	The request WSDL message for the GetLobSystemById WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage	The response WSDL message for the GetLobSystemById WSDL operation.

3.1.4.61.1.1

BusinessDataCatalogSharedService_GetLobSystemById_InputMessage

The request WSDL message for the **GetLobSystemById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemById
```

The SOAP body contains the **GetLobSystemById** element.

3.1.4.61.1.2

BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage

The response WSDL message for the **GetLobSystemById** WSDL operation.

The SOAP body contains the **GetLobSystemByIdResponse** element.

3.1.4.61.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemById	The input data for the GetLobSystemById WSDL operation.

Element	Description
GetLobSystemByIdResponse	The result data for the GetLobSystemById WSDL operation.

3.1.4.61.2.1 GetLobSystemById

The input data for the **GetLobSystemById** WSDL operation.

```
<xs:element name="GetLobSystemById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemId: The MetadataObjectId of the LobSystem that will be retrieved.

performErrorCheck: The value of this element MUST be ignored if a **LobSystem** with the specified **MetadataObjectId** exists.

partitionId: An empty GUID.

3.1.4.61.2.2 GetLobSystemByIdResponse

The result data for the **GetLobSystemById** WSDL operation.

```
<xs:element name="GetLobSystemByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemByIdResult" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemByIdResult: The LobSystem. The partition of the **LobSystem** MUST be an empty GUID.

3.1.4.61.3 Complex Types

None.

3.1.4.61.4 Simple Types

None.

3.1.4.61.5 Attributes

None.

3.1.4.61.6 Groups

None.

3.1.4.61.7 Attribute Groups

None.

3.1.4.62 GetLobSystemByName

This operation is used to retrieve the specified LobSystem.

```
<wsdl:operation name="GetLobSystemByName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByName"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameResponse"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage** request message, and the protocol server MUST respond with a

BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to read<69> the specified LobSystem.
ArgumentException (section 2.2.4.7)	The specified name length exceeds 255 characters.
MetadataObjectNotFoundStateException (section 2.2.4.43)	The specified LobSystem does not exist.

3.1.4.62.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage	The request WSDL message for the GetLobSystemByName WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage	The response WSDL message for the GetLobSystemByName WSDL operation.

3.1.4.62.1.1

BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage

The request WSDL message for the **GetLobSystemByName** WSDL operation.

The SOAP action value is:

`http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByName`

The SOAP body contains the **GetLobSystemByName** element.

3.1.4.62.1.2

BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage

The response WSDL message for the **GetLobSystemByName** WSDL operation.

The SOAP body contains the **GetLobSystemByNameResponse** element.

3.1.4.62.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemByName	The input data for the GetLobSystemByName WSDL operation.
GetLobSystemByNameResponse	The result data for the GetLobSystemByName WSDL operation.

3.1.4.62.2.1 GetLobSystemByName

The input data for the **GetLobSystemByName** WSDL operation.

```
<xs:element name="GetLobSystemByName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

name: The name of the LobSystem.

partitionId: An empty GUID.

3.1.4.62.2.2 GetLobSystemByNameResponse

The result data for the **GetLobSystemByName** WSDL operation.

```
<xs:element name="GetLobSystemByNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemByNameResult" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemByNameResult: The LobSystem with the specified name.

3.1.4.62.3 Complex Types

None.

3.1.4.62.4 Simple Types

None.

3.1.4.62.5 Attributes

None.

3.1.4.62.6 Groups

None.

3.1.4.62.7 Attribute Groups

None.

3.1.4.63 GetLobSystemDataByLobSystem

This operation is used to retrieve Business Logic Modules [<70>](#) associated with the specified LobSystem.

```
<wsdl:operation name="GetLobSystemDataByLobSystem"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystem"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
  </pre>
```

```

message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentOutOfRange
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to read the specified LobSystem. <71>
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified LobSystem is 0. <72>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified LobSystem does not exist.

3.1.4.63.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage	The request WSDL message for the GetLobSystemDataByLobSystem WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage	The response WSDL message for the GetLobSystemDataByLobSystem WSDL operation.

3.1.4.63.1.1 BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage

The request WSDL message for the **GetLobSystemDataByLobSystem** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemDataByLobSystem

```


The SOAP body contains the **GetLobSystemDataByLobSystem** element.

3.1.4.63.1.2

BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage

The response WSDL message for the **GetLobSystemDataByLobSystem** WSDL operation.

The SOAP body contains the **GetLobSystemDataByLobSystemResponse** element.

3.1.4.63.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemDataByLobSystem	The input data for the GetLobSystemDataByLobSystem WSDL operation.
GetLobSystemDataByLobSystemResponse	The result data for the GetLobSystemDataByLobSystem WSDL operation.

3.1.4.63.2.1 GetLobSystemDataByLobSystem

The input data for the **GetLobSystemDataByLobSystem** WSDL operation.

```
<xs:element name="GetLobSystemDataByLobSystem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemStruct: The LobSystem.

3.1.4.63.2.2 GetLobSystemDataByLobSystemResponse

The result data for the **GetLobSystemDataByLobSystem** WSDL operation.

```
<xs:element name="GetLobSystemDataByLobSystemResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
minOccurs="0" name="GetLobSystemDataByLobSystemResult" nillable="true"
type="tns2:ProxyGenerationResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemDataByLobSystemResult: The information about the Business Logic Modules [<73>](#) associated with the specified LobSystem.

3.1.4.63.3 Complex Types

None.

3.1.4.63.4 Simple Types

None.

3.1.4.63.5 Attributes

None.

3.1.4.63.6 Groups

None.

3.1.4.63.7 Attribute Groups

None.

3.1.4.64 GetLobSystemInstanceById

This operation is used to retrieve the LobSystemInstance with the specified MetadataObjectId.

```
<wsdl:operation name="GetLobSystemInstanceById"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceById"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_InvalidOperationExcep
tionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentNullException
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdArgumentOutOfRangeExceptionFault"
```

```

name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemInstanceByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemInstanceByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	One of the following conditions applies: <ul style="list-style-type: none"> The security principal (2) in whose context the protocol client is operating is not authorized to modify the LobSystemInstance with the specified MetadataObjectId. A LobSystemInstance with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is "false".<74>
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	A LobSystemInstance with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.64.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage	The request WSDL message for the GetLobSystemInstanceByI

Message	Description
	d WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage	The response WSDL message for the GetLobSystemInstanceById WSDL operation.

3.1.4.64.1.1

BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage

The request WSDL message for the **GetLobSystemInstanceById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemInstanceById
```

The SOAP body contains the **GetLobSystemInstanceById** element.

3.1.4.64.1.2

BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage

The response WSDL message for the **GetLobSystemInstanceById** WSDL operation.

The SOAP body contains the **GetLobSystemInstanceByIdResponse** element.

3.1.4.64.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemInstanceById	The input data for the GetLobSystemInstanceById WSDL operation.
GetLobSystemInstanceByIdResponse	The result data for the GetLobSystemInstanceById WSDL operation.

3.1.4.64.2.1 GetLobSystemInstanceById

The input data for the **GetLobSystemInstanceById** WSDL operation.

```
<xs:element name="GetLobSystemInstanceById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemInstanceId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

lobSystemInstanceId: The MetadataObjectId of the LobSystemInstance.

performErrorCheck: The value of this element MUST be ignored if a **LobSystemInstance** with the specified **MetadataObjectId** exists.

partitionId: An empty GUID.

3.1.4.64.2.2 GetLobSystemInstanceByIdResponse

The result data for the **GetLobSystemInstanceById** WSDL operation.

```
<xs:element name="GetLobSystemInstanceByIdResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetLobSystemInstanceByIdResult" nillable="true" type="tns5:LobSystemInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemInstanceByIdResult: The LobSystemInstance.

3.1.4.64.3 Complex Types

None.

3.1.4.64.4 Simple Types

None.

3.1.4.64.5 Attributes

None.

3.1.4.64.6 Groups

None.

3.1.4.64.7 Attribute Groups

None.

3.1.4.65 GetLobSystemInstancesForLobSystem

This operation is used to retrieve the list of LobSystemInstances of the specified LobSystem. Only the **LobSystemInstances** that the security principal (2) in whose context the protocol client is operating is authorized to read [<75>](#) are returned.

```
<wsdl:operation name="GetLobSystemInstancesForLobSystem"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystem"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage
" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessag
e" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InvalidOpera
tionExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_BdcException
StateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_MetadataExce
ptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentNull
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentOutO
fRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0. <76>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified LobSystem does not exist. <77>

3.1.4.65.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage	The request WSDL message for the GetLobSystemInstancesForLobSystem WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessage	The response WSDL message for the GetLobSystemInstancesForLobSystem WSDL operation.

3.1.4.65.1.1

BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage

The request WSDL message for the **GetLobSystemInstancesForLobSystem** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemInstancesForLobSystem
```

The SOAP body contains the **GetLobSystemInstancesForLobSystem** element.

3.1.4.65.1.2

BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessage

The response WSDL message for the **GetLobSystemInstancesForLobSystem** WSDL operation.

The SOAP body contains the **GetLobSystemInstancesForLobSystemResponse** element.

3.1.4.65.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemInstancesForLobSystem	The input data for the

Element	Description
	GetLobSystemInstancesForLobSystem WSDL operation.
GetLobSystemInstancesForLobSystemResponse	The result data for the GetLobSystemInstancesForLobSystem WSDL operation.

3.1.4.65.2.1 GetLobSystemInstancesForLobSystem

The input data for the **GetLobSystemInstancesForLobSystem** WSDL operation.

```
<xs:element name="GetLobSystemInstancesForLobSystem"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemId: The MetadataObjectId of the LobSystem.

partitionId: An empty GUID.

3.1.4.65.2.2 GetLobSystemInstancesForLobSystemResponse

The result data for the **GetLobSystemInstancesForLobSystem** WSDL operation.

```
<xs:element name="GetLobSystemInstancesForLobSystemResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemInstancesForLobSystemResult" nillable="true"
type="tns5:ArrayOfLobSystemInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemInstancesForLobSystemResult: The list of LobSystemInstances of the specified LobSystem.

3.1.4.65.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfLobSystemInstanceStruct	Contains a list of LobSystemInstances.

3.1.4.65.3.1 ArrayOfLobSystemInstanceStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfLobSystemInstanceStruct** complex type is a list of complex types, each of which represents an **LobSystemInstance**.

```
<xs:complexType name="ArrayOfLobSystemInstanceStruct"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="LobSystemInstanceStruct"
      nillable="true" type="tns5:LobSystemInstanceStruct"/>
  </xs:sequence>
</xs:complexType>
```

LobSystemInstanceStruct: A complex type that represents an **LobSystemInstance**.

3.1.4.65.4 Simple Types

None.

3.1.4.65.5 Attributes

None.

3.1.4.65.6 Groups

None.

3.1.4.65.7 Attribute Groups

None.

3.1.4.66 GetLobSystemProxyAssemblyBytesByLobSystemId

This operation is used to retrieve the implementation-specific Business Logic Module [<78>](#) associated with the specified **LobSystem**.

```
<wsdl:operation name="GetLobSystemProxyAssemblyBytesByLobSystemId"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemId"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault>
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Bd
cExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_In
validOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Me
tadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Ar
gumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Ar
gumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to read <79> the specified LobSystem.
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified LobSystem is 0.
InvalidMetadataPropertyExceptionState (section 2.2.4.38)	The specified LobSystem has an invalid value for the Property named "SystemUtilityTypeName". The validity of this Property is specified in section 3.1.4.82.2.2 .

Error complex type	Condition
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified LobSystem does not exist.

3.1.4.66.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InputMessage	The request WSDL message for the GetLobSystemProxyAssemblyBytesByLobSystemId WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_OutputMessage	The response WSDL message for the GetLobSystemProxyAssemblyBytesByLobSystemId WSDL operation.

3.1.4.66.1.1

BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InputMessage

The request WSDL message for the **GetLobSystemProxyAssemblyBytesByLobSystemId** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemId>

The SOAP body contains the **GetLobSystemProxyAssemblyBytesByLobSystemId** element.

3.1.4.66.1.2

BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_OutputMessage

The response WSDL message for the **GetLobSystemProxyAssemblyBytesByLobSystemId** WSDL operation.

The SOAP body contains the **GetLobSystemProxyAssemblyBytesByLobSystemIdResponse** element.

3.1.4.66.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemProxyAssemblyBytesByLobSystemId	The input data for the GetLobSystemProxyAssemblyBytesByLobSystemId

Element	Description
	mId WSDL operation.
GetLobSystemProxyAssemblyBytesByLobSystemIdResponse	The result data for the GetLobSystemProxyAssemblyBytesByLobSystemId WSDL operation.

3.1.4.66.2.1 GetLobSystemProxyAssemblyBytesByLobSystemId

The input data for the **GetLobSystemProxyAssemblyBytesByLobSystemId** WSDL operation.

```
<xs:element name="GetLobSystemProxyAssemblyBytesByLobSystemId"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemStruct: The LobSystem to retrieve the implementation-specific Business Logic Module from.

3.1.4.66.2.2 GetLobSystemProxyAssemblyBytesByLobSystemIdResponse

The result data for the **GetLobSystemProxyAssemblyBytesByLobSystemId** WSDL operation.

```
<xs:element name="GetLobSystemProxyAssemblyBytesByLobSystemIdResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetLobSystemProxyAssemblyBytesByLobSystemIdResult"
nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemProxyAssemblyBytesByLobSystemIdResult: The bytes of the implementation-specific Business Logic Module [<80>](#) associated with the specified LobSystem. If more than one Business Logic Module exists for the specified **LobSystem**, this element MUST contain the bytes of the first defined Business Logic Module as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.7. If no Business Logic Module is found for the specified **LobSystem**, this element MUST be NULL.

3.1.4.66.3 Complex Types

None.

3.1.4.66.4 Simple Types

None.

3.1.4.66.5 Attributes

None.

3.1.4.66.6 Groups

None.

3.1.4.66.7 Attribute Groups

None.

3.1.4.67 GetLobSystemsLikeName

This operation is used to retrieve the LobSystems that match the specified wildcard pattern that the security principal in whose context the protocol client is operating is authorized to read. [<81>](#)

A **LobSystem** matches the wildcard pattern specified by **searchLikeName** if and only if **searchLikeName** matches the name of the **LobSystem**, or the localized name of the **LobSystem** with LCID 0, or the localized name of the **LobSystem** with the LCID specified by **callerCultureLcid**.

```
<wsdl:operation name="GetLobSystemsLikeName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeName"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameResponse"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsLikeNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_BdcExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemsLikeName_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemsLikeName_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The length of the specified wildcard pattern exceeds 255 characters. ▪ The format of the specified wildcard pattern is invalid.

3.1.4.67.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemsLikeName_InputMessage	The request WSDL message for the GetLobSystemsLikeName WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemsLikeName_OutputMessage	The response WSDL message for the GetLobSystemsLikeName WSDL operation.

3.1.4.67.1.1

BusinessDataCatalogSharedService_GetLobSystemsLikeName_InputMessage

The request WSDL message for the **GetLobSystemsLikeName** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeName

```

The SOAP body contains the **GetLobSystemsLikeName** element.

3.1.4.67.1.2

BusinessDataCatalogSharedService_GetLobSystemsLikeName_OutputMessage

The response WSDL message for the **GetLobSystemsLikeName** WSDL operation.

The SOAP body contains the **GetLobSystemsLikeNameResponse** element.

3.1.4.67.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemsLikeName	The input data for the GetLobSystemsLikeName WSDL operation.
GetLobSystemsLikeNameResponse	The result data for the GetLobSystemsLikeName WSDL operation.

3.1.4.67.2.1 GetLobSystemsLikeName

The input data for the **GetLobSystemsLikeName** WSDL operation.

```
<xs:element name="GetLobSystemsLikeName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="searchLikeName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

searchLikeName: The wildcard pattern to be used to retrieve the LobSystems whose name or localized name matches the wildcard pattern. Following is the ABNF for the **searchLikeName**:

```
searchLikeName = 1 * (Literal / Escape / Wildcard)
Literal = %x00-29 / %x2B-5B / %x5D-FF
Wildcard = %x2A
Escape = EscapeBackSlash / EscapeWildcard
EscapeBackSlash = %x5C %x5C
EscapeWildcard = %x5C %x2A
```

The protocol server MUST match the name or localized name of the **LobSystems** with the value of **searchLikeName** when the EscapeBackSlash, EscapeWildcard and Wildcard rules are changed as follows:

```
EscapeBackSlash = %x5C
EscapeWildcard = %x2A
Wildcard = *(%x00-FF)
```

callerCultureLcid: The LCID representing the locale to be used when retrieving the **LobSystems**.

partitionId: An empty GUID.

3.1.4.67.2 GetLobSystemsLikeNameResponse

The result data for the **GetLobSystemsLikeName** WSDL operation.

```
<xs:element name="GetLobSystemsLikeNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemsLikeNameResult" nillable="true" type="tns5:ArrayOfLobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemsLikeNameResult: The list of LobSystems.

3.1.4.67.3 Complex Types

None.

3.1.4.67.4 Simple Types

None.

3.1.4.67.5 Attributes

None.

3.1.4.67.6 Groups

None.

3.1.4.67.7 Attribute Groups

None.

3.1.4.68 GetLobSystemsReferencedByEntitiesAssociatedWithModel

This operation is used to retrieve the LobSystems that the security principal in whose context the protocol client is operating is authorized to read [<82>](#) that are referenced by Entities associated with the specified Model.

```
<wsdl:operation name="GetLobSystemsReferencedByEntitiesAssociatedWithModel"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModel"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_InputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse"/>
```



```

message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_OutputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_ArgumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.

Error complex type	Condition
	<83>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Model does not exist. <84>

3.1.4.68.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_InputMessage	The request WSDL message for the GetLobSystemsReferencedByEntitiesAssociatedWithModel WSDL operation.
BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_OutputMessage	The response WSDL message for the GetLobSystemsReferencedByEntitiesAssociatedWithModel WSDL operation.

3.1.4.68.1.1

BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_InputMessage

The request WSDL message for the **GetLobSystemsReferencedByEntitiesAssociatedWithModel** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModel
```

The SOAP body contains the **GetLobSystemsReferencedByEntitiesAssociatedWithModel** element.

3.1.4.68.1.2

BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_OutputMessage

The response WSDL message for the **GetLobSystemsReferencedByEntitiesAssociatedWithModel** WSDL operation.

The SOAP body contains the **GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse** element.

3.1.4.68.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetLobSystemsReferencedByEntitiesAssociatedWithModel	The input data for the GetLobSystemsReferencedByEntitiesAssociatedWithModel WSDL operation.
GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse	The result data for the GetLobSystemsReferencedByEntitiesAssociatedWithModel WSDL operation.

3.1.4.68.2.1 GetLobSystemsReferencedByEntitiesAssociatedWithModel

The input data for the **GetLobSystemsReferencedByEntitiesAssociatedWithModel** WSDL operation.

```
<xs:element name="GetLobSystemsReferencedByEntitiesAssociatedWithModel"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="modelId" type="xs:unsignedInt"/>
      <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Adminis
tration.Client.Constants" minOccurs="0" name="queryMode"
type="tns4:LobSystemConstants.LobSystemsInModelQuery"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

modelId: The MetadataObjectId for the specified Model.

queryMode: The mode which specifies the LobSystems to be retrieved. The value MUST be a **LobSystemConstants.LobSystemsInModelQuery** (section [3.1.4.68.4.1](#)).

partitionId: An empty GUID.

3.1.4.68.2.2 GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse

The result data for the **GetLobSystemsReferencedByEntitiesAssociatedWithModel** WSDL operation.

```
<xs:element name="GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemsReferencedByEntitiesAssociatedWithModelResult" nillable="true"
type="tns5:ArrayOfLobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetLobSystemsReferencedByEntitiesAssociatedWithModelResult: The list of LobSystems.

3.1.4.68.3 Complex Types

None.

3.1.4.68.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
LobSystemConstants.LobSystemsInModelQuery	Specifies the mode in which to retrieve LobSystems.

3.1.4.68.4.1 LobSystemConstants.LobSystemsInModelQuery

Namespace:

http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants

The **LobSystemConstants.LobSystemsInModelQuery** simple type specifies the mode which determines the LobSystems to be retrieved.

```
<xs:simpleType name="LobSystemConstants.LobSystemsInModelQuery"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="AllLobSystemsInModel"/>
    <xs:enumeration value="OwnedLobSystemsInModel"/>
    <xs:enumeration value="SharedLobSystemsInModel"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for **LobSystemConstants.LobSystemsInModelQuery**.

Value	Meaning
AllLobSystemsInModel	All LobSystems referenced by the specified Model.
OwnedLobSystemsInModel	LobSystems referenced only by the specified Model . The returned LobSystems MUST not include LobSystems that are referenced by other Models .
SharedLobSystemsInModel	LobSystems referenced by the specified Model and by other Models . The returned LobSystems MUST not include LobSystems that are referenced only by the specified Model .

3.1.4.68.5 Attributes

None.

3.1.4.68.6 Groups

None.

3.1.4.68.7 Attribute Groups

None.

3.1.4.69 GetMethodById

This operation is used to retrieve the Method with the specified MetadataObjectId.

```
<wsdl:operation name="GetMethodById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodById"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodByIdArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodById_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetMethodById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetMethodById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section

[2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A Method with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.69.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetMethodById_InputMessage	The request WSDL message for the GetMethodById WSDL operation.
BusinessDataCatalogSharedService_GetMethodById_OutputMessage	The response WSDL message for the GetMethodById WSDL operation.

3.1.4.69.1.1 BusinessDataCatalogSharedService_GetMethodById_InputMessage

The request WSDL message for the **GetMethodById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodById
```

The SOAP body contains the **GetMethodById** element.

3.1.4.69.1.2 BusinessDataCatalogSharedService_GetMethodById_OutputMessage

The response WSDL message for the **GetMethodById** WSDL operation.

The SOAP body contains the **GetMethodByIdResponse** element.

3.1.4.69.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetMethodById	The input data for the GetMethodById WSDL operation.
GetMethodByIdResponse	The result data for the GetMethodById WSDL operation.

3.1.4.69.2.1 GetMethodById

The input data for the **GetMethodById** WSDL operation.

```
<xs:element name="GetMethodById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodId: The MetadataObjectId of the Method.

performErrorCheck: The value of this element MUST be ignored if a **Method** with the specified **MetadataObjectId** exists. If **Method** with the specified **MetadataObjectId** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetMethodByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.69.2.2 GetMethodByIdResponse

The result data for the **GetMethodById** WSDL operation.

```
<xs:element name="GetMethodByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodByIdResult" nillable="true" type="tns5:MethodStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetMethodByIdResult: The Method.

3.1.4.69.3 Complex Types

None.

3.1.4.69.4 Simple Types

None.

3.1.4.69.5 Attributes

None.

3.1.4.69.6 Groups

None.

3.1.4.69.7 Attribute Groups

None.

3.1.4.70 GetMethodInstanceById

This operation is used to retrieve the MethodInstance with the specified MetadataObjectId.

```
<wsdl:operation name="GetMethodInstanceById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceById"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceByIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetMethodInstanceById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetMethodInstanceById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A MethodInstance with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.70.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetMethodInstanceById_InputMessage	The request WSDL message for the GetMethodInstanceById WSDL operation.
BusinessDataCatalogSharedService_GetMethodInstanceById_OutputMessage	The response WSDL message for the GetMethodInstanceById WSDL operation.

3.1.4.70.1.1

BusinessDataCatalogSharedService_GetMethodInstanceById_InputMessage

The request WSDL message for the **GetMethodInstanceById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstanceById
```

The SOAP body contains the **GetMethodInstanceById** element.

3.1.4.70.1.2

BusinessDataCatalogSharedService_GetMethodInstanceById_OutputMessage

The response WSDL message for the **GetMethodInstanceById** WSDL operation.

The SOAP body contains the **GetMethodInstanceByIdResponse** element.

3.1.4.70.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetMethodInstanceById	The input data for the GetMethodInstanceById WSDL operation.
GetMethodInstanceByIdResponse	The result data for the GetMethodInstanceById WSDL operation.

3.1.4.70.2.1 GetMethodInstanceById

The input data for the **GetMethodInstanceById** WSDL operation.

```
<xs:element name="GetMethodInstanceById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodInstanceId: The MetadataObjectId for the MethodInstance.

performErrorCheck: The value of this element MUST be ignored if a **MethodInstance** with the specified **MetadataObjectId** exists. If a **MethodInstance** with the specified **MetadataObjectId** does not exist and value of this element is false, the protocol server MUST set the value of the **GetMethodInstanceByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.70.2.2 GetMethodInstanceByIdResponse

The result data for the **GetMethodInstanceById** WSDL operation.

```
<xs:element name="GetMethodInstanceByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodInstanceByIdResult" nillable="true" type="tns5:MethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetMethodInstanceByIdResult: The MethodInstance.

3.1.4.70.3 Complex Types

None.

3.1.4.70.4 Simple Types

None.

3.1.4.70.5 Attributes

None.

3.1.4.70.6 Groups

None.

3.1.4.70.7 Attribute Groups

None.

3.1.4.71 GetMethodInstancesForDataClass

This operation is used to retrieve the MethodInstances contained by the Methods contained by the specified DataClass.

```
<wsdl:operation name="GetMethodInstancesForDataClass"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClass"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentNullExc
eptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_BdcExceptionSta
teFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InvalidOperati
onExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_MetadataExcepti
onStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
```

```

message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExpectionState (section 2.2.4.43)	The specified DataClass does not exist. <85>

3.1.4.71.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InputMessage	The request WSDL message for the GetMethodInstancesForDataClass WSDL operation.
BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_OutputMessage	The response WSDL message for the GetMethodInstancesForDataClass WSDL operation.

3.1.4.71.1.1

BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InputMessage

The request WSDL message for the **GetMethodInstancesForDataClass** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstancesForDataClass

```

The SOAP body contains the **GetMethodInstancesForDataClass** element.

3.1.4.71.1.2

BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_OutputMessage

The response WSDL message for the **GetMethodInstancesForDataClass** WSDL operation.

The SOAP body contains the **GetMethodInstancesForDataClassResponse** element.

3.1.4.71.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetMethodInstancesForDataClass	The input data for the GetMethodInstancesForDataClass WSDL operation.
GetMethodInstancesForDataClassResponse	The result data for the GetMethodInstancesForDataClass WSDL operation.

3.1.4.71.2.1 GetMethodInstancesForDataClass

The input data for the **GetMethodInstancesForDataClass** WSDL operation.

```
<xs:element name="GetMethodInstancesForDataClass"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

dataClassId: The MetadataObjectId for the DataClass.

partitionId: An empty GUID.

3.1.4.71.2.2 GetMethodInstancesForDataClassResponse

The result data for the **GetMethodInstancesForDataClass** WSDL operation.

```
<xs:element name="GetMethodInstancesForDataClassResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetMethodInstancesForDataClassResult" nillable="true"
        type="tns5:ArrayOfMethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetMethodInstancesForDataClassResult: The list of MethodInstances.

3.1.4.71.3 Complex Types

None.

3.1.4.71.4 Simple Types

None.

3.1.4.71.5 Attributes

None.

3.1.4.71.6 Groups

None.

3.1.4.71.7 Attribute Groups

None.

3.1.4.72 GetMethodInstancesForMethod

This operation is used to retrieve the MethodInstances contained by the specified Method.

```
<wsdl:operation name="GetMethodInstancesForMethod"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethod"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_BdcExceptionStateF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InvalidEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_MetadataEx
ceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
```

```

message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentNullExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentOutOfRange
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetMethodInstancesForMethod_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExpectionState (section 2.2.4.43)	The specified Method does not exist. <86>

3.1.4.72.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InputMessage	The request WSDL message for the GetMethodInstancesForMethod WSDL operation.
BusinessDataCatalogSharedService_GetMethodInstancesForMethod_OutputMessage	The response WSDL message for the GetMethodInstancesForMethod WSDL operation.

3.1.4.72.1.1

BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InputMessage

The request WSDL message for the **GetMethodInstancesForMethod** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodInstancesForMethod
```

The SOAP body contains the **GetMethodInstancesForMethod** element.

3.1.4.72.1.2

BusinessDataCatalogSharedService_GetMethodInstancesForMethod_OutputMessage

The response WSDL message for the **GetMethodInstancesForMethod** WSDL operation.

The SOAP body contains the **GetMethodInstancesForMethodResponse** element.

3.1.4.72.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetMethodInstancesForMethod	The input data for the GetMethodInstancesForMethod WSDL operation.
GetMethodInstancesForMethodResponse	The result data for the GetMethodInstancesForMethod WSDL operation.

3.1.4.72.2.1 GetMethodInstancesForMethod

The input data for the **GetMethodInstancesForMethod** WSDL operation.

```
<xs:element name="GetMethodInstancesForMethod" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>  
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="partitionId" type="ser:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

methodId: The MetadataObjectId for the Method.

partitionId: An empty GUID.

3.1.4.72.2.2 GetMethodInstancesForMethodResponse

The result data for the **GetMethodInstancesForMethod** WSDL operation.

```
<xs:element name="GetMethodInstancesForMethodResponse"  
xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>
```



```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodInstancesForMethodResult" nillable="true"
type="tns5:ArrayOfMethodInstanceStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetMethodInstancesForMethodResult: The list of MethodInstances.

3.1.4.72.3 Complex Types

None.

3.1.4.72.4 Simple Types

None.

3.1.4.72.5 Attributes

None.

3.1.4.72.6 Groups

None.

3.1.4.72.7 Attribute Groups

None.

3.1.4.73 GetMethodsForDataClass

This operation is used to retrieve the Methods contained by the specified DataClass.

```

<wsdl:operation name="GetMethodsForDataClass" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClass"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_InvalidOperationExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_BdcExceptionStateFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetMethodsForDataClassArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodsForDataClassMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodsForDataClassArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodsForDataClassArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetMethodsForDataClass_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetMethodsForDataClass_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0. <87>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified DataClass does not exist. <88>

3.1.4.73.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetMethodsForDataClass_InputMessage	The request WSDL message for the GetMethodsForDataClass WSDL operation.
BusinessDataCatalogSharedService_GetMethodsForDataClass_OutputMessage	The response WSDL message for the GetMethodsForDataClass WSDL operation.

3.1.4.73.1.1

BusinessDataCatalogSharedService_GetMethodsForDataClass_InputMessage

The request WSDL message for the **GetMethodsForDataClass** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetMethodsForDataClass
```

The SOAP body contains the **GetMethodsForDataClass** element.

3.1.4.73.1.2

BusinessDataCatalogSharedService_GetMethodsForDataClass_OutputMessage

The response WSDL message for the **GetMethodsForDataClass** WSDL operation.

The SOAP body contains the **GetMethodsForDataClassResponse** element.

3.1.4.73.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetMethodsForDataClass	The input data for the GetMethodsForDataClass WSDL operation.
GetMethodsForDataClassResponse	The result data for the GetMethodsForDataClass WSDL operation.

3.1.4.73.2.1 GetMethodsForDataClass

The input data for the **GetMethodsForDataClass** WSDL operation.

```
<xs:element name="GetMethodsForDataClass" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>  
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="partitionId" type="ser:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

dataClassId: The MetadataObjectId of the DataClass.

partitionId: An empty GUID.

3.1.4.73.2.2 GetMethodsForDataClassResponse

The result data for the **GetMethodsForDataClass** WSDL operation.

```
<xs:element name="GetMethodsForDataClassResponse"  
xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

<xs:complexType>
  <xs:sequence>
    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodsForDataClassResult" nillable="true" type="tns5:ArrayOfMethodStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetMethodsForDataClassResult: The list of Methods.

3.1.4.73.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfMethodStruct	Contains a list of Methods.

3.1.4.73.3.1 ArrayOfMethodStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfMethodStruct** complex type contains a list of Methods.

```

<xs:complexType name="ArrayOfMethodStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="MethodStruct" nillable="true"
type="tns5:MethodStruct"/>
  </xs:sequence>
</xs:complexType>

```

MethodStruct: The element contains information about a Method.

3.1.4.73.4 Simple Types

None.

3.1.4.73.5 Attributes

None.

3.1.4.73.6 Groups

None.

3.1.4.73.7 Attribute Groups

None.

3.1.4.74 GetModelById

This operation is used to retrieve the Model with the specified MetadataObjectId.

```

<wsdl:operation name="GetModelById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelById"
message="tns6:BusinessDataCatalogSharedService_GetModelById_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetModelById_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_BdcExceptionStateFault_FaultMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_InvalidOperationExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_MetadataExceptionStateFault_Fault
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_ArgumentExceptionFault_FaultMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_ArgumentNullExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_ArgumentOutOfRangeExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetModelById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetModelById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.

Error complex type	Condition
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A Model with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.74.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetModelById_InputMessage	The request WSDL message for the GetModelById WSDL operation.
BusinessDataCatalogSharedService_GetModelById_OutputMessage	The response WSDL message for the GetModelById WSDL operation.

3.1.4.74.1.1 BusinessDataCatalogSharedService_GetModelById_InputMessage

The request WSDL message for the **GetModelById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelById
```

The SOAP body contains the **GetModelById** element.

3.1.4.74.1.2 BusinessDataCatalogSharedService_GetModelById_OutputMessage

The response WSDL message for the **GetModelById** WSDL operation.

The SOAP body contains the **GetModelByIdResponse** element.

3.1.4.74.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetModelById	The input data for the GetModelById WSDL operation.
GetModelByIdResponse	The result data for the GetModelById WSDL operation.

3.1.4.74.2.1 GetModelById

The input data for the **GetModelById** WSDL operation.

```
<xs:element name="GetModelById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element minOccurs="0" name="modelId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
    <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

modelId: The MetadataObjectId for the Model.

performErrorCheck: The value of this element MUST be ignored if a **Model** with the specified **MetadataObjectId** exists. If a **Model** with the specified **MetadataObjectId** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetModelByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.74.2.2 GetModelByIdResponse

The result data for the **GetModelById** WSDL operation.

```

<xs:element name="GetModelByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelByIdResult" nillable="true" type="tns5:ModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetModelByIdResult: The Model.

3.1.4.74.3 Complex Types

None.

3.1.4.74.4 Simple Types

None.

3.1.4.74.5 Attributes

None.

3.1.4.74.6 Groups

None.

3.1.4.74.7 Attribute Groups

None.

3.1.4.75 GetModelByName

This operation is used to retrieve the specified Model.

```
<wsdl:operation name="GetModelByName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByName"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameResponse"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByNameArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelByName_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetModelByName_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetModelByName_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	The length of the specified name exceeds 255 characters.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Model does not exist.

3.1.4.75.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetModelByName_InputMessage	The request WSDL message for the GetModelByName WSDL operation.
BusinessDataCatalogSharedService_GetModelByName_OutputMessage	The response WSDL message for the GetModelByName WSDL operation.

3.1.4.75.1.1

BusinessDataCatalogSharedService_GetModelByName_InputMessage

The request WSDL message for the **GetModelByName** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByName
```

The SOAP body contains the **GetModelByName** element.

3.1.4.75.1.2

BusinessDataCatalogSharedService_GetModelByName_OutputMessage

The response WSDL message for the **GetModelByName** WSDL operation.

The SOAP body contains the **GetModelByNameResponse** element.

3.1.4.75.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetModelByName	The input data for the GetModelByName WSDL operation.
GetModelByNameResponse	The result data for the GetModelByName WSDL operation.

3.1.4.75.2.1 GetModelByName

The input data for the **GetModelByName** WSDL operation.

```
<xs:element name="GetModelByName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

name: The name of the Model.

partitionId: The empty GUID.

3.1.4.75.2.2 GetModelByNameResponse

The result data for the **GetModelByName** WSDL operation.

```
<xs:element name="GetModelByNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelByNameResult" nillable="true" type="tns5:ModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetModelByNameResult: The Model.

3.1.4.75.3 Complex Types

None.

3.1.4.75.4 Simple Types

None.

3.1.4.75.5 Attributes

None.

3.1.4.75.6 Groups

None.

3.1.4.75.7 Attribute Groups

None.

3.1.4.76 GetModelsByEntityId

This operation is used to retrieve the Models that reference the specified Entity.

```
<wsdl:operation name="GetModelsByEntityId" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityId"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityIdArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Entity does not exist. <89>

3.1.4.76.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage	The request WSDL message for the GetModelsByEntityId WSDL operation.
BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage	The response WSDL message for the GetModelsByEntityId WSDL operation.

3.1.4.76.1.1

BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage

The request WSDL message for the **GetModelsByEntityId** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByEntityId
```

The SOAP body contains the **GetModelsByEntityId** element.

3.1.4.76.1.2

BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage

The response WSDL message for the **GetModelsByEntityId** WSDL operation.

The SOAP body contains the **GetModelsByEntityIdResponse** element.

3.1.4.76.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetModelsByEntityId	The input data for the GetModelsByEntityId WSDL operation.
GetModelsByEntityIdResponse	The result data for the GetModelsByEntityId WSDL operation.

3.1.4.76.2.1 GetModelsByEntityId

The input data for the **GetModelsByEntityId** WSDL operation.

```
<xs:element name="GetModelsByEntityId" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityId: The MetadataObjectId of the Entity.

partitionId: An empty GUID.

3.1.4.76.2.2 GetModelsByEntityIdResponse

The result data for the **GetModelsByEntityId** WSDL operation.

```
<xs:element name="GetModelsByEntityIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelsByEntityIdResult" nillable="true" type="tns5:ArrayOfModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetModelsByEntityIdResult: The list of Models.

3.1.4.76.3 Complex Types

None.

3.1.4.76.4 Simple Types

None.

3.1.4.76.5 Attributes

None.

3.1.4.76.6 Groups

None.

3.1.4.76.7 Attribute Groups

None.

3.1.4.77 GetModelsByName

This operation is used to retrieve the Models that match the specified wildcard pattern.

A **Model** matches the wildcard pattern specified by **wildcardedName** if and only if **wildcardedName** matches the name of the **Model**, or the localized name of the **Model** with LCID 0, or the localized name of the **Model** with the LCID specified by **callerCultureLcid**.

```
<wsdl:operation name="GetModelsByName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByName"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameResponse"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetModelsByName_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetModelsByName_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetModelsByName_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section

[2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> The length of the specified wildcard pattern exceeds 255 characters. The format of the specified wildcard pattern is invalid.

3.1.4.77.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetModelsByName_InputMessage	The request WSDL message for the GetModelsByName WSDL operation.
BusinessDataCatalogSharedService_GetModelsByName_OutputMessage	The response WSDL message for the GetModelsByName WSDL operation.

3.1.4.77.1.1

BusinessDataCatalogSharedService_GetModelsByName_InputMessage

The request WSDL message for the **GetModelsByName** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByName
```

The SOAP body contains the **GetModelsByName** element.

3.1.4.77.1.2

BusinessDataCatalogSharedService_GetModelsByName_OutputMessage

The response WSDL message for the **GetModelsByName** WSDL operation.

The SOAP body contains the **GetModelsByNameResponse** element.

3.1.4.77.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetModelsByName	The input data for the GetModelsByName WSDL operation.

Element	Description
GetModelsByNameResponse	The result data for the GetModelsByName WSDL operation.

3.1.4.77.2.1 GetModelsByName

The input data for the **GetModelsByName** WSDL operation.

```
<xs:element name="GetModelsByName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="wildcardedName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

wildcardedName: The wildcard pattern to be used to retrieve the Models whose name or localized name matches the wildcard pattern. Following is the ABNF for the **wildcardedName**:

```
wildcardedName = 1 * (Literal / Escape / Wildcard)
Literal = %x00-29 / %x2B-5B / %x5D-FF
Wildcard = %x2A
Escape = EscapeBackSlash / EscapeWildcard
EscapeBackSlash = %x5C %x5C
EscapeWildcard = %x5C %x2A
```

The protocol server MUST match the name or localized name of the **Models** with the value of **wildcardedName** when the **EscapeBackSlash**, **EscapeWildcard**, and **Wildcard** rules are changed as follows:

```
EscapeBackSlash = %x5C
EscapeWildcard = %x2A
Wildcard = *(%x00-FF)
```

callerCultureLcid: The LCID representing the locale to be used when retrieving the Models.

partitionId: An empty GUID.

3.1.4.77.2.2 GetModelsByNameResponse

The result data for the **GetModelsByName** WSDL operation.

```
<xs:element name="GetModelsByNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelsByNameResult" nillable="true" type="tns5:ArrayOfModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```


GetModelsByNameResult: The list of Models.

3.1.4.77.3 Complex Types

None.

3.1.4.77.4 Simple Types

None.

3.1.4.77.5 Attributes

None.

3.1.4.77.6 Groups

None.

3.1.4.77.7 Attribute Groups

None.

3.1.4.78 GetParameterById

This operation is used to retrieve the Parameter with the specified MetadataObjectId.

```
<wsdl:operation name="GetParameterById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterById"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_MetadataExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_BdcExceptionStateFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_InvalidOperationExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_ArgumentExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_ArgumentNullExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_ArgumentOutOfRangeExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetParameterById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetParameterById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataobjectNotFoundExceptionState (section 2.2.4.43)	A Parameter with the specified MetadataObjectId does not exist and the value of performErrorCheck element is true .

3.1.4.78.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetParameterById_InputMessage	The request WSDL message for the GetParameterById WSDL operation.
BusinessDataCatalogSharedService_GetParameterById_OutputMessage	The response WSDL message for the GetParameterById WSDL operation.

3.1.4.78.1.1

BusinessDataCatalogSharedService_GetParameterById_InputMessage

The request WSDL message for the **GetParameterById** WSDL operation.

The SOAP action value is:

The SOAP body contains the **GetParameterById** element.

3.1.4.78.1.2

BusinessDataCatalogSharedService_GetParameterById_OutputMessage

The response WSDL message for the **GetParameterById** WSDL operation.

The SOAP body contains the **GetParameterByIdResponse** element.

3.1.4.78.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetParameterById	The input data for the GetParameterById WSDL operation.
GetParameterByIdResponse	The result data for the GetParameterById WSDL operation.

3.1.4.78.2.1 GetParameterById

The input data for the **GetParameterById** WSDL operation.

```
<xs:element name="GetParameterById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

parameterId: The MetadataObjectId of the Parameter.

performErrorCheck: The value of this element MUST be ignored if a **Parameter** with the specified **MetadataObjectId** exists. If a **Parameter** with the specified **MetadataObjectId** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetParameterByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.78.2.2 GetParameterByIdResponse

The result data for the **GetParameterById** WSDL operation.

```
<xs:element name="GetParameterByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetParameterByIdResult" nillable="true" type="tns5:ParameterStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetParameterByIdResult: The Parameter.

3.1.4.78.3 Complex Types

None.

3.1.4.78.4 Simple Types

None.

3.1.4.78.5 Attributes

None.

3.1.4.78.6 Groups

None.

3.1.4.78.7 Attribute Groups

None.

3.1.4.79 GetParametersForMethod

This operation is used to retrieve the Parameters of the specified Method.

```

<wsdl:operation name="GetParametersForMethod" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethod"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_BdcExceptionStateFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodInvalidOperationExceptionFault"

```

```

name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_InvalidOperationExcepti
onFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_MetadataExceptionStateF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentNullExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0. <90>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Method does not exist. <91>

3.1.4.79.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage	The request WSDL message for the GetParametersForMethod WSDL operation.
BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage	The response WSDL message for the GetParametersForMethod WSDL operation.

3.1.4.79.1.1

BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage

The request WSDL message for the **GetParametersForMethod** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetParametersForMethod
```

The SOAP body contains the **GetParametersForMethod** element.

3.1.4.79.1.2

BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage

The response WSDL message for the **GetParametersForMethod** WSDL operation.

The SOAP body contains the **GetParametersForMethodResponse** element.

3.1.4.79.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetParametersForMethod	The input data for the GetParametersForMethod WSDL operation.
GetParametersForMethodResponse	The result data for the GetParametersForMethod WSDL operation.

3.1.4.79.2.1 GetParametersForMethod

The input data for the **GetParametersForMethod** WSDL operation.

```
<xs:element name="GetParametersForMethod" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodId: The MetadataObjectId of the Method.

partitionId: An empty GUID.

3.1.4.79.2.2 GetParametersForMethodResponse

The result data for the **GetParametersForMethod** WSDL operation.

```
<xs:element name="GetParametersForMethodResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

<xs:complexType>
  <xs:sequence>
    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetParametersForMethodResult" nillable="true" type="tns5:ArrayOfParameterStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetParametersForMethodResult: The list of Parameters.

3.1.4.79.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfParameterStruct	Contains a list of Parameters.

3.1.4.79.3.1 ArrayOfParameterStruct

Namespace: Microsoft.SharePoint.BusinessData

The **ArrayOfParameterStruct** complex type contains a list of Parameters.

```

<xs:complexType name="ArrayOfParameterStruct" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterStruct" nillable="true"
type="tns5:ParameterStruct"/>
  </xs:sequence>
</xs:complexType>

```

ParameterStruct: A Parameter.

3.1.4.79.4 Simple Types

None.

3.1.4.79.5 Attributes

None.

3.1.4.79.6 Groups

None.

3.1.4.79.7 Attribute Groups

None.

3.1.4.80 GetRootTypeDescriptorForParameter

This operation is used to retrieve the root TypeDescriptor of the specified Parameter.

```

<wsdl:operation name="GetRootTypeDescriptorForParameter"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameter"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InputMessage"
  xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterResponse"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_OutputMessag
e" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_MetadataExce
ptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentOutO
fRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_BdcException
StateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InvalidOpera
tionExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentNull
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Parameter does not exist.

3.1.4.80.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InputMessage	The request WSDL message for the GetRootTypeDescriptorForParameter WSDL operation.
BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_OutputMessage	The response WSDL message for the GetRootTypeDescriptorForParameter WSDL operation.

3.1.4.80.1.1

BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_Input Message

The request WSDL message for the **GetRootTypeDescriptorForParameter** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetRootTypeDescriptorForParameter
```

The SOAP body contains the **GetRootTypeDescriptorForParameter** element.

3.1.4.80.1.2

BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_Output Message

The response WSDL message for the **GetRootTypeDescriptorForParameter** WSDL operation.

The SOAP body contains the **GetRootTypeDescriptorForParameterResponse** element.

3.1.4.80.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetRootTypeDescriptorForParameter	The input data for the GetRootTypeDescriptorForParameter WSDL operation.

Element	Description
GetRootTypeDescriptorForParameterResponse	The result data for the GetRootTypeDescriptorForParameter WSDL operation.

3.1.4.80.2.1 GetRootTypeDescriptorForParameter

The input data for the **GetRootTypeDescriptorForParameter** WSDL operation.

```
<xs:element name="GetRootTypeDescriptorForParameter"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

parameterId: The MetadataObjectId of the Parameter.

partitionId: An empty GUID.

3.1.4.80.2.2 GetRootTypeDescriptorForParameterResponse

The result data for the **GetRootTypeDescriptorForParameter** WSDL operation.

```
<xs:element name="GetRootTypeDescriptorForParameterResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetRootTypeDescriptorForParameterResult" nillable="true"
        type="tns5:TypeDescriptorOfStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetRootTypeDescriptorForParameterResult: The root TypeDescriptor of the Parameter.

3.1.4.80.3 Complex Types

None.

3.1.4.80.4 Simple Types

None.

3.1.4.80.5 Attributes

None.

3.1.4.80.6 Groups

None.

3.1.4.80.7 Attribute Groups

None.

3.1.4.81 GetServiceApplicationId

This operation is used to retrieve the unique implementation-specific identifier of metadata store.

```
<wsdl:operation name="GetServiceApplicationId" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetServiceApplicationId"
    message="tns6:BusinessDataCatalogSharedService_GetServiceApplicationId_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetServiceApplicationIdResponse"
    message="tns6:BusinessDataCatalogSharedService_GetServiceApplicationId_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetServiceApplicationId_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetServiceApplicationId_OutputMessage** response message.

3.1.4.81.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetServiceApplicationId_InputMessage	The request WSDL message for the GetServiceApplicationId WSDL operation.
BusinessDataCatalogSharedService_GetServiceApplicationId_OutputMessage	The response WSDL message for the GetServiceApplicationId WSDL operation.

3.1.4.81.1.1

BusinessDataCatalogSharedService_GetServiceApplicationId_InputMessage

The request WSDL message for the **GetServiceApplicationId** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetServiceApplicationId>

The SOAP body contains the **GetServiceApplicationId** element.

3.1.4.81.1.2

BusinessDataCatalogSharedService_GetServiceApplicationId_OutputMessage

The response WSDL message for the **GetServiceApplicationId** WSDL operation.

The SOAP body contains the **GetServiceApplicationIdResponse** element.

3.1.4.81.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetServiceApplicationId	The input data for the GetServiceApplicationId WSDL operation.
GetServiceApplicationIdResponse	The result data for the GetServiceApplicationId WSDL operation.

3.1.4.81.2.1 GetServiceApplicationId

The input data for the **GetServiceApplicationId** WSDL operation.

```
<xs:element name="GetServiceApplicationId" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.81.2.2 GetServiceApplicationIdResponse

The result data for the **GetServiceApplicationId** WSDL operation.

```
<xs:element name="GetServiceApplicationIdResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="GetServiceApplicationIdResult" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetServiceApplicationIdResult: The unique implementation-specific identifier of metadata store. The value of the identifier MUST be a GUID.

3.1.4.81.3 Complex Types

None.

3.1.4.81.4 Simple Types

None.

3.1.4.81.5 Attributes

None.

3.1.4.81.6 Groups

None.

3.1.4.81.7 Attribute Groups

None.

3.1.4.82 GetSystemUtilityTypeNameForLobSystem

This operation is used to retrieve the implementation-specific identifier of the module that executes operations in the line-of-business (LOB) system corresponding to the specified LobSystem.

```
<wsdl:operation name="GetSystemUtilityTypeNameForLobSystem"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystem"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMess
age" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_OutputMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_BdcExcept
ionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InvalidOp
erationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_MetadataE
xceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentE
xceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentN
ullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentN
ullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetSystemUtilityTypeNameForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentO
utOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	The module cannot be found or loaded.
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
InvalidMetadataPropertyExceptionState (section 2.2.4.37)	The specified LobSystem has an invalid value for the Property named "SystemUtilityTypeName". Validity of this Property is specified in section 3.1.4.82.2.2.

3.1.4.82.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMessage	The request WSDL message for the GetSystemUtilityTypeNameForLobSystem WSDL operation.
BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_OutputMessage	The response WSDL message for the GetSystemUtilityTypeNameForLobSystem WSDL operation.

3.1.4.82.1.1

BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMessage

The request WSDL message for the **GetSystemUtilityTypeNameForLobSystem** WSDL operation.

The SOAP action value is:

The SOAP body contains the **GetSystemUtilityTypeNameForLobSystem** element.

3.1.4.82.1.2

BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_outputMessage

The response WSDL message for the **GetSystemUtilityTypeNameForLobSystem** WSDL operation.

The SOAP body contains the **GetSystemUtilityTypeNameForLobSystemResponse** element.

3.1.4.82.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetSystemUtilityTypeNameForLobSystem	The input data for the GetSystemUtilityTypeNameForLobSystem WSDL operation.
GetSystemUtilityTypeNameForLobSystemResponse	The result data for the GetSystemUtilityTypeNameForLobSystem WSDL operation.

3.1.4.82.2.1 GetSystemUtilityTypeNameForLobSystem

The input data for the **GetSystemUtilityTypeNameForLobSystem** WSDL operation.

```
<xs:element name="GetSystemUtilityTypeNameForLobSystem"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemStruct: The LobSystem.

3.1.4.82.2.2 GetSystemUtilityTypeNameForLobSystemResponse

The result data for the **GetSystemUtilityTypeNameForLobSystem** WSDL operation.

```
<xs:element name="GetSystemUtilityTypeNameForLobSystemResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element minOccurs="0" name="GetSystemUtilityTypeNameForLobSystemResult"
nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetSystemUtilityTypeNameForLobSystemResult: The implementation-specific [92](#) identifier of the module that executes operations in the line-of-business (LOB) system.

3.1.4.82.3 Complex Types

None.

3.1.4.82.4 Simple Types

None.

3.1.4.82.5 Attributes

None.

3.1.4.82.6 Groups

None.

3.1.4.82.7 Attribute Groups

None.

3.1.4.83 GetTypeDescriptorById

This operation is used to retrieve the TypeDescriptor with the specified MetadataObjectId.

```

<wsdl:operation name="GetTypeDescriptorById" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorById"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentNullExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentOutOfRangeExceptionExcep
tionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```



```

edService/GetTypeDescriptorByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentExceptionFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_BdcExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_InvalidOperationExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_MetadataExceptionStateFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetTypeDescriptorById_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetTypeDescriptorById_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding server error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	A TypeDescriptor with the specified MetadataObjectId does not exist and the value of the performErrorCheck element is true .

3.1.4.83.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetTypeDescriptorById_InputMessage	The request WSDL message for the GetTypeDescriptorById WSDL operation.
BusinessDataCatalogSharedService_GetTypeDescriptorById_OutputMessage	The response WSDL message for the GetTypeDescriptorById WSDL operation.

3.1.4.83.1.1

BusinessDataCatalogSharedService_GetTypeDescriptorById_InputMessage

The request WSDL message for the **GetTypeDescriptorById** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorById
```

The SOAP body contains the **GetTypeDescriptorById** element.

3.1.4.83.1.2

BusinessDataCatalogSharedService_GetTypeDescriptorById_OutputMessage

The response WSDL message for the **GetTypeDescriptorById** WSDL operation.

The SOAP body contains the **GetTypeDescriptorByIdResponse** element.

3.1.4.83.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetTypeDescriptorById	The input data for the GetTypeDescriptorById WSDL operation.
GetTypeDescriptorByIdResponse	The result data for the GetTypeDescriptorById WSDL operation.

3.1.4.83.2.1 GetTypeDescriptorById

The input data for the **GetTypeDescriptorById** WSDL operation.

```
<xs:element name="GetTypeDescriptorById" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

typeDescriptorId: The MetadataObjectId of the TypeDescriptor.

performErrorCheck: The value of this element MUST be ignored if a **TypeDescriptor** with the specified **MetadataObjectId** exists. If a **TypeDescriptor** with the specified **MetadataObjectId** does not exist and value of this element is **false**, the protocol server MUST set the value of the **GetTypeDescriptorByIdResult** element to NULL.

partitionId: An empty GUID.

3.1.4.83.2 GetTypeDescriptorByIdResponse

The result data for the **GetTypeDescriptorById** WSDL operation.

```
<xs:element name="GetTypeDescriptorByIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetTypeDescriptorByIdResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetTypeDescriptorByIdResult: The TypeDescriptor.

3.1.4.83.3 Complex Types

None.

3.1.4.83.4 Simple Types

None.

3.1.4.83.5 Attributes

None.

3.1.4.83.6 Groups

None.

3.1.4.83.7 Attribute Groups

None.

3.1.4.84 GetTypeDescriptorsByNameAndLevelForParameter

This operation SHOULD [<93>](#) retrieve the TypeDescriptors with the specified name and level contained by the specified Parameter. The level of a **TypeDescriptor** is defined as follows:

- The level of the root **TypeDescriptor** is 0.
- The level of specified **TypeDescriptor** is 1 plus the level of the **TypeDescriptor** containing the specified **TypeDescriptor**.

```
<wsdl:operation name="GetTypeDescriptorsByNameAndLevelForParameter"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameter"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameterResponse"/>
```

```

message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_OutputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_ArgumentNullExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameterInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	One of the following conditions applies:

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ The specified MetadataObjectId is 0. ▪ The specified level is less than 0.

3.1.4.84.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InputMessage	The request WSDL message for the GetTypeDescriptorsByNameAndLevelForParameter WSDL operation.
BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_OutputMessage	The response WSDL message for the GetTypeDescriptorsByNameAndLevelForParameter WSDL operation.

3.1.4.84.1.1

BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InputMessage

The request WSDL message for the **GetTypeDescriptorsByNameAndLevelForParameter** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeDescriptorsByNameAndLevelForParameter>

The SOAP body contains the **GetTypeDescriptorsByNameAndLevelForParameter** element.

3.1.4.84.1.2

BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_OutputMessage

The response WSDL message for the **GetTypeDescriptorsByNameAndLevelForParameter** WSDL operation.

The SOAP body contains the **GetTypeDescriptorsByNameAndLevelForParameterResponse** element.

3.1.4.84.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetTypeDescriptorsByNameAndLevelForParameter	The input data for the GetTypeDescriptorsByNameAndLevelForParameter WSDL operation.
GetTypeDescriptorsByNameAndLevelForParameterResponse	The result data for the GetTypeDescriptorsByNameAndLevelForParameter WSDL operation.

3.1.4.84.2.1 GetTypeDescriptorsByNameAndLevelForParameter

The input data for the **GetTypeDescriptorsByNameAndLevelForParameter** WSDL operation.

```
<xs:element name="GetTypeDescriptorsByNameAndLevelForParameter"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="level" type="xs:int"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

name: The name of the TypeDescriptors that are retrieved.

parameterId: The MetadataObjectId of the Parameter.

level: The level of the TypeDescriptors that are retrieved. [<94>](#)

partitionId: An empty GUID.

3.1.4.84.2.2 GetTypeDescriptorsByNameAndLevelForParameterResponse

The result data for the **GetTypeDescriptorsByNameAndLevelForParameter** WSDL operation.

```
<xs:element name="GetTypeDescriptorsByNameAndLevelForParameterResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetTypeDescriptorsByNameAndLevelForParameterResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetTypeDescriptorsByNameAndLevelForParameterResult: The list of TypeDescriptors.

3.1.4.84.3 Complex Types

None.

3.1.4.84.4 Simple Types

None.

3.1.4.84.5 Attributes

None.

3.1.4.84.6 Groups

None.

3.1.4.84.7 Attribute Groups

None.

3.1.4.85 GetTypeDescriptorsForFilterDescriptor

This operation is used to retrieve TypeDescriptors referenced by the specified FilterDescriptor.

```
<wsdl:operation name="GetTypeDescriptorsForFilterDescriptor"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InputMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_OutputMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Metadata
ExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_BdcExcep
tionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
OutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InvalidO
perationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
NullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a

BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InputMessage request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The specified MetadataObjectId of the FilterDescriptor is 0.

3.1.4.85.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InputMessage	The request WSDL message for the GetTypeDescriptorsForFilterDescriptor WSDL operation.
BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_OutputMessage	The response WSDL message for the GetTypeDescriptorsForFilterDescriptor WSDL operation.

3.1.4.85.1.1

BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InputMessage

The request WSDL message for the **GetTypeDescriptorsForFilterDescriptor** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Get
TypeDescriptorsForFilterDescriptor

```


The SOAP body contains the **GetTypeDescriptorsForFilterDescriptor** element.

3.1.4.85.1.2

BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_OutputMessage

The response WSDL message for the **GetTypeDescriptorsForFilterDescriptor** WSDL operation.

The SOAP body contains the **GetTypeDescriptorsForFilterDescriptorResponse** element.

3.1.4.85.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetTypeDescriptorsForFilterDescriptor	The input data for the GetTypeDescriptorsForFilterDescriptor WSDL operation.
GetTypeDescriptorsForFilterDescriptorResponse	The result data for the GetTypeDescriptorsForFilterDescriptor WSDL operation.

3.1.4.85.2.1 GetTypeDescriptorsForFilterDescriptor

The input data for the **GetTypeDescriptorsForFilterDescriptor** WSDL operation.

```
<xs:element name="GetTypeDescriptorsForFilterDescriptor"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="filterDescriptorId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

filterDescriptorId: The MetadataObjectId of the FilterDescriptor.

partitionId: An empty GUID.

3.1.4.85.2.2 GetTypeDescriptorsForFilterDescriptorResponse

The result data for the **GetTypeDescriptorsForFilterDescriptor** WSDL operation.

```
<xs:element name="GetTypeDescriptorsForFilterDescriptorResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="GetTypeDescriptorsForFilterDescriptorResult" nillable="true"
        type="tns5:ArrayOfTypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

GetTypeDescriptorsForFilterDescriptorResult: The list of TypeDescriptors that are referenced by the specified FilterDescriptor.

3.1.4.85.3 Complex Types

None.

3.1.4.85.4 Simple Types

None.

3.1.4.85.5 Attributes

None.

3.1.4.85.6 Groups

None.

3.1.4.85.7 Attribute Groups

None.

3.1.4.86 GetTypeReflectorTypeNameForParameter

This operation is used to retrieve the implementation-specific name of the type of the TypeReflector of the specified Parameter.

```
<wsdl:operation name="GetTypeReflectorTypeNameForParameter"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeReflectorTypeNameForParameter"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeReflectorTypeNameForParameterResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeReflectorTypeNameForParameterArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeReflectorTypeNameForParameterArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_BdcExcept
ionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InvalidOp
erationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_MetadataE
xceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentN
ullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	The type specified by a type name of the TypeReflector of the specified Parameter is invalid according to the protocol server's implementation-specific rules.
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified Parameter is 0.

3.1.4.86.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMessage	The request WSDL message for the GetTypeReflectorTypeNameForParameter WSDL operation.
BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMessage	The response WSDL message for

Message	Description
meter_OutputMessage	the GetTypeReflectorTypeNameForParameter WSDL operation.

3.1.4.86.1.1

BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMessage

The request WSDL message for the **GetTypeReflectorTypeNameForParameter** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeReflectorTypeNameForParameter
```

The SOAP body contains the **GetTypeReflectorTypeNameForParameter** element.

3.1.4.86.1.2

BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMessage

The response WSDL message for the **GetTypeReflectorTypeNameForParameter** WSDL operation.

The SOAP body contains the **GetTypeReflectorTypeNameForParameterResponse** element.

3.1.4.86.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetTypeReflectorTypeNameForParameter	The input data for the GetTypeReflectorTypeNameForParameter WSDL operation.
GetTypeReflectorTypeNameForParameterResponse	The result data for the GetTypeReflectorTypeNameForParameter WSDL operation.

3.1.4.86.2.1 GetTypeReflectorTypeNameForParameter

The input data for the **GetTypeReflectorTypeNameForParameter** WSDL operation.

```
<xs:element name="GetTypeReflectorTypeNameForParameter"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

parameterStruct: The Parameter for which the type name of the TypeReflector will be retrieved.

3.1.4.86.2.2 GetTypeReflectorTypeNameForParameterResponse

The result data for the **GetTypeReflectorTypeNameForParameter** WSDL operation.

```
<xs:element name="GetTypeReflectorTypeNameForParameterResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetTypeReflectorTypeNameForParameterResult"
        nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetTypeReflectorTypeNameForParameterResult: The implementation-specific name of the type of the TypeReflector of the specified Parameter.

3.1.4.86.3 Complex Types

None.

3.1.4.86.4 Simple Types

None.

3.1.4.86.5 Attributes

None.

3.1.4.86.6 Groups

None.

3.1.4.86.7 Attribute Groups

None.

3.1.4.87 GetXmlSchemaForView

This operation is used to retrieve an XML schema definition (XSD) that specifies a data structure that can store the data corresponding to a View that corresponds to the specified MethodInstance. The resulting XSD MUST conform to [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#). The following types of **MethodInstance** have a **View** corresponding to them:

- SpecificFinder
- BulkSpecificFinder
- Finder

- AssociationNavigator
- BulkAssociationNavigator
- IdEnumerator
- ChangedIdEnumerator
- DeletedIdEnumerator
- BulkIdEnumerator
- Creator
- Updater

The MethodInstances of any other type do not have a View associated with them.

```
<wsdl:operation name="GetXmlSchemaForView" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForView"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewResponse"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForViewMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentException (section 2.2.4.7)	The specified MethodInstance does not have a View .<95>
ArgumentNullException (section 2.2.4.8)	The specified MethodInstance does not have a ReturnTypeDescriptor and it is not an Updater or a Creator .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is greater than 0x7fffffff.
BdcExceptionState (section 2.2.4.25)	The specified MethodInstance does not exist.

3.1.4.87.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage	The request WSDL message for the GetXmlSchemaForView WSDL operation.
BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage	The response WSDL message for the GetXmlSchemaForView WSDL operation.

3.1.4.87.1.1

BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage

The request WSDL message for the **GetXmlSchemaForView** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetXmlSchemaForView>

The SOAP body contains the **GetXmlSchemaForView** element.

3.1.4.87.1.2

BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage

The response WSDL message for the **GetXmlSchemaForView** WSDL operation.

The SOAP body contains the **GetXmlSchemaForViewResponse** element.

3.1.4.87.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetXmlSchemaForView	The input data for the GetXmlSchemaForView WSDL operation.
GetXmlSchemaForViewResponse	The result data for the GetXmlSchemaForView WSDL operation.

3.1.4.87.2.1 GetXmlSchemaForView

The input data for the **GetXmlSchemaForView** WSDL operation.

```
<xs:element name="GetXmlSchemaForView" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="methodInstanceStruct" nillable="true" type="tns5:MethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodInstanceStruct: The MethodInstance.

3.1.4.87.2.2 GetXmlSchemaForViewResponse

The result data for the **GetXmlSchemaForView** WSDL operation.

```
<xs:element name="GetXmlSchemaForViewResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetXmlSchemaForViewResult" nillable="true"
type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetXmlSchemaForViewResult: A string that contains the resulting XML schema. The XML schema MUST conform to [XMLSCHEMA1](#) and [XMLSCHEMA2](#). The XML namespace specified by the XML schema is implementation-specific [<96>](#). The XML schema MUST specify the **root element** that corresponds to the View. The name the root element MUST be equal to the name of the **View**. The root element MUST contain exactly one **XML element** for each of the fields (4) in the **View**. The XML element is declared based on the TypeDescriptors that correspond to fields (4). For each **TypeDescriptor** the corresponding XML element MUST be declared as follows:

- The name of the corresponding XML element MUST be equal to the name of the **TypeDescriptor**.
- If the **TypeDescriptor** contains one or more other **TypeDescriptors**, the corresponding XML element MUST be declared as a **complex type** that contains XML elements that correspond to **TypeDescriptors** contained by the **TypeDescriptor**.
- If the **TypeDescriptor** does not contain any **TypeDescriptors**, and the data type represented by the **TypeDescriptor** can be represented by a **simple type**, the corresponding XML element MUST be declared as that simple type. For example, if the data type represents a bit, the corresponding XML element is declared as "Boolean" simple type as specified in [\[XMLSCHEMA2\]](#) section 3.2.2.
- If the **TypeDescriptor** does not contain any **TypeDescriptors**, and the data type represented by the **TypeDescriptor** cannot be represented by a simple type, the corresponding XML element SHOULD be declared as a complex type that contains a single XML element as specified in [\[XMLSCHEMA0\]](#) section 5.5. However, if the data type represented by the **TypeDescriptor** can be represented by a set of simple types, the corresponding XML element MAY be declared as a complex type that contains XML elements to represent the set of simple types.
- If the **TypeDescriptor** is contained by another **TypeDescriptor** which has the **IsCollection** flag set to **true**, the value of the "maxOccurs" attribute as specified in [\[XMLSCHEMA1\]](#) section 3.3.2 MUST be "unbounded". Otherwise, the value MUST be 1.

XML elements corresponding to **TypeDescriptors** MUST contain the following annotations as specified in [\[XMLSCHEMA1\]](#) section 3.13. The XML elements MAY also contain additional implementation-specific annotations, or additional implementation-specific **XML attributes** for the XML elements that represent the annotations specified in this section. The XML namespace of the XML elements that correspond to annotations are implementation-specific. <97>

- If the **TypeDescriptor** has the **ReadOnly** flag set to **true**, the XML element MUST contain an annotation with name "FieldInfo", which has an XML attribute with name "ReadOnly" and value **true**.
- If the **TypeDescriptor** references an Identifier, and the **TypeDescriptor** references an Association, the XML element MUST contain an annotation with name "ForeignKeyInfo" that has the XML attributes in the following table specified with their names and values.

Name	Value
EntityNamespace	The namespace of the Entity that contains the Identifier referenced by the TypeDescriptor .
EntityName	The name of the Entity that contains the Identifier referenced by the TypeDescriptor .
IdentifierIndex	The index of the Identifier referenced by the TypeDescriptor , within the Entity that contains the Identifier .
AssociationName	The name of the Association referenced by the TypeDescriptor

- If the **TypeDescriptor** references an **Identifier**, and the **TypeDescriptor** does not reference an **Association**, the XML element MUST contain an annotation with name "KeyInfo" that has the XML attributes in the following table specified with their names and values.

Name	Value
EntityNamespace	The namespace of the Entity that contains the Identifier referenced by the TypeDescriptor .
EntityName	The name of the Entity that contains the Identifier referenced by the TypeDescriptor .
IdentifierIndex	The index of the Identifier referenced by the TypeDescriptor , within the Entity that contains the Identifier .

- If the **TypeDescriptor** contains localized names, the XML element MUST contain an annotation with name "LocalizedNames". The XML element that represents the annotation MUST contain XML elements with name "LocalizedName" for each localized name contained by the **TypeDescriptor**. The value of the "LocalizedName" element MUST be the localized name, and it MUST have an XML attribute with name "LCID" and the LCID of the localized name as the value.
- If the **TypeDescriptor** has a DefaultValue for the specified MethodInstance, and data type of the **DefaultValue** can be represented by a simple type, the XML element MUST contain an annotation with name "DefaultValue" and the data of **DefaultValue** as the value.

3.1.4.87.3 Complex Types

None.

3.1.4.87.4 Simple Types

None.

3.1.4.87.5 Attributes

None.

3.1.4.87.6 Groups

None.

3.1.4.87.7 Attribute Groups

None.

3.1.4.88 HaveRights

The **HaveRights** operation retrieves whether the security principal (2) in whose context the protocol client is operating has the specified permission on the specified MetadataObject based on the permissions specified by the ACEs in the specified Setting associated with the specified **MetadataObject**.

```
<wsdl:operation name="HaveRights" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/HaveRights" message="tns6:BusinessDataCatalogSharedService_HaveRights_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/HaveRightsResponse"/>
</wsdl:operation>
```

```

message="tns6:BusinessDataCatalogSharedService_HaveRights_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_ArgumentNullExceptionFault_FaultMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_ArgumentExceptionFault_FaultMessage
" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_ArgumentOutOfRangeExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_BdcExceptionStateFault_FaultMessage
" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_InvalidOperationExceptionFault_Faul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_MetadataExceptionStateFault_FaultMe
ssage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_HaveRights_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_HaveRights_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataObject is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.88.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_HaveRights_InputMessage	The request WSDL message for the HaveRights WSDL operation.
BusinessDataCatalogSharedService_HaveRights_OutputMessage	The response WSDL message for the HaveRights WSDL operation.

3.1.4.88.1.1 BusinessDataCatalogSharedService_HaveRights_InputMessage

The request WSDL message for the **HaveRights** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/HaveRights
```

The SOAP body contains the **HaveRights** element.

3.1.4.88.1.2 BusinessDataCatalogSharedService_HaveRights_OutputMessage

The response WSDL message for the **HaveRights** WSDL operation.

The SOAP body contains the **HaveRightsResponse** element.

3.1.4.88.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
HaveRights	The input data for the HaveRights WSDL operation.
HaveRightsResponse	The result data for the HaveRights WSDL operation.

3.1.4.88.2.1 HaveRights

The input data for the **HaveRights** WSDL operation.

```
<xs:element name="HaveRights" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
minOccurs="0" name="rights" type="tns:BdcRights"/>
      <xs:element minOccurs="0" name="fallBack" type="xs:boolean"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject. The partition (1) of this **MetadataObject** MUST be an empty GUID.

rights: The permission to check.

fallback: When the value of this element is **true**, the protocol server MUST use the ACEs in the default Setting for the specified **MetadataObject** if there are no ACEs exist in the specified **Setting** for the specified **MetadataObject**.

settingId: The **Setting** which contains the ACEs. If the value of this element is NULL the protocol server MUST use the ACEs contained by the default **Setting**.

3.1.4.88.2.2 HaveRightsResponse

The result data for the **HaveRights** WSDL operation.

```
<xs:element name="HaveRightsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="HaveRightsResult" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

HaveRightsResult: If the security principal (2) in whose context the protocol client is operating has the specified permissions, this value MUST be set to TRUE. Otherwise, this value MUST be set to FALSE.

3.1.4.88.3 Complex Types

None.

3.1.4.88.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
BdcRights	Specifies the permission given a security principal (1) on a MetadataObject.

3.1.4.88.4.1 BdcRights

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure

The **BdcRights** simple type represents a permission a given security principal (2) can have on a MetadataObject.

```
<xs:simpleType name="BdcRights" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="None"/>
        <xs:enumeration value="Execute"/>
        <xs:enumeration value="Edit"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
```

```

    <xs:enumeration value="SetPermissions"/>
    <xs:enumeration value="UseInBusinessDataInLists"/>
    <xs:enumeration value="SelectableInClients"/>
  </xs:restriction>
</xs:simpleType>
</xs:list>
</xs:simpleType>

```

The following table specifies the allowable values for **BdcRights**.

Value	Meaning
None	No permissions.
Execute	The security principal (2) has the permission to call a MethodInstance.
Edit	The security principal (2) has permission to change the attributes of a MetadataObject or its relationship to other MetadataObjects .
SetPermissions	The security principal (2) has permission to change the set of permissions for a MetadataObject .
UseInBusinessDataInLists	This value is obsolete and MUST NOT be used.
SelectableInClients	The security principal (2) has permission to select the MetadataObject this permission refers to in an implementation-specific user interface from a list of available MetadataObjects . If the security principal (2) does not have this permission, the MetadataObject SHOULD NOT be presented in such a list.

3.1.4.88.5 Attributes

None.

3.1.4.88.6 Groups

None.

3.1.4.88.7 Attribute Groups

None.

3.1.4.89 ImportPackage

This operation is used to create the following objects in the metadata store:

- MetadataObjects contained by the specified MetadataModel along with their Properties, localized names and ACEs, if "Model" value is specified for the **packageContents** element. The **MetadataModel** MUST be specified as an XML that conforms to [\[MS-BDCMFFS\]](#) section 2.1.4.1. If the **MetadataModel** contains a LobSystem that has the same name and type as a **LobSystem** in the metadata store, the **LobSystem** in the **MetadataModel** MUST be ignored by the protocol server along with all LobSystemInstances contained by that **LobSystem** along with Properties, localized names and ACEs of the ignored MetadataObjects. If the **MetadataModel** contains an Entity that has the same name, namespace and version as an Entity in the metadata store, and if the names of the **LobSystems** that contain these **Entities** are identical, the **Entity** in the **MetadataModel** MUST be ignored by the protocol server along with all **MetadataObjects**

contained by the **Entity** or other ignored **MetadataObjects** along with the **Properties**, localized names, and ACEs of the ignored **MetadataObjects**.

- Localized names, **Properties**, and ACEs corresponding to **MetadataObjects** contained by the specified **MetadataModel**, if "Model" value is not specified for the **packageContents** element. The **MetadataModel** MUST be specified as an XML that conforms to [\[MS-BDCMFFS\]](#) section 2.2.4.1.

```
<wsdl:operation name="ImportPackage" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackage"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageResponse"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackagePackageFormatExceptionStateFault"
    name="PackageFormatExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_PackageFormatExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_ImportPackage_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_ImportPackage_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_ImportPackage_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to create or modify the specified Model.
PackageFormatExceptionState (section 2.2.4.48)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The "Model" value is specified for the packageContents element and the specified XML does not conform to [MS-BDCMFFS] section 2.1.4.1. ▪ The "Model" value is not specified for the packageContents element and the specified XML does not conform to [MS-BDCMFFS] section 2.2.4.1. ▪ The value of the updateModel element is "false", the "Model" value is specified for packageContents element and there is already another Model with the same name as the Model contained by the MetadataModel in the specified Partition. ▪ The value of the updateModel element is "true", the "Model" value is specified for packageContents element and the Model contained by the MetadataModel does not exist in the specified Partition. ▪ The "Model" value is not specified for the packageContents element and at least one the MetadataObjects contained by the MetadataModel does not exist in the metadata store. ▪ The "Model" value is specified for the packageContents element and one of the LobSystems contained by the MetadataModel has the same name as a LobSystem in the metadata store, but the LobSystem contained by the MetadataModel has a different type than the LobSystem in the metadata store. ▪ The "Model" value is specified for the packageContents element and one of the Entities contained by the MetadataModel has the same name, namespace and version as an Entity in the metadata store, but the names of the LobSystems that contain these Entities are not identical. ▪ The "InlineProxies" value is specified for the packageContents element and the specified MetadataModel contains LobSystem with an associated Business Logic Module. ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a Method that contains more than one FilterDescriptor of type

Error complex type	Condition
	<p>TimeStampFilter.</p> <ul style="list-style-type: none"> ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a StreamAccessor that specifies ReturnPropertyDescriptor that contains other TypeDescriptors. ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a StreamAccessor and the TypeDescriptor containing the ReturnPropertyDescriptor of this MethodInstance contains another TypeDescriptor under its parent TypeDescriptor, and the LOBSystem containing the Entity which contains this StreamAccessor has type specified as "Database". ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains MethodInstance, and the Method for which this MethodInstance is being created does not have a Parameter whose Direction is "In" or "InOut" and the type of the this MethodInstance, is one of the following values: <ul style="list-style-type: none"> ▪ AccessChecker ▪ AssociationNavigator ▪ Associator ▪ BinarySecurityDescriptorAccessor ▪ BulkAssociatedIdEnumerator ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ BulkSpecificFinder ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Deleter ▪ Disassociator ▪ SpecificFinder ▪ Updater ▪ StreamAccessor ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a MethodInstance, the Method containing this MethodInstance is not contain a TimeStampFilter and the type of this MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ ChangedIdEnumerator

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ DeletedIdEnumerator

3.1.4.89.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ImportPackage_InputMessage	The request WSDL message for the ImportPackage WSDL operation.
BusinessDataCatalogSharedService_ImportPackage_OutputMessage	The response WSDL message for the ImportPackage WSDL operation.

3.1.4.89.1.1 BusinessDataCatalogSharedService_ImportPackage_InputMessage

The request WSDL message for the **ImportPackage** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackage
```

The SOAP body contains the **ImportPackage** element.

3.1.4.89.1.2 BusinessDataCatalogSharedService_ImportPackage_OutputMessage

The response WSDL message for the **ImportPackage** WSDL operation.

The SOAP body contains the **ImportPackageResponse** element.

3.1.4.89.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ImportPackage	The input data for the ImportPackage WSDL operation.
ImportPackageResponse	The result data for the ImportPackage WSDL operation.

3.1.4.89.2.1 ImportPackage

The input data for the **ImportPackage** WSDL operation.

```
<xs:element name="ImportPackage" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="adminStruct" nillable="true" type="tns5:AdministrationMetadataCatalogStruct"/>
    <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    <xs:element minOccurs="0" name="updateModel" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

xml: The XML representation of the **MetadataModel** that conforms to [\[MS-BDCMFFS\]](#).

packageContents: Specifies what part of the **MetadataModel** are to be created. The protocol server MUST follow the following rules:

- If the "Model" value is specified, this operation MUST create **MetadataObjects** in the metadata store. The protocol server MUST set all the **Entities** contained by the specified **MetadataModel** as active. If any of the **Entities** contain reference errors as specified in section [3.1.4.4.3.2](#), the protocol server MUST NOT set any **Entity** contained by the specified **MetadataModel** as active.
- If "Model" value is not specified the protocol server MUST NOT create any **MetadataObjects**.

If the "Properties" value is specified the protocol server MUST create the specified **Properties** for the corresponding **MetadataObjects**. If the metadata store already contains a **Property** with the same name in the specified **Setting** for the **MetadataObject**, the **Property** in the metadata store MUST be replaced.

- If the "Properties" value is not specified the protocol server MUST ignore **Properties** in the specified **MetadataModel**.
- If the "LocalizedNames" value is specified the protocol server MUST create the specified localized names for the corresponding **MetadataObjects**. If the metadata store already contains a localized name with the same LCID in the specified **Setting** for the **MetadataObject**, the localized name in the metadata store MUST be replaced.
- If the "LocalizedNames" value is not specified the protocol server MUST ignore localized names in the specified **MetadataModel**.
- If the "Permissions" value is specified the protocol server MUST delete **ACEs** in the metadata store for the corresponding **MetadataObjects** and create the specified **ACEs** for the corresponding **MetadataObjects**.
- If the "Permissions" value is not specified the protocol server MUST ignore **ACEs** in the specified **MetadataModel**.

adminStruct: The **MetadataCatalog** that contains the **Model** contained by the **MetadataModel**. If the "Model" value is specified for the **packageContents** element, the protocol server MUST create the **Model** in the specified **MetadataCatalog**.

settingId: The **Setting** to create the **Properties**, localized names, and **ACEs** in.

callerCultureLcid: Specifies the LCID corresponding to the locale in which the error messages are to be returned for. If the protocol server is capable of generating error messages in the specified locale, all error messages MUST be generated for the specified locale. Otherwise, protocol server MUST return errors in a locale determined with an implementation-specific algorithm.

updateModel: Specifies if the **Model** contained by the **MetadataModel** already exists in the metadata store. If the value of this element is **true**, the protocol server **MUST** remove all Entity references from the **Model**. Then, the protocol server **MUST** create **Entity** references in the **Model** to all the **Entities** contained by the specified **MetadataModel**. If the "Model" value is not specified for the **packageContents** element the value of this element **MUST** be ignored.

3.1.4.89.2.2 ImportPackageResponse

The result data for the **ImportPackage** WSDL operation.

```
<xs:element name="ImportPackageResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="ImportPackageResult" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

ImportPackageResult: The Model from the metadata store that is corresponding to the specified MetadataModel.

errors: The list of implementation-specific error messages corresponding to the errors encountered during this operation as well as other implementation-specific informational messages related to the operation.

3.1.4.89.3 Complex Types

None.

3.1.4.89.4 Simple Types

None.

3.1.4.89.5 Attributes

None.

3.1.4.89.6 Groups

None.

3.1.4.89.7 Attribute Groups

None.

3.1.4.90 ImportPackageWithProgress

This operation is used to create the following objects in the metadata store:

- MetadataObjects contained by the specified MetadataModel along with their Properties, localized names, and ACEs, if "Model" value is specified for the **packageContents** element. The **MetadataModel** **MUST** be specified as an XML that conforms to [\[MS-BDCMFFS\]](#) section 2.1.4.1.

If the **MetadataModel** contains a **LobSystem** that has the same name and type as a **LobSystem** in the metadata store, the **LobSystem** in the **MetadataModel** MUST be ignored by the protocol server along with all **LobSystemInstances** contained by that **LobSystem** along with **Properties**, localized names and ACEs of the ignored **MetadataObjects**. If the **MetadataModel** contains an **Entity** that has the same name, namespace and version as an **Entity** in the metadata store, and if the names of the **LobSystems** that contain these **Entities** are identical, the **Entity** in the **MetadataModel** MUST be ignored by the protocol server along with all **MetadataObjects** contained by the **Entity** or other ignored **MetadataObjects** along with the **Properties**, localized names, and ACEs of the ignored **MetadataObjects**.

- Localized names, **Properties**, and ACEs corresponding to **MetadataObjects** contained by the specified **MetadataModel**, if "Model" value is not specified for the **packageContents** element. The **MetadataModel** MUST be specified as an XML that conforms to [\[MS-BDCMFFS\]](#) section 2.2.4.1.

The protocol server MUST track the progress of this operation with the specified identifier. The protocol client can retrieve the progress of this operation by using [GetImportProgress](#) operation with the specified identifier.

```
<wsdl:operation name="ImportPackageWithProgress"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgress"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressResponse"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_BdcExceptionStateFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentNullExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_MetadataExceptionSta
teFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_InvalidOperationExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/ImportPackageWithProgressPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_PackageFormatExcepti
onStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentOutOfRangeEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to create or modify the specified Model.
PackageFormatExceptionState (section 2.2.4.48)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The "Model" value is specified for the packageContents element and the specified XML does not conform to [MS-BDCMFFS] section 2.1.4.1. ▪ The "Model" value is not specified for the packageContents element and the specified XML does not conform to [MS-BDCMFFS] section 2.2.4.1. ▪ The value of the updateModel element is "false", the "Model" value is specified for packageContents element and there is already another Model with the same name as the Model contained by the MetadataModel in the specified Partition. ▪ The value of the updateModel element is "true", the "Model" value is specified for packageContents element and the Model contained by the MetadataModel does not exist in the specified Partition. ▪ The "Model" value is not specified for the packageContents element and at least one the MetadataObjects contained by the MetadataModel does not exist in the metadata store. ▪ The "Model" value is specified for the packageContents element and one of the LobSystems contained by the MetadataModel has the same name as a LobSystem in the metadata store, but the LobSystem contained by the MetadataModel has a different type than the LobSystem in the metadata store. ▪ The "Model" value is specified for the packageContents

Error complex type	Condition
	<p>element and one of the Entities contained by the MetadataModel has the same name, namespace and version as an Entity in the metadata store, but the names of the LobSystems that contain these Entities are not identical.</p> <ul style="list-style-type: none"> ▪ The "InlineProxies" value is specified for the packageContents element and the specified MetadataModel contains LobSystem with an associated Business Logic Module. ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a Method that contains more than one FilterDescriptor of type TimeStampFilter. ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a StreamAccessor that specifies ReturnPropertyDescriptor that contains other TypeDescriptors. ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a StreamAccessor and the TypeDescriptor containing the ReturnPropertyDescriptor of this MethodInstance contains another TypeDescriptor under its parent TypeDescriptor, and the LobSystem containing the Entity which contains this StreamAccessor has type specified as "Database". ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains MethodInstance, and the Method for which this MethodInstance is being created does not have a Parameter whose Direction is "In" or "InOut" and the type of the this MethodInstance, is one of the following values: <ul style="list-style-type: none"> ▪ AccessChecker ▪ AssociationNavigator ▪ Associator ▪ BinarySecurityDescriptorAccessor ▪ BulkAssociatedIdEnumerator ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ BulkSpecificFinder ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Deleter ▪ Disassociator ▪ SpecificFinder

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ Updater ▪ StreamAccessor ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a MethodInstance, the Method containing this MethodInstance is not contain a TimeStampFilter and the type of this MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator

3.1.4.90.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage	The request WSDL message for the ImportPackageWithProgress WSDL operation.
BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage	The response WSDL message for the ImportPackageWithProgress WSDL operation.

3.1.4.90.1.1

BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage

The request WSDL message for the **ImportPackageWithProgress** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageWithProgress
```

The SOAP body contains the **ImportPackageWithProgress** element.

3.1.4.90.1.2

BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage

The response WSDL message for the **ImportPackageWithProgress** WSDL operation.

The SOAP body contains the **ImportPackageWithProgressResponse** element.

3.1.4.90.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ImportPackageWithProgress	The input data for the ImportPackageWithProgress WSDL operation.
ImportPackageWithProgressResponse	The result data for the ImportPackageWithProgress WSDL operation.

3.1.4.90.2.1 ImportPackageWithProgress

The input data for the **ImportPackageWithProgress** WSDL operation.

```
<xs:element name="ImportPackageWithProgress" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="adminStruct" nillable="true" type="tns5:AdministrationMetadataCatalogStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element minOccurs="0" name="updateModel" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="jobId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

xml: The XML representation of the **MetadataModel** that conforms to [\[MS-BDCMFFS\]](#).

packageContents: Specifies what part of the **MetadataModel** are to be created. The protocol server MUST follow the following rules:

- If the "Model" value is specified, this operation MUST create **MetadataObjects** in the metadata store. The protocol server MUST set all the **Entities** contained by the specified **MetadataModel** as active. If any of the **Entities** contain reference errors as specified in section [3.1.4.4.3.2](#), the protocol server MUST NOT set any **Entity** contained by the specified **MetadataModel** as active.
- If "Model" value is not specified the protocol server MUST NOT create any **MetadataObjects**.
- If the "Properties" value is specified the protocol server MUST create the specified **Properties** for the corresponding **MetadataObjects**. If the metadata store already contains a **Property** with the same name in the specified Setting for the **MetadataObject**, the **Property** in the metadata store MUST be replaced.
- If the "Properties" value is not specified the protocol server MUST ignore **Properties** in the specified **MetadataModel**.
- If the "LocalizedNames" value is specified the protocol server MUST create the specified localized names for the corresponding **MetadataObjects**. If the metadata store already contains a

localized name with the same LCID in the specified **Setting** for the **MetadataObject**, the localized name in the metadata store MUST be replaced.

- If the "LocalizedNames" value is not specified the protocol server MUST ignore localized names in the specified **MetadataModel**.
- If the "Permissions" value is specified the protocol server MUST delete ACEs in the metadata store for the corresponding **MetadataObjects** and create the specified ACEs for the corresponding **MetadataObjects**.
- If the "Permissions" value is not specified the protocol server MUST ignore ACEs in the specified **MetadataModel**.

adminStruct: The MetadataCatalog that contains the **Model** contained by the **MetadataModel**. If the "Model" value is specified for the **packageContents** element, the protocol server MUST create the **Model** in the specified **MetadataCatalog**.

settingId: The **Setting** in which to create the **Properties**, localized names, and ACEs.

callerCultureLcid: Specifies the LCID corresponding to the locale in which the error messages are to be returned for. If the protocol server is capable of generating error messages in the specified locale, all error messages MUST be generated for the specified locale. Otherwise, protocol server MUST return errors in a locale determined with an implementation-specific algorithm.

updateModel: Specifies if the **Model** contained by the **MetadataModel** already exists in the metadata store. If the value of this element is **true**, the protocol server MUST remove all **Entity** references from the **Model**. Then, the protocol server MUST create **Entity** references in the **Model** to all the **Entities** contained by the specified **MetadataModel**. If the "Model" value is not specified for the **packageContents** element the value of this element MUST be ignored.

jobId: Identifier for the operation. The value of this element MUST be unique across all requests for this operation.

3.1.4.90.2.2 ImportPackageWithProgressResponse

The result data for the **ImportPackageWithProgress** WSDL operation.

```
<xs:element name="ImportPackageWithProgressResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="ImportPackageWithProgressResult" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

ImportPackageWithProgressResult: The Model from the metadata store that is corresponding to the specified MetadataModel.

errors: The list of implementation-specific error messages corresponding to the errors encountered during this operation as well as other implementation-specific informational messages related to the operation.

3.1.4.90.3 Complex Types

None.

3.1.4.90.4 Simple Types

None.

3.1.4.90.5 Attributes

None.

3.1.4.90.6 Groups

None.

3.1.4.90.7 Attribute Groups

None.

3.1.4.91 IsMethodInstantiated

This operation is used to determine if the specified Method contains at least one MethodInstance.

```
<wsdl:operation name="IsMethodInstantiated" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiated"
    message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedResponse"
    message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedArgumentExceptionFault"
    name="ArgumentExceptionFault"
  </wsdl:fault>
</wsdl:output>
</wsdl:operation>
```

```

message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiatedArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage** response message.

3.1.4.91.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage	The request WSDL message for the IsMethodInstantiated WSDL operation.
BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage	The response WSDL message for the IsMethodInstantiated WSDL operation.

3.1.4.91.1.1

BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage

The request WSDL message for the **IsMethodInstantiated** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsMethodInstantiated

```

The SOAP body contains the **IsMethodInstantiated** element.

3.1.4.91.1.2

BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage

The response WSDL message for the **IsMethodInstantiated** WSDL operation.

The SOAP body contains the **IsMethodInstantiatedResponse** element.

3.1.4.91.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
IsMethodInstantiated	The input data for the IsMethodInstantiated WSDL operation.
IsMethodInstantiatedResponse	The result data for the IsMethodInstantiated WSDL operation.

3.1.4.91.2.1 IsMethodInstantiated

The input data for the **IsMethodInstantiated** WSDL operation.

```
<xs:element name="IsMethodInstantiated" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

methodId: The MetadataObjectId for the Method.

partitionId: An empty GUID.

3.1.4.91.2.2 IsMethodInstantiatedResponse

The result data for the **IsMethodInstantiated** WSDL operation.

```
<xs:element name="IsMethodInstantiatedResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="IsMethodInstantiatedResult" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

IsMethodInstantiatedResult: The value of this element MUST be "true", if the Method contains at least one MethodInstance. Otherwise it MUST be set to "false".

3.1.4.91.3 Complex Types

None.

3.1.4.91.4 Simple Types

None.

3.1.4.91.5 Attributes

None.

3.1.4.91.6 Groups

None.

3.1.4.91.7 Attribute Groups

None.

3.1.4.92 IsParameterReferencedByMethodInstance

The **IsParameterReferencedByMethodInstance** operation checks whether the specified Parameter contains any TypeDescriptor that is the ReturnPropertyDescriptor of any MethodInstance contained by the Method containing the **Parameter**.

```
<wsdl:operation name="IsParameterReferencedByMethodInstance"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstance"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceResponse"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMe
ssage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Argument
OutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Argument
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Argument
NullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_BdcExcep
tionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InvalidO
perationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Metadata
ExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified Parameter is 0.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Parameter does not exist.

3.1.4.92.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMessage	The request WSDL message for the IsParameterReferencedByMethodInstance WSDL operation.
BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMessage	The response WSDL message for the IsParameterReferencedByMethodInstance WSDL operation.

3.1.4.92.1.1

BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMessage

The request WSDL message for the **IsParameterReferencedByMethodInstance** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/IsParameterReferencedByMethodInstance>

The SOAP body contains the **IsParameterReferencedByMethodInstance** element.

3.1.4.92.1.2

BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMessage

The response WSDL message for the **IsParameterReferencedByMethodInstance** WSDL operation.

The SOAP body contains the **IsParameterReferencedByMethodInstanceResponse** element.

3.1.4.92.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
IsParameterReferencedByMethodInstance	The input data for the IsParameterReferencedByMethodInstance WSDL operation.
IsParameterReferencedByMethodInstanceResponse	The result data for the IsParameterReferencedByMethodInstance WSDL operation.

3.1.4.92.2.1 IsParameterReferencedByMethodInstance

The input data for the **IsParameterReferencedByMethodInstance** WSDL operation.

```
<xs:element name="IsParameterReferencedByMethodInstance"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

parameterId: The MetadataObjectId for the Parameter.

partitionId: An empty GUID.

3.1.4.92.2.2 IsParameterReferencedByMethodInstanceResponse

The result data for the **IsParameterReferencedByMethodInstance** WSDL operation.

```
<xs:element name="IsParameterReferencedByMethodInstanceResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="IsParameterReferencedByMethodInstanceResult"
        type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

IsParameterReferencedByMethodInstanceResult: If the value of this element is **true**, the specified Parameter contains a ReturnPropertyDescriptor. If the value of this element is **false**, the specified **Parameter** does not contain a **ReturnPropertyDescriptor**. [<98>](#)

3.1.4.92.3 Complex Types

None.

3.1.4.92.4 Simple Types

None.

3.1.4.92.5 Attributes

None.

3.1.4.92.6 Groups

None.

3.1.4.92.7 Attribute Groups

None.

3.1.4.93 MetadataObjectCreate

This operation is used to create a MetadataObject in the metadata store. If the specified **MetadataObject** is a MetadataCatalog, and another **MetadataCatalog** with the same Partition as the specified **MetadataCatalog** already exists, then this operation **MUST NOT** change the state of the data in the metadata store.

```
<wsdl:operation name="MetadataObjectCreate" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreate"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreateResponse"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreateArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreateBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreateMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreateInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
  </wsdl:fault
</wsdl:operation>
```

```

message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_InvalidOperationException
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentNullExceptionFaul
t_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The rawValues element specifies a LobSystem and the security principal in whose context the protocol client is operating is not authorized to modify the MetadataCatalog specified by the parentStruct element. ▪ The rawValues element specifies a LobSystemInstance and the security principal in whose context the protocol client is operating is not authorized to modify the LobSystem specified by the parentStruct element. ▪ The rawValues element specifies an Identifier and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. ▪ The rawValues element specifies an Action and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. ▪ The rawValues element specifies an ActionParameter and the security principal in whose context the protocol client is operating is not authorized to modify the Entity that contains the Action specified by the parentStruct element.

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ The rawValues element specifies a Method and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. ▪ The rawValues element specifies an AssociationGroup and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. ▪ The rawValues element specifies a MethodInstance and the security principal in whose context the protocol client is operating is not authorized to modify the Method specified by the parentStruct element. ▪ The rawValues element specifies a Parameter and the security principal in whose context the protocol client is operating is not authorized to modify the Method specified by the parentStruct element. ▪ The rawValues element specifies a FilterDescriptor and the security principal in whose context the protocol client is operating is not authorized to modify the Method specified by the parentStruct element. ▪ The rawValues element specifies an Association and the security principal in whose context the protocol client is operating is not authorized to modify the Entity containing the Method specified by the parentStruct element.
ArgumentException (section 2.2.4.7)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The rawValues element specifies a MetadataObject with invalid attributes. ▪ The rawValues element specifies a MethodInstance that specifies a ReturnTypeDescriptor that is not contained by any Parameters that are contained by the Method specified by the parentStruct element. ▪ The rawValues element specifies a MethodInstance that specifies a ReturnTypeDescriptor that is contained by a Parameter with direction "In". ▪ The rawValues element specifies a MethodInstance that does not specify a ReturnTypeDescriptor and the type of the specified MethodInstance is one of the following values:

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ AccessChecker ▪ AssociationNavigator ▪ BulkAssociatedIdEnumerator ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ BulkSpecificFinder ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Finder ▪ IdEnumerator ▪ Scalar ▪ SpecificFinder ▪ StreamAccessor ▪ The rawValues element specifies a MethodInstance that has a ReturnTypeDescriptor with isCollection element value set to "false" in the typeDescriptorFlags element, and the type of the specified MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ Finder ▪ IdEnumerator ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ BulkSpecificFinder ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ The rawValues element specifies a MethodInstance that has a ReturnTypeDescriptor with isCollection element value set to "true" in the typeDescriptorFlags element and the type of the specified MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ SpecificFinder ▪ Scalar

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ AccessChecker ▪ Creator ▪ StreamAccessor ▪ The rawValues element specifies a MethodInstance that has a ReturnPropertyDescriptor that contains other TypeDescriptors, and the type of the specified MethodInstance is "StreamAccessor". ▪ The rawValues element specifies a MethodInstance and the TypeDescriptor that contains the ReturnPropertyDescriptor of the MethodInstance also contains other TypeDescriptors, and the LobSystem that contains the DataClass that contains the Method that contains the MethodInstance does not allow this configuration, and the specified MethodInstance is a StreamAccessor. ▪ The rawValues element specifies a MethodInstance, and the Method specified by the parentStruct element does not contain a TimeStampFilter, and the type of the specified MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ The rawValues element specifies a MethodInstance that requires an input but the Method specified by parentStruct does not contain any Parameters with direction "In" or "InOut". ▪ The rawValues element specifies a FilterDescriptor of type TimeStampFilter, but the Method specified by the parentStruct already contains a TimeStampFilter. ▪ The rawValues element specifies a Parameter with direction "Return" but the Method specified by parentStruct already contains another Parameter with direction "Return". ▪ The rawValues element specifies an Association and the same Entity is specified as a source of the Association more than once.
BdcExceptionState (section 2.2.4.25)	The MetadataObject specified in rawValues element is an Entity or a TypeDescriptor .
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The rawValues element specifies a LobSystem and another LobSystem with the same name

Error complex type	Condition
	<p>already exists in the metadata store.</p> <ul style="list-style-type: none"> ▪ The rawValues element specifies a MethodInstance and the DataClass, which contains the Method specified by the parentStruct element, already contains another Method that contains a MethodInstance with the same name as the specified MethodInstance. ▪ The rawValues element specifies an Association and the DataClass, which contains the Method specified by the parentStruct element, already contains another Method that contains an Association with the same name as the specified Association. ▪ On the server, if two threads are calling the same function at the same time, and the rawValues element of both threads specifies a MetadataCatalog with the same Partition, then one thread can cause the server to respond with a DuplicateMetadataObjectExceptionState exception. ▪ The MetadataObject specified by the parentStruct element already contains another MetadataObject that has same name and type as the MetadataObject specified by the rawValues element.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The MetadataObject specified by the parentStruct element already contains the implementation-specific maximum number of MetadataObjects that have the same type as the MetadataObject specified by the rawValues element. ▪ The rawValues element specifies a MethodInstance that is of type IdEnumerator, AccessChecker, Deleter, ChangedIdEnumerator, DeletedIdEnumerator, or BulkIdEnumerator, but the DataClass containing the Method specified by the parentStruct element already has another MethodInstance of the same type.
InvalidOperationException (section 2.2.4.38)	<p>The MetadataObject specified by the parentStruct is contained by an active Entity.<99></p>
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The MetadataObject specified by the parentStruct element does not exist in the metadata store. ▪ The rawValues element specifies a

Error complex type	Condition
	MetadataObject other than Association that references another MetadataObject that does not exist in the metadata store.

If the **rawValues** element specifies any of the **MetadataObjects** in the following table, the protocol server MUST perform the corresponding actions, in addition to creating the **MetadataObject** in the metadata store.

MetadataObject	Action
Identifier	Set the "OrdinalNumber" attribute of the created Identifier to 1 plus the maximum value of "OrdinalNumber" attributes of all the Identifiers contained by the Entity specified by the parentStruct element.
Parameter	Set the "OrdinalNumber" attribute of the created Parameter to 1 plus the maximum value of "OrdinalNumber" attributes of all the Parameters contained by the Method specified by the parentStruct element.
MethodInstance	Set the IsDefault attributes of all other MethodInstances of type equal to the type of the created MethodInstance within the DataClass that contains the Method specified by the parentStruct element to false , if the IsDefault attribute is true on the created MethodInstance . If the IsDefault attribute is false on the created MethodInstance , and the DataClass that contains the Method specified by the parentStruct element does not contain any other MethodInstance that has the type equal to the type of the created MethodInstance , the protocol server MUST set the IsDefault attribute of the created MethodInstance to true . Copy the ACEs from the Entity that contains the Method specified by the parentStruct to the created MethodInstance .
LobSystem	Copy the ACEs from the MetadataCatalog specified by the parentStruct to the created LobSystem .
Model	Copy the ACEs from the MetadataCatalog specified by the parentStruct to the created Model .
Method	Copy the ACEs from the Entity specified by the parentStruct to the created Method .

3.1.4.93.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage	The request WSDL message for the MetadataObjectCreate WSDL operation.
BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage	The response WSDL message for the MetadataObjectCreate WSDL operation.

3.1.4.93.1.1

BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage

The request WSDL message for the **MetadataObjectCreate** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectCreate
```

The SOAP body contains the **MetadataObjectCreate** element.

3.1.4.93.1.2

BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage

The response WSDL message for the **MetadataObjectCreate** WSDL operation.

The SOAP body contains the **MetadataObjectCreateResponse** element.

3.1.4.93.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
MetadataObjectCreate	The input data for the MetadataObjectCreate WSDL operation.
MetadataObjectCreateResponse	The result data for the MetadataObjectCreate WSDL operation.

3.1.4.93.2.1 MetadataObjectCreate

The input data for the **MetadataObjectCreate** WSDL operation.

```
<xs:element name="MetadataObjectCreate" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="rawValues" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

rawValues: Specifies the MetadataObject to create. The protocol client MUST specify values for all the elements in this complex type.

parentStruct: Specifies the MetadataObject in which to create the new MetadataObject in.

3.1.4.93.2.2 MetadataObjectCreateResponse

The result data for the **MetadataObjectCreate** WSDL operation.


```
<xs:element name="MetadataObjectCreateResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="MetadataObjectCreateResult" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

MetadataObjectCreateResult: The created MetadataObject. [<100>](#) If the **MetadataObject** specified in the request is a MetadataCatalog, and another **MetadataCatalog** with the same Partition as the specified **MetadataCatalog** already exists in the metadata store, this operation **MUST** return the already existing **MetadataCatalog**.

3.1.4.93.3 Complex Types

None.

3.1.4.93.4 Simple Types

None.

3.1.4.93.5 Attributes

None.

3.1.4.93.6 Groups

None.

3.1.4.93.7 Attribute Groups

None.

3.1.4.94 MetadataObjectMergeXml

This operation is used to merge the Properties, localized names, and ACEs contained by the specified MetadataModel into the existing MetadataObjects in the metadata store. The **MetadataModel** **MUST** be specified as a Well-Formed External Parsed Entity according to [XML](#) section 4.3.2 and **MUST** have one of the following elements as the root element:

- Action element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.27.
- ActionParameter element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.29.
- Association element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.30.
- AssociationGroup element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.13
- Entity element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.11.
- FilterDescriptor element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.19.
- Identifier element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.15.

- LobSystem element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.7.
- LobSystemInstance element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.9.
- Method element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.17.
- MethodInstance element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.21.
- Model element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.1
- Parameter element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.23.

```

<wsdl:operation name="MetadataObjectMergeXml"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXml"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlResponse"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_BdcExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_MetadataExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_PackageFormatExceptionStateFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXmlArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
BdcExceptionState (section 2.2.4.25)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The mergedStruct element specifies a TypeDescriptor. ▪ The "Properties" value is specified in the packageContents element, the specified MetadataModel contains Properties for a MetadataObject, and the security principal (2) in whose context the protocol client is operating is not authorized to modify that MetadataObject. ▪ The "LocalizedNames" value is specified in the packageContents element, the specified MetadataModel contains localized names for a MetadataObject, and the security principal (2) in whose context the protocol client is operating is not authorized to modify that MetadataObject. ▪ The "Permissions" value is specified in the packageContents element, the specified MetadataModel contains ACEs for a MetadataObject, and the security principal (2) in whose context the protocol client is operating is not authorized to set permissions for that MetadataObject.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified MetadataModel contains one or more MetadataObjects that already contain the implementation-specific maximum number of Properties and the packageContents element has "Properties" set in its value.
InvalidOperationException (section 2.2.4.38)	One of the following conditions applies:

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ The specified MetadataModel contains one or more MetadataObjects that already contain the implementation-specific maximum number of localized names and the packageContents element has "LocalizedNames" in its value. ▪ The specified MetadataModel contains one or more MetadataObjects which does not contain any ACE that specifies "SetPermissions" permission, and the packageContents element has "Permissions" in its value, and the specified MetadataObject is one of the following: <ul style="list-style-type: none"> ▪ Association ▪ MetadataCatalog ▪ Model ▪ ObjSystem ▪ Entity ▪ Method ▪ MethodInstance
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	One or more MetadataObjects specified by the MetadataModel do not exist in the metadata store. <101>
PackageFormatExceptionState (section 2.2.4.48)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified MetadataModel does not conform to [MS-BDCMFFS] section 2.2. <102> ▪ One or more MetadataObjects specified by the MetadataModel do not exist in the metadata store. ▪ The "Model" value is specified in the packageContents element.

3.1.4.94.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage	The request WSDL message for the MetadataObjectMergeXml WSDL operation.
BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage	The response WSDL

Message	Description
	message for the MetadataObjectMergeXml WSDL operation.

3.1.4.94.1.1

BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage

The request WSDL message for the **MetadataObjectMergeXml** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectMergeXml
```

The SOAP body contains the **MetadataObjectMergeXml** element.

3.1.4.94.1.2

BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage

The response WSDL message for the **MetadataObjectMergeXml** WSDL operation.

The SOAP body contains the **MetadataObjectMergeXmlResponse** element.

3.1.4.94.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
MetadataObjectMergeXml	The input data for the MetadataObjectMergeXml WSDL operation.
MetadataObjectMergeXmlResponse	The result data for the MetadataObjectMergeXml WSDL operation.

3.1.4.94.2.1 MetadataObjectMergeXml

The input data for the **MetadataObjectMergeXml** WSDL operation.

```
<xs:element name="MetadataObjectMergeXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="mergedStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

</xs:element>

xml: The XML representation of the **MetadataModel** that conforms to [\[MS-BDCMFFS\]](#) section 2.2.

packageContents: Specifies the parts of the **MetadataModel** to be merged into the existing **MetadataObjects**. The protocol server MUST follow the following rules:

- If the "Properties" value is specified the protocol server MUST merge the Properties for the corresponding **MetadataObjects** for the specified Setting. During this merge, if a Property, that has the same name as the **Property** specified by the **MetadataModel**, already exists for the specified **MetadataObject**, then the protocol server MUST remove the already existing Property and then create a new **Property** that corresponds to the Property specified in the **MetadataModel**. If a **Property** with the specified name does not exist for the specified **MetadataObject**, then the protocol server MUST create a new Property that corresponds to the **Property** specified in the **MetadataModel**.
- If the "Properties" value is not specified the protocol server MUST ignore **Properties** in the specified **MetadataModel**.
- If the "LocalizedNames" value is specified the protocol server MUST merge the localized names for the corresponding **MetadataObjects** for the specified **Setting**. During this merge, if a localized name, that has the same LCID and **Setting** as the localized name specified by the **MetadataModel**, already exists for the specified **MetadataObject**, then the protocol server MUST remove the already existing localized name and then create a new localized name that corresponds to the localized name specified in the **MetadataModel**. If a localized name with the specified LCID and **Setting** does not exist for the specified **MetadataObject** then the protocol server MUST create a new localized name that corresponds to the localized name specified in the **MetadataModel**.
- If the "LocalizedNames" value is not specified the protocol server MUST ignore localized names in the specified **MetadataModel**.
- If the "Permissions" value is specified and **MetadataModel** specifies ACEs for a **MetadataObject** for the specified **Setting**, protocol server MUST remove any of the existing ACEs for the specified **MetadataObject** for the specified **Setting**, and then create new ACEs that correspond to the ACEs specified in the **MetadataModel** for the specified **Setting**.
- If the "Permissions" value is not specified the protocol server MUST ignore ACEs in the specified **MetadataModel**.

parentStruct: The **MetadataObject** that contains the **MetadataObject** specified by the **MetadataModel**.

mergedStruct: The **MetadataObject** into which to merge the **Properties**, localized names, and ACEs. The attributes of the specified **MetadataObject** MUST be ignored by the protocol server. The type of this element MUST be the complex type corresponding to the root element of the specified XML in the following table.

Root element name	Complex type
Action	ActionStruct (section 2.2.4.5)
ActionParameter	ActionParameterStruct (section 2.2.4.4)
Association	AssociationStruct (section 2.2.4.23)

Root element name	Complex type
AssociationGroup	AssociationGroupStruct (section 2.2.4.21)
Entity	EntityStruct (section 2.2.4.31)
FilterDescriptor	FilterDescriptorStruct (section 2.2.4.34)
Identifier	IdentifierStruct (section 2.2.4.35)
LobSystem	LobSystemStruct (section 2.2.4.40)
LobSystemInstance	LobSystemInstanceStruct (section 2.2.4.39)
Method	MethodStruct (section 2.2.4.47)
MethodInstance	MethodInstanceStruct (section 2.2.4.45)
Model	ModelStruct (section 2.2.4.47)
Parameter	ParameterStruct (section 2.2.4.49)

settingId: The Setting to merge the Properties, localized names and ACEs. If the value is NULL, then protocol server MUST use the default Setting while performing the operation.

callerCultureLcid: Specifies the LCID corresponding to the locale in which the error messages are to be returned for. If the protocol server is capable of generating error messages in the specified locale, all error messages MUST be generated for the specified locale. Otherwise, protocol server MUST return errors in a locale determined with an implementation-specific algorithm.

3.1.4.94.2.2 MetadataObjectMergeXmlResponse

The result data for the **MetadataObjectMergeXml** WSDL operation.

```
<xs:element name="MetadataObjectMergeXmlResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="mergedStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

errors: List of implementation-specific error messages that occurred while performing this operation.

mergedStruct: The MetadataObject into which the Properties, localized names, and ACEs were merged.

3.1.4.94.3 Complex Types

None.

3.1.4.94.4 Simple Types

None.

3.1.4.94.5 Attributes

None.

3.1.4.94.6 Groups

None.

3.1.4.94.7 Attribute Groups

None.

3.1.4.95 MetadataObjectReadXml

This operation is used to create MetadataObjects in the metadata store, optionally along with their Properties, localized names, and ACEs, contained by the specified MetadataModel. This operation creates **Properties**, localized names, and ACEs for default Setting. The MetadataModel MUST be specified as a Well-Formed External Parsed Entity according to [\[XML\]](#) section 4.3.2 and MUST have one of the following elements as the root element:

- Action element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.34.
- ActionParameter element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.36.
- Association element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.37.
- AssociationGroup element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.13.
- Entity element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.11.
- Identifier element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.16.
- FilterDescriptor element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.20.
- LobSystem element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.7.
- LobSystemInstance element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.9.
- Method element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.18.
- MethodInstance element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.22.
- Parameter element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.24.

```
<wsdl:operation name="MetadataObjectReadXml"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXml"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlResponse"
  </wsdl:output
  </wsdl:operation>
```



```

message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_PackageFormatExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in the section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	One of the following conditions applies:

Error complex type	Condition
	<ul style="list-style-type: none"> <li data-bbox="824 216 1393 342">▪ The xml element specifies a LobSystem and the security principal in whose context the protocol client is operating is not authorized to modify the MetadataCatalog specified by the parentStruct element. <li data-bbox="824 373 1393 499">▪ The xml element specifies a LobSystemInstance and the security principal in whose context the protocol client is operating is not authorized to modify the LobSystem specified by the parentStruct element. <li data-bbox="824 531 1393 657">▪ The xml element specifies an Entity and the security principal in whose context the protocol client is operating is not authorized to modify the LobSystem specified by the parentStruct element. <li data-bbox="824 688 1393 814">▪ The xml element specifies an Identifier and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. <li data-bbox="824 846 1393 972">▪ The xml element specifies an Action and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. <li data-bbox="824 1003 1393 1129">▪ The xml element specifies an ActionParameter and the security principal in whose context the protocol client is operating is not authorized to modify the Entity that contains the Action specified by the parentStruct element. <li data-bbox="824 1161 1393 1287">▪ The xml element specifies a Method and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. <li data-bbox="824 1318 1393 1444">▪ The xml element specifies an AssociationGroup and the security principal in whose context the protocol client is operating is not authorized to modify the Entity specified by the parentStruct element. <li data-bbox="824 1476 1393 1602">▪ The xml element specifies a MethodInstance and the security principal in whose context the protocol client is operating is not authorized to modify the Method specified by the parentStruct element. <li data-bbox="824 1633 1393 1759">▪ The xml element specifies a Parameter and the security principal in whose context the protocol client is operating is not authorized to modify the Method specified by the parentStruct element. <li data-bbox="824 1791 1393 1917">▪ The xml element specifies a FilterDescriptor and the security principal in whose context the protocol client is operating is not authorized to

Error complex type	Condition
	<p>modify the Method specified by the parentStruct element.</p> <ul style="list-style-type: none"> ▪ The xml element specifies an Association and the security principal in whose context the protocol client is operating is not authorized to modify the Method specified by the parentStruct element.
<p>ArgumentException (section 2.2.4.7)</p>	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ "Model" value is not specified in the packageContents element. ▪ The "InlineProxies" value is specified for the packageContents element and the specified MetadataModel contains a LobSystem with an associated Business Logic Module. ▪ The specified MetadataModel contains a Method that contains more than one FilterDescriptor of type TimeStampFilter. ▪ The specified MetadataModel contains a Method that contains more than one Parameter with the Direction attribute set to "Return". ▪ The specified MetadataModel contains an Association which references the same Entity more than once as a source of the Association. ▪ The specified MetadataModel contains a StreamAccessor that specifies ReturnTypeDescriptor that contains other TypeDescriptors. ▪ The specified MetadataModel contains a StreamAccessor and the TypeDescriptor containing the ReturnTypeDescriptor of this MethodInstance contains another TypeDescriptor under its parent TypeDescriptor, and the LobSystem containing the Entity which contains this StreamAccessor has type specified as "Database". ▪ The specified MetadataModel contains MethodInstance, and the Method for which this MethodInstance is being created does not have a Parameter whose Direction is "In" or "InOut" and the type of the this MethodInstance, is one of the following values: <ul style="list-style-type: none"> ▪ AccessChecker ▪ AssociationNavigator

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ Associator ▪ BinarySecurityDescriptorAccessor ▪ BulkAssociatedIdEnumerator ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ BulkSpecificFinder ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Deleter ▪ Disassociator ▪ SpecificFinder ▪ Updater ▪ StreamAccessor ▪ The specified MetadataModel contains a MethodInstance, the Method containing this MethodInstance is not contain a TimeStampFilter and the type of this MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator
BdcExceptionState (section 2.2.4.25)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The specified MetadataModel represents a Model or a TypeDescriptor. ▪ The specified MetadataModel does not conform to the format specified in [MS-BDCMFFS]. ▪ One or more of the TypeDescriptors are specified in the MetadataModel have DefaultValues, but the Method that contains the Parameter that contains these TypeDescriptors, do not contain the MethodInstance specified by these DefaultValues.
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	<p>The specified MetadataModel represents a LobSystem, and another LobSystem with the same name and different type already exists in the metadata store.</p>
ExceededMetadataObjectLimitExceptionState	<p>The specified MetadataModel contains a MetadataObject that contains more objects of a</p>

Error complex type	Condition
(section 2.2.4.32)	type than the implementation-specific maximum number of that type of objects. MetadataObjects , Properties , localized names, <103> and ACEs are the types of objects where an implementation-specific maximum number limit can be enforced by the protocol server. For example, this condition is met when an Entity contains more Methods than the implementation-specific maximum number of Methods allowed per Entity .
InvalidOperationException (section 2.2.4.38)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The specified MetadataModel contains one or more MetadataObjects that contain an ACE which specify anonymous user to have permissions other than "Execute", the packageContents element has "Permissions" in its value, and the specified MetadataObject is one of the following: <ul style="list-style-type: none"> ▪ Association ▪ Entity ▪ LobSystem ▪ Method ▪ MethodInstance ▪ The specified MetadataModel contains one or more MetadataObject elements that does not contain an ACE that is set to "SetPermissions", the packageContents element has "Permissions" in its value, and the specified MetadataObject is one of the following: <ul style="list-style-type: none"> ▪ Association ▪ Entity ▪ LobSystem ▪ Method ▪ MethodInstance
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The creation of the MetadataObjects in the specified MetadataModel cannot be because MetadataObjects are missing in the metadata store.
PackageFormatExceptionState (section 2.2.4.48)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ One or more Entities in the specified MetadataModel already exist on a different LobSystem. ▪ The protocol server cannot find the Parameter

Error complex type	Condition
	that contains the ReturnPropertyDescriptor associated with one of the MethodInstances contained by the specified MetadataModel .

3.1.4.95.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage	The request WSDL message for the MetadataObjectReadXml WSDL operation.
BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage	The response WSDL message for the MetadataObjectReadXml WSDL operation.

3.1.4.95.1.1

BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage

The request WSDL message for the **MetadataObjectReadXml** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectReadXml>

The SOAP body contains the **MetadataObjectReadXml** element.

3.1.4.95.1.2

BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage

The response WSDL message for the **MetadataObjectReadXml** WSDL operation.

The SOAP body contains the **MetadataObjectReadXmlResponse** element.

3.1.4.95.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
MetadataObjectReadXml	The input data for the MetadataObjectReadXml WSDL operation.
MetadataObjectReadXmlResponse	The result data for the MetadataObjectReadXml WSDL operation.

3.1.4.95.2.1 MetadataObjectReadXml

The input data for the **MetadataObjectReadXml** WSDL operation.

```
<xs:element name="MetadataObjectReadXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

xml: The XML representation of the MetadataModel that conforms to Business Data Connectivity Model File Format as specified in [\[MS-BDCMFFS\]](#).

packageContents: Specifies what part of the MetadataModel are to be created. The protocol server MUST follow the following rules:

- If the "Properties" value is specified the protocol server MUST create the specified Properties for the corresponding MetadataObjects.
- If the "Properties" value is not specified the protocol server MUST ignore **Properties** in the specified **MetadataModel**.
- If the "LocalizedNames" value is specified the protocol server MUST create the specified localized names for the corresponding **MetadataObjects**.
- If the "LocalizedNames" value is not specified the protocol server MUST ignore localized names in the specified **MetadataModel**.
- If the "Permissions" value is specified the protocol server MUST create the specified ACEs for the corresponding **MetadataObjects**.
- If the "Permissions" value is not specified the protocol server MUST ignore ACEs in the specified **MetadataModel**.

parentStruct: Specifies the **MetadataObject** in which to create the new **MetadataObject**.

readStruct: The **MetadataObject** that corresponds to the root element of the specified **MetadataModel**. The attributes of the specified **MetadataObject** MUST be ignored by the protocol server. The type of this element MUST be the complex type corresponding to the root element of the specified XML in the following table.

Root Element Name	Complex Type
Action	ActionStruct (section 2.2.4.5)
ActionParameter	ActionParameterStruct (section 2.2.4.4)
Association	AssociationStruct (section 2.2.4.23)

Root Element Name	Complex Type
AssociationGroup	AssociationGroupStruct (section 2.2.4.21)
Entity	EntityStruct (section 2.2.4.31)
FilterDescriptor	FilterDescriptorStruct (section 2.2.4.34)
Identifier	IdentifierStruct (section 2.2.4.35)
LobSystem	LobSystemStruct (section 2.2.4.40)
LobSystemInstance	LobSystemInstanceStruct (section 2.2.4.39)
Method	MethodStruct (section 2.2.4.46)
MethodInstance	MethodInstanceStruct (section 2.2.4.45)
Parameter	ParameterStruct (section 2.2.4.49)

callerCultureLcid: Specifies the LCID corresponding to the locale for which the error messages are to be returned. If the protocol server is capable of generating error messages in the specified locale, all error messages MUST be generated for the specified locale. Otherwise, the protocol server MUST return errors in a locale determined with an implementation-specific algorithm.

3.1.4.95.2.2 MetadataObjectReadXmlResponse

The result data for the **MetadataObjectReadXml** WSDL operation.

```
<xs:element name="MetadataObjectReadXmlResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

errors: List of implementation-specific error messages that occurred while performing this operation.

readStruct: The MetadataObject that specifies the created **MetadataObject**.

3.1.4.95.3 Complex Types

None.

3.1.4.95.4 Simple Types

None.

3.1.4.95.5 Attributes

None.

3.1.4.95.6 Groups

None.

3.1.4.95.7 Attribute Groups

None.

3.1.4.96 MetadataObjectWriteXml

The **MetadataObjectWriteXml** operation is used to retrieve an XML representation of the following objects from the metadata store:

- MetadataObjects contained by the MetadataModel along with their Properties, localized names, and ACEs, if "Model" value is specified for the **packageContents** element. The XML MUST conform to [\[MS-BDCMFFS\]](#) section 2.1.
- Localized names, **Properties**, and ACEs corresponding to **MetadataObjects** contained by the **MetadataModel**, if "Model" value is not specified for the **packageContents** element. The XML MUST conform to [\[MS-BDCMFFS\]](#) section 2.2.

The **MetadataModel** used for this operation MUST contain the specified **MetadataObject**, and other **MetadataObjects** that are contained by the **MetadataModel**; it MUST NOT contain any other **MetadataObjects**.

If the specified **MetadataModel** contains LobSystems that the security principal (2) in whose context the protocol client is operating is not authorized to modify, the XML representation returned by this operation MUST NOT contain those **LobSystems**, and MUST NOT contain other **MetadataObjects** contained by **MetadataObjects** that are not contained in the result for this reason.

```
<wsdl:operation name="MetadataObjectWriteXml" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectWriteXml"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectWriteXmlResponse"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectWriteXmlArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectWriteXmlBdcExceptionStateFault"
    name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectWriteXmlInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_MetadataExceptionStateF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_PackageFormatExceptionS
tateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentNullExceptionFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_MetadataObjectWriteXml_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_MetadataObjectWriteXml_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in the section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	One of the following conditions applies: <ul style="list-style-type: none"> The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject and the MetadataObject is a LobSystem or a LobSystemInstance. The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject and the "Permissions" flag is set in packageContents element.
ArgumentException (section 2.2.4.7)	The "InlineProxies" value requires the "Model" value to be also specified for the packageContents element.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	One or more MetadataObjects required for the operation does not exist. <104>

3.1.4.96.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_MetadataObjectWriteXml_InputMessage	The request WSDL message for the MetadataObjectWriteXml WSDL operation.
BusinessDataCatalogSharedService_MetadataObjectWriteXml_OutputMessage	The response WSDL message for the MetadataObjectWriteXml WSDL operation.

3.1.4.96.1.1

BusinessDataCatalogSharedService_MetadataObjectWriteXml_InputMessage

The request WSDL message for the **MetadataObjectWriteXml** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/MetadataObjectWriteXml
```

The SOAP body contains the **MetadataObjectWriteXml** element.

3.1.4.96.1.2

BusinessDataCatalogSharedService_MetadataObjectWriteXml_OutputMessage

The response WSDL message for the **MetadataObjectWriteXml** WSDL operation.

The SOAP body contains the **MetadataObjectWriteXmlResponse** element.

3.1.4.96.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
MetadataObjectWriteXml	The input data for the MetadataObjectWriteXml WSDL operation.
MetadataObjectWriteXmlResponse	The result data for the MetadataObjectWriteXml WSDL operation.

3.1.4.96.2.1 MetadataObjectWriteXml

The input data for the **MetadataObjectWriteXml** WSDL operation.

```
<xs:element name="MetadataObjectWriteXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>
```

```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
    <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

metadataObjectStruct: The MetadataObject to be retrieved.

packageContents: Specifies what kind of data to retrieve for the specified **MetadataObject**. The protocol server MUST follow the following rules:

- If the "Properties" value is specified, the protocol server MUST retrieve the Properties for the corresponding **MetadataObjects** from the specified Setting and if the "Model" value is also specified, then the protocol server MUST also retrieve the **Properties** from the default **Setting** that do not have the same name as the **Properties** in the specified **Setting**.
- If the "Properties" value is not specified, the protocol server MUST ignore **Properties** in the specified MetadataModel.
- If the "LocalizedNames" value is specified, the protocol server MUST retrieve the localized names for the corresponding **MetadataObjects** from the specified **Setting** and if the "Model" value is also specified then the protocol server MUST also retrieve localized names from the default **Setting** that do not have the same LCID as the localized names in the specified **Setting**.
- If the "LocalizedNames" value is not specified, the protocol server MUST ignore localized names in the specified **MetadataModel**.
- If the "Permissions" value is specified, the protocol server MUST retrieve the ACEs for the corresponding **MetadataObjects** from the specified **Setting**. If there are no ACEs for the specified **Setting** for a **MetadataObject**, and if the "Model" value is also specified, then the protocol server MUST retrieve ACEs from the default **Setting** for that **MetadataObject**.
- If the "Permissions" value is not specified, the protocol server MUST ignore ACEs in the specified **MetadataModel**.
- If the "InlineProxies" value is not specified, the protocol server MUST ignore Business Logic Modules in the specified **MetadataModel**.

settingId: The **Setting** from which **Properties**, localized names, and ACEs are to be retrieved. If **Properties**, localized names, and ACEs are not retrieved, the protocol server MUST ignore the value of this element.

3.1.4.96.2.2 MetadataObjectWriteXmlResponse

The result data for the **MetadataObjectWriteXml** WSDL operation.

```

<xs:element name="MetadataObjectWriteXmlResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="MetadataObjectWriteXmlResult" nillable="true"
type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```
</xs:complexType>
</xs:element>
```

MetadataObjectWriteXmlResult: The XML that represents the MetadataObject represented by the specified **metadataObjectStruct**. The XML MUST be a Well-Formed External Parsed Entity according to [XML]. The schema of the root element of the XML fragment corresponding to the specified **metadataObjectStruct** MUST be as specified in the following table:

Complex type	Root element
ActionParameterStruct (section 2.2.4.4)	If the packageContents element is set to "Model", the ActionParameter element as specified in [MS-BDCMFFS] section 2.1.4.36. Otherwise, the ActionParameter element as specified in [MS-BDCMFFS] section 2.2.4.29.
ActionStruct (section 2.2.4.5)	If the packageContents element is set to "Model", the Action element as specified in [MS-BDCMFFS] section 2.1.4.34. Otherwise, the Action element as specified in [MS-BDCMFFS] section 2.2.4.27.
AssociationGroupStruct (section 2.2.4.21)	If the packageContents element is set to "Model", the AssociationGroup element as specified in [MS-BDCMFFS] section 2.1.4.13. Otherwise, the AssociationGroup element as specified in [MS-BDCMFFS] section 2.2.4.13.
AssociationStruct (section 2.2.4.23)	If the packageContents element is set to "Model", the Association element as specified in [MS-BDCMFFS] section 2.1.4.37. Otherwise, the Association element as specified in [MS-BDCMFFS] section 2.2.4.30.
EntityStruct (section 2.2.4.31)	If the packageContents element is set to "Model", the Entity element as specified in [MS-BDCMFFS] section 2.1.4.11. Otherwise, the Entity element as specified in [MS-BDCMFFS] section 2.2.4.11.
FilterDescriptorStruct (section 2.2.4.34)	If the packageContents element is set to "Model", the FilterDescriptor element as specified in [MS-BDCMFFS] section 2.1.4.20. Otherwise, the FilterDescriptor element as specified in [MS-BDCMFFS] section 2.2.4.19.
IdentifierStruct (section 2.2.4.35)	If the packageContents element is set to "Model", the Identifier element as specified in [MS-BDCMFFS] section 2.1.4.16. Otherwise, the Identifier element as specified in [MS-BDCMFFS] section 2.2.4.15.
LobSystemStruct (section 2.2.4.40)	If the "Model" value of packageContents is specified, the LobSystem element as specified in [MS-BDCMFFS] section 2.1.4.7. Otherwise, the LobSystem element as specified in [MS-BDCMFFS] section 2.2.4.7.
LobSystemInstanceStruct (section 2.2.4.39)	If the "Model" value of packageContents is specified, the LobSystemInstance element as specified in [MS-BDCMFFS] section 2.1.4.9. Otherwise, the LobSystemInstance element as specified in [MS-BDCMFFS] section 2.2.4.9.
MethodStruct (section 2.2.4.46)	If the "Model" value of packageContents is specified, the Method element as specified in [MS-BDCMFFS] section 2.1.4.18. Otherwise, the Method element as specified in [MS-BDCMFFS] section 2.2.4.17.
MethodInstanceStruct (section 2.2.4.45)	If the "Model" value of packageContents is specified, the MethodInstance element as specified in [MS-BDCMFFS] section 2.1.4.22. Otherwise, the MethodInstance element as specified in [MS-

Complex type	Root element
	BDCMFFS section 2.2.4.21.
ModelStruct (section 2.2.4.47)	If the "Model" value of packageContents is specified, the Model element as specified in [MS-BDCMFFS] section 2.1.4.1. Otherwise, the Model element as specified in [MS-BDCMFFS] section 2.2.4.1.
ParameterStruct (section 2.2.4.49)	If the "Model" value of packageContents is specified, the Parameter element as specified in [MS-BDCMFFS] section 2.1.4.24. Otherwise, the Parameter element as specified in [MS-BDCMFFS] section 2.2.4.23.
TypeDescriptorStruct (section 2.2.4.53)	If the "Model" value of packageContents is specified, the TypeDescriptor element as specified in [MS-BDCMFFS] section 2.1.4.25. Otherwise, the TypeDescriptor element as specified in [MS-BDCMFFS] section 2.2.4.24. <105>

3.1.4.96.3 Complex Types

None.

3.1.4.96.4 Simple Types

None.

3.1.4.96.5 Attributes

None.

3.1.4.96.6 Groups

None.

3.1.4.96.7 Attribute Groups

None.

3.1.4.97 ModelReadXml

This operation is used to create MetadataObjects contained by the specified MetadataModel along with their Properties, localized names, and ACEs in the metadata store. The **MetadataModel** MUST be specified as an XML that conforms to the Business Data Connectivity Model File Format as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.1. If the **MetadataModel** contains a LobSystem that has the same name and type as a **LobSystem** in the metadata store, the **LobSystem** in the **MetadataModel** MUST be ignored by the protocol server along with all LobSystemInstances contained by that **LobSystem** and **Properties**, localized names, and ACEs of the ignored **MetadataObjects**. If the **MetadataModel** contains an Entity that has the same name, namespace and version as an **Entity** in the metadata store, and if the names of the **LobSystems** that contain these **Entities** are identical, the **Entity** in the **MetadataModel** MUST be ignored by the protocol server along with all **MetadataObjects** contained by the **Entity** or other ignored **MetadataObjects** and the **Properties**, localized names, and ACEs of the ignored **MetadataObjects**.

```
<wsdl:operation name="ModelReadXml" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/ModelReadXml"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlResponse"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_ArgumentNullExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_PackageFormatExceptionStateFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_ArgumentExceptionFault_FaultMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_ArgumentOutOfRangeExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_BdcExceptionStateFault_FaultMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_InvalidOperationExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_MetadataExceptionStateFault_Fault
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_ModelReadXml_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_ModelReadXml_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the

Error complex type	Condition
	protocol client is operating is not authorized to modify the MetadataCatalog.
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The "Model" value is not specified in the packageContents element. ▪ The specified MetadataModel contains one or more MetadataObjects with invalid attributes. <106> ▪ The "InlineProxies" value is specified for the packageContents element and the specified MetadataModel contains LobSystem with an associated Business Logic Module. ▪ The specified MetadataModel contains a Method that contains more than one TimeStampFilter. ▪ The specified MetadataModel contains a Method that contains more than one Parameter with direction "Return". ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a StreamAccessor that specifies ReturnPropertyDescriptor that contains other TypeDescriptors. ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a StreamAccessor and the TypeDescriptor containing the ReturnPropertyDescriptor of this MethodInstance contains another TypeDescriptor under its parent TypeDescriptor, and the LobSystem containing the Entity which contains this StreamAccessor has type specified as "Database". ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains MethodInstance, and the Method for which this MethodInstance is being created does not have a Parameter whose Direction is "In" or "InOut" and the type of the this MethodInstance, is one of the following values: <ul style="list-style-type: none"> ▪ AccessChecker ▪ AssociationNavigator ▪ Associator ▪ BinarySecurityDescriptorAccessor ▪ BulkAssociatedIdEnumerator

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ BulkSpecificFinder ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Deleter ▪ Disassociator ▪ SpecificFinder ▪ Updater ▪ StreamAccessor ▪ The "Model" value is specified for the packageContents element, and the specified MetadataModel contains a MethodInstance, the Method containing this MethodInstance is not contain a TimeStampFilter and the type of this MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ The specified MetadataModel contains an Association which specifies an Entity as a source more than once.
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId of the specified MetadataCatalog is 0.
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The value of the updateModel element is FALSE, and there is already another Model with the same name as the Model contained by the MetadataModel contained by the specified MetadataCatalog. ▪ The specified MetadataModel represents a LobSystem, but a LobSystem with the same name and different SystemType value already exists in the metadata store.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified MetadataModel contains a MetadataObject that contains more objects of a type than the implementation-specific maximum number of that type of objects. MetadataObjects , Properties , localized names<107> and ACEs are the types of objects where an implementation-specific maximum number limit can be enforced by

Error complex type	Condition
	the protocol server. For example, this condition is met when an Entity contains more Methods than the implementation-specific maximum number of Methods allowed per Entity .
InvalidOperationException (section 2.2.4.38)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The specified MetadataModel contains one or more MetadataObjects that contain an ACE which specify anonymous user to have permissions other than "Execute", the packageContents element has "Permissions" in its value, and the specified MetadataObject is one of the following: <ul style="list-style-type: none"> ▪ Association ▪ Entity ▪ LobSystem ▪ Method ▪ MethodInstance ▪ The specified MetadataModel contains one or more MetadataObject elements that does not contain an ACE that is set to "SetPermissions", the packageContents element has "Permissions" in its value, and the specified MetadataObject is one of the following: <ul style="list-style-type: none"> ▪ Association ▪ Entity ▪ LobSystem ▪ Method ▪ MethodInstance
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The value of the updateModel element is true and the specified MetadataCatalog does not contain the Model contained by the MetadataModel .
PackageFormatExceptionState (section 2.2.4.48)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The specified XML does not conform to the format specified in [MS-BDCMFFS].<108> ▪ One of the Entities contained by the MetadataModel has the same name, namespace and version as an Entity in the metadata store, but the names of the LobSystems that contain these Entities are not identical.

3.1.4.97.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ModelReadXml_InputMessage	The request WSDL message for the ModelReadXml WSDL operation.
BusinessDataCatalogSharedService_ModelReadXml_OutputMessage	The response WSDL message for the ModelReadXml WSDL operation.

3.1.4.97.1.1 BusinessDataCatalogSharedService_ModelReadXml_InputMessage

The request WSDL message for the **ModelReadXml** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ModelReadXml
```

The SOAP body contains the **ModelReadXml** element.

3.1.4.97.1.2 BusinessDataCatalogSharedService_ModelReadXml_OutputMessage

The response WSDL message for the **ModelReadXml** WSDL operation.

The SOAP body contains the **ModelReadXmlResponse** element.

3.1.4.97.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ModelReadXml	The input data for the ModelReadXml WSDL operation.
ModelReadXmlResponse	The result data for the ModelReadXml WSDL operation.

3.1.4.97.2.1 ModelReadXml

The input data for the **ModelReadXml** WSDL operation.

```
<xs:element name="ModelReadXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="applicationRegistryStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    
```

```

    <xs:element minOccurs="0" name="updateModel" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

xml: The XML representation of the **MetadataModel** that conforms to [\[MS-BDCMFFS\]](#).

packageContents: Specifies what part of the **MetadataModel** are to be created. The protocol server **MUST** follow the following rules:

- If the "Properties" value is specified, the protocol server **MUST** create the specified Properties for the corresponding **MetadataObjects**. If the metadata store already contains a Property with the same name in the specified Setting for the **MetadataObject**, the Property in the metadata store **MUST** be replaced.
- If the "Properties" value is not specified, the protocol server **MUST** ignore Properties in the specified **MetadataModel**.
- If the "LocalizedNames" value is specified, the protocol server **MUST** create the specified localized names for the corresponding **MetadataObjects**. If the metadata store already contains a localized name with the same LCID in the specified **Setting** for the **MetadataObject**, the localized name in the metadata store **MUST** be replaced.
- If the "LocalizedNames" value is not specified, the protocol server **MUST** ignore localized names in the specified **MetadataModel**.
- If the "Permissions" value is specified, the protocol server **MUST** delete ACEs in the metadata store for the corresponding **MetadataObjects** and create the specified ACEs for the corresponding **MetadataObjects**.
- If the "Permissions" value is not specified, the protocol server **MUST** ignore ACEs in the specified **MetadataModel**.

applicationRegistryStruct: The **MetadataCatalog** that contains the **Model** contained by the **MetadataModel**.

callerCultureLcid: Specifies the LCID corresponding to the locale in which the error messages are to be returned for. If the protocol server is capable of generating error messages in the specified locale, all error messages **MUST** be generated for the specified locale. Otherwise, protocol server **MUST** return errors in a locale determined with an implementation-specific algorithm.

updateModel: Specifies if the **Model** contained by the **MetadataModel** already exists in the metadata store. If the value of this element is **true**, the protocol server **MUST** remove all Entity references from the **Model**. Then, the protocol server **MUST** create **Entity** references in the **Model** to all the **Entities** contained by the specified **MetadataModel**.

3.1.4.97.2.2 ModelReadXmlResponse

The result data for the **ModelReadXml** WSDL operation.

```

<xs:element name="ModelReadXmlResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="ModelReadXmlResult" nillable="true" type="tns5:ModelStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

ModelReadXmlResult: The Model from the metadata store that is corresponding to the specified MetadataModel.

errors: The list of implementation-specific error messages corresponding to the errors encountered during this operation as well as other implementation-specific informational messages related to the operation.

3.1.4.97.3 Complex Types

None.

3.1.4.97.4 Simple Types

None.

3.1.4.97.5 Attributes

None.

3.1.4.97.6 Groups

None.

3.1.4.97.7 Attribute Groups

None.

3.1.4.98 ReadSlicedXml

This operation is deprecated from the protocol and MUST NOT be called.

```

<wsdl:operation name="ReadSlicedXml" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXml"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlResponse"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_InvalidOperationExceptionFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"

```

```

message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_PackageFormatExceptionStateFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlAccessDeniedExceptionFault" name="AccessDeniedExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_AccessDeniedExceptionFault_Fault
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentOutOfRangeExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentExceptionFault_FaultMess
age" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_MetadataExceptionStateFault_Faul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentNullExceptionFault_Fault
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ReadSlicedXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_BdcExceptionStateFault_FaultMess
age" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

3.1.4.98.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_ReadSlicedXml_InputMessage	The request WSDL message for the ReadSlicedXml WSDL operation.
BusinessDataCatalogSharedService_ReadSlicedXml_OutputMessage	The response WSDL message for the ReadSlicedXml WSDL operation.

3.1.4.98.1.1 BusinessDataCatalogSharedService_ReadSlicedXml_InputMessage

The request WSDL message for the **ReadSlicedXml** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Rea
dSlicedXml

```

The SOAP body contains the **ReadSlicedXml** element.

3.1.4.98.1.2 BusinessDataCatalogSharedService_ReadSlicedXml_OutputMessage

The response WSDL message for the **ReadSlicedXml** WSDL operation.

The SOAP body contains the **ReadSlicedXmlResponse** element.

3.1.4.98.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
ReadSlicedXml	The input data for the ReadSlicedXml WSDL operation.
ReadSlicedXmlResponse	The result data for the ReadSlicedXml WSDL operation.

3.1.4.98.2.1 ReadSlicedXml

The input data for the **ReadSlicedXml** WSDL operation.

```
<xs:element name="ReadSlicedXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

xml:

packageContents:

parentStruct:

readStruct:

callerCultureLcid:

3.1.4.98.2.2 ReadSlicedXmlResponse

The result data for the **ReadSlicedXml** WSDL operation.

```
<xs:element name="ReadSlicedXmlResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

errors:

readStruct:

3.1.4.98.3 Complex Types

None.

3.1.4.98.4 Simple Types

None.

3.1.4.98.5 Attributes

None.

3.1.4.98.6 Groups

None.

3.1.4.98.7 Attribute Groups

None.

3.1.4.99 RemoveEntityFromModel

This operation is used to remove the reference to the specified Entity from the specified Model.

```

<wsdl:operation name="RemoveEntityFromModel" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModel"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelResponse"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentOutOfRangeExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_InvalidOperationExceptionFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>

```



```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_MetadataExceptionStateFa
ult_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentExceptionFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentNullExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_BdcExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_RemoveEntityFromModel_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_RemoveEntityFromModel_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section [2.2.4](#). If more than one error condition is encountered, the protocol server MUST respond with at most one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to remove the reference from the specified Model to the specified Entity.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified Entity is not referenced by the specified Model .

3.1.4.99.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_RemoveEntityFromModel_InputMessage	The request WSDL message for the RemoveEntityFromModel WSDL operation.
BusinessDataCatalogSharedService_RemoveEntityFromModel_OutputMessage	The response WSDL message for the

Message	Description
	RemoveEntityFromModel WSDL operation.

3.1.4.99.1.1

BusinessDataCatalogSharedService_RemoveEntityFromModel_InputMessage

The request WSDL message for the **RemoveEntityFromModel** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveEntityFromModel
```

The SOAP body contains the **RemoveEntityFromModel** element.

3.1.4.99.1.2

BusinessDataCatalogSharedService_RemoveEntityFromModel_OutputMessage

The response WSDL message for the **RemoveEntityFromModel** WSDL operation.

The SOAP body contains the **RemoveEntityFromModelResponse** element.

3.1.4.99.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveEntityFromModel	The input data for the RemoveEntityFromModel WSDL operation.
RemoveEntityFromModelResponse	The result data for the RemoveEntityFromModel WSDL operation.

3.1.4.99.2.1 RemoveEntityFromModel

The input data for the **RemoveEntityFromModel** WSDL operation.

```
<xs:element name="RemoveEntityFromModel" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

modelStruct: The Model.

entityStruct: The Entity.

3.1.4.99.2.2 RemoveEntityFromModelResponse

The result data for the **RemoveEntityFromModel** WSDL operation.

```
<xs:element name="RemoveEntityFromModelResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.99.3 Complex Types

None.

3.1.4.99.4 Simple Types

None.

3.1.4.99.5 Attributes

None.

3.1.4.99.6 Groups

None.

3.1.4.99.7 Attribute Groups

None.

3.1.4.100 RemoveLocalizedName

This operation is used to remove the localized name with the specified LCID from the specified MetadataObject.

```
<wsdl:operation name="RemoveLocalizedName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedName"
    message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedNameResponse"
    message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedNameArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedNameMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentNullExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentExceptionFault_Fau
ltMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_BdcExceptionStateFault_Fau
ltMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_InvalidOperationExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the following conditions is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client operates is not authorized to modify the specified MetadataObject in the specified Setting .
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	The specified MetadataObject does not exist.
InvalidOperationException (section 2.2.4.38)	The localized name for the specified LCID does not exist in the specified Setting for the specified MetadataObject .

3.1.4.100.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage	The request WSDL message for the RemoveLocalizedName WSDL operation.

Message	Description
BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage	The response WSDL message for the RemoveLocalizedName WSDL operation.

3.1.4.100.1.1

BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage

The request WSDL message for the **RemoveLocalizedName** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedName
```

The SOAP body contains the **RemoveLocalizedName** element.

3.1.4.100.1.2

BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage

The response WSDL message for the **RemoveLocalizedName** WSDL operation.

The SOAP body contains the **RemoveLocalizedNameResponse** element.

3.1.4.100.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveLocalizedName	The input data for the RemoveLocalizedName WSDL operation.
RemoveLocalizedNameResponse	The result data for the RemoveLocalizedName WSDL operation.

3.1.4.100.2.1 RemoveLocalizedName

The input data for the **RemoveLocalizedName** WSDL operation.

```
<xs:element name="RemoveLocalizedName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="lcid" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject.

lcid: The LCID of the localized name to be removed.

settingId: The Setting to remove the localized name from.

3.1.4.100.2 RemoveLocalizedNameResponse

The result data for the **RemoveLocalizedName** WSDL operation.

```
<xs:element name="RemoveLocalizedNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.100.3 Complex Types

None.

3.1.4.100.4 Simple Types

None.

3.1.4.100.5 Attributes

None.

3.1.4.100.6 Groups

None.

3.1.4.100.7 Attribute Groups

None.

3.1.4.101 RemoveProperty

This operation is used to remove the specified Property from the specified MetadataObject.

```
<wsdl:operation name="RemoveProperty" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveProperty"
    message="tns6:BusinessDataCatalogSharedService_RemoveProperty_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemovePropertyResponse"
    message="tns6:BusinessDataCatalogSharedService_RemoveProperty_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemovePropertyMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_RemoveProperty_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemovePropertyMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_RemoveProperty_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

edService/RemovePropertyArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_ArgumentExceptionFault_FaultMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_ArgumentNullExceptionFault_Faul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_ArgumentOutOfRangeExceptionFaul
tMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_BdcExceptionStateFault_FaultMes
sage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_InvalidOperationExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_RemoveProperty_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_RemoveProperty_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the following conditions is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client operates is not authorized to modify the specified MetadataObject in the specified Setting .
ArgumentException (section 2.2.4.7)	The name element is empty or NULL.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.101.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_RemoveProperty_InputMessage	The request WSDL message for the RemoveProperty WSDL operation.

Message	Description
BusinessDataCatalogSharedService_RemoveProperty_OutputMessage	The response WSDL message for the RemoveProperty WSDL operation.

3.1.4.101.1.1

BusinessDataCatalogSharedService_RemoveProperty_InputMessage

The request WSDL message for the **RemoveProperty** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveProperty
```

The SOAP body contains the **RemoveProperty** element.

3.1.4.101.1.2

BusinessDataCatalogSharedService_RemoveProperty_OutputMessage

The response WSDL message for the **RemoveProperty** WSDL operation.

The SOAP body contains the **RemovePropertyResponse** element.

3.1.4.101.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveProperty	The input data for the RemoveProperty WSDL operation.
RemovePropertyResponse	The result data for the RemoveProperty WSDL operation.

3.1.4.101.2.1 RemoveProperty

The input data for the **RemoveProperty** WSDL operation.

```
<xs:element name="RemoveProperty" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject.

name: The name of the **Property** to be deleted.

settingId: The Setting from which to delete the **Property**.

3.1.4.101.2 RemovePropertyResponse

The result data for the **RemoveProperty** WSDL operation.

```
<xs:element name="RemovePropertyResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.101.3 Complex Types

None.

3.1.4.101.4 Simple Types

None.

3.1.4.101.5 Attributes

None.

3.1.4.101.6 Groups

None.

3.1.4.101.7 Attribute Groups

None.

3.1.4.102 SaveLocalizedName

This operation is used to add or replace a localized name for the specified **MetadataObject**. If a localized name with the same LCID as the specified LCID already exists for the specified **MetadataObject**, the protocol server **MUST** replace the localized name of the specified **MetadataObject** with the specified localized name.

```
<wsdl:operation name="SaveLocalizedName" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveLocalizedName"
    message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveLocalizedNameResponse"
    message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveLocalizedNameArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_MetadataExceptionStateFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentNullExceptionFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentOutOfRangeExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_InvalidOperationExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_BdcExceptionStateFault_Fault
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the following conditions is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client operates is not authorized to modify the specified MetadataObject in the specified Setting.
InvalidOperationException (section 2.2.4.38)	The specified MetadataObject already contains the implementation-specific maximum number of localized names.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

3.1.4.102.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage	The request WSDL message for the SaveLocalizedName WSDL operation.
BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage	The response WSDL message for the SaveLocalizedName WSDL operation.

3.1.4.102.1.1

BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage

The request WSDL message for the **SaveLocalizedName** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveLocalizedName
```

The SOAP body contains the **SaveLocalizedName** element.

3.1.4.102.1.2

BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage

The response WSDL message for the **SaveLocalizedName** WSDL operation.

The SOAP body contains the **SaveLocalizedNameResponse** element.

3.1.4.102.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SaveLocalizedName	The input data for the SaveLocalizedName WSDL operation.
SaveLocalizedNameResponse	The result data for the SaveLocalizedName WSDL operation.

3.1.4.102.2.1 SaveLocalizedName

The input data for the **SaveLocalizedName** WSDL operation.

```
<xs:element name="SaveLocalizedName" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="lcid" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

metadataObjectStruct: The MetadataObject.

lcid: The LCID of the localized name to be saved.

name: The localized name of the **MetadataObject**.

settingId: The Setting to write the localized name to.

3.1.4.102.2 SaveLocalizedNameResponse

The result data for the **SaveLocalizedName** WSDL operation.

```
<xs:element name="SaveLocalizedNameResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.102.3 Complex Types

None.

3.1.4.102.4 Simple Types

None.

3.1.4.102.5 Attributes

None.

3.1.4.102.6 Groups

None.

3.1.4.102.7 Attribute Groups

None.

3.1.4.103 SaveProperty

This operation is used to add or replace a **Property** for the specified MetadataObject. If a **Property** with the same name as the specified **Property** already exists for the specified **MetadataObject**, the protocol server MUST replace the **Property** of the **MetadataObject** with the specified **Property**.

```
<wsdl:operation name="SaveProperty" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveProperty"
    message="tns6:BusinessDataCatalogSharedService_SaveProperty_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyResponse"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_MetadataExceptionStateFault_Fault
Message" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_ArgumentExceptionFault_FaultMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_ArgumentNullExceptionFault_FaultM
essage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_ArgumentOutOfRangeExceptionFault_
FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_BdcExceptionStateFault_FaultMessa
ge" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SavePropertyInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_InvalidOperationExceptionFault_Fa
ultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_SaveProperty_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_SaveProperty_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client operates is not authorized to modify the specified MetadataObject in the specified Setting.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified MetadataObject already contains the implementation-specific maximum number of Properties.
MetadataObjectNotFoundExceptionState (section	The specified MetadataObject does not exist.

Error complex type	Condition
2.2.4.43)	

3.1.4.103.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_SaveProperty_InputMessage	The request WSDL message for the SaveProperty WSDL operation.
BusinessDataCatalogSharedService_SaveProperty_OutputMessage	The response WSDL message for the SaveProperty WSDL operation.

3.1.4.103.1.1 BusinessDataCatalogSharedService_SaveProperty_InputMessage

The request WSDL message for the **SaveProperty** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveProperty
```

The SOAP body contains the **SaveProperty** element.

3.1.4.103.1.2 BusinessDataCatalogSharedService_SaveProperty_OutputMessage

The response WSDL message for the **SaveProperty** WSDL operation.

The SOAP body contains the **SavePropertyResponse** element.

3.1.4.103.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SaveProperty	The input data for the SaveProperty WSDL operation.
SavePropertyResponse	The result data for the SaveProperty WSDL operation.

3.1.4.103.2.1 SaveProperty

The input data for the **SaveProperty** WSDL operation.

```
<xs:element name="SaveProperty" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
<xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="propertyStruct" nillable="true" type="tns5:PropertyStruct"/>
</xs:sequence>
</xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject.

propertyStruct: The **Property** to be saved.

3.1.4.103.2 SavePropertyResponse

The result data for the **SaveProperty** WSDL operation.

```
<xs:element name="SavePropertyResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
<xs:complexType>
<xs:sequence/>
</xs:complexType>
</xs:element>
```

3.1.4.103.3 Complex Types

None.

3.1.4.103.4 Simple Types

None.

3.1.4.103.5 Attributes

None.

3.1.4.103.6 Groups

None.

3.1.4.103.7 Attribute Groups

None.

3.1.4.104 SetAccessControlEntries

This operation is used to set an access control list (ACL) to the specified MetadataObject. The protocol server MUST delete all ACEs of the specified **MetadataObject** for the specified Setting, and then adds the specified ACEs to the specified **MetadataObject**.

```
<wsdl:operation name="SetAccessControlEntries" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
<wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetAccessControlEntries"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/SetAccessControlEntriesResponse"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_MetadataExceptionState
Fault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentExceptionFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentNullExceptionF
ault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentOutOfRangeExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_BdcExceptionStateFault
_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_InvalidOperationExcept
ionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with at exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal in whose context the protocol client is operating is not authorized to set permissions on the specified MetadataObject .
ArgumentOutOfRangeException (section 2.2.4.9)	The MetadataObjectId for the specified MetadataObject is set to zero.
InvalidOperationException (section 2.2.4.38)	One of the following conditions applies:

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ At least one of the specified ACEs contains an invalid value for principalName element. ▪ The specified ACEs do not contain an ACE with "SetPermissions" permission, or contain an ACE that specify anonymous user to have permissions other than "Execute".

3.1.4.104.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage	The request WSDL message for the SetAccessControlEntries WSDL operation.
BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage	The response WSDL message for the SetAccessControlEntries WSDL operation.

3.1.4.104.1.1

BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage

The request WSDL message for the **SetAccessControlEntries** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetAccessControlEntries
```

The SOAP body contains the **SetAccessControlEntries** element.

3.1.4.104.1.2

BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage

The response WSDL message for the **SetAccessControlEntries** WSDL operation.

The SOAP body contains the **SetAccessControlEntriesResponse** element.

3.1.4.104.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetAccessControlEntries	The input data for the SetAccessControlEntries WSDL operation.

Element	Description
SetAccessControlEntriesResponse	The result data for the SetAccessControlEntries WSDL operation.

3.1.4.104.2.1 SetAccessControlEntries

The input data for the **SetAccessControlEntries** WSDL operation.

```
<xs:element name="SetAccessControlEntries" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="accessControlEntries" nillable="true" type="tns5:ArrayOfAccessControlEntryStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject. The **MetadataObject** MUST be of one of the following types:

- MetadataCatalog
- Model
- LobSystem
- Entity
- Method
- MethodInstance

accessControlEntries: The ACEs.

settingId: The Setting to write the ACEs to.

3.1.4.104.2.2 SetAccessControlEntriesResponse

The result data for the **SetAccessControlEntries** WSDL operation.

```
<xs:element name="SetAccessControlEntriesResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.104.3 Complex Types

None.

3.1.4.104.4 Simple Types

None.

3.1.4.104.5 Attributes

None.

3.1.4.104.6 Groups

None.

3.1.4.104.7 Attribute Groups

None.

3.1.4.105 SetDefaultActionForEntity

This operation is used to set the default Action for the specified Entity.

```
<wsdl:operation name="SetDefaultActionForEntity"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntity"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentOutOfRangeExceptionEx
ceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_BdcExceptionStateFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_InvalidOperationExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_MetadataExceptionSta
teFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentExceptionFau
lt_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentNullExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified Entity .
MetadataObjectNotFoundExceptionState (section 2.2.4.3)	The specified Entity does not exist or does not contain an Action with the specified name.

3.1.4.105.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage	The request WSDL message for the SetDefaultActionForEntity WSDL operation.
BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage	The response WSDL message for the SetDefaultActionForEntity WSDL operation.

3.1.4.105.1.1

BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage

The request WSDL message for the **SetDefaultActionForEntity** WSDL operation.

The SOAP action value is:

```

http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Set
DefaultActionForEntity

```

The SOAP body contains the **SetDefaultActionForEntity** element.

3.1.4.105.1.2

BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage

The response WSDL message for the **SetDefaultActionForEntity** WSDL operation.

The SOAP body contains the **SetDefaultActionForEntityResponse** element.

3.1.4.105.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetDefaultActionForEntity	The input data for the SetDefaultActionForEntity WSDL operation.
SetDefaultActionForEntityResponse	The result data for the SetDefaultActionForEntity WSDL operation.

3.1.4.105.2.1 SetDefaultActionForEntity

The input data for the **SetDefaultActionForEntity** WSDL operation.

```
<xs:element name="SetDefaultActionForEntity" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
      <xs:element minOccurs="0" name="actionName" nillable="true" type="xs:string"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

entityStruct: The Entity to which a default Action will be set.

actionName: The name of the Action to be set as default Action to the specified Entity.

partitionId: The empty GUID.

3.1.4.105.2.2 SetDefaultActionForEntityResponse

The result data for the **SetDefaultActionForEntity** WSDL operation.

```
<xs:element name="SetDefaultActionForEntityResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.105.3 Complex Types

None.

3.1.4.105.4 Simple Types

None.

3.1.4.105.5 Attributes

None.

3.1.4.105.6 Groups

None.

3.1.4.105.7 Attribute Groups

None.

3.1.4.106 SetDefaultValuesForTypeDescriptor

This operation is used to set the DefaultValue of the TypeDescriptor with the MetadataObjectId specified by the **typeDescriptorId** element of the specified DefaultValueStruct (section [2.2.4.29](#)) complex type for the MethodInstance with the **MetadataObjectId** specified by the **methodInstanceId** element of the specified **DefaultValueStruct** (section [2.2.4.29](#)).

```
<wsdl:operation name="SetDefaultValuesForTypeDescriptor"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InputMessage
" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_OutputMessag
e" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentOutO
fRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentNull
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_BdcException
StateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/SetDefaultValuesForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InvalidOpera
tionExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_MetadataExce
ptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the Method containing the Parameter containing the specified TypeDescriptor .
ArgumentException (section 2.2.4.7)	The specified DefaultValue is invalid.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified TypeDescriptor already contains the implementation-specific maximum number of DefaultValues .
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified TypeDescriptor does not exist.

3.1.4.106.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_I nputMessage	The request WSDL message for the SetDefaultValuesForTypeDesc riptor WSDL operation.
BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_	The response WSDL message for

Message	Description
OutputMessage	the SetDefaultValuesForTypeDescriptor WSDL operation.

3.1.4.106.1.1

BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InputMessage

The request WSDL message for the **SetDefaultValuesForTypeDescriptor** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetDefaultValuesForTypeDescriptor
```

The SOAP body contains the **SetDefaultValuesForTypeDescriptor** element.

3.1.4.106.1.2

BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_OutputMessage

The response WSDL message for the **SetDefaultValuesForTypeDescriptor** WSDL operation.

The SOAP body contains the **SetDefaultValuesForTypeDescriptorResponse** element.

3.1.4.106.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetDefaultValuesForTypeDescriptor	The input data for the SetDefaultValuesForTypeDescriptor WSDL operation.
SetDefaultValuesForTypeDescriptorResponse	The result data for the SetDefaultValuesForTypeDescriptor WSDL operation.

3.1.4.106.2.1 SetDefaultValuesForTypeDescriptor

The input data for the **SetDefaultValuesForTypeDescriptor** WSDL operation.

```
<xs:element name="SetDefaultValuesForTypeDescriptor"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="defaultValueStruct" nillable="true" type="tns5:DefaultValueStruct"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```



```
</xs:element>
```

defaultValueStruct: The DefaultValue to be set for the specified TypeDescriptor .

partitionId: An empty GUID.

3.1.4.106.2 SetDefaultValuesForTypeDescriptorResponse

The result data for the **SetDefaultValuesForTypeDescriptor** WSDL operation.

```
<xs:element name="SetDefaultValuesForTypeDescriptorResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.106.3 Complex Types

None.

3.1.4.106.4 Simple Types

None.

3.1.4.106.5 Attributes

None.

3.1.4.106.6 Groups

None.

3.1.4.106.7 Attribute Groups

None.

3.1.4.107 SetLobSystemDataByLobSystemId

This operation is deprecated from the protocol and MUST NOT be called.

```
<wsdl:operation name="SetLobSystemDataByLobSystemId"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetLobSystemDataByLobSystemId"
    message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetLobSystemDataByLobSystemIdResponse"
    message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```

```

edService/SetLobSystemDataByLobSystemIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InvalidOperation
ExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentNullExce
ptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentOutOfRan
geExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_BdcExceptionStat
eFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_MetadataExceptio
nStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentExceptio
nFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

3.1.4.107.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InputMessage	The request WSDL message for the SetLobSystemDataByLobSystemId WSDL operation.
BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_OutputMessage	The response WSDL message for the SetLobSystemDataByLobSystemId WSDL operation.

3.1.4.107.1.1

BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InputMessage

The request WSDL message for the **SetLobSystemDataByLobSystemId** WSDL operation.

The SOAP action value is:

The SOAP body contains the **SetLobSystemDataByLobSystemId** element.

3.1.4.107.1.2

BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_OutputMessage

The response WSDL message for the **SetLobSystemDataByLobSystemId** WSDL operation.

The SOAP body contains the **SetLobSystemDataByLobSystemIdResponse** element.

3.1.4.107.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetLobSystemDataByLobSystemId	The input data for the SetLobSystemDataByLobSystemId WSDL operation.
SetLobSystemDataByLobSystemIdResponse	The result data for the SetLobSystemDataByLobSystemId WSDL operation.

3.1.4.107.2.1 SetLobSystemDataByLobSystemId

The input data for the **SetLobSystemDataByLobSystemId** WSDL operation.

```
<xs:element name="SetLobSystemDataByLobSystemId" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      <xs:element
        xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
        minOccurs="0" name="proxyGenerationResult" nillable="true"
        type="tns2:ProxyGenerationResult"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

lobSystemId:

proxyGenerationResult:

partitionId:

3.1.4.107.2.2 SetLobSystemDataByLobSystemIdResponse

The result data for the **SetLobSystemDataByLobSystemId** WSDL operation.

```

<xs:element name="SetLobSystemDataByLobSystemIdResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>

```

3.1.4.107.3 Complex Types

None.

3.1.4.107.4 Simple Types

None.

3.1.4.107.5 Attributes

None.

3.1.4.107.6 Groups

None.

3.1.4.107.7 Attribute Groups

None.

3.1.4.108 TypeDescriptorCreate

This operation is used to create a TypeDescriptor in the metadata store.

```

<wsdl:operation name="TypeDescriptorCreate" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreate"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateResponse"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateArgumentExceptionFault" name="ArgumentExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the following conditions is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in section 2.2.4. If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the Method containing the Parameter specified by parameterStruct element.
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The TypeDescriptor specified by rawValues element and the TypeDescriptor specified by parentTypeDescriptorStruct element are contained by different Parameters. ▪ The data type referenced by the typeName element of the specified TypeDescriptor is invalid. This happens when the identifier of the data type is not in the correct format, or the protocol server cannot access or load the specified data type. ▪ The TypeDescriptor specified by parentTypeDescriptorStruct element is NULL and the Parameter has another root TypeDescriptor. ▪ The TypeDescriptor and the parent TypeDescriptor specified by parentTypeDescriptorStruct element have

Error complex type	Condition
	<p>the IsCollection flag set.</p> <ul style="list-style-type: none"> The TypeDescriptor is associated with a FilterDescriptor and the FilterDescriptor is not contained by the Method that contains the Parameter specified by parameterStruct element. The TypeDescriptor specified by parentTypeDescriptorStruct element has "IsCollection" flag set and already contains another TypeDescriptor. The TypeDescriptor is has "read-only" flag set, and the Direction attribute of the Parameter is set to "In".
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	The TypeDescriptor specified by the parentStruct element already contains another TypeDescriptor that has the same name.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> The TypeDescriptor specified by the parentTypeDescriptorStruct element already contains an implementation-specific maximum number of TypeDescriptors. The metadata store already contains an implementation-specific maximum number of TypeDescriptors associated with the FilterDescriptor referenced by the specified TypeDescriptor.
InvalidOperationException (section 2.2.4.38)	The Parameter specified by the parameterStruct element is contained by an active Entity. <109>

3.1.4.108.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMessage	The request WSDL message for the TypeDescriptorCreate WSDL operation.
BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMessage	The response WSDL message for the TypeDescriptorCreate WSDL operation.

3.1.4.108.1.1

BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMessage

The request WSDL message for the **TypeDescriptorCreate** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorCreate
```

The SOAP body contains the **TypeDescriptorCreate** element.

3.1.4.108.1.2

BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMessage

The response WSDL message for the **TypeDescriptorCreate** WSDL operation.

The SOAP body contains the **TypeDescriptorCreateResponse** element.

3.1.4.108.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
TypeDescriptorCreate	The input data for the TypeDescriptorCreate WSDL operation.
TypeDescriptorCreateResponse	The result data for the TypeDescriptorCreate WSDL operation.

3.1.4.108.2.1 TypeDescriptorCreate

The input data for the **TypeDescriptorCreate** WSDL operation.

```
<xs:element name="TypeDescriptorCreate" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="rawValues" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentTypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

rawValues: The TypeDescriptor to create. The protocol client MUST specify values for all the elements in this complex type.

parentTypeDescriptorStruct: The **TypeDescriptor** that contains the **TypeDescriptor** to create. If the **TypeDescriptor** to be created is a root TypeDescriptor, then the value of this element MUST be NULL.

parameterStruct: The Parameter containing the created TypeDescriptor.

3.1.4.108.2 TypeDescriptorCreateResponse

The result data for the **TypeDescriptorCreate** WSDL operation.

```
<xs:element name="TypeDescriptorCreateResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="TypeDescriptorCreateResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

TypeDescriptorCreateResult: The created TypeDescriptor.

3.1.4.108.3 Complex Types

None.

3.1.4.108.4 Simple Types

None.

3.1.4.108.5 Attributes

None.

3.1.4.108.6 Groups

None.

3.1.4.108.7 Attribute Groups

None.

3.1.4.109 TypeDescriptorMergeXml

This operation is used to merge the Properties and localized names contained by the TypeDescriptors in the specified MetadataModel into an existing **TypeDescriptor** in the metadata store. The **MetadataModel** MUST be specified as a Well-Formed External Parsed Entity according to [\[XML\]](#) section 4.3.2 and MUST have as a root element the **TypeDescriptor** element as specified in [\[MS-BDCMFFS\]](#) section 2.2.4.24.

```
<wsdl:operation name="TypeDescriptorMergeXml" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXml"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlResponse"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
```



```

edService/TypeDescriptorMergeXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_PackageFormatExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_TypeDescriptorMergeXml_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to edit the Method containing the specified Parameter.
ArgumentException (section 2.2.4.7)	The "Model" value is specified in the packageContents element.

Error complex type	Condition
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	The specified MetadataModel contains one or more TypeDescriptors that already contain the implementation-specific maximum number of Properties and the packageContents element has "Properties" set in its value.
InvalidOperationException (section 2.2.4.38)	The specified MetadataModel specifies one or more TypeDescriptors that already contain the implementation-specific maximum number of localized names and the packageContents element has "LocalizedNames" in its value.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified Parameter or the specified TypeDescriptor could not be found. ▪ The specified TypeDescriptor could not be found.
PackageFormatExceptionState (section 2.2.4.48)	The TypeDescriptor specified in the MetadataModel does not exist in the specified TypeDescriptor or the specified Parameter if a TypeDescriptor is not specified.

3.1.4.109.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InputMessage	The request WSDL message for the TypeDescriptorMergeXml WSDL operation.
BusinessDataCatalogSharedService_TypeDescriptorMergeXml_OutputMessage	The response WSDL message for the TypeDescriptorMergeXml WSDL operation.

3.1.4.109.1.1

BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InputMessage

The request WSDL message for the **TypeDescriptorMergeXml** WSDL operation.

The SOAP action value is:

<http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorMergeXml>

The SOAP body contains the **TypeDescriptorMergeXml** element.

3.1.4.109.1.2

BusinessDataCatalogSharedService_TypeDescriptorMergeXml_OutputMessage

The response WSDL message for the **TypeDescriptorMergeXml** WSDL operation.

The SOAP body contains the **TypeDescriptorMergeXmlResponse** element.

3.1.4.109.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
TypeDescriptorMergeXml	The input data for the TypeDescriptorMergeXml WSDL operation.
TypeDescriptorMergeXmlResponse	The result data for the TypeDescriptorMergeXml WSDL operation.

3.1.4.109.2.1 TypeDescriptorMergeXml

The input data for the **TypeDescriptorMergeXml** WSDL operation.

```
<xs:element name="TypeDescriptorMergeXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentTypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

xml: The XML representation of the **TypeDescriptor** that conforms to [\[MS-BDCMFFS\]](#) section 2.2.4.24.

packageContents: Specifies the parts of the **TypeDescriptors** to be merged into the existing **TypeDescriptors**. The protocol server MUST follow the following rules:

- If the "Properties" value is specified, the protocol server MUST merge the **Properties** for the corresponding **TypeDescriptors** for the specified Setting. During this merge, if a **Property**, that has the same name as the **Property** specified in the **MetadataModel** already exists for the specified **TypeDescriptor**, then the protocol server MUST remove the already existing **Property** and then create a new **Property** that corresponds to the **Property** specified in the **MetadataModel**. If a **Property** with the specified name does not exist for the specified **TypeDescriptor**, then the protocol server MUST create a new **Property** that corresponds to the **Property** specified in the **MetadataModel**.
- If the "Properties" value is not specified, the protocol server MUST ignore **Properties** in the specified **MetadataModel**.

- If the "LocalizedNames" value is specified, the protocol server MUST merge the localized names for the corresponding **TypeDescriptor** for the specified **Setting**. During this merge, if a localized name, that has the same LCID and **Setting** as the localized name specified by the **MetadataModel**, already exists for the specified **TypeDescriptor**, then the protocol server MUST remove the already existing localized name and then create a new localized name that corresponds to the localized name specified in the **MetadataModel**. If a localized name with the specified LCID and **Setting** does not exist for the specified **TypeDescriptor** then the protocol server MUST create a new localized name that corresponds to the localized name specified in the **MetadataModel**.
- If the "LocalizedNames" value is not specified, the protocol server MUST ignore localized names in the specified **MetadataModel**.

parameterStruct: The Parameter containing the **TypeDescriptor** that is updated.

parentTypeDescriptorStruct: The **TypeDescriptor** that contains the **TypeDescriptor** specified by the XML. This **TypeDescriptor** MUST be NULL if the **TypeDescriptor** specified by the XML is a root **TypeDescriptor**.

settingId: The **Setting** to merge the **Properties** and localized names. If the value is NULL, then protocol server MUST use the default **Setting** while performing the operation.

callerCultureLcid: This value MUST be ignored by the protocol server.

3.1.4.109.2.2 TypeDescriptorMergeXmlResponse

The result data for the **TypeDescriptorMergeXml** WSDL operation.

```
<xs:element name="TypeDescriptorMergeXmlResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="TypeDescriptorMergeXmlResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

TypeDescriptorMergeXmlResult: The **TypeDescriptor** into which the **Properties** and localized names were merged.

errors: List of implementation-specific error messages that occurred while performing this operation.

3.1.4.109.3 Complex Types

None.

3.1.4.109.4 Simple Types

None.

3.1.4.109.5 Attributes

None.

3.1.4.109.6 Groups

None.

3.1.4.109.7 Attribute Groups

None.

3.1.4.110 TypeDescriptorReadXml

This operation is used to create the TypeDescriptors contained by the specified MetadataModel, along with their Properties and localized names, in the metadata store. The **MetadataModel** MUST be specified as a Well-Formed External Parsed Entity according to [\[XML\]](#) section 4.3.2 and MUST have as a root element the **TypeDescriptor** element as specified in [\[MS-BDCMFFS\]](#) section 2.1.4.25.

```
<wsdl:operation name="TypeDescriptorReadXml" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXml"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlResponse"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlInvalidOperationExceptionFault"
    name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlMetadataExceptionStateFault"
    name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlArgumentExceptionFault"
    name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlArgumentNullExceptionFault"
    name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentNullExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorReadXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_BdcExceptionStateFault_F
aultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorReadXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_PackageFormatExceptionSt
ateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error Complex Type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the Method containing the specified Parameter.
ArgumentException (section 2.2.4.7)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The "Model" value is not specified in the packageContents element. ▪ The data type referenced by a TypeDescriptor contained by the MetadataModel is invalid. This happens when the identifier of the data type is not in the correct format, or the protocol server cannot access or load the specified data type. ▪ The MetadataModel contains a TypeDescriptor that has "IsCollection" flag set and contains another TypeDescriptor that has "IsCollection" flag set. ▪ The specified TypeDescriptor has "IsCollection" flag set and the TypeDescriptor which correspond to the specified MetadataModel also has "IsCollection" flag set. ▪ The specified TypeDescriptor has "IsCollection" flag set and already contains a TypeDescriptor.

Error Complex Type	Condition
	<ul style="list-style-type: none"> ▪ The specified TypeDescriptor is NULL and the specified Parameter already has a root TypeDescriptor. ▪ The specified TypeDescriptor is not contained by the specified Parameter. ▪ The specified MetadataModel contains a TypeDescriptor that has "ReadOnly" flag set and the specified Parameter has direction "In".
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	The specified TypeDescriptor already contains another TypeDescriptor with the same name as the TypeDescriptor which corresponds to the MetadataModel .
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified MetadataModel contains a TypeDescriptor that contains more TypeDescriptors than the implementation-specific maximum number of TypeDescriptors. ▪ The specified TypeDescriptor contains implementation-specific maximum number of TypeDescriptors.
InvalidOperationException (section 2.2.4.38)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The Entity containing the Method that contains the specified Parameter is active. <110> ▪ The specified Parameter does not exist.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified TypeDescriptor does not exist.
PackageFormatExceptionState (section 2.2.4.48)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified XML does not conform to the format specified in [MS-BDCMFFS]. ▪ The Method containing the specified Parameter does not contain the FilterDescriptor referenced by the specified MetadataModel.

3.1.4.110.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage	The request WSDL message for the TypeDescriptorReadXml WSDL operation.
BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage	The response WSDL message for the TypeDescriptorReadXml WSDL operation.

3.1.4.110.1.1

BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage

The request WSDL message for the **TypeDescriptorReadXml** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXml
```

The SOAP body contains the **TypeDescriptorReadXml** element.

3.1.4.110.1.2

BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage

The response WSDL message for the **TypeDescriptorReadXml** WSDL operation.

The SOAP body contains the **TypeDescriptorReadXmlResponse** element.

3.1.4.110.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
TypeDescriptorReadXml	The input data for the TypeDescriptorReadXml WSDL operation.
TypeDescriptorReadXmlResponse	The result data for the TypeDescriptorReadXml WSDL operation.

3.1.4.110.2.1 TypeDescriptorReadXml

The input data for the **TypeDescriptorReadXml** WSDL operation.

```
<xs:element name="TypeDescriptorReadXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
    
  
</xs:element>
```



```

    <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentTypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
    <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

xml: The XML representation of the **MetadataModel** that conforms to [\[MS-BDCMFFS\]](#) section 2.1.4.25.

packageContents: Specifies what parts of the **MetadataModel** are to be created. The protocol server MUST follow the following rules:

- If the "Properties" value is specified, the protocol server MUST create the specified Properties for the corresponding **MetadataObjects**.
- If the "Properties" value is not specified, the protocol server MUST ignore **Properties** in the specified **MetadataModel**.
- If the "LocalizedNames" value is specified, the protocol server MUST create the specified localized names for the corresponding **MetadataObjects**.
- If the "LocalizedNames" value is not specified, the protocol server MUST ignore localized names in the specified **MetadataModel**.

parameterStruct: The Parameter in which to create the TypeDescriptors contained by the **MetadataModel**.

parentTypeDescriptorStruct: The **TypeDescriptor** in which to create the **TypeDescriptors** contained by the **MetadataModel**. This value of this element MUST be NULL if the **MetadataModel** contains the root TypeDescriptor of the **Parameter**.

callerCultureLcid: This value MUST be ignored.

3.1.4.110.2.2 TypeDescriptorReadXmlResponse

The result data for the **TypeDescriptorReadXml** WSDL operation.

```

<xs:element name="TypeDescriptorReadXmlResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="TypeDescriptorReadXmlResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

TypeDescriptorReadXmlResult: The TypeDescriptor from the metadata store that is corresponding to the specified **MetadataModel**.

errors: The list of implementation-specific error messages corresponding to the errors encountered during this operation as well as other implementation-specific informational messages related to the operation.

3.1.4.110.3 Complex Types

None.

3.1.4.110.4 Simple Types

None.

3.1.4.110.5 Attributes

None.

3.1.4.110.6 Groups

None.

3.1.4.110.7 Attribute Groups

None.

3.1.4.111 Update

This operation is used to update a MetadataObject in the metadata store.

```
<wsdl:operation name="Update" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Update" message="tns6:BusinessDataCatalogSharedService_Update_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/UpdateResponse"
    message="tns6:BusinessDataCatalogSharedService_Update_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/UpdateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Update_InvalidOperationExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/UpdateBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Update_BdcExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/UpdateArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Update_ArgumentOutOfRangeExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/UpdateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_Update_MetadataExceptionStateFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/UpdateArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_Update_ArgumentExceptionFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

```

<wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Update_ArgumentNullExceptionFault_FaultMessage
" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BusinessDataCatalogSharedService_Update_InputMessage** request message, and the protocol server MUST respond with a **BusinessDataCatalogSharedService_Update_OutputMessage** response message, unless any one of the conditions in the following table is met.

If any one of the conditions in the following table is met, the protocol server MUST instead respond with a SOAP fault containing the corresponding error complex type, serialized as specified in **Complex Types** (section 2.2.4). If more than one error condition is encountered, the protocol server MUST respond with exactly one error complex type, determined in an implementation-specific manner.

Error complex type	Condition
AccessDeniedExceptionState (section 2.2.4.3)	The security principal (2) in whose context the protocol client is operating is not authorized to modify the specified MetadataObject .
ArgumentException (section 2.2.4.7)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The specified MetadataObject name is NULL or empty. ▪ The length of the specified MetadataObject name exceeds 255 characters.
ConcurrentModificationExceptionState (section 2.2.4.27)	The specified MetadataObject has been updated by a context other than the one that it has been currently read by. This happens when the specified object version is not equal to the current object version of the MetadataObject . For example, this error can be triggered when one context reads the given MetadataObject , after which another context updates the same MetadataObject , and then the original context tries to update the same MetadataObject .
DuplicateMetadataObjectExceptionState (section 2.2.4.30)	The parent MetadataObject contains another MetadataObject with the same MetadataObject name.
ExceededMetadataObjectLimitExceptionState (section 2.2.4.32)	One of the following conditions applies: <ul style="list-style-type: none"> ▪ The parent of the specified MetadataObject already contains the implementation-specific maximum number of MetadataObjects of the same type as the specified MetadataObject. ▪ The specified MetadataObject is a MethodInstance and one of the following conditions holds true:

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ The type of the specified MethodInstance is IdEnumerator and the DataClass that contains the specified MethodInstance already contains another MethodInstance that has the type IdEnumerator.<111> ▪ The type of the specified MethodInstance is AccessChecker and the DataClass that contains the specified MethodInstance already contains another MethodInstance that has the type AccessChecker.<112> ▪ The type of the specified MethodInstance is Deleter and the DataClass that contains the specified MethodInstance already contains another MethodInstance that has the type Deleter.<113> ▪ The type of the specified MethodInstance is ChangedIdEnumerator and the DataClass that contains the specified MethodInstance already contains another MethodInstance that has the type ChangedIdEnumerator.<114> ▪ The type of the specified MethodInstance is DeletedIdEnumerator and the DataClass that contains the specified MethodInstance already contains another MethodInstance that has the type DeletedIdEnumerator.<115> ▪ The type of the specified MethodInstance is BulkIdEnumerator and the DataClass that contains the specified MethodInstance already contains another MethodInstance that has the type BulkIdEnumerator.<116>
InvalidMetadataObjectExceptionState (section 2.2.4.36)	<p>One of the following conditions applies:</p> <ul style="list-style-type: none"> ▪ The specified MetadataObject is a root TypeDescriptor, and it is being updated to be part of a Parameter that already has a root TypeDescriptor. ▪ The specified MetadataObject is an Association or a MethodInstance and the Parameter of the specified ReturnPropertyDescriptor is not contained by the same Method as the specified Association or MethodInstance.<117> ▪ The specified MetadataObject is an Association or a MethodInstance and the specified type for the MethodInstance requires a Parameter with Direction "In" or "InOut" to be present on the Method containing the specified Association or MethodInstance.<118> The specified type of MethodInstance is one of the following values:

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ SpecificFinder ▪ AccessChecker ▪ Updater ▪ Deleter ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ AssociationNavigator ▪ Associator ▪ Disassociator ▪ StreamAccessor ▪ BinarySecurityDescriptorAccessor ▪ BulkSpecificFinder ▪ BulkAssociatedIdEnumerator ▪ BulkAssociationNavigator ▪ BulkIdEnumerator ▪ The specified MetadataObject is an Association or a MethodInstance and the Parameter containing the specified ReturnPropertyDescriptor has the Direction attribute specified as "In".<119> ▪ The specified MetadataObject is an Association or a MethodInstance and the ReturnPropertyDescriptor MUST be present for the specified type for the MethodInstance, however it is passed in as NULL or 0.<120> The specified type of MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ AccessChecker ▪ AssociationNavigator ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Finder ▪ IdEnumerator ▪ Scalar ▪ SpecificFinder

Error complex type	Condition
	<ul style="list-style-type: none"> ▪ StreamAccessor ▪ The specified MetadataObject is an Association or a MethodInstance and the ReturnTypeDescriptor MUST have the "IsCollection" flag set for the specified type for the MethodInstance. The specified type of MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ SpecificFinder ▪ Scalar ▪ AccessChecker ▪ Creator ▪ StreamAccessor ▪ The specified MetadataObject is an Association or a MethodInstance and the ReturnTypeDescriptor MUST have the "IsCollection" flag not set for the specified type for the MethodInstance. The specified type of MethodInstance is one of the following values: <ul style="list-style-type: none"> ▪ ChangedIdEnumerator ▪ DeletedIdEnumerator ▪ Finder ▪ IdEnumerator ▪ The specified MetadataObject is an Association or a MethodInstance and the ReturnTypeDescriptor MUST NOT contain any TypeDescriptors for MethodInstance of StreamAccessor type. ▪ The specified MetadataObject is a MethodInstance and the TypeDescriptor that contains the ReturnTypeDescriptor MUST NOT contain any other TypeDescriptors for MethodInstance of StreamAccessor type and the type for the LobSystem containing the Entity containing MethodInstance of StreamAccessor type is DataBase. ▪ The specified MetadataObject is an Entity and the specified CacheUsage, MajorVersion, MinorVersion, BuildVersion, or RevisionVersion is invalid. ▪ The specified MetadataObject is a Parameter and the specified Direction is invalid. ▪ The specified MetadataObject is a MethodInstance and the specified type is

Error complex type	Condition
	<p>invalid.</p> <ul style="list-style-type: none"> ▪ The specified MetadataObject is a TypeDescriptor and the specified flags are invalid. ▪ The specified MetadataObject is a Parameter and the Method that contains the specified Parameter already contains another Parameter with Direction "Return". ▪ The specified MetadataObject is a TypeDescriptor and the Parameter containing the specified TypeDescriptor has value "In" for the Direction attribute, but the specified TypeDescriptor has the "Read-Only" flag set for its TypeDescriptorFlags attribute. ▪ The specified MetadataObject is a Parameter and the specified Parameter is not allowed to have value "In" for the Direction attribute because one of the TypeDescriptors contained by the specified Parameter has the "Read-Only" flag set for its TypeDescriptorFlags attribute. ▪ The specified MetadataObject is a Parameter and the specified Parameter is not allowed to have the value "In" for the Direction attribute because the specified Parameter contains a ReturnPropertyDescriptor of a MethodInstance. ▪ The specified MetadataObject is a TypeDescriptor, which has its Parameter is being changed to the specified Parameter, and the specified Parameter already has a root TypeDescriptor.<121> ▪ The specified MetadataObject is a TypeDescriptor and the "IsCollection" flag cannot be set on a TypeDescriptor if its containing TypeDescriptor also has "IsCollection" flag set. ▪ The specified MetadataObject is a TypeDescriptor and a TypeDescriptor with the "IsCollection" flag set can only contain one TypeDescriptor. ▪ The specified MetadataObject is a TypeDescriptor and the FilterDescriptor associated with the specified TypeDescriptor is not defined on the Method that contains the Parameter containing the specified TypeDescriptor. ▪ The specified MetadataObject is a TypeDescriptor and the Parameter containing the containing TypeDescriptor is different from the Parameter containing the specified

Error complex type	Condition
	<p>TypeDescriptor.</p> <ul style="list-style-type: none"> The specified MetadataObject is a TypeDescriptor and the Parameter containing the specified TypeDescriptor has a TypeDescriptor hierarchy deeper than an implementation-specific maximum allowed depth. The specified MetadataObject is the FilterDescriptor and the Method associated with the specified FilterDescriptor already contains another FilterDescriptor of type TimeStampFilter and the specified FilterDescriptor is updated to be a FilterDescriptor of type TimeStampFilter.
InvalidOperationException (section 2.2.4.38)	<p>One of the following conditions applies:</p> <p>The operation cannot be performed because the specified MetadataObject is an Association or a MethodInstance contained by an active Entity.<122></p> <p>The operation cannot be performed because the specified MetadataObject is an Entity, which has its name or namespace being updated, and another Entity with the specified name and namespace is currently being referenced by other MetadataObjects.</p> <ul style="list-style-type: none"> The operation cannot be performed because the specified MetadataObject is the FilterDescriptor and the Method that contains the specified FilterDescriptor also contains a MethodInstance of type ChangedIdEnumerator or a DeletedIdEnumerator, and the type of the FilterDescriptor is changed from TimeStampFilter to another type.
MetadataObjectNotFoundExceptionState (section 2.2.4.43)	The specified MetadataObject does not exist.

Upon successful operation, the protocol server MUST increment the object version of any **MetadataObjects** that it updated. If the incremented object version of the **MetadataObject** is greater than or equal to an implementation-specific maximum value, the protocol server MUST set the object version of the updated **MetadataObjects** to 0.

If the **metadataObjectStruct** element specifies any of the **MetadataObjects** in the following table, the protocol server MUST perform the corresponding actions, in addition to updating the specified **MetadataObject** in the metadata store:

MetadataObject	Action
Parameter	If the ordinalNumber attribute of the specified Parameter is the same as the ordinalNumber attribute of another Parameter contained by the Method containing the specified Parameter , the ordinalNumber attribute of Parameters contained by that Method that have the ordinalNumber attribute greater than or

MetadataObject	Action
	<p>equal to the ordinalNumber attribute of the specified Parameter MUST be incremented.</p> <p>After the operation completes, all Parameters contained by the Method containing the specified Parameter MUST have ordinalNumber attributes in the range from zero to $n-1$, where n is the number of Parameters contained by that Method. Parameters not contained by the Method, which contains the specified Parameter, MUST NOT have their ordinalNumber attributes altered. <123></p>
MethodInstance	<p>When the isDefault attribute of the specified MethodInstance is set to 1, the protocol server MUST set the isDefault attribute of all other MethodInstances that have the same value for the MethodInstanceType attribute within the containing DataClass to 0. When the isDefault attribute of the specified MethodInstance is set to 0 (and it was previously set to 1), the protocol server MUST set the isDefault attribute of a MethodInstance with the same value for MethodInstanceType within the containing DataClass to 1 <124>. The protocol server MUST decide which MethodInstance to alter based on an implementation-specific algorithm.</p>

3.1.4.111.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_Update_InputMessage	The request WSDL message for the Update WSDL operation.
BusinessDataCatalogSharedService_Update_OutputMessage	The response WSDL message for the Update WSDL operation.

3.1.4.111.1.1 BusinessDataCatalogSharedService_Update_InputMessage

The request WSDL message for the **Update** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/Update
```

The SOAP body contains the **Update** element.

3.1.4.111.1.2 BusinessDataCatalogSharedService_Update_OutputMessage

The response WSDL message for the **Update** WSDL operation.

The SOAP body contains the **UpdateResponse** element.

3.1.4.111.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
Update	The input data for the Update WSDL operation.
UpdateResponse	The result data for the Update WSDL operation.

3.1.4.111.2.1 Update

The input data for the **Update** WSDL operation.

```
<xs:element name="Update" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

metadataObjectStruct: The MetadataObject to update [<125>](#). The MetadataObjectId of the specified **MetadataObject** MUST be used to identify the **MetadataObject** to update. The remaining values of the specified **MetadataObject** MUST be used to update the values associated with the identified **MetadataObject** in the metadata store.

3.1.4.111.2.2 UpdateResponse

The result data for the **Update** WSDL operation.

```
<xs:element name="UpdateResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="UpdateResult" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

UpdateResult: The updated MetadataObject.

3.1.4.111.3 Complex Types

None.

3.1.4.111.4 Simple Types

None.

3.1.4.111.5 Attributes

None.

3.1.4.111.6 Groups

None.

3.1.4.111.7 Attribute Groups

None.

3.1.4.112 WriteSlicedXml

This operation is deprecated from the protocol and MUST NOT [<126>](#) be called.

```
<wsdl:operation name="WriteSlicedXml" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXml"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlResponse"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_InvalidOperationExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_BdcExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlArgumentExceptionFault" name="ArgumentExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlAccessDeniedExceptionFault" name="AccessDeniedExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_AccessDeniedExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentNullExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlArgumentOutOfRangeExceptionFault"
    name="ArgumentOutOfRangeExceptionFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentOutOfRangeExceptionFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlMetadataExceptionStateFault" name="MetadataExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_MetadataExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXmlPackageFormatExceptionStateFault"
    name="PackageFormatExceptionStateFault"
    message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_PackageFormatExceptionStateFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

3.1.4.112.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
BusinessDataCatalogSharedService_WriteSlicedXml_InputMessage	The request WSDL message for the WriteSlicedXml WSDL operation.
BusinessDataCatalogSharedService_WriteSlicedXml_OutputMessage	The response WSDL message for the WriteSlicedXml WSDL operation.

3.1.4.112.1.1 BusinessDataCatalogSharedService_WriteSlicedXml_InputMessage

The request WSDL message for the **WriteSlicedXml** WSDL operation.

The SOAP action value is:

```
http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/WriteSlicedXml
```

The SOAP body contains the **WriteSlicedXml** element.

3.1.4.112.1.2 BusinessDataCatalogSharedService_WriteSlicedXml_OutputMessage

The response WSDL message for the **WriteSlicedXml** WSDL operation.

The SOAP body contains the **WriteSlicedXmlResponse** element.

3.1.4.112.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
WriteSlicedXml	The input data for the WriteSlicedXml WSDL operation.
WriteSlicedXmlResponse	The result data for the WriteSlicedXml WSDL operation.

3.1.4.112.2.1 WriteSlicedXml

The input data for the **WriteSlicedXml** WSDL operation.

```
<xs:element name="WriteSlicedXml" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
        name="packageContents" type="tns5:PackageContents"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

metadataObjectStruct:

packageContents:

3.1.4.112.2 WriteSlicedXmlResponse

The result data for the **WriteSlicedXml** WSDL operation.

```
<xs:element name="WriteSlicedXmlResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="WriteSlicedXmlResult" nillable="true"
        type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

WriteSlicedXmlResult:

3.1.4.112.3 Complex Types

None.

3.1.4.112.4 Simple Types

None.

3.1.4.112.5 Attributes

None.

3.1.4.112.6 Groups

None.

3.1.4.112.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

The following examples describe the process of communication between the protocol server and protocol client. In conjunction with the protocol specification in this document, this information is intended to provide a comprehensive view on how the protocol client operates with the protocol server when executing such an operation.

The examples in this section manipulate the `LobSystem` and `Entity` objects. However, the principals illustrated apply equally to other `MetadataObjects`.

4.1 Creating an `LobSystem`

This example illustrates how a user can create an `LobSystem` in the metadata store.

The following actions are carried out:

1. The user requests the protocol client to create an **`LobSystem`** with the name "ExampleCRM".
2. The protocol client calls the **`MetadataObjectCreate`** method as shown in the following sample code segment:

```
// Assumes a Service Reference to the Business Data Catalog shared service has been
created

// Instantiate the Business Data Catalog SharedService client
BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();

// /***** Any implementation-specific impersonation logic goes here *****/

// Instantiate the AdministrationMetadataCatalogStruct
BDCServiceReference.AdministrationMetadataCatalogStruct myBDC = new
BDCServiceReference.AdministrationMetadataCatalogStruct();
myBDC.id = 1;

Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");
myBDC.partitionId = myPartition;

// Instantiate the LobSystem object
BDCServiceReference.LobSystemStruct myLob = new BDCServiceReference.LobSystemStruct();

// Setup the LobSystem object
myLob.partitionId = myPartition;
myLob.name = "ExampleCRM";
myLob.systemType = BDCServiceReference.SystemType.Database;

// call the MetadataObjectCreate method to create the LobSystem.
myClient.MetadataObjectCreate(myLob, myBDC);
```

Request body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <MetadataObjectCreate xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <rawValues i:type="a:LobSystemStruct" xmlns:a="Microsoft.SharePoint.BusinessData"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
```

```

    <a:id>0</a:id>
    <a:isCached>>false</a:isCached>
    <a:name>ExampleCRM</a:name>
    <a:objectVersion>0</a:objectVersion>
    <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
    <a:systemType>Database</a:systemType>
  </rawValues>
  <parentStruct i:type="a:AdministrationMetadataCatalogStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
    <a:id>1</a:id>
    <a:isCached>>false</a:isCached>
    <a:name i:nil="true"/>
    <a:objectVersion>0</a:objectVersion>
    <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
  </parentStruct>
</MetadataObjectCreate>
</s:Body>
</s:Envelope>

```

Response body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <MetadataObjectCreateResponse
xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <MetadataObjectCreateResult i:type="a:LobSystemStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
        <a:id>122</a:id>
        <a:isCached>>false</a:isCached>
        <a:name>ExampleCRM</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:systemType>Database</a:systemType>
      </MetadataObjectCreateResult>
    </MetadataObjectCreateResponse>
  </s:Body>
</s:Envelope>

```

4.2 Setting the Security Information of a MetadataObject

This example illustrates how a user can set Security Information of a LobSystem.

This example assumes that the preceding example has been successfully executed.

The following actions are carried out:

1. The user requests the protocol client to set ACEs on the **LobSystem** with the name "ExampleCRM".
2. The protocol client calls the **SetAccessControlEntries** method as shown in the following sample code segment:

```

//This method shows how to set the ACL entries on an entity
BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient;

```

```

BDCServiceReference.LobSystemStruct myLob;
BDCServiceReference.AccessControlEntryStruct[] myACLs;
BDCServiceReference.AccessControlEntryStruct myACL;

//Instantiate the BDCSharedServiceClient
myClient = new BDCServiceReference.BusinessDataCatalogSharedServiceClient();

// /***** Any implementation-specific impersonation logic goes here *****/

//First get the metadataobject with the name
myLob = new BDCServiceReference.LobSystemStruct();
Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");
myLob = myClient.GetLobSystemByName("ExampleCRM", myPartition);

//setup the ACL object
myACL = new ConsoleApplication1.BDCServiceReference.AccessControlEntryStruct();
myACL.rights = 23;
myACL.principalName = "Domain\\UserName";
myACL.principalDisplayName = "UserName";

myACLs = new ConsoleApplication1.BDCServiceReference.AccessControlEntryStruct[] {
myACL };

// set the ACL on the metadataobject by calling the SetAccessControlEntries method
myClient.SetAccessControlEntries(myLob, myACLs, null);

```

Request body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <SetAccessControlEntries
xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <metadataObjectStruct i:type="a:LobSystemStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
        <a:id>122</a:id>
        <a:isCached>false</a:isCached>
        <a:name>ExampleCRM</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:systemType>Database</a:systemType>
      </metadataObjectStruct>
      <accessControlEntries xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:AccessControlEntryStruct>
          <a:principalBinaryForm i:nil="true"/>
          <a:principalDisplayName>UserName</a:principalDisplayName>
          <a:principalName>Domain\UserName</a:principalName>
          <a:rights>23</a:rights>
        </a:AccessControlEntryStruct>
      </accessControlEntries>
      <settingId i:nil="true" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"/>
    </SetAccessControlEntries>
  </s:Body>
</s:Envelope>

```

Response body


```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <SetAccessControlEntriesResponse
      xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog"/>
    </s:Body>
  </s:Envelope>
```

4.3 Reading the Security Information of a MetadataObject

This example illustrates how a user can read the ACEs of a LobSystem.

This example assumes that the preceding examples have been successfully executed.

The following actions are carried out:

1. The user requests the protocol client to read ACEs for the **LobSystem** identified by name "ExampleCRM".
2. The protocol client calls the **GetAccessControlEntries** method as shown in the following code segment:

```
//This method shows how to set the ACL entries on an entity
BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient;
BDCServiceReference.LobSystemStruct myLob;
BDCServiceReference.AccessControlEntryStruct[] myACLs;

//Instantiate the BDCSharedServiceClient
myClient = new BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// /***** Any implementation-specific impersonation logic goes here *****/
Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");

//First get the metadataobject with the name
myLob = new BDCServiceReference.LobSystemStruct();
myLob = myClient.GetLobSystemByName("ExampleCRM", myPartition);

//Read the ACL entries on the entity
myACLs = myClient.GetAccessControlEntries(myLob, null, true);
```

Request body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <GetAccessControlEntries
      xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <metadataObjectStruct i:type="a:LobSystemStruct"
        xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>122</a:id>
        <a:isCached>>false</a:isCached>
        <a:name>ExampleCRM</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:systemType>Database</a:systemType>
      </metadataObjectStruct>
      <settingId i:nil="true" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"/>
      <fallback>>true</fallback>
    </GetAccessControlEntries>
  </s:Body>
</s:Envelope>
```

```
</GetAccessControlEntries>
</s:Body>
</s:Envelope>
```

Response body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <GetAccessControlEntriesResponse
      xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <GetAccessControlEntriesResult xmlns:a="Microsoft.SharePoint.BusinessData"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:AccessControlEntryStruct>
          <a:principalBinaryForm i:nil="true"/>
          <a:principalDisplayName>UserName</a:principalDisplayName>
          <a:principalName>Domain\UserName</a:principalName>
          <a:rights>23</a:rights>
        </a:AccessControlEntryStruct>
      </GetAccessControlEntriesResult>
    </GetAccessControlEntriesResponse>
  </s:Body>
</s:Envelope>
```

4.4 Creating an Entity

This example illustrates how a user can create an Entity in the metadata store.

The example assumes that:

- A **LobSystem** that will contain the **Entity** is already created in the metadata store.
- The **LobSystem** is identified by the name "ExampleCRM".
- The **PartitionId** used while creating the **LobSystem** is "00000000-0000-0000-0000-000000000000".
- The **LobSystem** has an ACE associated with it.

The following actions are carried out:

1. The user requests the protocol client to create an **Entity** with the name "Customer", the namespace "example.com", and an estimated instance count of 100.
2. The protocol client calls the **EntityCreate** method as shown in the following code segment:

```
BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();

// /***** Any implementation-specific impersonation logic goes here *****/

Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");

//Get LOB system first as it is needed for creating the entity.
BDCServiceReference.LobSystemStruct myLob = new BDCServiceReference.LobSystemStruct();
myLob = myClient.GetLobSystemByName("ExampleCRM", myPartition);
```

```

//Instantiate entity object
BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();

//set properties
myEntity.name = "Customer";
myEntity.@namespace = "example.com";
myEntity.isCached = true;
myEntity.objectVersion = 0;
System.Version ver = new Version(1,0,0,0);
myEntity.version = ver;
myEntity.partitionId = myPartition;
myEntity.estimatedInstanceCount = 100;

//create entity
myClient.EntityCreate(myEntity,myLob,null);

```

3. The protocol server creates the **Entity** in the metadata store.

4. The protocol server copies the ACE of the **LobSystem** and associates it with the newly created **Entity**.

Request body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <EntityCreate xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <rawValues xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>0</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>>false</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
        <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
          <b:_Build>0</b:_Build>
          <b:_Major>1</b:_Major>
          <b:_Minor>0</b:_Minor>
          <b:_Revision>0</b:_Revision>
        </a:version>
        <a:cacheUsage>Default</a:cacheUsage>
        <a:description i:nil="true"/>
        <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
      </rawValues>
      <lobSystemStruct xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>122</a:id>
        <a:isCached>>false</a:isCached>
        <a:name>ExampleCRM</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:systemType>Database</a:systemType>
      </lobSystemStruct>
      <modelStruct i:nil="true" xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance"/>

```

```

    </EntityCreate>
  </s:Body>
</s:Envelope>

```

Response body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <EntityCreateResponse xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <EntityCreateResult xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>>false</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
        <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
          <b:_Build>0</b:_Build>
          <b:_Major>1</b:_Major>
          <b:_Minor>0</b:_Minor>
          <b:_Revision>0</b:_Revision>
        </a:version>
        <a:cacheUsage>Default</a:cacheUsage>
        <a:description i:nil="true"/>
        <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
      </EntityCreateResult>
    </EntityCreateResponse>
  </s:Body>
</s:Envelope>

```

4.5 Activating an Entity

This example illustrates how a user can set a version of an Entity to be active in the metadata store.

This example assumes that:

- The preceding examples have been successfully executed.
- After successfully creating the "Customer" **Entity**, the user has added some other MetadataObjects to; an Identifier, Method, and so on.

The following actions are carried out:

1. The user requests the protocol client to activate **Entity** with the name "Customer", the namespace "example.com", and the **PartitionId** "00000000-0000-0000-0000-000000000000".
2. The protocol client calls the **Activate** method as shown in the following code segment:

```

BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// /***** Any implementation-specific impersonation logic goes here *****/
BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();

```

```

System.Version ver = new Version(1,0,0,0);

myEntity = myClient.GetEntityWithNameAndNamespaceAndVersion("example.com", "Customer",
ver, partition);

BDCServiceReference.EntityStruct activeent = myClient.Activate(myEntity);

```

3. The protocol server checks whether the **Entity** exists in the metadata store.
4. If it exists, the protocol server marks the **Entity** as active. All references to the **Entity** being activated are bound correctly.

Request body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <Activate xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <entityStruct xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>0</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>>false</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
        <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
          <b:_Build>0</b:_Build>
          <b:_Major>1</b:_Major>
          <b:_Minor>0</b:_Minor>
          <b:_Revision>0</b:_Revision>
        </a:version>
        <a:cacheUsage>Default</a:cacheUsage>
        <a:description i:nil="true"/>
        <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
      </entityStruct>
    </Activate>
  </s:Body>
</s:Envelope>

```

Response body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <ActivateResponse xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <ActivateResult xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>1</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>true</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
      </ActivateResult>
    </ActivateResponse>
  </s:Body>
</s:Envelope>

```

```

    <a:namespace>example.com</a:namespace>
    <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
      <b:_Build>0</b:_Build>
      <b:_Major>1</b:_Major>
      <b:_Minor>0</b:_Minor>
      <b:_Revision>0</b:_Revision>
    </a:version>
    <a:cacheUsage>Default</a:cacheUsage>
    <a:description i:nil="true"/>
    <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
  </ActivateResult>
</ActivateResponse>
</s:Body>
</s:Envelope>

```

4.6 Reading an Entity

This example shows how a user can read an Entity in the metadata store.

The example assumes that the preceding example has been successfully executed.

The following actions are carried out:

1. The user requests the protocol client to read an **Entity** with the name "Customer" and the namespace "example.com" from the metadata store.
2. The protocol client calls the **GetEntityWithNameAndNamespace** method as shown in the following code segment:

```

BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// /***** Any implementation-specific impersonation logic goes here *****/
BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();
Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");

myEntity = myClient.GetEntityWithNameAndNamespace("example.com", "Customer",
myPartition);

```

3. The protocol server checks whether the **Entity** exists in the metadata store.
4. If it exists, the protocol server retrieves the attributes of the stored **Entity**.
5. The protocol server returns an **Entity** object to the protocol client.

Request body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <GetEntityWithNameAndNamespace
      xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <namespace>example.com</namespace>
      <name>Customer</name>
      <partitionId>00000000-0000-0000-0000-000000000000</partitionId>
    </GetEntityWithNameAndNamespace>
  </s:Body>

```

```
</s:Envelope>
```

Response body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <GetEntityWithNameAndNamespaceResponse
      xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <GetEntityWithNameAndNamespaceResult xmlns:a="Microsoft.SharePoint.BusinessData"
        xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>1</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>true</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
        <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
          <b:_Build>0</b:_Build>
          <b:_Major>1</b:_Major>
          <b:_Minor>0</b:_Minor>
          <b:_Revision>0</b:_Revision>
        </a:version>
        <a:cacheUsage>Default</a:cacheUsage>
        <a:description i:nil="true"/>
        <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
      </GetEntityWithNameAndNamespaceResult>
    </GetEntityWithNameAndNamespaceResponse>
  </s:Body>
</s:Envelope>
```

4.7 Creating Properties for MetadataObjects

This example shows how a user can create Properties for an Entity in the metadata store. The concepts can be applied to any other MetadataObject.

The example assumes that the preceding examples have been successfully executed.

The following actions are carried out:

1. The user requests the protocol client to create a Property for the **Entity** with the name "Customer" and the namespace "example.com".
2. To add a custom property called "CustomerAlternateName", the protocol client calls the **SaveProperty** method as shown in the following code segment:

```
BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// /***** Any implementation-specific impersonation logic goes here *****/
BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();
BDCServiceReference.PropertyStruct myProperty = new
BDCServiceReference.PropertyStruct();
System.Version ver = new Version(1,0,0,0);
Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");
```

```

//Get the entity object using the name and namespace
myEntity = myClient.GetEntityWithNameAndNamespace("example.com", "Customer",
myPartition);

//Setup the Property object
myProperty.name = "CustomerAlternateName";
myProperty.typeName = "System.String";
myProperty.settingId = null;

//Add the custom propety to the entity object
myClient.SaveProperty(myEntity, myProperty);

```

Request body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <SaveProperty xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <metadataObjectStruct i:type="a:EntityStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>1</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>true</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
        <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
          <b:_Build>0</b:_Build>
          <b:_Major>1</b:_Major>
          <b:_Minor>0</b:_Minor>
          <b:_Revision>0</b:_Revision>
        </a:version>
        <a:cacheUsage>Default</a:cacheUsage>
        <a:description i:nil="true"/>
        <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
      </metadataObjectStruct>
      <propertyStruct xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:needsTypeReflectionResolution>false</a:needsTypeReflectionResolution>
        <a:wcfMarshallableValue i:nil="true"/>
        <a:wcfMarshallableValueAssemblyQualifiedTypeName i:nil="true"/>
        <a:wcfMarshallableValueTypeTypeName i:nil="true"/>
        <a:metadataObjectId>0</a:metadataObjectId>
        <a:name>CustomerAltName</a:name>
        <a:settingId i:nil="true"/>
        <a:typeName>System.String</a:typeName>
      </propertyStruct>
    </SaveProperty>
  </s:Body>
</s:Envelope>

```

Response body


```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <SavePropertyResponse xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog"/>
  </s:Body>
</s:Envelope>
```

4.8 Adding Localized Names for Metadata Objects

This example shows how a user can add a localized name for an Entity in the metadata store. The concepts can be applied to any other Metadata Object.

The example assumes that the preceding examples have been successfully executed and that the user wants to create the localized name for LCID 2058.

The following actions are carried out:

1. The user requests the protocol client to create the localized name for the **Entity** with the name "Customer" and the namespace "example.com".
2. The protocol client calls the **SaveLocalizedName** method as shown in the following code segment:

```
BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// **** Any implementation-specific impersonation logic goes here ****
BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();

System.Version ver = new Version(1,0,0,0);
Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");

myEntity = myClient.GetEntityWithNameAndNamespace("example.com", "Customer",
myPartition);

myClient.SaveLocalizedName(myEntity, 2058, "Cliente", null);
```

3. The protocol server checks whether an Entity with name "Customer" and namespace "example.com" exists in the Metadata store.
4. If it exists, the protocol server creates the localized name for LCID 2058 and sets its value to "Cliente".

Request body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <SaveLocalizedName xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <metadataObjectStruct i:type="a:EntityStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Customer</a:name>
        <a:objectVersion>1</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>true</a:active>
        <a:lobSystemId>122</a:lobSystemId>
      </metadataObjectStruct>
    </SaveLocalizedName>
  </s:Body>
</s:Envelope>
```

```

    <a:modelId>0</a:modelId>
    <a:namespace>example.com</a:namespace>
    <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
      <b:_Build>0</b:_Build>
      <b:_Major>1</b:_Major>
      <b:_Minor>0</b:_Minor>
      <b:_Revision>0</b:_Revision>
    </a:version>
    <a:cacheUsage>Default</a:cacheUsage>
    <a:description i:nil="true"/>
    <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
  </metadataObjectStruct>
  <lcid>2058</lcid>
  <name>Cliente</name>
  <settingId i:nil="true" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"/>
</SaveLocalizedName>
</s:Body>
</s:Envelope>

```

Response body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <SaveLocalizedNameResponse
xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog"/>
  </s:Body>
</s:Envelope>

```

4.9 Updating an Entity

This example illustrates how a user can update an Entity in the metadata store.

The example assumes that the preceding example has been successfully executed.

The following actions are carried out:

1. The user requests the protocol client to update **Entity** with the name "Customer" and the namespace "example.com" and change its name from "Customer" to "Buyer".
2. The protocol client calls the **Update** method as shown in the following code segment:

```

BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// /***** Any implementation-specific impersonation logic goes here *****/

BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();

System.Version ver = new Version(1,1,0,0);
Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");

myEntity = myClient.GetEntityWithNameAndNamespace("example.com", "Customer",
myPartition);

// Set the name property to "Buyer"
myEntity.name = "Buyer";

```

```
// Call update method.
myClient.Update(myEntity);
```

3. The protocol server checks if the **Entity** exists in the metadata store.

4. If it exists, the protocol server updates all the name attribute of the **Entity** with the supplied value.

Request body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <Update xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <metadataObjectStruct i:type="a:EntityStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Buyer</a:name>
        <a:objectVersion>2</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>true</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
        <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
          <b:_Build>0</b:_Build>
          <b:_Major>1</b:_Major>
          <b:_Minor>0</b:_Minor>
          <b:_Revision>0</b:_Revision>
        </a:version>
        <a:cacheUsage>Default</a:cacheUsage>
        <a:description i:nil="true"/>
        <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
      </metadataObjectStruct>
    </Update>
  </s:Body>
</s:Envelope>
```

Response body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <UpdateResponse xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <UpdateResult i:type="a:EntityStruct" xmlns:a="Microsoft.SharePoint.BusinessData"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Buyer</a:name>
        <a:objectVersion>3</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
        <a:active>true</a:active>
        <a:lobSystemId>122</a:lobSystemId>
        <a:modelId>0</a:modelId>
        <a:namespace>example.com</a:namespace>
      </UpdateResult>
    </UpdateResponse>
  </s:Body>
</s:Envelope>
```

```

    <a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
      <b:_Build>0</b:_Build>
      <b:_Major>1</b:_Major>
      <b:_Minor>0</b:_Minor>
      <b:_Revision>0</b:_Revision>
    </a:version>
    <a:cacheUsage>Default</a:cacheUsage>
    <a:description i:nil="true"/>
    <a:estimatedInstanceCount>100</a:estimatedInstanceCount>
  </UpdateResult>
</UpdateResponse>
</s:Body>
</s:Envelope>

```

4.10 Deleting an Entity

This example illustrates how a user can delete an Entity in the metadata store.

The example assumes that the preceding example has been successfully executed.

The following actions are carried out:

1. The user requests the protocol client to delete **Entity** with the name "Buyer" and the namespace "example.com".
2. The protocol client calls the **Delete** method as shown in the following code segment:

```

BDCServiceReference.BusinessDataCatalogSharedServiceClient myClient = new
BDCServiceReference.BusinessDataCatalogSharedServiceClient();
// /***** Any implementation-specific impersonation logic goes here *****/
BDCServiceReference.EntityStruct myEntity = new BDCServiceReference.EntityStruct();
System.Version ver = new Version(1, 1);

Guid myPartition = new Guid("00000000-0000-0000-0000-000000000000");

myEntity = myClient.GetEntityWithNameAndNamespace("example.com", "Buyer",
myPartition);
myClient.Delete(myEntity);

```

3. The protocol server checks if the Entity exists in the Metadata store.

4. If it exists, the protocol server deletes the Entity from the Metadata store.

Request body

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <Delete xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog">
      <metadataObjectStruct i:type="a:EntityStruct"
xmlns:a="Microsoft.SharePoint.BusinessData" xmlns:i="http://www.w3.org/2001/XMLSchema-
instance">
        <a:id>135</a:id>
        <a:isCached>true</a:isCached>
        <a:name>Buyer</a:name>
        <a:objectVersion>3</a:objectVersion>
        <a:partitionId>00000000-0000-0000-0000-000000000000</a:partitionId>
      </metadataObjectStruct>
    </Delete>
  </s:Body>
</s:Envelope>

```

```
<a:active>true</a:active>
<a:lobSystemId>122</a:lobSystemId>
<a:modelId>0</a:modelId>
<a:namespace>example.com</a:namespace>
<a:version xmlns:b="http://schemas.datacontract.org/2004/07/System">
  <b:_Build>0</b:_Build>
  <b:_Major>1</b:_Major>
  <b:_Minor>0</b:_Minor>
  <b:_Revision>0</b:_Revision>
</a:version>
<a:cacheUsage>Default</a:cacheUsage>
<a:description i:nil="true"/>
<a:estimatedInstanceCount>100</a:estimatedInstanceCount>
</metadataObjectStruct>
</Delete>
</s:Body>
</s:Envelope>
```

Response body

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body>
    <DeleteResponse xmlns="http://www.microsoft.com/Office/2009/BusinessDataCatalog"/>
  </s:Body>
</s:Envelope>
```

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None

Preliminary

6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
xmlns:tns6="http://www.microsoft.com/Office/2009/BusinessDataCatalog"
targetNamespace="http://www.microsoft.com/Office/2009/BusinessDataCatalog"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xs:schema xmlns:tns7="http://www.microsoft.com/Office/2009/BusinessDataCatalog/Imports"
targetNamespace="http://www.microsoft.com/Office/2009/BusinessDataCatalog/Imports">
      <xs:import namespace="http://www.microsoft.com/Office/2009/BusinessDataCatalog"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"/>
      <xs:import namespace="Microsoft.BusinessData.SharePoint"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization"/>
      <xs:import namespace="Microsoft.SharePoint.BusinessData"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administ
ration.Client.Constants"/>
    </xs:schema>
  </wsdl:types>
  <wsdl:message name="BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetParametersForMethod"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetParametersForMethodResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentOutOfRangeExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetParametersForMethod_BdcExceptionStateFault_FaultMes
sage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetParametersForMethod_InvalidOperationExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetParametersForMethod_MetadataExceptionStateFault_Fau
ltMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
</wsdl:definitions>
```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentNullExceptionFault_Fault
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMessage">
    <wsdl:part name="parameters" element="tns6:IsParameterReferencedByMethodInstance"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMessage">
    <wsdl:part name="parameters"
element="tns6:IsParameterReferencedByMethodInstanceResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_ArgumentOutOfRan
geExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_ArgumentExceptio
nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_ArgumentNullExce
ptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_BdcExceptionStat
eFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InvalidOperatio
nExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_MetadataExceptio
nStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetTypeReflectorTypeNameForParameter"/>

```



```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMessage">
      <wsdl:part name="parameters"
element="tns6:GetTypeReflectorTypeNameForParameterResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentOutOfRangeExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InvalidOperationE
xceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_MetadataException
StateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentNullExcep
tionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescripto
r_InputMessage">
      <wsdl:part name="parameters"
element="tns6:GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescripto
r_OutputMessage">
      <wsdl:part name="parameters"
element="tns6:GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescripto
r_ArgumentOutOfRangeExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor
r_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor
r_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor
r_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor
r_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor
r_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetFieldTypeDescriptorsByMethodInstance"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_OutputMessage"
>
    <wsdl:part name="parameters"
element="tns6:GetFieldTypeDescriptorsByMethodInstanceResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_ArgumentOutOfR
angeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_ArgumentExcept
ionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_BdcExceptionSt
ateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InvalidOperati
onExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_MetadataExcept
ionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_ArgumentNullEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetTypeDescriptorById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetTypeDescriptorById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetTypeDescriptorById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetTypeDescriptorByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentNullExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentOutOfRangeExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorById_BdcExceptionStateFault_FaultMess
age">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorById_InvalidOperationExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorById_MetadataExceptionStateFault_Faul
tMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetRootTypeDescriptorForParameter"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetRootTypeDescriptorForParameterResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_MetadataExceptionSta
teFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentOutOfRangeEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_BdcExceptionStateFau
lt_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InvalidOperationExce
ptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentNullExceptio
nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InputMess
age">
    <wsdl:part name="parameters"
element="tns6:GetTypeDescriptorsByNameAndLevelForParameter"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_OutputMes
sage">
    <wsdl:part name="parameters"
element="tns6:GetTypeDescriptorsByNameAndLevelForParameterResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_ArgumentN
ullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_ArgumentO
utOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_ArgumentE
xceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_MetadataE
xceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_BdcExcept
ionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_InvalidOp
erationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_InputMessage"
>
    <wsdl:part name="parameters" element="tns6:GetChildTypeDescriptorsForTypeDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_OutputMessage
">
    <wsdl:part name="parameters"
element="tns6:GetChildTypeDescriptorsForTypeDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_ArgumentOutOf
RangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_ArgumentNullE
xceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_BdcExceptionS
tateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_InvalidOperat
ionExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_MetadataExcep
tionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_ArgumentExcep
tionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetTypeDescriptorsForFilterDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_OutputMessage">
    <wsdl:part name="parameters"
element="tns6:GetTypeDescriptorsForFilterDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_MetadataExceptio
nStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_BdcExceptionStat
eFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_ArgumentOutOfRan
geExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InvalidOperatio
nExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_ArgumentExcep
tionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_ArgumentNullExce
ptionFault_FaultMessage">

```

```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetDefaultValuesForTypeDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetDefaultValuesForTypeDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentNullExceptio
nFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentOutOfRangeEx
ceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InvalidOperationExce
ptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_MetadataExceptionSta
teFault_FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentExceptionFau
lt_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_BdcExceptionStateFau
lt_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InputMessage">
        <wsdl:part name="parameters" element="tns6:SetDefaultValuesForTypeDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_OutputMessage">
        <wsdl:part name="parameters" element="tns6:SetDefaultValuesForTypeDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentOutOfRangeEx
ceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InputMessage">
    <wsdl:part name="parameters" element="tns6:DeleteDefaultValueForTypeDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_OutputMessage">
    <wsdl:part name="parameters" element="tns6:DeleteDefaultValueForTypeDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_BdcExceptionStateFault_FaultMessage">

```



```

    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InvalidOperationEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLevelForTypeDescriptor"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLevelForTypeDescriptorResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_MetadataExceptionStateFault_
FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentOutOfRangeExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_BdcExceptionStateFault_Fault
Message">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InvalidOperationExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentNullExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMessage">

```

```

    <wsdl:part name="parameters" element="tns6:TypeDescriptorCreate"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMessage">
    <wsdl:part name="parameters" element="tns6:TypeDescriptorCreateResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentNullExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentOutOfRangeExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorCreate_BdcExceptionStateFault_FaultMessa
ge">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorCreate_InvalidOperationExceptionFault_Fa
ultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorCreate_MetadataExceptionStateFault_Fault
Message">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InputMessage">
    <wsdl:part name="parameters" element="tns6:TypeDescriptorMergeXml"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_OutputMessage">
    <wsdl:part name="parameters" element="tns6:TypeDescriptorMergeXmlResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentOutOfRangeExceptionFaul
t_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentNullExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_BdcExceptionStateFault_FaultMes
sage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InvalidOperationExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_MetadataExceptionStateFault_Fau
ltMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_PackageFormatExceptionStateFaul
t_FaultMessage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage">
    <wsdl:part name="parameters" element="tns6:TypeDescriptorReadXml"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage">
    <wsdl:part name="parameters" element="tns6:TypeDescriptorReadXmlResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_InvalidOperationExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_MetadataExceptionStateFault_Faul
tMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentNullExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentOutOfRangeExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_BdcExceptionStateFault_FaultMess
age">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_TypeDescriptorReadXml_PackageFormatExceptionStateFault
_FaultMessage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetAssociationById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetAssociationById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationById_ArgumentNullExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationById_ArgumentOutOfRangeExceptionFault_Fa
ultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationById_BdcExceptionStateFault_FaultMessage
">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationById_InvalidOperationExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationById_MetadataExceptionStateFault_FaultMe
ssage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationById_ArgumentExceptionFault_FaultMessage
">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationsForEntityAndRole"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationsForEntityAndRoleResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InvalidOperationExcept
ionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentNullExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentOutOfRangeExce
ptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_BdcExceptionStateFault
_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_MetadataExceptionState
Fault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationsForDataClass"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationsForDataClassResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentNullExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_MetadataExceptionStateFaul
t_FaultMessage">

```

```

        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentOutOfRangeExceptio
nFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_BdcExceptionStateFault_Fau
ltMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_InvalidOperationExceptionF
ault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentExceptionFault_Fau
ltMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetAssociationsForMethod"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetAssociationsForMethodResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentNullExceptionFault_Fa
ultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentOutOfRangeExceptionFa
ult_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentExceptionFault_FaultM
essage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_MetadataExceptionStateFault_F
aultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_BdcExceptionStateFault_FaultM
essage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationsForMethod_InvalidOperationExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationMembersInRole"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationMembersInRoleResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentOutOfRangeExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentNullExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_BdcExceptionStateFault_Fau
ltMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_InvalidOperationExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_MetadataExceptionStateFau
lt_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentExceptionFault_Fau
ltMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationGroupById"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationGroupByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationGroupsForEntity"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAssociationGroupsForEntityResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>

```



```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InvalidOperationExceptio
nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_MetadataExceptionStateFa
ult_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_BdcExceptionStateFault_F
aultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_InputMessa
ge">
    <wsdl:part name="parameters" element="tns6:GetAssociationReferencesForAssociationGroup"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_OutputMessa
ge">
    <wsdl:part name="parameters"
element="tns6:GetAssociationReferencesForAssociationGroupResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_ArgumentOu
tOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_ArgumentNu
llExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_BdcExcepti
onStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_InvalidOpe
rationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_MetadataEx
ceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_ArgumentEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_InputMessag
e">
    <wsdl:part name="parameters" element="tns6:AddAssociationReferenceToAssociationGroup"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_OutputMessag
e">
    <wsdl:part name="parameters"
element="tns6:AddAssociationReferenceToAssociationGroupResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_MetadataExce
ptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_ArgumentNull
ExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_ArgumentOutO
fRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_BdcExceptio
nStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_InvalidOpera
tionExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_ArgumentExce
ptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_InputMe
ssage">
    <wsdl:part name="parameters"
element="tns6:DeleteAssociationReferenceFromAssociationGroup"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_OutputM
essage">
    <wsdl:part name="parameters"
element="tns6:DeleteAssociationReferenceFromAssociationGroupResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_Metadat
aExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_Argumen
tExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_Argumen
tOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_BdcExce
ptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_Invalid
OperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup_Argumen
tNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetXmlSchemaForView"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetXmlSchemaForViewResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentNullExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetXmlSchemaForView_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetXmlSchemaForView_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetXmlSchemaForView_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntitiesLikeNameAndNamespace"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntitiesLikeNameAndNamespaceResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentNullExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage">
      <wsdl:part name="parameters" element="tns6:GetEntityWithNameAndNamespace"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage">
      <wsdl:part name="parameters" element="tns6:GetEntityWithNameAndNamespaceResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_MetadataExceptionStateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentNullExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentOutOfRangeExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InputMessage">
      <wsdl:part name="parameters" element="tns6:GetEntityWithNameAndNamespaceAndVersion"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_OutputMessage"
>
    <wsdl:part name="parameters"
element="tns6:GetEntityWithNameAndNamespaceAndVersionResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_InvalidOperati
onExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_ArgumentNullEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_ArgumentOutOfR
angeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_BdcExceptionSt
ateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_MetadataExcept
ionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_ArgumentExcept
ionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntitiesForSystem"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntitiesForSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentOutOfRangeExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForSystem_BdcExceptionStateFault_FaultMessa
ge">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForSystem_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForSystem_MetadataExceptionStateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentNullExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage">
      <wsdl:part name="parameters" element="tns6:GetEntitiesForAssociationAndRole"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage">
      <wsdl:part name="parameters" element="tns6:GetEntitiesForAssociationAndRoleResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentOutOfRangeExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_MetadataExceptionStateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentExceptionFault_FaultMessage">

```

```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentNullException
Fault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage">
        <wsdl:part name="parameters" element="tns6:SetDefaultActionForEntity"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage">
        <wsdl:part name="parameters" element="tns6:SetDefaultActionForEntityResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentOutOfRangeExceptionF
ault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_BdcExceptionStateFault_Fault
Message">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_InvalidOperationExceptionFau
lt_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_MetadataExceptionStateFault_
FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentExceptionFault_Fault
Message">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentNullExceptionFault_F
aultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_InputM
essage">
        <wsdl:part name="parameters"
element="tns6:GetEntityNameAndNamespacesForAssociationAndRole"/>
    </wsdl:message>

```



```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_Output
Message">
    <wsdl:part name="parameters"
element="tns6:GetEntityNameAndNamespacesForAssociationAndRoleResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_Invalid
OperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_BdcExc
eptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_Argume
ntOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_Metada
taExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_Argume
ntExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRole_Argume
ntNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetEntityById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntityById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetEntityById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntityByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityById_ArgumentOutOfRangeExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityById_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityById_InvalidOperationExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityById_MetadataExceptionStateFault_FaultMessage
">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityById_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityById_ArgumentNullExceptionFault_FaultMessage"
>
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_EntityCreate_InputMessage">
    <wsdl:part name="parameters" element="tns6:EntityCreate"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_EntityCreate_OutputMessage">
    <wsdl:part name="parameters" element="tns6:EntityCreateResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_InvalidOperationExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_MetadataExceptionStateFault_FaultMessage"
>
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_PackageFormatExceptionStateFault_FaultMes
sage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_ArgumentNullExceptionFault_FaultMessage">

```

```

    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_EntityCreate_ArgumentOutOfRangeExceptionHandler_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_Activate_InputMessage">
    <wsdl:part name="parameters" element="tns6:Activate"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_Activate_OutputMessage">
    <wsdl:part name="parameters" element="tns6:ActivateResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_PackageFormatExceptionStateFault_FaultMessage
">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_BdcExceptionHandlerStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionHandlerState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_MetadataExceptionHandlerStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.SharePoint.BusinessData.SharePoint" name="detail"
element="tns3:MetadataExceptionHandler"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_ArgumentExceptionHandler_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentExceptionHandler"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Activate_ArgumentOutOfRangeExceptionHandler_FaultMessage
">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeExceptionHandler"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_Deactivate_InputMessage">
    <wsdl:part name="parameters" element="tns6:Deactivate"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_Deactivate_OutputMessage">
    <wsdl:part name="parameters" element="tns6:DeactivateResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_BdcExceptionHandlerStateFault_FaultMessage">

```

```

    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_InvalidOperationExceptionFault_FaultMessage
">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_PackageFormatExceptionStateFault_FaultMessa
ge">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Deactivate_ArgumentOutOfRangeExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage">
    <wsdl:part name="parameters" element="tns6:BulkSwitchActiveOrValidate"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage">
    <wsdl:part name="parameters" element="tns6:BulkSwitchActiveOrValidateResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_BdcExceptionStateFault_Faul
tMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InvalidOperationExceptionFa
ult_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_MetadataExceptionStateFault
_FaultMessage">

```

```

        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_PackageFormatExceptionState
Fault_FaultMessage">
        <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentExceptionFault_Fault
tMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentNullExceptionFault_
FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentOutOfRangeException
Fault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetActionById_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetActionById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetActionById_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetActionByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionById_ArgumentNullExceptionFault_FaultMessage"
>
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionById_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionById_InvalidOperationExceptionFault_FaultMess
age">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionById_MetadataExceptionStateFault_FaultMessage
">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionById_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionById_ArgumentOutOfRangeExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetActionsForEntity"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetActionsForEntityResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionsForEntity_InvalidOperationExceptionFault_Fau
ltMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionsForEntity_BdcExceptionStateFault_FaultMessag
e">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentOutOfRangeExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionsForEntity_MetadataExceptionStateFault_FaultM
essage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentExceptionFault_FaultMessag
e">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentNullExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetActionParameterById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetActionParameterById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetActionParameterById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetActionParameterByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParameterById_ArgumentOutOfRangeExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParameterById_BdcExceptionStateFault_FaultMes
sage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParameterById_InvalidOperationExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParameterById_MetadataExceptionStateFault_Fau
ltMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParameterById_ArgumentExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParameterById_ArgumentNullExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetActionParametersForAction"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetActionParametersForActionResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentOutOfRangeExcepti
onFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_BdcExceptionStateFault_Fa
ultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_InvalidOperationException
Fault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_MetadataExceptionStateFau
lt_FaultMessage">

```

```

        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentExceptionFault_Fa
ultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentNullExceptionFault
t_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetIdentifierById_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetIdentifierById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetIdentifierByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifierById_ArgumentOutOfRangeExceptionFault_Fau
ltMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifierById_BdcExceptionStateFault_FaultMessage"
>
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifierById_InvalidOperationExceptionFault_Fault
Message">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifierById_MetadataExceptionStateFault_FaultMes
sage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifierById_ArgumentExceptionFault_FaultMessage"
>
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifierById_ArgumentNullExceptionFault_FaultMess
age">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetIdentifiersForEntity"/>
    </wsdl:message>

```



```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetIdentifiersForEntityResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetMethodById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetMethodById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodById_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodById_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodById_InvalidOperationExceptionFault_FaultMessage">

```

```

    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodById_MetadataExceptionStateFault_FaultMessage"
  >
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
    element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodById_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodById_ArgumentNullExceptionFault_FaultMessage"
  >
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetMethodsForDataClass_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodsForDataClass"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetMethodsForDataClass_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodsForDataClassResponse"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodsForDataClass_InvalidOperationExceptionFault_
    FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodsForDataClass_BdcExceptionStateFault_FaultMes
    sage">
    <wsdl:part
    xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
    name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentOutOfRangeExceptionFaul
    t_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodsForDataClass_MetadataExceptionStateFault_Fau
    ltMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
    element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentExceptionFault_FaultMes
    sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentNullExceptionFault_Faul
    tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentNullException"/>
  </wsdl:message>

```

```

</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage">
  <wsdl:part name="parameters" element="tns6:IsMethodInstantiated"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage">
  <wsdl:part name="parameters" element="tns6:IsMethodInstantiatedResponse"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentOutOfRangeExceptionFault_
FaultMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_IsMethodInstantiated_BdcExceptionStateFault_FaultMessa
ge">
  <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_IsMethodInstantiated_InvalidOperationExceptionFault_Fa
ultMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_IsMethodInstantiated_MetadataExceptionStateFault_Fault
Message">
  <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentExceptionFault_FaultMessa
ge">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentNullExceptionFault_FaultM
essage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage">
  <wsdl:part name="parameters" element="tns6:GetFilterDescriptorById"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage">
  <wsdl:part name="parameters" element="tns6:GetFilterDescriptorByIdResponse"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentNullExceptionFault_Fau
ltMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_BdcExceptionStateFault_FaultMe
ssage">

```

```

    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_InvalidOperationExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_MetadataExceptionStateFault_Fa
ultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentOutOfRangeExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetFilterDescriptorsForMethod"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetFilterDescriptorsForMethodResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_MetadataExceptionStateFa
ult_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_BdcExceptionStateFault_F
aultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InvalidOperationExceptio
nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetMethodInstanceById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodInstanceById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetMethodInstanceById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodInstanceByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstanceById_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstanceById_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstanceById_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetMethodInstancesForDataClass"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_OutputMessage">

```

```

        <wsdl:part name="parameters" element="tns6:GetMethodInstancesForDataClassResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentNullExceptionFa
ult_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_BdcExceptionStateFault_
FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InvalidOperationExcepti
onFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_MetadataExceptionStateF
ault_FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentExceptionFault_
FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentOutOfRangeExcep
tionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetMethodInstancesForMethod"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetMethodInstancesForMethodResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_BdcExceptionStateFault_Fau
ltMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InvalidOperationExceptionF
ault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage">
    <wsdl:part name="parameters" element="tns6:CheckPathInMethodInstances"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage">
    <wsdl:part name="parameters" element="tns6:CheckPathInMethodInstancesResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CheckPathInMethodInstances_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CheckPathInMethodInstances_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CheckPathInMethodInstances_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CheckPathInMethodInstances_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetParameterById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetParameterById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetParameterById_OutputMessage">

```

```

        <wsdl:part name="parameters" element="tns6:GetParameterByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParameterById_MetadataExceptionStateFault_FaultMess
age">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParameterById_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParameterById_InvalidOperationExceptionFault_FaultM
essage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParameterById_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParameterById_ArgumentNullExceptionFault_FaultMessa
ge">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetParameterById_ArgumentOutOfRangeExceptionFault_Faul
tMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage">
        <wsdl:part name="parameters" element="tns6:ImportPackageWithProgress"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage">
        <wsdl:part name="parameters" element="tns6:ImportPackageWithProgressResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_BdcExceptionStateFault_Fault
Message">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentExceptionFault_Fault
Message">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentNullExceptionFault_F
aultMessage">

```



```

    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_MetadataExceptionStateFault_
FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_InvalidOperationExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_PackageFormatExceptionStateF
ault_FaultMessage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentOutOfRangeExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetImportProgress_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetImportProgress"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetImportProgress_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetImportProgressResponse"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_ExportPackage_InputMessage">
    <wsdl:part name="parameters" element="tns6:ExportPackage"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_ExportPackage_OutputMessage">
    <wsdl:part name="parameters" element="tns6:ExportPackageResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_ArgumentOutOfRangeExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_ArgumentNullExceptionFault_FaultMessage"
>
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_InvalidOperationExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_MetadataExceptionStateFault_FaultMessage
">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ExportPackage_PackageFormatExceptionStateFault_FaultMe
ssage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetModelById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetModelById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetModelById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetModelByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelById_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelById_InvalidOperationExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelById_MetadataExceptionStateFault_FaultMessage"
>
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelById_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelById_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelById_ArgumentOutOfRangeFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetModelsByName_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetModelsByName"/>

```

```

</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_GetModelsByName_OutputMessage">
  <wsdl:part name="parameters" element="tns6:GetModelsByNameResponse"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByName_ArgumentOutOfRangeExceptionFault_Fault
Message">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByName_InvalidOperationExceptionFault_FaultMe
ssage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByName_MetadataExceptionStateFault_FaultMessa
ge">
  <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByName_ArgumentExceptionFault_FaultMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByName_ArgumentNullExceptionFault_FaultMessag
e">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByName_BdcExceptionStateFault_FaultMessage">
  <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_GetModelByName_InputMessage">
  <wsdl:part name="parameters" element="tns6:GetModelByName"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_GetModelByName_OutputMessage">
  <wsdl:part name="parameters" element="tns6:GetModelByNameResponse"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelByName_ArgumentOutOfRangeExceptionFault_FaultM
essage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelByName_BdcExceptionStateFault_FaultMessage">
  <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_GetModelByName_InvalidOperationExceptionFault_FaultMes
sage">

```

```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelByName_MetadataExceptionStateFault_FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelByName_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelByName_ArgumentNullExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetModelsByEntityId"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetModelsByEntityIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByEntityId_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByEntityId_InvalidOperationExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByEntityId_MetadataExceptionStateFault_FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentNullExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentOutOfRangeExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>

```

```

</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_AddEntityToModel_InputMessage">
  <wsdl:part name="parameters" element="tns6:AddEntityToModel"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage">
  <wsdl:part name="parameters" element="tns6:AddEntityToModelResponse"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_AddEntityToModel_InvalidOperationExceptionFault_FaultM
essage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_AddEntityToModel_ArgumentNullExceptionFault_FaultMessa
ge">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_AddEntityToModel_ArgumentOutOfRangeExceptionFault_Faul
tMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_AddEntityToModel_BdcExceptionStateFault_FaultMessage">
  <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_AddEntityToModel_MetadataExceptionStateFault_FaultMess
age">
  <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_AddEntityToModel_ArgumentExceptionFault_FaultMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_RemoveEntityFromModel_InputMessage">
  <wsdl:part name="parameters" element="tns6:RemoveEntityFromModel"/>
</wsdl:message>
<wsdl:message name="BusinessDataCatalogSharedService_RemoveEntityFromModel_OutputMessage">
  <wsdl:part name="parameters" element="tns6:RemoveEntityFromModelResponse"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentOutOfRangeExceptionFault
_FaultMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
</wsdl:message>
<wsdl:message
name="BusinessDataCatalogSharedService_RemoveEntityFromModel_InvalidOperationExceptionFault_F
aultMessage">
  <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
</wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveEntityFromModel_MetadataExceptionStateFault_Fault
tMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentNullExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveEntityFromModel_BdcExceptionStateFault_FaultMess
age">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage">
    <wsdl:part name="parameters" element="tns6:DeleteNoCascade"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage">
    <wsdl:part name="parameters" element="tns6:DeleteNoCascadeResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteNoCascade_InvalidOperationExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteNoCascade_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteNoCascade_MetadataExceptionStateFault_FaultMessa
ge">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentNullExceptionFault_FaultMessag
e">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentOutOfRangeExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ModelReadXml_InputMessage">
    <wsdl:part name="parameters" element="tns6:ModelReadXml"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ModelReadXml_OutputMessage">
    <wsdl:part name="parameters" element="tns6:ModelReadXmlResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_PackageFormatExceptionStateFault_FaultMes
sage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_ArgumentOutOfRangeExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_InvalidOperationExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ModelReadXml_MetadataExceptionStateFault_FaultMessage"
>
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InputMessa
ge">
    <wsdl:part name="parameters" element="tns6:GetLobSystemProxyAssemblyBytesByLobSystemId"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_OutputMess
age">

```

```

    <wsdl:part name="parameters"
element="tns6:GetLobSystemProxyAssemblyBytesByLobSystemIdResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_ArgumentNu
llExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_BdcExcepti
onStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InvalidOpe
rationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_MetadataEx
ceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_ArgumentEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_ArgumentOu
tOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemAllAssembliesBytes"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemAllAssembliesBytesResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentNullExceptionFa
ult_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentOutOfRangeExcep
tionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>

```



```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_BdcExceptionStateFault_
FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InvalidOperationExcepti
onFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_MetadataExceptionStateF
ault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemDataByLobSystem"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemDataByLobSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_BdcExceptionStateFault_Fau
ltMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InvalidOperationExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_MetadataExceptionStateFaul
t_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentExceptionFault_Fau
ltMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentNullExceptionFault_
FaultMessage">

```

```

    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentOutOfRangeExceptio
    nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InputMessage">
    <wsdl:part name="parameters" element="tns6:SetLobSystemDataByLobSystemId"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_OutputMessage">
    <wsdl:part name="parameters" element="tns6:SetLobSystemDataByLobSystemIdResponse"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InvalidOperationExceptio
    nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentNullExceptionFau
    lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentOutOfRangeExcept
    ionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_BdcExceptionStateFault_F
    aultMessage">
    <wsdl:part
    xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
    name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_MetadataExceptionStateFa
    ult_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
    element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentExceptionFault_F
    aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
    element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
    name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_I
    nputMessage">
    <wsdl:part name="parameters"
    element="tns6:GetLobSystemsReferencedByEntitiesAssociatedWithModel"/>
  </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_O
utputMessage">
    <wsdl:part name="parameters"
element="tns6:GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_A
rgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_I
nvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_M
etadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_A
rgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_A
rgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_B
dcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemByName"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemByNameResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemByName_InvalidOperationExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemByName_BdcExceptionStateFault_FaultMessage
">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemByName_MetadataExceptionStateFault_FaultMe
ssage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentExceptionFault_FaultMessage
">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentNullExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentOutOfRangeExceptionFault_Fa
ultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemsLikeName"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemsLikeNameResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_InvalidOperationExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_MetadataExceptionStateFault_Faul
tMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentNullExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentOutOfRangeExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemsLikeName_BdcExceptionStateFault_FaultMess
age">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetLobSystemById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemById_ArgumentOutOfRangeExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemById_InvalidOperationExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemById_MetadataExceptionStateFault_FaultMess
age">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemById_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemById_ArgumentNullExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemById_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetEntityCount_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntityCount"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetEntityCount_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetEntityCountResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityCount_ArgumentOutOfRangeExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityCount_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityCount_InvalidOperationExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityCount_MetadataExceptionStateFault_FaultMessag
e">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityCount_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntityCount_ArgumentNullExceptionFault_FaultMessage
">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetSystemUtilityTypeNameForLobSystem"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_OutputMessage">
    <wsdl:part name="parameters"
element="tns6:GetSystemUtilityTypeNameForLobSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_BdcExceptionState
Fault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InvalidOperati
onExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_MetadataExcepti
onStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentExcepti
onFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentNullExcept
tionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentOutOfRange
ExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage">
    <wsdl:part name="parameters" element="tns6:GenerateProxyAssemblyForLobSystem"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GenerateProxyAssemblyForLobSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InvalidOperationExce
ptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentNullExceptio
nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentOutOfRangeEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_BdcExceptionStateFau
lt_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_MetadataExceptionSta
teFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage">
    <wsdl:part name="parameters" element="tns6:DeleteProxyAssemblyForLobSystem"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_OutputMessage">
    <wsdl:part name="parameters" element="tns6:DeleteProxyAssemblyForLobSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemInstancesForLobSystem"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemInstancesForLobSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>

```



```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_MetadataExceptionSta
teFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentExceptionFau
lt_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentNullExceptio
nFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentOutOfRangeEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemInstanceById"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetLobSystemInstanceByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_InvalidOperationExceptionFaul
t_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentNullExceptionFault_Fa
ultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentOutOfRangeExceptionFa
ult_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_BdcExceptionStateFault_FaultM
essage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetLobSystemInstanceById_MetadataExceptionStateFault_F
aultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetDataClassesForSystem"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetDataClassesForSystemResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentOutOfRangeExceptionFault_
FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_InvalidOperationExceptionFault_
FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_MetadataExceptionStateFault_Fa
ultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentExceptionFault_FaultMe
ssage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentNullExceptionFault_Fau
ltMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassesForSystem_BdcExceptionStateFault_FaultMe
ssage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetDataClassById_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetDataClassById"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetDataClassById_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetDataClassByIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassById_InvalidOperationExceptionFault_FaultM
essage">

```

```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassById_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassById_MetadataExceptionStateFault_FaultMess
age">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassById_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassById_ArgumentNullExceptionFault_FaultMessa
ge">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetDataClassById_ArgumentOutOfRangeExceptionFault_Faul
tMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetEntitiesReferencedByModelId"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetEntitiesReferencedByModelIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_ArgumentOutOfRangeExcep
tionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_ArgumentNullExceptionFa
ult_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_BdcExceptionStateFault_
FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InvalidOperationExcepti
onFault_FaultMessage">

```

```

    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_MetadataExceptionStateF
ault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_ArgumentExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetServiceApplicationId_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetServiceApplicationId"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetServiceApplicationId_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetServiceApplicationIdResponse"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetAllPartitionIds_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllPartitionIds"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetAllPartitionIds_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllPartitionIdsResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPartitionIds_AccessDeniedExceptionFault_FaultMes
sage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:AccessDeniedException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPartitionIds_InvalidOperationExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPartitionIds_BdcExceptionStateFault_FaultMessage
">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPartitionIds_MetadataExceptionStateFault_FaultMe
ssage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_ReadSlicedXml_InputMessage">
    <wsdl:part name="parameters" element="tns6:ReadSlicedXml"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_ReadSlicedXml_OutputMessage">
    <wsdl:part name="parameters" element="tns6:ReadSlicedXmlResponse"/>
  </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_InvalidOperationExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_PackageFormatExceptionStateFault_FaultMe
ssage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_AccessDeniedExceptionFault_FaultMessage"
>
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:AccessDeniedException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentOutOfRangeExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentOutOfRangeExceptionFault_FaultMe
ssage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_MetadataExceptionStateFault_FaultMessage
">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentNullExceptionFault_FaultMessage"
>
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ReadSlicedXml_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_WriteSlicedXml_InputMessage">
    <wsdl:part name="parameters" element="tns6:WriteSlicedXml"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_WriteSlicedXml_OutputMessage">
    <wsdl:part name="parameters" element="tns6:WriteSlicedXmlResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_InvalidOperationExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_BdcExceptionStateFault_FaultMessage">

```

```

    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_AccessDeniedExceptionFault_FaultMessage
">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:AccessDeniedException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentNullExceptionFault_FaultMessage
">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentOutOfRangeExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_MetadataExceptionStateFault_FaultMessag
e">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_WriteSlicedXml_PackageFormatExceptionStateFault_FaultM
essage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_HaveRights_InputMessage">
    <wsdl:part name="parameters" element="tns6:HaveRights"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_HaveRights_OutputMessage">
    <wsdl:part name="parameters" element="tns6:HaveRightsResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_HaveRights_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_HaveRights_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_HaveRights_ArgumentOutOfRangeExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_HaveRights_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_HaveRights_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_HaveRights_MetadataExceptionStateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_InputMessage">
      <wsdl:part name="parameters" element="tns6:GetAllLocalizedNamesForMetadataObjectStruct"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_OutputMessage">
      <wsdl:part name="parameters"
element="tns6:GetAllLocalizedNamesForMetadataObjectStructResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_ArgumentNullExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_MetadataExceptionStateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_ArgumentExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_ArgumentOu
tOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllLocalizedNames"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllLocalizedNamesResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNames_BdcExceptionStateFault_FaultMessa
ge">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNames_InvalidOperationExceptionFault_Fa
ultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNames_MetadataExceptionStateFault_Fault
Message">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentNullExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentOutOfRangeExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllPropertiesForMetadataObjectStruct"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_OutputMessage"
>
    <wsdl:part name="parameters"
element="tns6:GetAllPropertiesForMetadataObjectStructResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_BdcExceptionSt
ateFault_FaultMessage">

```



```

    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_ArgumentNullEx
ceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_ArgumentOutOfR
angeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_ArgumentExcept
ionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InvalidOperati
onExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_MetadatanExcep
tionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetAllProperties_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllProperties"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_GetAllProperties_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetAllPropertiesResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllProperties_ArgumentOutOfRangeExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllProperties_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllProperties_InvalidOperationExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllProperties_MetadatanExceptionStateFault_FaultM
essage">

```

```

    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_GetAllProperties_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAllProperties_ArgumentNullExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage">
    <wsdl:part name="parameters" element="tns6:SaveLocalizedName"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage">
    <wsdl:part name="parameters" element="tns6:SaveLocalizedNameResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentExceptionFault_FaultMessage"
>
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveLocalizedName_MetadataExceptionStateFault_FaultMes
sage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentNullExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentOutOfRangeExceptionFault_Fau
ltMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveLocalizedName_InvalidOperationExceptionFault_Fault
Message">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveLocalizedName_BdcExceptionStateFault_FaultMessage"
>
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage">
    <wsdl:part name="parameters" element="tns6:ClearLocalizedNames"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage">

```

```

        <wsdl:part name="parameters" element="tns6:ClearLocalizedNamesResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentNullExceptionFault_FaultMe
ssage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearLocalizedNames_InvalidOperationExceptionFault_Fau
ltMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentOutOfRangeExceptionFault_F
aultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearLocalizedNames_MetadataExceptionStateFault_FaultM
essage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentExceptionFault_FaultMessag
e">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearLocalizedNames_BdcExceptionStateFault_FaultMessag
e">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage">
        <wsdl:part name="parameters" element="tns6:RemoveLocalizedName"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage">
        <wsdl:part name="parameters" element="tns6:RemoveLocalizedNameResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentOutOfRangeExceptionFault_F
aultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveLocalizedName_MetadataExceptionStateFault_FaultM
essage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentNullExceptionFault_FaultMe
ssage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveLocalizedName_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveLocalizedName_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_SaveProperty_InputMessage">
      <wsdl:part name="parameters" element="tns6:SaveProperty"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_SaveProperty_OutputMessage">
      <wsdl:part name="parameters" element="tns6:SavePropertyResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveProperty_MetadataExceptionStateFault_FaultMessage">
      <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveProperty_ArgumentExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveProperty_ArgumentNullExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveProperty_ArgumentOutOfRangeExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveProperty_BdcExceptionStateFault_FaultMessage">
      <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_SaveProperty_InvalidOperationExceptionFault_FaultMessage">
      <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ClearProperties_InputMessage">

```

```

        <wsdl:part name="parameters" element="tns6:ClearProperties"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ClearProperties_OutputMessage">
        <wsdl:part name="parameters" element="tns6:ClearPropertiesResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearProperties_ArgumentOutOfRangeExceptionFault_Fault
Message">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearProperties_InvalidOperationExceptionFault_FaultMe
ssage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearProperties_ArgumentNullExceptionFault_FaultMessag
e">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearProperties_MetadataExceptionStateFault_FaultMessa
ge">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearProperties_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ClearProperties_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_RemoveProperty_InputMessage">
        <wsdl:part name="parameters" element="tns6:RemoveProperty"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_RemoveProperty_OutputMessage">
        <wsdl:part name="parameters" element="tns6:RemovePropertyResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveProperty_MetadataExceptionStateFault_FaultMessag
e">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveProperty_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveProperty_ArgumentNullExceptionFault_FaultMessag
e">

```

```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveProperty_ArgumentOutOfRangeExceptionFault_FaultM
essage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveProperty_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_RemoveProperty_InvalidOperationExceptionFault_FaultMes
sage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_GetAccessControlEntries_InputMessage">
        <wsdl:part name="parameters" element="tns6:GetAccessControlEntries"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_OutputMessage">
        <wsdl:part name="parameters" element="tns6:GetAccessControlEntriesResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_MetadataExceptionStateFault_Fa
ultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentNullExceptionFault_Fau
ltMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentOutOfRangeExceptionFau
lt_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentExceptionFault_FaultMe
ssage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_BdcExceptionStateFault_FaultMe
ssage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetAccessControlEntries_InvalidOperationExceptionFault
_FaultMessage">

```

```

    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage">
    <wsdl:part name="parameters" element="tns6:SetAccessControlEntries"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage">
    <wsdl:part name="parameters" element="tns6:SetAccessControlEntriesResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentNullExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_SetAccessControlEntries_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage">
    <wsdl:part name="parameters" element="tns6:MetadataObjectCreate"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage">
    <wsdl:part name="parameters" element="tns6:MetadataObjectCreateResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
  </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectCreate_BdcExceptionStateFault_FaultMessa
ge">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectCreate_MetadataExceptionStateFault_Fault
Message">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectCreate_InvalidOperationExceptionFault_Fa
ultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentNullExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_Update_InputMessage">
    <wsdl:part name="parameters" element="tns6:Update"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_Update_OutputMessage">
    <wsdl:part name="parameters" element="tns6:UpdateResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Update_InvalidOperationExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Update_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Update_ArgumentOutOfRangeExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Update_MetadataExceptionStateFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Update_ArgumentExceptionFault_FaultMessage">

```



```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Update_ArgumentNullExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_Delete_InputMessage">
        <wsdl:part name="parameters" element="tns6:Delete"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_Delete_OutputMessage">
        <wsdl:part name="parameters" element="tns6:DeleteResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Delete_ArgumentOutOfRangeExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Delete_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Delete_InvalidOperationExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Delete_MetadataExceptionStateFault_FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Delete_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_Delete_ArgumentNullExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage">
        <wsdl:part name="parameters" element="tns6:MetadataObjectMergeXml"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage">
        <wsdl:part name="parameters" element="tns6:MetadataObjectMergeXmlResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentOutOfRangeExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_BdcExceptionStateFault_FaultMes
sage">

```

```

    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_InvalidOperationExceptionFault_
FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_MetadataExceptionStateFault_Faul
tMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_PackageFormatExceptionStateFaul
t_FaultMessage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentNullExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage">
    <wsdl:part name="parameters" element="tns6:MetadataObjectReadXml"/>
  </wsdl:message>
  <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage">
    <wsdl:part name="parameters" element="tns6:MetadataObjectReadXmlResponse"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_MetadataExceptionStateFault_Faul
tMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_BdcExceptionStateFault_FaultMes
sage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_InvalidOperationExceptionFault_F
aultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
  </wsdl:message>
  <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_PackageFormatExceptionStateFault
_FaultMessage">

```

```

        <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentExceptionFault_FaultMess
age">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentNullExceptionFault_Fault
Message">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentOutOfRangeExceptionFault
_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_InputMessage">
        <wsdl:part name="parameters" element="tns6:MetadataObjectWriteXml"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_OutputMessage">
        <wsdl:part name="parameters" element="tns6:MetadataObjectWriteXmlResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentOutOfRangeExceptionFault
_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_BdcExceptionStateFault_FaultMes
sage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_InvalidOperationExceptionFault_
FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_MetadataExceptionStateFault_Fau
ltMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_PackageFormatExceptionStateFaul
t_FaultMessage">
        <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentExceptionFault_FaultMes
sage">

```

```

        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentNullExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage">
        <wsdl:part name="parameters" element="tns6:CopyAclAcrossChildren"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage">
        <wsdl:part name="parameters" element="tns6:CopyAclAcrossChildrenResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_InvalidOperationExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentOutOfRangeExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_BdcExceptionStateFault_FaultMessage">
        <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_MetadataExceptionStateFault_FaultMessage">
        <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentNullExceptionFault_FaultMessage">
        <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage">
        <wsdl:part name="parameters" element="tns6:CopyAclAcrossChildrenForSetting"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage">
        <wsdl:part name="parameters" element="tns6:CopyAclAcrossChildrenForSettingResponse"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InvalidOperationExcept
ionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_BdcExceptionStateFault
_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentOutOfRangeExce
ptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_MetadataExceptionState
Fault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentExceptionFault
_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentNullExceptionF
ault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage">
    <wsdl:part name="parameters" element="tns6:CopyAclToSetting"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage">
    <wsdl:part name="parameters" element="tns6:CopyAclToSettingResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentOutOfRangeExceptionFault_Faul
tMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclToSetting_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclToSetting_InvalidOperationExceptionFault_FaultM
essage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>

```

```

    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclToSetting_MetadataExceptionStateFault_FaultMess
age">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentNullExceptionFault_FaultMessa
ge">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InputMessage">
    <wsdl:part name="parameters" element="tns6:GetCacheInvalidationRecordsSince"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_OutputMessage">
    <wsdl:part name="parameters" element="tns6:GetCacheInvalidationRecordsSinceResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_MetadataExceptionStat
eFault_FaultMessage">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_AccessDeniedException
Fault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:AccessDeniedException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_BdcExceptionStateFaul
t_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InvalidOperationExcep
tionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_PackageFormatExceptio
nStateFault_FaultMessage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentExceptionFaul
t_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>

```

```

    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentNullException
Fault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentOutOfRangeException
ExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ImportPackage_InputMessage">
    <wsdl:part name="parameters" element="tns6:ImportPackage"/>
    </wsdl:message>
    <wsdl:message name="BusinessDataCatalogSharedService_ImportPackage_OutputMessage">
    <wsdl:part name="parameters" element="tns6:ImportPackageResponse"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_ArgumentExceptionFault_FaultMessage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_ArgumentOutOfRangeExceptionFault_FaultMes
sage">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentOutOfRangeException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_BdcExceptionStateFault_FaultMessage">
    <wsdl:part
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
name="detail" element="tns:BdcExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_InvalidOperationExceptionFault_FaultMess
age">
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:InvalidOperationException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_MetadataExceptionStateFault_FaultMessage
">
    <wsdl:part xmlns:tns3="Microsoft.BusinessData.SharePoint" name="detail"
element="tns3:MetadataException"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_PackageFormatExceptionStateFault_FaultMes
sage">
    <wsdl:part xmlns:tns5="Microsoft.SharePoint.BusinessData" name="detail"
element="tns5:PackageFormatExceptionState"/>
    </wsdl:message>
    <wsdl:message
name="BusinessDataCatalogSharedService_ImportPackage_ArgumentNullExceptionFault_FaultMessage"
>
    <wsdl:part xmlns:q1="http://schemas.datacontract.org/2004/07/System" name="detail"
element="q1:ArgumentNullException"/>
    </wsdl:message>
    <wsdl:portType name="BusinessDataCatalogSharedService">

```

```

    <wsdl:operation name="GetParametersForMethod">
      <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethod"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_InputMessage"/>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentOutOfRangeExceptionF
ault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_BdcExceptionStateFault_
FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_InvalidOperationExcepti
onFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_MetadataExceptionStateF
ault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentExceptionFault_
FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParametersForMethodArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParametersForMethod_ArgumentNullExceptionFa
ult_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="IsParameterReferencedByMethodInstance">
      <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstance"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InputMes
sage"/>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceResponse"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_OutputMe
ssage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Argument
OutOfRangeExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceArgumentExceptionFault"
name="ArgumentExceptionFault"

```



```

message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Argument
ExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Argument
NullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_BdcExcep
tionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_InvalidO
perationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsParameterReferencedByMethodInstanceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_IsParameterReferencedByMethodInstance_Metadata
ExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetTypeReflectorTypeNameForParameter">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameter"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InputMess
age"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_OutputMes
sage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentO
utOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentE
xceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_BdcExcep
tionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_InvalidOp
erationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeReflectorTypeNameForParameterMetadataExceptionStateFault"

```

```

name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetTypeReflectorTypeNameForParameterArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeReflectorTypeNameForParameter_ArgumentNullExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor_ArgumentExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetFieldTypeDescriptorsByMethodInstance">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetFieldTypeDescriptorsByMethodInstance"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_InputMessage"/>

```

```

    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceResponse"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Output
Message"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Argume
ntOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Argume
ntExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_BdcExc
eptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Invali
dOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Metada
taExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFieldTypeDescriptorsByMethodInstanceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFieldTypeDescriptorsByMethodInstance_Argume
ntNullExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetTypeDescriptorById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorById"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentNullExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentOutOfRangeException
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetTypeDescriptorByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_ArgumentExceptionFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_BdcExceptionStateFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_InvalidOperationExceptio
nFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorById_MetadataExceptionStateFa
ult_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetRootTypeDescriptorForParameter">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameter"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InputMessage
"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterResponse"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_OutputMessag
e"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_MetadataExce
ptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentOutO
fRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_BdcException
StateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_InvalidOpera
tionExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetRootTypeDescriptorForParameterArgumentNullExceptionFault"

```

```

name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetRootTypeDescriptorForParameter_ArgumentNull
ExceptionFault_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="GetTypeDescriptorsByNameAndLevelForParameter">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameter"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_I
nputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_O
utputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterArgumentNullException"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_A
rgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterArgumentOutOfRangeException"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_A
rgumentOutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_A
rgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_M
etadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_B
dcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsByNameAndLevelForParameterInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsByNameAndLevelForParameter_I
nvalidOperationExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetChildTypeDescriptorsForTypeDescriptor">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Inpu
tMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Outpu
tMessage"/>
  </wsdl:operation>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Argum
entOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Argum
entNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_BdcEx
ceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Inval
idOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Metad
ataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetChildTypeDescriptorsForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetChildTypeDescriptorsForTypeDescriptor_Argum
entExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetTypeDescriptorsForFilterDescriptor">
        <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InputMes
sage"/>
        <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_OutputMe
ssage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Metadate
ExceptionStateFault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_BdcExcep
tionStateFault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
OutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_InvalidO
perationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
ExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetTypeDescriptorsForFilterDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetTypeDescriptorsForFilterDescriptor_Argument
NullExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetDefaultValuesForTypeDescriptor">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InputMessag
e"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_OutputMessag
e"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentNull
ExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentOutO
fRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_InvalidOpera
tionExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_MetadataExce
ptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_ArgumentExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDefaultValuesForTypeDescriptorBdcExceptionStateFault"

```

```

name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDefaultValuesForTypeDescriptor_BdcException
StateFault_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="SetDefaultValuesForTypeDescriptor">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InputMessage
"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_OutputMessag
e"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentOutO
fRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentNull
ExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_BdcException
StateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_InvalidOpera
tionExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_MetadataExce
ptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultValuesForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultValuesForTypeDescriptor_ArgumentExce
ptionFault_FaultMessage"/>
  </wsdl:operation>
<wsdl:operation name="DeleteDefaultValueForTypeDescriptor">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InputMessa
ge"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_OutputMess
age"/>

```



```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_MetadataEx
ceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentNu
llExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentOu
tOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_BdcExcepti
onStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_InvalidOpe
rationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteDefaultValueForTypeDescriptorArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteDefaultValueForTypeDescriptor_ArgumentEx
ceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetLevelForTypeDescriptor">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptor"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorResponse"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_MetadataSta
teFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentOutOfRangeEx
ceptionFault_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_BdcExceptionStateFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_InvalidOperationExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLevelForTypeDescriptorArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLevelForTypeDescriptor_ArgumentNullExceptio
nFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="TypeDescriptorCreate">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreate"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateResponse"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentNullExceptionFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentOutOfRangeExceptionExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_ArgumentExceptionFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_BdcExceptionStateFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_InvalidOperationException
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorCreateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorCreate_MetadataExceptionStateFau
lt_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="TypeDescriptorMergeXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/TypeDescriptorMergeXml"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlResponse"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentOutOfRangeExceptionExcep
tionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentNullExceptionFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_BdcExceptionStateFault_
FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_InvalidOperationExcepci
onFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_MetadataExceptionStateF
ault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_PackageFormatExceptionS
tateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorMergeXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorMergeXml_ArgumentExceptionFault_
FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="TypeDescriptorReadXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorReadXml"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorReadXmlResponse"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorReadXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_InvalidOperationExcepci
onFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/TypeDescriptorReadXmlMetadataExceptionStateFault"

```

```

name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/TypeDescriptorReadXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_TypeDescriptorReadXml_PackageFormatExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetAssociationById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationById"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAssociationByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetAssociationByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_MetadataExceptionStateFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationById_ArgumentExceptionFault_Faul
tMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetAssociationsForEntityAndRole">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRole"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InputMessage"/
>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_OutputMessage"
/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_InvalidOperati
onExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentNullEx
ceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentOutOfR
angeExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_BdcExceptionSt
ateFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_MetadataExcept
ionStateFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForEntityAndRoleArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForEntityAndRole_ArgumentExcept
ionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationsForDataClass">
      <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClass"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_InputMessage"/>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetAssociationsForDataClassResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentNullExcept
ionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_MetadataExceptionS
tateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentOutOfRange
ExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_BdcExceptionStateF
ault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_InvalidOperationEx
ceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForDataClassArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForDataClass_ArgumentExceptionF
ault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetAssociationsForMethod">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethod"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentNullException
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentOutOfRangeEx
ceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_ArgumentExceptionFaul
t_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_MetadataExceptionStat
eFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_BdcExceptionStateFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationsForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationsForMethod_InvalidOperationExcep
tionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationMembersInRole">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRole"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentOutOfRange
ExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentNullExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_BdcExceptionStateF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_InvalidOperationEx
ceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_MetadataExceptionS
tateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationMembersInRoleArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationMembersInRole_ArgumentExceptionF
ault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationGroupById">

```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupById"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentNullExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_BdcExceptionStateFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentOutOfRangeExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_InvalidOperationExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_MetadataExceptionState
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupById_ArgumentExceptionFault
_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationGroupsForEntity">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntity"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentNullExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentOutOfRan
geExceptionFault_FaultMessage"/>

```



```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_InvalidOperation
ExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_MetadataExceptio
nStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_ArgumentExceptio
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationGroupsForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationGroupsForEntity_BdcExceptionStat
eFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationReferencesForAssociationGroup">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroup"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_In
putMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupResponse"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ou
tputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ar
gumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ar
gumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Bd
cExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_In
validOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Me
tadataExceptionStateFault_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAssociationReferencesForAssociationGroupArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAssociationReferencesForAssociationGroup_Ar
gumentExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="AddAssociationReferenceToAssociationGroup">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroup"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Inpu
tMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupResponse"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Outp
utMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Meta
dataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Argu
mentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Argu
mentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_BdcE
xceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Inva
lidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddAssociationReferenceToAssociationGroupArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddAssociationReferenceToAssociationGroup_Argu
mentExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteAssociationReferenceFromAssociationGroup">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroup"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupResponse"

```

```

message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_InvalidOperationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteAssociationReferenceFromAssociationGroupArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteAssociationReferenceFromAssociationGroup
_ArgumentNullExceptionFault_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="GetXmlSchemaForView">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForView"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewResponse"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentNullExceptionFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentOutOfRangeExceptionExcepio
nFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_ArgumentExceptionFault_Fau
ltMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_BdcExceptionStateFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_InvalidOperationExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetXmlSchemaForViewMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetXmlSchemaForView_MetadataExceptionStateFau
lt_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetEntitiesLikeNameAndNamespace">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespace"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InputMessage"/
>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_OutputMessage"
/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentOutOfR
angeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_InvalidOperati
onExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_MetadataExcept
ionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_ArgumentNullEx
ceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesLikeNameAndNamespaceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesLikeNameAndNamespace_BdcExceptionSt
ateFault_FaultMessage"/>

```

```

</wsdl:operation>
<wsdl:operation name="GetEntityWithNameAndNamespace">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespace"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_InvalidOperation
ExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_BdcExceptionStat
eFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_MetadataExceptio
nStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentExceptio
nFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentNullExce
ptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespace_ArgumentOutOfRan
geExceptionFault_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="GetEntityWithNameAndNamespaceAndVersion">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersion"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Inpu
tMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersionResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Outpu
tMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersionInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Invali
dOperationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetEntityWithNameAndNamespaceAndVersionArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Argume
ntNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersionArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Argume
ntOutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersionBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_BdcExc
eptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersionMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Metada
taExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityWithNameAndNamespaceAndVersionArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityWithNameAndNamespaceAndVersion_Argume
ntExceptionFault_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="GetEntitiesForSystem">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystem"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentOutOfRangeExceptionExce
ptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_BdcExceptionStateFault_Fa
ultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_InvalidOperationException
Fault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_MetadataExceptionStateFau
lt_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentExceptionFault_Fa
ultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForSystemArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForSystem_ArgumentNullExceptionFaul
t_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetEntitiesForAssociationAndRole">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRole"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InputMessage"
/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_OutputMessage"
"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentOutOf
RangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_BdcExceptionS
tateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_InvalidOperat
ionExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_MetadataExcep
tionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentExcep
tionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntitiesForAssociationAndRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesForAssociationAndRole_ArgumentNullE
xceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetDefaultActionForEntity">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntity"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentOutOfRangeEx
ceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_BdcExceptionStateFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_InvalidOperationExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_MetadataExceptionSta
teFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetDefaultActionForEntityArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetDefaultActionForEntity_ArgumentNullExceptio
nFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetEntityNameAndNamespacesForAssociationAndRole">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRole"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_ArgumentOutOfRangeExceptionFault_FaultMessage"/>

```



```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityNameAndNamespacesForAssociationAndRoleArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityNameAndNamespacesForAssociationAndRol
e_ArgumentNullExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetEntityById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityById"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_ArgumentOutOfRangeExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_BdcExceptionStateFault_FaultMess
age"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_InvalidOperationExceptionFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_MetadataExceptionStateFault_Faul
tMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_ArgumentExceptionFault_FaultMess
age"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetEntityByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityById_ArgumentNullExceptionFault_Fault
Message"/>
    </wsdl:operation>
    <wsdl:operation name="EntityCreate">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/EntityCreate"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateResponse"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_ArgumentExceptionFault_FaultMessa
ge"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_BdcExceptionStateFault_FaultMessa
ge"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_InvalidOperationExceptionFault_Fa
ultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_MetadataExceptionStateFault_Fault
Message"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreatePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_PackageFormatExceptionStateFault_
FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_ArgumentNullExceptionFault_FaultM
essage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/EntityCreateArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_EntityCreate_ArgumentOutOfRangeExceptionFault_
FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="Activate">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/Activate" message="tns6:BusinessDataCatalogSharedService_Activate_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivateResponse"
message="tns6:BusinessDataCatalogSharedService_Activate_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivatePackageFormatExceptionStateFault" name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Activate_PackageFormatExceptionStateFault_Faul
tMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Activate_BdcExceptionStateFault_FaultMessage"/
>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/ActivateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Activate_InvalidOperationExceptionFault_FaultM
essage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Activate_MetadataExceptionStateFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Activate_ArgumentExceptionFault_FaultMessage"/
>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Activate_ArgumentNullExceptionFault_FaultMessa
ge"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ActivateArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Activate_ArgumentOutOfRangeExceptionFault_Faul
tMessage"/>
  </wsdl:operation>
  <wsdl:operation name="Deactivate">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/Deactivate"
message="tns6:BusinessDataCatalogSharedService_Deactivate_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateResponse"
message="tns6:BusinessDataCatalogSharedService_Deactivate_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_BdcExceptionStateFault_FaultMessage
"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_InvalidOperationExceptionFault_Faul
tMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_MetadataExceptionStateFault_FaultMes
sage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivatePackageFormatExceptionStateFault" name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_PackageFormatExceptionStateFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_ArgumentExceptionFault_FaultMessage
"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_ArgumentNullExceptionFault_FaultMes
sage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeactivateArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Deactivate_ArgumentOutOfRangeExceptionFault_Fa
ultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="BulkSwitchActiveOrValidate">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidate"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateResponse"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_BdcExceptionStateFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_InvalidExc
eptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_MetadataExcepti
onStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidatePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_PackageFormatExcept
ionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentExceptio
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentNullExcepti
onFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/BulkSwitchActiveOrValidateArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_BulkSwitchActiveOrValidate_ArgumentOutOfRangeE
xceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetActionById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionById"
message="tns6:BusinessDataCatalogSharedService_GetActionById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetActionByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetActionById_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionById_ArgumentNullExceptionFault_Fault
Message"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionById_BdcExceptionStateFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionByIdInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionById_InvalidOperationExceptionFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionById_MetadataExceptionStateFault_Faul
tMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionById_ArgumentExceptionFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionById_ArgumentOutOfRangeExceptionFault
_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetActionsForEntity">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntity"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_InvalidOperationExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_BdcExceptionStateFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentOutOfRangeExceptionEx
ceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionsForEntityMetadataExceptionStateFault" name="MetadataExceptionStateFault"

```

```

message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionsForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionsForEntityArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionsForEntity_ArgumentNullExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetActionParameterById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterById"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParameterByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParameterById_ArgumentNullExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetActionParametersForAction">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetActionParametersForAction"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetActionParametersForActionResponse"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentOutOfRang
eExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_BdcExceptionState
Fault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_InvalidOperationE
xceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_MetadataException
StateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentException
Fault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetActionParametersForActionArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetActionParametersForAction_ArgumentNullExcep
tionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetIdentifierById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierById"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_ArgumentOutOfRangeExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_BdcExceptionStateFault_Fault
Message"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_InvalidOperationExceptionFau
lt_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_MetadataExceptionStateFault_
FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_ArgumentExceptionFault_Fault
Message"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifierByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifierById_ArgumentNullExceptionFault_F
aultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetIdentifiersForEntity">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntity"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityResponse"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentOutOfRangeExce
ptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_BdcExceptionStateFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_InvalidOperationExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_MetadataExceptionState
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetIdentifiersForEntityArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetIdentifiersForEntity_ArgumentNullExceptionF
ault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetMethodById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```



```

edService/GetMethodById"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_ArgumentOutOfRangeExceptionFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_BdcExceptionStateFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_InvalidOperationExceptionFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_MetadataExceptionStateFault_Faul
tMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_ArgumentExceptionFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodById_ArgumentNullExceptionFault_Fault
Message"/>
  </wsdl:operation>
  <wsdl:operation name="GetMethodsForDataClass">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClass"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_InvalidOperationExcepti
onFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_BdcExceptionStateFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentOutOfRangeException
Fault_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_MetadataExceptionStateF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentExceptionFault_
FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodsForDataClassArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodsForDataClass_ArgumentNullExceptionFa
ult_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="IsMethodInstantiated">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiated"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedResponse"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentOutOfRangeExceptionExcepi
onFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_BdcExceptionStateFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_InvalidOperationException
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_MetadataExceptionStateFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentExceptionFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/IsMethodInstantiatedArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_IsMethodInstantiated_ArgumentNullExceptionFaul
t_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetFilterDescriptorById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorById"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_InputMessage"/>

```

```

    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentNullExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_BdcExceptionStateFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_InvalidOperationExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_MetadataExceptionState
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorById_ArgumentOutOfRangeExce
ptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetFilterDescriptorsForMethod">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethod"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_MetadataExceptio
nStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_BdcExceptionStat
eFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_InvalidOperation
ExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentExceptio
nFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentNullExce
ptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetFilterDescriptorsForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetFilterDescriptorsForMethod_ArgumentOutOfRan
geExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetMethodInstanceById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceById"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_BdcExceptionStateFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_InvalidOperationExceptio
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_MetadataExceptionStateFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentExceptionFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentNullExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstanceByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstanceById_ArgumentOutOfRangeException
Fault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetMethodInstancesForDataClass">

```

```

    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClass"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_OutputMessage"/
>

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentNullExc
eptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_BdcExceptionSta
teFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_InvalidOperatio
nExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_MetadataExcepti
onStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentExcepti
onFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForDataClassArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForDataClass_ArgumentOutOfRa
ngeExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetMethodInstancesForMethod">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethod"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodResponse"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_BdcExceptionStateF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_InvalidOperatio
nExceptionFault_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_MetadataExceptionS
tateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentNullExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetMethodInstancesForMethodArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetMethodInstancesForMethod_ArgumentOutOfRange
ExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="CheckPathInMethodInstances">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstances"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesResponse"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_BdcExceptionStateFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_MetadataExceptionSt
ateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_ArgumentExceptionFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CheckPathInMethodInstancesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CheckPathInMethodInstances_ArgumentNullExcepti
onFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetParameterById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterById"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetParameterByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_MetadataExceptionStateFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_BdcExceptionStateFault_FaultM
essage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_InvalidOperationExceptionFaul
t_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_ArgumentExceptionFault_FaultM
essage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_ArgumentNullExceptionFault_Fa
ultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetParameterByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetParameterById_ArgumentOutOfRangeExceptionFa
ult_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="ImportPackageWithProgress">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgress"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressResponse"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_BdcExceptionStateFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentNullExceptio
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageWithProgressMetadataExceptionStateFault"
name="MetadataExceptionStateFault"

```

```

message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageWithProgressInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_InvalidOperationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageWithProgressPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_PackageFormatExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ImportPackageWithProgressArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackageWithProgress_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetImportProgress">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetImportProgress"
message="tns6:BusinessDataCatalogSharedService_GetImportProgress_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetImportProgressResponse"
message="tns6:BusinessDataCatalogSharedService_GetImportProgress_OutputMessage"/>
    </wsdl:operation>
    <wsdl:operation name="ExportPackage">
      <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackage"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_InputMessage"/>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageResponse"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_ArgumentExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_ArgumentNullExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_BdcExceptionStateFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"

```



```

message="tns6:BusinessDataCatalogSharedService_ExportPackage_InvalidOperationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackageMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ExportPackagePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ExportPackage_PackageFormatExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetModelById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelById"
message="tns6:BusinessDataCatalogSharedService_GetModelById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetModelById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelById_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetModelsByName">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByName"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetModelsByNameResponse"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_ArgumentOutOfRangeExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByNameInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_InvalidOperationExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByNameMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_MetadataExceptionStateFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_ArgumentExceptionFault_FaultMe
ssage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_ArgumentNullExceptionFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByName_BdcExceptionStateFault_FaultMe
ssage"/>
    </wsdl:operation>
    <wsdl:operation name="GetModelByName">
        <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByName"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_InputMessage"/>
        <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameResponse"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_ArgumentOutOfRangeExceptionFau
lt_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_BdcExceptionStateFault_FaultMes
sage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_InvalidOperationExceptionFault
_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_MetadataExceptionStateFault_Fau
ltMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_ArgumentExceptionFault_FaultMes
sage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelByNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelByName_ArgumentNullExceptionFault_Faul
tMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetModelsByEntityId">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityId"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_BdcExceptionStateFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_InvalidOperationExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_MetadataExceptionStateFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentExceptionFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentNullExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetModelsByEntityIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetModelsByEntityId_ArgumentOutOfRangeException
nFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="AddEntityToModel">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModel"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelResponse"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_InvalidOperationExceptionFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_ArgumentNullExceptionFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_ArgumentOutOfRangeExceptionFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_BdcExceptionStateFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_MetadataExceptionStateFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/AddEntityToModelArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_AddEntityToModel_ArgumentExceptionFault_FaultM
essage"/>
    </wsdl:operation>
    <wsdl:operation name="RemoveEntityFromModel">
        <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModel"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_InputMessage"/>
        <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelResponse"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentOutOfRangeExceptionEx
ceptionFault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_InvalidOperationExceptio
nFault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_MetadataExceptionStateFa
ult_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveEntityFromModelArgumentExceptionFault" name="ArgumentExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveEntityFromModelArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_ArgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveEntityFromModelBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveEntityFromModel_BdcExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="DeleteNoCascade">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascade"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeResponse"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/DeleteNoCascadeArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteNoCascade_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="ModelReadXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ModelReadXml"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ModelReadXmlResponse"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_ArgumentNullExceptionFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_PackageFormatExceptionStateFault_
FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_ArgumentExceptionFault_FaultMessa
ge"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_ArgumentOutOfRangeExceptionFault_
FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_BdcExceptionStateFault_FaultMessa
ge"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_InvalidOperationExceptionFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ModelReadXmlMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ModelReadXml_MetadataExceptionStateFault_Fault
Message"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemProxyAssemblyBytesByLobSystemId">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemId"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_In
putMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Ou
tputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Ar
gumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_Bd
cExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemProxyAssemblyBytesByLobSystemIdInvalidOperationExceptionFault"

```

```

name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_InvalidOperationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemIdArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemProxyAssemblyBytesByLobSystemIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemProxyAssemblyBytesByLobSystemId_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemAllAssembliesBytes">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytes"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemAllAssembliesBytesArgumentExceptionFault" name="ArgumentExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_GetLobSystemAllAssembliesBytes_ArgumentExcepti
onFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemDataByLobSystem">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystem"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_BdcExceptionStateF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_InvalidOperationEx
ceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_MetadataExceptionS
tateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentNullExcept
ionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemDataByLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemDataByLobSystem_ArgumentOutOfRange
ExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="SetLobSystemDataByLobSystemId">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemId"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdResponse"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_InvalidOperation
ExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```



```

edService/SetLobSystemDataByLobSystemIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentNullExce
ptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentOutOfRan
geExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_BdcExceptionStat
eFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_MetadataExceptio
nStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetLobSystemDataByLobSystemIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetLobSystemDataByLobSystemId_ArgumentExceptio
nFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemsReferencedByEntitiesAssociatedWithModel">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModel"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWit
hModel_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsReferencedByEntitiesAssociatedWithModelArgumentNullExceptionFault"

```

```

name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_ArgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsReferencedByEntitiesAssociatedWithModelBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsReferencedByEntitiesAssociatedWithModel_BdcExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemByName">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByName"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemByName_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemsLikeName">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeName"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemsLikeNameInvalidOperationExceptionFault"

```

```

name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_InvalidOperationExceptio
nFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsLikeNameMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_MetadataExceptionStateFa
ult_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsLikeNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentExceptionFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsLikeNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentNullExceptionFau
lt_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsLikeNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_ArgumentOutOfRangeExceptionEx
ceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemsLikeNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemsLikeName_BdcExceptionStateFault_F
aultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemById"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_ArgumentOutOfRangeExceptionFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_InvalidOperationExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_MetadataExceptionStateFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_ArgumentExceptionFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetLobSystemByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_ArgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetLobSystemByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemById_BdcExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetEntityCount">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCount"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntityCountArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetEntityCount_ArgumentNullExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetSystemUtilityTypeNameForLobSystem">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystem"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemBdcExceptionStateFault"

```

```

name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_InvalidOperationExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetSystemUtilityTypeNameForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetSystemUtilityTypeNameForLobSystem_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GenerateProxyAssemblyForLobSystem">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystem"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GenerateProxyAssemblyForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    </wsdl:operation>
  </wsdl:operation>

```

```

edService/GenerateProxyAssemblyForLobSystemBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_BdcException
StateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_MetadataExce
ptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GenerateProxyAssemblyForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GenerateProxyAssemblyForLobSystem_ArgumentExce
ptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="DeleteProxyAssemblyForLobSystem">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystem"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InputMessage"/
>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_OutputMessage"
/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentOutOfR
angeExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_InvalidOperati
onExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_MetadataExcept
ionStateFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentExcept
ionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_ArgumentNullEx
ceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteProxyAssemblyForLobSystemBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_DeleteProxyAssemblyForLobSystem_BdcExceptionSt
ateFault_FaultMessage"/>
    </wsdl:operation>

```

```

    <wsdl:operation name="GetLobSystemInstancesForLobSystem">
      <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystem"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InputMessage
"/>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_OutputMessag
e"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_InvalidOpera
tionExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_BdcException
StateFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_MetadataExce
ptionStateFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentExce
ptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentNull
ExceptionFault_FaultMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstancesForLobSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstancesForLobSystem_ArgumentOutO
fRangeExceptionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetLobSystemInstanceById">
      <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceById"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_InputMessage"/>
      <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_InvalidOperationExcep
tionFault_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentExceptionFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentNullException
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_ArgumentOutOfRangeExc
eptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_BdcExceptionStateFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetLobSystemInstanceByIdMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetLobSystemInstanceById_MetadataExceptionStat
eFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetDataClassesForSystem">
        <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystem"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_InputMessage"/>
        <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemResponse"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentOutOfRangeExce
ptionFault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_InvalidOperationExcept
ionFault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_MetadataExceptionState
Fault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentExceptionFault
_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetDataClassesForSystemArgumentNullExceptionFault"

```



```

name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_ArgumentNullExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassesForSystemBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassesForSystem_BdcExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetDataClassById">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassById"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetDataClassByIdArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetDataClassById_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetEntitiesReferencedByModelId">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelId"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdResponse"
message="tns6:BusinessDataCatalogSharedService_GetEntitiesReferencedByModelId_OutputMessage"/>
  </wsdl:operation>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetEntitiesReferencedByModelIdArgumentOutOfRangeExceptionFault"

```



```

edService/GetAllPartitionIdsBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPartitionIdsMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPartitionIds_MetadataExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="ReadSlicedXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXml"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlResponse"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_PackageFormatExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlAccessDeniedExceptionFault" name="AccessDeniedExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_AccessDeniedExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ReadSlicedXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ReadSlicedXml_BdcExceptionStateFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="WriteSlicedXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShared

```

```

edService/WriteSlicedXml"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlResponse"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_InvalidOperationExceptionFault_
FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_BdcExceptionStateFault_FaultMes
sage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentExceptionFault_FaultMes
sage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlAccessDeniedExceptionFault" name="AccessDeniedExceptionFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_AccessDeniedExceptionFault_Faul
tMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentNullExceptionFault_Faul
tMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_ArgumentOutOfRangeExceptionFaul
t_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_MetadataExceptionStateFault_Fau
ltMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/WriteSlicedXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_WriteSlicedXml_PackageFormatExceptionStateFaul
t_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="HaveRights">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRights"
message="tns6:BusinessDataCatalogSharedService_HaveRights_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsResponse"
message="tns6:BusinessDataCatalogSharedService_HaveRights_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_ArgumentNullExceptionFault_FaultMes
sage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsArgumentOutOfRangeException" name="ArgumentOutOfRangeException"
message="tns6:BusinessDataCatalogSharedService_HaveRights_ArgumentOutOfRangeException_FaultMessage
"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsArgumentOutOfRangeException" name="ArgumentOutOfRangeException"
message="tns6:BusinessDataCatalogSharedService_HaveRights_ArgumentOutOfRangeException_FaultMe
ssage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_BdcExceptionStateFault_FaultMessage
"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_InvalidOperationExceptionFault_Faul
tMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/HaveRightsMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_HaveRights_MetadataExceptionStateFault_FaultMe
ssage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAllLocalizedNamesForMetadataObjectStruct">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStruct"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_In
putMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructResponse"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Ou
tputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Ar
gumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Bd
cExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_In
validOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_Me
tadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllLocalizedNamesForMetadataObjectStructArgumentExceptionFault"

```

```

name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesForMetadataObjectStructArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNamesForMetadataObjectStruct_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetAllLocalizedNames">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNames"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesResponse"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllLocalizedNamesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllLocalizedNames_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetAllPropertiesForMetadataObjectStruct">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesForMetadataObjectStruct"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAllPropertiesForMetadataObjectStructResponse"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_OutputMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_BdcExc
eptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Argume
ntNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Argume
ntOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Argume
ntExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Invali
dOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesForMetadataObjectStructMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllPropertiesForMetadataObjectStruct_Metada
taExceptionStateFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetAllProperties">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllProperties"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesResponse"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_ArgumentOutOfRangeExceptionFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_BdcExceptionStateFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_InvalidOperationExceptionFaul
t_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_MetadataExceptionStateFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_ArgumentExceptionFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetAllPropertiesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAllProperties_ArgumentNullExceptionFault_Fa
ultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SaveLocalizedName">
        <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedName"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_InputMessage"/>
        <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameResponse"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentExceptionFault_Fault
Message"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_MetadataExceptionStateFault_
FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentNullExceptionFault_F
aultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_ArgumentOutOfRangeExceptionF
ault_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_InvalidOperationExceptionFau
lt_FaultMessage"/>
        <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SaveLocalizedNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveLocalizedName_BdcExceptionStateFault_Fault
Message"/>
    </wsdl:operation>
    <wsdl:operation name="ClearLocalizedNames">
        <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNames"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_InputMessage"/>

```



```

    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesResponse"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentNullExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_InvalidOperationExceptionF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentOutOfRangeExceptionEx
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_MetadataExceptionStateFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_ArgumentExceptionFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearLocalizedNamesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearLocalizedNames_BdcExceptionStateFault_Fau
ltMessage"/>
    </wsdl:operation>
    <wsdl:operation name="RemoveLocalizedName">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedName"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameResponse"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentOutOfRangeExceptionEx
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_MetadataExceptionStateFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveLocalizedNameArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentNullExceptionFault
_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/RemoveLocalizedNameArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedNameBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemoveLocalizedNameInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveLocalizedName_InvalidOperationExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="SaveProperty">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SaveProperty"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyResponse"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SavePropertyInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SaveProperty_InvalidOperationExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="ClearProperties">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/ClearProperties"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/ClearPropertiesResponse"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_ArgumentOutOfRangeExceptionFau
lt_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_InvalidOperationExceptionFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_ArgumentNullExceptionFault_Fau
ltMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_MetadataExceptionStateFault_Fa
ultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_ArgumentExceptionFault_FaultMe
ssage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ClearPropertiesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ClearProperties_BdcExceptionStateFault_FaultMe
ssage"/>
</wsdl:operation>
  <wsdl:operation name="RemoveProperty">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemoveProperty"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyResponse"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_MetadataExceptionStateFault_Fau
ltMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_ArgumentExceptionFault_FaultMes
sage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_ArgumentNullExceptionFault_Faul
tMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/RemovePropertyArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_RemoveProperty_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemovePropertyBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/RemovePropertyInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_RemoveProperty_InvalidOperationExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetAccessControlEntries">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntries"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesResponse"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentNullExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/GetAccessControlEntriesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetAccessControlEntries_InvalidOperationExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="SetAccessControlEntries">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetAccessControlEntries"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/SetAccessControlEntriesResponse"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage"/>
  </wsdl:operation>

```

```

edService/SetAccessControlEntriesResponse"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_MetadataExceptionState
Fault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentExceptionFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentNullExceptionF
ault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_ArgumentOutOfRangeExce
ptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_BdcExceptionStateFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/SetAccessControlEntriesInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_SetAccessControlEntries_InvalidOperationExcept
ionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="MetadataObjectCreate">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreate"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateResponse"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentOutOfRangeException
Fault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_BdcExceptionStateFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_MetadataExceptionStateFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/MetadataObjectCreateInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_InvalidOperationException
Fault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentExceptionFault_Fa
ultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectCreateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectCreate_ArgumentNullExceptionFaul
t_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="Update">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/Update" message="tns6:BusinessDataCatalogSharedService_Update_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateResponse"
message="tns6:BusinessDataCatalogSharedService_Update_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Update_InvalidOperationExceptionFault_FaultMes
sage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Update_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Update_ArgumentOutOfRangeExceptionFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Update_MetadataExceptionStateFault_FaultMessag
e"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Update_ArgumentExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/UpdateArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Update_ArgumentNullExceptionFault_FaultMessage
"/>
  </wsdl:operation>
  <wsdl:operation name="Delete">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/Delete" message="tns6:BusinessDataCatalogSharedService_Delete_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteResponse"
message="tns6:BusinessDataCatalogSharedService_Delete_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteArgumentOutOfRangeExceptionFault" name="ArgumentOutOfRangeExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_Delete_ArgumentOutOfRangeExceptionFault_FaultM
essage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Delete_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Delete_InvalidOperationExceptionFault_FaultMes
sage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_Delete_MetadataExceptionStateFault_FaultMessag
e"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Delete_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/DeleteArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_Delete_ArgumentNullExceptionFault_FaultMessage
"/>
  </wsdl:operation>
  <wsdl:operation name="MetadataObjectMergeXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXml"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlResponse"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentOutOfRangeExceptionExcep
tionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_BdcExceptionStateFault_
FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_InvalidOperationExcep
tionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_MetadataExceptionStateF
ault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_PackageFormatExceptionS
tateFault_FaultMessage"/>

```

```

    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentExceptionFault_
FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectMergeXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectMergeXml_ArgumentNullExceptionFau
lt_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="MetadataObjectReadXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXml"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlResponse"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_MetadataExceptionStateFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_BdcExceptionStateFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_InvalidOperationExceptio
nFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_PackageFormatExceptionSt
ateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentExceptionFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentNullExceptionFau
lt_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectReadXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectReadXml_ArgumentOutOfRangeException
ionFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="MetadataObjectWriteXml">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```



```

edService/MetadataObjectWriteXml"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlResponse"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentOutOfRangeExceptionExcep
tionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_BdcExceptionStateFault_
FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_InvalidOperationExcepci
onFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_MetadataExceptionStateF
ault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlPackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_PackageFormatExcepions
tateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentExceptionFault_
FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/MetadataObjectWriteXmlArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_MetadataObjectWriteXml_ArgumentNullExceptionFau
lt_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="CopyAclAcrossChildren">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildren"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenResponse"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_InvalidOperationExcepci
onFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenArgumentOutOfRangeExceptionFault"

```

```

name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_BdcExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_MetadataExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildren_ArgumentNullExceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="CopyAclAcrossChildrenForSetting">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSetting"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingResponse"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_InvalidOperationExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_BdcExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentOutOfRangeExceptionFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_MetadataExceptionStateFault_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogSharedService/CopyAclAcrossChildrenForSettingArgumentExceptionFault"
name="ArgumentExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentExcept
ionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclAcrossChildrenForSettingArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclAcrossChildrenForSetting_ArgumentNullEx
ceptionFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="CopyAclToSetting">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSetting"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_InputMessage"/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingResponse"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentOutOfRangeExceptionFa
ult_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_BdcExceptionStateFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_InvalidOperationExceptionFaul
t_FaultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_MetadataExceptionStateFault_F
aultMessage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentExceptionFault_FaultM
essage"/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/CopyAclToSettingArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_CopyAclToSetting_ArgumentNullExceptionFault_Fa
ultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetCacheInvalidationRecordsSince">
    <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSince"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InputMessage"
/>
    <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceResponse"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_OutputMessage"
/>
    <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar

```

```

edService/GetCacheInvalidationRecordsSinceMetadataExceptionStateFault"
name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_MetadataExcep
tionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceAccessDeniedExceptionFault"
name="AccessDeniedExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_AccessDeniedE
xceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceBdcExceptionStateFault"
name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_BdcExceptionS
tateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceInvalidOperationExceptionFault"
name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_InvalidOperat
ionExceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSincePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_PackageFormat
ExceptionStateFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceArgumentExceptionFault"
name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentExcep
tionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceArgumentNullExceptionFault"
name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentNullE
xceptionFault_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/GetCacheInvalidationRecordsSinceArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"
message="tns6:BusinessDataCatalogSharedService_GetCacheInvalidationRecordsSince_ArgumentOutOf
RangeExceptionFault_FaultMessage"/>
</wsdl:operation>
<wsdl:operation name="ImportPackage">
  <wsdl:input
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackage"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_InputMessage"/>
  <wsdl:output
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageResponse"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_OutputMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageArgumentExceptionFault" name="ArgumentExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_ArgumentExceptionFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageArgumentOutOfRangeExceptionFault"
name="ArgumentOutOfRangeExceptionFault"

```

```

message="tns6:BusinessDataCatalogSharedService_ImportPackage_ArgumentOutOfRangeExceptionFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageBdcExceptionStateFault" name="BdcExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_BdcExceptionStateFault_FaultMess
age"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageInvalidOperationExceptionFault" name="InvalidOperationExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_InvalidOperationExceptionFault_F
aultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageMetadataExceptionStateFault" name="MetadataExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_MetadataExceptionStateFault_Faul
tMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackagePackageFormatExceptionStateFault"
name="PackageFormatExceptionStateFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_PackageFormatExceptionStateFault
_FaultMessage"/>
  <wsdl:fault
wsaw:Action="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShar
edService/ImportPackageArgumentNullExceptionFault" name="ArgumentNullExceptionFault"
message="tns6:BusinessDataCatalogSharedService_ImportPackage_ArgumentNullExceptionFault_Fault
Message"/>
  </wsdl:operation>
</wsdl:portType>
  <wsdl:binding name="DefaultBinding_BusinessDataCatalogSharedService"
type="tns6:BusinessDataCatalogSharedService">
  <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
  <wsdl:operation name="GetParametersForMethod">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetParametersForMethod" style="document"/>
  <wsdl:input>
  <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
  <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
  <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  </wsdl:operation>

```

```

    <wsdl:operation name="IsParameterReferencedByMethodInstance">
      <soap:operation
        soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
        dService/IsParameterReferencedByMethodInstance" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetTypeReflectorTypeNameForParameter">
      <soap:operation
        soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
        dService/GetTypeReflectorTypeNameForParameter" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetFieldTypeDescriptorsByMethodInstance">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetFieldTypeDescriptorsByMethodInstance" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetTypeDescriptorById">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetTypeDescriptorById" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetRootTypeDescriptorForParameter">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetRootTypeDescriptorForParameter" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetTypeDescriptorsByNameAndLevelForParameter">

```



```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetTypeDescriptorsByNameAndLevelForParameter" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetChildTypeDescriptorsForTypeDescriptor">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetChildTypeDescriptorsForTypeDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetTypeDescriptorsForFilterDescriptor">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetTypeDescriptorsForFilterDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetDefaultValuesForTypeDescriptor">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetDefaultValuesForTypeDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetDefaultValuesForTypeDescriptor">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/SetDefaultValuesForTypeDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="DeleteDefaultValueForTypeDescriptor">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/DeleteDefaultValueForTypeDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLevelForTypeDescriptor">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLevelForTypeDescriptor" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="TypeDescriptorCreate">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/TypeDescriptorCreate" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="TypeDescriptorMergeXml">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/TypeDescriptorMergeXml" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="PackageFormatExceptionStateFault">
        <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="TypeDescriptorReadXml">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/TypeDescriptorReadXml" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>

```

```

        <wsdl:fault name="PackageFormatExceptionStateFault">
            <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationById">
        <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAssociationById" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="ArgumentNullExceptionFault">
            <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
            <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="BdcExceptionStateFault">
            <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="InvalidOperationExceptionFault">
            <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="MetadataExceptionStateFault">
            <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="ArgumentExceptionFault">
            <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
        </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetAssociationsForEntityAndRole">
        <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAssociationsForEntityAndRole" style="document"/>
        <wsdl:input>
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal"/>
        </wsdl:output>
        <wsdl:fault name="InvalidOperationExceptionFault">
            <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="ArgumentNullExceptionFault">
            <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
            <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="BdcExceptionStateFault">
            <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="MetadataExceptionStateFault">
            <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
        </wsdl:fault>
        <wsdl:fault name="ArgumentExceptionFault">

```

```

        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAssociationsForDataClass">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAssociationsForDataClass" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAssociationsForMethod">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAssociationsForMethod" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>

```

```

    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetAssociationMembersInRole">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetAssociationMembersInRole" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetAssociationGroupById">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetAssociationGroupById" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>

```



```

</wsdl:operation>
<wsdl:operation name="GetAssociationGroupsForEntity">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAssociationGroupsForEntity" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAssociationReferencesForAssociationGroup">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAssociationReferencesForAssociationGroup" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>

```

```

    <wsdl:operation name="AddAssociationReferenceToAssociationGroup">
      <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/AddAssociationReferenceToAssociationGroup" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="DeleteAssociationReferenceFromAssociationGroup">
      <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/DeleteAssociationReferenceFromAssociationGroup" style="document"/>
      <wsdl:input>
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
      </wsdl:fault>
      <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="GetXmlSchemaForView">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetXmlSchemaForView" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntitiesLikeNameAndNamespace">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntitiesLikeNameAndNamespace" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntityWithNameAndNamespace">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntityWithNameAndNamespace" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntityWithNameAndNamespaceAndVersion">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntityWithNameAndNamespaceAndVersion" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntitiesForSystem">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntitiesForSystem" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntitiesForAssociationAndRole">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntitiesForAssociationAndRole" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetDefaultActionForEntity">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/SetDefaultActionForEntity" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntityNameAndNamespacesForAssociationAndRole">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntityNameAndNamespacesForAssociationAndRole" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntityById">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntityById" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="EntityCreate">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/EntityCreate" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="PackageFormatExceptionStateFault">
        <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>

```

```

</wsdl:operation>
<wsdl:operation name="Activate">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/Activate" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="Deactivate">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/Deactivate" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">

```



```

        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="BulkSwitchActiveOrValidate">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/BulkSwitchActiveOrValidate" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="PackageFormatExceptionStateFault">
        <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetActionById">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetActionById" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetActionsForEntity">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetActionsForEntity" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetActionParameterById">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetActionParameterById" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>

```

```

    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetActionParametersForAction">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetActionParametersForAction" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetIdentifierById">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetIdentifierById" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">

```

```

    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetIdentifiersForEntity">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetIdentifiersForEntity" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetMethodById">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetMethodById" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetMethodsForDataClass">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetMethodsForDataClass" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="IsMethodInstantiated">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/IsMethodInstantiated" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>

```

```

    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetFilterDescriptorById">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetFilterDescriptorById" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetFilterDescriptorsForMethod">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetFilterDescriptorsForMethod" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">

```

```

        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetMethodInstanceById">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetMethodInstanceById" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetMethodInstancesForDataClass">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetMethodInstancesForDataClass" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>

```

```

    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetMethodInstancesForMethod">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetMethodInstancesForMethod" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="CheckPathInMethodInstances">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/CheckPathInMethodInstances" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetParameterById">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetParameterById" style="document"/>
    <wsdl:input>

```



```

    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ImportPackageWithProgress">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ImportPackageWithProgress" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetImportProgress">

```

```

    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetImportProgress" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="ExportPackage">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ExportPackage" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="PackageFormatExceptionStateFault">
        <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetModelById">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetModelById" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">

```

```

    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetModelsByName">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetModelsByName" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetModelByName">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetModelByName" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetModelsByEntityId">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetModelsByEntityId" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="AddEntityToModel">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/AddEntityToModel" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RemoveEntityFromModel">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/RemoveEntityFromModel" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="DeleteNoCascade">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/DeleteNoCascade" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">

```

```

    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ModelReadXml">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ModelReadXml" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemProxyAssemblyBytesByLobSystemId">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemProxyAssemblyBytesByLobSystemId" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemAllAssembliesBytes">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemAllAssembliesBytes" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemDataByLobSystem">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemDataByLobSystem" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:fault>

```

```

<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetLobSystemDataByLobSystemId">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/SetLobSystemDataByLobSystemId" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemsReferencedByEntitiesAssociatedWithModel">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemsReferencedByEntitiesAssociatedWithModel" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>

```



```

    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemByName">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemByName" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemsLikeName">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemsLikeName" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemById">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemById" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetEntityCount">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntityCount" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:fault>

```

```

<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetSystemUtilityTypeNameForLobSystem">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetSystemUtilityTypeNameForLobSystem" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GenerateProxyAssemblyForLobSystem">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GenerateProxyAssemblyForLobSystem" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">

```

```

        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="DeleteProxyAssemblyForLobSystem">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/DeleteProxyAssemblyForLobSystem" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetLobSystemInstancesForLobSystem">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetLobSystemInstancesForLobSystem" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
        <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>

```

```

    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetLobSystemInstanceById">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetLobSystemInstanceById" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetDataClassesForSystem">
    <soap:operation
      soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
      dService/GetDataClassesForSystem" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>

```

```

    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetDataClassById">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetDataClassById" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">
      <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
  </wsdl:operation>
  <wsdl:operation name="GetEntitiesReferencedByModelId">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetEntitiesReferencedByModelId" style="document"/>
    <wsdl:input>
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
      <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentNullExceptionFault">
      <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
      <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
      <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
      <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentExceptionFault">

```

```

        <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetServiceApplicationId">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetServiceApplicationId" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetAllPartitionIds">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAllPartitionIds" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="AccessDeniedExceptionFault">
        <soap:fault use="literal" name="AccessDeniedExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="BdcExceptionStateFault">
        <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="MetadataExceptionStateFault">
        <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ReadSlicedXml">
    <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ReadSlicedXml" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="InvalidOperationExceptionFault">
        <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="PackageFormatExceptionStateFault">
        <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="AccessDeniedExceptionFault">
        <soap:fault use="literal" name="AccessDeniedExceptionFault" namespace=""/>
    </wsdl:fault>
    <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
        <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
    </wsdl:fault>

```

```

<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="WriteSlicedXml">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/WriteSlicedXml" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="AccessDeniedExceptionFault">
    <soap:fault use="literal" name="AccessDeniedExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="HaveRights">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/HaveRights" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">

```



```

    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAllLocalizedNamesForMetadataObjectStruct">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAllLocalizedNamesForMetadataObjectStruct" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAllLocalizedNames">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAllLocalizedNames" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="InvalidOperationExceptionFault">
  <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAllPropertiesForMetadataObjectStruct">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAllPropertiesForMetadataObjectStruct" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAllProperties">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAllProperties" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="InvalidOperationExceptionFault">
  <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SaveLocalizedName">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/SaveLocalizedName" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ClearLocalizedNames">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ClearLocalizedNames" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">

```

```

    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RemoveLocalizedName">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/RemoveLocalizedName" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SaveProperty">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/SaveProperty" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="InvalidOperationExceptionFault">
  <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ClearProperties">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ClearProperties" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="RemoveProperty">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/RemoveProperty" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="InvalidOperationExceptionFault">
  <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetAccessControlEntries">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetAccessControlEntries" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetAccessControlEntries">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/SetAccessControlEntries" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">

```

```

    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="MetadataObjectCreate">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/MetadataObjectCreate" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="Update">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/Update" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="Delete">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/Delete" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="MetadataObjectMergeXml">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/MetadataObjectMergeXml" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>

```



```

<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="PackageFormatExceptionStateFault">
  <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="MetadataObjectReadXml">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/MetadataObjectReadXml" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="MetadataObjectWriteXml">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/MetadataObjectWriteXml" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">

```

```

    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="CopyAclAcrossChildren">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/CopyAclAcrossChildren" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="CopyAclAcrossChildrenForSetting">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/CopyAclAcrossChildrenForSetting" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>

```

```

</wsdl:fault>
<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="MetadataExceptionStateFault">
  <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="CopyAclToSetting">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/CopyAclToSetting" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetCacheInvalidationRecordsSince">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/GetCacheInvalidationRecordsSince" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>

```

```

<wsdl:fault name="AccessDeniedExceptionFault">
  <soap:fault use="literal" name="AccessDeniedExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="BdcExceptionStateFault">
  <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="InvalidOperationExceptionFault">
  <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="PackageFormatExceptionStateFault">
  <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentExceptionFault">
  <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentNullExceptionFault">
  <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
</wsdl:fault>
<wsdl:fault name="ArgumentOutOfRangeExceptionFault">
  <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
</wsdl:fault>
</wsdl:operation>
<wsdl:operation name="ImportPackage">
  <soap:operation
soapAction="http://www.microsoft.com/Office/2009/BusinessDataCatalog/BusinessDataCatalogShare
dService/ImportPackage" style="document"/>
  <wsdl:input>
    <soap:body use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal"/>
  </wsdl:output>
  <wsdl:fault name="ArgumentExceptionFault">
    <soap:fault use="literal" name="ArgumentExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentOutOfRangeExceptionFault">
    <soap:fault use="literal" name="ArgumentOutOfRangeExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="BdcExceptionStateFault">
    <soap:fault use="literal" name="BdcExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="InvalidOperationExceptionFault">
    <soap:fault use="literal" name="InvalidOperationExceptionFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="MetadataExceptionStateFault">
    <soap:fault use="literal" name="MetadataExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="PackageFormatExceptionStateFault">
    <soap:fault use="literal" name="PackageFormatExceptionStateFault" namespace=""/>
  </wsdl:fault>
  <wsdl:fault name="ArgumentNullExceptionFault">
    <soap:fault use="literal" name="ArgumentNullExceptionFault" namespace=""/>
  </wsdl:fault>
</wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure	tns	7.1
http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel	tns1	7.2
http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime	tns2	7.3
Microsoft.BusinessData.SharePoint	tns3	7.4
http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants	tns4	7.5
Microsoft.SharePoint.BusinessData	tns5	7.6
http://schemas.microsoft.com/2003/10/Serialization/Arrays	q6	7.7
http://schemas.microsoft.com/2003/10/Serialization/	ser	7.8
http://schemas.datacontract.org/2004/07/System	q1	7.9
http://www.microsoft.com/Office/2009/BusinessDataCatalog	tns6	7.10

7.1

<http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure> Schema

```
<?xml version="1.0"?>
<xs:schema
  xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:complexType name="BdcExceptionState">
    <xs:sequence>
      <xs:element minOccurs="0" name="InnerExceptionToStringed" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="InnerExceptionTypeFullName" nillable="true"
        type="xs:string"/>
      <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ServerStackTrace" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="BdcExceptionState" nillable="true" type="tns:BdcExceptionState"/>
  <xs:complexType name="AccessDeniedExceptionState">
    <xs:complexContent mixed="false">
      <xs:extension base="tns:BdcExceptionState">
        <xs:sequence>
          <xs:element minOccurs="0" name="CurrentIdentity" nillable="true" type="xs:string"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:schema>
```

```

        <xs:element minOccurs="0" name="SecurableObjectName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="SecurableObjectTypeName" nillable="true"
type="xs:string"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="AccessDeniedExceptionState" nillable="true"
type="tns:AccessDeniedExceptionState"/>
<xs:complexType name="AccessDeniedException">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:BdcException"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="AccessDeniedException" nillable="true" type="tns:AccessDeniedException"/>
<xs:complexType name="BdcException">
    <xs:complexContent mixed="false">
        <xs:extension xmlns:q1="http://schemas.datacontract.org/2004/07/System"
base="q1:Exception"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="BdcException" nillable="true" type="tns:BdcException"/>
<xs:simpleType name="BdcRights">
    <xs:list>
        <xs:simpleType>
            <xs:restriction base="xs:string">
                <xs:enumeration value="None"/>
                <xs:enumeration value="Execute"/>
                <xs:enumeration value="Edit"/>
                <xs:enumeration value="SetPermissions"/>
                <xs:enumeration value="UseInBusinessDataInLists"/>
                <xs:enumeration value="SelectableInClients"/>
            </xs:restriction>
        </xs:simpleType>
    </xs:list>
</xs:simpleType>
<xs:element name="BdcRights" nillable="true" type="tns:BdcRights"/>
</xs:schema>

```

7.2

<http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel> Schema

```

<?xml version="1.0"?>
<xs:schema
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
    <xs:simpleType name="FilterType">
        <xs:restriction base="xs:string">
            <xs:enumeration value="Comparison"/>
            <xs:enumeration value="LastId"/>
            <xs:enumeration value="Limit"/>
            <xs:enumeration value="PageNumber"/>
            <xs:enumeration value="Password"/>
        </xs:restriction>
    </xs:simpleType>

```

```

    <xs:enumeration value="SsoTicket"/>
    <xs:enumeration value="Timestamp"/>
    <xs:enumeration value="UserContext"/>
    <xs:enumeration value="Username"/>
    <xs:enumeration value="UserProfile"/>
    <xs:enumeration value="Wildcard"/>
    <xs:enumeration value="Input"/>
    <xs:enumeration value="Output"/>
    <xs:enumeration value="InputOutput"/>
    <xs:enumeration value="Batching"/>
    <xs:enumeration value="BatchingTermination"/>
    <xs:enumeration value="UserCulture"/>
    <xs:enumeration value="ActivityId"/>
    <xs:enumeration value="Sorting"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="FilterType" nillable="true" type="tns1:FilterType"/>
<xs:simpleType name="SystemType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Database"/>
    <xs:enumeration value="WebService"/>
    <xs:enumeration value="Custom"/>
    <xs:enumeration value="Wcf"/>
    <xs:enumeration value="DotNetAssembly"/>
    <xs:enumeration value="OData"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SystemType" nillable="true" type="tns1:SystemType"/>
<xs:simpleType name="MethodInstanceType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Finder"/>
    <xs:enumeration value="SpecificFinder"/>
    <xs:enumeration value="GenericInvoker"/>
    <xs:enumeration value="IdEnumerator"/>
    <xs:enumeration value="Scalar"/>
    <xs:enumeration value="AccessChecker"/>
    <xs:enumeration value="Creator"/>
    <xs:enumeration value="Updater"/>
    <xs:enumeration value="Deleter"/>
    <xs:enumeration value="ChangedIdEnumerator"/>
    <xs:enumeration value="DeletedIdEnumerator"/>
    <xs:enumeration value="AssociationNavigator"/>
    <xs:enumeration value="Associator"/>
    <xs:enumeration value="Disassociator"/>
    <xs:enumeration value="StreamAccessor"/>
    <xs:enumeration value="BinarySecurityDescriptorAccessor"/>
    <xs:enumeration value="BulkSpecificFinder"/>
    <xs:enumeration value="BulkAssociatedIdEnumerator"/>
    <xs:enumeration value="BulkAssociationNavigator"/>
    <xs:enumeration value="BulkIdEnumerator"/>
    <xs:enumeration value="EventSubscriber"/>
    <xs:enumeration value="EventUnsubscriber"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="MethodInstanceType" nillable="true" type="tns1:MethodInstanceType"/>
<xs:simpleType name="TypeDescriptorFlags">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">

```

```

        <xs:enumeration value="None"/>
        <xs:enumeration value="CreatorField"/>
        <xs:enumeration value="UpdaterField"/>
        <xs:enumeration value="PreUpdaterField"/>
        <xs:enumeration value="IsCollection"/>
        <xs:enumeration value="ReadOnly"/>
        <xs:enumeration value="Significant"/>
        <xs:enumeration value="IsSortInput"/>
    </xs:restriction>
</xs:simpleType>
</xs:list>
</xs:simpleType>
<xs:element name="TypeDescriptorFlags" nillable="true" type="tns1:TypeDescriptorFlags"/>
<xs:simpleType name="DirectionType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="In"/>
        <xs:enumeration value="Out"/>
        <xs:enumeration value="InOut"/>
        <xs:enumeration value="Return"/>
    </xs:restriction>
</xs:simpleType>
<xs:element name="DirectionType" nillable="true" type="tns1:DirectionType"/>
</xs:schema>

```

7.3 <http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime> Schema

```

<?xml version="1.0"?>
<xs:schema
  xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:simpleType name="CacheUsage">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Default"/>
      <xs:enumeration value="Online"/>
      <xs:enumeration value="Cached"/>
      <xs:enumeration value="Offline"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="CacheUsage" nillable="true" type="tns2:CacheUsage"/>
  <xs:complexType name="ProxyGenerationResult">
    <xs:sequence>
      <xs:element minOccurs="0" name="compiledBytes" nillable="true" type="xs:base64Binary"/>
      <xs:element minOccurs="0" name="fingerprint" nillable="true" type="xs:base64Binary"/>
      <xs:element minOccurs="0" name="sourceCode" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ProxyGenerationResult" nillable="true"
    type="tns2:ProxyGenerationResult"/>
</xs:schema>

```

7.4 [Microsoft.BusinessData.SharePoint](#) Schema

```

<?xml version="1.0"?>

```



```

<xs:schema xmlns:tns3="Microsoft.BusinessData.SharePoint" elementFormDefault="qualified"
targetNamespace="Microsoft.BusinessData.SharePoint"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="MetadataException">
    <xs:sequence>
      <xs:element minOccurs="0" name="explicitMessage" type="xs:boolean"/>
      <xs:element minOccurs="0" name="innerExceptionToStringed" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="innerExceptionTypeFullName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="message" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="metadataObjectTypeName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="serverStackTrace" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="MetadataException" nillable="true" type="tns3:MetadataException"/>
</xs:schema>

```

7.5

<http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants> Schema

```

<?xml version="1.0"?>
<xs:schema
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants" elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:simpleType name="LobSystemConstants.LobSystemsInModelQuery">
    <xs:restriction base="xs:string">
      <xs:enumeration value="AllLobSystemsInModel"/>
      <xs:enumeration value="OwnedLobSystemsInModel"/>
      <xs:enumeration value="SharedLobSystemsInModel"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="LobSystemConstants.LobSystemsInModelQuery" nillable="true"
type="tns4:LobSystemConstants.LobSystemsInModelQuery"/>
  <xs:simpleType name="EntityConstants.EntitiesInModelQuery">
    <xs:restriction base="xs:string">
      <xs:enumeration value="AllEntitiesInModel"/>
      <xs:enumeration value="OwnedEntitiesInModel"/>
      <xs:enumeration value="SharedEntitiesInModel"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="EntityConstants.EntitiesInModelQuery" nillable="true"
type="tns4:EntityConstants.EntitiesInModelQuery"/>
</xs:schema>

```

7.6 Microsoft.SharePoint.BusinessData Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:tns5="Microsoft.SharePoint.BusinessData"
xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
elementFormDefault="qualified" targetNamespace="Microsoft.SharePoint.BusinessData"
xmlns:xs="http://www.w3.org/2001/XMLSchema">

```

```

<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"/>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
<xs:import namespace="http://schemas.datacontract.org/2004/07/System" />
<xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"/>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
<xs:import namespace="Microsoft.BusinessData.SharePoint" />
<xs:complexType name="ArrayOfParameterStruct">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ParameterStruct" nillable="true"
type="tns5:ParameterStruct"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfParameterStruct" nillable="true"
type="tns5:ArrayOfParameterStruct"/>
<xs:complexType name="ParameterStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="direction" type="tns1:DirectionType"/>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="ordinalNumber" type="xs:unsignedByte"/>
        <xs:element minOccurs="0" name="rootTypeDescriptorId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="ParameterStruct" nillable="true" type="tns5:ParameterStruct"/>
<xs:complexType name="MetadataObjectStruct">
  <xs:sequence>
    <xs:element minOccurs="0" name="id" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="isCached" type="xs:boolean"/>
    <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="objectVersion" type="xs:int"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="MetadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
<xs:complexType name="FilterDescriptorStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="filterField" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="FilterDescriptorStruct" nillable="true"
type="tns5:FilterDescriptorStruct"/>
<xs:complexType name="LobSystemInstanceStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="FilterDescriptorStruct" nillable="true"
type="tns5:FilterDescriptorStruct"/>
<xs:complexType name="LobSystemInstanceStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>

```

```

        <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="LobSystemInstanceStruct" nillable="true"
type="tns5:LobSystemInstanceStruct"/>
<xs:complexType name="LobSystemStruct">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:MetadataObjectStruct">
            <xs:sequence>
                <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="systemType" type="tns1:SystemType"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="LobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
<xs:complexType name="DataClassStruct">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:MetadataObjectStruct">
            <xs:sequence>
                <xs:element minOccurs="0" name="active" type="xs:boolean"/>
                <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
                <xs:element minOccurs="0" name="modelId" type="xs:unsignedInt"/>
                <xs:element minOccurs="0" name="namespace" nillable="true" type="xs:string"/>
                <xs:element xmlns:q1="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="version" nillable="true" type="q1:Version"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DataClassStruct" nillable="true" type="tns5:DataClassStruct"/>
<xs:complexType name="EntityStruct">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:DataClassStruct">
            <xs:sequence>
                <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
minOccurs="0" name="cacheUsage" type="tns2:CacheUsage"/>
                <xs:element minOccurs="0" name="description" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="estimatedInstanceCount" type="xs:unsignedInt"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="EntityStruct" nillable="true" type="tns5:EntityStruct"/>
<xs:complexType name="ActionParameterStruct">
    <xs:complexContent mixed="false">
        <xs:extension base="tns5:MetadataObjectStruct">
            <xs:sequence>
                <xs:element minOccurs="0" name="actionId" type="xs:unsignedInt"/>
                <xs:element minOccurs="0" name="index" type="xs:unsignedByte"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

```

<xs:element name="ActionParameterStruct" nillable="true"
type="tns5:ActionParameterStruct"/>
<xs:complexType name="ActionStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="imageUrl" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="isOpenedInNewWindow" type="xs:boolean"/>
        <xs:element minOccurs="0" name="position" type="xs:unsignedByte"/>
        <xs:element minOccurs="0" name="url" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="ActionStruct" nillable="true" type="tns5:ActionStruct"/>
<xs:complexType name="AdministrationMetadataCatalogStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AdministrationMetadataCatalogStruct" nillable="true"
type="tns5:AdministrationMetadataCatalogStruct"/>
<xs:complexType name="AssociationStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MethodInstanceStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="destinationEntityName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="destinationEntityNamespace" nillable="true"
type="xs:string"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="sourceEntityNames" nillable="true" type="q6:ArrayOfString"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="sourceEntityNamespaces" nillable="true" type="q6:ArrayOfString"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AssociationStruct" nillable="true" type="tns5:AssociationStruct"/>
<xs:complexType name="MethodInstanceStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="isDefault" type="xs:boolean"/>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
        <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="methodInstanceType" type="tns1:MethodInstanceType"/>
        <xs:element minOccurs="0" name="returnTypeDescriptorId" type="xs:unsignedInt"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="MethodInstanceStruct" nillable="true" type="tns5:MethodInstanceStruct"/>
<xs:complexType name="AssociationGroupStruct">
  <xs:complexContent mixed="false">

```

```

<xs:extension base="tns5:MetadataObjectStruct">
  <xs:sequence>
    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationEntityNames" nillable="true" type="q6:ArrayOfstring"/>
    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationEntityNamespaces" nillable="true" type="q6:ArrayOfstring"/>
    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationIds" nillable="true" type="q6:ArrayOfunsignedInt"/>
    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="associationNames" nillable="true" type="q6:ArrayOfstring"/>
    <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="AssociationGroupStruct" nillable="true"
type="tns5:AssociationGroupStruct"/>
<xs:complexType name="MethodStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="isStatic" type="xs:boolean"/>
        <xs:element minOccurs="0" name="lobName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="MethodStruct" nillable="true" type="tns5:MethodStruct"/>
<xs:complexType name="IdentifierStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="ordinalNumber" type="xs:unsignedByte"/>
        <xs:element minOccurs="0" name="typeName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="IdentifierStruct" nillable="true" type="tns5:IdentifierStruct"/>
<xs:complexType name="ModelStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="ModelStruct" nillable="true" type="tns5:ModelStruct"/>
<xs:complexType name="TypeDescriptorStruct">
  <xs:complexContent mixed="false">
    <xs:extension base="tns5:MetadataObjectStruct">
      <xs:sequence>
        <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="associationReferenceEntityName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="associationReferenceEntityNamespace"
nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="associationReferenceName" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

    <xs:element minOccurs="0" name="childrenContainRules" type="xs:boolean"/>
    <xs:element minOccurs="0" name="containsFilterDescriptor" type="xs:boolean"/>
    <xs:element minOccurs="0" name="containsIdentifier" type="xs:boolean"/>
    <xs:element minOccurs="0" name="containsReadOnly" type="xs:boolean"/>
    <xs:element minOccurs="0" name="filterDescriptorId" type="xs:unsignedInt"/>
    <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="flags" type="tns1:TypeDescriptorFlags"/>
    <xs:element minOccurs="0" name="identifierId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="identifierReferenceEntityName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="identifierReferenceEntityNamespace" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="identifierReferenceName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="lobName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="parentTypeDescriptorId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="serializedRules" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="typeName" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="TypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
<xs:complexType name="InvalidMetadataObjectExceptionState">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="InvalidFieldName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="InvalidMetadataObjectId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="InvalidMetadataObjectName" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="InvalidMetadataObjectExceptionState" nillable="true"
type="tns5:InvalidMetadataObjectExceptionState"/>
<xs:complexType name="DuplicateMetadataObjectExceptionState">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
      <xs:sequence>
        <xs:element minOccurs="0" name="DuplicateFieldName" nillable="true"
type="xs:string"/>
        <xs:element minOccurs="0" name="DuplicateMetadataObjectName" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DuplicateMetadataObjectExceptionState" nillable="true"
type="tns5:DuplicateMetadataObjectExceptionState"/>
<xs:complexType name="ExceededMetadataObjectLimitExceptionState">
  <xs:complexContent mixed="false">
    <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">

```

```

        <xs:sequence>
            <xs:element minOccurs="0" name="Limit" type="xs:int"/>
        </xs:sequence>
    </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="ExceededMetadataObjectLimitExceptionState" nillable="true"
type="tns5:ExceededMetadataObjectLimitExceptionState"/>
<xs:complexType name="ConcurrentModificationExceptionState">
    <xs:complexContent mixed="false">
        <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
            <xs:sequence>
                <xs:element minOccurs="0" name="MetadataObjectId" type="xs:unsignedInt"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="ConcurrentModificationExceptionState" nillable="true"
type="tns5:ConcurrentModificationExceptionState"/>
<xs:complexType name="MetadataObjectNotFoundExceptionState">
    <xs:complexContent mixed="false">
        <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
            <xs:sequence>
                <xs:element minOccurs="0" name="SearchCriteria" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="MetadataObjectNotFoundExceptionState" nillable="true"
type="tns5:MetadataObjectNotFoundExceptionState"/>
<xs:complexType name="InvalidMetadataPropertyExceptionState">
    <xs:complexContent mixed="false">
        <xs:extension xmlns:tns3="Microsoft.BusinessData.SharePoint"
base="tns3:MetadataException">
            <xs:sequence>
                <xs:element minOccurs="0" name="InvalidPropertyName" nillable="true"
type="xs:string"/>
                <xs:element minOccurs="0" name="MetadataObjectName" nillable="true"
type="xs:string"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="InvalidMetadataPropertyExceptionState" nillable="true"
type="tns5:InvalidMetadataPropertyExceptionState"/>
<xs:complexType name="ArrayOfTypeDescriptorStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="TypeDescriptorStruct"
nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfTypeDescriptorStruct" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
<xs:complexType name="ArrayOfDefaultValueStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="DefaultValueStruct"
nillable="true" type="tns5:DefaultValueStruct"/>
    </xs:sequence>

```

```

</xs:complexType>
<xs:element name="ArrayOfDefaultValueStruct" nillable="true"
type="tns5:ArrayOfDefaultValueStruct"/>
<xs:complexType name="DefaultValueStruct">
<xs:complexContent mixed="false">
<xs:extension base="tns5:ComplexValueStruct">
<xs:sequence>
<xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
<xs:element minOccurs="0" name="methodInstanceName" nillable="true"
type="xs:string"/>
<xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="DefaultValueStruct" nillable="true" type="tns5:DefaultValueStruct"/>
<xs:complexType name="ComplexValueStruct">
<xs:sequence>
<xs:element minOccurs="0" name="needsTypeReflectionResolution" type="xs:boolean"/>
<xs:element minOccurs="0" name="wcfMarshallableValue" nillable="true"
type="xs:anyType"/>
<xs:element minOccurs="0" name="wcfMarshallableValueAssemblyQualifiedTypeName"
nillable="true" type="xs:string"/>
<xs:element minOccurs="0" name="wcfMarshallableValueTypeName" nillable="true"
type="xs:string"/>
</xs:sequence>
</xs:complexType>
<xs:element name="ComplexValueStruct" nillable="true" type="tns5:ComplexValueStruct"/>
<xs:complexType name="PropertyStruct">
<xs:complexContent mixed="false">
<xs:extension base="tns5:ComplexValueStruct">
<xs:sequence>
<xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
<xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
<xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
<xs:element minOccurs="0" name="typeName" nillable="true" type="xs:string"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="PropertyStruct" nillable="true" type="tns5:PropertyStruct"/>
<xs:simpleType name="PackageContents">
<xs:list>
<xs:simpleType>
<xs:restriction base="xs:string">
<xs:enumeration value="None"/>
<xs:enumeration value="Model"/>
<xs:enumeration value="LocalizedNames"/>
<xs:enumeration value="Permissions"/>
<xs:enumeration value="Properties"/>
<xs:enumeration value="InlineProxies"/>
<xs:enumeration value="All"/>
</xs:restriction>
</xs:simpleType>
</xs:list>
</xs:simpleType>
<xs:element name="PackageContents" nillable="true" type="tns5:PackageContents"/>
<xs:complexType name="PackageFormatExceptionState">
<xs:sequence>

```



```

    <xs:element minOccurs="0" name="Message" nillable="true" type="xs:string"/>
    <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="ParseErrors" nillable="true" type="q6:ArrayOfstring"/>
    <xs:element xmlns:tns3="Microsoft.BusinessData.SharePoint" minOccurs="0"
name="SerializedInnerSystemException" nillable="true" type="tns3:MetadataException"/>
    <xs:element minOccurs="0" name="ServerStackTrace" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="PackageFormatExceptionState" nillable="true"
type="tns5:PackageFormatExceptionState"/>
  <xs:complexType name="ArrayOfAssociationStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationStruct"
nillable="true" type="tns5:AssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfAssociationStruct" nillable="true"
type="tns5:ArrayOfAssociationStruct"/>
  <xs:complexType name="ArrayOfAssociationMemberStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationMemberStruct"
nillable="true" type="tns5:AssociationMemberStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfAssociationMemberStruct" nillable="true"
type="tns5:ArrayOfAssociationMemberStruct"/>
  <xs:complexType name="AssociationMemberStruct">
    <xs:sequence>
      <xs:element minOccurs="0" name="_entityName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="_entityNamespace" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="AssociationMemberStruct" nillable="true"
type="tns5:AssociationMemberStruct"/>
  <xs:complexType name="ArrayOfAssociationGroupStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationGroupStruct"
nillable="true" type="tns5:AssociationGroupStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfAssociationGroupStruct" nillable="true"
type="tns5:ArrayOfAssociationGroupStruct"/>
  <xs:complexType name="ArrayOfAssociationReferenceStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="AssociationReferenceStruct"
nillable="true" type="tns5:AssociationReferenceStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfAssociationReferenceStruct" nillable="true"
type="tns5:ArrayOfAssociationReferenceStruct"/>
  <xs:complexType name="AssociationReferenceStruct">
    <xs:sequence>
      <xs:element minOccurs="0" name="_associationName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="_entityName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="_entityNamespace" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>

```

```

    <xs:element minOccurs="0" name="associationGroupObjectVersion" type="xs:int"/>
    <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="id" type="xs:unsignedInt"/>
    <xs:element minOccurs="0" name="isReverse" type="xs:boolean"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="AssociationReferenceStruct" nillable="true"
type="tns5:AssociationReferenceStruct"/>
  <xs:complexType name="ArrayOfEntityStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="EntityStruct" nillable="true"
type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfEntityStruct" nillable="true" type="tns5:ArrayOfEntityStruct"/>
  <xs:complexType name="ArrayOfActivationErrorRecordStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="ActivationErrorRecordStruct"
nillable="true" type="tns5:ActivationErrorRecordStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfActivationErrorRecordStruct" nillable="true"
type="tns5:ArrayOfActivationErrorRecordStruct"/>
  <xs:complexType name="ActivationErrorRecordStruct">
    <xs:sequence>
      <xs:element minOccurs="0" name="aGAssociationEntityReferenceName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="aGAssociationEntityReferenceNamespace" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="aGAssociationReferenceName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingAssociationGroupName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingEntityName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingEntityNamespace" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingEntityVersion" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingMethodName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingParameterName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="containingTypeDescriptorId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="containingTypeDescriptorName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="errorCode" type="xs:int"/>
      <xs:element minOccurs="0" name="tDAssociationEntityReferenceName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="tDAssociationEntityReferenceNamespace" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="tDAssociationReferenceName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="tDIDEntityReferenceName" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="tDIDEntityReferenceNamespace" nillable="true"
type="xs:string"/>
      <xs:element minOccurs="0" name="tDIDReferenceName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="tDIDReferenceTypeName" nillable="true"
type="xs:string"/>
    </xs:sequence>
  </xs:complexType>

```

```

    </xs:sequence>
  </xs:complexType>
  <xs:element name="ActivationErrorRecordStruct" nillable="true"
type="tns5:ActivationErrorRecordStruct"/>
  <xs:complexType name="ArrayOfActionStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="ActionStruct" nillable="true"
type="tns5:ActionStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfActionStruct" nillable="true" type="tns5:ArrayOfActionStruct"/>
  <xs:complexType name="ArrayOfActionParameterStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="ActionParameterStruct"
nillable="true" type="tns5:ActionParameterStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfActionParameterStruct" nillable="true"
type="tns5:ArrayOfActionParameterStruct"/>
  <xs:complexType name="ArrayOfIdentifierStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="IdentifierStruct" nillable="true"
type="tns5:IdentifierStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfIdentifierStruct" nillable="true"
type="tns5:ArrayOfIdentifierStruct"/>
  <xs:complexType name="ArrayOfMethodStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="MethodStruct" nillable="true"
type="tns5:MethodStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfMethodStruct" nillable="true" type="tns5:ArrayOfMethodStruct"/>
  <xs:complexType name="ArrayOfFilterDescriptorStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="FilterDescriptorStruct"
nillable="true" type="tns5:FilterDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfFilterDescriptorStruct" nillable="true"
type="tns5:ArrayOfFilterDescriptorStruct"/>
  <xs:complexType name="ArrayOfMethodInstanceStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="MethodInstanceStruct"
nillable="true" type="tns5:MethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfMethodInstanceStruct" nillable="true"
type="tns5:ArrayOfMethodInstanceStruct"/>
  <xs:complexType name="ArrayOfModelStruct">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="ModelStruct" nillable="true"
type="tns5:ModelStruct"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfModelStruct" nillable="true" type="tns5:ArrayOfModelStruct"/>
  <xs:complexType name="ArrayOfLobSystemStruct">
    <xs:sequence>

```

```

        <xs:element minOccurs="0" maxOccurs="unbounded" name="LobSystemStruct" nillable="true"
type="tns5:LobSystemStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfLobSystemStruct" nillable="true"
type="tns5:ArrayOfLobSystemStruct"/>
<xs:complexType name="ArrayOfLobSystemInstanceStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="LobSystemInstanceStruct"
nillable="true" type="tns5:LobSystemInstanceStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfLobSystemInstanceStruct" nillable="true"
type="tns5:ArrayOfLobSystemInstanceStruct"/>
<xs:complexType name="ArrayOfDataClassStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="DataClassStruct" nillable="true"
type="tns5:DataClassStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfDataClassStruct" nillable="true"
type="tns5:ArrayOfDataClassStruct"/>
<xs:complexType name="ArrayOfLocalizedNameStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="LocalizedNameStruct"
nillable="true" type="tns5:LocalizedNameStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfLocalizedNameStruct" nillable="true"
type="tns5:ArrayOfLocalizedNameStruct"/>
<xs:complexType name="LocalizedNameStruct">
    <xs:sequence>
        <xs:element minOccurs="0" name="lcid" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="vIue" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="LocalizedNameStruct" nillable="true" type="tns5:LocalizedNameStruct"/>
<xs:complexType name="ArrayOfPropertyStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="PropertyStruct" nillable="true"
type="tns5:PropertyStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfPropertyStruct" nillable="true"
type="tns5:ArrayOfPropertyStruct"/>
<xs:complexType name="ArrayOfAccessControlEntryStruct">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="AccessControlEntryStruct"
nillable="true" type="tns5:AccessControlEntryStruct"/>
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfAccessControlEntryStruct" nillable="true"
type="tns5:ArrayOfAccessControlEntryStruct"/>
<xs:complexType name="AccessControlEntryStruct">
    <xs:sequence>
        <xs:element minOccurs="0" name="principalBinaryForm" nillable="true"
type="xs:base64Binary"/>

```

```

    <xs:element minOccurs="0" name="principalDisplayName" nillable="true"
type="xs:string"/>
    <xs:element minOccurs="0" name="principalName" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="rights" type="xs:unsignedLong"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="AccessControlEntryStruct" nillable="true"
type="tns5:AccessControlEntryStruct"/>
<xs:complexType name="ArrayOfCacheInvalidationRecordStruct">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="CacheInvalidationRecordStruct"
nillable="true" type="tns5:CacheInvalidationRecordStruct"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfCacheInvalidationRecordStruct" nillable="true"
type="tns5:ArrayOfCacheInvalidationRecordStruct"/>
<xs:complexType name="CacheInvalidationRecordStruct">
  <xs:sequence>
    <xs:element minOccurs="0" name="cacheLine" type="xs:long"/>
    <xs:element minOccurs="0" name="counter" type="xs:int"/>
    <xs:element minOccurs="0" name="partitionId" type="ser:guid"/>
    <xs:element minOccurs="0" name="timestamp" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="CacheInvalidationRecordStruct" nillable="true"
type="tns5:CacheInvalidationRecordStruct"/>
</xs:schema>

```

7.7 <http://schemas.microsoft.com/2003/10/Serialization/Arrays> Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:complexType name="ArrayOfstring">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfstring" nillable="true" type="q6:ArrayOfstring"/>
  <xs:complexType name="ArrayOfunsignedInt">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="unsignedInt"
type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfunsignedInt" nillable="true" type="q6:ArrayOfunsignedInt"/>
  <xs:complexType name="ArrayOfbase64Binary">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="base64Binary" nillable="true"
type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfbase64Binary" nillable="true" type="q6:ArrayOfbase64Binary"/>
  <xs:complexType name="ArrayOfguid">

```

```

    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="guid" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfguid" nillable="true" type="q6:ArrayOfguid"/>
</xs:schema>

```

7.8 http://schemas.microsoft.com/2003/10/Serialization/ Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
  attributeFormDefault="qualified" elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="anyType" nillable="true" type="xs:anyType"/>
  <xs:element name="anyURI" nillable="true" type="xs:anyURI"/>
  <xs:element name="base64Binary" nillable="true" type="xs:base64Binary"/>
  <xs:element name="boolean" nillable="true" type="xs:boolean"/>
  <xs:element name="byte" nillable="true" type="xs:byte"/>
  <xs:element name="dateTime" nillable="true" type="xs:dateTime"/>
  <xs:element name="decimal" nillable="true" type="xs:decimal"/>
  <xs:element name="double" nillable="true" type="xs:double"/>
  <xs:element name="float" nillable="true" type="xs:float"/>
  <xs:element name="int" nillable="true" type="xs:int"/>
  <xs:element name="long" nillable="true" type="xs:long"/>
  <xs:element name="QName" nillable="true" type="xs:QName"/>
  <xs:element name="short" nillable="true" type="xs:short"/>
  <xs:element name="string" nillable="true" type="xs:string"/>
  <xs:element name="unsignedByte" nillable="true" type="xs:unsignedByte"/>
  <xs:element name="unsignedInt" nillable="true" type="xs:unsignedInt"/>
  <xs:element name="unsignedLong" nillable="true" type="xs:unsignedLong"/>
  <xs:element name="unsignedShort" nillable="true" type="xs:unsignedShort"/>
  <xs:element name="char" nillable="true" type="ser:char"/>
  <xs:simpleType name="char">
    <xs:restriction base="xs:int"/>
  </xs:simpleType>
  <xs:element name="duration" nillable="true" type="ser:duration"/>
  <xs:simpleType name="duration">
    <xs:restriction base="xs:duration">
      <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?"/>
      <xs:minInclusive value="-P10675199DT2H48M5.4775808S"/>
      <xs:maxInclusive value="P10675199DT2H48M5.4775807S"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="guid" nillable="true" type="ser:guid"/>
  <xs:simpleType name="guid">
    <xs:restriction base="xs:string">
      <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:attribute name="FactoryType" type="xs:QName"/>
  <xs:attribute name="Id" type="xs:ID"/>
  <xs:attribute name="Ref" type="xs:IDREF"/>
</xs:schema>

```

7.9 http://schemas.datacontract.org/2004/07/System Schema

```
<?xml version="1.0"?>
<xs:schema xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
xmlns:q1="http://schemas.datacontract.org/2004/07/System" elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">
  <xs:complexType name="Version">
    <xs:sequence>
      <xs:element name="_Build" type="xs:int"/>
      <xs:element name="_Major" type="xs:int"/>
      <xs:element name="_Minor" type="xs:int"/>
      <xs:element name="_Revision" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="Version" nillable="true" type="q1:Version"/>
  <xs:complexType name="ArgumentOutOfRangeException">
    <xs:complexContent mixed="false">
      <xs:extension base="q1:ArgumentException"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ArgumentOutOfRangeException" nillable="true"
type="q1:ArgumentOutOfRangeException"/>
  <xs:complexType name="ArgumentException">
    <xs:complexContent mixed="false">
      <xs:extension base="q1:SystemException"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ArgumentException" nillable="true" type="q1:ArgumentException"/>
  <xs:complexType name="SystemException">
    <xs:complexContent mixed="false">
      <xs:extension base="q1:Exception"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="SystemException" nillable="true" type="q1:SystemException"/>
  <xs:complexType name="Exception">
    <xs:sequence>
      <xs:any minOccurs="0" maxOccurs="unbounded" namespace="##local"
processContents="skip"/>
    </xs:sequence>
    <xs:attribute ref="ser:FactoryType"/>
  </xs:complexType>
  <xs:element name="Exception" nillable="true" type="q1:Exception"/>
  <xs:complexType name="InvalidOperationException">
    <xs:complexContent mixed="false">
      <xs:extension base="q1:SystemException"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="InvalidOperationException" nillable="true"
type="q1:InvalidOperationException"/>
  <xs:complexType name="ArgumentNullException">
    <xs:complexContent mixed="false">
      <xs:extension base="q1:ArgumentException"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ArgumentNullException" nillable="true" type="q1:ArgumentNullException"/>
</xs:schema>
```

7.10 <http://www.microsoft.com/Office/2009/BusinessDataCatalog> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://www.microsoft.com/Office/2009/BusinessDataCatalog"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import namespace="Microsoft.SharePoint.BusinessData" />
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System" />
  <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel" />
  <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime" />
  <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administ
ration.Client.Constants" />
  <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure" />
  <xs:element name="GetParametersForMethod">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt" />
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetParametersForMethodResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetParametersForMethodResult" nillable="true" type="tns5:ArrayOfParameterStruct" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="IsParameterReferencedByMethodInstance">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt" />
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="IsParameterReferencedByMethodInstanceResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="IsParameterReferencedByMethodInstanceResult"
type="xs:boolean" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetTypeReflectorTypeNameForParameter">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>

```



```

</xs:element>
<xs:element name="GetTypeReflectorTypeNameForParameterResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetTypeReflectorTypeNameForParameterResult"
nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="typeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFieldTypeDescriptorsByMethodInstance">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodName" nillable="true"
type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFieldTypeDescriptorsByMethodInstanceResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetFieldTypeDescriptorsByMethodInstanceResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetTypeDescriptorById">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetTypeDescriptorByIdResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetTypeDescriptorByIdResult" nillable="true" type="tns5:TypeDescriptorStruct"/>

```

```

        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetRootTypeDescriptorForParameter">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetRootTypeDescriptorForParameterResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetRootTypeDescriptorForParameterResult" nillable="true"
type="tns5:TypeDescriptorStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetTypeDescriptorsByNameAndLevelForParameter">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="level" type="xs:int"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetTypeDescriptorsByNameAndLevelForParameterResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetTypeDescriptorsByNameAndLevelForParameterResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetChildTypeDescriptorsForTypeDescriptor">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="parentTypeDescriptorId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetChildTypeDescriptorsForTypeDescriptorResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetChildTypeDescriptorsForTypeDescriptorResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetTypeDescriptorsForFilterDescriptor">

```

```

    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="filterDescriptorId" type="xs:unsignedInt"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetTypeDescriptorsForFilterDescriptorResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetTypeDescriptorsForFilterDescriptorResult" nillable="true"
type="tns5:ArrayOfTypeDescriptorStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetDefaultValuesForTypeDescriptor">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetDefaultValuesForTypeDescriptorResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetDefaultValuesForTypeDescriptorResult" nillable="true"
type="tns5:ArrayOfDefaultValueStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetDefaultValuesForTypeDescriptor">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="defaultValueStruct" nillable="true" type="tns5:DefaultValueStruct"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetDefaultValuesForTypeDescriptorResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="DeleteDefaultValueForTypeDescriptor">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="typeDescriptorId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

```

```

<xs:element name="DeleteDefaultValueForTypeDescriptorResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="GetLevelForTypeDescriptor">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="typeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetLevelForTypeDescriptorResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetLevelForTypeDescriptorResult"
type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="TypeDescriptorCreate">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="rawValues" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentTypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="TypeDescriptorCreateResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="TypeDescriptorCreateResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="TypeDescriptorMergeXml">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentTypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="TypeDescriptorMergeXmlResponse">
  <xs:complexType>
    <xs:sequence>

```

```

        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="TypeDescriptorMergeXmlResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="TypeDescriptorReadXml">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parameterStruct" nillable="true" type="tns5:ParameterStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentTypeDescriptorStruct" nillable="true" type="tns5:TypeDescriptorStruct"/>
            <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="TypeDescriptorReadXmlResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="TypeDescriptorReadXmlResult" nillable="true" type="tns5:TypeDescriptorStruct"/>
            <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationByIdResult" nillable="true" type="tns5:AssociationStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationsForEntityAndRole">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
            <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>

```

```

<xs:element name="GetAssociationsForEntityAndRoleResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationsForEntityAndRoleResult" nillable="true"
type="tns5:ArrayOfAssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAssociationsForDataClass">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAssociationsForDataClassResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationsForDataClassResult" nillable="true"
type="tns5:ArrayOfAssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAssociationsForMethod">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAssociationsForMethodResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationsForMethodResult" nillable="true" type="tns5:ArrayOfAssociationStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAssociationMembersInRole">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAssociationMembersInRoleResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationMembersInRoleResult" nillable="true"
type="tns5:ArrayOfAssociationMemberStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationGroupById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationGroupByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationGroupByIdResult" nillable="true" type="tns5:AssociationGroupStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationGroupsForEntity">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationGroupsForEntityResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationGroupsForEntityResult" nillable="true"
type="tns5:ArrayOfAssociationGroupStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationReferencesForAssociationGroup">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="associationGroupId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAssociationReferencesForAssociationGroupResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAssociationReferencesForAssociationGroupResult" nillable="true"
type="tns5:ArrayOfAssociationReferenceStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="AddAssociationReferenceToAssociationGroup">
    <xs:complexType>
        <xs:sequence>

```

```

        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationGroupStruct" nillable="true" type="tns5:AssociationGroupStruct"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationReferenceStruct" nillable="true" type="tns5:AssociationReferenceStruct"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="AddAssociationReferenceToAssociationGroupResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="AddAssociationReferenceToAssociationGroupResult" nillable="true"
type="tns5:AssociationGroupStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationReferenceStruct" nillable="true" type="tns5:AssociationReferenceStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="DeleteAssociationReferenceFromAssociationGroup">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="associationReferenceStruct" nillable="true" type="tns5:AssociationReferenceStruct"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="DeleteAssociationReferenceFromAssociationGroupResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="GetXmlSchemaForView">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="methodInstanceStruct" nillable="true" type="tns5:MethodInstanceStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetXmlSchemaForViewResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="GetXmlSchemaForViewResult" nillable="true"
type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetEntitiesLikeNameAndNamespace">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="wildcardedNamespace" nillable="true"
type="xs:string"/>
            <xs:element minOccurs="0" name="wildcardedName" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
            <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>

```



```

    </xs:complexType>
  </xs:element>
  <xs:element name="GetEntitiesLikeNameAndNamespaceResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesLikeNameAndNamespaceResult" nillable="true"
type="tns5:ArrayOfEntityStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetEntityWithNameAndNamespace">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="namespace" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetEntityWithNameAndNamespaceResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntityWithNameAndNamespaceResult" nillable="true" type="tns5:EntityStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetEntityWithNameAndNamespaceAndVersion">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="namespace" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
        <xs:element xmlns:q1="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="version" nillable="true" type="q1:Version"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetEntityWithNameAndNamespaceAndVersionResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntityWithNameAndNamespaceAndVersionResult" nillable="true"
type="tns5:EntityStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetEntitiesForSystem">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

```

```

<xs:element name="GetEntitiesForSystemResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesForSystemResult" nillable="true" type="tns5:ArrayOfEntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetEntitiesForAssociationAndRole">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetEntitiesForAssociationAndRoleResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesForAssociationAndRoleResult" nillable="true"
type="tns5:ArrayOfEntityStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetDefaultActionForEntity">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="EntityStruct" nillable="true" type="tns5:EntityStruct"/>
      <xs:element minOccurs="0" name="actionName" nillable="true" type="xs:string"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetDefaultActionForEntityResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="GetEntityNameAndNamespacesForAssociationAndRole">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="associationId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="role" type="xs:unsignedByte"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetEntityNameAndNamespacesForAssociationAndRoleResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="namespaces" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="names" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetEntityById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetEntityByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntityByIdResult" nillable="true" type="tns5:EntityStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="EntityCreate">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="rawValues" nillable="true" type="tns5:EntityStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="EntityCreateResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="EntityCreateResult" nillable="true" type="tns5:EntityStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="Activate">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="ActivateResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="ActivateResult" nillable="true" type="tns5:EntityStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="Deactivate">

```

```

    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="DeactivateResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="DeactivateResult" nillable="true" type="tns5:EntityStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="BulkSwitchActiveOrValidate">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStructs" nillable="true" type="tns5:ArrayOfEntityStruct"/>
        <xs:element minOccurs="0" name="validate" type="xs:boolean"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="BulkSwitchActiveOrValidateResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="BulkSwitchActiveOrValidateResult" nillable="true"
type="tns5:ArrayOfActivationErrorRecordStruct"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStructs" nillable="true" type="tns5:ArrayOfEntityStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetActionById">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="actionId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetActionByIdResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionByIdResult" nillable="true" type="tns5:ActionStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetActionsForEntity">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>

```

```

        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetActionsForEntityResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionsForEntityResult" nillable="true" type="tns5:ArrayOfActionStruct"/>
                </xs:sequence>
        </xs:complexType>
    </xs:element>
<xs:element name="GetActionParameterById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="actionParameterId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
                </xs:sequence>
        </xs:complexType>
    </xs:element>
<xs:element name="GetActionParameterByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionParameterByIdResult" nillable="true" type="tns5:ActionParameterStruct"/>
                </xs:sequence>
        </xs:complexType>
    </xs:element>
<xs:element name="GetActionParametersForAction">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="actionId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
                </xs:sequence>
        </xs:complexType>
    </xs:element>
<xs:element name="GetActionParametersForActionResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetActionParametersForActionResult" nillable="true"
type="tns5:ArrayOfActionParameterStruct"/>
                </xs:sequence>
        </xs:complexType>
    </xs:element>
<xs:element name="GetIdentifierById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="identifierId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
                </xs:sequence>
        </xs:complexType>
    </xs:element>
<xs:element name="GetIdentifierByIdResponse">

```

```

    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetIdentifierByIdResult" nillable="true" type="tns5:IdentifierStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetIdentifiersForEntity">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetIdentifiersForEntityResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetIdentifiersForEntityResult" nillable="true" type="tns5:ArrayOfIdentifierStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetMethodById">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetMethodByIdResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodByIdResult" nillable="true" type="tns5:MethodStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetMethodsForDataClass">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetMethodsForDataClassResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodsForDataClassResult" nillable="true" type="tns5:ArrayOfMethodStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

```

```

<xs:element name="IsMethodInstantiated">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="IsMethodInstantiatedResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="IsMethodInstantiatedResult" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFilterDescriptorById">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="filterDescriptorId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFilterDescriptorByIdResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetFilterDescriptorByIdResult" nillable="true" type="tns5:FilterDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFilterDescriptorsForMethod">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetFilterDescriptorsForMethodResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetFilterDescriptorsForMethodResult" nillable="true"
type="tns5:ArrayOfFilterDescriptorStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetMethodInstanceById">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetMethodInstanceByIdResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodInstanceByIdResult" nillable="true" type="tns5:MethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetMethodInstancesForDataClass">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetMethodInstancesForDataClassResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodInstancesForDataClassResult" nillable="true"
type="tns5:ArrayOfMethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetMethodInstancesForMethod">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="methodId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetMethodInstancesForMethodResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetMethodInstancesForMethodResult" nillable="true"
type="tns5:ArrayOfMethodInstanceStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CheckPathInMethodInstances">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="dottedPath" nillable="true" type="xs:string"/>
      <xs:element
xmlns:tns1="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel"
minOccurs="0" name="type" type="tns1:MethodInstanceType"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```



```

<xs:element name="CheckPathInMethodInstancesResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="CheckPathInMethodInstancesResult" type="xs:boolean"/>
      <xs:element minOccurs="0" name="methodInstanceId" type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetParameterById">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="parameterId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetParameterByIdResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetParameterByIdResult" nillable="true" type="tns5:ParameterStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ImportPackageWithProgress">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="adminStruct" nillable="true" type="tns5:AdministrationMetadataCatalogStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element minOccurs="0" name="updateModel" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="jobId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ImportPackageWithProgressResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="ImportPackageWithProgressResult" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetImportProgress">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="jobId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="GetImportProgressResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="GetImportProgressResult" type="xs:double"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="ExportPackage">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="ExportPackageResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="ExportPackageResult" nillable="true"
type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetModelById">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="modelId" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetModelByIdResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelByIdResult" nillable="true" type="tns5:ModelStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetModelsByName">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="wildcardedName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetModelsByNameResponse">
    <xs:complexType>
      <xs:sequence>

```

```

        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelsByNameResult" nillable="true" type="tns5:ArrayOfModelStruct"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetModelByName">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetModelByNameResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelByNameResult" nillable="true" type="tns5:ModelStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetModelsByEntityId">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="entityId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetModelsByEntityIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetModelsByEntityIdResult" nillable="true" type="tns5:ArrayOfModelStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="AddEntityToModel">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="AddEntityToModelResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="RemoveEntityFromModel">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="modelStruct" nillable="true" type="tns5:ModelStruct"/>

```

```

        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="entityStruct" nillable="true" type="tns5:EntityStruct"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="RemoveEntityFromModelResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="DeleteNoCascade">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="DeleteNoCascadeResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="ModelReadXml">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="applicationRegistryStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
            <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
            <xs:element minOccurs="0" name="updateModel" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="ModelReadXmlResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="ModelReadXmlResult" nillable="true" type="tns5:ModelStruct"/>
            <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemProxyAssemblyBytesByLobSystemId">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemProxyAssemblyBytesByLobSystemIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="GetLobSystemProxyAssemblyBytesByLobSystemIdResult"
nillable="true" type="xs:base64Binary"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="GetLobSystemAllAssembliesBytes">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetLobSystemAllAssembliesBytesResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="GetLobSystemAllAssembliesBytesResult" nillable="true"
type="q6:ArrayOfbase64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetLobSystemDataByLobSystem">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetLobSystemDataByLobSystemResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
minOccurs="0" name="GetLobSystemDataByLobSystemResult" nillable="true"
type="tns2:ProxyGenerationResult"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetLobSystemDataByLobSystemId">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
        <xs:element
xmlns:tns2="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime"
minOccurs="0" name="proxyGenerationResult" nillable="true"
type="tns2:ProxyGenerationResult"/>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetLobSystemDataByLobSystemIdResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetLobSystemsReferencedByEntitiesAssociatedWithModel">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="modelId" type="xs:unsignedInt"/>

```

```

    <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Adminis
tration.Client.Constants" minOccurs="0" name="queryMode"
type="tns4:LobSystemConstants.LobSystemsInModelQuery"/>
    <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemsReferencedByEntitiesAssociatedWithModelResult" nillable="true"
type="tns5:ArrayOfLobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemByName">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemByNameResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemByNameResult" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemsLikeName">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="searchLikeName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemsLikeNameResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemsLikeNameResult" nillable="true" type="tns5:ArrayOfLobSystemStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemById">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>

```

```

        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemByIdResult" nillable="true" type="tns5:LobSystemStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetEntityCount">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetEntityCountResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="GetEntityCountResult" type="xs:int"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetSystemUtilityTypeNameForLobSystem">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetSystemUtilityTypeNameForLobSystemResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="GetSystemUtilityTypeNameForLobSystemResult"
nillable="true" type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GenerateProxyAssemblyForLobSystem">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GenerateProxyAssemblyForLobSystemResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="DeleteProxyAssemblyForLobSystem">
    <xs:complexType>
        <xs:sequence>

```

```

        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="lobSystemStruct" nillable="true" type="tns5:LobSystemStruct"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="DeleteProxyAssemblyForLobSystemResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemInstancesForLobSystem">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemInstancesForLobSystemResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemInstancesForLobSystemResult" nillable="true"
type="tns5:ArrayOfLobSystemInstanceStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemInstanceById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="lobSystemInstanceId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetLobSystemInstanceByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetLobSystemInstanceByIdResult" nillable="true" type="tns5:LobSystemInstanceStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetDataClassesForSystem">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="lobSystemId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetDataClassesForSystemResponse">
    <xs:complexType>
        <xs:sequence>

```



```

        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetDataClassesForSystemResult" nillable="true" type="tns5:ArrayOfDataClassStruct"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="GetDataClassById">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="dataClassId" type="xs:unsignedInt"/>
            <xs:element minOccurs="0" name="performErrorCheck" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetDataClassByIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetDataClassByIdResult" nillable="true" type="tns5:DataClassStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetEntitiesReferencedByModelId">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
            <xs:element
xmlns:tns4="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Adminis
tration.Client.Constants" minOccurs="0" name="mode"
type="tns4:EntityConstants.EntitiesInModelQuery"/>
            <xs:element minOccurs="0" name="activeOnly" type="xs:boolean"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetEntitiesReferencedByModelIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetEntitiesReferencedByModelIdResult" nillable="true" type="tns5:ArrayOfEntityStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetServiceApplicationId">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="GetServiceApplicationIdResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="GetServiceApplicationIdResult" type="ser:guid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllPartitionIds">
    <xs:complexType>

```

```

        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllPartitionIdsResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="GetAllPartitionIdsResult" nillable="true" type="q6:ArrayOfguid"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="ReadSlicedXml">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
            <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="ReadSlicedXmlResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfString"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="WriteSlicedXml">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="WriteSlicedXmlResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="WriteSlicedXmlResult" nillable="true"
type="xs:string"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="HaveRights">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>

```

```

        <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure"
minOccurs="0" name="rights" type="tns:BdcRights"/>
        <xs:element minOccurs="0" name="fallBack" type="xs:boolean"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="HaveRightsResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="HaveRightsResult" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllLocalizedNamesForMetadataObjectStruct">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
            <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllLocalizedNamesForMetadataObjectStructResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAllLocalizedNamesForMetadataObjectStructResult" nillable="true"
type="tns5:ArrayOfLocalizedNameStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllLocalizedNames">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
            <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
            <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllLocalizedNamesResponse">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAllLocalizedNamesResult" nillable="true" type="tns5:ArrayOfLocalizedNameStruct"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:element name="GetAllPropertiesForMetadataObjectStruct">
    <xs:complexType>
        <xs:sequence>
            <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
            <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
</xs:element>

```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAllPropertiesForMetadataObjectStructResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAllPropertiesForMetadataObjectStructResult" nillable="true"
type="tns5:ArrayOfPropertyStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAllProperties">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="metadataObjectId" type="xs:unsignedInt"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="partitionId" type="ser:guid"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="merged" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetAllPropertiesResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAllPropertiesResult" nillable="true" type="tns5:ArrayOfPropertyStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SaveLocalizedName">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="lcid" type="xs:unsignedInt"/>
      <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SaveLocalizedNameResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="ClearLocalizedNames">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ClearLocalizedNamesResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="RemoveLocalizedName">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element minOccurs="0" name="lcid" type="xs:unsignedInt"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="RemoveLocalizedNameResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="SaveProperty">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="propertyStruct" nillable="true" type="tns5:PropertyStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SavePropertyResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="ClearProperties">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="ClearPropertiesResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="RemoveProperty">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element minOccurs="0" name="name" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="RemovePropertyResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>

```

```

    </xs:complexType>
  </xs:element>
  <xs:element name="GetAccessControlEntries">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="fallback" type="xs:boolean"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetAccessControlEntriesResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetAccessControlEntriesResult" nillable="true"
type="tns5:ArrayOfAccessControlEntryStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetAccessControlEntries">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="accessControlEntries" nillable="true" type="tns5:ArrayOfAccessControlEntryStruct"/>
        <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetAccessControlEntriesResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="MetadataObjectCreate">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="rawValues" nillable="true" type="tns5:MetadataObjectStruct"/>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="MetadataObjectCreateResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="MetadataObjectCreateResult" nillable="true" type="tns5:MetadataObjectStruct"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="Update">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>

```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="UpdateResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="UpdateResult" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="Delete">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="DeleteResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="MetadataObjectMergeXml">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="mergedStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="MetadataObjectMergeXmlResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="mergedStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="MetadataObjectReadXml">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="parentStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="MetadataObjectReadXmlResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="readStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="MetadataObjectWriteXml">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="MetadataObjectWriteXmlResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="MetadataObjectWriteXmlResult" nillable="true"
type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CopyAclAcrossChildren">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CopyAclAcrossChildrenResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="CopyAclAcrossChildrenForSetting">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CopyAclAcrossChildrenForSettingResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>

```



```

<xs:element name="CopyAclToSetting">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="metadataObjectStruct" nillable="true" type="tns5:MetadataObjectStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="CopyAclToSettingResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="GetCacheInvalidationRecordsSince">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="dateTime" type="xs:dateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetCacheInvalidationRecordsSinceResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="GetCacheInvalidationRecordsSinceResult" nillable="true"
type="tns5:ArrayOfCacheInvalidationRecordStruct"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ImportPackage">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="xml" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="packageContents" type="tns5:PackageContents"/>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="adminStruct" nillable="true" type="tns5:AdministrationMetadataCatalogStruct"/>
      <xs:element minOccurs="0" name="settingId" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="callerCultureLcid" type="xs:int"/>
      <xs:element minOccurs="0" name="updateModel" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="ImportPackageResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns5="Microsoft.SharePoint.BusinessData" minOccurs="0"
name="ImportPackageResult" nillable="true" type="tns5:ModelStruct"/>
      <xs:element xmlns:q6="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="errors" nillable="true" type="q6:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:schema>

```

8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Office 2010 suites
- Microsoft® SharePoint® Foundation 2010
- Microsoft® Office 15 Technical Preview
- Microsoft® SharePoint® Foundation 15 Technical Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.4:](#) SharePoint Foundation 2010 requires that Business Logic Modules conform to the Common Language Infrastructure (CLI) as specified in [\[ECMA-335\]](#) and are understood by the .NET Framework.

[<2> Section 2.2.4.4:](#) In SharePoint Foundation 2010, only the restriction that the index be greater than or equal to zero is enforced.

[<3> Section 2.2.4.21:](#) SharePoint Foundation 2010 always sets the values to zero on return.

[<4> Section 2.2.4.22:](#) In SharePoint Foundation 2010, this GUID can be non-empty.

[<5> Section 2.2.4.31:](#) In SharePoint Foundation 2010, this element is ignored, and the **EntityCreate** operation always sets the **description** element to NULL in the response.

[<6> Section 2.2.4.41:](#) In SharePoint Foundation 2010, this can be other values.

[<7> Section 2.2.4.51:](#) SharePoint Foundation 2010 requires that Business Logic Modules conform to the Common Language Infrastructure (CLI) as specified in [\[ECMA-335\]](#) and are understood by the .NET Framework.

[<8> Section 2.2.4.53:](#) The culture names used by SharePoint Foundation 2010 are as specified in [\[MSDN-SharePointSDK\]](#).

[<9> Section 2.2.4.53:](#) SharePoint Foundation 2010 requires this data type to conform to the Common Language Infrastructure (CLI) as specified in [\[ECMA-335\]](#) and to be understood by the .NET Framework.

[<10> Section 2.2.4.53:](#) SharePoint Foundation 2010 requires that the data type to conform to the Common Language Infrastructure (CLI) as specified in [\[ECMA-335\]](#) and is understood by the .NET Framework.

<11> [Section 2.2.4.53](#): The SharePoint Foundation 2010 module that performs the mapping of value of the **typeName** element to data types requires the value of the **typeName** element to be in the following format.

```
Value = TypeName *1(%x2C BusinessLogicModule)
BusinessLogicModule = FullAssemblyName / LobSystemName
FullAssemblyName = LibraryIdentifier %x2C VersionProperty %x2C CultureProperty %x2C
PublicKeyTokenProperty
```

LibraryIdentifier, **VersionProperty**, **PublicKeyTokenProperty**, and **CultureProperty** are as specified in [\[MS-NRTP\]](#), section [2.2.1.3](#).

TypeName: The name of the type that conforms to the Common Language Infrastructure (CLI) as specified in [\[ECMA-335\]](#) and is understood by the .NET Framework. The format is as specified in [\[MS-NRTP\]](#) section 2.2.1.2.

LobSystemName: The name of the LobSystem that contains the TypeDescriptor.

The occurrence of the **BusinessLogicModule** element is required by SharePoint Foundation 2010 to yield to a **LobSystemName** element if the represented data type resides in the Business Logic Module associated with the LobSystem that contains the TypeDescriptor. Otherwise, the occurrence of **BusinessLogicModule** is required by SharePoint Foundation 2010 to be a **FullAssemblyName** element. The values for the **TypeName** specified in the following table do not require a **BusinessLogicModule**.

Value	Description
System.String	A string of Unicode text.
System.Int16	A number in the range from -32,768 through 32,767.
System.Int32	A number in the range from -2,147,483,648 through 2,147,483,647.
System.Int64	A number in the range from -9,223,372,036,854,775,808 through 9,223,372,036,854,775,807.
System.UInt16	A number in the range from zero through 65535.
System.UInt32	A number in the range from zero through 4,294,967,295.
System.UInt64	A number in the range from zero through 18,446,744,073,709,551,615.
System.DateTime	A date and time in the range from midnight, January 1, 0001 through 11:59:59 PM, December 31, 9999, with a resolution of 100 nanoseconds.
System.TimeSpan	A duration in the range from negative 10,675,199 days 2 hours 48 minutes 5 seconds 477 milliseconds 580 microseconds 800 nanoseconds through positive 10,675,199 days 2 hours 48 minutes 5 seconds 477 milliseconds 580 microseconds 700 nanoseconds, with a resolution of 100 nanoseconds.
System.Single	A single-precision number in the range from -3.402823e38 through 3.402823e38.
System.Double	A double-precision number in the range from -1.79769313486232e308 through 1.79769313486232e308, as well as positive zero, negative zero, positive infinity, negative infinity, and NaN.
System.Decimal	A number in the range from -79,228,162,514,264,337,593,543,950,335 through 79,228,162,514,264,337,593,543,950,335.

Value	Description
System.Char	A Unicode character.
System.Byte	A number in the range from zero through 255.
System.SByte	A number in the range from -128 through 127.
System.Guid	A GUID.
System.Boolean	A bit.
System.Uri	A URL .

<12> [Section 2.2.5.9](#): A Business Logic Module that conforms to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<13> [Section 3.1.4](#): In SharePoint Foundation 2010 implementation the protocol client specifies the last known values for these elements. The protocol server uses the specified values to construct error messages and other informational messages.

<14> [Section 3.1.4](#): In SharePoint Foundation 2010 If The Entity is already Active, Object version is incremented by 2.

<15> [Section 3.1.4](#): A Business Logic Module that conforms to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<16> [Section 3.1.4](#): The Business Logic Module conforms to [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<17> [Section 3.1.4](#): SharePoint Foundation 2010 calls this method only when a deprecated public API is invoked.

<18> [Section 3.1.4](#): In SharePoint Foundation 2010, this operation always returns zero TypeDescriptors.

<19> [Section 3.1.4](#): The behavior would be identified by the specific implementation of the custom code that handles LobSystem data, and is not understood by the protocol server implementation.

<20> [Section 3.1.4](#): A set of Business Logic Modules that conform to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<21> [Section 3.1.4](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the **LobSystem**.

<22> [Section 3.1.4](#): A Business Logic Module that conforms to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<23> [Section 3.1.4](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the **LobSystem**.

<24> [Section 3.1.4](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the LobSystem.

<25> [Section 3.1.4](#): SharePoint Foundation 2010 ignores the level parameter when retrieving the **TypeDescriptors**.

<26> [Section 3.1.4:](#) SharePoint Foundation 2010 calls this method only when a deprecated public API is invoked.

<27> [Section 3.1.4.2.2.2:](#) **associationReferenceStruct** contains wrong **AssociationGroupId**.

<28> [Section 3.1.4.4.2.1:](#) In SharePoint Foundation 2010, if model is not null, the **PartitionId** element of the Model must be same as **PartitionId** of these Entities.

<29> [Section 3.1.4.4.2.2:](#) In SharePoint Foundation 2010, the **PartitionId** elements of these Entities are not an empty GUID.

<30> [Section 3.1.4.13:](#) SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<31> [Section 3.1.4.13:](#) SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<32> [Section 3.1.4.16:](#) A Business Logic Module that conforms to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<33> [Section 3.1.4.16.2.1:](#) A Business Logic Module that conforms to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<34> [Section 3.1.4.18:](#) In SharePoint Foundation 2010, a security principal (2) is authorized to export a MetadataObject, if the same security principal is authorized to modify the same **MetadataObject**.

<35> [Section 3.1.4.19:](#) The Business Logic Module conforms to [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<36> [Section 3.1.4.23:](#) SharePoint Foundation 2010 does not return a fault in this case.

<37> [Section 3.1.4.23:](#) SharePoint Foundation 2010 does not return a fault in this case.

<38> [Section 3.1.4.24:](#) SharePoint Foundation 2010 does not return a fault in this case.

<39> [Section 3.1.4.25:](#) SharePoint Foundation 2010 does not return a fault in this case.

<40> [Section 3.1.4.26:](#) SharePoint Foundation 2010 does not return a fault in this case.

<41> [Section 3.1.4.32:](#) SharePoint Foundation 2010 does not return a fault in this case.

<42> [Section 3.1.4.32:](#) SharePoint Foundation 2010 does not return a fault in this case.

<43> [Section 3.1.4.34:](#) SharePoint Foundation 2010 does not return a fault in this case.

<44> [Section 3.1.4.35:](#) SharePoint Foundation 2010 does not return a fault in this case.

<45> [Section 3.1.4.36:](#) SharePoint Foundation 2010 returns a fault containing the **InvalidOperationException** complex type (section [2.2.4.38](#)) in this case.

<46> [Section 3.1.4.37:](#) SharePoint Foundation 2010 does not return a fault in this case.

<47> [Section 3.1.4.38:](#) SharePoint Foundation 2010 calls this method only when a deprecated public API is invoked.

<48> [Section 3.1.4.39:](#) SharePoint Foundation 2010 does not return a fault in this case.

<49> [Section 3.1.4.40](#): In SharePoint Foundation 2010, this operation always returns zero TypeDescriptors.

<50> [Section 3.1.4.40](#): SharePoint Foundation 2010 does not return a fault in this case.

<51> [Section 3.1.4.40](#): SharePoint Foundation 2010 does not return a fault in this case.

<52> [Section 3.1.4.42](#): SharePoint Foundation 2010 does not return a fault in this case.

<53> [Section 3.1.4.44](#): SharePoint Foundation 2010 does not return a fault in this case.

<54> [Section 3.1.4.44](#): SharePoint Foundation 2010 does not return a fault in this case.

<55> [Section 3.1.4.45](#): SharePoint Foundation 2010 does not return a fault in this case.

<56> [Section 3.1.4.47](#): SharePoint Foundation 2010 does not return a fault in this case.

<57> [Section 3.1.4.49](#): SharePoint Foundation 2010 does not raise an error in this case.

<58> [Section 3.1.4.49](#): SharePoint Foundation 2010 does not raise an error in this case.

<59> [Section 3.1.4.50](#): SharePoint Foundation 2010 returns a fault containing the **BdcExceptionState** complex type (section [2.2.4.25](#)) in this case.

<60> [Section 3.1.4.55](#): SharePoint Foundation 2010 does not return a fault in this case.

<61> [Section 3.1.4.55](#): SharePoint Foundation 2010 does not return a fault in this case.

<62> [Section 3.1.4.57](#): SharePoint Foundation 2010 does not return a fault in this case.

<63> [Section 3.1.4.57](#): SharePoint Foundation 2010 does not return a fault in this case.

<64> [Section 3.1.4.59](#): SharePoint Foundation 2010 does not return a fault in this case.

<65> [Section 3.1.4.59](#): SharePoint Foundation 2010 does not return a fault in this case.

<66> [Section 3.1.4.60](#): The behavior would be identified by the specific implementation of the custom code that handles LobSystem data, and is not understood by the protocol server implementation.

<67> [Section 3.1.4.60](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the LobSystem.

<68> [Section 3.1.4.61](#): SharePoint Foundation 2010 (SP1) does respond with **AccessDeniedExceptionState** in this case. However, SharePoint Foundation 2010 instead responds with **ArgumentNullException**.

<69> [Section 3.1.4.62](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the LobSystem.

<70> [Section 3.1.4.63](#): A set of Business Logic Modules that conform to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<71> [Section 3.1.4.63](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the **LobSystem**.

<72> [Section 3.1.4.63](#): SharePoint Foundation 2010 does not return a fault in this case.

<73> [Section 3.1.4.63.2.2](#): A set of Business Logic Modules that conform to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<74> [Section 3.1.4.64](#): SharePoint Foundation 2010 (SP1) does respond with **AccessDeniedExceptionState** in this case. However, SharePoint Foundation 2010 instead responds with **BdcExceptionState**.

<75> [Section 3.1.4.65](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the **LobSystem**.

<76> [Section 3.1.4.65](#): SharePoint Foundation 2010 does not return a fault in this case.

<77> [Section 3.1.4.65](#): SharePoint Foundation 2010 does not return a fault in this case.

<78> [Section 3.1.4.66](#): A Business Logic Module that conforms to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<79> [Section 3.1.4.66](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the **LobSystem**.

<80> [Section 3.1.4.66.2.2](#): A set of Business Logic Modules that conform to the [\[ECMA-335\]](#) specification and is understood by the .NET Framework.

<81> [Section 3.1.4.67](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the **LobSystem**.

<82> [Section 3.1.4.68](#): SharePoint Foundation 2010 checks the edit rights of the security principal on the LobSystem to determine if the security principal is authorized to read the LobSystem.

<83> [Section 3.1.4.68](#): SharePoint Foundation 2010 does not return a fault in this case.

<84> [Section 3.1.4.68](#): SharePoint Foundation 2010 does not return a fault in this case.

<85> [Section 3.1.4.71](#): SharePoint Foundation 2010 does not return a fault in this case.

<86> [Section 3.1.4.72](#): SharePoint Foundation 2010 does not return a fault in this case.

<87> [Section 3.1.4.73](#): SharePoint Foundation 2010 does not return a fault in this case.

<88> [Section 3.1.4.73](#): SharePoint Foundation 2010 does not return a fault in this case.

<89> [Section 3.1.4.76](#): SharePoint Foundation 2010 does not return a fault in this case.

<90> [Section 3.1.4.79](#): SharePoint Foundation 2010 does not return a fault in this case.

<91> [Section 3.1.4.79](#): SharePoint Foundation 2010 does not return a fault in this case.

<92> [Section 3.1.4.82.2.2](#): SharePoint Foundation 2010 requires the identifier to be in the following format as expressed in ABNF as specified in [\[RFC5234\]](#):

```
Identifier = TypeName *1(%x2C FullAssemblyName)
FullAssemblyName = LibraryIdentifier %x2C VersionProperty %x2C CultureProperty %x2C
PublicKeyTokenProperty
```

where LibraryIdentifier, VersionProperty, PublicKeyTokenProperty, and CultureProperty are as specified in [\[MS-NRTP\]](#) section 2.2.1.3.

TypeName: The name of the type that conforms to the [\[ECMA-335\]](#) specification and can be understood by the .NET Framework. The format is as specified in [\[MS-NRTP\]](#), Section 2.2.1.2. The specified type implements operations that are described in [\[MSDN-SharePointSDK\]](#).

<93> [Section 3.1.4.84](#): SharePoint Foundation 2010 ignores the level parameter when retrieving the **TypeDescriptors**.

<94> [Section 3.1.4.84.2.1](#): In SharePoint Foundation 2010, **level** is ignored. Only **name**, **parameterId** and **partitionId** are used.

<95> [Section 3.1.4.87](#): In the case where the MethodInstance is an AccessChecker, SharePoint Foundation 2010 does not respond with a fault, instead returns an invalid response, which MUST be ignored by the protocol client.

<96> [Section 3.1.4.87.2.2](#): SharePoint Foundation 2010 uses XML namespace value "http://tempuri.org/XMLSchema.xsd/" concatenated with the namespace of the Entity that contains the specified MethodInstance.

<97> [Section 3.1.4.87.2.2](#): SharePoint Foundation 2010 uses XML namespace value "http://schemas.microsoft.com/windows/2007/BusinessDataCatalog/Annotations".

<98> [Section 3.1.4.92.2.2](#): SharePoint Foundation 2010 this operation always returns false.

<99> [Section 3.1.4.93](#): SharePoint Foundation 2010 does not return a fault in this case.

<100> [Section 3.1.4.93.2.2](#): In SharePoint Foundation 2010, if the **MetadataObject** specified in the request is an Entity, this operation will not set **description** while returning created **MetadataObject**.

<101> [Section 3.1.4.94](#): SharePoint Foundation 2010 returns a fault containing the **BdcExceptionState** complex type (section [2.2.4.25](#)) in case MetadataObject is LobSystem.

<102> [Section 3.1.4.94](#): SharePoint Foundation 2010 could return a fault containing the **BdcExceptionState** (section [2.2.4.25](#)) instead of **PackageFormatExceptionState** (section [2.2.4.48](#)).

<103> [Section 3.1.4.95](#): SharePoint Foundation 2010 returns a fault containing the **InvalidOperationException** complex type (section [2.2.4.38](#)) in this case.

<104> [Section 3.1.4.96](#): In the case when **packageContents** element is specified as **Model**, **LocalizedNames** or **None**, SharePoint Foundation 2010 does not return a fault.

<105> [Section 3.1.4.96.2.2](#): SharePoint Foundation 2010 returns a fault containing the **InvalidOperationException** complex type (section [2.2.4.38](#)) in this case.

<106> [Section 3.1.4.97](#): SharePoint Foundation 2010 returns a fault containing the **BdcExceptionState** (section [2.2.4.25](#)) in this case MetadataObject is LobSystem.

<107> [Section 3.1.4.97](#): SharePoint Foundation 2010 returns a fault containing the **InvalidOperationException** complex type (section [2.2.4.38](#)) in this case.

<108> [Section 3.1.4.97](#): SharePoint Foundation 2010 returns a fault containing the **BdcExceptionState** (section [2.2.4.25](#)) in this case MetadataObject is LobSystem.

<109> [Section 3.1.4.108](#): SharePoint Foundation 2010 does not return a fault in this case.

<110> [Section 3.1.4.110](#): SharePoint Foundation 2010 does not return a fault in cases where **xml** does not contain IdentifierName, IdentifierEntityName and IdentifierEntityNamespace OR AssociationName, AssociationEntityName and AssociationEntityNamespace.

<111> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<112> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<113> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<114> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<115> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<116> [Section 3.1.4.111](#): SharePoint Foundation 2010 does not raise an error in this case.

<117> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<118> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<119> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<120> [Section 3.1.4.111](#): SharePoint Foundation 2010 returns a **MetadataException**, serialized as specified in section [2.2.4](#), in this case.

<121> [Section 3.1.4.111](#): SharePoint Foundation 2010 does not return a fault in this case.

<122> [Section 3.1.4.111](#): SharePoint Foundation 2010 does not return a fault in this case.

<123> [Section 3.1.4.111](#): SharePoint Foundation 2010 always returns a fault containing the **BdcExceptionState** complex type (section [2.2.4.25](#)).

<124> [Section 3.1.4.111](#): In SharePoint Foundation 2010, this operation does not set the **IsDefault** attribute of a **MethodInstance** with the same value for **MethodInstanceType** within the containing **DataClass** to 1.

<125> [Section 3.1.4.111.2.1](#): SharePoint Foundation 2010 returns a fault containing the **InvalidMetadataObjectExceptionState** complex type (section [2.2.4.38](#)) in cases where the specified **MetadataObject** is the **FilterDescriptor** of type TimeStampFilter.

<126> [Section 3.1.4.112](#): SharePoint Foundation 2010 calls this method only when a deprecated public API is invoked.

9 Change Tracking

This section identifies changes that were made to the [MS-BDCRAWPS] protocol document between the June 2011 and January 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
1.4 Relationship to Other Protocols	Added references to [RFC2616] and [RFC2818].	N	Content updated.
2.2.1 Namespaces	Updated the list of namespaces and associated prefixes.	N	Content updated.
2.2.1 Namespaces	Removed the "(none)" and "q<#>" prefixes and associated namespace URI information. Replaced the information about the tns prefix with the namespace URI.	N	Content removed.
2.2.4.1 AccessControlEntryStruct	Added xmlns:xs information to the fragment.	N	Content updated.
2.2.4.2 AccessDeniedException	Added xmlns:xs information to the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
2.2.4.3 AccessDeniedExceptionState	Added xmlns:xs information to the fragment.	N	Content updated.
2.2.4.4 ActionParameterStruct	Updated xmlns:xs and extension base information in the fragment.	N	Content updated.
2.2.4.5 ActionStruct	Updated xmlns:xs and extension base information in the fragment.	N	Content updated.
2.2.4.6 AdministrationMetadataCatalogStruct	Updated xmlns:xs and extension base information in the fragment.	N	Content updated.
2.2.4.7 ArgumentException	Updated xmlns:xs and extension base information in the fragment.	N	Content updated.
2.2.4.8 ArgumentNullException	Updated xmlns:xs and extension base information in the fragment.	N	Content updated.
2.2.4.9 ArgumentOutOfRangeException	Updated xmlns:xs and extension base information in the fragment.	N	Content updated.
2.2.4.11 ArrayOfAssociationStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.11 ArrayOfAssociationStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.12 ArrayOfEntityStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.13	Updated xmlns:xs and type	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
ArrayOfLobSystemStruct	information in the fragment.		ent updated.
2.2.4.14 ArrayOfLocalizedNameStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.15 ArrayOfMethodInstanceStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.16 ArrayOfModelStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.17 ArrayOfPropertyStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.18 ArrayOfstring	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.19 ArrayOfTypeDescriptorStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.20 ArrayOfunsignedInt	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.21 AssociationGroupStruct	Removed two sentences from the description of associationEntityNames and associationEntityNamespaces in AssociationGroupStruct.	N	Content removed.
2.2.4.21 AssociationGroupStruct	Updated the description of associationIds in AssociationGroupStruct.	N	New product behavior note added.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.4.21 AssociationGroupStruct	Added product behavior note for AssociationGroupStruct.	N	New product behavior note added.
2.2.4.21 AssociationGroupStruct	Updated xmlns:xs and type information in the fragment.	N	Content updated.
2.2.4.22 AssociationReferenceStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.23 AssociationStruct	Updated xmlns:xs, extension base, and type information in the fragment.	N	Content updated.
2.2.4.24 BdcException	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.25 BdcExceptionState	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.26 ComplexValueStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.27 ConcurrentModificationExceptionState	Updated the xmlns:xs and base= information in the fragment.	N	Content updated.
2.2.4.28 DataClassStruct	Updated the xmlns:xs and extension base= information in the fragment.	N	Content updated.
2.2.4.29 DefaultValueStruct	Updated the xmlns:xs and extension base= information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.4.30 DuplicateMetadataObjectExceptionState	Updated the xmlns:xs and extension base= information in the fragment.	N	Content updated.
2.2.4.31 EntityStruct	Added a product behavior note for the description element of EntityStruct.	N	New product behavior note added.
2.2.4.31 EntityStruct	Updated the xmlns:xs and extension base= information in the fragment.	N	Content updated.
2.2.4.32 ExceededMetadataObjectLimitExceptionState	Updated the xmlns:xs and extension base= information in the fragment.	N	Content updated.
2.2.4.33 Exception	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.34 FilterDescriptorStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.35 IdentifierStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.36 InvalidMetadataObjectExceptionState	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.37 InvalidMetadataPropertyExceptionState	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.38 InvalidOperationException	Updated the xmlns:xs information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.4.39 LobSystemInstanceStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.40 LobSystemStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.41 LocalizedNameStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.42 MetadataException	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.43 MetadataObjectNotFoundStateException	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.44 MetadataObjectStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.45 MethodInstanceStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.46 MethodStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.47 ModelStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.48 PackageFormatExceptionState	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.49 ParameterStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
2.2.4.50 PropertyStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.51 ProxyGenerationResult	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.52 SystemException	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.53 TypeDescriptorStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.4.54 Version	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.1 CacheUsage	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.2 char	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.3 DirectionType	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.4 duration	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.5 FilterType	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.5	Added "Sorting" to the list of	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
FilterType	allowable values.		ent updated.
2.2.5.6 guid	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.7 MethodInstanceType	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.7 MethodInstanceType	Added "EventSubscriber" and "EventUnsubscriber" to the list of allowable values.	N	Content updated.
2.2.5.8 PackageContents	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.9 SystemType	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.9 SystemType	Added "OData" to the list of allowable values.	N	Content updated.
2.2.5.9 SystemType	Updated the description of the Wcf value.	N	Content updated.
2.2.5.10 TypeDescriptorFlags	Updated the xmlns:xs information in the fragment.	N	Content updated.
2.2.5.10 TypeDescriptorFlags	Added "IsSortInput" to the list of allowable values.	N	Content updated.
3.1.4 Message Processing Events and Sequencing Rules	Modified the column title in the table to read "Operation" instead of "WSDL Operation".	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4 Message Processing Events and Sequencing Rules	Updated the product behavior note listed in the MetadataObjects for the BulkSwitchActiveOrValidate operation.	N	Product behavior note updated.
3.1.4 Message Processing Events and Sequencing Rules	Updated the product behavior note listed in the description of the GenerateProxyAssemblyForLOBSystem operation.	N	Product behavior note updated.
3.1.4 Message Processing Events and Sequencing Rules	Updated the product behavior note listed in the description of the GetTypeDescriptorsByNameAndLevelForParameter operation.	N	Product behavior note updated.
3.1.4 Message Processing Events and Sequencing Rules	Updated the description of the GetXmlSchemaForView operation by replacing "XML Schema" with "XSD" and by replacing "MethodInstances" with "MethodInstance".	N	Content updated.
3.1.4.1 Activate	Updated some of the information in the fragment.	N	Content updated.
3.1.4.1 Activate	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.1.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.1.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.1.2.1 Activate	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.1.2.2 ActivateResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.2 AddAssociationReferenceToAssociationGroup	Updated some of the information in the fragment.	N	Content updated.
3.1.4.2 AddAssociationReferenceToAssociationGroup	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.2.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.2.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.2.2.1 AddAssociationReferenceToAssociationGroup	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.2.2.2 AddAssociationReferenceToAssociationGroupResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.2.2.2 AddAssociationReferenceToAssociationGroupResponse	Added product behavior note describing the relationship between associationReferenceStruct and AssociationGroupId.	N	New product behavior note added.
3.1.4.3 AddEntityToModel	Updated some of the information in the fragment.	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			updated.
3.1.4.3 AddEntityToModel	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.3.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.3.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.3.2.1 AddEntityToModel	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.3.2.2 AddEntityToModelResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.4 BulkSwitchActiveOrValidate	Updated some of the information in the fragment.	N	Content updated.
3.1.4.4.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.4.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.4.2.1 BulkSwitchActiveOrValidate	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.4.2.1 BulkSwitchActiveOrValidate	Updated the product behavior note by removing information about when a	N	Product behavior

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fault is not returned.		viornote updated.
3.1.4.4.2.2 BulkSwitchActiveOrValidateResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.4.3 Complex Types	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.4.3.1 ArrayOfActivationErrorRecordStruct	Updated the xmlns:xs information in the fragment; moved the xs:sequence further down.	N	Content updated.
3.1.4.4.3.2 ActivationErrorRecordStruct	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.5 CheckPathInMethodInstances	Updated some of the information in the fragment.	N	Content updated.
3.1.4.5 CheckPathInMethodInstances	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.5.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.5.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.5.2.1 CheckPathInMethodInstances	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.5.2.2	Updated the xmlns:xs	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
CheckPathInMethodInstancesResponse	information in the fragment.		ent updated.
3.1.4.6 ClearLocalizedNames	Updated some of the information in the fragment.	N	Content updated.
3.1.4.6 ClearLocalizedNames	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.6.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.6.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.6.2.1 ClearLocalizedNames	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.6.2.2 ClearLocalizedNamesResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.7 ClearProperties	Updated some of the information in the fragment.	N	Content updated.
3.1.4.7 ClearProperties	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.7.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.7.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.7.2.1 ClearProperties	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.7.2.2 ClearPropertiesResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.8 CopyAclAcrossChildren	Updated some of the information in the fragment.	N	Content updated.
3.1.4.8 CopyAclAcrossChildren	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.8.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.8.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.8.2.1 CopyAclAcrossChildren	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.8.2.2 CopyAclAcrossChildrenResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.9 CopyAclAcrossChildrenForSetting	Updated some of the information in the fragment.	N	Content updated.
3.1.4.9	Moved the sentence starting	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
CopyAclAcrossChildrenForSetting	with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.		ent updated.
3.1.4.9.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.9.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.9.2.1 CopyAclAcrossChildrenForSetting	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.9.2.2 CopyAclAcrossChildrenForSettingResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.10 CopyAclToSetting	Updated some of the information in the fragment.	N	Content updated.
3.1.4.10.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.10.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.10.2.1 CopyAclToSetting	Updated the xmlns:xs information and values in the fragment.	N	Content updated.
3.1.4.10.2.2 CopyAclToSettingResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.11 Deactivate	Updated some of the information in the fragment.	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			updated.
3.1.4.11.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.11.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.11.2.1 Deactivate	Updated the xmlns:xs information and values in the fragment.	N	Content updated.
3.1.4.11.2.2 DeactivateResponse	Updated the xmlns:xs information and values in the fragment.	N	Content updated.
3.1.4.12 Delete	Updated some of the information in the fragment.	N	Content updated.
3.1.4.12 Delete	Updated the InvalidOperationException conditions, by adding information about the MetadataObject.	N	Content updated.
3.1.4.12 Delete	Updated the InvalidOperationException conditions, by removing two MetadataObject-related conditions.	N	Content removed.
3.1.4.12.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.12.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.12.2.1 Delete	Updated the xmlns:xs information and values in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.12.2.2 DeleteResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.13 DeleteAssociationReferenceFromAssociationGroup	Updated some of the information in the fragment.	N	Content updated.
3.1.4.13 DeleteAssociationReferenceFromAssociationGroup	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.13.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.13.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.13.2.1 DeleteAssociationReferenceFromAssociationGroup	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.13.2.2 DeleteAssociationReferenceFromAssociationGroupResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.14 DeleteDefaultValueForTypeDescriptor	Updated some of the information in the fragment.	N	Content updated.
3.1.4.14.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.14.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.14.2.1 DeleteDefaultValueForTypeDescriptor	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.14.2.2 DeleteDefaultValueForTypeDescriptorResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.15 DeleteNoCascade	Updated some of the information in the fragment.	N	Content updated.
3.1.4.15 DeleteNoCascade	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.15.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.15.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.15.2.1 DeleteNoCascade	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.15.2.2 DeleteNoCascadeResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.16 DeleteProxyAssemblyForLobSystem	Updated some of the information in the fragment.	N	Content updated.
3.1.4.16.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.16.2	Added a table that	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Elements	summarizes the XML schema element definitions.		ent updated.
3.1.4.16.2.1 DeleteProxyAssemblyForLobSystem	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.16.2.2 DeleteProxyAssemblyForLobSystemResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.17 EntityCreate	Updated some of the information in the fragment.	N	Content updated.
3.1.4.17 EntityCreate	Added a table that summarizes the error complex type and condition; updated the associated fragment.	N	Content updated.
3.1.4.17 EntityCreate	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.17.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.17.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.17.2.1 EntityCreate	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.17.2.2 EntityCreateResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.18	Updated some of the	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
ExportPackage	information in the fragment.		ent updated.
3.1.4.18 ExportPackage	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.18.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.18.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.18.2.1 ExportPackage	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.18.2.2 ExportPackageResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.19 GenerateProxyAssemblyForLobSystem	Updated some of the information in the fragment.	N	Content updated.
3.1.4.19 GenerateProxyAssemblyForLobSystem	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.19.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.19.2.1 GenerateProxyAssemblyForLobSystem	Updated the xmlns:xs and related information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.19.2.2 GenerateProxyAssemblyForLobSystemResponse	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.20 GetAccessControlEntries	Updated some of the information in the fragment.	N	Content updated.
3.1.4.20 GetAccessControlEntries	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.20.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.20.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.20.2.1 GetAccessControlEntries	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.20.2.2 GetAccessControlEntriesResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.21 GetActionById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.21 GetActionById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.21.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.21.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.21.2.1 GetActionById	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.21.2.2 GetActionByIdResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.22 GetActionParameterById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.22 GetActionParameterById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.22.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.22.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.22.2.1 GetActionParameterById	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.22.2.2 GetActionParameterByIdResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.23 GetActionParametersForAction	Updated some of the information in the fragment.	N	Content updated.
3.1.4.23	Moved the sentence starting	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
GetActionParametersForAction	with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.		ent updated.
3.1.4.23.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.23.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.23.2.1 GetActionParametersForAction	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.23.2.2 GetActionParametersForActionResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.23.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.23.3.1 ArrayOfActionParameterStruct	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.24 GetActionsForEntity	Updated some of the information in the fragment.	N	Content updated.
3.1.4.24 GetActionsForEntity	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.24.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.24.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.24.2.1 GetActionsForEntity	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.24.2.2 GetActionsForEntityResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.24.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.24.3.1 ArrayOfActionStruct	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.25 GetAllLocalizedNames	Updated some of the information in the fragment.	N	Content updated.
3.1.4.25 GetAllLocalizedNames	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.25.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.25.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.25.2.1 GetAllLocalizedNames	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.25.2.2	Updated the xmlns:xs and	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
GetAllLocalizedNamesResponse	related information in the fragment.		ent updated.
3.1.4.26 GetAllLocalizedNamesForMetadataObjectStruct	Updated some of the information in the fragment.	N	Content updated.
3.1.4.26 GetAllLocalizedNamesForMetadataObjectStruct	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.26.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.26.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.26.2.1 GetAllLocalizedNamesForMetadataObjectStruct	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.26.2.2 GetAllLocalizedNamesForMetadataObjectStructResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.27 GetAllPartitionIds	Updated some of the information in the fragment.	N	Content updated.
3.1.4.27.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.27.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.27.2.1 GetAllPartitionIds	Updated the xmlns:xs information in the fragment.	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			updated.
3.1.4.27.2.2 GetAllPartitionIdsResponse	Updated the xmlns:xs and related information in the fragment.	N	Content updated.
3.1.4.27.2.2 GetAllPartitionIdsResponse	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.27.3.1 ArrayOfguid	Updated the xmlns:xs information in the fragment.	N	Content updated.
3.1.4.27.3.1 ArrayOfguid	Added a description of the guid element.	N	Content updated.
3.1.4.28 GetAllProperties	Updated some of the information in the fragment.	N	Content updated.
3.1.4.28 GetAllProperties	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.28.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.28.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.28.2.1 GetAllProperties	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.28.2.2 GetAllPropertiesResponse	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.29 GetAllPropertiesForMetadataObjectStruct	Updated some of the information in the fragment.	N	Content updated.
3.1.4.29 GetAllPropertiesForMetadataObjectStruct	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.29.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.29.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.29.2.1 GetAllPropertiesForMetadataObjectStruct	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.29.2.2 GetAllPropertiesForMetadataObjectStructResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.30 GetAssociationById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.30 GetAssociationById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.30.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.30.2 Elements	Added a table that summarizes the XML	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	schema element definitions.		updated.
3.1.4.30.2.1 GetAssociationById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.30.2.2 GetAssociationByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.31 GetAssociationGroupById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.31 GetAssociationGroupById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.31.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.31.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.31.2.1 GetAssociationGroupById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.31.2.2 GetAssociationGroupByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.32 GetAssociationGroupsForEntity	Updated some of the information in the fragment.	N	Content updated.
3.1.4.32 GetAssociationGroupsForEntity	Moved the sentence starting with "If more than one error condition is encountered..."	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	to the paragraph introducing the error complex type/condition table.		ted.
3.1.4.32 GetAssociationGroupsForEntity	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.32.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.32.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.32.2.1 GetAssociationGroupsForEntity	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.32.2.2 GetAssociationGroupsForEntityResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.32.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.32.3.1 ArrayOfAssociationGroupStruct	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.33 GetAssociationMembersInRole	Updated some of the information in the fragment.	N	Content updated.
3.1.4.33 GetAssociationMembersInRole	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	type/condition table.		
3.1.4.33.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.33.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.33.2.1 GetAssociationMembersInRole	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.33.2.2 GetAssociationMembersInRoleResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.33.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.33.3.1 ArrayOfAssociationMemberStruct	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.33.3.2 AssociationMemberStruct	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.34 GetAssociationReferencesForAssociationGroup	Updated some of the information in the fragment.	N	Content updated.
3.1.4.34 GetAssociationReferencesForAssociationGroup	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.34.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.34.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.34.2.1 GetAssociationReferencesForAssociationGroup	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.34.2.2 GetAssociationReferencesForAssociationGroupResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.34.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.34.3.1 ArrayOfAssociationReferenceStruct	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.35 GetAssociationsForDataClass	Updated some of the information in the fragment.	N	Content updated.
3.1.4.35 GetAssociationsForDataClass	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.35.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.35.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.35.2.1 GetAssociationsForDataClass	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.35.2.2	Updated some of the	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
GetAssociationsForDataClassResponse	element information in the fragment.		ent updated.
3.1.4.36 GetAssociationsForEntityAndRole	Updated some of the information in the fragment.	N	Content updated.
3.1.4.36 GetAssociationsForEntityAndRole	Added a product behavior note describing the situation in which a fault containing the <code>InvalidOperationException</code> complex type is returned.	N	New product behavior note added.
3.1.4.36.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.36.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.36.2.1 GetAssociationsForEntityAndRole	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.36.2.2 GetAssociationsForEntityAndRoleResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.37 GetAssociationsForMethod	Updated some of the information in the fragment.	N	Content updated.
3.1.4.37 GetAssociationsForMethod	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.37.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.37.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.37.2.1 GetAssociationsForMethod	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.37.2.2 GetAssociationsForMethodResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.38 GetCacheInvalidationRecordsSince	Updated some of the information in the fragment.	N	Content updated.
3.1.4.38.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.38.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.38.2.1 GetCacheInvalidationRecordsSince	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.38.2.2 GetCacheInvalidationRecordsSinceResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.38.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.38.3.1 ArrayOfCacheInvalidationRecordStruct	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.38.3.2	Updated some of the	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
CacheInvalidationRecordStruct	complex type information in the fragment.		ent updated.
3.1.4.39 GetChildTypeDescriptorsForTypeDescriptor	Updated some of the information in the fragment.	N	Content updated.
3.1.4.39 GetChildTypeDescriptorsForTypeDescriptor	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.39.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.39.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.39.2.1 GetChildTypeDescriptorsForTypeDescriptor	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.39.2.2 GetChildTypeDescriptorsForTypeDescriptorResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.40 GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor	Updated some of the information in the fragment.	N	Content updated.
3.1.4.40.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.40.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.40.2.1 GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor	Updated some of the element information in the	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fragment.		updated.
3.1.4.40.2.2 GetChildTypeDescriptorsWithIdentifiersForTypeDescriptorResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.41 GetDataClassById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.41 GetDataClassById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.41.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.41.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.41.2.1 GetDataClassById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.41.2.2 GetDataClassByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.42 GetDataClassesForSystem	Updated some of the information in the fragment.	N	Content updated.
3.1.4.42 GetDataClassesForSystem	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.42.1	Added a table that	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Messages	summarizes the set of WSDL message definitions.		ent updated.
3.1.4.42.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.42.2.1 GetDataClassesForSystem	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.42.2.2 GetDataClassesForSystemResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.42.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.42.3.1 ArrayOfClassStruct	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.43 GetDefaultValuesForTypeDescriptor	Updated some of the information in the fragment.	N	Content updated.
3.1.4.43 GetDefaultValuesForTypeDescriptor	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.43.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.43.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.43.2.1 GetDefaultValuesForTypeDescriptor	Updated some of the element information in the	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fragment.		updated.
3.1.4.43.2.2 GetDefaultValuesForTypeDescriptorResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.43.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.43.3.1 ArrayOfDefaultValueStruct	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.44 GetEntitiesForAssociationAndRole	Updated some of the information in the fragment.	N	Content updated.
3.1.4.44 GetEntitiesForAssociationAndRole	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.44.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.44.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.44.2.1 GetEntitiesForAssociationAndRole	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.44.2.2 GetEntitiesForAssociationAndRoleResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.45 GetEntitiesForSystem	Updated some of the information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.45 GetEntitiesForSystem	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.45.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.45.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.45.2.1 GetEntitiesForSystem	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.45.2.2 GetEntitiesForSystemResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.46 GetEntitiesLikeNameAndNamespace	Updated some of the information in the fragment.	N	Content updated.
3.1.4.46 GetEntitiesLikeNameAndNamespace	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.46.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.46.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.46.2.1 GetEntitiesLikeNameAndNamespace	Updated some of the element information in the	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fragment.		updated.
3.1.4.46.2.2 GetEntitiesLikeNameAndNamespaceResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.47 GetEntitiesReferencedByModelId	Updated some of the information in the fragment.	N	Content updated.
3.1.4.47 GetEntitiesReferencedByModelId	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.47 GetEntitiesReferencedByModelId	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.47.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.47.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.47.2.1 GetEntitiesReferencedByModelId	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.47.2.2 GetEntitiesReferencedByModelIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.47.4 Simple Types	Added a table that summarizes the XML schema simple type definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.47.4.1 EntityConstants.EntitiesInModelQuery	Updated some of the simple type information in the fragment.	N	Content updated.
3.1.4.48 GetEntityById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.48 GetEntityById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.48.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.48.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.48.2.1 GetEntityById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.48.2.2 GetEntityByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.49 GetEntityCount	Updated some of the information in the fragment.	N	Content updated.
3.1.4.49 GetEntityCount	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.49.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.49.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.49.2.1 GetEntityCount	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.49.2.2 GetEntityCountResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.50 GetEntityNameAndNamespacesForAssociationAndRole	Updated some of the information in the fragment.	N	Content updated.
3.1.4.50 GetEntityNameAndNamespacesForAssociationAndRole	Added a product behavior note describing the situation in which a fault containing the BdcExceptionState complex type is returned.	N	New product behavior note added.
3.1.4.50.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.50.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.50.2.1 GetEntityNameAndNamespacesForAssociationAndRole	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.50.2.2 GetEntityNameAndNamespacesForAssociationAndRoleResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.51 GetEntityWithNameAndNamespace	Updated some of the information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.51 GetEntityWithNameAndNamespace	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.51.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.51.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.51.2.1 GetEntityWithNameAndNamespace	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.51.2.2 GetEntityWithNameAndNamespaceResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.52 GetEntityWithNameAndNamespaceAndVersion	Updated some of the information in the fragment.	N	Content updated.
3.1.4.52 GetEntityWithNameAndNamespaceAndVersion	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.52.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.52.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.52.2.1 GetEntityWithNameAndNamespaceAndVersion	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.52.2.2 GetEntityWithNameAndNamespaceAndVersionResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.53 GetFieldTypeDescriptorsByMethodInstance	Updated some of the information in the fragment.	N	Content updated.
3.1.4.53 GetFieldTypeDescriptorsByMethodInstance	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.53.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.53.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.53.2.1 GetFieldTypeDescriptorsByMethodInstance	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.53.2.2 GetFieldTypeDescriptorsByMethodInstanceResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.54 GetFilterDescriptorById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.54 GetFilterDescriptorById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.54.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.54.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.54.2.1 GetFilterDescriptorById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.54.2.2 GetFilterDescriptorByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.55 GetFilterDescriptorsForMethod	Updated some of the information in the fragment.	N	Content updated.
3.1.4.55 GetFilterDescriptorsForMethod	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.55 GetFilterDescriptorsForMethod	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.55.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.55.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.55.2.1 GetFilterDescriptorsForMethod	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.55.2.2 GetFilterDescriptorsForMethodResponse	Updated some of the element information in the	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fragment.		updated.
3.1.4.55.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.55.3.1 ArrayOfFilterDescriptorStruct	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.56 GetIdentifierById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.56 GetIdentifierById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.56.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.56.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.56.2.1 GetIdentifierById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.56.2.2 GetIdentifierByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.57 GetIdentifiersForEntity	Updated some of the information in the fragment.	N	Content updated.
3.1.4.57 GetIdentifiersForEntity	Moved the sentence starting with "If more than one error condition is encountered..."	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	to the paragraph introducing the error complex type/condition table.		ted.
3.1.4.57.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.57.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.57.2.1 GetIdentifiersForEntity	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.57.2.2 GetIdentifiersForEntityResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.57.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.57.3.1 ArrayOfIdentifierStruct	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.58 GetImportProgress	Updated some of the information in the fragment.	N	Content updated.
3.1.4.58.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.58.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.58.2.1 GetImportProgress	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.58.2.2 GetImportProgressResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.59 GetLevelForTypeDescriptor	Updated some of the information in the fragment.	N	Content updated.
3.1.4.59 GetLevelForTypeDescriptor	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.59.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.59.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.59.2.1 GetLevelForTypeDescriptor	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.59.2.2 GetLevelForTypeDescriptorResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.60 GetLobSystemAllAssembliesBytes	Updated some of the information in the fragment.	N	Content updated.
3.1.4.60.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.60.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.60.2.1 GetLobSystemAllAssembliesBytes	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.60.2.2 GetLobSystemAllAssembliesBytesResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.60.3 Complex Types	Added a table that summarizes the XML schema complex type definitions.	N	Content updated.
3.1.4.60.3.1 ArrayOfbase64Binary	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.61 GetLobSystemById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.61 GetLobSystemById	Updated the product behavior note describing the AccessDeniedExceptionState response.	N	Product behavior note updated.
3.1.4.61.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.61.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.61.2.1 GetLobSystemById	Updated description for performErrorCheck element of GetLobSystemById.	N	Content removed.
3.1.4.61.2.1 GetLobSystemById	Removed product behavior note for GetLobSystemById.	N	Product behavior note

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			removed.
3.1.4.61.2.1 GetLobSystemById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.61.2.2 GetLobSystemByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.62 GetLobSystemByName	Updated some of the information in the fragment.	N	Content updated.
3.1.4.62.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.62.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.62.2.1 GetLobSystemByName	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.62.2.2 GetLobSystemByNameResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.63 GetLobSystemDataByLobSystem	Updated some of the information in the fragment.	N	Content updated.
3.1.4.63 GetLobSystemDataByLobSystem	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.63.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.63.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.63.2.1 GetLobSystemDataByLobSystem	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.63.2.2 GetLobSystemDataByLobSystemResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.64 GetLobSystemInstanceById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.64 GetLobSystemInstanceById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.64 GetLobSystemInstanceById	Added a product behavior note describing the AccessDeniedExceptionState and BdcExceptionState responses.	N	New product behavior note added.
3.1.4.64.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.64.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.64.2.1 GetLobSystemInstanceById	Removed product behavior note for GetLobSystemById.	N	Product behavior note

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			removed.
3.1.4.64.2.1 GetLobSystemInstanceById	Updated description for performErrorCheck parameter of GetLobSystemById.	N	Content updated.
3.1.4.64.2.1 GetLobSystemInstanceById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.64.2.2 GetLobSystemInstanceByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.65 GetLobSystemInstancesForLobSystem	Updated some of the information in the fragment.	N	Content updated.
3.1.4.65 GetLobSystemInstancesForLobSystem	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.65.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.65.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.65.2.1 GetLobSystemInstancesForLobSystem	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.65.2.2 GetLobSystemInstancesForLobSystemResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.65.3 Complex Types	Added a table that summarizes the XML schema complex type	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	definitions.		ted.
3.1.4.65.3.1 ArrayOfLobSystemInstanceStruct	Updated some of the complex type information in the fragment.	N	Content updated.
3.1.4.66 GetLobSystemProxyAssemblyBytesByLobSystemId	Updated some of the information in the fragment.	N	Content updated.
3.1.4.66 GetLobSystemProxyAssemblyBytesByLobSystemId	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.66.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.66.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.66.2.1 GetLobSystemProxyAssemblyBytesByLobSystemId	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.66.2.2 GetLobSystemProxyAssemblyBytesByLobSystemIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.67 GetLobSystemsLikeName	Updated some of the information in the fragment.	N	Content updated.
3.1.4.67 GetLobSystemsLikeName	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.67.2 Elements	Added a table that summarizes the XML	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	schema element definitions.		updated.
3.1.4.67.2.1 GetLobSystemsLikeName	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.67.2.2 GetLobSystemsLikeNameResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.68 GetLobSystemsReferencedByEntitiesAssociatedWithModel	Updated some of the information in the fragment.	N	Content updated.
3.1.4.68 GetLobSystemsReferencedByEntitiesAssociatedWithModel	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.68.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.68.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.68.2.1 GetLobSystemsReferencedByEntitiesAssociatedWithModel	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.68.2.2 GetLobSystemsReferencedByEntitiesAssociatedWithModelResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.68.4 Simple Types	Added a table that summarizes the XML schema simple type definitions.	N	Content updated.
3.1.4.68.4.1 LobSystemConstants.LobSystemsInModelQuery	Updated some of the simple type information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.69 GetMethodById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.69.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.69.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.69.2.1 GetMethodById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.69.2.2 GetMethodByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.70 GetMethodInstanceById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.70.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.70.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.70.2.1 GetMethodInstanceById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.70.2.2 GetMethodInstanceByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.71	Updated some of the	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
GetMethodInstancesForDataClass	information in the fragment.		ent updated.
3.1.4.71 GetMethodInstancesForDataClass	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.71 GetMethodInstancesForDataClass	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.71.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.71.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.71.2.1 GetMethodInstancesForDataClass	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.71.2.2 GetMethodInstancesForDataClassResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.72 GetMethodInstancesForMethod	Updated some of the information in the fragment.	N	Content updated.
3.1.4.72 GetMethodInstancesForMethod	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.72.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.72.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.72.2.1 GetMethodInstancesForMethod	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.72.2.2 GetMethodInstancesForMethodResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.73 GetMethodsForDataClass	Updated some of the information in the fragment.	N	Content updated.
3.1.4.73 GetMethodsForDataClass	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.73.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.73.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.73.2.1 GetMethodsForDataClass	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.73.2.2 GetMethodsForDataClassResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.74 GetModelById	Updated some of the information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.74 GetModelById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.74.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.74.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.74.2.1 GetModelById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.74.2.2 GetModelByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.75 GetModelByName	Updated some of the information in the fragment.	N	Content updated.
3.1.4.75 GetModelByName	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.75.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.75.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.75.2.1 GetModelByName	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.75.2.2 GetModelByNameResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.76 GetModelsByEntityId	Updated some of the information in the fragment.	N	Content updated.
3.1.4.76 GetModelsByEntityId	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.76.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.76.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.76.2.1 GetModelsByEntityId	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.76.2.2 GetModelsByEntityIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.77 GetModelsByName	Updated some of the information in the fragment.	N	Content updated.
3.1.4.77 GetModelsByName	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.77.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.77.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.77.2.1 GetModelsByName	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.77.2.2 GetModelsByNameResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.78 GetParameterById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.78 GetParameterById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.78.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.78.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.78.2.1 GetParameterById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.78.2.2 GetParameterByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.79 GetParametersForMethod	Updated some of the information in the fragment.	N	Content updated.
3.1.4.79	Moved the sentence starting	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
GetParametersForMethod	with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.		ent updated.
3.1.4.79 GetParametersForMethod	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.79.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.79.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.79.2.1 GetParametersForMethod	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.79.2.2 GetParametersForMethodResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.80 GetRootTypeDescriptorForParameter	Updated some of the information in the fragment.	N	Content updated.
3.1.4.80 GetRootTypeDescriptorForParameter	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.80.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.80.2	Added a table that	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Elements	summarizes the XML schema element definitions.		ent updated.
3.1.4.80.2.1 GetRootTypeDescriptorForParameter	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.80.2.2 GetRootTypeDescriptorForParameterResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.81 GetServiceApplicationId	Updated some of the information in the fragment.	N	Content updated.
3.1.4.81.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.81.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.81.2.1 GetServiceApplicationId	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.81.2.2 GetServiceApplicationIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.82 GetSystemUtilityTypeNameForLobSystem	Updated some of the information in the fragment.	N	Content updated.
3.1.4.82 GetSystemUtilityTypeNameForLobSystem	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.82.1 Messages	Added a table that summarizes the set of WSDL	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	message definitions.		updated.
3.1.4.82.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.82.2.1 GetSystemUtilityTypeNameForLobSystem	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.82.2.2 GetSystemUtilityTypeNameForLobSystemResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.83 GetTypeDescriptorById	Updated some of the information in the fragment.	N	Content updated.
3.1.4.83 GetTypeDescriptorById	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.83.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.83.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.83.2.1 GetTypeDescriptorById	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.83.2.2 GetTypeDescriptorByIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.84 GetTypeDescriptorsByNameAndLevelForParameter	Updated the description for the GetTypeDescriptorsByName	N	New product

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	AndLevelForParameter operation.		behavior note added.
3.1.4.84 GetTypeDescriptorsByNameAndLevelForParameter	Added product behavior note for GetTypeDescriptorsByNameAndLevelForParameter.	N	New product behavior note added.
3.1.4.84 GetTypeDescriptorsByNameAndLevelForParameter	Updated some of the information in the fragment.	N	Content updated.
3.1.4.84.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.84.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.84.2.1 GetTypeDescriptorsByNameAndLevelForParameter	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.84.2.1 GetTypeDescriptorsByNameAndLevelForParameter	Added a product behavior note describing the situation in which level is ignored.	N	New product behavior note added.
3.1.4.84.2.2 GetTypeDescriptorsByNameAndLevelForParameterResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.85 GetTypeDescriptorsForFilterDescriptor	Updated some of the information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.85 GetTypeDescriptorsForFilterDescriptor	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.85.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.85.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.85.2.1 GetTypeDescriptorsForFilterDescriptor	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.85.2.2 GetTypeDescriptorsForFilterDescriptorResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.86 GetTypeReflectorTypeNameForParameter	Updated some of the information in the fragment.	N	Content updated.
3.1.4.86 GetTypeReflectorTypeNameForParameter	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.86.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.86.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.86.2.1 GetTypeReflectorTypeNameForParameter	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.86.2.2 GetTypeReflectorTypeNameForParameterResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.87 GetXmlSchemaForView	Removed InvalidMetadataObjectExceptionState error complex type from the table.	N	Content removed.
3.1.4.87 GetXmlSchemaForView	Updated some of the information in the fragment.	N	Content updated.
3.1.4.87 GetXmlSchemaForView	Added the BdcExceptionState error complex type to the table.	N	Content updated.
3.1.4.87.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.87.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.87.2.1 GetXmlSchemaForView	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.87.2.2 GetXmlSchemaForViewResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.87.2.2 GetXmlSchemaForViewResponse	Updated the description of GetXmlSchemaForViewResult by stating that the XML namespace specified by the XML schema is implementation-specific.	N	Content updated.
3.1.4.88 HaveRights	Updated some of the information in the fragment.	N	Content updated.
3.1.4.88	Moved the sentence starting	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
HaveRights	with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.		ent updated.
3.1.4.88.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.88.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.88.2.1 HaveRights	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.88.2.2 HaveRightsResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.88.4 Simple Types	Added a table that summarizes the XML schema simple type definitions.	N	Content updated.
3.1.4.88.4.1 BdcRights	Updated some of the simple type information in the fragment.	N	Content updated.
3.1.4.89 ImportPackage	Updated some of the information in the fragment.	N	Content updated.
3.1.4.89.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.89.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.89.2.1 ImportPackage	Updated some of the element information in the	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fragment.		updated.
3.1.4.89.2.2 ImportPackageResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.90 ImportPackageWithProgress	Updated some of the information in the fragment.	N	Content updated.
3.1.4.90.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.90.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.90.2.1 ImportPackageWithProgress	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.90.2.2 ImportPackageWithProgressResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.91 IsMethodInstantiated	Updated some of the information in the fragment.	N	Content updated.
3.1.4.91.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.91.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.91.2.1 IsMethodInstantiated	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.91.2.2 IsMethodInstantiatedResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.92 IsParameterReferencedByMethodInstance	Updated some of the information in the fragment.	N	Content updated.
3.1.4.92 IsParameterReferencedByMethodInstance	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.92.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.92.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.92.2.1 IsParameterReferencedByMethodInstance	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.92.2.2 IsParameterReferencedByMethodInstanceResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.92.2.2 IsParameterReferencedByMethodInstanceResponse	Updated the product behavior note describing the situation in which the operation returns false.	N	Product behavior note updated.
3.1.4.93 MetadataObjectCreate	Updated the description of the conditions for the DuplicateMetadataObjectExceptionState exception.	N	Content updated.
3.1.4.93 MetadataObjectCreate	Updated some of the information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.93 MetadataObjectCreate	Updated the description of the AccessDeniedExceptionState error complex type by removing several of the rawValues element conditions.	N	Content updated.
3.1.4.93 MetadataObjectCreate	Moved several listed values of the type of the specified MethodInstance from the AccessDeniedExceptionState error complex type description to the ArgumentException error complex type description.	N	Content updated.
3.1.4.93 MetadataObjectCreate	Updated the product behavior note describing the situation in which a fault is not returned.	N	Product behavior note updated.
3.1.4.93.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.93.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.93.2.1 MetadataObjectCreate	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.93.2.2 MetadataObjectCreateResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.93.2.2 MetadataObjectCreateResponse	Updated the product behavior note describing the situation in which the MetadataObject specified in the request is an Entity.	N	Product behavior note updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.94 MetadataObjectMergeXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.94 MetadataObjectMergeXml	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.94 MetadataObjectMergeXml	Updated the description of the PackageFormatExceptionState error complex type by removing one of the conditions.	N	Content updated.
3.1.4.94 MetadataObjectMergeXml	Updated the product behavior note describing the situation in which a fault containing the BdcExceptionState complex type is returned.	N	Product behavior note updated.
3.1.4.94 MetadataObjectMergeXml	Added a product behavior note describing the situation in which a fault containing the BdcExceptionState complex type is returned.	N	New product behavior note added.
3.1.4.94.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.94.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.94.2.1 MetadataObjectMergeXml	Updated some of the element information in the fragment.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.94.2.2 MetadataObjectMergeXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.95 MetadataObjectReadXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.95 MetadataObjectReadXml	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.95 MetadataObjectReadXml	Updated the description of the BdcExceptionState error complex type by adding a condition.	N	Content updated.
3.1.4.95 MetadataObjectReadXml	Updated the description of the PackageFormatExceptionState error complex type by adding a condition.	N	Content updated.
3.1.4.95 MetadataObjectReadXml	Updated the product behavior note describing the situation in which a fault containing the InvalidOperationException complex type is returned.	N	Product behavior note updated.
3.1.4.95.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.95.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.95.2.1 MetadataObjectReadXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.95.2.2 MetadataObjectReadXmlResponse	Updated some of the element information in the	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	fragment.		updated.
3.1.4.96 MetadataObjectWriteXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.96 MetadataObjectWriteXml	Moved the sentence starting with "If more than one error condition is encountered..." to the paragraph introducing the error complex type/condition table.	N	Content updated.
3.1.4.96 MetadataObjectWriteXml	Added a product behavior note describing the situation in which the packageContents element is specified.	N	New product behavior note added.
3.1.4.96.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.96.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.96.2.1 MetadataObjectWriteXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.96.2.2 MetadataObjectWriteXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.97 ModelReadXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.97 ModelReadXml	Added a product behavior note describing the situation in which a fault containing the BdcExceptionState is	N	New product behavior

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	returned.		viornote added.
3.1.4.97 ModelReadXml	Added a product behavior note describing the situation in which a fault containing the InvalidOperationException complex type is returned.	N	New product behavior note added.
3.1.4.97 ModelReadXml	Added a product behavior note describing the situation in which a fault containing the BdcExceptionState is returned.	N	New product behavior note added.
3.1.4.97.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.97.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.97.2.1 ModelReadXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.97.2.2 ModelReadXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.98 ReadSlicedXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.98.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.98.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.98.2.1 ReadSlicedXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.98.2.2 ReadSlicedXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.99 RemoveEntityFromModel	Updated some of the information in the fragment.	N	Content updated.
3.1.4.99.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.99.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.99.2.1 RemoveEntityFromModel	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.99.2.2 RemoveEntityFromModelResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.100 RemoveLocalizedName	Updated some of the information in the fragment.	N	Content updated.
3.1.4.100 RemoveLocalizedName	Added the InvalidOperationException error complex type to the table.	N	Content updated.
3.1.4.100.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.100.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.100.2.1 RemoveLocalizedName	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.100.2.2 RemoveLocalizedNameResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.101 RemoveProperty	Updated some of the information in the fragment.	N	Content updated.
3.1.4.101 RemoveProperty	Added the MetadataObjectNotFoundExceptionState error complex type to the table.	N	Content updated.
3.1.4.101.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.101.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.101.2.1 RemoveProperty	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.101.2.2 RemovePropertyResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.102 SaveLocalizedName	Updated some of the information in the fragment.	N	Content updated.
3.1.4.102.1	Added a table that	N	Cont

Section	Tracking number (if applicable) and description	Maj or change (Y or N)	Cha nge type
Messages	summarizes the set of WSDL message definitions.		ent upda ted.
3.1.4.102.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Cont ent upda ted.
3.1.4.102.2.1 SaveLocalizedName	Updated some of the element information in the fragment.	N	Cont ent upda ted.
3.1.4.102.2.2 SaveLocalizedNameResponse	Updated some of the element information in the fragment.	N	Cont ent upda ted.
3.1.4.103 SaveProperty	Updated some of the information in the fragment.	N	Cont ent upda ted.
3.1.4.103.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Cont ent upda ted.
3.1.4.103.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Cont ent upda ted.
3.1.4.103.2.1 SaveProperty	Updated some of the element information in the fragment.	N	Cont ent upda ted.
3.1.4.103.2.2 SavePropertyResponse	Updated some of the element information in the fragment.	N	Cont ent upda ted.
3.1.4.104 SetAccessControlEntries	Updated some of the information in the fragment.	N	Cont ent upda ted.
3.1.4.104.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Cont ent upda ted.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.104.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.104.2.1 SetAccessControlEntries	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.104.2.2 SetAccessControlEntriesResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.105 SetDefaultActionForEntity	Updated some of the information in the fragment.	N	Content updated.
3.1.4.105.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.105.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.105.2.1 SetDefaultActionForEntity	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.105.2.2 SetDefaultActionForEntityResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.106 SetDefaultValuesForTypeDescriptor	Updated some of the information in the fragment.	N	Content updated.
3.1.4.106.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.106.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			ted.
3.1.4.106.2.1 SetDefaultValuesForTypeDescriptor	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.106.2.2 SetDefaultValuesForTypeDescriptorResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.107 SetLobSystemDataByLobSystemId	Updated some of the information in the fragment.	N	Content updated.
3.1.4.107.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.107.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.107.2.1 SetLobSystemDataByLobSystemId	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.107.2.2 SetLobSystemDataByLobSystemIdResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.108 TypeDescriptorCreate	Updated some of the information in the fragment.	N	Content updated.
3.1.4.108 TypeDescriptorCreate	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.108.1 Messages	Added a table that summarizes the set of WSDL	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	message definitions.		updated.
3.1.4.108.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.108.2.1 TypeDescriptorCreate	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.108.2.2 TypeDescriptorCreateResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.109 TypeDescriptorMergeXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.109.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.109.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.109.2.1 TypeDescriptorMergeXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.109.2.2 TypeDescriptorMergeXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.110 TypeDescriptorReadXml	Added product behavior note for InvalidOperationException conditions for TypeDescriptorReadXml operation.	N	New product behavior note added.
3.1.4.110	Updated error condition	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
TypeDescriptorReadXml	descriptions for TypeDescriptorReadXml operation.		ent updated.
3.1.4.110 TypeDescriptorReadXml	Updated some of the information in the fragment.	N	Content updated.
3.1.4.110 TypeDescriptorReadXml	Added a product behavior note describing the situations in which a fault is not returned.	N	New product behavior note added.
3.1.4.110.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.110.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.110.2.1 TypeDescriptorReadXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.110.2.2 TypeDescriptorReadXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.111 Update	Updated the product behavior note for the MethodInstance error complex type.	N	Product behavior note updated.
3.1.4.111 Update	Updated description of InvalidMetadataObjectExceptionState conditions to include specific MethodInstance types.	N	Content updated.
3.1.4.111	Updated some of the	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Update	information in the fragment.		ent updated.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is	N	New product beha

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	returned.		vior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a MetadataException is returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a fault is not returned.	N	New product behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which a fault containing	N	New product

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	the BdcExceptionState complex type is always returned.		behavior note added.
3.1.4.111 Update	Added a product behavior note describing the situation in which the operation does not set the IsDefault attribute of a MethodInstance.	N	New product behavior note added.
3.1.4.111.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.111.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.111.2.1 Update	Updated fault type in product behavior note from InvalidOperationException to InvalidMetadataObjectExceptionState.	N	Product behavior note updated.
3.1.4.111.2.1 Update	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.111.2.1 Update	Added a product behavior note describing the situations in which a fault containing the InvalidMetadataObjectExceptionState complex type is returned.	N	New product behavior note added.
3.1.4.111.2.2 UpdateResponse	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.112	Updated some of the	N	Cont

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
WriteSlicedXml	information in the fragment.		ent updated.
3.1.4.112.1 Messages	Added a table that summarizes the set of WSDL message definitions.	N	Content updated.
3.1.4.112.2 Elements	Added a table that summarizes the XML schema element definitions.	N	Content updated.
3.1.4.112.2.1 WriteSlicedXml	Updated some of the element information in the fragment.	N	Content updated.
3.1.4.112.2.2 WriteSlicedXmlResponse	Updated some of the element information in the fragment.	N	Content updated.
6 Appendix A: Full WSDL	Updated the full WSDL by adding, moving, and deleting information.	Y	Content updated.
7 Appendix B: Full XML Schema	Updated the description by adding a summary of the sections that cover the XML schema.	N	Content updated.
7.1 <u>http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Infrastructure.Schema</u>	Added the new section.	Y	New content added.
7.2 <u>http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.MetadataModel.Schema</u>	Added the new section.	Y	New content added.
7.3 <u>http://schemas.datacontract.org/2004/07/Microsoft.BusinessData.Runtime.Schema</u>	Added the new section.	Y	New content added.
7.4	Added the new section.	Y	New

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Microsoft.BusinessData.SharePoint.Schema			content added.
7.5 http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.BusinessData.Administration.Client.Constants.Schema	Added the new section.	Y	New content added.
7.6 Microsoft.SharePoint.BusinessData.Schema	Added the new section.	Y	New content added.
7.7 http://schemas.microsoft.com/2003/10/Serialization/Arrays.Schema	Added the new section.	Y	New content added.
7.8 http://schemas.microsoft.com/2003/10/Serialization/.Schema	Added the new section.	Y	New content added.
7.9 http://schemas.datacontract.org/2004/07/System.Schema	Added the new section.	Y	New content added.
7.10 http://www.microsoft.com/Office/2009/BusinessDataCatalog.Schema	Added the new section.	Y	New content added.
8 Appendix C: Product Behavior	Updated the product list.	N	Content updated.

10 Index

A

Abstract data model
 [server](#) 89
[AccessControlEntryStruct complex type](#) 51
[AccessDeniedException complex type](#) 51
[AccessDeniedExceptionState complex type](#) 51
[ActionParameterStruct complex type](#) 52
[ActionStruct complex type](#) 53
[Activate an Entity example](#) 532
[Adding localized names for MetadataObjects example](#) 537
[AdministrationMetadataCatalogStruct complex type](#) 53
[Applicability](#) 43
[ArgumentException complex type](#) 54
[ArgumentNullException complex type](#) 54
[ArgumentOutOfRangeException complex type](#) 54
[ArrayOfAccessControlEntryStruct complex type](#) 54
[ArrayOfAssociationStruct complex type](#) 55
[ArrayOfEntityStruct complex type](#) 55
[ArrayOfLobSystemStruct complex type](#) 55
[ArrayOfLocalizedNameStruct complex type](#) 56
[ArrayOfMethodInstanceStruct complex type](#) 56
[ArrayOfModelStruct complex type](#) 56
[ArrayOfPropertyStruct complex type](#) 57
[ArrayOfstring complex type](#) 57
[ArrayOfTypeDescriptorStruct complex type](#) 57
[ArrayOfunsignedInt complex type](#) 57
[AssociationGroupStruct complex type](#) 58
[AssociationReferenceStruct complex type](#) 59
[AssociationStruct complex type](#) 60
[Attribute groups](#) 88
[Attributes](#) 87

B

[BdcException complex type](#) 61
[BdcExceptionState complex type](#) 61

C

[CacheUsage simple type](#) 80
[Capability negotiation](#) 43
[Change tracking](#) 818
[char simple type](#) 80
Client
 [overview](#) 89
[Complex types](#) 46
 [AccessControlEntryStruct](#) 51
 [AccessDeniedException](#) 51
 [AccessDeniedExceptionState](#) 51
 [ActionParameterStruct](#) 52
 [ActionStruct](#) 53
 [AdministrationMetadataCatalogStruct](#) 53
 [ArgumentException](#) 54
 [ArgumentNullException](#) 54
 [ArgumentOutOfRangeException](#) 54

[ArrayOfAccessControlEntryStruct](#) 54
 [ArrayOfAssociationStruct](#) 55
 [ArrayOfEntityStruct](#) 55
 [ArrayOfLobSystemStruct](#) 55
 [ArrayOfLocalizedNameStruct](#) 56
 [ArrayOfMethodInstanceStruct](#) 56
 [ArrayOfModelStruct](#) 56
 [ArrayOfPropertyStruct](#) 57
 [ArrayOfstring](#) 57
 [ArrayOfTypeDescriptorStruct](#) 57
 [ArrayOfunsignedInt](#) 57
 [AssociationGroupStruct](#) 58
 [AssociationReferenceStruct](#) 59
 [AssociationStruct](#) 60
 [BdcException](#) 61
 [BdcExceptionState](#) 61
 [ComplexValueStruct](#) 61
 [ConcurrentModificationExceptionState](#) 62
 [DataClassStruct](#) 62
 [DefaultValueStruct](#) 63
 [DuplicateMetadataObjectExceptionState](#) 63
 [EntityStruct](#) 64
 [ExceededMetadataObjectLimitExceptionState](#) 64
 [Exception](#) 65
 [FilterDescriptorStruct](#) 65
 [IdentifierStruct](#) 66
 [InvalidMetadataObjectExceptionState](#) 67
 [InvalidMetadataPropertyExceptionState](#) 68
 [InvalidOperationException](#) 68
 [LobSystemInstanceStruct](#) 68
 [LobSystemStruct](#) 69
 [LocalizedNameStruct](#) 69
 [MetadataException](#) 69
 [MetadataObjectNotFoundExceptionState](#) 70
 [MetadataObjectStruct](#) 71
 [MethodInstanceStruct](#) 71
 [MethodStruct](#) 72
 [ModelStruct](#) 73
 [PackageFormatExceptionState](#) 73
 [ParameterStruct](#) 73
 [PropertyStruct](#) 74
 [ProxyGenerationResult](#) 75
 [SystemException](#) 75
 [TypeDescriptorStruct](#) 75
 [Version](#) 79
[ComplexValueStruct complex type](#) 61
[ConcurrentModificationExceptionState complex type](#) 62
[Creating an Entity example](#) 530
[Creating an LobSystem example](#) 526
[Creating properties for MetadataObjects example](#) 535

D

Data model - abstract
 [server](#) 89
[DataClassStruct complex type](#) 62

[DefaultValueStruct complex type](#) 63
[Deleting an Entity example](#) 540
[DirectionType simple type](#) 81
[DuplicateMetadataObjectExceptionState complex type](#) 63
[duration simple type](#) 81

E

[EntityStruct complex type](#) 64
Events
 [local - server](#) 525
 [timer - server](#) 525
Examples
 [activate an Entity](#) 532
 [adding localized names for MetadataObjects](#) 537
 [creating an Entity](#) 530
 [creating an LobSystem](#) 526
 [creating properties for MetadataObjects](#) 535
 [deleting an Entity](#) 540
 [overview](#) 526
 [reading an Entity](#) 534
 [reading the security information of a MetadataObject](#) 529
 [setting the security information of a MetadataObject](#) 527
 [updating an Entity](#) 538
[ExceededMetadataObjectLimitExceptionState complex type](#) 64
[Exception complex type](#) 65

F

[Fields - vendor-extensible](#) 44
[FilterDescriptorStruct complex type](#) 65
[FilterType simple type](#) 81
[Full WSDL](#) 543

G

[Glossary](#) 39
[Groups](#) 88
[guid simple type](#) 83

I

[IdentifierStruct complex type](#) 66
[Implementer - security considerations](#) 542
[Index of security parameters](#) 542
[Informative references](#) 42
Initialization
 [server](#) 94
[Introduction](#) 39
[InvalidMetadataObjectExceptionState complex type](#) 67
[InvalidMetadataPropertyExceptionState complex type](#) 68
[InvalidOperationException complex type](#) 68

L

[LobSystemInstanceStruct complex type](#) 68

[LobSystemStruct complex type](#) 69
Local events
 [server](#) 525
[LocalizedNameStruct complex type](#) 69

M

Message processing
 [server](#) 94
[Messages](#) 45
 [AccessControlEntryStruct complex type](#) 51
 [AccessDeniedException complex type](#) 51
 [AccessDeniedExceptionState complex type](#) 51
 [ActionParameterStruct complex type](#) 52
 [ActionStruct complex type](#) 53
 [AdministrationMetadataCatalogStruct complex type](#) 53
 [ArgumentException complex type](#) 54
 [ArgumentNullException complex type](#) 54
 [ArgumentOutOfRangeException complex type](#) 54
 [ArrayOfAccessControlEntryStruct complex type](#) 54
 [ArrayOfAssociationStruct complex type](#) 55
 [ArrayOfEntityStruct complex type](#) 55
 [ArrayOfLobSystemStruct complex type](#) 55
 [ArrayOfLocalizedNameStruct complex type](#) 56
 [ArrayOfMethodInstanceStruct complex type](#) 56
 [ArrayOfModelStruct complex type](#) 56
 [ArrayOfPropertyStruct complex type](#) 57
 [ArrayOfstring complex type](#) 57
 [ArrayOfTypeDescriptorStruct complex type](#) 57
 [ArrayOfunsignedInt complex type](#) 57
 [AssociationGroupStruct complex type](#) 58
 [AssociationReferenceStruct complex type](#) 59
 [AssociationStruct complex type](#) 60
 [attribute groups](#) 88
 [attributes](#) 87
 [BdcException complex type](#) 61
 [BdcExceptionState complex type](#) 61
 [CacheUsage simple type](#) 80
 [char simple type](#) 80
 [complex types](#) 46
 [ComplexValueStruct complex type](#) 61
 [ConcurrentModificationExceptionState complex type](#) 62
 [DataClassStruct complex type](#) 62
 [DefaultValueStruct complex type](#) 63
 [DirectionType simple type](#) 81
 [DuplicateMetadataObjectExceptionState complex type](#) 63
 [duration simple type](#) 81
 [elements](#) 46
 [EntityStruct complex type](#) 64
 [enumerated](#) 46
 [ExceededMetadataObjectLimitExceptionState complex type](#) 64
 [Exception complex type](#) 65
 [FilterDescriptorStruct complex type](#) 65
 [FilterType simple type](#) 81
 [groups](#) 88
 [guid simple type](#) 83
 [IdentifierStruct complex type](#) 66

[InvalidMetadataObjectExceptionState complex type](#) 67
[InvalidMetadataPropertyExceptionState complex type](#) 68
[InvalidOperationException complex type](#) 68
[LobSystemInstanceStruct complex type](#) 68
[LobSystemStruct complex type](#) 69
[LocalizedNameStruct complex type](#) 69
[MetadataException complex type](#) 69
[MetadataObjectNotFoundExceptionState complex type](#) 70
[MetadataObjectStruct complex type](#) 71
[MethodInstanceStruct complex type](#) 71
[MethodInstanceType simple type](#) 83
[MethodStruct complex type](#) 72
[ModelStruct complex type](#) 73
[namespaces](#) 45
[PackageContents simple type](#) 85
[PackageFormatExceptionState complex type](#) 73
[ParameterStruct complex type](#) 73
[PropertyStruct complex type](#) 74
[ProxyGenerationResult complex type](#) 75
[simple types](#) 79
[syntax](#) 45
[SystemException complex type](#) 75
[SystemType simple type](#) 86
[transport](#) 45
[TypeDescriptorFlags simple type](#) 87
[TypeDescriptorStruct complex type](#) 75
[Version complex type](#) 79
[MetadataException complex type](#) 69
[MetadataObjectNotFoundExceptionState complex type](#) 70
[MetadataObjectStruct complex type](#) 71
[MethodInstanceStruct complex type](#) 71
[MethodInstanceType simple type](#) 83
[MethodStruct complex type](#) 72
[ModelStruct complex type](#) 73

N

[Namespaces](#) 45
[Normative references](#) 41

O

Operations
[Activate](#) 112
[AddAssociationReferenceToAssociationGroup](#) 115
[AddEntityToModel](#) 118
[BulkSwitchActiveOrValidate](#) 121
[CheckPathInMethodInstances](#) 130
[ClearLocalizedNames](#) 133
[ClearProperties](#) 136
[CopyAclAcrossChildren](#) 139
[CopyAclAcrossChildrenForSetting](#) 142
[CopyAclToSetting](#) 146
[Deactivate](#) 149
[Delete](#) 152
[DeleteAssociationReferenceFromAssociationGroup](#) 156
[DeleteDefaultValueForTypeDescriptor](#) 159
[DeleteNoCascade](#) 163
[DeleteProxyAssemblyForLobSystem](#) 167
[EntityCreate](#) 170
[ExportPackage](#) 173
[GenerateProxyAssemblyForLobSystem](#) 177
[GetAccessControlEntries](#) 180
[GetActionById](#) 184
[GetActionParameterById](#) 187
[GetActionParametersForAction](#) 190
[GetActionsForEntity](#) 193
[GetAllLocalizedNames](#) 197
[GetAllLocalizedNamesForMetadataObjectStruct](#) 200
[GetAllPartitionIds](#) 204
[GetAllProperties](#) 207
[GetAllPropertiesForMetadataObjectStruct](#) 210
[GetAssociationById](#) 213
[GetAssociationGroupById](#) 217
[GetAssociationGroupsForEntity](#) 220
[GetAssociationMembersInRole](#) 223
[GetAssociationReferencesForAssociationGroup](#) 228
[GetAssociationsForDataClass](#) 232
[GetAssociationsForEntityAndRole](#) 235
[GetAssociationsForMethod](#) 238
[GetCacheInvalidationRecordsSince](#) 242
[GetChildTypeDescriptorsForTypeDescriptor](#) 245
[GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor](#) 249
[GetDataClassById](#) 252
[GetDataClassesForSystem](#) 255
[GetDefaultValuesForTypeDescriptor](#) 259
[GetEntitiesForAssociationAndRole](#) 263
[GetEntitiesForSystem](#) 266
[GetEntitiesLikeNameAndNamespace](#) 269
[GetEntitiesReferencedByModelId](#) 274
[GetEntityById](#) 278
[GetEntityCount](#) 281
[GetEntityNameAndNamespacesForAssociationAndRole](#) 283
[GetEntityWithNameAndNamespace](#) 287
[GetEntityWithNameAndNamespaceAndVersion](#) 291
[GetFieldTypeDescriptorsByMethodInstance](#) 294
[GetFilterDescriptorById](#) 298
[GetFilterDescriptorsForMethod](#) 301
[GetIdentifierById](#) 305
[GetIdentifiersForEntity](#) 308
[GetImportProgress](#) 311
[GetLevelForTypeDescriptor](#) 313
[GetLobSystemAllAssembliesBytes](#) 317
[GetLobSystemById](#) 320
[GetLobSystemByName](#) 324
[GetLobSystemDataByLobSystem](#) 327
[GetLobSystemInstanceById](#) 330
[GetLobSystemInstancesForLobSystem](#) 333
[GetLobSystemProxyAssemblyBytesByLobSystemId](#) 337
[GetLobSystemsLikeName](#) 341
[GetLobSystemsReferencedByEntitiesAssociatedWithModel](#) 344

- [GetMethodById](#) 349
- [GetMethodInstanceById](#) 352
- [GetMethodInstancesForDataClass](#) 355
- [GetMethodInstancesForMethod](#) 358
- [GetMethodsForDataClass](#) 361
- [GetModelById](#) 364
- [GetModelByName](#) 368
- [GetModelsByEntityId](#) 371
- [GetModelsByName](#) 374
- [GetParameterById](#) 377
- [GetParametersForMethod](#) 380
- [GetRootTypeDescriptorForParameter](#) 383
- [GetServiceApplicationId](#) 387
- [GetSystemUtilityTypeNameForLobSystem](#) 389
- [GetTypeDescriptorById](#) 392
- [GetTypeDescriptorsByNameAndLevelForParameter](#) 395
- [GetTypeDescriptorsForFilterDescriptor](#) 399
- [GetTypeReflectorTypeNameForParameter](#) 402
- [GetXmlSchemaForView](#) 405
- [HaveRights](#) 410
- [ImportPackage](#) 414
- [ImportPackageWithProgress](#) 420
- [IsMethodInstantiated](#) 427
- [IsParameterReferencedByMethodInstance](#) 430
- [MetadataObjectCreate](#) 433
- [MetadataObjectMergeXml](#) 441
- [MetadataObjectReadXml](#) 448
- [MetadataObjectWriteXml](#) 457
- [ModelReadXml](#) 462
- [ReadSlicedXml](#) 469
- [RemoveEntityFromModel](#) 472
- [RemoveLocalizedName](#) 475
- [RemoveProperty](#) 478
- [SaveLocalizedName](#) 481
- [SaveProperty](#) 484
- [SetAccessControlEntries](#) 487
- [SetDefaultActionForEntity](#) 491
- [SetDefaultValuesForTypeDescriptor](#) 494
- [SetLobSystemDataByLobSystemId](#) 497
- [TypeDescriptorCreate](#) 500
- [TypeDescriptorMergeXml](#) 504
- [TypeDescriptorReadXml](#) 509
- [Update](#) 514
- [WriteSlicedXml](#) 523
- [Overview \(synopsis\)](#) 42

P

- [PackageContents simple type](#) 85
- [PackageFormatExceptionState complex type](#) 73
- [Parameters - security index](#) 542
- [ParameterStruct complex type](#) 73
- [Preconditions](#) 43
- [Prerequisites](#) 43
- [Product behavior](#) 810
- [PropertyStruct complex type](#) 74
- [ProxyGenerationResult complex type](#) 75

R

- [Reading an Entity example](#) 534

- [Reading the security information of a MetadataObject example](#) 529
- [References](#) 41
 - [informative](#) 42
 - [normative](#) 41
- [Relationship to other protocols](#) 43

S

- Security
 - [implementer considerations](#) 542
 - [parameter index](#) 542
- Sequencing rules
 - [server](#) 94
- Server
 - [abstract data model](#) 89
 - [Activate operation](#) 112
 - [AddAssociationReferenceToAssociationGroup operation](#) 115
 - [AddEntityToModel operation](#) 118
 - [BulkSwitchActiveOrValidate operation](#) 121
 - [CheckPathInMethodInstances operation](#) 130
 - [ClearLocalizedNames operation](#) 133
 - [ClearProperties operation](#) 136
 - [CopyAclAcrossChildren operation](#) 139
 - [CopyAclAcrossChildrenForSetting operation](#) 142
 - [CopyAclToSetting operation](#) 146
 - [Deactivate operation](#) 149
 - [Delete operation](#) 152
 - [DeleteAssociationReferenceFromAssociationGroup operation](#) 156
 - [DeleteDefaultValueForTypeDescriptor operation](#) 159
 - [DeleteNoCascade operation](#) 163
 - [DeleteProxyAssemblyForLobSystem operation](#) 167
 - [details](#) 89
 - [EntityCreate operation](#) 170
 - [ExportPackage operation](#) 173
 - [GenerateProxyAssemblyForLobSystem operation](#) 177
 - [GetAccessControlEntries operation](#) 180
 - [GetActionById operation](#) 184
 - [GetActionParameterById operation](#) 187
 - [GetActionParametersForAction operation](#) 190
 - [GetActionsForEntity operation](#) 193
 - [GetAllLocalizedNames operation](#) 197
 - [GetAllLocalizedNamesForMetadataObjectStruct operation](#) 200
 - [GetAllPartitionIds operation](#) 204
 - [GetAllProperties operation](#) 207
 - [GetAllPropertiesForMetadataObjectStruct operation](#) 210
 - [GetAssociationById operation](#) 213
 - [GetAssociationGroupById operation](#) 217
 - [GetAssociationGroupsForEntity operation](#) 220
 - [GetAssociationMembersInRole operation](#) 223
 - [GetAssociationReferencesForAssociationGroup operation](#) 228
 - [GetAssociationsForDataClass operation](#) 232
 - [GetAssociationsForEntityAndRole operation](#) 235
 - [GetAssociationsForMethod operation](#) 238

[GetCacheInvalidationRecordsSince operation](#) 242
[GetChildTypeDescriptorsForTypeDescriptor operation](#) 245
[GetChildTypeDescriptorsWithIdentifiersForTypeDescriptor operation](#) 249
[GetDataClassById operation](#) 252
[GetDataClassesForSystem operation](#) 255
[GetDefaultValuesForTypeDescriptor operation](#) 259
[GetEntitiesForAssociationAndRole operation](#) 263
[GetEntitiesForSystem operation](#) 266
[GetEntitiesLikeNameAndNamespace operation](#) 269
[GetEntitiesReferencedByModelId operation](#) 274
[GetEntityById operation](#) 278
[GetEntityCount operation](#) 281
[GetEntityNameAndNamespacesForAssociationAndRole operation](#) 283
[GetEntityWithNameAndNamespace operation](#) 287
[GetEntityWithNameAndNamespaceAndVersion operation](#) 291
[GetFieldTypeDescriptorsByMethodInstance operation](#) 294
[GetFilterDescriptorById operation](#) 298
[GetFilterDescriptorsForMethod operation](#) 301
[GetIdentifierById operation](#) 305
[GetIdentifiersForEntity operation](#) 308
[GetImportProgress operation](#) 311
[GetLevelForTypeDescriptor operation](#) 313
[GetLobSystemAllAssembliesBytes operation](#) 317
[GetLobSystemById operation](#) 320
[GetLobSystemByName operation](#) 324
[GetLobSystemDataByLobSystem operation](#) 327
[GetLobSystemInstanceById operation](#) 330
[GetLobSystemInstancesForLobSystem operation](#) 333
[GetLobSystemProxyAssemblyBytesByLobSystemId operation](#) 337
[GetLobSystemsLikeName operation](#) 341
[GetLobSystemsReferencedByEntitiesAssociatedWithModel operation](#) 344
[GetMethodById operation](#) 349
[GetMethodInstanceById operation](#) 352
[GetMethodInstancesForDataClass operation](#) 355
[GetMethodInstancesForMethod operation](#) 358
[GetMethodsForDataClass operation](#) 361
[GetModelById operation](#) 364
[GetModelByName operation](#) 368
[GetModelsByEntityId operation](#) 371
[GetModelsByName operation](#) 374
[GetParameterById operation](#) 377
[GetParametersForMethod operation](#) 380
[GetRootTypeDescriptorForParameter operation](#) 383
[GetServiceApplicationId operation](#) 387
[GetSystemUtilityTypeNameForLobSystem operation](#) 389
[GetTypeDescriptorById operation](#) 392
[GetTypeDescriptorsByNameAndLevelForParameter operation](#) 395
[GetTypeDescriptorsForFilterDescriptor operation](#) 399
[GetTypeReflectorTypeNameForParameter operation](#) 402
[GetXmlSchemaForView operation](#) 405
[HaveRights operation](#) 410
[ImportPackage operation](#) 414
[ImportPackageWithProgress operation](#) 420
[initialization](#) 94
[IsMethodInstantiated operation](#) 427
[IsParameterReferencedByMethodInstance operation](#) 430
[local events](#) 525
[message processing](#) 94
[MetadataObjectCreate operation](#) 433
[MetadataObjectMergeXml operation](#) 441
[MetadataObjectReadXml operation](#) 448
[MetadataObjectWriteXml operation](#) 457
[ModelReadXml operation](#) 462
[overview](#) 89
[ReadSlicedXml operation](#) 469
[RemoveEntityFromModel operation](#) 472
[RemoveLocalizedName operation](#) 475
[RemoveProperty operation](#) 478
[SaveLocalizedName operation](#) 481
[SaveProperty operation](#) 484
[sequencing rules](#) 94
[SetAccessControlEntries operation](#) 487
[SetDefaultActionForEntity operation](#) 491
[SetDefaultValuesForTypeDescriptor operation](#) 494
[SetLobSystemDataByLobSystemId operation](#) 497
[timer events](#) 525
[timers](#) 94
[TypeDescriptorCreate operation](#) 500
[TypeDescriptorMergeXml operation](#) 504
[TypeDescriptorReadXml operation](#) 509
[Update operation](#) 514
[WriteSlicedXml operation](#) 523
[Setting the security information of a MetadataObject example](#) 527
[Simple types](#) 79
[CacheUsage](#) 80
[char](#) 80
[DirectionType](#) 81
[duration](#) 81
[FilterType](#) 81
[guid](#) 83
[MethodInstanceType](#) 83
[PackageContents](#) 85
[SystemType](#) 86
[TypeDescriptorFlags](#) 87
[Standards assignments](#) 44
[Syntax](#)
[messages - overview](#) 45
[SystemException complex type](#) 75
[SystemType simple type](#) 86
T
[Timer events server](#) 525
[Timers](#)

[server](#) 94
[Tracking changes](#) 818
[Transport](#) 45
[TypeDescriptorFlags simple type](#) 87
[TypeDescriptorStruct complex type](#) 75
Types
 [complex](#) 46
 [simple](#) 79

U

[Updating an Entity example](#) 538

V

[Vendor-extensible fields](#) 44
[Version complex type](#) 79
[Versioning](#) 43

W

[WSDL](#) 543