

[MS-EDCSOM]: eDiscovery Client-Side Object Model Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
01/20/2012	0.1	New	Released new document.
04/11/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
09/12/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
10/08/2012	1.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	5
1.1	Glossary	5
1.2	References.....	5
1.2.1	Normative References.....	5
1.2.2	Informative References	6
1.3	Overview	6
1.4	Relationship to Other Protocols.....	6
1.5	Prerequisites/Preconditions	6
1.6	Applicability Statement.....	7
1.7	Versioning and Capability Negotiation.....	7
1.8	Vendor-Extensible Fields.....	7
1.9	Standards Assignments	7
2	Messages.....	8
2.1	Transport.....	8
2.2	Message Syntax	8
2.2.1	Common Exceptions	8
3	Protocol Details.....	9
3.1	Server Details	9
3.1.1	Abstract Data Model	9
3.1.2	Timers	9
3.1.3	Initialization	9
3.1.4	Higher-Layer Triggered Events.....	9
3.1.5	Message Processing Events and Sequencing Rules.....	9
3.1.5.1	Microsoft.SharePoint.Client.Discovery.Case	9
3.1.5.1.1	Properties	10
3.1.5.1.1.1	Scalar Properties	10
3.1.5.1.1.2	ObjectPath Properties.....	10
3.1.5.1.2	Methods.....	10
3.1.5.1.2.1	Scalar Methods.....	10
3.1.5.1.2.1.1	GetExportContent	10
3.1.5.1.2.2	ObjectPath Methods.....	10
3.1.5.1.2.2.1	CSOM Constructor.....	10
3.1.5.2	Microsoft.SharePoint.Client.Discovery.Export	10
3.1.5.2.1	Properties	11
3.1.5.2.1.1	Scalar Properties	11
3.1.5.2.1.1.1	Status	11
3.1.5.2.1.2	ObjectPath Properties.....	11
3.1.5.2.2	Methods.....	11
3.1.5.2.2.1	Scalar Methods.....	11
3.1.5.2.2.1.1	GetExportContent	11
3.1.5.2.2.1.2	Update	13
3.1.5.2.2.2	ObjectPath Methods.....	13
3.1.5.2.2.2.1	CSOM Constructor.....	13
3.1.5.3	Microsoft.SharePoint.Client.Discovery.ExportStatus	13
3.1.5.3.1	Field Values.....	14
3.1.5.3.1.1	NotStarted.....	14
3.1.5.3.1.2	Started.....	14
3.1.5.3.1.3	Complete.....	14

3.1.5.3.1.4	Failed.....	14
3.1.5.4	Microsoft.SharePoint.Client.InformationPolicy.ProjectPolicy	14
3.1.5.4.1	Properties	14
3.1.5.4.1.1	Scalar Properties	14
3.1.5.4.1.1.1	Description.....	14
3.1.5.4.1.1.2	EmailBody.....	14
3.1.5.4.1.1.3	EmailBodyWithTeamMailbox	15
3.1.5.4.1.1.4	EmailSubject	15
3.1.5.4.1.1.5	Name	15
3.1.5.4.1.2	ObjectPath Properties.....	15
3.1.5.4.2	Methods.....	15
3.1.5.4.2.1	Scalar Methods.....	15
3.1.5.4.2.1.1	ApplyProjectPolicy	15
3.1.5.4.2.1.2	CloseProject	16
3.1.5.4.2.1.3	DoesProjectHavePolicy.....	16
3.1.5.4.2.1.4	GetProjectCloseDate.....	17
3.1.5.4.2.1.5	GetProjectExpirationDate	17
3.1.5.4.2.1.6	IsProjectClosed	18
3.1.5.4.2.1.7	OpenProject	18
3.1.5.4.2.1.8	PostponeProject.....	18
3.1.5.4.2.1.9	SavePolicy.....	19
3.1.5.4.2.2	ObjectPath Methods.....	19
3.1.5.4.2.2.1	GetCurrentlyAppliedProjectPolicyOnWeb	19
3.1.5.4.2.2.2	GetProjectPolicies.....	19
3.1.6	Timer Events	20
3.1.7	Other Local Events	20
4	Protocol Examples.....	21
5	Security.....	22
5.1	Security Considerations for Implementers.....	22
5.2	Index of Security Parameters	22
6	Appendix A: Product Behavior.....	23
7	Change Tracking.....	24
8	Index	27

1 Introduction

The eDiscovery Client-Side Object Model Protocol provides types, methods, and properties to enable a protocol client to access and control electronic discovery (eDiscovery) data stored on a protocol server.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-OFCGLOS\]](#):

CSOM array
CSOM Boolean
CSOM DateTime
CSOM Int32
CSOM Object
CSOM String
custodian
discovery case
discovery source
Information Rights Management (IRM)
legal hold
list item
policy
search query
site
static CSOM method
Uniform Resource Locator (URL)
website

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-CSOM] Microsoft Corporation, "[SharePoint Client Query Protocol Specification](#)".

[MS-CSOMSPT] Microsoft Corporation, "[SharePoint Client-Side Object Model Protocol Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC4627] Crockford, D., "The application/json Media Type for Javascript Object Notation (JSON)", RFC 4627, July 2006, <http://www.ietf.org/rfc/rfc4627.txt>

1.2.2 Informative References

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

1.3 Overview

This protocol defines types, methods, and properties that a protocol client uses to manage a **discovery case**. For example, the protocol enables a protocol client to retrieve a discovery case from the protocol server, retrieve the associated **discovery sources**, and perform such operations as initiating a **legal hold** on those discovery sources.

1.4 Relationship to Other Protocols

The eDiscovery Client-Side Object Model protocol is a set of types, properties, and methods that can be accessed by using the SharePoint Client Query protocol as described in [\[MS-CSOM\]](#). This protocol uses JSON as described in [\[RFC4627\]](#) to format data returned to a protocol client. This protocol also uses HTTP, as described in [\[RFC2616\]](#), and HTTPS, as described in [\[RFC2818\]](#). The dependencies for this protocol are shown in the following layering diagram.

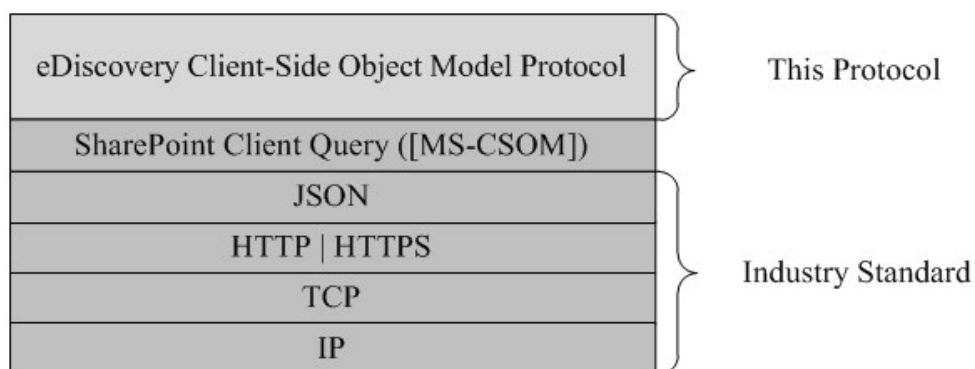


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

This protocol assumes that authentication has been performed by underlying protocols.

1.6 Applicability Statement

This protocol is optimized to enable a protocol client to specify the exact set of data and operations to perform in a single batch, making it suitable for situations where the connection speed between the protocol client and the protocol server can be slow.

This protocol is not suitable and is inefficient if both the protocol client and protocol server are on the same computer. In this case, the client can use an API that does not require communication over a network.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

Messages are transported by using the SharePoint Client Query Protocol, as specified in [\[MS-CSOM\]](#).

2.2 Message Syntax

None.

2.2.1 Common Exceptions

The protocol server MUST validate the request from the protocol client. When a protocol server processes a CSOM operation in the request, the following table lists common exceptions that could occur when accessing or updating a property or invoking a method.

Error Code	Error Type Name	Condition
- 2147024891	System.UnauthorizedAccessException	The user does not have permission to access a property, update a property, or call a method.

Besides the preceding exceptions and the exceptions that are listed for the specific properties or methods, the protocol server can return other exceptions to the protocol client, for which the protocol client could use the error message for display purpose but could not use the error code or error type to determine the causes of the exception.

Exceptions listed for the specific properties are thrown for both read and write operations, unless otherwise specified.

3 Protocol Details

3.1 Server Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The protocol server maintains a multiple collections of discovery cases, for example lawsuits for 2005-2010 and lawsuits for 2000-2005.

For each case, the protocol server maintains a list of discovery sources that are applicable to the scope of the discovery case. For example, if a case were about Contoso vs. Fabrikam, an exemplary discovery source might be the email mailbox for the executives of Contoso. Discovery sources can be organized in groups, such as locations associated with a given person, that is a **custodian**. The protocol server also maintains internal state about actions that need to be performed for discovery sources, such as when a given discovery source can be placed on legal hold, as well as the status of whether those actions have been performed.

In addition, the protocol server maintains a list of search queries applicable to the discovery sources of a given case, as well as metadata about when those search queries have been exported, that is downloaded.

The protocol server also maintains a directory of valid email mailboxes and **Web sites** that can be used as discovery sources. In addition, the protocol server maintains a set of **policies** that can be associated with the location, as well as state whether the location allows further editing or is in archival (closed).

This protocol shares the abstract data model used by the SharePoint Client Query protocol as described in [\[MS-CSOM\]](#) section 3.1.1 to communicate with the protocol server.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

3.1.5.1 Microsoft.SharePoint.Client.Discovery.Case

TypeId: {DF6AC2D8-CD50-4CF4-BC52-F61766F2E005}

ShortName: SP.Discovery.Case

A discovery case.

3.1.5.1.1 Properties

3.1.5.1.1.1 Scalar Properties

None.

3.1.5.1.1.2 ObjectPath Properties

None.

3.1.5.1.2 Methods

3.1.5.1.2.1 Scalar Methods

3.1.5.1.2.1.1 GetExportContent

Return Type: CSOM String

This method returns the export configuration content.

Parameters:

sourceIds: The identifier of each export included for the export content.

Type: CSOM array of CSOM Int32

3.1.5.1.2.2 ObjectPath Methods

3.1.5.1.2.2.1 CSOM Constructor

Constructs a discovery case CSOM Object.

Parameters:

web: The site (2) that represents a discovery case.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

3.1.5.2 Microsoft.SharePoint.Client.Discovery.Export

TypeId: {A0C1EA79-9E20-4F8E-96B7-B18956A5CFFB}

ShortName: SP.Discovery.Export

Represents an export associated with a discovery case.

3.1.5.2.1 Properties

3.1.5.2.1.1 Scalar Properties

3.1.5.2.1.1.1 Status

Type: Microsoft.SharePoint.Client.Discovery.ExportStatus

Accessibility: Read/Write

The status of the export, which MUST be a value as specified in section [3.1.5.3](#).

3.1.5.2.1.2 ObjectPath Properties

None.

3.1.5.2.2 Methods

3.1.5.2.2.1 Scalar Methods

3.1.5.2.2.1.1 GetExportContent

Return Type: CSOM String

Returns the export configuration, which MUST conform to the following schema:

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:xsi="http://schemas.microsoft.com/Discovery/ExportConfigSchema"
  targetNamespace="http://schemas.microsoft.com/Discovery/ExportConfigSchema"
  elementFormDefault="qualified"
>
  <xs:element name="Export">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="Metadata" minOccurs="1" maxOccurs="1" type="xsi:metadata"/>
        </xs:element>
        <xs:element name="Sources" minOccurs="1" maxOccurs="1" type="xsi:sources"/>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="metadata">
    <xs:sequence>
      <xs:element name="CaseName" type="xs:string" minOccurs="1" maxOccurs="1" />
      <xs:element name="CaseId" type="xs:string" minOccurs="1" maxOccurs="1" />
      <xs:element name="CaseURL" type="xs:string" minOccurs="1" maxOccurs="1" />
      <xs:element name="ExportURL" type="xs:string" minOccurs="1" maxOccurs="1" />
      <xs:element name="ExportName" type="xs:string" minOccurs="1" maxOccurs="1" />
      <xs:element name="ExportId" type="xs:string" minOccurs="1" maxOccurs="1" />
      <xs:element name="RemoveDuplicates" type="xs:boolean" minOccurs="1" maxOccurs="1" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="RemoveRms" type="xs:boolean" minOccurs="1" maxOccurs="1" />
  <xs:element name="IncludeVersions" type="xs:boolean" minOccurs="1" maxOccurs="1" />
  <xs:element name="IncludeUncrawlableContent" type="xs:boolean" minOccurs="1" maxOccurs="1" />
</xs:schema>
```

```

        <xs:element name="EstimatedItems" type="xs:double" minOccurs="1" maxOccurs="1" />
        <xs:element name="EstimatedSize" type="xs:double" minOccurs="1" maxOccurs="1" />
    </xs:sequence>
</xs:complexType>
<xs:complexType name="sources">
    <xs:sequence>
        <xs:element name="Source" type="xsi:source" minOccurs="0" maxOccurs="unbounded"
    />
    </xs:sequence>
</xs:complexType>
<xs:complexType name="source">
    <xs:sequence>
        <xs:element name="Id" type="xs:string" minOccurs="1" maxOccurs="1" />
        <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1" />
        <xs:element name="ServerSourceId" type="xs:string" minOccurs="1" maxOccurs="1" />
        <xs:element name="SourceFilter" type="xs:string" minOccurs="1" maxOccurs="1" />
        <xs:element name="Type" type="xs:string" minOccurs="1" maxOccurs="1" />
        <xs:element name="Endpoint" type="xs:string" minOccurs="0" maxOccurs="1" />
        <xs:element name="Custodians" type="xsi:custodians" minOccurs="1" maxOccurs="1"
    />
    </xs:sequence>
</xs:complexType>
<xs:complexType name="custodians">
    <xs:sequence>
        <xs:element name="Custodian" type="xsi:custodian" minOccurs="0"
maxOccurs="unbounded" />
    </xs:sequence>
</xs:complexType>
<xs:complexType name="custodian">
    <xs:sequence>
        <xs:element name="Name" type="xs:string" minOccurs="1" maxOccurs="1" />
        <xs:element name="Id" type="xs:int" minOccurs="1" maxOccurs="1" />
    </xs:sequence>
</xs:complexType>
</xs:schema>

```

The elements are defined as follows:

- **Metadata:** Metadata associated with the export.
 - **CaseName:** The name of the discovery case.
 - **CaseId:** The identifier of the discovery case.
 - **CaseUrl:** The **URL** of the discovery case.
 - **ExportUrl:** The URL of the export.
 - **ExportName:** The name of the export.
 - **ExportId:** The identifier of the export.
 - **RemoveDuplicates:** Whether duplicate content is removed from the content.
 - **RemoveRms:** Whether **Information Rights Management (IRM)** encryption is removed from the exported content.
 - **IncludeVersions:** Whether versions of content are included in the export.

- **IncludeUncrawlableContent:** Whether content that cannot be crawled is included in the export.
- **EstimatedItems:** The estimated number of items in the export.
- **EstimatedSize:** The estimated size of the content to be downloaded.
- **Sources:** The discovery sources associated with the export.
 - **Id:** The identifier of the discovery source.
 - **Name:** The name of the discovery source.
 - **ServerSourceId:** The identifier of the discovery source.
 - **SourceFilter:** A **search query** associated with the discovery source.
 - **Type:** The type of discovery source.
 - **Endpoint:** The URL of the discovery source.
 - **Custodians:** The custodians associated with the discovery source.
 - **Name:** The name of the custodian.
 - **Id:** The identifier of the custodian.

Parameters: None

3.1.5.2.2.1.2 Update

Return Type: None

Updates or adds the export in a discovery case.

Parameters: None

3.1.5.2.2.2 ObjectPath Methods

3.1.5.2.2.2.1 CSOM Constructor

Constructs a discovery export CSOM Object.

Parameters:

item: The **list item** that represents a discovery export.

Type: Microsoft.SharePoint.Client.ListItem

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.87.

3.1.5.3 Microsoft.SharePoint.Client.Discovery.ExportStatus

ShortName: SP.Discovery.ExportStatus

Flag: false

Represents the status of an export.

3.1.5.3.1 Field Values

3.1.5.3.1.1 NotStarted

Value: 0

The export has not yet been downloaded.

3.1.5.3.1.2 Started

Value: 1

The client has started processing the export.

3.1.5.3.1.3 Complete

Value: 2

The client has finished processing the export.

3.1.5.3.1.4 Failed

Value: 3

The client failed to process the export.

3.1.5.4 Microsoft.SharePoint.Client.InformationPolicy.ProjectPolicy

TypeId: {EC5E0A70-0CC3-408F-A4DC-1BB3495AAC75}

ShortName: SP.InformationPolicy.ProjectPolicy

A policy associated with a Web site (2) or email mailbox.

3.1.5.4.1 Properties

3.1.5.4.1.1 Scalar Properties

3.1.5.4.1.1.1 Description

Type: CSOM String

Accessibility: Read Only

The description of the policy.

3.1.5.4.1.1.2 EmailBody

Type: CSOM String

Accessibility: Read/Write

The body of the notification email if there is no site mailbox associated with the site (2).

The policy can be configured to send a notification email to site (2) owners in advance of the site (2) deletion.

3.1.5.4.1.1.3 EmailBodyWithTeamMailbox

Type: CSOM String

Accessibility: Read/Write

The body of the notification email if there is a site mailbox associated with the site (2).

The policy can be configured to send a notification email to site (2) owners in advance of the site (2) deletion.

3.1.5.4.1.1.4 EmailSubject

Type: CSOM String

Accessibility: Read/Write

The subject of the notification email.

The policy can be configured to send a notification email to site (2) owners in advance of the site (2) deletion.

3.1.5.4.1.1.5 Name

Type: CSOM String

Accessibility: Read Only

The name of the policy.

3.1.5.4.1.2 ObjectPath Properties

None.

3.1.5.4.2 Methods

3.1.5.4.2.1 Scalar Methods

3.1.5.4.2.1.1 ApplyProjectPolicy

This method is a **static CSOM method**.

Return Type: None

Apply the policy to the site (2). If the site (2) already has a policy applied, the new policy will replace the existing policy.

Parameters:

web: The site (2) that will have the policy to be applied.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

projectPolicy: The policy that will be applied to the site (2).

Type: Microsoft.SharePoint.Client.InformationPolicy.ProjectPolicy

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	<i>web</i> is null or <i>projectPolicy</i> is null.

3.1.5.4.2.1.2 CloseProject

This method is a static CSOM method.

Return Type: None

Close the site (2) if the site (2) has a policy applied and the site (2) is open.

Parameters:

web: The site (2) to be closed.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	<i>web</i> is null.

3.1.5.4.2.1.3 DoesProjectHavePolicy

This method is a static CSOM method.

Return Type: **CSOM Boolean**

Checks whether the Web site (2) has an associated policy.

Parameters:

web: The site (2).

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	Web is null.

3.1.5.4.2.1.4 GetProjectCloseDate

This method is a static CSOM method.

Return Type: CSOM DateTime

Gets the date the Web site (2) was archived (closed). If the Web site (2) is not closed, the protocol server returns an implementation specific default value that is less than 1970.

Parameters:

web: The site (2).

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	Web is null.

3.1.5.4.2.1.5 GetProjectExpirationDate

This method is a static CSOM method.

Return Type: CSOM DateTime

Gets the expiration date of the Web site (2) according to its associated policy. If there is no associated expiration date, the protocol server returns an implementation specific default value that is less than 1970.

Parameters:

web: The site (2).

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	Web is null.

3.1.5.4.2.1.6 IsProjectClosed

This method is a static CSOM method.

Return Type: CSOM Boolean

Checks whether the Web site (2) is in archival (closed).

Parameters:

web: The site (2).

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	Web is null.

3.1.5.4.2.1.7 OpenProject

This method is a static CSOM method.

Return Type: None

Open the site (2) if the site (2) has a policy applied and the site (2) is closed.

Parameters:

web: The site (2) to be opened.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	<i>web</i> is null.

3.1.5.4.2.1.8 PostponeProject

This method is a static CSOM method.

Return Type: None

Postpone the expiration date of the site (2) based on the policy if the site (2) has a policy applied and the site (2) has the expiration date.

Parameters:

web: The site (2) to be postponed.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	<i>web</i> is null.

3.1.5.4.2.1.9 SavePolicy

Return Type: None

Save the changes that are made to the current policy.

Parameters: None

3.1.5.4.2.2 ObjectPath Methods**3.1.5.4.2.2.1 GetCurrentlyAppliedProjectPolicyOnWeb**

This method is a static CSOM method.

Return Type: Microsoft.SharePoint.Client.InformationPolicy.ProjectPolicy

Gets the policy that is currently applied to the site (2) if the site (2) has a policy applied.

Parameters:

web: The site (2) that has a policy applied.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	<i>web</i> is null.

3.1.5.4.2.2.2 GetProjectPolicies

This method is a static CSOM method.

Return Type: CSOM array of Microsoft.SharePoint.Client.InformationPolicy.ProjectPolicy

Gets all policies that are available on the site (2).

Parameters:

web: The site (2) that might have one or more policies.

Type: Microsoft.SharePoint.Client.Web

The type is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

It MUST NOT be NULL.

Exceptions:

Error Code	Error Type Name	Condition
-2147467261	System.ArgumentNullException	<i>web</i> is null.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

4 Protocol Examples

None.

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® SharePoint® Server 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

7 Change Tracking

This section identifies changes that were made to the [MS-EDCSOM] protocol document between the September 2012 and October 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
1 Introduction	Updated all preliminary information in the document.	Y	Content updated.
1.4 Relationship to Other Protocols	Updated diagram for readability by removing RFC document name.	N	Content updated.
3.1.5.1.2.2.1 CSOM Constructor	Added reference hyperlink for the type definition of "Microsoft.SharePoint.Client.Web".	N	New content added.
3.1.5.2.2.2.1 CSOM Constructor	Added reference hyperlink for the type definition of "Microsoft.SharePoint.Client.ListItem".	N	New content added.
3.1.5.4 Microsoft.SharePoint.Client.InformationPolicy.ProjectPolicy	Added definition number for term "Web site".	N	Content updated.
3.1.5.4.2.1.3 DoesProjectHavePolicy	Added definition reference for the type "Microsoft.SharePoint.Client.Web".	N	New content added.
3.1.5.4.2.1.3 DoesProjectHavePolicy	Added definition number for term "Web site".	N	Content update

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			d.
3.1.5.4.2.1.4 GetProjectCloseDate	Added definition reference for the type "Microsoft.SharePoint.Client.Web".	N	New content added.
3.1.5.4.2.1.4 GetProjectCloseDate	Added definition number for term "Web site".	N	Content updated.
3.1.5.4.2.1.5 GetProjectExpirationDate	Added definition reference for the type "Microsoft.SharePoint.Client.Web".	N	New content added.
3.1.5.4.2.1.5 GetProjectExpirationDate	Added definition number for term "Web site".	N	Content updated.
3.1.5.4.2.1.6 IsProjectClosed	Added definition reference for the type "Microsoft.SharePoint.Client.Web".	N	New content added.
3.1.5.4.2.1.6 IsProjectClosed	Added definition number for term "Web site".	N	Content updated.

8 Index

A

Abstract data model
[server](#) 9
[Applicability](#) 7

C

[Capability negotiation](#) 7
[Case object](#) 9
[Change tracking](#) 24
[Common Exceptions message](#) 8

D

Data model - abstract
[server](#) 9

E

Examples
[overview](#) 21
[Export object](#) 10

F

[Fields - vendor-extensible](#) 7

G

[Glossary](#) 5

H

Higher-layer triggered events
[server](#) 9

I

[Implementer - security considerations](#) 22
[Index of security parameters](#) 22
[Informative references](#) 6
Initialization
[server](#) 9
[Introduction](#) 5

M

Messages
[Common Exceptions](#) 8
[transport](#) 8

N

[Normative references](#) 5

O

Objects

[Case](#) 9
[Export](#) 10
[ProjectPolicy](#) 14
Other local events
[server](#) 20
[Overview \(synopsis\)](#) 6

P

[Parameters - security index](#) 22
[Preconditions](#) 6
[Prerequisites](#) 6
[Product behavior](#) 23
[ProjectPolicy object](#) 14
[Protocol examples](#) 21

R

[References](#) 5
[informative](#) 6
[normative](#) 5
[Relationship to other protocols](#) 6

S

Security
[implementer considerations](#) 22
[parameter index](#) 22
Server
[abstract data model](#) 9
[higher-layer triggered events](#) 9
[initialization](#) 9
[other local events](#) 20
[timer events](#) 20
[timers](#) 9
[Standards assignments](#) 7

T

Timer events
[server](#) 20
Timers
[server](#) 9
[Tracking changes](#) 24
[Transport](#) 8
Triggered events - higher-layer
[server](#) 9

V

[Vendor-extensible fields](#) 7
[Versioning](#) 7