

[MS-IPDSP]: InfoPath Digital Signing Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final

documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Revision Summary

Date	Revision History	Revision Class	Comments
02/19/2010	1.0	Major	Initial Availability
03/31/2010	1.01	Editorial	Revised and edited the technical content
04/30/2010	1.02	Editorial	Revised and edited the technical content
06/07/2010	1.03	Editorial	Revised and edited the technical content
06/29/2010	1.04	Editorial	Changed language and formatting in the technical content.
07/23/2010	1.04	No change	No changes to the meaning, language, or formatting of the technical content.
09/27/2010	1.04	No change	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	1.04	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	1.04	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	1.04	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	1.04	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	2.0	Major	Significantly changed the technical content.

Table of Contents

1 Introduction	5
1.1 Glossary	5
1.2 References	6
1.2.1 Normative References	6
1.2.2 Informative References	6
1.3 Protocol Overview (Synopsis)	6
1.4 Relationship to Other Protocols	7
1.5 Prerequisites/Preconditions	7
1.6 Applicability Statement	8
1.7 Versioning and Capability Negotiation	8
1.8 Vendor-Extensible Fields	8
1.9 Standards Assignments	8
2 Messages	9
2.1 Transport	9
2.2 Message Syntax	9
2.2.1 Request Syntax	9
2.2.1.1 Request Metadata	9
2.2.1.2 Request Entity Body details	9
2.2.1.2.1 Request for Retrieve Form File Hash	9
2.2.1.2.1.1 Protocol Server Specific Event Log	10
2.2.1.2.2 Request for Add Signature Value and Context	11
2.2.1.2.3 Request for Cancel Digital Signature	11
2.2.2 Response Syntax	12
2.2.2.1 Response Status-Line	12
2.2.2.1.1 Success Response	12
2.2.2.1.2 Failure Response	12
2.2.2.2 Response Body Syntax	12
2.2.2.2.1 Response for Retrieve Form File Hash	12
2.2.2.2.1.1 ErrorCode	12
2.2.2.2.1.2 ResponseData	12
2.2.2.2.1.3 PageStateData	12
2.2.2.2.2 Response for Add Signature Value and Context	13
2.2.2.2.2.1 ErrorCode	13
2.2.2.2.2.2 ResponseData	13
2.2.2.2.2.3 PageStateData	13
2.2.2.2.3 Response for Cancel Digital Signature	13
2.2.2.2.3.1 ErrorCode	13
2.2.2.2.3.2 ResponseData	13
2.2.2.2.3.3 PageStateData	13
2.3 Directory Service Schema Elements	13
3 Protocol Details	14
3.1 Common Details	14
3.1.1 Abstract Data Model	14
3.1.2 Timers	14
3.1.3 Initialization	14
3.1.4 Higher-Layer Triggered Events	14
3.1.5 Message Processing Events and Sequencing Rules	14
3.1.6 Timer Events	14

3.1.7	Other Local Events	14
3.2	Protocol Client Details	15
3.2.1	Abstract Data Model	15
3.2.2	Timers	15
3.2.3	Initialization	15
3.2.4	Higher-Layer Triggered Events	15
3.2.5	Message Processing Events and Sequencing Rules	15
3.2.6	Timer Events	15
3.2.7	Other Local Events	15
3.3	Protocol Server Details	15
3.3.1	Abstract Data Model	15
3.3.2	Timers	15
3.3.3	Initialization	16
3.3.4	Higher-Layer Triggered Events	16
3.3.5	Message Processing Events and Sequencing Rules	16
3.3.5.1	Process the request for Retrieve Form File Hash	16
3.3.5.2	Process the request for Add Signature Value and Context	16
3.3.5.3	Process the request for Cancel Digital Signature	17
3.3.6	Timer Events	18
3.3.7	Other Local Events	18
4	Protocol Examples	19
4.1	Messages for Retrieve Form File Hash	19
4.1.1	Request Body	19
4.1.2	Response Body	19
4.2	Messages for Add Signature Value and Context	19
4.2.1	Request Body	20
4.2.2	Response Body	20
4.3	Messages for Request for Cancel Digital Signature	20
4.3.1	Request Body	20
4.3.2	Response Body	21
5	Security	22
5.1	Security Considerations for Implementers	22
5.2	Index of Security Parameters	22
6	Appendix A: Product Behavior	23
7	Change Tracking	24
8	Index	27

1 Introduction

The InfoPath Digital Signing Protocol specifies a mechanism by which a protocol client can work with a protocol server to apply a digital signature to a form file.

Sections 1.8, 2, and 3 of this specification are normative and contain RFC 2119 language. Sections 1.5 and 1.9 are also normative but cannot contain RFC 2119 language. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

Augmented Backus-Naur Form (ABNF)
authentication
base64
certificate
ciphertext
HTTP OK
Hypertext Transfer Protocol (HTTP)
Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)
XML

The following terms are defined in [\[MS-OFCGLOS\]](#):

digest
digital signature
empty string
form file
form view
Hypertext Transfer Protocol 1.1 (HTTP/1.1)
message body
persist
Request-URI
site
Status-Line
Uniform Resource Identifier (URI)
Uniform Resource Locator (URL)
XML document
XML schema

The following terms are specific to this document:

Hypertext Transfer Protocol 1.0 (HTTP/1.0): An application of the Standard Generalized Markup Language (SGML) that uses tags to mark elements in a document, as described in [HTML].

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-IPFF] Microsoft Corporation, "[InfoPath Form Template Format](#)".

[MS-IPFF2] Microsoft Corporation, "[InfoPath Form Template Format Version 2](#)".

[MS-IPFFX] Microsoft Corporation, "[InfoPath Form File Format Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC3986] Berners-Lee, T., Fielding, R., and Masinter, L., "Uniform Resource Identifier (URI): Generic Syntax", STD 66, RFC 3986, January 2005, <http://www.ietf.org/rfc/rfc3986.txt>

[RFC4648] Josefsson, S., "The Base16, Base32, and Base64 Data Encodings", RFC 4648, October 2006, <http://www.ietf.org/rfc/rfc4648.txt>

[RFC5234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <http://www.rfc-editor.org/rfc/rfc5234.txt>

[W3C-XML] Bray, T., Paoli, J., Sperberg-McQueen, C.M., Maler, E., Yergeau, F., Eds., "Extensible Markup Language (XML) 1.1 (Second Edition)", W3C Recommendation, August 2006, <http://www.w3.org/TR/2006/REC-xml11-20060816/>

[XMLDSig] Bartel, M., Boyer, J., Fox, B., et al., "XML-Signature Syntax and Processing", W3C Recommendation, February 2002, <http://www.w3.org/TR/2002/REC-xmlsig-core-20020212/>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[RFC1945] Berners-Lee, T., Fielding, R., and Frystyk, H., "Hypertext Transfer Protocol -- HTTP/1.0", RFC 1945, May 1996, <http://www.ietf.org/rfc/rfc1945.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

1.3 Protocol Overview (Synopsis)

This protocol enables a protocol client to communicate with a protocol server over a **Hypertext Transfer Protocol (HTTP)** connection to apply a **digital signature (2)** to a **form file** that is

stored on the protocol server. To apply a digital signature (2) to a form file stored on the protocol server, the protocol client performs the following supported functions:

- **Retrieve Form File Hash:** The protocol client sends this message to the protocol server to initiate the application of a digital signature (2) to a form file. Using this protocol function, the protocol client sends a request to the protocol server that contains local information, including a rendered image of the form file and operating system information, to be embedded in the signed form file. The protocol server sends back an HTTP response containing a **digest** of the local information sent by the protocol client, and other data stored in the form file. See section [5.1](#) for security considerations.
- **Add Signature Value and Context:** Using this protocol function, the protocol client generates encrypted **ciphertext** of the digest value returned in the HTTP response to the **Retrieve Form File Hash** request message. The ciphertext value, and the **certificate (1)** used to encrypt it, are sent to the protocol server and stored in the form file as **value** and **context**, respectively, of the digital signature (2). The application of the digital signature (2) is complete when the protocol server successfully processes this request. See section [5.1](#) for security considerations.
- **Cancel Digital Signature:** Using this protocol function, the protocol client sends an HTTP request to the protocol server to notify the protocol server that the signing process has been cancelled.

1.4 Relationship to Other Protocols

This protocol requires the **Hypertext Transfer Protocol 1.0 (HTTP/1.0)**, as described in [\[RFC1945\]](#), or the **Hypertext Transfer Protocol 1.1 (HTTP/1.1)**, as described in [\[RFC2616\]](#), protocol for message transport. It transmits those messages by using HTTP, as described in [\[RFC2616\]](#), or **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#).

The following diagram shows the underlying messaging and transport stack used by the protocol:

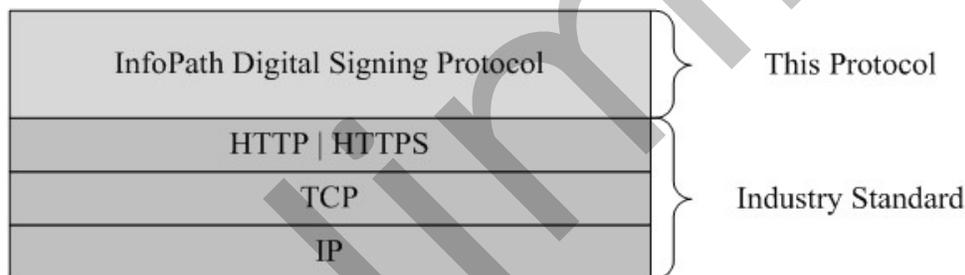


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

Prerequisites and preconditions of HTTP, as described in [\[RFC2616\]](#), apply to this protocol.

- This protocol operates against a **site (2)** identified by a **URL** known by the protocol client.
- The data represented by the **Protocol Server Specific Event Log**, as described in section [2.2.1.2.1.1](#), are known by the protocol client.
- **DataDefinition**, as described in section [2.2.1.2.1](#), is known by the protocol client.
- **PageStateData**, as described in section [2.2.2.2.1.3](#), is known by the protocol client.

This protocol assumes that **authentication (2)** has been performed by the underlying protocols.

1.6 Applicability Statement

The operations described by this protocol apply to a protocol client that interacts with a protocol server to create and apply a digital signature (2) to a form file stored on the protocol server. This protocol is intended for use by protocol clients and protocol servers connected by high-bandwidth and low-latency network connections.

1.7 Versioning and Capability Negotiation

Supported Transports: This protocol uses multiple transports with HTTP, as described in section [2.1](#).

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

All protocol messages MUST be transmitted in the HTTP protocol syntax specified in [\[RFC2616\]](#). Protocol servers MUST support the HTTP protocol. Protocol servers SHOULD additionally support HTTPS for secure communication with protocol clients.

2.2 Message Syntax

This section specifies the message syntax and details of the protocol messages transported between the protocol client and the protocol server.

2.2.1 Request Syntax

2.2.1.1 Request Metadata

The protocol client MUST send protocol messages to the protocol server using HTTP **POST**, as specified in [\[RFC2616\]](#) section 9.5. The protocol message **Request-URI** MUST be a valid **URI**, as specified in [\[RFC3986\]](#).

2.2.1.2 Request Entity Body details

The following subsections specify the syntax of the request entity body generated by the three functions supported by this protocol.

2.2.1.2.1 Request for Retrieve Form File Hash

This message is sent by the protocol client to initiate the signing process.

The **message body (1)** MUST be an **XML document**, as specified in [\[W3C-XML\]](#), which conforms to the following **XML schema**:

```
<xsd:element name="SignRequest">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="EventLog" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="DataDefinition" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Comment" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Time" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="OS" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Browser" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Version" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Monitors" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Width" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Height" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Colors" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="PNG" minOccurs="1" maxOccurs="1"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>

<xsd:element name="EventLog" type="xsd:string"/>
<xsd:element name="DataDefinition" type="xsd:string"/>
<xsd:element name="Comment" type="xsd:string"/>
```

```

<xsd:element name="Time" type="xsd:string"/>
<xsd:element name="OS" type="xsd:string"/>
<xsd:element name="Browser" type="xsd:string"/>
<xsd:element name="Version" type="xsd:string"/>
<xsd:element name="Monitors" type="xsd:string"/>
<xsd:element name="Width" type="xsd:string"/>
<xsd:element name="Height" type="xsd:string"/>
<xsd:element name="Colors" type="xsd:string"/>
<xsd:element name="PNG" type="xsd:base64Binary"/>

```

EventLog: As specified in section [2.2.1.2.1.1](#).

DataDefinition: The **string** indicating the signed data block of the form file being signed, as specified in [\[MS-IPFF\]](#) section 2.2.15 and [\[MS-IPFF2\]](#) section 2.2.1.1.15.

Comment: The comment for the digital signature(2) specified in [\[MS-IPFFX\]](#) section 2.1.2.1.

Time: The system date and time for the client computer specified in [\[MS-IPFFX\]](#) section 2.1.2.3.

OS: The version of the operating system running on the client computer at the time of signing, as specified in [\[MS-IPFFX\]](#) section 2.1.2.5.

Browser: The name and the version of the Web browser used on the client computer to sign the form, as specified in [\[MS-IPFFX\]](#) section 2.1.2.9.

Version: The version of the protocol server that last edited the form file, as specified in [\[MS-IPFFX\]](#) section 2.1.2.8.

Monitors: The number of monitors enabled on the client computer at the time of signing, as specified in [\[MS-IPFFX\]](#) section 2.1.2.12.

Width: The width of the primary monitor on the client computer at the time of signing, as specified in [\[MS-IPFFX\]](#) section 2.1.2.14.

Height: The height of the primary monitor on the client computer at the time of signing, as specified in [\[MS-IPFFX\]](#) section 2.1.2.15.

Colors: The color depth of the primary monitor on the client computer at the time of signing, as specified in [\[MS-IPFFX\]](#) section 2.1.2.16.

PNG: A representation of the **form view** that is displayed at the time of signing, as specified in [\[MS-IPFFX\]](#) section 2.1.2.20.

2.2.1.2.1.1 Protocol Server Specific Event Log

A semicolon-separated **string** of values specifying protocol server-specific information. Using the **Augmented Backus-Naur Form (ABNF)** syntax, as specified in [\[RFC5234\]](#), the event log MUST conform to the following specification:

```

EventLog = (Header)17(";" Entry) (";" State)7(";" Entry)
Header = 1*CHAR
Entry = *CHAR
State = *CHAR

```

2.2.1.2.2 Request for Add Signature Value and Context

This message is sent by the protocol client to complete the signing process.

The message body (1) MUST be an XML document, as specified in [\[W3C-XML\]](#), which conforms to the following XML schema:

```
<xsd:element name="SignValue">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="EventLog" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="DataDefinition" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Value" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="Key" minOccurs="1" maxOccurs="1"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>

<xsd:element name="EventLog" type="xsd:string"/>
<xsd:element name="DataDefinition" type="xsd:string"/>
<xsd:element name="Value" type="xsd:string"/>
<xsd:element name="Key" type="xsd:string"/>
```

EventLog: This is a semicolon-separated **string** of values containing protocol server-specific information, as specified in section [2.2.1.2.1.1](#).

DataDefinition: The **string** indicating the signed data block of the form file being signed, as specified in [\[MS-IPFF\]](#) section 2.2.15 and [\[MS-IPFF2\]](#) section 2.2.1.1.15.

Value: The value of the digital signature (2), as specified in [\[XMLDSig\]](#) section 4.2.

Key: The value used to populate the **X509Certificate** element of the **X509Data** node, as specified in [\[XMLDSig\]](#) Section 4.4.4.

2.2.1.2.3 Request for Cancel Digital Signature

This message is sent by the protocol client to cancel the signing process.

The message body (1) MUST be an XML document, as specified in [\[W3C-XML\]](#), which conforms to the following XML schema:

```
<xsd:element name="SignCancel">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="EventLog" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="DataDefinition" minOccurs="1" maxOccurs="1"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>

<xsd:element name="EventLog" type="xsd:string"/>
<xsd:element name="DataDefinition" type="xsd:string"/>
```

EventLog: This is a semicolon-separated **string** of values containing protocol server-specific information, as specified in section [2.2.1.2.1.1](#).

DataDefinition: The **string** indicating the signed data block of the form file being signed, as specified in [\[MS-IPFF\]](#) section 2.2.15 and [\[MS-IPFF2\]](#) section 2.2.1.1.15.

2.2.2 Response Syntax

2.2.2.1 Response Status-Line

The response **Status-Line** MUST be valid according to [\[RFC2616\]](#) section 6.1.

2.2.2.1.1 Success Response

The protocol server MUST return **HTTP OK** to indicate a success response. The response body MUST contain the detailed results specified in section [2.2.2.2](#).

2.2.2.1.2 Failure Response

An HTTP 4xx or 5xx Status-Line, as specified in [\[RFC2616\]](#) section 6.1.1. A failure response MUST only be returned by the protocol server to indicate that the request failed. There MUST NOT be a response body when a failure response is returned by the protocol server.

2.2.2.2 Response Body Syntax

A successful HTTP OK response returned by the protocol server MUST have a response body for any of the protocol supported functions. The response body MUST contain three lines delimited by the end-of-line indicator, **CRLF**, as specified in [\[RFC5234\]](#) sections 2.2 and 2.3. Each line MUST be either a **base64** encoded **string**, as specified in [\[RFC4648\]](#) section 4, or the **empty string (1)**. The **strings** MUST appear in the following sequence:

- **ErrorCode:** Specified in section [2.2.2.2.1.1](#), section [2.2.2.2.2.1](#), and section [2.2.2.2.3.1](#).
- **ResponseData:** Specified in section [2.2.2.2.1.2](#), section [2.2.2.2.2.2](#), and section [2.2.2.2.3.2](#).
- **PageStateData:** Specified in section [2.2.2.2.1.3](#), section [2.2.2.2.2.3](#), and section [2.2.2.2.3.3](#).

The following subsections specify the individual **strings** for each protocol method.

2.2.2.2.1 Response for Retrieve Form File Hash

2.2.2.2.1.1 ErrorCode

ErrorCode is the result of processing a request for **Retrieve Form File Hash**, as specified in section [2.2.1.2.1](#). This value MUST be base64 encoded, as specified in [\[RFC4648\]](#) section 4. The base64 encoded **string** MUST NOT be empty. When decoded, this value MUST be "1" to specify success. The decoded value MUST be a value other than 1 to indicate a failure.

2.2.2.2.1.2 ResponseData

ResponseData is the digest value associated with the form file after applying the processing rules specified in [\[XMLDSig\]](#) section 3. This **string** value MUST be base64 encoded, as specified in [\[RFC4648\]](#) section 4, and MUST NOT be empty.

2.2.2.2.1.3 PageStateData

PageStateData is a set of properties that the protocol server uses to **persist** implementation-specific data across protocol messages. If the protocol server persists properties, this **string** value

MUST be base64 encoded, as specified in [\[RFC4648\]](#) section 4. If the protocol server does not persist any properties, this value MUST be empty.

2.2.2.2.2 Response for Add Signature Value and Context

2.2.2.2.2.1 ErrorCode

ErrorCode is the result of processing a request for **Add Signature Value and Context**, as specified in section [2.2.1.2.2](#). The **string** value MUST be base64 encoded, as specified in [\[RFC4648\]](#) section 4. The base64 encoded **string** MUST NOT be empty. When decoded, this value MUST be "1" to specify success. The decoded value MUST be a value other than 1 to indicate a failure.

2.2.2.2.2.2 ResponseData

ResponseData is a **string** value that MUST be an empty string (1).

2.2.2.2.2.3 PageStateData

PageStateData is specified in section [2.2.2.2.1.3](#).

2.2.2.2.3 Response for Cancel Digital Signature

2.2.2.2.3.1 ErrorCode

ErrorCode is the result of processing a request for **Cancel Digital Signature**, as specified in section [2.2.1.2.3](#). The **string** value MUST be base64 encoded, as specified in [\[RFC4648\]](#) section 4. The base64 encoded **string** MUST NOT be empty.

2.2.2.2.3.2 ResponseData

ResponseData is a **string** value that MUST be an empty string (1).

2.2.2.2.3.3 PageStateData

PageStateData is specified in section [2.2.2.2.1.3](#).

2.3 Directory Service Schema Elements

None.

3 Protocol Details

3.1 Common Details

This section specifies the details common to both protocol server and protocol client behavior.

3.1.1 Abstract Data Model

This section specifies a conceptual model of data organization an implementation maintains to participate in this protocol. The specified organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that an implementation adhere to this conceptual model. An implemented model's external behavior should be consistent with the behavior specified in this document.

The protocol server maintains a mapping between the client data and the form file persisted on the server. This mapping can be stored as part of the **EventLog**, as specified in section [2.2.1.2.1.1](#), section [2.2.1.2.2](#), and section [2.2.1.2.3](#).

The protocol server accepts requests to create and add a digital signature (2) to the form file it maintains. This multi-step process, known as a signing session, requires the protocol server to modify the form file using data sent by the protocol client. A form file can have three different states during a signing session:

- **Initial State:** The state of the form file before a signing session is started.
- **Pre-Signed State:** The state of the form file after the protocol server successfully processed a **Retrieve Form File Hash** message, as specified in section [2.2.1.2.1](#).
- **Signed Complete State:** The state of the form file after the protocol server has successfully processed an **Add Signature Value and Context** message, as specified in section [2.2.1.2.2](#).

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

None.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

3.2 Protocol Client Details

3.2.1 Abstract Data Model

The abstract data model is as specified in section [3.1.1](#).

3.2.2 Timers

None.

3.2.3 Initialization

None.

3.2.4 Higher-Layer Triggered Events

None.

3.2.5 Message Processing Events and Sequencing Rules

Request messages sent by the protocol client MUST be in the syntax specified in section [2.2.1](#).

The protocol client MUST send request messages to the protocol server in one of the valid request sequences:

- A request for **Retrieve Form File Hash** followed by a request for **Add Signature Value and Context**.
- A request for **Retrieve Form File Hash** followed by a request for **Cancel Digital Signature**.

Any other request sequence is invalid and MUST NOT be used while sending requests to the protocol server.

For processing the response for **Cancel Digital Signature**, the protocol client MUST ignore the **ErrorCode** value returned by the protocol server.

3.2.6 Timer Events

None.

3.2.7 Other Local Events

None.

3.3 Protocol Server Details

3.3.1 Abstract Data Model

The abstract data model is as specified in section [3.1.1](#).

3.3.2 Timers

None.

3.3.3 Initialization

None.

3.3.4 Higher-Layer Triggered Events

None.

3.3.5 Message Processing Events and Sequencing Rules

When processing the messages sent by the protocol client, the protocol server modifies the state of the form file, as specified in section [3.1.1](#).

The protocol server MUST run the sequencing rules specified in section [3.3.5.1](#) if the protocol client message body (1) contains the XML specified in section [2.2.1.2.1](#).

The protocol server MUST run the sequencing rules specified in section [3.3.5.2](#) if the protocol client message body (1) contains the XML specified in section [2.2.1.2.2](#).

The protocol server MUST run the sequencing rules specified in section [3.3.5.3](#) if the protocol client message body (1) contains the XML specified in section [2.2.1.2.3](#).

3.3.5.1 Process the request for Retrieve Form File Hash

The protocol server MUST process this message as follows:

- If an error occurs while processing this request, the protocol server MUST stop processing this request and MUST return an **ErrorCode** other than 1, as specified in section [2.2.2.2.1.1](#). When an error occurs while processing the request, the protocol MUST set the state of the form file to **Initial State**.
- The protocol server MUST add the **Signature** element, as specified in [\[XMLDSig\]](#) section 2, to the form file identified by the protocol client message.
- The protocol server MUST use the protocol message data, as specified in section [2.2.1.2.1](#), to populate the digital signature (2) properties specified in [\[MS-IPFFX\]](#) section 2.1.2.
- The protocol server MUST determine the digest value associated with the form file by applying the processing rules specified in [\[XMLDSig\]](#) section 3.0.
- If the operations specified in this section are successful, the protocol server MUST move the state of the form file to **Pre-Signed State**, as specified in section [3.1.1](#).
- The protocol server MUST send a response, as specified in section [2.2.2.2.1](#), containing:
 - **ErrorCode**, as specified in section [2.2.2.2.1.1](#).
 - **ResponseData** as the digest value associated with the form file in the case of success, or empty if the **ErrorCode**, as specified in section [2.2.2.2.1.1](#), indicates a failure.
 - **PageStateData** as a set of properties of protocol server implementation specific data, as specified in section [2.2.2.2.1.3](#).

3.3.5.2 Process the request for Add Signature Value and Context

The protocol server MUST process this message as follows:

- If an error occurs while processing this request, the protocol server MUST stop processing this request and MUST return an **ErrorCode** other than 1, as specified in section [2.2.2.2.1](#).
- If the **State** entry of the **EventLog** in the client message, as specified in section [2.2.1.2.1.1](#), is different from the **PageStateData** sent in the response for **Retrieve Form File Hash**, as specified in section [2.2.2.2.1](#), the protocol server MUST stop processing this request and SHOULD [<1>](#) return an **ErrorCode** other than 1.
- The protocol server MUST verify that the value of **DataDefinition** sent by the protocol client message, as specified in section [2.2.1.2.2](#), is identical to the value received in the request for **Retrieve Form File Hash**, as specified in section [2.2.1.2.1](#). For any other values of the **DataDefinition** property, the protocol server SHOULD [<2>](#) return an **ErrorCode** other than 1, as specified in section [2.2.2.2.1](#).
- The protocol server MUST update the **SignatureValue** element specified by [\[XMLDSig\]](#) section 4.2 and the **X509Data** element specified by [\[XMLDSig\]](#) section 4.4.4.
- If the operations specified in this section are successful, the protocol server MUST move the state of the form file to **Signed Complete State**, as specified in section [3.1.1](#).
- After moving the state of the form file to **Signed Complete State**, the protocol server MUST move the state of the form file to **Initial State**.
- The protocol server MUST send a response, as specified in section [2.2.2.2.2](#), containing the following:
 - **ErrorCode**, as specified in section [2.2.2.2.1](#).
 - **ResponseData** as an empty string (1).
 - **PageStateData** as a set of properties of protocol server implementation-specific data, as specified in section [2.2.2.2.1.3](#).

3.3.5.3 Process the request for Cancel Digital Signature

The protocol server MUST process the message as follows:

- If an error occurs while processing this request, the protocol server MUST stop processing this request and MUST return an **ErrorCode** other than 1, as specified in section [2.2.2.2.3.1](#).
- If the **State** entry of the **EventLog** in the client message, as specified in section [2.2.1.2.1.1](#), is different from the **PageStateData** sent in the response for **Retrieve Form File Hash**, as specified in section [2.2.2.2.1](#), the protocol server SHOULD [<3>](#) return an **ErrorCode** other than 1.
- The protocol server MUST verify that the value of the **DataDefinition** sent by the protocol client message, as specified in section [2.2.1.2.3](#), is identical to the one received in the request for **Retrieve Form File Hash**, as specified in section [2.2.1.2.1](#). For any other values of the **DataDefinition** property, the protocol server SHOULD [<4>](#) return an **ErrorCode** other than 1.
- The protocol server MUST remove any digital signature (2) elements that have been added to the form file as the result of processing a request for a **Retrieve Form File Hash** message in the same signing session.
- If the operations specified in this section are successful, the protocol server MUST move the state of the form file to **Initial State**, as specified in section [3.1.1](#).

- The protocol server MUST send a response, as specified in section [2.2.2.2.3](#), containing the following:
 - **ErrorCode**, as specified in section [2.2.2.2.3.1](#).
 - **ResponseData** as an empty string (1).
 - **PageStateData** as a set of properties of protocol server implementation-specific data, as specified in section [2.2.2.2.1.3](#).

3.3.6 Timer Events

None.

3.3.7 Other Local Events

None.

4 Protocol Examples

The examples in this section show the messages exchanged when a protocol client makes a successful HTTP request to a protocol server using this protocol.

4.1 Messages for Retrieve Form File Hash

The following subsections show the interaction between the protocol client and protocol server to initiate a signing process.

4.1.1 Request Body

The following example is a protocol client request message to initiate a signing process, as specified in section [2.2.1.2.1](#).

```
POST /_layouts/Signature.FormServer.aspx HTTP/1.1
Accept: */*
Content-Type: text/xml
Host: contoso

<SignRequest><EventLog>1
8;5;872b5f4e78e1493582a00f161142fe62_be2940ab07fd4251bbcdf0041d2bc5da;AHLZ4GUVVKKSISFM2IIBTIR
CKQRSCL2TJFKEKUZPKY2C6RCTJFDS6RSPKJGVGL2UIVGVATCBKRCS4WCTJYVGQOORKNJG4STIHLVE6BUKVTE6N2CJ54W
OSZYGNLWQT3QPBUUMUBYM5GEMQSIGY3EQ4Y;0;;%2Fsites%2Fv4%2Fdsig%2Fforms%2Ftemplate.xsn;http%3A%2F
%contoso%2Fsites%2Fv4%2Fdsig%2Fforms%2Ftemplate.xsn;;http%3A%2F%contoso%2Fsites%2Fv4;;1;1;0
;1;0;0;633997851883411000;;FormControl1;0;1033;1033;0;13;Op0ZEFdM7QYQwAg6724FORnJu727/iMxjDBCQ
U2UHqX8B/P+trBObL+1XnQzZ/s068f9gUYZp1YxHRgsxi3A0w==|633997856567555876</EventLog><DataDefinit
ion>group1</DataDefinition><Comment></Comment><Time>2010-01-
22T19:34:33Z</Time><OS>6.0</OS><Browser>Microsoft Internet Explorer
7.0</Browser><Version>14</Version><Monitors>1</Monitors><Width>1404</Width><Height>1126</Heig
ht><Colors>16</Colors><PNG>(PNG IMAGE)</PNG></SignRequest>
```

4.1.2 Response Body

The following example is a protocol server response message to a request to initiate a signing process, as specified in section [2.2.2.2.1](#). The **string** value of **PageStateData**, as specified in section [2.2.2.2](#), is empty in the message example. The required CRLF characters are present.

```
HTTP/1.1 200 OK
Cache-Control: private
Content-Type: text/html; charset=utf-8
Vary: Accept-Encoding

AQ==
RLVG1nrhjkgeTBUNEGE1/cQoMlo=
```

4.2 Messages for Add Signature Value and Context

The examples in the following subsections show the interaction between the protocol client and protocol server to add a signature value and context to a form file.

4.2.1 Request Body

The following example is a protocol client request message to add a signature value and context to a form file, as specified in section [2.2.1.2.2](#). The **CERTIFICATE CONTEXT** in the following example is a binary representation of a certificate (1) specified as **key** in section [2.2.1.2.2](#). The value of **CERTIFICATE CONTEXT** is abbreviated for readability.

```
POST /_layouts/Signature.FormServer.aspx HTTP/1.1
Content-Type: text/xml
Host: contoso

<SignValue><EventLog>1
8;5;872b5f4e78e1493582a00f161142fe62_be2940ab07fd4251bbcdf0041d2bc5da;AHLZ4GUVVKKSISFM2IIBTIR
CKQRSCl2TJfKEKUZPKY2C6RCTJfDS6RSPKJGVGL2UIVGVATCBKRCS4WCTJYVQOCRKNJG4STIHFLVE6BUKVTE6N2CJ54W
OSZYGNLWQT3QPBUUMUBYM5GEMQSIGY3EQ4Y;0;;%2Fsites%2Fv4%2Fdsig%2Fforms%2Ftemplate.xsn;http%3A%2F
%2Fcontoso%2Fsites%2Fv4%2Fdsig%2Fforms%2Ftemplate.xsn;;http%3A%2F%2Fcontoso%2Fsites%2Fv4;;1;1
;0;1;0;0;633997851883411000;;FormControl;0;1033;1033;0;13;Op0ZEFdM7QYQwAg6724FORnJu727/iMxjDB
CQU2UHqX8B/P+trBobL+1XnQzZ/s068f9gUYZp1YxHRGsxI3A0w==|633997856567555876</EventLog><DataDefin
ition>group1</DataDefinition><Value>iWFKsksj4iFefBoOd1FCLLds7B8vfgHd7s2IJaI6r2r0kL0HR1Zq5Q33v
AuNZysNYUuis4ZeCzxnY69BY5eJ1SdhrQlOTDMIldFvDFCF7H+mPIRYQlktZZiTYZInmIhUkFVh4q+/mbBVRTT5xfFM5Q
rOD41R0jLpSrLCNEk=</Value><Key>(CERTIFICATE CONTEXT)</Key></SignValue>
```

4.2.2 Response Body

The following example is a protocol server response to add a signature value and context to a form file, as specified in section [2.2.2.2](#). The **string** values of **ResponseData** and **PageStateData**, as specified in section [2.2.2.2](#), are empty in the message example. The required CRLF characters are present.

```
HTTP/1.1 200 OK
Cache-Control: private
Content-Type: text/html; charset=utf-8
Vary: Accept-Encoding
Content-Length: 6

AQ==
```

4.3 Messages for Request for Cancel Digital Signature

The following subsection contains an example that shows the interaction between the protocol client and protocol server to cancel the application of a digital signature (2) to a form file.

4.3.1 Request Body

The following example is a protocol client request to cancel the application of a digital signature (2) to a form file, as specified in section [2.2.1.2.3](#).

```
POST /_layouts/Signature.FormServer.aspx HTTP/1.1
Content-Type: text/xml
Host: contoso

<SignCancel><EventLog>1
8;5;872b5f4e78e1493582a00f161142fe62_be2940ab07fd4251bbcdf0041d2bc5da;AHLZ4GUVVKKSISFM2IIBTIR
CKQRSCl2TJfKEKUZPKY2C6RCTJfDS6RSPKJGVGL2UIVGVATCBKRCS4WCTJYVQOCRKNJG4STIHFLVE6BUKVTE6N2CJ54W
OSZYGNLWQT3QPBUUMUBYM5GEMQSIGY3EQ4Y;0;;%2Fsites%2Fv4%2Fdsig%2Fforms%2Ftemplate.xsn;http%3A%2F
```

```
%2Fcontoso%2Fsites%2Fv4%2Fdsig%2Fforms%2Ftemplate.xsn;;http%3A%2F%2Fcontoso%2Fsites%2Fv4;;1;1;0;1;0;0;633997851883411000;;FormControl1;0;1033;1033;0;13;Op0ZEFdM7QYQwAg6724FORnJu727/iMxjDBCQU2UHqX8B/P+trBObL+1XnQzZ/s068f9gUYZp1YxHRgsxi3A0w==|633997856567555876</EventLog><DataDefinition>group1</DataDefinition></SignCancel>
```

4.3.2 Response Body

The following example is a protocol server response to cancel the application of a digital signature (2) to a form file, as specified in section [2.2.2.2.3](#). The string values of **ResponseData** and **PageStateData**, as specified in section [2.2.2.2](#), are empty in the message example. The required CRLF characters are present.

```
HTTP/1.1 200 OK
Cache-Control: private
Content-Type: text/html; charset=utf-8
Vary: Accept-Encoding
Content-Length: 6
```

```
Ag==
```

5 Security

5.1 Security Considerations for Implementers

The protocol server and protocol client both encrypt data stored on the protocol server when applying a digital signature (2) to a form file. A digital signature (2) is only as secure as the algorithms used to generate its encrypted elements. If an algorithm used to generate encrypted elements of the digital signature (2) is compromised, the integrity of the digital signature (2) can no longer be verified.

Security considerations for digitally signed form files can be found in [\[MS-IPFFX\]](#) section 4.1.

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® InfoPath® 2010
- Microsoft® InfoPath® 15 Technical Preview
- Microsoft® SharePoint® Server 2010
- Microsoft® SharePoint® Server 15 Technical Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 3.3.5.2:](#) SharePoint Server 2010 returns an HTTP OK response with a text/html response body containing an error message.

[<2> Section 3.3.5.2:](#) SharePoint Server 2010 returns an HTTP OK response with a text/html response body containing an error message.

[<3> Section 3.3.5.3:](#) SharePoint Server 2010 returns an HTTP OK response with a text/html response body containing an error message.

[<4> Section 3.3.5.3:](#) SharePoint Server 2010 returns an HTTP OK response with a text/html response body containing an error message.

7 Change Tracking

This section identifies changes that were made to the [MS-IPDSP] protocol document between the June 2011 and January 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.2.2.1.1 ErrorCode	Clarified the description of decoded value to indicate a failure.	N	Content updated.
2.2.2.2.1.3 PageStateData	Clarified the string value when the protocol server persists properties.	N	New content added.
2.2.2.2.2.1 ErrorCode	Clarified the description of decoded value to indicate a failure.	N	Content updated.
3.2.5 Message Processing Events and Sequencing Rules	Clarified valid message request sequences for the protocol client.	Y	Content updated.
3.3.5.1 Process the request for Retrieve Form File Hash	Revised initial error processing requirements.	Y	Content updated.
3.3.5.2 Process the request for Add Signature Value and Context	Revised initial error processing requirements.	Y	Content updated.
3.3.5.2 Process the request for Add Signature Value and Context	Added description of product response in case of error.	N	New product behavior note added.
3.3.5.3 Process the request for Cancel Digital Signature	Revised initial error processing requirements.	Y	Content updated.
3.3.5.3	Added description of product	N	New product

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
Process the request for Cancel Digital Signature	response in case of error.		behavior note added.
6 Appendix A: Product Behavior	Updated the list of applicable product versions.	N	Content updated.

Preliminary

8 Index

A

[Abstract data model](#) 14
 [client](#) 15
 [server](#) 15
[Applicability](#) 8

C

[Capability negotiation](#) 8
[Change tracking](#) 24

Client

[abstract data model](#) 15
[higher-layer triggered events](#) 15
[initialization](#) 15
[message processing](#) 15
[other local events](#) 15
[overview](#) 14
[sequencing rules](#) 15
[timer events](#) 15
[timers](#) 15

D

[Data model - abstract](#) 14
 [client](#) 15
 [server](#) 15
[Directory service schema elements](#) 13

E

[Elements - directory service schema](#) 13

Examples

[Messages for add signature value and context](#) 19
[messages for request for cancel digital signature](#)
 20
[messages for retrieve form file hash](#) 19
[overview](#) 19

F

[Failure response message](#) 12
[Fields - vendor-extensible](#) 8

G

[Glossary](#) 5

H

[Higher-layer triggered events](#) 14
 [client](#) 15
 [server](#) 16

I

[Implementer - security considerations](#) 22
[Index of security parameters](#) 22

[Informative references](#) 6
[Initialization](#) 14
 [client](#) 15
 [server](#) 16
[Introduction](#) 5

L

[Local events](#) 14

M

[Message processing](#) 14
 [client](#) 15
 [server](#) 16
Message processing - server
 [process the request for add signature value and context](#) 16
 [process the request for cancel digital signature](#)
 17
 [process the request for retrieve form file hash](#) 16

Messages

[failure response](#) 12
[request entity body details](#) 9
[request for add signature value and context](#) 11
[request for cancel digital signature](#) 11
[request for retrieve form file hash](#) 9
[request metadata](#) 9
[Request Syntax](#) 9
[response body syntax](#) 12
[response for add signature value and context](#) 13
[response for cancel digital signature](#) 13
[response for retrieve form file hash](#) 12
[response status syntax](#) 12
[Response Syntax](#) 12
[success response](#) 12
[transport](#) 9
[Messages for add signature value and context example](#) 19
[Messages for request for cancel digital signature example](#) 20
[Messages for retrieve form file hash example](#) 19

N

[Normative references](#) 6

O

Other local events
 [client](#) 15
 [server](#) 18
[Overview \(synopsis\)](#) 6

P

[Parameters - security index](#) 22
[Preconditions](#) 7

[Prerequisites](#) 7
[Product behavior](#) 23

R

References

[informative](#) 6
[normative](#) 6
[Relationship to other protocols](#) 7
[Request entity body details message](#) 9
[Request for add signature value and context message](#) 11
[Request for cancel digital signature message](#) 11
[Request for retrieve form file hash message](#) 9
[Request metadata message](#) 9
[Request Syntax message](#) 9
[Response body syntax](#) 12
[Response for add signature value and context message](#) 13
[Response for cancel digital signature message](#) 13
[Response for retrieve form file hash message](#) 12
[Response status syntax](#) 12
[Response Syntax message](#) 12

S

[Schema elements - directory service](#) 13

Security

[implementer considerations](#) 22
[parameter index](#) 22
[Sequencing rules](#) 14
[client](#) 15
[server](#) 16

Server

[abstract data model](#) 15
[higher-layer triggered events](#) 16
[initialization](#) 16
[message processing](#) 16
[other local events](#) 18
[overview](#) 14
[sequencing rules](#) 16
[timer events](#) 18
[timers](#) 15
Server - message processing
[process the request for add signature value and context](#) 16
[process the request for cancel digital signature](#) 17
[process the request for retrieve form file hash](#) 16
[Standards assignments](#) 8
[Success response message](#) 12

T

[Timer events](#) 14
[client](#) 15
[server](#) 18
[Timers](#) 14
[client](#) 15
[server](#) 15
[Tracking changes](#) 24
[Transport](#) 9

[Triggered events - higher layer](#) 14
Triggered events - higher-layer
[client](#) 15
[server](#) 16

V

[Vendor-extensible fields](#) 8
[Versioning](#) 8