

# [MS-IPFF]: InfoPath Form Template Format

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.01	Major	Initial Availability
06/27/2008	1.0	Minor	Revised and edited technical content
07/13/2009	1.01	Major	Revised and edited the technical content
08/28/2009	1.02	Editorial	Revised and edited the technical content
11/06/2009	1.03	Editorial	Revised and edited the technical content
02/19/2010	2.0	Minor	Updated the technical content
03/31/2010	2.01	Editorial	Revised and edited the technical content
04/30/2010	2.02	Editorial	Revised and edited the technical content
06/07/2010	2.03	Editorial	Revised and edited the technical content
06/29/2010	2.04	Editorial	Changed language and formatting in the technical content.
07/23/2010	2.05	Minor	Clarified the meaning of the technical content.
09/27/2010	2.05	No change	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	2.05	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	2.05	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	2.05	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	2.05	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	2.6	Minor	Clarified the meaning of the technical content.
04/11/2012	2.6	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	2.6	No change	No changes to the meaning, language, or formatting of the technical content.
09/12/2012	2.6	No change	No changes to the meaning, language, or formatting of the technical content.
10/08/2012	2.6	No change	No changes to the meaning, language, or formatting of the technical content.
02/11/2013	2.6	No change	No changes to the meaning, language, or formatting of

Date	Revision History	Revision Class	Comments
			the technical content.

# Table of Contents

<b>1 Introduction</b>	<b>12</b>
1.1 Glossary	12
1.2 References	14
1.2.1 Normative References	14
1.2.2 Informative References	15
1.3 Structure Overview (Synopsis)	16
1.3.1 Form Definition File (XSF)	16
1.3.2 XML Schema Files (XSD)	17
1.3.3 Form View Files (XSLT)	17
1.3.4 Print View Files (XSLT)	22
1.3.5 Submit Files (XML)	23
1.3.6 Template.XML File	23
1.3.7 Upgrade.XSL File	23
1.3.8 Resource Files	23
1.3.9 Unused Files	24
1.4 Relationship to Protocols and Other Structures	24
1.5 Applicability Statement	24
1.6 Versioning and Localization	24
1.7 Vendor-Extensible Fields	25
<b>2 Structures</b>	<b>26</b>
2.1 The InfoPath Form Template Format	26
2.1.1 manifest.xsf	26
2.1.2 primaryschema.xsd	26
2.1.3 view.xsl	26
2.1.4 sampledata.xml	26
2.1.5 template.xml	26
2.1.6 secondaryschema.xsd	26
2.1.7 submitdata.xml	26
2.1.8 upgrade.xsl	27
2.1.9 merge.xsl	27
2.1.10 secondaryschema_offline.xml	27
2.1.11 Business Object	27
2.1.12 script.js	27
2.1.13 script.vbs	27
2.1.14 importerrors.xml	27
2.1.15 irm_template	27
2.1.16 Resource Files	27
2.2 Form Definition File (XSF) Specification	27
2.2.1 xdTitle	33
2.2.2 xdViewName	34
2.2.3 xdRoleName	35
2.2.4 xdYesNo	35
2.2.5 xdEnabledDisabled	38
2.2.6 xdManualAuto	38
2.2.7 xdExpressionLiteral	39
2.2.8 xdFileName	39
2.2.9 xdScriptLanguage	40
2.2.10 xdSolutionVersion	40
2.2.11 xdEmptyString	41

2.2.12	xdErrorMessage	41
2.2.13	xdDesignMode	42
2.2.14	xdTrustLevel	42
2.2.15	xdSignedDataBlockName	43
2.2.16	xdSignedDataBlockMessage	43
2.2.17	xdSignatureRelationEnum	43
2.2.18	xdHWSname	44
2.2.19	xdHWScaption	44
2.2.20	xDocumentClass	45
2.2.21	schemaErrorMessages	48
2.2.22	override	48
2.2.23	applicationParameters	49
2.2.24	solutionProperties	50
2.2.25	featureRestrictions	50
2.2.26	save (1)	51
2.2.27	exportToWeb	52
2.2.28	exportToExcel	52
2.2.29	print	53
2.2.30	sendMail	53
2.2.31	autoRecovery	53
2.2.32	query (1)	54
2.2.33	scripts	55
2.2.34	script	55
2.2.35	dataObjects	56
2.2.36	dataObject	56
2.2.37	query (2)	57
2.2.38	adoAdapter	58
2.2.39	webServiceAdapter	59
2.2.40	hwsAdapter	60
2.2.41	operation	60
2.2.42	hwsOperation	61
2.2.43	input	62
2.2.44	partFragment	62
2.2.45	xmlFileAdapter	63
2.2.46	sharepointListAdapter	64
2.2.47	field (1)	65
2.2.48	davAdapter	65
2.2.49	folderURL	66
2.2.50	fileName	67
2.2.51	emailAdapter	67
2.2.52	to	69
2.2.53	cc	70
2.2.54	bcc	70
2.2.55	subject	71
2.2.56	intro	71
2.2.57	attachmentFileName	72
2.2.58	submitToHostAdapter	72
2.2.59	dataAdapters	73
2.2.60	documentSchemas	74
2.2.61	documentSchema	74
2.2.62	customValidation	75
2.2.63	errorCondition	75
2.2.64	errorMessage (1)	76

2.2.65	domEventHandlers.....	77
2.2.66	domEventHandler.....	78
2.2.67	importParameters.....	79
2.2.68	importSource.....	79
2.2.69	listProperties.....	80
2.2.70	fields.....	80
2.2.71	field (2).....	81
2.2.72	submit.....	83
2.2.73	submitAction (1).....	85
2.2.74	successMessage.....	85
2.2.75	errorMessage (2).....	86
2.2.76	useHttpHandler.....	86
2.2.77	useScriptHandler.....	87
2.2.78	useQueryAdapter.....	87
2.2.79	onLoad.....	87
2.2.80	save (2).....	88
2.2.81	roles.....	88
2.2.82	role.....	89
2.2.83	membership.....	90
2.2.84	getUserNameFromData.....	90
2.2.85	userName.....	91
2.2.86	group.....	91
2.2.87	hwsWorkflow.....	92
2.2.88	location.....	92
2.2.89	allowedActions.....	93
2.2.90	action.....	93
2.2.91	allowedTasks.....	94
2.2.92	task.....	94
2.2.93	fileNew.....	95
2.2.94	initialXmlDocument.....	95
2.2.95	customCategory.....	96
2.2.96	package.....	97
2.2.97	files.....	97
2.2.98	file.....	98
2.2.99	fileProperties.....	98
2.2.100	property.....	99
2.2.101	permissions.....	100
2.2.102	allowedControl.....	101
2.2.103	externalViews.....	101
2.2.104	externalView.....	102
2.2.105	attributeData.....	103
2.2.106	button (1).....	103
2.2.107	chooseFragment.....	105
2.2.108	editWith.....	106
2.2.109	unboundControls.....	108
2.2.110	button (2).....	109
2.2.111	editing.....	110
2.2.112	masterDetail.....	110
2.2.113	fragmentToInsert.....	111
2.2.114	mainpane.....	111
2.2.115	printSettings.....	112
2.2.116	header.....	115
2.2.117	footer.....	115

2.2.118	toolbar	116
2.2.119	menu	116
2.2.120	menuArea	117
2.2.121	taskpane	118
2.2.122	views	119
2.2.123	view	120
2.2.124	xmlToEdit	121
2.2.125	documentSignatures	122
2.2.126	signedDataBlock	123
2.2.127	message	124
2.2.128	documentVersionUpgrade	124
2.2.129	useTransform	124
2.2.130	extensions	125
2.2.131	extension	126
2.2.132	ruleSetAction	126
2.2.133	rule	127
2.2.134	submitAction (2)	128
2.2.135	exitRuleSet	129
2.2.136	dialogBoxMessageAction	129
2.2.137	dialogBoxExpressionAction	129
2.2.138	switchViewAction	130
2.2.139	assignmentAction	130
2.2.140	queryAction	131
2.2.141	openNewDocumentAction	131
2.2.142	closeDocumentAction	131
2.2.143	ruleSet	132
2.2.144	ruleSets	132
2.2.145	calculations	133
2.2.146	calculatedField	134
2.2.147	Form Definition File (XSF) Extension Specification	134
2.2.147.1	serverCommandActionType	136
2.2.147.2	emailAttachmentType	137
2.2.147.3	compatibilityModesType	137
2.2.147.4	solutionType	138
2.2.147.5	formDescriptionType	138
2.2.147.6	formLocaleType	138
2.2.147.7	managedCodeType	139
2.2.147.8	solutionDefinition	139
2.2.147.9	server	141
2.2.147.10	toolbar	141
2.2.147.11	commands	142
2.2.147.12	command	143
2.2.147.13	solutionPropertiesExtension	143
2.2.147.14	install	144
2.2.147.15	wss	145
2.2.147.16	contentType	146
2.2.147.17	contentTypeTemplate	146
2.2.147.18	share	147
2.2.147.19	mail	147
2.2.147.20	admin	148
2.2.147.21	mergedPrintView	148
2.2.147.22	includedViews	149
2.2.147.23	includedView	149

2.2.147.24	offline .....	150
2.2.147.25	listPropertiesExtension .....	150
2.2.147.26	fieldsExtension .....	151
2.2.147.27	fieldExtension .....	151
2.2.147.28	dataConnections .....	152
2.2.147.29	useHttpHandlerExtension .....	153
2.2.147.30	connectoid.....	153
2.2.147.31	davAdapterExtension .....	154
2.2.147.32	adoAdapterExtension .....	155
2.2.147.33	webServiceAdapterExtension .....	156
2.2.147.34	relativeQuery .....	156
2.2.147.35	emailAdapterExtension.....	157
2.2.147.36	xmlFileAdapterExtension .....	158
2.2.147.37	sharepointListAdapterExtension.....	158
2.2.147.38	sendByMail .....	159
2.2.147.39	warnings .....	160
2.2.147.40	warning.....	160
2.2.147.41	viewsExtension .....	161
2.2.147.42	viewExtension .....	161
2.2.147.43	xmlToEditExtension .....	162
2.2.147.44	preview.....	163
2.2.147.45	autoUpdatePrompt .....	163
2.2.147.46	inputScopes.....	164
2.2.147.47	inputScope .....	164
2.2.147.48	words .....	165
2.2.147.49	word .....	165
2.2.147.50	managedCode.....	166
2.2.147.51	submit .....	167
2.2.147.52	submitAction .....	168
2.2.147.53	successMessage .....	168
2.2.147.54	errorMessage.....	168
2.2.147.55	featureRestrictionsExtension.....	169
2.2.147.56	exportToPDFForXPS .....	169
2.3	XML Schema Files (XSD) Specification .....	169
2.3.1	Control Representation .....	170
2.3.1.1	Button Control.....	171
2.3.1.2	Check Box Control .....	171
2.3.1.3	Contact Selector Control .....	171
2.3.1.4	Date Picker Control .....	172
2.3.1.5	Drop-Down List Control .....	172
2.3.1.6	Expression Box Control.....	173
2.3.1.7	File Attachment Control .....	173
2.3.1.8	Hyperlink Control.....	174
2.3.1.9	List Box Control .....	174
2.3.1.10	Option Button Control.....	174
2.3.1.11	Repeating Section Control .....	175
2.3.1.12	Repeating Table Control.....	176
2.3.1.13	Rich Text Box Control .....	176
2.3.1.14	Section Control and Optional Section Control.....	177
2.3.1.15	Table Control.....	177
2.3.1.16	Text Box Control .....	177
2.4	Form View Files (XSLT) Specification .....	178
2.4.1	View Representation .....	178



2.4.1.1	View Syntax.....	179
2.4.1.2	XSL Root Template .....	184
2.4.1.3	XSL Root Template Style Sheets.....	185
2.4.1.4	Control Data Formatting .....	207
2.4.1.5	Button Control.....	208
2.4.1.6	Check Box Control .....	213
2.4.1.7	Contact Selector Control.....	214
2.4.1.8	Date Picker Control .....	218
2.4.1.9	Drop-Down List Control .....	223
2.4.1.10	Expression Box Control .....	229
2.4.1.11	File Attachment Control .....	232
2.4.1.12	Hyperlink Control .....	232
2.4.1.13	List Box Control .....	234
2.4.1.14	Option Button Control.....	237
2.4.1.15	Repeating Section Control .....	238
2.4.1.16	Repeating Table Control.....	240
2.4.1.17	Rich Text Box Control.....	242
2.4.1.18	Section Control and Optional Section Control.....	243
2.4.1.19	Table Control.....	249
2.4.1.20	Text Box Control.....	250
2.4.1.21	Ignored Controls.....	258
2.4.1.22	Invalid Controls .....	258
2.4.1.23	Invalid Constructs.....	259
2.4.2	Control-Specific Attributes.....	259
2.4.2.1	action.....	261
2.4.2.2	allownonmatching .....	262
2.4.2.3	autoAdvance .....	262
2.4.2.4	auxDom .....	262
2.4.2.5	backgroundPicture .....	263
2.4.2.6	binding.....	263
2.4.2.7	bindingProperty .....	264
2.4.2.8	bindingType .....	264
2.4.2.9	boundProp .....	265
2.4.2.10	CtrlId .....	265
2.4.2.11	datafmt .....	266
2.4.2.12	disableEditing .....	272
2.4.2.13	enabledProperty .....	272
2.4.2.14	enabledValue .....	272
2.4.2.15	ghosted .....	273
2.4.2.16	ictID.....	273
2.4.2.17	ictVersion .....	273
2.4.2.18	inline.....	273
2.4.2.19	innerCtrl .....	273
2.4.2.20	inputscope .....	274
2.4.2.21	inputScopeId.....	274
2.4.2.22	layoutText .....	274
2.4.2.23	linkedToMaster .....	274
2.4.2.24	masterID .....	275
2.4.2.25	masterName .....	275
2.4.2.26	num .....	275
2.4.2.27	offValue.....	275
2.4.2.28	onValue .....	276
2.4.2.29	postbackModel.....	276

2.4.2.30	ref .....	277
2.4.2.31	SignatureBlock .....	277
2.4.2.32	SignedSectionDisplaySignatures .....	278
2.4.2.33	SignedSectionName .....	278
2.4.2.34	value .....	278
2.4.2.35	xctname .....	279
2.4.2.36	xmlToEdit .....	280
2.4.3	XSL Function Extensions .....	280
2.4.3.1	msxsl .....	281
2.4.3.1.1	string-compare .....	281
2.4.3.2	xdDate .....	281
2.4.3.2.1	AddDays .....	281
2.4.3.2.2	AddSeconds .....	281
2.4.3.2.3	Now .....	282
2.4.3.2.4	Today .....	282
2.4.3.3	xdEnvironment .....	282
2.4.3.3.1	IsBrowser .....	282
2.4.3.3.2	IsMobile .....	282
2.4.3.4	xdFormatting .....	282
2.4.3.5	xdImage .....	282
2.4.3.6	xdMath .....	282
2.4.3.6.1	Avg .....	283
2.4.3.6.2	Eval .....	283
2.4.3.6.3	Max .....	283
2.4.3.6.4	Min .....	283
2.4.3.6.5	Nz .....	284
2.4.3.7	xdUser .....	284
2.4.3.7.1	get-UserName .....	284
2.4.3.8	xdUtil .....	284
2.4.3.8.1	Match .....	284
2.4.3.9	xdXDocument .....	284
2.4.3.9.1	get-dom .....	285
2.4.3.9.2	getDOM .....	285
2.4.3.9.3	getnamednodeproperty .....	285
2.5	Print View Files (XSLT) Specification .....	285
2.6	Submit Files (XML) Specification .....	285
2.6.1	myFields .....	286
2.6.2	dataFields .....	286
2.7	Template.XML Specification .....	287
2.8	Upgrade.XSL Specification .....	287
2.8.1	MSXSL:Node-Set() .....	287
<b>3</b>	<b>Structure Examples .....</b>	<b>288</b>
3.1	The InfoPath Form Template Format .....	288
3.1.1	Simple Form Template .....	288
3.1.2	Complex Form Template .....	288
3.2	Form Definition File (XSF) Examples .....	289
3.2.1	XSF Extension Examples .....	292
3.3	XML Schema Files (XSD) Examples .....	292
3.4	Form View Files (XSL) Examples .....	293
3.4.1	Control representation .....	293
3.4.1.1	Button Control .....	294
3.4.1.2	Check Box Control .....	295

3.4.1.3	Contact Selector Control .....	296
3.4.1.4	Date Picker Control .....	296
3.4.1.5	Drop-Down List Control .....	298
3.4.1.6	Expression Box Control.....	301
3.4.1.7	File Attachment Control .....	302
3.4.1.8	Hyperlink Control.....	302
3.4.1.9	List Box Control.....	302
3.4.1.10	Option Button Control.....	305
3.4.1.11	Repeating Section Control .....	306
3.4.1.12	Repeating Table Control.....	306
3.4.1.13	Rich Text Box Control.....	310
3.4.1.14	Section Control and Optional Section Control.....	310
3.4.1.15	Table Control.....	313
3.4.1.16	Text Box Control.....	314
3.4.2	Control-Specific Attributes .....	316
3.4.3	XSL Function Extensions .....	322
3.5	Print View Files (XSLT) Examples .....	326
3.6	Submit Files (XML) Examples .....	327
3.7	Template.XML Examples .....	328
3.8	Upgrade.XSL Examples.....	328
3.8.1	Upgrade.XSL Example.....	329
3.8.2	MSXSL:Node-Set() Example .....	331
<b>4</b>	<b>Security Considerations.....</b>	<b>332</b>
4.1	The InfoPath Form Template Format .....	332
4.2	Template.XML Specification.....	332
<b>5</b>	<b>Appendix A: Full XML Schemas.....</b>	<b>333</b>
5.1	The InfoPath XSF XSD .....	333
5.2	The InfoPath XSF2 XSD .....	361
<b>6</b>	<b>Appendix B: Product Behavior .....</b>	<b>371</b>
<b>7</b>	<b>Change Tracking.....</b>	<b>372</b>
<b>8</b>	<b>Index .....</b>	<b>373</b>

# 1 Introduction

This document specifies the file format for InfoPath form templates. A form template (.xsn) file contains several files that are used to represent the data fields, visualization and behavior of a specific type of electronic form. For example, an expense report form template could define the data that expense report forms need to contain, such as the total amount and date filed, which data is optional, and how the data fields are be presented to the person filling out the report.

A form server understanding the format can parse and retrieve the files inside the form template (.xsn) file. The form server can then use the information to render and edit a new or existing form file in a Web browser.

In other words, a form server needs to understand the two essential components of a form:

- The form template (.xsn) file used to render and edit the data.
- The form file used to store the data.

Details on how form files are associated with a form template are described in [\[MS-IPFFX\]](#).

Sections 1.7 and 2 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**Augmented Backus-Naur Form (ABNF)**  
**GUID**  
**Hypertext Transfer Protocol (HTTP)**  
**language code identifier (LCID)**  
**Unicode**  
**Universal Naming Convention (UNC)**  
**user agent**  
**UTF-16**  
**XML**

The following terms are defined in [\[MS-OFCGLOS\]](#):

**ActiveX Data Objects (ADO)**  
**ADO**  
**ASP.NET control**  
**assembly**  
**attachment**  
**background color**  
**blind carbon copy (bcc) recipient**  
**Boolean**  
**border formatting**  
**browser-compatible form template**  
**browser-enabled form template**  
**built-in control**  
**business object**  
**cabinet (.cab) file**  
**carbon copy (cc) recipient**  
**class identifier (CLSID)**

**column**  
**connection string**  
**control**  
**data adapter**  
**data connection**  
**data connection library**  
**data source**  
**digital signature**  
**empty string**  
**Extended Backus-Naur Form (EBNF)**  
**file**  
**form**  
**form definition (.xsf) file**  
**form file**  
**form library**  
**form security level**  
**form server**  
**form template**  
**form template (.xsn) file**  
**form view**  
**friendly name**  
**group**  
**header field**  
**HTTP method**  
**Hypertext Markup Language (HTML)**  
**Information Rights Management (IRM)**  
**left-to-right**  
**list**  
**list view**  
**locale**  
**lookup field**  
**main data connection**  
**main data source**  
**MIME type**  
**mobile device**  
**named property**  
**offline**  
**postback**  
**print view**  
**query**  
**red-green-blue (RGB)**  
**repeating group**  
**rich text**  
**right-to-left**  
**root element**  
**rule**  
**secondary data connection**  
**secondary data source**  
**site**  
**site collection**  
**SOAP action**  
**SOAP message**  
**SQL statement**  
**Structured Query Language (SQL)**  
**submit**

symbol file  
toolbar  
Uniform Resource Locator (URL)  
Uniform Resource Name (URN)  
Universal Data Connection (.udc, .udcx) file  
user name  
Web Distributed Authoring and Versioning Protocol (WebDAV)  
web service  
Web Services Description Language (WSDL)  
WebDAV server  
XML document  
XML element  
XML fragment  
XML node  
XML schema  
XML schema definition (XSD)  
XML schema document  
XPath expression  
XSL  
XSL Transformation (XSLT)

The following terms are specific to this document:

**custom control:** A component of an InfoPath form, such as a template part or ActiveX® control, that is not included with Microsoft® InfoPath® by default.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[CSS-LEVEL1] Lie, H. and Bos, B., "Cascading Style Sheets: W3C Recommendation", REC CSS1-19990111, January 1999, <http://www.w3.org/TR/1999/REC-CSS1-19990111>

[CSS-LEVEL2] Bos, B., Celik, T., Hickson, I., and Lie, H., "Cascading Style Sheets Level 2 Revision 1 (CSS2.1) Specification: W3C Candidate Recommendation", July 2007, <http://www.w3.org/TR/2007/CR-CSS21-20070719/>

[HTML] World Wide Web Consortium, "HTML 4.01 Specification", December 1999, <http://www.w3.org/TR/html4/>

[ISO-8601] International Organization for Standardization, "Data Elements and Interchange Formats - Information Interchange - Representation of Dates and Times", ISO/IEC 8601:2004, December

2004,  
<http://www.iso.org/iso/en/CatalogueDetailPage.CatalogueDetail?CSNUMBER=40874&ICS1=1&ICS2=140&ICS3=30>

**Note** There is a charge to download the specification.

[MC-MCF] Microsoft Corporation, "Microsoft Cabinet Format", <http://msdn.microsoft.com/en-us/library/bb417343.aspx>

[MC-NLSIP] Microsoft Corporation, "National Language Support (NLS) API Reference", <http://msdn.microsoft.com/en-us/goglobal/bb896001.aspx>

[MS-IPFFX] Microsoft Corporation, "[InfoPath Form File Format](#)".

[MS-LCID] Microsoft Corporation, "[Windows Language Code Identifier \(LCID\) Reference](#)".

[MS-UDCX] Microsoft Corporation, "[Universal Data Connection 2.0 XML File Format](#)".

[MS-WSSFO] Microsoft Corporation, "[Windows SharePoint Services \(WSS\): File Operations Database Communications Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2781] Hoffman, P., and Yergeau, F., "UTF-16, an encoding of ISO 10646", RFC 2781, February 2000, <http://www.ietf.org/rfc/rfc2781.txt>

[SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>

[W3C-XML] Bray, T., Paoli, J., Sperberg-McQueen, C.M., Maler, E., Yergeau, F., Eds., "Extensible Markup Language (XML) 1.1 (Second Edition)", W3C Recommendation, August 2006, <http://www.w3.org/TR/2006/REC-xml11-20060816/>

[W3C-XSLT] Clark, J., Ed., "XSL Transformations (XSLT) Version 1.0", W3C Recommendation, November 1999, <http://www.w3.org/TR/1999/REC-xslt-19991116>

[XML Namespaces] Bray, T., Hollander, D., and Layman, A., "Namespaces in XML", W3C Recommendation, January 1999, <http://www.w3.org/TR/1999/REC-xml-names-19990114/>

[XMLDSig] Bartel, M., Boyer, J., Fox, B., et al., "XML-Signature Syntax and Processing", W3C Recommendation, February 2002, <http://www.w3.org/TR/2002/REC-xmlsig-core-20020212/>

[XMLSCHEMA1] Thompson, H.S., Beech, D., Maloney, M., Eds., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XPATh] Clark, J. and DeRose, S., "XML Path Language (XPath), Version 1.0", W3C Recommendation, November 1999, <http://www.w3.org/TR/xpath>

## 1.2.2 Informative References

[MSDN-XPATh] Microsoft Corporation, "Microsoft XPath Extension Functions", <http://msdn.microsoft.com/en-us/library/ms256453.aspx>

[MSDN-XSF] Microsoft Corporation, "InfoPath 2007 XSF Schema Reference", <http://msdn.microsoft.com/en-us/library/bb265224.aspx>

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".


[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

### 1.3 Structure Overview (Synopsis)

The InfoPath form template format is a **form template (.xsn) file**. A form template (.xsn) file is a **cabinet (.cab) file**, as described in [\[MC-MCF\]](#), that contains files used by a **form server** to render and edit new or existing **form files** in a Web browser. Form files are used to store the data of a **form** that has been filled out.

Certain files need to be included within the form template (.xsn) file for a form server to correctly open or create a form file. Other files are included only in certain scenarios.

The following figure illustrates a typical form template (.xsn) file.

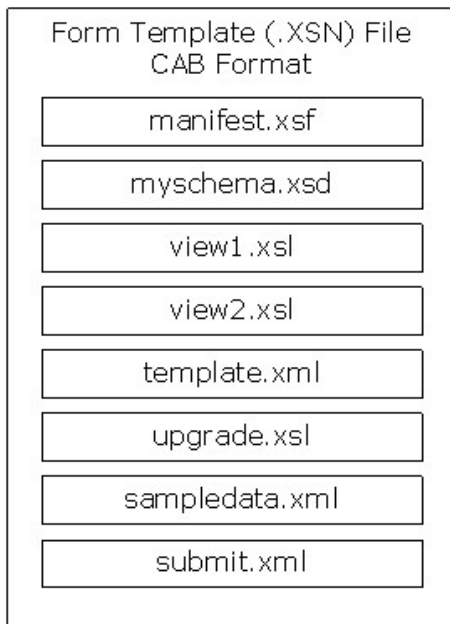

**Figure 1: A typical form template (.xsn) file**

The following sections describe the files that can be found in a form template (.xsn) file and how they are used to render a form.

The form template (.xsn) file is specified in section [2.1](#). Examples are provided in section [3.1](#).

#### 1.3.1 Form Definition File (XSF)

The **form definition (.xsf) file**, manifest.xsf, specifies information about the **form template**, including the following:

- The **list (1)** of files that comprise the form template (.xsn) file and the relationships between them.
- Properties of the form template, such as deployment information and user interface customizations.



- Properties of certain **controls** within the form template. For example, a control can have associated **rules (1)** that perform tasks automatically based on events and values.

The form definition (.xsf) file is specified in section [2.2](#). Examples are provided in section [3.2](#).

### 1.3.2 XML Schema Files (XSD)

There are one or more **XML schema documents** in a form template (.xsn) file:

- Typically there is one primary XSD file, often called myschema.xsd, which specifies the **XML schema** that all form files based on the form template conform to.
- One or more secondary XSD files that specify the XML schemas for **data connections (1)** used in the form template.

The form definition (.xsf) file specifies which XSD file is the primary one and which ones are associated with data connections (1).

The structure of the primary XSD file is specified in section [2.3](#). The function of each XSD file is specified in section [2.2.60](#). Examples are provided in section [3.3](#).

### 1.3.3 Form View Files (XSLT)

A **form view** is a specific visualization of a form file in a Web browser. It specifies what controls are used to represent the fields in the form and how they are laid out. It also provides information to the form server about the editing behavior for each control. For example, it provides information about what actions to take when a particular field's value changes.


A form view is represented by an **XSL Transformation (XSLT)** file, which uses the .XSL file extension. There are one or more XSLT files in the form template:

- One default XSLT file, for example view1.xsl, used to render a form file when it is first opened or created.
- Other XSLT files, for example view2.xsl, that can be used to render the form as it is edited.




The default XSLT file is specified in the form definition (.xsf) file.

The contents of an XSLT file are used to transform the data in a form file into **HTML**, so that the form can be rendered and edited in a Web browser. The resulting HTML visualization consists of HTML used to lay out and represent the controls and informative text. The HTML for a control also contains properties specifying its behavior.




The following table lists the controls that can be used in a form. Controls are usually tied to specific fields in the form file and are used to edit such fields. Some controls, as noted in the table, are not the direct representation of any particular fields.




Control	Description and sample visual representation
Button	<p>A control used to execute an action. It is not tied to a field.</p> <p>The following figure illustrates a typical representation of a button control.</p> <div data-bbox="428 1608 557 1654" style="text-align: center;">  </div>

Control	Description and sample visual representation																																																								
	<p><b>Figure 2: A button control</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.5</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.1</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>																																																								
Check Box	<p>A control that allows users to set yes/no or true/false values by adding or removing a check mark from a small square box.</p> <p>The following figure illustrates a typical representation of a check box control.</p> <div data-bbox="414 472 779 609" style="text-align: center;"> <input type="checkbox"/> Field 1      <input checked="" type="checkbox"/> Field 1  <input type="checkbox"/> Field 2      <input type="checkbox"/> Field 2  <input type="checkbox"/> Field 3      <input type="checkbox"/> Field 3 </div> <p><b>Figure 3: A set of check box controls</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.6</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.2</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>																																																								
Contact Selector	<p>A control that allows users to select one or more contacts from a protocol server user list.</p> <p>The following figure illustrates a typical representation of a contact selector control.</p> <div data-bbox="422 892 982 955" style="text-align: center;"> </div> <p><b>Figure 4: A contact selector control</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.7</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.3</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>																																																								
Date Picker	<p>A control that contains a box where users can type dates and a calendar button that allows users to select a date.</p> <p>The following figure illustrates a typical representation of a date picker control.</p> <div data-bbox="406 1260 917 1617" style="text-align: center;"> <input type="text"/>   <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="7">February, 2008</th> </tr> <tr> <th>S</th> <th>M</th> <th>T</th> <th>W</th> <th>T</th> <th>F</th> <th>S</th> </tr> </thead> <tbody> <tr> <td>27</td> <td>28</td> <td>29</td> <td>30</td> <td>31</td> <td>1</td> <td>2</td> </tr> <tr> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> <td>9</td> </tr> <tr> <td>10</td> <td>11</td> <td>12</td> <td>13</td> <td>14</td> <td>15</td> <td>16</td> </tr> <tr> <td>17</td> <td>18</td> <td>19</td> <td style="border: 2px solid orange;">20</td> <td>21</td> <td>22</td> <td>23</td> </tr> <tr> <td>24</td> <td>25</td> <td>26</td> <td>27</td> <td>28</td> <td>29</td> <td>1</td> </tr> <tr> <td colspan="7">Today is Wednesday, February 20, 2008</td> </tr> </tbody> </table> </div> <p><b>Figure 5: A date picker control</b></p>	February, 2008							S	M	T	W	T	F	S	27	28	29	30	31	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	1	Today is Wednesday, February 20, 2008						
February, 2008																																																									
S	M	T	W	T	F	S																																																			
27	28	29	30	31	1	2																																																			
3	4	5	6	7	8	9																																																			
10	11	12	13	14	15	16																																																			
17	18	19	20	21	22	23																																																			
24	25	26	27	28	29	1																																																			
Today is Wednesday, February 20, 2008																																																									

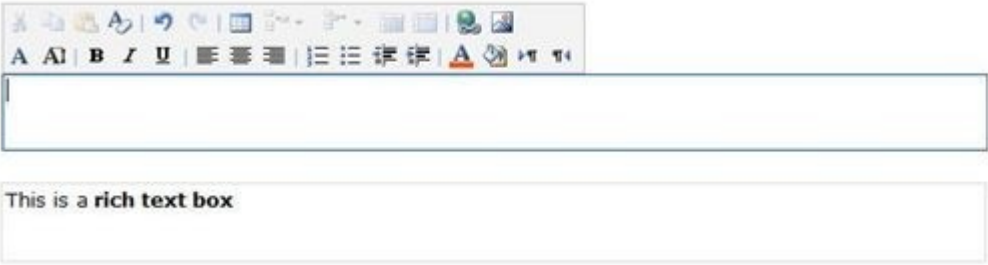Control	Description and sample visual representation
	<p>The visualization and properties of the control are specified in section <a href="#">2.4.1.8</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.4</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
<p>Drop-Down List Box</p>	<p>A control that presents users with a list of choices in a box. To select an item from the list (1), users click an arrow to open the list (1) of choices.</p> <p>The following figure illustrates a typical representation of a drop-down list box control.</p>  <p><b>Figure 6: A drop-down list box control</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.9</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.5</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
<p>Expression Box</p>	<p>A read-only text control used to display information.</p> <p>The following figure illustrates a typical representation of an expression box control.</p>  <p><b>Figure 7: An expression box control</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.10</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.6</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
<p>File Attachment</p>	<p>A control that allows users to attach files to their form files. Each file attachment control permits one file to be attached.</p> <p>The following figure illustrates a typical representation of a file attachment control.</p>  <p><b>Figure 8: A file attachment control</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.11</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.7</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
<p>Hyperlink</p>	<p>A control that can be used to link to a <b>Uniform Resource Locator (URL)</b>.</p> <p>The following figure illustrates a typical representation of a hyperlink.</p>

Control	Description and sample visual representation
	<p data-bbox="418 233 537 260"><a href="#">Hyperlink</a></p> <p data-bbox="399 310 781 338"><b>Figure 9: A hyperlink control</b></p> <p data-bbox="399 365 1406 438">The visualization and properties of the control are specified in section <a href="#">2.4.1.12</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.8</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
List Box	<p data-bbox="399 468 1370 516">A control that presents users with a list (1) of choices in a box from which users select the appropriate item.</p> <p data-bbox="399 527 1203 554">The following figure illustrates a typical representation of a list box control.</p> <div data-bbox="415 579 675 667" style="border: 1px solid gray; padding: 2px;"> <p data-bbox="423 590 521 617">Option 1</p> <p data-bbox="423 617 521 644">Option 2</p> <p data-bbox="423 644 521 672">Option 3</p> </div> <p data-bbox="399 705 773 732"><b>Figure 10: A list box control</b></p> <p data-bbox="399 760 1406 833">The visualization and properties of the control are specified in section <a href="#">2.4.1.13</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.9</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Option Button	<p data-bbox="399 861 1357 909">A control that lets users select from a set of mutually exclusive choices. When one option button in a <b>group (1)</b> is selected, the other option buttons are cleared.</p> <p data-bbox="399 919 1284 947">The following figure illustrates a typical representation of an option button control.</p> <div data-bbox="415 982 773 1125" style="display: flex; flex-wrap: wrap;"> <div style="margin-right: 20px;"> <p data-bbox="415 982 553 1010"><input type="radio"/> Field 1</p> <p data-bbox="415 1037 553 1064"><input type="radio"/> Field 2</p> <p data-bbox="415 1092 553 1119"><input type="radio"/> Field 3</p> </div> <div> <p data-bbox="630 982 768 1010"><input checked="" type="radio"/> Field 1</p> <p data-bbox="630 1037 768 1064"><input type="radio"/> Field 2</p> <p data-bbox="630 1092 768 1119"><input type="radio"/> Field 3</p> </div> </div> <p data-bbox="399 1167 954 1194"><b>Figure 11: A set of option button controls</b></p> <p data-bbox="399 1222 1419 1295">The visualization and properties of the control are specified in section <a href="#">2.4.1.14</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.10</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Rich Text Box	<p data-bbox="399 1329 1422 1377">A text input control that can contain formatted text, including bold and italic text, and a variety of fonts, font sizes, and font colors.</p> <p data-bbox="399 1388 1260 1415">The following figure illustrates a typical representation of a rich text box control.</p>

Control	Description and sample visual representation
	 <p><b>Figure 12: A rich text box control, the top image shows it in the editing state</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.17</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.13</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Table	<p>A table used to lay out the form. It is not tied to a field.</p> <p>The following figure illustrates a typical representation of a table control.</p>  <p><b>Figure 13: A table</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.19</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.15</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Text Box	<p>A text input control that can contain any unformatted text. Text box controls cannot contain formatted text.</p> <p>The following figure illustrates a typical representation of a text box control.</p>  <p><b>Figure 14: A text box control</b></p> <p>The visualization and properties of the control are specified in section <a href="#">2.4.1.20</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.16</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Repeating Table	<p>A control that displays repeating information in a tabular structure. Each item appears in a new row in the repeating table control. When filling out a form, users can add or delete rows in a repeating table control as necessary. Repeating table controls can contain other controls.</p> <p>The following figure illustrates a typical representation of a repeating table control.</p>

Control	Description and sample visual representation
	 <p data-bbox="399 352 1377 380"><b>Figure 15: A repeating table control with three text box controls per row</b></p> <p data-bbox="399 405 1419 480">The visualization and properties of the control are specified in section <a href="#">2.4.1.16</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.12</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Section, Optional Section	<p data-bbox="399 506 1395 590">A control that is a container for other controls. An optional section control is the same as the section control, but does not need to be initially displayed in the form. The following figure illustrates a typical representation of a section control.</p>  <p data-bbox="399 804 1216 831"><b>Figure 16: A section control containing two text box controls</b></p> <p data-bbox="399 856 1419 932">The visualization and properties of the control are specified in section <a href="#">2.4.1.18</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.14</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>
Repeating Section	<p data-bbox="399 957 1378 1041">A control that is a container for other controls and is used to display repeating information. When filling out the form that includes a repeating section control, users can add additional occurrences of the repeating section control. The following figure illustrates a typical representation of a repeating section control.</p>  <p data-bbox="399 1264 909 1291"><b>Figure 17: A repeating section control</b></p> <p data-bbox="399 1316 1419 1392">The visualization and properties of the control are specified in section <a href="#">2.4.1.15</a>. The relationship to the XML schema of the form template is specified in section <a href="#">2.3.1.11</a>. Behaviors affecting the control are specified in section <a href="#">2.2.144</a> and <a href="#">2.2.62</a>.</p>

The structure of an XSLT file that defines a form view is specified in section [2.4](#). The role of each XSLT file is specified in section [2.2.122](#). Examples are provided in section [3.4](#).

### 1.3.4 Print View Files (XSLT)

**Print views** are visualizations of the form used for printing. A print view is defined by an XSLT file that is optimized for printing the data instead of visualizing it in a Web browser. For example, a print view could be defined to use dark text on a white background or suppress borders on the controls.

A print view is always associated with a form view so that when the form server is displaying the form view and the user chooses to print the form, the print view is sent to the printer.

The association between a form view and a print view is specified in the form definition (.xsf) file.

The structure of an XSLT file that defines a print view is specified in section [2.5](#). The role of each XSLT file is specified in section [2.2.122](#). Examples are provided in section [3.5](#).

### 1.3.5 Submit Files (XML)

**Submit** files are XML files, as described in [\[W3C-XML\]](#), that specify the information used to submit form data to a **Web service**. This information is only needed when the form has behaviors that submit data to a Web service, although there are Web services for which no submit file is needed.

This information is composed of two parts, the submit files and form definition (.xsf) file, as follows:

- The submit files contain XML templates based on the parameters required by the Web service methods.
- The form definition (.xsf) file contains references to submit files and specifies a mapping between fields and parameters to the Web service methods.

Submit files are specified in section [2.6](#). Examples are provided in section [3.6](#).

### 1.3.6 Template.XML File

The template.xml file is a form file based on the form template that contains it. It is used to store and load initial values of the fields when creating a new form file based on the form template. For example, it is used in creating a new expense report based on an expense report template. This file is used only when creating a new form file based on the form template.

Template.xml is specified in section [2.7](#). Examples are provided in section [3.7](#).

### 1.3.7 Upgrade.XSL File

The upgrade.xsl file is an XSLT file used to upgrade an existing form file if a newer version of the form template becomes available.

When upgrade.xsl is present in a form template (.xsn) file, the form server applies it to transform a form file created with an older version of the associated form template to match the latest version. Upgrade.xsl is not used when creating new form files.

When applied, the upgrade.xsl transform does the following:

1. Copies fields from the form file to the upgraded one.
2. Removes fields that are no longer used.
3. Adds new fields that have been added to the newer version of the form template.

Once the transform has been applied, the resulting form file has to be usable by the form server.

Upgrade.xsl is specified in section [2.8](#). Examples are provided in section [3.8](#).

### 1.3.8 Resource Files

The following files are present for the form templates:

- **Business object** files used to run form code.
- Other resource files, which can be images or file **attachments**.

The list (1) of files in the form template is specified in sections [2.1](#) and [2.2.97](#). Examples are provided in section [3.1](#).

### 1.3.9 Unused Files

The following files are never used by a form server to render or edit a form, but are often present:

- The schema\_offline.xml files are used for storing data from data connections (1) so that they can be accessed **offline**.
- The merge.xsl file contains an XSLT, as described in [\[W3C-XSLT\]](#), that can be used to combine multiple form files into a single form file.
- The sampledata.xml file is an XML file, as described in [\[W3C-XML\]](#) containing sample data for the form.
- The script.js and script.vbs files are used for scripting events.
- The irm\_template file is used for **Information Rights Management (IRM)**.
- The importerrors.xml file contain errors resulting from importing files.

The list (1) of files in the form template is specified in sections [2.1](#) and [2.2.97](#).

## 1.4 Relationship to Protocols and Other Structures

The InfoPath Form Template format is an extension of the Cabinet file format, described in [\[MC-MCF\]](#).

All XSLT files contained in a form template (.xsn) file are XSLTs files, as described in [\[W3C-XSLT\]](#).

All XML schema (.xsd) files contained in a form template (.xsn) file are XSD files, as described in [\[XMLSCHEMA1\]](#).

Template.xml is a form file, as described in [\[MS-IPFFX\]](#).

## 1.5 Applicability Statement

This structure is used by a form server to render and edit forms based on a form template. The form is rendered and edited using a Web browser.

## 1.6 Versioning and Localization

This document covers versioning issues in the following areas:

**Structure Versions:** This structure specifies the only version of the InfoPath Form Template Format.

**Localization:** This structure specifies no locale-specific processes or data.



## 1.7 Vendor-Extensible Fields

The InfoPath Form Template Format defines vendor-extensible fields as specified by the **solutionDefinition** element, as described in section [2.2.147.8](#).

## 2 Structures

### 2.1 The InfoPath Form Template Format

A form template (.xsn) file MUST be a cabinet (.cab) file, as specified in [\[MC-MCF\]](#), containing other files used by form servers to display forms. The following subsections list files that could appear in a form template (.xsn) file.

The name of the form template (.xsn) file MUST end with the .xsn file extension and MUST contain **Unicode UTF-16** characters, as specified in [\[RFC2781\]](#). The form template (.xsn) file name MUST NOT contain following characters: " # % & \* : < > ? { | } ~. The form template (.xsn) file name MUST NOT contain characters that have different hexadecimal values than "0x00-0x1F and 0x7F-0x9F".

#### 2.1.1 manifest.xsf

A form template (.xsn) file MUST include manifest.xsf, the form definition (.xsf) file, and this file MUST be the first one in the form template (.xsn) file. The form definition (.xsf) file specifies the other files that are to appear in the form template (.xsn) file. All files in the form template (.xsn) file MUST be specified in the form definition (.xsf) file other than the form definition (.xsf) file itself. See section [2.2](#) and section [2.2.97](#).

#### 2.1.2 primaryschema.xsd

A form template (.xsn) file MUST contain *primaryschema.xsd*. *primaryschema* MUST conform to the naming conventions for files stored in a cabinet (.cab) file. See section [2.3](#).

#### 2.1.3 view.xsl

A form template (.xsn) file MUST include at least one *view.xsl*. *view* MUST conform to the naming conventions for files stored in a cabinet (.cab) file. *view.xsl* files conform to the **XSL** specification in section [2.4](#). Also see section [2.5](#).

#### 2.1.4 sampledata.xml

A form template (.xsn) file MUST include sampledata.xml. Contents of the sampledata.xml **file** MUST be ignored by the form server.

#### 2.1.5 template.xml

A form template (.xsn) file MUST include template.xml. See section [2.7](#).

#### 2.1.6 secondaryschema.xsd

A form template (.xsn) file MUST contain one or more *secondaryschema.xsd* files if there are data connections (1) within the form template. *secondaryschema* MUST conform to the naming conventions for files stored in a cabinet (.cab) file. See section [2.3](#) and [2.2.147.28](#).

#### 2.1.7 submitdata.xml

A form template (.xsn) file MAY contain one or more *submitdata.xml* files if there are data connections (1) within the form template. *submitdata* MUST conform to the naming conventions for files stored in a cabinet (.cab) file. See section [2.6](#).

### 2.1.8 upgrade.xml

A form template (.xsn) file SHOULD contain upgrade.xml if there are multiple versions of the form template published. See section [2.8](#).

### 2.1.9 merge.xml

A form template (.xsn) file MAY contain merge.xml. merge.xml MUST be ignored by the form server.

### 2.1.10 secondaryschema\_offline.xml

A form template (.xsn) file MAY contain one or more *secondaryschema\_offline.xml* files that are associated with a *secondaryschema.xsd*. *secondaryschema\_offline.xml* files MUST be ignored by the form server.

### 2.1.11 Business Object

A form template (.xsn) file MUST contain a business object file if there is a business object associated with the form template. The business object file MUST conform to the naming conventions for files stored in a cabinet (.cab) file. See section [2.2.147.50](#).

### 2.1.12 script.js

A form template (.xsn) file MAY contain one or more *script.js* files. See section [2.2.33](#).

### 2.1.13 script.vbs

A form template (.xsn) file MAY contain one or more *script.vbs* files. See section [2.2.33](#).

### 2.1.14 importerrors.xml

A form template (.xsn) file MAY contain importerrors.xml. importerrors.xml MUST be ignored.

### 2.1.15 irm\_template

A form template (.xsn) file MAY contain irm\_template. irm\_template MUST NOT be present.

### 2.1.16 Resource Files

A form template (.xsn) file MAY contain other files specified in the form definition (.xsf) file. These files MUST conform to the naming conventions for files stored in a cabinet (.cab) file. Resource files MAY include files that would cause the form server to reject the form template (.xsn) file or return an error in other circumstances. See section [2.2.97](#).

## 2.2 Form Definition File (XSF) Specification

The form definition (.xsf) file specifies the properties, content, and files of the form template. It MUST conform to the form definition (.xsf) file XML schema, as defined by the types and elements in the following table. The form definition (.xsf) file XML schema is used to validate the elements, attributes, and types in the xsf namespace:

<http://schemas.microsoft.com/office/infopath/2003/solutionDefinition>.

The **xDocumentClass** element, as defined in section [2.2.20](#), MUST be the root element of the form definition (.xsf) file.

The following tables list, in alphabetical order, the types and elements used in the XML schema for the form definition (.xsf) file.

The XML schema is extended by the additional types and elements specified in the Form Definition File (XSF) Extension Specification, as specified in section [2.2.147](#).

Type	Specified in Section
<b>xdDesignMode</b>	<a href="#">2.2.13</a>
<b>xdEmptyString</b>	<a href="#">2.2.11</a>
<b>xdEnabledDisabled</b>	<a href="#">2.2.5</a>
<b>xdErrorMessage</b>	<a href="#">2.2.12</a>
<b>xdExpressionLiteral</b>	<a href="#">2.2.7</a>
<b>xdFileName</b>	<a href="#">2.2.8</a>
<b>xdHWSCaption</b>	<a href="#">2.2.19</a>
<b>xdHWSname</b>	<a href="#">2.2.18</a>
<b>xdManualAuto</b>	<a href="#">2.2.6</a>
<b>xdRoleName</b>	<a href="#">2.2.3</a>
<b>xdScriptLanguage</b>	<a href="#">2.2.9</a>
<b>xdSignatureRelationEnum</b>	<a href="#">2.2.17</a>
<b>xdSignedDataBlockMessage</b>	<a href="#">2.2.16</a>
<b>xdSignedDataBlockName</b>	<a href="#">2.2.15</a>
<b>xdSolutionVersion</b>	<a href="#">2.2.10</a>
<b>xdTitle</b>	<a href="#">2.2.1</a>
<b>xdTrustLevel</b>	<a href="#">2.2.14</a>
<b>xdViewName</b>	<a href="#">2.2.2</a>
<b>xdYesNo</b>	<a href="#">2.2.4</a>

Element	Specified in Section
<b>action</b>	<a href="#">2.2.90</a>
<b>adoAdapter</b>	<a href="#">2.2.38</a>
<b>allowedActions</b>	<a href="#">2.2.89</a>
<b>allowedControl</b>	<a href="#">2.2.102</a>
<b>allowedTasks</b>	<a href="#">2.2.91</a>

<b>Element</b>	<b>Specified in Section</b>
<b>applicationParameters</b>	<a href="#">2.2.23</a>
<b>assignmentAction</b>	<a href="#">2.2.139</a>
<b>attachmentFileName</b>	<a href="#">2.2.57</a>
<b>attributeData</b>	<a href="#">2.2.105</a>
<b>autoRecovery</b>	<a href="#">2.2.31</a>
<b>bcc</b>	<a href="#">2.2.54</a>
<b>button</b>	<a href="#">2.2.106</a>
<b>button</b>	<a href="#">2.2.110</a>
<b>calculatedField</b>	<a href="#">2.2.146</a>
<b>calculations</b>	<a href="#">2.2.145</a>
<b>cc</b>	<a href="#">2.2.53</a>
<b>chooseFragment</b>	<a href="#">2.2.107</a>
<b>closeDocumentAction</b>	<a href="#">2.2.142</a>
<b>customCategory</b>	<a href="#">2.2.95</a>
<b>customValidation</b>	<a href="#">2.2.62</a>
<b>dataAdapters</b>	<a href="#">2.2.59</a>
<b>dataObject</b>	<a href="#">2.2.36</a>
<b>dataObjects</b>	<a href="#">2.2.35</a>
<b>davAdapter</b>	<a href="#">2.2.48</a>
<b>dialogBoxExpressionAction</b>	<a href="#">2.2.137</a>
<b>dialogBoxMessageAction</b>	<a href="#">2.2.136</a>
<b>documentSchema</b>	<a href="#">2.2.61</a>
<b>documentSchemas</b>	<a href="#">2.2.60</a>
<b>documentSignatures</b>	<a href="#">2.2.125</a>
<b>documentVersionUpgrade</b>	<a href="#">2.2.128</a>
<b>domEventHandler</b>	<a href="#">2.2.66</a>
<b>domEventHandlers</b>	<a href="#">2.2.65</a>
<b>editing</b>	<a href="#">2.2.111</a>
<b>editWith</b>	<a href="#">2.2.108</a>
<b>emailAdapter</b>	<a href="#">2.2.51</a>

<b>Element</b>	<b>Specified in Section</b>
<b>errorCondition</b>	<a href="#">2.2.63</a>
<b>errorMessage</b>	<a href="#">2.2.64</a>
<b>errorMessage</b>	<a href="#">2.2.75</a>
<b>exitRuleSet</b>	<a href="#">2.2.135</a>
<b>exportToExcel</b>	<a href="#">2.2.28</a>
<b>exportToWeb</b>	<a href="#">2.2.27</a>
<b>extension</b>	<a href="#">2.2.131</a>
<b>extensions</b>	<a href="#">2.2.130</a>
<b>externalView</b>	<a href="#">2.2.104</a>
<b>externalViews</b>	<a href="#">2.2.103</a>
<b>featureRestrictions</b>	<a href="#">2.2.25</a>
<b>field</b>	<a href="#">2.2.47</a>
<b>field</b>	<a href="#">2.2.71</a>
<b>fields</b>	<a href="#">2.2.70</a>
<b>file</b>	<a href="#">2.2.98</a>
<b>fileName</b>	<a href="#">2.2.50</a>
<b>fileNew</b>	<a href="#">2.2.93</a>
<b>fileProperties</b>	<a href="#">2.2.99</a>
<b>files</b>	<a href="#">2.2.97</a>
<b>folderURL</b>	<a href="#">2.2.49</a>
<b>footer</b>	<a href="#">2.2.117</a>
<b>fragmentToInsert</b>	<a href="#">2.2.113</a>
<b>getUserNameFromData</b>	<a href="#">2.2.84</a>
<b>group</b>	<a href="#">2.2.86</a>
<b>header</b>	<a href="#">2.2.116</a>
<b>hwsAdapter</b>	<a href="#">2.2.40</a>
<b>hwsOperation</b>	<a href="#">2.2.42</a>
<b>hwsWorkflow</b>	<a href="#">2.2.87</a>
<b>importParameters</b>	<a href="#">2.2.67</a>
<b>importSource</b>	<a href="#">2.2.68</a>

<b>Element</b>	<b>Specified in Section</b>
<b>initialXmlDocument</b>	<a href="#">2.2.94</a>
<b>input</b>	<a href="#">2.2.43</a>
<b>intro</b>	<a href="#">2.2.56</a>
<b>listProperties</b>	<a href="#">2.2.69</a>
<b>location</b>	<a href="#">2.2.88</a>
<b>mainpane</b>	<a href="#">2.2.114</a>
<b>masterDetail</b>	<a href="#">2.2.112</a>
<b>membership</b>	<a href="#">2.2.83</a>
<b>menu</b>	<a href="#">2.2.119</a>
<b>menuArea</b>	<a href="#">2.2.120</a>
<b>message</b>	<a href="#">2.2.127</a>
<b>onLoad</b>	<a href="#">2.2.79</a>
<b>openNewDocumentAction</b>	<a href="#">2.2.141</a>
<b>operation</b>	<a href="#">2.2.41</a>
<b>override</b>	<a href="#">2.2.22</a>
<b>package</b>	<a href="#">2.2.96</a>
<b>partFragment</b>	<a href="#">2.2.44</a>
<b>permissions</b>	<a href="#">2.2.101</a>
<b>print</b>	<a href="#">2.2.29</a>
<b>printSettings</b>	<a href="#">2.2.115</a>
<b>property</b>	<a href="#">2.2.100</a>
<b>query</b>	<a href="#">2.2.32</a>
<b>query</b>	<a href="#">2.2.37</a>
<b>queryAction</b>	<a href="#">2.2.140</a>
<b>role</b>	<a href="#">2.2.82</a>
<b>roles</b>	<a href="#">2.2.81</a>
<b>rule</b>	<a href="#">2.2.133</a>
<b>ruleSet</b>	<a href="#">2.2.143</a>
<b>ruleSetAction</b>	<a href="#">2.2.132</a>
<b>ruleSets</b>	<a href="#">2.2.144</a>

<b>Element</b>	<b>Specified in Section</b>
<b>save</b>	<a href="#">2.2.26</a>
<b>save</b>	<a href="#">2.2.80</a>
<b>schemaErrorMessages</b>	<a href="#">2.2.21</a>
<b>script</b>	<a href="#">2.2.34</a>
<b>scripts</b>	<a href="#">2.2.33</a>
<b>sendMail</b>	<a href="#">2.2.30</a>
<b>sharepointListAdapter</b>	<a href="#">2.2.46</a>
<b>signedDataBlock</b>	<a href="#">2.2.126</a>
<b>solutionProperties</b>	<a href="#">2.2.24</a>
<b>subject</b>	<a href="#">2.2.55</a>
<b>submit</b>	<a href="#">2.2.72</a>
<b>submitAction</b>	<a href="#">2.2.73</a>
<b>submitAction</b>	<a href="#">2.2.134</a>
<b>submitToHostAdapter</b>	<a href="#">2.2.58</a>
<b>successMessage</b>	<a href="#">2.2.74</a>
<b>switchViewAction</b>	<a href="#">2.2.138</a>
<b>task</b>	<a href="#">2.2.92</a>
<b>taskpane</b>	<a href="#">2.2.121</a>
<b>to</b>	<a href="#">2.2.52</a>
<b>toolbar</b>	<a href="#">2.2.118</a>
<b>unboundControls</b>	<a href="#">2.2.109</a>
<b>useHttpHandler</b>	<a href="#">2.2.76</a>
<b>useQueryAdapter</b>	<a href="#">2.2.78</a>
<b>userName</b>	<a href="#">2.2.85</a>
<b>useScriptHandler</b>	<a href="#">2.2.77</a>
<b>useTransform</b>	<a href="#">2.2.129</a>
<b>view</b>	<a href="#">2.2.123</a>
<b>views</b>	<a href="#">2.2.122</a>
<b>webServiceAdapter</b>	<a href="#">2.2.39</a>
<b>xDocumentClass</b>	<a href="#">2.2.20</a>



Element	Specified in Section
<b>xmlFileAdapter</b>	<a href="#">2.2.45</a>
<b>xmlToEdit</b>	<a href="#">2.2.124</a>

### 2.2.1 xdTitle

The **xdTitle** simple type specifies restrictions for a title string.

Referenced By
<a href="#">adoAdapter.xsfschema@name</a>
<a href="#">adoAdapterExtension.xsf2@ref</a>
<a href="#">adoAdapterExtension.xsf2@submitAdapterName</a>
<a href="#">button.xsfschema@caption</a>
<a href="#">button.xsfschema@tooltip</a>
<a href="#">command.xsf2@caption</a>
<a href="#">customCategory.xsfschema@name</a>
<a href="#">dataObject.xsfschema@name</a>
<a href="#">davAdapter.xsfschema@name</a>
<a href="#">davAdapterExtension.xsf2@ref</a>
<a href="#">editWith.xsfschema@caption</a>
<a href="#">emailAdapter.xsfschema@name</a>
<a href="#">emailAdapterExtension.xsf2@ref</a>
<a href="#">field.xsfschema@columnName</a>
<a href="#">field.xsfschema@name</a>
<a href="#">hwsAdapter.xsfschema@name</a>
<a href="#">initialXmlDocument.xsfschema@caption</a>
<a href="#">inputScope.xsf2@caption</a>
<a href="#">menu.xsfschema@caption</a>
<a href="#">sharepointListAdapter.xsfschema@name</a>
<a href="#">sharepointListAdapterExtension.xsf2@ref</a>
<a href="#">submitAction.rule.xsfschema@adapter</a>
<a href="#">submitAction.submit.xsf2@adapter</a>
<a href="#">submitAction.submit.xsfschema@adapter</a>

Referenced By
<a href="#">submitToHostAdapter.xsfschema@name</a>
<a href="#">toolbar.xsfschema@caption</a>
<a href="#">toolbar.xsfschema@name</a>
<a href="#">viewExtension.xsf2@ref</a>
<a href="#">webServiceAdapter.xsfschema@name</a>
<a href="#">webServiceAdapterExtension.xsf2@ref</a>
<a href="#">xmlFileAdapter.xsfschema@name</a>
<a href="#">xmlFileAdapterExtension.xsf2@ref</a>
<a href="#">xmlToEditExtension.xsf2@ref</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdTitle">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
    <xsd:maxLength value="255"/>
    <xsd:pattern
value="([^\p{Z}\p{Cc}\p{Cf}\p{Cn}])(([\p{Zl}\p{Zp}\p{Cc}])*([\p{Z}\p{Cc}\p{Cf}\p{Cn}]))?"/>
  </xsd:restriction>
</xsd:simpleType>
```

## 2.2.2 xdViewName

The **xdViewName** simple type specifies restrictions for specifying the name of a form view.

Referenced By
<a href="#">externalView.xsfschema@name</a>
<a href="#">includedView.xsf2@name</a>
<a href="#">role.xsfschema@name</a>
<a href="#">switchViewAction.xsfschema@view</a>
<a href="#">view.xsfschema@caption</a>
<a href="#">view.xsfschema@name</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdViewName">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
    <xsd:maxLength value="255"/>
  </xsd:restriction>
</xsd:simpleType>
```

```

    <xsd:pattern
value="([\p{Z}\p{C}/\#\&quot;&gt;&lt;])(([\p{Zl}\p{Zp}\p{C}/\#\&quot;&gt;&lt;])*([\p{Z}\p{C}/\#\&quot;&gt;&lt;])?)"/>
    </xsd:restriction>
</xsd:simpleType>

```

### 2.2.3 xdRoleName

The **xdRoleName** simple type specifies restrictions for an attribute that MUST NOT be present.

Referenced By
<a href="#">role.xsfschema@name</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="xdRoleName">
  <xsd:restriction base="xsf:xdViewName"/>
</xsd:simpleType>

```

### 2.2.4 xdYesNo

The **xdYesNo** simple type specifies enumeration values for specifying a "yes" or "no" value.

**no:** This enumeration value evaluates to "no".

**yes:** This enumeration value evaluates to "yes".

Referenced By
<a href="#">action.xsfschema@canInitiateWorkflow</a>
<a href="#">adoAdapter.xsfschema@queryAllowed</a>
<a href="#">adoAdapter.xsfschema@submitAllowed</a>
<a href="#">autoUpdatePrompt.xsf2@showPrompt</a>
<a href="#">calculations.xsfschema@treatBlankValueAsZero</a>
<a href="#">closeDocumentAction.xsfschema@promptToSaveChanges</a>
<a href="#">contentTypeTemplate.xsf2@browserEnable</a>
<a href="#">dataObject.xsfschema@initOnLoad</a>
<a href="#">davAdapter.xsfschema@overwriteAllowed</a>
<a href="#">davAdapter.xsfschema@queryAllowed</a>
<a href="#">davAdapter.xsfschema@submitAllowed</a>
<a href="#">documentSchema.xsfschema@rootSchema</a>
<a href="#">editWith.xsfschema@autoComplete</a>

Referenced By
<a href="#">editWith.xsfschema@proofing</a>
<a href="#">emailAdapter.xsfschema@queryAllowed</a>
<a href="#">emailAdapter.xsfschema@submitAllowed</a>
<a href="#">field.sharepointListAdapter.xsfschema@isLookup</a>
<a href="#">field.xsfschema@required</a>
<a href="#">field.xsfschema@viewable</a>
<a href="#">fieldExtension.xsf2@readWrite</a>
<a href="#">hwsAdapter.xsfschema@queryAllowed</a>
<a href="#">hwsAdapter.xsfschema@submitAllowed</a>
<a href="#">hwsWorkflow.xsfschema@taskpaneVisible</a>
<a href="#">importParameters.xsfschema@enabled</a>
<a href="#">importParameters.xsfschema@useScriptHandler</a>
<a href="#">managedCode.xsf2@enabled</a>
<a href="#">mergedPrintView.xsf2@isCustomizable</a>
<a href="#">mergedPrintView.xsf2@isDefault</a>
<a href="#">offline.xsf2@cacheQueries</a>
<a href="#">offline.xsf2@openIfQueryFails</a>
<a href="#">partFragment.xsfschema@sendAsString</a>
<a href="#">printSettings.xsfschema@collate</a>
<a href="#">roles.xsfschema@hideStatusBarDisplay</a>
<a href="#">rule.xsfschema@isEnabled</a>
<a href="#">scripts.xsfschema@enforceScriptTimeout</a>
<a href="#">sendByMail.xsf2@disableEmailForms</a>
<a href="#">server.xsf2@isMobileEnabled</a>
<a href="#">server.xsf2@isPreSubmitPostBackEnabled</a>
<a href="#">sharepointListAdapter.xsfschema@queryAllowed</a>
<a href="#">sharepointListAdapter.xsfschema@submitAllowed</a>
<a href="#">sharepointListAdapterExtension.xsf2@queryThisFormOnly</a>
<a href="#">solutionDefinition.xsf2@allowClientOnlyCode</a>
<a href="#">solutionDefinition.xsf2@verifyOnServer</a>

Referenced By
<a href="#">solutionProperties.xsfschema@allowCustomization</a>
<a href="#">solutionProperties.xsfschema@automaticallyCreateNodes</a>
<a href="#">submit.xsf2@disableMenuItem</a>
<a href="#">submit.xsf2@showSignatureReminder</a>
<a href="#">submit.xsf2@showStatusDialog</a>
<a href="#">submit.xsfschema@disableMenuItem</a>
<a href="#">submit.xsfschema@showSignatureReminder</a>
<a href="#">submit.xsfschema@showStatusDialog</a>
<a href="#">submitToHostAdapter.xsfschema@queryAllowed</a>
<a href="#">submitToHostAdapter.xsfschema@submitAllowed</a>
<a href="#">toolbar.xsf2@enabledBottom</a>
<a href="#">toolbar.xsf2@enabledTop</a>
<a href="#">view.xsfschema@showMenuItem</a>
<a href="#">viewExtension.xsf2@clientOnly</a>
<a href="#">viewExtension.xsf2@readOnly</a>
<a href="#">warning.xsf2@hidden</a>
<a href="#">webServiceAdapter.xsfschema@queryAllowed</a>
<a href="#">webServiceAdapter.xsfschema@submitAllowed</a>
<a href="#">webServiceAdapter.xsfschema@useDataSet</a>
<a href="#">webServiceAdapterExtension.xsf2@trackDataSetChanges</a>
<a href="#">wss.xsf2@browserEnable</a>
<a href="#">xDocumentClass.xsfschema@dataFormSolution</a>
<a href="#">xDocumentClass.xsfschema@requireFullTrust</a>
<a href="#">xmlToEditExtension.xsf2@allowLinkedImages</a>
<a href="#">xmlToEditExtension.xsf2@excludeEmbeddedImages</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdYesNo">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:enumeration value="yes"/>
    <xsd:enumeration value="no"/>
  </xsd:restriction>
</xsd:simpleType>
```

```
</xsd:simpleType>
```

## 2.2.5 xdEnabledDisabled

The **xdEnabledDisabled** simple type specifies enumeration values for specifying an "enabled" or "disabled" value.

**disabled:** This enumeration value evaluates to "disabled".

**enabled:** This enumeration value evaluates to "enabled".

Referenced By
<a href="#">autoRecovery.xsfschema@feature</a>
<a href="#">exportToExcel.xsfschema@ui</a>
<a href="#">exportToPDFForXPS.xsf2@ui</a>
<a href="#">exportToWeb.xsfschema@ui</a>
<a href="#">print.xsfschema@ui</a>
<a href="#">save.featureRestrictions.xsfschema@ui</a>
<a href="#">sendMail.xsfschema@ui</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdEnabledDisabled">  
  <xsd:restriction base="xsd:NMTOKEN">  
    <xsd:enumeration value="enabled"/>  
    <xsd:enumeration value="disabled"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

## 2.2.6 xdManualAuto

The **xdManualAuto** simple type specifies enumeration values for specifying a "manual" or "automatic" value.

**automatic:** This enumeration value evaluates to "automatic".

**manual:** This enumeration value evaluates to "manual".

Referenced By
<a href="#">importSource.xsfschema@authoringOfTransform</a>
<a href="#">xDocumentClass.xsfschema@trustSetting</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="xdManualAuto">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:enumeration value="manual"/>
    <xsd:enumeration value="automatic"/>
  </xsd:restriction>
</xsd:simpleType>

```

## 2.2.7 xdExpressionLiteral

The **xdExpressionLiteral** simple type specifies enumeration values for specifying whether the corresponding value is an **XPath expression** or a literal string.

**expression:** This enumeration value specifies that the corresponding value evaluates to an XPath expression.

**literal:** This enumeration value specifies that the corresponding value evaluates to a literal string.

Referenced By
<a href="#">attachmentFileName.emailAdapter.xsfschema@valueType</a>
<a href="#">bcc.emailAdapter.xsfschema@valueType</a>
<a href="#">cc.emailAdapter.xsfschema@valueType</a>
<a href="#">fileName.davAdapter.xsfschema@valueType</a>
<a href="#">subject.emailAdapter.xsfschema@valueType</a>
<a href="#">to.emailAdapter.xsfschema@valueType</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="xdExpressionLiteral">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:enumeration value="expression"/>
    <xsd:enumeration value="literal"/>
  </xsd:restriction>
</xsd:simpleType>

```

## 2.2.8 xdFileName

The **xdFileName** simple type specifies restrictions for specifying the name of a file that is part of the form template.

Referenced By
<a href="#">file.xsfschema@name</a>
<a href="#">importSource.xsfschema@schema</a>
<a href="#">importSource.xsfschema@transform</a>
<a href="#">initialXmlDocument.xsfschema@href</a>

Referenced By
<a href="#">mainpane.xsfschema@transform</a>
<a href="#">script.xsfschema@src</a>
<a href="#">solutionProperties.xsfschema@lastOpenView</a>
<a href="#">useTransform.xsfschema@transform</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdFileName">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
    <xsd:maxLength value="64"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.9 xdScriptLanguage

The **xdScriptLanguage** simple type specifies restrictions for the **language** and **scriptLanguage** attributes.

The **language** attribute of the **scripts** element, as defined in section [2.2.33](#), MUST NOT be present. The **scriptLanguage** attribute of the **solutionProperties** element, as defined in section [2.2.24](#), MUST be ignored.

Referenced By
<a href="#">scripts.xsfschema@language</a>
<a href="#">solutionProperties.xsfschema@scriptLanguage</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdScriptLanguage">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:pattern
value="((( [Jj] [Aa] [Vv] [Aa] | (( [Jj] | ([Vv] [Bb] ))) ([Ss] [Cc] [Rr] [Ii] [Pp] [Tt] ) | ([.] [Ee] [Nn] [Cc] [Oo]
] [Dd] [Ee] ) | (( [Jj] [Aa] [Vv] [Aa] | (( [Jj] | ([Vv] [Bb] ))) ([Ss] [Cc] [Rr] [Ii] [Pp] [Tt] ) | ([Mm] [Aa] [Nn] [
Aa] [Gg] [Ee] [Dd] [Cc] [Oo] [Dd] [Ee] ) ) ) )"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.10 xdSolutionVersion

The **xdSolutionVersion** simple type specifies restrictions for specifying the version of the form template.

Referenced By
---------------



Referenced By
<a href="#">solutionProperties.xsfschema@lastVersionNeedingTransform</a>
<a href="#">useTransform.xsfschema@maxVersionToUpgrade</a>
<a href="#">useTransform.xsfschema@minVersionToUpgrade</a>
<a href="#">xDocumentClass.xsfschema@solutionFormatVersion</a>
<a href="#">xDocumentClass.xsfschema@solutionVersion</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdSolutionVersion">
  <xsd:restriction base="xsd:string">
    <xsd:pattern value="([0-9]{1,4}.){3}[0-9]{1,4}"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.11 xdEmptyString

The **xdEmptyString** simple type specifies restrictions for specifying an **empty string (1)**.

Referenced By
<a href="#">useTransform.xsfschema@transform</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdEmptyString">
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="0"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.12 xdErrorMessage

The **xdErrorMessage** simple type specifies restrictions for specifying an error message.

Referenced By
<a href="#">errorMessage.xsfschema</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdErrorMessage">
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="1023"/>
  </xsd:restriction>
</xsd:simpleType>
```

```
</xsd:simpleType>
```

### 2.2.13 xdDesignMode

The **xdDesignMode** simple type specifies enumeration values for specifying a "normal" or "protected" value.

**normal:** This enumeration value evaluates to "normal".

**protected:** This enumeration value evaluates to "protected".

Referenced By
<a href="#">externalView.xsfschema@designMode</a>
<a href="#">view.xsfschema@designMode</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdDesignMode">  
  <xsd:restriction base="xsd:NMTOKEN">  
    <xsd:enumeration value="normal"/>  
    <xsd:enumeration value="protected"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

### 2.2.14 xdTrustLevel

The **xdTrustLevel** simple type specifies enumeration values for specifying a "restricted" or "domain" value.

**domain:** This enumeration value evaluates to "domain".

**restricted:** This enumeration value evaluates to "restricted". This value MUST NOT be present.

Referenced By
<a href="#">xDocumentClass.xsfschema@trustLevel</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdTrustLevel">  
  <xsd:restriction base="xsd:string">  
    <xsd:enumeration value="restricted"/>  
    <xsd:enumeration value="domain"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

### 2.2.15 xdSignedDataBlockName

The **xdSignedDataBlockName** simple type specifies restrictions for specifying the name of a signed data block.

Referenced By
<a href="#">signedDataBlock.xsfschema@name</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdSignedDataBlockName">  
  <xsd:restriction base="xsd:ID">  
    <xsd:minLength value="1"/>  
    <xsd:maxLength value="255"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

### 2.2.16 xdSignedDataBlockMessage

The **xdSignedDataBlockMessage** simple type specifies restrictions for specifying the confirmation message that is displayed when a **digital signature (1)** is applied to the form or section of the form.

Referenced By
<a href="#">message.signedDataBlock.xsfschema</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdSignedDataBlockMessage">  
  <xsd:restriction base="xsd:string">  
    <xsd:maxLength value="255"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

### 2.2.17 xdSignatureRelationEnum

The **xdSignatureRelationEnum** simple type specifies enumeration values for specifying a "countersign", "cosign", or "single" value.

**cosign:** This enumeration value evaluates to "cosign".

**countersign:** This enumeration value evaluates to "countersign".

**single:** This enumeration value evaluates to "single".

Referenced By
<a href="#">signedDataBlock.xsfschema@mode</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdSignatureRelationEnum">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="countersign"/>
    <xsd:enumeration value="cosign"/>
    <xsd:enumeration value="single"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.18 xdHWSname

The **xdHWSname** simple type specifies restrictions for an attribute that **MUST NOT** be present.

Referenced By
<a href="#">action.xsfschema@name</a>
<a href="#">task.xsfschema@name</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdHWSname">
  <xsd:restriction base="xsd:NCName">
    <xsd:pattern value="^[^-\.\^\|\^|\^|+^?^*^@^{\^\}\^\(\^\)\^\&gt;^\&lt;^\=^\;^\,]*"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.19 xdHWSCaption

The **xdHWSCaption** simple type specifies restrictions for an attribute that **MUST NOT** be present.

Referenced By
<a href="#">action.xsfschema@caption</a>
<a href="#">task.xsfschema@caption</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="xdHWSCaption">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
    <xsd:maxLength value="255"/>
  </xsd:restriction>
</xsd:simpleType>
```

## 2.2.20 xDocumentClass

The **xDocumentClass** element and its child elements specify the properties, appearance, content, and files of the form template. The values specified by this element determine the general behaviors, such as loading and upgrading, of all forms generated from the form template. This element **MUST** be the root element of the form definition (.xsf) file.

Child Elements
<a href="#">applicationParameters</a>
<a href="#">calculations</a>
<a href="#">customValidation</a>
<a href="#">dataAdapters</a>
<a href="#">dataObjects</a>
<a href="#">documentSchemas</a>
<a href="#">documentSignatures</a>
<a href="#">documentVersionUpgrade</a>
<a href="#">domEventHandlers</a>
<a href="#">extensions</a>
<a href="#">externalViews</a>
<a href="#">featureRestrictions</a>
<a href="#">fileNew</a>
<a href="#">hwsWorkflow</a>
<a href="#">importParameters</a>
<a href="#">listProperties</a>
<a href="#">onLoad</a>
<a href="#">package</a>
<a href="#">permissions</a>
<a href="#">query</a>
<a href="#">roles</a>
<a href="#">ruleSets</a>
<a href="#">save</a>
<a href="#">schemaErrorMessages</a>
<a href="#">scripts</a>
<a href="#">submit</a>

Child Elements
<a href="#">taskpane</a>
<a href="#">views</a>

Attributes:

**author:** The name of the author of the form template. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**dataFormSolution:** Specifies whether a form template was designed based on a **main data connection** to a database or Web service. If this attribute is not present, its value MUST be interpreted as "no".

**description:** The description of the form template. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**name:** An identifier for the form template in the form of a Uniform Resource Name (URN). This attribute MUST be specified.

**productVersion:** The version of the form designer with which the form template was created. This attribute's value SHOULD be "12.0.0.0" or "11.0.0.0".<1>

**publishUrl:** This attribute MUST NOT be present.

**requireFullTrust:** Specifies whether the form template requires an elevated **form security level**. If set to "yes", this attribute MUST override the form security level specified by the **trustLevel** attribute, and the form (1) MUST be loaded with an elevated form security level. An elevated form security level allows cross-domain data connections (1) and full access to business objects. If this attribute is not present, its value MUST be interpreted as "no".

**solutionFormatVersion:** The version number of the form template format. The attribute's value SHOULD be "2.0.0.0" or "1.100.0.0" or "1.0.0.0".<2>

**solutionVersion:** The version number of the form template. The value of this attribute MUST be greater than any version of the form template already published. Values are compared numerically, left-to-right.

**trustLevel:** The form security level. If this attribute is present, its value MUST be "domain". If this attribute is not present, its value MUST be interpreted as "domain". This is the default security context and can be overridden by the **requireFullTrust** attribute.

**trustSetting:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xDocumentClass">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf:package" minOccurs="1"/>
      <xsd:element ref="xsf:permissions" minOccurs="0"/>
      <xsd:element ref="xsf:views" minOccurs="1"/>
      <xsd:element ref="xsf:hwsWorkflow" minOccurs="0"/>
      <xsd:element ref="xsf:externalViews" minOccurs="0"/>
      <xsd:element ref="xsf:scripts" minOccurs="0"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>
```

```

<xsd:element ref="xsf:schemaErrorMessages" minOccurs="0"/>
<xsd:element ref="xsf:documentSchemas" minOccurs="0"/>
<xsd:element ref="xsf:applicationParameters" minOccurs="0"/>
<xsd:element ref="xsf:featureRestrictions" minOccurs="0"/>
<xsd:element ref="xsf:fileNew" minOccurs="0"/>
<xsd:element ref="xsf:customValidation" minOccurs="0"/>
<xsd:element ref="xsf:domEventHandlers" minOccurs="0"/>
<xsd:element ref="xsf:importParameters" minOccurs="0"/>
<xsd:element ref="xsf:listProperties" minOccurs="0"/>
<xsd:element ref="xsf:taskpane" minOccurs="0"/>
<xsd:element ref="xsf:documentSignatures" minOccurs="0"/>
<xsd:element ref="xsf:dataObjects" minOccurs="0"/>
<xsd:element ref="xsf:dataAdapters" minOccurs="0"/>
<xsd:element ref="xsf:query" minOccurs="0"/>
<xsd:element ref="xsf:submit" minOccurs="0"/>
<xsd:element ref="xsf:save" minOccurs="0"/>
<xsd:element ref="xsf:roles" minOccurs="0"/>
<xsd:element ref="xsf:onLoad" minOccurs="0"/>
<xsd:element ref="xsf:documentVersionUpgrade" minOccurs="0"/>
<xsd:element ref="xsf:extensions" minOccurs="0"/>
<xsd:element ref="xsf:ruleSets" minOccurs="0"/>
<xsd:element ref="xsf:calculations" minOccurs="0"/>
</xsd:all>
<xsd:attribute name="name" type="xsd:string" use="optional"/>
<xsd:attribute name="author" type="xsd:string" use="optional"/>
<xsd:attribute name="description" use="optional">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="255"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="solutionVersion" type="xsf:xdSolutionVersion" use="optional"/>
<xsd:attribute name="productVersion" type="xsd:string" use="optional"/>
<xsd:attribute name="solutionFormatVersion" type="xsf:xdSolutionVersion" use="required"/>
<xsd:attribute name="dataFormSolution" type="xsf:xdYesNo" use="optional"/>
<xsd:attribute name="requireFullTrust" type="xsf:xdYesNo" use="optional"/>
<xsd:attribute name="trustLevel" type="xsf:xdTrustLevel" use="optional"/>
<xsd:attribute name="trustSetting" type="xsf:xdManualAuto" use="optional"/>
<xsd:attribute name="publishUrl" type="xsd:string" use="optional"/>
</xsd:complexType>
<xsd:key name="view_name_key">
  <xsd:selector xpath="./xsf:views/xsf:view"/>
  <xsd:field xpath="@name"/>
</xsd:key>
<xsd:key name="externalView_name_key">
  <xsd:selector xpath="./xsf:externalViews/xsf:externalView"/>
  <xsd:field xpath="@name"/>
</xsd:key>
<xsd:key name="view_or_externalView_name_key">
  <xsd:selector xpath="./xsf:views/xsf:view | ./xsf:externalViews/xsf:externalView"/>
  <xsd:field xpath="@name"/>
</xsd:key>
<xsd:key name="ruleset_name_key">
  <xsd:selector xpath="./xsf:ruleSets/xsf:ruleSet"/>
  <xsd:field xpath="@name"/>
</xsd:key>
<xsd:key name="dataObject_name_key">
  <xsd:selector xpath="./xsf:dataObjects/xsf:dataObject"/>

```

```

    <xsd:field xpath="@name"/>
  </xsd:key>
  <xsd:unique name="adapter_name_unique">
    <xsd:selector xpath="./xsf:dataObjects/xsf:dataObject/xsf:query/* | ./xsf:query/* |
./xsf:dataAdapters/* | ./xsf:submit/xsf:webServiceAdapter | ./xsf:submit/xsf:davAdapter |
./xsf:submit/xsf:emailAdapter | ./xsf:submit/xsf:submitToHostAdapter"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
  <xsd:key name="adapter_name_key">
    <xsd:selector xpath="./xsf:dataAdapters/*"/>
    <xsd:field xpath="@name"/>
  </xsd:key>
  <xsd:unique name="view_external_name_unique">
    <xsd:selector xpath="./xsf:views/xsf:view | ./xsf:externalViews/xsf:externalView"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
</xsd:element>

```

### 2.2.21 schemaErrorMessages

The **schemaErrorMessages** element specifies custom error messages that are displayed for XML schema data type errors in the form file.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">override</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="schemaErrorMessages">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:override" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```

### 2.2.22 override

The **override** element specifies the **XML node** for which the XML schema data type error message **MUST** be overridden.

Parent Elements
<a href="#">schemaErrorMessages</a>



Child Elements
<a href="#">errorMessage</a>

Attributes:

**match:** This attribute MUST be an XPath expression that evaluates to a single XML node.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="override">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:errorMessage"/>
    </xsd:sequence>
    <xsd:attribute name="match" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.23 applicationParameters

The **applicationParameters** element MUST be ignored.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">solutionProperties</a>

Attributes:

**application:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="applicationParameters">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf:solutionProperties" minOccurs="0"/>
    </xsd:all>
    <xsd:attribute name="application" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:enumeration value="InfoPath Design Mode"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
```

</xsd:element>

## 2.2.24 solutionProperties

The **solutionProperties** element MUST be ignored.

Parent Elements
<a href="#">applicationParameters</a>

Attributes:

**allowCustomization:** This attribute MUST be ignored.

**automaticallyCreateNodes:** This attribute MUST be ignored.

**fullyEditableNamespace:** This attribute MUST be ignored.

**lastOpenView:** This attribute MUST be ignored.

**lastVersionNeedingTransform:** This attribute MUST be ignored.

**publishSaveUrl:** This attribute MUST be ignored.

**scriptLanguage:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="solutionProperties">
  <xsd:complexType>
    <xsd:attribute name="allowCustomization" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="lastOpenView" type="xsf:xdFileName" use="optional"/>
    <xsd:attribute name="scriptLanguage" type="xsf:xdScriptLanguage" use="optional"/>
    <xsd:attribute name="automaticallyCreateNodes" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="lastVersionNeedingTransform" type="xsf:xdSolutionVersion"
use="optional"/>
    <xsd:attribute name="fullyEditableNamespace" type="xsd:anyURI" use="optional"/>
    <xsd:attribute name="publishSaveUrl" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.25 featureRestrictions

The **featureRestrictions** element specifies one or more of the following features that are restricted when editing the form (1):

- Auto-recovering the form file. MUST be ignored.
- Exporting the form file. MUST be ignored.
- Printing the form (1).
- Saving the form file.

- Sending the form file as an e-mail attachment. MUST be ignored.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">autoRecovery</a>
<a href="#">exportToExcel</a>
<a href="#">exportToWeb</a>
<a href="#">print</a>
<a href="#">save</a>
<a href="#">sendMail</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="featureRestrictions">
  <xsd:complexType>
    <xsd:all>
      <xsd:element name="save" minOccurs="0">
        <xsd:complexType>
          <xsd:attribute name="ui" type="xsd:boolean" use="required"/>
        </xsd:complexType>
      </xsd:element>
      <xsd:element ref="xsd:exportToWeb" minOccurs="0"/>
      <xsd:element ref="xsd:exportToExcel" minOccurs="0"/>
      <xsd:element ref="xsd:print" minOccurs="0"/>
      <xsd:element ref="xsd:sendMail" minOccurs="0"/>
      <xsd:element ref="xsd:autoRecovery" minOccurs="0"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>
```

### 2.2.26 save (1)

The **save** element specifies whether the user interface elements of the form (1) and keyboard shortcuts for saving the form file MUST be disabled. Restricting saving the form file through this element MUST NOT disable saving the form file through the use of form code.

Parent Elements
<a href="#">featureRestrictions</a>

Attributes:

**ui:** Specifies whether the save feature is restricted via the menus, toolbars, or keyboard shortcuts of the form (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="save" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="ui" type="xsd:boolean" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.27 exportToWeb

The **exportToWeb** element MUST be ignored.

Parent Elements
<a href="#">featureRestrictions</a>

Attributes:

**ui:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="exportToWeb">
  <xsd:complexType>
    <xsd:attribute name="ui" type="xsd:boolean" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.28 exportToExcel

The **exportToExcel** element MUST be ignored.

Parent Elements
<a href="#">featureRestrictions</a>

Attributes:

**ui:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="exportToExcel">
  <xsd:complexType>
    <xsd:attribute name="ui" type="xsd:boolean" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.29 print

The **print** element specifies whether the user interface elements of the form (1) and keyboard shortcuts for printing the form (1) are disabled. Restricting printing through this element **MUST NOT** disable printing the form (1) through use of form code.

Parent Elements
<a href="#">featureRestrictions</a>

Attributes:

**ui:** Specifies whether the print feature is restricted via the menus, toolbars, or keyboard shortcuts of the form (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="print">
  <xsd:complexType>
    <xsd:attribute name="ui" type="xsd:boolean" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.30 sendMail

The **sendMail** element **MUST** be ignored.

Parent Elements
<a href="#">featureRestrictions</a>

Attributes:

**ui:** This attribute **MUST** be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sendMail">
  <xsd:complexType>
    <xsd:attribute name="ui" type="xsd:boolean" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.31 autoRecovery

The **autoRecovery** element **MUST** be ignored.

Parent Elements
<a href="#">featureRestrictions</a>

Attributes:

**feature:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="autoRecovery">
  <xsd:complexType>
    <xsd:attribute name="feature" type="xsf:xdEnabledDisabled" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.32 query (1)

The **query** element specifies the main data connection **data adapter** that queries a **data source (2)** for data to populate the **main data source**. The main data connection MUST specify a data connection (1) to a database or Web service.

If the form template is designed based on a main data connection, as specified by the **dataFormSolution** attribute of the **xDocumentClass** element, as defined in section [2.2.20](#), the main data source XML schema is derived from the XML schema provided by the main data connection. If the form template is not designed based on a main data connection, the main data source XML schema is derived from manual modifications or an external XML schema document.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">adoAdapter</a>
<a href="#">queryAction</a>
<a href="#">sharepointListAdapter</a>
<a href="#">webServiceAdapter</a>
<a href="#">xmlFileAdapter</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="query">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:queryAction"/>
      <xsd:element ref="xsf:adoAdapter"/>
      <xsd:element ref="xsf:webServiceAdapter"/>
      <xsd:element ref="xsf:xmlFileAdapter"/>
      <xsd:element ref="xsf:sharepointListAdapter"/>
    </xsd:choice>
  </xsd:complexType>
</xsd:element>
```

```
</xsd:complexType>
</xsd:element>
```

### 2.2.33 scripts

The **scripts** element MUST NOT be present.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">script</a>

Attributes:

**enforceScriptTimeout:** This attribute MUST NOT be present.

**language:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="scripts">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:script" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="language" type="xsf:xdScriptLanguage" use="required"/>
    <xsd:attribute name="enforceScriptTimeout" type="xsf:xdYesNo" use="optional"
      default="yes"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.34 script

The **script** element MUST NOT be present.

Parent Elements
<a href="#">scripts</a>

Attributes:

**src:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="script">
```

```

<xsd:complexType>
  <xsd:attribute name="src" type="xsf:xdFileName" use="required"/>
</xsd:complexType>
</xsd:element>

```

### 2.2.35 dataObjects

The **dataObjects** element specifies all **secondary data connections** that query a **secondary data source**. Secondary data sources are used only to provide data to populate the form file or to be used for form functionality. The form file MUST NOT be submitted to a secondary data source.

If the form template contains a secondary data connection that queries a secondary data source, the secondary data source XML schema document MUST be contained in the form template (.xsn) file.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">dataObject</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="dataObjects">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:dataObject"/>
    </xsd:choice>
  </xsd:complexType>
  <xsd:unique name="dataObjects_name_unique">
    <xsd:selector xpath="./xsf:dataObject"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
</xsd:element>

```

### 2.2.36 dataObject

The **dataObject** element specifies the properties and behavior of a secondary data connection that queries a secondary data source for data.

Parent Elements
<a href="#">dataObjects</a>

Child Elements
<a href="#">query</a>



Attributes:

**initOnLoad:** Specifies whether the secondary data source MUST be queried when the form (1) is loaded. If this attribute is not present, its value MUST be interpreted as "no".

**name:** The name for the secondary data source. The specified name MUST be unique among all secondary data sources in the form template.

**schema:** The name of the XML schema document associated with the secondary data source.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataObject">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element name="query">
        <xsd:complexType>
          <xsd:choice>
            <xsd:element ref="xsf:adoAdapter"/>
            <xsd:element ref="xsf:webServiceAdapter"/>
            <xsd:element ref="xsf:xmlFileAdapter"/>
            <xsd:element ref="xsf:sharepointListAdapter"/>
          </xsd:choice>
        </xsd:complexType>
      </xsd:element>
    </xsd:choice>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="schema" type="xsd:string" use="optional"/>
    <xsd:attribute name="initOnLoad" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.37 query (2)

The **query** element specifies a data adapter that queries a secondary data source.

Parent Elements
<a href="#">dataObject</a>

Child Elements
<a href="#">adoAdapter</a>
<a href="#">sharepointListAdapter</a>
<a href="#">webServiceAdapter</a>
<a href="#">xmlFileAdapter</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="query">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:adoAdapter"/>
      <xsd:element ref="xsf:webServiceAdapter"/>
      <xsd:element ref="xsf:xmlFileAdapter"/>
      <xsd:element ref="xsf:sharepointListAdapter"/>
    </xsd:choice>
  </xsd:complexType>
</xsd:element>

```

### 2.2.38 adoAdapter

The **adoAdapter** element specifies the properties of a data adapter that MUST be created to query data from a database. The **ActiveX Data Objects (ADO)** data adapter MUST NOT support submitting the form file and MUST NOT support querying an Access data source (2).

Parent Elements
<a href="#">dataAdapters</a>
<a href="#">query</a>

Attributes:

**commandText:** The **SQL statement** that is used for querying or submitting data to a database.

**connectionString:** The **ADO connection string** that is used to connect to a database. The specified value MUST NOT specify a data connection (1) to a data source (2) file with the extensions ".mdb", ".mde", or ".accdb".

**name:** The name of the data adapter. The specified name MUST be unique for all data adapters within the form template. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**queryAllowed:** Specifies whether the data adapter is allowed to query the database for data. If this attribute is not present, its value MUST be interpreted as "yes".

**submitAllowed:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="adoAdapter">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdTitle" use="optional"/>
    <xsd:attribute name="connectionString" type="xsd:string" use="required"/>
    <xsd:attribute name="commandText" type="xsd:string" use="required"/>
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.39 webServiceAdapter

The **webServiceAdapter** element specifies the properties of a data adapter that MUST be created to query and submit data to a Web service.

When a form (1) is submitted to a Web service, a **SOAP message** containing data from the form file is sent to the Web service. The SOAP message is generated from an **XML** template file, as specified by section [2.6](#), which is populated by data extracted from the form file.

Parent Elements
<a href="#">dataAdapters</a>
<a href="#">query</a>
<a href="#">submit</a>

Child Elements
<a href="#">operation</a>

Attributes:

**name:** The name of the data adapter. The specified name MUST be unique for all data adapters within the form template. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**queryAllowed:** Specifies whether the data adapter is allowed to query the Web service for data. If this attribute is not present, its value MUST be interpreted as "yes".

**submitAllowed:** Specifies whether the data adapter is allowed to submit data to the Web service. If this attribute is not present, its value MUST be interpreted as "yes".

**useDataSet:** Specifies whether the data adapter supports the ADO.Net **DataSet** type. The ADO.Net **DataSet** is used if the Web service queries data from and submits data to an internal database. If this attribute is not present, its value MUST be interpreted as "no".

**wSDLUri:** The URL of the Web service. If this attribute is not present, its value MUST be interpreted as an empty string (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="webServiceAdapter">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:operation"/>
    </xsd:choice>
    <xsd:attribute name="name" type="xsf:xdTitle" use="optional"/>
    <xsd:attribute name="wSDLUri" type="xsd:string" use="required"/>
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="useDataSet" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

</xsd:element>

## 2.2.40 hwsAdapter

The **hwsAdapter** element MUST NOT be present.

Parent Elements
<a href="#">dataAdapters</a>

Child Elements
<a href="#">hwsOperation</a>

Attributes:

**name:** This attribute MUST NOT be present.

**queryAllowed:** This attribute MUST NOT be present.

**submitAllowed:** This attribute MUST NOT be present.

**wsdlUrl:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="hwsAdapter">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:hwsOperation"/>
    </xsd:choice>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="wsdlUrl" type="xsd:string" use="required"/>
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.41 operation

The **operation** element specifies the Web service operation method that MUST be used by the Web service data adapter for querying and submitting data.

Parent Elements
<a href="#">webServiceAdapter</a>

Child Elements
----------------

Child Elements
<a href="#">input</a>

Attributes:

**name:** The name of the Web service method.

**serviceUrl:** The URL of the Web service to which the request is sent.

**soapAction:** The **SOAP action** of the Web service that is used for the operation. The specified value MUST match the value specified by the **SOAPAction HTTP header field**, as specified in [\[SOAP1.2/2\]](#), in the SOAP request message sent to the Web service.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="operation">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsd:input" minOccurs="0"/>
    </xsd:choice>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="soapAction" type="xsd:string" use="required"/>
    <xsd:attribute name="serviceUrl" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.42 hwsOperation

The **hwsOperation** element MUST NOT be present.

Parent Elements
<a href="#">hwsAdapter</a>

Child Elements
<a href="#">input</a>

Attributes:

**serviceUrl:** This attribute MUST NOT be present.

**type:** This attribute MUST NOT be present.

**typeID:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="hwsOperation">
  <xsd:complexType>
```

```

<xsd:choice>
  <xsd:element ref="xsf:input"/>
</xsd:choice>
<xsd:attribute name="type" type="xsd:string" use="required"/>
<xsd:attribute name="typeID" type="xsd:string" use="required"/>
<xsd:attribute name="serviceUrl" type="xsd:string" use="required"/>
</xsd:complexType>
</xsd:element>

```

### 2.2.43 input

The **input** element specifies a SOAP message that is submitted to a Web service.

Parent Elements
<a href="#">hwsOperation</a>
<a href="#">operation</a>

Child Elements
<a href="#">partFragment</a>

Attributes:

**source:** This attribute specifies the name of the file containing the XML template from which the SOAP message is created. The specified file **MUST** exist in the form template.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="input">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:partFragment"/>
    </xsd:choice>
    <xsd:attribute name="source" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.44 partFragment

The **partFragment** element specifies substitution information for a section of a SOAP message submitted to a Web service. If this element is present, the specified part of the SOAP message **MUST** be substituted with the specified data from the form file.

Parent Elements
<a href="#">input</a>

Attributes:

**dataObject:** This attribute MUST be ignored.

**filter:** An XPath expression that MUST evaluate to an XML subtree in the form file. This attribute MUST be present when substituting a part of the SOAP message with a subset of the form file. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**match:** This attribute specifies an XPath expression that identifies the elements and attributes inside the SOAP message to be replaced.

**replaceWith:** This attribute specifies an XPath expression that identifies the values in the form file that will replace a part of the SOAP message. If the **filter** attribute is present, an XML subtree MUST replace a part of the SOAP message. If the **filter** attribute is not present, an XML node MUST replace a part of the SOAP message.

**sendAsString:** This attribute specifies whether the substituted part of the SOAP message is submitted as a **string**. If this attribute is not present, its value MUST be interpreted as "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="partFragment">
  <xsd:complexType>
    <xsd:attribute name="match" type="xsd:string" use="required"/>
    <xsd:attribute name="replaceWith" type="xsd:string" use="required"/>
    <xsd:attribute name="sendAsString" type="xsd:string" use="optional"/>
    <xsd:attribute name="dataObject" type="xsd:string" use="optional"/>
    <xsd:attribute name="filter" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.45 xmlFileAdapter

The **xmlFileAdapter** element specifies the properties of a data adapter that MUST be created to query an XML file for data. The XML file can be located either within the form template (.xsn) file or at an external location.

Parent Elements
<a href="#">dataAdapters</a>
<a href="#">query</a>

Attributes:

**fileUrl:** Either the URL of an XML file that is not contained in the form template or the name of an XML file that is contained in the form template.

**name:** The name of the data adapter. The specified name MUST be unique for all data adapters within the form template. If this attribute is not present, its value MUST be interpreted as an empty string (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xmlFileAdapter">
```

```

<xsd:complexType>
  <xsd:attribute name="name" type="xsd:string" use="optional"/>
  <xsd:attribute name="fileUrl" type="xsd:anyURI" use="required"/>
</xsd:complexType>
</xsd:element>

```

## 2.2.46 sharepointListAdapter

The **sharepointListAdapter** element specifies the properties of a data adapter that **MUST** be created to query a protocol server list (1). The protocol server list (1) **MUST** be used as a secondary data source, and the protocol server list data adapter **MUST NOT** support submitting the form file.

Parent Elements
<a href="#">dataAdapters</a>
<a href="#">query</a>

Child Elements
<a href="#">field</a>

Attributes:

**infopathGroup:** The name of the parent **XML element** under which all query data is saved in the form file. The data adapter **MUST** save each returned query data item as a child of the specified element.

**name:** The name of the data adapter. The specified name **MUST** be unique for all data adapters within the form template.

**queryAllowed:** Specifies whether the data adapter is allowed to query the protocol server list (1) for data. If this attribute is not present, its value **MUST** be interpreted as "yes".

**sharepointGuid:** The **GUID** of the protocol server list (1).

**siteUrl:** The URL of the parent protocol server **site (2)**.

**submitAllowed:** Specifies whether the data adapter is allowed to submit data to the protocol server list (1). This attribute **MUST NOT** be set to "yes". If this attribute is not present, its value **MUST** be interpreted as "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="sharepointListAdapter">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="field" minOccurs="0" maxOccurs="unbounded">
        <xsd:complexType>
          <xsd:attribute name="sharepointName" type="xsd:string" use="required"/>
          <xsd:attribute name="infopathName" type="xsd:string" use="required"/>
          <xsd:attribute name="isLookup" type="xsd:boolean" use="optional"/>
        </xsd:complexType>
      </xsd:element>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```



```

    </xsd:complexType>
  </xsd:element>
</xsd:sequence>
<xsd:attribute name="name" type="xsd:string" use="required"/>
<xsd:attribute name="siteUrl" type="xsd:string" use="required"/>
<xsd:attribute name="sharepointGuid" type="xsd:string" use="required"/>
<xsd:attribute name="infopathGroup" type="xsd:string" use="required"/>
<xsd:attribute name="queryAllowed" type="xsd:boolean" use="optional"/>
<xsd:attribute name="submitAllowed" type="xsd:boolean" use="optional"/>
</xsd:complexType>
</xsd:element>

```

### 2.2.47 field (1)

The **field** element specifies mapping information for a protocol server list field that is used by the protocol server list data adapter to query a protocol server list (1). Each protocol server list field returned from a query MUST be specified by an instance of this element.

Parent Elements
<a href="#">sharepointListAdapter</a>

Attributes:

**infopathName:** The name of the field in the form view that corresponds to the protocol server list (1) field name, as specified by the value of the **sharepointName** attribute.

**isLookup:** Specifies whether the field is considered a **lookup field**. If this attribute is not present, its value MUST be interpreted as "no".

**sharepointName:** The protocol server list field name that corresponds to the name of the field in the form view specified by the value of the **infopathName** attribute.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="field" minOccurs="0" maxOccurs="unbounded">
  <xsd:complexType>
    <xsd:attribute name="sharepointName" type="xsd:string" use="required"/>
    <xsd:attribute name="infopathName" type="xsd:string" use="required"/>
    <xsd:attribute name="isLookup" type="xsd:boolean" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.48 davAdapter

The **davAdapter** element specifies the properties of a data adapter that MUST be created to submit a form file to a **WebDAV server**. The **Web Distributed Authoring and Versioning Protocol (WebDAV)** data adapter MUST NOT support querying a WebDAV server.

Parent Elements
<a href="#">dataAdapters</a>

Parent Elements
<a href="#">submit</a>

Child Elements
<a href="#">fileName</a>
<a href="#">folderURL</a>

Attributes:

**name:** The name of the data adapter. The specified name MUST be unique for all data adapters within the form template.

**overwriteAllowed:** Specifies whether the data adapter can overwrite an existing file. If this attribute is not present, its value MUST be interpreted as "no".

**queryAllowed:** Specifies whether the data adapter is allowed to query the WebDAV server for data. This attribute MUST be set to "no".

**submitAllowed:** Specifies whether the data adapter is allowed to submit data to the WebDAV server. This attribute MUST be set to "yes".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="davAdapter">
  <xsd:complexType>
    <xsd:all>
      <xsd:element name="folderURL">
        <xsd:complexType>
          <xsd:attribute name="value" type="xsd:string" use="required"/>
        </xsd:complexType>
      </xsd:element>
      <xsd:element name="fileName">
        <xsd:complexType>
          <xsd:attribute name="value" type="xsd:string" use="required"/>
          <xsd:attribute name="valueType" type="xsf:xdExpressionLiteral" use="optional"/>
        </xsd:complexType>
      </xsd:element>
    </xsd:all>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="overwriteAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.49 folderURL

The **folderURL** element specifies the URL of a WebDAV server or protocol server to which the form file MUST be submitted.

Parent Elements
<a href="#">davAdapter</a>

Attributes:

**value:** The server URL. The specified value MUST begin with "http://" or "https://".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="folderURL">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.50 fileName

The **fileName** element specifies a file name that is used when the form file is submitted using the WebDAV data adapter. The form file MUST be submitted as a file with the specified name. If the specified file name does not include a file extension, the extension ".xml" MUST be appended.

Parent Elements
<a href="#">davAdapter</a>

Attributes:

**value:** A file name or an XPath expression that evaluates to a file name. If it is set as an XPath expression, the **valueType** attribute MUST be set to "expression". If it is set to a file name, the **valueType** attribute MUST be set to "literal".

**valueType:** Specifies how the value specified by the **value** attribute is interpreted. If set to "expression", the value attribute value MUST be evaluated as an **XPath** expression. If set to "literal", the value attribute value MUST be evaluated as a literal string.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="fileName">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="valueType" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.51 emailAdapter

The **emailAdapter** element specifies the information needed to submit the form (1) as an attachment to an e-mail with a specified set of recipients, subject, and an introduction. The e-mail MUST have a set of recipients specified by the **to**, **cc**, or **bcc** elements.

Parent Elements
<a href="#">dataAdapters</a>
<a href="#">submit</a>

Child Elements
<a href="#">attachmentFileName</a>
<a href="#">bcc</a>
<a href="#">cc</a>
<a href="#">intro</a>
<a href="#">subject</a>
<a href="#">to</a>

Attributes:

**name:** This attribute specifies the name of the data adapter. The specified name **MUST** be unique for all data adapters within the form template

**queryAllowed:** This attribute specifies whether the data adapter is allowed to query for data. This attribute **MUST** be set to "no".

**submitAllowed:** This attribute specifies whether the data adapter is allowed to submit data via e-mail. This attribute **MUST** be set to "yes".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="emailAdapter">
  <xsd:complexType>
    <xsd:all>
      <xsd:element name="to" minOccurs="0">
        <xsd:complexType>
          <xsd:attribute name="value" type="xsd:string" use="required"/>
          <xsd:attribute name="valueType" type="xsd:expressionLiteral" use="optional"/>
        </xsd:complexType>
      </xsd:element>
      <xsd:element name="cc" minOccurs="0">
        <xsd:complexType>
          <xsd:attribute name="value" type="xsd:string" use="required"/>
          <xsd:attribute name="valueType" type="xsd:expressionLiteral" use="optional"/>
        </xsd:complexType>
      </xsd:element>
      <xsd:element name="bcc" minOccurs="0">
        <xsd:complexType>
          <xsd:attribute name="value" type="xsd:string" use="required"/>
          <xsd:attribute name="valueType" type="xsd:expressionLiteral" use="optional"/>
        </xsd:complexType>
      </xsd:element>
      <xsd:element name="subject" minOccurs="0">
```

```

    <xsd:complexType>
      <xsd:attribute name="value" type="xsd:string" use="required"/>
      <xsd:attribute name="valueType" type="xsf:xdExpressionLiteral" use="optional"/>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="intro" minOccurs="0">
    <xsd:complexType>
      <xsd:attribute name="value" type="xsd:string" use="required"/>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="attachmentFileName" minOccurs="0">
    <xsd:complexType>
      <xsd:attribute name="value" type="xsd:string" use="required"/>
      <xsd:attribute name="valueType" type="xsf:xdExpressionLiteral" use="optional"/>
    </xsd:complexType>
  </xsd:element>
</xsd:all>
<xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
<xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional"/>
<xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional"/>
</xsd:complexType>
</xsd:element>

```

## 2.2.52 to

The **to** element specifies the main recipient information for the e-mail message that is generated when the form file is submitted using the e-mail data adapter.

Parent Elements
<a href="#">emailAdapter</a>

Attributes:

**value:** This attribute specifies either a literal string of recipient addresses or an XPath expression that evaluates to a string of recipient addresses. The recipient addresses MUST be delimited by a ";". If the specified value is a literal string, the **valueType** attribute MUST be unspecified or set to "literal". Otherwise, it MUST be set to "expression".

**valueType:** This attribute specifies whether the **value** attribute value MUST be interpreted as a literal string or an XPath expression. If set to "expression", the **value** attribute value MUST be evaluated as an XPath expression. If set to "literal", the **value** attribute value MUST be evaluated as a literal string.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="to" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="valueType" type="xsf:xdExpressionLiteral" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.53 cc

The **cc** element specifies the **carbon copy (cc) recipients** for the e-mail message that is generated when the form file is submitted using the e-mail data adapter.

Parent Elements
<a href="#">emailAdapter</a>

Attributes:

**value:** This attribute specifies either a literal string of recipient addresses or an XPath expression that evaluates to a string of recipient addresses. The recipient addresses MUST be delimited by a ";". If the specified value is a literal string, the **valueType** attribute MUST be unspecified or set to "literal". Otherwise, it MUST be set to "expression".

**valueType:** This attribute specifies whether the **value** attribute value MUST be interpreted as a literal string or an XPath expression. If set to "expression", the **value** attribute value MUST be evaluated as an XPath expression. If set to "literal", the **value** attribute value MUST be evaluated as a literal string.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="cc" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="valueType" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.54 bcc

The **bcc** element specifies the **blind carbon copy (bcc) recipients** for the e-mail message that is generated when the form file is submitted using the e-mail data adapter.

Parent Elements
<a href="#">emailAdapter</a>

Attributes:

**value:** This attribute specifies either a literal string of recipient addresses or an XPath expression that evaluates to a string of recipient addresses. The recipient addresses MUST be delimited by a ";". If the specified value is a literal string, the **valueType** attribute MUST be unspecified or set to "literal". Otherwise, it MUST be set to "expression".

**valueType:** This attribute specifies whether the **value** attribute value MUST be interpreted as a literal string or an XPath expression. If set to "expression", the **value** attribute value MUST be evaluated as an XPath expression. If set to "literal", the **value** attribute value MUST be evaluated as a literal string.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="bcc" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="valueType" type="xsd:expressionLiteral" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.55 subject

The **subject** element specifies the subject text for the e-mail message that is generated when the form file is submitted using the e-mail data adapter. The specified subject text **MUST NOT** exceed 255 characters.

Parent Elements
<a href="#">emailAdapter</a>

Attributes:

**value:** This attribute specifies either a literal string or an XPath expression that evaluates to a **string**. If the specified value is a literal string, the **valueType** attribute **MUST** be set to "literal". Otherwise, it **MUST** be set to "expression".

**valueType:** This attribute specifies how the **value** attribute value **MUST** be interpreted. If set to "expression", the **value** attribute value **MUST** be evaluated as an XPath expression. If set to "literal", the **value** attribute value **MUST** be evaluated as a literal string.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="subject" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="valueType" type="xsd:expressionLiteral" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.56 intro

The **intro** element specifies the body text for the e-mail message that is generated when the form file is submitted using the e-mail data adapter.

Parent Elements
<a href="#">emailAdapter</a>

Attributes:

**value:** This attribute specifies the body text.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="intro" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.57 attachmentFileName

The **attachmentFileName** element specifies the file name of a file attachment to be included with the e-mail message when the form file is submitted using the e-mail data adapter.

Parent Elements
<a href="#">emailAdapter</a>

Attributes:

**value:** This attribute specifies the value of the **attachmentFileName** element.

**valueType:** This attribute specifies whether the **value** attribute is interpreted as an XPath expression or a string literal. If set to "expression", the **value** attribute value MUST be evaluated as an XPath expression. If set to "literal", the **value** attribute value MUST be evaluated as a literal string.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="attachmentFileName" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="valueType" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.58 submitToHostAdapter

The **submitToHostAdapter** element specifies the properties of a data adapter that MUST be created to submit data to a hosting environment.

Parent Elements
<a href="#">dataAdapters</a>
<a href="#">submit</a>

Attributes:

**name:** This attribute specifies the name of the data adapter. The specified name MUST be unique for all data adapters within the form template.

**queryAllowed:** This attribute MUST be ignored.

**submitAllowed:** This attribute specifies whether the data adapter is allowed to submit data to the host. This attribute MUST be interpreted as "yes".



The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="submitToHostAdapter">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.59 dataAdapters

The **dataAdapters** element specifies the secondary data connection data adapters that submit the form file to a data source (2).

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">adoAdapter</a>
<a href="#">davAdapter</a>
<a href="#">emailAdapter</a>
<a href="#">hwsAdapter</a>
<a href="#">sharepointListAdapter</a>
<a href="#">submitToHostAdapter</a>
<a href="#">webServiceAdapter</a>
<a href="#">xmlFileAdapter</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataAdapters">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:adoAdapter"/>
      <xsd:element ref="xsf:webServiceAdapter"/>
      <xsd:element ref="xsf:xmlFileAdapter"/>
      <xsd:element ref="xsf:sharepointListAdapter"/>
      <xsd:element ref="xsf:davAdapter"/>
      <xsd:element ref="xsf:emailAdapter"/>
      <xsd:element ref="xsf:submitToHostAdapter"/>
      <xsd:element ref="xsf:hwsAdapter"/>
    </xsd:choice>
  </xsd:complexType>
```

</xsd:element>

## 2.2.60 documentSchemas

The **documentSchemas** element specifies the XML schemas for the form template. This element contains references to one or more XML schemas that are used to form an authoritative XML schema to which the form file MUST fully conform, as specified by [\[XMLSCHEMA1\]](#).

The **root element** of the authoritative XML schema is defined in the XML schema identified by the **rootSchema** attribute of the **documentSchema** element. Additional XML schemas are included by using the XML schema's **import** or **include** constructs as follows:

- If the XML schema is included using the XML schema **import** construct, as specified by [\[XMLSCHEMA1\]](#), a **documentSchema** element MUST exist for that imported XML schema.
- If the XML schema is included using the XML schema **include** construct, as specified by [\[XMLSCHEMA1\]](#), a **documentSchema** element MUST NOT exist for the included XML schema.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">documentSchema</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="documentSchemas">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd:documentSchema" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

## 2.2.61 documentSchema

The **documentSchema** element specifies an XML schema for the form template. The specified XML schema MUST be defined by an XML schema document in the form template (.xsn) file.

Parent Elements
<a href="#">documentSchemas</a>

Attributes:

**location:** This attribute specifies the XML schema location as either one of the following:

- The name of the XML schema document.

- Both the XML schema namespace and the name of the XML schema document, separated by a space.

The specified name of the XML schema document MUST match the name of the corresponding file in the form template (.xsn) file. If the XML schema namespace is specified, it MUST match the namespace specified by the **value** attribute of the corresponding **property** element where the **name** attribute is "namespace". All XML schema documents in the form template MUST use different namespaces.

**rootSchema:** This attribute specifies whether an XML schema is the top-level XML schema for form files associated with this form template. There MUST be exactly one **documentSchema** element with a **rootSchema** value of "yes" in a form template. If this attribute is not present, its value MUST be interpreted as "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="documentSchema">
  <xsd:complexType>
    <xsd:attribute name="location" type="xsd:string" use="required"/>
    <xsd:attribute name="rootSchema" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.62 customValidation

The **customValidation** element specifies a rule-based custom validation that is enforced in addition to the XML schema validation.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">errorCondition</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="customValidation">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd:errorCondition" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.63 errorCondition

The **errorCondition** element specifies a custom validation for a set of XML nodes in the form file.

Parent Elements
<a href="#">customValidation</a>

Child Elements
<a href="#">errorMessage</a>

Attributes:

**expression:** This attribute specifies an XPath expression to validate the XML nodes returned by evaluating the **match** attribute value. If the **expressionContext** attribute is present, it specifies a context for the XPath expression.

**expressionContext:** This attribute specifies the XML node that provides the root context for the **expression** attribute value. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**match:** This attribute specifies an XPath expression that evaluates to the XML nodes for which the custom validation applies.

**showErrorOn:** This attribute specifies the XML nodes on which the error MUST be displayed when the form (1) is filled out. If this attribute is not present, its value MUST be interpreted as ".".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="errorCondition">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:errorMessage"/>
    </xsd:sequence>
    <xsd:attribute name="match" type="xsd:string" use="required"/>
    <xsd:attribute name="expression" type="xsd:string" use="required"/>
    <xsd:attribute name="expressionContext" type="xsd:string" use="optional"/>
    <xsd:attribute name="showErrorOn" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.64 errorCondition (1)

The **errorCondition** element specifies the error message that MUST be returned if the value of the specified XML node is considered invalid according to the value specified by the **expression** attribute of the **errorCondition** element.

Parent Elements
<a href="#">errorCondition</a>
<a href="#">override</a>

Attributes:

**shortMessage:** This attribute specifies the short error message that MUST be returned in case of invalid data.

**type:** This attribute specifies the modality of the error message. If this attribute is not present, its value MUST be interpreted as "modal". If the value is "modal", the **errorMessage** element MUST be ignored. If the value is "modeless", this **errorMessage** element MUST NOT be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="errorMessage">
  <xsd:complexType>
    <xsd:simpleContent>
      <xsd:extension base="xsd:xdErrorMessage">
        <xsd:attribute name="type" use="optional">
          <xsd:simpleType>
            <xsd:restriction base="xsd:NMTOKEN">
              <xsd:enumeration value="modal"/>
              <xsd:enumeration value="modeless"/>
            </xsd:restriction>
          </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="shortMessage" use="required">
          <xsd:simpleType>
            <xsd:restriction base="xsd:string">
              <xsd:maxLength value="127"/>
            </xsd:restriction>
          </xsd:simpleType>
        </xsd:attribute>
      </xsd:extension>
    </xsd:simpleContent>
  </xsd:complexType>
</xsd:element>
```

## 2.2.65 domEventHandlers

The **domEventHandlers** element specifies script-based event handlers that are triggered by changes to the form file.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">domEventHandler</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="domEventHandlers">
  <xsd:complexType>
    <xsd:sequence>
```

```

        <xsd:element ref="xsf:domEventHandler" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:unique name="domEventHandler_handlerObject_unique">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@handlerObject"/>
</xsd:unique>
</xsd:element>

```

## 2.2.66 domEventHandler

The **domEventHandler** element specifies a handler for events triggered when the specified XML nodes change. The **child rule** set is run when this handler is called. The various types of child rules specify supported actions to take on the form file.

Parent Elements
<a href="#">domEventHandlers</a>

Child Elements
<a href="#">ruleSetAction</a>

Attributes:

**dataObject:** This attribute specifies the name of the secondary data source that **MUST** be used in the event handler. The specified name **MUST** match the value specified by the corresponding name attribute of the **dataObject** element. If this attribute is not present, its value **MUST** be interpreted as an empty string (1).

**handlerObject:** This attribute specifies the name of the event handler. The specified name **MUST** be unique within the form template.

**match:** This attribute specifies the XML nodes for which the event handler is declared. The value **MUST** be a valid XPath expression that identifies one or more XML nodes.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="domEventHandler">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:ruleSetAction" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="dataObject" type="xsd:string" use="optional"/>
    <xsd:attribute name="match" type="xsd:string" use="required"/>
    <xsd:attribute name="handlerObject" type="xsd:string" use="optional"/>
  </xsd:complexType>
  <xsd:keyref name="domEventHandler_ruleSetAction" refer="xsf:ruleset_name_key">
    <xsd:selector xpath="./xsf:ruleSetAction"/>
    <xsd:field xpath="@ruleSet"/>
  </xsd:keyref>

```

</xsd:element>

## 2.2.67 importParameters

The **importParameters** element specifies whether the form file can merge another form file. The merge feature **MUST** be enabled through this element.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">importSource</a>

Attributes:

**enabled:** This attribute specifies whether form (1) merging is enabled.

**useScriptHandler:** This attribute **MUST** be set to "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="importParameters">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:importSource" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="enabled" type="xsf:xdYesNo" use="required"/>
    <xsd:attribute name="useScriptHandler" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.68 importSource

The **importSource** element specifies the parameters that are used when merging a source form file of a specific XML schema into a destination form file. If this element is not present, the default XSLT file **MUST** be used for all XSLTs during the merge operation.

Parent Elements
<a href="#">importParameters</a>

Attributes:

**authoringOfTransform:** This attribute specifies whether the XSLTs are automatically authored. If this attribute is not present, its value **MUST** be interpreted as "manual".

**name:** This attribute specifies the name of the source form (1).

**schema:** This attribute specifies the name of the XML schema document that is used to validate the source form file during the merge operation. The specified file **MUST** exist in the form template.

**transform:** This attribute specifies the name of the XSLT file that is used during the merge operation. The specified name **MUST** match the name of the corresponding file in the form template.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="importSource">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="schema" type="xsf:xdFileName" use="required"/>
    <xsd:attribute name="transform" type="xsf:xdFileName" use="required"/>
    <xsd:attribute name="authoringOfTransform" type="xsf:xdManualAuto" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.69 listProperties

The **listProperties** element specifies a collection of fields that are promoted from the form file and made available to the default **list view** of a protocol server **form library** as properties on that protocol server form library.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">fields</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="listProperties">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf:fields"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>
```

## 2.2.70 fields

The **fields** element specifies a collection of fields that are promoted from the form file and made available to the default list view of a protocol server form library.

Parent Elements
<a href="#">listProperties</a>



Child Elements
<a href="#">field</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="fields">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:field" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.71 field (2)

The **field** element specifies a field that is promoted from the form file and made available to the default list view of a protocol server form library. Each promoted field **MUST** be specified by an instance of this element.

Parent Elements
<a href="#">fields</a>

Attributes:

**aggregation:** This attribute specifies how a single XML node or a collection of XML nodes returned from evaluating the **node** attribute value is aggregated to obtain a value for the field. If this attribute is not present, its value **MUST** be interpreted as an empty string (1). If this attribute is present, it **MUST** be set to one of the following values:

- **average:** The aggregate **MUST** be determined by calculating the average of all XML node values. This value **MUST NOT** be specified if any of the XML nodes is not of an XML schema number data type.
- **count:** The aggregate value **MUST** be determined by calculating the number of XML nodes.
- **first:** The aggregate value **MUST** be determined by returning the first XML node value in the collection.
- **last:** The aggregate value **MUST** be determined by returning the last XML node value in the collection.
- **max:** The aggregate value **MUST** be determined by calculating the maximum XML node value in the collection. This value **MUST NOT** be specified if any of the XML nodes is not of an XML schema number data type.
- **merge:** The aggregate value **MUST** be determined by concatenating all XML node values in the collection separated by newline characters, or Unicode #x000D and #x000A.

- **min:** The aggregate value MUST be determined by calculating the minimum XML node value in the collection. This value MUST NOT be specified if any of the XML nodes is not of an XML schema number data type.
- **plaintext:** The aggregate value MUST be determined by returning the raw, unformatted text value of the XML node. This value MUST NOT be specified if the **node** attribute value evaluates to a collection of more than one XML node. This value MUST NOT be specified if the XML nodes is not of an XML schema rich text data type.
- **sum:** The aggregate value MUST be determined by calculating the sum of all XML node values in the collection. This value MUST NOT be specified if any of the XML nodes is not of an XML schema number data type.

**columnName:** This attribute specifies the internal name of the corresponding **column (2)** in the **Structured Query Language (SQL)** database underlying the protocol server list view. The specified value MUST match the **columnName** attribute for the **fieldExtension** element.

**maxLength:** This attribute specifies the maximum length of the field in the number of bytes. If this attribute is not present, its value MUST be determined by the field type and protocol server site settings.

**name:** This attribute specifies the **friendly name** of the field used on the protocol server list view.

**node:** This attribute specifies the XPath expression that evaluates to the corresponding field in the form file.

**required:** This attribute specifies whether this field accepts null values. If this attribute is not present, its value MUST be interpreted as "no".

**type:** This attribute specifies the standard XML schema data type of the field.

**viewable:** This attribute specifies whether this field is added to the default protocol server list view. If this attribute is not present, its value MUST be interpreted as "yes".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="field">
  <xsd:complexType>
    <xsd:attribute name="type" type="xsd:NMTOKEN" use="required"/>
    <xsd:attribute name="name" type="xsd:xdTitle" use="required"/>
    <xsd:attribute name="columnName" type="xsd:xdTitle" use="required"/>
    <xsd:attribute name="required" type="xsd:xdYesNo" use="optional"/>
    <xsd:attribute name="viewable" type="xsd:xdYesNo" use="optional"/>
    <xsd:attribute name="node" type="xsd:string" use="required"/>
    <xsd:attribute name="maxLength" type="xsd:byte"/>
    <xsd:attribute name="aggregation" use="optional">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="sum"/>
          <xsd:enumeration value="count"/>
          <xsd:enumeration value="average"/>
          <xsd:enumeration value="min"/>
          <xsd:enumeration value="max"/>
          <xsd:enumeration value="first"/>
          <xsd:enumeration value="last"/>
          <xsd:enumeration value="merge"/>
          <xsd:enumeration value="plaintext"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
```

```

    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
</xsd:complexType>
</xsd:element>

```

## 2.2.72 submit

The **submit** element specifies the necessary information for configuring the submit operation for the form (1). This includes information regarding the method to use, user interface elements that call the operation, and related actions to perform after the submit operation is complete.

A submit element can be associated with a data adapter, rule set, script handler, or HTTP handler as follows:

- **Data adapter:** The form file is submitted using a data adapter if the target for the submit operation is a data source (2) with an associated data adapter, as specified by the **davAdapter**, **emailAdapter**, **submitToHostAdapter**, and **webServiceAdapter** elements. The **data adapter** child element **MUST** have the **submitAllowed** attribute set to "yes".
- **Rule Set:** The form file is submitted by an associated collection of rules (1) that execute associated actions as specified by the **rulesetAction** element.
- **Script Handler:** The form file is submitted by associated form code as specified by the **useScriptHandler** element.
- **HTTP Handler:** The form file is submitted using the **HTTP method** specified by the **useHttpHandler** element (section [2.2.76](#)).

Prior to the **submit** operation being performed, the form file **MUST** fully conform to the XML schema specified in section [2.3](#) and to any custom validation defined in the form template specified by the **customValidation** element.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">davAdapter</a>
<a href="#">emailAdapter</a>
<a href="#">errorMessage</a>
<a href="#">ruleSetAction</a>
<a href="#">submitAction</a>
<a href="#">submitToHostAdapter</a>
<a href="#">successMessage</a>
<a href="#">useHttpHandler</a>

Child Elements
<a href="#">useQueryAdapter</a>
<a href="#">useScriptHandler</a>
<a href="#">webServiceAdapter</a>

Attributes:

**caption:** This attribute specifies the name of the submit button. A corresponding button **MUST** appear on the form view toolbar when the form (1) is loaded. If this attribute is not present, its value **MUST** be interpreted as "Submit".

**disableMenuItem:** This attribute specifies whether the button for submitting the form file is available. If this attribute's value is set to "yes", the button **MUST** be removed from the toolbar. If this attribute is not present, its value **MUST** be interpreted as "no".

**onAfterSubmit:** This attribute specifies an action that **MUST** be taken upon successful submission of the form file. If this attribute is not present, its value **MUST** be interpreted as "keepOpen". The specified value **MUST** be one of the following:

- **close:** The form (1) closes.
- **keepOpen:** The form state does not change.
- **openNew:** The form (1) resets itself to the state of a new form (1).

**showSignatureReminder:** This attribute **MUST** be ignored.

**showStatusDialog:** This attribute specifies that a dialog box **MUST** be shown after the form file is submitted if this attribute's value is "yes". If this attribute is not present, its value **MUST** be interpreted as "yes".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="submit">
  <xsd:complexType>
    <xsd:all>
      <xsd:element name="submitAction" minOccurs="0">
        <xsd:complexType>
          <xsd:attribute name="adapter" type="xsf:xdTitle" use="required"/>
        </xsd:complexType>
        <xsd:keyref name="submitAdapter_name_keyref" refer="xsf:adapter_name_key">
          <xsd:selector xpath="."/>
          <xsd:field xpath="@adapter"/>
        </xsd:keyref>
      </xsd:element>
      <xsd:element ref="xsf:useHttpHandler" minOccurs="0"/>
      <xsd:element ref="xsf:useScriptHandler" minOccurs="0"/>
      <xsd:element ref="xsf:ruleSetAction" minOccurs="0"/>
      <xsd:element ref="xsf:useQueryAdapter" minOccurs="0"/>
      <xsd:element ref="xsf:webServiceAdapter" minOccurs="0"/>
      <xsd:element ref="xsf:davAdapter" minOccurs="0"/>
      <xsd:element ref="xsf:emailAdapter" minOccurs="0"/>
      <xsd:element ref="xsf:submitToHostAdapter" minOccurs="0"/>
      <xsd:element name="successMessage" type="xsd:string" minOccurs="0"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>
```

```

    <xsd:element name="errorMessage" type="xsd:string" minOccurs="0"/>
  </xsd:all>
  <xsd:attribute name="caption" type="xsd:string" use="optional"/>
  <xsd:attribute name="onAfterSubmit" use="optional">
    <xsd:simpleType>
      <xsd:restriction base="xsd:NMTOKEN">
        <xsd:enumeration value="close"/>
        <xsd:enumeration value="keepOpen"/>
        <xsd:enumeration value="openNew"/>
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:attribute>
  <xsd:attribute name="showStatusDialog" type="xsd:boolean" use="optional"/>
  <xsd:attribute name="showSignatureReminder" type="xsd:boolean" use="optional"/>
  <xsd:attribute name="disableMenuItem" type="xsd:boolean" use="optional"/>
</xsd:complexType>
<xsd:keyref name="submit_ruleSetAction" refer="xsd:ruleset_name_key">
  <xsd:selector xpath="./xsd:ruleSetAction"/>
  <xsd:field xpath="@ruleSet"/>
</xsd:keyref>
</xsd:element>

```

### 2.2.73 submitAction (1)

The **submitAction** element MUST NOT be present.

Parent Elements
<a href="#">submit</a>

Attributes:

**adapter:** This attribute MUST NOT be present.

The following W3C XML Schema ([XMLSCHEMA1](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="submitAction" minOccurs="0">
  <xsd:complexType>
    <xsd:attribute name="adapter" type="xsd:string" use="required"/>
  </xsd:complexType>
  <xsd:keyref name="submitAdapter_name_keyref" refer="xsd:adapter_name_key">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@adapter"/>
  </xsd:keyref>
</xsd:element>

```

### 2.2.74 successMessage

The **successMessage** element specifies the **string** used to notify the user that the form (1) was submitted successfully.

Parent Elements
-----------------

Parent Elements
<a href="#">submit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="successMessage" type="xsd:string" minOccurs="0"/>
```

### 2.2.75 errorMessage (2)

The **errorMessage** element specifies the **string** used to notify the user that the form (1) was not submitted successfully.

Parent Elements
<a href="#">submit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="errorMessage" type="xsd:string" minOccurs="0"/>
```

### 2.2.76 useHttpHandler

The **useHttpHandler** element specifies that the form (1) **MUST** be submitted to the specified URL using the specified HTTP method.

Parent Elements
<a href="#">submit</a>

Attributes:

**href:** This attribute specifies the URL to which the form (1) is submitted.

**method:** This attribute specifies the HTTP method that is used to submit the form (1). This value **MUST** be "POST".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="useHttpHandler">
  <xsd:complexType>
    <xsd:attribute name="method" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="POST"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="href" type="xsd:anyURI" use="required"/>
  </xsd:complexType>
```

```
</xsd:element>
```

## 2.2.77 useScriptHandler

The **useScriptHandler** element specifies that the corresponding action **MUST** be performed using form code.

Parent Elements
<a href="#">documentVersionUpgrade</a>
<a href="#">save</a>
<a href="#">submit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="useScriptHandler"/>
```

## 2.2.78 useQueryAdapter

The **useQueryAdapter** element **MUST NOT** be present.

Parent Elements
<a href="#">submit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="useQueryAdapter"/>
```

## 2.2.79 onLoad

The **onLoad** element specifies a set of rules (1) that is called when the form (1) is loaded.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">ruleSetAction</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="onLoad">
```

```

<xsd:complexType>
  <xsd:sequence>
    <xsd:element ref="xsf:ruleSetAction" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:keyref name="load_ruleSetAction" refer="xsf:ruleset_name_key">
  <xsd:selector xpath="./xsf:ruleSetAction"/>
  <xsd:field xpath="@ruleSet"/>
</xsd:keyref>
</xsd:element>

```

### 2.2.80 save (2)

The **save** element MUST NOT be present.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">useScriptHandler</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="save">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="1">
      <xsd:element ref="xsf:useScriptHandler"/>
    </xsd:choice>
  </xsd:complexType>
</xsd:element>

```

### 2.2.81 roles

The **roles** element MUST NOT be present.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">membership</a>
<a href="#">role</a>

Attributes:



**default:** This attribute MUST NOT be present.

**hideStatusBarDisplay:** This attribute MUST NOT be present.

**initiator:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="roles">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:role" minOccurs="1" maxOccurs="unbounded"/>
      <xsd:element ref="xsf:membership" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="default" type="xsd:string" use="required"/>
    <xsd:attribute name="initiator" type="xsd:string" use="optional"/>
    <xsd:attribute name="hideStatusBarDisplay" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
  <!-- role names must be unique -->
  <xsd:unique name="roles_name_unique">
    <xsd:selector xpath="./xsf:role"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
  <!-- fields must reference existing role -->
  <xsd:key name="role_name_key">
    <xsd:selector xpath="./xsf:role"/>
    <xsd:field xpath="@name"/>
  </xsd:key>
  <xsd:keyref name="role_default" refer="xsf:role_name_key">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@default"/>
  </xsd:keyref>
  <xsd:keyref name="role_initiator" refer="xsf:role_name_key">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@initiator"/>
  </xsd:keyref>
  <xsd:keyref name="role_membership" refer="xsf:role_name_key">
    <xsd:selector xpath="./xsf:membership/*"/>
    <xsd:field xpath="@memberOf"/>
  </xsd:keyref>
</xsd:element>
```

## 2.2.82 role

The **role** element MUST NOT be present.

Parent Elements
<a href="#">roles</a>

Attributes:

**name:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="role">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:roleName" use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.83 membership

The **membership** element MUST NOT be present.

Parent Elements
<a href="#">roles</a>

Child Elements
<a href="#">getUserNameFromData</a>
<a href="#">group</a>
<a href="#">userName</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="membership">
  <xsd:complexType>
    <xsd:choice minOccurs="1" maxOccurs="unbounded">
      <xsd:element ref="xsd:getUserNameFromData"/>
      <xsd:element ref="xsd:userName"/>
      <xsd:element ref="xsd:group"/>
    </xsd:choice>
  </xsd:complexType>
</xsd:element>

```

### 2.2.84 getUserNameFromData

The **getUserNameFromData** element MUST NOT be present.

Parent Elements
<a href="#">membership</a>

Attributes:

**dataObject:** This attribute MUST NOT be present.

**memberOf:** This attribute MUST NOT be present.

**select:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="getUserDataFromData">
  <xsd:complexType>
    <xsd:attribute name="dataObject" type="xsd:string" use="optional"/>
    <xsd:attribute name="select" type="xsd:string" use="required"/>
    <xsd:attribute name="memberOf" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.85 userName

The **userName** element MUST NOT be present.

Parent Elements
<a href="#">membership</a>

Attributes:

**memberOf:** This attribute MUST NOT be present.

**name:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="userName">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="memberOf" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.86 group

The **group** element MUST NOT be present.

Parent Elements
<a href="#">membership</a>

Attributes:

**memberOf:** This attribute MUST NOT be present.

**name:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="group">
  <xsd:complexType>
```

```

    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="memberOf" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.87 hwsWorkflow

The **hwsWorkflow** element MUST NOT be present.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">allowedActions</a>
<a href="#">allowedTasks</a>
<a href="#">location</a>

Attributes:

**taskpaneVisible:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="hwsWorkflow">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:location" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="xsf:allowedActions" minOccurs="1" maxOccurs="1"/>
      <xsd:element ref="xsf:allowedTasks" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="taskpaneVisible" type="xsf:xdYesNo"/>
  </xsd:complexType>
  <xsd:unique name="hws_actiontask_name">
    <xsd:selector xpath="./xsf:allowedActions/xsf:action|./xsf:allowedTasks/xsf:task"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
</xsd:element>

```

### 2.2.88 location

The **location** element MUST NOT be present.

Parent Elements
<a href="#">hwsWorkflow</a>

Attributes:

**url:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="location">
  <xsd:complexType>
    <xsd:attribute name="url" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.89 allowedActions

The **allowedActions** element MUST NOT be present.

Parent Elements
<a href="#">hwsWorkflow</a>

Child Elements
<a href="#">action</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="allowedActions">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:action" minOccurs="1" maxOccurs="20"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:unique name="hws_actionTypeID_unique">
    <xsd:selector xpath="./xsf:action"/>
    <xsd:field xpath="@actionTypeID"/>
  </xsd:unique>
</xsd:element>
```

### 2.2.90 action

The **action** element MUST NOT be present.

Parent Elements
<a href="#">allowedActions</a>

Attributes:

**actionTypeID:** This attribute MUST NOT be present.

**canInitiateWorkflow:** This attribute MUST NOT be present.

**caption:** This attribute MUST NOT be present.

**name:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="action">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="actionTypeID" type="xsd:string" use="required"/>
    <xsd:attribute name="canInitiateWorkflow" type="xsd:boolean" use="required"/>
    <xsd:attribute name="caption" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.91 allowedTasks

The **allowedTasks** element MUST NOT be present.

Parent Elements
<a href="#">hwsWorkflow</a>

Child Elements
<a href="#">task</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="allowedTasks">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd:task" minOccurs="1" maxOccurs="20"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:unique name="hws_taskID_unique">
    <xsd:selector xpath="./xsd:task"/>
    <xsd:field xpath="@taskTypeID"/>
  </xsd:unique>
</xsd:element>
```

### 2.2.92 task

The **task** element MUST NOT be present.

Parent Elements
<a href="#">allowedTasks</a>

Attributes:

**caption:** This attribute MUST NOT be present.

**name:** This attribute MUST NOT be present.

**taskTypeID:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="task">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdHWSname" use="required"/>
    <xsd:attribute name="taskTypeID" type="xsd:string" use="required"/>
    <xsd:attribute name="caption" type="xsf:xdHWSCaption" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.93 fileNew

The **fileNew** element specifies the name and location of the XML template file that contains default values for a new form (1) based on the form template.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">initialXmlDocument</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="fileNew">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:initialXmlDocument"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.94 initialXmlDocument

The **initialXmlDocument** element specifies a reference to the template.xml file used for the creation of a new form (1).

When the new form (1) is created, its field values MUST be populated with existing default values specified by the template.xml file, as defined in section [2.7](#).

Parent Elements
-----------------

Parent Elements
<a href="#">fileNew</a>

Child Elements
<a href="#">customCategory</a>

Attributes:

**caption:** This attribute specifies the name of the form (1).

**href:** This attribute specifies the name of the template.xml file. The specified file name MUST match the name of the corresponding file in the form template.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="initialXmlDocument">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:customCategory" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="href" type="xsf:xdFileName" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.95 customCategory

The **customCategory** element specifies the form template category, which is used to group together form templates.

Parent Elements
<a href="#">initialXmlDocument</a>

Attributes:

**name:** This attribute specifies the name of the custom category.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="customCategory">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
  </xsd:complexType>
</xsd:element>
```



## 2.2.96 package

The **package** element specifies the collection of all files in the form template.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">files</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="package">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:files"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

## 2.2.97 files

The **files** element specifies the collection of all files in the form template, as specified in section [2.1](#), and their properties.

Parent Elements
<a href="#">package</a>

Child Elements
<a href="#">file</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="files">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:file" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

## 2.2.98 file

The **file** element specifies any file other than the form definition (.xsf) file contained within the form template (.xsn) file. Every such contained file MUST be specified by an instance of this element.

Parent Elements
<a href="#">files</a>

Child Elements
<a href="#">fileProperties</a>

Attributes:

**name:** This attribute specifies the name of the file that MUST exist in the form template.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="file">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:fileProperties" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsf:xdFileName" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.99 fileProperties

The **fileProperties** element specifies a collection of properties of a file in the form template

Parent Elements
<a href="#">file</a>

Child Elements
<a href="#">property</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="fileProperties">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:property" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
```

</xsd:element>

## 2.2.100 property

The **property** element specifies a property of a file that is part of the form template. Each file property MUST be specified by an instance of this element.

Parent Elements
<a href="#">fileProperties</a>

Attributes:

**name:** This attribute specifies the name of the file property and MUST be set to one of the following acceptable values. Each **property** element MUST have a unique name within the set of file properties specified by each **fileProperties** element. The corresponding acceptable values of the **value** attribute are listed for each possible value of the **name** attribute:

- **componentId:** The use of this value specifies that the corresponding **value** attribute value is an identifier that uniquely identifies the form view file. A form view file, as specified in section 2.4, MUST have a file property with this name. The **value** attribute value MUST be set to a positive integer that is unique among all form view file properties in the form template.
- **dataObject:** The use of this value specifies that the parent **file** element represents an XML schema document used to validate the secondary data source. The **value** attribute value MUST be set to the value of the name attribute of the **file** element of the file that is used as a secondary data source.
- **editability:** The use of this value specifies that the corresponding **value** attribute value is the degree to which the XML schema document is editable. The file specifying the XML schema of the form file MUST have a file property with this name. The **value** attribute value MUST be set to one of the following values:
  - **full:** This value specifies that the XML schema document MUST be fully editable.
  - **partial** – This value specifies that the XML schema document MUST be locked for editing. XML schema documents for secondary data sources MUST have an editability property set to this value.
- **fileType:** The use of this value specifies that the corresponding **value** attribute value specifies the file type. The **value** attribute value MUST be set to one of the following values:
  - **pdb:** This value specifies that the file MUST be a **symbol file**. A form template containing business objects MAY have any number of files of this type.
  - **refAssembly** – This value specifies that the file MUST be a form code **assembly** other than the main form code assembly. A form template containing business objects MAY have any number of files of this type.
  - **rootAssembly:** This value specifies that the file refers to the main assembly of the form (1) code. A form template containing business objects MUST have exactly one file property with a "rootAssembly" value.
  - **resource:** This value specifies that the file MUST be used as a secondary data source.

- **sampleData:** This value specifies that the file MUST be a file containing sample data for the form (1).
- **lang:** The use of this value specifies that the corresponding **value** attribute value MUST be the language of the form file. A form view file, as specified in section 2.4, MUST have a file property with this name. The **value** attribute value MUST be set to the **language code identifier (LCID)**, as specified in [MS-LCID], corresponding to the user **locale**.
- **namespace:** The use of this value specifies that the corresponding **value** attribute value MUST be the namespace of the XML schema document. An XML schema document MUST have a file property with this name. The **value** attribute value MUST be set to the namespace of the XML schema document.
- **rootElement:** The use of this value specifies that the corresponding **value** attribute value MUST be the root element of the XML schema document. An XML schema document MUST have a file property with this name. The **value** attribute value MUST be set to root element of the XML schema document.
- **useOnDemandAlgorithm:** The use of this value MUST be ignored.
- **xmlToEditName:** The use of this value specifies that the corresponding **value** attribute value MUST be equal to the value of the **value** attribute for the **componentId** file property. A form view file, as specified in section 2.4, MUST have a file property with this name. The **value** attribute value MUST be set to a positive integer.

**type:** This attribute MUST be set to "string".

**value:** This attribute specifies the value of the file property and MUST be set to one of the corresponding acceptable values specified in the **name** attribute.

The following W3C XML Schema ([XMLSCHEMA1] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="property">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
    <xsd:attribute name="type" type="xsd:QName" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.101 permissions

The **permissions** element specifies the permissions required to instantiate **custom controls** in the form view.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">allowedControl</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="permissions">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:allowedControl"/>
    </xsd:choice>
  </xsd:complexType>
</xsd:element>
```

### 2.2.102 allowedControl

The **allowedControl** element MUST be ignored.

Parent Elements
<a href="#">permissions</a>

Attributes:

**cabFile:** This attribute MUST be ignored.

**clsid:** This attribute MUST be ignored.

**version:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="allowedControl">
  <xsd:complexType>
    <xsd:attribute name="cabFile" type="xsd:string" use="optional"/>
    <xsd:attribute name="clsid" type="xsd:string" use="required"/>
    <xsd:attribute name="version" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.103 externalViews

The **externalViews** element MUST be ignored.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">externalView</a>

Attributes:

**default:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="externalViews">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:externalView" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="default" type="xsd:string"/>
  </xsd:complexType>
  <xsd:unique name="externalViews_name_unique">
    <xsd:selector xpath="./xsf:externalView"/>
    <xsd:field xpath="@default"/>
  </xsd:unique>
  <xsd:keyref name="external_views_printView" refer="xsf:externalView_name_key">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@default"/>
  </xsd:keyref>
</xsd:element>
```

### 2.2.104 externalView

The **externalView** element MUST be ignored.

Parent Elements
<a href="#">externalViews</a>

Child Elements
<a href="#">mainpane</a>

Attributes:

**designMode:** This attribute MUST be ignored.

**name:** This attribute MUST be ignored.

**target:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="externalView">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:mainpane"/>
    </xsd:sequence>
    <xsd:attribute name="target" type="xsd:string"/>
    <xsd:attribute name="name" type="xsf:xdViewName" use="required"/>
    <xsd:attribute name="designMode" type="xsf:xdDesignMode"/>
  </xsd:complexType>
```

</xsd:element>

### 2.2.105 attributeData

The **attributeData** element specifies the name and associated value of an attribute that MUST be inserted, or MUST be modified if it already exists, by the insert action of the **xCollection** or **xOptional** controls. This element MUST be a child element of the **chooseFragment** element, as specified in section [2.2.107](#).

Attributes:

**attribute:** This attribute specifies the name of the inserted attribute.

**value:** This attribute specifies the value of the inserted attribute.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="attributeData">
  <xsd:complexType>
    <xsd:attribute name="attribute" type="xsd:string" use="required"/>
    <xsd:attribute name="value" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.106 button (1)

The **button** element specifies a button on a control menu and its associated action that MUST be performed when the button is pressed.

Parent Elements
<a href="#">menu</a>
<a href="#">menuArea</a>
<a href="#">toolbar</a>

Attributes:

**action:** This attribute specifies the control action that is performed. This attribute MUST be specified for buttons that manipulate the following controls:

- **xCollection:** A repeating section control, as specified in section [2.3.1.11](#), or a repeating table control, as specified in section [2.4.1.16](#).
- **xOptional:** An optional section control, as specified in section [2.4.1.18](#).
- **xFileAttachment:** A file attachment control, as specified in section [2.3.1.7](#).

The specified value MUST be one of the following:

- **xCollection::insert:** This action inserts a new section after all existing sections.
- **xCollection::insertBefore:** This action inserts a new section before the current section.

- **xCollection::insertAfter:** This action inserts a new section after the current section.
- **xCollection::remove:** This action deletes the current section.
- **xCollection::removeAll:** This action deletes all existing sections.
- **xOptional::insert:** This action inserts a new section after the current section.
- **xOptional::remove:** This action deletes the current section.
- **xFileAttachment::attach:** This action attaches a file to the form file.
- **xFileAttachment::open:** This action opens an attached file.
- **xFileAttachment::saveAs:** This action saves an attached file out of the form file.
- **xFileAttachment::remove:** This action removes an attached file from the form file.

**caption:** This attribute specifies the caption that **MUST** be displayed on the button. The value **MUST** be defined.

**icon:** This attribute **MUST** be ignored.

**name:** This attribute **MUST** be ignored.

**showIf:** This attribute **MUST** [<3>](#) be ignored. . The specified value **MUST** be one of the following:

- **always:** This value is deprecated.
- **enabled:** This value is deprecated.
- **immediate:** This button **SHOULD** show if the menu is shown.

**tooltip:** This attribute **MUST** be ignored.

**xmlToEdit:** This attribute specifies the name of the control for which the button is used. The specified value **MUST** match the value of the **name** attribute of the corresponding **xmlToEdit** element, as specified in section [2.2.124](#). This attribute **MUST** be defined for buttons used with collection controls.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="button">
  <xsd:complexType>
    <xsd:attribute name="caption" type="xsd:string"/>
    <xsd:attribute name="icon" type="xsd:string"/>
    <xsd:attribute name="tooltip" type="xsd:string"/>
    <xsd:attribute name="name" type="xsd:NMTOKEN"/>
    <xsd:attribute name="xmlToEdit" type="xsd:NMTOKEN"/>
    <xsd:attribute name="action">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="xCollection::insert"/>
          <xsd:enumeration value="xCollection::insertBefore"/>
          <xsd:enumeration value="xCollection::insertAfter"/>
          <xsd:enumeration value="xCollection::remove"/>
          <xsd:enumeration value="xCollection::refreshFilter"/>
          <xsd:enumeration value="xCollection::removeAll"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
```



```

        <xsd:enumeration value="xOptional::insert"/>
        <xsd:enumeration value="xOptional::remove"/>
        <xsd:enumeration value="xReplace::replace"/>
        <xsd:enumeration value="xFileAttachment::attach"/>
        <xsd:enumeration value="xFileAttachment::open"/>
        <xsd:enumeration value="xFileAttachment::saveAs"/>
        <xsd:enumeration value="xFileAttachment::remove"/>
    </xsd:restriction>
</xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="showIf">
    <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
            <xsd:enumeration value="always"/>
            <xsd:enumeration value="enabled"/>
            <xsd:enumeration value="immediate"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
</xsd:complexType>
</xsd:element>

```

### 2.2.107 chooseFragment

The **chooseFragment** element specifies an **XML fragment**. An XML fragment is an XML subtree that is intended to represent a unit of data. It is typically used for data insertion and replacement operations.

Parent Elements
<a href="#">fragmentToInsert</a>

Attributes:

**followingSiblings:** This attribute specifies a relative XPath expression from the parent node. The parent node specifies the XML node prior to which the insertion of the XML fragment occurs. If the node is not found, the insertion action **MUST** be an append. If this attribute is not present, its value **MUST** be interpreted as an empty string (1).

**innerFragment:** This attribute specifies a relative XPath expression from the parent node to the smallest fragment to be inserted. If this attribute is not present, its value **MUST** be interpreted as an empty string (1).

**parent:** This attribute specifies a relative XPath expression from the container node that specifies the XML node under which the XML fragment **MUST** be inserted. If this attribute is not present, its value **MUST** be interpreted as a period (".").

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="chooseFragment">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
    </xsd:sequence>
    <xsd:attribute name="parent" type="xsd:string"/>
  </xsd:complexType>
</xsd:element>

```

```

    <xsd:attribute name="followingSiblings" type="xsd:string" use="optional"/>
    <xsd:attribute name="innerFragment" type="xsd:string" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.108 editWith

The **editWith** element specifies an instance of a control that edits data in the form file.

Parent Elements
<a href="#">xmlToEdit</a>

Child Elements
<a href="#">fragmentToInsert</a>
<a href="#">masterDetail</a>

Attributes:

**allowedFileTypes:** This attribute MUST be ignored.

**autoComplete:** This attribute specifies whether auto-completion of fields is on. If this attribute is not present, its value MUST be interpreted as "no".

**caption:** This attribute specifies an identifier for alternate forms of XML data to be used in the control. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**component:** This attribute specifies the name of the control that is referenced by an instance of the **xmlToEdit** element (section [2.2.124](#)).

**component:** This attribute specifies the name of the control that is referenced by an instance of the **xmlToEdit** element. The specified value MUST be one of the following:

- **xCollection:** A repeating section control, as specified in section [2.4.1.15](#), or a repeating table control, as specified in section [2.4.1.16](#).
- **xOptional:** An optional section control, as specified in section [2.4.1.18](#).
- **xReplace:** This value MUST be ignored.
- **xTextList:** This value MUST be ignored.
- **xField:** Maps to one of the following controls:
  - Check Box control, as specified in section [2.4.1.6](#).
  - Date Picker control, as specified in section [2.4.1.8](#).
  - Drop-down list control, as specified in section [2.4.1.9](#).
  - List Box control, as specified in section [2.4.1.13](#).

- Option Button control, as specified in section [2.4.1.14](#).
- Rich Text Box control, as specified in section [2.4.1.17](#).
- Text Box control, as specified in section [2.4.1.20](#).
- **xImage**: This value MUST be ignored.
- **xFileAttachment**: A file attachment control, as specified in section [2.4.1.11](#).

**field**: This attribute MUST be ignored.

**filterDependency**: This attribute MUST be ignored.

**maxLength**: This attribute MUST be ignored.

**proofing**: This attribute MUST be ignored.

**removeAncestors**: This attribute MUST be ignored.

**type**: This attribute MUST be ignored if the specified value is not "rich". If the specified value is "rich", the following MUST be true:

- If the **xmlToEditExtension** element (section [2.2.147.43](#)) is present, both the **excludeEmbeddedImages** and **allowLinkedImages** attributes of the **xmlToEditExtension** element MUST be set to "yes".
- Otherwise, the **clientOnly** attribute of the **viewExtension** element (section [2.2.147.42](#)) that is parent of the **xmlToEditExtension** element (section [2.2.147.43](#)) MUST be set to "no".

**useFilter**: This attribute MUST be ignored.

**widgetIcon**: This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="editWith">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:masterDetail" minOccurs="0" maxOccurs="1"/>
      <xsd:element ref="xsf:fragmentToInsert" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="component" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="xCollection"/>
          <xsd:enumeration value="xOptional"/>
          <xsd:enumeration value="xReplace"/>
          <xsd:enumeration value="xTextList"/>
          <xsd:enumeration value="xField"/>
          <xsd:enumeration value="xImage"/>
          <xsd:enumeration value="xFileAttachment"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="optional"/>
    <xsd:attribute name="autoComplete" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="proofing" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

```

<xsd:attribute name="type" use="optional">
  <xsd:simpleType>
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:enumeration value="plain"/>
      <xsd:enumeration value="formatted"/>
      <xsd:enumeration value="plainMultiline"/>
      <xsd:enumeration value="formattedMultiline"/>
      <xsd:enumeration value="rich"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="useFilter" use="optional">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="yes"/>
      <xsd:enumeration value="no"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="widgetIcon" use="optional">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="standard"/>
      <xsd:enumeration value="filter"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="filterDependency" type="xsd:string" use="optional"/>
<xsd:attribute name="field" type="xsd:string" use="optional"/>
<xsd:attribute name="removeAncestors" type="xsd:nonNegativeInteger" use="optional"/>
<xsd:attribute name="maxLength" use="optional">
  <xsd:simpleType>
    <xsd:restriction base="xsd:integer">
      <xsd:minInclusive value="-1"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="allowedFileTypes" type="xsd:string" use="optional"/>
<xsd:anyAttribute namespace="http://schemas.microsoft.com/office/infopath/2003"
processContents="skip"/>
</xsd:complexType>
</xsd:element>

```

### 2.2.109 unboundControls

The **unboundControls** element specifies a collection of buttons in the form view.

Parent Elements
<a href="#">view</a>

Child Elements
<a href="#">button</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="unboundControls">
  <xsd:complexType>
    <xsd:sequence>
      <!-- button -->
      <xsd:element name="button" minOccurs="0" maxOccurs="unbounded">
        <xsd:complexType>
          <xsd:sequence>
            <xsd:element ref="xsf:ruleSetAction" minOccurs="0" maxOccurs="1"/>
          </xsd:sequence>
          <xsd:attribute name="name" use="required">
            <xsd:simpleType>
              <!-- type of name is non qualified name, but NCName also accepts '.' and '-'
              so these characters are disabled by pattern restriction -->
              <xsd:restriction base="xsd:NCName">
                <xsd:pattern value="^[^\.^-]*"/>
              </xsd:restriction>
            </xsd:simpleType>
          </xsd:attribute>
        </xsd:complexType>
        <xsd:keyref name="button_ruleSetAction" refer="xsf:ruleset_name_key">
          <xsd:selector xpath="./xsf:ruleSetAction"/>
          <xsd:field xpath="@ruleSet"/>
        </xsd:keyref>
      </xsd:element>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```

### 2.2.110 button (2)

The **button** element specifies a button that MAY have an associated event handler or **ruleSetAction** (section [2.2.132](#)).

Parent Elements
<a href="#">unboundControls</a>

Child Elements
<a href="#">ruleSetAction</a>

Attributes:

**name:** This attribute specifies the event handler identifier of the button.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="button" minOccurs="0" maxOccurs="unbounded">
  <xsd:complexType>
    <xsd:sequence>

```

```

    <xsd:element ref="xsf:ruleSetAction" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" use="required">
    <xsd:simpleType>
      <!-- type of name is non qualified name, but NCName also accepts '.' and '-'
           so these characters are disabled by pattern restriction -->
      <xsd:restriction base="xsd:NCName">
        <xsd:pattern value="[^\.\^-]*"/>
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:attribute>
</xsd:complexType>
<xsd:keyref name="button_ruleSetAction" refer="xsf:ruleset_name_key">
  <xsd:selector xpath="./xsf:ruleSetAction"/>
  <xsd:field xpath="@ruleSet"/>
</xsd:keyref>
</xsd:element>

```

### 2.2.111 editing

The **editing** element specifies additional information about controls used in the form view to edit the form file.

Parent Elements
<a href="#">view</a>

Child Elements
<a href="#">xmlToEdit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="editing">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:xmlToEdit" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```

### 2.2.112 masterDetail

The **masterDetail** element MUST NOT be present.

Parent Elements
<a href="#">editWith</a>

Attributes:

**detailKey:** This attribute MUST NOT be present.

**master:** This attribute MUST NOT be present.

**masterKey:** This attribute MUST NOT be present.

**masterViewContext:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="masterDetail">
  <xsd:complexType>
    <xsd:attribute name="master" type="xsd:string"/>
    <xsd:attribute name="masterViewContext" type="xsd:string"/>
    <xsd:attribute name="masterKey" type="xsd:string"/>
    <xsd:attribute name="detailKey" type="xsd:string"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.113 fragmentToInsert

The **fragmentToInsert** element specifies alternate versions of default XML data that is inserted into an associated control.

Parent Elements
<a href="#">editWith</a>

Child Elements
<a href="#">chooseFragment</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="fragmentToInsert">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:chooseFragment" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.114 mainpane

The **mainpane** element specifies the XSLT file, as specified in section [2.4](#), included in the form template and used to represent a form view.

Parent Elements
-----------------

Parent Elements
<a href="#">externalView</a>
<a href="#">view</a>

Attributes:

**transform:** This attribute specifies the name of the XSLT file that is used to transform the form (1). The specified value MUST match the name of the corresponding file in the form template.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="mainpane">
  <xsd:complexType>
    <xsd:attribute name="transform" type="xsd:fileName" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.115 printSettings

The **printSettings** element MUST be ignored.

Parent Elements
<a href="#">mergedPrintView</a>
<a href="#">view</a>

Child Elements
<a href="#">footer</a>
<a href="#">header</a>

Attributes:

**bottomMargin:** This attribute MUST be ignored.

**collate:** This attribute MUST be ignored.

**copies:** This attribute MUST be ignored.

**footer:** This attribute MUST be ignored.

**header:** This attribute MUST be ignored.

**leftMargin:** This attribute MUST be ignored.

**marginUnitsType:** This attribute MUST be ignored.

**orientation:** This attribute MUST be ignored.



**pageRangeEnd:** This attribute MUST be ignored.

**pageRangeStart:** This attribute MUST be ignored.

**paperSize:** This attribute MUST be ignored.

**paperSource:** This attribute MUST be ignored.

**printerName:** This attribute MUST be ignored.

**printerSpecificSettings:** This attribute MUST be ignored.

**rightMargin:** This attribute MUST be ignored.

**topMargin:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="printSettings">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:header" minOccurs="0" maxOccurs="1"/>
      <xsd:element ref="xsf:footer" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="orientation">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="portrait"/>
          <xsd:enumeration value="landscape"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="header">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:maxLength value="255"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="footer">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:maxLength value="255"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="marginUnitsType">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="in"/>
          <xsd:enumeration value="cm"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="rightMargin">
      <xsd:simpleType>
        <xsd:restriction base="xsd:float">
          <xsd:minInclusive value="0"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
```

```

        <xsd:maxInclusive value="100"/>
    </xsd:restriction>
</xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="leftMargin">
    <xsd:simpleType>
        <xsd:restriction base="xsd:float">
            <xsd:minInclusive value="0"/>
            <xsd:maxInclusive value="100"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="topMargin">
    <xsd:simpleType>
        <xsd:restriction base="xsd:float">
            <xsd:minInclusive value="0"/>
            <xsd:maxInclusive value="100"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="bottomMargin">
    <xsd:simpleType>
        <xsd:restriction base="xsd:float">
            <xsd:minInclusive value="0"/>
            <xsd:maxInclusive value="100"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="printerName">
    <xsd:simpleType>
        <xsd:restriction base="xsd:string">
            <xsd:maxLength value="255"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="paperSize">
    <xsd:simpleType>
        <xsd:restriction base="xsd:string">
            <xsd:maxLength value="255"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="paperSource">
    <xsd:simpleType>
        <xsd:restriction base="xsd:string">
            <xsd:maxLength value="255"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="copies">
    <xsd:simpleType>
        <xsd:restriction base="xsd:integer">
            <xsd:minInclusive value="1"/>
            <xsd:maxInclusive value="9999"/>
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="collate" type="xsd:boolean"/>
<xsd:attribute name="pageRangeStart">

```

```

    <xsd:simpleType>
      <xsd:restriction base="xsd:integer">
        <xsd:minInclusive value="1"/>
        <xsd:maxInclusive value="32000"/>
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:attribute>
  <xsd:attribute name="pageRangeEnd">
    <xsd:simpleType>
      <xsd:restriction base="xsd:integer">
        <xsd:minInclusive value="1"/>
        <xsd:maxInclusive value="32000"/>
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:attribute>
  <xsd:attribute name="printerSpecificSettings">
    <xsd:simpleType>
      <xsd:restriction base="xsd:string">
        <xsd:maxLength value="255"/>
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:attribute>
</xsd:complexType>
</xsd:element>

```

### 2.2.116 header

The **header** element MUST be ignored.

Parent Elements
<a href="#">printSettings</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="header">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```

### 2.2.117 footer

The **footer** element MUST be ignored.

Parent Elements
<a href="#">printSettings</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="footer">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="skip"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```

### 2.2.118 toolbar

The **toolbar** element MUST be ignored.

Parent Elements
<a href="#">view</a>

Child Elements
<a href="#">button</a>
<a href="#">menu</a>

Attributes:

**caption:** This attribute MUST be ignored.

**name:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="toolbar">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:group ref="xsf:UIItem" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.119 menu

The **menu** element specifies a custom menu that MUST be applied to the form view.

Parent Elements
menu
<a href="#">menuArea</a>
<a href="#">toolbar</a>

Parent Elements
<a href="#">view</a>

Child Elements
<a href="#">button</a>
<a href="#">menu</a>

Attributes:

**caption:** This attribute specifies the caption for the menu.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="menu">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:group ref="xsf:UIItem" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.120 menuArea

The **menuArea** element specifies a custom menu area that MUST be applied to the specified control in the form view.

Parent Elements
<a href="#">view</a>

Child Elements
<a href="#">button</a>
<a href="#">menu</a>

Attributes:

**name:** This attribute MUST be set to "msoStructuralEditingContextMenu". This value refers to the context menu for structural controls. For more information, see section [2.4.1.15](#), section [2.4.1.16](#), and section [2.4.1.18](#). This attribute MUST NOT have the following values:

- **msoEditMenu:** Refers to the Edit menu.
- **msoFileMenu:** Refers to the File menu.

- **msoHelpMenu:** Refers to the Help menu.
- **msoInsertMenu:** Refers to the Insert menu.
- **msoFormatMenu:** Refers to the Format menu.
- **msoTableMenu:** Refers to the Table menu.
- **msoToolsMenu:** Refers to the Tools menu.
- **msoViewMenu:** Refers to the View menu.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="menuArea">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:group ref="xsd:UIItem" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="name" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="msoFileMenu"/>
          <xsd:enumeration value="msoEditMenu"/>
          <xsd:enumeration value="msoInsertMenu"/>
          <xsd:enumeration value="msoViewMenu"/>
          <xsd:enumeration value="msoFormatMenu"/>
          <xsd:enumeration value="msoToolsMenu"/>
          <xsd:enumeration value="msoTableMenu"/>
          <xsd:enumeration value="msoHelpMenu"/>
          <xsd:enumeration value="msoStructuralEditingContextMenu"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
```

### 2.2.121 taskpane

The **taskpane** element MUST be ignored.

Parent Elements
<a href="#">xDocumentClass</a>

Attributes:

**caption:** This attribute MUST be ignored.

**href:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="taskpane">
```

```

<xsd:complexType>
  <xsd:attribute name="caption" type="xsd:string" use="required"/>
  <xsd:attribute name="href" type="xsd:string" use="required"/>
</xsd:complexType>
</xsd:element>

```

## 2.2.122 views

The **views** element specifies the collection of all form views in the form template. Form views are used to render and edit form files associated with the form template. Form views are represented by XSLT files, as specified in section 2.4, which define how to convert form files into HTML. A specific form view is used by default, and other form views can be displayed.

Each **browser-compatible form template** MUST contain at least one form view where both of the following are true:

- The **clientOnly** attribute of the **viewExtension** element (section 2.2.147.42) is set to "no".
- The **designMode** attribute of the **view** element (section 2.2.123) is set "normal".

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">view</a>

Attributes:

**default:** This attribute specifies the name of the form view that is used to render the form file. If this attribute is present, the specified value MUST match the value specified by the **name** attribute of a **view** element. If this attribute is not present, the first form view MUST be rendered.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="views">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:view" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="default" type="xsd:string"/>
  </xsd:complexType>
  <xsd:unique name="views_name_unique">
    <xsd:selector xpath="./xsf:view"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
  <xsd:keyref name="view_printView" refer="xsf:view_or_externalView_name_key">
    <xsd:selector xpath="./xsf:view"/>
    <xsd:field xpath="@printView"/>
  </xsd:keyref>
  <xsd:keyref name="views_default" refer="xsf:view_name_key">

```

```

    <xsd:selector xpath="."/>
    <xsd:field xpath="@default"/>
  </xsd:keyref>
</xsd:element>

```

### 2.2.123 view

The **view** element specifies information about a form view, which is a specific visualization of a form file. It specifies what controls are used to represent the fields in the form (1) and how they are rendered using HTML. A form view is represented by an XSLT file, as specified in section [2.4](#).

A form view MUST be generated as specified by this element.

Parent Elements
<a href="#">views</a>

Child Elements
<a href="#">editing</a>
<a href="#">mainpane</a>
<a href="#">menu</a>
<a href="#">menuArea</a>
<a href="#">printSettings</a>
<a href="#">toolbar</a>
<a href="#">unboundControls</a>

Attributes:

**caption:** This attribute specifies the display name for the form view. If this attribute is not present, its value MUST be interpreted as an empty string (1).

**designMode:** This attribute specifies the state of the form view. A form view with a **designMode** value of "protected" MUST be ignored. There MUST be at least one form view with a **designMode** value of "normal".

**name:** This attribute specifies the name of the form view.

**printView:** This attribute specifies the name of another form view to be used for printing the form view. The specified value MUST match the **name** attribute of the **view** element of one of the **view** elements. If this attribute is not present, the current form view is used for printing.

**showMenuItem:** This attribute specifies whether the menu item corresponding to the form view is displayed in the menu of form views. If this attribute is not present, its value MUST be interpreted as "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.



```

<xsd:element name="view">
  <xsd:complexType>
    <xsd:group ref="xsf:ViewContent" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:attribute name="caption" type="xsf:xdViewName"/>
    <xsd:attribute name="name" type="xsf:xdViewName" use="required"/>
    <xsd:attribute name="showMenuItem" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="printView" type="xsd:string"/>
    <xsd:attribute name="designMode" type="xsf:xdDesignMode"/>
  </xsd:complexType>
  <xsd:unique name="toolbar_name_unique">
    <xsd:selector xpath="./xsf:toolbar"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
  <xsd:unique name="menuArea_name_unique">
    <xsd:selector xpath="./xsf:menuArea"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
  <xsd:unique name="xmlToEdit_name_unique">
    <xsd:selector xpath="./xsf:editing/xsf:xmlToEdit"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
  <xsd:key name="xmlToEdit_name_key">
    <xsd:selector xpath="./xsf:editing/xsf:xmlToEdit"/>
    <xsd:field xpath="@name"/>
  </xsd:key>
  <xsd:keyref name="button_xmlToEdit_reference" refer="xsf:xmlToEdit_name_key">
    <xsd:selector xpath="./xsf:menuArea/xsf:button | ./xsf:menu/xsf:button |
./xsf:toolbar/xsf:button"/>
    <xsd:field xpath="@xmlToEdit"/>
  </xsd:keyref>
</xsd:element>

```

## 2.2.124 xmlToEdit

The **xmlToEdit** element specifies additional properties of a control that is used in the form view to edit the form file.

Parent Elements
<a href="#">editing</a>

Child Elements
<a href="#">editWith</a>

Attributes:

**container:** This attribute specifies an XPath expression that evaluates to the context in which the control MUST be selectable and enabled.

**item:** This attribute specifies an XPath expression that MUST evaluate to the XML nodes to be edited with the control. The specified XPath expression MUST be unique among all **xmlToEdit** elements in the form definition (.xsf) file.

**name:** This attribute specifies the name of the control.

**viewContext:** This attribute specifies the identifier of the corresponding control in the form view. If this attribute is not present, its value MUST be interpreted as an empty string (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xmlToEdit">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:editWith" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:NMTOKEN" use="required"/>
    <xsd:attribute name="item" type="xsd:string" use="required"/>
    <xsd:attribute name="container" type="xsd:string"/>
    <xsd:attribute name="viewContext">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:pattern value="((\.\|\\#|[a-zA-Z0-9_])[a-zA-Z0-9_]*)(\s((\.\|\\#|[a-zA-Z0-9_])[a-zA-Z0-9_]*))*"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
```

### 2.2.125 documentSignatures

The **documentSignatures** element specifies the digital signatures (1), as specified by [\[MS-IPFFX\]](#), that are used to sign the form file according to [\[XMLDSig\]](#).

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">signedDataBlock</a>

Attributes:

**signatureLocation:** This attribute MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="documentSignatures">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:signedDataBlock" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="signatureLocation" type="xsd:string" use="optional"/>
  </xsd:complexType>
```

</xsd:element>

## 2.2.126 signedDataBlock

The **signedDataBlock** element specifies a set of XML nodes in the form file that MUST be signed by a digital signature (1).

Parent Elements
<a href="#">documentSignatures</a>

Child Elements
<a href="#">message</a>

Attributes:

**data:** This attribute specifies an XPath expression that MUST evaluate to a collection of XML nodes.

**mode:** This attribute specifies the relationship of the digital signature (1) and MUST be set to one of the following values:

- **countersign:** The digital signature (1) signs all previous digital signatures (1).
- **cosign:** The digital signature (1) is treated independently of all previous digital signatures (1).
- **single:** The signed data block MUST NOT be signed by more than one digital signature (1).

**name:** This attribute specifies the name of the signed data block.

**signatureLocation:** This attribute specifies an XPath expression that MUST evaluate to an XML node in the form file. The specified location MUST be used to store the digital signature (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="signedDataBlock">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="message" type="xsd:signedDataBlockMessage" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:signedDataBlockName" use="required"/>
    <xsd:attribute name="data" type="xsd:string" use="required"/>
    <xsd:attribute name="signatureLocation" type="xsd:string" use="required"/>
    <xsd:attribute name="mode" type="xsd:signatureRelationEnum" use="required"/>
  </xsd:complexType>
  <xsd:unique name="signedDataBlock_name_unique">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
</xsd:element>
```

## 2.2.127 message

The **message** element specifies the confirmation message that **MUST** be displayed before a digital signature (1) is applied to the form (1) or section of the form (1).

Parent Elements
<a href="#">signedDataBlock</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="message" type="xsf:xdSignedDataBlockMessage" minOccurs="0"/>
```

## 2.2.128 documentVersionUpgrade

The **documentVersionUpgrade** element specifies the process by which forms (1) created based on an older version of the form template are upgraded to the latest version of the form template.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">useScriptHandler</a>
<a href="#">useTransform</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="documentVersionUpgrade">  
  <xsd:complexType>  
    <xsd:choice>  
      <xsd:element ref="xsf:useScriptHandler"/>  
      <xsd:element ref="xsf:useTransform"/>  
    </xsd:choice>  
  </xsd:complexType>  
</xsd:element>
```

## 2.2.129 useTransform

The **useTransform** element specifies the XSLT file, as defined in section [2.8](#), and the restrictions that **MUST** be used to upgrade the form (1).

Parent Elements
<a href="#">documentVersionUpgrade</a>

Attributes:

**maxVersionToUpgrade:** This attribute specifies the inclusive value for the maximum form template version, specified by the **solutionVersion** attribute of the **xDocumentClass** element (section 2.2.20) that MUST be upgraded. If this attribute is not present, the maximum version boundary for upgrading MUST be ignored.

**minVersionToUpgrade:** This attribute specifies the inclusive value for the minimum form template version, specified by the **solutionVersion** attribute of the **xDocumentClass** element, that MUST be upgraded. If this attribute is not present, the minimum version boundary for upgrading is not checked.

**transform:** This attribute specifies the name of the XSLT file used to upgrade the form (1). The specified file MUST exist in the form template.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="useTransform">
  <xsd:complexType>
    <xsd:attribute name="transform" use="required">
      <xsd:simpleType>
        <xsd:union memberTypes="xsf:xdFileName xsf:xdEmptyString"/>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="minVersionToUpgrade" type="xsf:xdSolutionVersion" use="required"/>
    <xsd:attribute name="maxVersionToUpgrade" type="xsf:xdSolutionVersion"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.130 extensions

The **extensions** element specifies the enabled extensions in the form definition (.xsf) file. Each enabled extension MUST conform to the XML schema as defined in section 2.2.147.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">extension</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="extensions">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:extension" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.131 extension

The **extension** element specifies a container for an XML schema extension.

Parent Elements
<a href="#">extensions</a>

Attributes:

**name:** This attribute specifies the name of this XML schema extension.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="extension">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="lax"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:NMTOKEN" use="required"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.132 ruleSetAction

The **ruleSetAction** element specifies the rule set, as defined by the **ruleSet** element (section [2.2.143](#)) that MUST be called by a form or form file event.

Parent Elements
<a href="#">button</a>
<a href="#">domEventHandler</a>
<a href="#">onLoad</a>
<a href="#">submit</a>

Attributes:

**ruleSet:** This attribute specifies the name of the rule set that is called. The specified value MUST match the value specified by the **name** attribute of the corresponding **ruleSet** element.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ruleSetAction">
  <xsd:complexType>
    <xsd:attribute name="ruleSet" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.133 rule

The **rule** element specifies a rule (1), which is composed of the rule definition and the event by which the rule (1) is called. The rule definition is defined by the **rule** elements and the **ruleSet** elements (section [2.2.143](#)). The event is defined by the **button** (section [2.2.110](#)), **domEventHandler** (section [2.2.66](#)), **onLoad** (section [2.2.79](#)), and **submit** (section [2.2.72](#)) elements and their associated **ruleSetAction** element (section [2.2.132](#)).

A rule (1) consists of the following:

- A set of one or more actions.
- A condition that determines whether the actions are executed.

If the associated condition of the rule (1) evaluates positively with the **true** function specified in [\[XPATH\]](#) section 4.3, the actions associated with the rule are processed sequentially in the order in which they are listed in the **rule** element.

Rules (1) are grouped together as a rule set, as specified by the **ruleSet** element, containing one or more rules (1). A rule set is bound to one of the following events with the **ruleSetAction** element:

- A form file change, such as a change in the value of an XML node.
- A form (1) action, such as submitting the form file.
- An unbound control event, such as a button click event.

Each rule set is processed sequentially in the order in which they are listed within the **ruleSets** element (section [2.2.144](#)).

Parent Elements
<a href="#">ruleSet</a>

Child Elements
<a href="#">assignmentAction</a>
<a href="#">closeDocumentAction</a>
<a href="#">dialogBoxExpressionAction</a>
<a href="#">dialogBoxMessageAction</a>
<a href="#">exitRuleSet</a>
<a href="#">openNewDocumentAction</a>
<a href="#">queryAction</a>
<a href="#">submitAction</a>
<a href="#">switchViewAction</a>

Attributes:

**caption:** This attribute specifies the name of the rule (1).

**condition:** This attribute specifies an XPath expression that MUST evaluate to either "true()" or "false()". If it evaluates to "true()", the associated actions MUST be executed. If this attribute is not present, its value MUST be interpreted as "true()".

**isEnabled:** This attribute specifies if the rule (1) MUST be enabled for the form (1). If this attribute is not present, its value MUST be interpreted as "yes".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="rule">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:choice minOccurs="0" maxOccurs="unbounded">
        <xsd:element ref="xsf:dialogBoxMessageAction"/>
        <xsd:element ref="xsf:dialogBoxExpressionAction"/>
        <xsd:element ref="xsf:switchViewAction"/>
        <xsd:element ref="xsf:assignmentAction"/>
        <xsd:element ref="xsf:queryAction"/>
        <xsd:element name="submitAction">
          <xsd:complexType>
            <xsd:attribute name="adapter" type="xsf:xdTitle" use="required"/>
          </xsd:complexType>
        </xsd:element>
        <xsd:element ref="xsf:openNewDocumentAction"/>
        <xsd:element ref="xsf:closeDocumentAction"/>
      </xsd:choice>
      <xsd:element name="exitRuleSet" minOccurs="0">
        <xsd:complexType/>
      </xsd:element>
    </xsd:sequence>
    <xsd:attribute name="caption" type="xsd:string" use="required"/>
    <xsd:attribute name="condition" type="xsd:string" use="optional"/>
    <xsd:attribute name="isEnabled" type="xsf:xdYesNo" use="optional" default="yes"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.134 submitAction (2)

The **submitAction** element specifies the data adapter that MUST submit the form file when called by a form action.

Parent Elements
<a href="#">rule</a>

Attributes:

**adapter:** This attribute specifies the name of the corresponding data adapter that is used to submit the form file. The specified name MUST match the name of an existing data adapter that allows submission of the form file.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.



```

<xsd:element name="submitAction">
  <xsd:complexType>
    <xsd:attribute name="adapter" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.135 exitRuleSet

The **exitRuleSet** element specifies that rule processing **MUST** stop for the entire rule set.

Parent Elements
<a href="#">rule</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="exitRuleSet" minOccurs="0">
  <xsd:complexType/>
</xsd:element>

```

### 2.2.136 dialogBoxMessageAction

The **dialogBoxMessageAction** element **MUST** be ignored.

Parent Elements
<a href="#">rule</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="dialogBoxMessageAction">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="1024"/>
    </xsd:restriction>
  </xsd:simpleType>
</xsd:element>

```

### 2.2.137 dialogBoxExpressionAction

The **dialogBoxExpressionAction** element **MUST** be ignored.

Parent Elements
<a href="#">rule</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dialogBoxExpressionAction" type="xsd:string"/>
```

### 2.2.138 switchViewAction

The **switchViewAction** element specifies the form view that **MUST** be shown when called by a form event.

Parent Elements
<a href="#">rule</a>

Attributes:

**view:** This attribute specifies the name of the form view to be shown. The specified name **MUST** match an existing **name** attribute of the **view** element (section [2.2.123](#)).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="switchViewAction">
  <xsd:complexType>
    <xsd:attribute name="view" type="xsd:string" use="required"/>
  </xsd:complexType>
  <xsd:keyref name="switchViewAction_view_keyref" refer="xsd:string">
    <xsd:selector xpath="."/>
    <xsd:field xpath="@view"/>
  </xsd:keyref>
</xsd:element>
```

### 2.2.139 assignmentAction

The **assignmentAction** element specifies an action that **MUST** set the value of a field.

Parent Elements
<a href="#">rule</a>

Attributes:

**expression:** This attribute specifies an XPath expression to populate the value of the **targetField** attribute.

**targetField:** This attribute specifies an XPath expression that **MUST** evaluate to the target XML node.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="assignmentAction">
  <xsd:complexType>
    <xsd:attribute name="targetField" type="xsd:string" use="required"/>
    <xsd:attribute name="expression" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

</xsd:element>

### 2.2.140 queryAction

The **queryAction** element specifies a data adapter that MUST query its data source (2) when called by a form (1) action.

Parent Elements
<a href="#">query</a>
<a href="#">rule</a>

Attributes:

**adapter:** This attribute specifies the name of the data adapter that MUST query its data source (2).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="queryAction">
  <xsd:complexType>
    <xsd:attribute name="adapter" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.141 openNewDocumentAction

The **openNewDocumentAction** element MUST NOT be present.

Parent Elements
<a href="#">rule</a>

Attributes:

**solutionURI:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="openNewDocumentAction">
  <xsd:complexType>
    <xsd:attribute name="solutionURI" type="xsd:anyURI" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.142 closeDocumentAction

The **closeDocumentAction** element specifies an action to close the form (1).

Parent Elements
-----------------

Parent Elements
<a href="#">rule</a>

Attributes:

**promptToSaveChanges:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="closeDocumentAction">
  <xsd:complexType>
    <xsd:attribute name="promptToSaveChanges" type="xsd:boolean" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.143 ruleSet

The **ruleSet** element specifies a set of one or more rules (1) for the form (1).

Parent Elements
<a href="#">ruleSets</a>

Child Elements
<a href="#">rule</a>

Attributes:

**name:** This attribute specifies the name of the set of rules (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ruleSet">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd:rule" minOccurs="1" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.144 ruleSets

The **ruleSets** element specifies the rule sets for the form (1).

Parent Elements
-----------------

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">ruleSet</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ruleSets">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:ruleSet" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:unique name="ruleSets_name_unique">
    <xsd:selector xpath="./xsf:ruleSet"/>
    <xsd:field xpath="@name"/>
  </xsd:unique>
</xsd:element>
```

### 2.2.145 calculations

The **calculations** element specifies definitions for the calculations performed in the form (1) and how blank values are handled.

Parent Elements
<a href="#">xDocumentClass</a>

Child Elements
<a href="#">calculatedField</a>

Attributes:

**treatBlankValueAsZero:** This attribute specifies whether an empty string (1) is equivalent to the integer zero. If this attribute is not present, its value MUST be interpreted as "yes".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="calculations">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:calculatedField" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="treatBlankValueAsZero" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

```

    </xsd:complexType>
  </xsd:element>

```

### 2.2.146 **calculatedField**

The **calculatedField** element specifies an individual calculation, when the calculation is to be performed, and where the result is stored.

Parent Elements
<a href="#">calculations</a>

Attributes:

**expression:** This attribute specifies the formula, as an XPath expression, to be evaluated. The result **MUST** be stored in the **target** attribute.

**refresh:** This attribute specifies when the expression **MUST** be evaluated. The value **MUST** be one of the following values:

- **onInit:** The value is evaluated when the node is initialized.
- **onChange:** The value is evaluated when a parameter of the expression changes.

**target:** This attribute specifies the XPath expression location where the result of evaluating the **expression** attribute **MUST** be stored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="calculatedField">
  <xsd:complexType>
    <xsd:attribute name="target" type="xsd:string" use="required"/>
    <xsd:attribute name="expression" type="xsd:string" use="required"/>
    <xsd:attribute name="refresh" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147 **Form Definition File (XSF) Extension Specification**

The extensions to the form definition (.xsf) file specify extensions to the properties and content of the form template. The extensions **MUST** conform to the XML schema defined by the elements in the following table. The XML schema for the form definition (.xsf) file extensions is used to validate the elements, attributes, and types in the xsf2 namespace (<http://schemas.microsoft.com/office/infopath/2006/solutionDefinition/extensions>).

The following tables list, in alphabetical order, the types and elements used in the XML schema for the extensions to the form definition (.xsf) file.

Type	Specified in Section
<b>compatibilityModesType</b>	<a href="#">2.2.147.3</a>
<b>emailAttachmentType</b>	<a href="#">2.2.147.2</a>

Type	Specified in Section
<b>formDescriptionType</b>	<a href="#">2.2.147.5</a>
<b>formLocaleType</b>	<a href="#">2.2.147.6</a>
<b>managedCodeType</b>	<a href="#">2.2.147.7</a>
<b>serverCommandActionType</b>	<a href="#">2.2.147.1</a>
<b>solutionType</b>	<a href="#">2.2.147.4</a>

Element	Specified in Section
<b>admin</b>	<a href="#">2.2.147.20</a>
<b>adoAdapterExtension</b>	<a href="#">2.2.147.32</a>
<b>autoUpdatePrompt</b>	<a href="#">2.2.147.45</a>
<b>command</b>	<a href="#">2.2.147.12</a>
<b>commands</b>	<a href="#">2.2.147.11</a>
<b>connectoid</b>	<a href="#">2.2.147.30</a>
<b>contentType</b>	<a href="#">2.2.147.16</a>
<b>contentTypeTemplate</b>	<a href="#">2.2.147.17</a>
<b>dataConnections</b>	<a href="#">2.2.147.28</a>
<b>davAdapterExtension</b>	<a href="#">2.2.147.31</a>
<b>emailAdapterExtension</b>	<a href="#">2.2.147.35</a>
<b>errorMessage</b>	<a href="#">2.2.147.54</a>
<b>exportToPDFForXPS</b>	<a href="#">2.2.147.56</a>
<b>featureRestrictionsExtension</b>	<a href="#">2.2.147.55</a>
<b>fieldExtension</b>	<a href="#">2.2.147.27</a>
<b>fieldsExtension</b>	<a href="#">2.2.147.26</a>
<b>includedView</b>	<a href="#">2.2.147.23</a>
<b>includedViews</b>	<a href="#">2.2.147.22</a>
<b>inputScope</b>	<a href="#">2.2.147.47</a>
<b>inputScopes</b>	<a href="#">2.2.147.46</a>
<b>install</b>	<a href="#">2.2.147.14</a>
<b>listPropertiesExtension</b>	<a href="#">2.2.147.25</a>

Element	Specified in Section
mail	<a href="#">2.2.147.19</a>
managedCode	<a href="#">2.2.147.50</a>
mergedPrintView	<a href="#">2.2.147.21</a>
offline	<a href="#">2.2.147.24</a>
preview	<a href="#">2.2.147.44</a>
relativeQuery	<a href="#">2.2.147.34</a>
sendByMail	<a href="#">2.2.147.38</a>
server	<a href="#">2.2.147.9</a>
share	<a href="#">2.2.147.18</a>
sharepointListAdapterExtension	<a href="#">2.2.147.37</a>
solutionDefinition	<a href="#">2.2.147.8</a>
solutionPropertiesExtension	<a href="#">2.2.147.13</a>
submit	<a href="#">2.2.147.51</a>
submitAction	<a href="#">2.2.147.52</a>
successMessage	<a href="#">2.2.147.53</a>
toolbar	<a href="#">2.2.147.10</a>
useHttpHandlerExtension	<a href="#">2.2.147.29</a>
viewExtension	<a href="#">2.2.147.42</a>
viewsExtension	<a href="#">2.2.147.41</a>
warning	<a href="#">2.2.147.40</a>
warnings	<a href="#">2.2.147.39</a>
webServiceAdapterExtension	<a href="#">2.2.147.33</a>
word	<a href="#">2.2.147.49</a>
words	<a href="#">2.2.147.48</a>
wss	<a href="#">2.2.147.15</a>
xmlFileAdapterExtension	<a href="#">2.2.147.36</a>
xmlToEditExtension	<a href="#">2.2.147.43</a>

### 2.2.147.1 serverCommandActionType

The **serverCommandActionType** simple type specifies restrictions for specifying a form (1) action on the form (1) **toolbar**.



Referenced By
<a href="#">command.xsf2@action</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="serverCommandActionType">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:pattern value="[a-zA-Z0-9_]*"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.147.2 emailAttachmentType

The **emailAttachmentType** simple type specifies restrictions for specifying the file format of an attached form (1) or form template when it is sent in e-mail.

Referenced By
<a href="#">emailAdapterExtension.xsf2@emailAttachmentType</a>
<a href="#">sendByMail.xsf2@emailAttachmentType</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="emailAttachmentType">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:pattern value="[a-zA-Z0-9_]*"/>
  </xsd:restriction>
</xsd:simpleType>
```

### 2.2.147.3 compatibilityModesType

The **compatibilityModesType** simple type specifies restrictions for specifying the compatibility mode for the form template.

Referenced By
<a href="#">solutionDefinition.xsf2@runtimeCompatibility</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="compatibilityModesType">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:pattern value="[a-zA-Z0-9_]*"/>
  </xsd:restriction>
</xsd:simpleType>
```

## 2.2.147.4 solutionType

The **solutionType** simple type specifies restrictions for an attribute that, if present, MUST be ignored.

Referenced By
<a href="#">solutionDefinition.xsf2@solutionType</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="solutionType">
  <xsd:restriction base="xsd:NMTOKEN">
    <xsd:pattern value="[a-zA-Z0-9]*"/>
  </xsd:restriction>
</xsd:simpleType>
```

## 2.2.147.5 formDescriptionType

The **formDescriptionType** simple type specifies restrictions for specifying the form template description.

Referenced By
<a href="#">solutionDefinition.xsf2@description</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="formDescriptionType">
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="1024"/>
    <xsd:minLength value="1"/>
  </xsd:restriction>
</xsd:simpleType>
```

## 2.2.147.6 formLocaleType

The **formLocaleType** simple type specifies restrictions for specifying the locale of the form template.

Referenced By
<a href="#">server.xsf2@formLocale</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="formLocaleType">
  <xsd:restriction base="xsd:token">
    <xsd:minLength value="1"/>
  </xsd:restriction>
```

```
</xsd:simpleType>
```

### 2.2.147.7 managedCodeType

The **managedCodeType** simple type specifies restrictions for specifying the business objects programming language used in the form template.

Referenced By
<a href="#">managedCode.xsf2@language</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="managedCodeType">  
  <xsd:restriction base="xsd:string">  
    <xsd:pattern value="[a-zA-Z0-9\.]*/>  
  </xsd:restriction>  
</xsd:simpleType>
```

### 2.2.147.8 solutionDefinition

The **solutionDefinition** element specifies the extended properties and features of the form template. This element also enables extending the form definition (.xsf) file with custom attributes not specified in section 2.2 or section 2.2.147. Custom attributes MUST NOT be defined under the **xsF** or **xsF2** namespace. Any specified custom attribute MUST be ignored. This element MUST be the root element of all extensions to the form template.

Child Elements
<a href="#">autoUpdatePrompt</a>
<a href="#">dataConnections</a>
<a href="#">featureRestrictionsExtension</a>
<a href="#">inputScopes</a>
<a href="#">listPropertiesExtension</a>
<a href="#">managedCode</a>
<a href="#">mergedPrintView</a>
<a href="#">offline</a>
<a href="#">preview</a>
<a href="#">sendByMail</a>
<a href="#">server</a>
<a href="#">solutionPropertiesExtension</a>
<a href="#">submit</a>

Child Elements
<a href="#">viewsExtension</a>
<a href="#">warnings</a>

Attributes:

**allowClientOnlyCode:** This attribute specifies whether a browser-compatible form template is designed to enable the inclusion of client-specific object model code that is not compatible with the protocol server. If this attribute is set to "yes", a warning MUST be generated when browser-enabling a form template containing incompatible code. If this attribute is set to "no", an error MUST be generated when browser-enabling a form template containing incompatible code.

**description:** This attribute specifies the description of the form template.

**runtimeCompatibility:** This attribute MUST be set to "client server".

**runtimeCompatibilityURL:** This attribute MUST be ignored.

**solutionType:** This attribute MUST be ignored.

**verifyOnServer:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="solutionDefinition">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf2:server" minOccurs="0"/>
      <xsd:element ref="xsf2:solutionPropertiesExtension" minOccurs="0"/>
      <xsd:element ref="xsf2:mergedPrintView" minOccurs="0"/>
      <xsd:element ref="xsf2:offline" minOccurs="0"/>
      <xsd:element ref="xsf2:listPropertiesExtension" minOccurs="0"/>
      <xsd:element ref="xsf2:dataConnections" minOccurs="0"/>
      <xsd:element ref="xsf2:sendByMail" minOccurs="0"/>
      <xsd:element ref="xsf2:warnings" minOccurs="0"/>
      <xsd:element ref="xsf2:viewsExtension" minOccurs="0"/>
      <xsd:element ref="xsf2:preview" minOccurs="0"/>
      <xsd:element ref="xsf2:autoUpdatePrompt" minOccurs="0"/>
      <xsd:element ref="xsf2:inputScopes" minOccurs="0"/>
      <xsd:element ref="xsf2:managedCode" minOccurs="0"/>
      <xsd:element ref="xsf2:submit" minOccurs="0"/>
      <xsd:element ref="xsf2:featureRestrictionsExtension" minOccurs="0"/>
    </xsd:all>
    <xsd:attribute name="runtimeCompatibility" use="required">
      <xsd:simpleType>
        <xsd:list itemType="xsf2:compatibilityModesType"/>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="solutionType" type="xsf2:solutionType" use="optional"/>
    <xsd:attribute name="description" type="xsf2:formDescriptionType" use="optional"/>
    <xsd:attribute name="allowClientOnlyCode" type="xsf:xdYesNo" use="optional"
      default="no"/>
    <xsd:attribute name="runtimeCompatibilityURL" type="xsd:string" use="optional"/>
    <xsd:attribute name="verifyOnServer" type="xsf:xdYesNo" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

```
</xsd:complexType>
</xsd:element>
```

### 2.2.147.9 server

The **server** element specifies display and functional properties for the form template.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">toolbar</a>

Attributes:

**formLocale:** This attribute specifies the locale in which to render the form template. The specified value MUST be a valid locale, as defined by [\[MS-LCID\]](#).

**isMobileEnabled:** This attribute specifies whether the form template is a **browser-enabled form template** that can be rendered on a mobile device. This attribute MUST be set to "yes" for the form (1) to be loaded in a mobile Web browser.

**isPreSubmitPostBackEnabled:** This attribute specifies whether the Web browser MUST **postback** the form (1) prior to submitting the form file. If the form (1) will be post backed, the user MUST be notified that the form file will have to be submitted after the postback. If this attribute is not present, its value MUST be interpreted as "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="server">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:toolbar" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="formLocale" type="xsf2:formLocaleType" use="required"/>
    <xsd:attribute name="isPreSubmitPostBackEnabled" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="isMobileEnabled" type="xsf:xdYesNo" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.10 toolbar

The **toolbar** element specifies information about the toolbar that is displayed when a form (1) is loaded.

Parent Elements
-----------------

Parent Elements
<a href="#">server</a>

Child Elements
<a href="#">commands</a>

Attributes:

**enabledBottom:** This attribute specifies whether the toolbar **MUST** be displayed at the bottom of the form (1).

**enabledTop:** This attribute specifies whether the toolbar **MUST** be displayed at the top of the form (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="toolbar">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:commands" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="enabledTop" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:attribute name="enabledBottom" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.11 commands

The **commands** element contains commands that are displayed on visible toolbars when a form (1) is loaded.

Parent Elements
<a href="#">toolbar</a>

Child Elements
<a href="#">command</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="commands">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:command" maxOccurs="unbounded" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

```

    </xsd:sequence>
  </xsd:complexType>
</xsd:element>

```

## 2.2.147.12 command

The **command** element specifies a command that MUST be displayed on the toolbar when a form (1) is opened.

Parent Elements
<a href="#">commands</a>

Attributes:

**action:** This attribute specifies an action that MUST be performed when the toolbar button is clicked. The value MUST be one of the following acceptable values:

- "submit"
- "print"
- "view"
- "save"
- "saveAs"
- "close"
- "refresh"

**caption:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="command">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="action" type="xsf2:serverCommandActionType" use="required"/>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="optional"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.147.13 solutionPropertiesExtension

The **solutionPropertiesExtension** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">admin</a>
<a href="#">contentType</a>
<a href="#">contentTypeTemplate</a>
<a href="#">install</a>
<a href="#">mail</a>
<a href="#">share</a>
<a href="#">wss</a>

Attributes:

**branch:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="solutionPropertiesExtension">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf2:install" minOccurs="0"/>
      <xsd:element ref="xsf2:wss" minOccurs="0"/>
      <xsd:element ref="xsf2:contentType" minOccurs="0"/>
      <xsd:element ref="xsf2:share" minOccurs="0"/>
      <xsd:element ref="xsf2:mail" minOccurs="0"/>
      <xsd:element ref="xsf2:admin" minOccurs="0"/>
      <xsd:element ref="xsf2:contentTypeTemplate" minOccurs="0"/>
    </xsd:all>
    <xsd:attribute name="branch" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:enumeration value="install"/>
          <xsd:enumeration value="wss"/>
          <xsd:enumeration value="contentType"/>
          <xsd:enumeration value="share"/>
          <xsd:enumeration value="mail"/>
          <xsd:enumeration value="admin"/>
          <xsd:enumeration value="contentTypeTemplate"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.14 install

The **install** element MUST be ignored.

Parent Elements
-----------------



Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**companyName:** This attribute MUST be ignored.

**language:** This attribute MUST be ignored.

**path:** This attribute MUST be ignored.

**updatePath:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="install">
  <xsd:complexType>
    <xsd:attribute name="companyName" type="xsd:string" use="required"/>
    <xsd:attribute name="language" type="xsd:string" use="required"/>
    <xsd:attribute name="path" type="xsd:string" use="required"/>
    <xsd:attribute name="updatePath" type="xsd:string" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.147.15 wss

The **wss** element MUST be ignored.

Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**browserEnable:** This attribute MUST be ignored.

**description:** This attribute MUST be ignored.

**name:** This attribute MUST be ignored.

**path:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="wss">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="path" type="xsd:string" use="required"/>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="description" type="xsd:string" use="required"/>
    <xsd:attribute name="browserEnable" type="xsd:boolean" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

```
</xsd:complexType>
</xsd:element>
```

### 2.2.147.16 contentType

The **contentType** element MUST be ignored.

Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**path:** This attribute MUST be ignored.

**sharepointContentTypeId:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="contentType">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="path" type="xsd:string" use="required"/>
    <xsd:attribute name="sharepointContentTypeId" type="xsd:string" use="required"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.17 contentTypeTemplate

The **contentTypeTemplate** element MUST be ignored.

Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**browserEnable:** This attribute MUST be ignored.

**description:** This attribute MUST be ignored.

**name:** This attribute MUST be ignored.

**path:** This attribute MUST be ignored.

**site:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="contentTypeTemplate">
  <xsd:complexType>
```

```

<xsd:sequence/>
<xsd:attribute name="site" type="xsd:string" use="required"/>
<xsd:attribute name="path" type="xsd:string" use="required"/>
<xsd:attribute name="name" type="xsd:string" use="required"/>
<xsd:attribute name="description" type="xsd:string" use="required"/>
<xsd:attribute name="browserEnable" type="xsd:boolean" use="optional"/>
<xsd:anyAttribute processContents="skip"/>
</xsd:complexType>
</xsd:element>

```

## 2.2.147.18 share

The **share** element MUST be ignored.

Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**accessPath:** This attribute MUST be ignored.

**formName:** This attribute MUST be ignored.

**path:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="share">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="formName" type="xsd:string" use="required"/>
    <xsd:attribute name="path" type="xsd:string" use="required"/>
    <xsd:attribute name="accessPath" type="xsd:string" use="required"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.147.19 mail

The **mail** element MUST be ignored.

Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**formName:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="mail">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="formName" type="xsd:string" use="required"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.20 admin

The **admin** element MUST be ignored.

Parent Elements
<a href="#">solutionPropertiesExtension</a>

Attributes:

**path:** This attribute MUST be ignored.

**site:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="admin">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="path" type="xsd:string" use="required"/>
    <xsd:attribute name="site" type="xsd:string" use="required"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.21 mergedPrintView

The **mergedPrintView** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">includedViews</a>
<a href="#">printSettings</a>

Attributes:

**isCustomizable:** This attribute MUST be ignored.

**isDefault:** This attribute MUST be ignored.

**viewBreak:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="mergedPrintView">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf:printSettings" minOccurs="0"/>
      <xsd:element ref="xsf2:includedViews" minOccurs="0"/>
    </xsd:all>
    <xsd:attribute name="isDefault" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:attribute name="isCustomizable" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:attribute name="viewBreak" type="xsd:string" use="required"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.22 includedViews

The **includedViews** element MUST be ignored.

Parent Elements
<a href="#">mergedPrintView</a>

Child Elements
<a href="#">includedView</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="includedViews">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:includedView" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.23 includedView

The **includedView** element MUST be ignored.

Parent Elements
<a href="#">includedViews</a>

Attributes:

**name:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="includedView">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="name" type="xsf:xdViewName" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.147.24 offline

The **offline** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Attributes:

**cacheQueries:** This attribute MUST be ignored.

**expirationTime:** This attribute MUST be ignored.

**openIfQueryFails:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="offline">
  <xsd:complexType>
    <xsd:attribute name="openIfQueryFails" type="xsf:xdYesNo" default="no" use="optional"/>
    <xsd:attribute name="cacheQueries" type="xsf:xdYesNo" default="no" use="optional"/>
    <xsd:attribute name="expirationTime" type="xsd:nonNegativeInteger" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.147.25 listPropertiesExtension

The **listPropertiesExtension** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">fieldsExtension</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="listPropertiesExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:fieldsExtension" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.26 fieldsExtension

The **fieldsExtension** element MUST be ignored.

Parent Elements
<a href="#">listPropertiesExtension</a>

Child Elements
<a href="#">fieldExtension</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="fieldsExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:fieldExtension" maxOccurs="unbounded" minOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.27 fieldExtension

The **fieldExtension** element MUST be ignored.

Parent Elements
<a href="#">fieldsExtension</a>

Attributes:

**columnId:** This attribute MUST be ignored.

**columnName:** This attribute MUST be ignored.

**readWrite:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="fieldExtension">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="columnName" type="xsd:string" use="required"/>
    <xsd:attribute name="readWrite" type="xsd:boolean" use="optional" default="no"/>
    <xsd:attribute name="columnId" type="xsd:string" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>

```

## 2.2.147.28 dataConnections

The **dataConnections** element contains elements that specify extensions to data adapter connection settings.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">adoAdapterExtension</a>
<a href="#">davAdapterExtension</a>
<a href="#">emailAdapterExtension</a>
<a href="#">sharepointListAdapterExtension</a>
<a href="#">useHttpHandlerExtension</a>
<a href="#">webServiceAdapterExtension</a>
<a href="#">xmlFileAdapterExtension</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="dataConnections">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd2:useHttpHandlerExtension" minOccurs="0"/>
      <xsd:choice minOccurs="0" maxOccurs="unbounded">
        <xsd:element ref="xsd2:davAdapterExtension" minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="xsd2:adoAdapterExtension" minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="xsd2:webServiceAdapterExtension" minOccurs="0"
maxOccurs="unbounded"/>
        <xsd:element ref="xsd2:emailAdapterExtension" minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="xsd2:xmlFileAdapterExtension" minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="xsd2:sharepointListAdapterExtension" minOccurs="0"
maxOccurs="unbounded"/>
      </xsd:choice>
    </xsd:sequence>
  </xsd:complexType>

```



</xsd:element>

### 2.2.147.29 useHttpHandlerExtension

The **useHttpHandlerExtension** element specifies extended information for **useHttpHandler** (section [2.2.76](#)).

Parent Elements
<a href="#">dataConnections</a>

Child Elements
<a href="#">connectoid</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="useHttpHandlerExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:connectoid" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.30 connectoid

The **connectoid** element specifies the location of a **Universal Data Connection (.udc, .udcx) file**, as specified by [\[MS-UDCX\]](#), containing data adapter connection settings that **MUST** override the connection settings specified in the form definition (.xsf) file. A .udc file provides the following benefits:

- Allows a form template to be published on multiple form servers and have different connection settings for each form server without modifying the connection settings in the form template.
- Allows multiple form templates to be published on multiple form servers and share the same connection settings.
- Allows a form template without an elevated form security level, as specified by the **requireFullTrust** attribute of the **xDocumentClass** element, as defined in section [2.2.20](#), to access specific data sources (2) in a different domain.
- Allows the data adapter connection settings for a form template to be changed without modifying the form template (.xsn) file.

Parent Elements
<a href="#">adoAdapterExtension</a>
<a href="#">davAdapterExtension</a>

Parent Elements
<a href="#">sharepointListAdapterExtension</a>
<a href="#">useHttpHandlerExtension</a>
<a href="#">webServiceAdapterExtension</a>
<a href="#">xmlFileAdapterExtension</a>

Attributes:

**connectionLinkType:** This attribute specifies the location context of the .udc file. The value MUST be set to one of the following values:

- **relative:** This value specifies that the file is located in the current **site collection**.
- **store:** This value specifies that the file is located in the global **data connection library**.

**name:** This attribute MUST be ignored.

**siteCollection:** This attribute specifies the URL to the root of the site collection where the original .udc file is located. This value MUST be identical for all **connectoid** elements in the form template.

**source:** This attribute specifies a URL that specifies the relative path from the **siteCollection** attribute to the .udc file.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="connectoid">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="siteCollection" type="xsd:string" use="required"/>
    <xsd:attribute name="source" type="xsd:string" use="required"/>
    <xsd:attribute name="connectionLinkType" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.31 davAdapterExtension

The **davAdaptorExtension** element specifies the extended information for **davAdapter** (section [2.2.48](#)).

Parent Elements
<a href="#">dataConnections</a>

Child Elements
<a href="#">connectoid</a>

Attributes:

**ref:** This attribute specifies the associated **davAdapter** element that is being extended. The specified value SHOULD match the value specified by the **name** attribute of the corresponding **davAdapter** element.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="davAdapterExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:connectoid" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.32 adoAdapterExtension

The **adoAdapterExtension** element specifies extended information for **adoAdapter** (section [2.2.38](#)).

Parent Elements
<a href="#">dataConnections</a>

Child Elements
<a href="#">connectoid</a>

Attributes:

**queryFile:** This attribute MUST be ignored.

**queryKey:** This attribute MUST be ignored.

**ref:** This attribute specifies the associated **adoAdapter** element that is being extended. The specified value SHOULD match the value specified by the **name** attribute of the corresponding **adoAdapter** element.

**submitAdapterName:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="adoAdapterExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:connectoid" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="submitAdapterName" type="xsf:xdTitle" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

```

    <xsd:attributeGroup ref="xsf2:queryKeyFile"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.33 webServiceAdapterExtension

The **webServiceAdapterExtension** element specifies extended information for **webServiceAdapter** (section [2.2.39](#)). This element MUST NOT have both a **connectoid** (section [2.2.147.30](#)) child element and a **relativeQuery** (section [2.2.147.34](#)) child element present.

Parent Elements
<a href="#">dataConnections</a>

Child Elements
<a href="#">connectoid</a>
<a href="#">relativeQuery</a>

Attributes:

**queryFile:** This attribute MUST be ignored.

**queryKey:** This attribute MUST be ignored.

**ref:** This attribute specifies the associated **webServiceAdapter** element that is being extended. The specified value SHOULD match the value specified by the **name** attribute of the corresponding **webServiceAdapter** element.

**trackDataSetChanges:** This attribute MUST be set to "no".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="webServiceAdapterExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:connectoid" minOccurs="0"/>
      <xsd:element ref="xsf2:relativeQuery" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="trackDataSetChanges" type="xsf:xdYesNo" use="optional"
      default="no"/>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attributeGroup ref="xsf2:queryKeyFile"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.34 relativeQuery

The **relativeQuery** element specifies a substring of the specified Web service URL that is replaced at run time by a different substring to create a new Web service URL. This element is used when

hosting a form (1) that is published to multiple site collections that have different absolute root URLs to the site collection but the same relative paths to a Web service. The specified Web service URL substring MUST be replaced by the value specified by an implementation-specific **ASP.NET control** hosting the form (1).

Parent Elements
<a href="#">WebServiceAdapterExtension</a>

Attributes:

**replace:** This attribute specifies the substring of the Web service URL that is replaced at run time. The specified URL MUST be an absolute path and MUST NOT be a local or **Universal Naming Convention (UNC)** path. The specified URL MUST match the beginning of the value specified by the **serviceUrl** attribute of the **operation** element (section [2.2.41](#)).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="relativeQuery">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="replace" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.35 emailAdapterExtension

The **emailAdapterExtension** element specifies the method of submitting the form file using the e-mail data adapter.

Parent Elements
<a href="#">dataConnections</a>

Attributes:

**emailAttachmentType:** This attribute specifies the file type an attachment MUST be sent as when the form file is submitted using the e-mail data adapter. This attribute MUST be set to one of the following values:

- **none:** This value specifies that the form file is sent in the body of the e-mail.
- **xml:** This value specifies that the form file is attached to the e-mail as an XML file.
- **xmlXsn:** This value specifies that the form file and the form template (.xsn) file are both attached as two separate attachments to the e-mail.

**ref:** This attribute specifies the associated **emailAdapter** element (section [2.2.51](#)) that is being extended. The specified value SHOULD match the value specified by the **name** attribute of the corresponding **emailAdapter** element.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="emailAdapterExtension">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="emailAttachmentType" type="xsf2:emailAttachmentType"
use="required"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.36 xmlFileAdapterExtension

The **xmlFileAdapterExtension** element specifies extended information for **xmlFileAdapter** (section [2.2.45](#)).

Parent Elements
<a href="#">dataConnections</a>

Child Elements
<a href="#">connectoid</a>

Attributes:

**queryFile:** This attribute MUST be ignored.

**queryKey:** This attribute MUST be ignored.

**ref:** This attribute specifies the associated **xmlFileAdapter** element that is being extended. The specified value SHOULD match the value specified by the **name** attribute of the corresponding **xmlFileAdapter** element.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```

<xsd:element name="xmlFileAdapterExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:connectoid" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attributeGroup ref="xsf2:queryKeyFile"/>
  </xsd:complexType>
</xsd:element>

```

### 2.2.147.37 sharepointListAdapterExtension

The **sharepointListAdapterExtension** element specifies extended information for **sharepointListAdapter** (section [2.2.46](#)).

Parent Elements
-----------------

Parent Elements
<a href="#">dataConnections</a>

Child Elements
<a href="#">connectoid</a>

Attributes:

**queryFile:** This attribute MUST be ignored.

**queryKey:** This attribute MUST be ignored.

**queryThisFormOnly:** This attribute specifies whether the protocol server list data adapter MUST query the protocol server list (1) for values applicable only to the current form (1).

**ref:** This attribute specifies the associated **sharepointListAdapter** element that is being extended. The specified value SHOULD match the value specified by the **name** attribute of the corresponding **sharepointListAdapter** element.

**sharepointWebGuid:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sharepointListAdapterExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:connectoid" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="queryThisFormOnly" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:attribute name="sharepointWebGuid" type="xsd:string" use="optional"/>
    <xsd:attributeGroup ref="xsf2:queryKeyFile"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.38 sendByMail

The **sendByMail** element specifies whether the form file or form template is attached to the e-mail generated by the e-mail data adapter as a control-specific **MIME type**.

Parent Elements
<a href="#">solutionDefinition</a>

Attributes:

**disableEmailForms:** This attribute specifies the MIME type of the attached form file or form template. If this attribute is not present, its value MUST be interpreted as "no".

- **no:** A form file MUST be attached as "application/x-microsoft-InfoPathForm" MIME type and a form template MUST be attached as an "application/x-microsoft-InfoPathFormTemplate" MIME Type.
- **yes:** A form file or form template MUST be attached as a "text/xml" MIME type.

**emailAttachmentType:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sendByMail">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="emailAttachmentType" type="xsf2:emailAttachmentType"
use="optional"/>
    <xsd:attribute name="disableEmailForms" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.39 warnings

The **warnings** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">warning</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="warnings">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:warning" maxOccurs="unbounded" minOccurs="0"/>
    </xsd:sequence>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.40 warning

The **warning** element MUST be ignored.

Parent Elements
<a href="#">warnings</a>



Attributes:

**hidden:** This attribute MUST be ignored.

**source:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="warning">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="source" type="xsd:string" use="required"/>
    <xsd:attribute name="hidden" type="xsd:boolean" use="optional" default="no"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.41 viewsExtension

The **viewsExtension** element contains extended information for the form views in this form template.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">viewExtension</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="viewsExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd2:viewExtension" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.42 viewExtension

The **viewExtension** element specifies extended information for **view** (section [2.2.123](#)).

Parent Elements
<a href="#">viewsExtension</a>

Child Elements
<a href="#">xmlToEditExtension</a>

Attributes:

**clientOnly:** This attribute specifies whether the form view contains features that are not compatible with the protocol server. If this attribute is set to "yes", the form view MUST NOT be rendered and MUST NOT be present in the menu of form views. If this attribute is not present, its value MUST be interpreted as "no".

**designMode:** This attribute MUST be ignored.

**readOnly:** This attribute MUST be ignored.

**ref:** This attribute specifies the name of the corresponding form view and MUST match the corresponding the **name** attribute of the **view** element.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="viewExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:xmlToEditExtension" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="designMode" type="xsd:string" use="optional"/>
    <xsd:attribute name="readOnly" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="clientOnly" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.147.43 xmlToEditExtension

The **xmlToEditExtension** element specifies extended information for **xmlToEdit** (section [2.2.124](#)).

Parent Elements
<a href="#">viewExtension</a>

Attributes:

**allowLinkedImages:** This attribute specifies whether hyperlink references to images are allowed in a rich text box control. This attribute MUST be set to "yes" if the corresponding **xmlToEdit** element refers to a rich text box control.

**excludeEmbeddedImages:** This attribute specifies whether embedded images are excluded in a rich text box control. This attribute MUST be set to "yes" if the corresponding **xmlToEdit** element refers to a rich text box control.

**ref:** This attribute specifies the name of the corresponding control and MUST match the corresponding **name** attribute of the **xmlToEdit** element.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xmlToEditExtension">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="ref" type="xsf:xdTitle" use="required"/>
    <xsd:attribute name="excludeEmbeddedImages" type="xsf:xdYesNo" use="optional"
default="no"/>
    <xsd:attribute name="allowLinkedImages" type="xsf:xdYesNo" use="optional" default="no"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

#### 2.2.147.44 preview

The **preview** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Attributes:

**domain:** This attribute MUST be ignored.

**sampleData:** This attribute MUST be ignored.

**userRole:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="preview">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="sampleData" type="xsd:string" use="optional"/>
    <xsd:attribute name="domain" type="xsd:string" use="optional"/>
    <xsd:attribute name="userRole" type="xsd:string" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

#### 2.2.147.45 autoUpdatePrompt

The **autoUpdatePrompt** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Attributes:

**showPrompt:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="autoUpdatePrompt">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="showPrompt" type="xsd:boolean" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.46 inputScopes

The **inputScopes** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">inputScope</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="inputScopes">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsd2:inputScope" maxOccurs="unbounded" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.47 inputScope

The **inputScope** element MUST be ignored.

Parent Elements
<a href="#">inputScopes</a>

Child Elements
<a href="#">words</a>

Attributes:

**caption:** This attribute MUST be ignored.

**expression:** This attribute MUST be ignored.

**name:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="inputScope">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:words" maxOccurs="unbounded" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="optional"/>
    <xsd:attribute name="expression" type="xsd:string" use="optional"/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.48 words

The **words** element MUST be ignored.

Parent Elements
<a href="#">inputScope</a>

Child Elements
<a href="#">word</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="words">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="word" maxOccurs="unbounded" minOccurs="1">
        <xsd:complexType>
          <xsd:sequence/>
          <xsd:attribute name="value" type="xsd:string" use="optional" default=""/>
          <xsd:anyAttribute processContents="skip"/>
        </xsd:complexType>
      </xsd:element>
    </xsd:sequence>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.49 word

The **word** element MUST be ignored.

Parent Elements
<a href="#">words</a>

Attributes:

**value:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="word" maxOccurs="unbounded" minOccurs="1">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="value" type="xsd:string" use="optional" default=""/>
    <xsd:anyAttribute processContents="skip"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.50 managedCode

The **managedCode** element specifies settings for business objects in the form template (.xsn) file. Business objects are loaded when a form template (.xsn) file is published. Platform specifics determine the success of loading business objects.

Parent Elements
<a href="#">solutionDefinition</a>

Attributes:

**enabled:** This attribute MUST be ignored.

**language:** This attribute MUST be ignored.

**projectPath:** This attribute MUST be ignored.

**version:** This attribute specifies which version of the platform with which the business objects were compiled. The specified value MUST match a supported version of the platform installed on the protocol server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="managedCode">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="projectPath" type="xsd:string" use="optional"/>
    <xsd:attribute name="language" type="xsf2:managedCodeType" use="required"/>
    <xsd:attribute name="version" type="xsd:string" use="required"/>
    <xsd:attribute name="enabled" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

## 2.2.147.51 submit

The **submit** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">errorMessage</a>
<a href="#">submitAction</a>
<a href="#">successMessage</a>

Attributes:

**caption:** This attribute MUST be ignored.

**disableMenuItem:** This attribute MUST be ignored.

**onAfterSubmit:** This attribute MUST be ignored.

**showSignatureReminder:** This attribute MUST be ignored.

**showStatusDialog:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="submit">
  <xsd:complexType>
    <xsd:all>
      <xsd:element name="submitAction" minOccurs="0">
        <xsd:complexType>
          <xsd:sequence/>
          <xsd:attribute name="adapter" type="xsf:xdTitle" use="required"/>
        </xsd:complexType>
      </xsd:element>
      <xsd:element name="successMessage" type="xsd:string" minOccurs="0"/>
      <xsd:element name="errorMessage" type="xsd:string" minOccurs="0"/>
    </xsd:all>
    <xsd:attribute name="caption" type="xsd:string" use="optional"/>
    <xsd:attribute name="onAfterSubmit" use="optional">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="close"/>
          <xsd:enumeration value="keepOpen"/>
          <xsd:enumeration value="openNew"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="showStatusDialog" type="xsf:xdYesNo" use="optional"/>
    <xsd:attribute name="showSignatureReminder" type="xsf:xdYesNo" use="optional"/>
  </xsd:complexType>
</xsd:element>
```

```
<xsd:attribute name="disableMenuItem" type="xsf:xdYesNo" use="optional"/>
</xsd:complexType>
</xsd:element>
```

### 2.2.147.52 submitAction

The **submitAction** element MUST be ignored.

Parent Elements
<a href="#">submit</a>

Attributes:

**adapter:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="submitAction" minOccurs="0">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="adapter" type="xsf:xdTitle" use="required"/>
  </xsd:complexType>
</xsd:element>
```

### 2.2.147.53 successMessage

The **successMessage** element MUST be ignored.

Parent Elements
<a href="#">submit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="successMessage" type="xsd:string" minOccurs="0"/>
```

### 2.2.147.54 errorMessage

The **errorMessage** element MUST be ignored.

Parent Elements
<a href="#">submit</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="errorMessage" type="xsd:string" minOccurs="0"/>
```



## 2.2.147.55 featureRestrictionsExtension

The **featureRestrictionsExtension** element MUST be ignored.

Parent Elements
<a href="#">solutionDefinition</a>

Child Elements
<a href="#">exportToPDFForXPS</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="featureRestrictionsExtension">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf2:exportToPDFForXPS" minOccurs="0"/>
    </xsd:all>
  </xsd:complexType>
</xsd:element>
```

## 2.2.147.56 exportToPDFForXPS

The **exportToPDFForXPS** element MUST be ignored.

Parent Elements
<a href="#">featureRestrictionsExtension</a>

Attributes:

**ui:** This attribute MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="exportToPDFForXPS">
  <xsd:complexType>
    <xsd:attribute name="ui" type="xsf:xdEnabledDisabled" use="required"/>
  </xsd:complexType>
</xsd:element>
```

## 2.3 XML Schema Files (XSD) Specification

The XML schema documents in the form template (.xsn) file MUST be conformant to [\[XMLSCHEMA1\]](#).

This section specifies the XML schema documents representing the XML schema for the data of any form files based on the form template. The specific XML schema documents affected are specified by the **documentSchema** element (section [2.2.61](#)) of the form definition (.xsf) file.

### 2.3.1 Control Representation

Each control that is bound to a field or group (1) has a particular representation in the **XML schema definition (XSD)** language.

The following table lists the sections that specify what data types each control can be bound to in the XML schema document:

Section	Description
Button Control (section <a href="#">2.3.1.1</a> )	Specifies the representation of a button control in the XML schema document.
Check Box Control (section <a href="#">2.3.1.2</a> )	Specifies the representation of a check box control in the XML schema document.
Contact Selector Control (section <a href="#">2.3.1.3</a> )	Specifies the representation of a contact selector control in the XML schema document.
Date Picker Control (section <a href="#">2.3.1.4</a> )	Specifies the representation of a date picker control in the XML schema document.
Drop-Down List Control (section <a href="#">2.3.1.5</a> )	Specifies the representation of a drop-down control in the XML schema document.
Expression Box Control (section <a href="#">2.3.1.6</a> )	Specifies the representation of an expression box control in the XML schema document.
File Attachment Control (section <a href="#">2.3.1.7</a> )	Specifies the representation of a file attachment control in the XML schema document.
Hyperlink Control (section <a href="#">2.3.1.8</a> )	Specifies the representation of a hyperlink control in the XML schema document.
List Box Control (section <a href="#">2.3.1.9</a> )	Specifies the representation of a list box control in the XML schema document.
Option Button Control (section <a href="#">2.3.1.10</a> )	Specifies the representation of an option button control in the XML schema document.
Repeating Section Control (section <a href="#">2.3.1.11</a> )	Specifies the representation of a repeating section control in the XML schema document.
Repeating Table Control (section <a href="#">2.3.1.12</a> )	Specifies the representation of a repeating table control in the XML schema document.
Rich Text Box Control (section <a href="#">2.3.1.13</a> )	Specifies the representation of a rich text box control in the XML schema document.
Section Control and Optional Section Control section ( <a href="#">2.3.1.14</a> )	Specifies the representation of a section control in the XML schema document.
Table Control (section <a href="#">2.3.1.15</a> )	Specifies the representation of a table control in the XML schema document.
Text Box Control (section <a href="#">2.3.1.16</a> )	Specifies the representation of a text box control in the XML

Section	Description
	schema document.

### 2.3.1.1 Button Control

A button control **MUST** be unbound. It has no XSD representation.

### 2.3.1.2 Check Box Control

A check box control that is not required to contain data, for example that is bound to an XML element, named "field1" with data type set to "boolean" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```
<xsd:element name="field1" nillable="true" type="xsd:boolean"/>
```

A check box control that is required to contain data, for example that is bound to an XML element named "field1" with data type set to "boolean" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```
<xsd:element name="field1" type="xsd:boolean"/>
```

A check box control **SHOULD** be bound to a field with one of the following XSD data types, as specified in [\[XMLSCHEMA1\]](#), for which any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), **MAY** also be set:

- string
- integer
- double
- boolean
- anyURI
- date
- time
- dateTime

### 2.3.1.3 Contact Selector Control

A contact selector control bound to a group (1) **MUST** have a complex type XSD, as specified in [\[XMLSCHEMA1\]](#). The following example is the XSD in which the group (1) is named "group1":

```
<xsd:element name="group1">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="my:Person" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

```

<xsd:element name="Person">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="my:DisplayName" minOccurs="0"/>
      <xsd:element ref="my:AccountId" minOccurs="0"/>
      <xsd:element ref="my:AccountType" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="DisplayName" type="xsd:string"/>
<xsd:element name="AccountId" type="xsd:string"/>
<xsd:element name="AccountType" type="xsd:string"/>

```

### 2.3.1.4 Date Picker Control

A date picker control that is not required to contain data, for example that is bound to an XML element, named "field1" with data type set to "date" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set has an XSD as follows:

```

<xsd:element name="field1" nillable="true" type="xsd:date"/>

```

A date picker control that is required to contain data, for example that is bound to an XML element, named "field1" with data type set to "date" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set has the following XSD:

```

<xsd:element name="field1" type="xsd:date"/>

```

A date picker control SHOULD be bound to a field with one of the following XSD data types for which any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), MAY also be set:

- string
- date
- dateTime

### 2.3.1.5 Drop-Down List Control

A drop-down list control that is not required to contain data, for example that is bound to an XML element named "field1" with data type set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```

<xsd:element name="field1" type="xsd:string"/>

```

A drop-down list control that is required to contain data, for example that is bound to an XML element named "field1" with data type set to "string" for which a **xsd:minLength** constraining facet, as specified in [\[XMLSCHEMA1\]](#), has been set has the following XSD:

```

<xsd:element name="field1" type="my:requiredString"/>
<xsd:simpleType name="requiredString">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
  </xsd:restriction>
</xsd:simpleType>

```

```
</xsd:restriction>
</xsd:simpleType>
```

A drop-down list control SHOULD be bound to a field with one of the following XSD data types, as specified in [\[XMLSCHEMA1\]](#), for which any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), MAY also be set:

- string
- integer
- double
- boolean
- anyURI
- date
- time
- dateTime

### 2.3.1.6 Expression Box Control

An expression box control MAY be bound to a field to retrieve the value that it displays. If bound, an expression box control MUST NOT change the data in the field to which it is bound, though the data in that field MAY be changed by other relevant events within the form (1).

### 2.3.1.7 File Attachment Control

A file attachment control that is not required to contain data, which is bound to an XML element, for example named "field1", with data type set to "base64Binary" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```
<xsd:element name="field1" nillable="true" type="xsd:base64Binary"/>
```

A file attachment control that is required to contain data, for example that is bound to an XML element named "field1", with data type set to "xsd:base64Binary" for which an **xsd:minLength** constraining facet, as specified in [\[XMLSCHEMA1\]](#), has been set, has the following XSD:

```
<xsd:element name="field1" type="my:requiredBase64Binary"/>
<xsd:simpleType name="requiredBase64Binary">
  <xsd:restriction base="xsd:base64Binary">
    <xsd:minLength value="1"/>
  </xsd:restriction>
</xsd:simpleType>
```

A file attachment control SHOULD be bound to a field with the XSD data types **base64Binary**. Any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), MAY also be set.

### 2.3.1.8 Hyperlink Control

A hyperlink control MAY be bound to up to two fields; one field to retrieve the target of the hyperlink and another field to retrieve the value of the hyperlink's display text. If bound, a hyperlink control MUST NOT change the data in either field to which it is bound, though the data in those fields MAY be changed by other relevant events within the form (1).

### 2.3.1.9 List Box Control

A list box control that is not required to contain data, which is bound to an XML element named "field1", with data type set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set has the following XSD:

```
<xsd:element name="field1" type="xsd:string"/>
```

A list box control that is required to contain data, for example that is bound to an XML element, named "field1", with data type set to "string" for which an **xsd:minLength** constraining facet, as specified in [\[XMLSCHEMA1\]](#), has been set has the following XSD:

```
<xsd:element name="field1" type="my:requiredString"/>
<xsd:simpleType name="requiredString">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
  </xsd:restriction>
</xsd:simpleType>
```

A list box control SHOULD be bound to a field with one of the following XSD data types, as specified in [\[XMLSCHEMA1\]](#), for which any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), MAY also be set:

- string
- integer
- double
- boolean
- anyURI
- date
- time
- dateTime

### 2.3.1.10 Option Button Control

An option button control that is not required to contain data, for example that is bound to an XML element named "field1", with data type set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set has the following XSD:

```
<xsd:element name="field1" type="xsd:string"/>
```

An option button control that is required to contain data, for example that is bound to an XML element named "field1", with data type set to "string" for which a **minLength** constraining facet, as specified in [\[XMLSCHEMA1\]](#), has been set has the following XSD:

```
<xsd:element name="field1" type="my:requiredString"/>
<xsd:simpleType name="requiredString">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
  </xsd:restriction>
</xsd:simpleType>
```

An option button control SHOULD be bound to a field with one of the following XSD data types, as specified in [\[XMLSCHEMA1\]](#), for which any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), MAY also be set:

- string
- integer
- double
- boolean
- anyURI
- date
- time
- dateTime

### 2.3.1.11 Repeating Section Control

A repeating section control bound to a **repeating group**, for example named "group2" and containing no other bound controls, has the following complex type XSD:

```
<xsd:element name="group1">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="my:group2" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="group2">
  <xsd:complexType>
    <xsd:sequence/>
  </xsd:complexType>
</xsd:element>
```

A repeating section control bound to a repeating group, for example named "group2", and containing a text box control that is not required to contain data, which is bound to an XML element named "field1", with data type set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set has the following XSD:

```
<xsd:element name="group1">
```

```

    <xsd:complexType>
      <xsd:sequence>
        <xsd:element ref="my:group2" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="group2">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element ref="my:field1" minOccurs="0"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="field1" type="xsd:string"/>

```

### 2.3.1.12 Repeating Table Control

A repeating table control bound to a repeating group, for example named "group2", and containing three text box controls that are not required to contain data, which are bound to XML elements named "field1", "field2", and "field3" with data types set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```

  <xsd:element name="group1">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element ref="my:group2" minOccurs="0" maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="group2">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element ref="my:field1" minOccurs="0"/>
        <xsd:element ref="my:field2" minOccurs="0"/>
        <xsd:element ref="my:field3" minOccurs="0"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>
  <xsd:element name="field1" type="xsd:string"/>
  <xsd:element name="field2" type="xsd:string"/>
  <xsd:element name="field3" type="xsd:string"/>

```

### 2.3.1.13 Rich Text Box Control

A rich text box control, which is bound to an XML element, for example named "field1", has the following complex type XSD:

```

  <xsd:element name="field1">
    <xsd:complexType mixed="true">
      <xsd:sequence>
        <xsd:any minOccurs="0" maxOccurs="unbounded"
          namespace="http://www.w3.org/1999/xhtml" processContents="lax"/>
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>

```



```
</xsd:element>
```

### 2.3.1.14 Section Control and Optional Section Control

A section control or optional section control bound to a group (1), for example named "group1" and containing no other bound controls, has the following complex type XSD:

```
<xsd:element name="group1">
  <xsd:complexType>
    <xsd:sequence/>
  </xsd:complexType>
</xsd:element>
```

A section control or optional section control bound to a group (1), for example named "group1", and containing a text box control that is not required to contain data, which is bound to an XML element, named "field1", with data type set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```
<xsd:element name="group1">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="my:field1" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="field1" type="xsd:string"/>
```

### 2.3.1.15 Table Control

A table control MUST be unbound. It has no XSD representation.

### 2.3.1.16 Text Box Control

A text box control that is not required to contain data, for example that is bound to an XML element named "field1", with data type set to "string" for which no constraining facets, as specified in [\[XMLSCHEMA1\]](#), have been set, has the following XSD:

```
<xsd:element name="field1" type="xsd:string"/>
```

A text box control that is required to contain data, which is bound to an XML element, for example named "field1", with data type set to "string" for which an **xsd:minLength** constraining facet, as specified in [\[XMLSCHEMA1\]](#), has been set, has the following XSD:

```
<xsd:element name="field1" type="my:requiredString"/>
<xsd:simpleType name="requiredString">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1"/>
  </xsd:restriction>
</xsd:simpleType>
```

A text box control SHOULD be bound to a field with one of the following XSD data types, as specified in [\[XMLSCHEMA1\]](#), for which any valid constraining facets, as specified in [\[XMLSCHEMA1\]](#), MAY also be set:

- string
- integer
- double
- boolean
- anyURI
- date
- time
- dateTime

## 2.4 Form View Files (XSLT) Specification

The view XSL file MUST be an XSLT valid transformation, as specified in [\[W3C-XSLT\]](#), which MUST produce a valid HTML document, as specified in [\[HTML\]](#). The HTML document MUST be a valid **XML document**, as specified in [\[W3C-XML\]](#). The XSL file uses constructs with a specific pattern. The following sections specify the pattern of valid XSLT transformations.

The topic is divided into the following sections:

- **View Representation** (section [2.4.1](#)). This section specifies a valid XSLT transformation of the form data into HTML.
- **Control-specific Attributes** (section [2.4.2](#)). This section specifies the HTML representation of certain control properties and behaviors.
- **XSL Function Extensions** (section [2.4.3](#)). This section specifies extensions to XSLT used in transforming the form data to HTML.

### 2.4.1 View Representation

Each control MUST have the representation specified in the following sections. Simple or complex XSD values, as specified in [\[XMLSCHEMA1\]](#), MUST be rendered using controls.

The following table lists the sections that specify the different constructs used to represent the XSLT file.

Section	Description
View Syntax (section <a href="#">2.4.1.1</a> )	Specifies the syntax used to represent the XSLT file.
XSL Root Template (section <a href="#">2.4.1.2</a> )	Specifies the starting element that contains the XSLT file.
XSL Root Template Style Sheets (section <a href="#">2.4.1.3</a> )	Specifies the representation for the style sheet.
Control Data Formatting (section <a href="#">2.4.1.4</a> )	Specifies the representation of data formatting for multiple controls.

Section	Description
Button Control (section <a href="#">2.4.1.5</a> )	Specifies the representation of a button control.
Check Box Control (section <a href="#">2.3.1.2</a> )	Specifies the representation of a check box control.
Contact Selector Control (section <a href="#">2.4.1.7</a> )	Specifies the representation of a contact selector control.
Date Picker Control (section <a href="#">2.4.1.8</a> )	Specifies the representation of a date picker control.
Drop-Down List Control (section <a href="#">2.4.1.9</a> )	Specifies the representation of a drop-down list control.
Expression Box Control (section <a href="#">3.4.1.6</a> )	Specifies the representation of an expression box control.
File Attachment Control (section <a href="#">2.4.1.11</a> )	Specifies the representation of a file attachment control.
Hyperlink Control (section <a href="#">2.4.1.12</a> )	Specifies the representation of a hyperlink control.
List Box Control (section <a href="#">2.4.1.13</a> )	Specifies the representation of a list box control.
Option Button Control (section <a href="#">2.4.1.14</a> )	Specifies the representation of an option button control.
Repeating Section Control (section <a href="#">2.4.1.15</a> )	Specifies the representation of a repeating section control.
Repeating Table Control (section <a href="#">2.4.1.16</a> )	Specifies the representation of a table control.
Rich Text Box Control (section <a href="#">2.3.1.13</a> )	Specifies the representation of a rich text box control.
Section Control and Optional Section Control (section <a href="#">2.4.1.18</a> )	Specifies the representation of a section control.
Table Control (section <a href="#">2.4.1.19</a> )	Specifies the representation of a table control.
Text Box Control (section <a href="#">2.4.1.20</a> )	Specifies the representation of a text box control.
Ignored Controls (section <a href="#">2.4.1.21</a> )	Specifies a list of controls that are ignored.
Invalid Controls (section <a href="#">2.4.1.22</a> )	Specifies a list of controls that are invalid.
Invalid Constructs (section <a href="#">2.4.1.23</a> )	Specifies a list of invalid constructs for the XSLT.

### 2.4.1.1 View Syntax

The formal grammar of the view XSL file is given in this specification using an **Extended Backus-Naur Form (EBNF)** notation. The EBNF notation is used instead of **Augmented Backus-Naur Form (ABNF)** or XML schema definition (XSD) to enhance the clarity of the constructs used in the XSLT transformation.

#### Notation

Each rule (1) in the grammar defines one symbol, in the form (1).

**SYMBOL**::= expression

Symbols are written with capital and bold letters (SYMBOL). If a symbol has a subscript in a rule (1), the symbol MUST be expanded to the same yield in all places inside the rule (1).

**#xN** -where N is a hexadecimal integer, the expression matches the character whose number, or code point, in [ISO-10646] is "N". The number of leading zeros in the #xN form (1) is insignificant.

**[a-zA-Z], [#xN-#xN]**: Matches any character with a value in the range(s) indicated, inclusive.

**[abc], [#xN#xN#xN]**: Matches any character with a value among the characters enumerated. Enumerations and ranges can be mixed in one set of brackets.

**[^a-z], [^#xN-#xN]**: Matches any character with a value outside the range indicated.

**[^abc], [^#xN#xN#xN]**: Matches any character with a value not among the characters given. Enumerations and ranges of forbidden values can be mixed in one set of brackets.

**"string"**: Matches a literal string matching that given inside the double quotes.

**'string'**: Matches a literal string matching that given inside the single quotes.

To match more complex patterns, these symbols MUST be combined as follows, where A and B represent simple expressions:

**(expression)**: Expression is treated as a unit and MUST be combined as specified in this list.

**semicolon-delimited list((expression)(, expression)\*)**: Matches a semicolon-delimited list of expressions.

**A?**: Matches A or nothing; optional A.

**A B**: Matches A followed by B. This operator has higher precedence than alternation; thus A B | C D is identical to (A B) | (C D).

**A | B**: Matches A or B.

**A – B**: Matches any string that matches A but does not match B.

**A+**: Matches one or more occurrences of A. Concatenation has higher precedence than alternation; thus A+ | B+ is identical to (A+) | (B+).

**A\***: Matches zero or more occurrences of A. Concatenation has higher precedence than alternation; thus A\* | B\* is identical to (A\*) | (B\*).

**text**: The text that does not match any production specified earlier MUST be interpreted as a literal. Additionally, any construct that has the same semantics in the target language ([HTML], [CSS-LEVEL1], [W3C-XML],[XMLSCHEMA1],[XPath], and [W3C-XSLT]) can substitute the literal text.

The order and value of element attributes in the EBNF rules (1) MUST be interpreted in accordance with the target language.

For example, in HTML as a target language, the following constructs are semantically equivalent:

```
<span class="xdTextBox xdBehavior_Formatting"/>
<span CLASS="xdTextBox xdBehavior_Formatting"/>
<span Class="xdTextBox xdBehavior_Formatting"/>
```

This is true because the **class** attribute is specified in HTML and the syntax of the attribute is case-insensitive. Also the number of white spaces or tabs between **xdTextBox** and **xdBehavior\_Formatting** is not important as long as there is at least one. The syntax for the values of **class** attributes MUST be as specified in [\[HTML\]](#) section 7.5.2.

The following productions MUST be used for the controls representation:

- ISO\_646\_DIGIT: [#x0030-#x0039]
- LATIN\_CHARACTER: [#x0041-#x005A] | [#x0061- #x007a]
- SINGLE\_CHARACTER: LATIN\_CHARACTER | ISO\_646\_DIGIT
- BUTTON\_POSTBACKMODEL: always | auto
- POSTBACKMODEL: never | BUTTON\_POSTBACKMODEL

The semantics of the post back model values MUST be as specified in section [2.4.2.29](#).

**CONTROL\_ID:** MUST be (LATIN\_CHARACTER) (LATIN\_CHARACTER|ISO\_646\_DIGIT|\_)\*. The value of **CONTROL\_ID** MUST be a valid value for type **xf:xdTitle**.

**TEMPLATE\_MODE\_ID:** MUST be \_(ISO\_646\_DIGIT)\*.

**ANY\_STRING:** MUST be a value of **Reference**, as specified in [\[W3C-XML\]](#) section 4.1.

**NON\_EMPTY\_STRING:** MUST be a value of **Reference**, as specified in [\[W3C-XML\]](#) section 4.1 that contains at least one **char**.

**XML\_NAMESPACE:** Values MUST be as specified in [\[XML Namespaces\]](#).

**INPUT\_SCOPE\_ID:** MUST be **ANY\_STRING**.

**INPUT\_SCOPE\_NAME:** MUST be **ANY\_STRING**.

**INPUT\_SCOPE:** MUST be the following:

```
xd:inputScopeId="INPUT_SCOPE_ID" (xd:inputScope="INPUT_SCOPE_NAME")?  
(xd:allowNonMatching="yes")?
```

The semantics of the input scope attributes MUST be as specified in section [2.4.2.21](#), section [2.4.2.20](#), and section [2.4.2.2](#).

**ALIGN:** MUST be "left" or "right".

**VALIGN:** MUST be one of the following values:

- "middle"
- "baseline"
- "bottom"
- "top"

**SIZE:** Values MUST be as specified in [\[HTML\]](#) section 17.4.

**ANCHOR\_TEXT:** Values MUST be as specified in [\[HTML\]](#) section 12.2. MUST NOT contain an anchor tag, as specified in [\[HTML\]](#) section 12.2.

**XML\_TO\_EDIT\_NAME:** **Nmtoken**, as specified in [\[W3C-XML\]](#), and MUST match the name of a corresponding **xmlToEdit** (section [2.2.124](#)) entry in the XSF file.

**TAB\_INDEX<4>:** MUST be "-1" or as specified in [\[HTML\]](#) section 17.11.

**HEIGHT:** Value pairs MUST be as specified in [\[HTML\]](#) section 13.7.1.

**MIN\_HEIGHT:** Values MUST be as specified in [\[CSS-LEVEL2\]](#) section 10.7.

**WIDTH:** Value pairs MUST be as specified in [\[HTML\]](#) section 13.7.1.

**COLSPAN:** Value pairs MUST be as specified in [\[HTML\]](#) section 11.2.6.

**ROWSPAN:** Value pairs MUST be as specified in [\[HTML\]](#) section 11.2.6.

**STYLE\_SIZE:** Value pairs MUST be as specified in [\[HTML\]](#) section 17.4 and [\[CSS-LEVEL1\]](#) sections 5.5.23 and 5.5.24.

**STYLE\_WIDTH:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) sections 5.5.23.

**STYLE\_HEIGHT:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) sections 5.5.24.

**CSS1\_STYLE:** Values MUST be as specified in [\[CSS-LEVEL1\]](#).

**STYLE\_DISPLAY\_NONE:** MUST be "DISPLAY: none", as specified in [\[CSS-LEVEL1\]](#) section 5.6.1.

**STYLE\_MARGIN:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) sections 5.5.1, 5.5.2, 5.5.3, 5.5.4, 5.5.5.

**STYLE\_PADDING:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) sections 5.5.6, 5.5.7, 5.5.8, 5.5.9, 5.5.10.

**STYLE\_TEXT\_DECORATION:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.4.3.

**STYLE\_BACKGROUND\_COLOR:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.3.2.

**STYLE\_BORDER:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) sections 5.5.11, 5.5.12, 5.5.13, 5.5.14, 5.5.15, 5.5.16, 5.5.17, 5.5.18, 5.5.19, 5.5.20, 5.5.21, 5.5.22.

**STYLE\_BORDER\_STYLE:** Value pairs MUST be as specified in [\[CSS-LEVEL2\]](#) section 8.5.3.

**STYLE\_BORDER\_COLLAPSE:** Value pairs MUST be as specified in [\[CSS-LEVEL2\]](#) section 17.6.

**STYLE\_FONT:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.2.

**STYLE\_FONT\_STYLE:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.2.3.

**STYLE\_COLOR:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.3.1.

**STYLE\_FONT\_WEIGHT:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.2.5.

**STYLE\_TEXT\_ALIGN:** Value pairs MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.4.6.

**STYLE\_WRAP:** WHITE-SPACE: normal | WHITE-SPACE: nowrap; WORD-WRAP: normal

**STYLE\_OVERFLOW:** Value pairs MUST be as specified in [\[CSS-LEVEL2\]](#) section 11.1.1.

**STYLE\_VERTICAL\_ALIGN:** VERTICAL-ALIGN: (sub | super)

**STYLE\_DIRECTION:** (DIRECTION: ltr) | (DIRECTION: rtl)

**STYLE\_DISABLE\_CHILD\_XML\_TO\_EDIT:**

msos-(xOptional|xCollection)-XML\_TO\_EDIT\_NAME-editing:disabled;

**LEAF\_CONTROL\_CONDITIONAL\_FORMATTING\_CAPTION:** STYLE\_DISPLAY\_NONE | semicolon delimited list of (STYLE\_FONT?, STYLE\_COLOR?, STYLE\_BACKGROUND\_COLOR?, STYLE\_TEXT\_DECORATION?)

**AUX\_DOM\_SOURCE\_NAME:** (LATIN\_CHARACTER | \_) (LATIN\_CHARACTER|ISO\_646\_DIGIT|\_)\*. The value of **AUX\_DOM\_SOURCE\_NAME** MUST be a valid **name** attribute of **dataObject** (section [2.2.36](#)).

**LEAF\_XPATH:** MUST be an extended location XPath expression, which MUST NOT contain XPath predicates, as specified in [\[XPATH\]](#) section 2.4, and MUST use only the **child** and **attribute** XPath axes, as specified in [\[XPATH\]](#) section 2.2. The generated node-set MUST have only 1 element. The XPath expression MUST be a relative or absolute XPath expression. To alter the context of the XPath expression evaluation, the **xdXDocument:GetDOM** function (section [2.4.3.9.2](#)) MUST be used before the first XPath expression step.

**GROUP\_XPATH:** MUST be an extended location XPath expression, which MUST NOT contain XPath predicates, as specified in [\[XPATH\]](#) section 2.4, and MUST use only the child XPath axes, as specified in [\[XPATH\]](#) section 2.2. There are no restrictions for the number of elements in the generated node-set. The XPath expression MUST be a relative or absolute XPath expression. To alter the context of the XPath evaluation, the **xdXDocument:GetDOM** function (section [2.4.3.9.2](#)) MUST be used before the first XPath expression step.

**RELATIVE\_REPEATING\_GROUP\_XPATH:** MUST be a location XPath expression that MUST NOT contain XPath predicates, as specified in [\[XPATH\]](#) section 2.4, and MUST use only the child XPath axes, as specified in [\[XPATH\]](#) section 2.2. There are no restrictions for the number of elements in the generated node-set. The XPath expression MUST be a relative XPath expression.

**RELATIVE\_GROUP\_XPATH:** MUST be an extended location XPath expression that MUST NOT contain XPath predicates, as specified in [\[XPATH\]](#) section 2.4, and MUST use only the child XPath axes, as specified in [\[XPATH\]](#) section 2.2. There are no restrictions for the number of elements in the generated node-set. The XPath expression MUST be a relative XPath expression.

**RELATIVE\_LEAF\_XPATH:** MUST be a location XPath expression that MUST NOT contain XPath predicates, as specified in [\[XPATH\]](#) section 2.4, and MUST use only the child and attribute XPath axes, as specified in [\[XPATH\]](#) section 2.2. The XPath expression MUST be a relative XPath expression.

**BOOLEAN\_XPATH\_EXPRESSION:** MUST be an XPath expression that yields an object that MUST be a **Boolean** basic type. Boolean is specified in [\[XPATH\]](#) section 3.4. To extend the syntax of the XPath expression, the XSL function extensions specified in section [2.4.3](#) MUST be used. The XPath expression MUST be less than 100 in depth. It MUST NOT use the **position** and **last** functions specified in [\[XPATH\]](#) section 4.1. It MUST NOT use XPath predicates, as specified in [\[XPATH\]](#) section 2.4.

**STRING\_XPATH\_EXPRESSION:** MUST be an XPath expression that yields an object that has a **String** basic type. **String** is specified in [\[XPATH\]](#) section 3.6. To extend the syntax of XPath expressions, the XSL function extensions specified in section [2.4.3](#) MUST be used. The XPath expression MUST be less than 100 in depth. It MUST NOT use the **position** and **last** functions

specified in [\[XPATH\]](#) section 4.1. It MUST NOT use XPath predicates, as specified in [\[XPATH\]](#) section 2.4.

**CHECK\_FOR\_GETDOM\_BEGIN:** (<xsl:if test="function-available('xdXDocument:GetDOM')">)?

**CHECK\_FOR\_GETDOM\_END:** (</xsl:if>)?

**CHECK\_FOR\_GETDOM\_BEGIN** and **CHECK\_FOR\_GETDOM\_END** symbols always appear in pairs in the EBNF rules (1) in the following sections. Subscripts are used to mark the pairs.

If the yield of **CHECK\_FOR\_GETDOM\_BEGIN** in one production is empty, the yield of the pairing **CHECK\_FOR\_GETDOM\_END** MUST be empty.

If the yield of **CHECK\_FOR\_GETDOM\_END** in one production is empty, the yield of the pairing **CHECK\_FOR\_GETDOM\_BEGIN** MUST be empty.

### 2.4.1.2 XSL Root Template

The starting element for the EBNF notation is **XSL\_STYLE\_SHEET**.

```
XSL_STYLE_SHEET ::=
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet version="1.0"
  (XML_NAMESPACE) *
  xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  (xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance")?
  (xmlns:xd="http://schemas.microsoft.com/office/infopath/2003")?
  (xmlns:msxsl="urn:schemas-microsoft-com:xslt")?
  (xmlns:x="urn:schemas-microsoft-com:office:excel")?
  (xmlns:xdExtension="http://schemas.microsoft.com/office/infopath/2003/xslt/extension")?
  (xmlns:xdXDocument="http://schemas.microsoft.com/office/infopath/2003/xslt/xDocument")?
  (xmlns:xdSolution="http://schemas.microsoft.com/office/infopath/2003/xslt/solution")?
  (xmlns:xdFormatting="http://schemas.microsoft.com/office/infopath/2003/xslt/formatting")?
  (xmlns:xdImage="http://schemas.microsoft.com/office/infopath/2003/xslt/xImage")?
  (xmlns:xdUtil="http://schemas.microsoft.com/office/infopath/2003/xslt/Util")?
  (xmlns:xdMath="http://schemas.microsoft.com/office/infopath/2003/xslt/Math")?
  (xmlns:xdDate="http://schemas.microsoft.com/office/infopath/2003/xslt/Date")?
  (xmlns:sig="http://www.w3.org/2000/09/xmldsig#")?
  (xmlns:xdSignatureProperties="http://schemas.microsoft.com/office/infopath/2003/SignatureProperties")?
  (xmlns:ipApp="http://schemas.microsoft.com/office/infopath/2006/XPathExtension/ipApp")?

  (xmlns:xdEnvironment="http://schemas.microsoft.com/office/infopath/2006/xslt/environment")?
  (xmlns:dfs="http://schemas.microsoft.com/office/infopath/2003/dataFormSolution")?
  (xmlns:xsf="http://schemas.microsoft.com/office/infopath/2003/solutionDefinition")?

  (xmlns:xsf2="http://schemas.microsoft.com/office/infopath/2006/solutionDefinition/extensions")?
  )?
  (xmlns:xsd="http://www.w3.org/2001/XMLSchema")?
  (xmlns:xhtml="http://www.w3.org/1999/xhtml")?
  (xmlns:xdUser="http://schemas.microsoft.com/office/infopath/2006/xslt/User")? >
<xsl:output method="html" indent="no"/>
<xsl:template match="GROUP_XPATH">
  <html (dir="HTML_DIR") ?>
    <head>
      (HTML_COMMENTS)?
      <meta http-equiv="Content-Type" content="text/html"></meta>
      (CONTROL_STYLE)?
      TABLE_STYLE
    </head>
  </html>
</template>
</xsl:template>
</xsl:stylesheet>
```



```

        LANGUAGE_STYLE
        (THEME_STYLE)?
    </head>
    <body (style="CSS1_STYLE")? (background="IMAGE_FILE")?
        (scroll="auto")?>MAIN_BODY</body>
</html>
</xsl:template>
(SECTION_BODY | REPEATING_SECTION_BODY)*
</xsl:stylesheet>

MAIN_BODY ::= XML_HTML_4_1_WITH_CONTROLS |
<span>
    <xsl:attribute name="style">
        (<xsl:if test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)+
    </xsl:attribute>
    XML_HTML_4_1_WITH_CONTROLS
</span>

```

**XML\_HTML\_4\_1\_WITH\_CONTROLS:** MUST be an HTML 4.1 fragment, as specified in [\[HTML\]](#), valid under the **BODY** element that is also a valid XML 1.0 fragment, as specified in [\[W3C-XML\]](#). If an element inside the fragment contains the **xd:xcname** attribute, it MUST conform to one of the control productions specified for controls in section [2.4.1.5](#) to section [2.4.1.20](#). If the fragment contains an XSL element with the syntax of **SECTION\_CALL**, it MUST be located only in the locations where a **<DIV/>** element, as specified in [\[HTML\]](#) section 7.5.4, could also be placed.

**SECTION\_CALL:** SIMPLE\_SECTION\_CALL | OPTIONAL\_SECTION\_CALL | REPEATING\_SECTION\_CALL

**HTML\_COMMENTS:** MUST be a concatenation of one or more HTML 4.1 comments, as specified in [\[HTML\]](#) section 3.2.4.

**HTML\_DIR:** The values MUST be as specified in [\[HTML\]](#) section 8.2.

**IMAGE\_FILE:** MUST be the name of an image file, as specified in [\[CSS-LEVEL1\]](#) section 5.3.7. The image file MUST be present in the form template. See section [2.2.98](#).

### 2.4.1.3 XSL Root Template Style Sheets

The following rules (1) specify the CSS1 style sheets, as specified in [\[CSS-LEVEL1\]](#), used in the **head** element.

**CONTROL\_STYLE** yields are associated with a client-only feature and MUST be ignored by the form server.

#### **CONTROL\_STYLE:**

```

<style controlStyle="controlStyle">
    @media screen
    {
    BODY{margin-left:21px;background-position:21px 0px;}
    }
    BODY{color:windowtext;background-color:window;layout-grid:none;}
    .xdListItem {display:inline-block;width:100%;vertical-align:text-top;}
    .xdListBox, .xdComboBox{margin:1px;}
    .xdInlinePicture{margin:1px; BEHAVIOR: url(#default#urn::xdPicture) }

```

```

        .xdLinkedPicture{margin:1px; BEHAVIOR: url(#default#urn::xdPicture)
url(#default#urn::controls/Binder) }
        .xdSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
        .xdRepeatingSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px
5px;}
        .xdMultiSelectList{margin:1px;display:inline-block; border:1pt solid #dcdcdc; padding:1px
1px 1px 5px; text-indent:0; color:windowtext; background-color:window; overflow:auto;
behavior: url(#default#DataBindingUI) url(#default#urn::controls/Binder)
url(#default#MultiSelectHelper) url(#default#ScrollableRegion);}
        .xdMultiSelectListItem{display:block;white-space:nowrap}
        .xdMultiSelectFillIn{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;;padding:1px;margin:1px;border: 1pt solid #dcdcdc;overflow:hidden;text-
align:left;}
        .xdBehavior_Formatting {BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting);}
        .xdBehavior_FormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting);}
        .xdExpressionBox{margin: 1px;padding:1px;word-wrap: break-word;text-overflow:
ellipsis;overflow-x:hidden;}
        .xdBehavior_GhostedText,
        .xdBehavior_GhostedTextNoBUI{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#TextField) url(#default#GhostedText);}
        .xdBehavior_GTFormatting{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting) url(#default#GhostedText);}
        .xdBehavior_GTFormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting) url(#default#GhostedText);}
        .xdBehavior_Boolean{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#BooleanHelper);}
        .xdBehavior_Select{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#SelectHelper);}
        .xdBehavior_ComboBox{BEHAVIOR: url(#default#ComboBox) }
        .xdBehavior_ComboBoxTextField{BEHAVIOR: url(#default#ComboBoxTextField);}
        .xdRepeatingTable{BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE:
none; BORDER-BOTTOM-STYLE: none; BORDER-COLLAPSE: collapse; WORD-WRAP: break-word;}
        .xdScrollableRegion{BEHAVIOR: url(#default#ScrollableRegion);}
        .xdLayoutRegion{display:inline-block;}
        .xdMaster{BEHAVIOR: url(#default#MasterHelper);}
        .xdActiveX{margin:1px; BEHAVIOR: url(#default#ActiveX);}
        .xdFileAttachment{display:inline-
block;margin:1px;BEHAVIOR:url(#default#urn::xdFileAttachment);}
        .xdPageBreak{display: none;}
        BODY{margin-right:21px;}
        .xdTextBoxRTL{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;text-align:right;word-
wrap:normal;}
        .xdRichTextBoxRTL{display:inline-block;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow-x:hidden;word-wrap:break-word;text-
overflow:ellipsis;text-align:right;font-weight:normal;font-style:normal;text-
decoration:none;vertical-align:baseline;}
        .xdDTTextRTL{height:100%;width:100%;margin-left:22px;overflow:hidden;padding:0px;white-
space:nowrap;}
        .xdDTButtonRTL{margin-right:-21px;height:18px;width:20px;behavior:
url(#default#DTPicker);}
        .xdMultiSelectFillinRTL{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;;padding:1px;margin:1px;border: 1pt solid #dcdcdc;overflow:hidden;text-
align:right;}
        .xdTextBox{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;text-align:left;word-
wrap:normal;}

```

```

        .xdRichTextBox{display:inline-block;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow-x:hidden;word-wrap:break-word;text-
overflow:ellipsis;text-align:left;font-weight:normal;font-style:normal;text-
decoration:none;vertical-align:baseline;}
        .xDTPicker{;display:inline;margin:1px;margin-bottom: 2px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;text-indent:0}
        .xDTTText{height:100%;width:100%;margin-right:22px;overflow:hidden;padding:0px;white-
space:nowrap;}
        .xDTButton{margin-left:-21px;height:18px;width:20px;behavior: url(#default#DTPicker);}
        .xdRepeatingTable TD {VERTICAL-ALIGN: top;}
</style>
|
<style controlStyle="controlStyle">
BODY{margin-left:21px;color:windowtext;background-color:window;layout-grid:none;}
.xdListItem {display:inline-block;width:100%;vertical-align:text-top;}
.xdListBox,.xdComboBox{margin:1px;}
.xdInlinePicture{margin:1px; BEHAVIOR: url(#default#urn:xdPicture) }
.xdLinkedPicture{margin:1px; BEHAVIOR: url(#default#urn:xdPicture)
url(#default#urn::controls/Binder) }
.xdSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
.xdRepeatingSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
.xdBehavior_Formatting {BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting);}
.xdBehavior_FormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting);}
.xdExpressionBox{margin: 1px;padding:1px;word-wrap: break-word;text-overflow:
ellipsis;overflow-x:hidden;}
.xdBehavior_GhostedText,
.xdBehavior_GhostedTextNoBUI{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#TextField) url(#default#GhostedText);}
.xdBehavior_GTFormatting{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting) url(#default#GhostedText);}
.xdBehavior_GTFormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting) url(#default#GhostedText);}
.xdBehavior_Boolean{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#BooleanHelper);}
.xdBehavior_Select{BEHAVIOR: url(#default#urn::controls/Binder) url(#default#SelectHelper);}
.xdRepeatingTable{BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none;
BORDER-BOTTOM-STYLE: none; BORDER-COLLAPSE: collapse; WORD-WRAP: break-word;}
.xdTextBox{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;text-align:left;} /*
_locID_css@text-align="left" _locComment="for Arabic and Hebrew SKU, the text-align value
needs to be set to right {L=!1025,1037}{ValidStrings=left,right}" */
.xdRichTextBox{display:inline-block;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow-x:hidden;word-wrap:break-word;text-
overflow:ellipsis;text-align:left;font-weight:normal;font-style:normal;text-
decoration:none;vertical-align:baseline;} /* _locID_css@text-align="left" _locComment="for
Arabic and Hebrew SKU, the text-align value needs to be set to right
{L=!1025,1037}{ValidStrings=left,right}" */
.xdDTPicker{;display:inline;margin:1px;margin-bottom: 2px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;}
.xdTTText{height:100%;width:100%;margin-right:22px;overflow:hidden;padding:0px;white-
space:nowrap;}
.xdDTButton{margin-left:-21px;height:18px;width:20px;behavior: url(#default#DTPicker);}
.xdRepeatingTable TD {VERTICAL-ALIGN: top;}</style>
|
<style controlStyle="controlStyle">
BODY{margin-left:21px;color:windowtext;background-color:window;layout-grid:none;}
.xdListItem {display:inline-block;width:100%;vertical-align:text-top;}
.xdListBox,.xdComboBox{margin:1px;}
.xdInlinePicture{margin:1px; BEHAVIOR: url(#default#urn:xdPicture) }

```

```

.xdLinkedPicture{margin:1px; BEHAVIOR: url(#default#urn::xdPicture)
url(#default#urn::controls/Binder) }
.xdSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
.xdRepeatingSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
.xdBehavior_Formatting {BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting);}
.xdBehavior_FormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting);}
.xdExpressionBox{margin: 1px;padding:1px;word-wrap: break-word;text-overflow:
ellipsis;overflow-x:hidden;}
.xdBehavior_GhostedText,.xdBehavior_GhostedTextNoBUI{BEHAVIOR:
url(#default#urn::controls/Binder) url(#default#TextField) url(#default#GhostedText);}
.xdBehavior_GTFormatting{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting) url(#default#GhostedText);}
.xdBehavior_GTFormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting) url(#default#GhostedText);}
.xdBehavior_Boolean{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#BooleanHelper);}
.xdBehavior_Select{BEHAVIOR: url(#default#urn::controls/Binder) url(#default#SelectHelper);}
.xdRepeatingTable{BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none;
BORDER-BOTTOM-STYLE: none; BORDER-COLLAPSE: collapse; WORD-WRAP: break-
word;}
.xdTextBox{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;text-align:left;}/*
_locID_css@text-align="left" _locComment="for Arabic and Hebrew SKU, the text-align value
needs to be set to right {L=!1025,1037}{ValidStrings=left,right}" */
.xdRichTextBox{display:inline-block;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;word-wrap:break-word;text-
overflow:ellipsis;text-align:left;font-weight:normal;font-style:normal;text-
decoration:none;vertical-align:baseline;}/* _locID_css@text-align="left" _locComment="for
Arabic and Hebrew SKU, the text-align value needs to be set to right
{L=!1025,1037}{ValidStrings=left,right}" */
.xdDTPicker{display:inline;margin:1px;margin-bottom: 2px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;}
.xdTText{height:100%;width:100%;margin-right:22px;overflow:hidden;padding:0px;white-
space:nowrap;}
.xdTButton{margin-left:-21px;height:18px;width:20px;behavior: url(#default#DTPicker);}
.xdRepeatingTable TD {VERTICAL-ALIGN: top;}</style>
|
<style controlStyle="controlStyle">
BODY{margin-left:21px;color:windowtext;background-color:window;layout-grid:none;}
.xdListItem {display:inline-block;width:100%;vertical-align:text-top;}
.xdListBox,.xdComboBox{margin:1px;}
.xdInlinePicture{margin:1px; BEHAVIOR: url(#default#urn::xdPicture) }
.xdLinkedPicture{margin:1px; BEHAVIOR: url(#default#urn::xdPicture)
url(#default#urn::controls/Binder) }
.xdSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
.xdRepeatingSection{border:1pt solid #FFFFFF;margin:6px 0px 6px 0px;padding:1px 1px 1px 5px;}
.xdBehavior_Formatting {BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting);}
.xdBehavior_FormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting);}
.xdExpressionBox{margin: 1px;padding:1px;word-wrap: break-word;text-overflow:
ellipsis;overflow-x:hidden;}
.xdBehavior_GhostedText,.xdBehavior_GhostedTextNoBUI{BEHAVIOR:
url(#default#urn::controls/Binder) url(#default#TextField) url(#default#GhostedText);}
.xdBehavior_GTFormatting{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#Formatting) url(#default#GhostedText);}
.xdBehavior_GTFormattingNoBUI{BEHAVIOR: url(#default#CalPopup)
url(#default#urn::controls/Binder) url(#default#Formatting) url(#default#GhostedText);}
.xdBehavior_Boolean{BEHAVIOR: url(#default#urn::controls/Binder)
url(#default#BooleanHelper);}

```

```

.xdBehavior_Select{BEHAVIOR: url(#default#urn::controls/Binder) url(#default#SelectHelper);}
.xdRepeatingTable{BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none;
BORDER-BOTTOM-STYLE: none; BORDER-COLLAPSE: collapse; WORD-WRAP: break-
word;} .xdTextBox{display:inline-block;white-space:nowrap;text-
overflow:ellipsis;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;text-align:left;}/*
_locID_css@text-align="right" _locComment="for Arabic and Hebrew SKU, the text-align value
needs to be set to right {L=!1025,1037}{ValidStrings=left,right}" */
.xdRichTextBox{display:inline-block;;padding:1px;margin:1px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;word-wrap:break-word;text-
overflow:ellipsis;text-align:left;font-weight:normal;font-style:normal;text-
decoration:none;vertical-align:baseline;}/* _locID_css@text-align="left" _locComment="for
Arabic and Hebrew SKU, the text-align value needs to be set to right
{L=!1025,1037}{ValidStrings=left,right}" */
.xdDTPicker{display:inline;margin:1px;margin-bottom: 2px;border: 1pt solid
#dcdcdc;color:windowtext;background-color:window;overflow:hidden;}
.xdDTText{height:100%;width:100%;margin-right:22px;overflow:hidden;padding:0px;white-
space:nowrap;}
.xdDTButton{margin-left:-21px;height:18px;width:20px;behavior: url(#default#DTPicker);}
.xdRepeatingTable TD {VERTICAL-ALIGN: top;}</style>

```

**TABLE\_STYLE** yields are associated with a client-only feature and **MUST** be ignored by the form server.

#### **TABLE\_STYLE:**

```

<style tableEditor="TableStyleRulesID">
    TABLE.xdLayout TD {BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT:
medium none; BORDER-BOTTOM: medium none}
    TABLE.msoUcTable TD {BORDER-RIGHT: 1pt solid; BORDER-TOP: 1pt solid; BORDER-LEFT: 1pt
solid; BORDER-BOTTOM: 1pt solid}
    TABLE {BEHAVIOR: url (#default#urn::tables/NDTable)}
</style>

```

**LANGUAGE\_STYLE** yields are associated with a client-only feature and **MUST** be ignored by the form server.

#### **LANGUAGE\_STYLE:**

```

<style languageStyle="languageStyle">
    BODY {FONT-SIZE: 10pt; FONT-FAMILY: Verdana}
    TABLE {FONT-SIZE: 10pt; FONT-FAMILY: Verdana}
    SELECT {FONT-SIZE: 10pt; FONT-FAMILY: Verdana}
    .optionalPlaceholder {PADDING-LEFT: 20px; FONT-WEIGHT: normal; FONT-SIZE: xx-small;
BEHAVIOR: url(#default#xOptional); COLOR: #333333; FONT-STYLE: normal; FONT-FAMILY: Verdana;
TEXT-DECORATION: none}
    .langFont {FONT-FAMILY: Verdana}
    .defaultInDocUI {FONT-SIZE: xx-small; FONT-FAMILY: Verdana}
    .optionalPlaceholder {PADDING-RIGHT: 20px}
</style>
|
<style languageStyle="languageStyle">body, table,
select{font-family:CSS_FONT_FAMILY;font-size:CSS_FONT_SIZE}
.optionalPlaceholder{font-family:CSS_FONT_FAMILY;font-size:CSS_FONT_SIZE;color:#333333;font-
weight:normal;font-style:normal;text-decoration:none;padding-
left:20px;BEHAVIOR:url(#default#xOptional)}
.langFont{font-family:CSS_FONT_FAMILY;}
.defaultInDocUI{font-family:CSS_FONT_FAMILY;font-size:CSS_FONT_SIZE;}0

```

```
.optionalPlaceholder{padding-right:20px}
</style>
```

**CSS\_FONT\_FAMILY:** Values MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.2.2.

**CSS\_FONT\_SIZE:** Values MUST be as specified in [\[CSS-LEVEL1\]](#) section 5.2.6.

**THEME\_STYLE:**

```
<style themeStyle="urn:office.microsoft.com:themeBlackWhite">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #000000; BORDER-BOTTOM-COLOR: #000000; BORDER-TOP-COLOR: #000000; BORDER-
RIGHT-COLOR: #000000
}
TH {
BORDER-LEFT-COLOR: #000000; BORDER-BOTTOM-COLOR: #000000; COLOR: black; BORDER-TOP-COLOR:
#000000; BACKGROUND-COLOR: #ffffff; BORDER-RIGHT-COLOR: #000000
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #ffffff
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #ffffff
}
.primaryVeryDark {
COLOR: #ffffff; BACKGROUND-COLOR: #000000
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #000000
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #ffffff
}
.primaryLight {
```

```

COLOR: black; BACKGROUND-COLOR: #ffffff
}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #000000
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #ffffff
}
|
<style themeStyle="urn:office.microsoft.com:themeGray">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #626262; BORDER-BOTTOM-COLOR: #626262; BORDER-TOP-COLOR: #626262; BORDER-
RIGHT-COLOR: #626262
}
TH {
BORDER-LEFT-COLOR: #626262; BORDER-BOTTOM-COLOR: #626262; COLOR: black; BORDER-TOP-COLOR:
#626262; BACKGROUND-COLOR: #d2d2d2; BORDER-RIGHT-COLOR: #626262
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f6f6f6
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #626262
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f6f6f6
}
.primaryVeryDark {
COLOR: #f6f6f6; BACKGROUND-COLOR: #000000
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #626262
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d2d2d2
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f6f6f6
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #626262
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #f6f6f6
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeSlate">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #585867; BORDER-BOTTOM-COLOR: #585867; BORDER-TOP-COLOR: #585867; BORDER-
RIGHT-COLOR: #585867
}
TH {
BORDER-LEFT-COLOR: #585867; BORDER-BOTTOM-COLOR: #585867; COLOR: black; BORDER-TOP-COLOR:
#585867; BACKGROUND-COLOR: #dadae1; BORDER-RIGHT-COLOR: #585867
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #efeff6
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #000000
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #585867
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #efeff6
}
.primaryVeryDark {
COLOR: #efeff6; BACKGROUND-COLOR: #000000
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #585867
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #dadae1
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #efeff6
}

```



```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #585867
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #efeff6
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeBurgundy">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #ce5764; BORDER-BOTTOM-COLOR: #ce5764; BORDER-TOP-COLOR: #ce5764; BORDER-
RIGHT-COLOR: #ce5764
}
TH {
BORDER-LEFT-COLOR: #ce5764; BORDER-BOTTOM-COLOR: #ce5764; COLOR: black; BORDER-TOP-COLOR:
#ce5764; BACKGROUND-COLOR: #fcc8c7; BORDER-RIGHT-COLOR: #ce5764
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #fde9ec
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #79194d
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #79194d
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #79194d
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #79194d
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #ce5764
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #fde9ec
}
.primaryVeryDark {
COLOR: #fde9ec; BACKGROUND-COLOR: #79194d
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #ce5764
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #fcc8c7
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #fde9ec
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #79194d
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #fde9ec
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeMahogany">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #9b5d2c; BORDER-BOTTOM-COLOR: #9b5d2c; BORDER-TOP-COLOR: #9b5d2c; BORDER-
RIGHT-COLOR: #9b5d2c
}
TH {
BORDER-LEFT-COLOR: #9b5d2c; BORDER-BOTTOM-COLOR: #9b5d2c; COLOR: black; BORDER-TOP-COLOR:
#9b5d2c; BACKGROUND-COLOR: #d3a04f; BORDER-RIGHT-COLOR: #9b5d2c
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #ffdaab
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #61000a
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #61000a
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #61000a
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #61000a
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #9b5d2c
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #ffdaab
}
.primaryVeryDark {
COLOR: #ffdaab; BACKGROUND-COLOR: #61000a
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #9b5d2c
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d3a04f
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #ffdaab
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #5c73b6
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #bfcefa
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeBrown">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #845c42; BORDER-BOTTOM-COLOR: #845c42; BORDER-TOP-COLOR: #845c42; BORDER-
RIGHT-COLOR: #845c42
}
TH {
BORDER-LEFT-COLOR: #845c42; BORDER-BOTTOM-COLOR: #845c42; COLOR: black; BORDER-TOP-COLOR:
#845c42; BACKGROUND-COLOR: #e7d3bd; BORDER-RIGHT-COLOR: #845c42
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f8eee0
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #442422
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #442422
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #442422
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #442422
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #845c42
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f8eee0
}
.primaryVeryDark {
COLOR: #f8eee0; BACKGROUND-COLOR: #442422
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #845c42
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #e7d3bd
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f8eee0
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #3757b4
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #e1eaff
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeBlue">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #517dbf; BORDER-BOTTOM-COLOR: #517dbf; BORDER-TOP-COLOR: #517dbf; BORDER-
RIGHT-COLOR: #517dbf
}
TH {
BORDER-LEFT-COLOR: #517dbf; BORDER-BOTTOM-COLOR: #517dbf; COLOR: black; BORDER-TOP-COLOR:
#517dbf; BACKGROUND-COLOR: #cbd8eb; BORDER-RIGHT-COLOR: #517dbf
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #ebf0f9
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #1e3c7b
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #1e3c7b
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #1e3c7b
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #1e3c7b
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #517dbf
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #ebf0f9
}
.primaryVeryDark {
COLOR: #ebf0f9; BACKGROUND-COLOR: #1e3c7b
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #517dbf
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #cbd8eb
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #ebf0f9
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #517dbf
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #ebf0f9
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeBlueberry">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #637595; BORDER-BOTTOM-COLOR: #637595; BORDER-TOP-COLOR: #637595; BORDER-
RIGHT-COLOR: #637595
}
TH {
BORDER-LEFT-COLOR: #637595; BORDER-BOTTOM-COLOR: #637595; COLOR: black; BORDER-TOP-COLOR:
#637595; BACKGROUND-COLOR: #bbc9dc; BORDER-RIGHT-COLOR: #637595
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #ede6ef
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #183569
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #183569
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #183569
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #183569
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #637595
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #ede6ef
}
.primaryVeryDark {
COLOR: #ede6ef; BACKGROUND-COLOR: #183569
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #637595
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #bbc9dc
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #ede6ef
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #637595
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #ede6ef
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeBrightBlue">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #408ce8; BORDER-BOTTOM-COLOR: #408ce8; BORDER-TOP-COLOR: #408ce8; BORDER-
RIGHT-COLOR: #408ce8
}
TH {
BORDER-LEFT-COLOR: #408ce8; BORDER-BOTTOM-COLOR: #408ce8; COLOR: black; BORDER-TOP-COLOR:
#408ce8; BACKGROUND-COLOR: #d3e5fa; BORDER-RIGHT-COLOR: #408ce8
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f5f3eb
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #134fc7
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #134fc7
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #134fc7
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #134fc7
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #408ce8
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f5f3eb
}
.primaryVeryDark {
COLOR: #f5f3eb; BACKGROUND-COLOR: #134fc7
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #408ce8
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d3e5fa
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f5f3eb
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #ff8716
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #ffd991
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeTurquoise">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #2ea8e7; BORDER-BOTTOM-COLOR: #2ea8e7; BORDER-TOP-COLOR: #2ea8e7; BORDER-
RIGHT-COLOR: #2ea8e7
}
TH {
BORDER-LEFT-COLOR: #2ea8e7; BORDER-BOTTOM-COLOR: #2ea8e7; COLOR: black; BORDER-TOP-COLOR:
#2ea8e7; BACKGROUND-COLOR: #a4e0ff; BORDER-RIGHT-COLOR: #2ea8e7
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #fff4c7
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #7673fd
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #7673fd
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #7673fd
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #7673fd
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #2ea8e7
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #fff4c7
}
.primaryVeryDark {
COLOR: #fff4c7; BACKGROUND-COLOR: #7673fd
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #2ea8e7
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #a4e0ff
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #fff4c7
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #2ea8e7
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #fff4c7
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeGreen">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #489659; BORDER-BOTTOM-COLOR: #489659; BORDER-TOP-COLOR: #489659; BORDER-
RIGHT-COLOR: #489659
}
TH {
BORDER-LEFT-COLOR: #489659; BORDER-BOTTOM-COLOR: #489659; COLOR: black; BORDER-TOP-COLOR:
#489659; BACKGROUND-COLOR: #d6eace; BORDER-RIGHT-COLOR: #489659
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f4fbee
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #035647
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #035647
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #035647
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #035647
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #489659
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f4fbee
}
.primaryVeryDark {
COLOR: #f4fbee; BACKGROUND-COLOR: #035647
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #489659
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d6eace
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f4fbee
}

```



```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #9b58ba
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #f1e9ff
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeOlive">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #7c925d; BORDER-BOTTOM-COLOR: #7c925d; BORDER-TOP-COLOR: #7c925d; BORDER-
RIGHT-COLOR: #7c925d
}
TH {
BORDER-LEFT-COLOR: #7c925d; BORDER-BOTTOM-COLOR: #7c925d; COLOR: black; BORDER-TOP-COLOR:
#7c925d; BACKGROUND-COLOR: #d6e0c3; BORDER-RIGHT-COLOR: #7c925d
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f5f3eb
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #545f38
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #545f38
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #545f38
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #545f38
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #7c925d
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f5f3eb
}
.primaryVeryDark {
COLOR: #f5f3eb; BACKGROUND-COLOR: #545f38
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #7c925d
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d6e0c3
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f5f3eb
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #7c925d
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #f5f3eb
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeAqua">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #17889c; BORDER-BOTTOM-COLOR: #17889c; BORDER-TOP-COLOR: #17889c; BORDER-
RIGHT-COLOR: #17889c
}
TH {
BORDER-LEFT-COLOR: #17889c; BORDER-BOTTOM-COLOR: #17889c; COLOR: black; BORDER-TOP-COLOR:
#17889c; BACKGROUND-COLOR: #d2deed; BORDER-RIGHT-COLOR: #17889c
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #eaeef4
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #046a7c
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #046a7c
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #046a7c
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #046a7c
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #17889c
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #eaeef4
}
.primaryVeryDark {
COLOR: #eaeef4; BACKGROUND-COLOR: #046a7c
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #17889c
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d2deed
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #eaeef4
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #da7b00
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #fedc91
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeRed">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #f61208; BORDER-BOTTOM-COLOR: #f61208; BORDER-TOP-COLOR: #f61208; BORDER-
RIGHT-COLOR: #f61208
}
TH {
BORDER-LEFT-COLOR: #f61208; BORDER-BOTTOM-COLOR: #f61208; COLOR: black; BORDER-TOP-COLOR:
#f61208; BACKGROUND-COLOR: #fed3d1; BORDER-RIGHT-COLOR: #f61208
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f8eee0
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #c00b02
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #c00b02
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #c00b02
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #c00b02
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f61208
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f8eee0
}
.primaryVeryDark {
COLOR: #f8eee0; BACKGROUND-COLOR: #c00b02
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #f61208
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #fed3d1
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f8eee0
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #f61208
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #f8eee0
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themeOrange">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #fda102; BORDER-BOTTOM-COLOR: #fda102; BORDER-TOP-COLOR: #fda102; BORDER-
RIGHT-COLOR: #fda102
}
TH {
BORDER-LEFT-COLOR: #fda102; BORDER-BOTTOM-COLOR: #fda102; COLOR: black; BORDER-TOP-COLOR:
#fda102; BACKGROUND-COLOR: #fedc8e; BORDER-RIGHT-COLOR: #fda102
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #fff7e7
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f56116
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f56116
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f56116
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f56116
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #fda102
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #fff7e7
}
.primaryVeryDark {
COLOR: #fff7e7; BACKGROUND-COLOR: #f56116
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #fda102
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #fedc8e
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #fff7e7
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #fda102
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #fff7e7
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themePurpleSage">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #87978b; BORDER-BOTTOM-COLOR: #87978b; BORDER-TOP-COLOR: #87978b; BORDER-
RIGHT-COLOR: #87978b
}
TH {
BORDER-LEFT-COLOR: #87978b; BORDER-BOTTOM-COLOR: #87978b; COLOR: black; BORDER-TOP-COLOR:
#87978b; BACKGROUND-COLOR: #d7e1d9; BORDER-RIGHT-COLOR: #87978b
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #f0f1fb
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #665484
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #665484
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #665484
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #665484
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #87978b
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #f0f1fb
}
.primaryVeryDark {
COLOR: #f0f1fb; BACKGROUND-COLOR: #665484
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #87978b
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #d7e1d9
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #f0f1fb
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #87978b
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #d7e1d9
}
</style>
|
<style themeStyle="urn:office.microsoft.com:themePlum">BODY {
COLOR: black; BACKGROUND-COLOR: white
}
TABLE {
BORDER-RIGHT: medium none; BORDER-TOP: medium none; BORDER-LEFT: medium none; BORDER-BOTTOM:
medium none; BORDER-COLLAPSE: collapse
}
TD {
BORDER-LEFT-COLOR: #845c42; BORDER-BOTTOM-COLOR: #845c42; BORDER-TOP-COLOR: #845c42; BORDER-
RIGHT-COLOR: #845c42
}
TH {
BORDER-LEFT-COLOR: #845c42; BORDER-BOTTOM-COLOR: #845c42; COLOR: black; BORDER-TOP-COLOR:
#845c42; BACKGROUND-COLOR: #dabe9b; BORDER-RIGHT-COLOR: #845c42
}
.xdTableHeader {
COLOR: black; BACKGROUND-COLOR: #fbf3de
}
P {
MARGIN-TOP: 0px
}
H1 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #3e2244
}
H2 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #3e2244
}
H3 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #3e2244
}
H4 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #3e2244
}
H5 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #845c42
}
H6 {
MARGIN-TOP: 0px; MARGIN-BOTTOM: 0px; COLOR: #fbf3de
}
.primaryVeryDark {
COLOR: #fbf3de; BACKGROUND-COLOR: #3e2244
}
.primaryDark {
COLOR: white; BACKGROUND-COLOR: #845c42
}
.primaryMedium {
COLOR: black; BACKGROUND-COLOR: #dabe9b
}
.primaryLight {
COLOR: black; BACKGROUND-COLOR: #fbf3de
}

```

```

}
.accentDark {
COLOR: white; BACKGROUND-COLOR: #845c42
}
.accentLight {
COLOR: black; BACKGROUND-COLOR: #fbf3de
}
</style>

```

#### 2.4.1.4 Control Data Formatting

This section specifies the rules that MUST be used for formatting data in controls.

**DATA\_FMT\_LOCALE\_VAL:** MUST be an LCID.

**DATA\_FMT\_LOCALE:** locale:DATA\_FMT\_LOCALE\_VAL

**DATA\_FMT\_NUM\_DIGITS:** [0-9] | auto. See **numDigits** in section [2.4.2.11](#).

**DATA\_FMT\_GROUPING:** -1 | [0-9] | 32. See **grouping** in section [2.4.2.11](#).

**DATA\_FMT\_DECIMAL\_SEP:** . | , | space\_char. See **decimalSep** in section [2.4.2.11](#).

**DATA\_FMT\_THOUSAND\_SEP:** . | , | space\_char. See **thousandSep** in section [2.4.2.11](#).

**DATA\_FMT\_NEG\_ORDER:** See **negativeOrder** in section [2.4.2.11](#).

**DATA\_FMT\_POS\_ORDER:** See **positiveOrder** in section [2.4.2.11](#).

**DATA\_FMT\_CUR\_LOCALE:** currencyLocale:DATA\_FMT\_LOCALE\_VAL

**DATA\_FMT\_DATE\_FORMAT\_CUSTOM:** See **dateFormat** in section [2.4.2.11](#).

**DATA\_FMT\_DATE\_FORMAT:** Short Date | Long Date | Year Month | none |  
DATA\_FMT\_DATE\_FORMAT\_CUSTOM

**DATA\_FMT\_ALT\_CAL:** 0 | 1. See **useAltCalendar** in section [2.4.2.11](#).

**DATA\_FMT\_EN\_STR:** 0 | 1. See **englishStringOnly** in section [2.4.2.11](#).

**DATA\_FMT\_TIME\_FORMAT\_CUSTOM:** See **timeFormat** in section [2.4.2.11](#).

**DATA\_FMT\_TIME\_FORMAT:** Short Time | Long Time | none | DATA\_FMT\_TIME\_FORMAT\_CUSTOM

**DATA\_FMT\_NOSECONDS:** 0 | 1. See **noSeconds** in section [2.4.2.11](#).

**DATA\_FMT\_CAT\_STRING:** &quot;string&quot;;, &quot;plainMutiline&quot;;

**DATA\_FMT\_CAT\_PERCENTAGE:** &quot;percentage&quot;;&quot;semicolon delimited list of  
(DATA\_FMT\_LOCALE?, DATA\_FMT\_NUM\_DIGITS, DATA\_FMT\_GROUPING?,  
DATA\_FMT\_DECIMAL\_SEP?, DATA\_FMT\_THOUSAND\_SEP?, DATA\_FMT\_NEG\_ORDER)&quot;;

**DATA\_FMT\_CAT\_NUMBER:** &quot;number&quot;;&quot;semicolon delimited list of  
(DATA\_FMT\_LOCALE?, DATA\_FMT\_NUM\_DIGITS, DATA\_FMT\_GROUPING?,  
DATA\_FMT\_DECIMAL\_SEP?, DATA\_FMT\_THOUSAND\_SEP?, DATA\_FMT\_NEG\_ORDER)&quot;;

**DATA\_FMT\_CAT\_DATETIME:** "datetime";"semicolon delimited list of (DATA\_FMT\_LOCALE?, DATA\_FMT\_DATE\_FORMAT, DATA\_FMT\_ALT\_CAL?, DATA\_FMT\_EN\_STR?, DATA\_FMT\_TIME\_FORMAT, DATA\_FMT\_NOSECONDS?)"

**DATA\_FMT\_CAT\_DATE:** "date";"semicolon delimited list of (DATA\_FMT\_LOCALE?, DATA\_FMT\_DATE\_FORMAT, DATA\_FMT\_ALT\_CAL?, DATA\_FMT\_EN\_STR?)"

**DATA\_FMT\_CAT\_TIME:** "time";"semicolon delimited list of (DATA\_FMT\_LOCALE?, DATA\_FMT\_TIME\_FORMAT, DATA\_FMT\_NOSECONDS?)"

**DATA\_FMT\_CTRL\_DATE\_PICKER:** DATA\_FMT\_CAT\_DATE or DATA\_FMT\_CAT\_DATETIME.

**DATA\_FMT\_CTRL\_EXPBOX:** DATA\_FMT\_CAT\_TIME or DATA\_FMT\_CAT\_DATE or DATA\_FMT\_CAT\_DATETIME or DATA\_FMT\_CAT\_NUMBER or DATA\_FMT\_CAT\_PERCENTAGE.

**DATA\_FMT\_CTRL\_TEXTBOX:** DATA\_FMT\_CTRL\_EXPBOX

### 2.4.1.5 Button Control

The button control is an unbound control that executes actions, rules (1), or custom code when clicked. A **BUTTON** MUST have one of the symbols in the following table.

Symbol	Description
BUTTON_RULES_AND_CUSTOM_CODE	The button executes rules (1) and custom code when clicked.
BUTTON_RULES_AND_CUSTOM_CODE_WITH_CONDITIONAL_FORMATTING	The button executes rules (1) and custom code when clicked, and supports conditional formatting.
BUTTON_RULES_AND_CUSTOM_CODE_WITH_DYNAMIC_DISPLAY_NAME_AND_CONDITIONAL_FORMATTING	The button executes rules (1) and custom code when clicked, renders a dynamic display name, and supports



Symbol	Description
	conditional formatting .
BUTTON_UPDATE_FORM_WITH_CONDITIONAL_FORMATTING	The button updates the form (1) content when clicked, and supports conditional formatting .
BUTTON_UPDATE_FORM_WITH_DYNAMIC_DISPLAY_NAME_AND_CONDITIONAL_FORMATTING	The button updates the form (1) content when clicked, renders a dynamic display name, and supports conditional formatting .
BUTTON_ACTION	The button executes actions (submit, query, new, and refresh) when clicked.
BUTTON_ACTION_WITH_CONDITIONAL_FORMATTING	The button executes actions (submit, query, new, and refresh) when clicked, and supports conditional formatting .

Symbol	Description
BUTTON_ACTION_WITH_DYNAMIC_DISPLAY_NAME_AND_CONDITIONAL_FORMATTING	The button executes actions (submit, query, new, and refresh) when clicked, renders a dynamic display name, and supports conditional formatting.

**BUTTON\_ACTION\_TYPE:** MUST be one of the following:

- submit
- query
- new
- refresh

**BUTTON\_STYLE:** Semicolon-delimited list of (**STYLE\_SIZE?**, **STYLE\_MARGIN?**, **STYLE\_PADDING?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_BORDER?**, **STYLE\_FONT?**, **STYLE\_COLOR?**, **STYLE\_VERTICAL\_ALIGN?**).

**BUTTON\_ACTION\_STYLE:** Semicolon-delimited list of (**BEHAVIOR:** url(#default#ActionButton), **BUTTON\_STYLE**).

**BUTTON\_CONDITIONAL\_FORMATTING\_STYLE:** Semicolon-delimited list of (**STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_FONT?**, **STYLE\_COLOR?**)

**BUTTON\_CONDITIONAL\_FORMATTING:**

```

(<xsl:attribute name="style">BUTTON_STYLE?<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">BUTTON_CONDITIONAL_FORMATTING_STYLE</xsl:when>)+
</xsl:choose>
</xsl:attribute>)?
(<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>)+
</xsl:choose>)?

```

```

BUTTON_ACTION_CONDITIONAL_FORMATTING ::=
(<xsl:attribute name="style">BUTTON_ACTION_STYLE<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">BUTTON_CONDITIONAL_FORMATTING_STYLE</xsl:when>)+
  </xsl:choose>
</xsl:attribute>)?
(<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>)+
</xsl:choose>)?

BUTTON_UPDATE_FORM_CONDITIONAL_FORMATTING ::=
<xsl:attribute name="style">BUTTON_ACTION_STYLE<xsl:choose>
  <xsl:when test="not(xdEnvironment:IsBrowser())">STYLE_DISPLAY_NONE</xsl:when>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">BUTTON_CONDITIONAL_FORMATTING_STYLE</xsl:when>)*
  </xsl:choose>
</xsl:attribute>
(<xsl:choose>
  <xsl:when test="not(xdEnvironment:IsBrowser())"/>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>)+
</xsl:choose>)?

```

## BUTTON\_RULES\_AND\_CUSTOM\_CODE:

```

<input class="langFont" title="ANY_STRING" type="button" (value="NON_EMPTY_STRING"?
xd:xctname="Button" xd:CtrlId="CONTROL_ID" (xd:auxDom="AUX_DOM_SOURCE_NAME")?
(tabIndex="TAB_INDEX")? (style="BUTTON_STYLE")? (xd:postbackModel="BUTTON_POSTBACKMODEL")?
(accessKey="SINGLE_CHARACTER")? (size="SIZE")?)/>

```

## BUTTON\_RULES\_AND\_CUSTOM\_CODE\_WITH\_CONDITIONAL\_FORMATTING:

```

<input class="langFont" title="ANY_STRING" type="button" (value="NON_EMPTY_STRING"?
xd:xctname="Button" xd:CtrlId="CONTROL_ID" (xd:auxDom="AUX_DOM_SOURCE_NAME")?
(tabIndex="TAB_INDEX")? (style="BUTTON_STYLE")? (xd:postbackModel="BUTTON_POSTBACKMODEL")?
(accessKey="SINGLE_CHARACTER")? (size="SIZE")?>
  BUTTON_CONDITIONAL_FORMATTING
</input>

```

## BUTTON\_RULES\_AND\_CUSTOM\_CODE\_WITH\_DYNAMIC\_DISPLAY\_NAME\_AND\_CONDITIONAL\_FORMATTING:

```

<input class="langFont" title="ANY_STRING" type="button" xd:xctname="Button"
xd:CtrlId="CONTROL_ID" (xd:auxDom="AUX_DOM_SOURCE_NAME")? (tabIndex="TAB_INDEX")?
(style="BUTTON_STYLE")? (xd:postbackModel="BUTTON_POSTBACKMODEL")?
(accessKey="SINGLE_CHARACTER")? (size="SIZE")?>
  BUTTON_CONDITIONAL_FORMATTING

```

```

CHECK_FOR_GETDOM_BEGIN1
<xsl:attribute name="value">
  <xsl:value-of select="STRING_XPATH_EXPRESSION"/>
</xsl:attribute>
CHECK_FOR_GETDOM_END1
</input>

```

### **BUTTON\_UPDATE\_FORM\_WITH\_CONDITIONAL\_FORMATTING:**

```

<input class="langFont" title="ANY_STRING" type="button" value="NON_EMPTY_STRING"
xd:xctname="Button" xd:CtrlId="CONTROL_ID" xd:action="updateForm"
(xd:auxDom="AUX_DOM_SOURCE_NAME")? (tabIndex="TAB_INDEX")? (style="BUTTON_ACTION_STYLE")?
(xd:postbackModel="BUTTON_POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (size="SIZE")?>
  BUTTON_UPDATE_FORM_CONDITIONAL_FORMATTING
</input>

```

```

BUTTON_UPDATE_FORM_WITH_DYNAMIC_DISPLAY_NAME_AND_CONDITIONAL_FORMATTING ::=
<input class="langFont" title="ANY_STRING" type="button" xd:xctname="Button"
xd:CtrlId="CONTROL_ID" xd:action="updateForm" (xd:auxDom="AUX_DOM_SOURCE_NAME")?
(tabIndex="TAB_INDEX")? (style="BUTTON_ACTION_STYLE")?
(xd:postbackModel="BUTTON_POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (size="SIZE")?>
  BUTTON_UPDATE_FORM_CONDITIONAL_FORMATTING
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:attribute name="value">
    <xsl:value-of select="STRING_XPATH_EXPRESSION"/>
  </xsl:attribute>
  CHECK_FOR_GETDOM_END1
</input>

```

### **BUTTON\_ACTION:**

```

<input class="langFont" title="ANY_STRING" style="BUTTON_ACTION_STYLE" type="button"
(value="NON_EMPTY_STRING")? xd:xctname="Button" xd:CtrlId="CONTROL_ID"
(xd:action="BUTTON_ACTION_TYPE")? (xd:auxDom="AUX_DOM_SOURCE_NAME")? (tabIndex="TAB_INDEX")?
(xd:postbackModel="BUTTON_POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (size="SIZE")?>

```

### **BUTTON\_ACTION\_WITH\_CONDITIONAL\_FORMATTING:**

```

<input class="langFont" title="ANY_STRING" type="button" (value="NON_EMPTY_STRING")?
xd:xctname="Button" xd:CtrlId="CONTROL_ID" (xd:action="BUTTON_ACTION_TYPE")?
(xd:auxDom="AUX_DOM_SOURCE_NAME")? (tabIndex="TAB_INDEX")? (style="BUTTON_ACTION_STYLE")?
(xd:postbackModel="BUTTON_POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (size="SIZE")?>
  BUTTON_ACTION_CONDITIONAL_FORMATTING
</input>

```

### **BUTTON\_ACTION\_WITH\_DYNAMIC\_DISPLAY\_NAME\_AND\_CONDITIONAL\_FORMATTING:**

```

<input class="langFont" title="ANY_STRING" type="button" xd:xctname="Button"
xd:CtrlId="CONTROL_ID" xd:action="BUTTON_ACTION_TYPE" (xd:auxDom="AUX_DOM_SOURCE_NAME")?
(tabIndex="TAB_INDEX")? (style="BUTTON_ACTION_STYLE")?
(xd:postbackModel="BUTTON_POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (size="SIZE")?>
  BUTTON_ACTION_CONDITIONAL_FORMATTING
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:attribute name="value">
    <xsl:value-of select="STRING_XPATH_EXPRESSION"/>
  </xsl:attribute>

```

```

    </xsl:attribute>
    CHECK_FOR_GETDOM_END1
</input>

```

Following are the control-specific attributes used by the button control:

- xd:action (section [2.4.2.1](#))
- xd:auxDom (section [2.4.2.4](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:postbackModel (section [2.4.2.29](#))
- xd:xctname (section [2.4.2.35](#))

The **xdEnvironment:IsBrowser** XSL function extension, as specified in section [2.4.3.3.1](#), is used by the button control.

### 2.4.1.6 Check Box Control

A check box control is a bi-state leaf control that has a value when it is checked, and a different value when it is not checked. A **CHECK\_BOX** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_CHECK_BOX	A control that has two states, <b>checked</b> and <b>unchecked</b> . The <b>unchecked</b> state tends to be represented as a blank white square, and the <b>checked</b> state has a mark, which is commonly a check mark, contained in the white square.
CHECK_BOX_WITH_CONDITIONAL_FORMATTING	Similar to <b>SIMPLE_CHECK_BOX</b> , with the addition that the control can be disabled conditionally. A disabled checkbox does not allow the user to directly toggle the control between its two states.

#### SIMPLE\_CHECK\_BOX:

```

<input class="xdBehavior_Boolean" title="ANY_STRING1" type="checkbox"
(accessKey="SINGLE_CHARACTER"? xd:binding="LEAF_XPATH1" xd:boundProp="xd:value"
(CHECK_BOX_SINGLE_VALUE | CHECK_BOX_BOTH_VALUES) (tabIndex="TAB_INDEX")?
xd:xctname="CheckBox" xd:CtrlId="CONTROL_ID" (xd:postbackModel="POSTBACKMODEL")?
(style="CHECK_BOX_STYLE")?>
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:attribute name="xd:value">
    <xsl:value-of select="LEAF_XPATH1" />
  </xsl:attribute>
  <xsl:if test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
  </xsl:if>
  CHECK_FOR_GETDOM_END1
</input>
(ANY_STRING2)?

CHECK_BOX_WITH_CONDITIONAL_FORMATTING ::=

```

```



```

**CHECK\_BOX\_ONVALUE:** xd:onValue="(ISO\_DIGIT+)|(&quot;ANY\_STRING&quot;)"

**CHECK\_BOX\_OFFVALUE:** xd:offValue="(ISO\_DIGIT+)|(&quot;ANY\_STRING&quot;)"

**CHECK\_BOX\_SINGLE\_VALUE:** CHECK\_BOX\_OFFVALUE or CHECK\_BOX\_ONVALUE.

**CHECK\_BOX\_BOTH\_VALUES:** CHECK\_BOX\_OFFVALUE and CHECK\_BOX\_ONVALUE.

**CHECK\_BOX\_STYLE:** Semicolon-delimited list of (STYLE\_MARGIN?, STYLE\_WIDTH?, STYLE\_HEIGHT?, STYLE\_VERTICAL\_ALIGN?, STYLE\_COLOR?, STYLE\_BACKGROUND\_COLOR?, STYLE\_BORDER?, STYLE\_FONT?, STYLE\_TEXT\_DECORATION?)

Control-specific attributes used by the check box control are as follows:

- xd:binding (section [2.4.2.6](#))
- xd:boundProp (section [2.4.2.9](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:offValue (section [2.4.2.27](#))
- xd:onValue (section [2.4.2.28](#))
- xd:postbackModel (section [2.4.2.29](#))
- xd:value (section [2.4.2.34](#))
- xd:xctname (section [2.4.2.35](#))

### 2.4.1.7 Contact Selector Control

The contact selector control provides the ability to select one or more entities from a user information list (1).

**CONTACT\_SELECTOR:**

```

<object class="xdActiveX" hideFocus="1" style="CONTACT_SELECTOR_STYLE" (height="HEIGHT"
width="WIDTH")? classid="clsid:61e40d31-993d-4777-8fa0-19ca59b6d0bb" tabIndex="TAB_INDEX"
tabStop="true" xd:xctname="{ {61e40d31-993d-4777-8fa0-19ca59b6d0bb} }" xd:CtrlId="CONTROL_ID"
xd:bindingType="xmlNode" xd:bindingProperty="Value" xd:boundProp="xd:inline"
contentEditable="false" xd:binding="GROUP_XPATH" (title="ANY_STRING")?
(accessKey="SINGLE_CHARACTER")?>
  <xsl:if test="function-available('xdImage:getImageUrl')">
    <xsl:attribute name="src">
      <xsl:value-of select="xdImage:getImageUrl(GROUP_XPATH)"/>
    </xsl:attribute>
  </xsl:if>
  <xsl:choose>
    (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">
      <xsl:attribute name="xd:disableEditing">yes</xsl:attribute>
    </xsl:when>)+
  </xsl:choose>)?
  <param NAME="ButtonFont" VALUE="CONTACT_SELECTOR_BUTTON_FONT"/>
  <param NAME="ButtonText" VALUE="ANY_STRING"/>
  <param NAME="DisplayNameXPath" VALUE="CONTACT_SELECTOR_DISPLAY_NAME_XPATH"/>
  <param NAME="ObjectIdXPath" VALUE="CONTACT_SELECTOR_ACCOUNT_ID_XPATH"/>
  <param NAME="ObjectTypeXPath" VALUE="CONTACT_SELECTOR_ACCOUNT_TYPE_XPATH"/>
  <param NAME="SiteUrlXPath" VALUE="/Context/@siteUrl"/>
  <param NAME="SiteUrlDataSource" VALUE="Context"/>
  <param NAME="NewNodeTemplate" VALUE="CONTACT_SELECTOR_NEW_NODE_TEMPLATE"/>
  <param NAME="BackgroundColor" VALUE="CONTACT_SELECTOR_BACKGROUND_COLOR"/>
  <param NAME="MaxLines" VALUE="CONTACT_SELECTOR_MAX_LINES"/>
  <param NAME="Direction" VALUE="CONTACT_SELECTOR_DIRECTION"/>
</object>

```

Parameters used by the contact selector control are listed in the following table.

Parameter	Specification
<b>ButtonFont</b>	This parameter specifies the font that is used to render the button text and display names.
<b>ButtonText</b>	This parameter specifies the text that is displayed on the button that opens the address book.
<b>DisplayNameXPath</b>	This parameter specifies the <b>LEAF_XPATH</b> containing the display names.
<b>ObjectIdXPath</b>	This parameter specifies the <b>LEAF_XPATH</b> containing the object identifiers.
<b>ObjectTypeXPath</b>	This parameter specifies the <b>LEAF_XPATH</b> containing the object types.
<b>SiteUrlXPath</b>	This parameter specifies the <b>LEAF_XPATH</b> in the secondary data source containing the server URL, whose user information list (1) this control is querying. This parameter <b>MUST</b> be ignored by the form server.
<b>SiteUrlDataSource</b>	This parameter specifies the name of the secondary data source that contains the server URL, whose user information list (1) this control is querying. This parameter <b>MUST</b> be ignored by the form server.
<b>NewNodeTemplate</b>	This parameter specifies the XML template that is inserted in the form when a new contact is selected.
<b>BackgroundColor</b>	This parameter specifies the <b>background color</b> of the contact selector input box.
<b>MaxLines</b>	This parameter specifies the maximum number of lines used by the contact

Parameter	Specification
	selector input box to render display names.
<b>Direction</b>	This parameter specifies whether this control is displaying <b>left-to-right</b> or <b>right-to-left</b> .

**FONT: ANY\_STRING** without a comma.

**FONT\_ITALIC:** The symbol that specifies if the text is shown italic or not. The following table lists the possible values and explanations.

Value	Description
"0"	Not italic
"1"	Italic

**FONT\_SIZE:** All **integers** and all real numbers, ending in .5, between 1 and 2000, inclusive.

**FONT\_STRIKETHROUGH:** The symbol that specifies if the text is shown with a strike though line. The following table lists the possible values and explanations.

Value	Description
"0"	No strike through
"1"	Strike through

**FONT\_UNDERLINE:** The symbol that specifies if the text shown is underlined. The following table lists the possible values and explanations.

Value	Description
"0"	Not underlined
"1"	Underlined

**FONT\_WEIGHT:** The symbol that specifies if the text shown is bold. The following table lists the possible values and explanations.

Value	Description
"400"	Not bold
"700"	Bold

**CHARACTER\_SET: ANY\_STRING** without a comma.

**CONTACT\_SELECTOR\_BUTTON\_FONT: FONT, FONT\_SIZE, CHARACTER\_SET, FONT\_WEIGHT, FONT\_ITALIC, FONT\_UNDERLINE, FONT\_STRIKETHROUGH**

**CONTACT\_SELECTOR\_STYLE:** Semicolon-delimited list of (**STYLE\_SIZE?**, **STYLE\_MARGIN?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_BORDER?**, **STYLE\_FONT?**, **STYLE\_COLOR?**, **STYLE\_VERTICAL\_ALIGN?**)



**CONTACT\_SELECTOR\_BACKGROUND\_COLOR:** 2147483653 | MUST be an **integer** value that represents a **red-green-blue (RGB)** color. The value MUST be calculated using three variables (blue part, red part, green part), each of which MUST be an **integer** between 0 and 255, in the following formula:

blue part \* 65536 + green part \* 256 + red part

**CONTACT\_SELECTOR\_MAX\_LINES:** MUST be an **integer** between zero and 999, inclusive.

**CONTACT\_SELECTOR\_DIRECTION:** The symbol that specifies if the control is rendered left-to-right or right-to-left. The following table lists the possible values and explanations.

Value	Description
"0"	Use the orientation of the form (1).
"1"	Left to right.
"2"	Right to-left.

**CONTACT\_SELECTOR\_PERSON\_XPATH: RELATIVE\_REPREATING\_GROUP\_XPATH**

**CONTACT\_SELECTOR\_DISPLAY\_NAME\_XPATH: RELATIVE\_LEAF\_XPATH**

**CONTACT\_SELECTOR\_ACCOUNT\_ID\_XPATH: RELATIVE\_LEAF\_XPATH**

**CONTACT\_SELECTOR\_ACCOUNT\_TYPE\_XPATH: RELATIVE\_LEAF\_XPATH**

**CONTACT\_SELECTOR\_NEW\_NODE\_TEMPLATE:**

```
<lt;RELATIVE_REPREATING_GROUP_XPATH>>#xA;

<lt;CONTACT_SELECTOR_DISPLAY_NAME_XPATH>> <lt;/CONTACT_SELECTOR_DISPLAY_NAME_XPATH>>#xA;
  <lt;CONTACT_SELECTOR_ACCOUNT_ID_XPATH>> <lt;/CONTACT_SELECTOR_ACCOUNT_ID_XPATH>>#xA;

<lt;CONTACT_SELECTOR_ACCOUNT_TYPE_XPATH>> <lt;/CONTACT_SELECTOR_ACCOUNT_TYPE_XPATH>>#xA;
<lt;/RELATIVE_REPREATING_GROUP_XPATH>>
```

**GROUP\_XPATH:** MUST point to an XML node in the main data source.

Control-specific attributes used by the contact selector control are as follows:

- xd:binding (section [2.4.2.6](#))
- xd:bindingProperty (section [2.4.2.7](#))
- xd:boundProp (section [2.4.2.9](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:disableEditing (section [2.4.2.12](#))
- xd:xctname (section [2.4.2.35](#))

The **xdImage:getImageUrl** XSL function extension, as specified in section [2.4.3.5](#), is used by the contact selector control.

### 2.4.1.8 Date Picker Control

A date picker control is used to select and display a date. A **DATE\_PICKER** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_DATE_PICKER	A date picker is a control with the capabilities of displaying, as well as selecting, a date. This is usually accomplished by having a button that displays a view of a calendar. Clicking on the calendar allows the user to select a specific date. The date can also be manually entered in the date picker's display text box.
DATE_PICKER_WITH_CONDITIONAL_FORMATTING	Similar to <b>SIMPLE_DATE_PICKER</b> , but allows for conditional formatting. Conditional text formatting attributes such as bold, italics, and color can be applied to the displayed date. Conditional disabling disables both the text box and the date picker's calendar button. Conditionally hiding the control hides both the display box and the calendar button.
DATE_PICKER_WITH_DATA_FORMATTING	Similar to <b>SIMPLE_DATE_PICKER</b> , but the data is formatted from its natural XML value.
DATE_PICKER_WITH_DATA_FORMATTING_AND_CONDITIONAL_FORMATTING	Similar to <b>DATE_PICKER_WITH_CONDITIONAL_FORMATTING</b> , but the data is formatted from its natural XML value.
DATE_PICKER_WITH_PLACEHOLDER_TEXT	Similar to <b>SIMPLE_DATE_PICKER</b> , with the addition of text that is displayed in the control until actual data is entered. This displayed value is not persisted in the field as a value.
DATE_PICKER_WITH_CONDITIONAL_FORMATTING_AND_PLACEHOLDER_TEXT	Similar to <b>DATE_PICKER_WITH_PLACEHOLDER_TEXT</b> and <b>DATE_PICKER_WITH_CONDITIONAL_FORMATTING</b> .
DATE_PICKER_WITH_DATA_FORMATTING_AND_PLACEHOLDER_TEXT	Similar to <b>DATE_PICKER_WITH_PLACEHOLDER_TEXT</b> and <b>DATE_PICKER_WITH_DATA_FORMATTING</b> .
DATE_PICKER_WITH_DATA_FORMATTING_AND_CONDITIONAL_FORMATTING_AND_PLACEHOLDER_TEXT	Similar to <b>DATE_PICKER_WITH_PLACEHOLDER_TEXT</b> and <b>DATE_PICKER_WITH_DATA_FORMATTING_AND_CONDITIONAL_FORMATTING</b> .

#### **SIMPLE\_DATE\_PICKER:**

```
<div class="xDTPicker" title="ANY_STRING1" style="DATE_PICKER_STYLE" noWrap="1"
xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>
```

```

    <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_NoBUI" hideFocus="1"
      (title="ANY_STRING1")? (accessKey="SINGLE_CHARACTER")? xd:xctname="DTPicker_DTText"
      xd:binding="LEAF_XPATH1" (tabIndex="TAB_INDEX")? xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
      CHECK_FOR_GETDOM_BEGIN1
        <xsl:value-of select="LEAF_XPATH1" />
      CHECK_FOR_GETDOM_END1
    </span>
    <button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
      xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
      
    </button>
  </div>

```

## DATE\_PICKER\_WITH\_CONDITIONAL\_FORMATTING:

```

<div class="xdDTPicker" title="ANY_STRING1" (style="DATE_PICKER_STYLE")? noWrap="1"
  xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>
  <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_NoBUI" hideFocus="1"
    (title="ANY_STRING1")? (accessKey="SINGLE_CHARACTER")? xd:xctname="DTPicker_DTText"
    xd:binding="LEAF_XPATH1" (tabIndex="TAB_INDEX")? xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
      (<xsl:attribute name="style">
        <xsl:choose>
          (<xsl:when
            test="BOOLEAN_XPATH_EXPRESSIONx">(DATE_PICKER_STYLE_CONDITIONAL_FORMATTING)?</xsl:when>)*
        </xsl:choose>
      </xsl:attribute>)?
    (<xsl:choose>
      (<xsl:when test="BOOLEAN_XPATH_EXPRESSIONy">
        (<xsl:attribute name="contentEditable">>false</xsl:attribute>)?
      </xsl:when>)*
    </xsl:choose>)?
    <xsl:value-of select="LEAF_XPATH1" />
  CHECK_FOR_GETDOM_END1
</span>
  <button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
    xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
    
  </button>
</div>

```

## DATE\_PICKER\_WITH\_DATA\_FORMATTING:

```

<div class="xdDTPicker" title="ANY_STRING1" style="DATE_PICKER_STYLE" noWrap="1"
  xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>
  <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_FormattingNoBUI" hideFocus="1"
    contentEditable="true" xd:xctname="DTPicker_DTText" xd:dataFmt="DATA_FMT_CTRL_DATE_PICKER"
    xd:boundProp="xd:num" xd:binding="LEAF_XPATH1" (accessKey="SINGLE_CHARACTER")?
    (title="ANY_STRING1")? (tabIndex="TAB_INDEX")? xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
      (<xsl:attribute name="xd:num">
        <xsl:value-of select="LEAF_XPATH1" />
      </xsl:attribute>)?
    <xsl:choose>
      (<xsl:when test="function-available('xdFormatting:formatString')">
        <xsl:value-of select="xdFormatting:formatString(LEAFXPATH,
          DATA_FMT_CTRL_DATE_PICKER)" />
      </xsl:when>
    </xsl:choose>
  </span>

```

```

        <xsl:otherwise>
            <xsl:value-of select="LEAF_XPATH1" />
        </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>
<button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
    
</button>
</div>

```

## DATE\_PICKER\_WITH\_DATA\_FORMATTING\_AND\_CONDITIONAL\_FORMATTING:

```

<div class="xDTPicker" title="ANY_STRING1" (style="DATE_PICKER_STYLE")? noWrap="1"
xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>
    <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_FormattingNoBUI" hideFocus="1"
contentEditable="true" xd:xctname="DTPicker_DTText" xd:dateFormat="DATA_FMT_CTRL_DATE_PICKER"
xd:boundProp="xd:num" xd:binding="LEAF_XPATH1" (accessKey="SINGLE_CHARACTER")?
(title="ANY_STRING1")? (tabIndex="TAB_INDEX")? xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
        CHECK_FOR_GETDOM_BEGIN1
        (<xsl:attribute name="style">
            <xsl:choose>
                (<xsl:when
test="BOOLEAN_XPATH_EXPRESSIONx">(DATE_PICKER_STYLE_CONDITIONAL_FORMATTING)?</xsl:when>)*
            </xsl:choose>
        </xsl:attribute>)?
        (<xsl:choose>
            (<xsl:when test="BOOLEAN_XPATH_EXPRESSIONy">
                (<xsl:attribute name="contentEditable">>false</xsl:attribute>)?
            </xsl:when>)*
        </xsl:choose>)?
        (<xsl:attribute name="xd:num">
            <xsl:value-of select="LEAF_XPATH1" />
        </xsl:attribute>)?
        <xsl:choose>
            (<xsl:when test="function-available('xdFormatting:formatString')">
                <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH,
DATA_FMT_CTRL_DATE_PICKER)" />
            </xsl:when>
            <xsl:otherwise>
                <xsl:value-of select="LEAF_XPATH1" />
            </xsl:otherwise>
        </xsl:choose>
        CHECK_FOR_GETDOM_END1
    </span>
    <button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
        
    </button>
</div>

```

## DATE\_PICKER\_WITH\_PLACEHOLDER\_TEXT:

```

<div class="xDTPicker" title="ANY_STRING1" style="DATE_PICKER_STYLE" noWrap="1"
xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>

```

```

    <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_GhostedTextNoBUI" hideFocus="1"
contentEditable="true" (title="ANY_STRING1")? (accessKey="SINGLE_CHARACTER")?
xd:xctname="DTPicker_DTText" xd:binding="LEAF_XPATH1" (tabIndex="TAB_INDEX")?
xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:choose>
    <xsl:when test="not(string(LEAF_XPATH1))">
    <xsl:attribute name="xd:ghosted">true</xsl:attribute>
    ANY_STRING
    </xsl:when>
    <xsl:otherwise>
    <xsl:value-of select="LEAF_XPATH1" />
    </xsl:otherwise>
    </xsl:choose>) | (<xsl:value-of select="LEAF_XPATH1" />)
    CHECK_FOR_GETDOM_END1
</span>
    <button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
    
</button>
</div>
DATE_PICKER_WITH_CONDITIONAL_FORMATTING_AND_PLACEHOLDER_TEXT ::=
<div class="xdDTPicker" title="ANY_STRING1" (style="DATE_PICKER_STYLE")? noWrap="1"
xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>
    <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_GhostedTextNoBUI" hideFocus="1"
contentEditable="true" (title="ANY_STRING1")? (accessKey="SINGLE_CHARACTER")?
xd:xctname="DTPicker_DTText" xd:binding="LEAF_XPATH1" (tabIndex="TAB_INDEX")?
xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:attribute name="style">
    <xsl:choose>
    <xsl:when
    test="BOOLEAN_XPATH_EXPRESSIONx">(DATE_PICKER_STYLE_CONDITIONAL_FORMATTING)?</xsl:when>)*
    </xsl:choose>
    </xsl:attribute>)?
    (<xsl:choose>
    <xsl:when test="BOOLEAN_XPATH_EXPRESSIONy">
    <xsl:attribute name="contentEditable">>false</xsl:attribute>)?
    </xsl:when>)*
    </xsl:choose>)?
    (<xsl:choose>
    <xsl:when test="not(string(LEAF_XPATH1))">
    <xsl:attribute name="xd:ghosted">true</xsl:attribute>
    ANY_STRING
    </xsl:when>
    <xsl:otherwise>
    <xsl:value-of select="LEAF_XPATH1" />
    </xsl:otherwise>
    </xsl:choose>) | (<xsl:value-of select="LEAF_XPATH1" />)
    CHECK_FOR_GETDOM_END1
</span>
    <button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
    
</button>
</div>
DATE_PICKER_WITH_DATA_FORMATTING_AND_PLACEHOLDER_TEXT ::=
<div class="xdDTPicker" title="ANY_STRING1" style="DATE_PICKER_STYLE" noWrap="1"
xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>

```

```

    <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_GTFormattingNoBUI" hideFocus="1"
contentEditable="true" contentEditable="true" xd:xctname="DTPicker_DTText"
xd:datafmt="DATA_FMT_CTRL_DATE_PICKER" xd:boundProp="xd:num" xd:binding="LEAF_XPATH1"
(accessKey="SINGLE_CHARACTER"? (title="ANY_STRING1")? (tabIndex="TAB_INDEX"))?
xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:attribute name="xd:num">
    <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>)?
    <xsl:choose>
    (<xsl:when test="not(string(LEAF_XPATH1))">
    <xsl:attribute name="xd:ghosted">true</xsl:attribute>
    ANY_STRING
    </xsl:when>)?
    <xsl:when test="function-available('xdFormatting:formatString')">
    <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH,
DATA_FMT_CTRL_DATE_PICKER)" />
    </xsl:when>
    <xsl:otherwise>
    <xsl:value-of select="LEAF_XPATH1" />
    </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
    </span>
    <button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
    
    </button>
</div>

```

## DATE\_PICKER\_WITH\_DATA\_FORMATTING\_AND\_CONDITIONAL\_FORMATTING\_AND\_PLAC EHOLDER\_TEXT:

```

<div class="xdDTPicker" title="ANY_STRING1" (style="DATE_PICKER_STYLE")? noWrap="1"
xd:CtrlId="CONTROL_ID" xd:xctname="DTPicker" (xd:postbackModel="POSTBACKMODEL")?>
    <span class="DATE_PICKER_TEXT_BOX_CLASS_NAME xdBehavior_GTFormattingNoBUI" hideFocus="1"
contentEditable="true" contentEditable="true" xd:xctname="DTPicker_DTText"
xd:datafmt="DATA_FMT_CTRL_DATE_PICKER" xd:boundProp="xd:num" xd:binding="LEAF_XPATH1"
(accessKey="SINGLE_CHARACTER")? (title="ANY_STRING1")? (tabIndex="TAB_INDEX"))?
xd:innerCtrl="_DTText" (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:attribute name="style">
    <xsl:choose>
    (<xsl:when
test="BOOLEAN_XPATH_EXPRESSIONx">(DATE_PICKER_STYLE_CONDITIONAL_FORMATTING)?</xsl:when>)*
    </xsl:choose>
    </xsl:attribute>)?
    <xsl:choose>
    (<xsl:when test="BOOLEAN_XPATH_EXPRESSIONy">
    <xsl:attribute name="contentEditable">>false</xsl:attribute>)?
    </xsl:when>)*
    </xsl:choose>
    (<xsl:attribute name="xd:num">
    <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>)?
    <xsl:choose>
    (<xsl:when test="not(string(LEAF_XPATH1))">
    <xsl:attribute name="xd:ghosted">true</xsl:attribute>
    ANY_STRING

```

```

        </xsl:when>)?
        <xsl:when test="function-available('xdFormatting:formatString')">
            <xsl:value-of select="xdFormatting:formatString(LEAFXPath,
DATA_FMT_CTRL_DATE_PICKER)" />
        </xsl:when>
        <xsl:otherwise>
            <xsl:value-of select="LEAF_XPATH1" />
        </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>
<button class="DATE_PICKER_BUTTON_CLASS_NAME" (title="ANY_STRING1")?
xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton" (tabIndex="-1")?>
    
</button>
</div>

```

**DATE\_PICKER\_TEXT\_BOX\_CLASS\_NAME:** `xdDTText` or `xdDTTextRTL`.

**DATE\_PICKER\_BUTTON\_CLASS\_NAME:** `xdDTButton` or `xdDTButtonRTL`.

**DATE\_PICKER\_STYLE:** Semicolon-delimited list of (**STYLE\_WIDTH?**, **STYLE\_PADDING?**, **STYLE\_FONT?**, **STYLE\_HEIGHT?**, **STYLE\_TEXT\_ALIGN?**, **STYLE\_MARGIN?**, **WHITE-SPACE: nowrap?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BORDER?**, **STYLE\_VERTICAL\_ALIGN?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_COLOR?**, **STYLE\_DIRECTION?**).

**DATE\_PICKER\_STYLE\_CONDITIONAL\_FORMATTING:** Semicolon-delimited list of (**STYLE\_FONT\_WEIGHT?**, **STYLE\_COLOR?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_FONT\_STYLE?**).

Control-specific attributes used by the date picker control are as follows:

- `xd:AllowNonMatching` (section [2.4.2.2](#))
- `xd:binding` (section [2.4.2.6](#))
- `xd:boundProp` (section [2.4.2.9](#))
- `xd:CtrlId` (section [2.4.2.10](#))
- `xd:datfmt` (section [2.4.2.11](#))
- `xd:innerCtrl` (section [2.4.2.19](#))
- `xd:inputscope` (section [2.4.2.20](#))
- `xd:num` (section [2.4.2.26](#))
- `xd:postbackModel` (section [2.4.2.29](#))
- `xd:xctname` (section [2.4.2.35](#))

### 2.4.1.9 Drop-Down List Control

The dropdown list control enables the user to select a single value from a list of options that can be specified manually by the form template designer, or is populated from a data source (2). A **DROPDOWN\_LIST\_BOX** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_DROPDOWN_LIST_BOX	A drop down list box is a control that allows the user to select an entry from a collection of values. The collection of values tends to be hidden until the user has them displayed. The collection of values is statically available in the XSL.
DROPDOWN_LIST_BOX_WITH_CONDITIONAL_FORMATTING	Similar to <b>SIMPLE_DROPDOWN_LIST_BOX</b> , but allows conditional formatting (text formatting and disabling).
DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE	Similar to <b>SIMPLE_DROPDOWN_LIST_BOX</b> with the exception that the values for the collection are drawn from another location within the data source (2) of the form (1).
DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE_AND_CONDITIONAL_FORMATTING	Similar to <b>DROPDOWN_LIST_BOX_WITH_VALUES_FROM_EXTERNAL_DATA_SOURCE</b> and <b>DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE_AND_CONDITIONAL_FORMATTING</b> .
DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE_AND_UNIQUE_DISPLAY_NAMES	Similar to <b>DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE</b> with the difference that each value from the collection of values is unique.
DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE_AND_UNIQUE_DISPLAY_NAMES_AND_CONDITIONAL_FORMATTING	Similar to <b>DROPDOWN_LIST_BOX_WITH_VALUES_FROM_DATA_SOURCE_AND_UNIQUE_DISPLAY_NAMES</b> and <b>DROPDOWN_LIST_BOX_WITH_CONDITIONAL_FORMATTING</b> .

### **SIMPLE\_DROPDOWN\_LIST\_BOX:**

```

<select class="xdComboBox xdBehavior_Select" title="ANY_STRING1"
(accessKey="SINGLE_CHARACTER"? size="FONT_SIZE" xd:binding="LEAF_XPATH1"
xd:boundProp="value" xd:xctname="dropdown" (xd:postbackModel="POSTBACKMODEL")?
(tabIndex="TAB_INDEX"? xd:CtrlId="CONTROL_ID" (style="DROPDOWN_LIST_BOX_STYLES")?)>
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:attribute name="value">
    <xsl:value-of select="LEAF_XPATH1" />
  </xsl:attribute>
  ((<option (value="")?>
    <xsl:if test="LEAF_XPATH1=&quot;&quot;">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    ANY_STRING2
  </option>) |
  (<option value="LEAF_VALUE1">
    <xsl:if test="LEAF_XPATH1=LEAF_VALUE1">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    ANY_STRINGX
  </option>))+

```



```

    CHECK_FOR_GETDOM_END1
</select>

```

## DROPDOWN\_LIST\_BOX\_WITH\_CONDITIONAL\_FORMATTING:

```

<select class="xdComboBox xdBehavior_Select" title="ANY_STRING1"
(accessKey="SINGLE_CHARACTER")? (style="DROPDOWN_LIST_BOX_STYLES")? size="FONT_SIZE"
xd:binding="LEAF_XPATH1" xd:boundProp="value" xd:xctname="dropdown"
(xd:postbackModel="POSTBACKMODEL")? (tabIndex="TAB_INDEX")? xd:CtrlId="CONTROL_ID">
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:attribute name="style">
        DROPDOWN_LIST_BOX_STYLES
    <xsl:choose>
        (DROPDOWN_LIST_BOX_CONDITIONAL_FORMATTING) *
    </xsl:choose>
    </xsl:attribute>)?
    (<xsl:choose>
        (DROPDOWN_LIST_BOX_CONDITIONAL_FORMATTING | DROPDOWN_LIST_BOX_CONDITIONAL_DISABLING)+
    </xsl:choose>)?
    <xsl:attribute name="value">
        <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>
    ((<option (value="")?>
        <xsl:if test="LEAF_XPATH1=&quot;&quot;">
            <xsl:attribute name="selected">selected</xsl:attribute>
        </xsl:if>
        ANY_STRING2
    </option>) |
    (<option value="LEAF_VALUE1">
        <xsl:if test="LEAF_XPATH1=LEAF_VALUE1">
            <xsl:attribute name="selected">selected</xsl:attribute>
        </xsl:if>
        ANY_STRINGX
    </option>))+
    CHECK_FOR_GETDOM_END1
</select>

```

## DROPDOWN\_LIST\_BOX\_WITH\_VALUES\_FROM\_DATA\_SOURCE:

```

<select class="xdComboBox xdBehavior_Select" title="ANY_STRING1"
(accessKey="SINGLE_CHARACTER")? size="FONT_SIZE" xd:binding="LEAF_XPATH1"
xd:boundProp="value" value="ANY_STRING2" xd:xctname="dropdown"
(xd:postbackModel="POSTBACKMODEL")? (tabIndex="TAB_INDEX")? xd:CtrlId="CONTROL_ID"
(style="DROPDOWN_LIST_BOX_STYLES")?>
    CHECK_FOR_GETDOM_BEGIN1
    <xsl:attribute name="value">
        <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>
    <xsl:choose>
        <xsl:when test="function-available('xdXDocument:GetDOM')">
            <option />
            <xsl:variable name="val" select="LEAF_XPATH1" />
            <xsl:if test="not(REPEATING_LEAF_XPATH1[LEAF_XPATH=$val] or $val='')">
                <option selected="selected">
                    <xsl:attribute name="value">
                        <xsl:value-of select="$val" />
                    </xsl:attribute>
                </option>
            </xsl:if>
        </xsl:when>
    </xsl:choose>

```

```

        <xsl:value-of select="$val" />
    </option>
</xsl:if>
<xsl:for-each select="REPEATING_LEAF_XPATH1">
    <option>
        <xsl:attribute name="value">
            <xsl:value-of select="RELATIVE_LEAF_XPATH1" />
        </xsl:attribute>
        <xsl:if test="$val=RELATIVE_LEAF_XPATH1">
            <xsl:attribute name="selected">selected</xsl:attribute>
        </xsl:if>
        <xsl:value-of select="RELATIVE_LEAF_XPATH2"/>
    </option>
</xsl:for-each>
</xsl:when>
<xsl:otherwise>
    <option>
        <xsl:value-of select="LEAF_XPATH1" />
    </option>
</xsl:otherwise>
</xsl:choose>
CHECK_FOR_GETDOM_END1
</select>

```

## **DROPDOWN\_LIST\_BOX\_WITH\_VALUES\_FROM\_DATA\_SOURCE\_AND\_CONDITIONAL\_FORMATTING:**

```

<select class="xdComboBox xdBehavior_Select" title="ANY_STRING1"
(accessKey="SINGLE_CHARACTER"? (style="DROPDOWN_LIST_BOX_STYLES"? size="FONT_SIZE"
xd:binding="LEAF_XPATH1" xd:boundProp="value" value="ANY_STRING2" xd:xctname="dropdown"
(xd:postbackModel="POSTBACKMODEL"? (tabIndex="TAB_INDEX"? xd:CtrlId="CONTROL_ID">
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:attribute name="style">
        DROPDOWN_LIST_BOX_STYLES
        <xsl:choose>
            (DROPDOWN_LIST_BOX_CONDITIONAL_FORMATTING) *
        </xsl:choose>
    </xsl:attribute>)?
    (<xsl:choose>
        (DROPDOWN_LIST_BOX_CONDITIONAL_FORMATTING |
        DROPDOWN_LIST_BOX_CONDITIONAL_DISABLING)+
    </xsl:choose>)?
    <xsl:attribute name="value">
        <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>
    <xsl:choose>
        <xsl:when test="function-available('xdXDocument:GetDOM')">
            <option />
            <xsl:variable name="val" select="LEAF_XPATH1" />
            <xsl:if test="not(REPEATING_LEAF_XPATH1[LEAF_XPATH=$val] or $val='')">
                <option selected="selected">
                    <xsl:attribute name="value">
                        <xsl:value-of select="$val" />
                    </xsl:attribute>
                    <xsl:value-of select="$val" />
                </option>
            </xsl:if>
        </xsl:choose>
    </xsl:for-each select="REPEATING_LEAF_XPATH1">

```

```

        <option>
            <xsl:attribute name="value">
                <xsl:value-of select="RELATIVE_LEAF_XPATH1" />
            </xsl:attribute>
            <xsl:if test="$val=RELATIVE_LEAF_XPATH1">
                <xsl:attribute name="selected">selected</xsl:attribute>
            </xsl:if>
            <xsl:value-of select="RELATIVE_LEAF_XPATH2"/>
        </option>
    </xsl:for-each>
</xsl:when>
<xsl:otherwise>
    <option>
        <xsl:value-of select="LEAF_XPATH1" />
    </option>
</xsl:otherwise>
</xsl:choose>
CHECK_FOR_GETDOM_END1
</select>

```

## **DROPDOWN\_LIST\_BOX\_WITH\_VALUES\_FROM\_DATA\_SOURCE\_AND\_UNIQUE\_DISPLAY\_NAMES:**

```

<select class="xdComboBox xdBehavior_Select" title="ANY_STRING1"
(accessKey="SINGLE_CHARACTER"? size="FONT_SIZE" xd:binding="LEAF_XPATH1"
xd:boundProp="value" value="ANY_STRING2" xd:xctname="dropdown"
(xd:postbackModel="POSTBACKMODEL"? (tabIndex="TAB_INDEX"? xd:CtrlId="CONTROL_ID"
(style="DROPDOWN_LIST_BOX_STYLES"))?>
CHECK_FOR_GETDOM_BEGIN1
<xsl:attribute name="value">
    <xsl:value-of select="LEAF_XPATH1" />
</xsl:attribute>
<xsl:choose>
    <xsl:when test="function-available('xdXDocument:GetDOM')">
        <option />
        <xsl:variable name="val" select="LEAF_XPATH1" />
        <xsl:if test="not(REPEATING_LEAF_XPATH1[LEAF_XPATH=$val] or $val='')">
            <option selected="selected">
                <xsl:attribute name="value">
                    <xsl:value-of select="$val" />
                </xsl:attribute>
                <xsl:value-of select="$val" />
            </option>
        </xsl:if>
        <xsl:variable name="items">
            <xsl:copy-of select="REPEATING_LEAF_XPATH1" />
        </xsl:variable>
        <xsl:variable name="uniqueItems" select="msxsl:node-set($items)/*[not(LEAF_XPATH
= preceding::LEAF_XPATH2)]" />
        <xsl:for-each select="$uniqueItems">
            <option>
                <xsl:attribute name="value">
                    <xsl:value-of select="RELATIVE_LEAF_XPATH1" />
                </xsl:attribute>
                <xsl:if test="$val=RELATIVE_LEAF_XPATH1">
                    <xsl:attribute name="selected">selected</xsl:attribute>
                </xsl:if>
                <xsl:value-of select="RELATIVE_LEAF_XPATH2"/>
            </option>
        </xsl:for-each>
    </xsl:when>
    <xsl:otherwise>
        <option>
            <xsl:value-of select="LEAF_XPATH1" />
        </option>
    </xsl:otherwise>
</xsl:choose>
CHECK_FOR_GETDOM_END1
</select>

```

```

        </option>
    </xsl:for-each>
</xsl:when>
<xsl:otherwise>
    <option>
        <xsl:value-of select="LEAF_XPATH1" />
    </option>
</xsl:otherwise>
</xsl:choose>
CHECK_FOR_GETDOM_END1
</select>

```

## **DROPDOWN\_LIST\_BOX\_WITH\_VALUES\_FROM\_DATA\_SOURCE\_AND\_UNIQUE\_DISPLAY\_NAMES\_AND\_CONDITIONAL\_FORMATTING:**

```

<select class="xdComboBox xdBehavior_Select" title="ANY_STRING1"
(accessKey="SINGLE_CHARACTER")? (style="DROPDOWN_LIST_BOX_STYLES")? size="FONT_SIZE"
xd:binding="LEAF_XPATH1" xd:boundProp="value" value="ANY_STRING2" xd:xctname="dropdown"
(xd:postbackModel="POSTBACKMODEL")? (tabIndex="TAB_INDEX")? xd:CtrlId="CONTROL_ID">
    CHECK_FOR_GETDOM_BEGIN1
    (<xsl:attribute name="style">
        DROPDOWN_LIST_BOX_STYLES
        <xsl:choose>
            (DROPDOWN_LIST_BOX_CONDITIONAL_FORMATTING) *
        </xsl:choose>
    </xsl:attribute>)?
    (<xsl:choose>
        (DROPDOWN_LIST_BOX_CONDITIONAL_FORMATTING | DROPDOWN_LIST_BOX_CONDITIONAL_DISABLING)+
    </xsl:choose>)?
    <xsl:attribute name="value">
        <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>
    <xsl:choose>
        <xsl:when test="function-available('xdXDocument:GetDOM')">
            <option />
            <xsl:variable name="val" select="LEAF_XPATH1" />
            <xsl:if test="not (REPEATING_LEAF_XPATH1[LEAF_XPATH=$val] or $val='')">
                <option selected="selected">
                    <xsl:attribute name="value">
                        <xsl:value-of select="$val" />
                    </xsl:attribute>
                    <xsl:value-of select="$val" />
                </option>
            </xsl:if>
            <xsl:variable name="items">
                <xsl:copy-of select="REPEATING_LEAF_XPATH1" />
            </xsl:variable>
            <xsl:variable name="uniqueItems" select="msxsl:node-set($items)/*[not (LEAF_XPATH
= preceding::LEAF_XPATH2)]" />
            <xsl:for-each select="$uniqueItems">
                <option>
                    <xsl:attribute name="value">
                        <xsl:value-of select="RELATIVE_LEAF_XPATH1" />
                    </xsl:attribute>
                    <xsl:if test="$val=RELATIVE_LEAF_XPATH1">
                        <xsl:attribute name="selected">selected</xsl:attribute>
                    </xsl:if>
                    <xsl:value-of select="RELATIVE_LEAF_XPATH2"/>
                </option>
            </xsl:for-each>
        </xsl:choose>

```

```

        </option>
      </xsl:for-each>
    </xsl:when>
    <xsl:otherwise>
      <option>
        <xsl:value-of select="LEAF_XPATH1" />
      </option>
    </xsl:otherwise>
  </xsl:choose>
  CHECK_FOR_GETDOM_END1
</select>

```

### DROPDOWN\_LIST\_BOX\_CONDITIONAL\_DISABLING:

```

<xsl:when test="BOOLEAN_XPATH_EXPRESSIONY">
  <xsl:attribute name="disabled">true</xsl:attribute>
</xsl:when>

```

### DROPDOWN\_LIST\_BOX\_CONDITIONAL\_FORMATTING:

```

<xsl:when
  test="BOOLEAN_XPATH_EXPRESSIONX">(LEAF_CONTROL_CONDITIONAL_FORMATTING_CAPTION)?</xsl:when>

```

**DROPDOWN\_LIST\_BOX\_STYLES:** Semicolon-delimited list of (**STYLE\_WIDTH?**, **STYLE\_FONT?**, **STYLE\_MARGIN?**, **STYLE\_VERTICAL\_ALIGN?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_COLOR?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_DIRECTION?**).

Control-specific attributes used by the dropdown list control are as follows:

- xd:binding (section [2.4.2.6](#))
- xd:boundProp (section [2.4.2.9](#))
- xd:CrtlId (section [2.4.2.10](#))
- xd:postbackModel (section [2.4.2.29](#))
- xd:xctname (section [2.4.2.35](#))

The **xdXDocument:GetDOM** XSL function extension, as specified in section [2.4.3.9.2](#), is used by the dropdown list control.

#### 2.4.1.10 Expression Box Control

The expression box control is a read-only control that displays the result of an XPath expression evaluation. An **EXPRESSION\_BOX** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_EXPRESSION_BOX	An expression box is a control that displays the value of an XPath expression. It is constantly disabled.
EXPRESSIONBOX_WITH_CONDITIONAL_FORMATTING	Similar to <b>SIMPLE_EXPRESSION_BOX</b> , with text formatting and conditional

Symbol	Description
	formatting.
EXPRESSIONBOX_WITH_DATA_FORMATTING	Similar to <b>SIMPLE_EXPRESSION_BOX</b> , with the result formatted as a type of data.
EXPRESSIONBOX_WITH_DATA_FORMATTING_AND_CONDITIONAL_FORMATTING	Similar to <b>EXPRESSIONBOX_WITH_CONDITIONAL_FORMATTING</b> and <b>EXPRESSIONBOX_WITH_DATA_FORMATTING</b> .

### **SIMPLE\_EXPRESSION\_BOX:**

```
<span class="xdExpressionBox xdDataBindingUI (xdBehavior_Formatting)" title="ANY_STRING"
(tabIndex="-1")? xd:xctname="ExpressionBox" xd:CtrlId="CONTROL_ID" xd:disableEditing="yes"
(xd:binding="EXPRESSION_BOX_XPATH1"? style="EXPRESSION_BOX_STYLE">
CHECK_FOR_GETDOM_BEGIN1
<xsl:value-of select="EXPRESSION_BOX_XPATH1" />
CHECK_FOR_GETDOM_END1
</span>
```

### **EXPRESSIONBOX\_WITH\_CONDITIONAL\_FORMATTING:**

```
<span class="xdExpressionBox xdDataBindingUI" title="ANY_STRING" (tabIndex="-1")?
xd:xctname="ExpressionBox" xd:CtrlId="CONTROL_ID" xd:disableEditing="yes"
(xd:binding="EXPRESSION_BOX_XPATH1")?>
CHECK_FOR_GETDOM_BEGIN1
<xsl:attribute name="style">EXPRESSION_BOX_STYLE
<xsl:choose>
(<xsl:when
test="BOOLEAN_XPATH_EXPRESSIONX">LEAF_CONTROL_CONDITIONAL_FORMATTING_CAPTION</xsl:when>)+
</xsl:choose>
</xsl:attribute>
<xsl:value-of select="EXPRESSION_BOX_XPATH1" />
CHECK_FOR_GETDOM_END1
</span>
```

### **EXPRESSION\_BOX\_WITH\_DATA\_FORMATTING:**

```
<span class="xdExpressionBox xdDataBindingUI xdBehavior_Formatting" title="ANY_STRING"
(tabIndex="-1")? xd:xctname="ExpressionBox" xd:CtrlId="CONTROL_ID" xd:disableEditing="yes"
xd:binding="EXPRESSION_BOX_XPATH1" xd:datafmt="DATA_FMT_CTRL_EXPBOX" (xd:num="")?
style="EXPRESSION_BOX_STYLE">
CHECK_FOR_GETDOM_BEGIN1
(<xsl:attribute name="xd:num">
<xsl:value-of select="EXPRESSION_BOX_XPATH1" />
</xsl:attribute>)?
<xsl:choose>
<xsl:when test="function-available('xdFormatting:formatString')">
<xsl:value-of select="xdFormatting:formatString(EXPRESSION_BOX_XPATH1,
DATA_FMT_CTRL_EXPBOX)" />
</xsl:when>
<xsl:otherwise>
<xsl:value-of select="EXPRESSION_BOX_XPATH1" />
</xsl:otherwise>
```

```

    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>

```

## **EXPRESSION\_BOX\_WITH\_DATA\_FORMATTING\_AND\_CONDITIONAL\_FORMATTING:**

```

<span class="xdExpressionBox xdDataBindingUI xdBehavior_Formatting" title="ANY_STRING"
(tabIndex="-1")? xd:xctname="ExpressionBox" xd:CtrlId="CONTROL_ID" xd:disableEditing="yes"
xd:binding="EXPRESSION_BOX_XPATH1" xd:datafmt="DATA_FMT_CTRL_EXPBOX" (xd:num="")?>
    CHECK_FOR_GETDOM_BEGIN1
    <xsl:attribute name="style">EXPRESSION_BOX_STYLE
    <xsl:choose>
        (<xsl:when
test="BOOLEAN_XPATH_EXPRESSIONx">LEAF_CONTROL_CONDITIONAL_FORMATTING_CAPTION</xsl:when>)+
    </xsl:choose>
    </xsl:attribute>
    (<xsl:attribute name="xd:num">
    <xsl:value-of select="EXPRESSION_BOX_XPATH1" />
    </xsl:attribute>)?
    <xsl:choose>
        <xsl:when test="function-available('xdFormatting:formatString')">
            <xsl:value-of select="xdFormatting:formatString(EXPRESSION_BOX_XPATH1,
DATA_FMT_CTRL_EXPBOX)" />
        </xsl:when>
        <xsl:otherwise>
            <xsl:value-of select="EXPRESSION_BOX_XPATH1" />
        </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>

```

## **EXPRESSION\_BOX\_XPATH: LEAF\_XPATH or STRING\_XPATH\_EXPRESSION.**

**EXPRESSION\_BOX\_OVERFLOW\_Y:** OVERFLOW-Y: auto

**EXPRESSION\_BOX\_OVERFLOW\_X:** OVERFLOW-X: auto | OVERFLOW-X: visible

**EXPRESSION\_BOX\_STYLE:** Semicolon-delimited list of (**STYLE\_WIDTH?**,  
**STYLE\_BACKGROUND\_COLOR?**, **STYLE\_BORDER?**, **STYLE\_PADDING?**,  
**STYLE\_VERTICAL\_ALIGN?**, **EXPRESSION\_BOX\_OVERFLOW\_Y?**,  
**EXPRESSION\_BOX\_OVERFLOW\_X?**, **STYLE\_FONT?**, **STYLE\_MARGIN?**, **STYLE\_HEIGHT?**,  
**STYLE\_TEXT\_DECORATION?**, **STYLE\_WRAP?**, **STYLE\_COLOR?**, **STYLE\_DIRECTION?**)

Control-specific attributes used by the expression box control are as follows:

- xd:binding (section [2.4.2.6](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:datafmt (section [2.4.2.11](#))
- xd:disableEditing (section [2.4.2.12](#))
- xd:num (section [2.4.2.26](#))
- xd:xctname (section [2.4.2.35](#))

### 2.4.1.11 File Attachment Control

The file attachment control enables users to attach a file to a form (1).

#### FILE\_ATTACHMENT:

```
<span class="xdFileAttachment" hideFocus="1" style="FILE_ATTACHMENT_STYLE" tabStop="true"
xd:binding="LEAF_XPATH" xd:boundProp="xd:inline" tabIndex="TAB_INDEX"
xd:xctname="FileAttachment" xd:CtrlId="CONTROL_ID" (title="ANY_STRING")?
(accessKey="SINGLE_CHARACTER")? (xd:disableEditing="yes")?/>
  <xsl:if test="function-available('xdImage:getImageUrl')">
    <xsl:attribute name="src">
      <xsl:value-of select="xdImage:getImageUrl(LEAF_XPATH)"/>
    </xsl:attribute>
  </xsl:if>
</span>
```

**FILE\_ATTACHMENT\_STYLE:** Semicolon-delimited list of (**STYLE\_SIZE**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_BORDER?**, **STYLE\_FONT?**, **STYLE\_COLOR?**, **STYLE\_VERTICAL\_ALIGN?**)

**LEAF\_XPATH:** MUST point to an XML node in the main data source.

Control-specific attributes used by the file attachment control are as follows:

- `xd:binding` (section [2.4.2.6](#))
- `xd:boundProp` (section [2.4.2.9](#))
- `xd:CtrlId` (section [2.4.2.10](#))
- `xd:disableEditing` (section [2.4.2.12](#))
- `xd:xctname` (section [2.4.2.35](#))

The **xdImage:getImageUrl** XSL function extension, as specified in section [2.4.3.5](#), is used by the file attachment control.

### 2.4.1.12 Hyperlink Control

The hyperlink control allows the user to create a hyperlink that navigates the default browser to a specified URL. A **HYPERLINK** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_HYPERLINK	Hyperlinks are read-only controls that open a new browser window to another web location. They are composed of link target and display text.
HYPERLINK_WITH_DYNAMIC_LINK	Similar to <b>SIMPLE_HYPERLINK</b> , with the exception that the hyperlink's target link is dynamically populated from a node in the form (1).
HYPERLINK_WITH_DYNAMIC_TEXT	Similar to <b>SIMPLE_HYPERLINK</b> , with the exception that the hyperlink's display text is dynamically populated from a node in the



Symbol	Description
	form (1).
HYPERLINK_WITH_DYNAMIC_LINK_AND_DYNAMIC_TEXT	Similar to <b>HYPERLINK_WITH_DYNAMIC_LINK</b> and <b>HYPERLINK_WITH_DYNAMIC_TEXT</b> .

### **SIMPLE\_HYPERLINK:**

```

<a href="ANY_STRING" (title="ANY_STRING")? (accessKey="SINGLE_CHARACTER")?
(tabIndex="TAB_INDEX")? xd:disableEditing="yes">ANCHOR_TEXT</a>

HYPERLINK_WITH_DYNAMIC_LINK ::=
<a class="xdDataBindingUI" (title="ANY_STRING")? (accessKey="SINGLE_CHARACTER")?
(tabIndex="TAB_INDEX")? xd:disableEditing="yes">
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:attribute name="href">
    <xsl:value-of select="LEAF_XPATH"/>
  </xsl:attribute>
  ANCHOR_TEXT
  CHECK_FOR_GETDOM_END1
</a>

```

### **HYPERLINK\_WITH\_DYNAMIC\_TEXT:**

```

<span class="xdHyperlink" hideFocus="1" (title="ANY_STRING")?
style="DYNAMIC_HYPERLINK_TEXT_STYLE" xd:xctname="hyperlink">
  <a class="xdDataBindingUI" (title="ANY_STRING")? (accessKey="SINGLE_CHARACTER")?
(tabIndex="TAB_INDEX")? href="ANY_STRING" xd:disableEditing="yes" xd:CtrlId="CONTROL_ID">
    CHECK_FOR_GETDOM_BEGIN1
    <xsl:value-of select="LEAF_XPATH"/>
    CHECK_FOR_GETDOM_END1
  </a>
</span>

```

### **HYPERLINK\_WITH\_DYNAMIC\_LINK\_AND\_DYNAMIC\_TEXT:**

```

<span class="xdHyperlink" hideFocus="1" (title="ANY_STRING")?
style="DYNAMIC_HYPERLINK_TEXT_STYLE" xd:xctname="hyperlink">
  <a class="xdDataBindingUI" (title="ANY_STRING")? (accessKey="SINGLE_CHARACTER")?
(tabIndex="TAB_INDEX")? xd:disableEditing="yes" xd:CtrlId="CONTROL_ID">
    CHECK_FOR_GETDOM_BEGIN1
    <xsl:attribute name="href">
      <xsl:value-of select="LEAF_XPATH1"/>
    </xsl:attribute>
    <xsl:value-of select="LEAF_XPATH2"/>
    CHECK_FOR_GETDOM_END1
  </a>
</span>

```

**DYNAMIC\_HYPERLINK\_TEXT\_STYLE:** Semicolon-delimited list of (**OVERFLOW:** visible, **STYLE\_WIDTH?**, **STYLE\_TEXT\_ALIGN?**, **STYLE\_BORDER?**, **STYLE\_FONT?**, **STYLE\_VERTICAL\_ALIGN?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_COLOR?**)

Control-specific attributes used by the hyperlink control are as follows:

```

xd:CtrlId (section 2.4.2.10)
xd:disableEditing (section 2.4.2.12)
xd:xctname (section 2.4.2.35)

```

### 2.4.1.13 List Box Control

The list box control enables the user to select a single value from a list of options that can be specified manually by the form template designer, or is populated from a data source (2). A **LIST\_BOX** MUST have one of the symbols in the following table.

Symbol	Description
LIST_BOX_WITH_MANUAL_ENTRIES	The list box displays selection options that have been manually specified by the form template designer.
LIST_BOX_WITH_LOOKUP_ENTRIES	The list box displays selection options that are populated from a data source (2).
LIST_BOX_WITH_UNIQUE_LOOKUP_ENTRIES	The list box displays only unique selection options that are populated from a data source (2).

#### LIST\_BOX\_CONDITIONAL\_FORMATTING:

```

(<xsl:attribute name="style">LIST_BOX_STYLE<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">LIST_BOX_CONDITIONAL_FORMATTING_STYLE</xsl:when>)+
  </xsl:choose>
</xsl:attribute>)?
(<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>)+
</xsl:choose>)?

```

#### LIST\_BOX\_WITH\_MANUAL\_ENTRIES:

```

<select class="xdListBox xdBehavior_Select" title="ANY_STRING" size="3"
(tabindex="TAB_INDEX")? xd:CtrlId="CONTROL_ID" xd:xctname="ListBox" xd:binding="LEAF_XPATH1"
xd:boundProp="value" (style="LIST_BOX_STYLE")? (xd:postbackModel="POSTBACKMODEL")?
(accessKey="SINGLE_CHARACTER")?>
  CHECK_FOR_GETDOM_BEGIN1
  LIST_BOX_CONDITIONAL_FORMATTING?
  <xsl:attribute name="value">
    <xsl:value-of select="LEAF_XPATH1"/>
  </xsl:attribute>
  ((<option>
    <xsl:if test="LEAF_XPATH1=&quot;&quot;">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>OPTION_DISPLAY_VALUE?</option>)|
  (<option value="OPTION_VALUE1">
    <xsl:if test="LEAF_XPATH1=&quot;OPTION_VALUE1&quot;">

```

```

        <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>OPTION_DISPLAY_VALUE?</option>))+
    CHECK_FOR_GETDOM_END1
</select>

```

### LIST\_BOX\_WITH\_LOOKUP\_ENTRIES:

```

<select class="xdListBox xdBehavior_Select" title="ANY_STRING" size="3"
(tabindex="TAB_INDEX"? xd:CtrlId="CONTROL_ID" xd:xctname="ListBox" xd:binding="LEAF_XPATH1"
xd:boundProp="value" (value="ANY_STRING"? (style="LIST_BOX_STYLE"?
(xd:postbackModel="POSTBACKMODEL"? (accessKey="SINGLE_CHARACTER"?>
    LIST_BOX_CONDITIONAL_FORMATTING?
    <xsl:attribute name="value">
        <xsl:value-of select="LEAF_XPATH1"/>
    </xsl:attribute>
    <xsl:choose>
        <xsl:when test="function-available('xdXDocument:GetDOM')">
            <option/>
            <xsl:variable name="val" select="LEAF_XPATH1"/>
            <xsl:if
test="not(GROUP_XPATH1/RELATIVE_REPEATING_GROUP_XPATH1[RELATIVE_LEAF_XPATH1 =$val] or
$val='')">
                <option selected="selected">
                    <xsl:attribute name="value">
                        <xsl:value-of select="$val"/>
                    </xsl:attribute>
                    <xsl:value-of select="$val"/>
                </option>
            </xsl:if>
            <xsl:for-each select="GROUP_XPATH1/RELATIVE_REPEATING_GROUP_XPATH1">
                <option>
                    <xsl:attribute name="value">
                        <xsl:value-of select="RELATIVE_LEAF_XPATH1"/>
                    </xsl:attribute>
                    <xsl:if test="$val=RELATIVE_LEAF_XPATH1">
                        <xsl:attribute name="selected">selected</xsl:attribute>
                    </xsl:if>
                    <xsl:value-of select="RELATIVE_LEAF_XPATH2"/>
                </option>
            </xsl:for-each>
        </xsl:when>
        <xsl:otherwise>
            <option>
                <xsl:value-of select="LEAF_XPATH1"/>
            </option>
        </xsl:otherwise>
    </xsl:choose>
</select>

```

### LIST\_BOX\_WITH\_UNIQUE\_LOOKUP\_ENTRIES:

```

<select class="xdListBox xdBehavior_Select" title="ANY_STRING" size="3"
(tabindex="TAB_INDEX"? xd:CtrlId="CONTROL_ID" xd:xctname="ListBox" xd:binding="LEAF_XPATH1"
xd:boundProp="value" (value="ANY_STRING"? (style="LIST_BOX_STYLE"?
(xd:postbackModel="POSTBACKMODEL"? (accessKey="SINGLE_CHARACTER"?>
    LIST_BOX_CONDITIONAL_FORMATTING?
    <xsl:attribute name="value">

```

```

    <xsl:value-of select="LEAF_XPATH1"/>
  </xsl:attribute>
<xsl:choose>
  <xsl:when test="function-available('xdXDocument:GetDOM')">
    <option/>
    <xsl:variable name="val" select="LEAF_XPATH1"/>
    <xsl:if
test="not (GROUP_XPATH1/RELATIVE_REPEATING_GROUP_XPATH1[RELATIVE_LEAF_XPATH1=$val] or
$val='')">
      <option selected="selected">
        <xsl:attribute name="value">
          <xsl:value-of select="$val"/>
        </xsl:attribute>
        <xsl:value-of select="$val"/>
      </option>
    </xsl:if>
    <xsl:variable name="items">
      <xsl:copy-of select="GROUP_XPATH1/RELATIVE_REPEATING_GROUP_XPATH1"/>
    </xsl:variable>
    <xsl:variable name="uniqueItems" select="msxsl:node-
set($items)/*[not((RELATIVE_LEAF_XPATH2=
preceding::RELATIVE_REPEATING_GROUP_XPATH1/RELATIVE_LEAF_XPATH2)|(.=
preceding::RELATIVE_REPEATING_GROUP_XPATH1))]" />
    <xsl:for-each select="$uniqueItems">
      <option>
        <xsl:attribute name="value">
          <xsl:value-of select="RELATIVE_LEAF_XPATH1"/>
        </xsl:attribute>
        <xsl:if test="$val=RELATIVE_LEAF_XPATH1">
          <xsl:attribute name="selected">selected</xsl:attribute>
        </xsl:if>
        <xsl:value-of select="RELATIVE_LEAF_XPATH2"/>
      </option>
    </xsl:for-each>
  </xsl:when>
  <xsl:otherwise>
    <option>
      <xsl:value-of select="LEAF_XPATH1"/>
    </option>
  </xsl:otherwise>
</xsl:choose>
</select>

```

**LIST\_BOX\_STYLE:** Semicolon-delimited list of (STYLE\_SIZE?, STYLE\_MARGIN?, STYLE\_DIRECTION?, STYLE\_TEXT\_DECORATION?, STYLE\_BACKGROUND\_COLOR?, STYLE\_FONT?, STYLE\_COLOR?, STYLE\_VERTICAL\_ALIGN?)

**LIST\_BOX\_CONDITIONAL\_FORMATTING\_STYLE:** Semicolon-delimited list of (STYLE\_TEXT\_DECORATION?, STYLE\_BACKGROUND\_COLOR?, STYLE\_FONT?, STYLE\_COLOR?)

Control-specific attributes used by the list box control are as follows:

- xd:binding (section [2.4.2.6](#))
- xd:boundProp (section [2.4.2.9](#))
- xd:CrtId (section [2.4.2.10](#))

- `xd:postbackModel` (section [2.4.2.29](#))
- `xd:xctname` (section [2.4.2.35](#))

The **xdXDocument:GetDom** XSL function, as specified in section [2.4.3.9.2](#), extension is used by the list box control.

#### 2.4.1.14 Option Button Control

An option button is a bi-state control that has a value when selected and no value when not selected. Option button controls are meant to be used in groups (1), with selection among the option buttons in the group (1) being mutually exclusive. An **OPTION\_BUTTON** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_OPTION_BUTTON	An option button is a binary state control. It is found in a group (1) of option buttons where only a single member of the group (1) can be selected at any one time.
OPTION_BUTTON_WITH_CONDITIONAL_FORMATTING	The same as a <b>SIMPLE_OPTION_BUTTON</b> , but also allows the button to be conditionally disabled.

##### SIMPLE\_OPTION\_BUTTON:

```
<input class="xdBehavior_Boolean" title="ANY_STRING1" type="radio" name="{generate-
id(LEAF_XPATH1)}" (accessKey="SINGLE_CHARACTER"? xd:binding="LEAF_XPATH1"
xd:boundProp="xd:value" (xd:onValue="(ISO_DIGIT+)|(&quot;ANY_STRING2&quot;)"?)?
(tabIndex="LEAF_CONTROL_TAB_INDEX"? xd:xctname="OptionButton" xd:CtrlId="CONTROL_ID"
(xd:postbackModel="POSTBACKMODEL"? (style="OPTION_BUTTON_STYLE")?)?
CHECK_FOR_GETDOM_BEGIN1
<xsl:attribute name="xd:value">
  <xsl:value-of select="LEAF_XPATH1" />
</xsl:attribute>
<xsl:if test="BOOLEAN_XPATH_EXPRESSION">
  <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
</xsl:if>
CHECK_FOR_GETDOM_END1
</input>
ANY_STRING3
```

##### OPTION\_BUTTON\_WITH\_CONDITIONAL\_FORMATTING:

```
<input class="xdBehavior_Boolean" title="ANY_STRING1" type="radio" name="{generate-
id(LEAF_XPATH1)}" (accessKey="SINGLE_CHARACTER"? xd:binding="LEAF_XPATH1"
xd:boundProp="xd:value" (xd:onValue="(ISO_DIGIT+)|(&quot;ANY_STRING2&quot;)"?)?
(tabIndex="LEAF_CONTROL_TAB_INDEX"? xd:xctname="OptionButton" xd:CtrlId="CONTROL_ID"
(xd:postbackModel="POSTBACKMODEL"? (style="OPTION_BUTTON_STYLE")?)?
CHECK_FOR_GETDOM_BEGIN1
<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>)*
</xsl:choose>
<xsl:attribute name="xd:value">
```

```

        <xsl:value-of select="LEAF_XPATH1" />
    </xsl:attribute>
    <xsl:if test="BOOLEAN_XPATH_EXPRESSION">
        <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
    CHECK_FOR_GETDOM_END1
</input>
ANY_STRING3

```

**OPTION\_BUTTON\_STYLE:** Semicolon-delimited list of (STYLE\_MARGIN?, STYLE\_FONT?, STYLE\_VERTICAL\_ALIGN?, STYLE\_BORDER?, STYLE\_BACKGROUND\_COLOR?, STYLE\_COLOR?, STYLE\_TEXT\_DECORATION?, STYLE\_WIDTH?, STYLE\_HEIGHT?)

Control-specific attributes used by the option button control are as follows:

- xd:binding (section [2.4.2.6](#))
- xd:boundProp (section [2.4.2.9](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:onValue (section [2.4.2.28](#))
- xd:postbackModel (section [2.4.2.29](#))
- xd:value (section [2.4.2.34](#))
- xd:xctname (section [2.4.2.35](#))

#### 2.4.1.15 Repeating Section Control

A repeating section control acts as a container for other controls that can appear multiple times in the same form (1). A **REPEATING\_SECTION** MUST have one of the symbols in the following table.

Symbol	Description
REPEATING_SECTION_CALL	The first part of the repeating section control that indicates where the repeating section is rendered.
REPEATING_SECTION_BODY_WITHOUT_CONDITIONAL_HIDING	The second part of the repeating section that defines the properties of the repeating section and its content.
REPEATING_SECTION_BODY_WITHOUT_CONDITIONAL_HIDING	The second part of the repeating section that defines the properties of the repeating section and its content. This part is used when the section is conditionally hidden.

A **REPEATING\_SECTION** MUST consist of a **REPEATING\_SECTION\_CALL** at the point in the XSL where the control appears, which is either the body of the main template or another XSL template, and a **REPEATING\_SECTION\_BODY** that defines the section and appears as a separate XSL template. **TEMPLATE\_MODE\_ID** values in **REPEATING\_SECTION\_CALL** and **REPEATING\_SECTION\_BODY** MUST match.

**REPEATING\_SECTION\_CALL: SIMPLE\_SECTION\_CALL** or

```
(CHECK_FOR_GETDOM_BEGIN1
```

```

<xsl:apply-templates select="(GROUP_XPATH/)?RELATIVE_REPEATING_GROUP_XPATH"
mode="TEMPLATE_MODE_ID1"/>
  (<div class="optionalPlaceholder" xd:xmlToEdit="XML_TO_EDIT_NAME" tabIndex="TABINDEX"
xd:action="xCollection::insert" align="ALIGN" style="STYLE_WIDTH">ANY_STRING</div>)?
CHECK_FOR_GETDOM_END1)

```

**REPEATING\_SECTION\_BODY:  
REPEATING\_SECTION\_BODY\_WITHOUT\_CONDITIONAL\_HIDING or  
REPEATING\_SECTION\_BODY\_WITH\_CONDITIONAL\_HIDING.**

**REPEATING\_SECTION\_BODY\_WITHOUT\_CONDITIONAL\_HIDING:**

```

<xsl:template match="RELATIVE_REPEATING_GROUP_XPATH" mode="TEMPLATE_MODE_ID1">
  <div class="xdRepeatingSection xdRepeating" title="ANY_STRING" (style="SECTION_STYLE")?
align="ALIGN" xd:xctname="RepeatingSection" xd:CtrlId="CONTROL_ID" (tabIndex="-1")?
(xd:postbackModel="POSTBACKMODEL")?>
  XML_HTML_4_1_WITH_CONTROLS
  (<xsl:attribute name="style">SECTION_STYLE(<xsl:choose>
    (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
    <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
    <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_BACKGROUND_COLOR</xsl:when>)+
  </xsl:choose>)?
  (<xsl:if
test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
  </xsl:attribute>)?
  </div>
</xsl:template>

```

**REPEATING\_SECTION\_BODY\_WITH\_CONDITIONAL\_HIDING:**

```

<xsl:template match="RELATIVE_REPEATING_GROUP_XPATH" mode="TEMPLATE_MODE_ID1">
  <xsl:if test="BOOLEAN_XPATH_EXPRESSION">
    <div class="xdRepeatingSection xdRepeating" title="ANY_STRING"
(style="SECTION_STYLE")? align="ALIGN" xd:xctname="RepeatingSection" xd:CtrlId="CONTROL_ID"
(tabIndex="-1")? (xd:postbackModel="POSTBACKMODEL")?>
      XML_HTML_4_1_WITH_CONTROLS
      (<xsl:attribute name="style">SECTION_STYLE(<xsl:choose>
        (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
        <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
        <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">STYLE_BACKGROUND_COLOR</xsl:when>)+
      </xsl:choose>)?
      (<xsl:if
test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
      </xsl:attribute>)?
    </div>
  </xsl:if>
</xsl:template>

```

Control-specific attributes used by the repeating section control are as follows:

- xd:action (section [2.4.2.1](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:postbackModel (section [2.4.2.29](#))

- xd:xctname (section [2.4.2.35](#))
- xd:xmlToEdit (section [2.4.2.36](#))

### 2.4.1.16 Repeating Table Control

A repeating table control acts as a container for other controls, and can appear multiple times in an instance of a form (1). It has a tabular format. A **REPEATING\_TABLE** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_REPEATING_TABLE	A repeating table is a structural control, which overloads the HTML <b>table</b> element. It is possible to dynamically add and remove rows.
REPEATING_TABLE_WITH_CONDITIONAL_FORMATTING	The same as <b>SIMPLE_REPEATING_TABLE</b> , with the ability to conditionally change the background color and disable adding or removing rows.
TABLE_ROW_WITH_CONDITIONAL_FORMATTING	The same as <b>TABLE_ROW</b> , but allows for changing the background color.

#### SIMPLE\_REPEATING\_TABLE:

```
<table class="xdRepeatingTable msoUcTable" title="ANY_STRING" style="TABLE-LAYOUT: fixed;
STYLE_WIDTH; BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none;
BORDER-COLLAPSE: collapse; WORD-WRAP: break-word; BORDER-BOTTOM-STYLE: none" border="1"
xd:CtrlId="CONTROL_ID" (xd:postBackModel="POST_BACK_MODEL_VALUE")? WIDTH?>
  <colgroup>
    TABLE_COLUMN+
  </colgroup>
  <tbody (valign="VALIGN")? (style="STYLE_DIRECTION")? class="xdTableHeader">
    TABLE_ROW*
  </tbody>?
  <tbody (style="STYLE_DIRECTION")? xd:xctname="RepeatingTable">
    CHECK_FOR_GETDOM_BEGIN1
    <xsl:for-each select="GROUP_XPATH">
      TABLE_ROW*
    </xsl:for-each>
    CHECK_FOR_GETDOM_END1
  </tbody>
  <tbody (valign="VALIGN")? (style="STYLE_DIRECTION")? class="xdTableFooter">
    TABLE_ROW*
  </tbody>?
</table>
(<div class="optionalPlaceholder" xd:xmlToEdit="XML_TO_EDIT_NAME" tabIndex="TAB_INDEX"
xd:action="xCollection::insert" style="STYLE_WIDTH">ANY_STRING</div>)?
```

#### REPEATING\_TABLE\_WITH\_CONDITIONAL\_FORMATTING:

```
<table class="xdRepeatingTable msoUcTable" title="ANY_STRING" style="TABLE-LAYOUT: fixed;
STYLE_WIDTH; BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none;
BORDER-COLLAPSE: collapse; WORD-WRAP: break-word; BORDER-BOTTOM-STYLE: none" border="1"
xd:CtrlId="CONTROL_ID" (xd:postBackModel="POST_BACK_MODEL_VALUE")?>
  <colgroup>
```



```

        TABLE_COLUMN+
    </colgroup>
    (<tbody (valign="VALIGN")? (style="STYLE_DIRECTION")? class="xdTableHeader">
        TABLE_ROW*
    </tbody>)?
    <tbody (style="STYLE_DIRECTION")? xd:xctname="RepeatingTable">
    CHECK_FOR_GETDOM_BEGIN1
        <xsl:for-each select="GROUP_XPATH">
            REPEATING_TABLE_ROWS_WITH_CONDITIONALVISIBILITY |
TABLE_ROW_WITH_CONDITIONAL_FORMATTING*
        </xsl:for-each>
    CHECK_FOR_GETDOM_END1
    </tbody>
    (<tbody (valign="VALIGN")? (style="STYLE_DIRECTION")? class="xdTableFooter">
        TABLE_ROW*
    </tbody>)?
</table>
(<div class="optionalPlaceholder" xd:xmlToEdit="XML_TO_EDIT_NAME" tabIndex="TAB_INDEX"
xd:action="xCollection::insert" style="STYLE_WIDTH">ANY_STRING</div>)?

```

### REPEATING\_TABLE\_ROWS\_WITH\_CONDITIONALVISIBILITY:

```

<xsl:if test="not(BOOLEAN_XPATH_EXPRESSION)">
TABLE_ROW_WITH_CONDITIONAL_FORMATTING*
</xsl:if>

```

```

TABLE_ROW_WITH_CONDITIONAL_FORMATTING ::=
<tr>
    (<xsl:attribute name="style">
        MIN_HEIGHT?
        <xsl:choose>
            (<xsl:when
test="BOOLEAN_XPATH_EXPRESSIONx">CONTAINER_CONDITIONAL_FORMATTING</xsl:when>)+
        </xsl:choose>
        (<xsl:if test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
    </xsl:attribute>)?
    (TABLE_CELL)+
</tr>

```

**CONTAINER\_CONDITIONAL\_FORMATTING:** Semicolon-delimited list of (STYLE\_DISPLAY\_NONE?, STYLE\_BACKGROUND\_COLOR?)

Control-specific attributes used by the repeating table control are as follows:

- xd:action (section [2.4.2.1](#))
- xd:CtrlId (section [2.4.2.10](#))
- xd:postbackModel (section [2.4.2.29](#))
- xd:xctname (section [2.4.2.35](#))
- xd:xmlToEdit (section [2.4.2.36](#))

### 2.4.1.17 Rich Text Box Control

The rich text box control allows the user to enter **rich text**, such as formatted text, tables, hyperlinks, and images, in the form (1). A **RICH\_TEXT\_BOX** MUST have one of the symbols in the following table.

Symbol	Description
RICH_TEXT_BOX_PLAIN	The rich text box
RICH_TEXT_BOX_WITH_PLACEHOLDER_TEXT	The rich text box shows place holder text as long as the field it is bound to contains no data. (Important: Place holder text is not supported on the form server).

#### RICH\_TEXT\_BOX\_PLAIN:

```
<span class="xdRichTextBox(RTL)?" hideFocus="1" title="ANY_STRING" xd:binding="LEAF_XPATH"
(tabIndex="TAB_INDEX")? xd:xctname="RichText" xd:CtrlId="CONTROL_ID"
(style="RICH_TEXT_BOX_STYLE")? (accessKey="SINGLE_CHARACTER")?
(xd:postbackModel="POSTBACKMODEL")? (INPUT_SCOPE)? (contentEditable="true" |
xd:disableEditing="yes")>
  CHECK_FOR_GETDOM_BEGIN1
  RICH_TEXT_BOX_CONDITIONAL_FORMATTING?
  <xsl:copy-of select="LEAF_XPATH/node()"/>
  CHECK_FOR_GETDOM_END1
</span>
```

```
RICH_TEXT_BOX_WITH_PLACEHOLDER_TEXT ::=
<span class="xdRichTextBox(RTL)? xdBehavior_GhostedText" hideFocus="1" title="ANY_STRING"
xd:binding="LEAF_XPATH" (tabIndex="TAB_INDEX")? xd:xctname="RichText" xd:CtrlId="CONTROL_ID"
(style="RICH_TEXT_BOX_STYLE")? (accessKey="SINGLE_CHARACTER")?
(xd:postbackModel="POSTBACKMODEL")? (INPUT_SCOPE)? (contentEditable="true" |
xd:disableEditing="yes")>
  CHECK_FOR_GETDOM_BEGIN1
  RICH_TEXT_BOX_CONDITIONAL_FORMATTING?
  (<xsl:choose>
    <xsl:when test="not(string(LEAF_XPATH) or LEAF_XPATH/node())">
      <xsl:attribute name="xd:ghosted">true</xsl:attribute>ANY_STRING</xsl:when>
    <xsl:otherwise>
      <xsl:copy-of select="LEAF_XPATH/node()"/>
    </xsl:otherwise>
  </xsl:choose>) | (<xsl:copy-of select="LEAF_XPATH/node()"/>)
  CHECK_FOR_GETDOM_END1
</span>
```

**RICH\_TEXT\_BOX\_SCROLLING\_STYLE:** OVERFLOW-X: visible | OVERFLOW-Y: scroll; OVERFLOW-X: scroll | OVERFLOW-Y: auto; OVERFLOW-X: auto | OVERFLOW-Y: auto | OVERFLOW-Y: hidden.

**RICH\_TEXT\_BOX\_STYLE:** Semicolon-delimited list of (**RICH\_TEXT\_BOX\_SCROLLING\_STYLE?**, **STYLE\_WRAP?**, **STYLE\_SIZE?**, **STYLE\_MARGIN?**, **STYLE\_PADDING?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_BORDER?**, **STYLE\_FONT?**, **STYLE\_COLOR?**, **STYLE\_TEXT\_ALIGN?**, **STYLE\_DIRECTION?**)

**RICH\_TEXT\_BOX\_CONDITIONAL\_FORMATTING\_STYLE:** Semicolon-delimited list of (**STYLE\_BACKGROUND\_COLOR?**, **STYLE\_COLOR?**)

#### RICH\_TEXT\_BOX\_CONDITIONAL\_FORMATTING:

```

(<xsl:attribute name="style">RICH_TEXT_BOX_STYLE<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">RICH_TEXT_BOX_CONDITIONAL_FORMATTING_STYLE
  </xsl:when>)+
</xsl:choose>
</xsl:attribute>)?
(<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="contentEditable">>false</xsl:attribute>
  </xsl:when>)+
</xsl:choose>)?

```

Control-specific attributes used by the rich text box control are as follows:

- `xd:allownonmatching` (section [2.4.2.2](#))
- `xd:binding` (section [2.4.2.6](#))
- `xd:CtrlId` (section [2.4.2.10](#))
- `xd:disableEditing` (section [2.4.2.12](#))
- `xd:ghosted` (section [2.4.2.15](#))
- `xd:inputScopeId` (section [2.4.2.21](#))
- `xd:postbackModel` (section [2.4.2.29](#))
- `xd:xctname` (section [2.4.2.35](#))

### 2.4.1.18 Section Control and Optional Section Control

A section control acts as a container for other controls. An optional section control has the same functionality as a regular section, but it can also be deleted or inserted by the user. A **SECTION** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_SECTION_CALL	The first part of the section that indicates where the section control is rendered.
OPTIONAL_SECTION_CALL	The first part of the optional section that indicates where the optional section control is rendered. This part can be configured to not allow the user to delete or insert the optional section.

Symbol	Description
SIMPLE_SECTION_BODY	The second part of the section or optional section that defines the properties of the section and its content.
SIMPLE_SECTION_BODY_WITH_DIGITAL_SIGNATURE	The second part of the section that defines the properties of the section and its content. It also contains a digital signature component that enables the user to sign it.
SIMPLE_SECTION_BODY_WITH_CONDITIONAL_HIDING	The second part of the section or optional section that defines the properties of the section and its content. This part is used when the section is conditionally hidden.
SIMPLE_SECTION_BODY_WITH_CONDITIONAL_HIDING_AND_DIGITAL_SIGNATURE	The second part of the section or optional section that defines the properties of the section and its content. This part is used when the section is conditionally hidden. It also contains a digital signature component that enables the user to sign it.

A **SECTION** MUST consist of a **SIMPLE\_SECTION\_CALL** at the point in the XSL where the control appears, which is the body of the main template or another XSL template, and a **SECTION\_BODY** that defines the section and appears as a separate XSL template. **TEMPLATE\_MODE\_ID** values in **SIMPLE\_SECTION\_CALL** and **SECTION\_BODY** MUST match.

An **OPTIONAL\_SECTION** MUST consist of an **OPTIONAL\_SECTION\_CALL** at the point in the XSL where the control appears, which is the body of the main template or another XSL template, and a **SECTION\_BODY** that defines the section and appears as a separate XSL template. **TEMPLATE\_MODE\_ID** values in **OPTIONAL\_SECTION\_CALL** and **SECTION\_BODY** MUST match.

## **SIMPLE\_SECTION\_CALL:**

```
CHECK_FOR_GETDOM_BEGIN1
<xsl:apply-templates select="(GROUP_XPATH/)?RELATIVE_GROUP_XPATH" mode="TEMPLATE_MODE_ID1"/>
CHECK_FOR_GETDOM_END1

OPTIONAL_SECTION_CALL ::= SIMPLE_SECTION_CALL |
(CHECK_FOR_GETDOM_BEGIN1
<xsl:choose>
  <xsl:when test="OPTIONAL_SECTION_XPATH1">
    <xsl:apply-templates select="OPTIONAL_SECTION_XPATH1" mode="TEMPLATE_MODE_ID1"/>
  </xsl:when>
  <xsl:otherwise>
    <div class="optionalPlaceholder" xd:xmlToEdit="XML_TO_EDIT_NAME" tabIndex="TABINDEX"
align="ALIGN" style="STYLE_WIDTH">ANY_STRING</div>
  </xsl:otherwise>
</xsl:choose>
CHECK_FOR_GETDOM_END1)
```

**OPTIONAL\_SECTION\_XPATH:** (GROUP\_XPATH/)?RELATIVE\_GROUP\_XPATH

**SECTION\_STYLE:** Semicolon-delimited list of (STYLE\_SIZE?, STYLE\_DIRECTION?, STYLE\_BACKGROUND\_COLOR?, STYLE\_BORDER?, STYLE\_MARGIN?, STYLE\_PADDING?)

**DIGITAL\_SIGNATURE\_STYLE:** Semicolon-delimited list of (STYLE\_MARGIN?, BEHAVIOR: url (#default#SignaturesInDocUI), STYLE\_WIDTH?)

**SECTION\_BODY:** SIMPLE\_SECTION\_BODY or  
SIMPLE\_SECTION\_BODY\_WITH\_DIGITAL\_SIGNATURE or  
SIMPLE\_SECTION\_BODY\_WITH\_CONDITIONAL\_HIDING or  
SIMPLE\_SECTION\_BODY\_WITH\_CONDITIONAL\_HIDING\_AND\_DIGITAL\_SIGNATURE.

## **SIMPLE\_SECTION\_BODY:**

```
<xsl:template match="RELATIVE_GROUP_XPATH" mode="TEMPLATE_MODE_ID1">
  <div class="xdSection xdRepeating" title="ANY_STRING" (style="SECTION_STYLE")?
align="ALIGN" xd:xctname="Section" xd:CtrlId="CONTROL_ID" (tabIndex="-1")?
(xd:postbackModel="POSTBACKMODEL")?>
  XML_HTML_4_1_WITH_CONTROLS
  (<xsl:attribute name="style">SECTION_STYLE(<xsl:choose>
    (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
    <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
    <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_BACKGROUND_COLOR</xsl:when>)+
  </xsl:choose>)?
  (<xsl:if
test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
  </xsl:attribute>)?
  </div>
</xsl:template>
```

## **SIMPLE\_SECTION\_BODY\_WITH\_DIGITAL\_SIGNATURE:**

```
<xsl:template match="RELATIVE_GROUP_XPATH" mode="TEMPLATE_MODE_ID1">
  <div class="xdSection xdRepeating" title="ANY_STRING" (style="SECTION_STYLE")?
align="ALIGN" xd:xctname="Section" xd:CtrlId="CONTROL_ID" xd:SignedSectionName="ANY_STRING1"
(tabIndex="-1")? (xd:postbackModel="POSTBACKMODEL")?>
  XML_HTML_4_1_WITH_CONTROLS
```

```

        (<xsl:attribute name="style">SECTION_STYLE(<xsl:choose>
            (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
            <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
            <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_BACKGROUND_COLOR</xsl:when>)+
            </xsl:choose>)?
        (<xsl:if
test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
        </xsl:attribute>)?
    </div>
    (SECTION_DIGITAL_SIGNATURE_BLOCK |
SECTION_DIGITAL_SIGNATURE_BLOCK_NOT_SHOWING_SIGNATURES)
</xsl:template>

```

### **SIMPLE\_SECTION\_BODY\_WITH\_CONDITIONAL\_HIDING:**

```

<xsl:template match="RELATIVE_GROUP_XPATH" mode="TEMPLATE_MODE_ID1">
    <xsl:if test="BOOLEAN_XPATH_EXPRESSION">
        <div class="xdSection xdRepeating" title="ANY_STRING" (style="SECTION_STYLE")?
align="ALIGN" xd:xctname="Section" xd:CtrlId="CONTROL_ID" (tabIndex="-1")?
(xd:postbackModel="POSTBACKMODEL")?>
            XML_HTML_4_1_WITH_CONTROLS
            (<xsl:attribute name="style">SECTION_STYLE(<xsl:choose>
                (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
                <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
                <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">STYLE_BACKGROUND_COLOR</xsl:when>)+
                </xsl:choose>)?
                (<xsl:if
test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
                </xsl:attribute>)?
            </div>
        </xsl:if>
    </xsl:template>

```

### **SIMPLE\_SECTION\_BODY\_WITH\_CONDITIONAL\_HIDING\_AND\_DIGITAL\_SIGNATURE:**

```

<xsl:template match="RELATIVE_GROUP_XPATH" mode="TEMPLATE_MODE_ID1">
    <xsl:if test="BOOLEAN_XPATH_EXPRESSION">
        <div class="xdSection xdRepeating" title="ANY_STRING" (style="SECTION_STYLE")?
align="ALIGN" xd:xctname="Section" xd:CtrlId="CONTROL_ID" xd:SignedSectionName="ANY_STRING1"
(tabIndex="-1")? (xd:postbackModel="POSTBACKMODEL")?>
            XML_HTML_4_1_WITH_CONTROLS
            (<xsl:attribute name="style">SECTION_STYLE(<xsl:choose>
                (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
                <xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
                <xsl:when
test="BOOLEAN_XPATH_EXPRESSION">STYLE_BACKGROUND_COLOR</xsl:when>)+
                </xsl:choose>)?
                (<xsl:if
test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>)*
                </xsl:attribute>)?
            </div>
            (SECTION_DIGITAL_SIGNATURE_BLOCK |
SECTION_DIGITAL_SIGNATURE_BLOCK_NOT_SHOWING_SIGNATURES)
        </xsl:if>
    </xsl:template>

```

## SECTION\_DIGITAL\_SIGNATURE\_BLOCK\_VALID\_SIGNATURE\_BUTTON:

```
<button title="" style="width: 100%; height: 100%; text-align: left; border: 0px solid;
padding: 2px; background-color: window; cursor: hand;">
  <table style="color: windowtext;" class="defaultInDocUI">
    <tbody>
      <tr>
        <xsl:choose>
          <xsl:when test="function-available('xdImage:getImageUrl') and
sig:Object/sig:SignatureProperties/sig:SignatureProperty/xdSignatureProperties:NonRepudiation
/xdSignatureProperties:ValidSignedImage">
            <td style="display: none;"></td>
            <td> </td>
          </xsl:when>
          <xsl:otherwise>
            <td></td>
            <td style="color: gray;">
              <div><b><xsl:value-of select="xdXDocument:GetNamedNodeProperty(.,
'SignedBy', '???')"/></b><span style="margin: 0pt 20pt">ANY_STRING</span></div>
              <div><xsl:value-of select="xdXDocument:GetNamedNodeProperty(.,
'SignedOn', '???')"/></div>
            </td>
          </xsl:otherwise>
        </xsl:choose>
      </tr>
    </tbody>
  </table>
</button>
```

## SECTION\_DIGITAL\_SIGNATURE\_BLOCK\_INVALID\_SIGNATURE\_BUTTON:

```
<button title="" style="width: 100%; height: 100%; text-align: left; border: 0px solid;
padding: 2px; background-color: window; cursor: hand;">
  <table style="font: message-box; color: windowtext;">
    <tbody>
      <tr>
        <xsl:choose>
          <xsl:when test="function-available('xdImage:getImageUrl') and
sig:Object/sig:SignatureProperties/sig:SignatureProperty/xdSignatureProperties:NonRepudiation
/xdSignatureProperties:InvalidSignedImage">
            <td style="display: none;"></td>
            <td> </td>
          </xsl:when>
          <xsl:otherwise>
            <td></td>
            <td style="color: red;"><b>ANY_STRING</b><span style="margin: 0pt
20pt">ANY_STRING</span></td>
          </xsl:otherwise>
        </xsl:choose>
      </tr>
    </tbody>
```

```
</table>
</button>
```

### SECTION\_DIGITAL\_SIGNATURE\_BLOCK:

```
<div xd:disableEditing="yes" xd:SignatureBlock="ANY_STRING1"
xd:SignedSectionDisplaySignatures="true" style="DIGITAL_SIGNATURE_STYLE">
  <xsl:if test="function-available('xdXDocument:GetNamedNodeProperty')">
    <xsl:if test="xdXDocument:GetNamedNodeProperty(DIGITAL_SIGNATURE_XPATH,
'CanAddSignature', 'false') = 'true'">
      <button title="" style="width: 100%; height: 100%; text-align: left; border: 0px
solid; padding: 2px; background-color: window; cursor: hand;">
        <table style="color: windowtext;" class="defaultInDocUI">
          <tbody>
            <tr>
              <td></td>
              <td>ANY_STRING</td>
            </tr>
          </tbody>
        </table>
      </button>
    </xsl:if>
    <xsl:for-each select="DIGITAL_SIGNATURE_XPATH">
      <xsl:for-each select="sig:Signature">
        <xsl:choose>
          <xsl:when test="xdXDocument:GetNamedNodeProperty(., 'IsValidSignature',
'false') = 'true'">
```

### SECTION\_DIGITAL\_SIGNATURE\_BLOCK\_VALID\_SIGNATURE\_BUTTON:

```
</xsl:when>
<xsl:otherwise>
```

### SECTION\_DIGITAL\_SIGNATURE\_BLOCK\_INVALID\_SIGNATURE\_BUTTON:

```
</xsl:otherwise>
</xsl:choose>
</xsl:for-each>
</xsl:for-each>
</xsl:if>
</div>
```

### SECTION\_DIGITAL\_SIGNATURE\_BLOCK\_NOT\_SHOWING\_SIGNATURES:

```
<div xd:disableEditing="yes" xd:SignatureBlock="ANY_STRING1" style="DIGITAL_SIGNATURE_STYLE">
  <xsl:if test="function-available('xdXDocument:GetNamedNodeProperty')">
    <xsl:if test="xdXDocument:GetNamedNodeProperty(DIGITAL_SIGNATURE_XPATH,
'CanAddSignature', 'false') = 'true'">
      <button title="" style="width: 100%; height: 100%; text-align: left; border: 0px
solid; padding: 2px; background-color: window; cursor: hand;">
        <table style="color: windowtext;" class="defaultInDocUI">
          <tbody>
            <tr>
```



```

        <td></td>
        <td>ANY_STRING</td>
    </tr>
</tbody>
</table>
</button>
</xsl:if>
</xsl:if>
</div>

```

Control-specific attributes used by the section control are as follows:

- xd:disableEditing (section [2.4.2.12](#))
- xd:postbackModel (section [2.4.2.29](#))
- xd:SignatureBlock (section [2.4.2.31](#))
- xd:SignedSectionDisplaySignatures (section [2.4.2.32](#))
- xd:SignedSectionName (section [2.4.2.33](#))
- xd:xctname (section [2.4.2.35](#))
- xd:xmlToEdit (section [2.4.2.36](#))

XSL function extensions used by the section control are as follows:

- xdImage:getImageUrl (section [2.4.3.5](#))
- xdXDocument:GetNamedNodeProperty (section [2.4.3.9.3](#))

### 2.4.1.19 Table Control

A table control is used to ensure that elements of the form (1) are positioned according to the requirements of the form designer. A **TABLE** MUST have one of the symbols in the following table.

Symbol	Description
TABLE	Table maps to a standard html layout table as specified by <a href="#">[HTML]</a> section 11.2.1. Each cell can contain arbitrary html or more controls.
TABLE_COLUMN	Maps to the html col element as specified by <a href="#">[HTML]</a> section 11.2.4.
TABLE_ROW	Maps to the html tr element as specified by <a href="#">[HTML]</a> section 11.2.5.
TABLE_CELL	Maps to the html td element as specified by <a href="#">[HTML]</a> section 11.2.6.

#### TABLE:

```

<table class="(xdFormLayout)? xdLayout" style="STYLE_BORDER_STYLE?; STYLE_BORDER_COLLAPSE?
TABLE-LAYOUT: fixed; STYLE_WIDTH?; WORD-WRAP: break-word" (borderColor="buttontext"? WIDTH?
border="1">
    <colgroup>
        TABLE_COLUMN+
    </colgroup>

```

```

    <tbody (valign="VALIGN")?>
      TABLE_ROW*
    </tbody>
  </table>

```

### TABLE\_COLUMN:

```

<col style="STYLE_WIDTH" />

TABLE_ROW ::=
<tr (class="primaryVeryDark" | class="primarylight")? (style="MIN_HEIGHT")?>
  (<xsl:attribute name="style">
    <xsl:if test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISABLE_CHILD_XML_TO_EDIT</xsl:if>
  </xsl:attribute>)?
  (TABLE_CELL)+
</tr>

TABLE_CELL ::=
<td (rowSpan="ROWSPAN")? (colSpan="COLSPAN")? (xd:layoutText="ANY_STRING")?
  (valign="VALIGN")? (style="TABLE_CELL_STYLE")?>
  XML_HTML_4_1_WITH_CONTROLS
</td>

```

**TABLE\_CELL\_STYLE:** Semicolon-delimited list of (**STYLE\_BORDER?**, **STYLE\_MARGIN?**, **STYLE\_PADDING?**, **STYLE\_VERTICAL\_ALIGN?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_TEXT\_ALIGN?**)

**Xd:layoutText**, as specified in section [2.4.2.22](#), is the control-specific attribute used by the table control.

### 2.4.1.20 Text Box Control

The text box control allows the user to enter simple text in the form (1). A **TEXT\_BOX\_CONTROL** MUST have one of the symbols in the following table.

Symbol	Description
SIMPLE_TEXT_BOX	The text box with no conditional formatting, multiple lines, placeholder text, or data formatting.
TEXT_BOX_WITH_CONDITIONAL_FORMATTING	The text box with conditional formatting.
SIMPLE_TEXT_BOX_MULTI_LINE	The text box that

Symbol	Description
	allows multiple lines input.
TEXT_BOX_MULTI_LINE_WITH_CONDITIONAL_FORMATTING	The text box with conditional formatting and multiple lines input.
SIMPLE_TEXT_BOX_WITH_DATA_FORMATTING	The text box with data formatting.
TEXT_BOX_WITH_CONDITIONAL_FORMATTING_AND_DATA_FORMATTING	The text box with data formatting and conditional formatting.
SIMPLE_TEXT_BOX_WITH_PLACEHOLDER_TEXT	The text box with placeholder text. The placeholder text is ignored by the form server.
SIMPLE_TEXT_BOX_WITH_PLACEHOLER_TEXT_AND_DATA_FORMATTING	The text box with placeholder text and data formatting. The placeholder text is ignored by the form server.
TEXT_BOX_MULTI_LINE_PLACEHOLDER_TEXT	The text box that allows multiple lines input and has placeholder text. The placeholder text is

Symbol	Description
	ignored by the form server.
TEXT_BOX_MULTI_LINE_CONDITIONAL_FORMATTING_AND_PLACEHOLDER_TEXT	The text box that allows multiple lines input and has placeholder text with conditional formatting. The placeholder text is ignored by the form server.
TEXT_BOX_WITH_CONDITIONAL_FORMATTING_AND_PLACEHOLDER_TEXT	The text box that has placeholder text with conditional formatting. The placeholder text is ignored by the form server.
TEXT_BOX_WITH_CONDITIONAL_FORMATTING_AND_PLACEHOLDER_TEXT_AND_DATA_FORMATTING	The text box that has placeholder text with conditional formatting and data formatting. The placeholder text is ignored by the form server.

**TEXT\_BOX\_EDITING:** contentEditable="true" or xd:disableEditing="yes" or contentEditable="true" xd:disableEditing="yes".

**TEXT\_BOX\_AUTOADVANCE:** xd:autoAdvance="yes".

**WHITESPACE\_NO\_WRAP:** WHITE-SPACE: nowrap.

**TEXT\_BOX\_OUTPUT\_ESC:** disable-output-escaping="yes".

**TEXT\_BOX\_STYLE:** Semicolon-delimited list of (**STYLE\_SIZE?**, **STYLE\_MARGIN?**, **STYLE\_PADDING?**, **STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_BORDER?**, **STYLE\_FONT?**, **STYLE\_COLOR?**, **WHITESPACE\_NO\_WRAP?**, **STYLE\_WIDTH?**, **STYLE\_WRAP?**, **STYLE\_TEXT\_ALIGN?**, (**OVERFLOW-Y:** auto; **OVERFLOW-X:** auto;)?, **STYLE\_VERTICAL\_ALIGN?**, **STYLE\_DIRECTION?**)

**TEXT\_BOX\_STYLE\_CONDITIONAL\_FORMATTING:** Semicolon-delimited list of (**STYLE\_TEXT\_DECORATION?**, **STYLE\_BACKGROUND\_COLOR?**, **STYLE\_FONT?**, **STYLE\_COLOR?**, **STYLE\_TEXT\_ALIGN?**)

**TEXT\_BOX\_BASE\_CLASS\_NAME:** `xdTextBox` or `xdTextBoxRTL`.

#### **SIMPLE\_TEXT\_BOX:**

```
<span class="TEXT_BOX_BASE_CLASS_NAME" hideFocus="1" title="ANY_STRING"
xd:binding="LEAF_XPATH1"
  tabIndex="TAB_INDEX"  xd:xctname="PlainText"  xd:CtrlId="CONTROL_ID"
  (TEXT_BOX_EDITING)? style="TEXT_BOX_STYLE" (TEXT_BOX_AUTOADVANCE)?
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
CHECK_FOR_GETDOM_BEGIN1
<xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC? />
CHECK_FOR_GETDOM_END1
</span>
```

#### **TEXT\_BOX\_WITH\_CONDITIONAL\_FORMATTING:**

```
<span class="TEXT_BOX_BASE_CLASS_NAME" hideFocus="1" title="ANY_STRING"
xd:binding="LEAF_XPATH1" (style="TEXT_BOX_STYLE")?
  tabIndex="TAB_INDEX"  xd:xctname="PlainText"  xd:CtrlId="CONTROL_ID"
  (TEXT_BOX_EDITING)? (TEXT_BOX_AUTOADVANCE)?
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
CHECK_FOR_GETDOM_BEGIN1
TEXT_BOX_CONDITIONAL_FORMATTING
<xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC? />
CHECK_FOR_GETDOM_END1
</span>
```

**TEXT\_BOX\_CONDITIONAL\_FORMATTING:** **TEXT\_BOX\_CONDITIONAL\_FORMATTING\_ATT**  
(**TEXT\_BOX\_CONDITIONAL\_FORMATTING\_CHOOSE**)? or  
**TEXT\_BOX\_CONDITIONAL\_FORMATTING\_CHOOSE**

#### **TEXT\_BOX\_CONDITIONAL\_FORMATTING\_ATT:**

```
<xsl:attribute name="style">TEXT_BOX_STYLE<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION">STYLE_DISPLAY_NONE</xsl:when>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">TEXT_BOX_STYLE_CONDITIONAL_FORMATTING
  </xsl:when>)+
</xsl:choose>
</xsl:attribute>
```

#### **TEXT\_BOX\_CONDITIONAL\_FORMATTING\_CHOOSE:**

```

<xsl:choose>
  (<xsl:when test="BOOLEAN_XPATH_EXPRESSION"/>|
  <xsl:when test="BOOLEAN_XPATH_EXPRESSION">
    <xsl:attribute name="contentEditable">false</xsl:attribute>
  </xsl:when>)+
</xsl:choose>

```

### **SIMPLE\_TEXT\_BOX\_MULTI\_LINE:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME" hideFocus="1" title="ANY_STRING"
  xd:binding="LEAF_XPATH1" tabIndex="TAB_INDEX" (TEXT_BOX_AUTOADVANCE)?
  xd:datafmt="DATA_FMT_CAT_STRING" xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
  (TEXT_BOX_EDITING)? TEXT_BOX_STYLE
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:choose>
    <xsl:when test="function-available('xdFormatting:formatString')">
      <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH1,
  DATA_FMT_CAT_STRING)" TEXT_BOX_OUTPUT_ESC />
    </xsl:when>
    <xsl:otherwise>
      <xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC />
    </xsl:otherwise>
  </xsl:choose>
  CHECK_FOR_GETDOM_END1
</span>

```

### **TEXT\_BOX\_MULTI\_LINE\_WITH\_CONDITIONAL\_FORMATTING:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME" hideFocus="1" title="ANY_STRING"
  xd:binding="LEAF_XPATH1" tabIndex="TAB_INDEX" (style="TEXT_BOX_STYLE")?
  xd:datafmt="DATA_FMT_CAT_STRING" xd:xctname="PlainText"
  xd:CtrlId="CONTROL_ID" (TEXT_BOX_EDITING)? (TEXT_BOX_AUTOADVANCE)?
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
  CHECK_FOR_GETDOM_BEGIN1
  TEXT_BOX_CONDITIONAL_FORMATTING
  <xsl:choose>
    <xsl:when test="function-available('xdFormatting:formatString')">
      <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH1,
  DATA_FMT_CAT_STRING)" TEXT_BOX_OUTPUT_ESC />
    </xsl:when>
    <xsl:otherwise>
      <xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC />
    </xsl:otherwise>
  </xsl:choose>
  CHECK_FOR_GETDOM_END1
</span>

```

### **DATA\_FMT\_TEXT\_BOX\_VAL: xd:datafmt="DATA\_FMT\_CTRL\_TEXTBOX"**

### **DATA\_FMT\_XSL\_BASE:**

```

<xsl:when test="function-available('xdFormatting:formatString')">
  <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH1, DATA_FMT_CTRL_TEXTBOX)"/>

```

```
</xsl:when>
```

### **DATA\_FMT\_XSL\_NUM:**

```
<xsl:attribute name="xd:num">  
  <xsl:value-of select="LEAF_XPATH1"/>  
</xsl:attribute>
```

### **DATA\_FMT\_XSL:**

```
DATA_FMT_XSL_NUM  
<xsl:choose>  
  DATA_FMT_XSL_BASE  
  <xsl:otherwise>  
    <xsl:value-of select="LEAF_XPATH1"/>  
  </xsl:otherwise>  
</xsl:choose>
```

### **SIMPLE\_TEXT\_BOX\_WITH\_DATA\_FORMATTING:**

```
<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_Formatting" hideFocus="1" title="ANY_STRING"  
xd:binding="LEAF_XPATH1" (TEXT_BOX_AUTOADVANCE)?  
tabIndex="TAB_INDEX" DATA_FMT_TEXT_BOX_VAL xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"  
(TEXT_BOX_EDITING)? style="TEXT_BOX_STYLE" xd:boundProp="xd:num"  
(xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>  
CHECK_FOR_GETDOM_BEGIN1  
DATA_FMT_XSL  
CHECK_FOR_GETDOM_END1  
</span>
```

### **TEXT\_BOX\_WITH\_CONDITIONAL\_FORMATTING\_AND\_DATA\_FORMATTING:**

```
<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_Formatting" hideFocus="1"  
title="ANY_STRING" xd:binding="LEAF_XPATH1" xd:boundProp="xd:num"  
tabIndex="TAB_INDEX" DATA_FMT_TEXT_BOX_VAL xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"  
(TEXT_BOX_EDITING)? (TEXT_BOX_AUTOADVANCE)? (style="TEXT_BOX_STYLE")?  
(xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>  
CHECK_FOR_GETDOM_BEGIN1  
TEXT_BOX_CONDITIONAL_FORMATTING  
DATA_FMT_XSL  
CHECK_FOR_GETDOM_END1  
</span>
```

### **PLACEHOLDER\_TEXT\_XSL\_BASE:**

```
<xsl:when test="not(string(LEAF_XPATH1))">  
  <xsl:attribute name="xd:ghosted">true</xsl:attribute>ANY_STRING  
</xsl:when>
```

### **PLACEHOLDER\_TEXT\_XSL:**

```

<xsl:choose>
  PLACEHOLDER_TEXT_XSL_BASE
  <xsl:otherwise>
    <xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC? />
  </xsl:otherwise>
</xsl:choose>

```

### **SIMPLE\_TEXT\_BOX\_WITH\_PLACEHOLDER\_TEXT:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_GhostedText" hideFocus="1"
title="ANY_STRING" xd:binding="LEAF_XPATH1" (TEXT_BOX_AUTOADVANCE)?
  tabIndex="TAB_INDEX" xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
  (TEXT_BOX_EDITING)? style="TEXT_BOX_STYLE"
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
  CHECK_FOR_GETDOM_BEGIN1
  PLACEHOLDER_TEXT_XSL
  CHECK_FOR_GETDOM_END1
</span>

```

### **SIMPLE\_TEXT\_BOX\_WITH\_PLACEHOLDER\_TEXT\_AND\_DATA\_FORMATTING:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_GTFormatting" hideFocus="1"
title="ANY_STRING" xd:binding="LEAF_XPATH1" xd:boundProp="xd:num"
tabIndex="TAB_INDEX" DATA_FMT_TEXT_BOX_VAL xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
  (TEXT_BOX_EDITING)? style="TEXT_BOX_STYLE" (TEXT_BOX_AUTOADVANCE)?
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
  CHECK_FOR_GETDOM_BEGIN1
  DATA_FMT_XSL_NUM
  <xsl:choose>
    PLACEHOLDER_TEXT_XSL_BASE
    DATA_FMT_XSL_BASE
    <xsl:otherwise>
      <xsl:value-of select="LEAF_XPATH1"/>
    </xsl:otherwise>
  </xsl:choose>
  CHECK_FOR_GETDOM_END1
</span>

```

### **TEXT\_BOX\_MULTI\_LINE\_PLACEHOLDER\_TEXT:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_GhostedText" hideFocus="1"
title="ANY_STRING"
  xd:binding="LEAF_XPATH1" tabIndex="TAB_INDEX"
  xd:datatype="DATA_FMT_CAT_STRING" xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
  (TEXT_BOX_EDITING)? TEXT_BOX_STYLE (TEXT_BOX_AUTOADVANCE)?
  (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
  CHECK_FOR_GETDOM_BEGIN1
  <xsl:choose>
    PLACEHOLDER_TEXT_XSL_BASE
    <xsl:when test="function-available('xdFormatting:formatString')">
      <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH1,
DATA_FMT_CAT_STRING)" TEXT_BOX_OUTPUT_ESC />
    </xsl:when>
    <xsl:otherwise>
      <xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC/>
    </xsl:otherwise>
  </xsl:choose>

```



```

        </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>

```

### **TEXT\_BOX\_MULTI\_LINE\_CONDITIONAL\_FORMATTING\_AND\_PLACEHOLDER\_TEXT:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_GhostedText" hideFocus="1"
title="ANY_STRING"
    xd:binding="LEAF_XPATH1" tabIndex="TAB_INDEX"
        xd:datafmt="DATA_FMT_CAT_STRING" xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
        (TEXT_BOX_EDITING)? TEXT_BOX_STYLE (TEXT_BOX_AUTOADVANCE)?
        (style="TEXT_BOX_STYLE")?
        (xd:postbackModel="POSTBACKMODEL")? (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    TEXT_BOX_CONDITIONAL_FORMATTING
    <xsl:choose>
        PLACEHOLDER_TEXT_XSL_BASE
        <xsl:when test="function-available('xdFormatting:formatString')">
            <xsl:value-of select="xdFormatting:formatString(LEAF_XPATH1,
DATA_FMT_CAT_STRING)" TEXT_BOX_OUTPUT_ESC />
        </xsl:when>
        <xsl:otherwise>
            <xsl:value-of select="LEAF_XPATH1" TEXT_BOX_OUTPUT_ESC />
        </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>

```

### **TEXT\_BOX\_WITH\_CONDITIONAL\_FORMATTING\_AND\_PLACEHOLDER\_TEXT:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_GhostedText" hideFocus="1"
title="ANY_STRING" xd:binding="LEAF_XPATH1" (TEXT_BOX_AUTOADVANCE)? (style="TEXT_BOX_STYLE")?
    tabIndex="TAB_INDEX" xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
        (TEXT_BOX_EDITING)? (xd:postbackModel="POSTBACKMODEL")?
        (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    TEXT_BOX_CONDITIONAL_FORMATTING
    PLACEHOLDER_TEXT_XSL
    CHECK_FOR_GETDOM_END1
</span>

```

### **TEXT\_BOX\_WITH\_CONDITIONAL\_FORMATTING\_AND\_PLACEHOLDER\_TEXT\_AND\_DATA\_FORMATTING:**

```

<span class="TEXT_BOX_BASE_CLASS_NAME xdBehavior_GTFormatting" hideFocus="1"
title="ANY_STRING" xd:binding="LEAF_XPATH1" DATA_FMT_TEXT_BOX_VAL xd:boundProp="xd:num"
tabIndex="TAB_INDEX" xd:xctname="PlainText" xd:CtrlId="CONTROL_ID"
    (style="TEXT_BOX_STYLE")?
    (TEXT_BOX_EDITING)? (xd:postbackModel="POSTBACKMODEL")? (TEXT_BOX_AUTOADVANCE)?
    (accessKey="SINGLE_CHARACTER")? (INPUT_SCOPE)?>
    CHECK_FOR_GETDOM_BEGIN1
    TEXT_BOX_CONDITIONAL_FORMATTING
    DATA_FMT_XSL_NUM
    <xsl:choose>

```

```

        PLACEHOLDER_TEXT_XSL_BASE
        DATA_FMT_XSL_BASE
        <xsl:otherwise>
            <xsl:value-of select="LEAF_XPATH1"/>
        </xsl:otherwise>
    </xsl:choose>
    CHECK_FOR_GETDOM_END1
</span>

```

Control-specific attributes used by the textbox control are as follows:

- `xd:allownonmatching` (section [2.4.2.2](#))
- `xd:autoAdvance` (section [2.4.2.3](#))
- `xd:binding` (section [2.4.2.6](#))
- `xd:boundProp` (section [2.4.2.9](#))
- `xd:CtrlId` (section [2.4.2.10](#))
- `xd:datfmt` (section [2.4.2.11](#))
- `xd:disableEditing` (section [2.4.2.12](#))
- `xd:ghosted` (section [2.4.2.15](#))
- `xd:inputScopeId` (section [2.4.2.21](#))
- `xd:num` (section [2.4.2.26](#))
- `xd:postbackModel` (section [2.4.2.29](#))
- `xd:xctname` (section [2.4.2.35](#))

#### 2.4.1.21 Ignored Controls

XSL files SHOULD contain valid controls but MAY contain controls that are not recognized by the form server, and are therefore ignored. The XSL fragment that maps to an ignored control is passed directly by the form server to the **user agent**. Ignored controls have no mechanism for persisting information to the form server, nor are they able to manipulate form data.

The following table is a list of ignored controls and how to identify them.

Controls	Identifying Characteristic
Choice Group	xctName attribute = "ChoiceGroup"

#### 2.4.1.22 Invalid Controls

XHTML elements MUST NOT have an **xd:xctName** attribute (section [2.4.2.35](#)) matching any of the **strings**, case insensitive, in the following list.

- `inkpicture`
- `scrollableregion`

- combobox
- multiselectlistbox
- layoutregion
- choiceterm
- choicegrouprepeating
- choicetermrepeating
- bulletedlist
- numberedlist
- plainlist

Every XHTML element that contains an **xctName** attribute (section [2.4.2.35](#)) MUST be specified in the controls section of this document.

An **Expression Box** (section [2.4.1.10](#)) MUST NOT contain the writing-mode style in its style block.

A **Repeating Section** (section [2.4.1.15](#)) MUST NOT be encased in a **SPAN** HTML element instead of a **DIV** or **TABLE** element.

A control MUST NOT have an **XmlToEdit** element (section [2.2.124](#)) with a recursive item XPath expression.

A **Repeating Section** (section [2.4.1.15](#)) MUST NOT contain the attribute **linkedToMaster**.

A form definition (.xsf) file that contains an **editWith** element (section [2.2.108](#)) with the **component** attribute set to the value "xImage" or "xReplace" MUST NOT be present.

### 2.4.1.23 Invalid Constructs

An XSLT file that contains an **xsl:template** element with the **mode** attribute set to the value "xd:preserve" MUST NOT be present.

## 2.4.2 Control-Specific Attributes

This section specifies the use of attributes in the XSLT file, as specified in section [2.4.1](#).

Examples of the use of the attributes specified in this section can be found in section [3.4.2](#).

These attributes MUST be associated with the "xd" namespace prefix, as specified in [\[XMLSCHEMA1\]](#), and the "http://schemas.microsoft.com/office/infopath/2003" namespace in the XSLT file.

Attribute	Description
<b>action</b> (section <a href="#">2.4.2.1</a> )	The action executed when a control is clicked.
<b>allownonmatching</b> (section <a href="#">2.4.2.2</a> )	Client-only.
<b>autoAdvance</b> (section <a href="#">2.4.2.3</a> )	A <b>Boolean</b> value that specifies whether to move focus to the next control in the form (1) when the text limit is reached on a text box control.

Attribute	Description
<b>auxDom</b> (section <a href="#">2.4.2.4</a> )	The <b>name</b> (section <a href="#">2.2.36</a> ) of the secondary data connection associated with the "refresh" <b>action</b> (section <a href="#">2.4.2.1</a> ) of a button control.
<b>backgroundPicture</b> (section <a href="#">2.4.2.5</a> )	Client-only.
<b>binding</b> (section <a href="#">2.4.2.6</a> )	The XML field from which the control reads and writes data.
<b>bindingProperty</b> (section <a href="#">2.4.2.7</a> )	The name of the custom control property used by the custom control to read and write data from and to the XML field associated with the control.
<b>bindingType</b> (section <a href="#">2.4.2.8</a> )	The format of the data that the custom control reads and writes.
<b>boundProp</b> (section <a href="#">2.4.2.9</a> )	The name of the XSLT attribute that contains the XML field from which the control reads and writes data.
<b>CtrlId</b> (section <a href="#">2.4.2.10</a> )	The unique identifier of a control in the form (1).
<b>datafmt</b> (section <a href="#">2.4.2.11</a> )	The data formatting the control uses to display the data in the associated XML field in the form (1).
<b>disableEditing</b> (section <a href="#">2.4.2.12</a> )	A Boolean value that specifies whether a control is read-only.
<b>enabledProperty</b> (section <a href="#">2.4.2.13</a> )	The name of the custom control property called to enable or disable the control.
<b>enabledValue</b> (section <a href="#">2.4.2.14</a> )	A Boolean value used to enable or disable the custom control.
<b>ghosted</b> (section <a href="#">2.4.2.15</a> )	Client-only.
<b>ictID</b> (section <a href="#">2.4.2.16</a> )	Client-only.
<b>ictVersion</b> (section <a href="#">2.4.2.17</a> )	Client-only.
<b>inline</b> (section <a href="#">2.4.2.18</a> )	Client-only.
<b>innerCtrl</b> (section <a href="#">2.4.2.19</a> )	A type of component inside the date picker control.
<b>inputscope</b> (section <a href="#">2.4.2.20</a> )	Client-only.
<b>inputScopeId</b> (section <a href="#">2.4.2.21</a> )	Client-only.
<b>layoutText</b> (section <a href="#">2.4.2.22</a> )	Client-only.
<b>linkedToMaster</b> (section <a href="#">2.4.2.23</a> )	Client-only.
<b>masterID</b> (section <a href="#">2.4.2.24</a> )	Client-only.
<b>masterName</b> (section <a href="#">2.4.2.25</a> )	Client-only.
<b>num</b> (section <a href="#">2.4.2.26</a> )	Indicates that the <b>xd:num</b> XSLT attribute contains the XML field from which the control reads and writes data.
<b>offValue</b> (section <a href="#">2.4.2.27</a> )	The XML field value for a check box control when that check box control is <b>unchecked</b> .

Attribute	Description
<b>onValue</b> (section <a href="#">2.4.2.28</a> )	The XML field value for a control when that control is selected.
<b>postbackModel</b> (section <a href="#">2.4.2.29</a> )	Specifies whether to trigger a postback when the XML field value displayed in the control is changed.
<b>ref</b> (section <a href="#">2.4.2.30</a> )	Client-only.
<b>SignatureBlock</b> (section <a href="#">2.4.2.31</a> )	The name for the signed data block (section <a href="#">2.2.126</a> ) for a control that allows XML digital signatures (1).
<b>SignedSectionDisplaySignatures</b> (section <a href="#">2.4.2.32</a> )	A Boolean value that specifies whether to display XML digital signatures (1) inline in the form (1) for a control that allows XML digital signatures (1).
<b>SignedSectionName</b> (section <a href="#">2.4.2.33</a> )	The name for the signed data block (section <a href="#">2.2.126</a> ) for a control that allows XML digital signatures (1).
<b>value</b> (section <a href="#">2.4.2.34</a> )	Indicates that the <b>xd:value</b> XSLT attribute contains the XML field from which the control reads and writes data.
<b>xctname</b> (section <a href="#">2.4.2.35</a> )	The type of the control.
<b>xmlToEdit</b> (section <a href="#">2.4.2.36</a> )	The additional editing properties of the control.

### 2.4.2.1 action

The following controls MAY contain the **action** attribute in their respective XSLT representations:

- Button (section [2.4.1.5](#))
- Repeating section (section [2.4.1.15](#))
- Repeating table (section [2.4.1.16](#))

All other controls MUST NOT contain this attribute in their XSLT representations.

For button controls, the value of the **action** attribute MUST be one of the following:

- **delete:** This action is associated with a client-only feature and MUST NOT be present.
- **new:** Creates a new record associated with an ADO (section [2.2.38](#)) data connection (1). This action MUST be set only if the main data connection is an ADO (section [2.2.38](#)) data connection (1).
- **query:** Calls the **query** of the main data source's data connection (1). This value MUST be used only within forms (1) in which the main data source is a data connection (1).
- **refresh:** Calls the query of the secondary data connection specified by the **auxDom** attribute on the same control. This action MUST be set only if the form (1) has at least one secondary data connection that can query.
- **submit:** Calls the action to submit the form (1).
- **updateForm:** Calls a postback to the form server to update the form (1).

For repeating section and repeating table controls, the value of this attribute MUST be "xCollection::insert". This value inserts the XML editing component associated with the repeating section and repeating table controls.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="action" type="xsd:string"/>
```

### 2.4.2.2 allownonmatching

The **allownonmatching** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="allownonmatching" type="xsd:string"/>
```

### 2.4.2.3 autoAdvance

Text box controls (section [2.4.1.20](#)) MAY contain the **autoAdvance** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **autoAdvance** attribute MUST be "yes". This value moves the focus to the next control when the text limit is reached.

If this attribute is unspecified, the behavior MUST be to not move focus to the next control when the text limit is reached.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="autoAdvance" type="xsd:string"/>
```

### 2.4.2.4 auxDom

Button controls (section [2.4.1.5](#)) MAY contain the **auxDom** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **auxDom** attribute MUST range from 1 through 255 characters and MUST be equal to the **name** of a secondary data connection (section [2.2.36](#)) that exists in the form (1).

If this attribute is unspecified, all of the secondary data sources that can query MUST be refreshed as part of the "refresh" **action** (section [2.4.2.1](#)).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="auxDom" type="xsd:string"/>
```

### 2.4.2.5 backgroundPicture

The **backgroundPicture** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="backgroundPicture" type="xsd:string"/>
```

### 2.4.2.6 binding

The following controls MUST contain the **binding** attribute in their XSLT representation:

- Check box (section [2.4.1.6](#))
- Contact selector (section [2.4.1.7](#))
- Date picker (section [2.3.1.4](#))
- Drop-down list box (section [2.4.1.9](#))
- File attachment (section [2.4.1.11](#))
- List box (section [2.4.1.13](#))
- Option button (section [2.4.1.14](#))
- Rich text box (section [2.4.1.17](#))
- Text box (section [2.4.1.20](#))

The expression box control (section [2.4.1.10](#)) MAY contain the **binding** attribute in its XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **binding** attribute for the following controls MUST be set to a **LEAF\_XPATH**, as specified in section [2.4.1.1](#):

- Check box
- Date picker
- Drop-down list
- Expression box
- File attachment
- List box
- Option button

- Rich text box
- Text box

For the **contact selector** control (section [2.4.1.7](#)), the value of the **binding** attribute MUST be set to a **GROUP\_XPATH**, as specified in section [2.4.1.1](#).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="binding" type="xsd:string"/>
```

#### 2.4.2.7 bindingProperty

Custom controls MAY contain the **bindingProperty** attribute in their XSLT representation.

Contact selector controls (section [2.4.1.7](#)) MUST contain this attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **bindingProperty** attribute MUST be the name of a property exposed by the custom control.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="bindingProperty" type="xsd:string"/>
```

#### 2.4.2.8 bindingType

Custom controls MAY contain the **bindingType** attribute in their XSLT representation.

Contact selector controls (section [2.4.1.7](#)) MUST contain this attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

Custom controls use the **bindingType** attribute to determine how to read and write data in and out of the control.

The value of this attribute MUST be one of the following:

- **text:** A text string data format.
- **xmlnode:** An XML node data format.
- **xmltext:** An XML string data format.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="bindingType" type="xsd:string"/>
```



### 2.4.2.9 boundProp

The following controls MUST contain the **boundProp** attribute in their XSLT representation:

- Check box (section [2.4.1.6](#))
- Custom controls
- Drop-down list (section [2.4.1.9](#))
- File attachment (section [2.4.1.11](#))
- List box (section [2.4.1.13](#))
- Option button (section [2.4.1.14](#))

The following controls MAY contain this attribute in their XSLT representation:

- Date picker (section [2.4.1.8](#))
- Text box (section [2.4.1.20](#))

All other controls MUST NOT contain the **boundProp** attribute in their XSLT representations.

The value of the **boundProp** attribute MUST be one of the values specified in the following table.

Value	Description	Controls
"src"	This value is associated with a client-only feature and MUST be ignored by the form server.	
"value"	Indicates that the <b>value</b> XSLT attribute contains the XML field from which the control reads and writes data.	Drop-down list List box
"xdInkData"	This value is associated with a client-only feature and MUST be ignored by the form server.	
"xd:inline"	Indicates that the XML field, from which the control reads and writes data, is inline in the control's XSLT.	Custom controls File attachment
"xd:num"	Indicates that the <b>xd:num</b> XSLT attribute contains the XML field from which the control reads and writes data.	Date picker Text box
"xd:value"	Indicates that the <b>xd:value</b> XSLT attribute contains the XML field from which the control reads and writes data.	Check box Option button

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="boundProp" type="xsd:string"/>
```

### 2.4.2.10 CtrlId

The following controls MUST contain the **CtrlId** attribute in their XSLT representation:

- Button (section [2.4.1.5](#))
- Check box (section [2.4.1.6](#))
- Contact selector (section [2.4.1.7](#))
- Custom controls
- Date picker (section [2.3.1.4](#))
- Drop-down list (section [2.4.1.9](#))
- Expression box (section [2.4.1.10](#))
- File attachment (section [2.4.1.11](#))
- List box (section [2.4.1.13](#))
- Option button (section [2.4.1.14](#))
- Optional section (section [2.4.1.18](#))
- Repeating section (section [2.4.1.15](#))
- Repeating table (section [2.4.1.16](#))
- Rich text box (section [2.4.1.17](#))
- Section (section [2.4.1.18](#))
- Text box (section [2.4.1.20](#))

Hyperlink controls (section [2.4.1.12](#)) MAY contain this attribute in their XSLT representation.

The value of the **CtrlId** attribute MUST range from 1 through 255 characters, MUST begin with an alphabetic character, and MUST contain only alphanumeric and underscore characters.

The value of this attribute SHOULD be unique for each button control in the form (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="CtrlId" type="xsd:string"/>
```

### 2.4.2.11 datafmt

The following controls MAY contain the **datafmt** attribute in their XSLT representation:

- Date picker (section [2.4.1.8](#))
- Expression box (section [2.4.1.10](#))
- Text box (section [2.4.1.20](#))

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **datafmt** attribute MUST follow this structure:

"<FormatCategory>" , "<FormatSpecification>"

**FormatCategory:** The type of formatting applied when the control displays the XML field's data. The **FormatCategory** string MUST be one of the following:

- **currency:** Specifies that the data from the XML field be formatted as type "currency" when displayed in the corresponding control.
- **date:** Specifies that the data from the XML field be formatted as type "date" when displayed in the corresponding control.
- **datetime:** Specifies that the data from the XML field be formatted as type "datetime" when displayed in the corresponding control.
- **number:** Specifies that the data from the XML field be formatted as type "number" when displayed in the corresponding control.
- **percentage:** Specifies that the data from the XML field be formatted as type "percentage" when displayed in the corresponding control.
- **string:** Specifies that the data from the XML field be formatted as type "string" when displayed in the corresponding control.
- **time:** Specifies that the data from the XML field be formatted as type "time" when displayed in the corresponding control.

**FormatSpecification:** The data formatting properties applied when the control displays an XML field's data. The following table specifies which format specifications MUST be specified for each format category.

FormatCategory	Supported FormatSpecification
<b>currency</b>	locale, numDigits, grouping, decimalSep, thousandSep, negativeOrder, positiveOrder, currencyLocale
<b>date</b>	locale, dateFormat, useAltCalendar, englishStringsAlways
<b>datetime</b>	locale, dateFormat, timeFormat, useAltCalendar, englishStringsAlways, noSeconds
<b>number</b>	locale, numDigits, grouping, decimalSep, thousandSep, negativeOrder
<b>percentage</b>	locale, numDigits, grouping, decimalSep, thousandSep, negativeOrder
<b>string</b>	plainMultiline
<b>time</b>	locale, timeFormat, noSeconds

The **FormatSpecification** MUST be a semicolon-delimited list of one or more specification items. Each item MUST obey the proper structure according to the following table.

Format Specification Item Name	Specification Item Structure
plainMultiline	itemName
All other specification items.	itemName:itemValue

The item names MUST be set to the following and adhere to the specified value requirements:

- **currencyLocale:** The LCID, as specified in [\[MS-LCID\]](#). This is used to map the currency symbol string determined by the currency locale.
- **dateFormat:** The date format pattern to use when displaying date and time values. The value MUST be one of the following:
  - **Short Date:** A short date format, as specified in [\[MC-NLSIP\]](#).
  - **Long Date:** A long date format, as specified in [\[MC-NLSIP\]](#).
  - **Year Month:** A year month format, as specified in [\[MC-NLSIP\]](#).
  - **none:** No date format pattern applied.
  - A date format pattern specified in [\[ISO-8601\]](#).
- **decimalSep:** The string to display as the decimal separator in numeric values.
  - The value MUST be one of the following:
    - "." (Period)
    - "," (Comma)
    - " " (Space)
    - " " (Non-breaking space)
    - "'" (Single Quote)
    - "، " (Arabic Comma)
    - Empty (No separator)
  - If this item is unspecified, the decimal separator is determined based on the form server settings.
- **englishStringsAlways:** A Boolean value that specifies the ability to always use English as the LCID, as specified in [\[MS-LCID\]](#), when displaying date and date time values.
  - The value MUST be one of the following:
    - "0": Use locale specified by the LCID, as specified in [\[MS-LCID\]](#).
    - "1": Use English as the LCID, as specified in [\[MS-LCID\]](#).
  - If this item is unspecified, the behavior MUST be the same as a value of zero ("0").
- **grouping:** The digit grouping pattern for digits to the left of the decimal.
  - The value MUST be one of the following:
    - Range from zero ("0"), which means no grouping, through "9"
    - "32"
  - If this item is unspecified, the grouping is determined based on the form server settings.

- **locale:** The LCID, as specified in [MS-LCID]. If this item is unspecified, the locale is determined based on the form server settings.
- **negativeOrder:** The format pattern for negative numeric values. If this value is "-1", the negative order is determined by the default pattern associated with the form server's LCID, as specified in [MS-LCID]. If this item is unspecified, the negative order is determined based on the form server settings.
- **noSeconds:** A Boolean value that specifies whether to display seconds in time formatting.
  - The value MUST be one of the following:
    - "0": Display seconds for time formatting.
    - "1": Do not display seconds for time formatting.
  - If this item is unspecified, the behavior MUST be the same as a value of zero ("0").
- **numDigits:** The number of fractional digits to display after the decimal separator.
  - The value MUST be one of the following:
    - Range from zero ("0") through "9".
    - "Auto": The general numeric format string as implemented by the form server.
  - If this item is unspecified, the number of digits is determined based on the form server settings.
- **plainMultiline:** The ability for a text box control to display data across multiple lines. The value MUST be an empty string ("1").
- **positiveOrder:** The format pattern for positive currency values.
  - If this is "-1", the positive order is determined by the default pattern associated with the form server's LCID, as specified in [MS-LCID].
  - If this item is unspecified, the positive order is determined based on the form server settings.
- **thousandSep:** The string that separates groups of digits to the left of the decimal in numeric values.
  - The value MUST be one of the following:
    - "." (Period)
    - "," (Comma)
    - " " (Space)
    - " " (Non-breaking space)
    - "'" (Single Quote)
    - "، " (Arabic Comma)
    - Empty (No separator)

- If this item is unspecified, the thousand separator is determined based on the form server settings.
- **timeFormat:** The time format pattern to use when displaying time values.
  - The value MUST be one of the following:
    - **Short Time:** A short time format, as specified in [\[MC-NLSIP\]](#).
    - **Long Time:** A long time format, as specified in [\[MC-NLSIP\]](#).
    - **none:** No time format pattern applied.
    - A time format pattern specified in [\[ISO-8601\]](#).
  - If this item is unspecified, the time format is determined based on the form server settings.
- **useAltCalendar:** A Boolean value that specifies the ability to display an alternate calendar for calendar formatting, as specified in [\[MS-WSSFO\]](#) section 2.2.3.3.
  - The value MUST be one of the following:
    - "0": Use calendar type associated with the LCID, as specified in [MS-LCID].
    - "1": Use alternate calendar type for the LCID, as specified in [MS-LCID].
  - If this item is unspecified, the behavior MUST be the same as a value of zero ("0").

If the format category is **datetime**, at least one of the two specification items **timeFormat** and **dateFormat** MUST be "none".

The combinations of locale and date and time format specifications contained in the following table MUST NOT be present.

Locale	Date and time format
1028	"M'\u6708'd'\u65E5"
1036	"HH' h 'mm"
1037	"dd \u05D1MMMM yyyy"
1037	"dddd dd \u05D1MMMM yyyy"
1037	"ddd dd \u05D1MMMM yyyy"
1038	"MMMM d."
1041	"M'\u6708'd'\u65E5"
1042	"M'\uC6D4' d'\uC77C"
1045	"d MMMM"
1052	"MMMM dd"
1052	"h:mm.tt"
1052	"h:mm:ss.tt"

Locale	Date and time format
1053	"den 'd MMMM"
1054	"MMMM dd"
1062	"d. MMMM"
1063	"MMMM d 'd.'"
1066	"dd MMMM yyyy"
1066	"dd MMMM"
1066	"MMMM yyyy"
1069	"MMMM dd"
1078	"dd MMMM"
1079	"yyyy '\u10EC\u10DA\u10D8\u10E1' dd MM, dddd"
1104	"d MMMM"
1125	"MMMM dd"
2052	"M'\u6708'd'\u65E5"
2060	"dd-MMM-yy"
2060	"H' h 'mm"
2060	"H' h 'm' min '"
2060	"H' h 'm' min 's' s '"
2067	"H.mm' u.'"
2070	"HH'H'mm'm'"
3079	"d.MMMyyyy"
3082	"HH'H'mm'\\"
3084	"d MMMM"
3084	"H' h 'mm"
5132	"HH' h 'mm"
6156	"HH' h 'mm"
7177	"dd MMMM"

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="datafmt" type="xsd:string"/>
```

### 2.4.2.12 disableEditing

The following controls MAY contain the **disableEditing** attribute in their XSLT representation:

- Custom controls
- File attachment (section [2.4.1.11](#))
- Rich text box (section [2.4.1.17](#))
- Text box (section [2.4.1.20](#))

The following controls MUST contain this attribute in their XSLT representation:

- Expression box (section [2.4.1.10](#))
- Hyperlink (section [2.3.1.8](#))
- Section Control and Optional Section Control (section [2.4.1.18](#)) with XML digital signatures (1).

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **disableEditing** attribute MUST be "yes", which disables editing for the control.

If this attribute is unspecified, the behavior MUST be to enable editing for the control.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="disableEditing" type="xsd:string"/>
```

### 2.4.2.13 enabledProperty

Custom controls MAY contain the **enabledProperty** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **enabledProperty** attribute MUST map to a property exposed by the custom control.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="enabledProperty" type="xsd:string"/>
```

### 2.4.2.14 enabledValue

Custom controls MAY contain the **enabledValue** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **enabledValue** attribute MUST be one of the following:

- **true**: Enables the custom control using the enabledProperty (section [2.4.2.13](#)).
- **false**: Enable the custom control using the enabledProperty.



The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="enabledValue" type="xsd:string"/>
```

#### 2.4.2.15 ghosted

The **ghosted** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ghosted" type="xsd:string"/>
```

#### 2.4.2.16 ictID

The **ictID** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ictID" type="xsd:string"/>
```

#### 2.4.2.17 ictVersion

The **ictVersion** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ictVersion" type="xsd:string"/>
```

#### 2.4.2.18 inline

The **inline** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="inline" type="xsd:string"/>
```

#### 2.4.2.19 innerCtrl

Date picker controls, as specified in section [2.4.1.8](#), MUST contain the **innerCtrl** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

This attribute MUST have one of the following values, which specify the respective component types:

- **\_DTButton:** A date picker button.
- **\_DTText:** An editable text field.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="innerCtrl" type="xsd:string"/>
```

#### 2.4.2.20 **inputscope**

The **inputscope** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="inputscope" type="xsd:string"/>
```

#### 2.4.2.21 **inputScopeId**

The **inputScopeId** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="inputScopeId" type="xsd:string"/>
```

#### 2.4.2.22 **layoutText**

The **layoutText** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="layoutText" type="xsd:string"/>
```

#### 2.4.2.23 **linkedToMaster**

The **linkedToMaster** attribute is associated with a client-only feature and MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="linkedToMaster" type="xsd:string"/>
```

#### 2.4.2.24 masterID

The **masterID** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="masterID" type="xsd:string"/>
```

#### 2.4.2.25 masterName

The **masterName** attribute is associated with a client-only feature and MUST NOT be present.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="masterName" type="xsd:string"/>
```

#### 2.4.2.26 num

The following controls MAY contain this attribute in their XSLT representation:

- Date picker (section [2.4.1.8](#))
- Expression box (section [2.4.1.10](#))
- Text box (section [2.4.1.20](#))

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of this attribute MUST be set as specified in the **boundProp** attribute (section [2.4.2.9](#)).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="num" type="xsd:string"/>
```

#### 2.4.2.27 offValue

The **offValue** attribute is applicable to a check box control, as specified in section [2.3.1.2](#). Inclusion of this attribute is based on the **onValue** attribute, as specified in section [2.4.2.28](#), as follows:

- Check box controls MUST contain this attribute in their XSLT representation if the **onValue** attribute is unspecified.
- Check box controls MAY contain this attribute in their XSLT representation if the **onValue** attribute is specified.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of this attribute MUST be a value that is valid for the XML field's data type.

The value of this attribute MUST be a different string value than the string value specified for the **onValue** attribute.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="offValue" type="xsd:string"/>
```

### 2.4.2.28 onValue

The **onValue** attribute is applicable to a check box control, as specified in section [2.3.1.2](#). Inclusion of this attribute is based on the **offValue** attribute, as specified in section [2.4.2.27](#), as follows:

- Check box controls MUST contain this attribute in their XSLT representation if the **offValue** attribute is unspecified.
- Check box controls MAY contain this attribute in their XSLT representation if the **offValue** attribute is specified.

Option button controls, as specified in section [2.4.1.14](#), MAY contain this attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **onValue** attribute MUST be a value that is valid for the XML field's data type.

For the check box control, the value of this attribute MUST be a different string value than the string value specified for the **offValue** attribute.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="onValue" type="xsd:string"/>
```

### 2.4.2.29 postbackModel

The following controls MAY contain the **postbackModel** attribute in their XSLT representation:

- Button (section [2.4.1.5](#))
- Check box (section [2.4.1.6](#))
- Date picker (section [2.4.1.8](#))
- Drop-down list (section [2.4.1.9](#))
- List box (section [2.4.1.13](#))
- Option button (section [2.4.1.14](#))
- Optional section (section [2.4.1.18](#))
- Repeating section (section [2.4.1.15](#))
- Repeating table (section [2.4.1.16](#))

- Rich text box (section [2.4.1.17](#))
- Section (section [2.4.1.18](#))
- Text box (section [2.4.1.20](#))

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **postbackModel** attribute MUST be one of the following:

- **always:** Always send data to the form server when the XML field value in the control is changed.
- **auto:** Dependent on protocol server implementation. Send data to the form server when the XML field value in the control is changed only if the protocol server implementation requires it.
- **never:** Never send data to the form server when the XML field value in the control is changed.

If this attribute is unspecified, the behavior MUST be the same as an attribute value of "auto".

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="postbackModel" type="xsd:string"/>
```

#### 2.4.2.30 ref

The **ref** attribute is associated with a client-only feature and MUST be ignored by the form server.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ref" type="xsd:string"/>
```

#### 2.4.2.31 SignatureBlock

Section and optional section controls (section [2.4.1.18](#)) MAY contain the **SignatureBlock** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **SignatureBlock** attribute MUST be equal to the **name** attribute of the **signedDataBlock** (section [2.2.126](#)) that exists in the form (1).

The value of this attribute MUST be equal to the value specified for the **SignedSectionName** attribute (section [2.4.2.33](#)).

The value of this attribute MUST begin with an alphabetic or underscore character, and MUST contain only alphanumeric, underscore, hyphen, and period characters.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="SignatureBlock" type="xsd:string"/>
```

### 2.4.2.32 SignedSectionDisplaySignatures

Section and optional section controls (section [2.4.1.18](#)) MAY contain the **SignedSectionDisplaySignatures** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of **SignedSectionDisplaySignatures** attribute MUST be "true", which specifies to show signatures for the control.

If this attribute is unspecified, the behavior MUST be to not show signatures for the control.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="SignedSectionDisplaySignatures" type="xsd:string"/>
```

### 2.4.2.33 SignedSectionName

Section and optional section controls (section [2.4.1.18](#)) MAY contain the **SignedSectionName** attribute in their XSLT representation.

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **SignedSectionName** attribute MUST be equal to the **name** attribute of the **signedDataBlock** (section [2.2.126](#)) that exists in the form (1).

The value of this attribute MUST be equal to the value specified for the **SignatureBlock** attribute in section [2.4.2.31](#).

The value of this attribute MUST begin with an alphabetic or underscore character, and MUST contain only alphanumeric, underscore, hyphen, and period characters.

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="SignedSectionName" type="xsd:string"/>
```

### 2.4.2.34 value

The following controls MUST contain the **value** attribute in their XSLT representation:

- Check box (section [2.4.1.6](#))
- Option button (section [2.4.1.14](#))

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **value** attribute MUST be set as specified for the **boundProp** attribute in section [2.4.2.9](#).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="value" type="xsd:string"/>
```

### 2.4.2.35 xctname

All controls MUST contain the **xctname** attribute in their XSLT representation.

The value of this attribute MUST be one of the values in the following table for **built-in control**.

Control	"xctname" value
Button (section <a href="#">2.4.1.5</a> )	Button
Check box (section <a href="#">2.4.1.6</a> )	CheckBox
Date picker (section <a href="#">2.4.1.8</a> )	DTPicker (specifies the date picker control) DTPicker_DTButton (specifies the date picker button in the date picker control) DTPicker_DTTText (specifies the editable text field in the date picker control)
Drop-down list box (section <a href="#">2.4.1.9</a> )	DropDown
Expression box (section <a href="#">2.4.1.10</a> )	ExpressionBox
File attachment (section <a href="#">2.4.1.11</a> )	FileAttachment
Hyperlink (section <a href="#">2.4.1.12</a> )	Hyperlink
List box (section <a href="#">2.4.1.13</a> )	ListBox
Option button (section <a href="#">2.4.1.14</a> )	OptionButton
Optional section (section <a href="#">2.4.1.18</a> )	Section
Repeating section (section <a href="#">2.4.1.15</a> )	RepeatingSection
Repeating table (section <a href="#">2.4.1.16</a> )	RepeatingTable
Rich text box (section <a href="#">2.4.1.17</a> )	RichText
Section (section <a href="#">2.4.1.18</a> )	Section
Text box (section <a href="#">2.4.1.20</a> )	PlainText

For custom controls, the value of the **xctname** attribute MUST be the control's **class identifier (CLSID)**, and MUST follow this structure:

```
{{clsid}}
```

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xctname" type="xsd:string"/>
```

### 2.4.2.36 xmlToEdit

The following controls MAY contain the **xmlToEdit** attribute in their XSLT representation:

- Optional section (section [2.4.1.18](#))
- Repeating section (section [2.4.1.15](#))
- Repeating table (section [2.4.1.16](#))
- Section (section [2.4.1.18](#))

All other controls MUST NOT contain this attribute in their XSLT representations.

The value of the **xmlToEdit** attribute MUST be equal to the name of an **xmlToEdit** element (section [2.2.124](#)) that exists in the form (1).

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xmlToEdit" type="xsd:string"/>
```

### 2.4.3 XSL Function Extensions

This section describes the additional functions provided with the XSL function extension to be used in the XSL file.

Namespace	Description
Msxsl (section <a href="#">2.4.3.1</a> )	A <b>string</b> comparison function.
xdDate (section <a href="#">2.4.3.2</a> )	A set of date- and time-related functions.
xdEnvironment (section <a href="#">2.4.3.3</a> )	A set of functions that are related to the environment in which the form (1) is being filled out.
xdFormatting (section <a href="#">2.4.3.4</a> )	A set of string formatting functions..
xdImage (section <a href="#">2.4.3.5</a> )	A set of image related functions.
xdMath (section <a href="#">2.4.3.6</a> )	A set of mathematical functions.
xdUser (section <a href="#">2.4.3.7</a> )	A set of functions that are related to the user who is filling out the form (1).
xdUtil (section <a href="#">2.4.3.8</a> )	Generic helper tools.
xdXDocument (section <a href="#">2.4.3.9</a> )	A set of functions that are related to the data of the form (1) being filled out.



### 2.4.3.1 msxsl

Microsoft XPath Extension Functions, as specified in [\[MSDN-XPATH\]](#), specify a number of functions, one of which is supported by **msxsl**.

#### 2.4.3.1.1 string-compare

Function signature: **number** msxsl:string-compare(*First String*, *Second String*)

This function MUST take two parameters:

- *First String*: This parameter MUST be a **string**. **String** is specified in [\[XPATH\]](#), section 3.6.
- *Second String*: This parameter MUST be a **string**. **String** is specified in [\[XPATH\]](#), section 3.6.

The function MUST compare the lexicographical order of the two **strings** passed as parameters. It MUST return zero if they are equivalent strings; it MUST return 1 if the second **string** comes before the first in lexicographical order, and it MUST return -1 if the first **string** comes before the second in lexicographical order. **Number** is specified in [\[XPATH\]](#), section 3.5. **String** is specified in [\[XPATH\]](#) section 3.6.

#### 2.4.3.2 xdDate

**xdDate** contains a set of date- and time-related functions.

##### 2.4.3.2.1 AddDays

Function Signature: **string** xdDate:addDays(*date*, *days*)

This function MUST take two parameters:

- *date*: This parameter MUST be either a **string** or an XPath expression that returns a node. The **string** or the value of the node MUST be a date in ISO 8601 format, as specified in [\[ISO-8601\]](#), to be a valid parameter. XPath expression is specified in [\[XPATH\]](#).
- *days*: This parameter MUST be either a **string** or an XPath expression that returns a node. The **string** or the value of the node MUST be a **number**, as specified in [\[XPATH\]](#), section 3.5 to be a valid parameter.

The function MUST increase the given date by the given number of days and return the resulting date in ISO format. It MUST return an empty string (1) if both parameters are empty strings (1). It MUST return a **string** with the value of "#ERR?" if either of the parameters have an invalid value. **String** is specified in [\[XPATH\]](#) section 3.6.

##### 2.4.3.2.2 AddSeconds

Function Signature: **string** xdDate:addSeconds(*time*, *seconds*)

This function MUST take two parameters:

- *Time*: This parameter MUST be either a **string** or an XPath expression that returns a node. The **string** or the value of the node MUST be a time in ISO 8601 format, as specified in [\[ISO-8601\]](#), to be a valid parameter. XPath expression is specified in [\[XPATH\]](#).

- **Seconds**: This parameter MUST be either a **string** or an XPath expression that returns a node. The **string** or the value of the node MUST be a **number**, as specified in [\[XPATH\]](#) section 3.5, to be a valid parameter.

The function MUST increase the given time by the given number of seconds and return the resulting time in ISO format. It MUST return an empty string (1) if both parameters are empty strings (1). It MUST return a **string** with the value of "#ERR?" if either of the parameters have an invalid value. **String** is specified in [\[XPATH\]](#) section 3.6.

#### 2.4.3.2.3 Now

Function Signature: **string** xdDate:now()

This function MUST NOT take any parameters. It MUST return the current system date and time in ISO 8601 format, as specified in [\[ISO-8601\]](#). **String** is specified in [\[XPATH\]](#) section 3.6.

#### 2.4.3.2.4 Today

Function Signature: **string** xdDate:today()

This function MUST NOT take any parameters. It MUST return the current system date in ISO 8601 format, as specified in [\[ISO-8601\]](#). **String** is specified [\[XPATH\]](#) section 3.6.

### 2.4.3.3 xdEnvironment

**xdEnvironment** contains a set of functions that are related to the environment in which the form (1) is being filled out.

#### 2.4.3.3.1 IsBrowser

Function Signature: **boolean** xdEnvironment:IsBrowser()

This function MUST NOT take any parameters. It MUST return TRUE if the form (1) is being filled out with a Web browser, FALSE otherwise. **Boolean** is specified in [\[XPATH\]](#) section 3.4.

#### 2.4.3.3.2 IsMobile

Function Signature: **boolean** xdEnvironment:IsMobile()

This function MUST NOT take any parameters. It MUST return TRUE if the form (1) is being filled out with a **mobile device**, FALSE otherwise. **Boolean** is specified in [\[XPATH\]](#) section 3.4.

#### 2.4.3.4 xdFormatting

**xdFormatting** contains a set of **string** formatting functions. It is not supported and MUST be ignored.

#### 2.4.3.5 xdImage

**xdImage** contains a set of image-related functions. It is not supported and MUST be ignored.

#### 2.4.3.6 xdMath

**xdMath** contains a set of mathematical functions.

### 2.4.3.6.1 Avg

Function Signature: **number** xdMath:avg(*XPath Expression*)

This function MUST take one parameter:

- *XPath Expression*: This parameter MUST be an XPath expression that returns a **node-set**. XPath expression is specified in [\[XPATH\]](#). **Node-set** is specified in [\[XPATH\]](#) section 3.3.

The **string** value of every node in the **node-set** MUST be calculated using the **string** function specified in [\[XPATH\]](#) section 4.2. The output of the **string** function MUST be converted to a **number** using the **number** function specified in [\[XPATH\]](#) section 4.4. If the number function returns **NAN** for any node of the node-set, the **avg** function MUST return **NAN**. The output of the **number** function MUST be used as the numerical value of the node.

The **avg** function MUST return the average value of all of the numerical values in the given **node-set**. **Number** and **NAN** are specified in [\[XPATH\]](#) section 3.5.

### 2.4.3.6.2 Eval

Function Signature: **node-set** xdMath:eval(*XPath Expression*, *XSLT Expression*)

This function MUST take two parameters:

- *XPath Expression*: MUST be an XPath expression that returns a **node-set**. XPath expression is specified in [\[XPATH\]](#). **Node-set** is specified in [\[XPATH\]](#) section 3.3.
- *XSLT Expression*: MUST be a valid XSLT expression, as specified in [\[W3C-XSLT\]](#) section 4.

The function MUST apply the XSLT expression to every node in the **node-set** and return the resulting **node-set**.

### 2.4.3.6.3 Max

Function Signature: **number** xdMath:max(*XPath Expression*)

This function MUST take one parameter:

- *XPath Expression*: MUST be an XPath expression that returns a **node-set**. XPath expression is specified in [\[XPATH\]](#). **Node-set** is specified in [\[XPATH\]](#) section 3.3.

The **string** value of every node of the **node-set** MUST be calculated using the **string** function specified in [\[XPATH\]](#) section 4.2. The output of the **string** function MUST be converted to a **number** using the **number** function specified in [\[XPATH\]](#) section 4.4. If the **number** function returns **NAN** for any node of the **node-set**, the **max** function MUST return **NAN**. The output of the **number** function MUST be used as the numerical value of the node.

The **max** function MUST return the numerical value that is greater than or equal to the value of every other item in the **node-set**. **Number** and **NAN** are specified in [\[XPATH\]](#) section 3.5.

### 2.4.3.6.4 Min

Function Signature: **number** xdMath:min(*XPath Expression*)

This function MUST take one parameter:

- *XPath Expression*: MUST be an XPath expression that returns a **node-set**. XPath expression is specified in [\[XPATH\]](#). **Node-set** is specified in [\[XPATH\]](#) section 3.3.

The **string** value of every node of the **node-set** MUST be calculated using the **string** function specified in [\[XPATH\]](#) section 4.2. The output of the **string** function MUST be converted to a **number** using the **number** function specified in [\[XPATH\]](#) section 4.4. If the **number** function returns **NAN** for any node of the **node-set**, the **min** function MUST return **NAN**. The output of the **number** function MUST be used as the numerical value of the node.

The **min** function MUST return the numerical value that is smaller than or equal to the value of every other item in the given **node-set**. **Number** and **NAN** are specified in [\[XPATH\]](#) section 3.5.

#### 2.4.3.6.5 Nz

Function Signature: **node-set** xdMath:nz(*XPath Expression*)

This function MUST take one parameter:

- *XPath Expression*: This parameter MUST be an XPath expression that returns a **node-set**. XPath expression is specified in [\[XPATH\]](#). **Node-set** is specified in [\[XPATH\]](#) section 3.3.

The function MUST return a **node-set** that is identical to the given **node-set** with the exception that empty nodes are given the value zero ("0").

#### 2.4.3.7 xdUser

**xdUser** contains a set of functions that are related to the user who is filling out the form (1).

##### 2.4.3.7.1 get-UserName

Function Signature: **string** xdUser:get-UserName()

This function MUST NOT take any parameters. It MUST return the **user name** for the current user.

#### 2.4.3.8 xdUtil

xdUtil contains generic helper tools.

##### 2.4.3.8.1 Match

Function Signature: **boolean** xdUtil:match(*string*, *Regular Expression*)

This function MUST take two parameters:

- *String*: This parameter MUST be a **string**.
- *Regular Expression*: This parameter MUST be a valid XML regular expression.

This function MUST return TRUE if the input **string** conforms to the specified regular expression, or FALSE otherwise. **String** is specified in [\[XPATH\]](#) section 3.6. Regular expression is specified in [\[XMLSCHEMA1\]](#) Appendix F.

#### 2.4.3.9 xdXDocument

**xdXDocument** contains a set of functions that are related to the data of the form (1) being filled out.

### 2.4.3.9.1 get-dom

Function Signature: **node-set** xdXDocument:get-dom()

This function MUST NOT take any parameters. It MUST return a **node-set** that contains the main data source.

### 2.4.3.9.2 getDOM

Function Signature: **node-set** xdXDocument:getDOM(*Name*)

This function MUST take one parameter:

- **Name:** This parameter MUST be a **string**. It MUST be the name of a secondary data source (2).

This function MUST return the data object with the given name. **Node-set** is specified in [\[XPath\]](#) section 3.3. **String** is specified in [\[XPath\]](#) section 3.6.

### 2.4.3.9.3 getnamednodeproperty

Function Signature: **string** xdXDocument:getnamednodeproperty(*MainDOMNode*, *PropertyName*, *DefaultValue*)

The function MUST take the following parameters:

- *MainDOMNode*: This parameter MUST be an XPath expression that returns a non-attribute node in the main data source, for which a **named property** is to be set.
- *PropertyName*: This parameter MUST be a **string**. It specifies the name of the property whose value is to be returned.
- *DefaultValue*: This parameter MUST be a **string**. It specifies the default value to be returned if the property has not been set.

This function provides a mechanism to retrieve string data that is stored on the non-attribute nodes of the main data source. The protocol only defines a mechanism to retrieve the data. The protocol server SHOULD provide a mechanism to store **string** data.

This function MUST return the value of the named property that is stored in the specified XML node. **String** is specified in [\[XPath\]](#) section 3.6.

## 2.5 Print View Files (XSLT) Specification

The XSLT file representing a print view MUST conform to the format specified in section [2.4](#). A print view MUST be associated with a form view using the **printView** attribute of the **view** element (section [2.2.123](#)) in the form definition (.xsf) file. See section [3.5](#) for an example.

## 2.6 Submit Files (XML) Specification

For each **input** element (section [2.2.43](#)) inside of a **webServiceAdapter** element (section [2.2.39](#)) in the form definition (.xsf) file, there MUST be a corresponding XML file defined. This SHOULD be accomplished by naming the files according to the pattern "Submit[0-9]\*.xml". The first file SHOULD be "Submit.xml", and the subsequent files SHOULD be "Submit1.xml", "Submit2.xml", "Submit3.xml", and so on, with the number increasing by one for each additional file. Each of these files MUST be referenced at the **input** element inside of the form definition (.xsf) file. All of these files MUST be contained inside of the form template.

Each Submit.xml file MUST contain only the following types:

- myFields
- dataFields, including the Web service method template specified in [2.6.2](#).

### 2.6.1 myFields

The **myFields** element MUST be the top-level element in this XML file. Additionally, it MUST do the following:

- Specify 'xmlns:dfs="http://schemas.microsoft.com/office/infopath/2003/dataFormSolution"' as a namespace.
- Specify any additional namespaces required for the Web service method template specified in section [2.6.2](#).
- Have a single child **dataFields** element.

Child Elements
<a href="#">dataFields</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xs:element name="myFields" type="dfs:MyFieldType"/>
<xs:complexType name="MyFieldType">
  <xs:sequence>
    <xs:element ref="dfs:dataFields" minOccurs="1" maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

### 2.6.2 dataFields

The **dataFields** element MUST have exactly one child node that is the Web service method template. This template specifies the method and parameter fields names used when submitting to the Web service. The template MUST validate against the XML schema of the method in the Web service. This XML schema is defined in the Web service **Web Services Description Language (WSDL)**.

Parent Elements
<a href="#">myFields</a>

The following W3C XML Schema ([\[XMLSCHEMA1\]](#) section 2.1) fragment specifies the contents of this element.

```
<xs:element name="dataFields" type="dfs:DataFieldType"/>
<xs:complexType name="DataFieldType">
  <xs:sequence>
    <!-- Web Service Template -->
    <xs:any processContents="skip" minOccurs="1" maxOccurs="1"/>
  </xs:sequence>
```

</xs:complexType>

## 2.7 Template.XML Specification

The template.xml file MUST be an instance of the XML schema document, as specified in section [2.3](#), and MUST be a valid form file, as specified in [\[MS-IPFFX\]](#) section 2.1.

Initial values for the fields in a new form file MUST be stored in and loaded from this file. If a pre-existing form file is opened, contents of this file MUST be ignored.

## 2.8 Upgrade.XSL Specification

The upgrade.xsl file is an XSLT that MUST conform to the XSLT specification, as specified in [\[W3C-XSLT\]](#), with the exception of the **msxsl:node-set** function. Upgrade.xsl MUST be applied by the form server when opening an existing form file if upgrade.xsl is present within the form template (.xsn) file.

The upgrade.xsl file MUST use the **msxsl:node-set** function to create new empty XML node sets in cases that a new XML node set is required. The **msxsl:node-set** function is specified in the following section.

### 2.8.1 MSXSL:Node-Set()

The **msxsl:node-set** function converts a result tree fragment into an XML node set. The resulting XML node set always contains a single XML node and is the root XML node of the tree. It MUST take one argument, *\$var*, which is the result tree fragment to be converted.

## 3 Structure Examples

This section contains examples of the following:

- InfoPath form template
- Form definition (XSF) files
- XML schema (XSD) files
- Form view (XLS) files
- Print view (XLST) files
- Submit (XML) files
- Template.XML
- Upgrade.XSL

### 3.1 The InfoPath Form Template Format

#### 3.1.1 Simple Form Template

This example describes a simple form template (.xsn) file.

The contents of the Simple.xsn file are as follows:

- manifest.xsf
- myschema.xsd
- template.xml
- sampledata.xml
- view1.xsl

The preceding files represent a very simple form (1) with just one form view of the data:

- The manifest.xsf file is the first file in the cabinet (.cab) file, and within it lists the other four files in the form template (.xsn) file.
- The myschema.xsd file is an example of the primaryschema.xsd file, which is required to define the XML schema for the data in the form (1).
- The sampledata.xml file needs to be present, but the form server ignores it.
- The template.xml file also needs to be present. It provides the default values for the form (1).
- The view1.xsl is a view.xsl file. At least one is required. It represents how the form (1) is displayed, including which fields appear and in what order.

#### 3.1.2 Complex Form Template

This example describes a slightly more complex form template (.xsn) file.

The contents of the Complex.xsn file are as follows:



- manifest.xsf
- myschema.xsd
- template.xml
- sampledata.xml
- view1.xsl
- view2.xsl
- IPTemplate\_bkgd.gif
- 741C3E77.gif
- upgrade.xsl
- 70482F6B.gif

The files listed here include more than just the minimum for a form template (.xsn) file:

- The manifest.xsf file is the first file in the cabinet (.cab) file, and within it lists the other files in the form template (.xsn) file. Myschema.xsd, template.xml and sampledata.xml are also all present as required. See section [3.1](#).
- This form (1) uses two view.xsl files to represent the form (1):
  - view1.xsl
  - view2.xsl
- There is an upgrade.xsl file, which is used by the form server to upgrade older form (1) files to the newest XML schema.
- There are three resource files. These images are used when displaying the form (1):
  - IPTemplate\_bkgd.gif
  - 741C3E77.gif
  - 70482F6B.gif

### 3.2 Form Definition File (XSF) Examples

This sample form definition (.xsf) file specifies that this is a browser-compatible form template containing an ActiveX Data Objects (ADO) data adapter that queries a SQL database. The contained **files** element (section [2.2.97](#)) and **documentSchemas** element (section [2.2.60](#)) specify that there are three XML schema documents that are used to verify the form definition (.xsf) file and form file. There is also an [\[W3C-XML\]](#) file containing sample data for creating the form file and an [\[W3C-XSLT\]](#) file specifying how the form view is generated and displayed.

```
<?xml version="1.0" encoding="UTF-8"?>
<!--
This file is automatically created and modified by Microsoft Office InfoPath.
Changes made to the file outside of InfoPath might be lost if the form template is modified
in InfoPath.
-->
```

```

<xsf:xDocumentClass trustSetting="automatic" solutionFormatVersion="2.0.0.0"
dataFormSolution="yes" solutionVersion="1.0.0.6" productVersion="12.0.0" publishUrl=""
name="urn:schemas-microsoft-com:office:infopath:Unpacked:-dataFormSolution"
xmlns:xsf="http://schemas.microsoft.com/office/infopath/2003/solutionDefinition"
xmlns:xsf2="http://schemas.microsoft.com/office/infopath/2006/solutionDefinition/extensions"
xmlns:msxsl="urn:schemas-microsoft-com:xslt"
xmlns:xd="http://schemas.microsoft.com/office/infopath/2003"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xdUtil="http://schemas.microsoft.com/office/infopath/2003/xslt/Util"
xmlns:xdXDocument="http://schemas.microsoft.com/office/infopath/2003/xslt/xDocument"
xmlns:xdMath="http://schemas.microsoft.com/office/infopath/2003/xslt/Math"
xmlns:xdDate="http://schemas.microsoft.com/office/infopath/2003/xslt/Date" xmlns:xdExtension=
xmlns:xdEnvironment="http://schemas.microsoft.com/office/infopath/2006/xslt/environment"
xmlns:xdUser="http://schemas.microsoft.com/office/infopath/2006/xslt/User"
xmlns:q="http://schemas.microsoft.com/office/infopath/2003/ado/queryFields"
xmlns:d="http://schemas.microsoft.com/office/infopath/2003/ado/dataFields"
xmlns:dfs="http://schemas.microsoft.com/office/infopath/2003/dataFormSolution"
xmlns:my="http://schemas.microsoft.com/office/infopath/2003/myXSD/2007-03-19T15:02:59"
xmlns:xdado="http://schemas.microsoft.com/office/infopath/2003/adomapping">
  <xsf:package>
    <xsf:files>
      <xsf:file name="schema.xsd">
        <xsf:fileProperties>
          <xsf:property name="editability" type="string" value="none"></xsf:property>
          <xsf:property name="namespace" type="string"
value="http://schemas.microsoft.com/office/infopath/2003/dataFormSolution"></xsf:property>
          <xsf:property name="rootElement" type="string" value="myFields"></xsf:property>
          <xsf:property name="useOnDemandAlgorithm" type="string" value="yes"></xsf:property>
        </xsf:fileProperties>
      </xsf:file>
      <xsf:file name="schemal.xsd">
        <xsf:fileProperties>
          <xsf:property name="namespace" type="string"
value="http://schemas.microsoft.com/office/infopath/2003/ado/dataFields"></xsf:property>
          <xsf:property name="editability" type="string" value="none"></xsf:property>
        </xsf:fileProperties>
      </xsf:file>
      <xsf:file name="schema2.xsd">
        <xsf:fileProperties>
          <xsf:property name="namespace" type="string"
value="http://schemas.microsoft.com/office/infopath/2003/ado/queryFields"></xsf:property>
          <xsf:property name="editability" type="string" value="none"></xsf:property>
        </xsf:fileProperties>
      </xsf:file>
      <xsf:file name="template.xml"></xsf:file>
      <xsf:file name="sampledata.xml">
        <xsf:fileProperties>
          <xsf:property name="fileType" type="string" value="sampleData"></xsf:property>
        </xsf:fileProperties>
      </xsf:file>
      <xsf:file name="view1.xsl">
        <xsf:fileProperties>
          <xsf:property name="lang" type="string" value="1033"></xsf:property>
          <xsf:property name="queryView" type="string" value="yes"></xsf:property>
          <xsf:property name="componentId" type="string" value="12"></xsf:property>
          <xsf:property name="xmlToEditName" type="string" value="12"></xsf:property>
          <xsf:property name="mode" type="string" value="1"></xsf:property>
        </xsf:fileProperties>
      </xsf:file>
    </xsf:files>
  </xsf:package>

```

```

<xsf:importParameters enabled="yes"></xsf:importParameters>
<xsf:extensions>
  <xsf:extension name="SolutionDefinitionExtensions">
    <xsf2:solutionDefinition runtimeCompatibility="client server" allowClientOnlyCode="no">
      <xsf2:offline openIfQueryFails="yes" cacheQueries="yes"></xsf2:offline>
      <xsf2:server isPreSubmitPostBackEnabled="no" isMobileEnabled="no" formLocale="en-
US"></xsf2:server>
    </xsf2:solutionDefinition>
  </xsf:extension>
</xsf:extensions>
<xsf:views default="View 1">
  <xsf:view name="View 1" caption="View 1">
    <xsf:mainpane transform="view1.xsl"></xsf:mainpane>
    <xsf:editing>
      <xsf:xmlToEdit name="DimCustomer_7" item="/dfs:myFields/dfs:dataFields/d:DimCustomer"
container="/dfs:myFields">
        <xsf:editWith caption="DimCustomer" xd:autogeneration="template"
component="xCollection">
          <xsf:fragmentToInsert>
            <xsf:chooseFragment parent="dfs:dataFields" innerFragment="d:DimCustomer">
              <d:DimCustomer CustomerKey="" Title="" FirstName="" MiddleName="" LastName=""
BirthDate="" MaritalStatus=""
Suffix="" Gender="" EmailAddress="" AddressLine1="" AddressLine2=""></d:DimCustomer>
            </xsf:chooseFragment>
          </xsf:fragmentToInsert>
        </xsf:editWith>
      </xsf:xmlToEdit>
    </xsf:editing>
    <xsf:menuArea name="msoInsertMenu">
      <xsf:menu caption="&Section">
        <xsf:button action="xCollection::insert" xmlToEdit="DimCustomer_7"
caption="DimCustomer"></xsf:button>
      </xsf:menu>
    </xsf:menuArea>
    <xsf:menuArea name="msoStructuralEditingContextMenu">
      <xsf:button action="xCollection::insertBefore" xmlToEdit="DimCustomer_7"
caption="Insert DimCustomer before" showIf="immediate"></xsf:button>
      <xsf:button action="xCollection::insertAfter" xmlToEdit="DimCustomer_7"
caption="Insert DimCustomer after" showIf="immediate"></xsf:button>
      <xsf:button action="xCollection::remove" xmlToEdit="DimCustomer_7" caption="Remove
DimCustomer" showIf="immediate"></xsf:button>
      <xsf:button action="xCollection::insert" xmlToEdit="DimCustomer_7" caption="Insert
DimCustomer" showIf="immediate"></xsf:button>
    </xsf:menuArea>
  </xsf:view>
</xsf:views>
<xsf:applicationParameters application="InfoPath Design Mode">
  <xsf:solutionProperties
fullyEditableNamespace="http://schemas.microsoft.com/office/infopath/2003/myXSD/2007-03-
19T15:02:59" lastOpenView="view1.xsl"
lastVersionNeedingTransform="1.0.0.3"></xsf:solutionProperties>
</xsf:applicationParameters>
<xsf:documentSchemas>
  <xsf:documentSchema rootSchema="yes"
location="http://schemas.microsoft.com/office/infopath/2003/dataFormSolution
schema.xsd"></xsf:documentSchema>
  <xsf:documentSchema
location="http://schemas.microsoft.com/office/infopath/2003/ado/dataFields
schemal.xsd"></xsf:documentSchema>

```

```

    <xsf:documentSchema
location="http://schemas.microsoft.com/office/infopath/2003/ado/queryFields
schema2.xsd"></xsf:documentSchema>
</xsf:documentSchemas>
<xsf:fileNew>
    <xsf:initialXmlDocument caption="Unpacked" href="template.xml"></xsf:initialXmlDocument>
</xsf:fileNew>
<xsf:query>
    <xsf:adoAdapter connectionString="Provider=SQLOLEDB.1;Integrated Security=SSPI;Persist
Security Info=True;Initial Catalog=AdventureWorksDW;Data
Source=[Source];Use Procedure for Prepare=1;Auto Translate=True;Packet Size=4096;Workstation
ID=[ID];Use Encryption for Data=False;Tag with
column collation when possible=False" commandText="select
'CustomerKey','Title','FirstName','MiddleName','
LastName','BirthDate','MaritalStatus','Suffix','
Gender','EmailAddress','AddressLine1','AddressLine2'
from 'dbo'.DimCustomer as 'DimCustomer'"
queryAllowed="yes" name="Main connection" submitAllowed="no"></xsf:adoAdapter>
</xsf:query>
</xsf:xDocumentClass>

```

### 3.2.1 XSF Extension Examples

This sample **solutionDefinition** element (section [2.2.147.8](#)) specifies that this is a browser-compatible form template and its contents are verified at <http://www.someserver.com/verificationService>. The contained **offline** element (section [2.2.147.24](#)) specifies that the form (1) is loaded even if contained online queries fail and that the results of any queries are cached locally. The contained **server** element (section [2.2.147.9](#)) specifies:

- The form template is not compatible with mobile Web browsers.
- The form view is rendered in US English.
- The form (1) does not postback to the protocol server before submitting the form file.

Note that all elements are in the **xsf2** namespace.

```

<xsf2:solutionDefinition runtimeCompatibility="client server"
runtimeCompatibilityURL="http://www.someserver.com/verificationService" verifyOnServer="yes">
    <xsf2:offline openIfQueryFails="yes" cacheQueries="yes"></xsf2:offline>
    <xsf2:server isPreSubmitPostBackEnabled="no" isMobileEnabled="no" formLocale="en-
US"></xsf2:server>
</xsf2:solutionDefinition>

```

### 3.3 XML Schema Files (XSD) Examples

Section [2.3](#) provides sample XSD constructs for supported controls.

The following example is an XSD:

```

<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<xsd:schema targetNamespace="http://schemas.microsoft.com/office/infopath/2003/myXSD/2008-03-
17T22:37:33" xmlns:my="http://schemas.microsoft.com/office/infopath/2003/myXSD/2008-03-
17T22:37:33" xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:element name="myFields">

```

```

        <xsd:complexType>
            <xsd:sequence>
                <xsd:element ref="my:field1" minOccurs="0"/>
                <xsd:element ref="my:group1" minOccurs="0"/>
                <xsd:element ref="my:field3" minOccurs="0"/>
            </xsd:sequence>
            <xsd:anyAttribute processContents="lax"
namespace="http://www.w3.org/XML/1998/namespace"/>
        </xsd:complexType>
    </xsd:element>
    <xsd:element name="field1" type="xsd:string"/>
    <xsd:element name="group1">
        <xsd:complexType>
            <xsd:sequence>
                <xsd:element ref="my:group2" minOccurs="0"
maxOccurs="unbounded"/>
            </xsd:sequence>
        </xsd:complexType>
    </xsd:element>
    <xsd:element name="group2">
        <xsd:complexType>
            <xsd:sequence>
                <xsd:element ref="my:field2" minOccurs="0"/>
            </xsd:sequence>
        </xsd:complexType>
    </xsd:element>
    <xsd:element name="field2" type="xsd:string"/>
    <xsd:element name="field3" nillable="true" type="xsd:base64Binary"/>
</xsd:schema>

```

The first element represented in the XSD is **myFields**, which is the root element for all the other elements that represent a control in the XSD. **myFields** contains a reference to **my:field1**, **my:group1** and **my:field3**, which are defined as follows:

- **my:field1** represents a text box control, as specified in section [2.3.1.16](#), in the XSD that can have a **string** content.
- **my:group1** contains another group, **my:group2**. **my:group2** is a repeating element. This is used to represent repeating controls, such as a repeating section control specified in section [2.3.1.11](#).
- **my:field2** represents the control inside the repeating control, which is a text box control.
- **my:field3** is a file attachment control, as specified in section [2.3.1.7](#).

### 3.4 Form View Files (XSL) Examples

This section contains XSL examples for controls, attributes, style definitions, and function extensions, as specified in section [2.4](#).

#### 3.4.1 Control representation

This section contains example XSL fragments for all of the controls specified in section [2.4.1](#). Each fragment provides an example of how a control can be structured with features such as conditional formatting, data formatting, or retrieving selection options from a data source (2).

### 3.4.1.1 Button Control

The following XSL examples are button controls, as specified in section [2.3.1.1](#).

The following example is a button control with conditional formatting. The **name** attribute is set to the value of **my:field1**. This means that the button's display text is the value of **my:field1**. Conditional formatting is set such that if the value of **my:field3** is equal to "true", the control is hidden.

```
<input class="langFont" title="" type="button" xd:xctname="Button" xd:CtrlId="CTRL1_5"
tabIndex="0">
  <xsl:attribute name="style">
    <xsl:choose>
      <xsl:when test="my:field3 = string(true())">DISPLAY: none</xsl:when>
    </xsl:choose>
  </xsl:attribute>
  <xsl:attribute name="value">
    <xsl:value-of select="my:field1"/>
  </xsl:attribute>
</input>
```

The following example is a button control that is used to update the form content in the Web browser. The button display text is the value of **my:field1**. Conditional formatting is set such that if the value of **my:field2** is equal to "Red", the control has a red background color.

```
<input class="langFont" title="" style="BEHAVIOR: url(#default#ActionButton)" type="button"
xd:xctname="Button" xd:CtrlId="CTRL1_5" xd:action="updateForm" tabIndex="0">
  <xsl:attribute name="style">BEHAVIOR: url(#default#ActionButton);<xsl:choose>
    <xsl:when test="not(xdEnvironment:IsBrowser())">DISPLAY: none</xsl:when>
    <xsl:when test="my:field2 = &quot;Red&quot;">BACKGROUND-COLOR: #ff0000</xsl:when>
  </xsl:choose>
</xsl:attribute>
  <xsl:attribute name="value">
    <xsl:value-of select="my:field1"/>
  </xsl:attribute>
</input>
```

The following example is a button control that is used to submit the form (1) data. The button display text is statically set to "Submit". This control has two conditional formatting settings, as follows:

- If the value of **my:field1** is "1", the control is disabled and has a yellow background color.
- If the value of **my:field2** is "abc", the button display text is bold and the control has an orange background.

```
<input class="langFont" title="Press to submit this form" style="BEHAVIOR:
url(#default#ActionButton)" accessKey="S" type="button" value="Submit"
xd:xctname="Button" xd:CtrlId="CTRL1_5" xd:action="submit" xd:postbackModel="always"
tabIndex="0">
  <xsl:attribute name="style">BEHAVIOR: url(#default#ActionButton);<xsl:choose>
    <xsl:when test="my:field1 = 1">BACKGROUND-COLOR: #ffff00</xsl:when>
    <xsl:when test="my:field2 = &quot;abc&quot;">FONT-WEIGHT: bold; COLOR:
#ff6600</xsl:when>
  </xsl:choose>
</xsl:attribute>
```

```

<xsl:choose>
  <xsl:when test="my:field1 = 1">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>
  <xsl:when test="my:field2 = &quot;abc&quot;"/>
</xsl:choose>
</input>

```

The following example is a button control that is used to refresh the content of a secondary data source (2). The button display text is statically set to "Refresh". Conditional formatting is set such that if the value of **my:field1** is "1", the control is disabled and has a yellow background color.

```

<input class="langFont" title="" style="BEHAVIOR: url(#default#ActionButton)" type="button"
value="Refresh" xd:xctname="Button" xd:CtrlId="CTRL1_5" xd:action="refresh"
xd:auxDom="UserNameList" tabIndex="0">
  <xsl:attribute name="style">BEHAVIOR: url(#default#ActionButton);<xsl:choose>
    <xsl:when test="my:field1 = 1">BACKGROUND-COLOR: #ffff00</xsl:when>
  </xsl:choose>
</xsl:attribute>
<xsl:choose>
  <xsl:when test="my:field1 = 1">
    <xsl:attribute name="disabled">true</xsl:attribute>
  </xsl:when>
</xsl:choose>
</input>

```

### 3.4.1.2 Check Box Control

The following XSL examples are check box controls, as specified in section [2.3.1.2](#).

The following example is a check box control with the value "1" if the control is not checked, and zero ("0") if the control is checked. When the user hovers over the control with the cursor, it displays the message "this is a checkbox".

```

<input class="xdBehavior_Boolean" title="this is a checkbox" type="checkbox"
xd:binding="my:field1" xd:boundProp="xd:value" xd:offValue="1" xd:onValue="0" tabIndex="0"
xd:xctname="CheckBox" xd:CtrlId="CTRL1">
  <xsl:attribute name="xd:value">
    <xsl:value-of select="my:field1" />
  </xsl:attribute>
  <xsl:if test="my:field1=&quot;true&quot;">
    <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
  </xsl:if>
</input>

```

The following example is a check box control with the value "false" if the control is not checked, and "true" if the control is checked. Conditional formatting is set such that if the control is checked, the control is disabled.

```

<input class="xdBehavior_Boolean" title="" type="checkbox" xd:binding="my:field2"
xd:boundProp="xd:value" xd:offValue="false" xd:onValue="true" tabIndex="0"
xd:xctname="CheckBox" xd:CtrlId="CTRL2">
  <xsl:choose>
    <xsl:when test="my:field2 = string(true())">
      <xsl:attribute name="disabled">true</xsl:attribute>
    </xsl:when>
  </xsl:choose>

```

```

        </xsl:when>
    </xsl:choose>
    <xsl:attribute name="xd:value">
        <xsl:value-of select="my:field2" />
    </xsl:attribute>
    <xsl:if test="my:field2='true'">
        <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
</input>

```

### 3.4.1.3 Contact Selector Control

The following XSL example is a contact selector control, as specified in section [2.3.1.3](#), with conditional formatting. Conditional formatting is set such that if the value of **my:field1** is "false", the control is disabled.

```

<object class="xdActiveX" hideFocus="1" style="WIDTH: 288px; HEIGHT: 22px"
classid="{clsid:61e40d31-993d-4777-8fa0-19ca59b6d0bb}" tabIndex="0" tabStop="true"
xd:xctname="{ {61e40d31-993d-4777-8fa0-19ca59b6d0bb} }" xd:CtrlId="CTRL1"
xd:bindingType="xmlNode" xd:bindingProperty="Value" xd:boundProp="xd:inline"
contentEditable="false" xd:binding="my:group1">
    <xsl:if test="function-available('xdImage:getImageUrl')">
        <xsl:attribute name="src"><xsl:value-of
select="xdImage:getImageUrl(my:group1)"/></xsl:attribute>
    </xsl:if>
    <xsl:choose>
        <xsl:when test="my:field1 = string(false())">
            <xsl:attribute name="xd:disableEditing">yes</xsl:attribute>
        </xsl:when>
    </xsl:choose>
    <param NAME="ButtonFont" VALUE="Verdana,10,0,400,0,0,0"/>
    <param NAME="ButtonText" VALUE="To..."/>
    <param NAME="DisplayNameXPath" VALUE="my:DisplayName"/>
    <param NAME="ObjectIdXPath" VALUE="my:AccountId"/>
    <param NAME="ObjectTypeXPath" VALUE="my:AccountType"/>
    <param NAME="SiteUrlXPath" VALUE="/Context/@siteUrl"/>
    <param NAME="SiteUrlDataSource" VALUE="Context"/>
    <param NAME="NewNodeTemplate"
VALUE="&lt;my:Person&gt;&#xA;&lt;my:DisplayName&gt;&lt;/my:DisplayName&gt;&#xA;&lt;my:Account
Id&gt;&lt;/my:AccountId&gt;&#xA;&lt;my:AccountType&gt;&lt;/my:AccountType&gt;&#xA;&lt;/my:Per
son&gt;"/>
    <param NAME="BackgroundColor" VALUE="2147483653"/>
    <param NAME="MaxLines" VALUE="4"/>
    <param NAME="Direction" VALUE="0"/>
</object>

```

### 3.4.1.4 Date Picker Control

The following XSL examples are date picker controls, as specified in section [2.3.1.4](#).

The following example is a date picker control where **xd:datfmt** is equal to "date", "dateFormat:Short Date". This formats the value of **my:field1** to be a short date.

```

<div class="xdDTPicker" title="" style="WIDTH: 130px" noWrap="1" xd:CtrlId="CTRL1"
xd:xctname="DTPicker">

```



```

    <span class="xdDTText xdBehavior_FormattingNoBUI" hideFocus="1" contentEditable="true"
    xd:xctname="DTPicker_DTText" xd:datafmt="&quot;date&quot;;&quot;dateFormat:Short Date;&quot;"
    xd:boundProp="xd:num" xd:binding="my:field1" tabIndex="0" xd:innerCtrl="_DTText">
        <xsl:attribute name="xd:num">
            <xsl:value-of select="my:field1" />
        </xsl:attribute>
        <xsl:choose>
            <xsl:when test="function-available('xdFormatting:formatString')">
                <xsl:value-of
    select="xdFormatting:formatString(my:field1,&quot;date&quot;;&quot;dateFormat:Short
    Date;&quot;)" />
            </xsl:when>
            <xsl:otherwise>
                <xsl:value-of select="my:field1" />
            </xsl:otherwise>
        </xsl:choose>
    </span>
    <button class="xdDTButton" xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton"
    tabIndex="-1">
        
    </button>
</div>

```

The following example is a date picker control with conditional formatting. Conditional formatting is set such that if the value of **my:field3** is "1900-01-01", the text for the control is bold and strikethrough.

```

<div class="xdDTPicker" title="" style="WIDTH: 130px" noWrap="1" xd:CtrlId="CTRL3"
xd:xctname="DTPicker">
    <span class="xdDTText xdBehavior_FormattingNoBUI" hideFocus="1" contentEditable="true"
    xd:xctname="DTPicker_DTText" xd:datafmt="&quot;date&quot;;&quot;dateFormat:Short Date;&quot;"
    xd:boundProp="xd:num" xd:binding="my:field3" tabIndex="0" xd:innerCtrl="_DTText">
        <xsl:attribute name="style">
            <xsl:choose>
                <xsl:when test="my:field3 = &quot;1900-01-01&quot;">FONT-WEIGHT: bold; TEXT-
    DECORATION: line-through</xsl:when>
            </xsl:choose>
        </xsl:attribute>
        <xsl:attribute name="xd:num">
            <xsl:value-of select="my:field3" />
        </xsl:attribute>
        <xsl:choose>
            <xsl:when test="function-available('xdFormatting:formatString')">
                <xsl:value-of
    select="xdFormatting:formatString(my:field3,&quot;date&quot;;&quot;dateFormat:Short
    Date;&quot;)" />
            </xsl:when>
            <xsl:otherwise>
                <xsl:value-of select="my:field3" />
            </xsl:otherwise>
        </xsl:choose>
    </span>
    <button class="xdDTButton" xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton"
    tabIndex="-1">
        
    </button>
</div>

```

### 3.4.1.5 Drop-Down List Control

The following XSL examples are drop-down list controls, as specified in section [2.3.1.5](#).

The following example is a drop-down list control with the static values of "Select...", "1", "2", and "3".

```
<select class="xdComboBox xdBehavior_Select" title="" size="1" xd:binding="my:field1"
xd:boundProp="value" xd:xctname="dropdown" tabIndex="0" xd:CtrlId="CTRL1" style="WIDTH:
130px">
  <xsl:attribute name="value">
    <xsl:value-of select="my:field1" />
  </xsl:attribute>
  <option>
    <xsl:if test="my:field1='&quot;&quot;'">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    Select...
  </option>
  <option value="1">
    <xsl:if test="my:field1='1'">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    1
  </option>
  <option value="2">
    <xsl:if test="my:field1='2'">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    2
  </option>
  <option value="3">
    <xsl:if test="my:field1='3'">
      <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    3
  </option>
</select>
```

The following example is a drop-down list control with values that are dynamically generated from an external data source (2) called "sample".

```
<select class="xdComboBox xdBehavior_Select" title="" style="WIDTH: 130px" size="1"
xd:binding="my:field2" xd:boundProp="value" value="" xd:xctname="dropdown" xd:CtrlId="CTRL2"
tabIndex="0">
  <xsl:attribute name="value">
    <xsl:value-of select="my:field2" />
  </xsl:attribute>
  <xsl:choose>
    <xsl:when test="function-available('xdXDocument:GetDOM')">
      <option />
      <xsl:variable name="val" select="my:field2" />
      <xsl:if
test="not(xdXDocument:GetDOM('&quot;sample&quot;)/main/small/big/name[.= $val] or $val='')">
        <option selected="selected">
          <xsl:attribute name="value">
            <xsl:value-of select="$val" />
          </xsl:attribute>
        </option>
      </xsl:if>
    </xsl:when>
  </xsl:choose>
```

```

        <xsl:value-of select="$val" />
    </option>
</xsl:if>
<xsl:for-each
select="xdXDocument:GetDOM('sample')/main/small/big/name">
    <option>
        <xsl:attribute name="value">
            <xsl:value-of select="." />
        </xsl:attribute>
        <xsl:if test="$val=".>
            <xsl:attribute name="selected">selected</xsl:attribute>
        </xsl:if>
        <xsl:value-of select="." />
    </option>
</xsl:for-each>
</xsl:when>
<xsl:otherwise>
    <option>
        <xsl:value-of select="my:field2" />
    </option>
</xsl:otherwise>
</xsl:choose>
</select>

```

The following example is a drop-down list control with values that are dynamically generated from an external data source (2) called "sample", displaying only unique entries.

```

<select class="xdComboBox xdBehavior_Select" title="" style="WIDTH: 130px" size="1"
xd:binding="my:field2" xd:boundProp="value" value="" xd:xctname="dropdown" xd:CtrlId="CTRL2"
tabIndex="0">
    <xsl:attribute name="value">
        <xsl:value-of select="my:field2" />
    </xsl:attribute>
    <xsl:choose>
        <xsl:when test="function-available('xdXDocument:GetDOM')">
            <option />
            <xsl:variable name="val" select="my:field2" />
            <xsl:if
test="not(xdXDocument:GetDOM('sample')/main/small/big/name[.= $val] or $val='')">
                <option selected="selected">
                    <xsl:attribute name="value">
                        <xsl:value-of select="$val" />
                    </xsl:attribute>
                    <xsl:value-of select="$val" />
                </option>
            </xsl:if>
            <xsl:variable name="items">
                <xsl:copy-of
select="xdXDocument:GetDOM('sample')/main/small/big/name" />
            </xsl:variable>
            <xsl:variable name="uniqueItems" select="msxsl:node-set($items)/*[not(. =
preceding::name)]" />
            <xsl:for-each select="$uniqueItems">
                <option>
                    <xsl:attribute name="value">
                        <xsl:value-of select="." />
                    </xsl:attribute>
                    <xsl:if test="$val=".>

```

```

        <xsl:attribute name="selected">selected</xsl:attribute>
    </xsl:if>
    <xsl:value-of select="." />
</option>
</xsl:for-each>
</xsl:when>
<xsl:otherwise>
    <option>
        <xsl:value-of select="my:field2" />
    </option>
</xsl:otherwise>
</xsl:choose>
</select>

```

The following example is a drop-down list control with conditional formatting and values that are dynamically generated from an external data source (2) called "sample", displaying only unique entries.

```

<select class="xdComboBox xdBehavior_Select" title="" style="WIDTH: 130px" size="1"
xd:binding="my:field2" xd:boundProp="value" value="" xd:xctname="dropdown" xd:CtrlId="CTRL2"
tabIndex="0">
    <xsl:attribute name="style">
        WIDTH: 130px;
    <xsl:choose>
        <xsl:when test="my:field2 = &quot;bob&quot;">FONT-WEIGHT: bold; COLOR: #808000;
        FONT-STYLE: italic; BACKGROUND-COLOR: #800000; TEXT-DECORATION: underline line-
        through</xsl:when>
        <xsl:when test="my:field2 = &quot;theodore&quot;" />
    </xsl:choose>
</xsl:attribute>
<xsl:choose>
    <xsl:when test="my:field2 = &quot;bob&quot;" />
    <xsl:when test="my:field2 = &quot;theodore&quot;">
        <xsl:attribute name="disabled">true</xsl:attribute>
    </xsl:when>
</xsl:choose>
<xsl:attribute name="value">
    <xsl:value-of select="my:field2" />
</xsl:attribute>
<xsl:choose>
    <xsl:when test="function-available('xdXDocument:GetXDocument')">
        <option />
        <xsl:variable name="val" select="my:field2" />
        <xsl:if
            test="not (xdXDocument:GetXDocument(&quot;sample&quot;)/main/small/big/name[.= $val] or $val='')">
            <option selected="selected">
                <xsl:attribute name="value">
                    <xsl:value-of select="$val" />
                </xsl:attribute>
                <xsl:value-of select="$val" />
            </option>
        </xsl:if>
        <xsl:variable name="items">
            <xsl:copy-of
                select="xdXDocument:GetXDocument(&quot;sample&quot;)/main/small/big/name" />
        </xsl:variable>
        <xsl:variable name="uniqueItems" select="msxsl:node-set($items)/*[not(. =
            preceding::name)]" />
    </xsl:choose>

```

```

        <xsl:for-each select="$uniqueItems">
            <option>
                <xsl:attribute name="value">
                    <xsl:value-of select="." />
                </xsl:attribute>
                <xsl:if test="$val=">
                    <xsl:attribute name="selected">selected</xsl:attribute>
                </xsl:if>
                <xsl:value-of select="." />
            </option>
        </xsl:for-each>
    </xsl:when>
    <xsl:otherwise>
        <option>
            <xsl:value-of select="my:field2" />
        </option>
    </xsl:otherwise>
</xsl:choose>
</select>

```

### 3.4.1.6 Expression Box Control

The following XSL examples are expression box controls, as specified in section [2.3.1.6](#).

The following example is an expression box control that is displaying the value of **my:field1**.

```

<span class="xdExpressionBox xdDataBindingUI" title="" xd:xctname="ExpressionBox" tabIndex="-1" xd:CtrlId="CTRL3" xd:disableEditing="yes" style="WIDTH: 145px">
    <xsl:value-of select="my:field1" />
</span>

```

The following example is an expression box control with conditional formatting that is displaying the value of **my:field1**. **xd:datafmt** is equal to "&quot;datetime&quot;;,&quot;dateFormat:Short Date;timeFormat:none;&quot;". This formats the value of **my:field1** to be a short date.

```

<span class="xdExpressionBox xdDataBindingUI xdBehavior_Formatting" title="texas"
xd:binding="my:field1" xd:xctname="ExpressionBox" tabIndex="-1" xd:CtrlId="CTRL4"
xd:disableEditing="yes" xd:datafmt="&quot;datetime&quot;;,&quot;dateFormat:Short
Date;timeFormat:none;&quot;" xd:num="">
    <xsl:attribute name="style">
        WIDTH: 145px;
    </xsl:attribute>
    <xsl:choose>
        <xsl:when test="my:field1 = &quot;1&quot;">DISPLAY: none</xsl:when>
    </xsl:choose>
    <xsl:value-of select="my:field1" />
    <xsl:choose>
        <xsl:when test="function-available('xdFormatting:formatString')">
            <xsl:value-of
select="xdFormatting:formatString(my:field1, &quot;datetime&quot;;,&quot;dateFormat:Short
Date;timeFormat:none;&quot;)" />
        </xsl:when>
        <xsl:otherwise>
            <xsl:value-of select="my:field1" />
        </xsl:otherwise>
    </xsl:choose>

```

```

        </xsl:otherwise>
      </xsl:choose>
    </span>

```

### 3.4.1.7 File Attachment Control

The following XSL example is a file attachment control, as specified in section [2.3.1.7](#).

```

<span class="xdFileAttachment" hideFocus="1" style="WIDTH: 161px; HEIGHT: 30px"
tabStop="true" xd:binding="my:field1" xd:boundProp="xd:inline" tabIndex="0"
xd:xctname="FileAttachment" xd:CtrlId="CTRL1">
  <xsl:if test="function-available('xdImage:getImageUrl')">
    <xsl:attribute name="src"><xsl:value-of
select="xdImage:getImageUrl(my:field1)"/></xsl:attribute>
  </xsl:if>
</span>

```

### 3.4.1.8 Hyperlink Control

The following XSL examples are hyperlink controls, as specified in section [2.3.1.8](#).

The following example is a static hyperlink control.

```

<a href="http://www.contoso.com" xd:disableEditing="yes">http://www.contoso.com</a>

```

The following example is a hyperlink control that dynamically changes its target, as well as its display text. The target of the hyperlink is the value of **my:field1** and the display text is the value of **my:field2**. This control also contains **border formatting** and shading formatting.

```

<span class="xdHyperlink" hideFocus="1" title="" style="BORDER-RIGHT: #cbd8eb 4.5pt dotted;
BORDER-TOP: #cbd8eb 4.5pt dotted; OVERFLOW: visible; BORDER-LEFT: #cbd8eb 4.5pt dotted;
WIDTH: 130px; BORDER-BOTTOM: #cbd8eb 4.5pt dotted; BACKGROUND-COLOR: #ffff00; TEXT-ALIGN:
left" xd:xctname="hyperlink">
  <a class="xdDataBindingUI" xd:CtrlId="CTRL5" xd:disableEditing="yes">
    <xsl:attribute name="href">
      <xsl:value-of select="my:field1" />
    </xsl:attribute>
    <xsl:value-of select="my:field2" />
  </a>
</span>

```

### 3.4.1.9 List Box Control

The following XSL examples are list box controls, as specified in section [2.3.1.9](#).

The following example is a list box control with three selection entries.

```

<select class="xdListBox xdBehavior_Select" title="" size="3" xd:binding="my:field1"
xd:boundProp="value" tabIndex="0" xd:xctname="ListBox" xd:CtrlId="CTRL1" style="WIDTH:
130px">
  <xsl:attribute name="value">
    <xsl:value-of select="my:field1"/>
  </xsl:attribute>

```

```

<option value="a">
  <xsl:if test="my:field1='a'">
    <xsl:attribute name="selected">selected</xsl:attribute>
  </xsl:if>A</option>
<option value="b">
  <xsl:if test="my:field1='b'">
    <xsl:attribute name="selected">selected</xsl:attribute>
  </xsl:if>B</option>
<option value="c">
  <xsl:if test="my:field1='c'">
    <xsl:attribute name="selected">selected</xsl:attribute>
  </xsl:if>C</option>
</select>

```

The following example is a list box control that looks up the selection options from a repeating group within the main data source (2). The control only displays unique selection options. Conditional formatting is set such that if the value of **my:field1** is "a", the control has a red background color.

```

<select class="xdListBox xdBehavior_Select" title="" style="WIDTH: 130px" size="3"
xd:binding="my:field1" xd:boundProp="value" value="a" xd:xctname="ListBox" xd:CtrlId="CTRL1"
tabIndex="0">
  <xsl:attribute name="style">WIDTH: 130px;<xsl:choose>
    <xsl:when test="my:field1 = 'a'">BACKGROUND-COLOR: #ff0000</xsl:when>
  </xsl:choose>
</xsl:attribute>
<xsl:attribute name="value">
  <xsl:value-of select="my:field1"/>
</xsl:attribute>
<xsl:choose>
  <xsl:when test="function-available('xdXDocument:GetXDOM')">
    <option/>
    <xsl:variable name="val" select="my:field1"/>
    <xsl:if test="not(my:group1/my:group2[my:field2=$val] or $val='')">
      <option selected="selected">
        <xsl:attribute name="value">
          <xsl:value-of select="$val"/>
        </xsl:attribute>
        <xsl:value-of select="$val"/>
      </option>
    </xsl:if>
    <xsl:variable name="items">
      <xsl:copy-of select="my:group1/my:group2"/>
    </xsl:variable>
    <xsl:variable name="uniqueItems" select="msxsl:node-set($items)/*[not(my:field3 =
preceding::my:group2/my:field3)]"/>
    <xsl:for-each select="$uniqueItems">
      <option>
        <xsl:attribute name="value">
          <xsl:value-of select="my:field2"/>
        </xsl:attribute>
        <xsl:if test="$val=my:field2">
          <xsl:attribute name="selected">selected</xsl:attribute>
        </xsl:if>
        <xsl:value-of select="my:field3"/>
      </option>
    </xsl:for-each>
  </xsl:when>
  <xsl:otherwise>

```

```

        <option>
            <xsl:value-of select="my:field1"/>
        </option>
    </xsl:otherwise>
</xsl:choose>
</select>

```

The following example is a list box control that looks up the selection options from a repeating group in a secondary data source called "UserNameList". Conditional formatting is set such that if the value of **my:field1** is "a", the control has a red background color.

```

<select class="xdListBox xdBehavior_Select" title="" style="WIDTH: 130px" size="3"
xd:binding="my:field1" xd:boundProp="value" value="a" xd:xctname="ListBox" xd:CtrlId="CTRL1"
tabIndex="0">
    <xsl:attribute name="style">WIDTH: 130px;<xsl:choose>
        <xsl:when test="my:field1 = &quot;a&quot;">BACKGROUND-COLOR: #ff0000</xsl:when>
    </xsl:choose>
</xsl:attribute>
<xsl:attribute name="value">
    <xsl:value-of select="my:field1"/>
</xsl:attribute>
<xsl:choose>
    <xsl:when test="function-available('xdXDocument:GetDOM')">
        <option/>
        <xsl:variable name="val" select="my:field1"/>
        <xsl:if
test="not (xdXDocument:GetDOM(&quot;UserNameList&quot;)/dfs:myFields/dfs:dataFields/dfs:UserNa
meList[@E-mail_Address=$val] or $val='')">
            <option selected="selected">
                <xsl:attribute name="value">
                    <xsl:value-of select="$val"/>
                </xsl:attribute>
                <xsl:value-of select="$val"/>
            </option>
        </xsl:if>
        <xsl:for-each
select="xdXDocument:GetDOM(&quot;UserNameList&quot;)/dfs:myFields/dfs:dataFields/dfs:UserNa
meList">
            <option>
                <xsl:attribute name="value">
                    <xsl:value-of select="@E-mail_Address"/>
                </xsl:attribute>
                <xsl:if test="$val=@E-mail_Address">
                    <xsl:attribute name="selected">selected</xsl:attribute>
                </xsl:if>
                <xsl:value-of select="@Last_Name"/>
            </option>
        </xsl:for-each>
    </xsl:when>
    <xsl:otherwise>
        <option>
            <xsl:value-of select="my:field1"/>
        </option>
    </xsl:otherwise>
</xsl:choose>
</select>

```



### 3.4.1.10 Option Button Control

The following XSL examples are option button controls, as specified in section [2.3.1.10](#).

The following example is an option button control with three option buttons.

```
<div>
  <input class="xdBehavior_Boolean" title="" type="radio" name="{generate-id(my:field3)}"
    xd:binding="my:field3" xd:boundProp="xd:value" xd:xctname="OptionButton" tabIndex="0"
    xd:CtrlId="CTRL6" xd:onValue="1">
    <xsl:attribute name="xd:value">
      <xsl:value-of select="my:field3" />
    </xsl:attribute>
    <xsl:if test="my:field3='1'">
      <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
  </input>
  1
</div>
<div>
  <input class="xdBehavior_Boolean" title="" type="radio" name="{generate-id(my:field3)}"
    xd:binding="my:field3" xd:boundProp="xd:value" xd:xctname="OptionButton" tabIndex="0"
    xd:CtrlId="CTRL7" xd:onValue="2">
    <xsl:attribute name="xd:value">
      <xsl:value-of select="my:field3" />
    </xsl:attribute>
    <xsl:if test="my:field3='2'">
      <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
  </input>
  2
</div>
<div>
  <input class="xdBehavior_Boolean" title="" type="radio" name="{generate-id(my:field3)}"
    xd:binding="my:field3" xd:boundProp="xd:value" xd:xctname="OptionButton" tabIndex="0"
    xd:CtrlId="CTRL8" xd:onValue="3">
    <xsl:attribute name="xd:value">
      <xsl:value-of select="my:field3" />
    </xsl:attribute>
    <xsl:if test="my:field3='3'">
      <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
  </input>
  3
</div>
```

The following example is an option button control with conditional formatting. Conditional formatting is set such that if the value of **my:field3** is "2", the control is disabled.

```
<input class="xdBehavior_Boolean" title="" type="radio" name="{generate-id(my:field3)}"
  xd:binding="my:field3" xd:boundProp="xd:value" xd:xctname="OptionButton" tabIndex="0"
  xd:CtrlId="CTRL7" xd:onValue="2">
  <xsl:choose>
    <xsl:when test="my:field3 = 2">
      <xsl:attribute name="disabled">true</xsl:attribute>
    </xsl:when>
  </xsl:choose>
  <xsl:attribute name="xd:value">
```

```

        <xsl:value-of select="my:field3" />
    </xsl:attribute>
    <xsl:if test="my:field3='&quot;2&quot;'>
        <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
</input>
1

```

### 3.4.1.11 Repeating Section Control

The following XSL examples are **repeating section** controls, as specified in section [2.3.1.11](#).

The repeating section control contains a call to another section control. The repeating section call is surrounded by a **span** that shows how conditional formatting is set such that if the value of **my:field1** is "true", the control is disabled.

The following example is a repeating section call.

```

<span>
    <xsl:attribute name="style">
        <xsl:if test="my:field1 = string(true())">msos-xCollection-group2_1-
editing:disabled;</xsl:if>
    </xsl:attribute>
    <div><xsl:apply-templates select="my:group1/my:group2" mode="_1"/>
        <div class="optionalPlaceholder" xd:xmlToEdit="group2_1" tabIndex="0"
xd:action="xCollection::insert" align="left" style="WIDTH: 651px">Insert item</div>
    </div>
    <div> </div>
    <div> </div>
</span>

```

The following example is a repeating section body.

```

<xsl:template match="my:group2" mode="_1">
    <div class="xdRepeatingSection xdRepeating" title="" style="MARGIN-BOTTOM: 6px; WIDTH:
651px" align="left" xd:CtrlId="CTRL1" xd:xctname="RepeatingSection" tabIndex="-1">
        <div> </div>
        <div><xsl:apply-templates select="my:group3" mode="_2"/>
        </div>
        <div> </div>
    </div>
</xsl:template>

```

### 3.4.1.12 Repeating Table Control

The following XSL examples are repeating table controls, as specified in section [2.3.1.12](#).

The following example is a repeating table control that has three columns (2) containing a text box control, as specified in section [2.3.1.16](#), inside each column (2). The repeating table also outputs a link with the text "Insert Item" that adds an additional row to the repeating table after clicking this link.

```

<div>

```

```

<table class="xdRepeatingTable msoUcTable" title="" style="TABLE-LAYOUT: fixed; WIDTH:
651px; BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none; BORDER-
COLLAPSE: collapse; WORD-WRAP: break-word; BORDER-BOTTOM-STYLE: none" border="1"
xd:CtrlId="CTRL12">
  <colgroup>
    <col style="WIDTH: 210px" />
    <col style="WIDTH: 211px" />
    <col style="WIDTH: 230px" />
  </colgroup>
  <tbody class="xdTableHeader">
    <tr>
      <td>
        <div>
          <strong />
        </div>
      </td>
      <td>
        <div>
          <strong />
        </div>
      </td>
      <td>
        <div>
          <strong />
        </div>
      </td>
    </tr>
  </tbody>
  <tbody xd:xctname="RepeatingTable">
    <xsl:for-each select="my:group1/my:group2">
      <tr>
        <td>
          <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field5"
xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL13" style="WIDTH: 100%">
            <xsl:value-of select="my:field5" />
          </span>
        </td>
        <td>
          <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field6"
xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL14" style="WIDTH: 100%">
            <xsl:value-of select="my:field6" />
          </span>
        </td>
        <td>
          <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field7"
xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL15" style="WIDTH: 100%">
            <xsl:value-of select="my:field7" />
          </span>
        </td>
      </tr>
    </xsl:for-each>
  </tbody>
</table>
<div class="optionalPlaceholder" xd:xmlToEdit="group2_8" tabIndex="0"
xd:action="xCollection::insert" style="WIDTH: 651px">Insert item</div>
</div>

```

The following example is a repeating table control that has three columns (2) containing a text box control inside each column (2). This repeating table also contains a footer. Conditional formatting is

set such that if the value of **my:field8** is "2", the control has a different background color. This control also causes a postback whenever a table row is inserted or removed.

```

<div>
  <table class="xdRepeatingTable msoUcTable" title="" style="TABLE-LAYOUT: fixed; WIDTH:
651px; BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none; BORDER-
COLLAPSE: collapse; WORD-WRAP: break-word; BORDER-BOTTOM-STYLE: none" border="1"
xd:CtrlId="CTRL16" xd:postbackModel="always">
  <colgroup>
    <col style="WIDTH: 210px" />
    <col style="WIDTH: 211px" />
    <col style="WIDTH: 230px" />
  </colgroup>
  <tbody class="xdTableHeader">
    <tr>
      <td>
        <div>
          <strong />
        </div>
      </td>
      <td>
        <div>
          <strong />
        </div>
      </td>
      <td>
        <div>
          <strong />
        </div>
      </td>
    </tr>
  </tbody>
  <tbody xd:xctname="RepeatingTable">
    <xsl:for-each select="my:group3/my:group4">
      <xsl:if test="not((my:field8 = quot;lquot;))">
        <tr>
          <xsl:attribute name="style">
            <xsl:choose>
              <xsl:when test="my:field8 = 2">BACKGROUND-COLOR:
#ff00ff</xsl:when>
            </xsl:choose>
          </xsl:attribute>
          <td>
            <span class="xdTextBox" hideFocus="1" title=""
xd:binding="my:field8" xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL17" style="WIDTH:
100%">
              <xsl:value-of select="my:field8" />
            </span>
          </td>
          <td>
            <span class="xdTextBox" hideFocus="1" title=""
xd:binding="my:field9" xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL18" style="WIDTH:
100%">
              <xsl:value-of select="my:field9" />
            </span>
          </td>
          <td>
            <span class="xdTextBox" hideFocus="1" title=""
xd:binding="my:field10" xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL19" style="WIDTH:
100%">

```

```

                <xsl:value-of select="my:field10" />
            </span>
        </td>
    </tr>
</xsl:if>
</xsl:for-each>
</tbody>
<tbody class="xdTableFooter">
    <tr>
        <td>
            <div> </div>
        </td>
        <td>
            <div> </div>
        </td>
        <td>
            <div> </div>
        </td>
    </tr>
</tbody>
</table>
</div>

```

The following example is a repeating table control that has one column (2) with a text box inside. Conditional formatting is set such that if the value of **my:field1** is "1", the control does not allow the user to insert or delete rows from the table. Note that this conditional formatting is placed outside the repeating table element.

```

<span>
    <xsl:attribute name="style">
        <xsl:if test="my:field1 = &quot;1&quot;">msos-xCollection-group8_16-
        editing:disabled;</xsl:if>
    </xsl:attribute>
    <div>
        <table class="xdRepeatingTable msoUcTable" title="" style="TABLE-LAYOUT: fixed;
        WIDTH: 651px; BORDER-TOP-STYLE: none; BORDER-RIGHT-STYLE: none; BORDER-LEFT-STYLE: none;
        BORDER-COLLAPSE: collapse; WORD-WRAP: break-word; BORDER-BOTTOM-STYLE: none" border="1"
        xd:CtrlId="CTRL24">
            <colgroup>
                <col style="WIDTH: 651px" />
            </colgroup>
            <tbody class="xdTableHeader">
                <tr>
                    <td>
                        <div>
                            <strong />
                        </div>
                    </td>
                </tr>
            </tbody>
            <tbody xd:xctname="RepeatingTable">
                <xsl:for-each select="my:group7/my:group8">
                    <tr>
                        <td>
                            <span class="xdTextBox" hideFocus="1" title=""
                            xd:binding="my:field14" xd:xctname="PlainText" tabIndex="0" xd:CtrlId="CTRL25" style="WIDTH:
                            100%">
                                <xsl:value-of select="my:field14" />
                            </span>
                        </td>
                    </tr>
                </xsl:for-each>
            </tbody>
        </table>
    </div>

```

```

                </span>
            </td>
        </tr>
    </xsl:for-each>
</tbody>
</table>
<div class="optionalPlaceholder" xd:xmlToEdit="group8_16" tabIndex="0"
xd:action="xCollection::insert" style="WIDTH: 651px">Insert item</div>
</div>
</span>

```

### 3.4.1.13 Rich Text Box Control

The following XSL example is a rich text box control, as specified in section [2.3.1.13](#), with conditional formatting set such that if the value of **my:field2** is "false", the control is disabled.

```

<span class="xdRichTextBox" hideFocus="1" title="" xd:binding="my:field1" tabIndex="0"
xd:xctname="RichText" xd:CtrlId="CTRL1" style="WIDTH: 651px; HEIGHT: 50px">
    <xsl:choose>
        <xsl:when test="my:field2 = string(true())">
            <xsl:attribute name="contentEditable">false</xsl:attribute>
        </xsl:when>
    </xsl:choose>
    <xsl:copy-of select="my:field1/node()"/>
</span>

```

### 3.4.1.14 Section Control and Optional Section Control

The following XSL examples are **section and optional section** controls, as specified in section [2.4.1.18](#).

The following example is a section control that can be digitally signed. This control contains a text box control, as specified in section [2.3.1.16](#).

The section call is as follows:

```

<xsl:apply-templates select="my:group1" mode="_1"/>

```

The section body is as follows:

```

<xsl:template match="my:group1" mode="_1">
    <div class="xdSection xdRepeating" title="" style="MARGIN-BOTTOM: 6px; WIDTH: 651px"
align="left" xd:xctname="Section" xd:CtrlId="CTRL1" xd:SignedSectionName="group1" tabIndex="-1">
        <div> </div>
        <div><span class="xdTextBox" hideFocus="1" title="" xd:xctname="PlainText"
xd:CtrlId="CTRL2" tabIndex="0" xd:binding="my:field1" style="WIDTH: 130px">
            <xsl:value-of select="my:field1"/>
        </span>
        </div>
        <div> </div>
    </div>
    <div xd:disableEditing="yes" xd:SignatureBlock="group1"
xd:SignedSectionDisplaySignatures="true" style="MARGIN-TOP: 0px; MARGIN-BOTTOM: 6px;
BEHAVIOR: url (#default#SignaturesInDocUI); WIDTH: 651px">

```

```

        <xsl:if test="function-available('xdXDocument:GetNamedNodeProperty')">
            <xsl:if
test="xdXDocument:GetNamedNodeProperty(/my:myFields/my:signatures1/my:signatures2,
'CanAddSignature', 'false') = 'true'">
                <button title="" style="width: 100%; height: 100%; text-align: left; border:
0px solid; padding: 2px; background-color: window; cursor: hand;">
                    <table style="color: windowtext;" class="defaultInDocUI">
                        <tbody>
                            <tr>
                                <td></td>
                                <td>Click here to sign this section</td>
                            </tr>
                        </tbody>
                    </table>
                </button>
            </xsl:if>
            <xsl:for-each select="/my:myFields/my:signatures1/my:signatures2">
                <xsl:for-each select="sig:Signature">
                    <xsl:choose>
                        <xsl:when test="xdXDocument:GetNamedNodeProperty(.,
'IsValidSignature', 'false') = 'true'">
                            <button title="" style="width: 100%; height: 100%; text-align:
left; border: 0px solid; padding: 2px; background-color: window; cursor: hand;">
                                <table style="color: windowtext;" class="defaultInDocUI">
                                    <tbody>
                                        <tr>
                                            <xsl:choose>
                                                <xsl:when test="function-
available('xdImage:getImageUrl') and
sig:Object/sig:SignatureProperties/sig:SignatureProperty/xdSignatureProperties:NonRepudiation
/xdSignatureProperties:ValidSignedImage">
                                                    <td style="display: none;"></td>
                                                    <td></td>
                                                    <td style="color: gray;">
                                                        <div><b><xsl:value-of
select="xdXDocument:GetNamedNodeProperty(., 'SignedBy', '???')"/></b><span style="margin: 0pt
20pt">View details</span></div>
                                                        <div><xsl:value-of
select="xdXDocument:GetNamedNodeProperty(., 'SignedOn', '???')"/></div>
                                                    </td>
                                                </xsl:otherwise>
                                            </xsl:choose>
                                        </tr>
                                    </tbody>
                                </table>
                            </button>
                        </xsl:when>
                        <xsl:otherwise>
                            <button title="" style="width: 100%; height: 100%; text-align:
left; border: 0px solid; padding: 2px; background-color: window; cursor: hand;">
                                <table style="font: message-box; color: windowtext;">
                                    <tbody>

```

```

        <tr>
            <xsl:choose>
                <xsl:when test="function-
available('xdImage:getImageUrl') and
sig:Object/sig:SignatureProperties/sig:SignatureProperty/xdSignatureProperties:NonRepudiation
/xdSignatureProperties:InvalidSignedImage">
                    <td style="display: none;"></td>
                    <td> </td>
                </xsl:when>
                <xsl:otherwise>
                    <td></td>
                    <td style="color: red;"><b>There is a
problem with this signature</b><span style="margin: 0pt 20pt">View details</span></td>
                </xsl:otherwise>
            </xsl:choose>
        </tr>
    </tbody>
</table>
</button>
</xsl:otherwise>
</xsl:choose>
</xsl:for-each>
</xsl:for-each>
</xsl:if>
</div>
</xsl:template>

```

The following example is an optional section control. This control contains a date picker control, as specified in section [2.3.1.4](#).

The optional section call is as follows:

```

<xsl:choose>
    <xsl:when test="my:group1">
        <xsl:apply-templates select="my:group1" mode="_1"/>
    </xsl:when>
    <xsl:otherwise>
        <div class="optionalPlaceholder" xd:xmlToEdit="group1_1" tabIndex="0" align="left"
style="WIDTH: 651px">Click here to insert</div>
    </xsl:otherwise>
</xsl:choose>

```

The optional section body is as follows:

```

<xsl:template match="my:group1" mode="_1">
    <div class="xdSection xdRepeating" title="" style="MARGIN-BOTTOM: 6px; WIDTH: 651px"
align="left" xd:xctname="Section" xd:CtrlId="CTRL1" tabIndex="-1">
        <div> </div>
        <div>
            <div class="xdDTPicker" title="" style="WIDTH: 130px" noWrap="1"
xd:xctname="DTPicker" xd:CtrlId="CTRL3"><span class="xdDTText xdBehavior_FormattingNoBUI"
hideFocus="1" contentEditable="true" xd:xctname="DTPicker_DTText" tabIndex="0"
xd:binding="my:field2" xd:datafmt="&quot;date&quot;;&quot;dateFormat:Short Date;&quot;;"
xd:boundProp="xd:num" xd:innerCtrl="_DTText">

```



```

        <xsl:attribute name="xd:num">
            <xsl:value-of select="my:field2"/>
        </xsl:attribute>
        <xsl:choose>
            <xsl:when test="function-available('xdFormatting:formatString')">
                <xsl:value-of
select="xdFormatting:formatString(my:field2, &quot;date&quot;, &quot;dateFormat:Short
Date;&quot;)" />
            </xsl:when>
            <xsl:otherwise>
                <xsl:value-of select="my:field2"/>
            </xsl:otherwise>
        </xsl:choose>
    </span>
    <button class="xdDTButton" xd:xctname="DTPicker_DTButton"
xd:innerCtrl="_DTButton" tabIndex="-1">
        
    </button>
</div>
</div>
<div> </div>
</div>
</xsl:template>

```

### 3.4.1.15 Table Control

The following XSL example is a table control, as specified in section [2.3.1.15](#), that is two rows by two columns (2) that has the value "1" in three of the four cells and a button control, as specified in section [2.3.1.1](#), in the remaining cell.

```

<table class="xdLayout" style="BORDER-RIGHT: medium none; TABLE-LAYOUT: fixed; BORDER-TOP:
medium none; BORDER-LEFT: medium none; WIDTH: 260px; BORDER-BOTTOM: medium none; BORDER-
COLLAPSE: collapse; WORD-WRAP: break-word" borderColor="buttontext" border="1">
    <colgroup>
        <col style="WIDTH: 130px" />
        <col style="WIDTH: 130px" />
    </colgroup>
    <tbody vAlign="top">
        <tr>
            <td>
                <div>
                    <font face="Verdana" size="2">1</font>
                </div>
            </td>
            <td>
                <div>
                    <font face="Verdana" size="2">
                        <input class="langFont" title="" type="button" value="Button"
xd:xctname="Button" xd:CtrlId="CTRL10_5" tabIndex="0" />
                    </font>
                </div>
            </td>
        </tr>
        <tr>
            <td>
                <div>
                    <font face="Verdana" size="2">1</font>
                </div>
            </td>
        </tr>
    </tbody>
</table>

```

```

        </td>
        <td>
            <div>
                <font face="Verdana" size="2">1</font>
            </div>
        </td>
    </tr>
</tbody>
</table>

```

### 3.4.1.16 Text Box Control

The following XSL examples are text box controls, as specified in section [2.3.1.16](#).

The following example is a text box control that is bound to **my:field1**.

```

<div>
  <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field1" tabIndex="0"
  xd:xctname="PlainText" xd:CtrlId="CTRL1" style="WIDTH: 130px">
    <xsl:value-of select="my:field1"/>
  </span>
</div>

```

The following example is a text box control with **multi-line** enabled that is bound to **my:field2**.

```

<div>
  <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field2" tabIndex="0"
  xd:xctname="PlainText" xd:CtrlId="CTRL2"
  xd:datafmt="&quot;string&quot;;&quot;plainMultiline&quot;" style="OVERFLOW-Y: auto; OVERFLOW-
  X: auto; WIDTH: 130px; WHITE-SPACE: normal; WORD-WRAP: break-word">
    <xsl:choose>
      <xsl:when test="function-available('xdFormatting:formatString')">
        <xsl:value-of
        select="xdFormatting:formatString(my:field2, &quot;string&quot;;&quot;plainMultiline&quot;)"
        disable-output-escaping="yes"/>
      </xsl:when>
      <xsl:otherwise>
        <xsl:value-of select="my:field2" disable-output-escaping="yes"/>
      </xsl:otherwise>
    </xsl:choose>
  </span>
</div>

```

The following example is a text box control that is bound to **my:field3**. The value of **xd:datafmt** is **"&quot;date&quot;;&quot;locale:1061; dateFormat:d.MM.yyyy;&quot;**. This formats the value of **my:field3** to be a date and specifies the locale as "Estonian". The specific date format is **"dateFormat:d.MM.yyyy"**. This formats the date and specifies how the day, month, and year are displayed. For this example, the date could be displayed as 14.03.2001 corresponding to March 14<sup>th</sup>, 2001.

```

<div>
  <span class="xdTextBox xdBehavior_Formatting" hideFocus="1" title="" contentEditable="true"
  xd:binding="my:field3" tabIndex="0" xd:xctname="PlainText" xd:CtrlId="CTRL3"
  xd:datafmt="&quot;date&quot;;&quot;locale:1061; dateFormat:d.MM.yyyy;&quot;"
  xd:boundProp="xd:num" style="WIDTH: 130px">

```

```

    <xsl:attribute name="xd:num">
      <xsl:value-of select="my:field3"/>
    </xsl:attribute>
    <xsl:choose>
      <xsl:when test="function-available('xdFormatting:formatString')">
        <xsl:value-of
select="xdFormatting:formatString(my:field3, &quot;date&quot;, &quot;locale:1061;dateFormat:d.
MMMM yyyy'. a.'; &quot;)" />
        </xsl:when>
      <xsl:otherwise>
        <xsl:value-of select="my:field3"/>
      </xsl:otherwise>
    </xsl:choose>
  </span>
</div>

```

The following example is a text box control that has conditional formatting and is bound to **my:field4**. Conditional formatting is set such that if the value of **my:field4** is "abc", the text in the control is bold.

```

<div>
  <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field4" tabIndex="0"
xd:xctname="PlainText" xd:CtrlId="CTRL4">
    <xsl:attribute name="style">WIDTH: 130px;
    <xsl:choose>
      <xsl:when test="my:field4 = &quot;abc&quot;">FONT-WEIGHT: bold</xsl:when>
    </xsl:choose>
    </xsl:attribute>
    <xsl:value-of select="my:field4"/>
  </span>
</div>

```

The following example is a text box control that has conditional formatting and data formatting and is bound to **my:field5**. Conditional formatting is set such that if the value of **my:field5** is "def", the text in the control is underlined. The value of **xd:datafmt** is "&quot;time&quot;, &quot;locale:1033;timeFormat:hh:mm:ss tt&quot;". This formats the value of **my:field5** to be a time and specifies the locale as "English". The specific time format is "timeFormat:hh:mm:ss tt;". This formats the time and specifies how the hour, minutes, and seconds are displayed. For this example, the time could be displayed as 09:46:55 AM.

```

<div>
  <span class="xdTextBox xdBehavior_Formatting" hideFocus="1" title="" contentEditable="true"
xd:binding="my:field5" tabIndex="0" xd:xctname="PlainText" xd:CtrlId="CTRL5"
xd:datafmt="&quot;time&quot;, &quot;locale:1033;timeFormat:hh:mm:ss tt&quot;"
xd:boundProp="xd:num">
    <xsl:attribute name="style">WIDTH: 130px;
    <xsl:choose>
      <xsl:when test="my:field5 = &quot;def&quot;">TEXT-DECORATION: underline</xsl:when>
    </xsl:choose>
    </xsl:attribute>
    <xsl:attribute name="xd:num">
      <xsl:value-of select="my:field5"/>
    </xsl:attribute>
    <xsl:choose>
      <xsl:when test="function-available('xdFormatting:formatString')">

```

```

        <xsl:value-of
select="xdFormatting:formatString(my:field5, &quot;time&quot;, &quot;locale:1033;timeFormat:hh:
mm:ss tt;&quot;)" />
    </xsl:when>
    <xsl:otherwise>
        <xsl:value-of select="my:field5" />
    </xsl:otherwise>
</xsl:choose>
</span>
</div>

```

### 3.4.2 Control-Specific Attributes

#### **xd:action**

The following XSLT fragment is an example of a button control, as specified in section [2.3.1.1](#), with a submit action, as specified in section [2.2.147.12](#).

```

<input class="langFont" title="" style="BEHAVIOR: url(#default#ActionButton)" type="button"
value="Submit" xd:xctname="Button" xd:CtrlId="CTRL3_5" xd:action="submit" tabIndex="0"/>

```

The following XSLT fragment is an example of a repeating section control, as specified in section [2.4.1.15](#), that allows insertion of sections.

```

<xsl:apply-templates select="my:group3/my:group4" mode="_2" />
<div class="optionalPlaceholder" xd:xmlToEdit="group4_3" tabIndex="0"
xd:action="xCollection::insert" align="left" style="WIDTH: 651px">Insert item</div>
...

```

The following XSLT fragment is an example of a text box control, as specified in section [2.4.1.20](#), with the **autoAdvance** attribute, as specified in section [2.4.2.3](#), set to "yes".

```

<span class="xdTextBox" hideFocus="1" title="" contentEditable="true" xd:binding="my:field3"
tabIndex="0" xd:xctname="PlainText" xd:CtrlId="CTRL8" xd:autoAdvance="yes" style="WIDTH:
130px; WHITE-SPACE: nowrap">
    <xsl:value-of select="my:field3" />
</span>

```

The following XSLT fragment is an example of a button control with a "refresh" **action**, as specified in section [2.2.147.12](#), with the **auxDom** attribute, as specified in section [2.4.2.4](#).

```

<input class="langFont" title="" style="BEHAVIOR: url(#default#ActionButton)" type="button"
value="Refresh" xd:xctname="Button" xd:CtrlId="CTRL7_5" xd:action="refresh"
xd:auxDom="Notification List" tabIndex="0"/>

```

The following XSLT is an example of a text box control bound to an XML field with the **binding** attribute, as specified in section [2.4.2.6](#).

```

<span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field6" tabIndex="0"
xd:xctname="PlainText" xd:CtrlId="CTRL10" style="WIDTH: 130px">
    <xsl:value-of select="my:field6" />
</span>

```

The following XSLT fragment is an example of a custom control with a **bindingProperty** attribute, as specified in section [2.4.2.7](#), set to "Value".

```
<object class="xdActiveX" hideFocus="1" style="WIDTH: 288px; HEIGHT: 192px"
classid="clsid:8e27c92b-1264-101c-8a2f-040224009c02" tabIndex="0" tabStop="true"
xd:xctname="{8e27c92b-1264-101c-8a2f-040224009c02}" xd:CtrlId="CTRL9" xd:bindingType="text"
xd:bindingProperty="Value" xd:boundProp="xd:inline" contentEditable="false"
xd:binding="my:field5">
...
</object>
```

The following XSLT fragment is an example of a custom control with a **bindingType** attribute, as specified in section [2.4.2.8](#), set to "text".

```
<object class="xdActiveX" hideFocus="1" style="WIDTH: 288px; HEIGHT: 192px"
classid="clsid:8e27c92b-1264-101c-8a2f-040224009c02" tabIndex="0" tabStop="true"
xd:xctname="{8e27c92b-1264-101c-8a2f-040224009c02}" xd:CtrlId="CTRL9" xd:bindingType="text"
xd:bindingProperty="Value" xd:boundProp="xd:inline" contentEditable="false"
xd:binding="my:field5">
...
</object>
```

The following XSLT fragment is an example of a text box control with a **boundProp** attribute, as specified in section [2.4.2.9](#), set to "xd:num".

```
<span class="xdTextBox xdBehavior_Formatting" hideFocus="1" title="" contentEditable="true"
xd:binding="my:field12" tabIndex="0" xd:xctname="PlainText" xd:CtrlId="CTRL17"
xd:boundProp="xd:num"
xd:datafmt="&quot;currency&quot;, &quot;numDigits:0;negativeOrder:0;positiveOrder:0;currencyLo
cale:1033;&quot;" style="WIDTH: 130px">
  <xsl:attribute name="xd:num">
    <xsl:value-of select="my:field12"/>
  </xsl:attribute>
  <xsl:choose>
    <xsl:when test="function-available('xdFormatting:formatString')">
      <xsl:value-of
select="xdFormatting:formatString(my:field12, &quot;currency&quot;, &quot;numDigits:0;negativeO
rder:0;positiveOrder:0;currencyLocale:1033;&quot;)" />
    </xsl:when>
    <xsl:otherwise>
      <xsl:value-of select="my:field12"/>
    </xsl:otherwise>
  </xsl:choose>
</span>
```

The following XSLT fragment is an example of a text box control with a **CtrlId** attribute, as specified in section [2.4.2.10](#), set to "CTRL1":

```
<span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field1" tabIndex="0"
xd:xctname="PlainText" xd:CtrlId="CTRL1" style="WIDTH: 130px">
  <xsl:value-of select="my:field1"/>
</span>
```

The following XSLT fragment is an example of a text box control with currency data formatting specified using a **datafmt** attribute, as specified in section [2.4.2.11](#).

```

<span class="xdTextBox xdBehavior_Formatting" hideFocus="1" title="" contentEditable="true"
xd:binding="my:field7" tabIndex="0" xd:xctname="PlainText" xd:CtrlId="CTRL11"
xd:boundProp="xd:num"
xd:datafmt="&quot;currency&quot;;&quot;;&quot;;numDigits:0;negativeOrder:0;positiveOrder:0;currencyLo
cale:1033;&quot;" style="WIDTH: 130px">
...
</span>

```

The following XSLT fragment is an example of a hyperlink control, as specified in section [2.4.1.12](#), with the **disableEditing** attribute, as specified in section [2.4.2.12](#), set to "yes".

```

<span class="xdHyperlink" hideFocus="1" title="" style="OVERFLOW: visible; WIDTH: 130px;
TEXT-ALIGN: left" xd:xctname="hyperlink">
  <a class="xdDataBindingUI" xd:CtrlId="CTRL13" xd:disableEditing="yes">
    <xsl:attribute name="href">
      <xsl:value-of select="my:field1"/>
    </xsl:attribute>
    <xsl:value-of select="my:field1"/>
  </a>
</span>

```

The following XSLT fragment is an example of a text box control with the **disableEditing** attribute, as specified in section [2.4.2.12](#), set to "yes":

```

<span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field8" tabIndex="-1"
xd:xctname="PlainText" xd:CtrlId="CTRL15" xd:disableEditing="yes" style="WIDTH: 130px; WHITE-
SPACE: nowrap">
  <xsl:value-of select="my:field8"/>
</span>

```

The following XSLT fragment is an example of a custom control with the **enabledProperty** attribute, as specified in section [2.4.2.13](#), set to "Enabled".

```

<object
class="xdActiveX"
hideFocus="1"
style="WIDTH: 288px; HEIGHT: 192px"
classid="clsid:8e27c92b-1264-101c-8a2f-040224009c02"
tabIndex="0"
tabStop="true"
xd:xctname="{8e27c92b-1264-101c-8a2f-040224009c02}"
xd:CtrlId="CTRL2"
xd:bindingType="text"
xd:bindingProperty="Value"
xd:boundProp="xd:inline"
xd:enabledValue="true"
xd:enabledProperty="Enabled"
contentEditable="false"
xd:binding="my:field1">
  <xsl:if test="function-available('xdImage:getImageUrl')">
    <xsl:attribute name="src">
      <xsl:value-of select="xdImage:getImageUrl(my:field1)"/>
    </xsl:attribute>
  </xsl:if>
</object>

```

The following XSLT fragment is an example of a custom control with the **enabledValue** attribute, as specified in section [2.4.2.14](#), set to "true".

```
<object
class="xdActiveX"
hideFocus="1"
style="WIDTH: 288px; HEIGHT: 192px"
classid="clsid:8e27c92b-1264-101c-8a2f-040224009c02"
tabIndex="0"
tabStop="true"
xd:xctname="{8e27c92b-1264-101c-8a2f-040224009c02}"
xd:CtrlId="CTRL2"
xd:bindingType="text"
xd:bindingProperty="Value"
xd:boundProp="xd:inline"
xd:enabledValue="true"
xd:enabledProperty="Enabled"
contentEditable="false"
xd:binding="my:field1">
  <xsl:if test="function-available('xdImage:getImageUrl')">
    <xsl:attribute name="src">
      <xsl:value-of select="xdImage:getImageUrl(my:field1)"/>
    </xsl:attribute>
  </xsl:if>
</object>
```

The following XSLT is an example of a date picker control, as specified in section [2.4.1.8](#), with an **innerCtrl** attribute, as specified in section [2.4.2.19](#).

```
<div class="xdDTPicker" title="" style="WIDTH: 130px" noWrap="1" xd:xctname="DTPicker"
xd:CtrlId="CTRL15">
  <span class="xdDTText xdBehavior_FormattingNoBUI" hideFocus="1" contentEditable="true"
xd:binding="my:field10" tabIndex="0" xd:xctname="DTPicker_DTText" xd:boundProp="xd:num"
xd:datafmt="&quot;date&quot;;&quot;dateFormat:Short Date;&quot;" xd:innerCtrl="_DTText">
    ...
  </span>
  <button class="xdDTButton" xd:xctname="DTPicker_DTButton" xd:innerCtrl="_DTButton"
tabIndex="-1">
    
  </button>
</div>
```

The following XSLT fragment is an example of a text box control with a **num** attribute, as specified in section [2.4.2.26](#).

```
<span class="xdTextBox xdBehavior_Formatting" hideFocus="1" title="" contentEditable="true"
xd:binding="my:field12" tabIndex="0" xd:xctname="PlainText" xd:CtrlId="CTRL17"
xd:boundProp="xd:num"
xd:datafmt="&quot;currency&quot;;&quot;numDigits:0;negativeOrder:0;positiveOrder:0;currencyLo
cale:1033;&quot;" style="WIDTH: 130px">
  <xsl:attribute name="xd:num">
    <xsl:value-of select="my:field12"/>
  </xsl:attribute>
  <xsl:choose>
    <xsl:when test="function-available('xdFormatting:formatString')">
```

```

        <xsl:value-of
select="xdFormatting:formatString(my:field12, &quot;currency&quot;, &quot;numDigits:0;negativeO
rder:0;positiveOrder:0;currencyLocale:1033;&quot;)" />
    </xsl:when>
    <xsl:otherwise>
        <xsl:value-of select="my:field12" />
    </xsl:otherwise>
</xsl:choose>
</span>

```

The following XSLT fragment is an example of a check box control with the **offValue** attribute, as specified in section [2.4.2.27](#), set to "1".

```

<input class="xdBehavior_Boolean" title="" type="checkbox" xd:binding="my:field4"
tabIndex="0" xd:xctname="CheckBox" xd:CtrlId="CTRL9" xd:boundProp="xd:value" xd:offValue="1"
xd:onValue="true">
    <xsl:attribute name="xd:value">
        <xsl:value-of select="my:field4" />
    </xsl:attribute>
    <xsl:if test="my:field4=&quot;true&quot;">
        <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
</input> Field 4

```

The following XSLT fragment is an example of a check box control with the **onValue** attribute, as specified in section [2.4.2.28](#), set to "true".

```

<input class="xdBehavior_Boolean" title="" type="checkbox" xd:binding="my:field4"
tabIndex="0" xd:xctname="CheckBox" xd:CtrlId="CTRL9" xd:boundProp="xd:value" xd:offValue="1"
xd:onValue="true">
    <xsl:attribute name="xd:value">
        <xsl:value-of select="my:field4" />
    </xsl:attribute>
    <xsl:if test="my:field4=&quot;true&quot;">
        <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
</input> Field 4

```

The following XSLT fragment is an example of an option button control with two options, with the **onValue** attribute set to "value1" and "value2" respectively.

```

<input class="xdBehavior_Boolean" title="" type="radio" name="{generate-id(my:field5)}"
xd:binding="my:field5" tabIndex="0" xd:xctname="OptionButton" xd:CtrlId="CTRL10"
xd:boundProp="xd:value" xd:onValue="value1">
    <xsl:attribute name="xd:value">
        <xsl:value-of select="my:field5" />
    </xsl:attribute>
    <xsl:if test="my:field5=&quot;value1&quot;">
        <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
</input> Field 5
</div>
<div>
<input class="xdBehavior_Boolean" title="" type="radio" name="{generate-id(my:field5)}"
xd:binding="my:field5" tabIndex="0" xd:xctname="OptionButton" xd:CtrlId="CTRL11"
xd:boundProp="xd:value" xd:onValue="value2">

```



```

    <xsl:attribute name="xd:value">
      <xsl:value-of select="my:field5"/>
    </xsl:attribute>
    <xsl:if test="my:field5=&quot;value&quot;">
      <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
    </xsl:if>
  </input> Field 5

```

The following XSLT fragment is an example of a text box control with the **postbackModel** attribute, as specified in section [2.4.2.29](#), set to "always".

```

<span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field1" tabIndex="0"
xd:xctname="PlainText" xd:CtrlId="CTRL1" xd:postbackModel="always" style="WIDTH: 130px">
  <xsl:value-of select="my:field1"/>
</span>

```

The following XSLT fragment is an example of a section control, as specified in section [2.4.1.18](#), with the **SignatureBlock** attribute, as specified in section [2.4.2.31](#), set to "group3".

```

<div xd:disableEditing="yes" xd:SignatureBlock="group3"
xd:SignedSectionDisplaySignatures="true" style="MARGIN-TOP: 0px; MARGIN-BOTTOM: 6px;
BEHAVIOR: url (#default#SignaturesInDocUI); WIDTH: 651px">
  ...
</div>

```

The following XSLT fragment is an example of a section control with the **SignedSectionDisplaySignatures** attribute, as specified in section [2.4.2.32](#), set to "true".

```

<div xd:disableEditing="yes" xd:SignatureBlock="group3"
xd:SignedSectionDisplaySignatures="true" style="MARGIN-TOP: 0px; MARGIN-BOTTOM: 6px;
BEHAVIOR: url (#default#SignaturesInDocUI); WIDTH: 651px">
  ...
</div>

```

The following XSLT fragment is an example of a section control with the **SignedSectionName** attribute, as specified in section [2.4.2.33](#), set to "group3".

```

<div class="xdSection xdRepeating" title="" style="MARGIN-BOTTOM: 6px; WIDTH: 651px"
align="left" xd:xctname="Section" xd:CtrlId="CTRL4" xd:SignedSectionName="group3" tabIndex="-
1">
</div>

```

The following XSLT fragment is an example of a check box control with a **value** attribute, as specified in section [2.4.2.34](#).

```

<input class="xdBehavior_Boolean" title="" type="checkbox" xd:binding="my:field4"
tabIndex="0" xd:xctname="CheckBox" xd:CtrlId="CTRL9" xd:boundProp="xd:value" xd:offValue="1"
xd:onValue="true">
  <xsl:attribute name="xd:value">
    <xsl:value-of select="my:field4"/>
  </xsl:attribute>
  <xsl:if test="my:field4=&quot;true&quot;">
    <xsl:attribute name="CHECKED">CHECKED</xsl:attribute>
  </xsl:if>
</input>

```

```
</xsl:if>
</input> Field 4
```

### xd:xctname

The following XSLT fragment is an example of a text box control with an **xctname** attribute, as specified in section [2.4.2.35](#), set to "PlainText".

```
<span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field1" tabIndex="0"
xd:xctname="PlainText" xd:CtrlId="CTRL1" style="WIDTH: 130px">
  <xsl:value-of select="my:field1"/>
</span>
```

The following XSLT fragment is an example of a custom control with an **xctname** attribute set to "{8e27c92b-1264-101c-8a2f-040224009c02}".

```
<object class="xdActiveX" hideFocus="1" style="WIDTH: 288px; HEIGHT: 192px"
classid="clsid:8e27c92b-1264-101c-8a2f-040224009c02" tabIndex="0" tabStop="true"
xd:xctname="{8e27c92b-1264-101c-8a2f-040224009c02}" xd:CtrlId="CTRL2" xd:bindingType="text"
xd:bindingProperty="Value" xd:boundProp="xd:inline" contentEditable="false"
xd:binding="my:field2">
  <xsl:if test="function-available('xdImage:getImageUrl')">
    <xsl:attribute name="src"><xsl:value-of
select="xdImage:getImageUrl(my:field2)"/></xsl:attribute>
  </xsl:if>
  ...
</object>
```

The following XSLT fragment is an example of an optional section control, as specified in section [2.4.1.18](#), with the **xmlToEdit** attribute, as specified in section [2.4.2.36](#), set to "group3\_2".

```
<xsl:choose>
  <xsl:when test="my:group3">
    <xsl:apply-templates select="my:group3" mode="_2"/>
  </xsl:when>
  <xsl:otherwise>
    <div class="optionalPlaceholder" xd:xmlToEdit="group3_2" tabIndex="0" align="left"
style="WIDTH: 651px">Click here to insert</div>
  </xsl:otherwise>
</xsl:choose>
```

### 3.4.3 XSL Function Extensions

The following examples demonstrate the use of a selection of function extensions. XSL function extensions are specified in section [2.4.3](#).

The following example XML is used as the target for the given XSL snippets in the first four examples:

#### SampleXML1.xml

```
<my:myFields>
  <my:group1>
    <my:group2>
```

```

        <my:Values>6</my:Values>
    </my:group2>
    <my:group2>
        <my:Values>12</my:Values>
    </my:group2>
</my:group2>
        <my:Values>15</my:Values>
    </my:group2>
</my:group1>
    <my:Average>11</my:Average>
    <my:Maximum>15</my:Maximum>
    <my:Minimum>6</my:Minimum>
    <my:Date>2008-02-04</my:Date>
    <my:Seconds>3</my:Seconds>
    <my:ZipCode>98052x</my:ZipCode>
</my:myFields>

```

- **Conditional formatting with `xdMath:Avg`**

**`xdMath:Avg`** can be used to conditionally change the **style** attribute of an HTML tag.

```

<xsl:attributename="style">WIDTH: 130px;
  <xsl:choose>
    <xsl:when test="my:Average = xdMath:Avg(my:group1/my:group2)">FONT-WEIGHT:
bold</xsl:when>
  </xsl:choose>
</xsl:attribute>

```

The **`xdMath:Avg`** function is used to calculate the average of the values in the **`my:group2`** nodes, which is  $6+12+15 / 3 = 11$ . Because this value is equal to the value of the **`my:Average`** node, the test evaluates to true and **`xsl:when`** outputs **FONT-WEIGHT: bold** and makes the font bold.

- **Conditional formatting with `xdDate:AddDays`, `xdDate:Today`**

This example is similar to the first example in that it shows how to perform conditional formatting using XSL function extensions.

```

<xsl:attributename="style">
  <xsl:choose>
    <xsl:when test = "my:Date = xdDate:AddDays(xdDate:Today() , 3)">FONT-WEIGHT: bold;
COLOR: #ff0000
  </xsl:when>
  </xsl:choose>
</xsl:attribute>

```

The **`xsl:when`** clause is used to test if the date in the **`my:Date`** node is three days past today. **`xdDate:Today()`** is used to get today's date and the output is passed in to the **`AddDays`** function. **`AddDays`** adds three days to today's date and outputs the date three days past today. In the SampleXML1.xml snippet, **`my:Date`** is "2008-02-04". If today is 2008-02-01, **test** evaluates to true and the **style** attribute has the value "FONT-WEIGHT: bold; COLOR: #ff0000".

- **Outputting time with `xdDate:AddSeconds`**

```

<xsl:value-of select="xdDate:AddSeconds(xdDate:Now(), my:Seconds)"/>

```

The **xsl:value-of** clause outputs the value returned by the expression in the **select** attribute. **xdDate:AddSeconds** returns the time equivalent to now plus the number of seconds indicated in **my:Seconds**. **Xsl:value-of** outputs the resulting time.

- **Conditional formatting with xdUtil:Match**

```
<spanclass="xdTextBox" hideFocus="1" title="" xd:CtrlId="CTRL12" xd:xctname="PlainText"
tabIndex="0" xd:binding="my:ZipCode">
  <xsl:if test="function-available('xdXDocument:GetDOM')">
    <xsl:attributename="style">
      <xsl:choose>
        <xsl:when test = "not( xdUtil:Match( string(my:ZipCode),
        &quot;\d\d\d\d\d&quot; ; ) )">COLOR: #ff0000; TEXT-DECORATION: line-through
        </xsl:when>
      </xsl:choose>
    </xsl:attribute>
    <xsl:value-of select="my:ZipCode"/>
  </xsl:if>
</span>
```

In this example, the XSL representation of a text box control is given. This textbox is used to enter zip codes. To make users aware of the case where they enter an invalid zip code, the **xdUtil:Match** function is used to check that the entered value conforms to the zip code pattern. The first parameter of the **xdUtil:Match** function takes the value of the **my:ZipCode** node. The second parameter is the regular expression "**\d\d\d\d\d**", which means five consecutive digits. If the given zip code is not composed of five digits, the textbox has the **style** "COLOR: #ff0000; TEXT-DECORATION: line-through", which makes it more visible to the user that the entered zip code is not valid. In SampleXML1.xml, **my:ZipCode** is "98052x", which does not match the given regular expression. Therefore, **test** evaluates to TRUE and the text box control's **style** attribute has the given **style** attributes.

The following example XML is used as the target for the given XSL snippets in the next example.

### SampleXML2.xml

```
<root>
  <value>12</value>
  <value>14</value>
  <value>20</value>
</root>.
```

- **Getting data from a secondary data source using xdXDocument:GetDOM**

This example uses SampleXML2.xml as the secondary data source of a form template (.xsn) file. This secondary data source is registered with a data source name "example". Data is retrieved from this data source (2) for use within the XSL.

The example makes the font of a text box control bold if the average of the values in the secondary data source is less than 15.

```
<spanclass="xdTextBox"hideFocus="1"title=""tabIndex="0"xd:binding="my:field2"xd:xctname="Plain
Text"xd:CtrlId="CTRL3">
  <xsl:if test="function-available('xdXDocument:GetDOM')">
    <xsl:attribute name="style">WIDTH: 130px;
    <xsl:choose>
```

```

        <xsl:when test="xdMath:Avg(
xdXDocument:getDOM(&quot;example&quot;)/root/value )">FONT-WEIGHT: bold; caption: Conditional
Formatting 1
</xsl:when>
    </xsl:choose>
    </xsl:attribute>
    <xsl:value-of select="my:field2"/>
</xsl:if>
</span>

```

In the preceding XSL snippet, secondary data source content is queried using **xdXDocument:getDom** and then an XPath expression is built on it. This XPath expression returns a **node-set** containing all the **value** nodes in the "example" data source (2). Then **xdMath:Avg** is used to calculate the average.

The following example XML is used as the target for the given XSL snippets in the next example.

### SampleXML3.xml

```

<my:myFields>
  <my:group1>
    <my:group2>
      <my:Count>3</my:Count>
      <my:Value>4</my:Value>
      <my:Total>12</my:Total>
    </my:group2>
    <my:group2>
      <my:Count>12</my:Count>
      <my:Value>20</my:Value>
      <my:Total>240</my:Total>
    </my:group2>
    <my:group2>
      <my:Count>4</my:Count>
      <my:Value>8</my:Value>
      <my:Total>12</my:Total>
    </my:group2>
  </my:group1>
</my:myFields>

```

#### ▪ Using xdMath:Eval

```

<span class="xdExpressionBox xdDataBindingUI" title="" xd:CtrlId="CTRL9"
xd:xctname="ExpressionBox" tabIndex="-1" xd:disableEditing="yes" style="WIDTH: 145px">
<xsl:if test="function-available('xdXDocument:GetDOM')">
<xsl:value-of select="sum(xdMath:Eval (my:group1/my:group2, &quot;xdMath:Nz (my:Count) *
xdMath:Nz (my:Value) &quot;))"/>
</xsl:if>
</span>

```

This XSL example is an expression box control. The value of the expression box is calculated from SampleXML3.xml using **xdMath:Eval**. The XPath expression passed to **xdMath:Eval** returns a **node-set** containing all the **my:group2** nodes under **my:group1**. The **my:group2** nodes contain the child elements **my:Count** and **my:Value**. The expression passed in as the second parameter to the **xdMath:Eval** calculates the sum of the multiplication of the nodes from the first parameter.

**xdMath:Eval** calculates this multiplication for every **group2** node and returns the result as a **node-set**.

Count	Value
3	4
12	20
4	8

The output is  $3*4 + 12 * 20 + 4*8 = 284$ .

### 3.5 Print View Files (XSLT) Examples

The following example shows how a form view can be set as a print view of another form view. In this example, the first form view, "View 1", has two text box controls, as specified in section [2.4.1.20](#). The second form view, "Print Version View 1" has only one of the text box controls that "View 2" has and is set as a print view of "View 1".

The following XSLT excerpt shows two textbox controls for "View 1" from view1.xsl.

```
...
<div>
  <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field1" tabIndex="0"
  xd:xctname="PlainText" xd:CtrlId="CTRL1" style="WIDTH: 130px">
    <xsl:value-of select="my:field1"/>
  </span>
  <span class="xdTextBox" hideFocus="1" title="" xd:binding="my:field2" tabIndex="0"
  xd:xctname="PlainText" xd:CtrlId="CTRL2" style="WIDTH: 130px">
    <xsl:value-of select="my:field2"/>
  </span>
</div>
...
```

The following XSL excerpt shows only one control for "Print Version View 1" from PrintVersionView1.xsl.

```
...
<div>
  <span class="xdTextBox" hideFocus="1" title="" xd:CtrlId="CTRL2" xd:xctname="PlainText"
  tabIndex="0" xd:binding="my:field2" style="WIDTH: 130px">
    <xsl:value-of select="my:field2"/>
  </span>
</div>
...
```

The following excerpt shows how the "Print Version View 1" form view is set as a print view of "View 1" in the manifest from manifest.xsf.

```
...
<xsf:views default="View 1">
  <xsf:view showMenuItem="yes" name="View 1" caption="View 1" printView="Print Version View
  1">
    <xsf:mainpane transform="view1.xsl">
```

```

    </xsf:mainpane>
  </xsf:view>
  <xsf:view showMenuItem="yes" name="Print Version View 1" caption="Print Version View 1">
    <xsf:mainpane transform="PrintVersionView1.xsl">
      </xsf:mainpane>
    </xsf:view>
  </xsf:views>
...

```

The **printView** attribute of the **view** element, as specified in section [2.2.123](#), for "View 1" points to "Print Version View 1". This notation defines "Print Version View 1" as a print version view of "View 1".

```

...
<xsf:view showMenuItem="yes" name="View 1" caption="View 1" printView="Print Version View 1">
...

```

### 3.6 Submit Files (XML) Examples

Data from an XML document is be consumed by the Web service method **GetRandom**. Following is a fragment from the WSDL file containing the XML schema for the **GetRandom** method.

```

<?xml version="1.0" encoding="utf-8" ?>
<wsdl:definitions xmlns:s1="http://microsoft.com/wsdl/types/"
xmlns:http="http://schemas.xmlsoap.org/wsdl/http/"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" xmlns:s="http://www.w3.org/2001/XMLSchema"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:i0="http://tempuri.org/twrSchema.xsd" xmlns:tns="http://webservicesserver/Everett"
targetNamespace="http://webservicesserver/Everett"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:import namespace="http://tempuri.org/twrSchema.xsd"
location="http://webservicesserver/anon/Service1.asmx?schema=typedDataSet" />
  <wsdl:types>
    <s:schema elementFormDefault="qualified"
targetNamespace="http://webservicesserver/Everett">
      <s:import namespace="http://tempuri.org/twrSchema.xsd" />
      <s:import namespace="http://www.w3.org/2001/XMLSchema" />
      <s:import namespace="http://microsoft.com/wsdl/types/" />
      <s:element name="GetRandom">
        <s:complexType>
          <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="seed" type="s:int" />
            <s:element minOccurs="1" maxOccurs="1" name="min" type="s:int" />
            <s:element minOccurs="1" maxOccurs="1" name="max" type="s:int" />
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="GetRandomResponse">
        <s:complexType>
          <s:sequence>
            <s:element minOccurs="1" maxOccurs="1" name="GetRandomResult"
type="s:int" />
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:schema>

```

```
</wsdl:types>
</wsdl:definitions>
```

The following example is how a Submit.xml looks when using the **GetRandom** method.

```
<dfs:myFields xmlns:dfs="http://schemas.microsoft.com/office/infopath/2003/dataFormSolution"
xmlns:tns="http://webservicesserver/Everett">
  <dfs:dataFields>
    <tns:GetRandom>
      <tns:seed></tns:seed>
      <tns:min></tns:min>
      <tns:max></tns:max>
    </tns:GetRandom>
  </dfs:dataFields>
</dfs:myFields>
```

As specified before, Submit.xml can broadly be categorized into two parts

- The first part is static and contains **<dfs:myFields>** and **<dfs:dataFields>**.
- The second part is the template for the **GetRandom** Web service method based on the Web service's WSDL.

The child of **<dfs:dataFields>** is **<tns:GetRandom>**, which is the template of the **GetRandom** method. The three parameters to this Web service method are **<tns:seed>**, **<tns:min>**, and **<tns:max>**. This subtree validates against the XML schema element **<s:element name="GetRandom">** in the WSDL example.

### 3.7 Template.XML Examples

The following example shows two textbox controls with default values. When the form template containing this template.xml file is opened for editing, the first textbox, which is bound to the **my:field1** field is populated with the initial value of "Jean Philippe", and the second text box, which is bound to the **my:field2** field is populated with the initial value of "Bagel".

```
<?xml version="1.0" encoding="UTF-8"?>
<?mso-infoPathSolution name="urn:schemas-microsoft-com:office:infopath:Template:-myXSD-2008-02-15T23-26-48" href="manifest.xsf" solutionVersion="1.0.0.1" productVersion="12.0.0"
PIVersion="1.0.0.0" ?>
<?mso-application progid="InfoPath.Document" versionProgId="InfoPath.Document.2"?>
<my:myFields xmlns:my="http://schemas.microsoft.com/office/infopath/2003/myXSD/2008-02-15T23:26:48">
  <my:field1>Jean Philippe</my:field1>
  <my:field2>Bagel</my:field2>
</my:myFields>
```

### 3.8 Upgrade.XSL Examples

There are two examples. One is upgrade.xsl and one is focused on the **MSXSL:node-set()** function.



### 3.8.1 Upgrade.XSL Example

The following example is a simple upgrade.xml. The following example is a form file based on the original form template.

```
<?xml version="1.0" encoding="UTF-8"?>
<?mso-infoPathSolution solutionVersion="1.0.0.1" productVersion="12.0.0" PIVersion="1.0.0.0"
href="file:///C:\upgradeexample.xsn" name="urn:schemas-microsoft-
com:office:infopath:upgradeexample:-myXSD-2008-02-06T18-48-21" ?>
<?mso-application progid="InfoPath.Document" versionProgId="InfoPath.Document.2"?>
<my:myFields xmlns:my="http://schemas.microsoft.com/office/infopath/2003/myXSD/2008-02-
06T18:48:21" xml:lang="en-us">
  <my:field1>exampletext</my:field1>
  <my:field2>true</my:field2>
  <my:myRepeatingGroup>
    <my:fieldNumber xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance">20000</my:fieldNumber>
  </my:myRepeatingGroup>
  <my:myRepeatingGroup>
    <my:fieldNumber>30000</my:fieldNumber>
  </my:myRepeatingGroup>
</my:myFields>
```

A new version of the form template is published, and the upgrade.xml in the form template (.xsn) file is as follows.:

```
<?xml version="1.0" encoding="UTF-8" standalone="no"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" xmlns:msxsl="urn:schemas-
microsoft-com:xslt" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:my="http://schemas.microsoft.com/office/infopath/2003/myXSD/2008-02-06T18:48:21"
xmlns:xd="http://schemas.microsoft.com/office/infopath/2003" version="1.0">
  <xsl:output encoding="UTF-8" method="xml"/>
  <xsl:template match="/">
    <xsl:copy-of select="processing-instruction() | comment()"/>
    <xsl:choose>
      <xsl:when test="my:myFields">
        <xsl:apply-templates select="my:myFields" mode="_0"/>
      </xsl:when>
      <xsl:otherwise>
        <xsl:variable name="var">
          <xsl:element name="my:myFields"/>
        </xsl:variable>
        <xsl:apply-templates select="msxsl:node-set($var)/*" mode="_0"/>
      </xsl:otherwise>
    </xsl:choose>
  </xsl:template>
  <xsl:template match="my:myRepeatingGroup" mode="_1">
    <xsl:copy>
      <xsl:element name="my:fieldNumber">
        <xsl:choose>
          <xsl:when test="my:fieldNumber/text()[1]">
            <xsl:copy-of select="my:fieldNumber/text()[1]"/>
          </xsl:when>
          <xsl:otherwise>
            <xsl:attribute name="xsi:nil">true</xsl:attribute>
          </xsl:otherwise>
        </xsl:choose>
      </xsl:element>
    </xsl:copy>
  </xsl:template>
```

```

    <xsl:element name="my:fieldText">
      <xsl:copy-of select="my:fieldText/text() [1]"/>
    </xsl:element>
  </xsl:copy>
</xsl:template>
<xsl:template match="my:myFields" mode="_0">
  <xsl:copy>
    <xsl:element name="my:field1">
      <xsl:copy-of select="my:field1/text() [1]"/>
    </xsl:element>
    <xsl:choose>
      <xsl:when test="my:myRepeatingGroup">
        <xsl:apply-templates select="my:myRepeatingGroup" mode="_1"/>
      </xsl:when>
      <xsl:otherwise>
        <xsl:variable name="var">
          <xsl:element name="my:myRepeatingGroup"/>
        </xsl:variable>
        <xsl:apply-templates select="msxsl:node-set($var)/*" mode="_1"/>
      </xsl:otherwise>
    </xsl:choose>
  </xsl:copy>
</xsl:template>
</xsl:stylesheet>

```

After upgrade.xsl is applied, the form file is as follows.

```

<?xml version="1.0" encoding="UTF-8"?>
<?mso-infoPathSolution productVersion="12.0.0" PIVersion="1.0.0.0" href="
file:///C:/upgradeexample.xsn" name="urn:schemas-microsoft-
com:office:infopath:upgradeexample:-myXSD-2008-02-06T18-48-21" solutionVersion="1.0.0.3" ?>
<?mso-application progid="InfoPath.Document" versionProgid="InfoPath.Document.2"?>
<my:myFields xmlns:my="http://schemas.microsoft.com/office/infopath/2003/myXSD/2008-02-
06T18:48:21" xml:lang="en-us">
  <my:field1>exampletext</my:field1>
  <my:myRepeatingGroup>
    <my:fieldNumber>20000</my:fieldNumber>
    <my:fieldText></my:fieldText>
  </my:myRepeatingGroup>
  <my:myRepeatingGroup>
    <my:fieldNumber>30000</my:fieldNumber>
    <my:fieldText></my:fieldText>
  </my:myRepeatingGroup>
</my:myFields>

```

The upgrade.xsl file has the following effects:

- **my:field2** was removed. That data was discarded.
- **my:myRepeatingGroup** has a new field, **my:fieldText**, which is empty for all XML nodes under **my:myRepeatingGroup**.
- The data for all other fields was retained and moved to the new data source (2).

### 3.8.2 MSXSL:Node-Set() Example

In the following example, **\$var** is a variable that is an XML node tree in the style sheet. The **for-each** statement combined with the **node-set** function allows the user to iterate over this XML node tree as an XML node set.

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
                xmlns:msxsl="urn:schemas-microsoft-com:xslt"
                xmlns:user="http://www.contoso.com"
                version="1.0">
  <xsl:variable name="books">
    <book author="Michael Howard">Writing Secure Code</book>
    <book author="Michael Kay">XSLT Reference</book>
  </xsl:variable>

  <xsl:template match="/">
    <authors>
      <xsl:for-each select="msxsl:node-set($books)/book">
        <author><xsl:value-of select="@author"/></author>
      </xsl:for-each>
    </authors>
  </xsl:template>
</xsl:stylesheet>
```

This transformation outputs the following.

```
<?xml version="1.0" encoding="utf-8"?>

<authors><author>Michael Howard</author><author>Michael Kay</author></authors>
```

## 4 Security Considerations

This section describes security considerations related to the InfoPath form template format and the template.XML specification.

### 4.1 The InfoPath Form Template Format

Because a form template (.xsn) file is a cabinet (.cab) file, as described in [\[MC-MCF\]](#), any and all security considerations including, but not limited to, digital signatures (1) affecting cabinet (.cab) files affect form template (.xsn) files.

### 4.2 Template.XML Specification

Because template.xml is a form file, as described in [\[MS-IPFFX\]](#), any and all security considerations including, but not limited to, code signatures affecting form files affect template.xml files.

## 5 Appendix A: Full XML Schemas

For ease of implementation, this section provides the full XML schemas for the InfoPath XSF and XSF2 namespaces, as specified in section [2.2](#).

### 5.1 The InfoPath XSF XSD

The XML schema for the form definition (.xsf) file can also be found at the location described by [\[MSDN-XSF\]](#).

```
<?xml version="1.0" encoding="UTF-8" ?>
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsf="http://schemas.microsoft.com/office/infopath/2003/solutionDefinition"
targetNamespace="http://schemas.microsoft.com/office/infopath/2003/solutionDefinition"
elementFormDefault="qualified"
attributeFormDefault="unqualified">
  <!-- xdTitle type -->
  <xsd:simpleType name="xdTitle">
    <xsd:restriction base="xsd:string">
      <xsd:minLength value="1" />
      <xsd:maxLength value="255" />
      <xsd:pattern
value="([\p{Z}\p{Cc}\p{Cf}\p{Cn}])(([\p{Zl}\p{Zp}\p{Cc}])*([\p{Z}\p{Cc}\p{Cf}\p{Cn}]])?"
/>
    </xsd:restriction>
  </xsd:simpleType>
  <!-- xdViewName type -->
  <xsd:simpleType name="xdViewName">
    <xsd:restriction base="xsd:string">
      <xsd:minLength value="1" />
      <xsd:maxLength value="255" />
      <xsd:pattern
value="([\p{Z}\p{C}/\#\&quot;&gt;&lt;])(([\p{Zl}\p{Zp}\p{C}/\#\&quot;&gt;&lt;])*)*([\p{Z}\p{C}/\#\&quot;&gt;&lt;])?" />
    </xsd:restriction>
  </xsd:simpleType>
  <!-- xdRoleName type -->
  <!-- uses xdViewName as base -->
  <xsd:simpleType name="xdRoleName">
    <xsd:restriction base="xsf:xdViewName"></xsd:restriction>
  </xsd:simpleType>
  <!-- xdYesNo type -->
  <xsd:simpleType name="xdYesNo">
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:enumeration value="yes" />
      <xsd:enumeration value="no" />
    </xsd:restriction>
  </xsd:simpleType>
  <!-- xdEnabledDisabled type -->
  <xsd:simpleType name="xdEnabledDisabled">
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:enumeration value="enabled" />
      <xsd:enumeration value="disabled" />
    </xsd:restriction>
  </xsd:simpleType>
  <!-- xdManualAuto type -->
  <xsd:simpleType name="xdManualAuto">
    <xsd:restriction base="xsd:NMTOKEN">
```

```

        <xsd:enumeration value="manual" />
        <xsd:enumeration value="automatic" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdExpressionLiteral type -->
<xsd:simpleType name="xdExpressionLiteral">
    <xsd:restriction base="xsd:NMTOKEN">
        <xsd:enumeration value="expression" />
        <xsd:enumeration value="literal" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdFileName type -->
<xsd:simpleType name="xdFileName">
    <xsd:restriction base="xsd:string">
        <xsd:minLength value="1" />
        <xsd:maxLength value="64" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdScriptLanguage type -->
<xsd:simpleType name="xdScriptLanguage">
    <xsd:restriction base="xsd:NMTOKEN">
        <xsd:pattern
value="((([Jj][Aa][Vv][Aa]|([Jj])|([Vv][Bb])))([Ss][Cc][Rr][Ii][Pp][Tt]))(.[Ee][Nn][Cc][Oo]
][Dd][Ee])|([Jj][Aa][Vv][Aa]|([Jj])|([Vv][Bb])))([Ss][Cc][Rr][Ii][Pp][Tt])|([Mm][Aa][Nn][
Aa][Gg][Ee][Dd][Cc][Oo][Dd][Ee])" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdSolutionVersion type -->
<xsd:simpleType name="xdSolutionVersion">
    <xsd:restriction base="xsd:string">
        <xsd:pattern value="([0-9]{1,4}).{3}[0-9]{1,4}" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdEmptyString type -->
<xsd:simpleType name="xdEmptyString">
    <xsd:restriction base="xsd:string">
        <xsd:maxLength value="0" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdErrorMessage type -->
<xsd:simpleType name="xdErrorMessage">
    <xsd:restriction base="xsd:string">
        <xsd:maxLength value="1023" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdDesignMode type -->
<xsd:simpleType name="xdDesignMode">
    <xsd:restriction base="xsd:NMTOKEN">
        <xsd:enumeration value="normal" />
        <xsd:enumeration value="protected" />
    </xsd:restriction>
</xsd:simpleType>
<!-- xdTrustLevel type -->
<xsd:simpleType name="xdTrustLevel">
    <xsd:restriction base="xsd:string">
        <xsd:enumeration value="restricted" />
        <xsd:enumeration value="domain" />
    </xsd:restriction>
</xsd:simpleType>

```

```

<!-- xdSignedDataBlockName type -->
<xsd:simpleType name="xdSignedDataBlockName">
  <xsd:restriction base="xsd:ID">
    <xsd:minLength value="1" />
    <xsd:maxLength value="255" />
  </xsd:restriction>
</xsd:simpleType>
<!-- xdSignedDataBlockMessage type -->
<xsd:simpleType name="xdSignedDataBlockMessage">
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="255" />
  </xsd:restriction>
</xsd:simpleType>
<!-- xdSignatureRelationEnum type -->
<xsd:simpleType name="xdSignatureRelationEnum">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="countersign" />
    <xsd:enumeration value="cosign" />
    <xsd:enumeration value="single" />
  </xsd:restriction>
</xsd:simpleType>
<!-- xdHWSname type -->
<xsd:simpleType name="xdHWSname">
  <xsd:restriction base="xsd:NCName">
    <xsd:pattern value="[^-\.^\\|^\[\^\]\^\|^\+?^\*^@^\{\^\}\^\(\^\)\^\&gt;\^\&lt;\^\=^\;\^\,]*" />
  </xsd:restriction>
</xsd:simpleType>
<!-- xdHWSCaption type -->
<xsd:simpleType name="xdHWSCaption">
  <xsd:restriction base="xsd:string">
    <xsd:minLength value="1" />
    <xsd:maxLength value="255" />
  </xsd:restriction>
</xsd:simpleType>
<!-- xDocumentClass -->
<xsd:element name="xDocumentClass">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf:package" minOccurs="1" />
      <xsd:element ref="xsf:permissions" minOccurs="0" />
      <xsd:element ref="xsf:views" minOccurs="1" />
      <xsd:element ref="xsf:hwsWorkflow" minOccurs="0" />
      <xsd:element ref="xsf:externalViews" minOccurs="0" />
      <xsd:element ref="xsf:scripts" minOccurs="0" />
      <xsd:element ref="xsf:schemaErrorMessages" minOccurs="0" />
      <xsd:element ref="xsf:documentSchemas" minOccurs="0" />
      <xsd:element ref="xsf:applicationParameters" minOccurs="0" />
      <xsd:element ref="xsf:featureRestrictions" minOccurs="0" />
      <xsd:element ref="xsf:fileNew" minOccurs="0" />
      <xsd:element ref="xsf:customValidation" minOccurs="0" />
      <xsd:element ref="xsf:domEventHandlers" minOccurs="0" />
      <xsd:element ref="xsf:importParameters" minOccurs="0" />
      <xsd:element ref="xsf:listProperties" minOccurs="0" />
      <xsd:element ref="xsf:taskpane" minOccurs="0" />
      <xsd:element ref="xsf:documentSignatures" minOccurs="0" />
      <xsd:element ref="xsf:dataObjects" minOccurs="0" />
      <xsd:element ref="xsf:dataAdapters" minOccurs="0" />
      <xsd:element ref="xsf:query" minOccurs="0" />
      <xsd:element ref="xsf:submit" minOccurs="0" />
    </xsd:all>
  </xsd:complexType>
</xsd:element>

```

```

    <xsd:element ref="xsf:save" minOccurs="0" />
    <xsd:element ref="xsf:roles" minOccurs="0" />
    <xsd:element ref="xsf:onLoad" minOccurs="0" />
    <xsd:element ref="xsf:documentVersionUpgrade" minOccurs="0" />
    <xsd:element ref="xsf:extensions" minOccurs="0" />
    <xsd:element ref="xsf:ruleSets" minOccurs="0" />
    <xsd:element ref="xsf:calculations" minOccurs="0" />
  </xsd:all>
  <xsd:attribute name="name" type="xsd:string" use="optional" />
  <xsd:attribute name="author" type="xsd:string" use="optional" />
  <xsd:attribute name="description" use="optional">
    <xsd:simpleType>
      <xsd:restriction base="xsd:string">
        <xsd:maxLength value="255" />
      </xsd:restriction>
    </xsd:simpleType>
  </xsd:attribute>
  <xsd:attribute name="solutionVersion" type="xsf:xdSolutionVersion" use="optional" />
  <xsd:attribute name="productVersion" type="xsd:string" use="optional" />
  <xsd:attribute name="solutionFormatVersion" type="xsf:xdSolutionVersion" use="required"
/>
  <xsd:attribute name="dataFormSolution" type="xsf:xdYesNo" use="optional" />
  <xsd:attribute name="requireFullTrust" type="xsf:xdYesNo" use="optional" />
  <xsd:attribute name="trustLevel" type="xsf:xdTrustLevel" use="optional" />
  <xsd:attribute name="trustSetting" type="xsf:xdManualAuto" use="optional" />
  <xsd:attribute name="publishUrl" type="xsd:string" use="optional" />
</xsd:complexType>
<xsd:key name="view_name_key">
  <xsd:selector xpath="./xsf:views/xsf:view" />
  <xsd:field xpath="@name" />
</xsd:key>
<xsd:key name="externalView_name_key">
  <xsd:selector xpath="./xsf:externalViews/xsf:externalView" />
  <xsd:field xpath="@name" />
</xsd:key>
<xsd:key name="view_or_externalView_name_key">
  <xsd:selector xpath="./xsf:views/xsf:view | ./xsf:externalViews/xsf:externalView" />
  <xsd:field xpath="@name" />
</xsd:key>
<xsd:key name="ruleset_name_key">
  <xsd:selector xpath="./xsf:ruleSets/xsf:ruleSet" />
  <xsd:field xpath="@name" />
</xsd:key>
<xsd:key name="dataObject_name_key">
  <xsd:selector xpath="./xsf:dataObjects/xsf:dataObject" />
  <xsd:field xpath="@name" />
</xsd:key>
<xsd:unique name="adapter_name_unique">
  <xsd:selector xpath="./xsf:dataObjects/xsf:dataObject/xsf:query/* | ./xsf:query/* |
./xsf:dataAdapters/* | ./xsf:submit/xsf:webServiceAdapter | ./xsf:submit/xsf:davAdapter |
./xsf:submit/xsf:emailAdapter | ./xsf:submit/xsf:submitToHostAdapter" />
  <xsd:field xpath="@name" />
</xsd:unique>
<xsd:key name="adapter_name_key">
  <xsd:selector xpath="./xsf:dataAdapters/*" />
  <xsd:field xpath="@name" />
</xsd:key>
<xsd:unique name="view_external_name_unique">
  <xsd:selector xpath="./xsf:views/xsf:view | ./xsf:externalViews/xsf:externalView" />

```



```

        <xsd:field xpath="@name" />
    </xsd:unique>
</xsd:element>
<!-- schemaErrorMessages -->
<xsd:element name="schemaErrorMessages">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:override" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<!-- override -->
<xsd:element name="override">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:errorMessage" />
            <xsd:attribute name="match" type="xsd:string" use="required" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<!-- applicationParameters -->
<xsd:element name="applicationParameters">
    <xsd:complexType>
        <xsd:all>
            <xsd:element ref="xsf:solutionProperties" minOccurs="0" />
        </xsd:all>
        <xsd:attribute name="application" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string">
                    <xsd:enumeration value="InfoPath Design Mode" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
    </xsd:complexType>
</xsd:element>
<!-- solutionProperties -->
<xsd:element name="solutionProperties">
    <xsd:complexType>
        <xsd:attribute name="allowCustomization" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="lastOpenView" use="optional" />
        <xsd:attribute name="scriptLanguage" type="xsf:xdScriptLanguage" use="optional" />
        <xsd:attribute name="automaticallyCreateNodes" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="lastVersionNeedingTransform" type="xsf:xdSolutionVersion"
use="optional" />
        <xsd:attribute name="fullyEditableNamespace" type="xsd:anyURI" use="optional" />
        <xsd:attribute name="publishSaveUrl" type="xsd:string" use="optional" />
    </xsd:complexType>
</xsd:element>
<!-- featureRestrictions -->
<xsd:element name="featureRestrictions">
    <xsd:complexType>
        <xsd:all>
            <xsd:element name="save" minOccurs="0">
                <xsd:complexType>
                    <xsd:attribute name="ui" type="xsf:xdEnabledDisabled" use="required" />
                </xsd:complexType>
            </xsd:element>
            <xsd:element ref="xsf:exportToWeb" minOccurs="0" />
            <xsd:element ref="xsf:exportToExcel" minOccurs="0" />
        </xsd:all>
    </xsd:complexType>
</xsd:element>

```

```

        <xsd:element ref="xsf:print" minOccurs="0" />
        <xsd:element ref="xsf:sendMail" minOccurs="0" />
        <xsd:element ref="xsf:autoRecovery" minOccurs="0" />
    </xsd:all>
</xsd:complexType>
</xsd:element>
<!-- exportToWeb -->
<xsd:element name="exportToWeb">
    <xsd:complexType>
        <xsd:attribute name="ui" type="xsf:xdEnabledDisabled" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- exportToExcel -->
<xsd:element name="exportToExcel">
    <xsd:complexType>
        <xsd:attribute name="ui" type="xsf:xdEnabledDisabled" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- print -->
<xsd:element name="print">
    <xsd:complexType>
        <xsd:attribute name="ui" type="xsf:xdEnabledDisabled" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- sendMail -->
<xsd:element name="sendMail">
    <xsd:complexType>
        <xsd:attribute name="ui" type="xsf:xdEnabledDisabled" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- autoRecovery -->
<xsd:element name="autoRecovery">
    <xsd:complexType>
        <xsd:attribute name="feature" type="xsf:xdEnabledDisabled" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- query -->
<xsd:element name="query">
    <xsd:complexType>
        <xsd:choice>
            <xsd:element ref="xsf:queryAction" />
            <xsd:element ref="xsf:adoAdapter" />
            <xsd:element ref="xsf:webServiceAdapter" />
            <xsd:element ref="xsf:xmlFileAdapter" />
            <xsd:element ref="xsf:sharepointListAdapter" />
        </xsd:choice>
    </xsd:complexType>
</xsd:element>
<!-- scripts -->
<xsd:element name="scripts">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:script" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
        <xsd:attribute name="language" type="xsf:xdScriptLanguage" use="required" />
        <xsd:attribute name="enforceScriptTimeout" type="xsf:xdYesNo" use="optional"
default="yes" />
    </xsd:complexType>
</xsd:element>

```

```

<xsd:element name="script">
  <xsd:complexType>
    <xsd:attribute name="src" type="xsf:xdFileName" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- dataObjects -->
<xsd:element name="dataObjects">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:dataObject" />
    </xsd:choice>
  </xsd:complexType>
  <xsd:unique name="dataObjects_name_unique">
    <xsd:selector xpath="./xsf:dataObject" />
    <xsd:field xpath="@name" />
  </xsd:unique>
</xsd:element>
<xsd:element name="dataObject">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element name="query">
        <xsd:complexType>
          <xsd:choice>
            <xsd:element ref="xsf:adoAdapter" />
            <xsd:element ref="xsf:webServiceAdapter" />
            <xsd:element ref="xsf:xmlFileAdapter" />
            <xsd:element ref="xsf:sharepointListAdapter" />
          </xsd:choice>
        </xsd:complexType>
      </xsd:element>
    </xsd:choice>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required" />
    <xsd:attribute name="schema" type="xsd:string" use="optional" />
    <xsd:attribute name="initOnLoad" type="xsf:xdYesNo" use="optional" />
  </xsd:complexType>
</xsd:element>
<!-- dataAdapters -->
<xsd:element name="adoAdapter">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdTitle" use="optional" />
    <xsd:attribute name="connectionString" type="xsd:string" use="required" />
    <xsd:attribute name="commandText" type="xsd:string" use="required" />
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional" />
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="webServiceAdapter">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:operation" />
    </xsd:choice>
    <xsd:attribute name="name" type="xsf:xdTitle" use="optional" />
    <xsd:attribute name="wsdlUrl" type="xsd:string" use="required" />
    <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional" />
    <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional" />
    <xsd:attribute name="useDataSet" type="xsf:xdYesNo" use="optional" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="hwsAdapter">

```

```

<xsd:complexType>
  <xsd:choice>
    <xsd:element ref="xsf:hwsOperation" />
  </xsd:choice>
  <xsd:attribute name="name" type="xsf:xdTitle" use="required" />
  <xsd:attribute name="wsdlUrl" type="xsd:string" use="required" />
  <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional" />
  <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional" />
</xsd:complexType>
</xsd:element>
<xsd:element name="operation">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:input" minOccurs="0" />
    </xsd:choice>
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="soapAction" type="xsd:string" use="required" />
    <xsd:attribute name="serviceUrl" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="hwsOperation">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:input" />
    </xsd:choice>
    <xsd:attribute name="type" type="xsd:string" use="required" />
    <xsd:attribute name="typeID" type="xsd:string" use="required" />
    <xsd:attribute name="serviceUrl" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="input">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:partFragment" />
    </xsd:choice>
    <xsd:attribute name="source" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="partFragment">
  <xsd:complexType>
    <xsd:attribute name="match" type="xsd:string" use="required" />
    <xsd:attribute name="replaceWith" type="xsd:string" use="required" />
    <xsd:attribute name="sendAsString" type="xsf:xdYesNo" use="optional" />
    <xsd:attribute name="dataObject" type="xsd:string" use="optional" />
    <xsd:attribute name="filter" type="xsd:string" use="optional" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="xmlFileAdapter">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdTitle" use="optional" />
    <xsd:attribute name="fileUrl" type="xsd:anyURI" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="sharepointListAdapter">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="field" minOccurs="0" maxOccurs="unbounded">
        <xsd:complexType>
          <xsd:attribute name="sharepointName" type="xsd:string" use="required" />

```

```

        <xsd:attribute name="infopathName" type="xsd:string" use="required" />
        <xsd:attribute name="isLookup" type="xsd:string" use="optional" />
    </xsd:complexType>
</xsd:element>
</xsd:sequence>
<xsd:attribute name="name" type="xsd:string" use="required" />
<xsd:attribute name="siteUrl" type="xsd:string" use="required" />
<xsd:attribute name="sharepointGuid" type="xsd:string" use="required" />
<xsd:attribute name="infopathGroup" type="xsd:string" use="required" />
<xsd:attribute name="queryAllowed" type="xsd:string" use="optional" />
<xsd:attribute name="submitAllowed" type="xsd:string" use="optional" />
</xsd:complexType>
</xsd:element>
<xsd:element name="davAdapter">
    <xsd:complexType>
        <xsd:all>
            <xsd:element name="folderURL">
                <xsd:complexType>
                    <xsd:attribute name="value" type="xsd:string" use="required" />
                </xsd:complexType>
            </xsd:element>
            <xsd:element name="fileName">
                <xsd:complexType>
                    <xsd:attribute name="value" type="xsd:string" use="required" />
                    <xsd:attribute name="valueType" type="xsd:string" use="optional" />
                </xsd:complexType>
            </xsd:element>
        </xsd:all>
        <xsd:attribute name="name" type="xsd:string" use="required" />
        <xsd:attribute name="overwriteAllowed" type="xsd:string" use="optional" />
        <xsd:attribute name="queryAllowed" type="xsd:string" use="optional" />
        <xsd:attribute name="submitAllowed" type="xsd:string" use="optional" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="emailAdapter">
    <xsd:complexType>
        <xsd:all>
            <xsd:element name="to" minOccurs="0">
                <xsd:complexType>
                    <xsd:attribute name="value" type="xsd:string" use="required" />
                    <xsd:attribute name="valueType" type="xsd:string" use="optional" />
                </xsd:complexType>
            </xsd:element>
            <xsd:element name="cc" minOccurs="0">
                <xsd:complexType>
                    <xsd:attribute name="value" type="xsd:string" use="required" />
                    <xsd:attribute name="valueType" type="xsd:string" use="optional" />
                </xsd:complexType>
            </xsd:element>
            <xsd:element name="bcc" minOccurs="0">
                <xsd:complexType>
                    <xsd:attribute name="value" type="xsd:string" use="required" />
                    <xsd:attribute name="valueType" type="xsd:string" use="optional" />
                </xsd:complexType>
            </xsd:element>
            <xsd:element name="subject" minOccurs="0">
                <xsd:complexType>
                    <xsd:attribute name="value" type="xsd:string" use="required" />
                    <xsd:attribute name="valueType" type="xsd:string" use="optional" />
                </xsd:complexType>
            </xsd:element>
        </xsd:all>
    </xsd:complexType>
</xsd:element>

```

```

        </xsd:complexType>
    </xsd:element>
    <xsd:element name="intro" minOccurs="0">
        <xsd:complexType>
            <xsd:attribute name="value" type="xsd:string" use="required" />
        </xsd:complexType>
    </xsd:element>
    <xsd:element name="attachmentFileName" minOccurs="0">
        <xsd:complexType>
            <xsd:attribute name="value" type="xsd:string" use="required" />
            <xsd:attribute name="valueType" type="xsf:xdExpressionLiteral" use="optional" />
        </xsd:complexType>
    </xsd:element>
</xsd:all>
<xsd:attribute name="name" type="xsf:xdTitle" use="required" />
<xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional" />
<xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional" />
</xsd:complexType>
</xsd:element>
<xsd:element name="submitToHostAdapter">
    <xsd:complexType>
        <xsd:attribute name="name" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="queryAllowed" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="submitAllowed" type="xsf:xdYesNo" use="optional" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="dataAdapters">
    <xsd:complexType>
        <xsd:choice minOccurs="0" maxOccurs="unbounded">
            <xsd:element ref="xsf:adoAdapter" />
            <xsd:element ref="xsf:webServiceAdapter" />
            <xsd:element ref="xsf:xmlFileAdapter" />
            <xsd:element ref="xsf:sharepointListAdapter" />
            <xsd:element ref="xsf:davAdapter" />
            <xsd:element ref="xsf:emailAdapter" />
            <xsd:element ref="xsf:submitToHostAdapter" />
            <xsd:element ref="xsf:hwsAdapter" />
        </xsd:choice>
    </xsd:complexType>
</xsd:element>
<!-- documentSchemas -->
<xsd:element name="documentSchemas">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:documentSchema" maxOccurs="unbounded" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<xsd:element name="documentSchema">
    <xsd:complexType>
        <xsd:attribute name="location" type="xsd:string" use="required" />
        <xsd:attribute name="rootSchema" type="xsd:xdYesNo" />
    </xsd:complexType>
</xsd:element>
<!-- customValidation -->
<xsd:element name="customValidation">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:errorCondition" minOccurs="0" maxOccurs="unbounded" />

```

```

    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="errorCondition">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:errorMessage" />
    </xsd:sequence>
    <xsd:attribute name="match" type="xsd:string" use="required" />
    <xsd:attribute name="expression" type="xsd:string" use="required" />
    <xsd:attribute name="expressionContext" type="xsd:string" use="optional" />
    <xsd:attribute name="showErrorOn" type="xsd:string" use="optional" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="errorMessage">
  <xsd:complexType>
    <xsd:simpleContent>
      <xsd:extension base="xsf:xdErrorMessage">
        <xsd:attribute name="type" use="optional">
          <xsd:simpleType>
            <xsd:restriction base="xsd:NMTOKEN">
              <xsd:enumeration value="modal" />
              <xsd:enumeration value="modeless" />
            </xsd:restriction>
          </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="shortMessage" use="required">
          <xsd:simpleType>
            <xsd:restriction base="xsd:string">
              <xsd:maxLength value="127" />
            </xsd:restriction>
          </xsd:simpleType>
        </xsd:attribute>
      </xsd:extension>
    </xsd:simpleContent>
  </xsd:complexType>
</xsd:element>
<!-- domEventHandlers -->
<xsd:element name="domEventHandlers">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:domEventHandler" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
  </xsd:complexType>
  <xsd:unique name="domEventHandler_handlerObject_unique">
    <xsd:selector xpath="." />
    <xsd:field xpath="@handlerObject" />
  </xsd:unique>
</xsd:element>
<xsd:element name="domEventHandler">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:ruleSetAction" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
    <xsd:attribute name="dataObject" type="xsd:string" use="optional" />
    <xsd:attribute name="match" type="xsd:string" use="required" />
    <xsd:attribute name="handlerObject" type="xsd:string" use="optional" />
  </xsd:complexType>
  <xsd:keyref name="domEventHandler_ruleSetAction" refer="xsf:ruleset_name_key">

```

```

        <xsd:selector xpath="./xsf:ruleSetAction" />
        <xsd:field xpath="@ruleSet" />
    </xsd:keyref>
</xsd:element>
<!-- importParameters -->
<xsd:element name="importParameters">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:importSource" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
        <xsd:attribute name="enabled" type="xsf:xdYesNo" use="required" />
        <xsd:attribute name="useScriptHandler" type="xsf:xdYesNo" use="optional" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="importSource">
    <xsd:complexType>
        <xsd:attribute name="name" type="xsd:string" use="required" />
        <xsd:attribute name="schema" type="xsf:xdFileName" use="required" />
        <xsd:attribute name="transform" type="xsf:xdFileName" use="required" />
        <xsd:attribute name="authoringOfTransform" type="xsf:xdManualAuto" use="optional" />
    </xsd:complexType>
</xsd:element>
<!-- listProperties -->
<xsd:element name="listProperties">
    <xsd:complexType>
        <xsd:all>
            <xsd:element ref="xsf:fields" />
        </xsd:all>
    </xsd:complexType>
</xsd:element>
<xsd:element name="fields">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:field" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<xsd:element name="field">
    <xsd:complexType>
        <xsd:attribute name="type" type="xsd:NMTOKEN" use="required" />
        <xsd:attribute name="name" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="columnName" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="required" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="viewable" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="node" type="xsd:string" use="required" />
        <xsd:attribute name="maxLength" type="xsd:byte" />
        <xsd:attribute name="aggregation" use="optional">
            <xsd:simpleType>
                <xsd:restriction base="xsd:NMTOKEN">
                    <xsd:enumeration value="sum" />
                    <xsd:enumeration value="count" />
                    <xsd:enumeration value="average" />
                    <xsd:enumeration value="min" />
                    <xsd:enumeration value="max" />
                    <xsd:enumeration value="first" />
                    <xsd:enumeration value="last" />
                    <xsd:enumeration value="merge" />
                    <xsd:enumeration value="plaintext" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
    </xsd:complexType>
</xsd:element>

```



```

        </xsd:simpleType>
    </xsd:attribute>
</xsd:complexType>
</xsd:element>
<!-- submit -->
<xsd:element name="submit">
    <xsd:complexType>
        <xsd:all>
            <xsd:element name="submitAction" minOccurs="0">
                <xsd:complexType>
                    <xsd:attribute name="adapter" type="xsf:xdTitle" use="required" />
                </xsd:complexType>
                <xsd:keyref name="submitAdapter_name_keyref" refer="xsf:adapter_name_key">
                    <xsd:selector xpath="." />
                    <xsd:field xpath="@adapter" />
                </xsd:keyref>
            </xsd:element>
            <xsd:element ref="xsf:useHttpHandler" minOccurs="0" />
            <xsd:element ref="xsf:useScriptHandler" minOccurs="0" />
            <xsd:element ref="xsf:ruleSetAction" minOccurs="0" />
            <xsd:element ref="xsf:useQueryAdapter" minOccurs="0" />
            <xsd:element ref="xsf:webServiceAdapter" minOccurs="0" />
            <xsd:element ref="xsf:davAdapter" minOccurs="0" />
            <xsd:element ref="xsf:emailAdapter" minOccurs="0" />
            <xsd:element ref="xsf:submitToHostAdapter" minOccurs="0" />
            <xsd:element name="successMessage" type="xsd:string" minOccurs="0" />
            <xsd:element name="errorMessage" type="xsd:string" minOccurs="0" />
        </xsd:all>
        <xsd:attribute name="caption" type="xsd:string" use="optional" />
        <xsd:attribute name="onAfterSubmit" use="optional">
            <xsd:simpleType>
                <xsd:restriction base="xsd:NMTOKEN">
                    <xsd:enumeration value="close" />
                    <xsd:enumeration value="keepOpen" />
                    <xsd:enumeration value="openNew" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="showStatusDialog" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="showSignatureReminder" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="disableMenuItem" type="xsf:xdYesNo" use="optional" />
    </xsd:complexType>
    <xsd:keyref name="submit_ruleSetAction" refer="xsf:ruleset_name_key">
        <xsd:selector xpath="./xsf:ruleSetAction" />
        <xsd:field xpath="@ruleSet" />
    </xsd:keyref>
</xsd:element>
<xsd:element name="useHttpHandler">
    <xsd:complexType>
        <xsd:attribute name="method" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:NMTOKEN">
                    <xsd:enumeration value="POST" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="href" type="xsd:anyURI" use="required" />
    </xsd:complexType>
</xsd:element>

```

```

<xsd:element name="useScriptHandler" />
<xsd:element name="useQueryAdapter" />
<!-- onLoad -->
<xsd:element name="onLoad">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:ruleSetAction" minOccurs="1" maxOccurs="1" />
    </xsd:sequence>
  </xsd:complexType>
  <xsd:keyref name="load_ruleSetAction" refer="xsf:ruleset_name_key">
    <xsd:selector xpath="./xsf:ruleSetAction" />
    <xsd:field xpath="@ruleSet" />
  </xsd:keyref>
</xsd:element>
<!-- save -->
<xsd:element name="save">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="1">
      <xsd:element ref="xsf:useScriptHandler" />
    </xsd:choice>
  </xsd:complexType>
</xsd:element>
<!-- roles -->
<xsd:element name="roles">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:role" minOccurs="1" maxOccurs="unbounded" />
      <xsd:element ref="xsf:membership" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
    <xsd:attribute name="default" type="xsd:string" use="required" />
    <xsd:attribute name="initiator" type="xsd:string" use="optional" />
    <xsd:attribute name="hideStatusBarDisplay" type="xsf:xdYesNo" use="optional" />
  </xsd:complexType>
  <!-- role names must be unique -->
  <xsd:unique name="roles_name_unique">
    <xsd:selector xpath="./xsf:role" />
    <xsd:field xpath="@name" />
  </xsd:unique>
  <!-- fields must reference existing role -->
  <xsd:key name="role_name_key">
    <xsd:selector xpath="./xsf:role" />
    <xsd:field xpath="@name" />
  </xsd:key>
  <xsd:keyref name="role_default" refer="xsf:role_name_key">
    <xsd:selector xpath="." />
    <xsd:field xpath="@default" />
  </xsd:keyref>
  <xsd:keyref name="role_initiator" refer="xsf:role_name_key">
    <xsd:selector xpath="." />
    <xsd:field xpath="@initiator" />
  </xsd:keyref>
  <xsd:keyref name="role_membership" refer="xsf:role_name_key">
    <xsd:selector xpath="./xsf:membership/*" />
    <xsd:field xpath="@memberOf" />
  </xsd:keyref>
</xsd:element>
<xsd:element name="role">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsf:xdRoleName" use="required" />

```

```

    </xsd:complexType>
</xsd:element>
<xsd:element name="membership">
  <xsd:complexType>
    <xsd:choice minOccurs="1" maxOccurs="unbounded">
      <xsd:element ref="xsf:getUserNameFromData" />
      <xsd:element ref="xsf:userName" />
      <xsd:element ref="xsf:group" />
    </xsd:choice>
  </xsd:complexType>
</xsd:element>
<xsd:element name="getUserNameFromData">
  <xsd:complexType>
    <xsd:attribute name="dataObject" type="xsd:string" use="optional" />
    <xsd:attribute name="select" type="xsd:string" use="required" />
    <xsd:attribute name="memberOf" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="userName">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="memberOf" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="group">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="memberOf" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- hwsWorkflow -->
<xsd:element name="hwsWorkflow">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:location" minOccurs="1" maxOccurs="1" />
      <xsd:element ref="xsf:allowedActions" minOccurs="1" maxOccurs="1" />
      <xsd:element ref="xsf:allowedTasks" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
    <xsd:attribute name="taskpaneVisible" type="xsf:xdYesNo" />
  </xsd:complexType>
  <xsd:unique name="hws_actiontask_name">
    <xsd:selector xpath="./xsf:allowedActions/xsf:action|./xsf:allowedTasks/xsf:task" />
    <xsd:field xpath="@name" />
  </xsd:unique>
</xsd:element>
<!-- location -->
<xsd:element name="location">
  <xsd:complexType>
    <xsd:attribute name="url" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- allowedActions -->
<xsd:element name="allowedActions">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:action" minOccurs="1" maxOccurs="20" />
    </xsd:sequence>
  </xsd:complexType>
  <xsd:unique name="hws_actionTypeID_unique">

```

```

        <xsd:selector xpath="./xsf:action" />
        <xsd:field xpath="@actionTypeID" />
    </xsd:unique>
</xsd:element>
<!-- action -->
<xsd:element name="action">
    <xsd:complexType>
        <xsd:attribute name="name" type="xsf:xdHWSname" use="required" />
        <xsd:attribute name="actionTypeID" type="xsd:string" use="required" />
        <xsd:attribute name="canInitiateWorkflow" type="xsf:xdYesNo" use="required" />
        <xsd:attribute name="caption" type="xsf:xdHWSCaption" use="optional" />
    </xsd:complexType>
</xsd:element>
<!-- allowedTasks -->
<xsd:element name="allowedTasks">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:task" minOccurs="1" maxOccurs="20" />
        </xsd:sequence>
    </xsd:complexType>
    <xsd:unique name="hws_taskID_unique">
        <xsd:selector xpath="./xsf:task" />
        <xsd:field xpath="@taskTypeID" />
    </xsd:unique>
</xsd:element>
<!-- task -->
<xsd:element name="task">
    <xsd:complexType>
        <xsd:attribute name="name" type="xsf:xdHWSname" use="required" />
        <xsd:attribute name="taskTypeID" type="xsd:string" use="required" />
        <xsd:attribute name="caption" type="xsf:xdHWSCaption" use="optional" />
    </xsd:complexType>
</xsd:element>
<!-- fileNew -->
<xsd:element name="fileNew">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:initialXmlDocument" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<xsd:element name="initialXmlDocument">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:customCategory" minOccurs="0" />
        </xsd:sequence>
        <xsd:attribute name="caption" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="href" type="xsf:xdFileName" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- customCategory -->
<xsd:element name="customCategory">
    <xsd:complexType>
        <xsd:attribute name="name" type="xsf:xdTitle" use="required" />
    </xsd:complexType>
</xsd:element>
<!-- package -->
<xsd:element name="package">
    <xsd:complexType>

```

```

    <xsd:sequence>
      <xsd:element ref="xsf:files" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="files">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:file" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="file">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:fileProperties" minOccurs="0" maxOccurs="1" />
      <xsd:attribute name="name" type="xsf:xdFileName" use="required" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="fileProperties">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:property" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="property">
  <xsd:complexType>
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="value" type="xsd:string" use="required" />
    <xsd:attribute name="type" type="xsd:QName" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- permissions -->
<xsd:element name="permissions">
  <xsd:complexType>
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element ref="xsf:allowedControl" />
    </xsd:choice>
  </xsd:complexType>
</xsd:element>
<xsd:element name="allowedControl">
  <xsd:complexType>
    <xsd:attribute name="cabFile" type="xsd:string" use="optional" />
    <xsd:attribute name="clsid" type="xsd:string" use="required" />
    <xsd:attribute name="version" type="xsd:string" use="optional" />
  </xsd:complexType>
</xsd:element>
<!-- View and Context-Driven Editing definitions -->
<!-- External Views -->
<xsd:element name="externalViews">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:externalView" minOccurs="1" maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="default" type="xsd:string" />
  </xsd:complexType>
  <xsd:unique name="externalViews_name_unique">

```

```

    <xsd:selector xpath="./xsf:externalView" />
    <xsd:field xpath="@default" />
  </xsd:unique>
  <xsd:keyref name="external_views_printView" refer="xsf:externalView_name_key">
    <xsd:selector xpath="." />
    <xsd:field xpath="@default" />
  </xsd:keyref>
</xsd:element>
<xsd:element name="externalView">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:mainpane" />
    </xsd:sequence>
    <xsd:attribute name="target" type="xsd:string" />
    <xsd:attribute name="name" type="xsf:xdViewName" use="required" />
    <xsd:attribute name="designMode" type="xsf:xdDesignMode" />
  </xsd:complexType>
</xsd:element>
<!-- attributeData -->
<xsd:element name="attributeData">
  <xsd:complexType>
    <xsd:attribute name="attribute" type="xsd:string" use="required" />
    <xsd:attribute name="value" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- button -->
<xsd:element name="button">
  <xsd:complexType>
    <xsd:attribute name="caption" type="xsf:xdTitle" />
    <xsd:attribute name="icon" type="xsd:string" />
    <xsd:attribute name="tooltip" type="xsf:xdTitle" />
    <xsd:attribute name="name" type="xsd:NMTOKEN" />
    <xsd:attribute name="xmlToEdit" type="xsd:NMTOKEN" />
    <xsd:attribute name="action">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="xCollection::insert" />
          <xsd:enumeration value="xCollection::insertBefore" />
          <xsd:enumeration value="xCollection::insertAfter" />
          <xsd:enumeration value="xCollection::remove" />
          <xsd:enumeration value="xCollection::refreshFilter" />
          <xsd:enumeration value="xCollection::removeAll" />
          <xsd:enumeration value="xOptional::insert" />
          <xsd:enumeration value="xOptional::remove" />
          <xsd:enumeration value="xReplace::replace" />
          <xsd:enumeration value="xFileAttachment::attach" />
          <xsd:enumeration value="xFileAttachment::open" />
          <xsd:enumeration value="xFileAttachment::saveAs" />
          <xsd:enumeration value="xFileAttachment::remove" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="showIf">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="always" />
          <xsd:enumeration value="enabled" />
          <xsd:enumeration value="immediate" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>

```

```

        </xsd:simpleType>
    </xsd:attribute>
</xsd:complexType>
</xsd:element>
<!-- chooseFragment -->
<xsd:element name="chooseFragment">
    <xsd:complexType mixed="true">
        <xsd:sequence>
            <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="skip" />
        </xsd:sequence>
        <xsd:attribute name="parent" type="xsd:string" />
        <xsd:attribute name="followingSiblings" type="xsd:string" use="optional" />
        <xsd:attribute name="innerFragment" type="xsd:string" use="optional" />
    </xsd:complexType>
</xsd:element>
<!-- editWith -->
<xsd:element name="editWith">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:masterDetail" minOccurs="0" maxOccurs="1" />
            <xsd:element ref="xsf:fragmentToInsert" minOccurs="0" maxOccurs="1" />
        </xsd:sequence>
        <xsd:attribute name="component" use="required">
            <xsd:simpleType>
                <xsd:restriction base="xsd:NMTOKEN">
                    <xsd:enumeration value="xCollection" />
                    <xsd:enumeration value="xOptional" />
                    <xsd:enumeration value="xReplace" />
                    <xsd:enumeration value="xTextList" />
                    <xsd:enumeration value="xField" />
                    <xsd:enumeration value="xImage" />
                    <xsd:enumeration value="xFileAttachment" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="caption" type="xsf:xdTitle" use="optional" />
        <xsd:attribute name="autoComplete" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="proofing" type="xsf:xdYesNo" use="optional" />
        <xsd:attribute name="type" use="optional">
            <xsd:simpleType>
                <xsd:restriction base="xsd:NMTOKEN">
                    <xsd:enumeration value="plain" />
                    <xsd:enumeration value="formatted" />
                    <xsd:enumeration value="plainMultiline" />
                    <xsd:enumeration value="formattedMultiline" />
                    <xsd:enumeration value="rich" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="useFilter" use="optional">
            <xsd:simpleType>
                <xsd:restriction base="xsd:string">
                    <xsd:enumeration value="yes" />
                    <xsd:enumeration value="no" />
                </xsd:restriction>
            </xsd:simpleType>
        </xsd:attribute>
        <xsd:attribute name="widgetIcon" use="optional">
            <xsd:simpleType>

```

```

        <xsd:restriction base="xsd:string">
            <xsd:enumeration value="standard" />
            <xsd:enumeration value="filter" />
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="filterDependency" type="xsd:string" use="optional" />
<xsd:attribute name="field" type="xsd:string" use="optional" />
<xsd:attribute name="removeAncestors" type="xsd:nonNegativeInteger" use="optional" />
<xsd:attribute name="maxLength" use="optional">
    <xsd:simpleType>
        <xsd:restriction base="xsd:integer">
            <xsd:minInclusive value="-1" />
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="allowedFileTypes" type="xsd:string" use="optional" />
<xsd:anyAttribute namespace="http://schemas.microsoft.com/office/infopath/2003"
processContents="skip" />
</xsd:complexType>
</xsd:element>
<!-- unboundControls -->
<xsd:element name="unboundControls">
    <xsd:complexType>
        <xsd:sequence>
            <!-- button -->
            <xsd:element name="button" minOccurs="0" maxOccurs="unbounded">
                <xsd:complexType>
                    <xsd:sequence>
                        <xsd:element ref="xsf:ruleSetAction" minOccurs="0" maxOccurs="1" />
                    </xsd:sequence>
                    <xsd:attribute name="name" use="required">
                        <xsd:simpleType>
                            <!-- type of name is non qualified name, but NCName also
accepts '.' and '-', so these characters are disabled by pattern restriction -
-->
                            <xsd:restriction base="xsd:NCName">
                                <xsd:pattern value="[^\.\^-]*" />
                            </xsd:restriction>
                        </xsd:simpleType>
                    </xsd:attribute>
                </xsd:complexType>
                <xsd:keyref name="button_ruleSetAction" refer="xsf:ruleset_name_key">
                    <xsd:selector xpath="/xsf:ruleSetAction" />
                    <xsd:field xpath="@ruleSet" />
                </xsd:keyref>
            </xsd:element>
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<!-- editing -->
<xsd:element name="editing">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:xmlToEdit" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<!-- Master Detail -->

```



```

<xsd:element name="masterDetail">
  <xsd:complexType>
    <xsd:attribute name="master" type="xsd:string" />
    <xsd:attribute name="masterViewContext" type="xsd:string" />
    <xsd:attribute name="masterKey" type="xsd:string" />
    <xsd:attribute name="detailKey" type="xsd:string" />
  </xsd:complexType>
</xsd:element>
<!-- fragmentToInsert -->
<xsd:element name="fragmentToInsert">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:chooseFragment" minOccurs="1" maxOccurs="unbounded" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<!-- mainpane -->
<xsd:element name="mainpane">
  <xsd:complexType>
    <xsd:attribute name="transform" type="xsf:xdFileName" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- printSettings -->
<xsd:element name="printSettings">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:header" minOccurs="0" maxOccurs="1" />
      <xsd:element ref="xsf:footer" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
    <xsd:attribute name="orientation">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="portrait" />
          <xsd:enumeration value="landscape" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="header">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:maxLength value="255" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="footer">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:maxLength value="255" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="marginUnitsType">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="in" />
          <xsd:enumeration value="cm" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>

```

```

<xsd:attribute name="rightMargin">
  <xsd:simpleType>
    <xsd:restriction base="xsd:float">
      <xsd:minInclusive value="0" />
      <xsd:maxInclusive value="100" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="leftMargin">
  <xsd:simpleType>
    <xsd:restriction base="xsd:float">
      <xsd:minInclusive value="0" />
      <xsd:maxInclusive value="100" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="topMargin">
  <xsd:simpleType>
    <xsd:restriction base="xsd:float">
      <xsd:minInclusive value="0" />
      <xsd:maxInclusive value="100" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="bottomMargin">
  <xsd:simpleType>
    <xsd:restriction base="xsd:float">
      <xsd:minInclusive value="0" />
      <xsd:maxInclusive value="100" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="printerName">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="255" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="paperSize">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="255" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="paperSource">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="255" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="copies">
  <xsd:simpleType>
    <xsd:restriction base="xsd:integer">
      <xsd:minInclusive value="1" />
      <xsd:maxInclusive value="9999" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>

```

```

    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="collate" type="xsf:xdYesNo" />
<xsd:attribute name="pageRangeStart">
  <xsd:simpleType>
    <xsd:restriction base="xsd:integer">
      <xsd:minInclusive value="1" />
      <xsd:maxInclusive value="32000" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="pageRangeEnd">
  <xsd:simpleType>
    <xsd:restriction base="xsd:integer">
      <xsd:minInclusive value="1" />
      <xsd:maxInclusive value="32000" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="printerSpecificSettings">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="255" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:attribute>
</xsd:complexType>
</xsd:element>
<xsd:element name="header">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="skip" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="footer">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="skip" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<!-- toolbar -->
<xsd:element name="toolbar">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:group ref="xsf:UIItem" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="name" type="xsf:xdTitle" use="required" />
    <xsd:attribute name="caption" type="xsf:xdTitle" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- menu -->
<xsd:element name="menu">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:group ref="xsf:UIItem" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="caption" type="xsf:xdTitle" use="required" />
  </xsd:complexType>

```

```

    </xsd:complexType>
</xsd:element>
<!-- menuArea -->
<xsd:element name="menuArea">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:group ref="xsf:UIItem" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="name" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:NMTOKEN">
          <xsd:enumeration value="msoFileMenu" />
          <xsd:enumeration value="msoEditMenu" />
          <xsd:enumeration value="msoInsertMenu" />
          <xsd:enumeration value="msoViewMenu" />
          <xsd:enumeration value="msoFormatMenu" />
          <xsd:enumeration value="msoToolsMenu" />
          <xsd:enumeration value="msoTableMenu" />
          <xsd:enumeration value="msoHelpMenu" />
          <xsd:enumeration value="msoStructuralEditingContextMenu" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
<!-- UIContainer -->
<xsd:group name="UIContainer">
  <xsd:choice>
    <xsd:element ref="xsf:toolbar" />
    <xsd:element ref="xsf:menu" />
    <xsd:element ref="xsf:menuArea" />
  </xsd:choice>
</xsd:group>
<!-- UIItem -->
<xsd:group name="UIItem">
  <xsd:choice>
    <xsd:element ref="xsf:button" />
    <xsd:element ref="xsf:menu" />
  </xsd:choice>
</xsd:group>
<!-- taskpane -->
<xsd:element name="taskpane">
  <xsd:complexType>
    <xsd:attribute name="caption" type="xsd:string" use="required" />
    <xsd:attribute name="href" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<!-- views -->
<xsd:element name="views">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:view" minOccurs="1" maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="default" type="xsd:string" />
  </xsd:complexType>
  <xsd:unique name="views_name_unique">
    <xsd:selector xpath="./xsf:view" />
    <xsd:field xpath="@name" />
  </xsd:unique>

```

```

<xsd:keyref name="view_printView" refer="xsf:view_or_externalView_name_key">
  <xsd:selector xpath="./xsf:view" />
  <xsd:field xpath="@printView" />
</xsd:keyref>
<xsd:keyref name="views_default" refer="xsf:view_name_key">
  <xsd:selector xpath="." />
  <xsd:field xpath="@default" />
</xsd:keyref>
</xsd:element>
<!-- ViewContent -->
<xsd:group name="ViewContent">
  <xsd:choice>
    <xsd:element ref="xsf:editing" minOccurs="0" />
    <xsd:element ref="xsf:mainpane" minOccurs="0" />
    <xsd:element ref="xsf:printSettings" minOccurs="0" />
    <xsd:group ref="xsf:UIContainer" minOccurs="0" maxOccurs="unbounded" />
    <xsd:element ref="xsf:unboundControls" minOccurs="0" />
  </xsd:choice>
</xsd:group>
<!-- view -->
<xsd:element name="view">
  <xsd:complexType>
    <xsd:group ref="xsf:ViewContent" minOccurs="0" maxOccurs="unbounded" />
    <xsd:attribute name="caption" type="xsf:xdViewName" />
    <xsd:attribute name="name" type="xsf:xdViewName" use="required" />
    <xsd:attribute name="showMenuItem" type="xsf:xdYesNo" use="optional" />
    <xsd:attribute name="printView" type="xsd:string" />
    <xsd:attribute name="designMode" type="xsf:xdDesignMode" />
  </xsd:complexType>
  <xsd:unique name="toolbar_name_unique">
    <xsd:selector xpath="./xsf:toolbar" />
    <xsd:field xpath="@name" />
  </xsd:unique>
  <xsd:unique name="menuArea_name_unique">
    <xsd:selector xpath="./xsf:menuArea" />
    <xsd:field xpath="@name" />
  </xsd:unique>
  <xsd:unique name="xmlToEdit_name_unique">
    <xsd:selector xpath="./xsf:editing/xsf:xmlToEdit" />
    <xsd:field xpath="@name" />
  </xsd:unique>
  <xsd:key name="xmlToEdit_name_key">
    <xsd:selector xpath="./xsf:editing/xsf:xmlToEdit" />
    <xsd:field xpath="@name" />
  </xsd:key>
  <xsd:keyref name="button_xmlToEdit_reference" refer="xsf:xmlToEdit_name_key">
    <xsd:selector xpath="./xsf:menuArea/xsf:button | ./xsf:menu/xsf:button |
./xsf:toolbar/xsf:button" />
    <xsd:field xpath="@xmlToEdit" />
  </xsd:keyref>
</xsd:element>
<!-- xmlToEdit -->
<xsd:element name="xmlToEdit">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:editWith" minOccurs="0" maxOccurs="1" />
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:NMTOKEN" use="required" />
    <xsd:attribute name="item" type="xsd:string" use="required" />
  </xsd:complexType>

```

```

    <xsd:attribute name="container" type="xsd:string" />
    <xsd:attribute name="viewContext">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:pattern value="((\.\|\\#|[a-zA-Z0-9_])[a-zA-Z0-9_]*) (\s((\.\|\\#|[a-zA-Z0-9_])[a-zA-Z0-9_]*)*)*" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
  </xsd:complexType>
</xsd:element>
<!-- Digital Signatures -->
<xsd:element name="documentSignatures">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf:signedDataBlock" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="signatureLocation" type="xsd:string" use="optional" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="signedDataBlock">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="message" type="xsf:xdSignedDataBlockMessage" minOccurs="0" />
    </xsd:sequence>
    <xsd:attribute name="name" type="xsf:xdSignedDataBlockName" use="required" />
    <xsd:attribute name="data" type="xsd:string" use="required" />
    <xsd:attribute name="signatureLocation" type="xsd:string" use="required" />
    <xsd:attribute name="mode" type="xsf:xdSignatureRelationEnum" use="required" />
  </xsd:complexType>
  <xsd:unique name="signedDataBlock_name_unique">
    <xsd:selector xpath="." />
    <xsd:field xpath="@name" />
  </xsd:unique>
</xsd:element>
<!-- Version Upgrade -->
<xsd:element name="documentVersionUpgrade">
  <xsd:complexType>
    <xsd:choice>
      <xsd:element ref="xsf:useScriptHandler" />
      <xsd:element ref="xsf:useTransform" />
    </xsd:choice>
  </xsd:complexType>
</xsd:element>
<xsd:element name="useTransform">
  <xsd:complexType>
    <xsd:attribute name="transform" use="required">
      <xsd:simpleType>
        <xsd:union memberTypes="xsf:xdFileName xsf:xdEmptyString" />
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="minVersionToUpgrade" type="xsf:xdSolutionVersion" use="required" />
    <xsd:attribute name="maxVersionToUpgrade" type="xsf:xdSolutionVersion" />
  </xsd:complexType>
</xsd:element>
<!-- XSF Extensions -->
<xsd:element name="extensions">
  <xsd:complexType>

```

```

    <xsd:sequence>
      <xsd:element ref="xsf:extension" minOccurs="0" maxOccurs="unbounded" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="extension">
  <xsd:complexType mixed="true">
    <xsd:sequence>
      <xsd:any minOccurs="0" maxOccurs="unbounded" processContents="lax" />
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:NMTOKEN" use="required" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<!-- Rules -->
<xsd:element name="ruleSetAction">
  <xsd:complexType>
    <xsd:attribute name="ruleSet" type="xsd:string" use="required" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="rule">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:choice minOccurs="0" maxOccurs="unbounded">
        <xsd:element ref="xsf:dialogBoxMessageAction" />
        <xsd:element ref="xsf:dialogBoxExpressionAction" />
        <xsd:element ref="xsf:switchViewAction" />
        <xsd:element ref="xsf:assignmentAction" />
        <xsd:element ref="xsf:queryAction" />
        <xsd:element name="submitAction">
          <xsd:complexType>
            <xsd:attribute name="adapter" type="xsf:xdTitle" use="required" />
          </xsd:complexType>
        </xsd:element>
        <xsd:element ref="xsf:openNewDocumentAction" />
        <xsd:element ref="xsf:closeDocumentAction" />
      </xsd:choice>
      <xsd:element name="exitRuleSet" minOccurs="0">
        <xsd:complexType />
      </xsd:element>
    </xsd:sequence>
    <xsd:attribute name="caption" type="xsd:string" use="required" />
    <xsd:attribute name="condition" type="xsd:string" use="optional" />
    <xsd:attribute name="isEnabled" type="xsf:xdYesNo" use="optional" default="yes" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="dialogBoxMessageAction">
  <xsd:simpleType>
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="1024" />
    </xsd:restriction>
  </xsd:simpleType>
</xsd:element>
<xsd:element name="dialogBoxExpressionAction" type="xsd:string" />
<xsd:element name="switchViewAction">
  <xsd:complexType>
    <xsd:attribute name="view" type="xsf:xdViewName" use="required" />
  </xsd:complexType>
  <xsd:keyref name="switchViewAction_view_keyref" refer="xsf:view_name_key">

```

```

        <xsd:selector xpath="." />
        <xsd:field xpath="@view" />
    </xsd:keyref>
</xsd:element>
<xsd:element name="assignmentAction">
    <xsd:complexType>
        <xsd:attribute name="targetField" type="xsd:string" use="required" />
        <xsd:attribute name="expression" type="xsd:string" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="queryAction">
    <xsd:complexType>
        <xsd:attribute name="adapter" type="xsd:string" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="openNewDocumentAction">
    <xsd:complexType>
        <xsd:attribute name="solutionURI" type="xsd:anyURI" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="closeDocumentAction">
    <xsd:complexType>
        <xsd:attribute name="promptToSaveChanges" type="xsf:xdYesNo" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="ruleSet">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:rule" minOccurs="1" maxOccurs="unbounded" />
        </xsd:sequence>
        <xsd:attribute name="name" type="xsd:string" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="ruleSets">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:ruleSet" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
        <xsd:unique name="ruleSets_name_unique">
            <xsd:selector xpath="./xsf:ruleSet" />
            <xsd:field xpath="@name" />
        </xsd:unique>
    </xsd:complexType>
</xsd:element>
<!-- Declarative Calculations -->
<xsd:element name="calculations">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf:calculatedField" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
        <xsd:attribute name="treatBlankValueAsZero" type="xsf:xdYesNo" use="optional" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="calculatedField">
    <xsd:complexType>
        <xsd:attribute name="target" type="xsd:string" use="required" />
        <xsd:attribute name="expression" type="xsd:string" use="required" />
        <xsd:attribute name="refresh" type="xsd:string" use="required" />
    </xsd:complexType>

```



```
</xsd:element>
</xsd:schema>
```

## 5.2 The InfoPath XSF2 XSD

The XML schema for the form definition (.xsf) file can also be found at the location described by [\[MSDN-XSF\]](#).

```
<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:xsf="http://schemas.microsoft.com/office/infopath/2003/solutionDefinition"

  xmlns:xsf2="http://schemas.microsoft.com/office/infopath/2006/solutionDefinition/extensions"

  targetNamespace="http://schemas.microsoft.com/office/infopath/2006/solutionDefinition/extension
s"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">
  <xsd:import
    namespace="http://schemas.microsoft.com/office/infopath/2003/solutionDefinition"
    schemaLocation="xsfschema.xsd" />

  <!--
    Please note that any changes to this schema requires the documented xsd          to be
    updated as well.
    It is more important because some of the types are open and do not list      all the
    expected values and the documentation is expected list them.
  -->

  <!-- Allowed values: submit, print, view, save, saveAs, close, refresh -->
  <xsd:simpleType name="serverCommandActionType">
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:pattern value="[a-zA-Z0-9_]*" />
    </xsd:restriction>
  </xsd:simpleType>
  <!-- Allowed values: none, xml, xmlXsn -->
  <xsd:simpleType name="emailAttachmentType">
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:pattern value="[a-zA-Z0-9_]*" />
    </xsd:restriction>
  </xsd:simpleType>
  <!-- Allowed values: client, server -->
  <xsd:simpleType name="compatibilityModesType">
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:pattern value="[a-zA-Z0-9_]*" />
    </xsd:restriction>
  </xsd:simpleType>
  <!-- Allowed values: templatePart, formTemplate -->
  <xsd:simpleType name="solutionType">
    <xsd:restriction base="xsd:NMTOKEN">
      <xsd:pattern value="[a-zA-Z0-9_]*" />
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="formDescriptionType">
    <xsd:restriction base="xsd:string">
      <xsd:maxLength value="1024" />
      <xsd:minLength value="1" />
    </xsd:restriction>
  </xsd:simpleType>
```

```

    </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="formLocaleType">
  <xsd:restriction base="xsd:token">
    <xsd:minLength value="1" />
  </xsd:restriction>
</xsd:simpleType>
<!-- Allowed values: CSharp, VisualBasic -->
<xsd:simpleType name="managedCodeType">
  <xsd:restriction base="xsd:string">
    <xsd:pattern value="[a-zA-Z0-9\.\.]" />
  </xsd:restriction>
</xsd:simpleType>
<xsd:attributeGroup name="queryKeyFile">
  <xsd:attribute name="queryFile" type="xsd:string" use="optional" />
  <xsd:attribute name="queryKey" type="xsd:string" use="optional" />
</xsd:attributeGroup>

<!-- Root element for the xsf extension elements -->
<xsd:element name="solutionDefinition">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf2:server" minOccurs="0" />
      <xsd:element ref="xsf2:solutionPropertiesExtension" minOccurs="0" />
      <xsd:element ref="xsf2:mergedPrintView" minOccurs="0" />
      <xsd:element ref="xsf2:offline" minOccurs="0" />
      <xsd:element ref="xsf2:listPropertiesExtension" minOccurs="0" />
      <xsd:element ref="xsf2:dataConnections" minOccurs="0" />
      <xsd:element ref="xsf2:sendByMail" minOccurs="0" />
      <xsd:element ref="xsf2:warnings" minOccurs="0" />
      <xsd:element ref="xsf2:viewsExtension" minOccurs="0" />
      <xsd:element ref="xsf2:preview" minOccurs="0" />
      <xsd:element ref="xsf2:autoUpdatePrompt" minOccurs="0" />
      <xsd:element ref="xsf2:inputScopes" minOccurs="0" />
      <xsd:element ref="xsf2:managedCode" minOccurs="0" />
      <xsd:element ref="xsf2:submit" minOccurs="0" />
      <xsd:element ref="xsf2:featureRestrictionsExtension" minOccurs="0" />
    </xsd:all>
    <xsd:attribute name="runtimeCompatibility" use="required">
      <xsd:simpleType>
        <xsd:list itemType="xsf2:compatibilityModesType"/>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:attribute name="solutionType" type="xsf2:solutionType" use="optional" />
    <xsd:attribute name="description" type="xsf2:formDescriptionType" use="optional" />
    <xsd:attribute name="allowClientOnlyCode" type="xsf:xdYesNo" use="optional"
default="no" />
    <xsd:attribute name="runtimeCompatibilityURL" type="xsd:string" use="optional"/>
    <xsd:attribute name="verifyOnServer" type="xsf:xdYesNo" use="optional"/>
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="server">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:toolbar" minOccurs="0" />
    </xsd:sequence>
    <xsd:attribute name="formLocale" type="xsf2:formLocaleType" use="required" />
    <xsd:attribute name="isPreSubmitPostBackEnabled" type="xsf:xdYesNo" use="optional" />
  </xsd:complexType>
</xsd:element>

```

```

    <xsd:attribute name="isMobileEnabled" type="xsf:xdYesNo" use="optional" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>

<xsd:element name="toolbar">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:commands" minOccurs="0" />
    </xsd:sequence>
    <xsd:attribute name="enabledTop" type="xsf:xdYesNo" use="optional" default="no" />
    <xsd:attribute name="enabledBottom" type="xsf:xdYesNo" use="optional" default="no" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="commands">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:command" maxOccurs="unbounded" minOccurs="0"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="command">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="action" type="xsf2:serverCommandActionType" use="required" />
    <xsd:attribute name="caption" type="xsf:xdTitle" use="optional" />
  </xsd:complexType>
</xsd:element>

<xsd:element name="solutionPropertiesExtension">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf2:install" minOccurs="0" />
      <xsd:element ref="xsf2:wss" minOccurs="0" />
      <xsd:element ref="xsf2:contentType" minOccurs="0" />
      <xsd:element ref="xsf2:share" minOccurs="0" />
      <xsd:element ref="xsf2:mail" minOccurs="0" />
      <xsd:element ref="xsf2:admin" minOccurs="0" />
      <xsd:element ref="xsf2:contentTypeTemplate" minOccurs="0" />
    </xsd:all>
    <xsd:attribute name="branch" use="required">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:enumeration value="install" />
          <xsd:enumeration value="wss" />
          <xsd:enumeration value="contentType" />
          <xsd:enumeration value="share" />
          <xsd:enumeration value="mail" />
          <xsd:enumeration value="admin" />
          <xsd:enumeration value="contentTypeTemplate" />
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:attribute>
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="install">
  <xsd:complexType>

```

```

    <xsd:attribute name="companyName" type="xsd:string" use="required" />
    <xsd:attribute name="language" type="xsd:string" use="required" />
    <xsd:attribute name="path" type="xsd:string" use="required" />
    <xsd:attribute name="updatePath" type="xsd:string" use="optional" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="wss">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="path" type="xsd:string" use="required" />
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="description" type="xsd:string" use="required" />
    <xsd:attribute name="browserEnable" type="xsd:boolean" use="optional" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="contentType">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="path" type="xsd:string" use="required" />
    <xsd:attribute name="sharepointContentTypeId" type="xsd:string" use="required" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="contentTypeTemplate">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="site" type="xsd:string" use="required" />
    <xsd:attribute name="path" type="xsd:string" use="required" />
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="description" type="xsd:string" use="required" />
    <xsd:attribute name="browserEnable" type="xsd:boolean" use="optional" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="share">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="formName" type="xsd:string" use="required" />
    <xsd:attribute name="path" type="xsd:string" use="required" />
    <xsd:attribute name="accessPath" type="xsd:string" use="required" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="mail">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="formName" type="xsd:string" use="required" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="admin">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="path" type="xsd:string" use="required" />
    <xsd:attribute name="site" type="xsd:string" use="required" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>

```

```

</xsd:element>

<xsd:element name="mergedPrintView">
  <xsd:complexType>
    <xsd:all>
      <xsd:element ref="xsf:printSettings" minOccurs="0" />
      <xsd:element ref="xsf2:includedViews" minOccurs="0" />
    </xsd:all>
    <xsd:attribute name="isDefault" type="xsf:xdYesNo" use="optional" default="no" />
    <xsd:attribute name="isCustomizable" type="xsf:xdYesNo" use="optional" default="no" />
    <xsd:attribute name="viewBreak" type="xsd:string" use="required" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="includedViews">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:includedView" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="includedView">
  <xsd:complexType>
    <xsd:sequence />
    <xsd:attribute name="name" type="xsf:xdViewName" use="required" />
  </xsd:complexType>
</xsd:element>

<xsd:element name="offline">
  <xsd:complexType>
    <xsd:attribute name="openIfQueryFails" type="xsf:xdYesNo" default="no" use="optional"
/>
    <xsd:attribute name="cacheQueries" type="xsf:xdYesNo" default="no" use="optional" />
    <xsd:attribute name="expirationTime" type="xsd:nonNegativeInteger" use="optional" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>

<xsd:element name="listPropertiesExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:fieldsExtension" minOccurs="0"></xsd:element>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="fieldsExtension">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:fieldExtension" maxOccurs="unbounded" minOccurs="1" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="fieldExtension">
  <xsd:complexType>
    <xsd:sequence>
      </xsd:sequence>
    <xsd:attribute name="columnName" type="xsd:string" use="required" />
    <xsd:attribute name="readWrite" type="xsf:xdYesNo" use="optional" default="no" />
    <xsd:attribute name="columnId" type="xsd:string" use="optional" />
  </xsd:complexType>
</xsd:element>

```

```

        <xsd:anyAttribute processContents="skip" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="dataConnections">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:useHttpHandlerExtension" minOccurs="0" />
            <xsd:choice minOccurs="0" maxOccurs="unbounded">
                <xsd:element ref="xsf2:davAdapterExtension" minOccurs="0" maxOccurs="unbounded" />
                <xsd:element ref="xsf2:adoAdapterExtension" minOccurs="0" maxOccurs="unbounded" />
                <xsd:element ref="xsf2:webServiceAdapterExtension" minOccurs="0"
maxOccurs="unbounded" />
                <xsd:element ref="xsf2:emailAdapterExtension" minOccurs="0" maxOccurs="unbounded"
/>
            </xsd:choice>
            <xsd:element ref="xsf2:xmlFileAdapterExtension" minOccurs="0" maxOccurs="unbounded"
/>
            <xsd:element ref="xsf2:sharepointListAdapterExtension" minOccurs="0"
maxOccurs="unbounded" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<xsd:element name="useHttpHandlerExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:connectoid" minOccurs="0" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<xsd:element name="connectoid">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="name" type="xsd:string" use="required" />
        <xsd:attribute name="siteCollection" type="xsd:string" use="required" />
        <xsd:attribute name="source" type="xsd:string" use="required" />
        <xsd:attribute name="connectionLinkType" type="xsd:string" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="davAdapterExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:connectoid" minOccurs="0" />
        </xsd:sequence>
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required"></xsd:attribute>
    </xsd:complexType>
</xsd:element>
<xsd:element name="adoAdapterExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:connectoid" minOccurs="0" />
        </xsd:sequence>
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="submitAdapterName" type="xsf:xdTitle" use="optional" />
        <xsd:attributeGroup ref="xsf2:queryKeyFile" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="webServiceAdapterExtension">
    <xsd:complexType>
        <xsd:sequence>

```

```

        <xsd:element ref="xsf2:connectoid" minOccurs="0" />
        <xsd:element ref="xsf2:relativeQuery" minOccurs="0" />
    </xsd:sequence>
    <xsd:attribute name="trackDataSetChanges" type="xsf:xdYesNo" use="optional"
default="no" />
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
        <xsd:attributeGroup ref="xsf2:queryKeyFile" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="relativeQuery">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="replace" type="xsd:string" use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="emailAdapterExtension">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="emailAttachmentType" type="xsf2:emailAttachmentType"
use="required" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="xmlFileAdapterExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:connectoid" minOccurs="0" />
        </xsd:sequence>
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
        <xsd:attributeGroup ref="xsf2:queryKeyFile" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="sharepointListAdapterExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:connectoid" minOccurs="0" />
        </xsd:sequence>
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="queryThisFormOnly" type="xsf:xdYesNo" use="optional" default="no"
/>
        <xsd:attribute name="sharepointWebGuid" type="xsd:string" use="optional" />
        <xsd:attributeGroup ref="xsf2:queryKeyFile" />
    </xsd:complexType>
</xsd:element>

<xsd:element name="sendByMail">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="emailAttachmentType" type="xsf2:emailAttachmentType"
use="optional" />
        <xsd:attribute name="disableEmailForms" type="xsf:xdYesNo" use="optional" />
    </xsd:complexType>
</xsd:element>

<xsd:element name="warnings">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:warning" maxOccurs="unbounded" minOccurs="0" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>

```

```

        <xsd:anyAttribute processContents="skip" />
    </xsd:complexType>
</xsd:element>
<xsd:element name="warning">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="source" type="xsd:string" use="required" />
        <xsd:attribute name="hidden" type="xsf:xdYesNo" use="optional" default="no" />
    </xsd:complexType>
</xsd:element>

<xsd:element name="viewsExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:viewExtension" minOccurs="0" maxOccurs="unbounded" />
        </xsd:sequence>
    </xsd:complexType>
</xsd:element>
<xsd:element name="viewExtension">
    <xsd:complexType>
        <xsd:sequence>
            <xsd:element ref="xsf2:xmlToEditExtension" minOccurs="0" maxOccurs="unbounded" />
            <xsd:sequence>
                <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
                <xsd:attribute name="designMode" type="xsd:string" use="optional" />
                <xsd:attribute name="readOnly" type="xsf:xdYesNo" use="optional" />
                <xsd:attribute name="clientOnly" type="xsf:xdYesNo" use="optional" default="no"/>
                <xsd:anyAttribute processContents="skip" />
            </xsd:sequence>
        </xsd:complexType>
    </xsd:element>
<xsd:element name="xmlToEditExtension">
    <xsd:complexType>
        <xsd:sequence/>
        <xsd:attribute name="ref" type="xsf:xdTitle" use="required" />
        <xsd:attribute name="excludeEmbeddedImages" type="xsf:xdYesNo" use="optional"
default="no" />
        <xsd:attribute name="allowLinkedImages" type="xsf:xdYesNo" use="optional" default="no"
/>
    </xsd:complexType>
</xsd:element>

<xsd:element name="preview">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="sampleData" type="xsd:string" use="optional" />
        <xsd:attribute name="domain" type="xsd:string" use="optional" />
        <xsd:attribute name="userRole" type="xsd:string" use="optional" />
        <xsd:anyAttribute processContents="skip" />
    </xsd:complexType>
</xsd:element>

<xsd:element name="autoUpdatePrompt">
    <xsd:complexType>
        <xsd:sequence />
        <xsd:attribute name="showPrompt" type="xsf:xdYesNo" use="optional" />
        <xsd:anyAttribute processContents="skip" />
    </xsd:complexType>
</xsd:element>

```



```

<xsd:element name="inputScopes">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:inputScope" maxOccurs="unbounded" minOccurs="0" />
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="inputScope">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element ref="xsf2:words" maxOccurs="unbounded" minOccurs="0" />
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:string" use="required" />
    <xsd:attribute name="caption" type="xsf:xdTitle" use="optional" />
    <xsd:attribute name="expression" type="xsd:string" use="optional" />
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>
<xsd:element name="words">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="word" maxOccurs="unbounded" minOccurs="1">
        <xsd:complexType>
          <xsd:sequence />
          <xsd:attribute name="value" type="xsd:string" use="optional" default="" />
          <xsd:anyAttribute processContents="skip" />
        </xsd:complexType>
      </xsd:element>
    </xsd:sequence>
    <xsd:anyAttribute processContents="skip" />
  </xsd:complexType>
</xsd:element>

<xsd:element name="managedCode">
  <xsd:complexType>
    <xsd:sequence/>
    <xsd:attribute name="projectPath" type="xsd:string" use="optional" />
    <xsd:attribute name="language" type="xsf2:managedCodeType" use="required" />
    <xsd:attribute name="version" type="xsd:string" use="required" />
    <xsd:attribute name="enabled" type="xsf:xdYesNo" use="optional" />
  </xsd:complexType>
</xsd:element>

<xsd:element name="submit">
  <xsd:complexType>
    <xsd:all>
      <xsd:element name="submitAction" minOccurs="0">
        <xsd:complexType>
          <xsd:sequence />
          <xsd:attribute name="adapter" type="xsf:xdTitle" use="required" />
        </xsd:complexType>
      </xsd:element>
      <xsd:element name="successMessage" type="xsd:string" minOccurs="0" />
      <xsd:element name="errorMessage" type="xsd:string" minOccurs="0" />
    </xsd:all>
    <xsd:attribute name="caption" type="xsd:string" use="optional" />
    <xsd:attribute name="onAfterSubmit" use="optional">
      <xsd:simpleType>

```

```

        <xsd:restriction base="xsd:NMTOKEN">
            <xsd:enumeration value="close" />
            <xsd:enumeration value="keepOpen" />
            <xsd:enumeration value="openNew" />
        </xsd:restriction>
    </xsd:simpleType>
</xsd:attribute>
<xsd:attribute name="showStatusDialog" type="xsd:boolean" use="optional" />
<xsd:attribute name="showSignatureReminder" type="xsd:boolean" use="optional" />
<xsd:attribute name="disableMenuItem" type="xsd:boolean" use="optional" />
</xsd:complexType>
</xsd:element>

<xsd:element name="featureRestrictionsExtension">
    <xsd:complexType>
        <xsd:all>
            <xsd:element ref="xsd2:exportToPDFForXPS" minOccurs="0" />
        </xsd:all>
    </xsd:complexType>
</xsd:element>

<xsd:element name="exportToPDFForXPS">
    <xsd:complexType>
        <xsd:attribute name="ui" type="xsd:boolean" use="required" />
    </xsd:complexType>
</xsd:element>
</xsd:schema>

```

## 6 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft Office SharePoint Server 2007
- Microsoft Office InfoPath 2007

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.20:](#) The value "12.0.0.0" specifies that the form template was created with Office InfoPath 2007. The value "11.0.0.0" specifies that the form template was created with Office InfoPath 2003 or Office InfoPath 2003 SP1.

[<2> Section 2.2.20:](#) The value "2.0.0.0" specifies that the form template is compatible with Office InfoPath 2007. The value "1.100.0.0" specifies that the form template is compatible with Office InfoPath 2003 SP1. The value "1.0.0.0" specifies that the form template is compatible with Office InfoPath 2003.

[<3> Section 2.2.106:](#) Office InfoPath 2007 has the following behavior: The value for this property is interpreted as "immediate".

[<4> Section 2.4.1.1:](#) Office InfoPath 2007 has the following behavior: The maximum value allowed for this property is 9999.

## 7 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

## 8 Index

### A

[action attribute - form view file](#) 261  
[action element - form definition file](#) 93  
[admin element - form definition file extension](#) 148  
[adoAdapter element - form definition file](#) 58  
[adoAdapterExtension element - form definition file extension](#) 155  
[allowedActions element - form definition file](#) 93  
[allowedControl element - form definition file](#) 101  
[allowedTasks element - form definition file](#) 94  
[allownonmatching attribute - form view file](#) 262  
[Applicability](#) 24  
[applicationParameters element - form definition file](#) 49  
[assignmentAction element - form definition file](#) 130  
[attachmentFileName element - form definition file](#) 72  
[attributeData element - form definition file](#) 103  
[autoAdvance attribute - form view file](#) 262  
[autoRecovery element - form definition file](#) 53  
[autoUpdatePrompt element - form definition file extension](#) 163  
[auxDom attribute - form view file](#) 262

### B

[backgroundPicture attribute - form view file](#) 263  
[bcc element - form definition file](#) 70  
[binding attribute - form view file](#) 263  
[bindingProperty attribute - form view file](#) 264  
[bindingType attribute - form view file](#) 264  
[boundProp attribute - form view file](#) 265  
[business object - form template file component](#) 27  
[button \(with event\) element - form definition file](#) 109  
[Button control - form view file](#) 208  
[Button control - XML schema file](#) 171  
[Button control example](#) 294  
[button element - form definition file](#) 103

### C

[calculatedField element - form definition file](#) 134  
[calculations element - form definition file](#) 133  
[cc element - form definition file](#) 70  
[Change tracking](#) 372  
[Check box control - form view file](#) 213  
[Check box control - XML schema file](#) 171  
[Check box control example](#) 295  
[chooseFragment element - form definition file](#) 105  
[closeDocumentAction element - form definition file](#) 131  
[command element - form definition file extension](#) 143  
[commands element - form definition file extension](#) 142  
[compatibilityModesType simple type - form definition file extension](#) 137

[Complex form template example](#) 288  
[connectoid element - form definition file extension](#) 153  
[Contact selector control - form view file](#) 214  
[Contact selector control - XML schema file](#) 171  
[Contact selector control example](#) 296  
[contentType element - form definition file extension](#) 146  
[contentTypeTemplate element - form definition file extension](#) 146  
[Control data formatting - form view file](#) 207  
[Control representation examples - form view file](#) 293  
[Control-specific attributes example](#) 316  
[CtrlId attribute - form view file](#) 265  
[customCategory element - form definition file](#) 96  
[customValidation element - form definition file](#) 75

### D

[dataAdapters element - form definition file](#) 73  
[dataConnections element - form definition file extension](#) 152  
[dataFields element - submit file](#) 286  
[datafmt attribute - form view file](#) 266  
[dataObject element - form definition file](#) 56  
[dataObjects element - form definition file](#) 56  
[Date picker control - form view file](#) 218  
[Date picker control - XML schema file](#) 172  
[Date picker control example](#) 296  
[davAdapter element - form definition file](#) 65  
[davAdapterExtension element - form definition file extension](#) 154

#### Details

[action attribute - form view file](#) 261  
[action element - form definition file](#) 93  
[admin element - form definition file extension](#) 148  
[adoAdapter element - form definition file](#) 58  
[adoAdapterExtension element - form definition file extension](#) 155  
[allowedActions element - form definition file](#) 93  
[allowedControl element - form definition file](#) 101  
[allowedTasks element - form definition file](#) 94  
[allownonmatching attribute - form view file](#) 262  
[applicationParameters element - form definition file](#) 49  
[assignmentAction element - form definition file](#) 130  
[attachmentFileName element - form definition file](#) 72  
[attributeData element - form definition file](#) 103  
[autoAdvance attribute - form view file](#) 262  
[autoRecovery element - form definition file](#) 53  
[autoUpdatePrompt element - form definition file extension](#) 163  
[auxDom attribute - form view file](#) 262  
[backgroundPicture attribute - form view file](#) 263  
[bcc element - form definition file](#) 70

[binding attribute - form view file](#) 263  
[bindingProperty attribute - form view file](#) 264  
[bindingType attribute - form view file](#) 264  
[boundProp attribute - form view file](#) 265  
[business object - form template file component](#)  
 27  
[button \(with event\) element - form definition file](#)  
 109  
[button control - form view file](#) 208  
[button control - XML schema file](#) 171  
[button element - form definition file](#) 103  
[calculatedField element - form definition file](#) 134  
[calculations element - form definition file](#) 133  
[cc element - form definition file](#) 70  
[check box control - form view file](#) 213  
[check box control - XML schema file](#) 171  
[chooseFragment element - form definition file](#)  
 105  
[closeDocumentAction element - form definition](#)  
[file](#) 131  
[command element - form definition file extension](#)  
 143  
[commands element - form definition file](#)  
[extension](#) 142  
[compatibilityModesType simple type - form](#)  
[definition file extension](#) 137  
[connectoid element - form definition file](#)  
[extension](#) 153  
[contact selector control - form view file](#) 214  
[contact selector control - XML schema file](#) 171  
[contentType element - form definition file](#)  
[extension](#) 146  
[contentTypeTemplate element - form definition](#)  
[file extension](#) 146  
[control data formatting - form view file](#) 207  
[CtrlId attribute - form view file](#) 265  
[customCategory element - form definition file](#) 96  
[customValidation element - form definition file](#) 75  
[dataAdapters element - form definition file](#) 73  
[dataConnections element - form definition file](#)  
[extension](#) 152  
[dataFields element - submit file](#) 286  
[datafmt attribute - form view file](#) 266  
[dataObject element - form definition file](#) 56  
[dataObjects element - form definition file](#) 56  
[date picker control - form view file](#) 218  
[date picker control - XML schema file](#) 172  
[davAdapter element - form definition file](#) 65  
[davAdapterExtension element - form definition](#)  
[file extension](#) 154  
[dialogBoxExpressionAction element - form](#)  
[definition file](#) 129  
[dialogBoxMessageAction element - form definition](#)  
[file](#) 129  
[disableEditing attribute - form view file](#) 272  
[documentSchema element - form definition file](#)  
 74  
[documentSchemas element - form definition file](#)  
 74  
[documentSignatures element - form definition file](#)  
 122  
[documentVersionUpgrade element - form](#)  
[definition file](#) 124  
[domEventHandler element - form definition file](#)  
 78  
[domEventHandlers element - form definition file](#)  
 77  
[drop-down list control - form view file](#) 223  
[drop-down list control - XML schema file](#) 172  
[editing element - form definition file](#) 110  
[editWith element - form definition file](#) 106  
[emailAdapter element - form definition file](#) 67  
[emailAdapterExtension element - form definition](#)  
[file extension](#) 157  
[emailAttachmentType simple type - form](#)  
[definition file extension](#) 137  
[enabledProperty attribute - form view file](#) 272  
[enabledValue attribute - form view file](#) 272  
[errorCondition element - form definition file](#) 75  
[errorMessage element - form definition file](#)  
 (section 2.2.64 76, section 2.2.75 86)  
[errorMessage element - form definition file](#)  
[extension](#) 168  
[exitRuleSet element - form definition file](#) 129  
[exportToExcel element - form definition file](#) 52  
[exportToPDFForXPS element - form definition file](#)  
[extension](#) 169  
[exportToWeb element - form definition file](#) 52  
[expression box control - form view file](#) 229  
[expression box control - XML schema file](#) 173  
[extension element - form definition file](#) 126  
[extensions element - form definition file](#) 125  
[externalView element - form definition file](#) 102  
[externalViews element - form definition file](#) 101  
[featureRestrictions element - form definition file](#)  
 50  
[featureRestrictionsExtension element - form](#)  
[definition file extension](#) 169  
[field \(list view\) element - form definition file](#) 81  
[field element - form definition file](#) 65  
[fieldExtension element - form definition file](#)  
[extension](#) 151  
[fields \(list view\) element - form definition file](#) 80  
[fieldsExtension element - form definition file](#)  
[extension](#) 151  
[file attachment control - form view file](#) 232  
[file attachment control - XML schema file](#) 173  
[file element - form definition file](#) 98  
[fileName element - form definition file](#) 67  
[fileNew element - form definition file](#) 95  
[fileProperties element - form definition file](#) 98  
[files element - form definition file](#) 97  
[folderURL element - form definition file](#) 66  
[footer element - form definition file](#) 115  
[form definition file \(XSF\) extension specification](#)  
 134  
[form definition file structure](#) 27  
[form template file structure](#) 26  
[form view file - control-specific attributes](#) 259  
[form view file - view representation](#) 178  
[form view file - view syntax](#) 179  
[form view file - XSL function extensions](#) 280

[form view file \(XSLT\) structure](#) 178  
[formDescriptionType simple type - form definition file extension](#) 138  
[formLocaleType simple type - form definition file extension](#) 138  
[fragmentToInsert element - form definition file](#) 111  
[getUserNameFromData element - form definition file](#) 90  
[ghosted attribute - form view file](#) 273  
[group element - form definition file](#) 91  
[header element - form definition file](#) 115  
[hwsAdapter element - form definition file](#) 60  
[hwsOperation element - form definition file](#) 61  
[hwsWorkflow element - form definition file](#) 92  
[hyperlink control - form view file](#) 232  
[hyperlink control - XML schema file](#) 174  
[ictID attribute - form view file](#) 273  
[ictVersion attribute - form view file](#) 273  
[ignored controls - form view file](#) 258  
[importerrors.xml - form template file component](#) 27  
[importParameters element - form definition file](#) 79  
[importSource element - form definition file](#) 79  
[includedView element - form definition file extension](#) 149  
[includedViews element - form definition file extension](#) 149  
[initialXmlDocument element - form definition file](#) 95  
[inline attribute - form view file](#) 273  
[innerCtrl attribute - form view file](#) 273  
[input element - form definition file](#) 62  
[inputscope attribute - form view file](#) 274  
[inputScope element - form definition file extension](#) 164  
[inputScopeId attribute - form view file](#) 274  
[inputScopes element - form definition file extension](#) 164  
[install element - form definition file extension](#) 144  
[intro element - form definition file](#) 71  
[invalid constructs - form view file](#) 259  
[invalid controls - form view file](#) 258  
[irm template - form template file component](#) 27  
[layoutText attribute - form view file](#) 274  
[linkedToMaster attribute - form view file](#) 274  
[list box control - form view file](#) 234  
[list box control - XML schema file](#) 174  
[listProperties element - form definition file](#) 80  
[listPropertiesExtension element - form definition file extension](#) 150  
[location element - form definition file](#) 92  
[mail element - form definition file extension](#) 147  
[mainpane element - form definition file](#) 111  
[managedCode element - form definition file extension](#) 166  
[managedCodeType simple type - form definition file extension](#) 139  
[manifest.xsf - form template file component](#) 26  
[masterDetail element - form definition file](#) 110  
[masterID attribute - form view file](#) 275  
[masterName attribute - form view file](#) 275  
[membership element - form definition file](#) 90  
[menu element - form definition file](#) 116  
[menuArea element - form definition file](#) 117  
[merge.xml - form template file component](#) 27  
[mergedPrintView element - form definition file extension](#) 148  
[message element - form definition file](#) 124  
[msxsl function extension - form view file](#) 281  
[MSXSL Node-Set\(\) function - upgrade.XSL file](#) 287  
[myFields element - submit file](#) 286  
[num attribute - form view file](#) 275  
[offline element - form definition file extension](#) 150  
[offValue attribute - form view file](#) 275  
[onLoad element - form definition file](#) 87  
[onValue attribute - form view file](#) 276  
[openNewDocumentAction element - form definition file](#) 131  
[operation element - form definition file](#) 60  
[option button control - form view file](#) 237  
[option button control - XML schema file](#) 174  
[override element - form definition file](#) 48  
[package element - form definition file](#) 97  
[partFragment element - form definition file](#) 62  
[permissions element - form definition file](#) 100  
[postbackModel attribute - form view file](#) 276  
[preview element - form definition file extension](#) 163  
[primaryschema.xsd - form template file component](#) 26  
[print element - form definition file](#) 53  
[print view file - structure](#) 285  
[printSettings element - form definition file](#) 112  
[property element - form definition file](#) 99  
[query \(secondary\) element - form definition file](#) 57  
[query element - form definition file](#) 54  
[queryAction element - form definition file](#) 131  
[ref attribute - form view file](#) 277  
[relativeQuery element - form definition file extension](#) 156  
[repeating section control - form view file](#) 238  
[repeating section control - XML schema file](#) 175  
[repeating table control - form view file](#) 240  
[repeating table control - XML schema file](#) 176  
[resource files - form template file component](#) 27  
[rich text box control - form view file](#) 242  
[rich text box control - XML schema file](#) 176  
[role element - form definition file](#) 89  
[roles element - form definition file](#) 88  
[rule element - form definition file](#) 127  
[ruleSet element - form definition file](#) 132  
[ruleSetAction element - form definition file](#) 126  
[ruleSets element - form definition file](#) 132  
[sampledata.xml - form template file component](#) 26  
[save \(disabled\) element - form definition file](#) 88  
[save element - form definition file](#) 51

[schemaErrorMessages element - form definition file](#) 48  
[script element - form definition file](#) 55  
[script.js - form template file component](#) 27  
[script.vbs - form template file component](#) 27  
[scripts element - form definition file](#) 55  
[secondaryschema.xsd - form template file component](#) 26  
[secondaryschema\\_offline.xml - form template file component](#) 27  
[section/optional section control - form view file](#) 243  
[section/optional section control - XML schema file](#) 177  
[sendByMail element - form definition file extension](#) 159  
[sendMail element - form definition file](#) 53  
[server element - form definition file extension](#) 141  
[serverCommandActionType simple type - form definition file extension](#) 136  
[share element - form definition file extension](#) 147  
[sharepointListAdapter element - form definition file](#) 64  
[sharepointListAdapterExtension element - form definition file extension](#) 158  
[SignatureBlock attribute - form view file](#) 277  
[signedDataBlock element - form definition file](#) 123  
[SignedSectionDisplaySignatures attribute - form view file](#) 278  
[SignedSectionName attribute - form view file](#) 278  
[solutionDefinition element - form definition file extension](#) 139  
[solutionProperties element - form definition file](#) 50  
[solutionPropertiesExtension element - form definition file extension](#) 143  
[solutionType simple type - form definition file extension](#) 138  
[subject element - form definition file](#) 71  
[submit element - form definition file](#) 83  
[submit element - form definition file extension](#) 167  
[submit file - structure](#) 285  
[submitAction element - form definition file \(section 2.2.73 85, section 2.2.134 128\)](#)  
[submitAction element - form definition file extension](#) 168  
[submitdata.xml - form template file component](#) 26  
[submitToHostAdapter element - form definition file](#) 72  
[successMessage element - form definition file](#) 85  
[successMessage element - form definition file extension](#) 168  
[switchViewAction element - form definition file](#) 130  
[table control - form view file](#) 249  
[table control - XML schema file](#) 177  
[task element - form definition file](#) 94  
[taskpane element - form definition file](#) 118  
[template.xml - form template file component](#) 26  
[template.XML file - structure](#) 287  
[text box control - form view file](#) 250  
[text box control - XML schema file](#) 177  
[to element - form definition file](#) 69  
[toolbar element - form definition file](#) 116  
[toolbar element - form definition file extension](#) 141  
[unboundControls element - form definition file](#) 108  
[upgrade.xsl - form template file component](#) 27  
[upgrade.XSL file - structure](#) 287  
[useHttpHandler element - form definition file](#) 86  
[useHttpHandlerExtension element - form definition file extension](#) 153  
[useQueryAdapter element - form definition file](#) 87  
[userName element - form definition file](#) 91  
[useScriptHandler element - form definition file](#) 87  
[useTransform element - form definition file](#) 124  
[value attribute - form view file](#) 278  
[view element - form definition file](#) 120  
[view.xsl - form template file component](#) 26  
[viewExtension element - form definition file extension](#) 161  
[views element - form definition file](#) 119  
[viewsExtension element - form definition file extension](#) 161  
[warning element - form definition file extension](#) 160  
[warnings element - form definition file extension](#) 160  
[webServiceAdapter element - form definition file](#) 59  
[webServiceAdapterExtension element - form definition file extension](#) 156  
[word element - form definition file extension](#) 165  
[words element - form definition file extension](#) 165  
[wss element - form definition file extension](#) 145  
[xctname attribute - form view file](#) 279  
[xdDate function extension - form view file](#) 281  
[xdDesignMode simple type - form definition file](#) 42  
[xdEmptyString simple type - form definition file](#) 41  
[xdEnabledDisabled simple type - form definition file](#) 38  
[xdEnvironment function extension - form view file](#) 282  
[xdErrorMessage simple type - form definition file](#) 41  
[xdExpressionLiteral simple type - form definition file](#) 39  
[xdFileName simple type - form definition file](#) 39  
[xdFormatting function extension - form view file](#) 282  
[xdHWSCaption simple type - form definition file](#) 44  
[xdHWSname simple type - form definition file](#) 44  
[xdImage function extension - form view file](#) 282



[xdManualAuto simple type - form definition file](#) 38  
[xdMath function extension - form view file](#) 282  
[xDocumentClass element - form definition file](#) 45  
[xdRoleName simple type - form definition file](#) 35  
[xdScriptLanguage simple type - form definition file](#) 40  
[xdSignatureRelationEnum simple type - form definition file](#) 43  
[xdSignedDataBlockMessage simple type - form definition file](#) 43  
[xdSignedDataBlockName simple type - form definition file](#) 43  
[xdSolutionVersion simple type - form definition file](#) 40  
[xdTitle simple type - form definition file](#) 33  
[xdTrustLevel simple type - form definition file](#) 42  
[xdUser function extension - form view file](#) 284  
[xdUtil function extension - form view file](#) 284  
[xdViewName simple type - form definition file](#) 34  
[xdXDocument function extension - form view file](#) 284  
[xdYesNo simple type - form definition file](#) 35  
[XML schema file - control representation](#) 170  
[XML schema file structure](#) 169  
[xmlFileAdapter element - form definition file](#) 63  
[xmlFileAdapterExtension element - form definition file extension](#) 158  
[xmlToEdit attribute - form view file](#) 280  
[xmlToEdit element - form definition file](#) 121  
[xmlToEditExtension element - form definition file extension](#) 162  
[XSL root template element - form view file](#) 184  
[XSL root template style sheets - form view file](#) 185  
[dialogBoxExpressionAction element - form definition file](#) 129  
[dialogBoxMessageAction element - form definition file](#) 129  
[disableEditing attribute - form view file](#) 272  
[documentSchema element - form definition file](#) 74  
[documentSchemas element - form definition file](#) 74  
[documentSignatures element - form definition file](#) 122  
[documentVersionUpgrade element - form definition file](#) 124  
[domEventHandler element - form definition file](#) 78  
[domEventHandlers element - form definition file](#) 77  
[Drop-down list control - form view file](#) 223  
[Drop-down list control - XML schema file](#) 172  
[Drop-down list control example](#) 298

## E

[editing element - form definition file](#) 110  
[editWith element - form definition file](#) 106  
[emailAdapter element - form definition file](#) 67  
[emailAdapterExtension element - form definition file extension](#) 157  
[emailAttachmentType simple type - form definition file extension](#) 137  
[enabledProperty attribute - form view file](#) 272

[enabledValue attribute - form view file](#) 272  
[errorCondition element - form definition file](#) 75  
[errorMessage element - form definition file \(section 2.2.64 76, section 2.2.75 86\)](#)  
[errorMessage element - form definition file extension](#) 168  
[Examples](#) 288  
[button control](#) 294  
[checkbox control](#) 295  
[complex form template](#) 288  
[contact selector control](#) 296  
[Control representation - form view file](#) 293  
[control-specific attributes](#) 316  
[date picker control](#) 296  
[drop-down list control](#) 298  
[expression box control](#) 301  
[file attachment control](#) 302  
[form definition file](#) 289  
[Form Definition File \(XSF\) Examples](#) 289  
[form view file](#) 293  
[Form View Files \(XSL\) Examples](#) 293  
[hyperlink control](#) 302  
[list box control](#) 302  
[MSXSL Node-Set\(\)](#) 331  
[option button control](#) 305  
[print view file](#) 326  
[Print View Files \(XSLT\) Examples](#) 326  
[repeating section control](#) 306  
[repeating table control](#) 306  
[rich text box control](#) 310  
[section/optional section control](#) 310  
[simple form template](#) 288  
[submit file](#) 327  
[Submit Files \(XML\) Examples](#) 327  
[table control](#) 313  
[Template.XML](#) 328  
[Template.XML Examples](#) 328  
[text box control](#) 314  
[Upgrade.XSL](#) 329  
[Upgrade.XSL Examples](#) 328  
[XML schema file](#) 292  
[XML Schema Files \(XSD\) Examples](#) 292  
[XSF extension](#) 292  
[XSL function extensions](#) 322  
[exitRuleSet element - form definition file](#) 129  
[exportToExcel element - form definition file](#) 52  
[exportToPDFForXPS element - form definition file extension](#) 169  
[exportToWeb element - form definition file](#) 52  
[Expression box control - form view file](#) 229  
[Expression box control - XML schema file](#) 173  
[Expression box control example](#) 301  
[extension element - form definition file](#) 126  
[extensions element - form definition file](#) 125  
[externalView element - form definition file](#) 102  
[externalViews element - form definition file](#) 101

## F

[featureRestrictions element - form definition file](#) 50  
[featureRestrictionsExtension element - form definition file extension](#) 169

[field \(list view\) element - form definition file](#) 81  
[field element - form definition file](#) 65  
[fieldExtension element - form definition file extension](#) 151  
[Fields - vendor-extensible](#) 25  
[fields \(list view\) element - form definition file](#) 80  
[fieldsExtension element - form definition file extension](#) 151  
[File attachment control - form view file](#) 232  
[File attachment control - XML schema file](#) 173  
[File attachment control example](#) 302  
[file element - form definition file](#) 98  
[fileName element - form definition file](#) 67  
[fileNew element - form definition file](#) 95  
[fileProperties element - form definition file](#) 98  
[files element - form definition file](#) 97  
[folderURL element - form definition file](#) 66  
[footer element - form definition file](#) 115  
[Form definition \(.xsf\) file- overview](#) 16  
[Form Definition File \(XSF\) Examples example](#) 289  
[Form definition file \(XSF\) extension specification](#) 134  
 Form definition file elements  
   [action](#) 93  
   [adoAdapter](#) 58  
   [allowedActions](#) 93  
   [allowedControl](#) 101  
   [allowedTasks](#) 94  
   [applicationParameters](#) 49  
   [assignmentAction](#) 130  
   [attachmentFileName](#) 72  
   [attributeData](#) 103  
   [autoRecovery](#) 53  
   [bcc](#) 70  
   [button](#) 103  
   [button \(with event\)](#) 109  
   [calculatedField](#) 134  
   [calculations](#) 133  
   [cc](#) 70  
   [chooseFragment](#) 105  
   [closeDocumentAction](#) 131  
   [customCategory](#) 96  
   [customValidation](#) 75  
   [dataAdapters](#) 73  
   [dataObject](#) 56  
   [dataObjects](#) 56  
   [davAdapter](#) 65  
   [dialogBoxExpressionAction](#) 129  
   [dialogBoxMessageAction](#) 129  
   [documentSchema](#) 74  
   [documentSchemas](#) 74  
   [documentSignatures](#) 122  
   [documentVersionUpgrade](#) 124  
   [domEventHandler](#) 78  
   [domEventHandlers](#) 77  
   [editing](#) 110  
   [editWith](#) 106  
   [emailAdapter](#) 67  
   [errorCondition](#) 75  
   [errorMessage](#) ([section 2.2.64](#) 76, [section 2.2.75](#) 86)  
   [exitRuleSet](#) 129  
   [exportToExcel](#) 52  
   [exportToWeb](#) 52  
   [extension](#) 126  
   [extensions](#) 125  
   [externalView](#) 102  
   [externalViews](#) 101  
   [featureRestrictions](#) 50  
   [field](#) 65  
   [field \(list view\)](#) 81  
   [fields \(list view\)](#) 80  
   [file](#) 98  
   [fileName](#) 67  
   [fileNew](#) 95  
   [fileProperties](#) 98  
   [files](#) 97  
   [folderURL](#) 66  
   [footer](#) 115  
   [fragmentToInsert](#) 111  
   [getUserNameFromData](#) 90  
   [group](#) 91  
   [header](#) 115  
   [hwsAdapter](#) 60  
   [hwsOperation](#) 61  
   [hwsWorkflow](#) 92  
   [importParameters](#) 79  
   [importSource](#) 79  
   [initialXmlDocument](#) 95  
   [input](#) 62  
   [intro](#) 71  
   [listProperties](#) 80  
   [location](#) 92  
   [mainpane](#) 111  
   [masterDetail](#) 110  
   [membership](#) 90  
   [menu](#) 116  
   [menuArea](#) 117  
   [message](#) 124  
   [onLoad](#) 87  
   [openNewDocumentAction](#) 131  
   [operation](#) 60  
   [override](#) 48  
   [package](#) 97  
   [partFragment](#) 62  
   [permissions](#) 100  
   [print](#) 53  
   [printSettings](#) 112  
   [property](#) 99  
   [query](#) 54  
   [query \(secondary\)](#) 57  
   [queryAction](#) 131  
   [role](#) 89  
   [roles](#) 88  
   [rule](#) 127  
   [ruleSet](#) 132  
   [ruleSetAction](#) 126  
   [ruleSets](#) 132  
   [save](#) 51  
   [save \(disabled\)](#) 88  
   [schemaErrorMessages](#) 48  
   [script](#) 55

- [scripts](#) 55
- [sendMail](#) 53
- [sharepointListAdapterExtension](#) 64
- [signedDataBlock](#) 123
- [solutionProperties](#) 50
- [subject](#) 71
- [submit](#) 83
- [submitAction](#) ([section 2.2.73](#) 85, [section 2.2.134](#) 128)
- [submitToHostAdapter](#) 72
- [successMessage](#) 85
- [switchViewAction](#) 130
- [task](#) 94
- [taskpane](#) 118
- [to](#) 69
- [toolbar](#) 116
- [unboundControls](#) 108
- [useHttpHandler](#) 86
- [useQueryAdapter](#) 87
- [userName](#) 91
- [useScriptHandler](#) 87
- [useTransform](#) 124
- [views](#) 119
- [webServiceAdapter](#) 59
- [xDocumentClass](#) 45
- [xmlFileAdapter](#) 63
- [xmlToEdit](#) ([section 2.2.123](#) 120, [section 2.2.124](#) 121)
- [Form definition file example](#) 289
- Form definition file extension elements
  - [admin](#) 148
  - [adoAdapterExtension](#) 155
  - [autoUpdatePrompt](#) 163
  - [command](#) 143
  - [commands](#) 142
  - [connectoid](#) 153
  - [contentType](#) 146
  - [contentTypeTemplate](#) 146
  - [dataConnections](#) 152
  - [davAdapterExtension](#) 154
  - [emailAdapterExtension](#) 157
  - [errorMessage](#) 168
  - [exportToPDFForXPS](#) 169
  - [featureRestrictionsExtension](#) 169
  - [fieldExtension](#) 151
  - [fieldsExtension](#) 151
  - [includedView](#) 149
  - [includedViews](#) 149
  - [inputScope](#) 164
  - [inputScopes](#) 164
  - [install](#) 144
  - [listPropertiesExtension](#) 150
  - [mail](#) 147
  - [managedCode](#) 166
  - [mergedPrintView](#) 148
  - [offline](#) 150
  - [preview](#) 163
  - [relativeQuery](#) 156
  - [sendByMail](#) 159
  - [server](#) 141
  - [share](#) 147
  - [sharepointListAdapterExtension](#) 158
  - [solutionDefinition](#) 139
  - [solutionPropertiesExtension](#) 143
  - [submit](#) 167
  - [submitAction](#) 168
  - [successMessage](#) 168
  - [toolbar](#) 141
  - [useHttpHandlerExtension](#) 153
  - [viewExtension](#) 161
  - [viewsExtension](#) 161
  - [warning](#) 160
  - [warnings](#) 160
  - [webServiceAdapterExtension](#) 156
  - [word](#) 165
  - [words](#) 165
  - [wss](#) 145
  - [xmlFileAdapterExtension](#) 158
  - [xmlToEditExtension](#) 162
- Form definition file extension simple types
  - [compatibilityModesType](#) 137
  - [emailAttachmentType](#) 137
  - [formDescriptionType](#) 138
  - [formLocaleType](#) 138
  - [managedCodeType](#) 139
  - [serverCommandActionType](#) 136
  - [solutionType](#) 138
- Form definition file simple types
  - [xdDesignMode](#) 42
  - [xdEmptyString](#) 41
  - [xdEnabledDisabled](#) 38
  - [xdErrorMessage](#) 41
  - [xdExpressionLiteral](#) 39
  - [xdFileName](#) 39
  - [xdHWSCaption](#) 44
  - [xdHWSName](#) 44
  - [xdManualAuto](#) 38
  - [xdRoleName](#) 35
  - [xdScriptLanguage](#) 40
  - [xdSignatureRelationEnum](#) 43
  - [xdSignedDataBlockMessage](#) 43
  - [xdSignedDataBlockName](#) 43
  - [xdSolutionVersion](#) 40
  - [xdTitle](#) 33
  - [xdTrustLevel](#) 42
  - [xdViewName](#) 34
  - [xdYesNo](#) 35
- [Form definition file structure](#) 27
- Form template file components
  - [business object](#) 27
  - [importerrors.xml](#) 27
  - [irm template](#) 27
  - [manifest.xsf](#) 26
  - [merge.xsl](#) 27
  - [primaryschema.xsd](#) 26
  - [resource files](#) 27
  - [sampledata.xml](#) 26
  - [script.js](#) 27
  - [script.vbs](#) 27
  - [secondaryschema.xsd](#) 26
  - [secondaryschema\\_offline.xml](#) 27
  - [submitdata.xml](#) 26

- [template.xml](#) 26
- [upgrade.xsl](#) 27
- [view.xsl](#) 26
- [Form template file structure](#) 26
- [Form template format - overview](#) 16
- Form view file
  - [control data formatting](#) 207
  - [invalid constructs](#) 259
  - [invalid controls](#) 258
  - [view syntax](#) 179
  - [XSL root template style sheets](#) 185
- [Form view file - control-specific attributes](#) 259
- [Form view file - view representation](#) 178
- [Form view file - XSL function extensions](#) 280
- [Form view file \(XSLT\) structure](#) 178
- Form view file attributes
  - [action](#) 261
  - [allownonmatching](#) 262
  - [autoAdvance](#) 262
  - [auxDom](#) 262
  - [backgroundPicture](#) 263
  - [binding](#) 263
  - [bindingProperty](#) 264
  - [bindingType](#) 264
  - [boundProp](#) 265
  - [CtrlId](#) 265
  - [datafmt](#) 266
  - [disableEditing](#) 272
  - [enabledProperty](#) 272
  - [enabledValue](#) 272
  - [ghosted](#) 273
  - [ictID](#) 273
  - [ictVersion](#) 273
  - [inline](#) 273
  - [innerCtrl](#) 273
  - [inputscope](#) 274
  - [inputScopeId](#) 274
  - [layoutText](#) 274
  - [linkedToMaster](#) 274
  - [masterID](#) 275
  - [masterName](#) 275
  - [num](#) 275
  - [offValue](#) 275
  - [onValue](#) 276
  - [postbackModel](#) 276
  - [ref](#) 277
  - [SignatureBlock](#) 277
  - [SignedSectionDisplaySignatures](#) 278
  - [SignedSectionName](#) 278
  - [value](#) 278
  - [xctname](#) 279
  - [xmlToEdit](#) 280
- Form view file controls
  - [button](#) 208
  - [check box](#) 213
  - [contact selector](#) 214
  - [date picker](#) 218
  - [drop-down list](#) 223
  - [expression box](#) 229
  - [file attachment](#) 232
  - [hyperlink](#) 232
  - [Ignored](#) 258
  - [list box](#) 234
  - [option button](#) 237
  - [repeating section](#) 238
  - [repeating table](#) 240
  - [rich text box](#) 242
  - [section/optional section](#) 243
  - [table](#) 249
  - [text box](#) 250
- Form view file elements
  - [XSL root template](#) 184
- [Form view file example](#) 293
- Form view file function extensions
  - [msxsl](#) 281
  - [xdDate](#) 281
  - [xdEnvironment](#) 282
  - [xdFormatting](#) 282
  - [xdImage](#) 282
  - [xdMath](#) 282
  - [xdUser](#) 284
  - [xdUtil](#) 284
  - [xdXDocument](#) 284
- [Form View Files \(XSL\) Examples example](#) 293
- [formDescriptionType simple type - form definition file extension](#) 138
- [formLocaleType simple type - form definition file extension](#) 138
- [fragmentToInsert element - form definition file](#) 111
- Full XML schema ([section 5](#) 333, [section 5](#) 333)
  - [InfoPath XSF XSD](#) 333
  - [InfoPath XSF2 XSD](#) 361
  - [the InfoPath XSF2 XSD](#) 361

## G

- [getUserNameFromData element - form definition file](#) 90
- [ghosted attribute - form view file](#) 273
- [Glossary](#) 12
- [group element - form definition file](#) 91

## H

- [header element - form definition file](#) 115
- [hwsAdapter element - form definition file](#) 60
- [hwsOperation element - form definition file](#) 61
- [hwsWorkflow element - form definition file](#) 92
- [Hyperlink control - form view file](#) 232
- [Hyperlink control - XML schema file](#) 174
- [Hyperlink control example](#) 302

## I

- [ictID attribute - form view file](#) 273
- [ictVersion attribute - form view file](#) 273
- [Ignored controls - form view file](#) 258
- [Implementer - security considerations](#) 332
- [importerrors.xml - form template file component](#) 27
- [importParameters element - form definition file](#) 79
- [importSource element - form definition file](#) 79
- [includedView element - form definition file extension](#) 149

[includedViews element - form definition file extension](#) 149  
[Informative references](#) 15  
[initialXmlDocument element - form definition file](#) 95  
[inline attribute - form view file](#) 273  
[innerCtrl attribute - form view file](#) 273  
[input element - form definition file](#) 62  
[inputscope attribute - form view file](#) 274  
[inputScope element - form definition file extension](#) 164  
[inputScopeId attribute - form view file](#) 274  
[inputScopes element - form definition file extension](#) 164  
[install element - form definition file extension](#) 144  
[intro element - form definition file](#) 71  
[Introduction](#) 12  
[Invalid constructs - form view file](#) 259  
[Invalid controls - form view file](#) 258  
[irm template - form template file component](#) 27

## L

[layoutText attribute - form view file](#) 274  
[linkedToMaster attribute - form view file](#) 274  
[List box control - form view file](#) 234  
[List box control - XML schema file](#) 174  
[List box control example](#) 302  
[listProperties element - form definition file](#) 80  
[listPropertiesExtension element - form definition file extension](#) 150  
[Localization](#) 24  
[location element - form definition file](#) 92

## M

[mail element - form definition file extension](#) 147  
[mainpane element - form definition file](#) 111  
[managedCode element - form definition file extension](#) 166  
[managedCodeType simple type - form definition file extension](#) 139  
[manifest.xsf - form template file component](#) 26  
[masterDetail element - form definition file](#) 110  
[masterID attribute - form view file](#) 275  
[masterName attribute - form view file](#) 275  
[membership element - form definition file](#) 90  
[menu element - form definition file](#) 116  
[menuArea element - form definition file](#) 117  
[merge.xsl - form template file component](#) 27  
[mergedPrintView element - form definition file extension](#) 148  
[message element - form definition file](#) 124  
[msxsl function extension - form view file](#) 281  
[MSXSL Node-Set\(\) example](#) 331  
[MSXSL Node-Set\(\) function - upgrade.XSL file](#) 287  
[myFields element - submit file](#) 286

## N

[Normative references](#) 14  
[num attribute - form view file](#) 275

## O

[offline element - form definition file extension](#) 150  
[offValue attribute - form view file](#) 275  
[onLoad element - form definition file](#) 87  
[onValue attribute - form view file](#) 276  
[openNewDocumentAction element - form definition file](#) 131  
[operation element - form definition file](#) 60  
[Option button control - form view file](#) 237  
[Option button control - XML schema file](#) 174  
[Option button control example](#) 305  
[override element - form definition file](#) 48  
[Overview \(synopsis\)](#) 16  
[form definition \(.xsf\) file](#) 16  
[form template format](#) 16  
[form view files xsl function extensions \(XSLT\)](#) 17  
[print view files \(XSLT\)](#) 22  
[resource files](#) 23  
[submit files \(XML\)](#) 23  
[template.xml file](#) 23  
[unused files](#) 24  
[upgrade.xsl file](#) 23  
[XML schema files \(XSD\)](#) 17

## P

[package element - form definition file](#) 97  
[partFragment element - form definition file](#) 62  
[permissions element - form definition file](#) 100  
[postbackModel attribute - form view file](#) 276  
[preview element - form definition file extension](#) 163  
[primaryschema.xsd - form template file component](#) 26  
[print element - form definition file](#) 53  
[Print view file - structure](#) 285  
[Print view file examples](#) 326  
[Print View Files \(XSLT\) Examples example](#) 326  
[printSettings element - form definition file](#) 112  
[Product behavior](#) 371  
[property element - form definition file](#) 99

## Q

[query \(secondary\) element - form definition file](#) 57  
[query element - form definition file](#) 54  
[queryAction element - form definition file](#) 131

## R

[ref attribute - form view file](#) 277  
[References](#) 14  
[informative](#) 15  
[normative](#) 14  
[Relationship to protocols and other structures](#) 24  
[relativeQuery element - form definition file extension](#) 156  
[Repeating section control - form view file](#) 238  
[Repeating section control - XML schema file](#) 175  
[Repeating section control example](#) 306  
[Repeating table control - form view file](#) 240  
[Repeating table control - XML schema file](#) 176

[Repeating table control example](#) 306  
[Resource files - form template file component](#) 27  
[Rich text box control - form view file](#) 242  
[Rich text box control - XML schema file](#) 176  
[Rich text box control example](#) 310  
[role element - form definition file](#) 89  
[roles element - form definition file](#) 88  
[rule element - form definition file](#) 127  
[ruleSet element - form definition file](#) 132  
[ruleSetAction element - form definition file](#) 126  
[ruleSets element - form definition file](#) 132

## S

[sampledata.xml - form template file component](#) 26  
[save \(disabled\) element - form definition file](#) 88  
[save element - form definition file](#) 51  
[schemaErrorMessages element - form definition file](#) 48  
[script element - form definition file](#) 55  
[script.js - form template file component](#) 27  
[script.vbs - form template file component](#) 27  
[scripts element - form definition file](#) 55  
[secondaryschema.xsd - form template file component](#) 26  
[secondaryschema\\_offline.xml - form template file component](#) 27  
[Section/optional section control - form view file](#) 243  
[Section/optional section control - XML schema file](#) 177  
[Section/optional section control example](#) 310  
Security  
[template.xml specification](#) 332  
[the infopath form template format](#) 332  
[Security - form template format](#) 332  
[Security - implementer considerations](#) 332  
[Security - Template.XML specification](#) 332  
[sendByMail element - form definition file extension](#) 159  
[sendMail element - form definition file](#) 53  
[server element - form definition file extension](#) 141  
[serverCommandActionType simple type - form definition file extension](#) 136  
[share element - form definition file extension](#) 147  
[sharepointListAdapter element - form definition file](#) 64  
[sharepointListAdapterExtension element - form definition file extension](#) 158  
[SignatureBlock attribute - form view file](#) 277  
[signedDataBlock element - form definition file](#) 123  
[SignedSectionDisplaySignatures attribute - form view file](#) 278  
[SignedSectionName attribute - form view file](#) 278  
[Simple form template example](#) 288  
[solutionDefinition element - form definition file extension](#) 139  
[solutionProperties element - form definition file](#) 50  
[solutionPropertiesExtension element - form definition file extension](#) 143  
[solutionType simple type - form definition file extension](#) 138  
Structures

[form definition file](#) 27  
[form template file](#) 26  
[form view file - control-specific attributes](#) 259  
[form view file - view representation](#) 178  
[form view file - XSL function extensions](#) 280  
[form view file \(XSLT\)](#) 178  
[print view file](#) 285  
[submit file](#) 285  
[template.XML file](#) 287  
[upgrade.XSL file](#) 287  
[XML schema file](#) 169  
[XML schema file - control representation](#) 170  
[subject element - form definition file](#) 71  
[submit element - form definition file](#) 83  
[submit element - form definition file extension](#) 167  
[Submit file - structure](#) 285  
Submit file elements  
[dataFields](#) 286  
[myFields](#) 286  
[Submit file examples](#) 327  
[Submit Files \(XML\) Examples example](#) 327  
submitAction element - form definition file ([section 2.2.73](#) 85, [section 2.2.134](#) 128)  
[submitAction element - form definition file extension](#) 168  
[submitdata.xml - form template file component](#) 26  
[submitToHostAdapter element - form definition file](#) 72  
[successMessage element - form definition file](#) 85  
[successMessage element - form definition file extension](#) 168  
[switchViewAction element - form definition file](#) 130

## T

[Table control - form view file](#) 249  
[Table control - XML schema file](#) 177  
[Table control example](#) 313  
[task element - form definition file](#) 94  
[taskpane element - form definition file](#) 118  
[template.xml - form template file component](#) 26  
[Template.XML example](#) 328  
[Template.XML Examples example](#) 328  
[Template.XML file - structure](#) 287  
[Text box control - form view file](#) 250  
[Text box control - XML schema file](#) 177  
[Text box control example](#) 314  
[to element - form definition file](#) 69  
[toolbar element - form definition file](#) 116  
[toolbar element - form definition file extension](#) 141  
[Tracking changes](#) 372

## U

[unboundControls element - form definition file](#) 108  
[upgrade.xsl - form template file component](#) 27  
[Upgrade.XSL example](#) 329  
[Upgrade.XSL Examples example](#) 328  
[Upgrade.XSL file - structure](#) 287  
Upgrade.XSL file functions  
[MSXSL Node-Set\(\)](#) 287  
[useHttpHandler element - form definition file](#) 86

[useHttpHandlerExtension element - form definition file extension](#) 153  
[useQueryAdapter element - form definition file](#) 87  
[userName element - form definition file](#) 91  
[useScriptHandler element - form definition file](#) 87  
[useTransform element - form definition file](#) 124

## V

[value attribute - form view file](#) 278  
[Vendor-extensible fields](#) 25  
[Versioning](#) 24  
[view element - form definition file](#) 120  
[View syntax - form view file](#) 179  
[view.xsl - form template file component](#) 26  
[viewExtension element - form definition file extension](#) 161  
[views element - form definition file](#) 119  
[viewsExtension element - form definition file extension](#) 161

## W

[warning element - form definition file extension](#) 160  
[warnings element - form definition file extension](#) 160  
[webServiceAdapter element - form definition file](#) 59  
[webServiceAdapterExtension element - form definition file extension](#) 156  
[word element - form definition file extension](#) 165  
[words element - form definition file extension](#) 165  
[wss element - form definition file extension](#) 145

## X

[xctname attribute - form view file](#) 279  
[xDDate function extension - form view file](#) 281  
[xDDesignMode simple type - form definition file](#) 42  
[xDEmptyString simple type - form definition file](#) 41  
[xDEnabledDisabled simple type - form definition file](#) 38  
[xDEnvironment function extension - form view file](#) 282  
[xDErrorMessage simple type - form definition file](#) 41  
[xDExpressionLiteral simple type - form definition file](#) 39  
[xDFileName simple type - form definition file](#) 39  
[xDFormatting function extension - form view file](#) 282  
[xDHWSCaption simple type - form definition file](#) 44  
[xDHWSname simple type - form definition file](#) 44  
[xDImage function extension - form view file](#) 282  
[xDManualAuto simple type - form definition file](#) 38  
[xDMath function extension - form view file](#) 282  
[xDDocumentClass element - form definition file](#) 45  
[xDRoleName simple type - form definition file](#) 35  
[xDScriptLanguage simple type - form definition file](#) 40  
[xDSignatureRelationEnum simple type - form definition file](#) 43  
[xDSignedDataBlockMessage simple type - form definition file](#) 43

[xDSignedDataBlockName simple type - form definition file](#) 43  
[xDSolutionVersion simple type - form definition file](#) 40  
[xDTitle simple type - form definition file](#) 33  
[xDTrustLevel simple type - form definition file](#) 42  
[xDUser function extension - form view file](#) 284  
[xDUtil function extension - form view file](#) 284  
[xDViewName simple type - form definition file](#) 34  
[xDXDocument function extension - form view file](#) 284  
[xDYesNo simple type - form definition file](#) 35  
XML schema ([section 5](#) 333, [section 5](#) 333)  
[InfoPath XSF XSD](#) 333  
[InfoPath XSF2 XSD](#) 361  
[the InfoPath XSF2 XSD](#) 361  
[XML schema file - control representation](#) 170  
XML schema file controls  
[button](#) 171  
[checkbox](#) 171  
[contact selector](#) 171  
[date picker](#) 172  
[drop-down list](#) 172  
[expression box](#) 173  
[file attachment](#) 173  
[hyperlink](#) 174  
[list box](#) 174  
[option button](#) 174  
[repeating section](#) 175  
[repeating table](#) 176  
[rich text box](#) 176  
[section/optional section](#) 177  
[table](#) 177  
[text box](#) 177  
[XML schema file example](#) 292  
[XML schema file structure](#) 169  
[XML Schema Files \(XSD\) Examples example](#) 292  
[xmlFileAdapter element - form definition file](#) 63  
[xmlFileAdapterExtension element - form definition file extension](#) 158  
[xmlToEdit attribute - form view file](#) 280  
[xmlToEdit element - form definition file](#) 121  
[xmlToEditExtension element - form definition file extension](#) 162  
[XSF extension example](#) 292  
[XSL function extensions example](#) 322  
[XSL root template element - form view file](#) 184  
[XSL root template style sheets - form view file](#) 185