

# [MS-OCEXUM]: Call Control for Exchange Unified Messaging Protocol Extensions

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

**Preliminary Documentation.** This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

## Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial version
04/25/2008	0.2		Revised and edited technical content
06/27/2008	1.0		Revised and edited technical content
08/15/2008	1.01		Revised and edited technical content
12/12/2008	2.0		Revised and edited technical content
02/13/2009	2.01		Revised and edited technical content
03/13/2009	2.02		Revised and edited technical content
07/13/2009	2.03	Major	Revised and edited the technical content
08/28/2009	2.04	Editorial	Revised and edited the technical content
11/06/2009	2.05	Editorial	Revised and edited the technical content
02/19/2010	2.06	Editorial	Revised and edited the technical content
03/31/2010	2.07	Major	Updated and revised the technical content
04/30/2010	2.08	Editorial	Revised and edited the technical content
06/07/2010	2.09	Editorial	Revised and edited the technical content
06/29/2010	2.10	Editorial	Changed language and formatting in the technical content.
07/23/2010	2.10	No change	No changes to the meaning, language, or formatting of the technical content.
09/27/2010	3.0	Major	Significantly changed the technical content.
11/15/2010	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	3.0	No change	No changes to the meaning, language, or formatting of the technical content.

<b>Date</b>	<b>Revision History</b>	<b>Revision Class</b>	<b>Comments</b>
03/18/2011	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	4.0	Major	Significantly changed the technical content.

Preliminary

# Table of Contents

<b>1 Introduction</b>	<b>6</b>
1.1 Glossary	6
1.2 References	6
1.2.1 Normative References	7
1.2.2 Informative References	7
1.3 Protocol Overview (Synopsis)	7
1.4 Relationship to Other Protocols	8
1.5 Prerequisites/Preconditions	8
1.6 Applicability Statement	8
1.7 Versioning and Capability Negotiation	8
1.8 Vendor-Extensible Fields	8
1.9 Standards Assignments	8
<b>2 Messages</b>	<b>9</b>
2.1 Transport	9
2.2 Message Syntax	9
2.2.1 Ms-Exchange-Command	9
2.2.2 Ms-Sensitivity	9
<b>3 Protocol Details</b>	<b>11</b>
3.1 Ms-Exchange-Command Details	11
3.1.1 Protocol Client Behavior	11
3.1.2 Unified Messaging Server Behavior	11
3.1.3 Abstract Data Model	11
3.1.4 Timers	11
3.1.5 Initialization	11
3.1.6 Higher-Layer Triggered Events	11
3.1.7 Message Processing Events and Sequencing Rules	11
3.1.8 Timer Events	11
3.1.9 Other Local Events	11
3.2 Ms-Sensitivity Details	12
3.2.1 Unified Messaging Server Behavior	12
3.2.2 Protocol Server Behavior	12
3.2.3 Abstract Data Model	12
3.2.4 Timers	12
3.2.5 Initialization	12
3.2.6 Higher-Layer Triggered Events	12
3.2.7 Message Processing Events and Sequencing Rules	12
3.2.8 Timer Events	12
3.2.9 Other Local Events	13
<b>4 Protocol Examples</b>	<b>14</b>
4.1 Ms-Exchange-Command	14
4.2 Ms-Sensitivity	14
<b>5 Security</b>	<b>16</b>
5.1 Security Considerations for Implementers	16
5.2 Index of Security Parameters	16
<b>6 Appendix A: Product Behavior</b>	<b>17</b>

**7 Change Tracking..... 18**  
**8 Index ..... 21**

Preliminary

# 1 Introduction

This document specifies the Call Control for Exchange Unified Messaging Protocol Extensions, which consist of proprietary extensions to the **Session Initiation Protocol (SIP)**, which is used to play voice messages and to manage the unified messaging mailbox using voice commands. SIP is used to establish, modify, and terminate multimedia sessions or calls. These protocol extensions are used to integrate with other telephony networks or systems, such as a private branch exchange (PBX).

Sections 1.8, 2, and 3 of this specification are normative and contain RFC 2119 language. Sections 1.5 and 1.9 are also normative but cannot contain RFC 2119 language. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**Augmented Backus-Naur Form (ABNF)  
authentication  
server  
Transmission Control Protocol (TCP)**

The following terms are defined in [\[MS-OFCGLOS\]](#):

**automaton  
endpoint  
INVITE  
Session Initiation Protocol (SIP)  
SIP message  
Transport Layer Security (TLS)  
Uniform Resource Identifier (URI)  
user agent client (UAC)**

The following terms are specific to this document:

**Exchange Web Service (EWS):** A service that is provided by Microsoft® Exchange Server and that enables clients to access mailbox content.

**personal identification number (PIN):** A number that is used by Exchange Unified Messaging to authenticate a user.

**subscriber access:** The ability of a user to gain access to features of a Unified Messaging server, such as using a phone to listen to telephony voice messages or e-mail messages.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-EUMR] Microsoft Corporation, "[Routing to Exchange Unified Messaging Extensions](#)".

[MS-OXWUMS] Microsoft Corporation, "[Voice Mail Settings Web Service Protocol Specification](#)".

[MS-SIPRE] Microsoft Corporation, "[Session Initiation Protocol \(SIP\) Routing Extensions](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC3261] Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and Schooler, E., "SIP: Session Initiation Protocol", RFC 3261, June 2002, <http://www.ietf.org/rfc/rfc3261.txt>

### 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFGLGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[RFC5234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <http://www.rfc-editor.org/rfc/rfc5234.txt>

### 1.3 Protocol Overview (Synopsis)

The unified messaging **server (2)** provides a Session Initiation Protocol (SIP) interface toward a server (2) or gateways. By default, the unified messaging server (2) requires a **personal identification number (PIN)** to be entered to access the voice mail in a user's inbox. This protocol allows previously authenticated protocol clients to bypass the PIN requirement, thus streamlining the connection with the unified messaging server (2).

This protocol is used to support calls between a protocol client and the unified messaging server (2) supported by this protocol.

There are two types of calls between a protocol client and the unified messaging server (2):

- **Call-in:** Using the protocol client user interface (UI), a user calls into the unified messaging server (2) to access the voice mail system. This is also known as **subscriber access**.
- **Dial Out (Play-On-Phone):** Upon receiving an appropriate event, the unified messaging server (2) sends a SIP **INVITE** to the client for the purpose of playing back the recorded voice message on a protocol server (2) **endpoint (5)** identified by a phone number.

This protocol can be used in Play-On-Phone scenarios to prevent a protocol server from rerouting the message back to voice mail back and call forwarding when the Play-On-Phone call is not answered by the user.

This protocol also adds the ability to specify the subject of a voice message, the importance of a call, and an indication that the endpoint (5) is not a user but an **automaton** functioning on behalf of the user.

Please refer to [\[MS-EUMR\]](#) for details on how the Lync Server routes the call from client to the unified messaging server.

#### **1.4 Relationship to Other Protocols**

This protocol depends on Session Initiation Protocol (SIP).

This protocol depends on all the protocols on which SIP depends.

#### **1.5 Prerequisites/Preconditions**

None.

#### **1.6 Applicability Statement**

This protocol is designed to be used to support calls between a protocol client and the unified messaging server (2) supported by this protocol.

#### **1.7 Versioning and Capability Negotiation**

None.

#### **1.8 Vendor-Extensible Fields**

None.

#### **1.9 Standards Assignments**

None.



## 2 Messages

### 2.1 Transport

Messages MUST be transported over **Transmission Control Protocol (TCP)** or **Transport Layer Security (TLS)**.

### 2.2 Message Syntax

Messages are formatted as **SIP messages**, as specified in [\[RFC3261\]](#) section 7, with the custom headers and parameters described in this document.

#### 2.2.1 Ms-Exchange-Command

The **Ms-Exchange-Command** custom Session Initiation Protocol (SIP) header is added to the INVITE method in calls originating from a protocol client. This header is used to indicate an action to be performed by the unified messaging server (2).

The syntax of this header, in the **Augmented Backus-Naur Form (ABNF)** notation, as defined in [\[RFC5234\]](#), is as follows:

```
Ms-Exchange-Command header = "Ms-Exchange-Command" HCOLON param
param = "skip-pin"
```

The only supported action is specified by the valueless parameter, **skip-pin**, which indicates to the unified messaging server (2) not to prompt the user for a personal identification number (PIN). Before this parameter can be set, the protocol client MUST be authenticated by the SIP server (2), and the additional level of **authentication (2)** in the form of a PIN is not needed for the INVITE transaction.

The syntax of the **Ms-Exchange-Command** header with the **skip-pin** parameter is illustrated as follows:

```
INVITE ... SIP/2.0
From: ...
To: ...
Ms-Exchange-Command: skip-pin
```

#### 2.2.2 Ms-Sensitivity

The **Ms-Sensitivity** custom Session Initiation Protocol (SIP) header, as specified in [\[MS-SIPRE\]](#), is used to instruct a protocol server (2) not to reroute the call back to the voice mail server (2) and to prevent call forwarding. When the value of this header is set to "private-no-diversion", a protocol server (2) does not reroute the message back to voice mail when a Play-On-Phone call is not answered by the user.

The syntax of this header, in the Augmented Backus-Naur Form (ABNF) notation, as defined in [\[RFC5234\]](#), is as follows:

```
Ms-Sensitivity header = "Ms-Sensitivity" HCOLON privacy
privacy="private-no-diversion"
```

The syntax of the **Ms-Sensitivity** header is illustrated as follows:

```
INVITE ... SIP/2.0
From: ...
To: ...
Ms-Sensitivity: private-no-diversion
```

Preliminary

## 3 Protocol Details

### 3.1 Ms-Exchange-Command Details

The **Ms-Exchange-Command** header with the **skip-pin** parameter is used when the protocol client uses subscriber access to the voice mail system, and to provide a better user experience, requires the voice mail server (2) to skip the personal identification number (PIN) prompt. When the voice mail server (2) receives this command, it MUST skip the PIN prompt, provided that the INVITE is received over a trusted transport, such as a Transport Layer Security (TLS) transport, to the voice mail server (2). The assumption here is that the voice mail system trusts the authentication (2) mechanism for requests that are received by it over the trusted transport.

#### 3.1.1 Protocol Client Behavior

A **user agent client (UAC)** accessing subscriber access feature of the voice mail system over a trusted transport SHOULD provide **Ms-Exchange-Command** header with **skip-pin** parameter to provide a better user experience.

#### 3.1.2 Unified Messaging Server Behavior

If a voice mail server receives a SIP INVITE over a trusted transport with **Ms-Exchange-Command** header with **skip-pin** parameter then it MUST skip personal identification number (PIN) prompt.

#### 3.1.3 Abstract Data Model

None.

#### 3.1.4 Timers

None.

#### 3.1.5 Initialization

None.

#### 3.1.6 Higher-Layer Triggered Events

None.

#### 3.1.7 Message Processing Events and Sequencing Rules

None.

#### 3.1.8 Timer Events

None.

#### 3.1.9 Other Local Events

None.

## 3.2 Ms-Sensitivity Details

The **Ms-Sensitivity** header, as specified in [\[MS-SIPRE\]](#), SHOULD be used in Dial Out(Play-On-Phone), scenarios when the user requests a voice mail message to be played on the phone from an application. In such a scenario, the unified messaging server (2) sends an INVITE to the user and uses this header to indicate to the protocol server (2) that the call MUST NOT be rerouted back to voice mail and call forwarding when the Play-On-Phone call is not answered by the user. In this case, unanswered call forwarding or immediate call forwarding MUST NOT be applied. The unified messaging server (2) sends such an INVITE through the **Exchange Web Service (EWS)**, as specified in [\[MS-OXWUMS\]](#). The trigger point for this is an event sent by EWS.<1>

The unified messaging server (2) supported by this protocol uses the **Ms-Sensitivity** header with the **private-no-diversion** parameter, as specified in section [2.2.2](#).

Use of other parameters, as specified in [\[MS-SIPRE\]](#), is out of the scope of this extension.

Note that in Play-On-Phone INVITEs that originate from the unified messaging server (2), the **URIs** in the **From** header and the **To** header MUST match. This is because the protocol clients have special logic that checks for this condition and allows the protocol client to ring for Play-On-Phone calls, even if the user has manually set himself or herself to the "Appear Offline" presence state.

### 3.2.1 Unified Messaging Server Behavior

A unified messaging server SHOULD send **Ms-Sensitivity** header with the **private-no-diversion** parameter in Dial Out or Play-On-Phone scenarios.

### 3.2.2 Protocol Server Behavior

If a SIP INVITE contains **Ms-Sensitivity** header with the **private-no-diversion** parameter then unanswered call forwarding or immediate call forwarding MUST NOT be applied.

### 3.2.3 Abstract Data Model

None.

### 3.2.4 Timers

None.

### 3.2.5 Initialization

None.

### 3.2.6 Higher-Layer Triggered Events

None.

### 3.2.7 Message Processing Events and Sequencing Rules

None.

### 3.2.8 Timer Events

None.

### 3.2.9 Other Local Events

None.


Preliminary

## 4 Protocol Examples

### 4.1 Ms-Exchange-Command

**Ms-Exchange-Command** header can be used to skip pin verification for previously authenticated protocol clients.

The following figure shows the flow of the Session Initiation Protocol (SIP) INVITE transaction for subscriber access to voice mail.

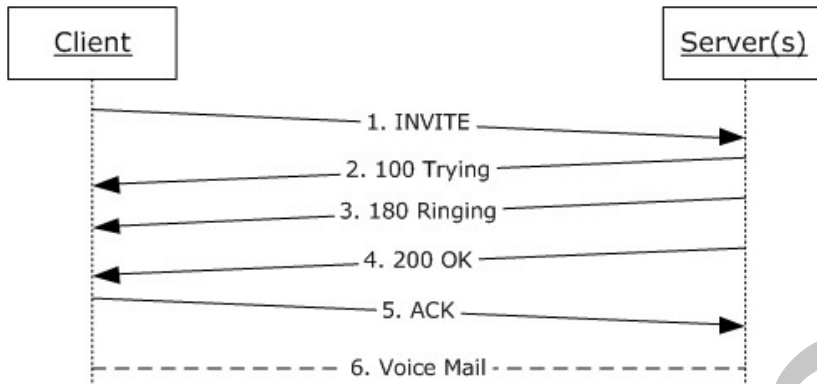


**Figure 1: Subscriber access flow**

The INVITE message carries the **Ms-Exchange-Command** header with the **skip-pin** parameter, as shown in the following example.

```
INVITE sip:alice@contoso.com;opaque=app:voicemail SIP/2.0
Via: SIP/2.0/TLS 10.56.65.37:33876
Max-Forwards: 70
From: <sip:alice@contoso.com>;tag=01742a55e6;epid=6b5d10e663
To: <sip:alice@contoso.com;opaque=app:voicemail>
Call-ID: f7c2efff9240413cb6e5125fdca4b63a
CSeq: 1 INVITE
Contact: <sip:alice@contoso.com;opaque=user:epid:ihclvAI6-FmKSGLKr_2rtAAA;gruu>
Ms-Exchange-Command: skip-pin
... SDP SNIPPED ...
```

### 4.2 Ms-Sensitivity

The following figure shows the flow for the **Ms-Sensitivity** header that is added by the unified messaging server (2) when dialing out to the protocol client.

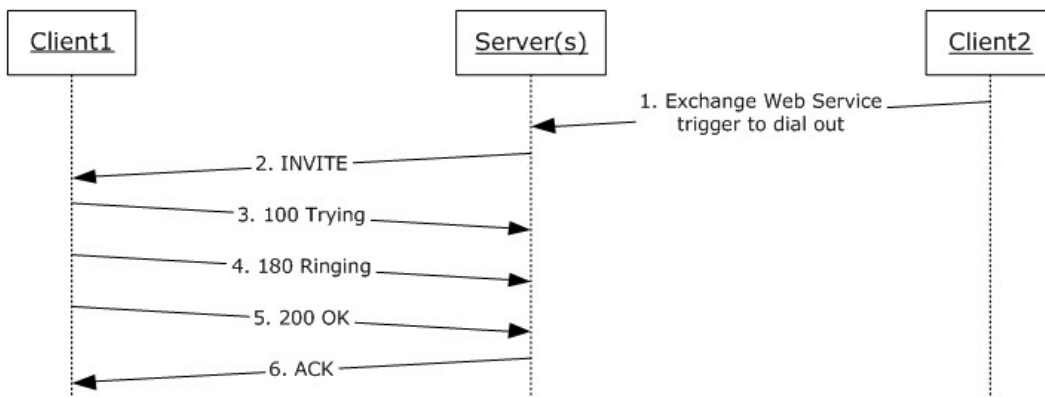

**Figure 2: Play-On-Phone dial out**

The INVITE message in step 2 of the preceding figure is shown in the following example.

```

INVITE sip:172.19.58.98:2280;transport=tls;ms-opaque=ce5f21cc9d;ms-received-cid=D0A300
SIP/2.0
Max-Forwards: 68
Content-Length: 317
From: <sip:alice@contoso.com>;epid=1944B98832;tag=7534fa434
To: <sip:alice@contoso.com>;epid=d793aff63a
CSeq: 5 INVITE
Call-ID: 7a7378c9-7b3c-4cec-b6da-ec27d752e904
Contact: <sip: exchange.contoso.com:5066;transport=Tls;ms-opaque=a752506cbee22182>;automata
User-Agent: RTCC/3.0.0.0
Content-Type: application/sdp
Allow: UPDATE
Ms-Sensitivity: private-no-diversion
Allow: Ack, Cancel, Bye, Invite, Message, Info, Service, Options, BeNotify
...SDP SNIPPED...
  
```

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.

Preliminary



## 6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2007 Service Pack 1 (SP1)
- Microsoft® Exchange Server 2010
- Microsoft® Lync 15 Technical Preview
- Microsoft® Lync Server 15 Technical Preview
- Microsoft® Lync™ 2010
- Microsoft® Lync™ Server 2010
- Microsoft® Office Communications Server 2007
- Microsoft® Office Communications Server 2007 R2
- Microsoft® Office Communicator 2007
- Microsoft® Office Communicator 2007 R2
- Microsoft® Exchange Server 15 Technical Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 3.2:](#) Office Outlook 2007, Office Outlook 2007 SP1, Outlook 2010 supports Play-On-Phone as an option. Any of these clients can be used to raise the event.

## 7 Change Tracking

This section identifies changes that were made to the [MS-OCEXUM] protocol document between the June 2011 and January 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">1.6 Applicability Statement</a>	Clarified that this protocol supports calls between a protocol client and a unified messaging server.	N	Content updated.
<a href="#">3.1 Ms-Exchange-Command Details</a>	Added subsection "Protocol Client Behavior".	Y	New content added.
<a href="#">3.1 Ms-Exchange-Command Details</a>	Added subsection "Unified Messaging Server Behavior".	Y	New content added.
<a href="#">3.1 Ms-Exchange-Command Details</a>	Removed subsection "Protocol Server Behavior", as the protocol server is not affected by the "skip-pin" parameter.	N	Content removed.
<a href="#">3.2 Ms-Sensitivity Details</a>	Added subsection "Unified Messaging Server Behavior".	Y	New content added.
<a href="#">3.2 Ms-Sensitivity Details</a>	Removed subsection "Protocol Client Behavior", as the protocol client is not affected by the "private-no-diversion" parameter.	N	Content removed.
	Removed section "Subject", because the "Subject" header is not specific to this protocol.	N	Content removed.
	Removed section "Priority", because the "Priority" header is not specific to this protocol.	N	Content removed.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
	Removed section "Automata", because the "Automata" URI parameter is not specific to this protocol.	N	Content removed.

Preliminary

## 8 Index

### A

Abstract data model  
[Ms-Exchange-Command](#) 11  
[Ms-Sensitivity](#) 12  
[Applicability](#) 8

### C

[Capability negotiation](#) 8  
[Change tracking](#) 18

### D

Data model - abstract  
[Ms-Exchange-Command](#) 11  
[Ms-Sensitivity](#) 12

### E

Examples  
[Ms-Exchange-Command](#) 14  
[Ms-Sensitivity](#) 14

### F

[Fields - vendor-extensible](#) 8

### G

[Glossary](#) 6

### H

Higher-layer triggered events  
[Ms-Exchange-Command](#) 11  
[Ms-Sensitivity](#) 12

### I

[Implementer - security considerations](#) 16  
[Index of security parameters](#) 16  
[Informative references](#) 7  
Initialization  
[Ms-Exchange-Command](#) 11  
[Ms-Sensitivity](#) 12  
[Introduction](#) 6

### L

Local events  
[Ms-Exchange-Command](#) 11  
[Ms-Sensitivity](#) 13

### M

Message processing  
[Ms-Exchange-Command](#) 11

[Ms-Sensitivity](#) 12

[Message syntax](#) 9

Messages

[message syntax](#) 9  
[Ms-Exchange-Command](#) 9  
[Ms-Sensitivity](#) 9  
[transport](#) 9

Ms-Exchange-Command

[abstract data model](#) 11  
[example](#) 14  
[higher-layer triggered events](#) 11  
[initialization](#) 11  
[local events](#) 11  
[message processing](#) 11  
[overview](#) 11  
[sequencing rules](#) 11  
[timer events](#) 11  
[timers](#) 11

[Ms-Exchange-Command message](#) 9

Ms-Sensitivity

[abstract data model](#) 12  
[example](#) 14  
[higher-layer triggered events](#) 12  
[initialization](#) 12  
[local events](#) 13  
[message processing](#) 12  
[overview](#) 12  
[sequencing rules](#) 12  
[timer events](#) 12  
[timers](#) 12

[Ms-Sensitivity message](#) 9

### N

[Normative references](#) 7

### O

[Overview \(synopsis\)](#) 7

### P

[Parameters - security index](#) 16  
[Preconditions](#) 8  
[Prerequisites](#) 8  
[Product behavior](#) 17

### R

References  
[informative](#) 7  
[normative](#) 7  
[Relationship to other protocols](#) 8

### S

Security  
[implementer considerations](#) 16

[parameter index](#) 16  
Sequencing rules  
    [Ms-Exchange-Command](#) 11  
    [Ms-Sensitivity](#) 12  
[Standards assignments](#) 8

## T

Timer events  
    [Ms-Exchange-Command](#) 11  
    [Ms-Sensitivity](#) 12  
Timers  
    [Ms-Exchange-Command](#) 11  
    [Ms-Sensitivity](#) 12  
[Tracking changes](#) 18  
[Transport](#) 9  
Triggered events  
    [Ms-Exchange-Command](#) 11  
    [Ms-Sensitivity](#) 12

## V

[Vendor-extensible fields](#) 8  
[Versioning](#) 8