

[MS-OXCPRPT]: Property and Stream Object Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final

documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability.
04/25/2008	0.2		Revised and updated property names and other technical content.
06/27/2008	1.0		Initial Release.
08/06/2008	1.01		Revised and edited technical content.
09/03/2008	1.02		Updated references.
12/03/2008	1.03		Updated IP notice
03/04/2009	1.04		Revised and edited technical content.
04/10/2009	2.0		Updated technical content and applicable product releases.
07/15/2009	3.0	Major	Revised and edited for technical content.
11/04/2009	4.0.0	Major	Updated and revised the technical content.
02/10/2010	4.1.0	Minor	Updated the technical content.
05/05/2010	4.1.1	Editorial	Revised and edited the technical content.
08/04/2010	4.2	Minor	Clarified the meaning of the technical content.
11/03/2010	5.0	Major	Significantly changed the technical content.
03/18/2011	5.0	No change	No changes to the meaning, language, and formatting of the technical content.
08/05/2011	5.1	Minor	Clarified the meaning of the technical content.
10/07/2011	6.0	Major	Significantly changed the technical content.
01/20/2012	7.0	Major	Significantly changed the technical content.
04/27/2012	7.1	Minor	Clarified the meaning of the technical content.

Table of Contents

1 Introduction	7
1.1 Glossary	7
1.2 References	8
1.2.1 Normative References	8
1.2.2 Informative References	8
1.3 Overview	8
1.4 Relationship to Other Protocols	9
1.5 Prerequisites/Preconditions	9
1.6 Applicability Statement	9
1.7 Versioning and Capability Negotiation	9
1.8 Vendor-Extensible Fields	9
1.9 Standards Assignments	10
2 Messages	11
2.1 Transport	11
2.2 Message Syntax	11
2.2.1 Common Object Properties	11
2.2.1.1 PidTagAccess Property	11
2.2.1.2 PidTagAccessLevel Property	11
2.2.1.3 PidTagChangeKey Property	12
2.2.1.4 PidTagCreationTime Property	12
2.2.1.5 PidTagLastModifierName Property	12
2.2.1.6 PidTagLastModificationTime Property	12
2.2.1.7 PidTagObjectType Property	12
2.2.1.8 PidTagRecordKey Property	12
2.2.1.9 PidTagSearchKey Property	13
2.2.2 RopGetPropertiesSpecific ROP	13
2.2.2.1 RopGetPropertiesSpecific ROP Request Buffer	13
2.2.2.2 RopGetPropertiesSpecific ROP Response Buffer	13
2.2.3 RopGetPropertiesAll ROP	14
2.2.3.1 RopGetPropertiesAll ROP Request Buffer	14
2.2.3.2 RopGetPropertiesAll ROP Response Buffer	14
2.2.4 RopGetPropertiesList ROP	14
2.2.4.1 RopGetPropertiesList ROP Request Buffer	15
2.2.4.2 RopGetPropertiesList ROP Response Buffer	15
2.2.5 RopSetProperties ROP	15
2.2.5.1 RopSetProperties ROP Request Buffer	15
2.2.5.2 RopSetProperties ROP Response Buffer	15
2.2.6 RopSetPropertiesNoReplicate ROP	15
2.2.6.1 RopSetPropertiesNoReplicate ROP Request Buffer	16
2.2.6.2 RopSetPropertiesNoReplicate ROP Response Buffer	16
2.2.7 RopDeleteProperties ROP	16
2.2.7.1 RopDeleteProperties ROP Request Buffer	16
2.2.7.2 RopDeleteProperties ROP Response Buffer	16
2.2.8 RopDeletePropertiesNoReplicate ROP	17
2.2.8.1 RopDeletePropertiesNoReplicate ROP Request Buffer	17
2.2.8.2 RopDeletePropertiesNoReplicate ROP Response Buffer	17
2.2.9 RopQueryNamedProperties ROP	17
2.2.9.1 RopQueryNamedProperties ROP Request Buffer	17
2.2.9.2 RopQueryNamedProperties ROP Response Buffer	18

2.2.10	RopCopyProperties ROP	18
2.2.10.1	RopCopyProperties ROP Request Buffer	18
2.2.10.2	RopCopyProperties ROP Response Buffer	19
2.2.11	RopCopyTo ROP	19
2.2.11.1	RopCopyTo ROP Request Buffer	19
2.2.11.2	RopCopyTo ROP Response Buffer	20
2.2.12	RopGetPropertyIdsFromNames ROP	20
2.2.12.1	RopGetPropertyIdsFromNames ROP Request Buffer	21
2.2.12.2	RopGetPropertyIdsFromNames ROP Response Buffer	21
2.2.13	RopGetNamesFromPropertyIds ROP	21
2.2.13.1	RopGetNamesFromPropertyIds ROP Request Buffer	22
2.2.13.2	RopGetNamesFromPropertyIds ROP Response Buffer	22
2.2.14	RopOpenStream ROP	22
2.2.14.1	RopOpenStream ROP Request Buffer	22
2.2.14.2	RopOpenStream ROP Response Buffer	23
2.2.15	RopReadStream ROP	23
2.2.15.1	RopReadStream ROP Request Buffer	23
2.2.15.2	RopReadStream ROP Response Buffer	23
2.2.16	RopWriteStream ROP	24
2.2.16.1	RopWriteStream ROP Request Buffer	24
2.2.16.2	RopWriteStream ROP Response Buffer	24
2.2.17	RopCommitStream ROP	24
2.2.17.1	RopCommitStream ROP Request Buffer	24
2.2.17.2	RopCommitStream ROP Response Buffer	24
2.2.18	RopGetStreamSize ROP	24
2.2.18.1	RopGetStreamSize ROP Request Buffer	25
2.2.18.2	RopGetStreamSize ROP Response Buffer	25
2.2.19	RopSetStreamSize ROP	25
2.2.19.1	RopSetStreamSize ROP Request Buffer	25
2.2.19.2	RopSetStreamSize ROP Response Buffer	25
2.2.20	RopSeekStream ROP	25
2.2.20.1	RopSeekStream ROP Request Buffer	25
2.2.20.2	RopSeekStream ROP Response Buffer	26
2.2.21	RopCopyToStream ROP	26
2.2.21.1	RopCopyToStream ROP Request Buffer	26
2.2.21.2	RopCopyToStream ROP Response Buffer	26
2.2.22	RopProgress ROP	27
2.2.22.1	RopProgress ROP Request Buffer	27
2.2.22.2	RopProgress ROP Response Buffer	27
2.2.23	RopLockRegionStream ROP	27
2.2.23.1	RopLockRegionStream ROP Request Buffer	27
2.2.23.2	RopLockRegionStream ROP Response Buffer	28
2.2.24	RopUnlockRegionStream ROP	28
2.2.24.1	RopUnlockRegionStream ROP Request Buffer	28
2.2.24.2	RopUnlockRegionStream ROP Response Buffer	28
2.2.25	RopWriteAndCommitStream ROP	28
2.2.25.1	RopWriteAndCommitStream ROP Request Buffer	29
2.2.25.2	RopWriteAndCommitStream ROP Response Buffer	29
2.2.26	RopCloneStream ROP	29
2.2.26.1	RopCloneStream ROP Request Buffer	29
2.2.26.2	RopCloneStream ROP Response Buffer	29
3	Protocol Details	30

3.1	Client Details.....	30
3.1.1	Abstract Data Model	30
3.1.2	Timers	30
3.1.3	Initialization	30
3.1.4	Higher-Layer Triggered Events.....	30
3.1.4.1	Getting Property IDs for Named Properties	30
3.1.4.2	Reading a Property	31
3.1.4.3	Setting a Property	31
3.1.4.4	Getting a List of an Object's Existing Properties.....	31
3.1.4.5	Reading a Property as a Stream	31
3.1.4.6	Setting a Property with a Stream.....	32
3.1.5	Message Processing Events and Sequencing Rules.....	32
3.1.6	Timer Events	33
3.1.7	Other Local Events	33
3.2	Server Details	33
3.2.1	Abstract Data Model	33
3.2.2	Timers	33
3.2.3	Initialization	33
3.2.4	Higher-Layer Triggered Events.....	33
3.2.5	Message Processing Events and Sequencing Rules.....	33
3.2.5.1	Processing RopGetPropertiesSpecific	33
3.2.5.2	Processing RopGetPropertiesAll	34
3.2.5.3	Processing RopGetPropertiesList.....	34
3.2.5.4	Processing RopSetProperties	34
3.2.5.5	Processing RopDeleteProperties.....	35
3.2.5.6	Processing RopQueryNamedProperties	35
3.2.5.7	Processing RopCopyProperties.....	36
3.2.5.8	Processing RopCopyTo	37
3.2.5.9	Processing RopGetNamesFromPropertyIds	37
3.2.5.10	Processing RopGetPropertyIdsFromNames	38
3.2.5.11	Processing RopOpenStream.....	39
3.2.5.12	Processing RopReadStream.....	39
3.2.5.13	Processing RopWriteStream	40
3.2.5.14	Processing RopCommitStream	40
3.2.5.15	Processing RopGetStreamSize	40
3.2.5.16	Processing RopSetStreamSize	41
3.2.5.17	Processing RopSeekStream.....	41
3.2.5.18	Processing RopCopyToStream	41
3.2.5.19	Processing RopProgress	42
3.2.5.20	Processing RopLockRegionStream	42
3.2.5.21	Processing RopUnlockRegionStream	43
3.2.5.22	Processing RopWriteAndCommitStream	43
3.2.5.23	Processing RopCloneStream	43
3.2.6	Timer Events	44
3.2.7	Other Local Events	44
4	Protocol Examples.....	45
4.1	Getting Property IDs	45
4.1.1	Client Request Buffer	45
4.1.2	Server Response Buffer.....	47
4.2	Setting Properties	47
4.2.1	Client Request Buffer	47
4.2.2	Server Response Buffer.....	49

4.3	Getting Properties	49
4.3.1	Client Request Buffer	49
4.3.2	Server Response Buffer	50
4.4	Working with Streams	51
4.4.1	Opening a Stream	51
4.4.1.1	Client Request Buffer	51
4.4.1.2	Server Response Buffer	52
4.4.2	Writing to the Stream	53
4.4.2.1	Client Request Buffer	53
4.4.2.2	Server Response Buffer	53
4.4.3	Committing a Stream.....	54
4.4.3.1	Client Request Buffer	54
4.4.3.2	Server Response Buffer	54
4.5	Asynchronous Progress.....	54
5	Security.....	58
5.1	Security Considerations for Implementers.....	58
5.2	Index of Security Parameters	58
6	Appendix A: Product Behavior	59
7	Change Tracking.....	61
8	Index	65

1 Introduction

The Property and Stream Object Protocol enables a client to read, set, and delete the properties of an object.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

code page
Coordinated Universal Time (UTC)
GUID
handle
little-endian
property set
remote procedure call (RPC)
Unicode

The following terms are defined in [\[MS-OXGLOS\]](#):

address book container
Address Book object
Attachment object
attachments table
contents table
distribution list
Folder object
global identifier
hierarchy table
Logon object
long ID (LID)
mail user
Message object
multibyte character set (MBCS)
named property
property ID
property name
property tag
property type
recipient table
remote operation (ROP)
ROP buffer
ROP request
ROP request buffer
ROP response
ROP response buffer
Server object
Server object handle
Server object handle table
store

Store object
Stream object
string property
tagged property

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXCDATA] Microsoft Corporation, "[Data Structures](#)".

[MS-OXCFOLD] Microsoft Corporation, "[Folder Object Protocol Specification](#)".

[MS-OXCFXICS] Microsoft Corporation, "[Bulk Data Transfer Protocol Specification](#)".

[MS-OXCMSG] Microsoft Corporation, "[Message and Attachment Object Protocol Specification](#)".

[MS-OXCROPS] Microsoft Corporation, "[Remote Operations \(ROP\) List and Encoding Protocol Specification](#)".

[MS-OXCRPC] Microsoft Corporation, "[Wire Format Protocol Specification](#)".

[MS-OXCSTOR] Microsoft Corporation, "[Store Object Protocol Specification](#)".

[MS-OXPROPS] Microsoft Corporation, "[Exchange Server Protocols Master Property List](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXORULE] Microsoft Corporation, "[E-Mail Rules Protocol Specification](#)".

1.3 Overview

This protocol enables a client to access and manage the properties of a **Server object** by using **remote operations (ROPs)**. The properties store data about the object.

Properties can be set, retrieved, and deleted. Properties can also be copied from one object to another. A client can copy just a select few properties or copy all properties. Some properties on **Message objects** and **Attachment objects** can be opened as a stream. With an open stream, the client can seek, read, write, and commit data to the stream.

All operations on a property require that the property is specified by a **property tag**, which comprises the **property ID** and the **property type**. A property is either a **tagged property**, which has a hard-coded property ID, or a **named property**, which has a dynamic property ID assigned by the server. A client can create custom properties by defining its own named properties. A client can obtain a property ID for a named property by querying the server for the named property-to-property ID mapping. A query for the reverse mapping (property ID-to-named property) allows the client to obtain the named property from the property ID.

There are two different models for saving changes to properties. Changes to properties on **Folder objects** and **Logon objects** are saved immediately, whereas changes to properties on Message objects and Attachment objects are not saved until the client explicitly saves the object.

1.4 Relationship to Other Protocols

The Property and Stream Object Protocol uses other protocols as follows:

- The Remote Operations (ROP) List and Encoding Protocol, described in [\[MS-OXCROPS\]](#), to format the **ROP buffers** for transmission between client and server.
- The Wire Format Protocol, described in [\[MS-OXCRPC\]](#), to transmit the ROP buffers between client and server.
- The the Store Object Protocol, described in [\[MS-OXCSTOR\]](#), to log on to the **store**.

Any protocol that reads, sets, or deletes the properties of an object relies on the Property and Stream Object Protocol.

1.5 Prerequisites/Preconditions

This protocol assumes the client has previously logged on to the store, as specified in [\[MS-OXCSTOR\]](#) section 3.1.4.1, and has acquired a **handle** to the Server object on which it is going to operate. Methods to open the object and acquire a handle are dependent on the type of object. For details about Message objects and Attachment objects, see [\[MS-OXCMSG\]](#). For details about Folder objects, see [\[MS-OXCFOLD\]](#). For details about Logon objects, see [\[MS-OXCSTOR\]](#). Details about **Stream objects** are specified in this document.

1.6 Applicability Statement

A client can use this protocol to perform all operations on the properties of a Message object, an Attachment object, a Folder object, or a Logon object.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

A client can create its own custom property for an object by defining a named property. A named property has a dynamic property ID that is assigned by the server. A mapping of named properties to property IDs is provided by the server.

1.9 Standards Assignments

None.

Preliminary

2 Messages

2.1 Transport

The **ROP request buffers** and **ROP response buffers** specified by this protocol are sent to and are received from the server using the underlying remote procedure call (RPC) transport as specified in [\[MS-OXCROPS\]](#) section 2.1 and [\[MS-OXCRPC\]](#) section 2.1.

2.2 Message Syntax

2.2.1 Common Object Properties

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The properties specified in section [2.2.1.1](#) through section [2.2.1.9](#) are present on all objects. When a property is specified as "read-only for the client", any request to change the value of that property MUST be ignored by the server and MAY<1> result in an error.

2.2.1.1 PidTagAccess Property

Type: **PtypInteger32** ([\[MS-OXCDATA\]](#) section 2.11.1)

The **PidTagAccess** property ([\[MS-OXPROPS\]](#) section 2.579) indicates the operations available to the client for the object. The value is a bitwise OR of zero or more values from the following table. This property is read-only for the client.

Value	Meaning
0x00000001	Modify
0x00000002	Read
0x00000004	Delete
0x00000008	Create hierarchy table
0x00000010	Create contents table
0x00000020	Create associated contents table

2.2.1.2 PidTagAccessLevel Property

Type: **PtypInteger32** ([\[MS-OXCDATA\]](#) section 2.11.1)

The **PidTagAccessLevel** property ([\[MS-OXPROPS\]](#) section 2.581) indicates the client's access level to the object. This property does not apply to Folder objects and Logon objects. This value of this property MUST be one of the values in the following table. This property is read-only for the client.

Value	Meaning
0x00000000	Read-only
0x00000001	Modify

2.2.1.3 PidTagChangeKey Property

Type: **PtypBinary** ([MS-OXCDATA] section 2.11.1)

The **PidTagChangeKey** property ([MS-OXCFXICS] section 2.2.1.2.7) contains a **global identifier** indicating the last change to the object. This property is read-only for clients.

2.2.1.4 PidTagCreationTime Property

Type: **PtypTime** ([MS-OXCDATA] section 2.11.1)

The **PidTagCreationTime** property ([MS-OXCMSG] section 2.2.2.3) contains the time that the object was created in **Coordinated Universal Time (UTC)**. This property is read-only for clients.

2.2.1.5 PidTagLastModifierName Property

Type: **PtypString** ([MS-OXCDATA] section 2.11.1)

The **PidTagLastModifierName** property ([MS-OXPROPS] section 2.838) contains the name of the last **mail user** to modify the object. This property does not apply to Folder objects and Logon objects. This property is read-only for clients.

2.2.1.6 PidTagLastModificationTime Property

Type: **PtypTime** ([MS-OXCDATA] section 2.11.1)

The **PidTagLastModificationTime** property ([MS-OXCMSG] section 2.2.2.2) contains the time of the last modification to the object in **UTC**. This property is read-only for clients.

2.2.1.7 PidTagObjectType Property

Type: **PtypInteger32** ([MS-OXCDATA] section 2.11.1)

The **PidTagObjectType** property ([MS-OXPROPS] section 2.882) indicates the type of Server object. This property does not apply to Folder objects and Logon objects. The value of this property MUST be one of the values in the following table. This property is read-only for the client.

Value	Meaning
0x00000001	Store object
0x00000002	Address Book object
0x00000004	address book container
0x00000005	Message object
0x00000006	mail user
0x00000007	Attachment object
0x00000008	distribution list

2.2.1.8 PidTagRecordKey Property

Type: **PtypBinary** ([MS-OXCDATA] section 2.11.1)

The **PidTagRecordKey** property ([MS-OXPROPS] section 2.979) contains a unique binary-comparable identifier for a specific object. Whenever a copy of an object is created, the server generates a new identifier for the copied object. This property does not apply to Folder objects and Logon objects. This property is read-only for the client.

2.2.1.9 PidTagSearchKey Property

Type: **PtypBinary** ([MS-OXCDATA] section 2.11.1)

The **PidTagSearchKey** property ([MS-OXPROPS] section 2.1064) contains a unique binary-comparable key that identifies an object for a search. Whenever a copy of an object is created, the key is also copied from the original object. This property does not apply to Folder objects and Logon objects. This property is read-only for clients.

2.2.2 RopGetPropertiesSpecific ROP

The **RopGetPropertiesSpecific** ROP ([MS-OXCROPS] section 2.2.8.3) queries for and returns the values of properties specified in the **PropertyTags** field. This operation is valid on Message objects, Folder objects, Attachment objects and Logon objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.2.1 RopGetPropertiesSpecific ROP Request Buffer

The following descriptions define valid fields for the **RopGetPropertiesSpecific** ROP request buffer ([MS-OXCROPS] section 2.2.8.3.1).

PropertySizeLimit (2 bytes): An integer that specifies the maximum size allowed for a property value. If this value is zero, the property values are limited only by the size of the ROP response buffer. If this value is nonzero, the property values are limited both by the size of the ROP response buffer and by the value of the **PropertySizeLimit** field.

WantUnicode (2 bytes): A Boolean value that is nonzero if **string properties** that are requested with **PtypUnspecified** ([MS-OXCADATA] section 2.11.1) as the property type are to be encoded in the **Unicode** format in the ROP response buffer. If **WantUnicode** is set to zero, the string properties that are requested with **PtypUnspecified** as the property type are to be encoded in **multibyte character set (MBCS)** format.

PropertyTagCount (2 bytes): An integer that specifies the number of property tags contained in the **PropertyTags** field.

PropertyTags (variable): An array of **PropertyTag** structures ([MS-OXCADATA] section 2.9). Each structure contains the property tag of a property for which the client is requesting the value.

2.2.2.2 RopGetPropertiesSpecific ROP Response Buffer

The following descriptions define valid fields for the **RopGetPropertiesSpecific** ROP response buffer ([MS-OXCROPS] section 2.2.8.3.2).

RowData (variable): A **PropertyRow** structure ([MS-OXCADATA] section 2.8.1) that contains the values of the properties specified in the ROP request buffer.

2.2.3 RopGetPropertiesAll ROP

The **RopGetPropertiesAll** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.4) queries for and returns all of the property tags and values of properties that have been set. The client can create an equivalent duplicate of a Message object by copying only these properties, without considering its **attachments table** and **recipient table** that might be on the object. This operation is valid on Message objects, Folder objects, Attachment objects, and Logon objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.3.1 RopGetPropertiesAll ROP Request Buffer

The following descriptions define valid fields for the **RopGetPropertiesAll** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.4.1).

PropertySizeLimit (2 bytes): An integer that specifies the maximum size allowed for a property value. If this value is zero, the property values are limited only by the size of the ROP response buffer. If this value is nonzero, the property values are limited both by the size of the ROP response buffer and by the value of the **PropertySizeLimit** field.

WantUnicode (2 bytes): A Boolean value that is nonzero if string properties that are requested with **PtypUnspecified** ([\[MS-OXCADATA\]](#) section 2.11.1) as the property type are to be encoded in the Unicode format in the ROP response buffer. If **WantUnicode** is set to zero, the string properties that are requested with **PtypUnspecified** as the property type are to be encoded in MBCS format.

2.2.3.2 RopGetPropertiesAll ROP Response Buffer

The following descriptions define valid fields for the **RopGetPropertiesAll** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.4.2).

PropertyValueCount (2 bytes): An integer that specifies the number of elements in the **PropertyValues** field.

PropertyValues (variable): An array of **TaggedPropertyValue** structures ([\[MS-OXCADATA\]](#) section 2.11.4) containing all property tags and property values on the queried object. If a property value is larger than the available space in the ROP response buffer or if the property value is larger than the size specified in the **PropertySizeLimit** field of the ROP request buffer, the type MUST be **PtypErrorCode** ([\[MS-OXCADATA\]](#) section 2.11.1) with a value of **NotEnoughMemory** ([\[MS-OXCADATA\]](#) section 2.4.2).

2.2.4 RopGetPropertiesList ROP

The **RopGetPropertiesList** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.5) queries for and returns all of the property tags for properties that have been set on an object. This operation is valid on Message objects, Folder objects, Attachment objects, and Logon objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.4.1 RopGetPropertiesList ROP Request Buffer

This protocol adds no additional field details to the **RopGetPropertiesList** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.5.1).

2.2.4.2 RopGetPropertiesList ROP Response Buffer

The following descriptions define valid fields for the **RopGetPropertiesList** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.5.2).

PropertyTagCount (2 bytes): An integer that specifies the number of property tags contained in the **PropertyTags** field.

PropertyTags (variable): An array of **PropertyTag** structures ([\[MS-OXCADATA\]](#) section 2.9). The array contains a property tag for each property currently set on the object.

2.2.5 RopSetProperties ROP

The **RopSetProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.6) updates the specified properties on an object. This operation is valid on Message objects, Folder objects, Attachment objects, and Logon objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.5.1 RopSetProperties ROP Request Buffer

The following descriptions define valid fields for the **RopSetProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.6.1).

PropertyValueSize (2 bytes): An integer that specifies the number of bytes in the **PropertyValueCount** field plus the number of bytes in the **PropertyValues** field.

PropertyValueCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyValues** field.

PropertyValues (variable): An array of **TaggedPropertyValue** structures ([\[MS-OXCADATA\]](#) section 2.11.4). Each structure specifies a property that is to be updated.

2.2.5.2 RopSetProperties ROP Response Buffer

The following descriptions define valid fields for the **RopSetProperties** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.6.2).

PropertyProblemCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyProblems** field.

PropertyProblems (variable): An array of **PropertyProblem** structures ([\[MS-OXCADATA\]](#) section 2.7). Each structure specifies a property that was not set and the reason that the property was not set.

2.2.6 RopSetPropertiesNoReplicate ROP

The **RopSetPropertiesNoReplicate** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.7) has the same fields and works the same way as the **RopSetProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.6), with the

exception that when this ROP is used to set properties on a Folder object, the updated properties will not undergo folder replication. For information about folder replication, see [\[MS-OXCSTOR\]](#) section 3.1.4.3. On all other objects, the **RopSetPropertiesNoReplicate** ROP works the same way as the **RopSetProperties** ROP.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.6.1 RopSetPropertiesNoReplicate ROP Request Buffer

The following descriptions define valid fields for the **RopSetPropertiesNoReplicate** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.7.1).

The fields of the **RopSetPropertiesNoReplicate** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.7.1) are the same as those of the **RopSetProperties** ROP request buffer (section [2.2.5.1](#)).

2.2.6.2 RopSetPropertiesNoReplicate ROP Response Buffer

The following descriptions define valid fields for the **RopSetPropertiesNoReplicate** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.7.2).

The fields of the **RopSetPropertiesNoReplicate** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.7.2) are the same as those of the **RopSetProperties** ROP response buffer (section [2.2.5.2](#)).

2.2.7 RopDeleteProperties ROP

The **RopDeleteProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.8) removes the specified properties from an object. This operation is valid on Message objects, Folder objects, Attachment objects, and Logon objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.7.1 RopDeleteProperties ROP Request Buffer

The following descriptions define valid fields for the **RopDeleteProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.8.1).

PropertyTagCount (2 bytes): An integer that specifies the number of property tags contained in the **PropertyTags** field.

PropertyTags (variable): An array of **PropertyTag** structures ([\[MS-OXCROPS\]](#) section 2.9). Each structure specifies the property tag of a property that the client is deleting.

2.2.7.2 RopDeleteProperties ROP Response Buffer

The following descriptions define valid fields for the **RopDeleteProperties** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.8.2).

PropertyProblemCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyProblems** field.

PropertyProblems (variable): An array of **PropertyProblem** structures ([MS-OXCADATA] section 2.7). Each structure specifies a property that was not deleted and the reason that the property was not deleted.

2.2.8 RopDeletePropertiesNoReplicate ROP

The **RopDeletePropertiesNoReplicate** ROP ([MS-OXCROPS] section 2.2.8.9) has the same fields and works the same way as the **RopDeleteProperties** ROP ([MS-OXCROPS] section 2.2.8.8), with the exception that when this ROP is used to delete properties from a Folder object, the deleted properties will not undergo folder replication. For information about folder replication, see [MS-OXCSTOR] section 3.1.4.3. On all other objects, the **RopDeletePropertiesNoReplicate** ROP works the same way as **RopDeleteProperties**.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.8.1 RopDeletePropertiesNoReplicate ROP Request Buffer

The following descriptions define valid fields for the **RopDeletePropertiesNoReplicate** ROP request buffer ([MS-OXCROPS] section 2.2.8.9.1).

The fields of the **RopDeletePropertiesNoReplicate** ROP request buffer are the same as those of the **RopDeleteProperties** ROP request buffer (section 2.2.7.1).

2.2.8.2 RopDeletePropertiesNoReplicate ROP Response Buffer

The following descriptions define valid fields for the **RopDeletePropertiesNoReplicate** ROP response buffer ([MS-OXCROPS] section 2.2.8.9.2).

The fields of the **RopDeletePropertiesNoReplicate** ROP response buffer are the same as those of the **RopDeleteProperties** ROP response buffer (section 2.2.7.2).

2.2.9 RopQueryNamedProperties ROP

Note *Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.*

The **RopQueryNamedProperties** ROP ([MS-OXCROPS] section 2.2.8.10) queries an object for all the named properties. This operation is valid on Logon objects, Message objects, Folder objects, and Attachment objects. <2>

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.9.1 RopQueryNamedProperties ROP Request Buffer

The following descriptions define valid fields for the **RopQueryNamedProperties** ROP request buffer ([MS-OXCROPS] section 2.2.8.10.1).

QueryFlags (1 byte): A set of bits that control which type of named property is returned. The valid bits for this field are listed in the following table.

Bit name	Value	Meaning
NoStrings	0x01	Named properties that have a property name identifier MUST NOT be included in the response.
NoIds	0x02	Named properties that have a long ID (LID) MUST NOT be included in the response.

HasGuid (1 byte): A Boolean value that is nonzero if the **PropertyGuid** field is included in the request. If the value is zero, the **PropertyGUID** field MUST NOT be present.

PropertyGuid (16 bytes): A **GUID** that specifies the **property set** of properties to be returned. If this field is present, only named properties with a property set matching the GUID are returned in a successful response. This field MUST be present if the **HasGuid** field is set to nonzero.

2.2.9.2 RopQueryNamedProperties ROP Response Buffer

The following descriptions define valid fields for the **RopQueryNamedProperties** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.10.2).

IdCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyIds** field.

PropertyIds (variable): An array of 16-bit integers, each of which is a property ID. The number of integers contained in the array MUST equal the value specified in the **IdCount** field. The array MUST contain one property ID for each of the named properties specified in the **PropertyNames** field.

PropertyNames (variable): An array of **PropertyName** structures ([\[MS-OXCADATA\]](#) section 2.6.1). Each structure contains the details about a named property. The entries in this list MUST match the order of the entries in the **PropertyIds** field, and the number of entries MUST be equal.

2.2.10 RopCopyProperties ROP

The **RopCopyProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.11) copies or moves one or more properties from one object to another. It can be used for replying to and forwarding Message objects in which only some of the properties from the original Message object travel with the reply or forwarded copy. Also, the source and destination object MUST be of the same type. This operation is valid on Folder objects, Attachment objects, and Message objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.10.1 RopCopyProperties ROP Request Buffer

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The following descriptions define valid fields for the **RopCopyProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.11.1).

WantAsynchronous (1 byte): A Boolean value that indicates whether the ROP is to be processed synchronously or asynchronously. If this field is set to zero, the ROP is processed synchronously. If this field is set to nonzero, the ROP is processed either synchronously or asynchronously.

CopyFlags (1 byte): A set of bits that control options for moving or copying properties. The valid bits are listed in the following table. These bits SHOULD NOT [<3>](#) be combined.

Bit name	Value	Meaning
Move	0x01	If this bit is set, properties are moved; otherwise, properties are copied.
NoOverwrite	0x02	If this bit is set, properties that already have a value on the destination object will not be overwritten; otherwise, they are overwritten.

PropertyTagCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyTags** field.

PropertyTags (variable): An array of **PropertyTag** structures ([\[MS-OXCADATA\]](#) section 2.9). Each structure contains the property tag of a property to be copied or moved.

2.2.10.2 RopCopyProperties ROP Response Buffer

The following descriptions define valid fields for the **RopCopyProperties** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.11.2).

PropertyProblemCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyProblems** field. This field MUST NOT be present if the **ReturnValue** field is set to `NullDestinationObject (0x00000503)`.

PropertyProblems (variable): An array of **PropertyProblem** structures ([\[MS-OXCADATA\]](#) section 2.7). Each structure specifies a property that was not copied or moved and the reason that the property was not copied or moved. This field MUST NOT be present if the **ReturnValue** field is set to `NullDestinationObject (0x00000503)`.

DestHandleIndex (4 bytes): An integer that specifies the location in the **Server object handle table** where the handle for the destination Server object is stored. The **DestHandleIndex** field MUST be set to the value of the **DestHandleIndex** field of the ROP request buffer. The **DestHandleIndex** field MUST NOT be present if the **ReturnValue** field is set to any value other than `NullDestinationObject (0x00000503)`.

2.2.11 RopCopyTo ROP

The **RopCopyTo** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.12) is used to copy or move all but a specified few properties from a source object to a destination object. This operation is valid on Message objects, Attachment objects, and Folder objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.11.1 RopCopyTo ROP Request Buffer

Note *Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.*

The following descriptions define valid fields for the **RopCopyTo** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.12.1).

WantAsynchronous (1 byte): A Boolean value that indicates whether the ROP is to be processed synchronously or asynchronously. If this field is set to zero, this ROP is processed synchronously. If this field is set to nonzero, this ROP is processed either synchronously or asynchronously.

WantSubObjects (1 byte): A Boolean value that is nonzero if subobjects are also to be copied. Otherwise, they are not.

CopyFlags (1 byte): A set of bits that control options for moving or copying properties. The valid bits are listed in the following table. These bits SHOULD NOT [<4>](#) be combined.

Bit name	Value	Meaning
Move	0x01	If this bit is set, properties are moved; otherwise, properties are copied.
NoOverwrite	0x02	If this bit is set, properties that already have a value on the destination object will not be overwritten; otherwise, they are overwritten.

ExcludedTagCount (2 bytes): An integer that specifies the number of elements contained in the **ExcludedTags** field.

ExcludedTags (variable): An array of **PropertyTag** structures ([\[MS-OXCADATA\]](#) section 2.9). Each structure contains the property tag of a property that MUST NOT be copied or moved as part of this operation.

2.2.11.2 RopCopyTo ROP Response Buffer

The following descriptions define valid fields for the **RopCopyTo** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.12.2).

PropertyProblemCount (2 bytes): An integer that specifies the number of elements contained in the **PropertyProblems** field. This field MUST NOT be present if the **ReturnValue** field is set to `NullDestinationObject (0x00000503)`.

PropertyProblems (variable): An array of **PropertyProblem** structures ([\[MS-OXCADATA\]](#) section 2.7). Each structure specifies a property that was not copied or moved and the reason that the property was not copied or moved. This field MUST NOT be present if the **ReturnValue** field is set to `NullDestinationObject (0x00000503)`.

DestHandleIndex (4 bytes): An integer that specifies the location in the Server object handle table where the handle for the destination Server object is stored. The **DestHandleIndex** field MUST be set to the value of the **DestHandleIndex** field of the ROP request buffer. The **DestHandleIndex** field MUST NOT be present if the **ReturnValue** field is set to any value other than `NullDestinationObject (0x00000503)`.

2.2.12 RopGetPropertyIdsFromNames ROP

The **RopGetPropertyIdsFromNames** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.1) maps abstract, client-defined named properties to concrete 16-bit property IDs (of which 15 bits are significant). This operation is valid on Message objects, Attachment objects, Folder objects, and Logon objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.12.1 RopGetPropertyIdsFromNames ROP Request Buffer

The following descriptions define valid fields for the **RopGetPropertyIdsFromNames** ROP request buffer ([MS-OXCROPS] section 2.2.8.1.1).

Flags (1 byte): An integer that specifies whether to create a new entry. This field is set to 0x02 to request that a new entry be created for each named property that is not found in the existing mapping table; this field is set to 0x00 otherwise.

PropertyNameCount (2 bytes): An integer that specifies the number of **PropertyName** structures contained in the **PropertyNames** field. A value of zero indicates that the client is querying the complete list of registered named properties.

PropertyNames (variable): An array of **PropertyName** structures ([MS-OXCROPS] section 2.6). Each structure specifies a named property to be mapped to a property ID.

2.2.12.2 RopGetPropertyIdsFromNames ROP Response Buffer

The following descriptions define valid fields for the **RopGetPropertyIdsFromNames** ROP response buffer ([MS-OXCROPS] section 2.2.8.1.2).

PropertyIdCount (2 bytes): An integer that specifies the number of property IDs contained in the **PropertyIds** field. The value of this field **MUST** be equal to the value of the **PropertyNameCount** field of the ROP request buffer unless the value of the **PropertyNameCount** field is zero. In that case, the value **MUST** be equal to the total number of registered named properties.

PropertyIds (variable): An array of 16-bit integers. Each integer is a property ID that is mapped from a named property that is specified in the **PropertyNames** field of the ROP request buffer. If a named property cannot be mapped, the associated entry in the **PropertyIds** field **MUST** be 0x0000. The order of property IDs in this array **MUST** match the order of the named properties specified in the **PropertyNames** field of the ROP request buffer.

Reasons a name couldn't be mapped include:

- Use of the PS_MAPI namespace and not specifying 0x00 for the **Kind** field of the **PropertyName** structure ([MS-OXCROPS] section 2.6.1).
- The name wasn't found in the mapping table and the **Flags** field of the ROP request buffer was not set to 0x02.
- The user does not have permission to register new named properties.
- The user has reached an artificial quota of named properties imposed by the server.
- The user has reached the hard limit of 32,767 registered named properties.

2.2.13 RopGetNamesFromPropertyIds ROP

The **RopGetNamesFromPropertyIds** ROP ([MS-OXCROPS] section 2.2.8.2) maps concrete property IDs to abstract, client-defined named properties. This operation is valid on Message

objects, Attachment objects, Folder objects, and Logon objects. Property IDs for named properties are identified by having their most significant bit set (0x8000). The client can request to map non-named property IDs (IDs with the most significant bit unset) into names.

The PS_MAPI namespace is used for mapping non-named property IDs into names.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.13.1 RopGetNamesFromPropertyIds ROP Request Buffer

The following descriptions define valid fields for the **RopGetNamesFromPropertyIds** ROP request buffer ([MS-OXCROPS] section 2.2.8.2.1).

PropertyIdCount (2 bytes): An integer that specifies the number of 16-bit property IDs contained in the **PropertyIds** field.

PropertyIds (variable): An array of 16-bit integers. Each integer is a property ID to be mapped to a named property. The client can pass property ID values less than 0x8000. These values will be mapped into names in the PS_MAPI namespace ([MS-OXPROPS] section 1.3.2).

2.2.13.2 RopGetNamesFromPropertyIds ROP Response Buffer

The following descriptions define valid fields for the **RopGetNamesFromPropertyIds** ROP response buffer ([MS-OXCROPS] section 2.2.8.2.2).

PropertyNameCount (2 bytes): An integer that specifies the number of structures contained in the **PropertyNames** field. This value MUST be equal to the value of the **PropertyIdCount** field of the ROP request buffer.

PropertyNames (variable): An array of **PropertyName** structures ([MS-OXCADATA] section 2.6). Each structure specifies a named property that is mapped from a property ID that is specified in the **PropertyIds** field of the ROP request buffer.

2.2.14 RopOpenStream ROP

The **RopOpenStream** ROP ([MS-OXCROPS] section 2.2.9.1) opens a property as a Stream object, enabling the client to perform various streaming operations on the property. This operation is valid on Folder objects, Attachment objects, and Message objects. Only single-valued **PtypBinary**, **PtypObject**, **PtypString8**, and **PtypString** type properties ([MS-OXCADATA] section 2.11.1) are supported for Attachment objects and Message objects. Only single-valued **PtypBinary** type properties are supported for Folder objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.14.1 RopOpenStream ROP Request Buffer

The following descriptions define valid fields for the **RopOpenStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.1.1).

PropertyTag (4 bytes): An integer that is the property tag of the property for which the client is opening the stream. The format of a property tag is specified in [MS-OXCADATA] section 2.9.

OpenModeFlags (1 byte): An integer that specifies the mode for opening the stream. The **OpenModeFlags** field MUST be set to one of the values in the following table.

Bit name	Value	Meaning
ReadOnly	0x00	Open the stream for read-only access.
ReadWrite	0x01	Open the stream for read/write access.
Create	0x02	Open a new stream. This mode will delete the current property value and open the stream for read/write access. This mode is required for a property that has not been set.
BestAccess	0x03	If the Folder object, Attachment object, or Message object was opened with read/write access, then the stream MUST be opened with read/write access. Otherwise, the stream MUST be opened with read-only access.

2.2.14.2 RopOpenStream ROP Response Buffer

The following descriptions define valid fields for the **RopOpenStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.1.2).

StreamSize (4 bytes): An integer that specifies the number of bytes in the opened stream.

2.2.15 RopReadStream ROP

The **RopReadStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.2) reads the stream of bytes from a Stream object. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.15.1 RopReadStream ROP Request Buffer

The following descriptions define valid fields for the **RopReadStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.2.1).

ByteCount (2 bytes): An integer that specifies the maximum number of bytes to be read unless the value is 0xBABE. In that case, the maximum number of bytes to be read is specified by the **MaximumByteCount** field.

MaximumByteCount (4 bytes): An integer that specifies the maximum number of bytes to be read if the **ByteCount** field is set to 0xBABE. Note that because the value of the **MaximumByteCount** field can exceed the amount of data that can be returned in a single ROP response buffer, the server's response can span multiple ROP response buffers. This field MUST be present if and only if the value of the **ByteCount** field is 0xBABE.

2.2.15.2 RopReadStream ROP Response Buffer

The following descriptions define valid fields for the **RopReadStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.2.2).

DataSize (2 bytes): An integer that specifies the number of bytes in the **Data** field.

Data (variable): An array of bytes that constitute the data read from the stream. This field MUST contain exactly the number of bytes specified in the **DataSize** field.

2.2.16 RopWriteStream ROP

The **RopWriteStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.3) writes the stream of bytes into a Stream object. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.16.1 RopWriteStream ROP Request Buffer

The following descriptions define valid fields for the **RopWriteStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.3.1).

DataSize (2 bytes): An integer that specifies the number of bytes in the **Data** field.

Data (variable): An array of bytes that constitute the data to be written to the stream.

2.2.16.2 RopWriteStream ROP Response Buffer

The following descriptions define valid fields for the **RopWriteStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.3.2).

WrittenSize (2 bytes): An integer that specifies the number of bytes actually written to the stream.

2.2.17 RopCommitStream ROP

The **RopCommitStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.4) ensures that any changes made to a Stream object are persisted in storage. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.17.1 RopCommitStream ROP Request Buffer

This protocol adds no additional field details to the **RopCommitStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.4.1).

2.2.17.2 RopCommitStream ROP Response Buffer

This protocol adds no additional field details to the **RopCommitStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.4.2).

2.2.18 RopGetStreamSize ROP

The **RopGetStreamSize** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.5) retrieves the size of the stream. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.18.1 RopGetStreamSize ROP Request Buffer

This protocol adds no additional field details to the **RopGetStreamSize** ROP request buffer ([MS-OXCROPS] section 2.2.9.5.1).

2.2.18.2 RopGetStreamSize ROP Response Buffer

The following descriptions define valid fields for the **RopGetStreamSize** ROP response buffer ([MS-OXCROPS] section 2.2.9.5.2).

StreamSize (4 bytes): An integer that specifies the number of bytes in the stream. The maximum allowed stream size is 2^{31} bytes.

2.2.19 RopSetStreamSize ROP

The **RopSetStreamSize** ROP ([MS-OXCROPS] section 2.2.9.6) sets the size of a stream. This operation is valid only on Stream objects. This ROP is not required prior to writing to the stream.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.19.1 RopSetStreamSize ROP Request Buffer

The following descriptions define valid fields for the **RopSetStreamSize** ROP request buffer ([MS-OXCROPS] section 2.2.9.6.1).

StreamSize (8 bytes): An integer that specifies the size, in bytes, of the stream. The maximum allowed stream size is 2^{31} bytes.

2.2.19.2 RopSetStreamSize ROP Response Buffer

This protocol adds no additional field details to the **RopSetStreamSize** ROP response buffer ([MS-OXCROPS] section 2.2.9.6.2).

2.2.20 RopSeekStream ROP

The **RopSeekStream** ROP ([MS-OXCROPS] section 2.2.9.7) sets the seek pointer to a new location, which is relative to the beginning of the stream, the end of the stream, or the location of the current seek pointer. This ROP can also be used to get the location of the current seek pointer by setting the **Origin** field to 0x01 and the **Offset** field to zero. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.20.1 RopSeekStream ROP Request Buffer

The following descriptions define valid fields for the **RopSeekStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.7.1).

Origin (1 byte): An integer that specifies the point of origin for the seek pointer. The **Origin** field MUST be set to one of the values in the following table.

Value	Meaning
0x00	The point of origin is the beginning of the stream.
0x01	The point of origin is the location of the current seek pointer.
0x02	The point of origin is the end of the stream.

Offset (8 bytes): An integer that specifies the number of bytes that the seek pointer is to be offset from the origin. The value can be positive or negative.

2.2.20.2 RopSeekStream ROP Response Buffer

The following descriptions define valid fields for the **RopSeekStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.7.2).

NewPosition (8 bytes): An integer that specifies the new offset, in bytes, of the seek pointer from the beginning of the stream.

2.2.21 RopCopyToStream ROP

The **RopCopyToStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.8) copies a specified number of bytes from the current seek pointer in the source stream to the current seek pointer in the destination stream. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.21.1 RopCopyToStream ROP Request Buffer

The following descriptions define valid fields for the **RopCopyToStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.8.1).

ByteCount (8 bytes): An integer that specifies the number of bytes to be copied from the source stream to the destination stream.

2.2.21.2 RopCopyToStream ROP Response Buffer

The following descriptions define valid fields for the **RopCopyToStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.8.2).

DestHandleIndex (4 bytes): An integer that specifies the location in the Server object handle table where the handle for the destination Server object is stored. The **DestHandleIndex** field MUST be set to the value of the **DestHandleIndex** field of the ROP request buffer. The **DestHandleIndex** field MUST NOT be present if the **ReturnValue** field is set to any value other than NullDestinationObject (0x00000503).

ReadByteCount (8 bytes): An integer that specifies the number of bytes read from the source stream. If the **ReturnValue** field is set to NullDestinationObject (0x00000503), the value of the **ReadByteCount** field is undefined.

WrittenByteCount (8 bytes): An integer that specifies the number of bytes written to the destination stream. If the **ReturnValue** field is set to `NullDestinationObject (0x00000503)`, the value of the **WrittenByteCount** field is undefined.

2.2.22 RopProgress ROP

The **RopProgress** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.13) reports the progress status of an asynchronous operation. This ROP also can abort an in-progress operation if the **WantCancel** field is set to nonzero. This operation is valid on any object on which an asynchronous operation is used.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.22.1 RopProgress ROP Request Buffer

The following descriptions define valid fields for the **RopProgress** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.13.1).

WantCancel (1 byte): A Boolean value that is zero if the client wants the current operation to continue. The value is nonzero to request that the server cancel the operation.

2.2.22.2 RopProgress ROP Response Buffer

The following descriptions define valid fields for the **RopProgress** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.13.2).

CompletedTaskCount (4 bytes): An integer that specifies the approximate number of tasks that the server has completed.

TotalTaskCount (4 bytes): An integer that specifies the approximate number of tasks the server will complete for the entire operation. The value of this field **MUST** be greater than or equal to the value of the **CompletedTaskCount** field.

2.2.23 RopLockRegionStream ROP

The **RopLockRegionStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.9) is used to lock a specified range of bytes in a Stream object. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [\[MS-OXCROPS\]](#). This section specifies the syntax and semantics of various fields that are not fully specified in [\[MS-OXCROPS\]](#).

2.2.23.1 RopLockRegionStream ROP Request Buffer

The following descriptions define valid fields for the **RopLockRegionStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.9.1).

RegionOffset (8 bytes): An unsigned 64-bit integer that specifies the number of bytes from the beginning of the stream where the beginning of the region to be locked is located.

RegionSize (8 bytes): An unsigned 64-bit integer that specifies the size, in bytes, of the region to be locked.

LockFlags (4 bytes): A set of bits that control the read/write access to the locked region. The **LockFlags** field **MUST** be set to one of the values in the following table.

Value	Meaning
0x00000001	If this lock is granted, the specified range of bytes can be opened and read any number of times, but writing to the locked range is prohibited except for the owner that was granted this lock.
Any other value	If this lock is granted, reading and writing to the specified range of bytes is prohibited except by the owner that was granted this lock.

2.2.23.2 RopLockRegionStream ROP Response Buffer

This protocol adds no additional field details to the **RopLockRegionStream** ROP response buffer ([MS-OXCROPS] section 2.2.9.9.2).

2.2.24 RopUnlockRegionStream ROP

The **RopUnlockRegionStream** ROP ([MS-OXCROPS] section 2.2.9.10) unlocks a specified range of bytes in a Stream object. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.24.1 RopUnlockRegionStream ROP Request Buffer

The following descriptions define valid fields for the **RopUnlockRegionStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.10.1).

RegionOffset (8 bytes): An unsigned 64-bit integer that specifies the number of bytes from the beginning of the stream where the beginning of the region to be unlocked is located.

RegionSize (8 bytes): An unsigned 64-bit integer that specifies the size, in bytes, of the region to be unlocked.

LockFlags (4 bytes): A set of bits that control the read/write access to the locked region. The value of the **LockFlags** field MUST be one of the values specified in section 2.2.23.1. In addition, it MUST be set to the same value that was used in the **RopLockRegionStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.9) that was used to lock the region of bytes.

2.2.24.2 RopUnlockRegionStream ROP Response Buffer

This protocol adds no additional field details to the **RopUnlockRegionStream** ROP response buffer ([MS-OXCROPS] section 2.2.9.10.2).

2.2.25 RopWriteAndCommitStream ROP

The **RopWriteAndCommitStream** ROP ([MS-OXCROPS] section 2.2.9.11) is functionally equivalent to **RopWriteStream** ([MS-OXCROPS] section 2.2.9.3) followed by **RopCommitStream** ([MS-OXCROPS] section 2.2.9.4). This operation is valid only on Stream objects. This ROP MUST NOT be used on a Stream object that is opened on a property of a Folder object.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.25.1 RopWriteAndCommitStream ROP Request Buffer

The following descriptions define valid fields for the **RopWriteAndCommitStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.11.1).

DataSize (2 bytes): An integer that specifies the number of bytes in the **Data** field.

Data (variable): An array of bytes that constitute the data to be written and committed to the stream.

2.2.25.2 RopWriteAndCommitStream ROP Response Buffer

The following descriptions define valid fields for the **RopWriteAndCommitStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.11.2).

WrittenSize (2 bytes): An integer that specifies the number of bytes actually written and committed to the stream.

2.2.26 RopCloneStream ROP

The **RopCloneStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.12) creates a new Stream object that is a clone of another Stream object. The cloned Stream object allows access to the same bytes but has a separate seek pointer. This operation is valid only on Stream objects.

The complete syntax of the ROP request buffer and the ROP response buffer is specified in [MS-OXCROPS]. This section specifies the syntax and semantics of various fields that are not fully specified in [MS-OXCROPS].

2.2.26.1 RopCloneStream ROP Request Buffer

This protocol adds no additional field details to the **RopCloneStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.12.1).

2.2.26.2 RopCloneStream ROP Response Buffer

This protocol adds no additional field details to the **RopCloneStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.12.2).

3 Protocol Details

3.1 Client Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

Changes to a property: There are two different models for persisting the new value of a property to the database. Changes to properties of a Folder object or a Logon object are saved implicitly in the database, whereas changes to properties of a Message object are not saved until the client sends a **RopSaveChangesMessage ROP request** ([\[MS-OXCROPS\]](#) section 2.2.6.3). Changes to properties of an Attachment object are not saved until the client sends a **RopSaveChangesAttachment ROP request** ([\[MS-OXCROPS\]](#) section 2.2.6.15) followed by a **RopSaveChangesMessage ROP request**.

Changes to a Stream object: There are two different models for persisting the new value of property that is opened as a Stream object to the database. For a Folder object, the new value of a property that is opened as a Stream object is not persisted until the client sends a **RopCommitStream ROP request** ([\[MS-OXCROPS\]](#) section 2.2.9.4) on the Stream object. For a Message object and an Attachment object, the persistence of the new value is the same as when the property is changed directly.

Caching property IDs: When the client uses the **RopGetPropertyIdsFromNames ROP** ([\[MS-OXCROPS\]](#) section 2.2.8.1) to map named properties to property IDs, the client can cache the property IDs for the length of its session. A property ID is not guaranteed to be the same for a new session. A property ID that is mapped from a named property is valid on any item within the Logon object.

3.1.2 Timers

None.

3.1.3 Initialization

There is no initialization specific to this protocol. Higher layers calling this protocol MUST obtain handles to the objects required by the message syntax specified in [\[MS-OXCROPS\]](#) section 2.

3.1.4 Higher-Layer Triggered Events

3.1.4.1 Getting Property IDs for Named Properties

All operations (setting, getting, deleting) on the properties of an object are done with a 32-bit property tag, which is built from a 16-bit property ID and a 16-bit type code. If the predefined set of property tags does not cover a semantic need for a new client feature, the client can create a custom property by defining a named property.

The client registers a property ID for a new named property or obtains a registered property ID for an existing named property by using the **RopGetPropertyIdsFromNames ROP** ([\[MS-OXCROPS\]](#) section 2.2.8.1). The client provides a property set and an identifier in either integer or string form,

and the server returns the property ID, which the client uses for any operations performed on that property. The property ID of a named property has the most significant bit set (0x8000).

If the client needs to obtain the named property to which a property ID is registered, the client obtains that named property by using the **RopGetNamesFromPropertyIds** ROP ([MS-OXCROPS] section 2.2.8.2).

3.1.4.2 Reading a Property

If any of the properties to be read are named properties, the client obtains the property IDs for those properties, as specified in section [3.1.4.1](#).

The client then reads the properties by using either the **RopGetPropertiesSpecific** ROP ([MS-OXCROPS] section 2.2.8.3) or the **RopGetPropertiesAll** ROP ([MS-OXCROPS] section 2.2.8.4). The client checks the ROP response buffer for error codes that are returned in place of the values of the properties.

3.1.4.3 Setting a Property

If any of the properties to be set are named properties, the client obtains the property IDs for those properties, as specified in section [3.1.4.1](#).

The client then sets the properties by using the **RopSetProperties** ROP ([MS-OXCROPS] section 2.2.8.6). If the value of the **PropertyProblemCount** field in the ROP response buffer is nonzero, then the client checks the array contained in the **PropertyProblems** field of the ROP response buffer to verify which properties failed to be set. Clients SHOULD NOT include read-only properties in the **PropertyValues** field of the ROP request buffer.

3.1.4.4 Getting a List of an Object's Existing Properties

To get a list of properties that are set on an object, the client uses the **RopGetPropertiesList** ROP ([MS-OXCROPS] section 2.2.8.5). The client can use this list to create an equivalent duplicate of an object by copying only the properties specified in the list. For example, if the **RopGetPropertiesList** ROP is used on a Message object, the client can create a duplicate of the Message object without considering its attachments table and recipient table by copying only the listed properties.

3.1.4.5 Reading a Property as a Stream

If the server returned **NotEnoughMemory** (0x8007000E) in place of the property value in the ROP response buffer of the **RopGetPropertiesSpecific** ROP ([MS-OXCROPS] section 2.2.8.3) or **RopGetPropertiesAll** ROP ([MS-OXCROPS] section 2.2.8.4), the property is too big to fit in a single ROP. In this case, the client can read the property as a stream.

If the property to be read is a named property, the client obtains the property ID for that property, as specified in section [3.1.4.1](#).

The client then obtains a handle to a Stream object for the property by using the **RopOpenStream** ROP ([MS-OXCROPS] section 2.2.9.1). The client sets the **OpenModeFlags** field of the ROP request buffer to **ReadOnly**. To verify that the handle was retrieved, the client checks the **ReturnValue** field of the ROP response buffer.

If it is not necessary for the client to read from the start of the stream, the client uses the **RopSeekStream** ROP ([MS-OXCROPS] section 2.2.9.7) to set the seek pointer. The client then reads data from the stream by sending one or more **RopReadStream** ROP requests ([MS-OXCROPS] section 2.2.9.2). If the **DataSize** field of the ROP response buffer is set to the maximum

value that was specified in the ROP request buffer, the client can determine whether there is more data in the stream by issuing another **RopReadStream** request. The client stops reading the stream when it has read all the data it requires or when the server returns zero in the **DataSize** field.

When the client is done with the Stream object, it releases the Stream object by using the **RopRelease** ROP ([\[MS-OXCROPS\]](#) section 2.2.15.3).

3.1.4.6 Setting a Property with a Stream

If the property to be set is a named property, the client obtains the property ID for that property, as specified in section [3.1.4.1](#).

The client then obtains a handle to the Stream object on the property by using the **RopOpenStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.1). The client sets the **OpenModeFlags** field of the ROP request buffer to **ReadWrite**, **Create**, or **BestAccess**. To verify that the handle was retrieved, the client checks the **ReturnValue** field of the ROP response buffer.

If it is not necessary for the client to write from the start of the stream, the client sets the seek pointer by using the **RopSeekStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.7). The client then writes data to the stream by using one or more **RopWriteStream** ROP requests ([\[MS-OXCROPS\]](#) section 2.2.9.3).

The client saves the changes to the property of a Folder object by using the **RopCommitStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.4). The client saves the changes to the property of a Message object by using the **RopSaveChangesMessage** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.3). The client saves the changes to the property of an Attachment object by using the **RopSaveChangesAttachment** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.15) followed by the **RopSaveChangesMessage** ROP.

When the client is done with the Stream object, the client releases the Stream object by using the **RopRelease** ROP ([\[MS-OXCROPS\]](#) section 2.2.15.3).

3.1.5 Message Processing Events and Sequencing Rules

With the exception of the **RopProgress** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.13), all of the ROPs specified in section [2](#) of this specification are sent by the client and processed by the server. The client SHOULD process the ROP response buffer associated with each message it sends.

If the client set the **WantAsynchronous** field to nonzero in the ROP request buffer of any of the following ROPs, the server can respond with a **RopProgress ROP response**.

- **RopCopyTo** ([\[MS-OXCROPS\]](#) section 2.2.8.12)
- **RopCopyProperties** ([\[MS-OXCROPS\]](#) section 2.2.8.11)
- **RopSetReadFlags** ([\[MS-OXCROPS\]](#) section 2.2.6.10)
- **RopMoveCopyMessages** ([\[MS-OXCROPS\]](#) section 2.2.4.6)
- **RopMoveFolder** ([\[MS-OXCROPS\]](#) section 2.2.4.7)
- **RopCopyFolder** ([\[MS-OXCROPS\]](#) section 2.2.4.8)
- **RopHardDeleteMessagesAndSubfolders** ([\[MS-OXCROPS\]](#) section 2.2.4.10)
- **RopEmptyFolder** ([\[MS-OXCROPS\]](#) section 2.2.4.9)

- **RopDeleteMessages** ([\[MS-OXCROPS\]](#) section 2.2.4.11)
- **RopHardDeleteMessages** ([\[MS-OXCROPS\]](#) section 2.2.4.12)

The server can notify the client of its current progress by responding with a **RopProgress** ROP response buffer. When the client receives a **RopProgress** response, it can use the values of the **CompletedTaskCount** and **TotalTaskCount** fields to provide progress information to the user. The client can request additional status or abort the operation by sending additional **RopProgress** ROP requests. In response to the client's **RopProgress** ROP request, the server MUST respond with either the response to the original ROP or another **RopProgress** ROP response. If the client sends a ROP other than **RopProgress** to the server with the same logon before the asynchronous operation is complete, the server MUST abort the asynchronous operation and respond to the new ROP.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

3.2 Server Details

3.2.1 Abstract Data Model

The server abstract data model is the same as the client abstract data model specified in section [3.1.1](#).

3.2.2 Timers

None.

3.2.3 Initialization

None.

3.2.4 Higher-Layer Triggered Events

None.

3.2.5 Message Processing Events and Sequencing Rules

3.2.5.1 Processing RopGetPropertiesSpecific

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopGetPropertiesSpecific** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.3) from the client, the server parses the buffer. The server responds with a **RopGetPropertiesSpecific** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST return the values for all properties on the object, including those set by any client, those set by any server, and computed properties. The server MUST order properties in the **PropertyValues** field of the ROP response buffer in the same order in which properties are specified in the **PropertyTags** field of the ROP request buffer.

If the **WantUnicode** field is set to a nonzero value, the server MUST return string properties that are requested without a specified type (**PtypUnspecified**) in Unicode format. If the **WantUnicode** field is set to zero, the server MUST return string properties that are requested without a specified type (**PtypUnspecified**) in MBCS format. Properties requested with a specific string type MUST be returned using that type.

For properties on Message objects, the **code page** used for strings in MBCS format MUST be the code page that was set on the Message object when it was opened. If no code page was set on the Message object, the code page of the Logon object MUST be used. For properties on Attachment objects, the code page used for strings in MBCS format MUST be the code page that was set on the parent Message object when it was opened. If no code page was set on the parent Message object, the code page of the Logon object MUST be used. For all other objects, the code page used for strings in MBCS format MUST be the code page of the Logon object.

The server SHOULD [<5>](#) ignore the **PropertySizeLimit** field of the ROP request buffer.

3.2.5.2 Processing RopGetPropertiesAll

When the server receives a **RopGetPropertiesAll** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.4) from the client, the server parses the buffer. The server responds with a **RopGetPropertiesAll** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server behavior for this ROP is the same as that for the **RopGetPropertiesSpecific** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.3), as specified in section [3.2.5.1](#), except that the server MUST return the values for all properties on the object.

3.2.5.3 Processing RopGetPropertiesList

When the server receives a **RopGetPropertiesList** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.5) from the client, the server parses the buffer. The server responds with a **RopGetPropertiesList** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST return the list of all properties that are currently set on the object.

3.2.5.4 Processing RopSetProperties

When the server receives a **RopSetProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.6) from the client, the server parses the buffer. The server responds with a **RopSetProperties** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST modify the value of each property specified in the **PropertyValues** field of the ROP request buffer. If the server fails to modify a property, that property, along with details of the failure, is specified in a **PropertyProblem** structure ([\[MS-OXCADATA\]](#) section 2.7) that is contained in the **PropertyProblems** field of the ROP response buffer.

For Message objects, the new value of the properties MUST be made available immediately for retrieval by a ROP that uses the same Message object handle. For example, if the client uses the same object handle in a **RopGetPropertiesAll** ROP request ([\[MS-OXCROPS\]](#) section 2.2.8.4) to read those same properties, the modified value MUST be returned. However, the modified value MUST NOT be persisted to the database until a successful **RopSaveChangesMessage** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.3) is issued.

For Attachment objects, the new value of the properties MUST be made available immediately for retrieval by a ROP that uses the same Attachment object handle. However, the modified value MUST NOT be persisted to the database until a successful **RopSaveChangesAttachment** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.15) followed by a successful **RopSaveChangesMessage** ROP is issued.

For Folder objects and Logon objects, the new value of the properties MUST be persisted immediately without requiring another ROP to commit it.

3.2.5.5 Processing RopDeleteProperties

When the server receives a **RopDeleteProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.8) from the client, the server parses the buffer. The server responds with a **RopDeleteProperties** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST delete the property from the object. If the server fails to delete a property, that property, along with details of the failure, is specified in a **PropertyProblem** structure ([\[MS-OXCADATA\]](#) section 2.7) that is contained in the **PropertyProblems** field of the ROP response buffer.

If the server returns success, it MUST NOT have a valid value to return to a client that asks for the value of this property. If a client requests the value of this property, the server SHOULD return the NotFound error (0x8004010F) ([\[MS-OXCADATA\]](#) section 2.4.2) in place of a value.

For Message objects, the properties MUST be removed immediately when using the same handle. In other words, if the client uses the same handle to read those same properties using the **RopGetPropertiesSpecific** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.3) or the **RopGetPropertiesAll** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.4), the properties MUST be deleted. However, the deleted properties MUST NOT be persisted to the database until a successful **RopSaveChangesMessage** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.3) is issued.

For Attachment objects, the properties MUST be removed immediately when using the same handle. However, the deleted properties MUST NOT be persisted to the database until a successful **RopSaveChangesAttachment** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.15) and a successful **RopSaveChangesMessage** ROP are issued, in that order.

For Folder objects and Logon objects, the properties MUST be removed immediately without requiring another ROP to commit the change.

3.2.5.6 Processing RopQueryNamedProperties

When the server receives a **RopQueryNamedProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.10) from the client, the server parses the buffer. The server responds with a **RopQueryNamedProperties** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST return the list of all named properties and their property IDs, filtered based on the fields in the ROP request buffer. Starting with the full list of all named properties:

1. If the **NoStrings** bit is set in the **QueryFlags** field of the ROP request buffer, named properties with the **Kind** field ([\[MS-OXCADATA\]](#) section 2.6.1) set to 0x1 MUST NOT be returned.
2. If the **NoIds** bit is set in the **QueryFlags** field, named properties with the **Kind** field set to 0x0 MUST NOT be returned.
3. If the **PropertyGuid** field of the ROP request buffer is present, named properties with a **GUID** field ([\[MS-OXCADATA\]](#) section 2.6.1) value that does not match the value of the **PropertyGuid** field MUST NOT be returned.

The server MUST ignore any invalid bits that are set in the **QueryFlags** field of the ROP request buffer.

3.2.5.7 Processing RopCopyProperties

Note *Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.*

When the server receives a **RopCopyProperties** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.11) from the client, the server parses the buffer. The server responds with a **RopCopyProperties** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST copy or move the properties specified from the source object to the destination object. If the server fails to copy or move a property, that property, along with details of the failure, is specified in a **PropertyProblem** structure ([\[MS-OXCADATA\]](#) section 2.7) that is contained in the **PropertyProblems** field of the ROP response buffer.

If the **Move** flag is set in the **CopyFlags** field of the ROP request buffer, the server MAY [<6>](#) delete the copied properties from the source object. If the **NoOverwrite** flag is set in the **CopyFlags** field, the server MUST NOT overwrite any properties that already have a value on the destination object. If any other bits are set in the **CopyFlags** field, the server SHOULD [<7>](#) return an InvalidParameter error (0x80070057) ([\[MS-OXCADATA\]](#) section 2.4).

In the case of Message objects, the changes on either source or destination MUST NOT be persisted until the **RopSaveChangesMessage** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.3) is successfully issued. In the case of Attachment objects, the changes on either source or destination MUST NOT be persisted until the **RopSaveChangesAttachment** ROP ([\[MS-OXCROPS\]](#) section 2.2.6.15) and the **RopSaveChangesMessage** ROP are successfully issued, in that order.

In the case of Folder objects, the changes on the source and destination MUST be immediately persisted. If the original object is a Folder object and the **CopyFlags** field has the **Move** flag set, the server SHOULD return a NotSupported error (0x80040102) ([\[MS-OXCADATA\]](#) section 2.4).

If the client requests asynchronous processing, the server can process this ROP asynchronously. During asynchronous processing, the server can indicate that the operation is still being processed by returning a **RopProgress** ROP response ([\[MS-OXCROPS\]](#) section 2.2.8.13), or it can indicate that the operation has already completed by returning a **RopCopyProperties** ROP response. If the operation fails at any point during the asynchronous processing, the server returns a **RopCopyProperties** ROP response buffer with an appropriate error code. For details about the **RopProgress** ROP and how it is used, see section [2.2.22](#) and section [3.2.5.19](#).

3.2.5.8 Processing RopCopyTo

When the server receives a **RopCopyTo** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.12) from the client, the server parses the buffer. The server responds with a **RopCopyTo** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

This ROP works in the same way as the **RopCopyProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.11), as specified in section [3.2.5.7](#), except that the server MUST copy or move only the writable properties that are not specified in the **ExcludedTags** field.

If the client requests asynchronous processing, the server can process this ROP asynchronously. During asynchronous processing, the server can indicate that the operation is still being processed by returning a **RopProgress** ROP response ([\[MS-OXCROPS\]](#) section 2.2.8.13), or it can indicate that the operation has already completed by returning a **RopCopyTo** ROP response. If the operation fails at any point during the asynchronous processing, the server returns a **RopCopyTo** ROP response buffer with an appropriate error code. For details about the **RopProgress** ROP and how it is used, see section [2.2.22](#) and section [3.2.5.19](#).

The following error codes SHOULD be returned when the scenarios described in the corresponding Description column of the following table are met.

Error code name	Value	Description
NotSupported	0x80040102	The source object and destination object are not compatible with each other for the copy operation. The source object and destination object need to be of the same type, and MUST be a Message object, Folder object, or Attachment object.
MessageCycle	0x00000504	The source message directly or indirectly contains the destination message.
FolderCycle	0x8004060B	The source folder contains the destination folder.
CollidingNames	0x80040604	A subobject cannot be copied because there is already a subobject existing in the destination object with the same display name, which is specified in the PidTagDisplayName property ([MS-OXCFCOLD] section 2.2.2.2.4), as the subobject to be copied.

3.2.5.9 Processing RopGetNamesFromPropertyIds

When the server receives a **RopGetNamesFromPropertyIds** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.2) from the client, the server parses the buffer. The server responds with a **RopGetNamesFromPropertyIds** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

For each property ID in the **PropertyIds** field of the ROP request buffer, the server MUST perform the following:

1. If the property ID is less than 0x8000, the associated **PropertyName** structure ([\[MS-OXCDATA\]](#) section 2.6.1) contained in the **PropertyNames** field of the ROP response buffer MUST be composed as follows:
 - The structure's **GUID** field is set to the PS_MAPI property set ([\[MS-OXPROPS\]](#) section 1.3.2).

- The structure's **Kind** field is set to 0x00.
 - The structure's **LID** field is set to the property ID.
2. For property IDs that have an associated **PropertyName** structure, the server MUST return the **PropertyName** structure associated with the property ID.
 3. For property IDs that do not have an associated **PropertyName** structure, the associated name MUST be composed as follows:
 - A value in the **Kind** field of 0xFF. There is no other return data for this entry.

3.2.5.10 Processing RopGetPropertyIdsFromNames

When the server receives a **RopGetPropertyIdsFromNames** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.1) from the client, the server parses the buffer. The server responds with a **RopGetPropertyIdsFromNames** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

If the **PropertyNameCount** field of the ROP request buffer is zero, and the **RopGetPropertyIdsFromNames** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.1) is acting on a Logon object, the server MUST enumerate all property IDs that are registered for named properties. Otherwise, the server MUST, for each entry in the **PropertyNames** field of the ROP request buffer, follow this procedure:

1. If the **GUID** field of the **PropertyName** structure ([\[MS-OXCDATA\]](#) section 2.6.1) in the ROP request buffer specifies the PS_MAPI property set, the returned property ID is obtained from the **LID** field. Otherwise, if the **GUID** field specifies the PS_INTERNET_HEADERS property set and the **Kind** field of the **PropertyName** structure is set to 0x01, coerce the value of the **Name** field to all lowercase. Property sets are specified in [\[MS-OXPROPS\]](#) section 1.3.2.
2. Find the property ID registered for the named property that matches the **PropertyName** structure as follows:
 - If the **Kind** field is set to 0x01, the named property has a property name that matches the value of the **Name** field of the **PropertyName** structure.
 - If the **Kind** field is set to 0x00, the named property has a LID that matches the value of the **LID** field of the **PropertyName** structure.
3. For unfound rows, the returned property ID MUST be 0x0000 unless all of the following conditions are true:
 - The **Flags** field of the ROP request buffer is set to 0x02.
 - The user has permission to create new entries.
 - The server-imposed limit on property ID mappings specified later in this section hasn't yet been reached.
4. If the above conditions in step three are all met, a new property ID is registered for the named property. The newly assigned property ID MUST be unique in that it MUST NOT be assigned to another named property and MUST NOT be equal to 0xFFFF. The newly assigned property ID MUST be greater than 0x8000.

Because only 32,767 property IDs are available (15 significant bits), the server MUST impose a limit of at most 32,767 on the total number of registered property IDs. If the client attempts to register additional property IDs and the server has reached this limit, then the server MUST return **OutOfMemory** (0x8007000E) in the **ReturnValue** field of the ROP response buffer.

3.2.5.11 Processing RopOpenStream

When the server receives a **RopOpenStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.1) from the client, the server parses the buffer. The server responds with a **RopOpenStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST open the stream in the mode indicated by the **OpenModeFlags** field as specified by the table in section [2.2.14.1](#).

The implementation of the **RopOpenStream** ROP can allocate some temporary resource on the server to represent the link between the Folder object returned to the client and the Folder object in the database. To free this resource, the client MUST call the **RopRelease** ROP ([\[MS-OXCROPS\]](#) section 2.2.15.3) on the Folder object.

The server MUST store the location of the seek pointer until the client calls the **RopRelease** ROP. The seek pointer MUST be initialized as specified in the request. The stream MUST be prepopulated with the current value of the property that is specified in the request.

The following error code SHOULD be returned when the scenario described in the Description column of the following table is met.

Error code name	Value	Description
NotFound	0x8004010F	The property tag does not exist for the object, and it cannot be created because the Create bit was not specified in OpenModeFlags field.

3.2.5.12 Processing RopReadStream

When the server receives a **RopReadStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.2) from the client, the server parses the buffer. The server responds with a **RopReadStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST read less than or equal to the amount of data requested. If the **ByteCount** field of the ROP request buffer is set to 0xBABE, the number of bytes read MUST be less than or equal to the value of the **MaximumByteCount** field of the ROP request buffer; otherwise, the number of bytes read MUST be less than or equal to the value of the **ByteCount** field.

The server MUST read from the Stream object beginning at the current seek pointer. The seek pointer MUST be moved forward the same number of bytes as was read from the Stream object. In the case of a failure, the **DataSize** field SHOULD be set to zero.

3.2.5.13 Processing RopWriteStream

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopWriteStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.3) from the client, the server parses the buffer. The server responds with a **RopWriteStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

The server SHOULD<8> return the TooBig error code if it writes less than the amount requested. The server MUST store the data that is specified in the ROP request buffer into a stream buffer, writing forward starting at the current seek pointer. The seek pointer MUST be moved forward the same number of bytes as were written to the Stream object.

After a **RopWriteStream** ROP request buffer is processed, the new value of the property MUST be immediately available for retrieval by a ROP that uses the same object handle. However, the new value of the property is not persisted to the database. For a Message object, the new value is persisted to the database when a successful **RopSaveChangesMessage** ROP ([MS-OXCROPS] section 2.2.6.3) is issued. For an Attachment object, the new value is persisted to the database when a successful **RopSaveChangesAttachment** ROP ([MS-OXCROPS] section 2.2.6.15) followed by a successful **RopSaveChangesMessage** ROP is issued. For a Folder object, the value is persisted when the **RopCommitStream** ROP ([MS-OXCROPS] section 2.2.9.4) is issued on the Stream object.

The following error codes SHOULD be returned when the scenarios described in the corresponding Description column of the following table are met.

Error code name	Value	Description
StreamSizeError	0x80030070	The write will exceed the maximum stream size.
TooBig	0x80040305	The result set of the operation is too big for the server to return.
STG_E_ACCESSDENIED	0x80030005	Write access is denied.

3.2.5.14 Processing RopCommitStream

When the server receives a **RopCommitStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.4) from the client, the server parses the buffer. The server responds with a **RopCommitStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

The server MUST set the property specified in the **RopOpenStream** ROP request ([MS-OXCROPS] section 2.2.9.1) with the data from the Stream object.

3.2.5.15 Processing RopGetStreamSize

When the server receives a **RopGetStreamSize** ROP request buffer ([MS-OXCROPS] section 2.2.9.5) from the client, the server parses the buffer. The server responds with a **RopGetStreamSize** ROP response buffer. For details about how the server parses buffers and

processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST return the current size of the Stream object.

3.2.5.16 Processing RopSetStreamSize

When the server receives a **RopSetStreamSize** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.6) from the client, the server parses the buffer. The server responds with a **RopSetStreamSize** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server sets the current size of the Stream object according to the value specified in the **StreamSize** field of the ROP request buffer. If the size of the stream is increased, the server MUST set the values in the extended stream to 0x00. If the size of the stream is decreased, the server discards the values that are beyond the end of the new size.

3.2.5.17 Processing RopSeekStream

When the server receives a **RopSeekStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.7) from the client, the server parses the buffer. The server responds with a **RopSeekStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server modifies the location of the seek point associated with the Stream object according to the ROP request buffer. If the client requests the seek pointer be moved beyond 2^{31} bytes, the server MUST return the StreamSeekError error code in the **ReturnValue** field of the ROP response buffer. If the client requests the seek pointer be moved beyond the end of the stream, the stream is extended, and zeros filled to the new seek location.

The following error codes SHOULD be returned when the scenarios described in the corresponding Description column of the following table are met.

Error code name	Value	Description
StreamSeekError	0x80030019	Tried to seek to offset before the start or beyond the max stream size of 2^{31} .
StreamInvalidParam	0x80030057	The value of the Origin field is invalid.

3.2.5.18 Processing RopCopyToStream

When the server receives a **RopCopyToStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.8) from the client, the server parses the buffer. The server responds with a **RopCopyToStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [\[MS-OXCROPS\]](#) section 3.2.5.1. For details about how the server formats buffers for the response, see [\[MS-OXCROPS\]](#) section 3.2.5.2.

The server MUST read the number of bytes requested from the source Stream object and write those bytes into the destination Stream object. The server MUST move the seek pointer of both the source and destination streams forward the same number of bytes as were copied.

The following error code SHOULD be returned when the scenario described in the Description column of the table is met.

Error code name	Value	Description
NullDestinationObject	0x00000503	Destination object does not exist.

3.2.5.19 Processing RopProgress

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopProgress** ROP request buffer ([MS-OXCROPS] section 2.2.8.13) from the client, the server parses the buffer. The server responds with a **RopProgress** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

Servers MAY<9> implement this ROP as follows:

If the server implements this ROP, the server MUST respond with a **RopProgress** ROP response when the server is not done with the asynchronous operation. If the server receives a **RopProgress** ROP request with the **WantCancel** field set to nonzero, then the server can abort the operation instead of completing it. If the server has completed or aborted the operation, it MUST respond with a ROP response buffer that corresponds to the original ROP request.

3.2.5.20 Processing RopLockRegionStream

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopLockRegionStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.9) from the client, the server parses the buffer. The server responds with a **RopLockRegionStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

Servers MAY<10> implement this ROP as follows:

If the server implements this ROP, the server MUST check for any existing locks on the requested region of the Stream object. If any are found, the server MUST check the last activity time on the session that locked the region previously. If the last activity time was greater than 30 seconds prior to the new request, the server MUST mark the previous lock as expired and discard any pending changes of the Stream object from the session that owned that lock. If all previous locks are expired, or if there are no previous locks, the server MUST grant the requesting client a new lock. If there are previous locks that are not expired, the server MUST return the AccessDenied error code (0x80070005) in the **ReturnValue** field of the ROP response buffer.

If a session with an expired lock calls any ROP for the Stream object that would encounter the locked region, the server MUST return the NetworkError error code (0x80040115) in the **ReturnValue** field of the ROP response buffer. The server MUST limit access to the locked region by other sessions as indicated by the **LockFlags** field of the ROP request buffer.

3.2.5.21 Processing RopUnlockRegionStream

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopUnlockRegionStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.10) from the client, the server parses the buffer. The server responds with a **RopUnlockRegionStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

Servers MAY<11> implement this ROP as follows:

If the server implements this ROP, the server MUST remove any existing locks on the requested region that are owned by the session calling the ROP. If there are previous locks that are not owned by the session calling the ROP, the server MUST leave them unmodified.

3.2.5.22 Processing RopWriteAndCommitStream

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopWriteAndCommitStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.11) from the client, the server parses the buffer. The server responds with a **RopWriteAndCommitStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

Servers MAY<12> implement this ROP. If the server implements this ROP, it MUST first process the ROP request as specified in section 3.2.5.13 and then process the ROP request as specified in section 3.2.5.14.

3.2.5.23 Processing RopCloneStream

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

When the server receives a **RopCloneStream** ROP request buffer ([MS-OXCROPS] section 2.2.9.12) from the client, the server parses the buffer. The server responds with a **RopCloneStream** ROP response buffer. For details about how the server parses buffers and processes ROPs, see [MS-OXCROPS] section 3.2.5.1. For details about how the server formats buffers for the response, see [MS-OXCROPS] section 3.2.5.2.

Servers MAY<13> implement this ROP as follows:

If the server implements this ROP, it MUST create a new Stream object that contains the same data as the source Stream object. Changes made to the stream in one Stream object MUST be immediately visible in the other. The initial setting of the seek pointer in the cloned Stream object MUST be the same as the current setting of the seek pointer in the source Stream object at the time that this ROP is processed. Afterwards, the seek pointers MUST be independent of each other.

3.2.6 Timer Events

None.

3.2.7 Other Local Events

None.

Preliminary

4 Protocol Examples

The following examples illustrate the byte order of ROPs in a buffer being prepared for transmission. Please note that the examples listed here only show the relevant portions of the specified ROPs; this is not the final byte sequence that gets transmitted over the wire. Also note that the data for a multibyte field appear in **little-endian** format, with the bytes in the field presented from least significant to most significant. Generally speaking, these ROP requests are packed with other ROP requests, compressed and packed in one or more **remote procedure calls (RPCs)** according to the description in [\[MS-OXCRPC\]](#) section 3. These examples assume the client has already successfully logged on to the server and has obtained any **Server object handles** that are to be used as inputs for the ROPs.

Examples in this section use the following format for byte sequences.

```
0080: 45 4D 53 4D 44 42 2E 44-4C 4C 00 00 00 00 00
```

The value at the far left (0080) is the byte sequence's offset from the beginning of the buffer. Following the offset is a series of up to 16 bytes, with each two-character sequence describing the value of one byte. Here, the first byte (45) in the series is located 0x80 bytes (128 bytes) from the beginning of the buffer. The seventh byte (2E) in the series is located 0x86 bytes (134 bytes) from the beginning of the buffer. The dash between the eighth byte (44) and the ninth byte (4C) has no semantic value and serves only to distinguish the eight-byte boundary for readability.

Such a byte sequence is then followed by one or more lines interpreting it. In larger examples the byte sequence is shown once in its entirety and then repeated in smaller chunks, with each smaller chunk interpreted separately.

The following example shows how a property tag and its value are represented in a buffer and interpreted directly from it (according to the property buffer format described in [\[MS-OXCDATA\]](#) section 2.2.3). The property tag appears in the buffer in little-endian format.

```
0021: 03 00 76 66 0A 00 00-00
```

PropertyTag: 0x66760003 (**PidTagRuleSequence** ([\[MS-OXORULE\]](#) section 2.2.1.3.1.2))

PropertyValue: 10

Generally speaking interpreted values will be shown in their native format, interpreted appropriately from the raw byte sequence as described in the appropriate section. Here, the byte sequence 0A 00 00 00 has been interpreted as a **PtypInteger32** ([\[MS-OXCDATA\]](#) section 2.11.1) with a value of 10 because the type of the **PidTagRuleSequence** property is **PtypInteger32**.

4.1 Getting Property IDs

The getting PropertyIds example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopGetPropertyIdsFromNames** ROP as described in section [2.2.12](#).

4.1.1 Client Request Buffer

The client requests the server to register property IDs for two named properties it will create on a Message object.

A complete ROP request buffer is formatted as follows.

```
0000: 56 00 00 02 02 00 01 02-20 06 00 00 00 00 00 c0
0010: 00 00 00 00 00 00 46 14-54 00 65 00 73 00 74 00
0020: 50 00 72 00 6f 00 70 00-31 00 00 00 01 02 20 06
0030: 00 00 00 00 00 c0 00 00-00 00 00 00 46 14 54 00
0040: 65 00 73 00 74 00 50 00-72 00 6f 00 70 00 32 00
0050: 00 00
```

The first three bytes of the buffer refer to the **RopId**, **LogonId**, and **InputHandleIndex** fields of the **RopGetPropertyIdsFromNames** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.1).

```
0000: 56 00 00
```

RopId: 0x56 (**RopGetPropertyIdsFromNames**)

LogonId: 0x00

InputHandleIndex: 0x00

The next three bytes refer to the **Flags** and **PropertyNameCount** fields defined in section [2.2.12.1](#).

```
0003: 02 02 00
```

Flags: 0x02. **Create** flag, indicating that server will create new property IDs for any named properties that do not already have an existing mapping.

PropertyNameCount: 0x0002. Two properties in the **PropertyNames** field follow.

The remaining bytes form the **PropertyNames** field. Each row in the **PropertyNames** field contains a **PropertyName** structure ([\[MS-OXCADATA\]](#) section 2.6).

```
0006: 01 02-20 06 00 00 00 00 00 c0
0010: 00 00 00 00 00 00 46 14-54 00 65 00 73 00 74 00
0020: 50 00 72 00 6f 00 70 00-31 00 00 00 01 02 20 06
0030: 00 00 00 00 00 c0 00 00-00 00 00 00 46 14 54 00
0040: 65 00 73 00 74 00 50 00-72 00 6f 00 70 00 32 00
0050: 00 00
```

Property 1:

Kind: 0x01 MNID_STRING

GUID: 00062002-0000-0000-C000-000000000046

NameSize: 0x14

Name: TestProp1

Property 2:

Kind: 0x01 MNID_STRING

GUID: 00062002-0000-0000-C000-000000000046

NameSize: 0x14

Name: TestProp2

4.1.2 Server Response Buffer

The server registers two named properties on the Message object and sends a response to the client.

A complete ROP response buffer is formatted as follows.

```
0000: 56 00 00 00 00 00 02 00-3E 86 3F 86
```

The first six bytes of the response buffer contain the **RopId**, **InputHandleIndex**, and **ReturnValue** fields, as described in [\[MS-OXCROPS\]](#) section 2.2.

```
0000: 56 00 00 00 00 00
```

RopId: 0x56 (**RopGetPropertyIdsFromNames** ([\[MS-OXCROPS\]](#) section 2.2.8.1))

InputHandleIndex: 0x00

ReturnValue: 0x00000000 (Success)

The next two bytes specify the number of property IDs that are packed in the buffer as described in section [2.2.12.2](#).

PropertyIdCount: 0x0002 (2 properties in the **PropertyIds** field)

The remaining bytes are for the **PropertyIds** field, where each entry in the array is four-byte property ID as described in section [2.2.12.2](#).

```
0009: 3E 86 3F 86
```

property ID: 0x863E

property ID: 0x863F

4.2 Setting Properties

The setting properties example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopSetProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.6) as described in section [2.2.5](#).

4.2.1 Client Request Buffer

The client requests the server to set values for two properties on a Message object.

A complete ROP request buffer is a variable length sequence, with seven required bytes followed by a property value array. An example of the request buffer follows.

```
0000: 0A 00 00 24 00 02 00 1F-00 3D 00 00 00 1F 00 1D
0010: 0E 48 00 65 00 6C 00 6C-00 6F 00 20 00 57 00 6F
0020: 00 72 00 6C 00 64 00 00-00
```

The first three bytes of the buffer refer to the **RopId**, **LogonId**, and **InputHandleIndex** fields of the **RopSetProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.6).

```
0000: 0A 00 00
```

RopId: 0x0A (**RopSetProperties**)

LogonId: 0x00

InputHandleIndex: 0x00

The next four bytes refer to the **PropertyValueSize** and **PropertyValueCount** fields of the **RopSetProperties** ROP defined in section [2.2.5.1](#). For more details on property buffer format, see [\[MS-OXCADATA\]](#) section 2.2.3.

```
0003:          24 00 02 00
```

PropertyValueSize: 0x0024. There are 36 (decimal) bytes contained in both the **PropertyValueCount** field and the **PropertyValues** field.

PropertyValueCount: 0x0002. Two properties in the property array.

The remaining bytes constitute the **PropertyValues** field, where each row in the array consists of property tag and value. A property tag is a 32-bit number that contains a property type in bits 0 through 15 and a unique property ID in bits 16 through 31 as shown in the following illustration.

```
0007:          1F-00 3D 00 00 00 1F 00 1D
0010: 0E 48 00 65 00 6C 00 6C-00 6F 00 20 00 57 00 6F
0020: 00 72 00 6C 00 64 00 00-00
```

Property 1 (0008: 1F 00 3D 00 00 00)

PropertyTag: 0x003D001F (**PropertyId:** 0x003D->**PidTagSubjectPrefix**, **PropertyType:** 0x001F-> **PtypString**)

PropertyValue: 0x0000 (empty string)

Property 2 (000D: 1F 00 1D 0E 48 00 65 00 6C 00 6C 00 6F 00 20 00 57 00 6F 00 72 00 6C 00 64 00 00 00)

PropertyTag: 0x0E1D001F (**PropertyId:** 0x0E1D->**PidTagNormalizedSubject**, **PropertyType:** 0x001F-> **PtypString**)

PropertyValue: 48 00 65 00 6C 00 6C 00 6F-00 20 00 57 00 6F 00 72 00 6C 00 64 00 00 00 (Hello World)

4.2.2 Server Response Buffer

The server sets the values for the two properties on the Message object and sends a response to the client.

A complete ROP response buffer is formatted as follows.

```
0000: 0A 00 00 00 00 00 00 00
```

The first six bytes of the **RopSetProperties** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.6) contain the **RopId**, **InputHandleIndex**, and **ReturnValue** fields.

RopId: 0x0A (**RopSetProperties**)

InputHandleIndex: 0x00

ReturnValue: 0x00000000. (ecNone: Success)

The final two bytes in the ROP response buffer are the **PropertyProblemCount** field described in section [2.2.5.2](#).

```
0006: 00 00
```

PropertyProblemCount: 0x0000. Count of problem properties that follows. A value of 0 indicates that all properties were set successfully.

4.3 Getting Properties

The getting properties example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopGetPropertiesSpecific** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.3) as described in section [2.2.2](#).

4.3.1 Client Request Buffer

The client is requesting property values for specific properties from the server. The first two are named properties and the third one is a standard property. The property IDs for the named properties were gotten from the server by calling the **RopGetPropertyIdsFromNames** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.1). For more details, see section [4.1](#).

A complete **RopGetPropertiesSpecific** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.8.3) is a variable length sequence, with nine required bytes followed by a property tag array. The following example shows the request buffer.

```
0000: 07 00 00 00 00 01 00 03-00 0B 00 3E 86 03 00 3F
0010: 86 02 01 E2 65
```

The first three bytes refer to the **RopId**, **LogonId**, and **InputHandleIndex** fields as described in [\[MS-OXCROPS\]](#) section 2.2.

```
0000: 07 00 00
```

RopId: 0x07 (**RopGetPropertiesSpecific** ([\[MS-OXCROPS\]](#) section 2.2.8.3))

LogonId: 0x00

InputHandleIndex: 0x00

The next six bytes of the request buffer are the **PropertySizeLimit**, **WantUnicode**, and **PropertyTagCount** fields as described in section [2.2.2.1](#).

```
0003: 00 00 01 00 03-00
```

PropertySizeLimit: 0x0000. No property size set; maximum limit is default.

WantUnicode: 0x0001. Nonzero means Unicode.

PropertyTagCount: 0x0003. Three property tags in the array.

The remaining bytes constitute the **PropertyTags** field as described in section [2.2.2.1](#).

```
0009: 0B 00 3E 86 03 00 3F 86 02 01 E2 65
```

PropertyTag1: 0x863E000B (**PropertyId:** 0x863E->TestProp1, **PropertyType:** 0x000B->**PtypBoolean**)

PropertyTag2: 0x863F0003 (**PropertyId:** 0x863F->TestProp2, **PropertyType:** 0x0003->**PtypInteger32**)

PropertyTag3: 0x65E20102 (**PropertyId:** 0x65E2->PidTagChangeKey, **PropertyType:** 0x0102->**PtypBinary**)

4.3.2 Server Response Buffer

The server returns the property values to the client.

A complete ROP response buffer is formatted as follows.

```
0000: 07 00 00 00 00 00 01 00-00 00 62 00 00 00 0a 0f
0010: 01 04 80
```

The first six bytes of the **RopGetPropertiesSpecific** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.8.3) contain the **RopId**, **InputHandleIndex**, and **ReturnValue** fields.

```
0000: 07 00 00 00 00 00
```

RopId: 0x07 (**RopGetPropertiesSpecific** ([\[MS-OXCROPS\]](#) section 2.2.8.3))

InputHandleIndex: 0x00

ReturnValue: 0x00000000 (Success)

The remaining bytes in the ROP response buffer are for the **RowData** field, which contains a **PropertyRow** structure. The first byte of the **RowData** field is the **Flag** field of the **PropertyRow** structure. This is followed by three **FlaggedPropertyValue** structures ([\[MS-OXCADATA\]](#) section 2.11.5). The order of properties is the same as in the request buffer.

```
0006: 01 00 00 00 62 00 00 00-0A 0F 01 04 80
```

Flag: 0x01 (Nonzero indicates there was an error in at least one of the property values)

Property 1:

Flag: 0x00

PropertyValue: 0x00 (False)

Property 2:

Flag: 0x00

PropertyValue: 0x00000062 (98 in decimal)

Property 3:

Flag: 0x0A (Indicates that the **PropertyValue** field will be an error code)

PropertyValue: 0x8004010F (NotFound)

4.4 Working with Streams

Examples of how to set a value for a property using streams are given in section [4.4.1](#) through section [4.4.3.2](#). These examples cover the following ROPs:

- **RopOpenStream** ([\[MS-OXCROPS\]](#) section 2.2.9.1)
- **RopSetStreamSize** ([\[MS-OXCROPS\]](#) section 2.2.9.6)
- **RopWriteStream** ([\[MS-OXCROPS\]](#) section 2.2.9.3)
- **RopCommitStream** ([\[MS-OXCROPS\]](#) section 2.2.9.4)

4.4.1 Opening a Stream

The opening a stream example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopOpenStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.1) as described in section [2.2.14](#).

4.4.1.1 Client Request Buffer

A complete **RopOpenStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.1) is nine bytes in length, formatted as follows.

```
0000: 2B 01 00 01 02 01 9A 0E-01
```

The first four bytes of the buffer refer to the **RopId**, **LogonId**, **InputHandleIndex**, and **OutputHandleIndex** fields of the **RopOpenStream** ROP.

```
0000: 2B 01 00 01
```

RopId: 0x2B (**RopOpenStream**)

LogonId: 0x01

InputHandleIndex: 0x00

OutputHandleIndex: 0x01. Index in the Server object handle table for the object created by this ROP.

The next five bytes refer to the **PropertyTag** and **OpenModeFlags** fields defined in section [2.2.14.1](#).

```
0004: 02 01 9A 0E-01
```

PropertyTag: 0x0E9A0102 (**PidTagExtendedRuleMessageCondition** ([\[MS-OXORULE\]](#) section 2.2.4.1.10))

OpenModeFlags: 0x01. ReadWrite mode

4.4.1.2 Server Response Buffer

The complete ROP response buffer is formatted as follows.

```
0000: 2B 01 00 00 00 00 15 2E-00 00
```

The first six bytes of the **RopOpenStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.1) contain the **RopId**, **OutputHandleIndex**, and **ReturnValue** fields.

```
0000: 2B 01 00 00 00 00
```

RopId: 0x2B (**RopOpenStream**)

OutputHandleIndex: 0x01

ReturnValue: 0x00000000 (Success)

The last four bytes in the ROP response buffer are the **StreamSize** field as described in section [2.2.14.2](#).

```
0006: 15 2E-00 00
```

StreamSize: 0x00002E15 (11797)

4.4.2 Writing to the Stream

The writing to the stream example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopWriteStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.3) as described in section [2.2.16](#).

4.4.2.1 Client Request Buffer

A complete **RopWriteStream** ROP request buffer ([\[MS-OXCROPS\]](#) section 2.2.9.3) is a variable length buffer, formatted as follows.

```
0000: 2D 01 01 15 2E 00 00 61-6E 20 61 6C 77 61 79 73
0010: 20 72 65 73 74 6F 72 65-20 74 68 65 20 6C 6F 6F
0020: 6B 20 6F 66 20 79 6F 75-72 20 64 6F 63 75 6D 65
```

The first three bytes of the buffer refer to the **RopId**, **LogonId**, and **InputHandleIndex** fields of the **RopWriteStream** ROP.

```
0000: 2D 01 01
```

RopId: 0x2D (**RopWriteStream**)

LogonId: 0x01

InputHandleIndex: 0x01

The next two bytes in the ROP request buffer are the **DataSize** field, described in section [2.2.16.1](#).

```
0006: 15 2E
```

DataSize: 0x2E15 (11797)

The remaining bytes constitute the **Data** field. The ROP request buffer specified earlier in this section is truncated, and all of the stream data is not shown.

Data: 00 00 61-6E 20 61 6C 77 61 79 73 20 72 65 73 74 6F 72 65-20 74 68 65 20 6C 6F 6F 6B 20 6F 66 20 79 6F 75-72 20 64 6F 63 75 6D 65.....

4.4.2.2 Server Response Buffer

The complete ROP response buffer is formatted as follows.

```
0000: 2D 01 00 00 00 00 15 2E
```

The first six bytes of the **RopWriteStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.3) contain the **RopId**, **InputHandleIndex**, and **ReturnValue** fields.

```
0000: 2D 01 00 00 00 00
```

RopId: 0x2D (**RopWriteStream**)

InputHandleIndex: 0x01

ReturnValue: 0x00000000 (Success)

The last two bytes are the **WrittenSize** field described in section [2.2.16.2](#).

```
0006: 15 2E
```

WrittenSize: 0x2E15 (11797)

4.4.3 Committing a Stream

The committing a stream example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopCommitStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.4) as described in section [2.2.17](#).

4.4.3.1 Client Request Buffer

For the purposes of this example, it is assumed that a stream is open before this ROP is called. A complete ROP request buffer for the **RopCommitStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.4) is a three-byte sequence formatted as follows.

```
0000: 5D 01 01
```

The three bytes refer to the **RopId**, **LogonId**, and **InputHandleIndex** fields described in [\[MS-OXCROPS\]](#) section 2.2.

RopId: 0x5D (**RopCommitStream**)

LogonId: 0x01

InputHandleIndex: 0x01

4.4.3.2 Server Response Buffer

The complete ROP response buffer is formatted as follows.

```
0000: 5d 01 00 00 00 00
```

The six bytes of the **RopCommitStream** ROP response buffer ([\[MS-OXCROPS\]](#) section 2.2.9.4) contain the **RopId**, **InputHandleIndex**, and **ReturnValue** fields.

RopId: 0x5D (**RopCommitStream**)

InputHandleIndex: 0x00

ReturnValue: 0x00000000 (Success)

4.5 Asynchronous Progress

The asynchronous progress example describes the contents of the ROP request buffer and ROP response buffer for a successful **RopProgress** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.13) as described in section [2.2.22](#). In this example, the user is trying to empty a Folder object, which has 729 items in it, and the **RopEmptyFolder** ROP ([\[MS-OXCROPS\]](#) section 2.2.4.9) will represent the asynchronous operation that the **RopProgress** ROP reports progress for.

The sequence in which ROPs get passed between client and server is shown in the following figure.

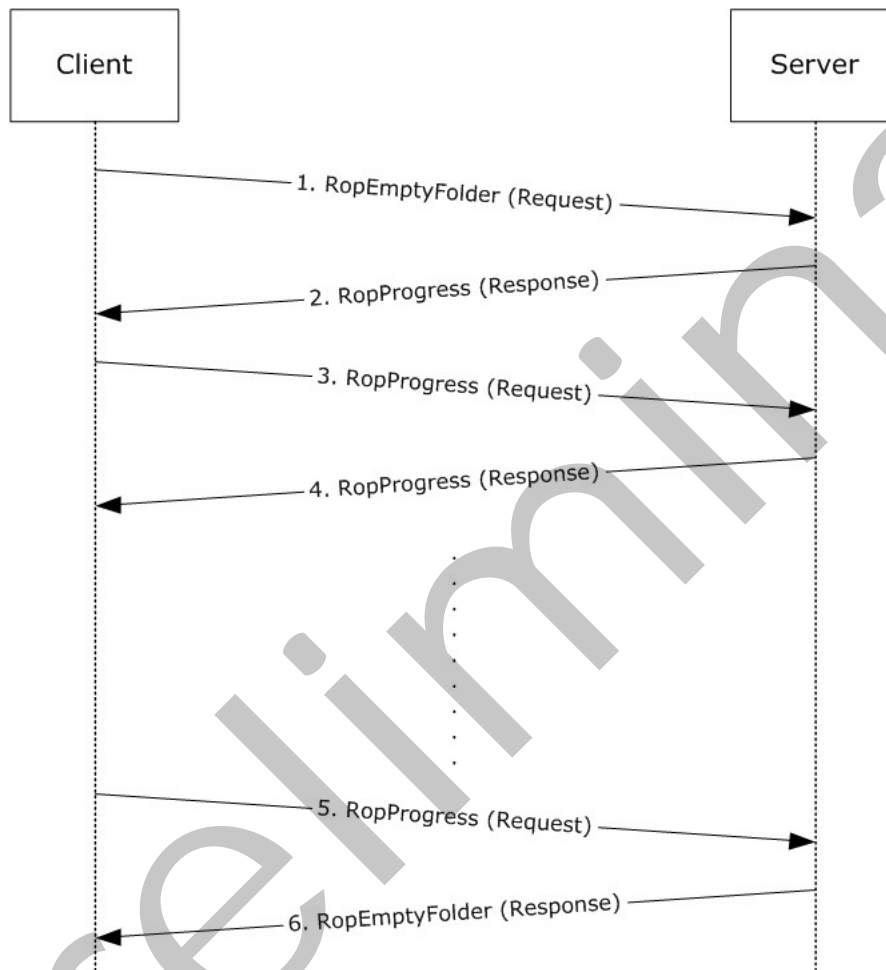


Figure 1: Sequence in which ROPs are passed between client and server

1. Client sends a **RopEmptyFolder** ROP request to the server. The ROP request buffer is formatted as follows.

0000: 58 00 00 01 00

RopId: 0x58 (RopEmptyFolder)

LogonId: 0x00

InputHandleIndex: 0x00

WantAsynchronous: 0x01 (TRUE)

WantDeleteAssociated: 0x00 (FALSE)

2. Server responds to request by sending the **RopProgress** ROP response buffer, which is formatted as follows.

0000: 50 00 00 00 00 00 00 1D-00 00 00 D9 02 00 00

RopId: 0x50 (**RopProgress**)

InputHandleIndex: 0x00

ReturnValue: 0x00000000 (Success)

LogonId: 0x00

CompletedTaskCount: 0x0000001D (29 in decimal)

TotalTaskCount: 0x000002D9 (729 in decimal)

3. Now client sends a **RopProgress** ROP request buffer asking server how much progress has been made. The ROP request buffer is formatted as follows.

0000: 50 00 00 00

RopId: 0x50 (**RopProgress**)

LogonId: 0x00

InputHandleIndex: 0x00

WantCancel: 0x00 (FALSE)

4. Server responds to request by sending the **RopProgress** ROP response buffer, which is formatted as follows.

0000: 50 00 00 00 00 00 00 3B-00 00 00 D9 02 00 00

RopId: 0x50 (**RopProgress**)

InputHandleIndex: 0x00

ReturnValue: 0x00000000 (ecNone: Success)

LogonId: 0x00

CompletedTaskCount: 0x0000003B (59 in decimal)

TotalTaskCount: 0x000002D9 (729 in decimal)

5. Client keeps sending **RopProgress** ROP requests, and server keeps sending **RopProgress** ROP response buffers telling client the current progress status.

Finally, when server has completed the the **RopEmptyFolder** ROP, instead of sending a **RopProgress** ROP response buffer, it sends the **RopEmptyFolder** ROP response buffer back. The following is the last **RopProgress** ROP request that the client makes.

0000: 50 00 00 00

RopId: 0x50 (**RopProgress**)

LogonId: 0x00

InputHandleIndex: 0x00

WantCancel: 0x00 (FALSE)

6. Server responds by sending the **RopEmptyFolder** ROP response buffer back, formatted as follows.

0000: 58 00 00 00 00 00 00

RopId: 0x58 (**RopEmptyFolder**)

InputHandleIndex: 0x00

ReturnValue: 0x00000000 (Success)

ParitalCompletion: 0x00 (FALSE)

5 Security

5.1 Security Considerations for Implementers

There are no special security considerations specific to the Property and Stream Object Protocol. General security considerations that pertain to the underlying ROP-based transport apply.

5.2 Index of Security Parameters

None.

Preliminary

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2003
- Microsoft® Exchange Server 2007
- Microsoft® Exchange Server 2010
- Microsoft® Exchange Server 15 Technical Preview
- Microsoft® Office Outlook® 2003
- Microsoft® Office Outlook® 2007
- Microsoft® Outlook® 2010
- Microsoft® Outlook® 15 Technical Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.1:](#) A request to change the value of a read-only property results in an error on Exchange 2003 and Exchange 2007.

[<2> Section 2.2.9:](#) Exchange 2003 and Exchange 2007 do not support Logon objects for the **PropQueryNamedProperties** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.10).

[<3> Section 2.2.10.1:](#) Exchange 2003 and Exchange 2007 support the combination of the **Move** bit and the **NoOverwrite** bit in the **CopyFlags** field.

[<4> Section 2.2.11.1:](#) Exchange 2003 and Exchange 2007 support the combination of the **Move** bit and the **NoOverwrite** bit in the **CopyFlags** field.

[<5> Section 3.2.5.1:](#) Exchange 2003 and Exchange 2007 do not ignore the **PropertySizeLimit** field. When the property is a **PtypBinary** type, a **PtypObject** type, or a string property, Exchange 2003 and Exchange 2007 return the **PtypErrorCode** type with a value of NotEnoughMemory (0x8007000E) in place of the property value if the value is larger than either the available space in the ROP response buffer or the size specified in the **PropertySizeLimit** field of the ROP request buffer. For information about the property types, see [\[MS-OXCADATA\]](#) section 2.11.1. For information about property error codes, see [\[MS-OXCADATA\]](#) section 2.4.2.

[<6> Section 3.2.5.7:](#) Exchange 2003 and Exchange 2007 remove the properties from the source object.

[<7> Section 3.2.5.7:](#) Exchange 2003 and Exchange 2007 ignore invalid bits and do not return the InvalidParameter error code (0x80070057).

<8> [Section 3.2.5.13](#): Exchange 2003 and Exchange 2007 return the StreamSizeError error code if they write less than the amount requested.

<9> [Section 3.2.5.19](#): Exchange 2003 and Exchange 2007 implement the **RopProgress** ROP ([\[MS-OXCROPS\]](#) section 2.2.8.13).

<10> [Section 3.2.5.20](#): Exchange 2003 and Exchange 2007 implement the **RopLockRegionStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.9).

<11> [Section 3.2.5.21](#): Exchange 2003 and Exchange 2007 implement the **RopUnlockRegionStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.10).

<12> [Section 3.2.5.22](#): Exchange 2003 and Exchange 2007 implement the **RopWriteAndCommitStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.11).

<13> [Section 3.2.5.23](#): Exchange 2003 and Exchange 2007 implement the **RopCloneStream** ROP ([\[MS-OXCROPS\]](#) section 2.2.9.12).

7 Change Tracking

This section identifies changes that were made to the [MS-OXCPRPT] protocol document between the January 2012 and April 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.1 Common Object Properties	Revised the product behavior note concerning a read-only property to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
2.2.1 Common Object Properties	Changed "SHOULD" to "MAY" in statement about requests to change read-only properties.	N	Content updated.
2.2.9 RopQueryNamedProperties ROP	Revised the product behavior note concerning Logon objects for the RopQueryNamedProperties ROP to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
2.2.9 RopQueryNamedProperties ROP	Specified that the operation is valid on Logon objects.	N	Content updated.
2.2.10.1 RopCopyProperties ROP Request Buffer	Revised the product behavior note concerning support of the combination of the Move bit and NoOverwrite bit to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
2.2.10.1 RopCopyProperties ROP Request Buffer	Specified that the Move and NoOverwrite bits SHOULD NOT be combined.	N	Content updated.
2.2.11.1 RopCopyTo ROP Request Buffer	Revised the product behavior note concerning support of the combination of the Move bit and NoOverwrite bit to describe behavior of	N	Product behavior note

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	Exchange 2003 and Exchange 2007.		updated.
2.2.11.1 RopCopyTo ROP Request Buffer	Specified that the Move and NoOverwrite bits SHOULD NOT be combined.	N	Content updated.
3.2.5.1 Processing RopGetPropertiesSpecific	Revised the product behavior note concerning the PropertySizeLimit field to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.1 Processing RopGetPropertiesSpecific	Specified that the server SHOULD ignore the PropertySizeLimit field.	N	Content updated.
3.2.5.7 Processing RopCopyProperties	Revised the product behavior note concerning removal of the properties from the source object to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.7 Processing RopCopyProperties	Changed "SHOULD" to "MAY" in statement about the deleting copied properties from the source object.	N	Content updated.
3.2.5.13 Processing RopWriteStream	Revised the product behavior note concerning the error code returned when less than the amount requested is written to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.13 Processing RopWriteStream	Specified that the server SHOULD return the TooBig error if it writes less than the amount requested.	N	Content updated.
3.2.5.19 Processing RopProgress	Revised the product behavior note concerning the implementation of the RopProgress ROP to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.19 Processing RopProgress	Specified that the server MAY implement the ROP.	N	Content updated.
3.2.5.20 Processing RopLockRegionStream	Revised the product behavior note concerning the implementation of the RopLockRegionStream ROP to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.20 Processing RopLockRegionStream	Changed "SHOULD" to "MAY" in the statement concerning implementation of the ROP.	N	Content updated.
3.2.5.21 Processing RopUnlockRegionStream	Revised the product behavior note concerning the implementation of the RopUnlockRegionStream ROP to describe behavior of Exchange 2003 and Exchange	N	Product behavior note updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	2007.		
3.2.5.21 Processing RopUnlockRegionStream	Changed "SHOULD" to "MAY" in the statement concerning implementation of the ROP.	N	Content updated.
3.2.5.22 Processing RopWriteAndCommitStream	Revised the product behavior note concerning the implementation of the RopWriteAndCommitStream ROP to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.22 Processing RopWriteAndCommitStream	Changed "SHOULD" to "MAY" in the statement concerning implementation of the ROP and clarified server behavior if implemented.	N	Content updated.
3.2.5.23 Processing RopCloneStream	Revised the product behavior note concerning the implementation of the RopCloneStream ROP to describe behavior of Exchange 2003 and Exchange 2007.	N	Product behavior note updated.
3.2.5.23 Processing RopCloneStream	Changed "SHOULD" to "MAY" in the statement concerning implementation of the ROP.	N	Content updated.

8 Index

A

Abstract data model
[client](#) 30
[server](#) 33
[Applicability](#) 9
[Asynchronous progress example](#) 54

C

[Capability negotiation](#) 9
[Change tracking](#) 61

Client

[abstract data model](#) 30
[initialization](#) 30
[message processing](#) 32
[other local events](#) 33
[sequencing rules](#) 32
[timer events](#) 33
[timers](#) 30
Client - higher-layer triggered events
[getting a list of an object's existing properties](#) 31
[getting property IDs for named properties](#) 30
[reading a property](#) 31
[reading a property as a stream](#) 31
[setting a property](#) 31
[setting a property with a stream](#) 32

Common object properties

[PidTagAccess property](#) 11
[PidTagAccessLevel property](#) 11
[PidTagChangeKey property](#) 12
[PidTagCreationTime property](#) 12
[PidTagLastModificationTime property](#) 12
[PidTagLastModifierName property](#) 12
[PidTagObjectType property](#) 12
[PidTagRecordKey property](#) 12
[PidTagSearchKey property](#) 13
[Common Object Properties message](#) 11

D

Data model - abstract

[client](#) 30
[server](#) 33

E

Examples

[asynchronous progress](#) 54
[getting properties](#) 49
[getting PropertyIds](#) 45
[overview](#) 45
[setting properties](#) 47
[working with streams](#) 51

F

[Fields - vendor-extensible](#) 9

G

Getting properties example
[client request buffer](#) 49
[overview](#) 49
[server response buffer](#) 50
Getting PropertyIds example
[client request buffer](#) 45
[overview](#) 45
[server response buffer](#) 47
[Glossary](#) 7

H

Higher-layer triggered events
[server](#) 33
Higher-layer triggered events - client
[getting a list of an object's existing properties](#) 31
[getting property IDs for named properties](#) 30
[reading a property](#) 31
[reading a property as a stream](#) 31
[setting a property](#) 31
[setting a property with a stream](#) 32

I

[Implementer - security considerations](#) 58
[Index of security parameters](#) 58
[Informative references](#) 8
Initialization
[client](#) 30
[server](#) 33
[Introduction](#) 7

M

Message processing

[client](#) 32

Message processing - server

[processing RopCloneStream](#) 43
[processing RopCommitStream](#) 40
[processing RopCopyProperties](#) 36
[processing RopCopyTo](#) 37
[processing RopCopyToStream](#) 41
[processing RopDeleteProperties](#) 35
[processing RopGetNamesFromPropertyIds](#) 37
[processing RopGetPropertiesAll](#) 34
[processing RopGetPropertiesList](#) 34
[processing RopGetPropertiesSpecific](#) 33
[processing RopGetPropertyIdsFromNames](#) 38
[processing RopGetStreamSize](#) 40
[processing RopLockRegionStream](#) 42
[processing RopOpenStream](#) 39
[processing RopProgress](#) 42
[processing RopQueryNamedProperties](#) 35
[processing RopReadStream](#) 39
[processing RopSeekStream](#) 41

[processing RopSetProperties](#) 34
[processing RopSetStreamSize](#) 41
[processing RopUnlockRegionStream](#) 43
[processing RopWriteandCommitStream](#) 43
[processing RopWriteStream](#) 40

Messages

[Common Object Properties](#) 11
[RopCloneStream ROP](#) 29
[RopCommitStream ROP](#) 24
[RopCopyProperties ROP](#) 18
[RopCopyTo ROP](#) 19
[RopCopyToStream ROP](#) 26
[RopDeleteProperties ROP](#) 16
[RopDeletePropertiesNoReplicate ROP](#) 17
[RopGetNamesFromPropertyIds ROP](#) 21
[RopGetPropertiesAll ROP](#) 14
[RopGetPropertiesList ROP](#) 14
[RopGetPropertiesSpecific ROP](#) 13
[RopGetPropertyIdsFromNames ROP](#) 20
[RopGetStreamSize ROP](#) 24
[RopLockRegionStream ROP](#) 27
[RopOpenStream ROP](#) 22
[RopProgress ROP](#) 27
[RopQueryNamedProperties ROP](#) 17
[RopReadStream ROP](#) 23
[RopSeekStream ROP](#) 25
[RopSetProperties ROP](#) 15
[RopSetPropertiesNoReplicate ROP](#) 15
[RopSetStreamSize ROP](#) 25
[RopUnlockRegionStream ROP](#) 28
[RopWriteAndCommitStream ROP](#) 28
[RopWriteStream ROP](#) 24
[transport](#) 11

N

[Normative references](#) 8

O

Other local events

[client](#) 33
[server](#) 44
[Overview \(synopsis\)](#) 8

P

[Parameters - security index](#) 58
[PidTagAccess common object property](#) 11
[PidTagAccessLevel common object property](#) 11
[PidTagChangeKey common object property](#) 12
[PidTagCreationTime common object property](#) 12
[PidTagLastModificationTime common object property](#) 12
[PidTagLastModifierName common object property](#) 12
[PidTagObjectType common object property](#) 12
[PidTagRecordKey common object property](#) 12
[PidTagSearchKey common object property](#) 13
[Preconditions](#) 9
[Prerequisites](#) 9
[Product behavior](#) 59

R

[References](#) 8
[informative](#) 8
[normative](#) 8
[Relationship to other protocols](#) 9
ROP request buffer
[RopCloneStream ROP](#) 29
[RopCommitStream ROP](#) 24
[RopCopyProperties ROP](#) 18
[RopCopyTo ROP](#) 19
[RopCopyToStream ROP](#) 26
[RopDeleteProperties ROP](#) 16
[RopGetNamesFromPropertyIds ROP](#) 22
[RopGetPropertiesAll ROP](#) 14
[RopGetPropertiesList ROP](#) 15
[RopGetPropertiesSpecific ROP](#) 13
[RopGetPropertyIdsFromNames ROP](#) 21
[RopGetStreamSize ROP](#) 25
[RopLockRegionStream ROP](#) 27
[RopOpenStream ROP](#) 22
[RopProgress ROP](#) 27
[RopQueryNamedProperties ROP](#) 17
[RopReadStream ROP](#) 23
[RopSeekStream ROP](#) 25
[RopSetProperties ROP](#) 15
[RopSetStreamSize ROP](#) 25
[RopUnlockRegionStream ROP](#) 28
[RopWriteAndCommitStream ROP](#) 29
[RopWriteStream ROP](#) 24
ROP response buffer
[RopCloneStream ROP](#) 29
[RopCommitStream ROP](#) 24
[RopCopyProperties ROP](#) 19
[RopCopyTo ROP](#) 20
[RopCopyToStream ROP](#) 26
[RopDeleteProperties ROP](#) 16
[RopGetNamesFromPropertyIds ROP](#) 22
[RopGetPropertiesAll ROP](#) 14
[RopGetPropertiesList ROP](#) 15
[RopGetPropertiesSpecific ROP](#) 13
[RopGetPropertyIdsFromNames ROP](#) 21
[RopGetStreamSize ROP](#) 25
[RopLockRegionStream ROP](#) 28
[RopOpenStream ROP](#) 23
[RopProgress ROP](#) 27
[RopQueryNamedProperties ROP](#) 18
[RopReadStream ROP](#) 23
[RopSeekStream ROP](#) 26
[RopSetProperties ROP](#) 15
[RopSetStreamSize ROP](#) 25
[RopUnlockRegionStream ROP](#) 28
[RopWriteAndCommitStream ROP](#) 29
[RopWriteStream ROP](#) 24
[RopCloneStream ROP message](#) 29
[RopCloneStream ROP request buffer](#) 29
[RopCloneStream ROP response buffer](#) 29
[RopCommitStream ROP message](#) 24
[RopCommitStream ROP request buffer](#) 24
[RopCommitStream ROP response buffer](#) 24
[RopCopyProperties ROP message](#) 18

[RopCopyProperties ROP request buffer](#) 18
[RopCopyProperties ROP response buffer](#) 19
[RopCopyTo ROP message](#) 19
[RopCopyTo ROP request buffer](#) 19
[RopCopyTo ROP response buffer](#) 20
[RopCopyToStream ROP message](#) 26
[RopCopyToStream ROP request buffer](#) 26
[RopCopyToStream ROP response buffer](#) 26
[RopDeleteProperties ROP message](#) 16
[RopDeleteProperties ROP request buffer](#) 16
[RopDeleteProperties ROP response buffer](#) 16
[RopDeletePropertiesNoReplicate ROP message](#) 17
[RopGetNamesFromPropertyIds ROP message](#) 21
[RopGetNamesFromPropertyIds ROP request buffer](#) 22
[RopGetNamesFromPropertyIds ROP response buffer](#) 22
[RopGetPropertiesAll ROP message](#) 14
[RopGetPropertiesAll ROP request buffer](#) 14
[RopGetPropertiesAll ROP response buffer](#) 14
[RopGetPropertiesList ROP message](#) 14
[RopGetPropertiesList ROP request buffer](#) 15
[RopGetPropertiesList ROP response buffer](#) 15
[RopGetPropertiesSpecific ROP message](#) 13
[RopGetPropertiesSpecific ROP request buffer](#) 13
[RopGetPropertiesSpecific ROP response buffer](#) 13
[RopGetPropertyIdsFromNames ROP message](#) 20
[RopGetPropertyIdsFromNames ROP request buffer](#) 21
[RopGetPropertyIdsFromNames ROP response buffer](#) 21
[RopGetStreamSize ROP message](#) 24
[RopGetStreamSize ROP request buffer](#) 25
[RopGetStreamSize ROP response buffer](#) 25
[RopLockRegionStream ROP message](#) 27
[RopLockRegionStream ROP request buffer](#) 27
[RopLockRegionStream ROP response buffer](#) 28
[RopOpenStream ROP message](#) 22
[RopOpenStream ROP request buffer](#) 22
[RopOpenStream ROP response buffer](#) 23
[RopProgress ROP message](#) 27
[RopProgress ROP request buffer](#) 27
[RopProgress ROP response buffer](#) 27
[RopQueryNamedProperties ROP message](#) 17
[RopQueryNamedProperties ROP request buffer](#) 17
[RopQueryNamedProperties ROP response buffer](#) 18
[RopReadStream ROP message](#) 23
[RopReadStream ROP request buffer](#) 23
[RopReadStream ROP response buffer](#) 23
[RopSeekStream ROP message](#) 25
[RopSeekStream ROP request buffer](#) 25
[RopSeekStream ROP response buffer](#) 26
[RopSetProperties ROP message](#) 15
[RopSetProperties ROP request buffer](#) 15
[RopSetProperties ROP response buffer](#) 15
[RopSetPropertiesNoReplicate ROP message](#) 15
[RopSetStreamSize ROP message](#) 25
[RopSetStreamSize ROP request buffer](#) 25
[RopSetStreamSize ROP response buffer](#) 25
[RopUnlockRegionStream ROP message](#) 28
[RopUnlockRegionStream ROP request buffer](#) 28

[RopUnlockRegionStream ROP response buffer](#) 28
[RopWriteAndCommitStream ROP message](#) 28
[RopWriteAndCommitStream ROP request buffer](#) 29
[RopWriteAndCommitStream ROP response buffer](#) 29
[RopWriteStream ROP message](#) 24
[RopWriteStream ROP request buffer](#) 24
[RopWriteStream ROP response buffer](#) 24

S

Security
 [implementer considerations](#) 58
 [parameter index](#) 58
 Sequencing rules
 [client](#) 32
 Sequencing rules - server
 [processing RopCloneStream](#) 43
 [processing RopCommitStream](#) 40
 [processing RopCopyProperties](#) 36
 [processing RopCopyTo](#) 37
 [processing RopCopyToStream](#) 41
 [processing RopDeleteProperties](#) 35
 [processing RopGetNamesFromPropertyIds](#) 37
 [processing RopGetPropertiesAll](#) 34
 [processing RopGetPropertiesList](#) 34
 [processing RopGetPropertiesSpecific](#) 33
 [processing RopGetPropertyIdsFromNames](#) 38
 [processing RopGetStreamSize](#) 40
 [processing RopLockRegionStream](#) 42
 [processing RopOpenStream](#) 39
 [processing RopProgress](#) 42
 [processing RopQueryNamedProperties](#) 35
 [processing RopReadStream](#) 39
 [processing RopSeekStream](#) 41
 [processing RopSetProperties](#) 34
 [processing RopSetStreamSize](#) 41
 [processing RopUnlockRegionStream](#) 43
 [processing RopWriteAndCommitStream](#) 43
 [processing RopWriteStream](#) 40
 Server
 [abstract data model](#) 33
 [higher-layer triggered events](#) 33
 [initialization](#) 33
 [other local events](#) 44
 [timer events](#) 44
 [timers](#) 33
 Server - message processing
 [processing RopCloneStream](#) 43
 [processing RopCommitStream](#) 40
 [processing RopCopyProperties](#) 36
 [processing RopCopyTo](#) 37
 [processing RopCopyToStream](#) 41
 [processing RopDeleteProperties](#) 35
 [processing RopGetNamesFromPropertyIds](#) 37
 [processing RopGetPropertiesAll](#) 34
 [processing RopGetPropertiesList](#) 34
 [processing RopGetPropertiesSpecific](#) 33
 [processing RopGetPropertyIdsFromNames](#) 38
 [processing RopGetStreamSize](#) 40
 [processing RopLockRegionStream](#) 42
 [processing RopOpenStream](#) 39
 [processing RopProgress](#) 42

- [processing RopQueryNamedProperties](#) 35
- [processing RopReadStream](#) 39
- [processing RopSeekStream](#) 41
- [processing RopSetProperties](#) 34
- [processing RopSetStreamSize](#) 41
- [processing RopUnlockRegionStream](#) 43
- [processing RopWriteAndCommitStream](#) 43
- [processing RopWriteStream](#) 40
- Server - sequencing rules
 - [processing RopCloneStream](#) 43
 - [processing RopCommitStream](#) 40
 - [processing RopCopyProperties](#) 36
 - [processing RopCopyTo](#) 37
 - [processing RopCopyToStream](#) 41
 - [processing RopDeleteProperties](#) 35
 - [processing RopGetNamesFromPropertyIds](#) 37
 - [processing RopGetPropertiesAll](#) 34
 - [processing RopGetPropertiesList](#) 34
 - [processing RopGetPropertiesSpecific](#) 33
 - [processing RopGetPropertyIdsFromNames](#) 38
 - [processing RopGetStreamSize](#) 40
 - [processing RopLockRegionStream](#) 42
 - [processing RopOpenStream](#) 39
 - [processing RopProgress](#) 42
 - [processing RopQueryNamedProperties](#) 35
 - [processing RopReadStream](#) 39
 - [processing RopSeekStream](#) 41
 - [processing RopSetProperties](#) 34
 - [processing RopSetStreamSize](#) 41
 - [processing RopUnlockRegionStream](#) 43
 - [processing RopWriteAndCommitStream](#) 43
 - [processing RopWriteStream](#) 40
- Setting properties example
 - [client request buffer](#) 47
 - [overview](#) 47
 - [server response buffer](#) 49
- [Standards assignments](#) 10

T

- Timer events
 - [client](#) 33
 - [server](#) 44
- Timers
 - [client](#) 30
 - [server](#) 33
- [Tracking changes](#) 61
- [Transport](#) 11
- Triggered events - client
 - [getting property IDs for named properties](#) 30
 - [reading a property](#) 31
 - [reading a property as a stream](#) 31
 - setting a property ([section 3.1.4.3](#) 31, [section 3.1.4.4](#) 31)
 - [setting a property as a stream](#) 32
- Triggered events - higher-layer
 - [server](#) 33

V

- [Vendor-extensible fields](#) 9
- [Versioning](#) 9

W

- Working with streams example
 - [committing a stream client request buffer](#) 54
 - [committing a stream overview](#) 54
 - [committing a stream server response buffer](#) 54
 - [opening a stream client request buffer](#) 51
 - [opening a stream overview](#) 51
 - [opening a stream server response buffer](#) 52
 - [overview](#) 51
 - [writing to the stream client request buffer](#) 53
 - [writing to the stream overview](#) 53
 - [writing to the stream server response buffer](#) 53