

[MS-OXCROPS]: Remote Operations (ROP) List and Encoding Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.mspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplq@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability.
04/25/2008	0.2		Revised and updated property names and other technical content.
06/27/2008	1.0		Initial Release.
08/06/2008	1.01		Revised and edited technical content.
09/03/2008	1.02		Revised and edited technical content.
12/03/2008	1.03		Revised and edited technical content.
03/04/2009	1.04		Revised and edited technical content.
04/10/2009	2.0		Updated technical content and applicable product releases.
07/15/2009	3.0	Major	Revised and edited for technical content.
11/04/2009	4.0.0	Major	Updated and revised the technical content.
02/10/2010	5.0.0	Major	Updated and revised the technical content.

Table of Contents

1 Introduction	14
1.1 Glossary	14
1.2 References	15
1.2.1 Normative References	15
1.2.2 Informative References	16
1.3 Protocol Overview	16
1.3.1 Server Objects	16
1.3.2 Format of ROP Buffers	16
1.4 Relationship to Other Protocols	17
1.5 Prerequisites/Preconditions	17
1.6 Applicability Statement	17
1.7 Versioning and Capability Negotiation	17
1.8 Vendor-Extensible Fields	17
1.9 Standards Assignments	17
2 Messages	18
2.1 Transport	18
2.2 Message Syntax	18
2.2.1 The Table of RopIds	18
2.2.2 Logon ROPs	27
2.2.2.1 RopLogon	27
2.2.2.1.1 Request Buffer	27
2.2.2.1.2 Success Response Buffer for Private Mailboxes	28
2.2.2.1.2.1 LogonTime Structure	30
2.2.2.1.3 Success Response Buffer for Public Folders	31
2.2.2.1.4 Redirect Response Buffer	32
2.2.2.1.5 Failure Response	33
2.2.2.2 RopGetReceiveFolder	33
2.2.2.2.1 Request Buffer	33
2.2.2.2.2 Success Response Buffer	34
2.2.2.2.3 Failure Response Buffer	34
2.2.2.3 RopSetReceiveFolder	35
2.2.2.3.1 Request Buffer	35
2.2.2.3.2 Response Buffer	35
2.2.2.4 RopGetReceiveFolderTable	36
2.2.2.4.1 Request Buffer	36
2.2.2.4.2 Success Response Buffer	36
2.2.2.4.3 Failure Response Buffer	37
2.2.2.5 RopGetStoreState	37
2.2.2.5.1 Request Buffer	37
2.2.2.5.2 Success Response Buffer	38
2.2.2.5.3 Failure Response Buffer	38
2.2.2.6 RopGetOwningServers	39
2.2.2.6.1 Request Buffer	39
2.2.2.6.2 Success Response Buffer	39
2.2.2.6.3 Failure Response Buffer	40
2.2.2.7 RopPublicFolderIsGhosted	40
2.2.2.7.1 Request Buffer	40
2.2.2.7.2 Success Response Buffer	41
2.2.2.7.3 Failure Response Buffer	42

2.2.2.8	RopLongTermIdFromId.....	42
2.2.2.8.1	Request Buffer.....	42
2.2.2.8.2	Success Response Buffer.....	43
2.2.2.8.3	Failure Response Buffer.....	43
2.2.2.9	RopIdFromLongTermId.....	44
2.2.2.9.1	Request Buffer.....	44
2.2.2.9.2	Success Response Buffer.....	45
2.2.2.9.3	Failure Response Buffer.....	45
2.2.2.10	RopGetPerUserLongTermIds.....	45
2.2.2.10.1	Request Buffer.....	46
2.2.2.10.2	Success Response Buffer.....	46
2.2.2.10.3	Failure Response Buffer.....	47
2.2.2.11	RopGetPerUserGuid.....	47
2.2.2.11.1	Request Buffer.....	47
2.2.2.11.2	Success Response Buffer.....	48
2.2.2.11.3	Failure Response Buffer.....	49
2.2.2.12	RopReadPerUserInformation.....	49
2.2.2.12.1	Request Buffer.....	49
2.2.2.12.2	Success Response Buffer.....	50
2.2.2.12.3	Failure Response Buffer.....	51
2.2.2.13	RopWritePerUserInformation.....	51
2.2.2.13.1	Request Buffer.....	51
2.2.2.13.2	Response Buffer.....	52
2.2.3	Folder ROPs.....	53
2.2.3.1	RopOpenFolder.....	53
2.2.3.1.1	Request Buffer.....	53
2.2.3.1.2	Success Response Buffer.....	54
2.2.3.1.3	Failure Response Buffer.....	54
2.2.3.2	RopCreateFolder.....	55
2.2.3.2.1	Request Buffer.....	55
2.2.3.2.2	Success Response Buffer.....	56
2.2.3.2.3	Failure Response Buffer.....	57
2.2.3.3	RopDeleteFolder.....	57
2.2.3.3.1	Request Buffer.....	58
2.2.3.3.2	Response Buffer.....	58
2.2.3.4	RopSetSearchCriteria.....	59
2.2.3.4.1	Request Buffer.....	59
2.2.3.4.2	Response Buffer.....	60
2.2.3.5	RopGetSearchCriteria.....	60
2.2.3.5.1	Request Buffer.....	60
2.2.3.5.2	Success Response Buffer.....	61
2.2.3.5.3	Failure Response Buffer.....	62
2.2.3.6	RopMoveCopyMessages.....	62
2.2.3.6.1	Request Buffer.....	62
2.2.3.6.2	Response Buffer.....	63
2.2.3.6.3	Null Destination Failure Response Buffer.....	63
2.2.3.7	RopMoveFolder.....	64
2.2.3.7.1	Request Buffer.....	64
2.2.3.7.2	Response Buffer.....	65
2.2.3.7.3	Null Destination Failure Response Buffer.....	65
2.2.3.8	RopCopyFolder.....	66
2.2.3.8.1	Request Buffer.....	66
2.2.3.8.2	Response Buffer.....	67

2.2.3.8.3	Null Destination Failure Response Buffer.....	67
2.2.3.9	RopEmptyFolder.....	68
2.2.3.9.1	Request Buffer.....	68
2.2.3.9.2	Response Buffer.....	68
2.2.3.10	RopHardDeleteMessagesAndSubfolders.....	69
2.2.3.10.1	Request Buffer.....	69
2.2.3.10.2	Response Buffer.....	69
2.2.3.11	RopDeleteMessages.....	70
2.2.3.11.1	Request Buffer.....	70
2.2.3.11.2	Response Buffer.....	70
2.2.3.12	RopHardDeleteMessages.....	71
2.2.3.12.1	Request Buffer.....	71
2.2.3.12.2	Response Buffer.....	72
2.2.3.13	RopGetHierarchyTable.....	72
2.2.3.13.1	Request Buffer.....	72
2.2.3.13.2	Success Response Buffer.....	73
2.2.3.13.3	Failure Response Buffer.....	73
2.2.3.14	RopGetContentsTable.....	73
2.2.3.14.1	Request Buffer.....	74
2.2.3.14.2	Success Response Buffer.....	74
2.2.3.14.3	Failure Response Buffer.....	75
2.2.4	Table ROPs.....	75
2.2.4.1	RopSetColumns.....	75
2.2.4.1.1	Request Buffer.....	75
2.2.4.1.2	Success Response Buffer.....	76
2.2.4.1.3	Failure Response Buffer.....	76
2.2.4.2	RopSortTable.....	77
2.2.4.2.1	Request Buffer.....	77
2.2.4.2.2	Success Response Buffer.....	77
2.2.4.2.3	Failure Response Buffer.....	78
2.2.4.3	RopRestrict.....	78
2.2.4.3.1	Request Buffer.....	78
2.2.4.3.2	Success Response Buffer.....	79
2.2.4.3.3	Failure Response Buffer.....	79
2.2.4.4	RopQueryRows.....	80
2.2.4.4.1	Request Buffer.....	80
2.2.4.4.2	Success Response Buffer.....	80
2.2.4.4.3	Failure Response Buffer.....	81
2.2.4.5	RopAbort.....	81
2.2.4.5.1	Request Buffer.....	82
2.2.4.5.2	Success Response Buffer.....	82
2.2.4.5.3	Failure Response Buffer.....	82
2.2.4.6	RopGetStatus.....	83
2.2.4.6.1	Request Buffer.....	83
2.2.4.6.2	Success Response Buffer.....	83
2.2.4.6.3	Failure Response Buffer.....	84
2.2.4.7	RopQueryPosition.....	84
2.2.4.7.1	Request Buffer.....	84
2.2.4.7.2	Success Response Buffer.....	84
2.2.4.7.3	Failure Response Buffer.....	85
2.2.4.8	RopSeekRow.....	85
2.2.4.8.1	Request Buffer.....	86
2.2.4.8.2	Success Response Buffer.....	86

2.2.4.8.3	Failure Response Buffer.....	87
2.2.4.9	RopSeekRowBookmark.....	87
2.2.4.9.1	Request Buffer.....	87
2.2.4.9.2	Success Response Buffer.....	88
2.2.4.9.3	Failure Response Buffer.....	89
2.2.4.10	RopSeekRowFractional.....	89
2.2.4.10.1	Request Buffer.....	89
2.2.4.10.2	Response Buffer.....	90
2.2.4.11	RopCreateBookmark.....	90
2.2.4.11.1	Request Buffer.....	90
2.2.4.11.2	Success Response Buffer.....	90
2.2.4.11.3	Failure Response Buffer.....	91
2.2.4.12	RopQueryColumnsAll.....	91
2.2.4.12.1	Request Buffer.....	92
2.2.4.12.2	Success Response Buffer.....	92
2.2.4.12.3	Failure Response Buffer.....	93
2.2.4.13	RopFindRow.....	93
2.2.4.13.1	Request Buffer.....	93
2.2.4.13.2	Success Response Buffer.....	94
2.2.4.13.3	Failure Response Buffer.....	95
2.2.4.14	RopFreeBookmark.....	95
2.2.4.14.1	Request Buffer.....	95
2.2.4.14.2	Response Buffer.....	96
2.2.4.15	RopResetTable.....	96
2.2.4.15.1	Request Buffer.....	96
2.2.4.15.2	Response Buffer.....	96
2.2.4.16	RopExpandRow.....	97
2.2.4.16.1	Request Buffer.....	97
2.2.4.16.2	Success Response Buffer.....	97
2.2.4.16.3	Failure Response Buffer.....	98
2.2.4.17	RopCollapseRow.....	99
2.2.4.17.1	Request Buffer.....	99
2.2.4.17.2	Success Response Buffer.....	99
2.2.4.17.3	Failure Response Buffer.....	100
2.2.4.18	RopGetCollapseState.....	100
2.2.4.18.1	Request Buffer.....	100
2.2.4.18.2	Success Response Buffer.....	101
2.2.4.18.3	Failure Response Buffer.....	101
2.2.4.19	RopSetCollapseState.....	102
2.2.4.19.1	Request Buffer.....	102
2.2.4.19.2	Success Response Buffer.....	102
2.2.4.19.3	Failure Response Buffer.....	103
2.2.5	Message ROPs.....	103
2.2.5.1	RopOpenMessage.....	103
2.2.5.1.1	Request Buffer.....	103
2.2.5.1.2	Success Response Buffer.....	104
2.2.5.1.2.1	OpenRecipientRow structure.....	106
2.2.5.1.3	Failure Response Buffer.....	106
2.2.5.2	RopCreateMessage.....	106
2.2.5.2.1	Request Buffer.....	107
2.2.5.2.2	Success Response Buffer.....	107
2.2.5.2.3	Failure Response Buffer.....	108
2.2.5.3	RopSaveChangesMessage.....	108

2.2.5.3.1	Request Buffer	108
2.2.5.3.2	Success Response Buffer	109
2.2.5.3.3	Failure Response Buffer	109
2.2.5.4	RopRemoveAllRecipients	110
2.2.5.4.1	Request Buffer	110
2.2.5.4.2	Response Buffer	110
2.2.5.5	RopModifyRecipients	111
2.2.5.5.1	Request Buffer	111
2.2.5.5.1.1	ModifyRecipientRow structure	112
2.2.5.5.2	Response Buffer	112
2.2.5.6	RopReadRecipients	113
2.2.5.6.1	Request Buffer	113
2.2.5.6.2	Success Response Buffer	113
2.2.5.6.2.1	ReadRecipientRow structure	114
2.2.5.6.3	Failure Response Buffer	114
2.2.5.7	RopReloadCachedInformation	115
2.2.5.7.1	Request Buffer	115
2.2.5.7.2	Success Response Buffer	115
2.2.5.7.3	Failure Response Buffer	117
2.2.5.8	RopSetMessageStatus	117
2.2.5.8.1	Request Buffer	117
2.2.5.8.2	Success Response Buffer	118
2.2.5.8.3	Failure Response Buffer	118
2.2.5.9	RopGetMessageStatus	119
2.2.5.9.1	Request Buffer	119
2.2.5.9.2	Response Buffers	119
2.2.5.10	RopSetReadFlags	119
2.2.5.10.1	Request Buffer	119
2.2.5.10.2	Response Buffer	120
2.2.5.11	RopSetMessageReadFlag	121
2.2.5.11.1	Request Buffer	121
2.2.5.11.2	Success Response Buffer	122
2.2.5.11.3	Failure Response Buffer	122
2.2.5.12	RopOpenAttachment	123
2.2.5.12.1	Request Buffer	123
2.2.5.12.2	Response Buffer	124
2.2.5.13	RopCreateAttachment	124
2.2.5.13.1	Request Buffer	124
2.2.5.13.2	Success Response Buffer	125
2.2.5.13.3	Failure Response Buffer	125
2.2.5.14	RopDeleteAttachment	125
2.2.5.14.1	Request Buffer	126
2.2.5.14.2	Response Buffer	126
2.2.5.15	RopSaveChangesAttachment	126
2.2.5.15.1	Request Buffer	127
2.2.5.15.2	Response Buffer	127
2.2.5.16	RopOpenEmbeddedMessage	127
2.2.5.16.1	Request Buffer	128
2.2.5.16.2	Success Response Buffer	128
2.2.5.16.3	Failure Response Buffer	130
2.2.5.17	RopGetAttachmentTable	130
2.2.5.17.1	Request Buffer	130
2.2.5.17.2	Response Buffer	131

2.2.5.18	RopGetValidAttachments	131
2.2.5.18.1	Request Buffer	131
2.2.5.18.2	Success Response Buffer	131
2.2.5.18.3	Failure Response Buffer	132
2.2.6	Transport ROPs	132
2.2.6.1	RopSubmitMessage	132
2.2.6.1.1	Request Buffer	133
2.2.6.1.2	Response Buffer	133
2.2.6.2	RopAbortSubmit	133
2.2.6.2.1	Request Buffer	133
2.2.6.2.2	Response Buffer	134
2.2.6.3	RopGetAddressTypes	134
2.2.6.3.1	Request Buffer	135
2.2.6.3.2	Success Response Buffer	135
2.2.6.3.3	Failure Response Buffer	136
2.2.6.4	RopSetSpooler	136
2.2.6.4.1	Request Buffer	136
2.2.6.4.2	Response Buffer	136
2.2.6.5	RopSpoolerLockMessage	137
2.2.6.5.1	Request Buffer	137
2.2.6.5.2	Response Buffer	137
2.2.6.6	RopTransportSend	138
2.2.6.6.1	Request Buffer	138
2.2.6.6.2	Response Buffer	138
2.2.6.7	RopTransportNewMail	139
2.2.6.7.1	Request Buffer	139
2.2.6.7.2	Response Buffer	140
2.2.6.8	RopGetTransportFolder	140
2.2.6.8.1	Request Buffer	140
2.2.6.8.2	Success Response Buffer	141
2.2.6.8.3	Failure Response Buffer	141
2.2.6.9	RopOptionsData	142
2.2.6.9.1	Request Buffer	142
2.2.6.9.2	Response Buffer	142
2.2.7	Property ROPs	143
2.2.7.1	RopGetPropertyIdsFromNames	143
2.2.7.1.1	Request Buffer	143
2.2.7.1.2	Success Response Buffer	144
2.2.7.1.3	Failure Response Buffer	145
2.2.7.2	RopGetNamesFromPropertyIds	145
2.2.7.2.1	Request Buffer	145
2.2.7.2.2	Success Response Buffer	146
2.2.7.2.3	Failure Response Buffer	146
2.2.7.3	RopGetPropertiesSpecific	147
2.2.7.3.1	Request Buffer	147
2.2.7.3.2	Success Response Buffer	148
2.2.7.3.3	Failure Response Buffer	148
2.2.7.4	RopGetPropertiesAll	148
2.2.7.4.1	Request Buffer	149
2.2.7.4.2	Success Response Buffer	149
2.2.7.4.3	Failure Response Buffer	150
2.2.7.5	RopGetPropertiesList	150
2.2.7.5.1	Request Buffer	150

2.2.7.5.2	Success Response Buffer.....	151
2.2.7.5.3	Failure Response Buffer.....	151
2.2.7.6	RopSetProperties.....	152
2.2.7.6.1	Request Buffer.....	152
2.2.7.6.2	Success Response Buffer.....	152
2.2.7.6.3	Failure Response Buffer.....	153
2.2.7.7	RopSetPropertiesNoReplicate.....	153
2.2.7.7.1	Request Buffer.....	153
2.2.7.7.2	Success Response Buffer.....	154
2.2.7.7.3	Failure Response Buffer.....	155
2.2.7.8	RopDeleteProperties.....	155
2.2.7.8.1	Request Buffer.....	155
2.2.7.8.2	Success Response Buffer.....	156
2.2.7.8.3	Failure Response Buffer.....	156
2.2.7.9	RopDeletePropertiesNoReplicate.....	157
2.2.7.9.1	Request Buffer.....	157
2.2.7.9.2	Success Response Buffer.....	157
2.2.7.9.3	Failure Response Buffer.....	158
2.2.7.10	RopQueryNamedProperties.....	158
2.2.7.10.1	Request Buffer.....	159
2.2.7.10.2	Success Response Buffer.....	159
2.2.7.10.3	Failure Response Buffer.....	160
2.2.7.11	RopCopyProperties.....	161
2.2.7.11.1	Request Buffer.....	161
2.2.7.11.2	Success Response Buffer.....	162
2.2.7.11.3	Null Destination Failure Response Buffer.....	162
2.2.7.11.4	Failure Response Buffer.....	163
2.2.7.12	RopCopyTo.....	163
2.2.7.12.1	Request Buffer.....	163
2.2.7.12.2	Success Response Buffer.....	164
2.2.7.12.3	Null Destination Failure Response Buffer.....	165
2.2.7.12.4	Failure Response Buffer.....	165
2.2.7.13	RopProgress.....	165
2.2.7.13.1	Request Buffer.....	166
2.2.7.13.2	Success Response Buffer.....	166
2.2.7.13.3	Failure Response Buffer.....	167
2.2.8	Stream ROPs.....	167
2.2.8.1	RopOpenStream.....	167
2.2.8.1.1	Request Buffer.....	167
2.2.8.1.2	Success Response Buffer.....	168
2.2.8.1.3	Failure Response Buffer.....	168
2.2.8.2	RopReadStream.....	169
2.2.8.2.1	Request Buffer.....	169
2.2.8.2.2	Response Buffer.....	169
2.2.8.3	RopWriteStream.....	170
2.2.8.3.1	Request Buffer.....	170
2.2.8.3.2	Response Buffer.....	171
2.2.8.4	RopCommitStream.....	171
2.2.8.4.1	Request Buffer.....	171
2.2.8.4.2	Response Buffer.....	171
2.2.8.5	RopGetStreamSize.....	172
2.2.8.5.1	Request Buffer.....	172
2.2.8.5.2	Success Response Buffer.....	172

2.2.8.5.3	Failure Response Buffer.....	173
2.2.8.6	RopSetStreamSize	173
2.2.8.6.1	Request Buffer.....	173
2.2.8.6.2	Response Buffer.....	174
2.2.8.7	RopSeekStream	174
2.2.8.7.1	Request Buffer.....	174
2.2.8.7.2	Success Response Buffer.....	175
2.2.8.7.3	Failure Response Buffer.....	175
2.2.8.8	RopCopyToStream.....	176
2.2.8.8.1	Request Buffer.....	176
2.2.8.8.2	Response Buffer.....	176
2.2.8.8.3	Null Destination Failure Response Buffer.....	177
2.2.8.9	RopLockRegionStream.....	178
2.2.8.9.1	Request Buffer.....	178
2.2.8.9.2	Response Buffer.....	179
2.2.8.10	RopUnlockRegionStream	179
2.2.8.10.1	Request Buffer.....	179
2.2.8.10.2	Response Buffer.....	180
2.2.8.11	RopWriteAndCommitStream	180
2.2.8.11.1	Request Buffer	180
2.2.8.11.2	Response Buffer.....	181
2.2.8.12	RopCloneStream	181
2.2.8.12.1	Request Buffer	181
2.2.8.12.2	Response Buffer.....	181
2.2.9	Permission ROPs	182
2.2.9.1	RopModifyPermissions	182
2.2.9.1.1	Request Buffer.....	182
2.2.9.1.1.1	PermissionData Structure.....	183
2.2.9.1.2	Response Buffer.....	183
2.2.9.2	RopGetPermissionsTable	183
2.2.9.2.1	Request Buffer.....	184
2.2.9.2.2	Response Buffer.....	184
2.2.10	Rule ROPs.....	184
2.2.10.1	RopModifyRules.....	184
2.2.10.1.1	Request Buffer	185
2.2.10.1.1.1	RuleData Structure.....	185
2.2.10.1.2	Response Buffer.....	186
2.2.10.2	RopGetRulesTable	186
2.2.10.2.1	Request Buffer	186
2.2.10.2.2	Response Buffer.....	187
2.2.10.3	RopUpdateDeferredActionMessages	187
2.2.10.3.1	Request Buffer	187
2.2.10.3.2	Response Buffer.....	188
2.2.11	Fast Transfer ROPs.....	188
2.2.11.1	RopFastTransferDestinationConfigure	188
2.2.11.1.1	Request Buffer	188
2.2.11.1.2	Response Buffer.....	189
2.2.11.2	RopFastTransferDestinationPutBuffer.....	189
2.2.11.2.1	Request Buffer	189
2.2.11.2.2	Response Buffer.....	190
2.2.11.3	RopFastTransferSourceGetBuffer	191
2.2.11.3.1	Request Buffer	191
2.2.11.3.2	Response Buffer.....	191

2.2.11.4	RopFastTransferSourceCopyFolder.....	192
2.2.11.4.1	Request Buffer	192
2.2.11.4.2	Response Buffer.....	193
2.2.11.5	RopFastTransferSourceCopyMessages.....	193
2.2.11.5.1	Request Buffer	193
2.2.11.5.2	Response Buffer.....	194
2.2.11.6	RopFastTransferSourceCopyTo	194
2.2.11.6.1	Request Buffer	195
2.2.11.6.2	Response Buffer.....	196
2.2.11.7	RopFastTransferSourceCopyProperties	196
2.2.11.7.1	Request Buffer	196
2.2.11.7.2	Response Buffer.....	197
2.2.11.8	RopTellVersion	197
2.2.11.8.1	Request Buffer	197
2.2.11.8.2	Response Buffer.....	198
2.2.12	Incremental Change Synchronization ROPs.....	198
2.2.12.1	RopSynchronizationConfigure	198
2.2.12.1.1	Request Buffer	198
2.2.12.1.2	Response Buffer.....	200
2.2.12.2	RopSynchronizationImportMessageChange	200
2.2.12.2.1	Request Buffer	200
2.2.12.2.2	Success Response Buffer.....	201
2.2.12.2.3	Failure Response Buffer.....	201
2.2.12.3	RopSynchronizationImportReadStreamChanges.....	202
2.2.12.3.1	Request Buffer	202
2.2.12.3.1.1	MessageReadStream structure	202
2.2.12.3.2	Response Buffer.....	203
2.2.12.4	RopSynchronizationImportHierarchyChange.....	203
2.2.12.4.1	Request Buffer	203
2.2.12.4.2	Success Response Buffer.....	204
2.2.12.4.3	Failure Response Buffer.....	205
2.2.12.5	RopSynchronizationImportDeletes	205
2.2.12.5.1	Request Buffer	205
2.2.12.5.2	Response Buffer.....	206
2.2.12.6	RopSynchronizationImportMessageMove.....	206
2.2.12.6.1	Request Buffer	206
2.2.12.6.2	Success Response Buffer.....	208
2.2.12.6.3	Failure Response Buffer.....	208
2.2.12.7	RopSynchronizationOpenCollector.....	209
2.2.12.7.1	Request Buffer	209
2.2.12.7.2	Response Buffer.....	209
2.2.12.8	RopSynchronizationGetTransferState.....	210
2.2.12.8.1	Request Buffer	210
2.2.12.8.2	Response Buffer.....	210
2.2.12.9	RopSynchronizationUploadStateStreamBegin.....	210
2.2.12.9.1	Request Buffer	211
2.2.12.9.2	Response Buffer.....	211
2.2.12.10	RopSynchronizationUploadStateStreamContinue	211
2.2.12.10.1	Request Buffer	212
2.2.12.10.2	Response Buffer.....	212
2.2.12.11	RopSynchronizationUploadStateStreamEnd.....	212
2.2.12.11.1	Request Buffer	213
2.2.12.11.2	Response Buffer.....	213

2.2.12.12 RopSetLocalReplicaMidsetDeleted	213
2.2.12.12.1 Request Buffer	213
2.2.12.12.1.1 LongTermIdRange structure	214
2.2.12.12.2 Response Buffer	215
2.2.12.13 RopGetLocalReplicaIds	215
2.2.12.13.1 Request Buffer	215
2.2.12.13.2 Success Response Buffer	216
2.2.12.13.3 Failure Response Buffer	217
2.2.13 Notification ROPs	217
2.2.13.1 RopRegisterNotification	217
2.2.13.1.1 Request Buffer	217
2.2.13.1.2 Response Buffer	218
2.2.13.2 RopSynchronizationOpenAdvisor	218
2.2.13.2.1 Request Buffer	219
2.2.13.2.2 Response Buffer	219
2.2.13.3 RopRegisterSynchronizationNotifications	219
2.2.13.3.1 Request Buffer	220
2.2.13.3.2 Response Buffer	220
2.2.13.4 RopSetSynchronizationNotificationGuid	221
2.2.13.4.1 Request Buffer	221
2.2.13.4.2 Response Buffer	221
2.2.13.5 RopNotify	222
2.2.13.5.1 Response Buffer	222
2.2.13.6 RopPending	222
2.2.13.6.1 Response Buffer	222
2.2.14 Other ROPs	223
2.2.14.1 RopBufferTooSmall	223
2.2.14.1.1 Response Buffer	223
2.2.14.2 RopBackoff	223
2.2.14.2.1 Response Buffer	223
2.2.14.2.1.1 BackoffRop structure	224
2.2.14.3 RopRelease	224
2.2.14.3.1 Request Buffer	224
3 Protocol Details	226
3.1 Client Details	226
3.1.1 Abstract Data Model	226
3.1.2 Timers	226
3.1.3 Initialization	226
3.1.4 Higher-Layer Triggered Events	226
3.1.4.1 Creating an Input ROP Buffer	226
3.1.4.2 Logon	226
3.1.5 Message Processing Events and Sequencing Rules	227
3.1.5.1 Extra ROP Responses	227
3.1.5.1.1 RopBackoff	227
3.1.5.1.2 RopBufferTooSmall	227
3.1.5.1.3 RopNotify and RopPending	227
3.1.5.2 Server Object Dependencies	227
3.1.6 Timer Events	228
3.1.7 Other Local Events	228
3.1.7.1 Shutdown	228
3.2 Server Details	228
3.2.1 Abstract Data Model	228

3.2.2	Timers	229
3.2.3	Initialization	229
3.2.4	Higher-Layer Triggered Events	229
3.2.4.1	Notifications	229
3.2.4.2	Backoff	229
3.2.4.3	Insufficient Output Buffer Space	229
3.2.5	Message Processing Events and Sequencing Rules	229
3.2.5.1	Processing an Input ROP Buffer	229
3.2.5.2	Creating an Output ROP Buffer	230
3.2.5.3	RopRelease	230
3.2.6	Timer Events	230
3.2.7	Other Local Events	230
3.2.7.1	Disconnection	230
4	Protocol Examples	231
4.1	Empty ROP Buffer	231
4.1.1	Full Buffer	231
4.1.2	Explanation of Parts	231
4.1.3	Description	231
4.2	Single ROP Request	231
4.2.1	Full Buffer	231
4.2.2	Explanation of Parts	231
4.2.3	Description	232
4.3	Multiple ROP Request	232
4.3.1	Full Buffer	232
4.3.2	Explanation of Parts	232
4.3.3	Description	233
4.4	RopRelease Request	233
4.4.1	Full Buffer	233
4.4.2	Explanation of Parts	233
4.4.3	Description	233
4.5	RopBufferTooSmall Response	233
4.5.1	Full Buffer	233
4.5.2	Explanation of Parts	233
4.5.3	Description	234
4.6	Logon RopBackoff Response	234
4.6.1	Full Buffer	234
4.6.2	Explanation of Parts	234
4.6.3	Description	235
4.7	ROP RopBackoff Request	235
4.7.1	Full Buffer	235
4.7.2	Explanation of Parts	235
4.7.3	Description	236
5	Security	237
5.1	Security Considerations for Implementers	237
5.2	Index of Security Parameters	237
6	Appendix A: Product Behavior	238
7	Change Tracking	239
8	Index	244

1 Introduction

This document specifies the Remote Operations (ROP) List and Encoding protocol, which is used by the client to access and modify **mailbox** information on the server.

1.1 Glossary

The following terms are defined in [\[MS-OXGLOS\]](#):

- code page (1)**
- distinguished name (DN)**
- Entry ID**
- folder**
- folder associated information (FAI)**
- folder ID (FID)**
- Folder object**
- Gateway Address Routing Table (GWART)**
- ghosted folder**
- GUID**
- identifier**
- little-endian**
- long-term ID**
- mailbox**
- message**
- message class**
- Message object**
- messaging object**
- property (1)**
- property ID**
- property name**
- property tag**
- public folder**
- Receive folder**
- remote operation (ROP)**
- replica GUID (REPLGUID)**
- replica ID (REPLID)**
- restriction**
- ROP buffer**
- ROP request**
- ROP response**
- search criteria**
- search folder**
- Server object**
- Server object handle table**
- server replica**
- short-term ID**
- Simple Mail Transfer Protocol (SMTP)**
- special folder**
- store**
- synchronization upload context**

The following terms are specific to this document:

Collector: See **synchronization upload context**, as specified in [\[MS-OXGLOS\]](#).

lowest-cost server: A server whose communication cost to access is the lowest in a list of servers.

Server object handle: A 32-bit value that identifies a **Server object**.

Server object map: An object that stores the connection between a **Server object handle** and the **Server object** that it identifies.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochejp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXCDATA] Microsoft Corporation, "[Data Structures](#)", June 2008.

[MS-OXCFOLD] Microsoft Corporation, "[Folder Object Protocol Specification](#)", June 2008.

[MS-OXCFXICS] Microsoft Corporation, "[Bulk Data Transfer Protocol Specification](#)", June 2008.

[MS-OXCMSG] Microsoft Corporation, "[Message and Attachment Object Protocol Specification](#)", June 2008.

[MS-OXCNOTIF] Microsoft Corporation, "[Core Notifications Protocol Specification](#)", June 2008.

[MS-OXCPERM] Microsoft Corporation, "[Exchange Access and Operation Permissions Protocol Specification](#)", June 2008.

[MS-OXCPRPT] Microsoft Corporation, "[Property and Stream Object Protocol Specification](#)", June 2008.

[MS-OXCRPC] Microsoft Corporation, "[Wire Format Protocol Specification](#)", June 2008.

[MS-OXCSTOR] Microsoft Corporation, "[Store Object Protocol Specification](#)", June 2008.

[MS-OXCTABL] Microsoft Corporation, "[Table Object Protocol Specification](#)", June 2008.

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)", June 2008.

[MS-OXOMSG] Microsoft Corporation, "[E-Mail Object Protocol Specification](#)", June 2008.

[MS-OXORULE] Microsoft Corporation, "[E-Mail Rules Protocol Specification](#)", June 2008.

[MS-OXPROPS] Microsoft Corporation, "[Exchange Server Protocols Master Property List](#)", June 2008.

[MS-XWDVSEC] Microsoft Corporation, "[Web Distributed Authoring and Versioning \(WebDAV\) Protocol Security Descriptor Extensions](#)", June 2008.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>.

1.2.2 Informative References

None.

1.3 Protocol Overview

The Remote Operations (ROP) List and Encoding protocol specifies the details of each **remote operation (ROP)**.

ROP buffers are used by the client to send operation requests to the server and by the server to send responses back to the client. These requests specify operations, such as the following, that access and modify mailbox data on a server:

- Log on to mailboxes or public **folders** on a server
- Retrieve the list of folders and messages on a mailbox
- Move and copy messages or folders from one location to another
- Sort and filter views of messages or folders
- Submit new messages for delivery to other mailboxes or servers
- Retrieve a list of changes made to messages and folders
- Register for notifications when contents of a mailbox have changed

A client packages one or more **ROP requests** into a ROP buffer and makes a function call on the **EMSMDB** interface, as specified in [\[MS-OXCRPC\]](#), passing the buffer. The server then parses the ROP requests from the buffer. Each request is executed and a **ROP response** is added to the output ROP buffer. Once the server is done processing the input ROP buffer, the function call returns the responses to the client.

1.3.1 Server Objects

A **Server object** refers to an object created during execution of specific ROPs. Once created, a Server object can then be used as a parameter for other ROPs until it is released. A Server object is typically a view of data on the server, such as a folder or a **Message object**, but it could also be an object used to control synchronization or change notifications.

A Server object is identified in a ROP buffer by a **Server object handle**, a 32-bit handle value. This handle is assigned by the server when the Server object is created. A client uses a Server object handle to specify a Server object to be used as input for a ROP request.

1.3.2 Format of ROP Buffers

A ROP buffer contains a list of ROP requests or responses followed by a **Server object handle table**. Each request contains input values to use for an operation. Each response contains output produced during the execution of previous requests. The Server object handle table contains Server object handles that are used as input or output for ROPs.

With few exceptions, a ROP request or response does not directly specify Server object handles, but instead contains an index into the Server object handle table. When the index is used for an input parameter, it specifies the location of the Server object handle identifying the input Server object. When the index is used for an output parameter, it specifies the entry in the Server object handle table where the handle for the created Server object will be stored if the operation is successful. If

the operation is unsuccessful, the content of the entry in the Server object handle table is undefined.

The usage of an index allows a client to create a ROP buffer consisting of ROP requests that reference as an input parameter a Server object created earlier during processing of the buffer. In this way, fewer round-trip calls between the client and server are necessary.

1.4 Relationship to Other Protocols

The Remote Operations (ROP) List and Encoding protocol is dependent upon the Wire Format protocol, as specified in [\[MS-OXCRPC\]](#). The ROP buffers are sent and received as parameters of the **EcDoRpcExt2** function on the **EMSMDb** interface. In addition, information that is provided during calls of the **EcDoConnectEx** function, also on the **EMSMDb** interface, is used later when executing ROP requests. For details about the **EcDoRpcExt2** function, the **EcDoConnectEx** function, or the **EMSMDb** interface, see [\[MS-OXCRPC\]](#) sections [3.1](#) and [3.2](#).

There are a number of protocols that are built on the Remote Operations (ROP) List and Encoding protocol. Some examples include the Bulk Data Transfer protocol, specified in [\[MS-OXCFXICS\]](#), and the Property and Stream Object protocol, specified in [\[MS-OXCPRPT\]](#).

There are several protocols which can be considered alternatives to the Remote Operations (ROP) List and Encoding protocol. These alternatives include IMAP4 and Distributed Authoring and Versioning (DAV). For details about IMAP4, see [\[MS-OXIMAP4\]](#). For details about DAV, see [\[MS-XWDVSEC\]](#).

1.5 Prerequisites/Preconditions

The Remote Operations (ROP) List and Encoding protocol assumes that a connection was already made using the **EMSMDb** interface, as specified in [\[MS-OXCRPC\]](#). The connection process authenticates and exchanges version information between the server and client.

Successful communication between the client and server requires that the client is already configured with information about the mailbox and server. Several ROPs make use of a **distinguished name (DN)** as an input field to specify a mailbox or a server.

1.6 Applicability Statement

This protocol is used to view and modify mailbox and public folder data. It provides broad low-level access to the contents that are on the server.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages


Unless otherwise specified, buffers and fields in this section are depicted in little-endian byte order.

2.1 Transport

The ROP request and ROP response buffers specified in the following sections are sent and received by using the **EcDoRpcExt2** RPC functions, as specified in [\[MS-OXCRPC\]](#).

2.2 Message Syntax

Each ROP request and response buffer consists of the following structure.

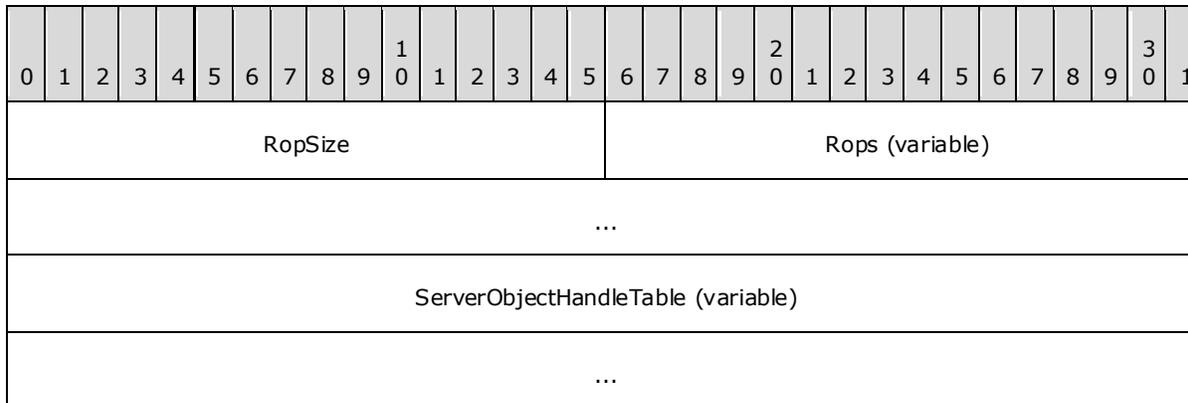

RopSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of this field and the **Rops** field.

Rops (variable): List of ROP buffers. The number of bytes in this field is two bytes less than the value specified in the **RopSize** field. The formats of the ROP buffers are specified in subsequent sections.

ServerObjectHandleTable (variable): Array of 32-bit **identifiers**. The length of this field is the length of the remaining data in the buffer after the **Rops** field. These identifiers specify the Server Object Handles that are referenced in the **Rops** field.

2.2.1 The Table of RopIds

Each ROP is identified by a one-byte value, which is contained in the **RopId** field of ROP request and ROP response buffers. The ROPs that a client is allowed to use are listed in the following table. A ROP that is specified as "Reserved" is not used in the communication between the client and server. Therefore, the client **MUST NOT** use the reserved ROPs.

The server **SHOULD** [<1>](#) return an error for the RPC call when it encounters a **RopId** value that is associated with a reserved ROP.

RopId Value	ROP name	Section
0x00	Reserved	
0x01	RopRelease	2.2.14.3

RopId Value	ROP name	Section
0x02	RopOpenFolder	2.2.3.1
0x03	RopOpenMessage	2.2.5.1
0x04	RopGetHierarchyTable	2.2.3.13
0x05	RopGetContentsTable	2.2.3.14
0x06	RopCreateMessage	2.2.5.2
0x07	RopGetPropertiesSpecific	2.2.7.3
0x08	RopGetPropertiesAll	2.2.7.4
0x09	RopGetPropertiesList	2.2.7.5
0x0A	RopSetProperties	2.2.7.6
0x0B	RopDeleteProperties	2.2.7.8
0x0C	RopSaveChangesMessage	2.2.5.3
0x0D	RopRemoveAllRecipients	2.2.5.4
0x0E	RopModifyRecipients	2.2.5.5
0x0F	RopReadRecipients	2.2.5.6
0x10	RopReloadCachedInformation	2.2.5.7
0x11	RopSetMessageReadFlag	2.2.5.11
0x12	RopSetColumns	2.2.4.1
0x13	RopSortTable	2.2.4.2
0x14	RopRestrict	2.2.4.3
0x15	RopQueryRows	2.2.4.4
0x16	RopGetStatus	2.2.4.6
0x17	RopQueryPosition	2.2.4.7
0x18	RopSeekRow	2.2.4.8
0x19	RopSeekRowBookmark	2.2.4.9
0x1A	RopSeekRowFractional	2.2.4.10
0x1B	RopCreateBookmark	2.2.4.11
0x1C	RopCreateFolder	2.2.3.2
0x1D	RopDeleteFolder	2.2.3.3
0x1E	RopDeleteMessages	2.2.3.11
0x1F	RopGetMessageStatus	2.2.5.9

RopId Value	ROP name	Section
0x20	RopSetMessageStatus	2.2.5.8
0x21	RopGetAttachmentTable	2.2.5.17
0x22	RopOpenAttachment	2.2.5.12
0x23	RopCreateAttachment	2.2.5.13
0x24	RopDeleteAttachment	2.2.5.14
0x25	RopSaveChangesAttachment	2.2.5.15
0x26	RopSetReceiveFolder	2.2.2.3
0x27	RopGetReceiveFolder	2.2.2.2
0x28	Reserved	
0x29	RopRegisterNotification	2.2.13.1
0x2A	RopNotify	2.2.13.4
0x2B	RopOpenStream	2.2.8.1
0x2C	RopReadStream	2.2.8.2
0x2D	RopWriteStream	2.2.8.3
0x2E	RopSeekStream	2.2.8.7
0x2F	RopSetStreamSize	2.2.8.6
0x30	RopSetSearchCriteria	2.2.3.4
0x31	RopGetSearchCriteria	2.2.3.5
0x32	RopSubmitMessage	2.2.6.1
0x33	RopMoveCopyMessages	2.2.3.6
0x34	RopAbortSubmit	2.2.6.2
0x35	RopMoveFolder	2.2.3.7
0x36	RopCopyFolder	2.2.3.8
0x37	RopQueryColumnsAll	2.2.4.12
0x38	RopAbort	2.2.4.5
0x39	RopCopyTo	2.2.7.12
0x3A	RopCopyToStream	2.2.8.8
0x3B	RopCloneStream	2.2.8.12
0x3C	Reserved	
0x3D	Reserved	

RopId Value	ROP name	Section
0x3E	RopGetPermissionsTable	2.2.9.2
0x3F	RopGetRulesTable	2.2.10.2
0x40	RopModifyPermissions	2.2.9.1
0x41	RopModifyRules	2.2.10.1
0x42	RopGetOwningServers	2.2.2.6
0x43	RopLongTermIdFromId	2.2.2.8
0x44	RopIdFromLongTermId	2.2.2.9
0x45	RopPublicFolderIsGhosted	2.2.2.7
0x46	RopOpenEmbeddedMessage	2.2.5.16
0x47	RopSetSpooler	2.2.6.4
0x48	RopSpoolerLockMessage	2.2.6.5
0x49	RopGetAddressTypes	2.2.6.3
0x4A	RopTransportSend	2.2.6.6
0x4B	RopFastTransferSourceCopyMessages	2.2.11.5
0x4C	RopFastTransferSourceCopyFolder	2.2.11.4
0x4D	RopFastTransferSourceCopyTo	2.2.11.6
0x4E	RopFastTransferSourceGetBuffer	2.2.11.3
0x4F	RopFindRow	2.2.4.13
0x50	RopProgress	2.2.7.13
0x51	RopTransportNewMail	2.2.6.7
0x52	RopGetValidAttachments	2.2.5.18
0x53	RopFastTransferDestinationConfigure	2.2.11.1
0x54	RopFastTransferDestinationPutBuffer	2.2.11.2
0x55	RopGetNamesFromPropertyIds	2.2.7.2
0x56	RopGetPropertyIdsFromNames	2.2.7.1
0x57	RopUpdateDeferredActionMessages	2.2.10.3
0x58	RopEmptyFolder	2.2.3.9
0x59	RopExpandRow	2.2.4.16
0x5A	RopCollapseRow	2.2.4.17
0x5B	RopLockRegionStream	2.2.8.9

RopId Value	ROP name	Section
0x5C	RopUnlockRegionStream	2.2.8.10
0x5D	RopCommitStream	2.2.8.4
0x5E	RopGetStreamSize	2.2.8.5
0x5F	RopQueryNamedProperties	2.2.7.10
0x60	RopGetPerUserLongTermIds	2.2.2.10
0x61	RopGetPerUserGuid	2.2.2.11
0x62	Reserved	
0x63	RopReadPerUserInformation	2.2.2.12
0x64	RopWritePerUserInformation	2.2.2.13
0x65	Reserved	
0x66	RopSetReadFlags	2.2.5.10
0x67	RopCopyProperties	2.2.7.11
0x68	RopGetReceiveFolderTable	2.2.2.4
0x69	RopFastTransferSourceCopyProperties	2.2.11.1
0x6A	Reserved	
0x6B	RopGetCollapseState	2.2.4.18
0x6C	RopSetCollapseState	2.2.4.19
0x6D	RopGetTransportFolder	2.2.6.8
0x6E	RopPending	2.2.13.6
0x6F	RopOptionsData	2.2.6.9
0x70	RopSynchronizationConfigure	2.2.12.1
0x71	Reserved	
0x72	RopSynchronizationImportMessageChange	2.2.12.2
0x73	RopSynchronizationImportHierarchyChange	2.2.12.4
0x74	RopSynchronizationImportDeletes	2.2.12.5
0x75	RopSynchronizationUploadStateStreamBegin	2.2.12.9
0x76	RopSynchronizationUploadStateStreamContinue	2.2.12.10
0x77	RopSynchronizationUploadStateStreamEnd	2.2.12.11
0x78	RopSynchronizationImportMessageMove	2.2.12.6
0x79	RopSetPropertiesNoReplicate	2.2.7.7

RopId Value	ROP name	Section
0x7A	RopDeletePropertiesNoReplicate	2.2.7.9
0x7B	RopGetStoreState	2.2.4.15
0x7C	Reserved	
0x7D	Reserved	
0x7E	RopSynchronizationOpenCollector	2.2.12.7
0x7F	RopGetLocalReplicaIds	2.2.12.13
0x80	RopSynchronizationImportReadStateChanges	2.2.12.3
0x81	RopResetTable	2.2.4.15
0x82	RopSynchronizationGetTransferState	2.2.12.8
0x83	RopSynchronizationOpenAdvisor	2.2.13.2
0x84	RopRegisterSynchronizationNotifications	2.2.13.3
0x85	Reserved	
0x86	RopTellVersion	2.2.11.8
0x87	Reserved	
0x88	RopSetSynchronizationNotificationGuid	2.2.13.4
0x89	RopFreeBookmark	2.2.4.14
0x8A	Reserved	
0x8B	Reserved	
0x8C	Reserved	
0x8D	Reserved	
0x8E	Reserved	
0x8F	Reserved	
0x90	RopWriteAndCommitStream	2.2.8.11
0x91	RopHardDeleteMessages	2.2.3.12
0x92	RopHardDeleteMessagesAndSubfolders	2.2.3.10
0x93	RopSetLocalReplicaMidsetDeleted	2.2.12.12
0x94	Reserved	
0x95	Reserved	
0x96	Reserved	
0x97	Reserved	

RopId Value	ROP name	Section
0x98	Reserved	
0x99	Reserved	
0x9A	Reserved	
0x9B	Reserved	
0x9C	Reserved	
0x9D	Reserved	
0x9E	Reserved	
0x9F	Reserved	
0xA0	Reserved	
0xA1	Reserved	
0xA2	Reserved	
0xA3	Reserved	
0xA4	Reserved	
0xA5	Reserved	
0xA6	Reserved	
0xA7	Reserved	
0xA8	Reserved	
0xA9	Reserved	
0xAA	Reserved	
0xAB	Reserved	
0xAC	Reserved	
0xAD	Reserved	
0xAE	Reserved	
0xAF	Reserved	
0xB0	Reserved	
0xB1	Reserved	
0xB2	Reserved	
0xB3	Reserved	
0xB4	Reserved	
0xB5	Reserved	

RopId Value	ROP name	Section
0xB6	Reserved	
0xB7	Reserved	
0xB8	Reserved	
0xB9	Reserved	
0xBA	Reserved	
0xBB	Reserved	
0xBC	Reserved	
0xBD	Reserved	
0xBE	Reserved	
0xBF	Reserved	
0xC0	Reserved	
0xC1	Reserved	
0xC2	Reserved	
0xC3	Reserved	
0xC4	Reserved	
0xC5	Reserved	
0xC6	Reserved	
0xC7	Reserved	
0xC8	Reserved	
0xC9	Reserved	
0xCA	Reserved	
0xCB	Reserved	
0xCC	Reserved	
0xCD	Reserved	
0xCE	Reserved	
0xCF	Reserved	
0xD0	Reserved	
0xD1	Reserved	
0xD2	Reserved	
0xD3	Reserved	

RopId Value	ROP name	Section
0xD4	Reserved	
0xD5	Reserved	
0xD6	Reserved	
0xD7	Reserved	
0xD8	Reserved	
0xD9	Reserved	
0xDA	Reserved	
0xDB	Reserved	
0xDC	Reserved	
0xDD	Reserved	
0xDE	Reserved	
0xDF	Reserved	
0xE0	Reserved	
0xE1	Reserved	
0xE2	Reserved	
0xE3	Reserved	
0xE4	Reserved	
0xE5	Reserved	
0xE6	Reserved	
0xE7	Reserved	
0xE8	Reserved	
0xE9	Reserved	
0xEA	Reserved	
0xEB	Reserved	
0xEC	Reserved	
0xED	Reserved	
0xEE	Reserved	
0xEF	Reserved	
0xF0	Reserved	
0xF1	Reserved	

RopId Value	ROP name	Section
0xF2	Reserved	
0xF3	Reserved	
0xF4	Reserved	
0xF5	Reserved	
0xF6	Reserved	
0xF7	Reserved	
0xF8	Reserved	
0xF9	RopBackoff	2.2.14.2
0xFA	Reserved	
0xFB	Reserved	
0xFC	Reserved	
0xFD	Reserved	
0xFE	RopLogon	2.2.2.1
0xFF	RopBufferTooSmall	2.2.14.1

2.2.2 Logon ROPs

2.2.2.1 RopLogon

This remote operation logs on to a mailbox or **public folder**. More detailed information about this operation can be found in [[MS-OXCSTOR](#)].

2.2.2.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										OutputHandleIndex						LogonFlags					
OpenFlags																															
StoreState																															
EssdnSize																Essdn (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xFE.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the ID that the client wants associated with the created logon. Any value is allowed and the client does not have to use values in a certain numeric order. If the client specifies an active logon ID, the current logon is released and replaced with the new one.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

LogonFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCSTOR]. This structure contains flags that control the behavior of the logon.

OpenFlags (4 bytes): 32-bit flags structure. The possible values are specified in [MS-OXCSTOR]. This structure contains more flags that control the behavior of the logon.

StoreState (4 bytes): 32-bit flags structure. The possible values are specified in [MS-OXCSTOR]. This structure specifies ongoing action on the mailbox or public folder.

EssdnSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Essdn** field.

Essdn (variable): Null terminated ASCII string. The number of characters (including the null) contained in this field is specified by the **EssdnSize** field. This string specifies which mailbox to log on to.

2.2.2.1.2 Success Response Buffer for Private Mailboxes

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex						ReturnValue															
...																LogonFlags						FolderIds									
...																															
...																															
...																															
...																															
...																															
...																															
...																															

(FolderIds cont'd for 18 rows)	
...	ResponseFlags
MailboxGuid	
...	
...	
...	
ReplId	ReplGuid
...	
...	
...	
...	LogonTime
...	
...	GwartTime
...	
...	StoreState
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xFE.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

LogonFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCSTOR\]](#). These flags specify the type of logon.

FolderIds (104 bytes): 13 64-bit identifiers. These IDs specify a set of **special folders** for a mailbox.

ResponseFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCSTOR]. These flags provide details about the state of the mailbox.

MailboxGuid (16 bytes): **GUID**. This value identifies the mailbox on which the logon was performed.

ReplId (2 bytes): 16-bit identifier. This field specifies a **replica ID** for the logon.

ReplGuid (16 bytes): GUID. This field specifies the **replica GUID** that is associated with the replica ID, which is specified in the **ReplId** field.

LogonTime (8 bytes): **LogonTime** structure. The format of this structure is specified in section [2.2.2.1.2.1](#). This structure specifies the time at which the logon occurred.

GwartTime (8 bytes): Unsigned 64-bit integer. This value represents the number of 100-nanosecond intervals since January 1, 1601. This time specifies when the **Gateway Address Routing Table** last changed.

StoreState (4 bytes): 32-bit flags structure. The possible values are specified in [MS-OXCSTOR]. These flags specify ongoing action on the mailbox or public folder.

2.2.2.1.2.1 LogonTime Structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
Seconds								Minutes								Hour								DayOfWeek							
Day								Month								Year															

Seconds (1 byte): Unsigned 8-bit integer. This value specifies the current second.

Minutes (1 byte): Unsigned 8-bit integer. This value specifies the current minute.

Hour (1 byte): Unsigned 8-bit integer. This value specifies the current hour.

DayOfWeek (1 byte): 8-bit enumeration. This value specifies the current day of the week (Sunday = 0, Monday = 1, and so on).

Day (1 byte): Unsigned 8-bit integer. This value specifies the current day of the month.

Month (1 byte): Unsigned 8-bit integer. This value specifies the current month (January = 1, February = 2, and so on).

Year (2 bytes): Unsigned 16-bit integer. This value specifies the current year.

2.2.2.1.3 Success Response Buffer for Public Folders

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											
...															LogonFlags						FolderIds										
...																															
...																															
...																															
...																															
...																															
...																															
...																															
(FolderIds cont'd for 18 rows)																															
...																								ReplId							
...										ReplGuid																					
...																															
...																															
...																															
...										PerUserGuid																					
...																															
...																															

...
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xFE.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server object handle table where the handle for the output Server object will be stored. More information about Server objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

LogonFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCSTOR]. These flags specify the type of logon.

FolderIds (104 bytes): 13 64-bit identifiers. These IDs specify a set of special folders for a mailbox.

ReplId (2 bytes): 16-bit identifier. This field specifies a replica ID for the logon.

ReplGuid (16 bytes): GUID. This field specifies the replica GUID associated with the replica ID that is specified in the **ReplId** field.

PerUserGuid (16 bytes): GUID. This field is not used and is ignored by the client. The server SHOULD set this field to an empty GUID (all zeroes).

2.2.2.1.4 Redirect Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31				
RopId										OutputHandleIndex										ReturnValue															
...																LogonFlags								ServerNameSize											
ServerName (variable)																																			
...																																			

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xFE.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000478.

LogonFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCSTOR\]](#). These flags specify the type of logon.

ServerNameSize (1 byte): Unsigned 8-bit integer. This value specifies the length of the **ServerName** field.

ServerName (variable): Null terminated ASCII string. The number of characters (including the null) contained in this field is specified by the **ServerNameSize** field. This string specifies a different server for the client to connect to.

2.2.2.1.5 Failure Response

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xFE.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000 or 0x000000478.

2.2.2.2 RopGetReceiveFolder

This remote operation gets the receive folder for incoming **messages** of a particular **message class**. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								MessageClass (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x27.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

MessageClass (variable): Null-terminated ASCII string. This string specifies which message class to find the receive folder for.

2.2.2.2.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																FolderId															
...																															
...																ExplicitMessageClass (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x27.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

FolderId (8 bytes): 64-bit identifier. This value identifies the receive folder.

ExplicitMessageClass (variable): Null-terminated ASCII string. This string specifies the message class that is actually configured for delivery to the folder.

2.2.2.2.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x27.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.3 RopSetReceiveFolder

This remote operation sets the receive folder for incoming messages of a particular message class. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderId							
...																															
...																								MessageClass (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x26.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

FolderId (8 bytes): 64-bit identifier. This value identifies the receiving folder.

MessageClass (variable): Null-terminated ASCII string. This string specifies which message class to set the receive folder for.

2.2.2.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x26.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.2.4 RopGetReceiveFolderTable

This remote operation gets the table of all folders that were established as receive folders. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										InputHandleIndex											

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x68.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.2.4.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										...										RowCount											
...										...										Rows (variable)											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x68.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowCount (4 bytes): 32-bit integer. This value specifies the number of row structures contained in the **Rows** field.

Rows (variable): Array of row structures. This field contains the rows of the **Receive folder table**. Each row is returned in either a **StandardPropertyRow** structure or a **FlaggedPropertyRow** structure, both of which are specified in [\[MS-OXCDATA\]](#) sections [2.9.1.1](#) and [2.9.1.2](#). The number of row structures contained in this field is specified by the **RowCount** field. The **ValueArray** field of either **StandardPropertyRow** or **FlaggedPropertyRow** MUST include only the [PidTagFolderId](#), [PidTagMessageClass](#), and [PidTagLastModificationTime](#) **properties**, in that order, and no other properties.

2.2.2.4.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x68.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.5 RopGetStoreState

This remote operation gets the current state of the **store** for the logged on user. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

2.2.2.5.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																StoreState															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

StoreState (4 bytes): 32-bit flags structure. The possible values are specified in [\[MS-OXCSTOR\]](#). These flags specify the state related to the logged on user.

2.2.2.5.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.6 RopGetOwningServers

This remote operation gets the list of servers that host replicas of a given public folder. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderId							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x42.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

FolderId (8 bytes): 64-bit identifier. This value identifies the folder for which to get owning servers.

2.2.2.6.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																OwningServersCount															
CheapServersCount																OwningServers (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x42.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

OwningServersCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of strings in the **OwningServers** field.

CheapServersCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of strings in **OwningServers** that refer to **lowest-cost servers**.

OwningServers (variable): List of null-terminated ASCII strings. The number of strings contained in this field is specified by the **OwningServersCount** field. These strings specify which servers have replicas of this folder.

2.2.2.6.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x42.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.7 RopPublicFolderIsGhosed

This remote operation determines if a public folder is ghosed. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderId							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x45.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

FolderId (8 bytes): 64-bit identifier. This value identifies the folder to check.

2.2.2.7.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																IsGhosed								ServersCount (optional)							
...								CheapServersCount (optional)																Servers (optional) (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x45.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

IsGhosed (1 byte): 8-bit Boolean. This value specifies whether the folder is a **ghosed folder**.

ServersCount (2 bytes): Unsigned 16-bit integer. This field is present if **IsGhosed** is non-zero and is not present if **IsGhosed** is zero. This value specifies the number of strings in the **Servers** field.

CheapServersCount (2 bytes): Unsigned 16-bit integer. This field is present if **IsGhosed** is non-zero and is not present if **IsGhosed** is zero. This value specifies the number of strings in **Servers** that refer to lowest cost servers.

Servers (optional) (variable): List of null-terminated ASCII strings. This field is present if **IsGhosed** is non-zero and is not present if **IsGhosed** is zero. The number of strings contained in this field is specified by the **ServersCount** field. These strings specify which servers have replicas of this folder.

2.2.2.7.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x45.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.8 RopLongTermIdFromId

This remote operation converts a **short-term ID** into a **long-term ID**. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								ObjectId							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x43.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

ObjectId (8 bytes): 64-bit identifier. This value specifies the short-term ID to be converted to a long-term ID.

2.2.2.8.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																LongTermId															
...																															
...																															
...																															
...																															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x43.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

LongTermId (24 bytes): **LongTermId** structure. This structure specifies the long-term ID that was converted from the short-term ID, which is specified in the **Id** field of the request. The format of the **LongTermId** structure is specified in [\[MS-OXCDATA\]](#) section 2.2.1.3.1.

2.2.2.8.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x43.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.9 RopIdFromLongTermId

This remote operation converts a long-term ID into a short-term ID. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								LongTermId							
...																															
...																															
...																															
...																															
...																															
...																															


RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x44.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

LongTermId (24 bytes): **LongTermId** structure. The structure specifies the long-term ID to be converted to a short-term ID. The format of the **LongTermId** structure is specified in [\[MS-OXCSTOR\]](#) section 2.2.1.3.1.

2.2.2.9.2 Success Response Buffer

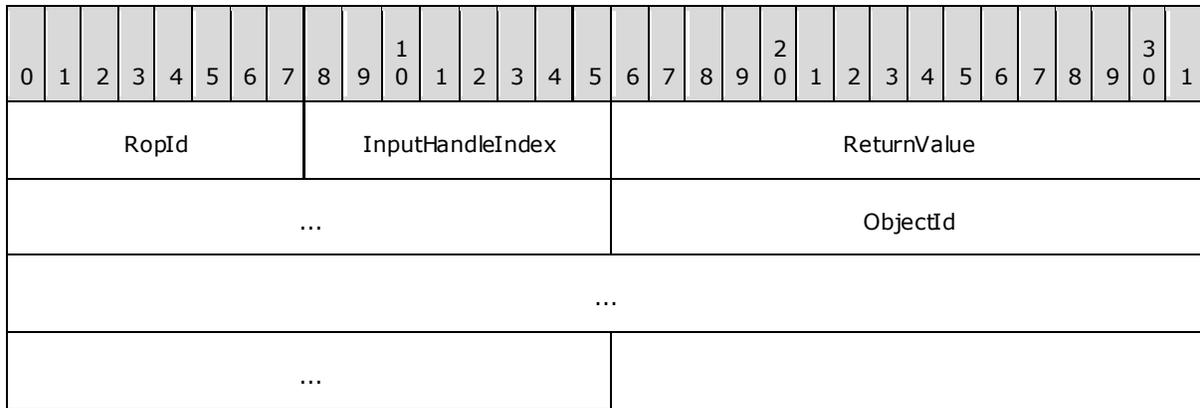


RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x44.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

ObjectId (8 bytes): 64-bit identifier. This value specifies the short-term ID that was converted from the long-term ID, which is specified in the **LongTermId** field of the request.

2.2.2.9.3 Failure Response Buffer

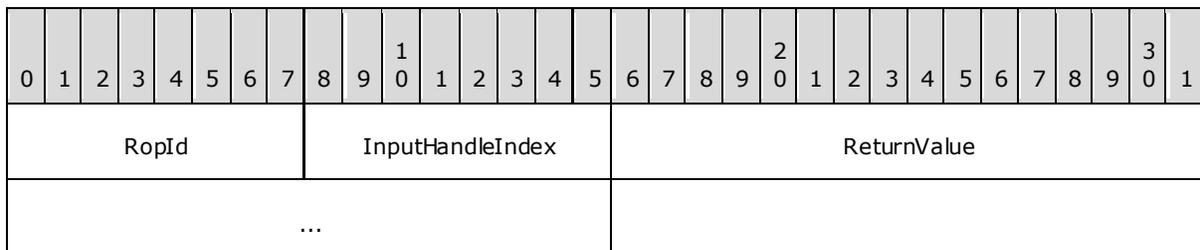

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x44.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.10 RopGetPerUserLongTermIds

This remote operation gets the long-term ID of a public folder that is identified by the per-user GUID of the logged on user. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								DatabaseGuid							
...																															
...																															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x60.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

DatabaseGuid (16 bytes): GUID. This value specifies which database the client is querying data for.

2.2.2.10.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																LongTermIdCount															
LongTermIds (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x60.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

LongTermIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **LongTermIds** field.

LongTermIds (variable): Array of **LongTermId** structures. The format of the **LongTermId** structure is specified in [\[MS-OXCDATA\]](#) section 2.2.1.3.1. The number of structures contained in this field is specified by the **LongTermIdCount** field. These structures specify which folders the user has per-user information about.

2.2.2.10.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x60.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).


ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.11 RopGetPerUserGuid

This remote operation gets the GUID of a public folder's per-user information. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								LongTermId							
...																															
...																															
...																															
...																															

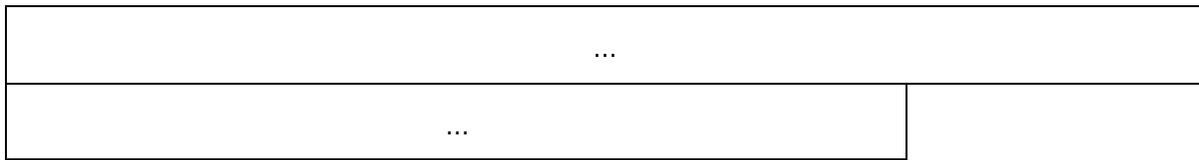


RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x61.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

LongTermId (24 bytes): **LongTermId** structure. The format of the **LongTermId** structure is specified in [\[MS-OXCDATA\]](#) section 2.2.1.3.1. This structure specifies the public folder.

2.2.2.11.2 Success Response Buffer

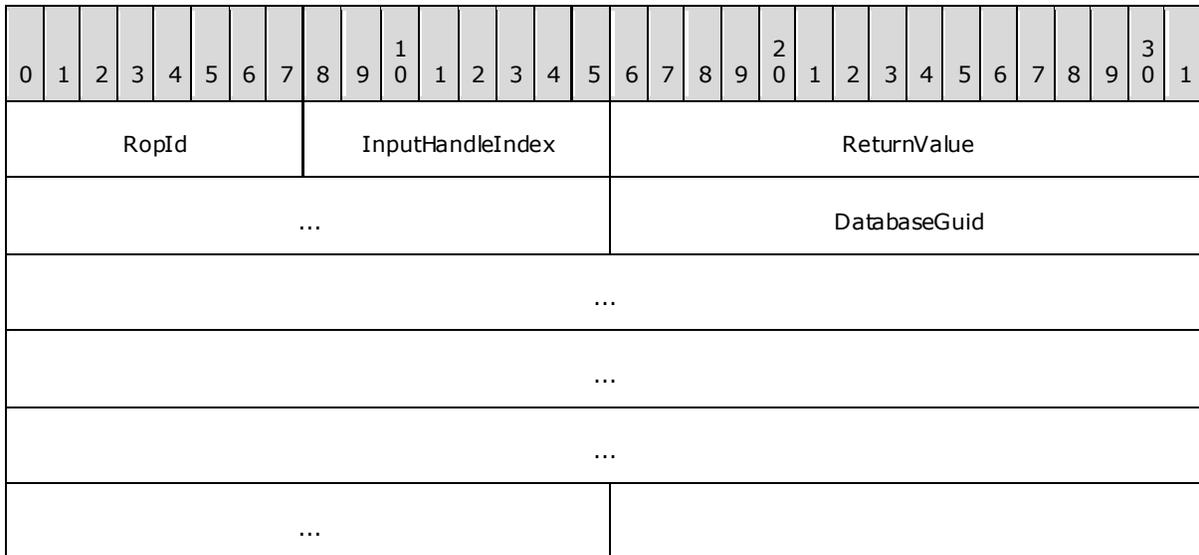

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x61.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

DatabaseGuid (16 bytes): GUID. This value specifies the database for which per-user information was obtained.

2.2.2.11.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x61.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.12 RopReadPerUserInformation

This remote operation gets per-user information for a public folder. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderId							
...																															
...																															
...																															
...																															
...																															
...																								Reserved							
DataOffset																															
MaxDataSize																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x63.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

FolderId (24 bytes): LongTermId structure. The structure specifies the folder for which to get per-user information. The format of the **LongTermId** structure is specified in [MS-OXCADATA] section 2.2.1.3.1.

Reserved (1 byte): Reserved. This field is not used and is ignored by the server. This field MUST be set to 0x00.

DataOffset (4 bytes): Unsigned 32-bit integer. This value specifies the location at which to start reading within the per-user information stream.

MaxDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the maximum number of bytes of per-user information to be retrieved.

2.2.2.12.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																HasFinished				DataSize											
...								Data (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x63.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

HasFinished (1 byte): 8-bit Boolean. This value specifies whether this operation reached the end of the per-user information stream.

DataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Data** field.

Data (variable): Array of bytes. The size of this field, in bytes, is specified by the **DataSize** field. This field contains the per-user data that is returned.

2.2.2.12.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x63.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.2.13 RopWritePerUserInformation

This remote operation sets per-user information for a public folder. More detailed information about this operation can be found in [\[MS-OXCSTOR\]](#).

2.2.2.13.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderId							
...																															
...																															
...																															
...																															
...																															
...																								HasFinished							
DataOffset																															
DataSize																Data (variable)															

...
ReplGuid (optional)
...
...
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x64.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

FolderId (24 bytes): LongTermId structure. The structure specifies the folder for which to set per-user information. The format of the **LongTermId** structure is specified in [\[MS-OXCDATA\]](#) section 2.2.1.3.1.

HasFinished (1 byte): 8-bit Boolean. This value specifies whether this operation specifies the end of the per-user information stream.

DataOffset (4 bytes): Unsigned 32-bit integer. This value specifies the location in the per-user information stream to start writing.

DataSet (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Data** field in bytes.

Data (variable): Array of bytes. The size of this field, in bytes, is specified by the **DataSet** field. This array is the per-user data to write.

ReplGuid (16 bytes): GUID. This field is present when the **DataOffset** field is 0x00000000 and the logon associated with **LogonId** was created with the Private flag set (see [\[MS-OXCSTOR\]](#) for more information) and is not present otherwise.

2.2.2.13.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x64.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.3 Folder ROPs

2.2.3.1 RopOpenFolder

This remote operation opens an existing folder in a mailbox. More detailed information about this operation can be found in [\[MS-OXCFOld\]](#).

2.2.3.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
FolderId																															
...																															
OpenModeFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x02.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

FolderId (8 bytes): 64-bit identifier. This identifier specifies the folder to be opened.

OpenModeFlags (1 byte): 8-bit flags structure. These flags are used to control how the folder is opened. The possible flags values are specified in [\[MS-OXCFOld\]](#).

2.2.3.1.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											
...										HasRules										IsGhosted											
ServerCount (optional)															CheapServerCount (optional)																
Servers (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x02.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

HasRules (1 byte): 8-bit Boolean. This value indicates whether there are rules associated with the folder.

IsGhosted (1 byte): 8-bit Boolean. This value specifies whether the folder is a ghosted folder.

ServerCount (2 bytes): Unsigned 16-bit integer. This field is present if **IsGhosted** is non-zero and is not present if **IsGhosted** is zero. This value specifies the number of strings in the **Servers** field.

CheapServerCount (2 bytes): Unsigned 16-bit integer. This field is present if **IsGhosted** is non-zero and is not present if **IsGhosted** is zero. This value specifies the number of values in **Servers** that refers to lowest cost servers.

Servers (variable): List of null-terminated ASCII strings. This field is present if **IsGhosted** is non-zero and is not present if **IsGhosted** is zero. The number of strings contained in this field is specified by the **ServerCount** field. These strings specify which servers have replicas of this folder.

2.2.3.1.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x02.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.3.2 RopCreateFolder

This remote operation creates a new subfolder. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
FolderType								UseUnicodeStrings								OpenExisting								Reserved							
DisplayName (variable)																															
...																															
Comment (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1C.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

FolderType (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCFCOLD\]](#). This value specifies what type of folder to create.

UseUnicodeStrings (1 byte): 8-bit Boolean. This value specifies whether the **DisplayName** and **Comment** are specified in Unicode or ASCII.

OpenExisting (1 byte): 8-bit Boolean. This value specifies whether this operation opens or fails when a folder already exists.

Reserved (1 byte): Reserved. This field MUST be set to 0x00.

DisplayName (variable): Null-terminated string. This value specifies the name of the created folder. If **UseUnicodeStrings** is non-zero, the string is composed of Unicode characters. If **UseUnicodeStrings** is zero, the string is composed of ASCII characters.

Comment (variable): Null-terminated string. This value specifies the folder comment that is associated with the created folder. If **UseUnicodeStrings** is non-zero, the string is composed of Unicode characters. If **UseUnicodeStrings** is zero, the string is composed of ASCII characters.

2.2.3.2.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																FolderId															
...																															
...																IsExistingFolder								HasRules (optional)							
IsGhosted (optional)								ServerCount (optional)																CheapServerCount (optional)							
...								Servers (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1C.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

FolderId (8 bytes): 64-bit Identifier. This value identifies the folder created or opened.

IsExistingFolder (1 byte): 8-bit Boolean. This value indicates whether an existing folder was opened or a new folder was created.

HasRules (1 byte): 8-bit Boolean. This field is present if the **IsExistingFolder** field is non-zero and is not present otherwise. This value indicates whether there are rules associated with the folder.

IsGhosted (1 byte): 8-bit Boolean. This field is present if the **IsExistingFolder** field is non-zero and is not present otherwise. This value indicates whether the server is an active replica of this folder.

ServerCount (2 bytes): Unsigned 16-bit integer. This field is present if both **IsExistingFolder** and **IsGhosted** are non-zero and is not present otherwise. This value specifies the number of strings in the **Servers** field.

CheapServerCount (2 bytes): Unsigned 16-bit integer. This field is present if both **IsExistingFolder** and **IsGhosted** are non-zero and is not present otherwise. This value specifies the number of values in **Servers** that refers to lowest cost servers.

Servers (variable): List of null-terminated ASCII strings. This field is present if both **IsExistingFolder** and **IsGhosted** are non-zero and is not present otherwise. The number of strings contained in this field is specified by the **ServersCount** field. These strings specify which servers have replicas of this folder.

2.2.3.2.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1C.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.3.3 RopDeleteFolder

This remote operation deletes a subfolder. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								DeleteFolderFlags							
FolderId																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1D.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

DeleteFolderFlags (1 byte): 8-bit flags structure. These flags control how to delete the folder. The possible flags values are specified in [\[MS-OXCFLD\]](#).

FolderId (8 bytes): 64-bit identifier. This value identifies the folder to be deleted.

2.2.3.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1D.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

PartialCompletion (1 byte): 8-bit Boolean. This value specifies whether the operation was partially completed.

2.2.3.4 RopSetSearchCriteria

This remote operation sets the **search criteria** for a **search folder**. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										RestrictionDataSize									
...										RestrictionData (variable)																													
...																																							
FolderIdCount																FolderIds (variable)																							
...																																							
SearchFlags																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x30.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

RestrictionDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the length of the **RestrictionData** field.

RestrictionData (variable): Restriction packet. The size of this field is **RestrictionDataSize** bytes. This field contains a **restriction** packet, as specified in [\[MS-OXCDATA\]](#) section 2.13. The restriction specifies the filter for this search folder.

FolderIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of IDs in the **FolderIds** field.

FolderIds (variable): Array of 64-bit identifiers. This field contains identifiers that specify which folders are searched. The number of identifiers contained in this field is specified by the **FolderIdCount** field.

SearchFlags (4 bytes): 32-bit flags structure. These flags control the search for a search folder.

2.2.3.4.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x30.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.3.5 RopGetSearchCriteria

This remote operation gets the search criteria for a search folder. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								UseUnicode							
IncludeRestriction								IncludeFolders																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x31.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

UseUnicode (1 byte): 8-bit Boolean. This value specifies whether the client wants the restriction data (returned in the **RestrictionData** field of the response) to be specified with Unicode strings or ASCII strings.

IncludeRestriction (1 byte): 8-bit Boolean. This value specifies whether the server includes the restriction information in the response.

IncludeFolders (1 byte): 8-bit Boolean. This value specifies whether the server includes the folders list in the response.

2.2.3.5.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																RestrictionDataSize															
RestrictionData (variable)																															
...																															
LogonId								FolderIdCount																FolderIds (variable)							
...																															
SearchFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x31.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RestrictionDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the length of the **RestrictionData** field.

RestrictionData (variable): Restriction packet. The size of this field is **RestrictionDataSize** bytes. This field contains a restriction packet, as specified in [\[MS-OXCADATA\]](#) section 2.13. The restriction specifies the filter for this search folder.

LogonId (1 byte): Unsigned 8-bit integer. This field MUST be set to the value of the **LogonId** field in the request.

FolderIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of IDs in the **FolderIds** field.

FolderIds (variable): Array of 64-bit identifiers. This field contains identifiers that specify which folders are searched. The number of identifiers contained in this field is specified by the **FolderIdCount** field.

SearchFlags (4 bytes): 32-bit flags structure. These flags control the search for a search folder.

2.2.3.5.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x31.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.3.6 RopMoveCopyMessages

This remote operation either moves or copies messages from a source folder to a destination folder. More detailed information about this operation can be found in [\[MS-OXCFOld\]](#).

2.2.3.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								SourceHandleIndex								DestHandleIndex							
MessageIdCount																MessageIds (variable)															
...																															
WantAsynchronous																WantCopy															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x33.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the source Server Object is stored. More information about Server Objects can be found in section 3.

DestHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the destination Server Object is stored. More information about Server Objects can be found in section 3.

MessageIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **MessageIds** field.

MessageIds (variable): Array of 64-bit identifiers. The number of identifiers contained in this field is specified by the **MessageIdCount** field. These identifiers specify which messages to move or copy.

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

WantCopy (1 byte): 8-bit Boolean. This value specifies whether the operation is a copy or a move.

2.2.3.6.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x33.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000503.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.6.3 Null Destination Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																DestHandleIndex															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x33.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. For more details about Server objects, see section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000503.

DestHandleIndex (4 bytes): Unsigned 32-bit integer. This index MUST be set to the **DestHandleIndex** specified in the request. For more details about Server objects, see section 3.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.7 RopMoveFolder

This remote operation moves a folder. More detailed information about this operation can be found in [\[MS-OXCFLD\]](#).

2.2.3.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								SourceHandleIndex								DestHandleIndex							
WantAsynchronous								UseUnicode								FolderId															
...																															
...																NewFolderName (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x35.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the source Server Object is stored. More information about Server Objects can be found in section 3.

DestHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the destination Server Object is stored. More information about Server Objects can be found in section 3.

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

UseUnicode (1 byte): 8-bit Boolean. This value specifies whether the **NewFolderName** field is specified in Unicode or ASCII.

FolderId (8 bytes): 64-bit identifier. This value identifies the folder to be moved.

NewFolderName (variable): Null terminated string. If the **UseUnicode** field is non-zero, then the string is composed of Unicode characters. Otherwise, the string is composed of ASCII characters. This string specifies the name for the new moved folder.

2.2.3.7.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										SourceHandleIndex										ReturnValue											
...										PartialCompletion																					

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x35.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000503.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.7.3 Null Destination Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										SourceHandleIndex										ReturnValue											
...										DestHandleIndex																					
...										PartialCompletion																					

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x35.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000503.

DestHandleIndex (4 bytes): Unsigned 32-bit integer. This index MUST be set to the **DestHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.8 RopCopyFolder

This remote operation copies a folder. More detailed information about this operation can be found in [\[MS-OXCFLD\]](#).

2.2.3.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								LogonId								SourceHandleIndex								DestHandleIndex							
WantAsynchronous								WantRecursive								UseUnicode								FolderId							
...																															
...																								NewFolderName (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x36.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the source Server Object is stored. More information about Server Objects can be found in section [3](#).

DestHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the destination Server Object is stored. More information about Server Objects can be found in section [3](#).

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

WantRecursive (1 byte): 8-bit Boolean. This value specifies that the copy is recursive.

UseUnicode (1 byte): 8-bit Boolean. This value specifies whether the **NewFolderName** field is specified in Unicode or ASCII.

FolderId (8 bytes): 64-bit identifier. This value identifies the folder to be copied.

NewFolderName (variable): Null terminated string. If the **UseUnicode** field is non-zero, then the string is composed of Unicode characters. Otherwise, the string is composed of ASCII characters. This string specifies the name for the new copied folder.

2.2.3.8.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x36.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000503.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.8.3 Null Destination Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																DestHandleIndex															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x36.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000503.

DestHandleIndex (4 bytes): Unsigned 32-bit integer. This index MUST be set to the **DestHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.9 RopEmptyFolder

This remote operation deletes all messages and subfolders from a folder. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										InputHandleIndex						WantAsynchronous					
WantDeleteAssociated																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x58.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server object handle table where the handle for the input Server object is stored. More information about Server objects can be found in section [3](#).

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

WantDeleteAssociated (1 byte): 8-bit Boolean. This value specifies whether the operation also deletes **folder associated information** messages.

2.2.3.9.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										PartialCompletion																					

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x58.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.10 RopHardDeleteMessagesAndSubfolders

This remote operation hard deletes messages and subfolders from a folder. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										InputHandleIndex						WantAsynchronous					
WantDeleteAssociated																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x92.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server object handle table where the handle for the input Server object is stored. More information about Server objects can be found in section [3](#).

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

WantDeleteAssociated (1 byte): 8-bit Boolean. This value specifies whether to also delete folder associated information messages.

2.2.3.10.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										PartialCompletion																					

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x92.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.11 RopDeleteMessages

This remote operation deletes one or more messages in a folder. More detailed information about this operation can be found in [\[MS-OXCFCOLD\]](#).

2.2.3.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								WantAsynchronous							
NotifyNonRead								MessageIdCount																MessageIds (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

NotifyNonRead (1 byte): 8-bit Boolean. This value specifies whether the server sends a **non-read receipt** to the message-sender when a message is deleted.

MessageIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of identifiers in the **MessageIds** field.

MessageIds (variable): Array of 64-bit identifiers. The number of identifiers contained in this field is specified by the **MessageIdCount** field. These IDs specify the messages to be deleted.

2.2.3.11.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

PartialCompletion (1 byte): 8-bit Boolean. This value specifies whether this operation partially completed.

2.2.3.12 RopHardDeleteMessages

This remote operation hard deletes messages in a folder. More detailed information about this operation can be found in [\[MS-OXCFLD\]](#).

2.2.3.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								WantAsynchronous							
NotifyNonRead								MessageIdCount																MessageIds (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x91.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

NotifyNonRead (1 byte): 8-bit Boolean. This value specifies whether the server sends a non-read receipt to the message-sender when a message is deleted.

MessageIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of identifiers in the **MessageIds** field.

MessageIds (variable): Array of 64-bit identifiers. The number of identifiers contained in this field is specified by the **MessageIdCount** field. These IDs specify the messages to be hard deleted.

2.2.3.12.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PartialCompletion															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x91.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed.

2.2.3.13 RopGetHierarchyTable

This remote operation gets the subfolder hierarchy table for a folder. More detailed information about this operation can be found in [\[MS-OXCFOLD\]](#).

2.2.3.13.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
TableFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x04.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

TableFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCFOld\]](#). These flags control the type of table.

2.2.3.13.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																RowCount															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x04.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowCount (4 bytes): Unsigned 32-bit integer. This value represents the number of rows in the hierarchy table.

2.2.3.13.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x04.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.3.14 RopGetContentsTable

This remote operation gets the content table of a container. More detailed information about this operation can be found in [\[MS-OXCFOld\]](#).

2.2.3.14.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
TableFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x05.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored.

TableFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCFLD]. These flags control the type of table.

2.2.3.14.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																RowCount															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x05.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowCount (4 bytes): Unsigned 32-bit integer. This value represents the number of rows in the hierarchy table.

2.2.3.14.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x05.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4 Table ROPs

2.2.4.1 RopSetColumns

This remote operation sets the properties visible on a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								SetColumnsFlags							
PropertyTagCount																PropertyTags (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x12.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

SetColumnsFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCTABL\]](#). These flags control this operation.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies how many tags are present in **PropertyTags**.

PropertyTags (variable): Array of **PropertyTag** structures. This field specifies the property values that are visible in table rows. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#).

2.2.4.1.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																TableStatus															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x12.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

TableStatus (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCTABL\]](#). This value specifies the status of the table.

2.2.4.1.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x12.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.2 RopSortTable

This remote operation defines the order of rows of a table based on sort criteria. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										InputHandleIndex						SortTableFlags					
SortOrderCount																CategoryCount															
ExpandedCount																SortOrders (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x13.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

SortTableFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCTABL\]](#). These flags control this operation.

SortOrderCount (2 bytes): Unsigned 16-bit integer. This value specifies how many **SortOrder** structures are present in the **SortOrders** field.

CategoryCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of category **SortOrder** structures in the **SortOrders** field.

ExpandedCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of expanded categories in the **SortOrders** field.

SortOrders (variable): Array of **SortOrder** structures. The number of structures contained in this field is specified by the **SortOrderCount** field. The format of the **SortOrder** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the sort order for the rows in the table.

2.2.4.2.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											

...	TableStatus
-----	-------------

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x13.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

TableStatus (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [MS-OXCTABL]. This value specifies the status of the table.

2.2.4.2.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x13.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.3 RopRestrict

This remote operation establishes a filter for a table. More detailed information about this operation can be found in [MS-OXCTABL].

2.2.4.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								RestrictFlags							
RestrictionDataSize																RestrictionData (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x14.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

RestrictFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCTABL\]](#). These flags control this operation.

RestrictionDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the length of the **RestrictionData** field.

RestrictionData (variable): Restriction packet. The size of this field is **RestrictionDataSize** bytes. This field contains a restriction packet, as specified in [\[MS-OXCDATA\]](#) section 2.13. The restriction specifies the filter for this table.

2.2.4.3.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																TableStatus															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x14.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

TableStatus (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCTABL\]](#). This value specifies the status of the table.

2.2.4.3.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x14.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.4 RopQueryRows

This remote operation retrieves rows from a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId						InputHandleIndex						QueryRowsFlags									
ForwardRead										RowCount																					

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x15.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

QueryRowsFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCTABL\]](#). These flags control this operation.

ForwardRead (1 byte): 8-bit Boolean. This value specifies the direction to read rows.

RowCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of requested rows.

2.2.4.4.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex						ReturnValue															
...																Origin						RowCount									

...	RowData (variable)
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x15.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

Origin (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCTABL\]](#). This value specifies current location of the cursor.

RowCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **RowData** field.

RowData (variable): List of **PropertyRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of the **PropertyRow** structure is specified in [\[MS-OXCDATA\]](#) and the columns used for these rows were those previously set on this table by a **RopSetColumns** request.

2.2.4.4.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x15.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.5 RopAbort

This remote operation aborts an asynchronous table operation in progress. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x38.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.4.5.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																TableStatus															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x38.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

TableStatus (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [MS-OXCTABL]. This value specifies the status of the table.

2.2.4.5.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x38.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.6 RopGetStatus

This remote operation gets the status of a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x16.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

2.2.4.6.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																TableStatus															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x16.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

TableStatus (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCTABL\]](#). This value specifies the status of the table.

2.2.4.6.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x16.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.7 RopQueryPosition

This remote operation gets the cursor position. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x17.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.4.7.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																Numerator															

...	Denominator
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x17.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

Numerator (4 bytes): Unsigned 32-bit integer. This value represents the numerator of the fraction identifying the table position.

Denominator (4 bytes): Unsigned 32-bit integer. This value represents the denominator of the fraction identifying the table position.

2.2.4.7.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x17.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.8 RopSeekRow

This remote operation moves the cursor to a specific position in a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								Origin							
RowCount																															
WantRowMovedCount																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x18.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

Origin (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCTABL\]](#). This value specifies the origin of this seek operation.

RowCount (4 bytes): Signed 32-bit integer. This value specifies the direction and the number of rows to seek.

WantRowMovedCount (1 byte): 8-bit Boolean. This value specifies whether the server returns the actual number of rows moved in the response.

2.2.4.8.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																HasSoughtLess								RowsSought							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x18.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

HasSoughtLess (1 byte): 8-bit Boolean. This value specifies whether the full number of rows sought past was less than the number that was requested.

RowsSought (4 bytes): Signed 32-bit integer. This value specifies the direction and number of rows sought.

2.2.4.8.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x18.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.9 RopSeekRowBookmark

This remote operation moves the cursor to a location specified relative to a user-defined bookmark. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								BookmarkSize							
...								Bookmark (variable)																							
...																															
RowCount																															
WantRowMovedCount																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x19.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

BookmarkSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Bookmark** field.

Bookmark (variable): Array of bytes. The size of this field, in bytes, is specified by the **BookmarkSize** field. This array specifies the origin for the seek operation.

RowCount (4 bytes): Signed 32-bit integer. This value specifies the direction and the number of rows to seek.

WantRowMovedCount (1 byte): 8-bit Boolean. This value specifies whether the server returns the actual number of rows sought in the response.

2.2.4.9.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										RowNoLongerVisible										HasSoughtLess											
RowsSought																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x19.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowNoLongerVisible (1 byte): 8-bit Boolean. This value specifies whether the bookmark target is no longer visible.

HasSoughtLess (1 byte): 8-bit Boolean. This value specifies whether the full number of rows sought past was less than the number that was requested.

RowsSought (4 bytes): Signed 32-bit integer. This value specifies the direction and number of rows sought.

2.2.4.9.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x19.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.10 RopSeekRowFractional

This remote operation moves the cursor to an approximate position in a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								Numerator							
...																Denominator															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1A.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

Numerator (4 bytes): Unsigned 32-bit integer. This value represents the numerator of the fraction identifying the table position to seek to.

Denominator (4 bytes): Unsigned 32-bit integer. This value represents the denominator of the fraction identifying the table position to seek to.

2.2.4.10.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.4.11 RopCreateBookmark

This remote operation marks the current cursor position in a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.4.11.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																BookmarkSize															

Bookmark (variable)
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

BookmarkSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Bookmark** field.

Bookmark (variable): Array of bytes. The size of this field, in bytes, is specified by the **BookmarkSize** field. This array specifies the bookmark created.

2.2.4.11.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.12 RopQueryColumnsAll

This remote operation gets a list of columns in a table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x37.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

2.2.4.12.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PropertyTagCount															
PropertyTags (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x37.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies how many tags are present in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the columns of the table.

2.2.4.12.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x37.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.13 RopFindRow

This remote operation moves the cursor to a row in a table that matches specific search criteria. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.13.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FindRowFlags							
RestrictionDataSize																RestrictionData (variable)															
...																															
Origin								BookmarkSize																Bookmark (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

FindRowFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCTABL\]](#). These flags control this operation.

RestrictionDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the length of the **RestrictionData** field.

RestrictionData (variable): Restriction packet. The size of this field, in bytes, is specified by the **RestrictionDataSize** field. This field contains a restriction packet, as specified in [\[MS-OXCADATA\]](#) section 2.13. The restriction specifies the filter for this operation.

Origin (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCTABL\]](#). This enumeration specifies where this operation begins its search.

BookmarkSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Bookmark** field.

Bookmark (variable): Array of bytes. The size of this field, in bytes, is specified by the **BookmarkSize** field. This array specifies the bookmark to use as the origin.

2.2.4.13.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										RowNoLongerVisible										HasRowData											
RowData (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowNoLongerVisible (1 byte): 8-bit Boolean. This value specifies whether the bookmark target is no longer visible.

HasRowData (1 byte): 8-bit Boolean. This value indicates whether the **RowData** field is present.

RowData (variable): **PropertyRow** structure. This field is only present when the **HasRowData** field is set to a non-zero value. The format of the **PropertyRow** structure is specified in [\[MS-OXCADATA\]](#) and the columns used for these rows were those previously set on this table by a **RopSetColumns**.

2.2.4.13.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.14 RopFreeBookmark

This remote operation releases a bookmark. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.14.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								BookmarkSize							
...								Bookmark (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x89.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

BookmarkSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Bookmark** field.

Bookmark (variable): Array of bytes. The size of this field, in bytes, is specified by the **BookmarkSize** field. This array specifies the bookmark to be freed.

2.2.4.14.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x89.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.4.15 RopResetTable

This remote operation resets a table to its original state. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.15.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x81.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.4.15.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x81.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.4.16 RopExpandRow

This remote operation expands a categorized row. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.16.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								MaxRowCount							
...								CategoryId																							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x59.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

MaxRowCount (2 bytes): Unsigned 16-bit integer. This value specifies the maximum number of expanded rows to return data for.

CategoryId (8 bytes): 64-bit identifier. This identifier specifies the category to be expanded.

2.2.4.16.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															

...	ExpandedRowCount
...	RowCount
RowData (variable)	
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x59.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

ExpandedRowCount (4 bytes): Unsigned 32-bit integer. This value specifies the total number of rows available in the expanded category.

RowCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures present in the **RowData** field.

RowData (variable): List of **PropertyRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of the **PropertyRow** structure is specified in [\[MS-OXCDATA\]](#) and the columns used for these rows were those previously set on this table by a **RopSetColumns**.

2.2.4.16.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x59.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.17 RopCollapseRow

This remote operation collapses a categorized row. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.17.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								CategoryId							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5A.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

CategoryId (8 bytes): 64-bit identifier. This identifier specifies the category to be collapsed.

2.2.4.17.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																CollapsedRowCount															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

CollapsedRowCount (4 bytes): Unsigned 32-bit integer. This value specifies the total number of rows in the collapsed category.

2.2.4.17.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.18 RopGetCollapseState

This remote operation gets the current collapse state of rows in a categorized table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.18.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								RowId							
...																															
...																								RowInstanceNumber							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

RowId (8 bytes): 64-bit identifier. This identifier specifies the row to be preserved as the cursor. The cursor is returned as part of the collapse state in the **CollapseState** field of the response.

RowIndexNumber (4 bytes): Unsigned 32-bit integer. This value specifies the instance number of the row that is to be preserved as the cursor.

2.2.4.18.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																CollapseStateSize															
CollapseState (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

CollapseStateSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **CollapseState** field.

CollapseState (variable): Array of bytes. The size of this field, in bytes, is specified by the **CollapseStateSize** field. This array specifies a collapse state for a categorized table.

2.2.4.18.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.4.19 RopSetCollapseState

This remote operation restores the collapse state of rows in a categorized table. More detailed information about this operation can be found in [\[MS-OXCTABL\]](#).

2.2.4.19.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								CollapseStateSize							
...								CollapseState (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6C.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

CollapseStateSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **CollapseState** field.

CollapseState (variable): Array of bytes. The size of this field, in bytes, is specified by the **CollapseStateSize** field. This array specifies a collapse state for a categorized table.

2.2.4.19.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																BookmarkSize															
Bookmark (variable)																															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6C.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

BookmarkSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Bookmark** field.

Bookmark (variable): Array of bytes. The size of this field, in bytes, is specified by the **BookmarkSize** field. This array specifies the current cursor position.

2.2.4.19.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6C.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5 Message ROPs

2.2.5.1 RopOpenMessage

This remote operation opens an existing message in a mailbox. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							

CodePageId	FolderId	
...		
...	OpenModeFlags	MessageId
...		
...		

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x03.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

CodePageId (2 bytes): 16-bit identifier. This value specifies which code page will be used for string values associated with the message.

FolderId (8 bytes): 64-bit identifier. This value identifies the parent folder of the message to be opened.

OpenModeFlags (1 byte): 8-bit flags structure. These flags control the access to the message. The possible values are specified in [\[MS-OXCMSG\]](#).

MessageId (8 bytes): 64-bit identifier. This value identifies the message to be opened.

2.2.5.1.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	1	2	3	4	5	6	7	8	9	20	1	2	3	4	5	6	7	8	9	30	1		
RopId										OutputHandleIndex										ReturnValue													
...										HasNamedProperties								SubjectPrefix (variable)															
...																																	
NormalizedSubject (variable)																																	

...	
RecipientCount	ColumnCount
RecipientColumns (variable)	
...	
RowCount	RecipientRows (variable)
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x03.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

HasNamedProperties (1 byte): 8-bit Boolean. This value specifies whether the message has named properties.

SubjectPrefix (variable): **TypedString** structure. The format of the **TypedString** structure is specified in [\[MS-OXCDATA\]](#). This structure specifies the subject prefix of the message.

NormalizedSubject (variable): **TypedString** structure. The format of the **TypedString** structure is specified in [\[MS-OXCDATA\]](#). This structure specifies the normalized subject of the message.

RecipientCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of recipients on the message.

ColumnCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **RecipientColumns** field.

RecipientColumns (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **ColumnCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the property values that can be included in each row that is specified in the **RecipientRows** field.

RowCount (1 byte): Unsigned 8-bit integer. This value specifies the number of structures in the **RecipientRows** field.

RecipientRows (variable): List of **OpenRecipientRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of the **OpenRecipientRow** structure is defined in section [2.2.5.1.2.1](#).

2.2.5.1.2.1 OpenRecipientRow structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RecipientType								CodePageId																Reserved							
...								RecipientRowSize																RecipientRow (variable)							
...																															

RecipientType (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCMSG\]](#). This enumeration specifies the type of recipient.

CodePageId (2 bytes): 16-bit identifier. This value specifies the **code page** for the recipient.

Reserved (2 bytes): Reserved. The server MUST set this field to 0x0000.

RecipientRowSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **RecipientRow** field.

RecipientRow (variable): **RecipientRow** structure. The format of this structure is specified in [\[MS-OXCDATA\]](#). The size of this field, in bytes, is specified by the **RecipientRowSize** field.

2.2.5.1.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x03.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.2 RopCreateMessage

This remote operation creates a Message object in a mailbox. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
CodePageId																FolderId															
...																															
...																AssociatedFlag															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x06.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

CodePageId (2 bytes): 16-bit identifier. This value specifies the code page for the message.

FolderId (8 bytes): 64-bit identifier. This value identifies the parent folder.

AssociatedFlag (1 byte): 8-bit Boolean. This value specifies whether the message is a Folder Associated Information message.

2.2.5.2.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																HasMessageId								MessageId (optional)							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x06.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

HasMessageId (1 byte): 8-bit Boolean. This value specifies whether the **MessageId** field is present.

MessageId (8 bytes): 64-bit identifier. This field is present if **HasMessageId** is non-zero and is not present if it is zero. This value is an identifier that is associated with the created message.

2.2.5.2.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x06.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.3 RopSaveChangesMessage

This remote operation commits the changes made to a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								LogonId								ResponseHandleIndex								InputHandleIndex							
SaveFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0C.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table that is referenced in the response. More information about Server Objects can be found in section 3.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

SaveFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCMSG]. These flags specify how the save operation behaves.

2.2.5.3.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								ResponseHandleIndex								ReturnValue															
...																InputHandleIndex								MessageId							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0C.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **ResponseHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

MessageId (8 bytes): 64-bit identifier. This value specifies the ID of the message saved.

2.2.5.3.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								ResponseHandleIndex								ReturnValue															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0C.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **ResponseHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.4 RopRemoveAllRecipients

This remote operation deletes all recipients from a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								Reserved							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0D.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

Reserved (4 bytes): Reserved. The client SHOULD set this field to 0x00000000. The server MUST ignore this field, regardless of its value.

2.2.5.4.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0D.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.5.5 RopModifyRecipients

This remote operation adds or modifies recipients on a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								ColumnCount							
...								RecipientColumns (variable)																							
...																															
RowCount																RecipientRows (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

ColumnCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **RecipientColumns** field.

RecipientColumns (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **ColumnCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the property values that can be included for each recipient row.

RowCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of rows in the **RecipientRows** field.

RecipientRows (variable): List of **ModifyRecipientRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of **ModifyRecipientRow** is defined in section [2.2.5.5.1.1](#).

2.2.5.5.1.1 ModifyRecipientRow structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RowId																															
RecipientType								RecipientRowSize																RecipientRow (variable)							
...																															

RowId (4 bytes): Unsigned 32-bit integer. This value specifies the ID of the recipient row.

RecipientType (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCMSG\]](#). This enumeration specifies the type of recipient.

RecipientRowSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **RecipientRow** field.

RecipientRow (variable): **RecipientRow** structure. This field is present when the **RecipientRowSize** field is non-zero and is not present otherwise. The format of the **RecipientRow** structure is specified in [\[MS-OXCDATA\]](#). The size of this field, in bytes, is specified by the **RecipientRowSize** field.

2.2.5.5.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.5.6 RopReadRecipients

This remote operation gets recipient details from a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								RowId							
...																								Reserved							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

RowId (4 bytes): Unsigned 32-bit integer. This value specifies the recipient to start reading.

Reserved (2 bytes): Reserved. This field MUST be set to 0x0000. Server behavior is undefined if this field is not set to 0x0000.

2.2.5.6.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																RowCount								RecipientRows (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowCount (1 byte): Unsigned 8-bit integer. This value specifies the number of structures in the **RecipientRows** field.

RecipientRows (variable): List of **ReadRecipientRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of the **ReadRecipientRow** structure is defined in section [2.2.5.6.2.1](#).

2.2.5.6.2.1 ReadRecipientRow structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RowId																															
RecipientType								CodePageId																Reserved							
...								RecipientRowSize																RecipientRow (variable)							
...																															

RowId (4 bytes): Unsigned 32-bit integer. This value specifies the ID of the recipient row.

RecipientType (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCMSG\]](#). This enumeration specifies the type of recipient.

CodePageId (2 bytes): 16-bit identifier. This value specifies the code page for the recipient.

Reserved (2 bytes): Reserved. The server MUST set this field to 0x0000.

RecipientRowSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **RecipientRow** field.

RecipientRow (variable): **RecipientRow** structure. The format of this structure is specified in [\[MS-OXCDATA\]](#). The size of this field, in bytes, is specified by the **RecipientRowSize** field.

2.2.5.6.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.7 RopReloadCachedInformation

This remote operation gets message and recipient information from a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								Reserved							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x10.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

Reserved (2 bytes): Reserved. This field MUST be set to 0x0000. Server behavior is undefined if this field is not set to 0x0000.

2.2.5.7.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																HasNamedProperties								SubjectPrefix (variable)							
...																															
NormalizedSubject (variable)																															
...																															

RecipientCount	ColumnCount
RecipientColumns (variable)	
...	
RowCount	RecipientRows (variable)
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x10.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

HasNamedProperties (1 byte): 8-bit Boolean. This value specifies whether the message has named properties.

SubjectPrefix (variable): **TypedString** structure. The format of the **TypedString** structure is specified in [\[MS-OXCDATA\]](#). This value specifies the subject prefix of the message.

NormalizedSubject (variable): **TypedString** structure. The format of the **TypedString** structure is specified in [\[MS-OXCDATA\]](#). This value specifies the normalized subject of the message.

RecipientCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of recipients on the message.

ColumnCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **RecipientColumns** field.

RecipientColumns (variable): Array of **Property Tag** structures. The number of structures contained in this field is specified by the **ColumnCount** field. The format of the Property Tag structure is specified in [\[MS-OXCDATA\]](#). This field specifies the property values that can be included for each recipient row.

RowCount (1 byte): Unsigned 8-bit integer. This value specifies the number of rows in the **RecipientRows** field.

RecipientRows (variable): List of **OpenRecipientRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of the **OpenRecipientRow** structure is defined in section [2.2.5.1.2.1](#).

2.2.5.7.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x10.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.8 RopSetMessageStatus

This remote operation sets the status of a message in a folder. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								MessageId							
...																															
...																								MessageStatusFlags							
...																								MessageStatusMask							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x20.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

MessageId (8 bytes): 64-bit identifier. This value identifies the message for which the status will be changed.

MessageStatusFlags (4 bytes): 32-bit flags structure. This field contains status flags to set on the message. The possible values are specified in [\[MS-OXCMSG\]](#).

MessageStatusMask (4 bytes): 32-bit bitmask. This bitmask specifies which bits in the **MessageStatusFlags** field are to be changed.

2.2.5.8.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																MessageStatusFlags															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x20.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

MessageStatusFlags (4 bytes): 32-bit flags structure. This field contains the status flags that were set on the message before this operation. The possible values are specified in [\[MS-OXCMSG\]](#).

2.2.5.8.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x20.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.9 RopGetMessageStatus

This remote operation returns the status of a message in a folder. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								MessageId							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x1F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

MessageId (8 bytes): 64-bit identifier. This value identifies the message for which the status will be returned.

2.2.5.9.2 Response Buffers

The response buffers for this ROP are the same as those for **RopSetMessageStatus**, as specified in sections [2.2.5.8.2](#) and [2.2.5.8.3](#).

2.2.5.10 RopSetReadFlags

This remote operation sets the read flag for messages in a folder. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								WantAsynchronous							
ReadFlags								MessageIdCount																MessageIds (variable)							

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x66.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

ReadFlags (1 byte): 8-bit flags structure. The possible values for these flags are specified in [MS-OXCMSG]. These flags specify the flags to set.

MessageIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of identifiers in the **MessageIds** field.

MessageIds (variable): Array of 64-bit identifiers. The number of identifiers contained in this field is specified by the **MessageIdCount** field. These IDs specify the messages that are to have their read flags changed.

2.2.5.10.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										PartialCompletion																					

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x66.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

PartialCompletion (1 byte): 8-bit Boolean. This value indicates whether the operation was only partially completed. The operation is partially completed if the server was unable to modify one or more of the Message objects that are specified in the **MessageIds** field of the request.

2.2.5.11 RopSetMessageReadFlag

This remote operation sets or clears the message read flag. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								ResponseHandleIndex								InputHandleIndex							
ReadFlags								ClientData (optional)																							
...																															
...																															
...																															
...																															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x11.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table that is referenced in the response. More information about Server Objects can be found in section [3](#).

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

ReadFlags (1 byte): 8-bit flags structure. The possible values for these flags are specified in [\[MS-OXCMSG\]](#).

ClientData (24 bytes): Array of 24 bytes. This field is present when the logon associated with **LogonId** was created with the Private flag unset (see [\[MS-OXCSTOR\]](#) for more information) and is not present otherwise. This value specifies the information that is returned to the client in a successful response.

2.2.5.11.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								ResponseHandleIndex								ReturnValue															
...																ReadStatusChanged				LogonId (optional)											
ClientData (optional)																															
...																															
...																															
...																															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x11.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **ResponseHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

ReadStatusChanged (1 byte): 8-bit Boolean. This value specifies whether the read status of a public folder's message has changed.

LogonId (1 byte): Unsigned 8-bit integer. This field is present when the value in the **ReadStatusChanged** field is non-zero and is not present otherwise. This field MUST be set to the value of the **LogonId** field in the request.

ClientData (24 bytes): Array of 24 bytes. This field is present when the value in the **ReadStatusChanged** field is non-zero and is not present otherwise. This field MUST be set to the value of the **ClientData** field in the request.

2.2.5.11.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								ResponseHandleIndex								ReturnValue															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x11.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **ResponseHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.12 RopOpenAttachment

This remote operation opens an attachment of a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
OpenAttachmentFlags								AttachmentID																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x22.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section [3](#).

OpenAttachmentFlags (1 byte): 8-bit flags structure. This field contains flags for opening attachments.

AttachmentID (4 bytes): Unsigned 32-bit integer. This value identifies the attachment to be opened. The value of this field is equivalent to the [PidTagAttachNumber](#) property ([\[MS-OXPROPS\]](#) section 2.672).

2.2.5.12.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x22.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.5.13 RopCreateAttachment

This remote operation creates a new attachment on a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.13.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x23.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

2.2.5.13.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											
...										AttachmentID																					
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x23.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

AttachmentID (4 bytes): Unsigned 32-bit integer. This ID refers to the attachment created. The value of this field is equivalent to the [PidTagAttachNumber](#) property ([\[MS-OXPROPS\]](#) section 2.672).

2.2.5.13.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x23.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.14 RopDeleteAttachment

This remote operation deletes an attachment on a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.14.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								AttachmentID							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x24.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

AttachmentID (4 bytes): Unsigned 32-bit integer. This value identifies the attachment to be deleted. The value of this field is equivalent to the [PidTagAttachNumber](#) property ([\[MS-OXPROPS\]](#) section 2.672).

2.2.5.14.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x24.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.5.15 RopSaveChangesAttachment

This remote operation commits the changes made to an attachment. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.15.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								ResponseHandleIndex								InputHandleIndex							
SaveFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x25.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table that is referenced in the response. More information about Server Objects can be found in section 3.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

SaveFlags (1 byte): 8-bit flags structure. The possible values for these flags are specified in [\[MS-OXCMSG\]](#). These flags specify how the save operation behaves.

2.2.5.15.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								ResponseHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x25.

ResponseHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **ResponseHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.5.16 RopOpenEmbeddedMessage

This remote operation opens an attachment as a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.16.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
CodePageId																OpenModeFlags															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x46.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

CodePageId (2 bytes): 16-bit identifier. This value specifies which code page is used for string values associated with the message.

OpenModeFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCMSG\]](#). These flags control the access to the message.

2.2.5.16.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																Reserved								MessageId							
...																															
...																								HasNamedProperties							
SubjectPrefix (variable)																															
...																															
NormalizedSubject (variable)																															

...	
RecipientCount	ColumnCount
RecipientColumns (variable)	
...	
RowCount	RecipientRows (variable)
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x46.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

Reserved (1 byte): Reserved. This field MUST be set to 0x00.

MessageId (8 bytes): 64-bit identifier. This value specifies the ID of the embedded message.

HasNamedProperties (1 byte): 8-bit Boolean. This value specifies whether the message has named properties.

SubjectPrefix (variable): TypedString structure. The format of the **TypedString** structure is specified in [MS-OXCDATA]. This structure specifies the subject prefix of the message.

NormalizedSubject (variable): TypedString structure. The format of the **TypedString** structure is specified in [MS-OXCDATA]. This structure specifies the normalized subject of the message.

RecipientCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of recipients on the message.

ColumnCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **RecipientColumns** field.

RecipientColumns (variable): Array of Property Tag structures. The number of structures contained in this field is specified by the **ColumnCount** field. The format of the Property Tag structure is specified in [MS-OXCDATA]. This field specifies the property values that can be included for each recipient row.

RowCount (1 byte): Unsigned 8-bit integer. This value specifies the number of rows in the **RecipientRows** field.

RecipientRows (variable): List of **OpenRecipientRow** structures. The number of structures contained in this field is specified by the **RowCount** field. The format of the **OpenRecipientRow** structure is defined in section [2.2.5.1.3](#).

2.2.5.16.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x46.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.5.17 RopGetAttachmentTable

This remote operation gets the attachment table of a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.17.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
TableFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x21.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section [3](#).

TableFlags (1 byte): 8-bit flags structure. These flags control the type of table. The possible values are specified in [\[MS-OXCMSG\]](#).

2.2.5.17.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x21.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.5.18 RopGetValidAttachments

This remote operation gets the valid attachment identifiers of a message. More detailed information about this operation can be found in [\[MS-OXCMSG\]](#).

2.2.5.18.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x52.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

2.2.5.18.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															

...	AttachmentIdCount
AttachmentIdArray (variable)	
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x52.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

AttachmentIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of integers in the **AttachmentIdArray** field.

AttachmentIdArray (variable): Array of 32-bit integers. The number of integer values contained in this field is specified by the **AttachmentIdCount** field. These values represent the valid attachment identifiers of the message.

2.2.5.18.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x52.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.6 Transport ROPs

2.2.6.1 RopSubmitMessage

This remote operation submits a message for sending. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								SubmitFlags							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x32.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

SubmitFlags (1 byte): 8-bit flags structure. These flags specify special behavior for submitting the message. The possible values are specified in [\[MS-OXOMSG\]](#).

2.2.6.1.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x32.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.6.2 RopAbortSubmit

This remote operation aborts a previous message submission. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderId							

...	
...	MessageId
...	
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x34.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server object is stored. More information about Server objects can be found in section 3.

FolderId (8 bytes): 64-bit identifier. This value identifies the folder in which the submitted message is located.

MessageId (8 bytes): 64-bit identifier. This value identifies the submitted message.

2.2.6.2.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x34.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.6.3 RopGetAddressTypes

This remote operation returns the type of recipients handled by a transport provider. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x49.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.6.3.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																AddressTypeCount															
AddressTypeSize																AddressTypes (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x49.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

AddressTypeCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of strings in the **AddressTypes** field.

AddressTypeSize (2 bytes): Unsigned 16-bit integer. This value specifies the length of the **AddressTypes** field.

AddressTypes (variable): List of null-terminated ASCII strings. The number of strings contained in this field is specified by the **AddressTypeCount** field. The size of this field, in bytes, is specified by the **AddressTypeSize** field.

2.2.6.3.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x49.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.6.4 RopSetSpooler

This remote operation informs the server that the client intends to act as a mail spooler. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x47.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.6.4.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x47.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.6.5 RopSpoolerLockMessage

This remote operation locks the specified message for spooling. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								MessageId							
...																															
...																								LockState							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x48.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

MessageId (8 bytes): 64-bit identifier. This value identifies the message for which the status will be changed.

LockState (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXOMSG\]](#).

2.2.6.5.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x48.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.6.6 RopTransportSend

This remote operation sends the specified Message object out for message delivery. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										InputHandleIndex											

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4A.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.6.6.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31				
RopId										InputHandleIndex										ReturnValue															
...															NoPropertiesReturned										PropertyValueCount (optional)										
...										PropertyValues (variable)																									
...																																			

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

NoPropertiesReturned (1 byte): 8-bit Boolean. This value specifies whether property values are returned.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures returned in the **PropertyValues** field.

PropertyValues (variable): Array of **PropertyValue** structures. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#). The number of structures contained in this field is specified by the **PropertyValueCount** field. This array specifies the properties to copy.

2.2.6.7 RopTransportNewMail

This remote operation informs the server of new mail. More detailed information about this operation can be found in [\[MS-OXOMSG\]](#).

2.2.6.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1								
RopId										LogonId										InputHandleIndex										MessageId									
...																																							
...																									FolderId														
...																																							
...																									MessageClass (variable)														
...																																							
MessageFlags																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x51.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.


MessageId (8 bytes): 64-bit identifier. This value identifies the new Message object.

FolderId (8 bytes): 64-bit identifier. This value identifies the folder of the new Message object.

MessageClass (variable): Null-terminated ASCII string. This string specifies the message class of the new Message object.

MessageFlags (4 bytes): 32-bit flags structure. The possible values are specified in [MS-OXCMSG]. This field contains the message flags of the new message object.

2.2.6.7.2 Response Buffer

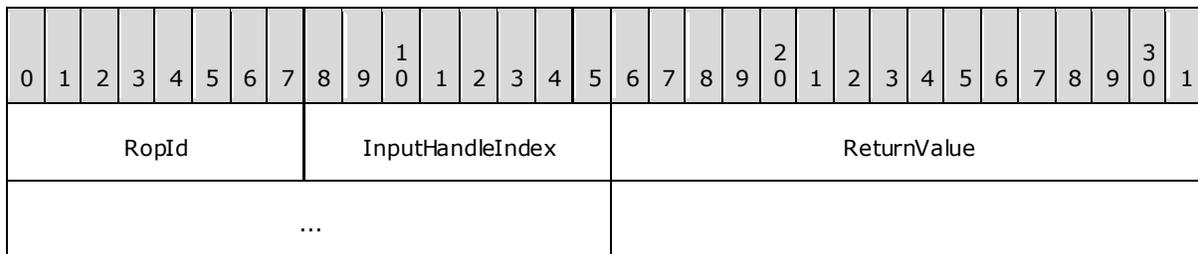

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x51.


InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.6.8 RopGetTransportFolder

This remote operation retrieves the **folder ID** of the temporary transport folder. More detailed information about this operation can be found in [MS-OXOMSG].

2.2.6.8.1 Request Buffer

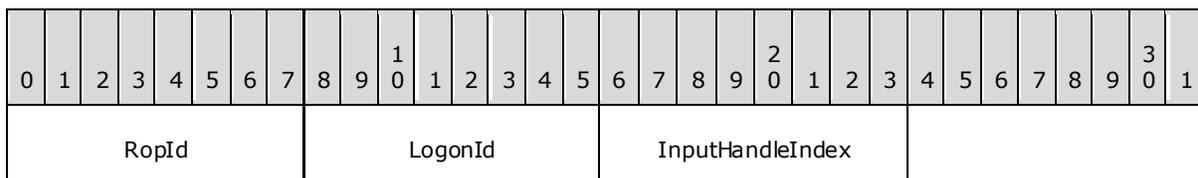

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6D.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.6.8.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																FolderId															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6D.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This field MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

FolderId (8 bytes): 64-bit identifier. This value identifies the transport folder.

2.2.6.8.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6D.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This field MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.6.9 RopOptionsData

This remote operation retrieves the options data that is associated with an address type. For more information about this operation, see [\[MS-OXOMSG\]](#).

2.2.6.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										LogonId										InputHandleIndex						AddressType (variable)					
...																															
WantWin32																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server object handle table where the handle for the input Server object is stored. For more information about Server objects, see section [3](#).

AddressType (variable): Null-terminated ASCII string. This value specifies the address type for which options are to be returned.

WantWin32 (1 byte): Unsigned 8-bit Boolean. This value specifies whether the help file data is to be returned in a format that is suited for 32-bit machines.

2.2.6.9.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										Reserved						OptionsInfoSize															
...										OptionsInfo (variable)																					
...																															
HelpFileSize																HelpFile (variable)															
...																															

HelpFileName (variable)
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This field **MUST** be set to the **InputHandleIndex** specified in the request. For more information about Server objects, see section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

Reserved (1 byte): Reserved. This field **MUST** be set to 0x01.

OptionsInfoSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **OptionsInfo** field.

OptionsInfo (variable): Array of bytes. This field contains opaque data from the server. Clients **SHOULD** ignore this field. Servers **SHOULD** return this field as an empty array. <2> The size of this field, in bytes, is specified by the **OptionsInfoSize** field.

HelpFileSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **HelpFile** field.

HelpFile (variable): Array of bytes. This field contains the help file associated with the specified address type. The size of this field, in bytes, is specified by the **HelpFileSize** field.

HelpFileName (variable): Null-terminated ASCII string. This string specifies the name of the help file that is associated with the specified address type. This field is present if **HelpFileSize** is non-zero and is not present otherwise.

2.2.7 Property ROPs

2.2.7.1 RopGetPropertyIdsFromNames

This remote operation gets **property IDs** for specified **property names**. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31																																
RopId										LogonId										InputHandleIndex										Flags																																	
PropertyNameCount																				PropertyNames (variable)																																											
...																																																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x56.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

Flags (1 byte): 8-bit flags structure. These flags control the behavior of this operation. The possible values are specified in [\[MS-OXCPRPT\]](#).

PropertyNameCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyNames** field.

PropertyNames (variable): List of **PropertyName** structures. The number of structures contained in this field is specified by the **PropertyNameCount** field. The format of the **PropertyName** structure is specified in [\[MS-OXCADATA\]](#). This field specifies the property names requested.

2.2.7.1.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										PropertyIdCount																					
PropertyIds (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x56.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyId** structures in the **PropertyIds** field.

PropertyIds (variable): Array of **PropertyId** structures. The number of structures contained in this field is specified by the **PropertyIdCount** field. The format of the **PropertyId** structure is specified in [\[MS-OXCADATA\]](#). This field lists the property IDs associated with the requested property names, which are specified in the **PropertyNames** field of the request.

2.2.7.1.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x56.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.2 RopGetNamesFromPropertyIds

This remote operation gets property names for specified property IDs. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								PropertyIdCount							
...								PropertyIds (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x55.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

PropertyIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyId** structures in the **PropertyIds** field.

PropertyIds (variable): Array of **PropertyId** structures. The number of structures contained in this field is specified by the **PropertyIdCount** field. The format of the **PropertyId**

structure is specified in [\[MS-OXCDATA\]](#). This field specifies which property IDs for which to retrieve names.

2.2.7.2.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PropertyNameCount															
PropertyNames (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x55.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyNameCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyNames** field.

PropertyNames (variable): List of **PropertyName** structures. The number of structures contained in this field is specified by the **PropertyNameCount** field. The format of the **PropertyName** structure is specified in [\[MS-OXCADATA\]](#). This field lists the property names for the property IDs requested.

2.2.7.2.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x55.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.3 RopGetPropertiesSpecific

This remote operation gets property values for specified property tags. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								PropertySizeLimit							
...								WantUnicode																PropertyTagCount							
...								PropertyTags (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x07.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

PropertySizeLimit (2 bytes): Unsigned 16-bit integer. This value specifies the maximum size allowed for a property value returned.

WantUnicode (2 bytes): 16-bit Boolean. This value specifies whether to return string properties in Unicode.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies how many tags are present in **PropertyTags**.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the properties requested.

2.2.7.3.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																RowData (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x07.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

RowData (variable): **PropertyRow** structure. The format of the **PropertyRow** structure is specified in [\[MS-OXCDATA\]](#) and the columns used for these rows were those specified in the **PropertyTags** field in the request.

2.2.7.3.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x07.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.4 RopGetPropertiesAll

This remote operation gets all the property values for an object. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								PropertySizeLimit							
...								WantUnicode																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x08.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

PropertySizeLimit (2 bytes): Unsigned 16-bit integer. This value specifies the maximum size allowed for a property value returned.

WantUnicode (2 bytes): 16-bit Boolean. This value specifies whether to return string properties in Unicode.

2.2.7.4.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PropertyValueCount															
PropertyValues (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x08.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyValue** structures present in the **PropertyValues** field.

PropertyValues (variable): List of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. These values are the properties defined on the object. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.4.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x08.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.5 RopGetPropertiesList

This remote operation gets the list of property tags for an object. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x09.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

2.2.7.5.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PropertyTagCount															
PropertyTags (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x09.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of property tags in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field lists the property tags on the object.

2.2.7.5.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x09.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.6 RopSetProperties

This remote operation sets property values for an object. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										PropertyValueSize									
...										PropertyValueCount																				PropertyValues (variable)									
...																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0A.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

PropertyValueSize (2 bytes): Unsigned 16-bit integer. This value specifies the number of bytes used for the **PropertyValueCount** field and the **PropertyValues** field.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyValue** structures listed in the **PropertyValues** field.

PropertyValues (variable): Array of **TaggedPropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The size of this field, in bytes, is equal to **PropertyValueSize** - 2. The format of the **TaggedPropertyValue** structure is specified in [\[MS-OXCDATA\]](#) section 2.12.4. This field specifies the property values to be set on the object.

2.2.7.6.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...										PropertyProblemCount																					
PropertyProblems (variable)																															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyProblemCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyProblem** structures in the **PropertyProblems** field.

PropertyProblems (variable): Array of **PropertyProblem** structures. The number of structures contained in this field is specified by the **PropertyProblemCount** field. The format of the **PropertyProblem** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.6.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.7 RopSetPropertiesNoReplicate

This remote operation sets property values for an object without invoking replication. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								PropertyValueSize							

...	PropertyValueCount	PropertyValues (variable)
...		

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x79.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

PropertyValueSize (2 bytes): Unsigned 16-bit integer. This value specifies the number of bytes used for the **PropertyValueCount** field and the **PropertyValues** field.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyValue** structures listed in the **PropertyValues** field.

PropertyValues (variable): List of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The size of this field, in bytes, is equal to **PropertyValueSize** - 2. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the property values to be set on the object.

2.2.7.7.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId										InputHandleIndex										ReturnValue											
...										PropertyProblemCount																					
PropertyProblems (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x79.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyProblemCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyProblem** structures in the **PropertyProblems** field.

PropertyProblems (variable): Array of **PropertyProblem** structures. The number of structures contained in this field is specified by the **PropertyProblemCount** field. The format of the **PropertyProblem** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.7.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x79.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.8 RopDeleteProperties

This remote operation deletes property values for an object. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								PropertyTagCount							
...								PropertyTags (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyTag** structures in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the property values to be deleted from the object.

2.2.7.8.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PropertyProblemCount															
PropertyProblems (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyProblemCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyProblem** structures in the **PropertyProblems** field.

PropertyProblems (variable): Array of **PropertyProblem** structures. The number of structures contained in this field is specified by the **PropertyProblemCount** field. The format of the **PropertyProblem** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.8.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x0B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.9 RopDeletePropertiesNoReplicate

This remote operation deletes property values from an object without invoking replication. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								PropertyTagCount							
...								PropertyTags (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7A.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyTag** structures in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the property values to be deleted from the object.

2.2.7.9.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																PropertyProblemCount															

PropertyProblems (variable)
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyProblemCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyProblem** structures in the **PropertyProblems** field.

PropertyProblems (variable): Array of **PropertyProblem** structures. The number of structures contained in this field is specified by the **PropertyProblemCount** field. The format of the **PropertyProblem** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.9.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7A.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.7.10 RopQueryNamedProperties

This remote operation retrieves all the named properties for an object. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								QueryFlags							
HasGuid								PropertyGuid (optional)																							
...																															
...																															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

QueryFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCPRPT\]](#). These flags control how this remote operation behaves.

HasGuid (1 byte): 8-bit Boolean. This value specifies whether the **PropertyGuid** field is present.

PropertyGuid (16 bytes): 128-bit GUID. This field is present if **HasGuid** is non-zero and is not present if the value of the **HasGuid** field is zero. This value specifies the subset of named properties to be returned.

2.2.7.10.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																IdCount															
PropertyIds (variable)																															

...
PropertyNames (variable)
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000 or 0x00040380.

IdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of Ids and names in the **PropertyIds** and **PropertyNames** fields, respectively.

PropertyIds (variable): Array of **PropertyId** structures. The number of structures contained in this field is specified by the **IdCount** field. The format of the **PropertyId** structure is specified in [MS-OXCDATA]. This field lists the property IDs for which property names are given.

PropertyNames (variable): List of **PropertyName** structures. The number of structures contained in this field is specified by the **IdCount** field. The format of the **PropertyName** structure is specified in [MS-OXCADATA]. This field lists the property names for the property IDs specified in the **PropertyIds** field.

2.2.7.10.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex						ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000 or 0x00040380.

2.2.7.11 RopCopyProperties

This remote operation copies property values from one object to another. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								SourceHandleIndex								DestHandleIndex							
WantAsynchronous								CopyFlags								PropertyTagCount															
PropertyTags (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x67.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the source Server Object is stored. More information about Server Objects can be found in section [3](#).

DestHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the destination Server Object is stored. More information about Server Objects can be found in section [3](#).

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

CopyFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCPRPT\]](#). These flags control the operation behavior.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies how many tags are present in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the properties to copy.

2.2.7.11.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																PropertyProblemCount															
PropertyProblems (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x67.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** value specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyProblemCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyProblem** structures in the **PropertyProblems** field.

PropertyProblems (variable): Array of **PropertyProblem** structures. The number of structures contained in this field is specified by the **PropertyProblemCount** field. The format of the **PropertyProblem** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.11.3 Null Destination Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																DestHandleIndex															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x67.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000503.

DestHandleIndex (4 bytes): Unsigned 32-bit integer. This index MUST be set to the **DestHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

2.2.7.11.4 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x67.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000 or 0x00000503.

2.2.7.12 RopCopyTo

This remote operation copies properties from one server object to another. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								SourceHandleIndex								DestHandleIndex							
WantAsynchronous								WantSubObjects								CopyFlags								ExcludedTagCount							
...								ExcludedTags (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x39.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the source Server Object is stored. More information about Server Objects can be found in section 3.

DestHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the destination Server Object is stored. More information about Server Objects can be found in section 3.

WantAsynchronous (1 byte): 8-bit Boolean. This value specifies whether the operation is to be executed asynchronously with status reported via **RopProgress**.

WantSubObjects (1 byte): 8-bit Boolean. This value specifies whether to copy sub-objects.

CopyFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCPRPT\]](#). These flags control the operation behavior.

ExcludedTagCount (2 bytes): Unsigned 16-bit integer. This value specifies how many tags are present in **ExcludedTags**.

ExcludedTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **ExcludedTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This field specifies the properties to exclude from the copy.

2.2.7.12.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																PropertyProblemCount															
PropertyProblems (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x39.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

PropertyProblemCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of **PropertyProblem** structures in the **PropertyProblems** field.

PropertyProblems (variable): Array of **PropertyProblem** structures. The number of structures contained in this field is specified by the **PropertyProblemCount** field. The format of the **PropertyProblem** structure is specified in [\[MS-OXCDATA\]](#).

2.2.7.12.3 Null Destination Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																DestHandleIndex															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x39.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000503.

DestHandleIndex (4 bytes): Unsigned 32-bit integer. This index MUST be set to the **DestHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

2.2.7.12.4 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x39.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000 or 0x00000503.

2.2.7.13 RopProgress

This remote operation gets the status of an asynchronous operation. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.7.13.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								WantCancel							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x50.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

WantCancel (1 byte): 8-bit Boolean. This value specifies whether to cancel the operation.

2.2.7.13.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																LogonId								CompletedTaskCount							
...																TotalTaskCount															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x50.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

CompletedTaskCount (4 bytes): Unsigned 32-bit integer. This value specifies the number of tasks completed.

TotalTaskCount (4 bytes): Unsigned 32-bit integer. This value specifies the total number of tasks.

2.2.7.13.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x50.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.8 Stream ROPs

2.2.8.1 RopOpenStream

This remote operation opens a property for streaming access. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
PropertyTag																															
OpenModeFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

PropertyTag (4 bytes): **PropertyTag** structure. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). This structure specifies the property of the object to stream.

OpenModeFlags (1 byte): 8-bit flags structure. These flags control how the stream is opened. The possible values are specified in [\[MS-OXCPRPT\]](#).

2.2.8.1.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																StreamSize															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2B.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

StreamSize (4 bytes): Unsigned 32-bit integer. This value indicates the size of the stream opened.

2.2.8.1.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2B.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.8.2 RopReadStream

This remote operation reads bytes from a stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								ByteCount							
...								MaximumByteCount (optional)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2C.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

ByteCount (2 bytes): Unsigned 16-bit integer. The value of this field specifies the maximum number of bytes to read if the value is not equal to 0xBABE; the **MaximumByteCount** field specifies the maximum number of bytes to read if the value of **ByteCount** is equal to 0xBABE. [<3>](#)

MaximumByteCount (4 bytes): Unsigned 32-bit integer. This value specifies the maximum number of bytes to read if the value of the **ByteCount** field is equal to 0xBABE. The **MaximumByteCount** field is present when **ByteCount** is equal to 0xBABE and is not present otherwise. If **MaximumByteCount** is greater than 0x80000000, then the RPC call SHOULD fail with error code 0x000004B6.

2.2.8.2.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...								DataSize																							
Data (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2C.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

DataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size, in bytes, of the **Data** field. The maximum size is specified in the request buffer by one of the following:

- The **ByteCount** field, when the value of **ByteCount** is not equal to 0xBABE.
- The **MaximumByteCount** field, when the value of **ByteCount** is equal to 0xBABE.

Data (variable): Array of bytes. These values are the bytes read from the stream. The size of this field, in bytes, is specified by the **DataSize** field.

2.2.8.3 RopWriteStream

This remote operation writes bytes to a stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId								LogonId								InputHandleIndex								DataSize															
...								Data (variable)																															
...																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2D.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

DataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Data** field.

Data (variable): Array of bytes. The size of this field, in bytes, is specified by the **DataSize** field. These values specify the bytes to be written to the stream.

2.2.8.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																WrittenSize															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2D.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

WrittenSize (2 bytes): Unsigned 16-bit integer. This value specifies the number of bytes actually written.

2.2.8.4 RopCommitStream

This remote operation commits stream operations. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5D.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.8.4.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5D.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.8.5 RopGetStreamSize

This remote operation gets the size of a stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.8.5.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																StreamSize															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

StreamSize (4 bytes): Unsigned 32-bit integer. This value is the current size of the stream.

2.2.8.5.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.8.6 RopSetStreamSize

This remote operation sets the size of a stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								StreamSize							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

StreamSize (8 bytes): Unsigned 64-bit integer. This value specifies the size of the stream. The server limits the maximum size of the stream. <4>

2.2.8.6.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.8.7 RopSeekStream

This remote operation seeks to a specific offset within a stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								Origin							
Offset																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

Origin (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [MS-OXCPRPT]. This value specifies the origin location for the seek operation.

Offset (8 bytes): 64-bit integer. This value specifies the seek offset.

2.2.8.7.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								InputHandleIndex								ReturnValue															
...																NewPosition															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

NewPosition (8 bytes): Unsigned 64-bit integer. This value represents the new position after the operation.

2.2.8.7.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.8.8 RopCopyToStream

This remote operation copies a number of bytes from a source stream to a destination stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								SourceHandleIndex								DestHandleIndex							
ByteCount																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3A.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.


SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the source Server Object is stored. More information about Server Objects can be found in section [3](#).

DestHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the destination Server Object is stored. More information about Server Objects can be found in section [3](#).

ByteCount (8 bytes): Unsigned 64-bit integer. This value specifies the number of bytes to be copied.

2.2.8.8.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SourceHandleIndex								ReturnValue															
...																ReadByteCount															
...																															
...																WrittenByteCount															

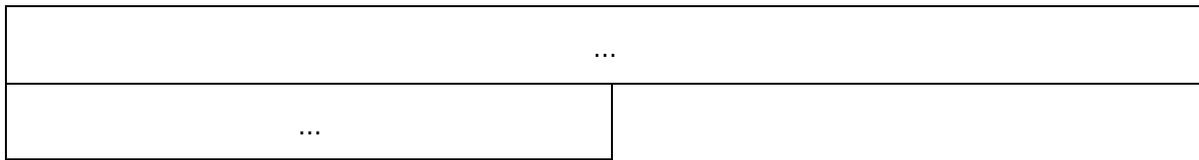

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3A.


SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000503.

ReadByteCount (8 bytes): Unsigned 64-bit integer. This value specifies the number of bytes read from the source object.

WrittenByteCount (8 bytes): Unsigned 64-bit integer. This value specifies the number of bytes written to the destination object.

2.2.8.8.3 Null Destination Failure Response Buffer

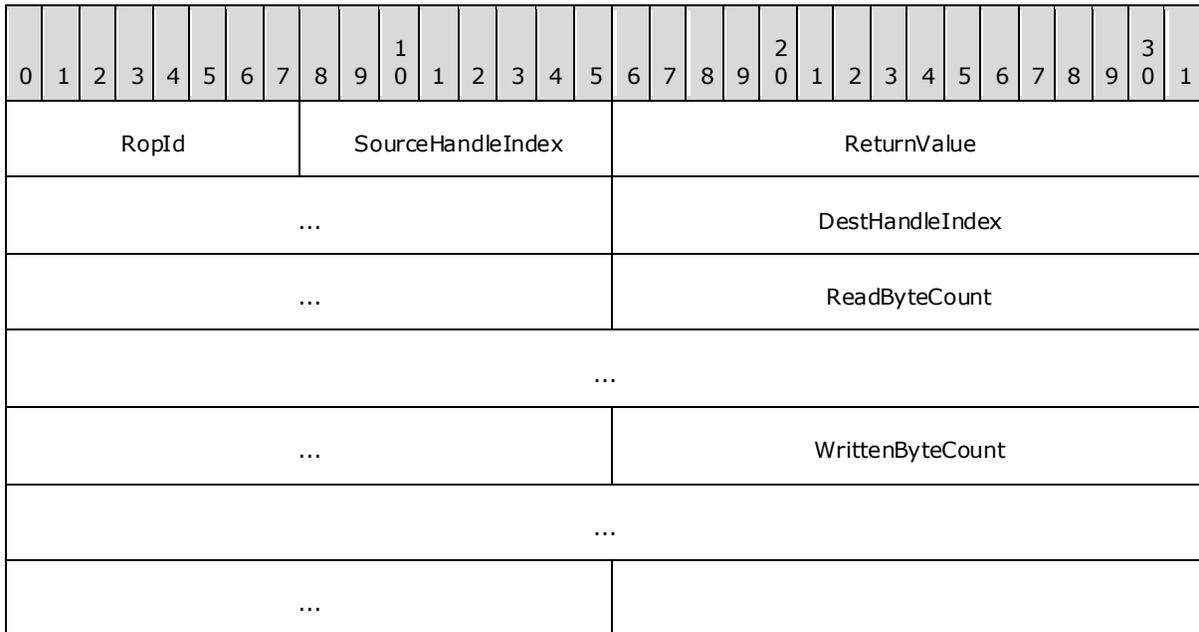

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3A.

SourceHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **SourceHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000503.

DestHandleIndex (4 bytes): Unsigned 32-bit integer. This index MUST be set to the **DestHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReadByteCount (8 bytes): Unsigned 64-bit integer. This value specifies the number of bytes read from the source object and for this result SHOULD be 0x0000000000000000.

WrittenByteCount (8 bytes): Unsigned 64-bit integer. This value specifies the number of bytes written to the destination object and for this result SHOULD be 0x0000000000000000.

2.2.8.9 RopLockRegionStream

This remote operation locks a specified range of bytes in a stream. For more details about this operation, see [\[MS-OXCPRPT\]](#).

2.2.8.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										RegionOffset									
...																																							
...																								RegionSize															
...																																							
...																								LockFlags															
...																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server object is stored. For more information about Server objects, see section [3](#).

RegionOffset (8 bytes): Unsigned 64-bit integer. This value specifies the byte location in the stream where the region begins.

RegionSize (8 bytes): Unsigned 64-bit integer. This value specifies the size of the region, in bytes.

LockFlags (4 bytes): 32-bit flags structure. This structure contains flags specifying the behavior of the lock operation. The possible values for this structure are specified in [\[MS-OXCPRPT\]](#).

2.2.8.9.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5B.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. For more information about Server objects, see section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.8.10 RopUnlockRegionStream

This remote operation unlocks a specified range of bytes in a stream. For more details about this operation, see [\[MS-OXCPRPT\]](#).

2.2.8.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								RegionOffset							
...																															
...																								RegionSize							
...																															
...																								LockFlags							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5C.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server object is stored. For more information about Server objects, see section 3.

RegionOffset (8 bytes): Unsigned 64-bit integer. This value specifies the byte location in the stream where the region begins.

RegionSize (8 bytes): Unsigned 64-bit integer. This value specifies the size of the region in bytes.

LockFlags (4 bytes): 32-bit flags structure. This structure contains flags specifying the behavior of the lock operation. The possible values for this structure are specified in [\[MS-OXCPRPT\]](#).

2.2.8.10.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x5C.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. For more information about Server objects, see section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.8.11 RopWriteAndCommitStream

This remote operation writes bytes to a stream and commits the stream. More detailed information about this operation can be found in [\[MS-OXCPRPT\]](#).

2.2.8.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								DataSize							
...								Data (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x90.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

DataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **Data** field.

Data (variable): Array of bytes. The size of this field, in bytes, is specified by the **DataSize** field. This array contains the bytes to be written to the stream.

2.2.8.11.2 Response Buffer

The response buffer for this ROP is the same as the response buffer for **RopWriteStream**, as specified in section 2.2.8.3.2.

2.2.8.12 RopCloneStream

This remote operation creates a new stream object based on the same data as another stream. More detailed information about this operation can be found in [MS-OXCPRPT].

2.2.8.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

2.2.8.12.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3B.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.9 Permission ROPs

2.2.9.1 RopModifyPermissions

This remote operation modifies the permissions associated with a folder. More detailed information about this operation can be found in [\[MS-OXCPerm\]](#).

2.2.9.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								ModifyFlags							
ModifyCount																PermissionsData (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x40.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

ModifyFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCPerm\]](#). These flags control behavior of this operation.

ModifyCount (2 bytes): Unsigned 16-bit integer. This count specifies the number of structures serialized in the **PermissionData** array.

PermissionsData (variable): A list of **PermissionData** structures. The number of structures contained in this field is specified by the **ModifyCount** field. The format of the **PermissionData** structure is specified in section [2.2.9.1.1.1](#).

2.2.9.1.1.1 PermissionData Structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
PermissionDataFlags								PropertyValueCount																PropertyValues (variable)							
...																															

PermissionDataFlags (1 byte): 8-bit flag structure. This field is used to specify the type of operation.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of value structures in the **PropertyValues** field.

PropertyValues (variable): Array of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#). These values are used to specify and describe the modify operations.

2.2.9.1.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x40.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.9.2 RopGetPermissionsTable

This remote operation gets the permissions table for a folder. More detailed information about this operation can be found in [\[MS-OXCPerm\]](#).

2.2.9.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
TableFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

TableFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCPERM\]](#). These flags control the type of table.

2.2.9.2.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3E.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.10 Rule ROPs

2.2.10.1 RopModifyRules

This remote operation modifies the rules associated with a folder. More detailed information about this operation can be found in [\[MS-OXORULE\]](#).

2.2.10.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								ModifyRulesFlags							
RulesCount																RulesData (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x41.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon on which the operation is performed.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the handle in the Server Object Handle Table used as input for this operation. More information about Server Objects can be found in section 3.

ModifyRulesFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXORULE\]](#). These flags specify behavior of this operation.

RulesCount (2 bytes): Unsigned 16-bit integer. This count specifies the number of structures serialized in the **RuleData** field.

RulesData (variable): A list of **RuleData** structures. The number of structures contained in this field is specified by the **RulesCount** field. The format of the **RuleData** structure is specified in section [2.2.10.1.1.1](#).

2.2.10.1.1.1 RuleData Structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RuleDataFlags								PropertyValueCount																PropertyValues (variable)							
...																															

RuleDataFlags (1 byte): 8-bit flag structure. This field is used to specify the type of operation.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of value structures in the **PropertyValues** field.

PropertyValues (variable): Array of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#). These values are used to specify and describe the rule operations.

2.2.10.1.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x41.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the handle in the Server Object Handle Table used as input for this operation. More information about Server Objects can be found in [section 3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.10.2 RopGetRulesTable

This remote operation gets the rules table of a folder. More detailed information about this operation can be found in [\[MS-OXORULE\]](#).

2.2.10.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
TableFlags																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon on which the operation is performed.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the location in the Server Object Handle Table used to find the handle for this operation. More information about Server Objects can be found in [section 3](#).

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the location in the Server Object Handle Table used to store the output handle. More information about Server Objects can be found in [section 3](#).

TableFlags (1 byte): 8-bit flags structure. These flags control the type of table. The possible values are specified in [\[MS-OXORULE\]](#).

2.2.10.2.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x3F.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the handle in the Server Object Handle Table specified. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.10.3 RopUpdateDeferredActionMessages

This remote operation updates the **Entry IDs** in the deferred action messages. More detailed information about this operation can be found in [\[MS-OXORULE\]](#).

2.2.10.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								ServerEntryIdSize							
...								ServerEntryId (variable)																							
...																															
ClientEntryIdSize																ClientEntryId (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x57.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon on which the operation is performed.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the location in the Server Object Handle Table used to find the handle for this operation. More information about Server Objects can be found in section 3.

ServerEntryIdSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **ServerEntryId** field.

ServerEntryId (variable): Byte Array. The size of this field, in bytes, is specified by the **ServerEntryIdSize** field. This value specifies the ID of the message on the server.

ClientEntryIdSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **ClientEntryId** field.

ClientEntryId (variable): Byte Array. The size of this field, in bytes, is specified by the **ClientEntryIdSize** field. This value specifies the ID of the downloaded message on the client.

2.2.10.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x57.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index refers to the handle in the Server Object Handle Table specified as the input handle. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.11 Fast Transfer ROPs

2.2.11.1 RopFastTransferDestinationConfigure

This remote operation creates a destination fast transfer object. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.11.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
SourceOperation								CopyFlags																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x53.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

SourceOperation (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [MS-OXCFXICS]. This enumeration is used to indicate how the data stream was created on the source.

CopyFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCFXICS]. These flags control the behavior of the transfer operation.

2.2.11.1.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x53.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.11.2 RopFastTransferDestinationPutBuffer

This remote operation sends a stream of data to a fast transfer destination object. More detailed information about this operation can be found in [MS-OXCFXICS].

2.2.11.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								TransferDataSize							
...								TransferData (variable)																							

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x54.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

TransferDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **TransferData** field.

TransferData (variable): Array of bytes. The size of this field, in bytes, is specified by the **TransferDataSize** field. This array contains the data to be uploaded to the destination fast transfer object.

2.2.11.2.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																TransferStatus															
InProgressCount																TotalStepCount															
Reserved								BufferUsedSize																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x54.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

TransferStatus (2 bytes): 16-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCFCICS\]](#). This value specifies the current status of the transfer.

InProgressCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of steps that have been completed in the current operation.

TotalStepCount (2 bytes): Unsigned 16-bit integer. This value specifies the approximate total number of steps to be completed in the current operation.

Reserved (1 byte): Reserved. The server MUST set this field to 0x00.

BufferUsedSize (2 bytes): Unsigned 16-bit integer. This value is the buffer size that was used.

2.2.11.3 RopFastTransferSourceGetBuffer

This remote operation retrieves a stream of data from a fast transfer source object. More detailed information about this operation can be found in [\[MS-OXCFICS\]](#).

2.2.11.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								BufferSize							
...								MaximumBufferSize (optional)																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

BufferSize (2 bytes): Unsigned 16-bit integer. This value specifies the buffer size requested.

MaximumBufferSize (2 bytes): Unsigned 16-bit integer. This field is present when the **BufferSize** field is set to 0xBABE. This value specifies the maximum size limit when the server determines the buffer size.

2.2.11.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																TransferStatus															
InProgressCount																TotalStepCount															
Reserved								TransferBufferSize																TransferBuffer (variable)							
...																															

BackoffTime (optional)

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4E.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

TransferStatus (2 bytes): 16-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCFCICS\]](#). This value specifies the current status of the transfer.

InProgressCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of steps that have been completed in the current operation.

TotalStepCount (2 bytes): Unsigned 16-bit integer. This value specifies the approximate number of steps to be completed in the current operation.

Reserved (1 byte): Reserved. The server **MUST** set this field to 0x00.

TransferBufferSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **TransferBuffer** field.

TransferBuffer (variable): Array of bytes. This field is present if the **ReturnValue** is not 0x00000480 and is not present otherwise. If present, the size of this field, in bytes, is specified by the **TransferBufferSize** field.

BackoffTime (4 bytes): Unsigned 32-bit integer. This field is present if the **ReturnValue** is 0x00000480 and is not present otherwise. This value specifies the number of milliseconds for the client to wait before trying this operation again.

2.2.11.4 RopFastTransferSourceCopyFolder

This remote operation downloads properties and descendant subobjects of a specified folder. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.11.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
CopyFlags								SendOptions																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4C.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

CopyFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCFXICS]. These flags control the type of operation.

SendOptions (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCFXICS]. These values control the behavior of the operation.

2.2.11.4.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4C.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.11.5 RopFastTransferSourceCopyMessages

This remote operation downloads from a folder the content and descendant sub-objects for messages identified by a given set of IDs. More detailed information about this operation can be found in [MS-OXCFXICS].

2.2.11.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										OutputHandleIndex									
MessageIdCount																MessageIds (variable)																							
...																																							

CopyFlags	SendOptions
-----------	-------------

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4B.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

MessageIdCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of identifiers in the **MessageIds** field.

MessageIds (variable): Array of 64-bit identifiers. The number of identifiers contained in this field is specified by the **MessageIdCount** field. This list specifies the messages to copy.

CopyFlags (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCFXICS]. These values control the type of operation.

SendOptions (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCFXICS]. These values control the behavior of the operation.

2.2.11.5.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										OutputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4B.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.11.6 RopFastTransferSourceCopyTo

This remote operation downloads the properties of a given **messaging object** and its descendant subobjects. More detailed information about this operation can be found in [MS-OXCFXICS].

2.2.11.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
Level								CopyFlags																							
...								SendOptions								PropertyTagCount															
PropertyTags (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4D.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

Level (1 byte): Unsigned 8-bit integer. This value specifies the level at which the copy is occurring.

CopyFlags (4 bytes): 32-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These flags control the behavior of the transfer operation.

SendOptions (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These values control the behavior of the operation.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The format of the **PropertyTag** structure is specified in [\[MS-OXCADATA\]](#). The number of structures contained in this field is specified by the **PropertyTagCount** field. This array specifies the properties to exclude during the copy.

2.2.11.6.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x4D.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.11.7 RopFastTransferSourceCopyProperties

This remote operation copies properties from Message, Folder, or Attachment objects to a fast transfer object. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.11.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
Level								CopyFlags								SendOptions								PropertyTagCount							
...								PropertyTags (variable)																							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x69.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

Level (1 byte): Unsigned 8-bit integer. This value specifies the level at which the copy is occurring.

CopyFlags (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These flags control the behavior of the transfer operation.

SendOptions (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These values control the behavior of the operation.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The format of the **PropertyTag** structure is specified in [\[MS-OXCDATA\]](#). The number of structures contained in this field is specified by the **PropertyTagCount** field. This array specifies the properties to copy.

2.2.11.7.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x69.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.11.8 RopTellVersion

This remote operation provides the version of the other server in a server-to-client-to-server upload. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.11.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								Version							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x86.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

Version (6 bytes): Array of 3 unsigned 16-bit integers. This array contains the version information for the other server. The format of this structure is the same as that specified in [\[MS-OXCRPC\]](#) section 3.1.9.

2.2.11.8.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31				
RopId										InputHandleIndex										ReturnValue															
...																																			

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x86.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12 Incremental Change Synchronization ROPs

2.2.12.1 RopSynchronizationConfigure

This remote operation configures a synchronization object. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.12.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										OutputHandleIndex									
SynchronizationType										SendOptions										SynchronizationFlags																			
RestrictionDataSize																RestrictionData (variable)																							

...	
SynchronizationExtraFlags	
PropertyTagCount	PropertyTags (variable)
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x70.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

SynchronizationType (1 byte): 8-bit enumeration. The possible values for this enumeration are specified in [\[MS-OXCFXICS\]](#). This value controls the type of synchronization.

SendOptions (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These values control the behavior of the operation.

SynchronizationFlags (2 bytes): 16-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These flags control the behavior of the synchronization.

RestrictionDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the length of the **RestrictionData** field.

RestrictionData (variable): Restriction packet. The size of this field, in bytes, is specified by the **RestrictionDataSize** field. This field contains a restriction packet, as specified in [\[MS-OXCADATA\]](#) section 2.13. The restriction specifies the filter for this synchronization object.

SynchronizationExtraFlags (4 bytes): 32-bit flags structure. The possible values are specified in [\[MS-OXCFXICS\]](#). These flags control the additional behavior of the synchronization.

PropertyTagCount (2 bytes): Unsigned 16-bit integer. This value specifies how many tags are present in the **PropertyTags** field.

PropertyTags (variable): Array of **PropertyTag** structures. The number of structures contained in this field is specified by the **PropertyTagCount** field. The format of the **PropertyTag** structure is specified in [\[MS-OXCADATA\]](#). This field specifies the property tags to be used for the synchronization process.

2.2.12.1.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x70.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.2 RopSynchronizationImportMessageChange

This remote operation imports new messages or full changes to existing messages into the **server replica**. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.12.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
ImportFlag								PropertyValueCount																PropertyValues (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x72.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

ImportFlag (1 byte): 8-bit flags structure. The possible values are specified in [\[MS-OXCFCICS\]](#). These flags control the behavior of the synchronization.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyValues** field.

PropertyValues (variable): Array of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#) and possible properties to be set are specified in [\[MS-OXCFXICS\]](#). These values are used to specify some extra properties on the message.

2.2.12.2.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																MessageId															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x72.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

MessageId (8 bytes): 64-bit identifier. This value is the ID of the message that was imported.

2.2.12.2.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x72.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.12.3 RopSynchronizationImportReadStateChanges

This remote operation synchronizes a change in the read status for messages. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.12.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31				
RopId										LogonId										InputHandleIndex						MessageReadStatesSize									
...										MessageReadStates (variable)																									
...																																			

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x80.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

MessageReadStatesSize (2 bytes): Unsigned 16-bit integer. This value specifies the size, in bytes, of the **MessageReadStates** field.

MessageReadStates (variable): List of **MessageReadState** structures. The format of the **MessageReadState** structure is defined in section [2.2.12.3.1.1](#). The size of this field, in bytes, is specified by the **MessageReadStatesSize** field. These values specify the messages and associated read states to be changed.

2.2.12.3.1.1 MessageReadState structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31				
MessageIdSize																MessageId (variable)																			
...																																			
MarkAsRead																																			

MessageIdSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **MessageId** field.

MessageId (variable): Array of bytes. The size of this field, in bytes, is specified by the **MessageIdSize** field. This value identifies the message to be marked as read or unread.

MarkAsRead (1 byte): 8-bit Boolean. This value specifies whether to mark the message as read or not.

2.2.12.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x80.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.4 RopSynchronizationImportHierarchyChange

This remote operation synchronizes a change to the folder hierarchy. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.12.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										HierarchyValueCount									
...										HierarchyValues (variable)																													
...																																							
PropertyValueCount																PropertyValues (variable)																							
...																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x73.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

HierarchyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **HierarchyValues** field.

HierarchyValues (variable): Array of **PropertyValue** structures. The number of structures contained in this field is specified by the **HierarchyValueCount** field. The format of the **PropertyValue** structure is specified in [MS-OXCDATA] and possible properties to be set are specified in [MS-OXCFCICS]. These values are used to specify some hierarchy related properties of the folder.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyValues** field.

PropertyValues (variable): Array of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The format of the **PropertyValue** structure is specified in [MS-OXCDATA]. These values are used to specify folder properties.

2.2.12.4.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																FolderId															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x73.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

FolderId (8 bytes): 64-bit identifier. This value is the ID of the folder that was imported.

2.2.12.4.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x73.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.12.5 RopSynchronizationImportDeletes

This remote operation synchronizes deleted messages or folders. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.12.5.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								IsHierarchy							
PropertyValueCount																PropertyValues (variable)															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x74.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

IsHierarchy (1 byte): 8-bit Boolean. This value specifies whether this operation consists of hierarchy or content deletions.

PropertyValueCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of structures in the **PropertyValues** field.

PropertyValues (variable): Array of **PropertyValue** structures. The number of structures contained in this field is specified by the **PropertyValueCount** field. The format of the **PropertyValue** structure is specified in [\[MS-OXCDATA\]](#) and possible properties to be set are specified in [\[MS-OXCFXICS\]](#). These values are used to specify the folders or messages to delete.

2.2.12.5.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x74.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.6 RopSynchronizationImportMessageMove

This remote operation synchronizes a move of a message from one folder to another. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.12.6.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								SourceFolderIdSize							
...																								SourceFolderId (variable)							
...																															
SourceMessageIdSize																															
SourceMessageId (variable)																															
...																															

PredecessorChangeListSize
PredecessorChangeList (variable)
...
DestinationMessageIdSize
DestinationMessageId (variable)
...
ChangeNumberSize
ChangeNumber (variable)
...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x78.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

SourceFolderIdSize (4 bytes): Unsigned 32-bit integer. This value specifies the size of the **SourceFolderId** field.

SourceFolderId (variable): Array of bytes. The size of this field, in bytes, is specified by the **SourceFolderIdSize** field. This value identifies the parent folder of the source message.

SourceMessageIdSize (4 bytes): Unsigned 32-bit integer. This value specifies the size of the **SourceMessageId** field.

SourceMessageId (variable): Array of bytes. The size of this field, in bytes, is specified by the **SourceMessageIdSize**. This value identifies the source message.

PredecessorChangeListSize (4 bytes): Unsigned 32-bit integer. This value specifies the size of the **PredecessorChangeList** field.

PredecessorChangeList (variable): Array of bytes. The size of this field, in bytes, is specified by the **PredecessorChangeListSize** field.

DestinationMessageIdSize (4 bytes): Unsigned 32-bit integer. This value specifies the size of the **DestinationMessageId** field.

DestinationMessageId (variable): Array of bytes. The size of this field, in bytes, is specified by the **DestinationMessageIdSize**. This value identifies the destination message.

ChangeNumberSize (4 bytes): Unsigned 32-bit integer. This value specifies the size of the **ChangeNumber** field.

ChangeNumber (variable): Array of bytes. The size of this field, in bytes, is specified by the **ChangeNumberSize** field. This field specifies the change number of the message.

2.2.12.6.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																MessageId															
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x78.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

MessageId (8 bytes): 64-bit identifier. This value is the ID of the moved message.

2.2.12.6.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x78.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.12.7 RopSynchronizationOpenCollector

This remote operation creates a new incremental change synchronization **collector**. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.12.7.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
IsContentsCollector																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7E.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section [3](#).

IsContentsCollector (1 byte): 8-bit Boolean. This value specifies whether this collector is for contents or for hierarchy.

2.2.12.7.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7E.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.8 RopSynchronizationGetTransferState

This remote operation opens a synchronization transfer object to retrieve the storage state properties. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.12.8.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x82.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section [3](#).

2.2.12.8.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x82.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.9 RopSynchronizationUploadStateStreamBegin

This remote operation begins an operation to upload stream data. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.12.9.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										StateProperty									
...																				TransferBufferSize																			
...																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x75.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

StateProperty (4 bytes): 32-bit Property Tag. The possible values for this field are specified in [\[MS-OXCFXICS\]](#).

TransferBufferSize (4 bytes): Unsigned 32-bit integer. This value specifies the size of the stream to be uploaded.

2.2.12.9.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x75.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.10 RopSynchronizationUploadStateStreamContinue

This remote operation uploads storage state property values. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.12.10.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31				
RopId										LogonId										InputHandleIndex						StreamDataSize									
...										StreamData (variable)																									
...																																			

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x76.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

StreamDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **StreamData** field.

StreamData (variable): Array of bytes. The size of this field, in bytes, is specified by the **StreamDataSize** field. This array contains the state stream data to be uploaded.

2.2.12.10.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x76.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.11 RopSynchronizationUploadStateStreamEnd

This remote operation marks the end of a storage state property upload operation. More detailed information about this operation can be found in [\[MS-OXCFCICS\]](#).

2.2.12.11.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x77.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

2.2.12.11.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x77.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.12 RopSetLocalReplicaMidsetDeleted

This remote operation marks a set of messages in a given folder as deleted. More detailed information about this operation can be found in [\[MS-OXCFCIS\]](#).

2.2.12.12.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								DataSize							
...								LongTermIdRangeCount																							

...	LongTermIdRanges (variable)
...	

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x93.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

DataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of both the **LongTermIdRangeCount** and **LongTermIdRanges** fields.

LongTermIdRangeCount (4 bytes): Unsigned 32-bit integer. This value specifies the number of structures in the **LongTermIdRanges** field.

LongTermIdRanges (variable): Array of **LongTermIdRange** structures. The number of structures contained in this field is specified by the **LongTermIdRangeCount** field. The format of the **LongTermIdRange** structure is specified in section [2.2.12.12.1.1](#). These structures specify the ranges of message identifiers that have been deleted.

2.2.12.12.1.1 LongTermIdRange structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
MinLongTermId																															
...																															
...																															
...																															
...																															
...																															
...																															
MaxLongTermId																															
...																															

...
...
...
...

MinLongTermId (24 bytes): **LongTermId** structure. The format of the **LongTermId** structure is specified in [\[MS-OXCDATA\]](#) section 2.2.1.3.1. This identifier specifies the beginning of a range.

MaxLongTermId (24 bytes): **LongTermId** structure. The format of the **LongTermId** structure is specified in [\[MS-OXCDATA\]](#) section 2.2.1.3.1. This identifier specifies the end of a range.

2.2.12.12.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x93.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.12.13 RopGetLocalReplicaIds

This remote operation reserves a range of IDs to be used by a local replica. More detailed information about this operation can be found in [\[MS-OXCFXICS\]](#).

2.2.12.13.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								IdCount							

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7F.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

IdCount (4 bytes): Unsigned 32-bit integer. This value specifies the number of IDs to reserve.

2.2.12.13.2 Success Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																ReplGuid															
...																															
...																															
...																GlobalCount															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to 0x00000000.

ReplGuid (16 bytes): **REPLGUID** structure. The format of the **REPLGUID** structure is specified in [\[MS-OXCDATA\]](#). This structure specifies the local table replica GUID.

GlobalCount (6 bytes): Array of bytes. This array specifies the first value in the reserved range.

2.2.12.13.3 Failure Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x7F.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index **MUST** be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation. For this response, this field is set to a value other than 0x00000000.

2.2.13 Notification ROPs

2.2.13.1 RopRegisterNotification

This remote operation registers for notification events. More detailed information about this operation can be found in [\[MS-OXCNOTIF\]](#).

2.2.13.1.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							
NotificationTypes								Reserved								WantWholeStore								FolderId (optional)							
...																															
...																								MessageId (optional)							
...																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x29.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

NotificationTypes (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCNOTIF]. These flags specify the types of events to register for.

Reserved (1 byte): 8-bit flags structure. The possible values are specified in [MS-OXCNOTIF].

WantWholeStore (1 byte): 8-bit Boolean. This value specifies whether the notification is scoped to the mailbox store instead of a specific folder or message.

FolderId (8 bytes): 64-bit identifier. This field is present when the **WantWholeStore** field is zero and is not present when it is non-zero. This value specifies the folder to register notifications for.

MessageId (8 bytes): 64-bit identifier. This field is present when the **WantWholeStore** field is zero and is not present when it is non-zero. This value specifies the message to register notifications for.

2.2.13.1.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x29.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.13.2 RopSynchronizationOpenAdvisor

This remote operation opens the incremental change synchronization advisor object. More detailed information about this operation can be found in [MS-OXCNOTIF].

2.2.13.2.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								OutputHandleIndex							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x83.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the output Server Object will be stored. More information about Server Objects can be found in section 3.

2.2.13.2.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								OutputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x83.

OutputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **OutputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.13.3 RopRegisterSynchronizationNotifications

This remote operation registers incremental change synchronization notifications for given folders. More detailed information about this operation can be found in [\[MS-OXCNOTIF\]](#).

2.2.13.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex								FolderCount							
...								FolderIds (variable)																							
...																															
FolderChangeNumbers (variable)																															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x84.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section 3.

FolderCount (2 bytes): Unsigned 16-bit integer. This value specifies the number of folders to register for notifications for.

FolderIds (variable): Array of 64-bit identifiers. The number of identifiers contained in this field is specified by the **FolderCount** field. These IDs specify the folders to register for notification for.

FolderChangeNumbers (variable): Array of unsigned 32-bit integers. The number of 32-bit integers contained in this field is specified by the **FolderCount** field. Each value is a unique change number for a folder.

2.2.13.3.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								InputHandleIndex								ReturnValue															
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x84.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section [3](#).

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.13.4 RopSetSynchronizationNotificationGuid

This remote operation sets the incremental synchronization notification GUID. More detailed information about this operation can be found in [\[MS-OXCNOTIF\]](#).

2.2.13.4.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31								
RopId										LogonId										InputHandleIndex										NotificationGuid									
...																																							
...																																							
...																																							
...																																							

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x88.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

NotificationGuid (16 bytes): GUID. This GUID specifies the notification GUID to set.

2.2.13.4.2 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId										InputHandleIndex										ReturnValue											
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x88.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index MUST be set to the **InputHandleIndex** specified in the request. More information about Server Objects can be found in section 3.

ReturnValue (4 bytes): Unsigned 32-bit integer. This value specifies the status of the remote operation.

2.2.13.5 RopNotify

This remote operation response provides notification event data to the client. There is no request buffer for this Rop. More detailed information about this operation can be found in [\[MS-OXCNOTIF\]](#).

2.2.13.5.1 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31					
RopId										NotificationHandle																										
...										LogonId										NotificationData (variable)																
...																																				

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x2A.

NotificationHandle (4 bytes): 32-bit Server Object Handle. This handle specifies the notification server object associated with this notification event.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this notification event.

NotificationData (variable): Various structures. The notification structures that can be found here are specified in [\[MS-OXCADATA\]](#).

2.2.13.6 RopPending

This remote operation response notifies the client that there are pending notifications on a session. There is no request buffer for this ROP. More detailed information about this operation can be found in [\[MS-OXCNOTIF\]](#).

2.2.13.6.1 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31					
RopId										SessionIndex																										

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x6E.

SessionIndex (2 bytes): Unsigned 16-bit integer. This index specifies which session has pending notifications.

2.2.14 Other ROPs

2.2.14.1 RopBufferTooSmall

This remote operation response notifies the client that there is insufficient space to return all ROP responses.

2.2.14.1.1 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								SizeNeeded																RequestBuffers (variable)							
...																															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xFF.

SizeNeeded (2 bytes): Unsigned 16-bit integer. This value specifies the size requested for the output buffer for a subsequent request.

RequestBuffers (variable): Array of bytes. The size of this array is the remaining space in the output **ROP response buffer**. This array specifies the section of the input buffer that was not executed because of this condition.

2.2.14.2 RopBackoff

This remote operation response notifies the client that the server is busy and is requesting that the client retry later.

2.2.14.2.1 Response Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								Duration															
...																BackoffRopCount				BackoffRopData (variable)											
...																															
AdditionalDataSize																AdditionalData (variable)															

...

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0xF9.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon to which the [RopBackoff](#) response applies.

Duration (4 bytes): Unsigned 32-bit integer. This value specifies the number of milliseconds to apply a logon backoff.

BackoffRopCount (1 byte): Unsigned 8-bit integer. This value specifies the number of structures in the **BackoffRopData** field.

BackoffRopData (variable): Array of **BackoffRop** structures. The format of the **BackoffRop** structure is specified in section [2.2.14.2.1.1](#). This array specifies the operations to be backed off and also the backoff duration for each.

AdditionalDataSize (2 bytes): Unsigned 16-bit integer. This value specifies the size of the **AdditionalData** field.

AdditionalData (variable): Array of bytes. The size of this field, in bytes, is specified by the **AdditionalDataSize**. This array specifies additional information about the backoff response.

2.2.14.2.1.1 BackoffRop structure

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopIdBackoff										Duration																					
...																															

RopIdBackoff (1 byte): Unsigned 8-bit integer. This value identifies the remote operation for which to apply the ROP backoff.

Duration (4 bytes): Unsigned 32-bit integer. This value specifies the number of milliseconds to apply a ROP backoff.

2.2.14.3 RopRelease

This remote operation releases all resources associated with a Server object. For more details about the dependencies of Server objects, see section [3.1.5.2](#).

2.2.14.3.1 Request Buffer

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
RopId								LogonId								InputHandleIndex															

RopId (1 byte): Unsigned 8-bit integer. This value specifies the type of remote operation. For this operation, this field is set to 0x01.

LogonId (1 byte): Unsigned 8-bit integer. This value specifies the logon associated with this operation.

InputHandleIndex (1 byte): Unsigned 8-bit integer. This index specifies the location in the Server Object Handle Table where the handle for the input Server Object is stored. More information about Server Objects can be found in section [3](#).

3 Protocol Details

3.1 Client Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

Logon Collection: A collection of LogonIds in use.

Server Object Handle Collection: A collection of valid Server Object Handles received from the server but not yet released.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

The client creates ROP buffers consisting of ROP requests for operations to be performed on the server. This input buffer is sent to the server and an output ROP buffer is received back from the server.

3.1.4.1 Creating an Input ROP Buffer

An input ROP buffer is constructed by the client and sent to the server. The client packages its ROP requests together in the intended execution order and creates an associated Server Object Handle Table.

When assembling an input ROP buffer, the client MUST use a Server Object Handle Table large enough to include an entry for the largest index used by ROP requests in the buffer. Each entry in the table that is only referenced as input indexes for ROPs MUST be filled in with the handle of the Server Object that is intended to be the input of the operation. Each entry that is only referenced as an output index SHOULD be filled in with the 0xFFFFFFFF value. Each entry that is referenced first as an output index and then as input indexes SHOULD also be initialized to the 0xFFFFFFFF value.

Multiple ROPs in a buffer can use the same Server Object Handle Table index. For example, a **RopOpenFolder** can specify index 1 as the location to place the handle for the folder Server Object. Later in the same buffer, a **RopGetContentsTable** can specify index 1 as the location for the input Server Object handle.

3.1.4.2 Logon

The client specifies the logon ID associated with the logon Server Object created by a **RopLogon** request. The client manages the identifiers in use by use of a Logon Collection. Any 8-bit integer value is allowed for the logon ID and the client does not have to specify logon IDs in a certain

numeric order. If the client specifies an active logon ID, the current logon is released and replaced with the new one.

3.1.5 Message Processing Events and Sequencing Rules

The client finds the responses for the operations in this output buffer in the same order as sent in the input buffer. The output buffer can also include ROP responses that do not have corresponding ROP requests in the input buffer. These extra ROP responses include **RopBackoff**, **RopBufferTooSmall**, **RopNotify**, and **RopPending**.

3.1.5.1 Extra ROP Responses

3.1.5.1.1 RopBackoff

Any client reporting its version as 12.0.4228.0 or later (as specified in [\[MS-OXCRPC\]](#)) MUST support processing the **RopBackoff** response buffer. The layout of this ROP is specified in section [2.2.14.2](#).

RopBackoff can appear at any location in the ROP output buffer. This ROP response indicates that the server requests the client delay the resending of ROP requests for the specified logon or type of ROPs for an amount of time. When this response contains a non-zero **RopIdBackoff**, it specifies the ROP request that needs to be delayed. The ROP response that was delayed and all subsequent ROP responses will not be in the buffer. When the **BackoffRopCount** is set to 0x00, this indicates that all ROP requests for that logon are to be delayed.

3.1.5.1.2 RopBufferTooSmall

The layout of this ROP is specified in section [2.2.14.1](#).

RopBufferTooSmall can appear at any location in the ROPs field in the ROP buffer. This ROP response indicates that the size of the output buffer is insufficient to return responses for all the ROP requests sent. The **RopBufferTooSmall** includes all the ROP requests that were not executed by the server. The client SHOULD resend the unexecuted ROP requests in a new call to the server. The client MUST also specify an output buffer size that is at least as large as the size specified in the **RopBufferTooSmall** response.

3.1.5.1.3 RopNotify and RopPending

These ROP responses appear at the end of the ROP output buffer. More detailed information about these ROPs can be found in [\[MS-OXCNOTIF\]](#).

3.1.5.2 Server Object Dependencies

The client MUST use [RopRelease](#) to release an object. The client MUST release an owned object before releasing the object's owner. For example, a stream object that is owned by a folder is released before the owning folder is released. A summary of object owners and the objects that they can own is provided below.

An attachment owns the following:

- A stream that is opened on properties of the attachment.
- An embedded message that is created from the attachment.
- A fast-transfer source stream that is opened by [RopFastTransferSourceCopyTo](#) or [RopFastTransferSourceCopyProperties](#).

- A fast-transfer destination stream that is opened by **RopFastTransferDestinationCopyTo** or **RopFastTransferDestinationCopyProperties**.

A message owns the following:

- An attachment of the message.
- A stream that is opened on properties of the message.
- An attachments table that is opened on the message.
- A fast-transfer source stream that is opened by **RopFastTransferSourceCopyTo** or **RopFastTransferSourceCopyProperties**.
- A fast-transfer destination stream that is opened by **RopFastTransferDestinationCopyTo** or **RopFastTransferDestinationCopyProperties**.

A folder owns the following:

- A stream that is opened on properties of the folder.
- A rules table that is opened on the folder.
- A permissions table that is opened on the folder.
- A fast-transfer source stream that is opened by **RopFastTransferSourceCopyTo** or **RopFastTransferSourceCopyProperties**.
- A fast-transfer source stream that is opened by [RopSynchronizationConfigure](#), [RopFastTransferSourceCopyMessages](#), or [RopFastTransferSourceCopyFolder](#).
- A fast-transfer destination stream that is opened by **RopFastTransferDestinationCopyTo** or **RopFastTransferDestinationCopyProperties**.
- A fast-transfer destination stream that is opened by **RopFastTransferDestinationCopyMessages** or **RopFastTransferDestinationCopyFolder**.
- A **synchronization upload context** (also called a collector) that is opened by [RopSynchronizationOpenCollector](#).

3.1.6 Timer Events

None.

3.1.7 Other Local Events

3.1.7.1 Shutdown

When the client shuts down, it SHOULD send [RopRelease](#) requests to the server to clean up all Server Objects it had created but had not yet released before it disconnects.

3.2 Server Details

3.2.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the

explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that specified in this document.

Logon Map: A mapping of LogonIds and logon Server Objects.

Server Object Map: A mapping of Server Object Handles and Server Objects. There is one map for each logon Server Object.

3.2.2 Timers

None.

3.2.3 Initialization

When a connection is first set up between a client and server via the EMSMDB interface specified in [\[MS-OXCRPC\]](#), the **Server Object Map** and Logon Map are empty.

3.2.4 Higher-Layer Triggered Events

3.2.4.1 Notifications

More detailed information about notifications can be found in [\[MS-OXCNOTIF\]](#).

3.2.4.2 Backoff

When the server determines that a ROP request needs to be delayed, the server MUST respond with either a [RopBackoff](#) response or fail the RPC call.

If the server version is greater than 08.00.0525.0, and the client version is greater than 12.0.4228.0, the server SHOULD add a RopBackoff response buffer is returned in place of the response for the ROP request. If either the client or the server are earlier versions, the server MUST instead fail the RPC call by raising the RPC_S_SERVER_TOO_BUSY exception as specified in [\[MS-OXCRPC\]](#).

If ROPs are specified in a RopBackoff response, then all subsequent ROP requests SHOULD NOT be processed.

3.2.4.3 Insufficient Output Buffer Space

When the server determines that there is not enough space remaining in the output ROP buffer for responses for remaining ROPs, it MUST NOT execute the remaining ROPs. If the client is able to resubmit the remaining ROPs in another call, then the server MUST use a [RopBufferTooSmall](#) response. If another call would fail, such as if one ROP response is larger than the maximum output RopBufferSize, the server MUST fail the RPC call returning 0x0000047D.

3.2.5 Message Processing Events and Sequencing Rules

3.2.5.1 Processing an Input ROP Buffer

When processing an input ROP buffer received from a client, the server MUST execute the ROP requests in the order they are specified in the ROP buffer and MUST NOT process more than one input ROP buffer concurrently for a connection. The ROP responses in the output ROP buffer MUST also be in the same order in which they were executed.

If the server is unable to parse the ROP requests in the input ROP buffer, the RPC call MUST fail by returning 0x000004B6.

During execution of a ROP request, the server needs to resolve the Server Object Handle Table index to a Server Object. Any index used for input is converted into the corresponding Server Object by looking up the handle in the Server Object Handle Table and then looking up the Server Object Handle in the Server Object Map associated with the logon for the ROP request. If any lookup in the Logon Map or the Server Object Map fails, the server MUST fill in a failure ROP response with a non-zero return value.

After successful execution of a ROP request that created a Server Object, the server MUST assign an unused Server Object Handle to the object and record the mapping in the Server Object Map for the logon associated with the Rop. The handle assigned is then set in the Server Object Handle Table at the location specified by the output index in the ROP request and can be potentially used by subsequent ROP requests in the buffer.

Because the Server Object Handle value 0xFFFFFFFF is used to initialize unused entries of a Server Object Handle Table, a server MUST NOT assign that value to a created Server Object.

3.2.5.2 Creating an Output ROP Buffer

After processing the input ROP buffer, a list of ROP responses and a modified Server Object Handle Table are specified in the output ROP buffer created by the server. This table MUST be large enough to contain an entry for the highest Server Object Handle Table index specified in the ROP responses. The table can be a smaller size compared to the table in the input ROP buffer if entries at the end of the table were not referenced. The server MUST preserve the order of entries in the Server Object Handle Table between the input and output tables.

3.2.5.3 RopRelease

The layout of [RopRelease](#) is specified in section [2.2.14.3](#).

This request is used when the client is done with a Server Object. The server MUST remove the mapping for the Server Object Handle from the Server Object Map and release the resources associated with it. The same Server Object Handle can now be reused for another Server Object. If the Server Object specified is a logon Server Object, then the server MUST also remove it from the Logon Map.

Unlike all other ROP requests, RopRelease does not have any associated ROP response. The server MUST not return any response for a RopRelease request. Any errors resulting from the execution of this ROP MUST be ignored and not sent back to the client.

3.2.6 Timer Events

None.

3.2.7 Other Local Events

3.2.7.1 Disconnection

When the client disconnects, the server MUST release all Server Objects, Logon Maps, and Server Object Maps associated with the connection.

4 Protocol Examples

4.1 Empty ROP Buffer

4.1.1 Full Buffer

```
02 00
```

4.1.2 Explanation of Parts

RopSize:

```
02 00
```

Rops:

```
<empty>
```

ServerObjectHandleTable:

```
<empty>
```

4.1.3 Description

This empty buffer contains no ROPs and no Server Object Handles. This type of buffer can be used by a client when it expects to receive extra information in the output buffer, such as pending notifications.

4.2 Single ROP Request

4.2.1 Full Buffer

```
09 00 15 01 01 02 01 FF 0F 6D 00 00 00 56 00 00 00
```

4.2.2 Explanation of Parts

RopSize:

```
09 00
```

Rops:

15 — **RopId (RopQueryRows)**

01 — **LogonId**

01 — **InputHandleIndex**

02 — **QueryRowsFlags**

01 — **ForwardRead**

FF 0F — **RowCount**

ServerObjectHandleTable:

6D 00 00 00 (Handle 0, unused)

56 00 00 00 (Handle 1, input of **RopQueryRows**)

4.2.3 Description

This buffer contains a single ROP that has an input index. The **ServerObjectHandleTable** field is offset from the beginning of the buffer by the number of bytes specified in the **RopSize** field. The Server object handle table in this buffer contains an unused entry.

4.3 Multiple ROP Request

4.3.1 Full Buffer

```
14 00 02 00 00 01 01 00 59 65 73 73 69 72 00 04 00 01 02 04 6E 00 00 00 FF FF FF FF FF FF FF FF
FF
```

4.3.2 Explanation of Parts

RopSize:

14 00

Rops:

02 — **RopId (RopOpenFolder)**

00 — **LogonId**

00 — **InputHandleIndex**

01 — **OutputHandleIndex**

01 00 59 65 73 73 69 72 — **FolderId** (ID of the folder to be opened)

00 — **OpenModeFlags**

04 — **RopId (RopGetHierarchyTable)**

00 — **LogonId**

01 — **InputHandleIndex**

02 — **OutputHandleIndex**

04 — **TableFlags**

ServerObjectHandleTable:

6E 00 00 00 (Handle 0, input of **RopOpenFolder**)

FF FF FF FF (Handle 1, output of **RopOpenFolder**, input of **RopGetHierarchyTable**)

FF FF FF FF (Handle 2, output of **RopGetHierarchyTable**)

4.3.3 Description

This buffer consists of two ROP requests. The first request is a [RopOpenFolder](#), and the second is a [RopGetHierarchyTable](#). The input for the second ROP is the output for the first ROP. All output handles are initialized to 0xFFFFFFFF.

4.4 RopRelease Request

4.4.1 Full Buffer

```
08 00 01 00 00 01 00 01 6F 00 00 00 6E 00 00 00
```

4.4.2 Explanation of Parts

RopSize:

08 00

Rops:

01 — **RopId (RopRelease)**

00 — **LogonId**

00 — **InputHandleIndex**

01 — **RopId (RopRelease)**

00 — **LogonId**

01 — **InputHandleIndex**

ServerObjectHandleTable:

6F 00 00 00 (Handle 0, input of first **RopRelease**)

6E 00 00 00 (Handle 1, input of second **RopRelease**)

4.4.3 Description

This buffer contains a pair of [RopRelease](#) requests. These two ROPs are releasing two different Server Objects, based on the different Server Object Handles they reference.

4.5 RopBufferTooSmall Response

4.5.1 Full Buffer

```
1C 00 FF 2C 00 03 00 00 01 FF 0F 01 00 15 89 00 78 27 1E 03 01 00 15 89 00 78 2F BB 12 00 00  
00 FF FF FF FF
```

4.5.2 Explanation of Parts

RopSize:

1C 00

Rops:

FF — **RopId (RopBufferTooSmall)**
 2C 00 — **SizeNeeded** (0x002C bytes)
 03 — **RopId (RopOpenMessage)**
 00 — **LogonId**
 00 — **InputHandleIndex**
 01 — **OutputHandleIndex**
 FF 0F — **CodePageID**
 01 00 15 89 00 78 27 1E — **FolderId**
 03 — **OpenModeFlags**
 01 00 15 89 00 78 2F BB — **MessageId**

ServerObjectHandleTable:

12 00 00 00 (Handle 0, input of **RopOpenMessage**)
 FF FF FF FF (Handle 1, output of **RopOpenMessage**)

4.5.3 Description

This buffer shows a [RopOpenMessage](#) call that would produce a response that wouldn't fit in the buffer (the output buffer was much smaller than usual for this example). The [RopBufferTooSmall](#) indicates that it would need at least 0x002C bytes to return a response buffer. The RopOpenMessage request and the Server Object Handle Table are the same as what would have been specified in the input ROP buffer. In this buffer, the RopBufferTooSmall is the first ROP, which indicates that no ROPs were executed before running out of room.

4.6 Logon RopBackoff Response**4.6.1 Full Buffer**

12 00 12 00 00 00 00 00 00 00 F9 00 34 12 00 00 00 00 00 28 00 00 00

4.6.2 Explanation of Parts**RopSize:**

12 00

Rops:

12 — **RopId (RopSetColumns)**
 00 — **InputHandleIndex**
 00 00 00 00 — **ReturnValue**

00 — **TableStatus**
 F9 — **RopId (RopBackoff)**
 00 — **LogonId**
 34 12 00 00 — **Duration**
 00 — **BackoffRopCount**
 00 00 — **AdditionalDataSize**
ServerObjectHandleTable:
 28 00 00 00 (Handle 0, input of **RopSetColumns**)

4.6.3 Description

This buffer contains a [RopBackoff](#) response in the same buffer as a [RopSetColumns](#) response. The RopBackoff here contains no information specific to a ROP, but instead a general duration for the logon.

4.7 ROP RopBackoff Request

4.7.1 Full Buffer

```
18 00 02 01 00 00 00 00 00 00 00 00 00 00 00 00 F9 00 00 00 00 00 00 01 1C 17 4F 04 00 00 00 0A 00 00 00 00 24 00 00
00
```

4.7.2 Explanation of Parts

RopSize:
 18 00

Rops:

- 02 — **RopId (RopOpenFolder)**
- 01 — **OutputHandleIndex**
- 00 00 00 00 — **ReturnValue**
- 00 — **HasRules**
- 00 — **IsGhosted**
- F9 — **RopId (RopBackoff)**
- 00 — **LogonId**
- 00 00 00 00 — **Duration**
- 01 — **BackoffRopCount**
- 1C — **RopIdBackoff** (1C is the **RopId** value of **RopCreateFolder**)

17 4F 04 00 — **Duration**

00 00 — **AdditionalDataSize**

ServerObjectHandleTable:

0A 00 00 00 (Handle 0, unused)

24 00 00 00 (Handle 1, output of **RopOpenFolder**)

4.7.3 Description

This buffer shows a [RopBackoff](#) response in the same buffer as a [RopOpenFolder](#) response. The RopBackoff contains information about only one ROP, [RopCreateFolder](#).

5 Security

5.1 Security Considerations for Implementers

There are no special security considerations specific to this protocol. General security considerations pertaining to the underlying Wire Format protocol apply, as specified in [\[MS-OXCRPC\]](#).

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following product versions. References to product versions include released service packs.

- Microsoft Office Outlook 2003
- Microsoft Exchange Server 2003
- Microsoft Office Outlook 2007
- Microsoft Exchange Server 2007
- Microsoft Outlook 2010
- Microsoft Exchange Server 2010

Exceptions, if any, are noted below. If a service pack number appears with the product version, behavior changed in that service pack. The new behavior also applies to subsequent service packs of the product unless otherwise specified.

Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that product does not follow the prescription.

[<1> Section 2.2.1:](#) Exchange Server 2003 and Exchange Server 2007 behavior is undefined when it encounters a reserved RopId.

[<2> Section 2.2.6.9.2:](#) Exchange 2003, Exchange 2007, and Exchange 2010 do not return an empty array.

[<3> Section 2.2.8.2.1:](#) Exchange 2003 limits the stream size to 32K bytes. Therefore, if the value of the **ByteCount** field in the request buffer is greater than 0x8000, the server returns RopBufferTooSmall. The **MaximumByteCount** field is never present in the request buffer because the **ByteCount** field is never set to 0xBABE.

[<4> Section 2.2.8.6.1:](#) Exchange 2003 and Exchange 2007 limit the size of the stream to 2^{31} bytes. Exchange 2010 has a lower limit.

7 Change Tracking

This section identifies changes made to [MS-OXCROPS] protocol documentation between November 2009 and February 2010 releases. Changes are classed as major, minor, or editorial.

Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- A protocol is deprecated.
- The removal of a document from the documentation set.
- Changes made for template compliance.

Minor changes do not affect protocol interoperability or implementation. Examples are updates to fix technical accuracy or ambiguity at the sentence, paragraph, or table level.

Editorial changes apply to grammatical, formatting, and style issues.

No changes means that the document is identical to its last release.

Major and minor changes can be described further using the following revision types:

- New content added.
- Content update.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.

- Content removed for template compliance.
- Obsolete document removed.

Editorial changes always have the revision type "Editorially updated."

Some important terms used in revision type descriptions are defined as follows:

Protocol syntax refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.

Protocol revision refers to changes made to a protocol that affect the bits that are sent over the wire.

Changes are listed in the following table. If you need further information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Revision Type
1.1 Glossary	54651 Removed "Gateway Address Routing Table (GWART)" from the local glossary and added it to the list of terms that are defined in [MS-OXGLOS].	N	Content update.
1.1 Glossary	48928 Specified that the first definition of the term "property" applies.	N	Content update.
1.1 Glossary	49439 Added "code page (1)" to the list of terms that are defined in [MS-OXGLOS].	N	Content update.
1.1 Glossary	49735 Added "search criteria" and "search folder" to the list of terms that are defined in [MS-OXGLOS].	N	Content update.
1.1 Glossary	49417 Added "long-term ID" and "short-term ID" to the list of terms that are defined in [MS-OXGLOS].	N	Content update.
1.3 Protocol Overview	49165 Removed wording "In a typical scenario".	N	Content update.
1.4 Relationship to Other Protocols	49168 Added references for details about EcDoRpcExt2, EcDoConnectEx, and EMSMDB.	N	Content update.
1.4 Relationship to Other Protocols	Clarified the statement about information that is provided during calls of the EcDoConnectEx function.	N	Content update.
2.2.2.1.3 Success Response Buffer for	49303 Changed field name from "Guid" to "ReplGuid"	N	Content update.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Revision Type
Public Folders	for consistency with [MS-OXCSTOR].		
2.2.2.1.3 Success Response Buffer for Public Folders	50133 Updated the description of the PerUserGuid field to state that the field is not used.	N	Content update.
2.2.2.2.2 Success Response Buffer	49175 Updated field name from "MessageClass" to "ExplicitMessageClass" for consistency with [MS-OXCSTOR].	N	Content update.
2.2.2.4.2 Success Response Buffer	54652 Revised the descriptions of the RowCount and Rows fields to clarify which row structures are used.	N	Content update.
2.2.2.8.1 Request Buffer	49258 Changed name of field from "Id" to "ObjectId" to match the [MS-OXCSTOR] document.	N	Content update.
2.2.2.8.2 Success Response Buffer	49420 Added section number to [MS-OXCADATA] reference for details about the LongTermId structure.	N	Content update.
2.2.2.9.1 Request Buffer	49420 Added section number to [MS-OXCADATA] reference for details about LongTermId structure.	N	Content update.
2.2.2.9.2 Success Response Buffer	49258 Changed name of field from "Id" to "ObjectId" to match the [MS-OXCSTOR] document.	N	Content update.
2.2.2.10 RopGetPerUserLongTermIds	51616 Changed capitalization for consistency.	N	Content update.
2.2.2.10.2 Success Response Buffer	49420 Added section number to [MS-OXCADATA] reference for details about LongTermId structure.	N	Content update.
2.2.2.11.1 Request Buffer	49420 Added section number to [MS-OXCADATA] reference for details about LongTermId structure.	N	Content update.
2.2.2.12.1 Request Buffer	49325 Revised the descriptions of the DataOffset and MaxDataSize fields.	N	Content update.
2.2.2.12.1 Request Buffer	49420 Added section number to [MS-OXCADATA] reference for details about the LongTermId structure.	N	Content update.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Revision Type
2.2.2.12.1 Request Buffer	49303 Changed field name from "LongTermId" to "FolderId" for consistency with [MS-OXCSTOR].	N	Content update.
2.2.2.12.2 Success Response Buffer	49325 Revised the descriptions of the DataSize and Data fields.	N	Content update.
2.2.2.13.1 Request Buffer	49304 Updated field names from "LongTermId" to "FolderId" and "ReplicaGuid" to "ReplGuid" for consistency with [MS-OXCSTOR].	N	Content update.
2.2.2.13.1 Request Buffer	49420 Added section number to [MS-OXCADATA] reference for details about the LongTermId structure.	N	Content update.
2.2.3.2.1 Request Buffer	50769 Revised description of the UseUnicodeStrings field to specify Unicode or ASCII.	N	Content update.
2.2.3.5.1 Request Buffer	50767 Revised the description of the UseUnicode field.	N	Content update.
2.2.3.9.1 Request Buffer	51616 Changed capitalization of terms to match the glossary.	N	Content update.
2.2.3.10.1 Request Buffer	51616 Changed capitalization of terms to match the glossary.	N	Content update.
2.2.3.11.1 Request Buffer	49437 Revised the description of the NotifyNonRead field.	N	Content update.
2.2.3.12.1 Request Buffer	49437 Revised the description of the NotifyNonRead field.	N	Content update.
2.2.4.7 RopQueryPosition	49438 Revised wording from "gets the approximate cursor position" to "gets the cursor position".	N	Content update.
2.2.4.18.1 Request Buffer	Clarified descriptions of the RowId field and the RowInstanceNumber field.	N	Content update.
2.2.6.8.2 Success Response Buffer	51683 Updated the section heading to "Success Response Buffer".	N	Content update.
2.2.6.8.3	51683	Y	New

Section	Tracking number (if applicable) and description	Major change (Y or N)	Revision Type
Failure Response Buffer	Added new topic.		content added.
2.2.6.9.1 Request Buffer	51616 Changed capitalization for consistency.	N	Content update.
2.2.11.8 RopTellVersion	54658 Replaced "server-to-server upload" with "server-to-client-to-server upload".	N	Content update.
2.2.12.12.1.1 LongTermIdRange structure	49420 Added section number to [MS-OXCDATA] reference for details about the LongTermId structure.	N	Content update.
2.2.14.2.1 Response Buffer	49730 Revised the description of the LogonId field.	N	Content update.
3.1.7 Other Local Events	49732 Removed "None".	N	Content update.

8 Index

A

[Applicability](#) 17

C

[Capability negotiation](#) 17

[Change tracking](#) 239

Client

[overview](#) 226

E

Examples

[overview](#) 231

F

[Fields – vendor-extensible](#) 17

G

[Glossary](#) 14

I

[Implementer – security considerations](#) 237

[Index of security parameters](#) 237

[Informative references](#) 16

[Introduction](#) 14

L

[LogonTime Structure packet](#) 30

M

[Message Syntax packet](#) 18

Messages

[overview](#) 18

Messaging

[transport](#) 18

N

[Normative references](#) 15

O

[Overview](#) 16

P

[Parameters – security index](#) 237

[Preconditions](#) 17

[Prerequisites](#) 17

[Product Behavior](#) 238

R

References

[informative](#) 16

[normative](#) 15

[Relationship to other protocols](#) 17

[RopAbort Failure Response Buffer packet](#) 82

[RopAbort Request Buffer packet](#) 82

[RopAbort Success Response Buffer packet](#) 82

[RopAbortSubmit Request Buffer packet](#) 133

[RopAbortSubmit Response Buffer packet](#) 134

[RopBackoff BackoffRop Structure packet](#) 224

[RopBackoff Response Buffer packet](#) 223

[RopBufferTooSmall Response Buffer packet](#) 223

[RopCloneStream Request Buffer packet](#) 181

[RopCloneStream Response Buffer packet](#) 181

[RopCollapseRow Failure Response Buffer packet](#) 100

[RopCollapseRow Request Buffer packet](#) 99

[RopCollapseRow Success Response Buffer packet](#) 99

[RopCommitStream Request Buffer packet](#) 171

[RopCommitStream Response Buffer packet](#) 171

[RopCopyFolder Null Destination Failure Response Buffer packet](#) 67

[RopCopyFolder Request Buffer packet](#) 66

[RopCopyFolder Response Buffer packet](#) 67

[RopCopyProperties Failure Response Buffer packet](#) 163

[RopCopyProperties Null Destination Failure Response Buffer packet](#) 162

[RopCopyProperties Request Buffer packet](#) 161

[RopCopyProperties Success Response Buffer packet](#) 162

[RopCopyTo Failure Response Buffer packet](#) 165

[RopCopyTo Null Destination Failure Response packet](#) 165

[RopCopyTo Request Buffer packet](#) 163

[RopCopyTo Success Response Buffer packet](#) 164

[RopCopyToStream Null Destination Failure Response Buffer packet](#) 177

[RopCopyToStream Request Buffer packet](#) 176

[RopCopyToStream Response Buffer packet](#) 176

[RopCreateAttachment Failure Response Buffer packet](#) 125

[RopCreateAttachment Request Buffer packet](#) 124

[RopCreateAttachment Success Response Buffer packet](#) 125

[RopCreateBookmark Failure Response Buffer packet](#) 91

[RopCreateBookmark Request Buffer packet](#) 90

[RopCreateBookmark Success Response Buffer packet](#) 90

[RopCreateFolder Failure Response Buffer packet](#) 57

[RopCreateFolder Request Buffer packet](#) 55

[RopCreateFolder Success Response Buffer packet 56](#)
[RopCreateMessage Failure Response Buffer packet 108](#)
[RopCreateMessage Request Buffer packet 107](#)
[RopDeleteAttachment Request Buffer packet 126](#)
[RopDeleteAttachment Response Buffer packet 126](#)
[RopDeleteFolder Request Buffer packet 58](#)
[RopDeleteFolder Response Buffer packet 58](#)
[RopDeleteMessages Request Buffer packet 70](#)
[RopDeleteMessages Response Buffer packet 70](#)
[RopDeleteProperties Failure Response Buffer packet 156](#)
[RopDeleteProperties Request Buffer packet 155](#)
[RopDeleteProperties Success Response Buffer packet 156](#)
[RopDeletePropertiesNoReplicate Failure Response Buffer packet 158](#)
[RopDeletePropertiesNoReplicate Request Buffer packet 157](#)
[RopDeletePropertiesNoReplicate Success Response Buffer packet 157](#)
[RopEmptyFolder Request Buffer packet 68](#)
[RopEmptyFolder Response Buffer packet 68](#)
[RopExpandRow Failure Response Buffer packet 98](#)
[RopExpandRow Request Buffer packet 97](#)
[RopExpandRow Success Response Buffer packet 97](#)
[RopFastTransferDestinationConfigure Request Buffer packet 188](#)
[RopFastTransferDestinationConfigure Response Buffer packet 189](#)
[RopFastTransferDestinationPutBuffer Request Buffer packet 189](#)
[RopFastTransferDestinationPutBuffer Response Buffer packet 190](#)
[RopFastTransferSourceCopyFolder Request Buffer packet 192](#)
[RopFastTransferSourceCopyFolder Response Buffer packet 193](#)
[RopFastTransferSourceCopyMessages Request Buffer packet 193](#)
[RopFastTransferSourceCopyMessages Response Buffer packet 194](#)
[RopFastTransferSourceCopyProperties Request Buffer packet 196](#)
[RopFastTransferSourceCopyProperties Response Buffer packet 197](#)
[RopFastTransferSourceCopyTo Request Buffer packet 195](#)
[RopFastTransferSourceCopyTo Response Buffer packet 196](#)
[RopFastTransferSourceGetBuffer Request Buffer packet 191](#)
[RopFastTransferSourceGetBuffer Response Buffer packet 191](#)
[RopFindRow Failure Response Buffer packet 95](#)
[RopFindRow Request Buffer packet 93](#)
[RopFindRow Success Response Buffer packet 94](#)
[RopFreeBookmark Request Buffer packet 95](#)
[RopFreeBookmark Response Buffer packet 96](#)
[RopGetAddressTypes Failure Response Buffer packet 136](#)
[RopGetAddressTypes Request Buffer packet 135](#)
[RopGetAddressTypes Success Response Buffer packet 135](#)
[RopGetAttachmentTable Request Buffer packet 130](#)
[RopGetAttachmentTable Response Buffer packet 131](#)
[RopGetCollapseState Failure Response Buffer packet 101](#)
[RopGetCollapseState Request Buffer packet 100](#)
[RopGetCollapseState Success Response Buffer packet 101](#)
[RopGetContentsTable Failure Response Buffer packet 75](#)
[RopGetContentsTable Request Buffer packet 74](#)
[RopGetContentsTable Success Response Buffer packet 74](#)
[RopGetHierarchyTable Failure Response Buffer packet 73](#)
[RopGetHierarchyTable Request Buffer packet 72](#)
[RopGetHierarchyTable Success Response Buffer packet 73](#)
[RopGetLocalReplicaIds Failure Response Buffer packet 217](#)
[RopGetLocalReplicaIds Request Buffer packet 215](#)
[RopGetLocalReplicaIds Success Response Buffer packet 216](#)
[RopGetMessageStatus Request Buffer packet 119](#)
[RopGetNamesFromPropertyIds Failure Response Buffer packet 146](#)
[RopGetNamesFromPropertyIds Request Buffer packet 145](#)
[RopGetNamesFromPropertyIds Success Response Buffer packet 146](#)
[RopGetOwningServers Failure Response Buffer packet 40](#)
[RopGetOwningServers Request Buffer packet 39](#)
[RopGetOwningServers Success Response Buffer packet 39](#)
[RopGetPermissionsTable Request Buffer packet 184](#)
[RopGetPermissionsTable Response Buffer packet 184](#)
[RopGetPerUserGuid Failure Response Buffer packet 49](#)
[RopGetPerUserGuid Request Buffer packet 47](#)
[RopGetPerUserGuid Success Response Buffer packet 48](#)
[RopGetPerUserLongTermIds Failure Response Buffer packet 47](#)
[RopGetPerUserLongTermIds Request Buffer packet 46](#)
[RopGetPerUserLongTermIds Success Response Buffer packet 46](#)
[RopGetPropertiesAll Failure Response Buffer packet 150](#)
[RopGetPropertiesAll Request Buffer packet 149](#)
[RopGetPropertiesAll Success Response Buffer packet 149](#)

[RopGetPropertiesList Failure Response Buffer packet](#) 151
[RopGetPropertiesList Request Buffer packet](#) 150
[RopGetPropertiesList Success Response Buffer packet](#) 151
[RopGetPropertiesSpecific Failure Response Buffer packet](#) 148
[RopGetPropertiesSpecific Request Buffer packet](#) 147
[RopGetPropertiesSpecific Success Response Buffer packet](#) 148
[RopGetPropertyIdsFromNames Failure Response Buffer packet](#) 145
[RopGetPropertyIdsFromNames Request Buffer packet](#) 143
[RopGetPropertyIdsFromNames Success Response Buffer packet](#) 144
[RopGetReceiveFolder Failure Response Buffer packet](#) 34
[RopGetReceiveFolder Request Buffer packet](#) 33
[RopGetReceiveFolder Success Response Buffer packet](#) 34
[RopGetReceiveFolderTable Failure Response Buffer packet](#) 37
[RopGetReceiveFolderTable Request Buffer packet](#) 36
[RopGetReceiveFolderTable Success Response Buffer packet](#) 36
[RopGetRulesTable Request Buffer packet](#) 186
[RopGetRulesTable Response Buffer packet](#) 187
[RopGetSearchCriteria Failure Response Buffer packet](#) 62
[RopGetSearchCriteria Request Buffer packet](#) 60
[RopGetSearchCriteria Success Response Buffer packet](#) 61
[RopGetStatus Failure Response Buffer packet](#) 84
[RopGetStatus Request Buffer packet](#) 83
[RopGetStatus Success Response Buffer packet](#) 83
[RopGetStoreState Failure Response Buffer packet](#) 38
[RopGetStoreState Request Buffer packet](#) 37
[RopGetStoreState Success Response Buffer packet](#) 38
[RopGetStreamSize Failure Response Buffer packet](#) 173
[RopGetStreamSize Request Buffer packet](#) 172
[RopGetStreamSize Success Response Buffer packet](#) 172
[RopGetTransportFolder Failure Response Buffer packet](#) 141
[RopGetTransportFolder Request Buffer packet](#) 140
[RopGetTransportFolder Success Response Buffer packet](#) 141
[RopGetValidAttachments Failure Response Buffer packet](#) 132
[RopGetValidAttachments Request Buffer packet](#) 131
[RopGetValidAttachments Success Response Buffer packet](#) 131
[RopHardDeleteMessages Request Buffer packet](#) 71
[RopHardDeleteMessages Response Buffer packet](#) 72
[RopHardDeleteMessagesAndSubfolders Request Buffer packet](#) 69
[RopHardDeleteMessagesAndSubfolders Response Buffer packet](#) 69
[RopIdFromLongTermId Failure Response Buffer packet](#) 45
[RopIdFromLongTermId Request Buffer packet](#) 44
[RopIdFromLongTermId Success Response Buffer packet](#) 45
[RopLockRegionStream Request Buffer packet](#) 178
[RopLockRegionStream Response Buffer packet](#) 179
[RopLogon Failure Response packet](#) 33
[RopLogon Redirect Response Buffer packet](#) 32
[RopLogon Request Buffer packet](#) 27
[RopLogon Success Buffer for Private Mailboxes packet](#) 28
[RopLogon Success Buffer for Public Folders packet](#) 31
[RopLongTermIdFromId Failure Response Buffer packet](#) 43
[RopLongTermIdFromId Request Buffer packet](#) 42
[RopLongTermIdFromId Success Response Buffer packet](#) 43
[RopModifyPermissions PermissionData packet](#) 183
[RopModifyPermissions Request Buffer packet](#) 182
[RopModifyPermissions Response Buffer packet](#) 183
[RopModifyRecipients ModifyRecipientRow packet](#) 112
[RopModifyRecipients Request Buffer packet](#) 111
[RopModifyRecipients Response Buffer packet](#) 112
[RopModifyRules Request Buffer packet](#) 185
[RopModifyRules Response Buffer packet](#) 186
[RopModifyRules RuleData Structure packet](#) 185
[RopMoveCopyMessages Null Destination Failure Response Buffer packet](#) 63
[RopMoveCopyMessages Request Buffer packet](#) 62
[RopMoveCopyMessages Response Buffer packet](#) 63
[RopMoveFolder Null Destination Failure Response Buffer packet](#) 65
[RopMoveFolder Request Buffer packet](#) 64
[RopMoveFolder Response Buffer packet](#) 65
[RopNotify Response Buffer packet](#) 222
[RopOpenAttachment Request Buffer packet](#) 123
[RopOpenAttachment Response Buffer packet](#) 124
[RopOpenEmbeddedMessage Failure Response Buffer packet](#) 130
[RopOpenEmbeddedMessage Request Buffer packet](#) 128
[RopOpenEmbeddedMessage Success Response Buffer packet](#) 128
[RopOpenFolder Failure Response Buffer packet](#) 54
[RopOpenFolder Request Buffer packet](#) 53
[RopOpenFolder Success Response Buffer packet](#) 54
[RopOpenMessage Failure Response Buffer packet](#) 106
[RopOpenMessage OpenRecipientRow Structure packet](#) 106
[RopOpenMessage Request Buffer packet](#) 103

[RopOpenMessage_Success_Response_Buffer packet \(section 2.2.5.1.2 104, section 2.2.5.2.2 107\)](#)
[RopOpenStream_Failure_Response_Buffer packet 168](#)
[RopOpenStream_Request_Buffer packet 167](#)
[RopOpenStream_Success_Response_Buffer packet 168](#)
[RopOptionsData_Request_Buffer packet 142](#)
[RopOptionsData_Response_Buffer packet 142](#)
[RopPending_Response_Buffer packet 222](#)
[RopProgress_Failure_Response_Buffer packet 167](#)
[RopProgress_Request_Buffer packet 166](#)
[RopProgress_Success_Response_Buffer packet 166](#)
[RopPublicFolderIsGhosted_Failure_Response_Buffer packet 42](#)
[RopPublicFolderIsGhosted_Request_Buffer packet 40](#)
[RopPublicFolderIsGhosted_Success_Response_Buffer packet 41](#)
[RopQueryColumnsAll_Failure_Response_Buffer packet 93](#)
[RopQueryColumnsAll_Request_Buffer packet 92](#)
[RopQueryColumnsAll_Success_Response_Buffer packet 92](#)
[RopQueryNamedProperties_Failure_Response_Buffer packet 160](#)
[RopQueryNamedProperties_Request_Buffer packet 159](#)
[RopQueryNamedProperties_Success_Response_Buffer packet 159](#)
[RopQueryPosition_Failure_Response_Buffer packet 85](#)
[RopQueryPosition_Request_Buffer packet 84](#)
[RopQueryPosition_Success_Response_Buffer packet 84](#)
[RopQueryRows_Failure_Response_Buffer packet 81](#)
[RopQueryRows_Request_Buffer packet 80](#)
[RopQueryRows_Success_Response_Buffer packet 80](#)
[RopReadPerUserInfo_Failure_Response_Buffer packet 51](#)
[RopReadPerUserInfo_Request_Buffer packet 49](#)
[RopReadPerUserInfo_Success_Response_Buffer packet 50](#)
[RopReadRecipients_Failure_Response_Buffer packet 114](#)
[RopReadRecipients_ReadRecipientRow packet 114](#)
[RopReadRecipients_Request_Buffer packet 113](#)
[RopReadRecipients_Success_Response_Buffer packet 113](#)
[RopReadStream_Request_Buffer packet 169](#)
[RopReadStream_Response_Buffer packet 169](#)
[RopRegisterNotification_Request_Buffer packet 217](#)
[RopRegisterNotification_Response_Buffer packet 218](#)
[RopRegisterSynchronizationNotifications_Request_Buffer packet 220](#)
[RopRegisterSynchronizationNotifications_Response_Buffer packet 220](#)
[RopRelease_Request_Buffer packet 224](#)
[RopReloadCachedInformation_Failure_Response_Buffer packet 117](#)
[RopReloadCachedInformation_Request_Buffer packet 115](#)
[RopReloadCachedInformation_Success_Response_Buffer packet 115](#)
[RopRemoveAllRecipients_Request_Buffer packet 110](#)
[RopRemoveAllRecipients_Response_Buffer packet 110](#)
[RopResetTable_Request_Buffer packet 96](#)
[RopResetTable_Response_Buffer packet 96](#)
[RopRestrict_Failure_Response_Buffer packet 79](#)
[RopRestrict_Request_Buffer packet 78](#)
[RopRestrict_Success_Response_Buffer packet 79](#)
[RopSaveChangesAttachment_Request_Buffer packet 127](#)
[RopSaveChangesAttachment_Response_Buffer packet 127](#)
[RopSaveChangesMessage_Failure_Response_Buffer packet 109](#)
[RopSaveChangesMessage_Request_Buffer packet 108](#)
[RopSaveChangesMessage_Success_Response_Buffer packet 109](#)
[RopSeekRow_Failure_Response_Buffer packet 87](#)
[RopSeekRow_Request_Buffer packet 86](#)
[RopSeekRow_Success_Response_Buffer packet 86](#)
[RopSeekRowBookmark_Failure_Response_Buffer packet 89](#)
[RopSeekRowBookmark_Request_Buffer packet 87](#)
[RopSeekRowBookmark_Success_Response_Buffer packet 88](#)
[RopSeekRowFractional_Request_Buffer packet 89](#)
[RopSeekRowFractional_Response_Buffer packet 90](#)
[RopSeekStream_Failure_Response_Buffer packet 175](#)
[RopSeekStream_Request_Buffer packet 174](#)
[RopSeekStream_Success_Response_Buffer packet 175](#)
[RopSetCollapseState_Failure_Response_Buffer packet 103](#)
[RopSetCollapseState_Request_Buffer packet 102](#)
[RopSetCollapseState_Success_Response_Buffer packet 102](#)
[RopSetColumns_Failure_Response_Buffer packet 76](#)
[RopSetColumns_Request_Buffer packet 75](#)
[RopSetColumns_Success_Response_Buffer packet 76](#)
[RopSetLocalReplicaMidsetDeleted_LongTermIdRange packet 214](#)
[RopSetLocalReplicaMidsetDeleted_Request_Buffer packet 213](#)
[RopSetLocalReplicaMidsetDeleted_Response_Buffer packet 215](#)
[RopSetMessageReadFlag_Failure_Response_Buffer packet 122](#)
[RopSetMessageReadFlag_Request_Buffer packet 121](#)
[RopSetMessageReadFlag_Success_Response_Buffer packet 122](#)

[RopSetMessageStatus Failure Response Buffer packet](#) 118
[RopSetMessageStatus Request Buffer packet](#) 117
[RopSetMessageStatus Success Response Buffer packet](#) 118
[RopSetProperties Failure Response Buffer packet](#) 153
[RopSetProperties Request Buffer packet](#) 152
[RopSetProperties Success Response Buffer packet](#) 152
[RopSetPropertiesNoReplicate Failure Response Buffer packet](#) 155
[RopSetPropertiesNoReplicate Request Buffer packet](#) 153
[RopSetPropertiesNoReplicate Success Response Buffer packet](#) 154
[RopSetReadFlags Request Buffer packet](#) 119
[RopSetReadFlags Response Buffer packet](#) 120
[RopSetReceiveFolder Request Buffer packet](#) 35
[RopSetReceiveFolder Response Buffer packet](#) 35
[RopSetSearchCriteria Request Buffer packet](#) 59
[RopSetSearchCriteria Response Buffer packet](#) 60
[RopSetSpooler Request Buffer packet](#) 136
[RopSetSpooler Response Buffer packet](#) 136
[RopSetStreamSize Request Buffer packet](#) 173
[RopSetStreamSize Response Buffer packet](#) 174
[RopSetSynchronizationNotificationGuid Request Buffer packet](#) 221
[RopSetSynchronizationNotificationGuid Response Buffer packet](#) 221
[RopSortTable Failure Response Buffer packet](#) 78
[RopSortTable Request Buffer packet](#) 77
[RopSortTable Success Response Buffer packet](#) 77
[RopSpoolerLockMessage Request Buffer packet](#) 137
[RopSpoolerLockMessage Response Buffer packet](#) 137
[RopSubmitMessage Request Buffer packet](#) 133
[RopSubmitMessage Response Buffer packet](#) 133
[RopSynchronizationConfigure Request Buffer packet](#) 198
[RopSynchronizationConfigure Response Buffer packet](#) 200
[RopSynchronizationGetTransferState Request Buffer packet](#) 210
[RopSynchronizationGetTransferState Response Buffer packet](#) 210
[RopSynchronizationImportDeletes Request Buffer packet](#) 205
[RopSynchronizationImportDeletes Response Buffer packet](#) 206
[RopSynchronizationImportHierarchyChange Failure Response Buffer packet](#) 205
[RopSynchronizationImportHierarchyChange Request Buffer packet](#) 203
[RopSynchronizationImportHierarchyChange Success Response Buffer packet](#) 204
[RopSynchronizationImportMessageChange Failure Response Buffer packet](#) 201
[RopSynchronizationImportMessageChange Request Buffer packet](#) 200
[RopSynchronizationImportMessageChange Success Response Buffer packet](#) 201
[RopSynchronizationImportMessageMove Failure Response Buffer packet](#) 208
[RopSynchronizationImportMessageMove Request Buffer packet](#) 206
[RopSynchronizationImportMessageMove Success Response Buffer packet](#) 208
[RopSynchronizationImportReadStateChanges MessageReadState packet](#) 202
[RopSynchronizationImportReadStateChanges Request Buffer packet](#) 202
[RopSynchronizationImportReadStateChanges Response Buffer packet](#) 203
[RopSynchronizationOpenAdvisor Request Buffer packet](#) 219
[RopSynchronizationOpenAdvisor Response Buffer packet](#) 219
[RopSynchronizationOpenCollector Request Buffer packet](#) 209
[RopSynchronizationOpenCollector Response Buffer packet](#) 209
[RopSynchronizationUploadStateStreamBegin Request Buffer packet](#) 211
[RopSynchronizationUploadStateStreamBegin Response Buffer packet](#) 211
[RopSynchronizationUploadStateStreamContinue Request Buffer packet](#) 212
[RopSynchronizationUploadStateStreamContinue Response Buffer packet](#) 212
[RopSynchronizationUploadStateStreamEnd Request Buffer packet](#) 213
[RopSynchronizationUploadStateStreamEnd Response Buffer packet](#) 213
[RopTellVersion Request Buffer packet](#) 197
[RopTellVersion Response Buffer packet](#) 198
[RopTransportNewMail Request Buffer packet](#) 139
[RopTransportNewMail Response Buffer packet](#) 140
[RopTransportSend Request Buffer packet](#) 138
[RopTransportSend Response Buffer packet](#) 138
[RopUnlockRegionStream Request Buffer packet](#) 179
[RopUnlockRegionStream Response Buffer packet](#) 180
[RopUpdateDeferredActionMessages Request Buffer packet](#) 187
[RopUpdateDeferredActionMessages Response Buffer packet](#) 188
[RopWriteAndCommitStream Request Buffer packet](#) 180
[RopWritePerUserInfo Request Buffer packet](#) 51
[RopWritePerUserInfo Response Buffer packet](#) 52
[RopWriteStream Request Buffer packet](#) 170
[RopWriteStream Response Buffer packet](#) 171

S
 Security [implementer considerations](#) 237
[overview](#) 237

[parameter index](#) 237
Server
[overview](#) 228
[Standards Assignments](#) 17

T

[Tracking changes](#) 239
[Transport](#) 18

V

[Vendor-extensible fields](#) 17
[Versioning](#) 17