

[MS-OXORMMS]: Rights-Managed E-Mail Object Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.mspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplq@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability.
04/25/2008	0.2		Revised and updated property names and other technical content.
06/27/2008	1.0		Initial Release.
08/06/2008	1.01		Revised and edited technical content.
09/03/2008	1.02		Updated references.
12/03/2008	1.03		Updated IP notice.
03/04/2009	1.04		Revised and edited technical content.
04/10/2009	2.0		Updated applicable product releases.
07/15/2009	3.0	Major	Revised and edited for technical content.

Table of Contents

1 Introduction	5
1.1 Glossary	5
1.2 References	6
1.2.1 Normative References	6
1.2.2 Informative References	6
1.3 Protocol Overview	7
1.4 Relationship to Other Protocols	7
1.5 Prerequisites/Preconditions	7
1.6 Applicability Statement	7
1.7 Versioning and Capability Negotiation	7
1.8 Vendor-Extensible Fields	7
1.9 Standards Assignments	7
2 Messages	8
2.1 Transport	8
2.2 Message Syntax	8
2.2.1 Rights-Managed E-Mail Message Property	8
2.2.1.1 PidNameRightsManagementLicense	8
2.2.2 Additional Property Constraints	8
2.2.2.1 PidNameContentClass	8
2.2.3 Attachment Object	8
2.2.3.1 PidTagAttachLongFilename	8
2.2.3.2 PidTagAttachMimeTag	8
3 Protocol Details	9
3.1 Client Details	9
3.1.1 Abstract Data Model	9
3.1.1.1 Managing a Rights-Managed E-Mail Message	9
3.1.2 Timers	9
3.1.3 Initialization	9
3.1.4 Higher-Layer Triggered Events	9
3.1.4.1 Creating a Rights-Managed E-Mail Message	9
3.1.4.1.1 Encryption of the Message	9
3.1.4.1.2 Format of the Storage Container	10
3.1.4.1.2.1 \11DRMContent Storage	11
3.1.4.1.2.2 Attachments to the Rights-Managed E-Mail Message	13
3.1.4.1.2.3 Attachment Info	13
3.1.4.1.2.4 MailAttachment Structure	14
3.1.4.1.2.4.1 afByValue	14
3.1.4.1.2.4.1.1 \3MailAttachment Stream	15
3.1.4.1.2.4.1.2 AttachPres	15
3.1.4.1.2.4.1.3 AttachDesc	15
3.1.4.1.2.4.1.4 AttachContents	17
3.1.4.1.2.4.2 afEmbeddedMessage	17
3.1.4.1.2.4.3 afOle	17
3.1.4.2 Opening a Rights-Managed E-Mail Message	17
3.1.4.2.1 Decryption of the Message	17
3.1.5 Message Processing Events and Sequencing Rules	18
3.1.6 Timer Events	18
3.1.7 Other Local Events	18

3.2	Server Details	18
3.2.1	Abstract Data Model.....	18
3.2.2	Timers	18
3.2.3	Initialization	18
3.2.4	Higher-Layer Triggered Events	18
3.2.5	Message Processing Events and Sequencing Rules	18
3.2.6	Timer Events.....	18
3.2.7	Other Local Events	18
4	Protocol Examples	19
4.1	Creating a Rights-Managed E-Mail Message	19
5	Security.....	20
5.1	Security Considerations for Implementers.....	20
5.2	Index of Security Parameters	20
6	Appendix A: Product Behavior	21
7	Change Tracking	23
8	Index.....	24

1 Introduction

This document specifies the Rights-Managed E-mail object protocol that is used by the client to create and consume a **rights-managed e-mail message**. A rights-managed **message** is used to protect e-mail content from inappropriate access, use, and distribution.

1.1 Glossary

The following terms are defined in [\[MS-OXGLOS\]](#):

Attachment object
binary large object (BLOB)
code page
GUID
Hypertext Markup Language (HTML)
little-endian
message
message body
Message object
metafile
named property
plain text
property
property ID
publishing license (PL)
Rich Text Format (RTF)
rights-managed e-mail message
rights policy template
Unicode
Use License (UL)

The following terms are specific to this document:

LPString: A string that contains a 1-byte positive integer (LengthOfString) indicating the length of the string, followed by LengthOfString **Unicode** characters. This string is not null-terminated. The length of this string cannot be more than 255 characters.

Mapping mode: The way in which logical (device-independent) coordinates are mapped to device-specific coordinates.

non-Unicode LPString: A string that contains a 1-byte positive integer (LengthOfString), indicating the length of the string, followed by LengthOfString non-**Unicode** characters. This string is not null-terminated. The length of this string cannot be more than 255 characters.

pipe-delimited string: A **Unicode** string containing multiple sub-strings, delimited by the pipe ("|") character. Each sub-string cannot contain the pipe character. This string always ends with the pipe character, even if there is only one sub-string. This is a length-prefixed string with the first byte containing the length of the **Unicode** characters. The length of this string cannot be more than 255 characters.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-DTYP] Microsoft Corporation, "Windows Data Types", March 2007, <http://go.microsoft.com/fwlink/?LinkId=111558>.

[MS-OFFCRYPTO] Microsoft Corporation, "Office Document Cryptography Structure Specification", April 2008, <http://go.microsoft.com/fwlink/?LinkId=115029>.

[MS-OXBBODY] Microsoft Corporation, "[Best Body Retrieval Protocol Specification](#)", June 2008.

[MS-OXCMSG] Microsoft Corporation, "[Message and Attachment Object Protocol Specification](#)", June 2008.

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)", June 2008.

[MS-OXMSG] Microsoft Corporation, "[MSG File Format Specification](#)", June 2008.

[MS-OXOMSG] Microsoft Corporation, "[E-Mail Object Protocol Specification](#)", June 2008.

[MS-OXPROPS] Microsoft Corporation, "[Exchange Server Protocols Master Property List Specification](#)", June 2008.

[MS-RMPR] Microsoft Corporation, "Rights Management Services (RMS): Client-to-Server Protocol Specification", March 2007, <http://go.microsoft.com/fwlink/?LinkId=111755>.

[MS-WMF] Microsoft Corporation, "Windows Metafile Format Specification", June 2007, <http://go.microsoft.com/fwlink/?LinkId=112205>.

[MSFT-CFB] Microsoft Corporation, "Compound File Binary File Format", February 2008, <http://go.microsoft.com/fwlink/?LinkId=111739>.

[RFC1950] Deutsch, P. and Gailly, J-L., "ZLIB Compressed Data Format Specification version 3.3", RFC 1950, May 1996, <http://www.ietf.org/rfc/rfc1950.txt>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>.

[XRML] ContentGuard, Inc., "XrML... eXtensible rights Markup Language", 2005, http://www.xrml.org/XrML_12.asp.

1.2.2 Informative References

[MSDN-DVASP] Microsoft Corporation, "DVASPECT", <http://go.microsoft.com/fwlink/?LinkId=111748>.

[MSDN-OLE] Microsoft Corporation, "OleConvertIStorageToOLESTREAM Function", <http://go.microsoft.com/fwlink/?LinkId=111754>.

1.3 Protocol Overview

This protocol enables the client to create and consume rights-managed e-mail messages.

When a client creates a rights-managed e-mail message, it encrypts the contents of the message (body, attachments, and so on) and stores the encrypted contents as part of the message that is sent to the recipient(s). The client sets certain **properties** on the message to identify it as rights-managed.

When a client receives a rights-managed e-mail message, it decrypts the encrypted **BLOB** and displays the content to the end user if the end user has sufficient permissions for the same. In addition, the client disables certain functionality on the rights-managed e-mail message to prevent the recipient from using the message in an unauthorized manner.

1.4 Relationship to Other Protocols

The Rights-Managed E-mail object protocol specification relies on the following:

- An understanding of the **Message object** (as specified in [\[MS-OXCMSG\]](#)) so that the client can obtain a handle to the Message object and perform property operations on it.
- An understanding of attachments (as specified in [\[MS-OXCMSG\]](#)) and message properties (as specified in [\[MS-OXCMSG\]](#) and [\[MS-OXOMSG\]](#)) so that the client can handle attachments and perform property operations on **Attachment objects**.
- An understanding of the Rights Management Services (RMS) Client-Server protocol (as specified in [\[MS-RMPR\]](#)).
- An understanding of the compound file format (as specified in [\[MSFT-CFB\]](#)).

1.5 Prerequisites/Preconditions

This protocol specification assumes that the messaging client has previously logged on to the messaging server and has acquired a handle to the rights-managed e-mail message (as specified in [\[MS-OXCMSG\]](#)).

This protocol relies on the Rights Management Services (RMS) client-server protocol (as specified in [\[MS-RMPR\]](#)) to create and consume rights-managed e-mail messages, and therefore assumes that the prerequisites of the RMS client-server protocol are met.

1.6 Applicability Statement

A client can use this protocol to create and consume rights-managed e-mail messages.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

The properties specified in this protocol are transported between client and server, as specified in [\[MS-OXCMSG\]](#).

2.2 Message Syntax

A rights-managed e-mail message extends the Message and Attachment object protocol specified in [\[MS-OXCMSG\]](#).

Unless otherwise specified, rights-managed e-mail message objects adhere to all property constraints specified in [\[MS-OXPROPS\]](#) and all property constraints specified in [\[MS-OXCMSG\]](#). A rights-managed e-mail message object can [<1>](#) also contain other properties, which are defined in [\[MS-OXPROPS\]](#), but these properties have no impact on the Rights-Managed E-mail object protocol.

2.2.1 Rights-Managed E-Mail Message Property

The following property is specific to the Rights-Managed E-mail object protocol.

2.2.1.1 PidNameRightsManagementLicense

A **PtypMultipleBinary named property**. This property is used to cache the **Use License** for the rights-managed e-mail message. If the Use License is successfully obtained, this property SHOULD [<2>](#) be present on a rights-managed e-mail message object. If the property is present, the first value of this multiple binary property MUST contain the ZLIB (as specified in [\[RFC1950\]](#)) compressed Use License for the rights-managed e-mail message.

2.2.2 Additional Property Constraints

This document specifies additional constraints on the following properties beyond what is specified in [\[MS-OXCMSG\]](#).

2.2.2.1 PidNameContentClass

The value of this property for a rights-managed e-mail message MUST be set to "rmsg.message".

2.2.3 Attachment Object

A rights-managed e-mail message consists of a wrapper e-mail message with the original e-mail contents encrypted in an attachment. A rights-managed e-mail message, therefore, has at least one attachment. This attachment has specific property values, as specified in the following sections, that distinguish it from the other attachments. For details about encryption and decryption of the original contents in the attachment, see section [3.1.4](#).

2.2.3.1 PidTagAttachLongFilename

The value of this property for a rights-managed e-mail message MUST be set to "message.rmsg".

2.2.3.2 PidTagAttachMimeTag

The value of this property for a rights-managed e-mail message MUST be set to "application/x-microsoft-rmsg-message".

3 Protocol Details

The role of the client is to create a rights-managed e-mail message (by setting properties to distinguish the message from a normal message) and to identify and consume a rights-managed e-mail message when it is received.

3.1 Client Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

3.1.1.1 Managing a Rights-Managed E-Mail Message

When a higher layer triggers the creation of rights-managed e-mail message, the original message, along with its attachments that are to be rights-managed, is encrypted and packaged in a storage container. This storage container is then compressed and stored as an attachment to a wrapper message that is marked with the specific property, as specified in section [2.2.2](#), which results in a rights-managed e-mail message. The attachment is also specified with certain properties, as specified in section [2.2.3](#), that distinguish it from a regular attachment.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

3.1.4.1 Creating a Rights-Managed E-Mail Message

This section specifies how the client creates a rights-managed e-mail message when requested by the higher layers.

3.1.4.1.1 Encryption of the Message

When the higher layer creates a rights-managed e-mail message, handshaking between the client and the RMS server takes place, resulting in the generation of required certificates by the RMS server for creation and consumption of rights-managed content. For more information about this process, see [\[MS-RMPR\]](#).

When the client obtains the certificates that are required to create the rights-managed content:

- A storage container that is based on a storage structure referred to as the "compound file" (as specified in [\[MSFT-CFB\]](#)) is created with the format as specified in section 3.1.4.1.2.
- The following components of the original message are encrypted before they are included in the container:


Message body: Depending on the body format of the message, the message body is contained in one of these properties: [PidTagBody](#), [PidTagBodyHtml](#), [PidTagRtfCompressed](#), [PidTagRtfInSync](#) or the combination of [PidTagRtfCompressed](#) and [PidTagRtfInSync](#).

attachments: If there are any attachments present in the original message, they are encrypted.

- The publishing license is obtained for the encrypted content (as specified in [\[MS-RMPRI\]](#)) and packaged in the storage container.
- This storage container is then compressed using ZLIB [<3>](#) to reduce its size.
- A wrapper e-mail message for the rights-managed e-mail message is created with the compressed stream as an attachment with the [PidTagAttachLongFilename](#) set to "message.rpmsg" and [PidTagAttachMimeTag](#) set to "application/x-microsoft-rpmsg-message". The [PidNameContentClass](#) of the wrapper message is set to "rpmsg. message".

3.1.4.1.2 Format of the Storage Container

The "message.rpmsg" attachment is a ZLIB compressed file that contains the standard ZLIB header [<4>](#) followed by the compressed storage container. Figure 1 shows the format of the storage container.

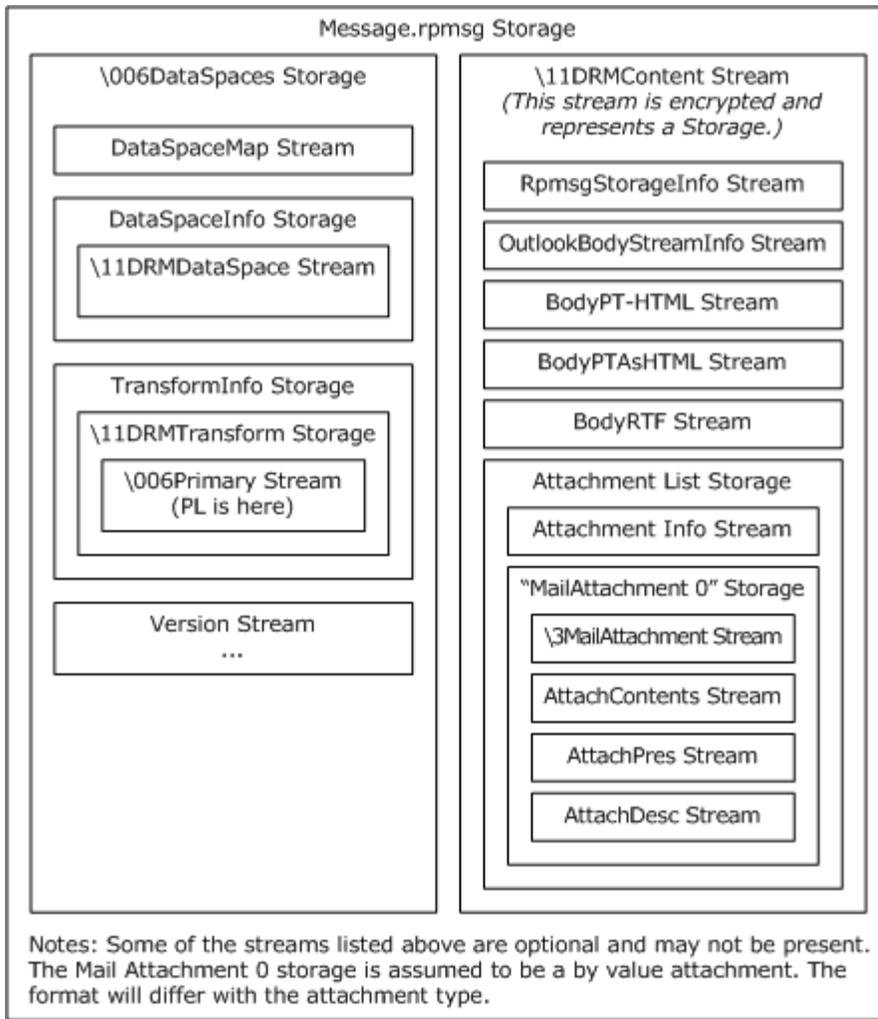

The following components MUST be present in the uncompressed message.rpmsg storage:

stream/ storage	Name	Description	Format
storage	"\006DataSpaces"	Contains data, such as the PL and transformation information for the document.	See [MS-OFFCRYPTO] for more details.
stream	"\11DRMContent"	Contains the encrypted message body and attachments.	See section 3.1.4.1.4.1 for details.

3.1.4.1.2.1 \11DRMContent Storage

The \11DRMContent storage contains the encrypted e-mail message body and attachments. Before encryption, the \11DRMContent has the components specified in the following table.

Name	stream/storage	Description
------	----------------	-------------

Name	stream/storage	Description
OutlookBodyStreamInfo	This stream MUST be present in the storage.	<p>This stream contains two consecutive values:</p> <p>The first value is of type WORD and contains the message body format. If the body format is plain text, the value MUST be 0x0001. If the body format is HTML, the value MUST be 0x0002. If the body format is RTF, the value MUST be 0x0003.</p> <p>The second value is of type DWORD whose value MUST correspond to PidTagInternetCodepage, if present; otherwise it MUST be set to the active code page of the system.</p>
BodyPT-HTML	This stream MUST be present in the storage.	<p>The contents of this stream are based on the body format as specified in OutlookBodyStreamInfo stream. If the body format is plain text, this stream MUST contain the plain text version of the message body that is present in the PidTagBody property, as specified in [MS-OXBBODY].</p> <p>If the body format is HTML, this stream MUST contain the HTML version of the message body that is present in the PidTagHtml property, as specified in [MS-OXBBODY].</p> <p>If the body format is RTF, this stream MUST contain an HTML version of the RTF message body. <5></p>
BodyRtf	If the message body format specified in OutlookBodyStreamInfo is RTF, this stream MUST be present in the storage.	Contains the RTF representation of the message body that is present in the PidTagRtfCompressed property, as specified in [MS-OXBBODY] .
BodyPTAsHTML	If the message body format specified in OutlookBodyStreamInfo is plain text, this stream MUST be present in the storage.	This stream contains an HTML version of a plain text message body . The client MUST ignore this stream on receipt. <6>
RpmsgStorageInfo	This stream MUST be present in the storage.	<p>This stream contains implementation specific details. It MUST contain the following byte stream:</p> <pre>1F 32 DE 15 02 00 00 00 02 00 00 00 00 00 00 00 00 00 00</pre>
WordMailRightsIndex	This stream SHOULD <7> be present in the storage if the message is a Reply to a rights-managed e-mail message; otherwise, it MUST NOT be included.	When replying to a rights-managed e-mail message, the replier cannot copy or print the original message included within/below the reply. To differentiate between this protected and unprotected content in saved e-mail messages, WordMailRightsIndex contains first and last character position pairs that bind content within the message. The first pair represents the beginning and end

Name	stream/storage	Description
		character positions of the original message. The remaining character pairs represent the bounds of the inline comments in the original message. Multiple pairs exist when inline comments are used. The stream MUST contain the following: A ULONG to represent the number of pairs, followed by the character position pairs. Each pair consists of two character positions, each of type ULONG . The values are stored in the little-endian format.
attachment List	This storage MUST be present if the message has any attachment.	Contains the attachment storage collection of the message. See section 3.1.4.1.3.2 for details.

3.1.4.1.2.2 Attachments to the Rights-Managed E-Mail Message

All attachments in the message MUST be stored in the "Attachment List" storage. The contents of the attachment can be encrypted with the same **PL** as the Message object if the associated application supports rights management [<8>](#).

The components of the "Attachment List" storage are specified in the following table.

Name	stream/ storage	Description
attachment Info	This stream MUST be present.	See section 3.1.4.1.3.3 for details.
MailAttachment N	This storage MUST be present.	N represents the "attachment number" that starts from zero and is incremented with each attachment. See section 3.1.4.1.3.4 for details.

3.1.4.1.2.3 Attachment Info

This stream provides a table of contents for the Attachment List storage. This stream MUST contain the following in the order given:

- **ULONG** AttachmentCount, which gives the number of attachments. If this value is 0xFFFFFFFF, the message body format MUST be RTF. The number of attachments in case of RTF messages is in the **DWORD** NumberOfAttachments, as specified in the next table.
- **Pipe-delimited string** containing the list of attachments in the form of "Mail Attachment N", where N represents the attachment number starting from zero. The format of the **Unicode** pipe-delimited string is as follows:

MailAttachment 0|MailAttachment 1|... MailAttachment N|

If the message body format specified in OutlookBodyStreamInfo is RTF, the following information is appended to the stream. All values are stored in the little-endian format.

Name	Format	Description
NumberOfAttachments	DWORD	This value contains the number of attachments in the RTF message.

The following are then repeated for each attachment that is present in the RTF message:

Name	Format	Description
CharacterPosition	DWORD	This is the location in the RTF stream in which the embedded object appears. This corresponds to the PidTagRenderingPosition , as specified in [MS-OXCMSG] .
Objf	DWORD	This value represents the way the contents of an attachment can be accessed. The following are the possible values: A value of 0x00000001 MUST be matched to the attachment with PidTagAttachMethod afOle. A value of 0x00000004 MUST be matched to the attachment with PidTagAttachMethod afByValue. A value of 0x00000008 MUST be matched to the attachment with PidTagAttachMethod afEmbeddedMessage. Objf also has other client-specific flags logically ORed to the above values which are implementation-specific and can be ignored.
Aspect	DWORD	This contains the objects draw aspect. If the Objf value is 0x00000004 or 0x00000008, it is set to DVASPECT_ICON (as described in [MSDN-DVASPI]). If the Objf value is 0x00000001, it is set to DVASPECT_CONTENT.
SizeAlongXAxis	DWORD	This value is the length of the metafile that is displayed in the message body. Metrics are based on the mapping mode of the metafile.
SizeAlongYAxis	DWORD	This value is the height of the metafile that is displayed in the message body. Metrics are based on the mapping mode of the metafile.

3.1.4.1.2.4 MailAttachment Structure

The structure of "MailAttachment N" storage is dependent on the way the contents of the attachment can be accessed. The different ways are specified by the [PidTagAttachMethod](#) property, as specified in [\[MS-OXCMSG\]](#). A rights-managed e-mail message MUST allow only the following values for the [PidTagAttachMethod](#) property:

- afByValue
- afEmbeddedMessage
- afOle

Treatment of each type of attachment is described separately in the following subsections.

3.1.4.1.2.4.1 afByValue

The following table specifies the components of the "MailAttachment N" storage for the attachment for which the [PidTagAttachMethod](#) property is afByValue.

Name	stream/storage	Description
\3MailAttachment	This stream MUST be present	Attachment header stream. See section 3.1.4.1.2.4.1.1 .
AttachPres	This stream MUST be	This stores the attachment's icon. See section

Name	stream/ storage	Description
	present	3.1.4.1.2.4.1.2.
AttachDesc	This stream MUST be present	Information about the attachment. See section 3.1.4.1.2.4.1.3.
AttachContents	This stream MUST be present	The actual contents of the attachment. See section 3.1.4.1.2.4.1.4.

Other streams MAY be present in the storage but they are client-specific.

3.1.4.1.2.4.1.1 \3MailAttachment Stream

The following table specifies the format of the components in the \3MailAttachment stream in the order in which they appear. The values are stored in little-endian format.

Component	Format	Comments
Attachment Number	DWORD	Represents the index of the attachment at the time of attaching. This can be set to 0x00000000. Client ignores this value on receipt.
Reference Flag	DWORD	This is an implementation-specific flag. This can be set to 0x00000000. Client ignores this value on receipt.

3.1.4.1.2.4.1.2 AttachPres

This stream stores the attachment icon for user presentation in the Windows **metafile** format, as specified in [\[MS-WMF\]](#).

3.1.4.1.2.4.1.3 AttachDesc

This stream stores information about the attachment. The following table specifies the format of the components of the AttachDesc stream in the order in which they appear.

Component	Format	Comments
stream Version	USHORT	When creating a rights-managed e-mail message, this value MUST always be set to 0x0203. The value is stored in the little-endian format.
Long Path Name	non-Unicode LPString	Long Path Name SHOULD <9> contain the value of the PidTagAttachLongPathname property of the attachment, if present; otherwise, it MUST be 0x00.
Path Name	non-Unicode LPString	Path Name MUST contain the value of the PidTagAttachPathname property of the attachment, if present; otherwise, it MUST be 0x00.
Display name	non-Unicode LPString	Display name MUST contain the value of the PidTagDisplayName property of the attachment, if present; otherwise, it MUST be 0x00.
Long File Name	non-Unicode LPString	Long File Name MUST contain the value of the PidTagAttachLongFilename property of the attachment, if present; otherwise, it MUST be 0x00.
File Name	non-Unicode LPString	File Name MUST contain the value of the PidTagAttachFilename property of the attachment, if present; otherwise, it MUST be 0x00.

Component	Format	Comments
Extension	non-Unicode LPString	Extension MUST contain the value of the PidTagAttachExtension property of the attachment, if present; otherwise, it MUST be 0x00.
File Creation Time	64-bit value	File Creation Time MUST contain the value of the PidTagCreationTime property of the attachment, if present; otherwise, it MUST be 0x0000000000000000. This is stored in little-endian format.
File Last Modified Time	64-bit value	File Last Modified Time MUST contain the value of the PidTagLastModificationTime property of the attachment, if present; otherwise, it MUST be 0x0000000000000000. This is stored in little-endian format.
Attach Method	ULONG	Attach Method MUST contain the value of the PidTagAttachMethod property of the attachment stored in little-endian format.
Content ID	LPString	Content ID MUST contain the PidTagAttachContentId property value, if present; otherwise it MUST be 0x00.
Content Location	LPString	Content Location MUST contain the PidTagAttachContentLocation property value, if present; otherwise, it MUST be 0x00.
Long Path Name	LPString	Long Path Name SHOULD <10> contain the value of the PidTagAttachLongPathname property of the attachment, if present; otherwise, it MUST be 0x00.
Path name	LPString	Path Name MUST contain the value of the PidTagAttachPathname property of the attachment, if present; otherwise, it MUST be 0x00.
display name	LPString	Display name MUST contain the value of the PidTagDisplayName property of the attachment, if present; otherwise, it MUST be 0x00.
Long File name	LPString	Long File name MUST contain the value of the PidTagAttachLongFilename property of the attachment, if present; otherwise, it MUST be 0x00.
File name	LPString	File name MUST contain the value of the PidTagAttachFilename property of the attachment, if present; otherwise, it MUST be 0x00.
Extension	LPString	Extension MUST contain the value of the PidTagAttachExtension property of the attachment, if present; otherwise, it MUST be 0x00.
Image Preview Small	LPString	This value MUST contain the file name that contains the small Image Preview of the attachment, if present; otherwise, it MUST be 0x00.
Image Preview Medium	LPString	This value MUST contain the file name of the medium Image preview of the attachment, if present; otherwise, it MUST be 0x00.
Image Preview Large	LPString	This value MUST contain the file name of the large Image preview of the attachment, if present; otherwise, it MUST be 0x00.
Rendered	LONG	This value MUST be 0x00000001 if the attachment is rendered inline (only valid for HTML images). Otherwise, it MUST be set to 0x00000000. This value is stored in little-endian format.
flags	LONG	This field contains certain implementation-specific flags that correspond to the attachment. When creating a rights-managed e-mail message, this value can be set to 0x00000000. This value is stored in little-endian format.

3.1.4.1.2.4.1.4 AttachContents

This stream stores the actual bits of the attachment, as specified in the following table.

Component	Format	Comments
attachment	Binary data	The attachment contents are stored here. This is the same as the PidTagAttachDataBinary property value.

3.1.4.1.2.4.2 afEmbeddedMessage

The "MailAttachment N" storage structure for attachments with [PidTagAttachMethod](#) property afEmbeddedMessage is the same as that for the attachment with [PidTagAttachMethod](#) as afByValue, with the following exceptions:

- In the AttachDesc stream, the Attach Method field MUST be set to "0x0005" to represent that the attachment is an embedded message.
- The AttachContents stream MUST be replaced by an.msg storage file (the structure of which is specified in MS-OXMSG), which is the embedded message converted into storage.
- On receipt of the rights-managed e-mail message with.msg attachments, the client creates an embedded message Attachment object from the contents of the.msg storage file.

3.1.4.1.2.4.3 afOle

This applies to RTFmessage body formats only.

If the attachments [PidTagAttachTag](#) property value is OLESTORAGE (as specified in [\[MS-OXCMSG\]](#)), then "MailAttachment N" storage MUST contain the value of [PidTagAttachDataBinary](#) (as specified in [\[MS-OXCMSG\]](#)) converted to a compound file storage. For more information, see [\[MSDN-OLE\]](#).

If the [PidTagAttachTag](#) property value is not OLESTORAGE, then "MailAttachment N" storage MUST contain a copy of [PidTagAttachDataObject](#), as specified in [\[MS-OXCMSG\]](#).

3.1.4.2 Opening a Rights-Managed E-Mail Message

This section specifies how a rights-managed e-mail message is consumed when a user or user agent invokes an event to open a rights-managed e-mail message.

When an event to open a message is triggered, the client scans the message for the properties specified in section [2.2.1](#) and [2.2.2](#) and scans the attachment for the properties specified in section [2.2.3](#). The client uses the values of these properties to determine whether a message is rights-managed. Following this determination, the client proceeds to open the message, as specified in section [3.1.4.2.1](#).

3.1.4.2.1 Decryption of the Message

After the message has been identified as a rights-managed e-mail message:

- The client ZLIB decompresses the "message.rpmsg" attachment to get the storage container, as specified in section [3.1.4.1.2](#).
- If the [PidNameRightsManagementLicense](#) property is present, this indicates that the Use License (UL) has already been obtained. If it is not present, the client obtains the required UL from the

RMS server by using the **publishing license (PL)** in the container, as specified in [\[MS-RMPR\]](#) section 3.1.7.9.

- The client SHOULD [<11>](#) then cache the UL in the [PidNameRightsManagementLicense](#) property, as specified in section 2.2.2.2, if the UL is not already present. A user can open the message offline if the UL is cached. [<12>](#)
- By using the UL, the messaging client decrypts the encrypted content as specified in [\[MS-RMPR\]](#).

3.1.5 Message Processing Events and Sequencing Rules

None.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

3.2 Server Details

The RMS server is responsible for issuing the various certificates and licenses required for the creation and consumption of rights-managed e-mail messages. The role and details of the RMS server are specified in detail in [\[MS-RMPR\]](#).

3.2.1 Abstract Data Model

None.

3.2.2 Timers

None.

3.2.3 Initialization

None.

3.2.4 Higher-Layer Triggered Events

None.

3.2.5 Message Processing Events and Sequencing Rules

None.

3.2.6 Timer Events

None.

3.2.7 Other Local Events

None.

4 Protocol Examples

4.1 Creating a Rights-Managed E-Mail Message

Joe creates a rights-managed e-mail message and saves it. The following is a description of what a protocol client might do to accomplish Joe's intentions, followed by the responses a protocol server might return.

Before manipulating rights-managed Message objects, the protocol client needs a request for the protocol server to perform a mapping from named properties to **property identifiers**, by using `RopGetPropertyIDsOfNames`.

property	property set GUID	Name or ID
PidNameContentClass	{ 00020386-0000-0000-c000-000000000046}	Content class

The protocol server might return the following property IDs in response to [RopGetPropertyIDsFromNames](#). The actual IDs are completely at the discretion of the protocol server.

property	property ID
PidNameContentClass	0x806C

To create a rights-managed object, the protocol client uses [RopCreateMessage](#). The protocol server returns a success code and a handle to the Message object. The protocol client then uses [RopSetProperties](#) to transmit the data to the protocol server.

property	property ID	Type	Value
PidNameContentClass	0x806C	0x001F	rpsmsg.message

In order to create message.rpsmsg attachment, the protocol client uses [RopCreateAttachment](#) to create the Attachment object. Then the protocol client uses [RopOpenStream](#) and [RopSetStreamSize](#) followed by [RopWriteStream](#) to write out the contents into the attachment. The protocol client also asks the protocol server for specific attachment properties, which are then set by using [RopSetProperties](#).

property	property ID	Type	Value
PidTagAttachMimeType	0x370E	0x001F	application/x-microsoft-rpsmsg-message
PidTagAttachLongFilename	0x3703	0x001F	message.rpsmsg

The protocol client uses [RopSaveChangesAttachment](#) to save the Attachment object.

When Joe is ready to save his changes, the protocol client uses [RopSaveChangesMessage](#) to commit the properties on the protocol server, and then uses [RopRelease](#) to release the object.

The values of some properties will change during the execution of [RopSaveChangesMessage](#), but none of the properties that are specified in this document will change.

5 Security

5.1 Security Considerations for Implementers

The key used to encrypt the content, which is generated by the RMS client, has to be different every time a rights-managed e-mail message is created and whenever any component of the **rights policy template** changes. Security considerations of the RMS client and server also figure in this protocol and are specified in [\[MS-OXRMPR\]](#).

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following product versions:

- Microsoft Office Outlook 2003
- Microsoft Exchange Server 2003
- Microsoft Office Outlook 2007
- Microsoft Exchange Server 2007
- Microsoft Outlook 2010
- Microsoft Exchange Server 2010

Exceptions, if any, are noted below. If a service pack number appears with the product version, behavior changed in that service pack. The new behavior also applies to subsequent service packs of the product unless otherwise specified.

Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2](#): Outlook 2007 and Outlook 2010 have the following properties in addition to those mentioned in sections 2.2.2.1, 2.2.2.2, and 2.2.2.3 that it will set on a new rights-managed e-mail message regardless of user input: [PidLidAgingDontAgeMe](#), [PidLidCurrentVersion](#), [PidLidCurrentVersionName](#), [PidLidPrivate](#), [PidLidSideEffects](#), [PidTagAlternateRecipientAllowed](#), [PidTagClientSubmitTime](#), [PidTagDeleteAfterSubmit](#), [PidTagImportance](#), [PidTagMessageDeliveryTime](#), [PidTagPriority](#), [PidTagReadReceiptRequested](#), [PidTagSensitivity](#), [PidLidReminderDelta](#), [PidLidReminderSet](#), [PidLidTaskMode](#).

[<2> Section 2.2.1.1](#): Outlook 2007 and Outlook 2010 do not use this property to cache the Use License.

[<3> Section 3.1.4.1.1](#): ZLIB library version that is greater than 1.2.3 has to be used.

[<4> Section 3.1.4.1.2](#): The specific format of the Message.rpmsg header is described as follows: CHAR STRING header - Value is "\x76\xe8\x04\x60\xc4\x11\xe3\x86" in little-endian format. DWORD ULCheck - Value is 0x00000FA0. DWORD SizeBeforeInflation - Size of byte stream after decompressing. DWORD SizeAfterInflation - Size of byte stream after compressing. The bytes following the header contain the compressed bits of the storage container. The size of the compressed bits is determined by SizeBeforeInflation.

[<5> Section 3.1.4.1.2.1](#): Outlook Web Access does not recognize the rights-managed e-mail message. To read the rights-managed e-mail message in Outlook Web Access, a Rights Managed add-on for Internet Explorer has to be installed. This stream is meant for the Rights Managed add-on for Internet Explorer.

[<6> Section 3.1.4.1.2.1](#): This stream is meant only for the Rights Managed add-on for Internet Explorer.

[<7> Section 3.1.4.1.2.1](#): This stream is not included in Outlook 2003 with a reply to a rights-managed e-mail message.

[<8> Section 3.1.4.1.2.2](#): In the typical case, the unmodified bits of the attachment are stored in this stream. However, if the file type of the attachment supports rights management, the attachment is also rights-managed. Examples of such file types are: Microsoft Word, Microsoft Excel, and Microsoft PowerPoint binary Office 97-2003 file format; Office 2007 new Open **XML** files formats (for example, .docx); Microsoft Infopath 2007 forms and templates; and XPS documents. When rights-managed protection is applied to attachments, the same issuance license that is used to protect the message itself is used. The structure of each encrypted attachment conforms to the specifications for its file type. To view a rights-managed attachment, the file has to be opened and unencrypted in its native viewer.

[<9> Section 3.1.4.1.2.4.1.3](#): In some cases, Outlook 2003, Outlook 2007, and Outlook 2010 write the full directory path to the attachment on the local computer.

[<10> Section 3.1.4.1.2.4.1.3](#): In some cases, Outlook 2003, Outlook 2007, and Outlook 2010 write the full directory path to the attachment on the local computer.

[<11> Section 3.1.4.2.1](#): Outlook 2007 and Outlook 2010 do not use this property to cache the Use License (UL).

[<12> Section 3.1.4.2.1](#): Outlook 2003, Outlook 2007, and Outlook 2010 recognize the incoming e-mail Message as a rights-managed e-mail message and tries to pre-license the e-mail Message even before the Message is opened. The Use License (UL) is then cached in the [PidNameRightsManagementLicense](#) property. When the e-mail Message is opened, Outlook also **stores** this license in the RMS License store so that the license can be used to open any rights-managed **attachments** in the Message.

7 Change Tracking

This section will report content and/or editorial changes, beginning with the next release.

8 Index

C

[Change tracking](#)

E

[Examples - overview](#)

G

[Glossary](#)

I

[Informative references](#)

[Introduction](#)

M

Messages

[overview](#)

N

[Normative references](#)

O

[Overview \(synopsis\)](#)

P

[Preconditions](#)

[Prerequisites](#)

[Product behavior](#)

R

References

[informative](#)

[normative](#)

[Relationship to other protocols](#)

S

Security

[overview](#)

T

[Tracking changes](#)