

# [MS-OXWOOF]: Out of Office (OOF) Web Service Protocol Specification

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.mspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplq@microsoft.com](mailto:iplq@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability.
06/27/2008	1.0		Initial Release.
08/06/2008	1.01		Revised and edit technical content.
09/03/2008	1.02		Updated references.
12/03/2008	1.03		Updated IP notice.
02/04/2009	1.04		Revised and edited technical content.
03/04/2009	1.05		Revised and edited technical content.
04/10/2009	2.0		Updated technical content and applicable product releases.
07/15/2009	3.0	Major	Revised and edited for technical content.

# Table of Contents

<b>1 Introduction</b> .....	<b>5</b>
1.1 Glossary.....	5
1.2 References.....	5
1.2.1 Normative References .....	5
1.2.2 Informative References .....	6
1.3 Protocol Overview .....	6
1.4 Relationship to Other Protocols.....	6
1.5 Prerequisites/Preconditions.....	7
1.6 Applicability Statement.....	7
1.7 Versioning and Capability Negotiation.....	7
1.8 Vendor-Extensible Fields .....	7
1.9 Standards Assignments .....	7
<b>2 Messages</b> .....	<b>8</b>
2.1 Transport.....	8
2.2 Message Syntax.....	8
2.2.1 Namespaces.....	8
2.2.2 Simple Types .....	8
2.2.2.1 t:ExternalAudience.....	8
2.2.2.2 t:OofState.....	9
2.2.2.3 t:ResponseClassType .....	9
2.2.2.4 t:ResponseCodeType.....	9
2.2.3 Complex Types.....	10
2.2.3.1 m:BaseRequestType.....	10
2.2.3.2 t:Duration.....	10
2.2.3.3 t:EmailAddress.....	11
2.2.3.4 m:GetUserOofSettingsResponse .....	11
2.2.3.5 m:GetUserOofSettingsRequest .....	12
2.2.3.6 t:Mailbox.....	12
2.2.3.7 t:ReplyBody.....	12
2.2.3.8 m:ResponseMessageType.....	12
2.2.3.9 t:ServerVersionInfo.....	13
2.2.3.10 m:SetUserOofSettingsResponse.....	14
2.2.3.11 m:SetUserOofSettingsRequest.....	14
2.2.3.12 t:UserOofSettings.....	15
2.2.4 Fault Detail.....	15
<b>3 Protocol Details</b> .....	<b>17</b>
3.1 ExchangeServicePortType Server Details .....	17
3.1.1 Abstract Data Model.....	17
3.1.2 Timers .....	17
3.1.3 Initialization .....	17
3.1.4 Message Processing Events and Sequencing Rules .....	17
3.1.4.1 GetUserOofSettings.....	17
3.1.4.2 SetUserOofSettings Operation .....	18
3.1.5 Timer Events.....	18
3.1.6 Other Local Events .....	19
3.2 ExchangeServicePortType Client Details.....	19
3.2.1 Abstract Data Model.....	19
3.2.2 Timers .....	19

3.2.3	Initialization .....	19
3.2.4	Message Processing Events and Sequencing Rules .....	19
3.2.5	Timer Events.....	19
3.2.6	Other Local Events .....	19
<b>4</b>	<b>Protocol Examples .....</b>	<b>20</b>
4.1	GetUserOutOfSettings Request.....	20
4.2	GetUserOutOfSettings Response .....	20
4.3	SetUserOutOfSettings Request.....	21
4.4	SetUserOutOfSettings Successful Response .....	21
4.5	SetUserOutOfSetting Failure Response .....	21
<b>5</b>	<b>Security.....</b>	<b>23</b>
5.1	Security Considerations for Implementers.....	23
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>24</b>
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>29</b>
<b>8</b>	<b>Change Tracking .....</b>	<b>30</b>
<b>9</b>	<b>Index.....</b>	<b>31</b>

# 1 Introduction

When users know that they are going to be away from work or are unable to respond to mail, they can set up a response message that can be sent automatically to people who send them mail. This response message is called the **Out of Office (OOF)** message. The conditions in which the **OOF message** is sent are determined by the **OOF settings**.

This document specifies the **XML** structures that represent the configuration and retrieval of OOF settings.

## 1.1 Glossary

The following terms are defined in [\[MS-OXGLOS\]](#):

**Coordinated Universal Time (UTC)**  
**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**  
**Out of Office (OOF)**  
**Secure Sockets Layer (SSL)**  
**Simple Mail Transfer Protocol (SMTP)**  
**SOAP fault**  
**Web Services Description Language (WSDL)**  
**WSDL message**  
**WSDL port type**  
**XML**  
**XML schema**

The following terms are specific to this document:

**internal users:** Users who are within the organization.

**external users:** Users who are outside the organization.

**OOF message:** A reply that is sent to senders of e-mail messages when the mailbox owner is Out of Office (OOF).

**external OOF message:** An OOF message that is sent to external users.

**OOF settings:** The values that determine whether an OOF message is sent, to whom it is sent, and the contents of the message.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)", June 2008.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>.

[RFC2616] Fielding, R., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>.

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>.

[SOAP1.1] Box, D., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>.

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>.

[XMLNS] World Wide Web Consortium, "Namespaces in XML 1.0 (Second Edition)", August 2006, <http://www.w3.org/TR/REC-xml-names/>.

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>.

[XMLSCHEMA2] Biron, P.V., Ed., and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>.

## 1.2.2 Informative References

None.


## 1.3 Protocol Overview

The Out of Office (OOF) Web service protocol defines the interaction between a client and a server that configures OOF settings and OOF messages for users.

The OOF Web service also enables a user to either turn on their OOF message or schedule their OOF message so that it is enabled for the duration they specify.

## 1.4 Relationship to Other Protocols

Clients contact the OOF Web service by using the SOAP protocol [SOAP1.1] over HTTPS [RFC2616], as shown in Figure 1.

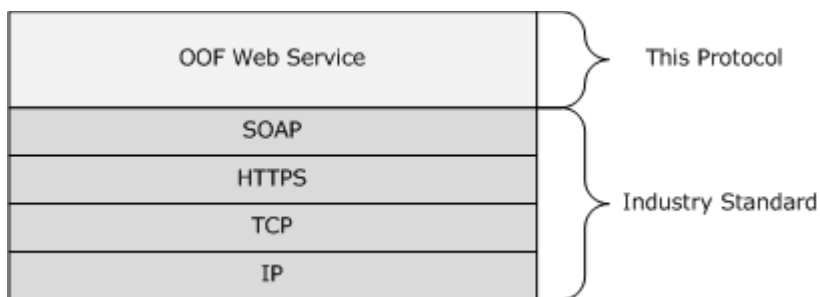

**Figure 1: OOF Web service protocol stack**

## 1.5 Prerequisites/Preconditions

None.

## 1.6 Applicability Statement

The OOF Web service protocol is applicable to SOAP-based clients [\[SOAP1.1\]](#).

## 1.7 Versioning and Capability Negotiation

- **Supported Transports:** This protocol uses SOAP 1.1.
- **Protocol Versions:** This protocol has a single **WSDL port type**.
- **Security and Authentication Methods:** This protocol relies on the Web server that hosts it to perform authentication.
- **Localization:** This protocol includes text strings in various messages.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

### 2.1 Transport

Soap 1.1, as specified in [\[SOAP1.1\]](#), is supported.

### 2.2 Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema** as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **Web Services Description Language (WSDL)**, as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

Namespaces are specified in [\[XMLNS\]](#). Clients can use any valid prefix. The following table lists the prefixes that are used throughout this specification.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/WSDL/soap">http://schemas.xmlsoap.org/WSDL/soap</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	Appendix B
xs	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a>
targetNamespace	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	Appendix B
WSDL	<a href="http://schemas.xmlsoap.org/WSDL/">http://schemas.xmlsoap.org/WSDL/</a>	<a href="#">[WSDL]</a>
T	<a href="http://schemas.microsoft.com/exchange/services/2006/types">http://schemas.microsoft.com/exchange/services/2006/types</a>	Appendix B
M	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	Appendix B

#### 2.2.2 Simple Types

##### 2.2.2.1 t:ExternalAudience

The **ExternalAudience** type specifies a value that determines to whom **external OOF messages** are sent.

```
<xs:simpleType name="ExternalAudience">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None" />
    <xs:enumeration value="Known" />
    <xs:enumeration value="All" />
  </xs:restriction>
</xs:simpleType>
```

Value	Description
None	Specifies that mail sent from <b>external users</b> will not get an OOF message.
Known	Specifies that mail sent from external users that are known to the user will receive an OOF message in response to the mail they sent. A known user is one that appears in the user's list of contacts in any of their contacts folders in their mailbox.



Value	Description
All	Specifies that the external OOF message SHOULD be sent to all external users.

### 2.2.2.2 t:OofState

The **OofState** type specifies the state of the user's mailbox with respect to OOF.

```
<xs:simpleType name="OofState">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Disabled" />
    <xs:enumeration value="Enabled" />
    <xs:enumeration value="Scheduled" />
  </xs:restriction>
</xs:simpleType>
```

Value	Description
Disabled	Specifies that OOF behavior is disabled.
Enabled	Specifies that OOF state is enabled – this indicates that OOF messages will be sent.
Scheduled	Specifies that the OOF status is set to Enabled for the time period identified by the <b>Duration</b> element.

### 2.2.2.3 t:ResponseClassType

The **ResponseClassType** type indicates whether the request was successfully processed by the OOF Web service.

```
<xs:simpleType name="ResponseClassType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Success" />
    <xs:enumeration value="Warning" />
    <xs:enumeration value="Error" />
  </xs:restriction>
</xs:simpleType>
```

Value	Description
Success	Specifies that the request was successfully processed.
Warning	Specifies that an unusual situation was encountered during the processing of the request.
Error	Specifies that the request could not be processed.

### 2.2.2.4 t:ResponseCodeType

The **ResponseCodeType** enumeration [<1>](#) specifies the status states of a response.

```
<xs:simpleType name="ResponseCodeType">
  <xs:annotation>
    <xs:documentation>
      Represents the message keys that can be returned by response error messages
    </xs:documentation>
  </xs:annotation>
</xs:simpleType>
```

```

    </xs:documentation>
</xs:annotation>
<xs:restriction base="xs:string">
  <xs:enumeration value="NoError" />
  <xs:enumeration value="ErrorAccessDenied" />
  <xs:enumeration value="ErrorInvalidOofParameter" />
  <xs:enumeration value="ErrorInvalidScheduledOofDuration" />
  <xs:enumeration value="ErrorInvalidUserOofSettings" />
  <xs:enumeration value="ErrorUnableToGetUserOofSettings" />
</xs:restriction>
</xs:simpleType>

```

Value	Description
NoError = 0	No error returned in the request.
ErrorAccessDenied	The caller does not have access to make the request.
ErrorInvalidOofParameter	Occurs when one of the parameters is invalid.
ErrorInvalidScheduledOofDuration	Occurs when the scheduled duration is not valid.
ErrorInvalidUserOofSettings	Occurs when the OOF settings are not valid.
ErrorUnableToGetUserOofSettings	Occurs when the service is unable to get the OOF settings.

## 2.2.3 Complex Types

### 2.2.3.1 m:BaseRequestType

The **BaseRequestType** type is an abstract type. The **GetUserOofSettingsRequest** and **SetUserOofSettingsRequest** types derive from this type.

```
<xs:complexType name="BaseRequestType" abstract="true" />
```

### 2.2.3.2 t:Duration

The **Duration** type specifies the time interval for which the user is OOF.

```

<xs:complexType name="Duration">
  <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="StartTime" type="xs:dateTime" />
    <xs:element minOccurs="1" maxOccurs="1" name="EndTime" type="xs:dateTime" />
  </xs:sequence>
</xs:complexType>

```

Element	Type	Definition
<b>StartTime</b>	<b>xs:dateTime</b>	Represents the start time of the window. MUST be present.
<b>EndTime</b>	<b>xs:dateTime</b>	Represents the end time of the window. MUST be present.

Restriction: **EndTime** MUST be greater than the **StartTime**. Times specified MUST be in **Coordinated Universal Time (UTC)**.

### 2.2.3.3 t:EmailAddress

The **EmailAddress** type specifies the name and address of the user.

```
<xs:complexType name="EmailAddress">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="1" name="Name" type="xs:string" />
    <xs:element minOccurs="1" maxOccurs="1" name="Address" type="xs:string" />
    <xs:element minOccurs="0" maxOccurs="1" name="RoutingType" type="xs:string" />
  </xs:sequence>
</xs:complexType>
```

Element	Type	Definition
<b>Name</b>	<b>xs:string</b>	Represents the name of the attendee. Can be present.
<b>Address</b>	<b>xs:string</b>	Represents the e-mail address of the attendee. MUST be present and MUST be a <b>Simple Mail Transfer Protocol (SMTP)</b> address.
<b>RoutingType</b>	<b>xs:string</b>	Represents the routing protocol for the e-mail address. Can be present.

### 2.2.3.4 m:GetUserOofSettingsResponse

The **GetUserOofSettingsResponse** type contains the response message to the **GetUserOofSettings** request and the OOF settings for the user as specified in the **GetUserOofSettings** request.

```
<xs:complexType name="GetUserOofSettingsResponse">
  <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="ResponseMessage" type="m:ResponseMessageType" />
    <xs:element minOccurs="0" maxOccurs="1" ref="t:OofSettings" />
    <xs:element minOccurs="0" maxOccurs="1" name="AllowExternalOof" type="t:ExternalAudience" />
  </xs:sequence>
</xs:complexType>
```

Element	Type	Definition
<b>ResponseMessage</b>	<b>m:ResponseMessageType</b>	Provides descriptive information about the response status. MUST be present.
<None>	<b>t:OofSettings</b>	Contains the OOF settings. Can be present.
<b>AllowExternalOof</b>	<b>t:ExternalAudience</b>	Contains a value that identifies to whom external OOF messages are sent. Can be present.

### 2.2.3.5 m:GetUserOofSettingsRequest

The **GetUserOofSettingsRequest** type contains the arguments that are used to get a user's OOF settings.

```
<xs:complexType name="GetUserOofSettingsRequest">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" ref="t:Mailbox" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Element	Type	Definition
<None>	<b>t:Mailbox</b>	Specifies the user for which OOF settings are to be retrieved. MUST be present.

The caller MUST be the owner of the mailbox specified in the request.

### 2.2.3.6 t:Mailbox

For details about the **Mailbox** type, see section [2.2.3.3](#).

```
<xs:element name="Mailbox" type="t:EmailAddress" />
```

### 2.2.3.7 t:ReplyBody

The ReplyBody type specifies the body of the OOF message that is sent to users.

```
<xs:complexType name="ReplyBody">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="1" name="Message" type="xs:string" />
  </xs:sequence>
  <xs:attribute ref="xml:lang" use="optional" />
</xs:complexType>
```

Element	Type	Definition
<b>Message</b>	<b>xs:string</b>	HTML message that forms the body of the OOF message. Can be present and SHOULD not exceed 128000 bytes.

Attribute	Definition
xml:lang	Specifies the language used in the OOF message. The possible values of this attribute are defined by <a href="#">[RFC3066]</a> .

### 2.2.3.8 m:ResponseMessageType

The ResponseMessageType type specifies whether the service returned a successful response.

```

<xs:complexType name="ResponseMessageType">
<xs:sequence minOccurs="0">
  <xs:element name="MessageText" type="xs:string" minOccurs="0"/>
<xs:element name="ResponseCode" type="m:ResponseCodeType" minOccurs="0"/>
  <xs:element name="DescriptiveLinkKey" type="xs:int" minOccurs="0"/>
  <xs:element name="MessageXml" minOccurs="0">
    <xs:complexType>
      <xs:sequence>
        <xs:any processContents="lax" minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:sequence>
  <xs:attribute name="ResponseClass" type="t:ResponseClassType" use="required"/>
</xs:complexType>

```

Element	Type	Definition
<b>MessageText</b>	<b>xs:string</b>	A text description of the status of the response. Can be present. MUST be present when errors are returned.
<b>ResponseCode</b>	<b>t:ResponseCodeType</b>	The error code that identifies the specific error that the request encountered. Can be present.
<b>DescriptiveLinkKey</b>	<b>xs:int</b>	Currently unused and is reserved for future use. It MUST contain a value of 0 (zero).
<b>MessageXml</b>	<b>xs:any</b>	Additional error response information. Can be present.

Attribute	Type	Definition
ResponseClass	<b>t:ResponseClassType</b>	Represents the status of the response. The following values are valid for this attribute: Success Warning Error

### 2.2.3.9 t:ServerVersionInfo

The **ServerVersionInfo** type specifies the version of the **OOF Web service**.

```

<xs:element name="ServerVersionInfo">
<xs:complexType>
<xs:attribute name="MajorVersion" type="xs:int" use="optional"/>
  <xs:attribute name="MinorVersion" type="xs:int" use="optional"/>
  <xs:attribute name="MajorBuildNumber" type="xs:int" use="optional"/>
  <xs:attribute name="MinorBuildNumber" type="xs:int" use="optional"/>
  <xs:attribute name="Version" type="xs:string" use="optional"/>
</xs:complexType>

```

```
</xs:element>
```

Element	Type	Definition
<b>MajorVersion</b>	<b>xs:int</b>	The major version number of the server. Can be present.
<b>MinorVersion</b>	<b>xs:int</b>	The minor version number of the server. Can be present.
<b>MajorBuildNumber</b>	<b>xs:int</b>	The major build number. Can be present.
<b>MinorBuildNumber</b>	<b>xs:int</b>	The minor build number. Can be present.
<b>Version</b>	<b>xs:string</b>	Version of the server that is processing the request. Can be present.

### 2.2.3.10 m:SetUserOofSettingsResponse

The **SetUserOofSettingsResponse** type specifies the result of a **SetUserOofSettingsRequest** message attempt.

```
<xs:complexType name="SetUserOofSettingsResponse">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="1" name="ResponseMessage" type="m:ResponseMessageType" />
  </xs:sequence>
</xs:complexType>
```

Element	Type	Definition
<b>ResponseMessage</b>	<b>m:ResponseMessageType</b>	Descriptive information about the response status. Can be present.

### 2.2.3.11 m:SetUserOofSettingsRequest

The **SetUserOofSettingsRequest** type specifies the arguments used to set a mailbox user's OOF settings.

```
<xs:complexType name="SetUserOofSettingsRequest">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="1" ref="t:Mailbox" />
        <xs:element minOccurs="1" maxOccurs="1" ref="t:UserOofSettings" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Element	Type	Definition
<None>	<b>t:Mailbox</b>	Specifies the mailbox user. MUST be present.
<None>	<b>t:UserOofSettings</b>	Specifies the OOF settings. MUST be present.

### 2.2.3.12 t:UserOofSettings

The **UserOofSetting** type specifies the OOF settings.

```
<xs:complexType name="UserOofSettings">
  <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="OofState" type="t:OofState" />
    <xs:element minOccurs="1" maxOccurs="1" name="ExternalAudience" type="t:ExternalAudience" />
    <xs:element minOccurs="0" maxOccurs="1" name="Duration" type="t:Duration" />
    <xs:element minOccurs="0" maxOccurs="1" name="InternalReply" type="t:ReplyBody" />
    <xs:element minOccurs="0" maxOccurs="1" name="ExternalReply" type="t:ReplyBody" />
  </xs:sequence>
</xs:complexType>
```

Element	Type	Definition
<b>OofState</b>	<b>t:OofState</b>	Indicates the user's OOF state. MUST be present.
<b>ExternalAudience</b>	<b>t:ExternalAudience</b>	Indicates how external users are handled. MUST be present.
<b>Duration</b>	<b>t:Duration</b>	Indicates the duration for which the OOF status is enabled if the OOF state in the <b>OofState</b> element is set to Scheduled. The times MUST be in the time zone of the mailbox.  This is ignored if the <b>OofState</b> element is set to Enabled or Disabled. Can be present.
<b>InternalReply</b>	<b>t:ReplyBody</b>	Contains the body of the OOF response message that is sent to <b>internal users</b> . Can be present.
<b>ExternalReply</b>	<b>t:ReplyBody</b>	Contains the body of the OOF response message that is sent to external users. Can be present.

### 2.2.4 Fault Detail

A **SOAP Fault** [SOAP1.1] is used to carry error information from the OOF methods when an API is misused or when there are configuration failures. This will also occur if the caller is not the mailbox owner.

<b>SOAP Fault sub-element</b>	<b>Type</b>	<b>Definition</b>
<b>faultstring</b>	<b>xs:string</b>	Contains information about the exception that was returned.
<b>faultCode</b>	<b>System.Xml....XmlQualified Name</b>	This protocol returns <b>SoapException.ClientFaultCode</b> .
<b>faultactor</b>	<b>xs:string</b>	Contains the OOF Web service <b>URI</b> where this occurred.
<b>Role</b>		The OOF Web service returns the following: "Exception Handler".
<b>detail</b>	<b>xs:XmlNode</b>	A child node is created with Name="ErrorCode " Namespace= http://schemas.microsoft.com/exchange/services/2006/ messages InnerText=stringized error This is used for debugging purposes only.
<b>subCode</b>	<b>xs:SoapFaultCode</b>	This protocol returns <b>SoapException.ClientFaultCode</b> .
<b>innerException</b>	<b>xs:System.exception</b>	Contains the exception that was thrown.



## 3 Protocol Details

This protocol specifies a way of getting OOF settings and configuring OOF settings for a mailbox.

### 3.1 ExchangeServicePortType Server Details

#### 3.1.1 Abstract Data Model

The OOF service is a stateless protocol.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Message Processing Events and Sequencing Rules

Operation	Description
<b>GetUserOofSettings</b>	Gets a user's OOF settings and OOF messages from his or her mailbox.
<b>SetUserOofSettings</b>	Sets a user's OOF settings and OOF messages in his or her mailbox

```
<wsdl:portType name="ExchangeServicePortType">
  <wsdl:operation name="GetUserOofSettings">
    <wsdl:input message="tns:GetUserOofSettingsSoapIn" />
    <wsdl:output message="tns:GetUserOofSettingsSoapOut" />
  </wsdl:operation>

  <wsdl:operation name="SetUserOofSettings">
    <wsdl:input message="tns:SetUserOofSettingsSoapIn" />
    <wsdl:output message="tns:SetUserOofSettingsSoapOut" />
  </wsdl:operation>
</wsdl:portType>
```

##### 3.1.4.1 GetUserOofSettings

The **GetUserOofSettings** operation specifies how to get the OOF settings and OOF messages from a user's mailbox.

```
<wsdl:message name="GetUserOofSettingsSoapIn">
  <wsdl:part name="GetUserOofSettingsRequest" element="tns:GetUserOofSettingsRequest" />
</wsdl:message>
<wsdl:message name="GetUserOofSettingsSoapOut">
  <wsdl:part name="GetUserOofSettingsResult" element="tns:GetUserOofSettingsResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **GetUserOofSettings** operation requires an input **WSDL message** called **GetUserSettingsSoapIn** and returns an output WSDL message called **GetUserOofSettingsSoapOut**.

Parts for the **GetUserOofSettingsSoapIn** WSDL message:

Part	Element/Type	Description
<b>GetUserOofSettingsRequest</b>	<b>tns:GetUserOofSettingsRequest</b>	This part contains the information required to get OOF information.

Parts for the **GetUserOofSettingsSoapOut** WSDL message:

Part	Element/Type	Description
<b>GetUserOofSettingsResult</b>	<b>tns:GetUserOofSettingsResponse</b>	Response containing OOF information that was requested.
<b>ServerVersion</b>	<b>ServerVersionInfo</b>	Used for diagnostic purposes.

### 3.1.4.2 SetUserOofSettings Operation

The **SetUserOofSettings** operation specifies how to set a mailbox user's OOF settings and response message.

```
<wsdl:message name="SetUserOofSettingsSoapIn">
  <wsdl:part name="SetUserOofSettingsRequest" element="tns:SetUserOofSettingsRequest" />
</wsdl:message>
<wsdl:message name="SetUserOofSettingsSoapOut">
  <wsdl:part name="SetUserOofSettingsResult" element="tns:SetUserOofSettingsResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

Parts for **SetUserOofSettingsSoapIn** WSDL message:

Part	Element/Type	Description
<b>SetUserOofSettingsRequest</b>	<b>tns: SetUserOofSettingsRequest</b>	This part contains the information required to set OOF settings and messages.

Parts for **SetUserOofSettingsSoapOut** WSDL message:

Part	Element/Type	Description
<b>SetUserOofSettingsResult</b>	<b>tns:SetUserOofSettingsResponse</b>	This part contains the response from the OOF Web service.
<b>ServerVersion</b>	<b>ServerVersionInfo</b>	Used for diagnostic purposes.

### 3.1.5 Timer Events

None.

### **3.1.6 Other Local Events**

The **OOF Web service** does not maintain state. If there are network problems, the client is expected to re-query the service.

## **3.2 ExchangeServicePortType Client Details**

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

### **3.2.1 Abstract Data Model**

The OOF service is a stateless protocol.

### **3.2.2 Timers**

None.

### **3.2.3 Initialization**

None.

### **3.2.4 Message Processing Events and Sequencing Rules**

None.

### **3.2.5 Timer Events**

None.

### **3.2.6 Other Local Events**

Not applicable.

## 4 Protocol Examples

### 4.1 GetUserOofSettings Request

The following example shows how to get a specified user's OOF settings.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <GetUserOofSettingsRequest
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <Mailbox xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
        <Address>user@example.com</Address>
      </Mailbox>
    </GetUserOofSettingsRequest>
  </soap:Body>
</soap:Envelope>
```

### 4.2 GetUserOofSettings Response

The following example shows a successful response to get a user's OOF settings.

```
<?xml version="1.0" encoding="utf-8" ?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <t:ServerVersionInfo MajorVersion="8" MinorVersion="1" MajorBuildNumber="240"
MinorBuildNumber="5" xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <GetUserOofSettingsResponse
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseMessage ResponseClass="Success">
        <ResponseCode>NoError</ResponseCode>
      </ResponseMessage>
      <OofSettings xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
        <OofState>Enabled</OofState>
        <ExternalAudience>All</ExternalAudience>
        <Duration>
          <StartTime>2008-02-01T00:00:00</StartTime>
          <EndTime>2008-02-02T00:00:00</EndTime>
        </Duration>
        <InternalReply>
          <Message>I am out of office. This is my internal reply.</Message>
        </InternalReply>
        <ExternalReply>
          <Message>I am out of office. This is my external reply.</Message>
        </ExternalReply>
      </OofSettings>
      <AllowExternalOof>All</AllowExternalOof>
    </GetUserOofSettingsResponse>
  </soap:Body>
</soap:Envelope>
```

### 4.3 SetUserOofSettings Request

The following example shows how to set a specified user's OOF settings.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <SetUserOofSettingsRequest
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <Mailbox xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
        <Address>ul@example.com</Address>
        <RoutingType>SMTP</RoutingType>
      </Mailbox>
      <UserOofSettings xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
        <OofState>Enabled</OofState>
        <ExternalAudience>All</ExternalAudience>
        <InternalReply>
          <Message>I am out of office. This is my internal reply.</Message>
        </InternalReply>
        <ExternalReply>
          <Message>I am out of office. This is my external reply.</Message>
        </ExternalReply>
      </UserOofSettings>
    </SetUserOofSettingsRequest>
  </soap:Body>
</soap:Envelope>
```

### 4.4 SetUserOofSettings Successful Response

The following example shows a successful response to a **SetUserOofSetting** request.

```
<?xml version="1.0" encoding="utf-8" ?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <t:ServerVersionInfo MajorVersion="8" MinorVersion="1" MajorBuildNumber="240"
MinorBuildNumber="5" xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <SetUserOofSettingsResponse
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseMessage ResponseClass="Success">
        <ResponseCode>NoError</ResponseCode>
      </ResponseMessage>
    </SetUserOofSettingsResponse>
  </soap:Body>
</soap:Envelope>
```

### 4.5 SetUserOofSetting Failure Response

The following example shows an unsuccessful response to a **SetUserOofSetting** request.

```
<?xml version="1.0" encoding="utf-8" ?>
```

```

<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <t:ServerVersionInfo MajorVersion="8" MinorVersion="1" MajorBuildNumber="240"
MinorBuildNumber="5" xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <SetUserOutOfSettingsResponse
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseMessage ResponseClass="Error">
        <MessageText>The scheduled Out of Office duration is not valid.</MessageText>
        <ResponseCode>ErrorInvalidScheduledOutOfDuration</ResponseCode>
        <DescriptiveLinkKey>0</DescriptiveLinkKey>
        <MessageXml>
          <ExceptionType
xmlns="http://schemas.microsoft.com/exchange/services/2006/errors">Microsoft.Exchange.InfoWorker.Common.OOF.InvalidScheduledOutOfDuration</ExceptionType>
          <ExceptionCode
xmlns="http://schemas.microsoft.com/exchange/services/2006/errors">158</ExceptionCode>
        </MessageXml>
      </ResponseMessage>
    </SetUserOutOfSettingsResponse>
  </soap:Body>
</soap:Envelope>

```

## 5 Security

### 5.1 Security Considerations for Implementers

The OOF service does not use additional security mechanisms.

## 6 Appendix A: Full WSDL

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:s="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
  <wsdl:types>
  <xs:schema id="types"
    elementFormDefault="qualified"
    version="Exchange2007_SP1"
    xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
    targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
    xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
    xmlns:xs="http://www.w3.org/2001/XMLSchema">

    <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>

    <!-- Used in the SOAP header of responses for diagnostics purposes. -->
    <xs:element name="ServerVersionInfo">
    <xs:complexType>
    <xs:attribute name="MajorVersion" type="xs:int" use="optional"/>
    <xs:attribute name="MinorVersion" type="xs:int" use="optional"/>
    <xs:attribute name="MajorBuildNumber" type="xs:int" use="optional"/>
    <xs:attribute name="MinorBuildNumber" type="xs:int" use="optional"/>
    <xs:attribute name="Version" type="xs:string" use="optional"/>
    </xs:complexType>
    </xs:element>

    <xs:simpleType name="ResponseClassType">
    <xs:restriction base="xs:string">
    <xs:enumeration value="Success" />
    <xs:enumeration value="Warning" />
    <xs:enumeration value="Error" />
    </xs:restriction>
    </xs:simpleType>

    <xs:complexType name="EmailAddress">
    <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="1" name="Name" type="xs:string" />
    <xs:element minOccurs="1" maxOccurs="1" name="Address" type="xs:string" />
    <xs:element minOccurs="0" maxOccurs="1" name="RoutingType" type="xs:string" />
    </xs:sequence>
    </xs:complexType>

    <xs:element name="Mailbox" type="t:EmailAddress" />

    <xs:complexType name="Duration">
    <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="StartTime" type="xs:dateTime" />
    <xs:element minOccurs="1" maxOccurs="1" name="EndTime" type="xs:dateTime" />
    </xs:sequence>
    </xs:complexType>

    <xs:simpleType name="OutOfState">
    <xs:restriction base="xs:string">
```



```

<xs:enumeration value="Disabled" />
<xs:enumeration value="Enabled" />
<xs:enumeration value="Scheduled" />
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="ExternalAudience">
<xs:restriction base="xs:string">
<xs:enumeration value="None" />
<xs:enumeration value="Known" />
<xs:enumeration value="All" />
</xs:restriction>
</xs:simpleType>

<xs:complexType name="ReplyBody">
<xs:sequence>
<xs:element minOccurs="0" maxOccurs="1" name="Message" type="xs:string" />
</xs:sequence>
<xs:attribute ref="xml:lang" use="optional" />
</xs:complexType>

<xs:complexType name="UserOofSettings">
<xs:sequence>
<xs:element minOccurs="1" maxOccurs="1" name="OofState" type="t:OofState" />
<xs:element minOccurs="1" maxOccurs="1" name="ExternalAudience" type="t:ExternalAudience" />
<xs:element minOccurs="0" maxOccurs="1" name="Duration" type="t:Duration" />
<xs:element minOccurs="0" maxOccurs="1" name="InternalReply" type="t:ReplyBody" />
<xs:element minOccurs="0" maxOccurs="1" name="ExternalReply" type="t:ReplyBody" />
</xs:sequence>
</xs:complexType>

<xs:element name="OofSettings" type="t:UserOofSettings" />
<xs:element name="UserOofSettings" type="t:UserOofSettings" />
</xs:schema>

<xs:schema id="messages"
elementFormDefault="qualified"
version="Exchange2007_Sp1"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
<!-- Import common types. -->
<xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="types.xsd"/>
<!-- Basic response type -->
<!-- Common to all responses -->
<xs:simpleType name="ResponseCodeType">
<xs:annotation>
<xs:documentation>
Represents the message keys that can be returned by response error messages
</xs:documentation>
</xs:annotation>
<xs:restriction base="xs:string">
<xs:enumeration value="NoError"/>
<xs:enumeration value="ErrorAccessDenied"/>
<xs:enumeration value="ErrorInvalidOofParameter"/>
<xs:enumeration value="ErrorInvalidScheduledOofDuration"/>

```

```

    <xs:enumeration value="ErrorInvalidUserOofSettings" />
    <xs:enumeration value="ErrorUnableToGetUserOofSettings" />
</xs:restriction>
</xs:simpleType>

<xs:complexType name="ResponseMessageType">
<xs:sequence minOccurs="0">
<xs:element name="MessageText" type="xs:string" minOccurs="0" />
<xs:element name="ResponseCode" type="m:ResponseCodeType" minOccurs="0" />
<xs:element name="DescriptiveLinkKey" type="xs:int" minOccurs="0" />
<xs:element name="MessageXml" minOccurs="0">
<xs:complexType>
<xs:sequence>
<xs:any processContents="lax" minOccurs="0" maxOccurs="unbounded" />
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:sequence>
<xs:attribute name="ResponseClass" type="t:ResponseClassType" use="required" />
</xs:complexType>

<!-- GetUserOofSettingsRequest -->
<xs:complexType name="BaseRequestType" abstract="true" />
<xs:complexType name="GetUserOofSettingsRequest">
<xs:complexContent mixed="false">
<xs:extension base="m:BaseRequestType">
<xs:sequence>
<xs:element minOccurs="1" maxOccurs="1" ref="t:Mailbox" />
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:element name="GetUserOofSettingsRequest" type="tns:GetUserOofSettingsRequest" />

<!-- GetUserOofSettingsResponse -->

<xs:complexType name="GetUserOofSettingsResponse">
<xs:sequence>
<xs:element minOccurs="1" maxOccurs="1" name="ResponseMessage" type="m:ResponseMessageType" />
<xs:element minOccurs="0" maxOccurs="1" ref="t:OofSettings" />
<xs:element minOccurs="0" maxOccurs="1" name="AllowExternalOof" type="t:ExternalAudience" />
</xs:sequence>
</xs:complexType>

<xs:element name="GetUserOofSettingsResponse" type="tns:GetUserOofSettingsResponse" />

<!-- SetUserOofSettingsRequest -->

<xs:complexType name="SetUserOofSettingsRequest">
<xs:complexContent mixed="false">
<xs:extension base="m:BaseRequestType">
<xs:sequence>
<xs:element minOccurs="1" maxOccurs="1" ref="t:Mailbox" />
<xs:element minOccurs="1" maxOccurs="1" ref="t:UserOofSettings" />
</xs:sequence>
</xs:extension>
</xs:complexContent>

```

```

</xs:complexType>

<xs:element name="SetUserOofSettingsRequest" type="tns:SetUserOofSettingsRequest" />

<!-- SetUserOofSettingsResponse -->

<xs:complexType name="SetUserOofSettingsResponse">
<xs:sequence>
<xs:element minOccurs="0" maxOccurs="1" name="ResponseMessage" type="m:ResponseMessageType"
/>
</xs:sequence>
</xs:complexType>

<xs:element name="SetUserOofSettingsResponse" type="tns:SetUserOofSettingsResponse" />
</xs:schema>
</wsdl:types>

<wsdl:message name="GetUserOofSettingsSoapIn">
  <wsdl:part name="GetUserOofSettingsRequest" element="tns:GetUserOofSettingsRequest" />
</wsdl:message>
<wsdl:message name="GetUserOofSettingsSoapOut">
  <wsdl:part name="GetUserOofSettingsResult" element="tns:GetUserOofSettingsResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="SetUserOofSettingsSoapIn">
  <wsdl:part name="SetUserOofSettingsRequest" element="tns:SetUserOofSettingsRequest" />
</wsdl:message>
<wsdl:message name="SetUserOofSettingsSoapOut">
  <wsdl:part name="SetUserOofSettingsResult" element="tns:SetUserOofSettingsResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

<wsdl:portType name="ExchangeServicePortType">
  <!-- GetUserOofSettings -->
  <wsdl:operation name="GetUserOofSettings">
    <wsdl:input message="tns:GetUserOofSettingsSoapIn" />
    <wsdl:output message="tns:GetUserOofSettingsSoapOut" />
  </wsdl:operation>

  <!-- SetUserOofSettings -->
  <wsdl:operation name="SetUserOofSettings">
    <wsdl:input message="tns:SetUserOofSettingsSoapIn" />
    <wsdl:output message="tns:SetUserOofSettingsSoapOut" />
  </wsdl:operation>
</wsdl:portType>

<wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
<wsdl:documentation>
<wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim/" />
</wsdl:documentation>
<soap:binding transport="http://schemas.xmlsoap.org/soap/http" style="document" />

  <!-- GetUserOofSettings -->
  <wsdl:operation name="GetUserOofSettings">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetUserOofSettings"
/>
    <wsdl:input>

```

```

        <soap:body parts="GetUserOofSettingsRequest" use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="GetUserOofSettingsResult" use="literal" />
        <soap:header message="tns:GetUserOofSettingsSoapOut" part="ServerVersion"
use="literal"/>
    </wsdl:output>
</wsdl:operation>

<!-- SetUserOofSettings -->
<wsdl:operation name="SetUserOofSettings">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SetUserOofSettings"
/>
    <wsdl:input>
        <soap:body parts="SetUserOofSettingsRequest" use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="SetUserOofSettingsResult" use="literal" />
        <soap:header message="tns:SetUserOofSettingsSoapOut" part="ServerVersion"
use="literal"/>
    </wsdl:output>
</wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following product versions:

- Microsoft Office Outlook 2007
- Microsoft Exchange Server 2007
- Microsoft Outlook 2010
- Microsoft Exchange Server 2010

Exceptions, if any, are noted below. If a service pack number appears with the product version, behavior changed in that service pack. The new behavior also applies to subsequent service packs of the product unless otherwise specified.

Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.2.4](#): The enumeration value `ErrorUnableToGetUserOofSettings` that is defined in the `ResponseCodeType` element is never returned by the Exchange server.

## 8 Change Tracking

This section will report content and/or editorial changes, beginning with the next release.

## 9 Index

### C

[Change tracking](#)

### G

[Glossary](#)

### I

[Introduction](#)

### M

Messages  
[overview](#)

### N

[Normative references](#)

### O

[Overview \(synopsis\)](#)

### P

[Preconditions](#)  
[Prerequisites](#)  
[Product behavior](#)

### R

References  
[normative](#)  
[Relationship to other protocols](#)

### S

Security  
[overview](#)

### T

[Tracking changes](#)