

[MS-OXWSADISC]:

Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the

documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Preliminary

Revision Summary

| Date | Revision History | Revision Class | Comments |
|------------|------------------|----------------|--|
| 7/15/2009 | 1.0 | Major | Initial Availability. |
| 11/4/2009 | 2.0.0 | Major | Updated and revised the technical content. |
| 2/10/2010 | 3.0.0 | Major | Updated and revised the technical content. |
| 5/5/2010 | 4.0.0 | Major | Updated and revised the technical content. |
| 8/4/2010 | 5.0 | Major | Significantly changed the technical content. |
| 11/3/2010 | 6.0 | Major | Significantly changed the technical content. |
| 3/18/2011 | 7.0 | Major | Significantly changed the technical content. |
| 8/5/2011 | 7.1 | Minor | Clarified the meaning of the technical content. |
| 10/7/2011 | 8.0 | Major | Significantly changed the technical content. |
| 1/20/2012 | 9.0 | Major | Significantly changed the technical content. |
| 4/27/2012 | 9.0 | No Change | No changes to the meaning, language, or formatting of the technical content. |
| 7/16/2012 | 10.0 | Major | Significantly changed the technical content. |
| 10/8/2012 | 11.0 | Major | Significantly changed the technical content. |
| 2/11/2013 | 12.0 | Major | Significantly changed the technical content. |
| 7/26/2013 | 13.0 | Major | Significantly changed the technical content. |
| 11/18/2013 | 13.0 | No Change | No changes to the meaning, language, or formatting of the technical content. |
| 2/10/2014 | 13.0 | No Change | No changes to the meaning, language, or formatting of the technical content. |
| 4/30/2014 | 14.0 | Major | Significantly changed the technical content. |
| 7/31/2014 | 14.1 | Minor | Clarified the meaning of the technical content. |
| 10/30/2014 | 14.2 | Minor | Clarified the meaning of the technical content. |
| 5/26/2015 | 15.0 | Major | Significantly changed the technical content. |

Table of Contents

| | | |
|--------------|--|-----------|
| 1 | Introduction | 8 |
| 1.1 | Glossary | 8 |
| 1.2 | References | 11 |
| 1.2.1 | Normative References | 11 |
| 1.2.2 | Informative References | 12 |
| 1.3 | Overview | 12 |
| 1.4 | Relationship to Other Protocols | 12 |
| 1.5 | Prerequisites/Preconditions | 13 |
| 1.6 | Applicability Statement | 13 |
| 1.7 | Versioning and Capability Negotiation | 13 |
| 1.8 | Vendor-Extensible Fields | 14 |
| 1.9 | Standards Assignments | 14 |
| 2 | Messages | 15 |
| 2.1 | Transport | 15 |
| 2.2 | Common Message Syntax | 15 |
| 2.2.1 | Namespaces | 15 |
| 2.2.2 | Messages | 16 |
| 2.2.3 | Elements | 16 |
| 2.2.3.1 | ServerVersionInfo Element | 16 |
| 2.2.3.2 | Domains Element | 16 |
| 2.2.3.3 | tns:RequestedSettings Element | 17 |
| 2.2.4 | Complex Types | 17 |
| 2.2.4.1 | tns:ServerVersionInfo Complex Type | 17 |
| 2.2.4.2 | tns:Domains Complex Type | 18 |
| 2.2.4.3 | tns:RequestedSettings Complex Type | 18 |
| 2.2.5 | Simple Types | 21 |
| 2.2.6 | Attributes | 21 |
| 2.2.7 | Groups | 21 |
| 2.2.8 | Attribute Groups | 22 |
| 3 | Protocol Details | 23 |
| 3.1 | Autodiscover Server Details | 23 |
| 3.1.1 | Abstract Data Model | 23 |
| 3.1.2 | Timers | 23 |
| 3.1.3 | Initialization | 23 |
| 3.1.4 | Message Processing Events and Sequencing Rules | 23 |
| 3.1.4.1 | GetDomainSettings | 23 |
| 3.1.4.1.1 | Messages | 24 |
| 3.1.4.1.1.1 | tns:GetDomainSettingsRequestMessage | 24 |
| 3.1.4.1.1.2 | tns:GetDomainSettingsRequestMessage_Headers | 25 |
| 3.1.4.1.1.3 | tns:GetDomainSettingsResponseMessage | 25 |
| 3.1.4.1.1.4 | tns:GetDomainSettingsResponseMessage_Headers | 26 |
| 3.1.4.1.2 | Elements | 26 |
| 3.1.4.1.2.1 | tns:GetDomainSettingsRequestMessage Element | 27 |
| 3.1.4.1.2.2 | tns:GetDomainSettingsResponseMessage Element | 27 |
| 3.1.4.1.2.3 | tns:GetDomainSettingsRequest Element | 28 |
| 3.1.4.1.2.4 | tns:GetDomainSettingsResponse Element | 28 |
| 3.1.4.1.2.5 | tns:ArrayOfDomainResponse Element | 28 |
| 3.1.4.1.2.6 | tns:DomainResponse Element | 28 |
| 3.1.4.1.2.7 | tns:DomainSettingErrors Element | 28 |
| 3.1.4.1.2.8 | tns:DomainSettingError Element | 29 |
| 3.1.4.1.2.9 | tns:DomainSettings Element | 29 |
| 3.1.4.1.2.10 | tns:DomainSetting Element | 29 |

| | | |
|-------------|---|----|
| 3.1.4.1.3 | Complex Types | 29 |
| 3.1.4.1.3.1 | tns:GetDomainSettingsRequest Complex Type | 30 |
| 3.1.4.1.3.2 | tns:GetDomainSettingsResponse Complex Type | 31 |
| 3.1.4.1.3.3 | tns:ArrayOfDomainResponse Complex Type | 31 |
| 3.1.4.1.3.4 | tns:DomainResponse Complex Type | 32 |
| 3.1.4.1.3.5 | tns:DomainSettingErrors Complex Type | 33 |
| 3.1.4.1.3.6 | tns:DomainSettingError Complex Type | 33 |
| 3.1.4.1.3.7 | tns:DomainSettings Complex Type | 34 |
| 3.1.4.1.3.8 | tns:DomainSetting Complex Type | 34 |
| 3.1.4.1.3.9 | tns:DomainStringSetting Complex Type | 35 |
| 3.1.4.1.4 | Simple Types | 35 |
| 3.1.4.1.5 | Attributes | 35 |
| 3.1.4.1.6 | Groups | 35 |
| 3.1.4.1.7 | Attribute Groups | 36 |
| 3.1.4.2 | GetFederationInformation | 36 |
| 3.1.4.2.1 | Messages | 36 |
| 3.1.4.2.1.1 | tns:GetFederationInformationRequestMessage | 37 |
| 3.1.4.2.1.2 | tns:GetFederationInformationRequestMessage_Headers | 37 |
| 3.1.4.2.1.3 | tns:GetFederationInformationResponseMessage | 37 |
| 3.1.4.2.1.4 | tns:GetFederationInformationResponseMessage_Headers | 38 |
| 3.1.4.2.2 | Elements | 38 |
| 3.1.4.2.2.1 | tns:GetFederationInformationRequestMessage Element | 39 |
| 3.1.4.2.2.2 | tns:GetFederationInformationResponseMessage Element | 39 |
| 3.1.4.2.2.3 | tns:GetFederationInformationRequest Element | 40 |
| 3.1.4.2.2.4 | tns:GetFederationInformationResponse Element | 40 |
| 3.1.4.2.3 | Complex Types | 40 |
| 3.1.4.2.3.1 | tns:GetFederationInformationRequest Complex Type | 41 |
| 3.1.4.2.3.2 | tns:GetFederationInformationResponse Complex Type | 41 |
| 3.1.4.2.3.3 | tns:TokenIssuer Complex Type | 42 |
| 3.1.4.2.3.4 | tns:TokenIssuers Complex Type | 43 |
| 3.1.4.2.4 | Simple Types | 43 |
| 3.1.4.2.5 | Attributes | 43 |
| 3.1.4.2.6 | Groups | 43 |
| 3.1.4.2.7 | Attribute Groups | 43 |
| 3.1.4.3 | GetOrganizationRelationshipSettings | 43 |
| 3.1.4.3.1 | Messages | 44 |
| 3.1.4.3.1.1 | tns:GetOrganizationRelationshipSettingsRequestMessage | 45 |
| 3.1.4.3.1.2 | tns:GetOrganizationRelationshipSettingsRequestMessage_Headers .. | 45 |
| 3.1.4.3.1.3 | tns:GetOrganizationRelationshipSettingsResponseMessage | 45 |
| 3.1.4.3.1.4 | tns:GetOrganizationRelationshipSettingsResponseMessage_Headers | 46 |
| 3.1.4.3.2 | Elements | 46 |
| 3.1.4.3.2.1 | tns:GetOrganizationRelationshipSettingsRequestMessage Element ... | 47 |
| 3.1.4.3.2.2 | tns:GetOrganizationRelationshipSettingsRequest Element | 47 |
| 3.1.4.3.2.3 | tns:GetOrganizationRelationshipSettingsResponseMessage Element . | 48 |
| 3.1.4.3.2.4 | tns:GetOrganizationRelationshipSettingsResponse Element | 48 |
| 3.1.4.3.2.5 | tns:OrganizationRelationshipSettingsCollection Element | 48 |
| 3.1.4.3.2.6 | tns:OrganizationRelationshipSettings Element | 49 |
| 3.1.4.3.3 | Complex Types | 49 |
| 3.1.4.3.3.1 | tns:GetOrganizationRelationshipSettingsRequest Complex Type | 49 |
| 3.1.4.3.3.2 | tns:GetOrganizationRelationshipSettingsResponse Complex Type | 50 |
| 3.1.4.3.3.3 | tns:OrganizationRelationshipSettingsCollection Complex Type | 51 |
| 3.1.4.3.3.4 | tns:OrganizationRelationshipSettings Complex Type | 51 |
| 3.1.4.3.4 | Simple Types | 53 |
| 3.1.4.3.5 | Attributes | 53 |
| 3.1.4.3.6 | Groups | 53 |
| 3.1.4.3.7 | Attribute Groups | 53 |
| 3.1.4.4 | GetUserSettings | 53 |

| | | |
|--------------|--|----|
| 3.1.4.4.1 | Messages | 54 |
| 3.1.4.4.1.1 | tns:GetUserSettingsRequestMessage..... | 54 |
| 3.1.4.4.1.2 | tns:GetUserSettingsRequestMessage_Headers..... | 54 |
| 3.1.4.4.1.3 | tns:GetUserSettingsResponseMessage..... | 55 |
| 3.1.4.4.1.4 | tns:GetUserSettingsResponseMessage_Headers..... | 55 |
| 3.1.4.4.2 | Elements..... | 56 |
| 3.1.4.4.2.1 | tns:GetUserSettingsRequestMessage Element | 57 |
| 3.1.4.4.2.2 | tns:GetUserSettingsResponseMessage Element | 57 |
| 3.1.4.4.2.3 | tns:GetUserSettingsRequest Element | 58 |
| 3.1.4.4.2.4 | tns:GetUserSettingsResponse Element | 58 |
| 3.1.4.4.2.5 | tns:AutodiscoverRequest Element | 58 |
| 3.1.4.4.2.6 | tns:Users Element | 59 |
| 3.1.4.4.2.7 | tns:User Element | 59 |
| 3.1.4.4.2.8 | tns:RequestedServerVersion Element | 59 |
| 3.1.4.4.2.9 | tns:AutodiscoverResponse Element | 59 |
| 3.1.4.4.2.10 | tns:ErrorCode Element | 59 |
| 3.1.4.4.2.11 | tns:ArrayOfUserResponse Element | 60 |
| 3.1.4.4.2.12 | tns:UserResponse Element..... | 60 |
| 3.1.4.4.2.13 | tns:UserSettingErrors Element | 60 |
| 3.1.4.4.2.14 | tns:UserSettingError Element | 60 |
| 3.1.4.4.2.15 | tns:UserSettings Element..... | 60 |
| 3.1.4.4.2.16 | tns:UserSetting Element | 61 |
| 3.1.4.4.2.17 | tns:WebClientUrls Element..... | 61 |
| 3.1.4.4.2.18 | tns:WebClientUrl Element | 61 |
| 3.1.4.4.2.19 | tns:ProtocolConnections Element | 61 |
| 3.1.4.4.2.20 | tns:ProtocolConnection Element | 61 |
| 3.1.4.4.2.21 | tns:AlternateMailboxes Element..... | 62 |
| 3.1.4.4.2.22 | tns:AlternateMailbox Element..... | 62 |
| 3.1.4.4.2.23 | tns:ArrayOfFileExtension Element | 62 |
| 3.1.4.4.2.24 | tns:DocumentSharingLocation Element..... | 62 |
| 3.1.4.4.2.25 | tns:DocumentSharingLocationCollectionSetting Element | 62 |
| 3.1.4.4.2.26 | tns:DocumentSharingLocations Element | 63 |
| 3.1.4.4.3 | Complex Types | 63 |
| 3.1.4.4.3.1 | tns:GetUserSettingsRequest Complex Type | 64 |
| 3.1.4.4.3.2 | tns:AutodiscoverRequest Complex Type..... | 65 |
| 3.1.4.4.3.3 | tns:Users Complex Type | 65 |
| 3.1.4.4.3.4 | tns:User Complex Type | 66 |
| 3.1.4.4.3.5 | tns:GetUserSettingsResponse Complex Type | 66 |
| 3.1.4.4.3.6 | tns:AutodiscoverResponse Complex Type | 67 |
| 3.1.4.4.3.7 | tns:UserResponse Complex Type | 67 |
| 3.1.4.4.3.8 | tns:UserSettingErrors Complex Type | 68 |
| 3.1.4.4.3.9 | tns:ArrayOfUserResponse Complex Type | 69 |
| 3.1.4.4.3.10 | tns:UserSettingError Complex Type | 69 |
| 3.1.4.4.3.11 | tns:UserSettings Complex Type | 70 |
| 3.1.4.4.3.12 | tns:UserSetting Complex Type | 70 |
| 3.1.4.4.3.13 | tns:StringSetting Complex Type | 71 |
| 3.1.4.4.3.14 | tns:WebClientUrlCollectionSetting Complex Type | 71 |
| 3.1.4.4.3.15 | tns:WebClientUrls Complex Type | 72 |
| 3.1.4.4.3.16 | tns:WebClientUrl Complex Type..... | 72 |
| 3.1.4.4.3.17 | tns:ProtocolConnectionCollectionSetting Complex Type | 73 |
| 3.1.4.4.3.18 | tns:ProtocolConnections Complex Type..... | 73 |
| 3.1.4.4.3.19 | tns:ProtocolConnection Complex Type | 74 |
| 3.1.4.4.3.20 | tns:AlternateMailboxCollectionSetting Complex Type | 75 |
| 3.1.4.4.3.21 | tns:AlternateMailboxes Complex Type | 75 |
| 3.1.4.4.3.22 | tns:AlternateMailbox Complex Type | 76 |
| 3.1.4.4.3.23 | tns:ArrayOfFileExtension Complex Type..... | 76 |
| 3.1.4.4.3.24 | tns:DocumentSharingLocation Complex Type | 77 |

| | | |
|--------------|--|------------|
| 3.1.4.4.3.25 | tns:DocumentSharingLocationCollectionSetting Complex Type..... | 78 |
| 3.1.4.4.3.26 | tns:DocumentSharingLocations Complex Type..... | 78 |
| 3.1.4.4.4 | Simple Types | 79 |
| 3.1.4.4.4.1 | tns:ExchangeVersion Simple Type..... | 79 |
| 3.1.4.4.4.2 | tns:ErrorCode Simple Type | 80 |
| 3.1.4.4.5 | Attributes | 81 |
| 3.1.4.4.6 | Groups..... | 81 |
| 3.1.4.4.7 | Attribute Groups..... | 81 |
| 3.1.5 | Timer Events..... | 81 |
| 3.1.6 | Other Local Events..... | 81 |
| 4 | Protocol Examples | 82 |
| 4.1 | GetDomainSettings Operation..... | 82 |
| 4.2 | GetFederationInformation Operation..... | 83 |
| 4.3 | GetUserSettings Operation | 84 |
| 5 | Security | 87 |
| 5.1 | Security Considerations for Implementers | 87 |
| 5.2 | Index of Security Parameters | 87 |
| 6 | Appendix A: Full WSDL | 88 |
| 7 | Appendix B: Full XML Schema..... | 91 |
| 8 | Appendix C: Product Behavior | 99 |
| 9 | Change Tracking..... | 102 |
| 10 | Index..... | 104 |

Preliminary

1 Introduction

The Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol is used to send request-response messages for retrieving user settings configuration information. Clients use this protocol and the Autodiscover service (autodiscovery) to obtain specific configuration settings by passing in their **email addresses** as simple strings.

The Autodiscover service can then be used to discover and configure internal and external URLs for the server's web services during profile setup and later sessions with the computer that has the Client Access server role installed.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are specific to this document:

address book: A collection of Address Book objects, each of which are contained in any number of address lists.

Autodiscover client: A client that queries for a set of server locations where setup and configuration information for an [\[RFC2821\]](#)-compliant email address is stored.

Autodiscover server: A server in a managed environment that makes setup and configuration information available to **Autodiscover clients**. The location of Autodiscover servers is made available via the Autodiscover HTTP Service Protocol, as described in [\[MS-OXDISCO\]](#).

delivery receipt: A report message that is generated and sent by a client or server to the sender of a message or another designated recipient when an email message is received by an intended recipient.

display name: A text string that is used to identify a principal or other object in the user interface. Also referred to as title.

distinguished name (DN): In the Active Directory directory service, the unique identifier of an object in Active Directory, as described in [\[MS-ADTS\]](#) and [\[RFC2251\]](#).

email address: A string that identifies a user and enables the user to receive Internet messages.

endpoint: (1) A network-specific address of a remote procedure call (RPC) server process for remote procedure calls. The actual name and type of the endpoint depends on the **RPC** protocol sequence that is being used. For example, for RPC over TCP (RPC Protocol Sequence `ncacn_ip_tcp`), an endpoint might be TCP port 1025. For RPC over Server Message Block (RPC Protocol Sequence `ncacn_np`), an endpoint might be the name of a named pipe. For more information, see [\[C706\]](#).

(2) A communication port that is exposed by an application server for a specific shared service and to which messages can be addressed.

free/busy status: A property of an appointment that indicates how an appointment on the calendar of an attendee or resource affects their availability.

fully qualified domain name (FQDN): An unambiguous domain name (2) that gives an absolute location in the Domain Name System's (DNS) hierarchy tree, as defined in [\[RFC1035\]](#) section 3.1 and [\[RFC2181\]](#) section 11.

Global Address List (GAL): An address list that conceptually represents the default address list for an **address book**.

Hypertext Transfer Protocol (HTTP): An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS): An extension of **HTTP** that securely encrypts and decrypts webpage requests.

Internet Message Access Protocol - Version 4 (IMAP4): A protocol that is used for accessing email and news items from mail servers, as described in [\[RFC3501\]](#).

mail tip: A note that is presented to the author of a message when the author is composing the message. A mail tip provides information about the recipients of a message and issues that might impact delivery of the message, such as moderation or delivery restrictions.

mailbox: A message store that contains email, calendar items, and other Message objects for a single recipient.

offline address book (OAB): A collection of address lists that are stored in a format that a client can save and use locally.

Post Office Protocol - Version 3 (POP3): A protocol that is used for accessing email from mail servers, as described in [\[RFC1939\]](#).

public folder: A Folder object that is stored in a location that is publicly available.

remote procedure call (RPC): A context-dependent term commonly overloaded with three meanings. Note that much of the industry literature concerning RPC technologies uses this term interchangeably for any of the three meanings. Following are the three definitions: (*) The runtime environment providing remote procedure call facilities. The preferred usage for this meaning is "RPC runtime". (*) The pattern of request and response message exchange between two parties (typically, a client and a server). The preferred usage for this meaning is "RPC exchange". (*) A single message from an exchange as defined in the previous definition. The preferred usage for this term is "RPC message". For more information about RPC, see [C706].

Secure Sockets Layer (SSL): A security protocol that supports confidentiality and integrity of messages in client and server applications that communicate over open networks. SSL uses two keys to encrypt data—a public key known to everyone and a private or secret key known only to the recipient of the message. SSL supports server and, optionally, client authentication (2) using X.509 certificates (2). For more information, see [\[X509\]](#). The SSL protocol is precursor to Transport Layer Security (TLS). The TLS version 1.0 specification is based on SSL version 3.0.

security token: An opaque message or data packet produced by a Generic Security Services (GSS)-style authentication package and carried by the application protocol. The application has no visibility into the contents of the token.

security token service (STS): A web service that issues claims (2) and packages them in encrypted security tokens.

Simple Mail Transfer Protocol (SMTP): A member of the TCP/IP suite of protocols that is used to transport Internet messages, as described in [\[RFC5321\]](#).

SOAP: A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses **XML** technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming

model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [\[SOAP1.2-1/2003\]](#).

SOAP action: The HTTP request header field used to indicate the intent of the **SOAP** request, using a **URI** value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

SOAP body: A container for the payload data being delivered by a **SOAP message** to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

SOAP header: A mechanism for implementing extensions to a **SOAP message** in a decentralized manner without prior agreement between the communicating parties. See [\[SOAP1.2-1/2007\]](#) section 5.2 for more information.

SOAP message: An **XML** document consisting of a mandatory SOAP envelope, an optional **SOAP header**, and a mandatory **SOAP body**. See [\[SOAP1.2-1/2007\]](#) section 5 for more information.

Unified Messaging: A set of components and services that enable voice, fax, and email messages to be stored in a user's **mailbox** and accessed from a variety of devices.

Uniform Resource Identifier (URI): A string that identifies a resource. The URI is an addressing mechanism defined in Internet Engineering Task Force (IETF) Uniform Resource Identifier (URI): Generic Syntax [\[RFC3986\]](#).

Uniform Resource Locator (URL): A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

web server: A server computer that hosts websites and responds to requests from applications.

web service: A unit of application logic that provides data and services to other applications and can be called by using standard Internet transport protocols such as **HTTP**, **Simple Mail Transfer Protocol (SMTP)**, or File Transfer Protocol (FTP). Web services can perform functions that range from simple requests to complicated business processes.

Web Services Description Language (WSDL): An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

WSDL message: An abstract, typed definition of the data that is communicated during a **WSDL operation** [\[WSDL\]](#). Also, an element that describes the data being exchanged between web service providers and clients.

WSDL operation: A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

WSDL port type: A named set of logically-related, abstract **Web Services Description Language (WSDL)** operations and messages.

XML: The Extensible Markup Language, as described in [\[XML1.0\]](#).

XML namespace: A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [\[RFC3986\]](#). A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [\[XMLNS-2ED\]](#).

XML namespace prefix: An abbreviated form of an **XML namespace**, as described in [\[XML\]](#).

XML schema: A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by **XML** itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WS-MetadataExchangeDir] BEA Systems, Computer Associates, IBM, Microsoft, SAP, Sun, and webMethods, "Web Services Metadata Exchange (WS-MetadataExchange)", August 2006, <http://schemas.xmlsoap.org/ws/2004/09/mex/>

[WSA10] W3C, "WS-Addressing 1.0 Namespace: <http://www.w3.org/2005/08/addressing>", <http://www.w3.org/2005/08/addressing/>

[WSADDR-Metadata] Gudgin, M., Hadley, M., Rogers, T., and Yalçinalp, Ü., Eds., "Web Services Addressing 1.0 - Metadata", W3C Recommendation, September 2007, <http://www.w3.org/TR/2007/REC-ws-addr-metadata-20070904/>

[WSADDRCORE] Gudgin, M., Hadley, M., and Rogers, T., Eds., "Web Services Addressing 1.0 - Core", W3C Recommendation, May 2006, <http://www.w3.org/TR/2006/REC-ws-addr-core-20060509/>

[WSAddressing] Box, D., et al., "Web Services Addressing (WS-Addressing)", August 2004, <http://www.w3.org/Submission/ws-addressing/>

[WSDLSOAP] Angelov, D., Ballinger, K., Butek, R., et al., "WSDL 1.1 Binding Extension for SOAP 1.2", W3C Member Submission, April 2006, <http://www.w3.org/Submission/2006/SUBM-wsdl11soap12-20060405/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[WSPOLICY] Bajaj, S., Box, D., Chappell, D., et al., "Web Services Policy Framework (WS-Policy) and Web Services Policy Attachment (WS-PolicyAttachment)", March 2006, <http://schemas.xmlsoap.org/ws/2004/09/policy>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".

1.3 Overview

The Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol enables clients to ascertain email configuration settings for specific email addresses. This protocol includes four operations for requesting specific configuration settings: **GetDomainSetting** (section [3.1.4.1](#)), **GetFederationInformation** (section [3.1.4.2](#)), **GetOrganizationRelationshipSettings** (section [3.1.4.3](#)), and **GetUserSettings** (section [3.1.4.4](#)). If the user configuration settings listed and described in the following table are implemented by the server, they are then included in valid server responses.

If the user configuration settings listed and described in the second table in section [2.2.4.3](#) are implemented by the server, they are then included in valid server responses.

1.4 Relationship to Other Protocols

The Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol uses **SOAP** over **HTTP** and SOAP over **HTTPS**, as shown in the following layering diagram.

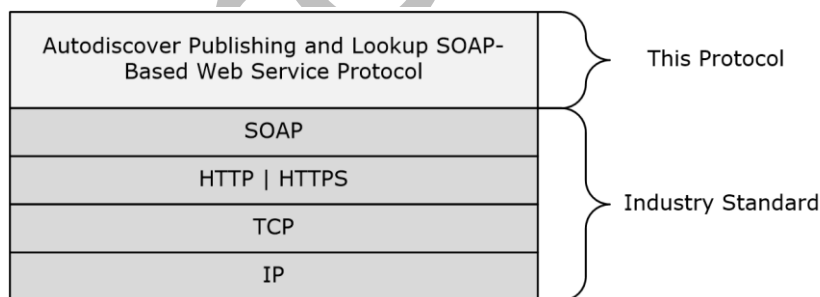


Figure 1: This protocol in relation to other protocols

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

1.5 Prerequisites/Preconditions

When the caller doesn't know the **URL** to use to communicate with the server that hosts the domain of interest, the caller performs one of the following two procedures to reach the server that can provide the information.

To reach the server by using a direct attempt:

1. Compose URLs for Autodiscover **endpoints (2)**, where {0} is the domain of interest, in the following order:
U1: `https://autodiscover.{0}/autodiscover/autodiscover.svc`
U2: `https://{0}/autodiscover/autodiscover.svc`
2. Call the **GetFederationInformation** (section [3.1.4.2](#)) operation at the Autodiscover endpoints (2) U1 and U2. Use the results from the first discovered URL that provides a successful response.
3. Follow HTTP 302 redirects only to HTTPS URLs.

To reach the server by using an indirect attempt:

1. Probe for an HTTP 302 redirect on a non-**Secure Sockets Layer (SSL)** endpoint (2).
2. Compose the URL for an Autodiscover endpoint (2), where {0} is the domain of interest:
`http://autodiscover.{0}/autodiscover/autodiscover.xml`
The response is an HTTP 302 redirect. The redirect URL in response starts with `https://` and ends with `/autodiscover/autodiscover.xml`.
3. Parse the host element of the URL and compose the following URL, where {0} is the host element of the previous URL:
`https://{0}/autodiscover/autodiscover.svc`
4. Call the **GetFederationInformation** operation at the Autodiscover endpoint (2).
5. Follow HTTP 302 redirects only to HTTPS URLs.

1.6 Applicability Statement

The Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol is applicable to SOAP-based clients in which a client can perform an autodiscovery of a user's configuration data by providing the user's email address and using the server's web services.

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses multiple transports with SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol has only one **WSDL port type** version. The **WSDL** version of the request is identified by using the **RequestedServerVersion** element, as described in section [3.1.4.4.2.8](#), and the version of the server responding to the request is identified using the **ServerVersionInfo** element, as described in section [2.2.3.1](#).

- **Security and Authentication Methods:** This protocol relies on the **web server** that hosts the application to perform authentication.
- **Capability Negotiation:** This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

Preliminary

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

2.1 Transport

The SOAP version supported is SOAP 1.1. For details, see [\[SOAP1.1\]](#).

This protocol relies on the web server that hosts the application to perform authentication. This protocol **MUST** support SOAP over HTTP, as specified in [\[RFC2616\]](#). The protocol **SHOULD** use secure communication via HTTPS, as defined in [\[RFC2818\]](#).

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language (WSDL), as defined in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

| Prefix | Namespace URI | Reference |
|----------------|---|--|
| soap | http://schemas.xmlsoap.org/wsdl/soap/ | [SOAP1.1] |
| wsu | http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd | |
| soapenc | http://schemas.xmlsoap.org/soap/encoding/ | [SOAP1.1] |
| wsam | http://www.w3.org/2007/05/addressing/metadata | [WSADDR-Metadata] |
| tns | http://schemas.microsoft.com/exchange/2010/Autodiscover | |
| wsa | http://schemas.xmlsoap.org/ws/2004/08/addressing | [WSAddressing] |
| wsp | http://schemas.xmlsoap.org/ws/2004/09/policy | [WSPOLICY] |
| wsap | http://schemas.xmlsoap.org/ws/2004/08/addressing/policy | |
| xsd | http://www.w3.org/2001/XMLSchema | [XMLSCHEMA1] , [XMLSCHEMA2] |
| msc | http://schemas.microsoft.com/ws/2005/12/wsdl/contract | |
| wsaw | http://www.w3.org/2006/05/addressing/wsdl | [WSADDRCORE] |
| soap12 | http://schemas.xmlsoap.org/wsdl/soap12 | [WSDLSOAP] |

| Prefix | Namespace URI | Reference |
|--------------|---|--|
| wsa10 | http://www.w3.org/2005/08/addressing | [WSA10] |
| wsx | http://schemas.xmlsoap.org/ws/2004/09/mex | [WS-MetadataExchangeDir] |
| wsdl | http://schemas.xmlsoap.org/wsdl/ | [WSDL] |
| xs | http://www.w3.org/2001/XMLSchema | [XMLSCHEMA1] [XMLSCHEMA2] |

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

The following table summarizes the set of XML schema element definitions that are specific to this operation.

| Element name | Description |
|--------------------------|---|
| ServerVersionInfo | Specifies the message server's version number, including the major and minor version numbers and the major and minor build numbers. |
| Domains | Specifies a list of domains discovered by the Autodiscover service. |
| RequestedSettings | Specifies the configuration settings to be returned in an autodiscovery. |

2.2.3.1 ServerVersionInfo Element

The **ServerVersionInfo** element specifies the message server's version number, including the major and minor version numbers and the major and minor build numbers.

```
<xs:element name="ServerVersionInfo"
  type="tns:ServerVersionInfo"
  nillable="true"
/>
```

2.2.3.2 Domains Element

The **Domains** element specifies a list of domains to be discovered by the client.

```
<xs:element name="Domains"
  type="tns:Domains"
  nillable="true"
/>
```


2.2.3.3 tns:RequestedSettings Element

The **RequestedSettings** element represents the configuration settings to be returned in an autodiscovery.

```
<xs:element name="RequestedSettings"
  type="tns:RequestedSettings"
  nillable="true"
/>
```

2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions that are specific to this operation. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

| Complex type name | Description |
|--------------------------|---|
| ServerVersionInfo | Represents the message server version. This complex type is returned in the SOAP header of a web services response message. |
| Domains | Represents a collection of domain names to be used in autodiscovery. |
| RequestedSettings | Represents the configuration settings to be returned by the server. |

2.2.4.1 tns:ServerVersionInfo Complex Type

The **ServerVersionInfo** complex type represents the message server version. This complex type is returned in the SOAP header of a web services response message.

```
<xs:complexType name="ServerVersionInfo">
  <xs:sequence>
    <xs:element name="MajorVersion"
      type="xs:int"
      minOccurs="0"
    />
    <xs:element name="MinorVersion"
      type="xs:int"
      minOccurs="0"
    />
    <xs:element name="MajorBuildNumber"
      type="xs:int"
      minOccurs="0"
    />
    <xs:element name="MinorBuildNumber"
      type="xs:int"
      minOccurs="0"
    />
    <xs:element name="Version"
      type="xs:string"
      minOccurs="0"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **ServerVersionInfo** complex type.

| Element name | Type | Description |
|-------------------------|---|--|
| MajorVersion | xs:int [XMLSCHEMA2] | Specifies the major version number for the server. |
| MinorVersion | xs:int | Specifies the minor version number for the server. |
| MajorBuildNumber | xs:int | Specifies the major build number for the server. |
| MinorBuildNumber | xs:int | Specifies the minor build number for the server. |
| Version | xs:string [XMLSCHEMA2] | Specifies the server product version. |

The **ServerVersionInfo** specifies the version of the Autodiscover service.

2.2.4.2 tns:Domains Complex Type

The **Domains** complex type represents a collection of domain names to be used in autodiscovery.

```
<xs:complexType name="Domains">
  <xs:sequence>
    <xs:element name="Domain"
      type="xs:string"
      maxOccurs="unbounded"
      minOccurs="0"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child element of the **Domains** complex type.

| Element name | Type | Description |
|---------------|---|---|
| Domain | xs:string [XMLSCHEMA2] | Specifies the user's domain (the location of the email server). |

The **Domains** complex type is submitted in a request message.

2.2.4.3 tns:RequestedSettings Complex Type

The **RequestedSettings** complex type specifies the configuration settings to be returned by the server for the **GetUserSettings** operation, as described in section [3.1.4.4](#), and the **GetDomainSettings** operation, as described in section [3.1.4.1](#).

```
<xs:complexType name="RequestedSettings">
  <xs:sequence>
    <xs:element name="Setting"
      type="xs:string"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **RequestedSettings** complex type.

| Element name | Type | Description |
|----------------|---------------------------------------|--|
| Setting | xs:string XMLSCHEMA21 | Specifies the configuration settings to be returned. |

If the user configuration settings listed and described in the following table are implemented by the server, they are then included in valid server responses.

| Configuration setting name | Description |
|--|---|
| UserDisplayName | The user's display name . |
| UserDN | The user's legacy DN . |
| UserDeploymentId | The user's deployment identifier. |
| InternalMailboxServer | The fully qualified domain name (FQDN) of the mailbox server. |
| InternalRpcClientServer | The FQDN of the RPC client server. |
| InternalMailboxServerDN | The legacy DN of the mailbox server. |
| InternalEcpUrl | The internal URL of the server's control panel. |
| InternalEcpVoicemailUrl | The internal URL of the server's control panel for voice mail customization. |
| InternalEcpEmailSubscriptionsUrl | The internal URL of the server's control panel for email subscriptions. |
| InternalEcpTextMessagingUrl | The internal URL of the server's control panel for text messaging. |
| InternalEcpDeliveryReportUrl | The internal URL of the server's control panel for delivery reports. |
| InternalEcpRetentionPolicyTagsUrl | The internal URL of the server's control panel for retention policy tags. <1> |
| InternalEcpPublishingUrl | The internal URL of the server's control panel for publishing. <2> |
| InternalEwsUrl | The internal URL of the server's web services. |
| InternalOABUrl | The internal URL of the OAB . |
| InternalUMUrl | The internal URL of the Unified Messaging services. |
| InternalWebClientUrls | A collection of the internal URLs of the server's web client. |
| MailboxDN | The DN of the mailbox database of the user's mailbox. |
| PublicFolderServer | The name of the public folders server. |
| ActiveDirectoryServer | The name of the directory service server. |
| ExternalMailboxServer | The name of the RPC over HTTP server. |
| ExternalMailboxServerRequiresSSL | A value that indicates whether the RPC over HTTP server SSL. |

| Configuration setting name | Description |
|---|---|
| ExternalMailboxServerAuthenticationMethods | The authentication methods supported by the RPC over HTTP server. |
| EcpVoicemailUrlFragment | The URL fragment of the server's control panel for voice mail customization. |
| EcpEmailSubscriptionsUrlFragment | The URL fragment of the server's control panel for email subscriptions. |
| EcpTextMessagingUrlFragment | The URL fragment of the server's control panel for text messaging. |
| EcpDeliveryReportUrlFragment | The URL fragment of the server's control panel for delivery reports. |
| EcpRetentionPolicyTagsUrlFragment | The URL fragment of the server's control panel for retention policy tags.<3> |
| EcpPublishingUrlFragment | The URL fragment of the server's control panel for publishing.<4> |
| ExternalEcpUrl | The external URL of the server's control panel. |
| ExternalEcpVoicemailUrl | The external URL of the server's control panel for voice mail customization. |
| ExternalEcpEmailSubscriptionsUrl | The external URL of the server's control panel for email subscriptions. |
| ExternalEcpTextMessagingUrl | The external URL of the server's control panel for text messaging. |
| ExternalEcpDeliveryReportUrl | The external URL of the server's control panel for delivery reports. |
| ExternalEcpRetentionPolicyTagsUrl | The external URL of the server's control panel for retention policy tags.<5> |
| ExternalEcpPublishingUrl | The external URL of the server's control panel for publishing.<6> |
| ExternalEwsUrl | The external URL of the server's web services. |
| ExternalOABUrl | The external URL of the OAB. |
| ExternalUMUrl | The external URL of the Unified Messaging services. |
| ExternalWebClientUrIs | The external URLs of the server's web client. |
| CrossOrganizationSharingEnabled | A value that indicates that cross-organization sharing is enabled. |
| AlternateMailboxes | A collection of alternate mailboxes. |
| CasVersion | The version of the mailbox server that is serving the specified request (for example, 14.XX.YYY.ZZZ). |
| EwsSupportedSchemas | A comma-separated list of schema versions supported by the server's web services. |
| InternalPop3Connections | The internal connection settings list for POP3 connections. |

| Configuration setting name | Description |
|---------------------------------------|--|
| ExternalPop3Connections | The external connection settings list for POP3 connections. |
| InternalImap4Connections | The internal connection settings list for IMAP4 connections. |
| ExternalImap4Connections | The external connection settings list for IMAP4 connections. |
| InternalSmtpConnections | The internal connection settings list for SMTP connections. |
| ExternalSmtpConnections | The external connection settings list for SMTP connections. |
| InternalServerExclusiveConnect | The internal server exclusive connect flag. If this is set to "Off", clients SHOULD NOT connect to the server by means of this protocol.<7> |
| ExternalServerExclusiveConnect | The external server exclusive connect flag. If this is set to "On", clients SHOULD connect to the server by means of this protocol.<8> |
| ExchangeRpcUrl | The URL that is used for remote procedure calls (RPCs). This URL is internal to the server and is not to be used by clients.<9> |
| ShowGalAsDefaultView | A Boolean value that indicates whether the GAL is shown as the address book . A text value of "true" indicates that the GAL is to be shown by default. A text value of "false" indicates that the contact list is to be shown.<10> |
| AutoDiscoverSMTPAddress | The AutoDiscover primary SMTP address for the user. This is the proxy address to be used instead of the user's email address, if a proxy address exists.<11> |
| InteropExternalEwsUrl | The external URL of the server's web service endpoint (2). This is the URL for a server that can serve mailboxes hosted on a server that does not have the web services.<12> |
| ExternalEwsVersion | The version of the web services server that is delivering the specified request.<13> |
| InteropExternalEwsVersion | The version of the server that the InteropExternalEwsUrl configuration setting points to.<14> |
| MobileMailboxPolicy | The mobile mailbox policy settings.<15> |

2.2.5 Simple Types

This specification does not define any common XML schema simple type definitions.

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

Preliminary

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 Autodiscover Server Details

The Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol enables the user to determine specific user configuration settings by submitting email addresses.

3.1.1 Abstract Data Model

None.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of **WSDL operations** as defined by this specification.

| Operation name | Description |
|--|---|
| GetDomainSettings | Retrieves the domain settings for the domain. |
| GetFederationInformation | Gets the configuration data for the security token service (STS) . |
| GetOrganizationRelationshipSettings | Gets the settings from all matching organization relationships that have at least one domain that maps to at least one email address claim in the security token . |
| GetUserSettings | Gets the specified configurations settings for the email user. |

3.1.4.1 GetDomainSettings

The **GetDomainSettings** operation retrieves the specified domain settings for the user.

The following is the WSDL port type specification of the operation.

```
<wsdl:operation name="GetDomainSettings">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/
    Autodiscover/Autodiscover/GetDomainSettings"
    name="GetDomainSettingsRequestMessage"
    message="tns:GetDomainSettingsRequestMessage" />
  <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/
    Autodiscover/Autodiscover/GetDomainSettingsResponse" />
</wsdl:operation>
```

```

        name="GetDomainSettingsResponseMessage"
        message="tns:GetDomainSettingsResponseMessage" />
</wsdl:operation>

```

The following is the WSDL binding specification of the operation

```

<wsdl:operation name="GetDomainSettings">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetDomainSettings"
    style="document" />
  <wsdl:input name="GetDomainSettingsRequestMessage">
    <soap:header message="tns:GetDomainSettingsRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetDomainSettingsResponseMessage">
    <soap:header message="tns:GetDomainSettingsResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>

```

The protocol client sends a **GetDomainSettingsRequestMessage** request WSDL message and the protocol server responds with a **GetDomainSettingsResponseMessage** response WSDL message.

3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to the **GetDomainSettings** operation.

| Message name | Description |
|---|---|
| GetDomainSettingsRequestMessage | Retrieves the specified settings for a domain. |
| GetDomainSettingsRequestMessage_Headers | Specifies the SOAP header for a GetDomainSettings operation request. |
| GetDomainSettingsResponseMessage | Represents the response to a GetDomainSettings operation for a specified domain. |
| GetDomainSettingsResponseMessage_Headers | Specifies the SOAP header for a GetDomainSettings operation response. |

3.1.4.1.1.1 tns:GetDomainSettingsRequestMessage

The **GetDomainSettingsRequestMessage** WSDL message specifies the **SOAP message** that represents a request to get the specified settings for a domain.

```

<wsdl:message name="GetDomainSettingsRequestMessage">
  <wsdl:part name="parameters" element="tns:GetDomainSettingsRequestMessage" />
</wsdl:message>

```

The **GetDomainSettingsRequestMessage** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetDomainSettings>.

The one part of the **GetDomainSettingsRequestMessage** message is described in the following table.

| Part name | Element/type | Description |
|------------|---|--|
| parameters | tns:GetDomainSettingsRequestMessage element (section 3.1.4.1.2.1) | Specifies the SOAP body (the parameters) of a call to a GetDomainSettings operation request. |

3.1.4.1.1.2 tns:GetDomainSettingsRequestMessage_Headers

The **GetDomainSettingsRequestMessage_Headers Message** WSDL message specifies the SOAP header for a **GetDomainSettings** operation.

```
<wsdl:message name="GetDomainSettingsRequestMessage_Headers">
  <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
</wsdl:message>
```

The **GetDomainSettingsRequestMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|-------------------------------|--|---|
| RequestedServerVersion | tns:RequestedServerVersion element (section 3.1.4.4.2.8) | Specifies the server version that the GetDomainSettings operation request targets. |

3.1.4.1.1.3 tns:GetDomainSettingsResponseMessage

The **GetDomainSettingsResponseMessage** WSDL message specifies the SOAP message that represents the server response to a **GetDomainSettings** operation for an individual domain.

```
<wsdl:message name="GetDomainSettingsResponseMessage">
  <wsdl:part name="parameters" element="tns:GetDomainSettingsResponseMessage" />
</wsdl:message>
```

The **GetDomainSettingsResponseMessage** WSDL message is the response message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetDomainSettingsResponse>.

The one part of the **GetDomainSettingsResponseMessage** WSDL message is described in the following table.

| Part name | Element/type | Description |
|------------|--|--|
| parameters | tns:GetDomainSettingsResponseMessage element (section 3.1.4.1.2.2) | Specifies the SOAP body of the response to a GetDomainSettings operation. |

3.1.4.1.1.4 tns:GetDomainSettingsResponseMessage_Headers

The **GetDomainSettingsResponseMessage_Headers Message** WSDL message specifies the SOAP header for a **GetDomainSettings** operation response.

```
<wsdl:message name="GetDomainSettingsResponseMessage_Headers">
  <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
</wsdl:message>
```

The **GetDomainSettingsResponseMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|--------------------------|---|--|
| ServerVersionInfo | tns:ServerVersionInfo (section 2.2.3.1) | Contains the server version that processed the GetDomainSettings operation request. |

3.1.4.1.2 Elements

The following table summarizes the set of XML schema element definitions that are specific to the **GetDomainSettings** operation.

| Element name | Description |
|---|---|
| GetDomainSettingsRequestMessage | Specifies a call to the server, requesting configuration settings for the user's domain. The GetDomainSettingsResponseMessage element (section 3.1.4.1.2.2) response contains the domain settings requested in this call. |
| GetDomainSettingsResponseMessage | Returns to the caller the user's configuration settings that were requested in the GetDomainSettingsRequestMessage element (section 3.1.4.1.2.1). |
| GetDomainSettingsRequest | Represents the parameters of a call to a GetDomainSettings operation. |
| GetDomainSettingsResponse | Represents the response to a GetDomainSettings operation for a domain, and returns the domain settings. |
| ArrayOfDomainResponse | Represents an array of DomainResponse elements (section 3.1.4.1.2.6). Each DomainResponse element contains the requested settings for the specified user. |
| DomainResponse | Contains the requested settings for the specified domain. |
| DomainSettingErrors | Contains error information for settings that could not be returned. |
| DomainSettingError | Represents an error that occurred while retrieving a domain setting in response to a GetDomainSettings operation request. |
| DomainSettings | Represents the domain settings that were submitted in a request or returned by an Autodiscover response. |
| DomainSetting | Represents the base class for all domain settings returned by the GetDomainSettings request. |

3.1.4.1.2.1 tns:GetDomainSettingsRequestMessage Element

The **GetDomainSettingsRequestMessage** element specifies a call to the server, requesting configuration settings for the user's domain. The **GetDomainSettingsResponseMessage** response contains the domain settings requested in this call.

```
<xs:element name="GetDomainSettingsRequestMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Request"
        type="tns:GetDomainSettingsRequest"
        nillable="true"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetDomainSettingsRequestMessage** element.

| Element name | Type | Description |
|----------------|--|---|
| Request | tns:GetDomainSettingsRequest (section 3.1.4.1.3.1) | Specifies the GetDomainSettings operation request. |

3.1.4.1.2.2 tns:GetDomainSettingsResponseMessage Element

The **GetDomainSettingsResponseMessage** element returns to the caller the user's configuration settings that were requested in a **GetDomainSettingsRequestMessage** element, as specified in section [3.1.4.1.2.1](#).

The name-value pairs for each returned domain setting are included in the response. The **GetDomainSettings** operation call returns only the requested configuration settings.

```
<xs:element name="GetDomainSettingsResponseMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Response"
        type="tns:GetDomainSettingsResponse"
        nillable="true"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetDomainSettingsResponseMessage** element.

| Element name | Type | Description |
|-----------------|---|--|
| Response | tns:GetDomainSettingsResponse (section 3.1.4.1.3.2) | Specifies the response to a GetDomainSettings operation request for a specified domain. |

3.1.4.1.2.3 tns:GetDomainSettingsRequest Element

The **GetDomainSettingsRequest** element represents the parameters of a call to a **GetDomainSettings** operation.

```
<xs:element name="GetDomainSettingsRequest"
  type="tns:GetDomainSettingsRequest"
  nillable="true"
/>
```

3.1.4.1.2.4 tns:GetDomainSettingsResponse Element

The **GetDomainSettingsResponse** element represents the response to a **GetDomainSettings** operation for a domain. This response contains the domain settings.

```
<xs:element name="GetDomainSettingsResponse"
  type="tns:GetDomainSettingsResponse"
  nillable="true"
/>
```

3.1.4.1.2.5 tns:ArrayOfDomainResponse Element

The **ArrayOfDomainResponse** element represents an array of **DomainResponse** elements. Each **DomainResponse** element contains the requested settings for the specified user.

```
<xs:element name="ArrayOfDomainResponse"
  type="tns:ArrayOfDomainResponse"
  nillable="true"
/>
```

3.1.4.1.2.6 tns:DomainResponse Element

The **DomainResponse** element contains the requested settings for the specified domain.

```
<xs:element name="DomainResponse"
  type="tns:DomainResponse"
  nillable="true"
/>
```

3.1.4.1.2.7 tns:DomainSettingErrors Element

The **DomainSettingErrors** element contains error information for settings that could not be returned.

```
<xs:element name="DomainSettingErrors"
  type="tns:DomainSettingErrors"
  nillable="true"
/>
```

3.1.4.1.2.8 tns:DomainSettingError Element

The **DomainSettingError** element represents an error that occurred while retrieving a domain setting in response to a **GetDomainSettings** operation.

```
<xs:element name="DomainSettingError"
  type="tns:DomainSettingError"
  nillable="true"
/>
```

3.1.4.1.2.9 tns:DomainSettings Element

The **DomainSettings** element represents the domain settings that were submitted in a request or returned by an Autodiscover response.

```
<xs:element name="DomainSettings"
  type="tns:DomainSettings"
  nillable="true"
/>
```

3.1.4.1.2.10 tns:DomainSetting Element

The **DomainSetting** element represents the base class for all domain settings that are returned by the **GetDomainSettings** operation.

```
<xs:element name="DomainSetting"
  type="tns:DomainSettings"
  nillable="true"
/>
```

3.1.4.1.3 Complex Types

The following table summarizes the set of XML schema complex type definitions that are specific to the **GetDomainSettings** operation.

| Complex type name | Description |
|----------------------------------|---|
| GetDomainSettingsRequest | Retrieves the specified setting for a domain. |
| GetDomainSettingsResponse | Contains an array of domain settings. The domain response contains the configuration settings for the specified domain. This complex type represents the response to a GetDomainSettings operation for a specified domain. |
| ArrayOfDomainResponse | Represents an array of DomainResponse complex type (section 3.1.4.1.3.4) objects. |
| DomainResponse | Represents a response to a GetDomainSettings operation for an individual domain. The returned DomainResponse object contains the requested settings for the specified domain. |
| DomainSettingErrors | Represents a collection of DomainSettingError element (section 3.1.4.1.3.6) objects that contain error information for settings that could not be returned. |
| DomainSettingError | Represents an error that occurred while retrieving a domain setting in |

| Complex type name | Description |
|----------------------------|---|
| | response to a GetDomainSettings operation request. |
| DomainSettings | Represents a collection of DomainSetting complex type (section 3.1.4.1.3.8) objects, the base class for all domain settings returned by the GetDomainSettings operation. |
| DomainSetting | Represents the domain settings to be returned by the GetDomainSettings operation. |
| DomainStringSetting | Represents a domain setting whose value is of type string . |

3.1.4.1.3.1 tns:GetDomainSettingsRequest Complex Type

The **GetDomainSettingsRequest** complex type retrieve the specified setting for a domain. The **GetDomainSettingsRequest** complex type contains the domain for which autodiscovery is to be performed and the settings that are to be returned by the server. The **GetDomainSettingsRequest** complex type represents a **GetDomainSettings** operation request. The **GetDomainSettingsRequest** complex type returns a **DomainResponse** complex type, as specified in section [3.1.4.1.3.4](#) object that contains the requested settings for the specified domain.

The **GetDomainSettingsRequest** complex type extends the **AutodiscoverRequest** complex type, as specified in section [3.1.4.4.3.2](#).

```
<xs:complexType name="GetDomainSettingsRequest"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverRequest"
    >
      <xs:sequence>
        <xs:element name="Domains"
          type="tns:Domains"
          nillable="true"
        />
        <xs:element name="RequestedSettings"
          type="tns:RequestedSettings"
          nillable="true"
        />
        <xs:element name="RequestedVersion"
          type="tns:ExchangeVersion"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **GetDomainSettingsRequest** complex type.

| Element name | Type | Description |
|----------------|---|---|
| Domains | tns:Domains (section 2.2.4.2) | Specifies the domains for which autodiscovery is to be performed. |

| Element name | Type | Description |
|--------------------------|---|--|
| RequestedSettings | tns:RequestedSettings (section 2.2.4.3) | Specifies the configuration settings being requested. |
| RequestedVersion | tns:ExchangeVersion (section 3.1.4.4.4.1) | Specifies the specific server version the provider would like to use. <16> |

3.1.4.1.3.2 tns:GetDomainSettingsResponse Complex Type

The **GetDomainSettingsResponse** complex type contains an array of domain settings. The domain response contains the configuration settings for the specified domain. This complex type represents the response to a **GetDomainSettings** operation request for an individual domain.

The **GetDomainSettingsResponse** complex type extends the **AutodiscoverResponse** complex type, as specified in section [3.1.4.4.3.6](#).

```
<xs:complexType name="GetDomainSettingsResponse"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverResponse"
    >
      <xs:sequence>
        <xs:element name="DomainResponses"
          type="tns:ArrayOfDomainResponse"
          nillable="true"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **GetDomainSettingsResponse** complex type.

| Element name | Type | Description |
|------------------------|---|---|
| DomainResponses | tns:ArrayOfDomainResponse (section 3.1.4.1.3.3) | Specifies an array of DomainResponse elements, a response for each specified domain. |

3.1.4.1.3.3 tns:ArrayOfDomainResponse Complex Type

The **ArrayOfDomainResponse** complex type represents an array of **DomainResponse** elements, as specified in section [3.1.4.1.2.6](#). Each **DomainResponse** complex type contains a **DomainSettings** complex type, as specified in section [3.1.4.1.3.7](#), for the specified domain.

```
<xs:complexType name="ArrayOfDomainResponse">
  <xs:sequence>
    <xs:element name="DomainResponse"
```

```

        type="tns:DomainResponse"
        nillable="true"
        minOccurs="0"
        maxOccurs="unbounded"
      />
    </xs:sequence>
  </xs:complexType>

```

The following table lists the child elements of the **ArrayOfDomainResponse** complex type.

| Element name | Type | Description |
|-----------------------|--|--|
| DomainResponse | tns:DomainResponse (section 3.1.4.1.3.4) | Specifies a response message from a GetDomainSettings operation for a specified domain. |

3.1.4.1.3.4 tns:DomainResponse Complex Type

The **DomainResponse** complex type represents a response to a **GetDomainSettings** operation for a specified domain. The **DomainResponse** complex type object contains the requested settings for the specified domain. The **DomainResponse** complex type extends the **AutodiscoverResponse** complex type (section [3.1.4.4.3.6](#)).

```

<xs:complexType name="DomainResponse"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverResponse"
    >
      <xs:sequence>
        <xs:element name="DomainSettingErrors"
          type="tns:DomainSettingErrors"
          nillable="true"
          minOccurs="0"
        />
        <xs:element name="DomainSettings"
          type="tns:DomainSettings"
          nillable="true"
          minOccurs="0"
        />
        <xs:element name="RedirectTarget"
          type="xs:string"
          nillable="true"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **DomainResponse** complex type.

| Element name | Type | Description |
|----------------------------|---|--|
| DomainSettingErrors | tns:DomainSettingErrors (section 3.1.4.1.3.5) | Specifies the error information for settings that could not be returned. |
| DomainSettings | tns:DomainSettings (section 3.1.4.1.3.7) | Specifies the requested settings for the specified domain. |
| RedirectTarget | xs:string [XMLSCHEMA2] | Specifies the redirection target (URL or email address). |

3.1.4.1.3.5 tns:DomainSettingErrors Complex Type

The **DomainSettingErrors** complex type represents a collection of **DomainSettingError** elements, as specified in section [3.1.4.1.2.7](#), that contain error information for settings that could not be returned.

```
<xs:complexType name="DomainSettingErrors">
  <xs:sequence>
    <xs:element name="DomainSettingError"
      type="tns:DomainSettingError"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **DomainSettingErrors** complex type.

| Element name | Type | Description |
|---------------------------|--|---|
| DomainSettingError | tns:DomainSettingError (section 3.1.4.1.3.6) | Specifies an error from a GetDomainSettings operation request. |

3.1.4.1.3.6 tns:DomainSettingError Complex Type

The **DomainSettingError** complex type represents an error that occurred while retrieving a domain setting in response to a **GetDomainSettings** operation request.

```
<xs:complexType name="DomainSettingError">
  <xs:sequence>
    <xs:element name="ErrorCode"
      type="tns:ErrorCode"
    />
    <xs:element name="ErrorMessage"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="SettingName"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **DomainSettingError** complex type.

| Element name | Type | Description |
|---------------------|---|--|
| ErrorCode | tns:ErrorCode (section 3.1.4.4.4.2) | Specifies the error code that is associated with the specified request. |
| ErrorMessage | xs:string [XMLSCHEMA2] | Specifies the error message that is associated with the specified request. |
| SettingName | xs:string | Specifies the name of the setting. |

3.1.4.1.3.7 tns:DomainSettings Complex Type

The **DomainSettings** complex type represents a collection of **DomainSetting** elements, as specified in section [3.1.4.1.2.10](#), the base class for all domain settings returned by the **GetDomainSettings** operation.

```
<xs:complexType name="DomainSettings">
  <xs:sequence>
    <xs:element name="DomainSetting"
      type="tns:DomainSetting"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **DomainSettings** complex type.

| Element name | Type | Description |
|----------------------|---|---|
| DomainSetting | tns:DomainSetting (section 3.1.4.1.3.8) | Specifies the domain settings returned by the GetDomainSettings operation. |

3.1.4.1.3.8 tns:DomainSetting Complex Type

The **DomainSetting** complex type represents the domain settings to be returned by the **GetDomainSettings** operation call.

```
<xs:complexType name="DomainSetting">
  <xs:sequence>
    <xs:element name="Name"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **DomainSetting** complex type.

| Element name | Type | Description |
|--------------|---|---|
| Name | xs:string [XMLSCHEMA2] | Specifies the name of the setting to be returned. |

The **DomainStringSetting** complex type, as specified in section [3.1.4.1.3.9](#), extends this base type.

3.1.4.1.3.9 tns:DomainStringSetting Complex Type

The **DomainStringSetting** complex type represents a domain setting the value of which is of type **string**. The **DomainStringSetting** complex type extends the **DomainSetting** complex type, as specified in section [3.1.4.1.3.8](#).

```
<xs:complexType name="DomainStringSetting"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:DomainSetting"
    >
      <xs:sequence>
        <xs:element name="Value"
          type="xs:string"
          nillable="true"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **DomainStringSetting** complex type.

| Element name | Type | Description |
|--------------|---|---|
| Value | xs:string [XMLSCHEMA2] | Specifies the value of the specified setting. |

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 GetFederationInformation

The **GetFederationInformation** operation provides information about the federation status of the specified organization, such as the target **URI** to be used when requesting security tokens targeted at this organization, and the other domains that the organization has also federated.

The following is the WSDL port type specification of the operation.

```
<wsdl:operation name="GetFederationInformation">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/
    Autodiscover/Autodiscover/GetFederationInformation"
    name="GetFederationInformationRequestMessage"
    message="tns:GetFederationInformationRequestMessage" />
  <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/
    Autodiscover/Autodiscover/GetFederationInformationResponse"
    name="GetFederationInformationResponseMessage"
    message="tns:GetFederationInformationResponseMessage" />
</wsdl:operation>
```

The following is the WSDL binding specification of the operation

```
<wsdl:operation name="GetFederationInformation">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetFederationInformation" style="document" />
  <wsdl:input name="GetFederationInformationRequestMessage">
    <soap:header message="tns:GetFederationInformationRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetFederationInformationResponseMessage">
    <soap:header message="tns:GetFederationInformationResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **GetFederationInformationRequestMessage** request WSDL message and the protocol server responds with a **GetFederationInformationResponseMessage** response WSDL message.

3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to the **GetFederationInformation** operation.

| Message name | Description |
|---|--|
| GetFederationInformationRequestMessage | Retrieves the federation status of an organization. |
| GetFederationInformationRequestMessage_Headers | Specifies the SOAP header for a GetFederationInformation operation request. |
| GetFederationInformationResponseMessage | Represents the response to a GetFederationInformation operation for a |

| Message name | Description |
|--|---|
| | specified domain. |
| GetFederationInformationResponseMessage_Headers | Specifies the SOAP header for a GetFederationInformation operation response. |

3.1.4.2.1.1 tns:GetFederationInformationRequestMessage

The **GetFederationInformationRequestMessage** WSDL message specifies the SOAP message that represents a request to get the federation status of an organization.

```
<wsdl:message name="GetFederationInformationRequestMessage">
  <wsdl:part name="parameters" element="tns:GetFederationInformationRequestMessage" />
</wsdl:message>
```

The **GetFederationInformationRequestMessage** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetFederationInformation>.

The one part of the **GetFederationInformationRequestMessage** message is described in the following table.

| Part name | Element/type | Description |
|-------------------|--|---|
| parameters | tns:GetFederationInformationRequestMessage element (section 3.1.4.2.2.1) | Specifies the SOAP body the parameters) of a call to a GetFederationInformation operation request. |

3.1.4.2.1.2 tns:GetFederationInformationRequestMessage_Headers

The **GetFederationInformationRequestMessage_Headers** WSDL message specifies the SOAP header for a **GetFederationInformation** operation.

```
<wsdl:message name="GetFederationInformationRequestMessage_Headers">
  <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
</wsdl:message>
```

The **GetFederationInformationRequestMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|-------------------------------|--|--|
| RequestedServerVersion | tns:RequestedServerVersion element (section 3.1.4.4.2.8) | Specifies the server version that the GetFederationInformation operation request targets. |

3.1.4.2.1.3 tns:GetFederationInformationResponseMessage

The **GetFederationInformationResponseMessage** WSDL message specifies the SOAP message that represents the server response to a **GetFederationInformation** operation for a specified domain.

```
<wsdl:message name="GetFederationInformationResponseMessage">
  <wsdl:part name="parameters" element="tns:GetFederationInformationResponseMessage" />
</wsdl:message>
```

The **GetFederationInformationResponsetMessage** WSDL message is the response message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetFederationInformationResponse>.

The one part of the **GetFederationInformationResponseMessage** WSDL message is described in the following table.

| Part name | Element/type | Description |
|-------------------|---|---|
| parameters | tns:GetFederationInformationResponseMessage element (section 3.1.4.2.2.2) | Specifies the SOAP body of the response to GetFederationInformation operation. |

3.1.4.2.1.4 tns:GetFederationInformationResponseMessage_Headers

The **GetFederationInformationResponseMessage_Headers** WSDL message specifies the SOAP header for a **GetFederationInformation** operation response.

```
<wsdl:message name="GetFederationInformationResponseMessage_Headers">
  <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
</wsdl:message>
```

The **GetFederationInformationResponseMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|--------------------------|---|---|
| ServerVersionInfo | tns:ServerVersionInfo (section 2.2.3.1) | Contains the server version that processed the GetFederationInformation operation request. |

3.1.4.2.2 Elements

The following table summarizes the set of XML schema element definitions that are specific to the **GetFederationInformation** operation.

| Element name | Description |
|--|--|
| GetFederationInformationRequestMessage | Specifies a call to the server to request configuration data for the STS. |
| GetFederationInformationResponseMessage | Returns to the caller the specified federation configuration settings that were requested in the |

| Element name | Description |
|---|---|
| | GetFederationInformationRequestMessage element. |
| GetFederationInformationRequest | Represents the parameters of a call to a GetFederationInformation operation. |
| GetFederationInformationResponse | Represents the response to a GetFederationInformation operation. |

3.1.4.2.2.1 tns:GetFederationInformationRequestMessage Element

The **GetFederationInformationRequestMessage** element specifies a call to the server to request configuration data for the STS. The **GetFederationInformationResponseMessage** element (section [3.1.4.2.2.2](#)) contains the federation settings requested in this call.

```
<xs:element name="GetFederationInformationRequestMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Request"
        type="tns:GetFederationInformationRequest"
        nillable="true"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetFederationInformationRequestMessage** element.

| Element name | Type | Description |
|----------------|---|--|
| Request | tns:GetFederationInformationRequest (section 3.1.4.2.3.1) | Specifies the GetFederationInformation operation request. |

3.1.4.2.2.2 tns:GetFederationInformationResponseMessage Element

The **GetFederationInformationResponseMessage** element returns to the caller the specified federation configuration settings that were requested in the **GetFederationInformationRequestMessage** element.

The STS is specified in the response message.

```
<xs:element name="GetFederationInformationResponseMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Response"
        type="tns:GetFederationInformationResponse"
        nillable="true"
        minOccurs="0"
      />
    </xs:sequence>
</xs:element>
```

```

</xs:complexType>
</xs:element>

```

The following table lists the child elements of the **GetFederationInformationResponseMessage** element.

| Element name | Type | Description |
|-----------------|---|--|
| Response | tns:GetFederationInformationResponse (section 3.1.4.2.3.2) | Specifies the response to a GetFederationInformation operation request. |

3.1.4.2.2.3 tns:GetFederationInformationRequest Element

The **GetFederationInformationRequest** element represents the parameters of a call to a **GetFederationInformation** operation.

```

<xs:element name="GetFederationInformationRequest"
  type="tns:GetFederationInformationRequest"
  nillable="true"
/>

```

3.1.4.2.2.4 tns:GetFederationInformationResponse Element

The **GetFederationInformationResponse** element represents the response to a **GetFederationInformation** operation. The response contains the federation settings.

```

<xs:element name="GetFederationInformationResponse"
  type="tns:GetFederationInformationResponse"
  nillable="true"
/>

```

3.1.4.2.3 Complex Types

The following table summarizes the set of XML schema complex type definitions that are specific to the **GetFederationInformation** operation.

| Complex type name | Description |
|---|--|
| GetFederationInformationRequest | Retrieves the specified federation settings for a user and contains the federation information (including federated domain names) from an external server. The requester provides the domain name that enables the server to return the federation settings. |
| GetFederationInformationResponse | Returns to the caller the federation information that was requested in the GetFederationInformationRequest complex type. |
| TokenIssuer | Specifies the URI and endpoint (2) for the STS. |
| TokenIssuers | Represents a collection of TokenIssuer complex types to be used in |

| Complex type name | Description |
|-------------------|--------------------|
| | the autodiscovery. |

3.1.4.2.3.1 tns:GetFederationInformationRequest Complex Type

The **GetFederationInformationRequest** complex type retrieves the specified federation settings for a user. This complex type contains the federation information (including federated domain names) from an external server. The requester provides the domain name that enables the server to return the federation settings. The **GetFederationInformationRequest** complex type extends the **AutodiscoverRequest** complex type, as specified in section [3.1.4.4.3.2](#).

```
<xs:complexType name="GetFederationInformationRequest"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverRequest"
    >
      <xs:sequence>
        <xs:element name="Domain"
          type="xs:string"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **GetFederationInformationRequest** complex type.

| Element name | Type | Description |
|---------------|---|--|
| Domain | xs:string [XMLSCHEMA2] | Specifies the domain that contains the federation trust. |

3.1.4.2.3.2 tns:GetFederationInformationResponse Complex Type

The **GetFederationInformationResponse** complex type returns to the caller the federation information that was requested in the **GetFederationInformationRequest** complex type, as specified in section [3.1.4.2.3.1](#). The **GetFederationInformationResponse** complex type extends the **AutodiscoverResponse** complex type, as specified in section [3.1.4.4.3.6](#).

```
<xs:complexType name="GetFederationInformationResponse"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverResponse"
    >
      <xs:sequence>
        <xs:element name="ApplicationUri"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

        type="xs:anyURI"
        nillable="true"
        minOccurs="0"
      />
    <xs:element name="TokenIssuers"
      type="tns:TokenIssuers"
      minOccurs="0"
      nillable="true"
    />
    <xs:element name="Domains"
      type="tns:Domains"
      nillable="true"
      minOccurs="0"
    />
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **GetFederationInformationResponse** complex type.

| Element name | Type | Description |
|-----------------------|---|---|
| ApplicationUri | xs:anyURI [XMLSCHEMA2] | Specifies the value used by the caller in the AppliesTo/EndpointReference/Address of the Request Security Token message to the STS. |
| TokenIssuers | tns:TokenIssuers (section 3.1.4.2.3.4) | Specifies a collection of TokenIssuer complex types (section 3.1.4.2.3.3) to be used in the autodiscovery. |
| Domains | tns:Domains (section 2.2.4.2) | Specifies the additional returned domains (besides the one specified in the request) that the organization has federated. These are domains that this server uses in the email address claim when it makes requests to other servers outside its organization, including the caller's domain. |

3.1.4.2.3.3 tns:TokenIssuer Complex Type

The **TokenIssuer** complex type specifies the URI and endpoint (1) for the STS.

```

<xs:complexType name="TokenIssuer">
  <xs:sequence>
    <xs:element name="Uri"
      type="xs:anyURI"
      minOccurs="0"
      nillable="true"
    />
    <xs:element name="Endpoint"
      type="xs:anyURI"
      minOccurs="0"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **TokenIssuer** complex type.

| Element name | Type | Description |
|-----------------|---|--|
| Uri | xs:anyURI [XMLSCHEMA2] | The URI of the STS that issued the security token. |
| Endpoint | xs:anyURI | The web service endpoint (2) URI. |

3.1.4.2.3.4 tns:TokenIssuers Complex Type

The **TokenIssuers** complex type represents a collection of **TokenIssuer** complex types, as specified in section [3.1.4.2.3.3](#), to be used in autodiscovery.

```
<xs:complexType name="TokenIssuers">
  <xs:sequence>
    <xs:element name="TokenIssuer"
      type="tns:TokenIssuer"
      minOccurs="0"
      maxOccurs="unbounded"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **TokenIssuers** complex type.

| Element name | Type | Description |
|--------------------|---|---|
| TokenIssuer | tns:TokenIssuer (section 3.1.4.2.3.3) | The URI and endpoint (2) of the STS that issued the security token. |

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 GetOrganizationRelationshipSettings

The **GetOrganizationRelationshipSettings** operation retrieves the settings from all matching organization relationships that have at least one domain in the **DomainNames** element that maps to

at least one email address claim in the security token. The **GetOrganizationRelationshipSetting** operation is for internal use only. This operation is not used by clients. <17>

The following is the WSDL port type specification of the operation.

```
<wsdl:operation name="GetOrganizationRelationshipSettings">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetOrganizationRelationshipSettings"
    name="GetOrganizationRelationshipSettingsRequestMessage"
    message="tns:GetOrganizationRelationshipSettingsRequestMessage" />
  <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetOrganizationRelationshipSettingsResponse"
    name="GetOrganizationRelationshipSettingsResponseMessage"
    message="tns:GetOrganizationRelationshipSettingsResponseMessage" />
</wsdl:operation>
```

The following is the WSDL binding specification of the operation

```
<wsdl:operation name="GetOrganizationRelationshipSettings">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetOrganizationRelationshipSettings" style="document" />
  <wsdl:input name="GetOrganizationRelationshipSettingsRequestMessage">
    <soap:header message="tns:GetOrganizationRelationshipSettingsRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetOrganizationRelationshipSettingsResponseMessage">
    <soap:header message="tns:GetOrganizationRelationshipSettingsResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **GetOrganizationRelationshipSettingsRequestMessage** request WSDL message and the protocol server responds with a **GetOrganizationRelationshipSettingsResponseMessage** response WSDL message.

3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to the **GetOrganizationRelationshipSettings** operation.

| Message name | Description |
|---|--|
| GetOrganizationRelationshipSettingsRequestMessage | Retrieves the organization relationship settings. |
| GetOrganizationRelationshipSettingsRequestMessage_Headers | Specifies the SOAP header for a GetOrganizationRelationshipSettings operation request. |
| GetOrganizationRelationshipSettingsResponseMessage | Represents a response to a GetOrganizationRelationshipSettings operation. |
| GetOrganizationRelationshipSettingsResponseMessage_Headers | Specifies the SOAP header for a GetOrganizationRelationshipSettingsResponse operation response. |

3.1.4.3.1.1 tns:GetOrganizationRelationshipSettingsRequestMessage

The **GetOrganizationRelationshipSettingsRequestMessage** WSDL message specifies the SOAP message that represents a request to get the organization relationship settings. <18>

```
<wsdl:message name="GetOrganizationRelationshipSettingsRequestMessage">
  <wsdl:part name="parameters"
    element="tns:GetOrganizationRelationshipSettingsRequestMessage" />
</wsdl:message>
```

The **GetOrganizationRelationshipSettingsRequestMessage** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetOrganizationRelationshipSettings>.

The one part of the **GetOrganizationRelationshipSettingsRequestMessage** message is described in the following table.

| Part name | Element/type | Description |
|------------|--|---|
| parameters | tns:GetOrganizationRelationshipSettingsRequestMessage element (section 3.1.4.3.2.1) | Specifies the SOAP body (the parameters) of a call to a GetOrganizationRelationshipSettings operation request. |

3.1.4.3.1.2 tns:GetOrganizationRelationshipSettingsRequestMessage_Headers

The **GetOrganizationRelationshipSettingsRequestMessage_Headers** WSDL message specifies the SOAP header for the **GetOrganizationRelationshipSettings** operation. <19>

```
<wsdl:message name="GetOrganizationRelationshipSettingsRequestMessage_Headers">
  <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
</wsdl:message>
```

The **GetOrganizationRelationshipSettingsRequestMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|------------------------|---|---|
| RequestedServerVersion | tns:RequestedServerVersion (section 3.1.4.4.2.8) | Specifies the server version that the GetOrganizationRelationshipSettings operation request targets. |

3.1.4.3.1.3 tns:GetOrganizationRelationshipSettingsResponseMessage

The **GetOrganizationRelationshipSettingsResponseMessage** WSDL message specifies the SOAP message that represents the server response to the **GetOrganizationRelationshipSettings** operation. <20>

```

<wsdl:message name="GetOrganizationRelationshipSettingsResponseMessage">
  <wsdl:part name="parameters"
    element="tns:GetOrganizationRelationshipSettingsResponseMessage" />
</wsdl:message>

```

The **GetOrganizationRelationshipSettingsResponseMessage** WSDL message is the response message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetOrganizationRelationshipSettingsResponse>.

The one part of the **GetOrganizationRelationshipSettingsResponseMessage** WSDL message is described in the following table.

| Part name | Element/type | Description |
|-------------------|---|--|
| parameters | tns:GetOrganizationRelationshipSettingsResponseMessage element (section 3.1.4.3.2.3). | Specifies the SOAP body of the response to a GetOrganizationRelationshipSettings operation. |

3.1.4.3.1.4 tns:GetOrganizationRelationshipSettingsResponseMessage_Headers

The **GetOrganizationRelationshipSettingsResponseMessage_Headers** WSDL message specifies the SOAP header for a **GetOrganizationRelationshipSettings** operation (section [3.1.4.3](#)) response. [<21>](#)

```

<wsdl:message name="GetOrganizationRelationshipSettingsResponseMessage_Headers">
  <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
</wsdl:message>

```

The **GetOrganizationRelationshipSettingsResponseMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|--------------------------|---|--|
| ServerVersionInfo | tns:ServerVersionInfo (section 2.2.3.1) | Contains the server version that processed the GetOrganizationRelationshipSettings operation request. |

3.1.4.3.2 Elements

The following table summarizes the set of XML schema element definitions that are specific to the **GetOrganizationRelationshipSettings** operation.

| Element name | Description |
|--|---|
| GetOrganizationRelationshipSettingsRequestMessage | Specifies a call to the server to request the organization relationship settings for the specified user. The GetOrganizationRelationshipSettingsResponseMessage response message contains the organizational |

| Element name | Description |
|---|--|
| | settings requested in this call. |
| GetOrganizationRelationshipSettingsRequest | Represents the parameters of a call to the GetOrganizationRelationshipSettings operation. |
| GetOrganizationRelationshipSettingsResponseMessage | Returns to the caller the organization relationship settings that were requested in the GetOrganizationRelationshipSettingsRequestMessage element call. |
| GetOrganizationRelationshipSettingsResponse | Represents the response to the GetOrganizationRelationshipSettings operation request. |
| OrganizationRelationshipSettingsCollection | Represents a list of organization relationships that match the request. |
| OrganizationRelationshipSettings | Represents the organizational relationship returned by the GetOrganizationalRelationshipSettings operation request. |

3.1.4.3.2.1 tns:GetOrganizationRelationshipSettingsRequestMessage Element

The **GetOrganizationRelationshipSettingsRequestMessage** element specifies a call to the server to request the organization relationship settings for the specified user. <22> The **GetOrganizationRelationshipSettingsResponseMessage** element, as specified in section [3.1.4.3.2.3](#), response contains the organizational settings requested in this call.

```
<xs:element name="GetOrganizationRelationshipSettingsRequestMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Request"
        type="tns:GetOrganizationRelationshipSettingsRequest"
        minOccurs="0"
        nillable="true"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetOrganizationRelationshipSettingsRequestMessage** element.

| Element name | Type | Description |
|----------------|---|---|
| Request | tns:GetOrganizationRelationshipSettingsRequest (section 3.1.4.3.3.1) | Specifies the GetOrganizationRelationshipSettings operation request. |

3.1.4.3.2.2 tns:GetOrganizationRelationshipSettingsRequest Element

The **GetOrganizationRelationshipSettingsRequest** element represents the parameters of a call to the **GetOrganizationRelationshipSettings** operation. [<23>](#)

```
<xs:element name="GetOrganizationRelationshipSettingsRequest"
  type="tns:GetOrganizationRelationshipSettingsRequest"
  nillable="true"
/>
```

3.1.4.3.2.3 tns:GetOrganizationRelationshipSettingsResponseMessage Element

The **GetOrganizationRelationshipSettingsResponseMessage** element returns to the caller the organization relationship settings that were requested in the **GetOrganizationRelationshipSettingsRequestMessage** element, as specified in section [3.1.4.3.2.1](#), call. [<24>](#)

```
<xs:element name="GetOrganizationRelationshipSettingsResponseMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Response"
        type="tns:GetOrganizationRelationshipSettingsResponse"
        minOccurs="0"
        nillable="true"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetOrganizationRelationshipSettingsResponseMessage** element.

| Element name | Type | Description |
|-----------------|--|---|
| Response | tns:GetOrganizationRelationshipSettingsResponse (section 3.1.4.3.3.2) | Specifies the response to a GetOrganizationRelationshipSettings operation request. |

3.1.4.3.2.4 tns:GetOrganizationRelationshipSettingsResponse Element

The **GetOrganizationRelationshipSettingsResponse** element represents the response to the **GetOrganizationRelationshipSettings** operation (section [3.1.4.3](#)). [<25>](#)

```
<xs:element name="GetOrganizationRelationshipSettingsResponse"
  type="tns:GetOrganizationRelationshipSettingsResponse"
  nillable="true"
/>
```

3.1.4.3.2.5 tns:OrganizationRelationshipSettingsCollection Element

The **OrganizationRelationshipSettingsCollection** element represents a list of organization relationships that match the query. [<26>](#)


```

<xs:element name="OrganizationRelationshipSettingsCollection"
  type="tns:OrganizationRelationshipSettingsCollection"
  nillable="true"
/>

```

3.1.4.3.2.6 tns:OrganizationRelationshipSettings Element

The **OrganizationRelationshipSettings** element represents the organizational relationship that is returned by the **GetOrganizationalRelationshipSettings** operation request.

```

<xs:element name="OrganizationRelationshipSettings"
  type="tns:OrganizationRelationshipSettings"
  nillable="true"
/>

```

3.1.4.3.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **GetOrganizationRelationshipSettings** operation.

| Complex type name | Description |
|--|--|
| GetOrganizationRelationshipSettingsRequest | Retrieves the specified settings for the organization relationship and contains the parameters of a call to the GetOrganizationRelationshipSettings operation (section 3.1.4.3). |
| GetOrganizationRelationshipSettingsResponse | Contains a response to a call to a GetOrganizationRelationshipSettings operation (section 3.1.4.3). |
| OrganizationRelationshipSettingsCollection | Represents a list of organization relationships that match the query. |
| OrganizationRelationshipSettings | Represents a list of organization relationships for the specified organization and SMTP addresses. |

3.1.4.3.3.1 tns:GetOrganizationRelationshipSettingsRequest Complex Type

The **GetOrganizationRelationshipSettingsRequest** complex type represents the parameters of a call to the **GetOrganizationRelationshipSettings** operation. The **GetOrganizationRelationshipSettingsRequest** complex type returns a **GetOrganizationRelationshipSettingsResponse** complex type, as specified in section [3.1.4.3.3.2](#), object that contains the requested domain settings. [<27>](#) The **GetOrganizationRelationshipSettingsRequest** complex type extends the **AutodiscoverRequest** complex type, as specified in section [3.1.4.4.3.2](#).

```

<xs:complexType name="GetOrganizationRelationshipSettingsRequest">
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverRequest"
    >
      <xs:sequence>

```

```

    <xs:element name="Domains"
      type="tns:Domains"
      nillable="true"
    />
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **GetOrganizationRelationshipSettingsRequest** complex type.

| Element name | Type | Description |
|----------------|---|---|
| Domains | tns:Domains (section 2.2.4.2) | Specifies the domains for which the Autodiscover service is to be run and that are to be used in a query. |

3.1.4.3.3.2 tns:GetOrganizationRelationshipSettingsResponse Complex Type

The **GetOrganizationRelationshipSettingsResponse** complex type represents a response to a call to the **GetOrganizationRelationshipSettings** operation. [28](#) The **GetOrganizationRelationshipSettingsResponse** complex type extends the **AutodiscoverResponse** complex type, as specified in section [3.1.4.4.3.6](#).

```

<xs:complexType name="GetOrganizationRelationshipSettingsResponse">
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverResponse"
    >
      <xs:sequence>
        <xs:element name="OrganizationRelationshipSettingsCollection"
          type="tns:OrganizationRelationshipSettingsCollection"
          minOccurs="0"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **GetOrganizationRelationshipSettingsResponse** complex type.

| Element name | Type | Description |
|---|--|---|
| OrganizationRelationshipSettingsCollection | tns:OrganizationRelationshipSettingsCollection (section 3.1.4.3.3.3) | Specifies a list of organization relationship settings that |

| Element name | Type | Description |
|--------------|------|------------------|
| | | match the query. |

3.1.4.3.3 tns:OrganizationRelationshipSettingsCollection Complex Type

The **OrganizationRelationshipSettingsCollection** complex type represents a list of organization relationships that match the query. [<29>](#)

```
<xs:complexType name="OrganizationRelationshipSettingsCollection">
  <xs:sequence>
    <xs:element name="OrganizationRelationshipSettings"
      type="tns:OrganizationRelationshipSettings"
      minOccurs="0"
      maxOccurs="unbounded"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **OrganizationRelationshipSettingsCollection** complex type.

| Element name | Type | Description |
|---|---|--|
| OrganizationRelationshipSettings | tns:OrganizationRelationshipSettings (section 3.1.4.3.3.4) | Represents the organization relationships. |

3.1.4.3.4 tns:OrganizationRelationshipSettings Complex Type

The **OrganizationRelationshipSettings** complex type represents the list of organization relationships for the specified organization and SMTP addresses. [<30>](#)

```
<xs:complexType name="OrganizationRelationshipSettings">
  <xs:sequence>
    <xs:element name="DeliveryReportEnabled"
      type="xs:boolean"
    />
    <xs:element name="DomainNames"
      type="tns:Domains"
      nillable="true"
    />
    <xs:element name="FreeBusyAccessEnabled"
      type="xs:boolean"
    />
    <xs:element name="FreeBusyAccessLevel"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="MailTipsAccessEnabled"
      type="xs:boolean"
    />
  </xs:sequence>
</xs:complexType>
```

```

<xs:element name="MailTipsAccessLevel"
  type="xs:string"
  nillable="true"
/>
<xs:element name="MailboxMoveEnabled"
  type="xs:boolean"
/>
<xs:element name="Name"
  type="xs:string"
  nillable="true"
/>
<xs:element name="TargetApplicationUri"
  type="xs:anyURI"
  nillable="true"
/>
<xs:element name="TargetAutodiscoverEpr"
  type="xs:anyURI"
  nillable="true"
/>
<xs:element name="TargetSharingEpr"
  type="xs:anyURI"
  nillable="true"
/>
</xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **OrganizationRelationshipSettings** complex type.

| Element name | Type | Description |
|------------------------------|--|--|
| DeliveryReportEnabled | xs:boolean [XMLSCHEMA2] | Specifies whether delivery receipt is enabled. |
| DomainNames | tns:Domains (section 2.2.4.2) | Specifies the domain names collection. |
| FreeBusyAccessEnabled | xs:boolean | Specifies whether free/busy status is shared. |
| FreeBusyAccessLevel | xs:string [XMLSCHEMA2] | Specifies the free/busy status level that can be shared out of the organization. MUST be one of the following values, "None": No calendar sharing with free/busy status. "AvailabilityOnly": Calendar sharing with free/busy status. "LimitedDetails": Calendar sharing with free/busy status plus subject and location. |
| MailTipsAccessEnabled | xs:boolean | Specifies whether mail tips is shared. |
| MailTipsAccessLevel | xs:string | Specifies the mail tips access level that can be shared out of the organization. MUST be one of the following values, "None": No mail tips access. "Limited": Limited mail tips access "All": All mail tips. |
| MailboxMoveEnabled | xs:boolean | Specifies whether mailbox move is enabled. |
| Name | xs:string | Specifies the name of the organization relationship. |
| TargetApplicationUri | xs:anyURI [XMLSCHEMA2] | Specifies the target application URI. |

| Element name | Type | Description |
|------------------------------|------------------|--|
| TargetAutodiscoverEpr | xs:anyURI | Specifies the endpoint reference to this protocol in the partner organization. |
| TargetSharingEpr | xs:anyURI | Specifies the endpoint reference to the partner organization. |

3.1.4.3.4 Simple Types

None.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 GetUserSettings

The **GetUserSettings** operation retrieves the specified settings for a specified user.

The following is the WSDL port type specification of the operation.

```
<wsdl:operation name="GetUserSettings">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/
    Autodiscover/Autodiscover/GetUserSettings"
    name="GetUserSettingsRequestMessage"
    message="tns:GetUserSettingsRequestMessage" />
  <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/
    Autodiscover/Autodiscover/GetUserSettingsResponse"
    name="GetUserSettingsResponseMessage"
    message="tns:GetUserSettingsResponseMessage" />
</wsdl:operation>
```

The following is the WSDL binding specification of the operation

```
<wsdl:operation name="GetUserSettings">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetUserSettings" style="document" />
  <wsdl:input name="GetUserSettingsRequestMessage">
    <soap:header message="tns:GetUserSettingsRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetUserSettingsResponseMessage">
    <soap:header message="tns:GetUserSettingsResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
```

```
</wsdl:operation>
```

The protocol client sends a **GetUserSettingsRequestMessage** request WSDL message and the protocol server responds with a **GetUserSettingsResponseMessage** response WSDL message.

The **GetUserSettings** operation enables the client to request specific user configuration settings by passing in the user names as simple strings, and to receive results as a simple dictionary of string name/value pairs.

3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to the **GetUserSettings** operation.

| Message name | Description |
|---|--|
| GetUserSettingsRequestMessage | Retrieves the specified settings for a particular user. |
| GetUserSettingsRequestMessage_Headers | Specifies the SOAP header for a GetUserSettings operation request. |
| GetUserSettingsResponseMessage | Represents the response to a GetUserSettings operation call for a specified user. |
| GetUserSettingsResponseMessage_Headers | Specifies the SOAP header for a GetUserSettings operation response. |

3.1.4.4.1.1 tns:GetUserSettingsRequestMessage

The **GetUserSettingsRequestMessage** WSDL message specifies the SOAP message that represents a request to get the specified settings for a particular user.

```
<wsdl:message name="GetUserSettingsRequestMessage">  
  <wsdl:part name="parameters" element="tns:GetUserSettingsRequestMessage" />  
</wsdl:message>
```

The **GetUserSettingsRequestMessage** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetUserSettings>.

The one part of the **GetUserSettingsRequestMessage** message is described in the following table.

| Part name | Element/type | Description |
|-------------------|--|---|
| parameters | tns:GetUserSettingsRequestMessage element (section 3.1.4.4.2.1) | Specifies the SOAP body (the parameters) of a call to a GetUserSettings operation request. |

3.1.4.4.1.2 tns:GetUserSettingsRequestMessage_Headers

The **GetUserSettingsRequestMessage_Headers** WSDL message specifies the SOAP header for a **GetUserSettings** operation.

```
<wsdl:message name="GetUserSettingsRequestMessage_Headers">
  <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
</wsdl:message>
```

The **GetUserSettingsRequestMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|-------------------------------|--|---|
| RequestedServerVersion | tns:RequestedServerVersion element (section 3.1.4.4.2.8) | Specifies the server version that the GetUserSettings operation request targets. |

3.1.4.4.1.3 tns:GetUserSettingsResponseMessage

The **GetUserSettingsResponseMessage** WSDL message specifies the SOAP message that represents the server response to a **GetUserSettings** operation for a specified user.

```
<wsdl:message name="GetUserSettingsResponseMessage">
  <wsdl:part name="parameters" element="tns:GetUserSettingsResponseMessage" />
</wsdl:message>
```

The **GetUserSettingsResponseMessage** WSDL message is the response message for the SOAP action <http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetUserSettingsResponse>.

The one part of the **GetUserSettingsResponseMessage** WSDL message is described in the following table.

| Part name | Element/type | Description |
|-------------------|--|---|
| parameters | tns:GetUserSettingsResponseMessage element (section 3.1.4.4.2.2) | Specifies the response to a GetUserSettings operation. |

3.1.4.4.1.4 tns:GetUserSettingsResponseMessage_Headers

The **GetUserSettingsResponseMessage_Headers** WSDL message specifies the SOAP header for a **GetUserSettings** operation response.

```
<wsdl:message name="GetUserSettingsResponseMessage_Headers">
  <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
</wsdl:message>
```

The **GetUserSettingsResponseMessage_Headers** WSDL message contains one part, as described in the following table.

| Part name | Element/type | Description |
|--------------------------|---|--|
| ServerVersionInfo | tns:ServerVersionInfo (section 2.2.3.1) | Contains the server version that processed the GetUserSettings operation request. |

3.1.4.4.2 Elements

The following table summarizes the set of XML schema element definitions that are specific to the **GetUserSettings** operation.

| Element name | Description |
|---------------------------------------|---|
| GetUserSettingsRequestMessage | Specifies a call to the server, specifying the configuration settings to be returned along with the email address of the user whose settings are to be retrieved. |
| GetUserSettingsResponseMessage | Returns to the caller the user's configuration settings that were requested in the GetUserSettingsRequestMessage element call. |
| GetUserSettingsRequest | Represents the parameters of a call to a GetUserSettings operation. |
| GetUserSettingsResponse | Represents the response to a GetUserSettings operation for a specified user. |
| AutodiscoverRequest | Represents the base element of all Autodiscover requests. |
| Users | Represents a list of User elements. |
| User | Represents the user. |
| RequestedServerVersion | Specifies the server version that an Autodiscover operation targets. |
| AutodiscoverResponse | Represents the base class for all responses returned by the Autodiscover service. |
| ErrorCode | Defines the error codes that can be returned by the Autodiscover service. |
| ArrayOfUserResponse | Contains an array of UserResponse elements. |
| UserResponse | Contains the requested settings for the specified user. |
| UserSettingErrors | Contains error information for settings that could not be returned. |
| UserSettingError | Represents an error that occurred while retrieving a user setting in response to a GetUserSettings operation request. |
| UserSettings | Represents the base class for all user settings returned by the GetUserSettings operation request. |
| UserSetting | Represents the base class for all user settings returned by the GetUserSettings operation. |
| WebClientUrls | Represents the internal and external URLs of a web client. |
| WebClientUrl | Represents a URL of a web client. |
| ProtocolConnections | Represents a collection of protocol connections. |
| ProtocolConnection | Represents the email protocol connection settings for POP3, IMAP4, and SMTP. |

| Element name | Description |
|---|--|
| AlternateMailboxes | Represents a collection of alternate mailboxes. |
| AlternateMailbox | Represents an alternate mailbox, such as an archived mailbox which is a secondary mailbox that is associated with a user and is used to manage email storage limits. |
| ArrayOfFileExtension | Represents a list of valid file extensions for a document sharing location. <31> |
| DocumentSharingLocation | Represents a document sharing location and provides metadata for the location. <32> |
| DocumentSharingLocationCollectionSetting | Represents a collection of document sharing location settings. <33> |
| DocumentSharingLocations | Represents a list of document sharing locations. <34> |

3.1.4.4.2.1 tns:GetUserSettingsRequestMessage Element

The **GetUserSettingsRequestMessage** element prepares a call to the server, specifying the configuration settings to be returned along with the email address of the user whose settings are to be retrieved. The **GetUserSettingsResponseMessage** element, as specified in section [3.1.4.4.2.2](#), response contains the settings requested in this call.

```
<xs:element name="GetUserSettingsRequestMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Request"
        type="tns:GetUserSettingsRequest"
        nillable="true"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetUserSettingsRequestMessage** element.

| Element name | Type | Description |
|----------------|--|---|
| Request | tns:GetUserSettingsRequest (section 3.1.4.4.3.1) | Specifies the GetUserSettings operation request. |

3.1.4.4.2.2 tns:GetUserSettingsResponseMessage Element

The **GetUserSettingsResponseMessage** element returns to the caller the user's configuration settings that were requested in the **GetUserSettingsRequestMessage** element, as specified in section [3.1.4.4.2.1](#).

The name/value pair for each returned user setting is included in the response. The **GetUserSettings** operation, as specified in section [3.1.4.4](#), returns only the requested configuration settings if they exist on the server.

```
<xs:element name="GetUserSettingsResponseMessage">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="Response"
        type="tns:GetUserSettingsResponse"
        nillable="true"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

The following table lists the child elements of the **GetUserSettingsResponseMessage** element.

| Element name | Type | Description |
|-----------------|---|---|
| Response | tns:GetUserSettingsResponse (section 3.1.4.4.3.5) | Specifies the response to a GetUserSettings operation request. |

3.1.4.4.2.3 tns:GetUserSettingsRequest Element

The **GetUserSettingsRequest** element represents the parameters of a call to a **GetUserSettings** operation.

```
<xs:element name="GetUserSettingsRequest"
  type="tns:GetUserSettingsRequest"
  nillable="true"
/>
```

3.1.4.4.2.4 tns:GetUserSettingsResponse Element

The **GetUserSettingsResponse** element represents the response to the **GetUserSettings** operation for a specified user.

```
<xs:element name="GetUserSettingsResponse"
  type="tns:GetUserSettingsResponse"
  nillable="true"
/>
```

3.1.4.4.2.5 tns:AutodiscoverRequest Element

The **AutodiscoverRequest** element represents the base element of all Autodiscover requests.

```
<xs:element name="AutodiscoverRequest"
  type="tns:AutodiscoverRequest"
  nillable="true"
/>
```

3.1.4.4.2.6 tns:Users Element

The **Users** element represents a list of **User** elements, as specified in section [3.1.4.4.2.7](#), each of which includes an email address.

```
<xs:element name="Users"
  type="tns:Users"
  nillable="true"
/>
```

3.1.4.4.2.7 tns:User Element

The **User** element represents the user.

```
<xs:element name="User"
  type="tns:User"
  nillable="true"
/>
```

3.1.4.4.2.8 tns:RequestedServerVersion Element

The **RequestedServerVersion** element specifies the server version that an Autodiscover method call targets.

```
<xs:element name="RequestedServerVersion">
  <xs:simpleType>
    <xs:restriction
      base="tns:ExchangeVersion"
    />
  </xs:simpleType>
</xs:element>
```

3.1.4.4.2.9 tns:AutodiscoverResponse Element

The **AutodiscoverResponse** element represents the base class for all responses returned by the Autodiscover service. The **AutodiscoverResponse** element includes the **ErrorCode** simple type, as specified in section [3.1.4.4.2.10](#), and the **ErrorMessage** element.

```
<xs:element name="AutodiscoverResponse"
  type="tns:AutodiscoverResponse"
  nillable="true"
/>
```

3.1.4.4.2.10 tns:ErrorCode Element

The **ErrorCode** element defines the error codes that can be returned by the Autodiscover service.

```
<xs:element name="ErrorCode"
```

```
    type="tns:ErrorCode"
    nillable="true"
  />
```

3.1.4.4.2.11 tns:ArrayOfUserResponse Element

The **ArrayOfUserResponse** element contains an array of **UserResponse** elements, as specified in section [3.1.4.4.2.12](#), each of which contains the requested settings for a specified user.

```
<xs:element name="ArrayOfUserResponse"
  type="tns:ArrayOfUserResponse"
  nillable="true"
/>
```

3.1.4.4.2.12 tns:UserResponse Element

The **UserResponse** element contains the requested settings for a specified user.

```
<xs:element name="UserResponse"
  type="tns:UserResponse"
  nillable="true"
/>
```

3.1.4.4.2.13 tns:UserSettingErrors Element

The **UserSettingErrors** element contains error information for settings that could not be returned.

```
<xs:element name="UserSettingErrors"
  type="tns:UserSettingErrors"
  nillable="true"
/>
```

3.1.4.4.2.14 tns:UserSettingError Element

The **UserSettingError** element represents an error that occurred while retrieving a user setting in response to a **GetUserSettings** operation request.

```
<xs:element name="UserSettingError"
  type="tns:UserSettingError"
  nillable="true"
/>
```

3.1.4.4.2.15 tns:UserSettings Element

The **UserSettings** element represents a collection of **UserSetting** elements, as specified in section [3.1.4.4.2.16](#), that are returned by the **GetUserSettings** operation request.

```
<xs:element name="UserSettings"
  type="tns:UserSettings"
/>
```

```
nillable="true"
/>
```

3.1.4.4.2.16 tns:UserSetting Element

The **UserSetting** element represents the user setting that is returned by the **GetUserSettings** operation.

```
<xs:element name="UserSetting"
  type="tns:UserSetting"
  nillable="true"
/>
```

3.1.4.4.2.17 tns:WebClientUrls Element

The **WebClientUrls** element represents the internal and external URLs of a web client.

```
<xs:element name="WebClientUrls"
  type="tns:WebClientUrls"
  nillable="true"
/>
```

3.1.4.4.2.18 tns:WebClientUrl Element

The **WebClientUrl** element represents a URL of a web client.

```
<xs:element name="WebClientUrl"
  type="tns:WebClientUrl"
  nillable="true"
/>
```

3.1.4.4.2.19 tns:ProtocolConnections Element

The **ProtocolConnections** element represents the collection of protocol connections.

```
<xs:element name="ProtocolConnections"
  type="tns:ProtocolConnections"
  nillable="true"
/>
```

3.1.4.4.2.20 tns:ProtocolConnection Element

The **ProtocolConnection** element represents the email protocol connection settings for POP3, IMAP4, and SMTP.

```
<xs:element name="ProtocolConnection"
  type="tns:ProtocolConnection"
  nillable="true"
/>
```

3.1.4.4.2.21 tns:AlternateMailboxes Element

The **AlternateMailboxes** element represents a collection of alternate mailboxes.

```
<xs:element name="AlternateMailboxes"
  type="tns:AlternateMailboxes"
  nillable="true"
/>
```

3.1.4.4.2.22 tns:AlternateMailbox Element

The **AlternateMailbox** element represents an alternate mailbox, such as an archived mailbox.

```
<xs:element name="AlternateMailbox"
  type="tns:AlternateMailbox"
  nillable="true"
/>
```

An alternate mailbox corresponds to an external mailbox of the user's, such as a personal POP3/IMAP4 account, a webmail account, or an archived account.

3.1.4.4.2.23 tns:ArrayOfFileExtension Element

The **ArrayOfFileExtension** element represents a list of file extensions that are valid in a document sharing location. [<35>](#)

```
<xs:element name="ArrayOfFileExtension"
  type="tns:ArrayOfFileExtension"
/>
```

3.1.4.4.2.24 tns:DocumentSharingLocation Element

The **DocumentSharingLocation** element represents a document sharing location and provides configuration information for the location. [<36>](#)

```
<xs:element name="DocumentSharingLocation"
  type="tns:DocumentSharingLocation"
/>
```

3.1.4.4.2.25 tns:DocumentSharingLocationCollectionSetting Element

The **DocumentSharingLocationCollectionSetting** element represents a user setting, the value for which is a collection of sharing locations for documents. [<37>](#)

```
<xs:element name="DocumentSharingLocationCollectionSetting"
  type="tns:DocumentSharingLocationCollectionSetting"
/>
```

3.1.4.4.2.26 tns:DocumentSharingLocations Element

The **DocumentSharingLocations** element represents a list of sharing locations. <38>

```
<xs:element name="DocumentSharingLocationCollectionSetting"
  type="tns:DocumentSharingLocationCollectionSetting"
/>
```

3.1.4.4.3 Complex Types

The following table summarizes the set of XML schema complex type definitions that are specific to the **GetUserSettings** operation.

| Complex type name | Description |
|--------------------------------------|---|
| GetUserSettingsRequest | Specifies a request message for the GetUserSettings operation. Retrieves the specified settings for one or more users. |
| AutodiscoverRequest | Represents the base class for all requests made to the Autodiscover service. |
| Users | Represents a collection of User elements denoting users whose settings are to be retrieved. |
| User | Represents a user whose settings are to be retrieved. The user is identified by SMTP address or legacy DN. |
| GetUserSettingsResponse | Represents a response that contains an array of user responses. |
| AutodiscoverResponse | Represents the base class for all responses returned by the Autodiscover service. |
| UserResponse | Represents a response to a GetUserSettings operation for a specified user. The server returns only the configuration settings requested by the client. |
| UserSettingErrors | Represents a collection of UserSettingError elements that contains error information for settings that could not be returned. |
| ArrayOfUserResponse | Represents an array of UserResponse elements that contains the responses for each specified user. |
| UserSettingError | Represents a user setting error that resulted from a GetUserSettings operation request. |
| UserSettings | Represents a collection of UserSetting elements (section 3.1.4.4.2.16) all user settings that are returned by the GetUserSettings operation. |
| UserSetting | Represents the user settings to be returned by the GetUserSettings operation. |
| StringSetting | Represents a user setting value. |
| WebClientUrlCollectionSetting | Represents a collection of WebClientUrls elements. |
| WebClientUrls | Represents a collection of WebClientUrl elements that denote the server's web clients. |

| Complex type name | Description |
|---|---|
| WebClientUrl | Represents the URL of the server's web client. |
| ProtocolConnectionCollectionSetting | Represents a collection of ProtocolConnection elements. |
| ProtocolConnections | Represents a collection of ProtocolConnection elements that denote the internal and external protocol connections for the server's web client. |
| ProtocolConnection | Represents the email protocol connection settings for POP3, IMAP4, and SMTP protocols. |
| AlternateMailboxCollectionSetting | Represents a collection of AlternateMailboxes elements. |
| AlternateMailboxes | Represents a collection of AlternateMailbox elements. |
| AlternateMailbox | Represents an alternate mailbox. |
| ArrayOfFileExtension | Represents a list of valid file extensions for a document sharing location. <39> |
| DocumentSharingLocation | Represents a document sharing location and provides metadata for the location. <40> |
| DocumentSharingLocationCollectionSetting | Represents a collection of document sharing location settings. <41> |
| DocumentSharingLocations | Represents a list of document sharing locations. <42> |

3.1.4.4.3.1 tns:GetUserSettingsRequest Complex Type

The **GetUserSettingsRequest** complex type retrieves the specified settings for one or more users. This complex type contains the email addresses for the specified users, and for each such user it returns a **UserResponse** complex type, as specified in section [3.1.4.4.3.7](#), object that contains the requested settings. The **GetUserSettingsRequest** complex type extends the **AutodiscoverRequest** complex type, as specified in section [3.1.4.4.3.2](#).

```

<xs:complexType name="GetUserSettingsRequest"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverRequest"
    >
      <xs:sequence>
        <xs:element name="Users"
          type="tns:Users"
          nillable="true"
        />
        <xs:element name="RequestedSettings"
          type="tns:RequestedSettings"
          nillable="true"
        />
        <xs:element name="RequestedVersion"
          type="tns:ExchangeVersion"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </complexContent>
</complexType>

```



```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **GetUserSettingsRequest** complex type.

| Element name | Type | Description |
|--------------------------|---|--|
| Users | tns:Users (section 3.1.4.4.3.3) | Specifies the email addresses of the users whose settings are to be retrieved. |
| RequestedSettings | tns:RequestedSettings (section 2.2.4.3) | Specifies the configuration settings being requested. |
| RequestedVersion | tns:ExchangeVersion (section 3.1.4.4.4.1) | Specifies the specific server version that the provider would prefer to use. |

3.1.4.4.3.2 tns:AutodiscoverRequest Complex Type

The **AutodiscoverRequest** complex type represents the base class for all requests made to the Autodiscover service.

```

<xs:complexType name="AutodiscoverRequest">
  <xs:sequence />
</xs:complexType>

```

The **GetDomainSettingsRequest** complex type, as specified in section [3.1.4.1.3.1](#), **GetUserSettingsRequest** complex type, as specified in section [3.1.4.4.3.1](#), **GetOrganizationRelationshipSettingsRequest** complex type, as specified in section [3.1.4.3.3.1](#), and **GetFederationInformationRequest** complex type, as specified in section [3.1.4.2.3.1](#), extend the **AutodiscoverRequest** complex type.

3.1.4.4.3.3 tns:Users Complex Type

The **Users** complex type represents a collection of **User** elements, as specified in section [3.1.4.4.2.7](#), that denote users whose settings are to be retrieved.

```

<xs:complexType name="Users">
  <xs:sequence>
    <xs:element name="User"
      type="tns:User"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **Users** complex type.

| Element name | Type | Description |
|--------------|--|--|
| User | tns:User (section 3.1.4.4.3.4) | Specifies the user whose settings are to be retrieved. |

3.1.4.4.3.4 tns:User Complex Type

The **User** complex type represents a user whose settings are to be retrieved. The user is identified by SMTP address or legacy DN.

```
<xs:complexType name="User">
  <xs:sequence>
    <xs:element name="Mailbox"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **User** complex type.

| Element name | Type | Description |
|----------------|--|---|
| Mailbox | xs:string [XMLSCHEMA2] | Specifies the email address of the user whose settings are to be retrieved. |

The **GetUserSettings** operation uses the specified user's email address to discover that user's mailbox. The **User** element **MUST** be present.

3.1.4.4.3.5 tns:GetUserSettingsResponse Complex Type

The **GetUserSettingsResponse** complex type represents a response that contains an array of user responses. A single user response contains the configuration settings for a specific user. The **GetUserSettingsResponse** complex type returns to the caller the user's configuration settings that were requested in the **GetUserSettingRequest** complex type, as specified in section [3.1.4.4.3.1](#). The **GetUserSettingsResponse** complex type extends the **AutodiscoverResponse** complex type, as specified in section [3.1.4.4.3.6](#).

The name-value pairs for each returned user setting are included in the response. The **GetUserSettings** operation returns only the requested configuration settings, if they exist on the server.

```
<xs:complexType name="GetUserSettingsResponse"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverResponse"
    >
      <xs:sequence>
        <xs:element name="UserResponses"
          type="tns:ArrayOfUserResponse"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

        minOccurs="0"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **GetUserSettingsResponse** complex type.

| Element name | Type | Description |
|----------------------|---|---------------------------------------|
| UserResponses | tns:ArrayOfUserResponse (section 3.1.4.4.3.9) | Specifies the response for each user. |

3.1.4.4.3.6 tns:AutodiscoverResponse Complex Type

The **AutodiscoverResponse** complex type represents the base class for all responses returned by the Autodiscover service. It includes the **ErrorCode** and **ErrorMessage** elements.

```

<xs:complexType name="AutodiscoverResponse">
  <xs:sequence>
    <xs:element name="ErrorCode"
      type="tns:ErrorCode"
      minOccurs="0"
    />
    <xs:element name="ErrorMessage"
      type="xs:string"
      nillable="true"
      minOccurs="0"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **AutodiscoverResponse** complex type.

| Element name | Type | Description |
|---------------------|---|--|
| ErrorCode | tns:ErrorCode (section 3.1.4.4.4.2) | Specifies the error code that is associated with this response. |
| ErrorMessage | xs:string [XMLSCHEMA2] | Specifies the error message that is associated with this response. |

The **GetUserSettingsResponse** complex type, as specified in section [3.1.4.4.3.5](#), **UserResponse** complex type, as specified in section [3.1.4.4.3.7](#), **GetDomainSettingsResponse** complex type, as specified in section [3.1.4.1.3.2](#), **DomainResponse** complex type, as specified in section [3.1.4.1.3.4](#), **GetOrganizationRelationshipSettingsResponse** complex type, as specified in section [3.1.4.3.3.2](#), and **GetFederationInformationResponse** complex type, as specified in section [3.1.4.2.3.2](#) extend the **AutodiscoverResponse** complex type.

3.1.4.4.3.7 tns:UserResponse Complex Type

The **UserResponse** complex type represents a response to a **GetUserSettings** operation for a specified user. The server returns only the configuration settings requested by the client. The

UserResponse complex type extends the **AutodiscoverResponse** complex type, as specified in section [3.1.4.4.3.6](#).

```
<xs:complexType name="UserResponse"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:AutodiscoverResponse"
    >
      <xs:sequence>
        <xs:element name="RedirectTarget"
          type="xs:string"
          nillable="true"
          minOccurs="0"
        />
        <xs:element name="UserSettingErrors"
          type="tns:UserSettingErrors"
          nillable="true"
          minOccurs="0"
        />
        <xs:element name="UserSettings"
          type="tns:UserSettings"
          nillable="true"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **UserResponse** complex type.

| Element name | Type | Description |
|--------------------------|---|--|
| RedirectTarget | xs:string [XMLSCHEMA2] | Specifies the target of the redirection URL or email address. |
| UserSettingErrors | tns:UserSettingErrors (section 3.1.4.4.3.8) | Specifies the error information for settings that could not be returned. |
| UserSettings | tns:UserSettings (section 3.1.4.4.3.11) | Specifies the requested settings for the user. |

3.1.4.4.3.8 tns:UserSettingErrors Complex Type

The **UserSettingErrors** complex type represents a collection of **UserSettingError** elements, as specified in section [3.1.4.4.2.16](#), that contains error information for settings that could not be returned.

```
<xs:complexType name="UserSettingErrors">
  <xs:sequence>
    <xs:element name="UserSettingError"
      type="tns:UserSettingError"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

```

/>
</xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **UserSettingErrors** complex type.

| Element name | Type | Description |
|-------------------------|---|---|
| UserSettingError | tns:UserSettingError (section 3.1.4.4.3.10) | Specifies an error from a GetUserSettings operation request. |

3.1.4.4.3.9 tns:ArrayOfUserResponse Complex Type

The **ArrayOfUserResponse** complex type represents an array of **UserResponse** elements, as specified in section [3.1.4.4.2.12](#), that contains the responses for the specified user.

```

<xs:complexType name="ArrayOfUserResponse">
  <xs:sequence>
    <xs:element name="UserResponse"
      type="tns:UserResponse"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **ArrayOfUserResponse** complex type.

| Element name | Type | Description |
|---------------------|--|--|
| UserResponse | tns:UserResponse (section 3.1.4.4.3.7) | Specifies a response from a GetUserSettings operation for a specified user. |

3.1.4.4.3.10 tns:UserSettingError Complex Type

The **UserSettingError** complex type represents an error that occurred while retrieving a user setting in response to a **GetUserSettings** operation request.

```

<xs:complexType name="UserSettingError">
  <xs:sequence>
    <xs:element name="ErrorCode"
      type="tns:ErrorCode"
    />
    <xs:element name="ErrorMessage"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="SettingName"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>

```

```

    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **UserSettingError** complex type.

| Element name | Type | Description |
|---------------------|---|--|
| ErrorCode | tns:ErrorCode (section 3.1.4.4.4.2) | Specifies the error code that is associated with the specified request. |
| ErrorMessage | xs:string [XMLSCHEMA2] | Specifies the error message that is associated with the specified request. |
| SettingName | xs:string | Specifies the name of the specified setting. |

3.1.4.4.3.11 tns:UserSettings Complex Type

The **UserSettings** complex type represents a collection of **UserSetting** elements, as specified in section [3.1.4.4.2.16](#), for all user settings returned by the **GetUserSettings** operation.

```

<xs:complexType name="UserSettings">
  <xs:sequence>
    <xs:element name="UserSetting"
      type="tns:UserSetting"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **UserSettings** complex type.

| Element name | Type | Description |
|--------------------|--|--|
| UserSetting | tns:UserSetting (section 3.1.4.4.3.12) | Specifies the user settings that are returned by the GetUserSettings operation. |

3.1.4.4.3.12 tns:UserSetting Complex Type

The **UserSetting** complex type represents the user settings to be returned by the **GetUserSettings** operation.

```

<xs:complexType name="UserSetting">
  <xs:sequence>
    <xs:element name="Name"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>

```

```
</xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **UserSetting** complex type.

| Element name | Type | Description |
|--------------|---|--|
| Name | xs:string [XMLSCHEMA2] | Specifies the name of the specified setting. |

The **ProtocolConnectionCollectionSetting** complex type, as specified in section [3.1.4.4.3.17](#), **StringSetting** complex type, as specified in section [3.1.4.4.3.13](#), **WebClientUrlCollectionSetting** complex type, as specified in section [3.1.4.4.3.14](#), **AlternateMailboxCollectionSetting** complex type, as specified in section [3.1.4.4.3.20](#), and **DocumentSharingLocationCollectionSetting** complex type, as specified in section [3.1.4.4.3.25](#), extend the **UserSetting** complex type.

3.1.4.4.3.13 tns:StringSetting Complex Type

The **StringSetting** complex type represents a user setting value. The **StringSetting** complex type extends the **UserSetting** complex type, as specified in section [3.1.4.4.3.4](#).

```
<xs:complexType name="StringSetting"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:UserSetting"
    >
      <xs:sequence>
        <xs:element name="Value"
          type="xs:string"
          nillable="true"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **StringSetting** complex type.

| Element name | Type | Description |
|--------------|---|---|
| Value | xs:string [XMLSCHEMA2] | Specifies the value of the specified setting. |

3.1.4.4.3.14 tns:WebClientUrlCollectionSetting Complex Type

The **WebClientUrlCollectionSetting** complex type represents a collection of **WebClientUrls** elements, as specified in section [3.1.4.4.2.17](#). The **WebClientUrlCollectionSetting** complex type extends the **UserSetting** complex type, as specified in section [3.1.4.4.3.12](#).

```
<xs:complexType name="WebClientUrlCollectionSetting"
```

```

mixed="false"
>
<xs:complexContent
mixed="false"
>
  <xs:extension
base="tns:UserSetting"
  >
    <xs:sequence>
      <xs:element name="WebClientUrls"
type="tns:WebClientUrls"
nillable="true"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **WebClientUrlCollectionSetting** complex type.

| Element name | Type | Description |
|----------------------|--|--------------------------------|
| WebClientUrls | tns:WebClientUrls (section 3.1.4.4.3.15) | Specifies the web client URLs. |

3.1.4.4.3.15 tns:WebClientUrls Complex Type

The **WebClientUrls** complex type represents a collection of **WebClientUrl** elements, as specified in section [3.1.4.4.2.18](#), that specify the internal and external URLs of the server's web client.

```

<xs:complexType name="WebClientUrls">
  <xs:sequence>
    <xs:element name="WebClientUrl"
type="tns:WebClientUrl"
nillable="true"
minOccurs="0"
maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **WebClientUrls** complex type.

| Element name | Type | Description |
|---------------------|---|---|
| WebClientUrl | tns:WebClientUrl (section 3.1.4.4.3.16) | Specifies the URL of the server's web client. |

3.1.4.4.3.16 tns:WebClientUrl Complex Type

The **WebClientUrl** complex type represents the URL of the server's web client.

```

<xs:complexType name="WebClientUrl">
  <xs:sequence>

```



```

    <xs:element name="AuthenticationMethods"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="Url"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **WebClientUrl** complex type.

| Element name | Type | Description |
|------------------------------|---|---|
| AuthenticationMethods | xs:string [XMLSCHEMA2] | Specifies the authentication methods. |
| Url | xs:string | Specifies the URL of the server's web client. |

The **WebClientUrl** can be used to retrieve data from a web service.

3.1.4.4.3.17 tns:ProtocolConnectionCollectionSetting Complex Type

The **ProtocolConnectionCollectionSetting** complex type represents a collection of **ProtocolConnection** elements, as specified in section [3.1.4.4.2.20](#). The **ProtocolConnectionCollectionSetting** complex type extends the **UserSetting** complex type, as specified in section [3.1.4.4.3.4](#).

```

<xs:complexType name="ProtocolConnectionCollectionSetting"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:UserSetting"
    >
      <xs:sequence>
        <xs:element name="ProtocolConnections"
          type="tns:ProtocolConnections"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **ProtocolConnectionCollectionSetting** complex type.

| Element name | Type | Description |
|----------------------------|--|-------------------------------------|
| ProtocolConnections | tns:ProtocolConnections (section 3.1.4.4.3.18) | Specifies the protocol connections. |

3.1.4.4.3.18 tns:ProtocolConnections Complex Type

The **ProtocolConnections** complex type represents a collection of **ProtocolConnection** elements, as specified in section [3.1.4.4.2.20](#), that specify the internal and external protocol connection of the server's web client.

```
<xs:complexType name="ProtocolConnections">
  <xs:sequence>
    <xs:element name="ProtocolConnection"
      type="tns:ProtocolConnection"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **ProtocolConnections** complex type.

| Element name | Type | Description |
|---------------------------|---|---|
| ProtocolConnection | tns:ProtocolConnection (section 3.1.4.4.3.19) | Specifies the protocol connection of the server's web client. |

3.1.4.4.3.19 tns:ProtocolConnection Complex Type

The **ProtocolConnection** complex type represents the email protocol connection settings for POP3, IMAP4, and SMTP.

```
<xs:complexType name="ProtocolConnection">
  <xs:sequence>
    <xs:element name="Hostname"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="Port"
      type="xs:int"
    />
    <xs:element name="EncryptionMethod"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **ProtocolConnection** complex type.

| Element name | Type | Description |
|-------------------------|--|---|
| Hostname | xs:string [XMLSCHEMA2] | Specifies the host name portion of the computer's full name. |
| Port | xs:int [XMLSCHEMA2] | Specifies the port number to be used for the specified protocol. |
| EncryptionMethod | xs:string | Specifies the cryptographic method to be used for the specified protocol. |

3.1.4.4.3.20 tns:AlternateMailboxCollectionSetting Complex Type

The **AlternateMailboxCollectionSetting** complex type represents a collection of **AlternateMailboxes** elements, as specified in section [3.1.4.4.2.21](#). The **AlternateMailboxCollectionSetting** complex type extends the **UserSetting** complex type, as specified in section [3.1.4.4.3.12](#).

```
<xs:complexType name="AlternateMailboxCollectionSetting"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="tns:UserSetting"
    >
      <xs:sequence>
        <xs:element name="AlternateMailboxes"
          type="tns:AlternateMailboxes"
          nillable="true"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **AlternateMailboxCollectionSetting** complex type.

| Element name | Type | Description |
|---------------------------|---|---|
| AlternateMailboxes | tns:AlternateMailboxes (section 3.1.4.4.3.21) | Represents a collection of alternate mailboxes. |

3.1.4.4.3.21 tns:AlternateMailboxes Complex Type

The **AlternateMailboxes** complex type represents a collection of **AlternateMailbox** elements, as specified in section [3.1.4.4.2.22](#).

```
<xs:complexType name="AlternateMailboxes">
  <xs:sequence>
    <xs:element name="AlternateMailbox"
      type="tns:AlternateMailbox"
      nillable="true"
      minOccurs="0"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **AlternateMailboxes** complex type.

| Element name | Type | Description |
|-------------------------|---|---------------------------------|
| AlternateMailbox | tns:AlternateMailbox (section 3.1.4.4.3.22) | Specifies an alternate mailbox. |

3.1.4.4.3.22 tns:AlternateMailbox Complex Type

The **AlternateMailbox** complex type represents an alternate mailbox.

```
<xs:complexType name="AlternateMailbox">
  <xs:sequence>
    <xs:element name="Type"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="DisplayName"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="LegacyDN"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="Server"
      type="xs:string"
      nillable="true"
    />
    <xs:element name="SmtpAddress"
      type="xs:string"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **AlternateMailbox** complex type.

| Element name | Type | Description |
|--------------------|---|---|
| Type | xs:string [XMLSCHEMA2] | Specifies the alternate mailbox type. |
| DisplayName | xs:string | Specifies the alternate mailbox display name. |
| LegacyDN | xs:string | Specifies the alternate mailbox legacy DN. |
| Server | xs:string | Specifies the alternate mailbox server. |
| SmtpAddress | xs:string | Specifies the alternate mailbox SMTP address. |

An alternate mailbox corresponds to a user's external mailbox, such as a personal POP3/IMAP4 account, a webmail account, or an archived account.

3.1.4.4.3.23 tns:ArrayOfFileExtension Complex Type

The **ArrayOfFileExtension** complex type represents a list of file extensions for a document sharing location. [<43>](#)

```
<xs:complexType name="ArrayOfFileExtension">
  <xs:sequence>
```

```

    <xs:element name="FileExtension"
      minOccurs="1" maxOccurs="unbounded"
      type="xs:string"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the `ArrayOfFileExtension` complex type.

| Element name | Type | Description |
|----------------------|-------------------------------|-------------------------------|
| FileExtension | xs:string [XMLSCHEMA2] | Specifies the file extension. |

3.1.4.4.3.24 tns:DocumentSharingLocation Complex Type

The **DocumentSharingLocation** complex type specifies location and metadata information for a document sharing location. <44>

```

<xs:complexType name="DocumentSharingLocation">
  <xs:sequence>
    <xs:element name="ServiceUrl" type="xs:string" />
    <xs:element name="LocationUrl" type="xs:string" />
    <xs:element name="DisplayName" type="xs:string" />
    <xs:element name="SupportedFileExtensions" type="tns:ArrayOfFileExtension" />
    <xs:element name="ExternalAccessAllowed" type="xs:boolean" />
    <xs:element name="AnonymousAccessAllowed" type="xs:boolean" />
    <xs:element name="CanModifyPermissions" type="xs:boolean" />
    <xs:element name="IsDefault" type="xs:boolean" />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **DocumentSharingLocation** complex type.

| Element name | Type | Description |
|--------------------------------|---|--|
| ServiceUrl | xs:string [XMLSCHEMA2] | Specifies the URL of the document sharing web service. |
| LocationUrl | xs:string | Specifies the URL of the document sharing location. |
| DisplayName | xs:string | Specifies the name of the document sharing location to use in the user interface. |
| SupportedFileExtensions | tns:ArrayOfFileExtension (section 3.1.4.4.3.23) | Specifies the file extensions that can be stored in the document sharing location. |
| ExternalAccessAllowed | xs:boolean [XMLSCHEMA2] | Specifies whether the document sharing location is available to outside connections. |
| AnonymousAccessAllowed | xs:boolean | Specifies whether access to the sharing location requires an authenticated user. |
| CanModifyPermissions | xs:boolean | Specifies whether the user can modify access permissions to the document |

| Element name | Type | Description |
|------------------|-------------------|---|
| | | sharing location. |
| IsDefault | xs:boolean | Specifies whether the document sharing location is the user's default sharing location. |

3.1.4.4.3.25 tns:DocumentSharingLocationCollectionSetting Complex Type

The **DocumentSharingLocationCollectionSetting** complex type represents a collection of **DocumentSharingLocations** elements, as specified in section [3.1.4.4.2.26](#). The **DocumentSharingLocationCollectionSetting** complex type extends the **UserSetting** complex type, as specified in section [3.1.4.4.3.12](#).<45>

```
<xs:complexType name="DocumentSharingLocationCollectionSetting">
  <xs:complexContent mixed="false">
    <xs:extension base="tns:UserSetting">
      <xs:sequence>
        <xs:element name="DocumentSharingLocations"
          type="tns:DocumentSharingLocations"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **DocumentSharingLocationSettings** complex type.

| Element name | Type | Description |
|---------------------------------|--|---|
| DocumentSharingLocations | tns:DocumentSharingLocations (section 3.1.4.4.3.26) | Specifies the location and metadata for a list of document sharing locations. |

3.1.4.4.3.26 tns:DocumentSharingLocations Complex Type

The **DocumentSharingLocations** complex type specifies a list of **DocumentSharingLocation** elements, as specified in section [3.1.4.4.2.24](#).<46>

```
<xs:complexType name="DocumentSharingLocations">
  <xs:sequence>
    <xs:element name="DocumentSharingLocation"
      type="tns:DocumentSharingLocation"
      minOccurs="0" maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **DocumentSharingLocations** complex type.

| Element name | Type | Description |
|--------------------------------|--|--|
| DocumentSharingLocation | tns:DocumentSharingLocation (section 3.1.4.4.3.24) | Specifies the location and metadata for a document sharing location. |

3.1.4.4.4 Simple Types

The following table summarizes the set of XML schema simple type definitions that are specific to the **GetUserSettings** operation.

| Simple type name | Description |
|------------------------|---|
| ExchangeVersion | Defines the server versions used with this protocol. |
| ErrorCode | Specifies the error codes that can be returned by the Autodiscover service. |

3.1.4.4.4.1 tns:ExchangeVersion Simple Type

The **ExchangeVersion** simple type that defines the server versions that are used with this protocol.

```
<xs:simpleType name="ExchangeVersion">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Exchange2010"
    />
    <xs:enumeration
      value="Exchange2010_SP1"
    />
    <xs:enumeration
      value="Exchange2010_SP2"
    />
    <xs:enumeration
      value="Exchange2013"
    />
    <xs:enumeration
      value="Exchange2013_SP1"
    />
    <xs:enumeration
      value="Exchange2016"
    />
  </xs:restriction>
</xs:simpleType>
```

The following table lists the values that are defined by the **ExchangeVersion** simple type.

| Value | Meaning |
|-------------------------|--|
| Exchange2010 | Specifies a version of the target web service schema. |
| Exchange2010_SP1 | Specifies a version of the target web service schema. <47> |
| Exchange2010_SP2 | Specifies a version of the target web service schema. <48> |

| Value | Meaning |
|-------------------------|---|
| Exchange2013 | Specifies a version of the target web service schema. .<49> |
| Exchange2013_SP1 | Specifies a version of the target web service schema. .<50> |
| Exchange2016 | Specifies a version of the target web service schema. .<51> |

3.1.4.4.2 tns:ErrorCode Simple Type

The **ErrorCode** simple type specifies the error codes that can be returned by the Autodiscover service.

```
<xs:simpleType name="ErrorCode">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="NoError"
    />
    <xs:enumeration
      value="RedirectAddress"
    />
    <xs:enumeration
      value="RedirectUrl"
    />
    <xs:enumeration
      value="InvalidUser"
    />
    <xs:enumeration
      value="InvalidRequest"
    />
    <xs:enumeration
      value="InvalidSetting"
    />
    <xs:enumeration
      value="SettingIsNotAvailable"
    />
    <xs:enumeration
      value="ServerBusy"
    />
    <xs:enumeration
      value="InvalidDomain"
    />
    <xs:enumeration
      value="NotFederated"
    />
    <xs:enumeration
      value="InternalServerError"
    />
  </xs:restriction>
</xs:simpleType>
```

The following table lists the values that are defined by the **ErrorCode** simple type.

| Value | Meaning |
|------------------------|---|
| NoError | Indicates that there was no error. |
| RedirectAddress | Indicates that the caller is to follow the email address redirection that was returned by |

| Value | Meaning |
|------------------------------|---|
| | the Autodiscover service. |
| RedirectUrl | Indicates that the caller is to follow the URL redirection that was returned by the Autodiscover service. |
| InvalidUser | Indicates that the user name that was passed in the request is invalid. |
| InvalidRequest | Indicates that the request is invalid. |
| InvalidSetting | Indicates that the specified setting is invalid. |
| SettingIsNotAvailable | Indicates that a specified setting is not available. |
| ServerBusy | Indicates that the server is too busy to process the request. |
| InvalidDomain | Indicates that the requested domain is not valid. |
| NotFederated | Indicates that the organization is not federated. |
| InternalServerError | Indicates that there is an internal server error. |

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

The examples in the following subsections show an autodiscovery request and response, using the **GetDomainSettings**, **GetFederationInformation**, and **GetUserSettings** operations, respectively. In the **GetDomainSettings** and **GetUserSettings** examples, only the specified settings are returned to the client.

4.1 GetDomainSettings Operation

The two examples in this section show how to construct the request XML and response XML for the **GetDomainSettings** operation.

To retrieve the specified domain settings, the client constructs the Autodiscover request XML and sends it to the server, as shown in the following example.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:a="http://schemas.microsoft.com/exchange/2010/Autodiscover"
  xmlns:wsa="http://www.w3.org/2005/08/addressing"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Header>
    <a:RequestedServerVersion>Exchange2010</a:RequestedServerVersion>
    <wsa:Action>http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodi
  </wsa:Action>
    <wsa:To>https://autodiscover.exchange.microsoft.com/autodiscover/autodisco
  </wsa:To>
  </soap:Header>
  <soap:Body>
    <a:GetDomainSettingsRequestMessage xmlns:a="http://schemas.microsoft.com/e
  </a:Request>
    <a:Domains>
      <a:Domain>Redmond</a:Domain>
    </a:Domains>
    <a:RequestedSettings>
      <a:Setting>ExternalEwsUrl</a:Setting>
    </a:RequestedSettings>
  </a:Request>
  </a:GetDomainSettingsRequestMessage>
</soap:Body>
</soap:Envelope>
</EwsLogEntry>
```

The server then constructs the Autodiscover response XML and sends it to the client, as shown in the following example.

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/" xmlns:a="http:
//www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action s:mustUnderstand="1">http://schemas.microsoft.com/exchange/2010/
  </a:Action>
    <h:ServerVersionInfo xmlns:h="http://schemas.microsoft.com/exchange/2010/A
  </h:ServerVersionInfo>
  </s:Header>
  <s:Body>
```

```

    <GetDomainSettingsResponseMessage xmlns="http://schemas.microsoft.com/exch
ange/2010/Autodiscover">
      <Response xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <ErrorCode>NoError</ErrorCode>
        <ErrorMessage />
        <DomainResponses>
          <DomainResponse>
            <ErrorCode>NoError</ErrorCode>
            <ErrorMessage>No error.</ErrorMessage>
            <DomainSettingErrors />
            <DomainSettings>
              <DomainSetting i:type="DomainStringSetting">
                <Name>ExternalEwsUrl</Name>
                <Value>https://emea.mail.microsoft.com/EWS/Exchange.asmx</Valu
e>
              </DomainSetting>
            </DomainSettings>
            <RedirectTarget i:nil="true" />
          </DomainResponse>
        </DomainResponses>
      </Response>
    </GetDomainSettingsResponseMessage>
  </s:Body>
</s:Envelope>

```

4.2 GetFederationInformation Operation

The two examples in this section show how to construct the request XML and response XML for the **GetFederationInformation** operation.

In the request, the caller is requesting domain information for the domain "contoso.com", as shown in the following example.

```

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:exm="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:ext="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:a="http://www.w3.org/2005/08/addressing"
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <a:RequestedServerVersion>Exchange2010</a:RequestedServerVersion>
    <a:MessageID>urn:uuid:6389558d-9e05-465e-ade9-aae14c4bcd10</a:MessageID>
    <a:Action
  soap:mustUnderstand="1">http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/
  GetFederationInformation</a:Action>
    <a:To soap:mustUnderstand="1">https://autodiscover.byfcxu-
  dom.extest.microsoft.com/autodiscover/autodiscover.svc</a:To>
    <a:ReplyTo>
      <a:Address>http://www.w3.org/2005/08/addressing/anonymous</a:Address>
    </a:ReplyTo>
  </soap:Header>
  <soap:Body>
    <GetFederationInformationRequestMessage
  xmlns="http://schemas.microsoft.com/exchange/2010/Autodiscover">
      <Request>
        <Domain>contoso.com</Domain>
      </Request>
    </GetFederationInformationRequestMessage>
  </soap:Body>
</soap:Envelope>

```

The server then constructs the response XML and sends it to the client, as shown in the following example.

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action
s:mustUnderstand="1">http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/Get
FederationInformationResponse</a:Action>
    <h:ServerVersionInfo xmlns:h="http://schemas.microsoft.com/exchange/2010/A
utodiscover" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
      <h:MajorVersion>14</h:MajorVersion>
      <h:MinorVersion>0</h:MinorVersion>
      <h:MajorBuildNumber>639</h:MajorBuildNumber>
      <h:MinorBuildNumber>20</h:MinorBuildNumber>
      <h:Version>Exchange2010</h:Version>
    </h:ServerVersionInfo>
  </s:Header>
  <s:Body>
    <GetFederationInformationResponseMessage
xmlns="http://schemas.microsoft.com/exchange/2010/Autodiscover">
      <Response xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <ErrorCode>NoError</ErrorCode>
        <ErrorMessage/>
        <ApplicationUri>BYFCXU-DOM.EXTEST.MICROSOFT.COM</ApplicationUri>
        <Domains>
          <Domain>contoso.com</Domain>
          <Domain>europe.contoso.com</Domain>
          <Domain>americas.contoso.com</Domain>
          <Domain>contosolive.com</Domain>
        </Domains>
      </Response>
    </GetFederationInformationResponseMessage>
  </s:Body>
</s:Envelope>
```

4.3 GetUserSettings Operation

The two examples in this section show how to construct the request XML and response XML for the **GetUserSettings** operation.

To retrieve the requested user settings, the client constructs the Autodiscover request XML and sends it to the server, as shown in the following example.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:a="http://schemas.microsoft.com/exchange/2010/Autodiscove
r" xmlns:wsa="http://www.w3.org/2005/08/addressing" xmlns:xsi="http://www.w3.org
/2001/XMLSchema-instance" xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
>
  <soap:Header>
    <a:RequestedServerVersion>Exchange2010</a:RequestedServerVersion>
    <wsa:Action>http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodi
scover/GetUserSettings</wsa:Action>
    <wsa:To>https://autodiscover.exchange.microsoft.com/autodiscover/autodisco
ver.svc</wsa:To>
  </soap:Header>
  <soap:Body>
    <a:GetUserSettingsRequestMessage xmlns:a="http://schemas.microsoft.com/exc
hange/2010/Autodiscover">
      <a:Request>
        <a:Users>
          <a:User>
            <a:Mailbox>tadam@exchange.microsoft.com</a:Mailbox>
          </a:User>
        </a:Users>
      </a:Request>
    </a:GetUserSettingsRequestMessage>
  </soap:Body>
</soap:Envelope>
```

```

    </a:User>
  </a:Users>
  <a:RequestedSettings>
    <a:Setting>UserDisplayName</a:Setting>
    <a:Setting>UserDN</a:Setting>
    <a:Setting>UserDeploymentId</a:Setting>
    <a:Setting>InternalMailboxServer</a:Setting>
    <a:Setting>MailboxDN</a:Setting>
    <a:Setting>PublicFolderServer</a:Setting>
    <a:Setting>ActiveDirectoryServer</a:Setting>
    <a:Setting>ExternalEwsUrl</a:Setting>
    <a:Setting>CasVersion</a:Setting>
    <a:Setting>EwsSupportedSchemas</a:Setting>
  </a:RequestedSettings>
</a:Request>
</a:GetUserSettingsRequestMessage>
</soap:Body>
</soap:Envelope>

```

The server then constructs the Autodiscover response XML and sends it to the client, as shown in the following example.

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/" xmlns:a="http://www.w3.org/2005/08/addressing">
  <s:Header>
    <a:Action s:mustUnderstand="1">http://schemas.microsoft.com/exchange/2010/Autodiscover/Autodiscover/GetUserSettingsResponse</a:Action>
    <h:ServerVersionInfo xmlns:h="http://schemas.microsoft.com/exchange/2010/Autodiscover" xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
      <h:MajorVersion>14</h:MajorVersion>
      <h:MinorVersion>1</h:MinorVersion>
      <h:MajorBuildNumber>63</h:MajorBuildNumber>
      <h:MinorBuildNumber>0</h:MinorBuildNumber>
      <h:Version>Exchange2010_SP1</h:Version>
    </h:ServerVersionInfo>
  </s:Header>
  <s:Body>
    <GetUserSettingsResponseMessage xmlns="http://schemas.microsoft.com/exchange/2010/Autodiscover">
      <Response xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
        <ErrorCode>NoError</ErrorCode>
        <ErrorMessage />
        <UserResponses>
          <UserResponse>
            <ErrorCode>NoError</ErrorCode>
            <ErrorMessage>No error.</ErrorMessage>
            <RedirectTarget i:nil="true" />
            <UserSettingErrors />
            <UserSettings>
              <UserSetting i:type="StringSetting">
                <Name>UserDisplayName</Name>
                <Value>Terry Adams</Value>
              </UserSetting>
              <UserSetting i:type="StringSetting">
                <Name>UserDN</Name>
                <Value>/o=microsoft/ou=Exchange Administrative Group (FYDIBOHF23SPDLT)/cn=Recipients/cn=tadam</Value>
              </UserSetting>
              <UserSetting i:type="StringSetting">
                <Name>UserDeploymentId</Name>
                <Value>649d50b8-a1ce-4bac-8ace-2321e463f701</Value>
              </UserSetting>
              <UserSetting i:type="StringSetting">
                <Name>CasVersion</Name>
                <Value>14.01.0063.000</Value>
              </UserSetting>
            </UserSettings>
          </UserResponse>
        </UserResponses>
      </Response>
    </GetUserSettingsResponseMessage>
  </s:Body>
</s:Envelope>

```

```

        </UserSetting>
        <UserSetting i:type="StringSetting">
          <Name>EwsSupportedSchemas</Name>
          <Value>Exchange2007, Exchange2007_SP1, Exchange2010,
Exchange2010 SP1</Value>
        </UserSetting>
        <UserSetting i:type="StringSetting">
          <Name>InternalMailboxServer</Name>
          <Value>DF-M14-05.Contoso.com</Value>
        </UserSetting>
        <UserSetting i:type="StringSetting">
          <Name>ActiveDirectoryServer</Name>
          <Value>C01-EXCH-DC-05.Contoso.com</Value>
        </UserSetting>
        <UserSetting i:type="StringSetting">
          <Name>MailboxDN</Name>
          <Value>/o=microsoft/ou=Exchange Administrative Group (FYDIBOHF
23SPDLT)/cn=Configuration/cn=Servers/cn=outlookbeta.exchange.corp.microsoft.com/
cn=Microsoft Private MDB</Value>
        </UserSetting>
        <UserSetting i:type="StringSetting">
          <Name>PublicFolderServer</Name>
          <Value>DF-P14-01.Contoso.com</Value>
        </UserSetting>
        <UserSetting i:type="StringSetting">
          <Name>ExternalEwsUrl</Name>
          <Value>https://mail.Contoso.com/EWS/Exchange.asmx</
Value>
        </UserSetting>
      </UserSettings>
    </UserResponse>
  </UserResponses>
</Response>
</GetUserSettingsResponseMessage>
</s:Body>
</s:Envelope>

```

Prell

5 Security

5.1 Security Considerations for Implementers

This protocol requires HTTPS. Not providing SSL will seriously affect the functionality of this protocol. The server will not answer Autodiscover queries unless the **Autodiscover client** has first authenticated with the **Autodiscover server**.

The **GetFederationInformation** operation has to be anonymous. The intent of the **GetFederationInformation** operation is to provide information to other organizations with the STS in common and instruct them as to how to request security tokens to authenticate against other services. Therefore, the caller needs to have access to the federation information without the need to authenticate first.

5.2 Index of Security Parameters

None.

Preliminary

6 Appendix A: Full WSDL

For ease of implementation, the full WSDL and schema are provided in this appendix.

```
<?xml version="1.0" encoding="utf-8"?>
  <wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
    xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-
utility-1.0.xsd"
    xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
    xmlns:wsam="http://www.w3.org/2007/05/addressing/metadata"
    xmlns:tns="http://schemas.microsoft.com/exchange/2010/Autodiscover"
    xmlns:wsa="http://schemas.xmlsoap.org/ws/2004/08/addressing"
    xmlns:wsp="http://schemas.xmlsoap.org/ws/2004/09/policy"
    xmlns:wsap="http://schemas.xmlsoap.org/ws/2004/08/addressing/policy"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema"
    xmlns:msc="http://schemas.microsoft.com/ws/2005/12/wsdl/contract"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
    xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"
    xmlns:wsa10="http://www.w3.org/2005/08/addressing"
    xmlns:wxs="http://schemas.xmlsoap.org/ws/2004/09/mex"
    targetNamespace="http://schemas.microsoft.com/exchange/2010/Autodiscover"
    xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xsd:schema
targetNamespace="http://schemas.microsoft.com/exchange/2010/Autodiscover/Imports">
      <xsd:import namespace="http://schemas.microsoft.com/exchange/2010/Autodiscover"
        schemalocation="messages.xsd" />
    </xsd:schema>
  </wsdl:types>
  <wsdl:message name="GetUserSettingsRequestMessage">
    <wsdl:part name="parameters" element="tns:GetUserSettingsRequestMessage" />
  </wsdl:message>
  <wsdl:message name="GetUserSettingsRequestMessage_Headers">
    <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
  </wsdl:message>
  <wsdl:message name="GetUserSettingsResponseMessage">
    <wsdl:part name="parameters" element="tns:GetUserSettingsResponseMessage" />
  </wsdl:message>
  <wsdl:message name="GetUserSettingsResponseMessage_Headers">
    <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
  </wsdl:message>
  <wsdl:message name="GetDomainSettingsRequestMessage">
    <wsdl:part name="parameters" element="tns:GetDomainSettingsRequestMessage" />
  </wsdl:message>
  <wsdl:message name="GetDomainSettingsRequestMessage_Headers">
    <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
  </wsdl:message>
  <wsdl:message name="GetDomainSettingsResponseMessage">
    <wsdl:part name="parameters" element="tns:GetDomainSettingsResponseMessage" />
  </wsdl:message>
  <wsdl:message name="GetDomainSettingsResponseMessage_Headers">
    <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
  </wsdl:message>
  <wsdl:message name="GetFederationInformationRequestMessage">
    <wsdl:part name="parameters" element="tns:GetFederationInformationRequestMessage" />
  </wsdl:message>
  <wsdl:message name="GetFederationInformationRequestMessage_Headers">
    <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
  </wsdl:message>
  <wsdl:message name="GetFederationInformationResponseMessage">
    <wsdl:part name="parameters" element="tns:GetFederationInformationResponseMessage" />
  </wsdl:message>
  <wsdl:message name="GetFederationInformationResponseMessage_Headers">
    <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
  </wsdl:message>
  <wsdl:message name="GetOrganizationRelationshipSettingsRequestMessage">
```



```

    <wsdl:part name="parameters"
element="tns:GetOrganizationRelationshipSettingsRequestMessage" />
</wsdl:message>
<wsdl:message name="GetOrganizationRelationshipSettingsRequestMessage_Headers">
  <wsdl:part name="RequestedServerVersion" element="tns:RequestedServerVersion" />
</wsdl:message>
<wsdl:message name="GetOrganizationRelationshipSettingsResponseMessage">
  <wsdl:part name="parameters"
element="tns:GetOrganizationRelationshipSettingsResponseMessage" />
</wsdl:message>
<wsdl:message name="GetOrganizationRelationshipSettingsResponseMessage_Headers">
  <wsdl:part name="ServerVersionInfo" element="tns:ServerVersionInfo" />
</wsdl:message>
<wsdl:portType name="Autodiscover">
  <wsdl:operation name="GetUserSettings">
    <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/
Autodiscover/Autodiscover/GetUserSettings"
name="GetUserSettingsRequestMessage"
message="tns:GetUserSettingsRequestMessage" />
    <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/
Autodiscover/GetUserSettingsResponse"
name="GetUserSettingsResponseMessage"
message="tns:GetUserSettingsResponseMessage" />
  </wsdl:operation>
  <wsdl:operation name="GetDomainSettings">
    <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/
Autodiscover/Autodiscover/GetDomainSettings"
name="GetDomainSettingsRequestMessage"
message="tns:GetDomainSettingsRequestMessage" />
    <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/
Autodiscover/GetDomainSettingsResponse"
name="GetDomainSettingsResponseMessage"
message="tns:GetDomainSettingsResponseMessage" />
  </wsdl:operation>
  <wsdl:operation name="GetFederationInformation">
    <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/
Autodiscover/Autodiscover/GetFederationInformation"
name="GetFederationInformationRequestMessage"
message="tns:GetFederationInformationRequestMessage" />
    <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/
Autodiscover/GetFederationInformationResponse"
name="GetFederationInformationResponseMessage"
message="tns:GetFederationInformationResponseMessage" />
  </wsdl:operation>
  <wsdl:operation name="GetOrganizationRelationshipSettings">
    <wsdl:input wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/
Autodiscover/GetOrganizationRelationshipSettings"
name="GetOrganizationRelationshipSettingsRequestMessage"
message="tns:GetOrganizationRelationshipSettingsRequestMessage" />
    <wsdl:output wsaw:Action="http://schemas.microsoft.com/exchange/2010/Autodiscover/
Autodiscover/GetOrganizationRelationshipSettingsResponse"
name="GetOrganizationRelationshipSettingsResponseMessage"
message="tns:GetOrganizationRelationshipSettingsResponseMessage" />
  </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="DefaultBinding_Autodiscover" type="tns:Autodiscover">
  <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
  <wsdl:operation name="GetUserSettings">
    <soap:operation soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/
Autodiscover/GetUserSettings" style="document" />
    <wsdl:input name="GetUserSettingsRequestMessage">
      <soap:header message="tns:GetUserSettingsRequestMessage_Headers"
part="RequestedServerVersion" use="literal" />
      <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output name="GetUserSettingsResponseMessage">
      <soap:header message="tns:GetUserSettingsResponseMessage_Headers"
part="ServerVersionInfo" use="literal" />
    </wsdl:output>
  </wsdl:operation>

```

```

    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetDomainSettings">
  <soap:operation soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/
    Autodiscover/GetDomainSettings" style="document" />
  <wsdl:input name="GetDomainSettingsRequestMessage">
    <soap:header message="tns:GetDomainSettingsRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetDomainSettingsResponseMessage">
    <soap:header message="tns:GetDomainSettingsResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetFederationInformation">
  <soap:operation soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/
    Autodiscover/GetFederationInformation" style="document" />
  <wsdl:input name="GetFederationInformationRequestMessage">
    <soap:header message="tns:GetFederationInformationRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetFederationInformationResponseMessage">
    <soap:header message="tns:GetFederationInformationResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetOrganizationRelationshipSettings">
  <soap:operation soapAction="http://schemas.microsoft.com/exchange/2010/Autodiscover/
    Autodiscover/GetOrganizationRelationshipSettings" style="document" />
  <wsdl:input name="GetOrganizationRelationshipSettingsRequestMessage">
    <soap:header message="tns:GetOrganizationRelationshipSettingsRequestMessage_Headers"
      part="RequestedServerVersion" use="literal" />
    <soap:body use="literal" />
  </wsdl:input>
  <wsdl:output name="GetOrganizationRelationshipSettingsResponseMessage">
    <soap:header message="tns:GetOrganizationRelationshipSettingsResponseMessage_Headers"
      part="ServerVersionInfo" use="literal" />
    <soap:body use="literal" />
  </wsdl:output>
</wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```



7 Appendix B: Full XML Schema

For ease of implementation, the following section provides the full XML schema for this protocol.

This file has to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the messages.xsd schema have to be placed in the common folder.

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:tns="http://schemas.microsoft.com/exchange/2010/Autodiscover"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/exchange/2010/Autodiscover"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetUserSettingsRequestMessage">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Request" nillable="true"
type="tns:GetUserSettingsRequest" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="GetUserSettingsRequest">
    <xs:complexContent mixed="false">
      <xs:extension base="tns:AutodiscoverRequest">
        <xs:sequence>
          <xs:element name="Users" nillable="true" type="tns:Users" />
          <xs:element name="RequestedSettings" nillable="true" type="tns:RequestedSettings"
/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetUserSettingsRequest" nillable="true" type="tns:GetUserSettingsRequest"
/>
  <xs:complexType name="AutodiscoverRequest">
    <xs:sequence />
  </xs:complexType>
  <xs:element name="AutodiscoverRequest" nillable="true" type="tns:AutodiscoverRequest" />
  <xs:complexType name="Users">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="User" nillable="true"
type="tns:User" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="Users" nillable="true" type="tns:Users" />
  <xs:complexType name="User">
    <xs:sequence>
      <xs:element name="Mailbox" nillable="true" type="xs:string" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="User" nillable="true" type="tns:User" />
  <xs:complexType name="RequestedSettings">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="Setting" nillable="true"
type="xs:string" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="RequestedSettings" nillable="true" type="tns:RequestedSettings" />
  <xs:simpleType name="ExchangeVersion">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Exchange2010" />
      <xs:enumeration value="Exchange2010_SP1" />
      <xs:enumeration value="Exchange2010_SP2" />
      <xs:enumeration value="Exchange2013" />
      <xs:enumeration value="Exchange2013_SP1" />
    </xs:restriction>
  </xs:simpleType>

```

```

        <xs:enumeration value="Exchange2016" />
    </xs:restriction>
</xs:simpleType>
<xs:element name="RequestedServerVersion">
    <xs:simpleType>
        <xs:restriction base="tns:ExchangeVersion" />
    </xs:simpleType>
</xs:element>
<xs:element name="GetUserSettingsResponseMessage">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="Response" nillable="true"
type="tns:GetUserSettingsResponse" />
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetUserSettingsResponse">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverResponse">
            <xs:sequence>
                <xs:element minOccurs="0" name="UserResponses" nillable="true"
type="tns:ArrayOfUserResponse" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetUserSettingsResponse" nillable="true"
type="tns:GetUserSettingsResponse" />
<xs:complexType name="AutodiscoverResponse">
    <xs:sequence>
        <xs:element minOccurs="0" name="ErrorCode" type="tns:ErrorCode" />
        <xs:element minOccurs="0" name="ErrorMessage" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="AutodiscoverResponse" nillable="true" type="tns:AutodiscoverResponse" />
<xs:simpleType name="ErrorCode">
    <xs:restriction base="xs:string">
        <xs:enumeration value="NoError" />
        <xs:enumeration value="RedirectAddress" />
        <xs:enumeration value="RedirectUrl" />
        <xs:enumeration value="InvalidUser" />
        <xs:enumeration value="InvalidRequest" />
        <xs:enumeration value="InvalidSetting" />
        <xs:enumeration value="SettingIsNotAvailable" />
        <xs:enumeration value="ServerBusy" />
        <xs:enumeration value="InvalidDomain" />
        <xs:enumeration value="NotFederated" />
        <xs:enumeration value="InternalServerError" />
    </xs:restriction>
</xs:simpleType>
<xs:element name="ErrorCode" nillable="true" type="tns:ErrorCode" />
<xs:complexType name="ArrayOfUserResponse">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="UserResponse" nillable="true"
type="tns:UserResponse" />
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfUserResponse" nillable="true" type="tns:ArrayOfUserResponse" />
<xs:complexType name="UserResponse">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverResponse">
            <xs:sequence>
                <xs:element minOccurs="0" name="RedirectTarget" nillable="true" type="xs:string" />
                <xs:element minOccurs="0" name="UserSettingErrors" nillable="true"
type="tns:UserSettingErrors" />
                <xs:element minOccurs="0" name="UserSettings" nillable="true"
type="tns:UserSettings" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

```

        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UserResponse" nillable="true" type="tns:UserResponse" />
<xs:complexType name="UserSettingErrors">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="UserSettingError" nillable="true"
type="tns:UserSettingError" />
    </xs:sequence>
</xs:complexType>
<xs:element name="UserSettingErrors" nillable="true" type="tns:UserSettingErrors" />
<xs:complexType name="UserSettingError">
    <xs:sequence>
        <xs:element name="ErrorCode" type="tns:ErrorCode" />
        <xs:element name="ErrorMessage" nillable="true" type="xs:string" />
        <xs:element name="SettingName" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="UserSettingError" nillable="true" type="tns:UserSettingError" />
<xs:complexType name="UserSettings">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="UserSetting" nillable="true"
type="tns:UserSetting" />
    </xs:sequence>
</xs:complexType>
<xs:element name="UserSettings" nillable="true" type="tns:UserSettings" />
<xs:complexType name="UserSetting">
    <xs:sequence>
        <xs:element name="Name" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="UserSetting" nillable="true" type="tns:UserSetting" />
<xs:complexType name="ProtocolConnectionCollectionSetting">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:UserSetting">
            <xs:sequence>
                <xs:element name="ProtocolConnections" nillable="true"
type="tns:ProtocolConnections" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="ProtocolConnections">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="ProtocolConnection"
nillable="true" type="tns:ProtocolConnection" />
    </xs:sequence>
</xs:complexType>
<xs:element name="ProtocolConnections" nillable="true" type="tns:ProtocolConnections" />
<xs:complexType name="ProtocolConnection">
    <xs:sequence>
        <xs:element name="Hostname" nillable="true" type="xs:string" />
        <xs:element name="Port" type="xs:int" />
        <xs:element name="EncryptionMethod" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="ProtocolConnection" nillable="true" type="tns:ProtocolConnection" />
<xs:complexType name="StringSetting">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:UserSetting">
            <xs:sequence>
                <xs:element minOccurs="0" name="Value" nillable="true" type="xs:string" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="WebClientUrlCollectionSetting">
    <xs:complexContent mixed="false">

```

```

        <xs:extension base="tns:UserSetting">
            <xs:sequence>
                <xs:element name="WebClientUrls" nillable="true" type="tns:WebClientUrls" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="WebClientUrls">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="WebClientUrl" nillable="true"
type="tns:WebClientUrl" />
    </xs:sequence>
</xs:complexType>
<xs:element name="WebClientUrls" nillable="true" type="tns:WebClientUrls" />
<xs:complexType name="WebClientUrl">
    <xs:sequence>
        <xs:element name="AuthenticationMethods" nillable="true" type="xs:string" />
        <xs:element name="Url" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="WebClientUrl" nillable="true" type="tns:WebClientUrl" />
<xs:complexType name="AlternateMailboxCollectionSetting">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:UserSetting">
            <xs:sequence>
                <xs:element name="AlternateMailboxes" nillable="true" type="tns:AlternateMailboxes"
/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="AlternateMailboxes">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="AlternateMailbox" nillable="true"
type="tns:AlternateMailbox" />
    </xs:sequence>
</xs:complexType>
<xs:element name="AlternateMailboxes" nillable="true" type="tns:AlternateMailboxes" />
<xs:complexType name="AlternateMailbox">
    <xs:sequence>
        <xs:element name="Type" nillable="true" type="xs:string" />
        <xs:element name="DisplayName" nillable="true" type="xs:string" />
        <xs:element name="LegacyDN" nillable="true" type="xs:string" />
        <xs:element name="Server" nillable="true" type="xs:string" />
        <xs:element name="SmtpAddress" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="AlternateMailbox" nillable="true" type="tns:AlternateMailbox" />
<xs:complexType name="DocumentSharingLocationCollectionSetting">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:UserSetting">
            <xs:sequence>
                <xs:element name="DocumentSharingLocations" type="tns:DocumentSharingLocations" />
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DocumentSharingLocationCollectionSetting"
type="tns:DocumentSharingLocationCollectionSetting" />
<xs:complexType name="DocumentSharingLocations">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="DocumentSharingLocation"
type="tns:DocumentSharingLocation" />
    </xs:sequence>
</xs:complexType>
<xs:element name="DocumentSharingLocations" type="tns:DocumentSharingLocations" />
<xs:complexType name="DocumentSharingLocation">
    <xs:sequence>

```

```

        <xs:element name="ServiceUrl" type="xs:string" />
        <xs:element name="LocationUrl" type="xs:string" />
        <xs:element name="DisplayName" type="xs:string" />
        <xs:element name="SupportedFileExtensions" type="tns:ArrayOfFileExtension" />
        <xs:element name="ExternalAccessAllowed" type="xs:boolean" />
        <xs:element name="AnonymousAccessAllowed" type="xs:boolean" />
        <xs:element name="CanModifyPermissions" type="xs:boolean" />
        <xs:element name="IsDefault" type="xs:boolean" />
    </xs:sequence>
</xs:complexType>
<xs:element name="DocumentSharingLocation" type="tns:DocumentSharingLocation" />
<xs:complexType name="ArrayOfFileExtension">
    <xs:sequence>
        <xs:element minOccurs="1" maxOccurs="unbounded" name="FileExtension" type="xs:string"
    />
    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfFileExtension" type="tns:ArrayOfFileExtension" />
<xs:complexType name="ServerVersionInfo">
    <xs:sequence>
        <xs:element minOccurs="0" name="MajorVersion" type="xs:int" />
        <xs:element minOccurs="0" name="MinorVersion" type="xs:int" />
        <xs:element minOccurs="0" name="MajorBuildNumber" type="xs:int" />
        <xs:element minOccurs="0" name="MinorBuildNumber" type="xs:int" />
        <xs:element minOccurs="0" name="Version" nillable="true" type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="ServerVersionInfo" nillable="true" type="tns:ServerVersionInfo" />
<xs:element name="GetDomainSettingsRequestMessage">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="Request" nillable="true"
type="tns:GetDomainSettingsRequest" />
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetDomainSettingsRequest">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverRequest">
            <xs:sequence>
                <xs:element name="Domains" nillable="true" type="tns:Domains" />
                <xs:element name="RequestedSettings" nillable="true" type="tns:RequestedSettings"
    />
            </xs:sequence>
        </xs:extension>
    </xs:complexType>
</xs:element>
<xs:element name="RequestedVersion" nillable="true" type="tns:ExchangeVersion" />
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="GetDomainSettingsRequest" nillable="true"
type="tns:GetDomainSettingsRequest" />
<xs:complexType name="Domains">
    <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="Domain" nillable="true"
type="xs:string" />
    </xs:sequence>
</xs:complexType>
<xs:element name="Domains" nillable="true" type="tns:Domains" />
<xs:element name="GetDomainSettingsResponseMessage">
    <xs:complexType>
        <xs:sequence>
            <xs:element minOccurs="0" name="Response" nillable="true"
type="tns:GetDomainSettingsResponse" />
        </xs:sequence>
    </xs:complexType>
</xs:element>
<xs:complexType name="GetDomainSettingsResponse">
    <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverResponse">

```

```

        <xs:sequence>
          <xs:element minOccurs="0" name="DomainResponses" nillable="true"
type="tns:ArrayOfDomainResponse" />
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetDomainSettingsResponse" nillable="true"
type="tns:GetDomainSettingsResponse" />
  <xs:complexType name="ArrayOfDomainResponse">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="DomainResponse" nillable="true"
type="tns:DomainResponse" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfDomainResponse" nillable="true" type="tns:ArrayOfDomainResponse"
/>
  <xs:complexType name="DomainResponse">
    <xs:complexContent mixed="false">
      <xs:extension base="tns:AutodiscoverResponse">
        <xs:sequence>
          <xs:element minOccurs="0" name="DomainSettingErrors" nillable="true"
type="tns:DomainSettingErrors" />
          <xs:element minOccurs="0" name="DomainSettings" nillable="true"
type="tns:DomainSettings" />
          <xs:element minOccurs="0" name="RedirectTarget" nillable="true" type="xs:string" />
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="DomainResponse" nillable="true" type="tns:DomainResponse" />
  <xs:complexType name="DomainSettingErrors">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="DomainSettingError"
nillable="true" type="tns:DomainSettingError" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="DomainSettingErrors" nillable="true" type="tns:DomainSettingErrors" />
  <xs:complexType name="DomainSettingError">
    <xs:sequence>
      <xs:element name="ErrorCode" type="tns:ErrorCode" />
      <xs:element name="ErrorMessage" nillable="true" type="xs:string" />
      <xs:element name="SettingName" nillable="true" type="xs:string" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="DomainSettingError" nillable="true" type="tns:DomainSettingError" />
  <xs:complexType name="DomainSettings">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="DomainSetting" nillable="true"
type="tns:DomainSetting" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="DomainSettings" nillable="true" type="tns:DomainSettings" />
  <xs:complexType name="DomainSetting">
    <xs:sequence>
      <xs:element name="Name" nillable="true" type="xs:string" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="DomainSetting" nillable="true" type="tns:DomainSetting" />
  <xs:complexType name="DomainStringSetting">
    <xs:complexContent mixed="false">
      <xs:extension base="tns:DomainSetting">
        <xs:sequence>
          <xs:element minOccurs="0" name="Value" nillable="true" type="xs:string" />
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

```



```

    <xs:element name="GetFederationInformationRequestMessage">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" name="Request" nillable="true"
type="tns:GetFederationInformationRequest" />
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetFederationInformationRequest">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverRequest">
          <xs:sequence>
            <xs:element name="Domain" nillable="true" type="xs:string" />
          </xs:sequence>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:element name="GetFederationInformationRequest" nillable="true"
type="tns:GetFederationInformationRequest" />
    <xs:element name="GetFederationInformationResponseMessage">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" name="Response" nillable="true"
type="tns:GetFederationInformationResponse" />
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetFederationInformationResponse">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverResponse">
          <xs:sequence>
            <xs:element minOccurs="0" name="ApplicationUri" nillable="true" type="xs:anyURI" />
            <xs:element minOccurs="0" name="TokenIssuers" nillable="true"
type="tns:TokenIssuers" />
            <xs:element minOccurs="0" name="Domains" nillable="true" type="tns:Domains" />
          </xs:sequence>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>
    <xs:complexType name="TokenIssuers">
      <xs:sequence>
        <xs:element minOccurs="0" maxOccurs="unbounded" name="TokenIssuer" nillable="true"
type="tns:TokenIssuer" />
      </xs:sequence>
    </xs:complexType>
    <xs:complexType name="TokenIssuer">
      <xs:sequence>
        <xs:element minOccurs="0" name="Uri" nillable="true" type="xs:anyURI" />
        <xs:element minOccurs="0" name="Endpoint" nillable="true" type="xs:anyURI" />
      </xs:sequence>
    </xs:complexType>
    <xs:element name="GetFederationInformationResponse" nillable="true"
type="tns:GetFederationInformationResponse" />
    <xs:element name="GetOrganizationRelationshipSettingsRequestMessage">
      <xs:complexType>
        <xs:sequence>
          <xs:element minOccurs="0" name="Request" nillable="true"
type="tns:GetOrganizationRelationshipSettingsRequest" />
        </xs:sequence>
      </xs:complexType>
    </xs:element>
    <xs:complexType name="GetOrganizationRelationshipSettingsRequest">
      <xs:complexContent mixed="false">
        <xs:extension base="tns:AutodiscoverRequest">
          <xs:sequence>
            <xs:element name="Domains" nillable="true" type="tns:Domains" />
          </xs:sequence>
        </xs:extension>
      </xs:complexContent>
    </xs:complexType>

```

```

    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetOrganizationRelationshipSettingsRequest" nillable="true"
type="tns:GetOrganizationRelationshipSettingsRequest" />
  <xs:element name="GetOrganizationRelationshipSettingsResponseMessage">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Response" nillable="true"
type="tns:GetOrganizationRelationshipSettingsResponse" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="GetOrganizationRelationshipSettingsResponse">
    <xs:complexContent mixed="false">
      <xs:extension base="tns:AutodiscoverResponse">
        <xs:sequence>
          <xs:element minOccurs="0" name="OrganizationRelationshipSettingsCollection"
nillable="true" type="tns:OrganizationRelationshipSettingsCollection" />
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetOrganizationRelationshipSettingsResponse" nillable="true"
type="tns:GetOrganizationRelationshipSettingsResponse" />
  <xs:complexType name="OrganizationRelationshipSettingsCollection">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="OrganizationRelationshipSettings"
nillable="true" type="tns:OrganizationRelationshipSettings" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="OrganizationRelationshipSettingsCollection" nillable="true"
type="tns:OrganizationRelationshipSettingsCollection" />
  <xs:complexType name="OrganizationRelationshipSettings">
    <xs:sequence>
      <xs:element name="DeliveryReportEnabled" type="xs:boolean" />
      <xs:element name="DomainNames" nillable="true" type="tns:Domains" />
      <xs:element name="FreeBusyAccessEnabled" type="xs:boolean" />
      <xs:element name="FreeBusyAccessLevel" nillable="true" type="xs:string" />
      <xs:element name="MailTipsAccessEnabled" type="xs:boolean" />
      <xs:element name="MailTipsAccessLevel" nillable="true" type="xs:string" />
      <xs:element name="MailboxMoveEnabled" type="xs:boolean" />
      <xs:element name="Name" nillable="true" type="xs:string" />
      <xs:element name="TargetApplicationUri" nillable="true" type="xs:anyURI" />
      <xs:element name="TargetAutodiscoverEpr" nillable="true" type="xs:anyURI" />
      <xs:element name="TargetSharingEpr" nillable="true" type="xs:anyURI" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="OrganizationRelationshipSettings" nillable="true"
type="tns:OrganizationRelationshipSettings" />
</xs:schema>

```



8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Microsoft Exchange Server 2010
- Microsoft Exchange Server 2013
- Microsoft Exchange Server 2016 Preview
- Microsoft Lync Server 2013
- Microsoft SharePoint Server 2013
- Skype for Business Server
- Microsoft SharePoint Server 2016 Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **InternalEcpRetentionPolicyTagsUrl** enumerated value.

<2> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **InternalEcpPublishingUrl** enumerated value.

<3> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **EcpRetentionPolicyTagsUrlFragment** enumerated value.

<4> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **EcpPublishingUrlFragment** enumerated value.

<5> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **ExternalEcpRetentionPolicyTagsUrl** enumerated value.

<6> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **ExternalEcpPublishingUrl** enumerated value.

<7> [Section 2.2.4.3](#): The **InternalServerExclusiveConnect** configuration setting is not implemented in Exchange 2010 or Microsoft Exchange Server 2010 Service Pack 1 (SP1).

<8> [Section 2.2.4.3](#): The **ExternalServerExclusiveConnect** configuration setting is not implemented in Exchange 2010 or Exchange 2010 SP1.

<9> [Section 2.2.4.3](#): The **ExchangeRpcUrl** configuration setting is not implemented in initial release version of Exchange 2010.

<10> [Section 2.2.4.3](#): The **ShowGalAsDefaultView** configuration setting is not implemented in Exchange 2010 or Exchange 2010 SP1.

- <11> [Section 2.2.4.3](#): The **AutoDiscoverSMTPAddress** configuration setting is not implemented in Exchange 2010 or Exchange 2010 SP1.
- <12> [Section 2.2.4.3](#): The **InteropExternalEwsUrl** configuration setting is not implemented in Exchange 2010 or Exchange 2010 SP1.
- <13> [Section 2.2.4.3](#): The **ExternalEwsVersion** configuration setting is not implemented in the initial release version of Exchange 2010.
- <14> [Section 2.2.4.3](#): The **InteropExternalEwsVersion** configuration setting is not implemented in Exchange 2010 or Exchange 2010 SP1.
- <15> [Section 2.2.4.3](#): The initial release version of Exchange 2010 does not include the **MobileMailboxPolicy** enumerated value.
- <16> [Section 3.1.4.1.3.1](#): Exchange 2010, Exchange 2013, and Exchange 2016 Preview do not include the **RequestedVersion** element.
- <17> [Section 3.1.4.3](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettings** operation.
- <18> [Section 3.1.4.3.1.1](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsRequestMessage** message.
- <19> [Section 3.1.4.3.1.2](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsRequestMessage_Headers** message.
- <20> [Section 3.1.4.3.1.3](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsResponseMessage** message.
- <21> [Section 3.1.4.3.1.4](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsResponseMessage_Headers** message.
- <22> [Section 3.1.4.3.2.1](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsRequestMessage** element.
- <23> [Section 3.1.4.3.2.2](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsRequest** element.
- <24> [Section 3.1.4.3.2.3](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsResponseMessage** element.
- <25> [Section 3.1.4.3.2.4](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsResponse** element.
- <26> [Section 3.1.4.3.2.5](#): The initial release version of Exchange 2010 does not include the **OrganizationRelationshipSettingsCollection** element.
- <27> [Section 3.1.4.3.3.1](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsRequest** complex type.
- <28> [Section 3.1.4.3.3.2](#): The initial release version of Exchange 2010 does not include the **GetOrganizationRelationshipSettingsResponse** complex type.
- <29> [Section 3.1.4.3.3.3](#): The initial release version of Exchange 2010 does not include the **OrganizationRelationshipSettingsCollection** complex type.
- <30> [Section 3.1.4.3.3.4](#): The initial release version of Exchange 2010 does not include the **OrganizationRelationshipSettings** complex type.

- [<31> Section 3.1.4.4.2](#): Exchange 2010 does not implement the **ArrayOfFileExtension** element.
- [<32> Section 3.1.4.4.2](#): Exchange 2010 does not implement the **DocumentSharingLocation** element.
- [<33> Section 3.1.4.4.2](#): Exchange 2010 does not implement the **DocumentSharingLocationCollectionSetting** element.
- [<34> Section 3.1.4.4.2](#): Exchange 2010 does not implement the **DocumentSharingLocations** element.
- [<35> Section 3.1.4.4.2.23](#): Exchange 2010 does not implement the **ArrayOfFileExtension** element.
- [<36> Section 3.1.4.4.2.24](#): Exchange 2010 does not implement the **DocumentSharingLocation** element.
- [<37> Section 3.1.4.4.2.25](#): Exchange 2010 does not implement the **DocumentSharingLocationCollectionSetting** element.
- [<38> Section 3.1.4.4.2.26](#): Exchange 2010 does not implement the **DocumentSharingLocations** element.
- [<39> Section 3.1.4.4.3](#): Exchange 2010 does not implement the **ArrayOfFileExtension** complex type.
- [<40> Section 3.1.4.4.3](#): Exchange 2010 does not implement the **DocumentSharingLocation** complex type.
- [<41> Section 3.1.4.4.3](#): Exchange 2010 does not implement the **DocumentSharingLocationCollectionSetting** complex type.
- [<42> Section 3.1.4.4.3](#): Exchange 2010 does not implement the **DocumentSharingLocations** complex type.
- [<43> Section 3.1.4.4.3.23](#): Exchange 2010 does not implement the **ArrayOfFileExtension** complex type.
- [<44> Section 3.1.4.4.3.24](#): Exchange 2010 does not implement the **DocumentSharingLocation** complex type.
- [<45> Section 3.1.4.4.3.25](#): Exchange 2010 does not implement the **DocumentSharingLocationCollectionSetting** complex type.
- [<46> Section 3.1.4.4.3.26](#): Exchange 2010 does not implement the **DocumentSharingLocations** complex type.
- [<47> Section 3.1.4.4.4.1](#): The initial release version of Exchange 2010 does not include the **Exchange2010_SP1** value.
- [<48> Section 3.1.4.4.4.1](#): The initial release version of Exchange 2010 and Exchange 2010 SP1 do not include the **Exchange2010_SP2** value.
- [<49> Section 3.1.4.4.4.1](#): Exchange 2010 does not include the **Exchange2013** value.
- [<50> Section 3.1.4.4.4.1](#): Exchange 2010 and the initial release of Exchange 2013 do not include the **Exchange2013_SP1** value.
- [<51> Section 3.1.4.4.4.1](#): Exchange 2010 and Exchange 2013 do not include the **Exchange2016** value.

9 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

| Section | Tracking number (if applicable) and description | Major change (Y or N) | Change type |
|---|--|-----------------------|--|
| 3.1.4.4.4.1 tns:ExchangeVersion Simple Type | Added enumeration values Exchange2013_SP1 and Exchange2016. | Y | Content update. |
| 3.1.4.4.4.1 tns:ExchangeVersion Simple Type | Specified that Exchange2013_SP1 does not appear in earlier versions. | Y | New product behavior note added. |
| 3.1.4.4.4.1 tns:ExchangeVersion Simple Type | Specified that Exchange2016 does not appear in earlier versions. | Y | New product behavior note added. |
| 8 Appendix C: Product Behavior | Added Exchange 2016, Skype for Business Server, and SharePoint Server 2016 to list of applicable products. | Y | Content update. |

10 Index

A

Abstract data model
[server](#) 23
[Applicability](#) 13
[Attribute groups](#) 22
[Attributes](#) 21

C

[Capability negotiation](#) 13
[Change tracking](#) 102
[Complex types](#) 17
[tns:Domains Complex Type](#) 18
[tns:RequestedSettings Complex Type](#) 18
[tns:ServerVersionInfo Complex Type](#) 17

D

Data model - abstract
[server](#) 23
[Domains Element element](#) 16

E

Elements
[Domains Element](#) 16
[ServerVersionInfo Element](#) 16
[tns:RequestedSettings Element](#) 17

Events

[local - server](#) 81
[timer - server](#) 81
[Examples:overview](#) 82

F

[Fields - vendor-extensible](#) 14
[Full WSDL](#) 88
[Full XML schema](#) 91

G

GetDomainSettings operation example
[Example:GetDomainSettings operation](#) 82
GetFederationInformation operation example
[Example:GetFederationInformation operation](#) 83
GetUserSettings operation example
[Example:GetUserSettings operation](#) 84
[Glossary](#) 8
[Groups](#) 21

I

[Implementer - security considerations](#) 87
[Index of security parameters](#) 87
[Informative references](#) 12
Initialization
[server](#) 23
[Introduction](#) 8

L

Local events
[server](#) 81

M

Message processing
[server](#) 23
Messages
[attribute groups](#) 22
[attributes](#) 21
[complex types](#) 17
[Domains Element element](#) 16
[elements](#) 16
[enumerated](#) 16
[groups](#) 21
[namespaces](#) 15
[ServerVersionInfo Element element](#) 16
[simple types](#) 21
[syntax](#) 15
[tns:Domains Complex Type complex type](#) 18
[tns:RequestedSettings Complex Type complex type](#) 18
[tns:RequestedSettings Element element](#) 17
[tns:ServerVersionInfo Complex Type complex type](#) 17
[transport](#) 15

N

[Namespaces](#) 15
[Normative references](#) 11

O

Operations
[GetDomainSettings](#) 23
[GetFederationInformation](#) 36
[GetOrganizationRelationshipSettings](#) 43
[GetUserSettings](#) 53
[Overview \(synopsis\)](#) 12

P

[Parameters - security index](#) 87
[Preconditions](#) 13
[Prerequisites](#) 13
[Product behavior](#) 99
Protocol Details
[overview](#) 23

R

[References](#) 11
[informative](#) 12
[normative](#) 11
[Relationship to other protocols](#) 12

S

Security

- [implementer considerations](#) 87
- [parameter index](#) 87

Sequencing rules

- [server](#) 23

Server

- [abstract data model](#) 23
- [GetDomainSettings operation](#) 23
- [GetFederationInformation operation](#) 36
- [GetOrganizationRelationshipSettings operation](#) 43
- [GetUserSettings operation](#) 53
- [initialization](#) 23
- [local events](#) 81
- [message processing](#) 23
- [sequencing rules](#) 23
- [timer events](#) 81
- [timers](#) 23
- [ServerVersionInfo Element element](#) 16
- [Simple types](#) 21
- [Standards assignments](#) 14

Syntax

- [messages - overview](#) 15

T

Timer events

- [server](#) 81

Timers

- [server](#) 23
- [tns:Domains Complex Type complex type](#) 18
- [tns:RequestedSettings Complex Type complex type](#) 18
- [tns:RequestedSettings Element element](#) 17
- [tns:ServerVersionInfo Complex Type complex type](#) 17
- [Tracking changes](#) 102
- [Transport](#) 15

Types

- [complex](#) 17
- [simple](#) 21

V

- [Vendor-extensible fields](#) 14

- [Versioning](#) 13

W

- [WSDL](#) 88

X

- [XML schema](#) 91