

[MS-OXWSBTRF]: Bulk Transfer Web Service Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final

documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Revision Summary

| Date | Revision History | Revision Class | Comments |
|------------|------------------|----------------|--|
| 05/05/2010 | 0.1.0 | Major | Initial Release. |
| 08/04/2010 | 0.2 | Minor | Clarified the meaning of the technical content. |
| 11/03/2010 | 0.2 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 03/18/2011 | 1.0 | Major | Significantly changed the technical content. |
| 08/05/2011 | 2.0 | Major | Significantly changed the technical content. |
| 10/07/2011 | 2.0 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 01/20/2012 | 3.0 | Major | Significantly changed the technical content. |
| 04/27/2012 | 3.0 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 07/16/2012 | 4.0 | Major | Significantly changed the technical content. |

Table of Contents

| | |
|---|-----------|
| 1 Introduction | 5 |
| 1.1 Glossary | 5 |
| 1.2 References | 5 |
| 1.2.1 Normative References | 5 |
| 1.2.2 Informative References | 6 |
| 1.3 Overview | 6 |
| 1.4 Relationship to Other Protocols | 6 |
| 1.5 Prerequisites/Preconditions | 7 |
| 1.6 Applicability Statement | 7 |
| 1.7 Versioning and Capability Negotiation | 7 |
| 1.8 Vendor-Extensible Fields | 8 |
| 1.9 Standards Assignments | 8 |
| 2 Messages | 9 |
| 2.1 Transport | 9 |
| 2.2 Common Message Syntax | 9 |
| 2.2.1 Namespaces | 9 |
| 2.2.2 Messages | 9 |
| 2.2.3 Elements | 9 |
| 2.2.4 Complex Types | 10 |
| 2.2.5 Simple Types | 10 |
| 2.2.6 Attributes | 10 |
| 2.2.7 Groups | 10 |
| 2.2.8 Attribute Groups | 10 |
| 3 Protocol Details | 11 |
| 3.1 ExchangeServicePortType Server Details | 11 |
| 3.1.1 Abstract Data Model | 11 |
| 3.1.2 Timers | 11 |
| 3.1.3 Initialization | 11 |
| 3.1.4 Message Processing Events and Sequencing Rules | 11 |
| 3.1.4.1 ExportItems | 11 |
| 3.1.4.1.1 Messages | 12 |
| 3.1.4.1.1.1 tns:ExportItemsSoapIn Message | 12 |
| 3.1.4.1.1.2 tns:ExportItemsSoapOut Message | 13 |
| 3.1.4.1.1.2 Elements | 14 |
| 3.1.4.1.2.1 ExportItems Element | 14 |
| 3.1.4.1.2.2 ExportItemsResponse Element | 14 |
| 3.1.4.1.3 Complex Types | 14 |
| 3.1.4.1.3.1 m:ExportItemsResponseMessageType Complex Type | 14 |
| 3.1.4.1.3.2 ExportItemsResponseType Complex Type | 15 |
| 3.1.4.1.3.3 ExportItemsType Complex Type | 15 |
| 3.1.4.1.3.4 t:NonEmptyArrayOfItemIdsType Complex Type | 16 |
| 3.1.4.1.4 Simple Types | 16 |
| 3.1.4.1.5 Attributes | 16 |
| 3.1.4.1.6 Groups | 17 |
| 3.1.4.1.7 Attribute Groups | 17 |
| 3.1.4.2 UploadItems | 17 |
| 3.1.4.2.1 Messages | 17 |
| 3.1.4.2.1.1 tns:UploadItemsSoapIn Message | 17 |

| | | |
|-------------|---|-----------|
| 3.1.4.2.1.2 | tns:UploadItemsSoapOut Message..... | 18 |
| 3.1.4.2.2 | Elements..... | 19 |
| 3.1.4.2.2.1 | UploadItems Element..... | 19 |
| 3.1.4.2.2.2 | UploadItemsResponse Element | 19 |
| 3.1.4.2.3 | Complex Types | 19 |
| 3.1.4.2.3.1 | t:NonEmptyArrayOfUploadItemsType Complex Type | 20 |
| 3.1.4.2.3.2 | m:UploadItemsResponseMessageType Complex Type | 20 |
| 3.1.4.2.3.3 | m:UploadItemsResponseType Complex Type | 21 |
| 3.1.4.2.3.4 | m:UploadItemsType Complex Type..... | 21 |
| 3.1.4.2.3.5 | m:UploadItemType Complex Type | 21 |
| 3.1.4.2.4 | Simple Types..... | 22 |
| 3.1.4.2.4.1 | CreateActionType Simple Type | 23 |
| 3.1.4.2.5 | Attributes..... | 23 |
| 3.1.4.2.6 | Groups..... | 24 |
| 3.1.4.2.7 | Attribute Groups | 24 |
| 3.1.5 | Timer Events | 24 |
| 3.1.6 | Other Local Events | 24 |
| 4 | Protocol Examples..... | 25 |
| 5 | Security..... | 27 |
| 5.1 | Security Considerations for Implementers..... | 27 |
| 5.2 | Index of Security Parameters | 27 |
| 6 | Appendix A: Full WSDL..... | 28 |
| 7 | Appendix B: Full XML Schema | 30 |
| 7.1 | Messages Schema..... | 30 |
| 7.2 | Types Schema..... | 31 |
| 8 | Appendix C: Product Behavior | 33 |
| 9 | Change Tracking..... | 34 |
| 10 | Index | 37 |

1 Introduction

The Bulk Transfer Web Service Protocol enables a protocol client to export and upload streamed opaque item data between the server and the client.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

Hypertext Transfer Protocol (HTTP)
Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)
XML

The following terms are defined in [\[MS-OXGLOS\]](#):

endpoint
mailbox
Simple Object Access Protocol (SOAP)
SOAP action
SOAP body
SOAP fault
SOAP header
SOAP message
Web server
Web Services Description Language (WSDL)
WSDL message
WSDL port type
XML namespace
XML schema

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Language", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol Specification](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol Specification](#)".

1.3 Overview

Bulk data transfer enables clients and servers to move large amounts of information. This protocol enables clients to upload large streams of data to a **mailbox** server and download large streams of data from a mailbox server.

The upload and export data stream is an opaque format that only needs to be understood by a server implementation. The client only serves as a repository for the opaque data stream so that it can be uploaded to the server at a later time.

1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup

Protocol, as described in [\[MS-OXDSCLI\]](#), to identify the target **endpoint (4)** to use for each operation.

This protocol uses the SOAP Protocol, as described in [\[SOAP1.1\]](#), to specify the structure information exchanged between the client and server. This protocol uses the **XML** Protocol, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content sent to and from the server.

The Bulk Transfer Web Service Protocol uses **SOAP** over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

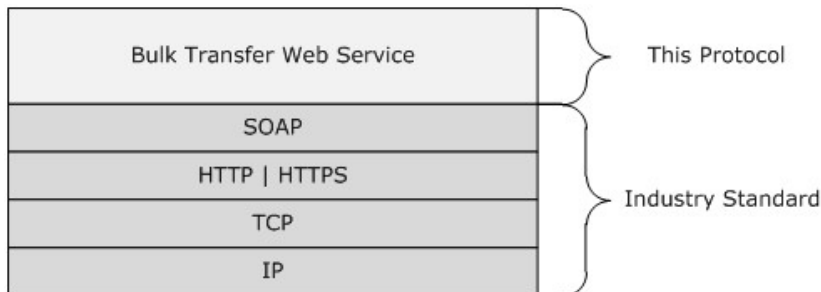


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

The endpoint (4) URL that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), is required to form the HTTP request to the Web server that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP Web requests that target this protocol.

1.6 Applicability Statement

The protocol is applicable to environments that stream items into and out of a mailbox by using Web services. This protocol is intended for scenarios in which a mailbox server is backed up and restored, where accessing item content is not a requirement. This Web service protocol is applicable to SOAP-based clients [\[SOAP1.1\]](#).

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol specifies only one **WSDL port type** version. The **WSDL** version of the request is identified by using the **t:RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.5.9, and the version of the server responding to the request is identified by using the **t:ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.5.10.
- **Security and Authentication Methods:** This protocol relies on the Web server that is hosting it to perform authentication.
- **Capability Negotiation:** This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

Preliminary

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

2.1 Transport

The SOAP version used for this protocol is SOAP 1.1, as specified in [\[SOAP1.1\]](#).

This protocol relies on the **Web server** that hosts the application to perform authentication. The protocol **MUST** support SOAP over HTTP, as specified in [\[RFC2616\]](#). The protocol **SHOULD** use secure communications via HTTPS, as defined in [\[RFC2818\]](#).

2.2 Common Message Syntax

This section contains common definitions used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language (WSDL), as defined in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

| Prefix | Namespace URI | Reference |
|--------|---|------------------------------|
| soap | http://schemas.xmlsoap.org/wsdl/soap/ | [SOAP1.1] |
| tns | http://schemas.microsoft.com/exchange/services/2006/messages | |
| wsdl | http://schemas.xmlsoap.org/wsdl/ | [WSDL] |
| t | http://schemas.microsoft.com/exchange/services/2006/types | |
| xs | http://www.w3.org/2001/XMLSchema | [XMLSCHEMA1] |
| m | http://schemas.microsoft.com/exchange/services/2006/messages | |
| none | http://schemas.microsoft.com/exchange/services/2006/messages | |
| none | http://schemas.microsoft.com/exchange/services/2006/types | |

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

This specification does not define any common XML schema element definitions.

2.2.4 Complex Types

This specification does not define any common XML schema complex type definitions.

2.2.5 Simple Types

This specification does not define any common XML schema simple types definitions.

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 ExchangeServicePortType Server Details

The Bulk Transfer Web Service Protocol defines a single WSDL port type with two operations. The operations enable client implementations to import and export items to and from a mailbox.

3.1.1 Abstract Data Model

None.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

| Operation | Description |
|---|---|
| ExportItems (section 3.1.4.1) | Specifies the WSDL messages for exporting items out of a mailbox. |
| UploadItems (section 3.1.4.2) | Specifies the WSDL messages for uploading items into a mailbox. |

The data stream for the **UploadItems** operation is provided by previously exported item data streams provided by the **ExportItems** operation.

3.1.4.1 ExportItems

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The **ExportItems** operation specifies the WSDL messages for exporting items out of a mailbox.

The following is the WSDL port type definition of the operation.

```
<wsdl:operation name="ExportItems">
  <wsdl:input message="tns:ExportItemsSoapIn"/>
  <wsdl:output message="tns:ExportItemsSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the operation. [<1>](#)

```

<wsdl:operation name="ExportItems">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ExportItems" />
  <wsdl:input>
    <soap:header message="tns:ExportItemsSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:ExportItemsSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:ExportItemsSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:ExportItemsSoapIn" part="ManagementRole" use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="ExportItemsResult" use="literal" />
    <soap:header message="tns:ExportItemsSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

3.1.4.1.1 Messages

The following table lists the set of WSDL message definitions that are specific to this operation.

| Message | Description |
|--|---|
| ExportItemsSoapIn (section 3.1.4.1.1.1) | Specifies the SOAP message that represents a request to export items out of a mailbox. |
| ExportItemsSoapOut (section 3.1.4.1.1.2) | Specifies the SOAP message that represents a response that contains exported items. |

3.1.4.1.1.1 tns:ExportItemsSoapIn Message

Note Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The **ExportItemsSoapIn** WSDL message specifies the SOAP message that represents a request to export items out of a mailbox.

The following is the **ExportItemsSoapIn** WSDL message specification.

```

<wsdl:message name="ExportItemsSoapIn">
  <wsdl:part name="request" element="tns:ExportItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>

```

The **ExportItemSoapIn** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/services/2006/messages/ExportItem>.

The parts of the **ExportItemSoapIn** WSDL message are described in the following table.

| Part name | Element/type | Description |
|-----------------------|--|--|
| request | tns:ExportItems (section 3.1.4.1.2.1) | Specifies the SOAP body of the request to export items. This part is required. |
| Impersonation | t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3) | Specifies a SOAP header that identifies the user whom the client application is impersonating. This part is optional. |
| MailboxCulture | t:MailboxCulture ([MS-OXWSCDATA] section 2.2.5.6) | Specifies a SOAP header that identifies the culture to use for accessing the server. The cultures are defined by [RFC3066] . |
| RequestVersion | t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9) | Specifies a SOAP header that identifies the schema version for the ExportItems operation request. |
| ManagementRole | t:ManagementRole ([MS-OXWSCDATA] section 2.2.5.7) | Specifies the SOAP header that identifies the caller's role. <2> |

3.1.4.1.1.2 tns:ExportItemsSoapOut Message

The **ExportItemsSoapOut** WSDL message specifies the SOAP message that represents a response that contains exported items.

```
<wsdl:message name="ExportItemsSoapOut">
  <wsdl:part name="ExportItemsResult" element="tns:ExportItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **ExportItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/ExportItem>.

The parts of the **ExportItemsSoapOut** WSDL message are described in the following table.

| Part name | Element/type | Description |
|--------------------------|---|--|
| ExportItemsResult | tns:ExportItemsResponse (section 3.1.4.1.2.2) | Specifies the SOAP body of the response. |
| ServerVersion | ServerVersion ([MS-OXWSCDATA] section 2.2.5.10) | Specifies the SOAP header that identifies the server version for the response. |

If the request is successful, the **ExportItems** operation returns an **ExportItemsResponse** element with the **ResponseClass** attribute of the **ExportItemsResponseMessage** element set to "Success". The **ResponseCode** element of the **ExportItemsResponseMessage** element is set to "NoError".

If the request is unsuccessful, the **ExportItems** operation returns an **ExportItemsResponse** element with the **ResponseClass** attribute of the **ExportItemsResponseMessage** element set to "Error". The **ResponseCode** element of the **ExportItemsResponseMessage** element is set to a value of the **ResponseCodeType** simple type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.22.

3.1.4.1.2 Elements

The following table lists the XML schema element definitions that are specific to this operation.

| Element | Description |
|---|---|
| ExportItems (section 3.1.4.1.2.1) | Specifies a request to export items from a mailbox. |
| ExportItemsResponse (section 3.1.4.1.2.2) | Specifies a response that contains exported items. |

3.1.4.1.2.1 ExportItems Element

The **ExportItems** element specifies a request to export items. This element **MUST** be present.

```
<xs:element name="ExportItems"
  type="m:ExportItemsType"
 />
```

3.1.4.1.2.2 ExportItemsResponse Element

The **ExportItemsResponse** element specifies a response to a request to export items from a mailbox. This element **MUST** be present.

```
<xs:element name="ExportItemsResponse"
  type="m:ExportItemsResponseType"
 />
```

3.1.4.1.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to this operation.

| Complex type | Description |
|--|--|
| ExportItemsResponseMessageType (section 3.1.4.1.3.1) | Specifies a single exported item. |
| ExportItemsResponseType (section 3.1.4.1.3.2) | Specifies a response to export items from a mailbox. |
| ExportItemsType (section 3.1.4.1.3.3) | Specifies a request to export items out of a mailbox. |
| NonEmptyArrayOfItemIdsType (section 3.1.4.1.3.4) | Specifies the array of items to export from a mailbox. |

3.1.4.1.3.1 m:ExportItemsResponseMessageType Complex Type

The **ExportItemsResponseMessageType** complex type specifies a single exported item. The **ExportItemsResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="ExportItemsResponseMessageType">
  <xs:complexContent>
```

```

<xs:extension
  base="m:ResponseMessageType"
>
  <xs:sequence>
    <xs:element name="ItemId"
      type="t:ItemIdType"
      minOccurs="0"
      maxOccurs="1"
    />
    <xs:element name="Data"
      type="xs:base64Binary"
      minOccurs="0"
      maxOccurs="1"
    />
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **ExportItemsResponseMessageType** complex type.

| Element | Type | Description |
|---------------|---|---|
| ItemId | t:ItemIdType ([MS-OXWSCORE] section 2.2.4.18) | Specifies the item identifier of a single exported item. This element MUST be present if the export operation is successful. |
| Data | xs:base64Binary ([XMLSCHEMA2]) | Specifies the data of a single exported item. This element MUST be present if the export operation is successful. |

3.1.4.1.3.2 ExportItemsResponseType Complex Type

The **ExportItemsResponseType** complex type specifies a response to export items from a mailbox. The **ExportItemsResponseType** complex type extends the **BaseResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.16.

```

<xs:complexType name="ExportItemsResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>

```

3.1.4.1.3.3 ExportItemsType Complex Type

The **ExportItemsType** complex type specifies a request to export items out of a mailbox. The **ExportItemsType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```

<xs:complexType name="ExportItemsType">
  <xs:complexContent>
    <xs:extension

```

```

    base="m:BaseRequestType"
  >
    <xs:sequence>
      <xs:element name="ItemIds"
        type="t:NonEmptyArrayOfItemIdsType"
        maxOccurs="1"
        minOccurs="1"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **ExportItemsType** complex type.

| Element | Type | Description |
|----------------|--|--|
| ItemIds | t:NonEmptyArrayOfItemIdsType (section 3.1.4.1.3.4) | Specifies the item identifier array of the items to export. This element MUST be present. |

3.1.4.1.3.4 t:NonEmptyArrayOfItemIdsType Complex Type

The **NonEmptyArrayOfItemIdsType** complex type specifies the array of items to export from a mailbox.

```

<xs:complexType name="NonEmptyArrayOfItemIdsType">
  <xs:sequence>
    <xs:element name="ItemId"
      type="t:ItemIdType"
      maxOccurs="unbounded"
      minOccurs="1"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **ExportItemsType** complex type.

| Element | Type | Description |
|---------------|--|--|
| ItemId | t:ItemIdType ([MS-OXWScore] section 2.2.4.18) | Specifies the item identifier of an item to export from a mailbox. At least one ItemId element MUST be present. If the ChangeKey attribute of the ItemIdType complex type is present, its value MUST be either valid or NULL. |

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 UploadItems

The **UploadItems** operation uploads items to a mailbox.

The following is the WSDL port type definition of the operation.

```
<wsdl:operation name="UploadItems">
  <wsdl:input message="tns:UploadItemsSoapIn"/>
  <wsdl:output message="tns:UploadItemsSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the operation.

```
<wsdl:operation name="UploadItems">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UploadItems" />
  <wsdl:input>
    <soap:header message="tns:UploadItemsSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:UploadItemsSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:UploadItemsSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UploadItemsResult" use="literal" />
    <soap:header message="tns:UploadItemsSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.2.1 Messages

The following table lists the set of WSDL message definitions that are specific to this operation.

| Message | Description |
|--|---|
| UploadItemsSoapIn (section 3.1.4.2.1.1) | Specifies the SOAP message that represents a request to upload items into a mailbox. |
| UploadItemsSoapOut (section 3.1.4.2.1.2) | Specifies the SOAP message that represents a response that contains the results of an attempt to upload items into a mailbox. |

3.1.4.2.1.1 tns:UploadItemsSoapIn Message

The **UploadItemsSoapIn** WSDL message specifies the SOAP message that represents a request to upload items into a mailbox.

The following is the WSDL message specification of the **UploadItemsSoapIn** message.

```

<wsdl:message name="UploadItemsSoapIn">
  <wsdl:part name="request" element="tns:UploadItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **UploadItemsSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UploadItems>.

The parts of the **UploadItemsSoapIn** WSDL message are described in the following table.

| Part name | Element/type | Description |
|-----------------------|--|---|
| request | UploadItems (section 3.1.4.2.2.1) | Specifies the SOAP body of the request. |
| Impersonation | ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3) | Specifies a SOAP header that identifies the user whom the client application is impersonating. This part is optional. |
| MailboxCulture | MailboxCulture ([MS-OXWSCDATA] section 2.2.5.6) | Specifies the SOAP header that identifies the culture to use for accessing the server. The cultures are defined by [RFC3066] . This part is optional. |
| RequestVersion | RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9) | Specifies a SOAP header that identifies the schema version for the UploadItems operation request. |

3.1.4.2.1.2 tns:UploadItemsSoapOut Message

The **UploadItemsSoapOut** WSDL message specifies the SOAP message that represents a response that contains the results of an attempt to upload items into a mailbox.

```

<wsdl:message name="UploadItemsSoapOut">
  <wsdl:part name="UploadItemsResult" element="tns:UploadItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The **UploadItemsSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UploadItems>.

The parts of the **UploadItemsSoapOut** WSDL message are described in the following table.

| Part name | Element/type | Description |
|--------------------------|--|---|
| UploadItemsResult | UploadItemsResponse (section 3.1.4.2.2.2) | Specifies the SOAP body of the response to an UploadItems operation request. |
| ServerVersion | ServerVersion ([MS-OXWSCDATA] section 2.2.5.10) | Specifies the SOAP header that identifies the server version for the response. |

If the request is successful, the **UploadItems** operation returns an **UploadItemsResponse** element with the **ResponseClass** attribute of the **UploadItemsResponseMessage** element set to

"Success". The **ResponseCode** element of the **UploadItemsResponseMessage** element is set to "NoError".

If the request is unsuccessful, the **UploadItems** operation returns an **UploadItemsResponse** element with the **ResponseClass** attribute of the **UploadItemsResponseMessage** element set to "Error". The **ResponseCode** element of the **UploadItemsResponseMessage** element is set to a value of the **ResponseCodeType** simple type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.22.

3.1.4.2.2 Elements

The following table lists the XML schema element definitions that are specific to this operation.

| Element | Description |
|---|---|
| UploadItems (section 3.1.4.2.2.1) | Specifies the request to upload items into a mailbox. This element MUST be present. |
| UploadItemsResponse (section 3.1.4.2.2.2) | Specifies the response to an attempt to upload items. This element MUST be present. |

3.1.4.2.2.1 UploadItems Element

The **UploadItems** element specifies the request to upload items into a mailbox. This element MUST be present.

```
<xs:element name="UploadItems"
  type="m:UploadItemsType"
 />
```

3.1.4.2.2.2 UploadItemsResponse Element

The **UploadItemsResponse** element specifies the response to an attempt to upload items. This element MUST be present.

```
<xs:element name="UploadItemsResponse"
  type="m:UploadItemsResponseType"
 />
```

3.1.4.2.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to this operation.

| Complex type | Description |
|--|---|
| NonEmptyArrayOfUploadItemsType (section 3.1.4.2.3.1) | Specifies the array of items to upload into a mailbox. |
| UploadItemsResponseMessageType (section 3.1.4.2.3.2) | Specifies the item identifier of an item that was uploaded into a mailbox. |
| UploadItemsResponseType (section 3.1.4.2.3.3) | Specifies the response messages for items for which an attempt was made to upload into a mailbox. |
| UploadItemsType (section 3.1.4.2.3.4) | Specifies the contents of a request to upload items |

| Complex type | Description |
|--|---|
| | into a mailbox. |
| UploadItemType (section 3.1.4.2.3.5) | Specifies the contents of single item to upload into a mailbox. |

3.1.4.2.3.1 t:NonEmptyArrayOfUploadItemsType Complex Type

The **NonEmptyArrayOfUploadItemsType** complex type specifies the array of items to upload into a mailbox.

```
<xs:complexType name="NonEmptyArrayOfUploadItemsType">
  <xs:sequence>
    <xs:element name="Item"
      type="t:UploadItemType"
      maxOccurs="unbounded"
      minOccurs="1"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **NonEmptyArrayOfUploadItemsType** complex type.

| Element | Type | Description |
|-------------|--|---|
| Item | t:UploadItemType (section 3.1.4.2.3.5) | Specifies the array of items to upload in to a mailbox. At least one Item element MUST be present. |

3.1.4.2.3.2 m:UploadItemsResponseMessageType Complex Type

The **UploadItemsResponseMessageType** complex type specifies the item identifier of an item that was uploaded into a mailbox. The **UploadItemsResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="UploadItemsResponseMessageType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
    <xs:sequence>
      <xs:element name="ItemId"
        type="t:ItemIdType"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **UploadItemsResponseMessageType** complex type.

| Element | Type | Description |
|---------|---|---|
| ItemId | t:ItemIdType ([MS-OXWSCORE] section 2.2.4.18) | Specifies the item identifier of an item that was uploaded into a mailbox. Only a single instance of this element can be present. |

3.1.4.2.3.3 m:UploadItemsResponseType Complex Type

The **UploadItemsResponseType** complex type specifies the response messages for which an attempt was made to update into a mailbox. The **UploadItemsResponseType** complex type extends the **BaseResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.16.

```
<xs:complexType name="UploadItemsResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.2.3.4 m:UploadItemsType Complex Type

The **UploadItemsType** complex type specifies the contents of a request to upload items in to a mailbox. The **UploadItemsType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="UploadItemsType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="Items"
        type="t:NonEmptyArrayOfUploadItemsType"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexType>
```

The following table lists the child elements of the **UploadItemsType** complex type.

| Element | Type | Description |
|---------|---|---|
| Items | t:NonEmptyArrayOfUploadItemsType (section 3.1.4.2.3.1) | Specifies the collection of items to upload into a mailbox. This element MUST be present. |

3.1.4.2.3.5 m:UploadItemType Complex Type

The **UploadItemType** complex type specifies the contents of a single item to upload in to a mailbox.

```

<xs:complexType name="UploadItemType">
  <xs:sequence>
    <xs:element name="ParentFolderId"
      type="t:FolderIdType"
      maxOccurs="1"
      minOccurs="1"
    />
    <xs:element name="ItemId"
      type="t:ItemIdType"
      maxOccurs="1"
      minOccurs="0"
    />
    <xs:element name="Data"
      type="xs:base64Binary"
      maxOccurs="1"
      minOccurs="1"
    />
  </xs:sequence>
  <xs:attribute name="CreateAction"
    type="t:CreateActionType"
    use="required"
  />
  <xs:attribute name="IsAssociated"
    type="xs:boolean"
  />
</xs:complexType>

```

The following table lists the child elements of the **UploadItemType** complex type.

| Element | Type | Description |
|-----------------------|---|--|
| ParentFolderId | t:FolderIdType ([MS-OXWSCDATA] section 2.2.4.31) | Specifies the target folder in which to place the upload item. This element MUST be present. |
| ItemId | t:ItemIdType ([MS-OXWSCORE] section 2.2.4.18) | Specifies the item identifier of the upload item. |
| Data | xs:base64Binary ([XMLSCHEMA2]) | Specifies the data of the upload item. This element MUST be present. |

The following table lists the attributes of the **UploadItemType** complex type.

| Name | Type | Description |
|---------------------|---|---|
| CreateAction | t:CreateActionType (section 3.1.4.2.4.1) | Specifies the action for uploading items into a mailbox. This attribute MUST be present. |
| IsAssociated | xs:boolean ([XMLSCHEMA2]) | This attribute is optional. If it is present, it indicates that the item is a folder associated item. If this attribute is not present, the server MUST assume that the item is not a folder associated item. |

3.1.4.2.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

| Simple type | Description |
|--|--|
| CreateActionType (section 3.1.4.2.4.1) | Specifies the action for uploading items into a mailbox. |

3.1.4.2.4.1 CreateActionType Simple Type

The **CreateActionType** simple type specifies the action for uploading items into a mailbox.

```
<xs:simpleType>
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="CreateNew"
    />
    <xs:enumeration
      value="Update"
    />
    <xs:enumeration
      value="UpdateOrCreate"
    />
  </xs:restriction>
</xs:simpleType>
```

Enumeration

The following values are defined by the **CreateActionType** simple type:

| Value | Description |
|----------------|---|
| CreateNew | Specifies that a new copy of the original item is uploaded to the mailbox. The <ItemId> element in the UploadItemType complex type, as specified in section 3.1.4.2.3.5 , MUST be ignored by the server. The <ItemId> element that is returned in the UploadItemsResponseMessageType complex type, as specified in section 3.1.4.2.3.2 , MUST contain the new item identifier. |
| Update | Specifies that the upload will update an item that is already present in the mailbox. The <ItemId> element in the UploadItemType complex type MUST be specified; otherwise, a SOAP fault MUST be returned. If the target item is not in the original folder specified by the <ParentFolderId> element in the UploadItemType complex type, an ErrorItemNotFound error code MUST be returned in the UploadItemsResponseMessageType complex type. |
| UpdateOrCreate | Specifies an attempt to first update the item. If the criteria for a successful update are met, the target item is updated. The <ItemId> element in the UploadItemType complex type MUST be specified; otherwise, a SOAP fault MUST be returned. If the target item is not in the original folder specified by the <ParentFolderId> element in the UploadItemType complex type, a new copy of the original item is uploaded to the mailbox associated with the folder specified by the <ParentFolderId> element. The <ItemId> element that is returned in the UploadItemsResponseMessageType complex type, as specified in section 3.1.4.2.3.2 , MUST contain the new item identifier. |

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

This section provides a simplified example of a request-response sequence for the **ExportItems** operation, as specified in section [3.1.4.1](#).

The following example shows an **ExportItems** request to export three items.

```
<?xml version="1.0" encoding="utf-8" ?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
  <soap:Header>
    <t:RequestServerVersion Version="Exchange2010_SP1" />
  </soap:Header>
  <soap:Body>
    <m:ExportItems>
      <m:ItemIds>
        <t:ItemId Id="AAMkAGYzZjZmRiUsidkC+NAAAAAY89GAAA=" />
        <t:ItemId Id="AAMkAGYzZjZmRiUsidkC+NAAAAAY89FAAA=" />
        <t:ItemId Id="AAMkAGYzZjZmRiUsidkC+NAAAAAY87NAAA=" />
      </m:ItemIds>
    </m:ExportItems>
  </soap:Body>
</soap:Envelope>
```

The following example shows an **ExportItems** response to the request to export three items. The item identifier and data have been shortened to preserve readability.

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <t:ServerVersionInfo MajorVersion="14"
      MinorVersion="1"
      MajorBuildNumber="139"
      MinorBuildNumber="0"
      Version="Exchange2010_SP1"
      xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <m:ExportItemsResponse
      xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
      xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
      <m:ResponseMessages>
        <m:ExportItemsResponseMessage ResponseClass="Success">
          <m:ResponseCode>NoError</m:ResponseCode>
          <m:ItemId Id="AAMkAGYzZjZmRiUsidkC+NAAAAAY89GAAA=" ChangeKey="FwAAAA=" />
          <m:Data>AQAAAAGAAAAAALgBlAHgAdABlAHMAAdAAuAG0AaQBjAHIAbwBzAG8AZgB0AC4A
            YwBvAG0AAABTAE0AVABQAAAAVQBzAGUAcgAyAEAAAYQB1AGoAaQBuAGcALQBkAG8AbQAUAGUA
            eAB0AGUAcwB0AC4AbQBpAGMAcGvBvAHMAbwBmAHQALGbjAG8AbQAAALCE/jlMAAAAVQBzAGUA
            cgAyAEAAAYQB1AGoAaQBuAGcALQBkAG8AbQAUAGUAEAB0AGUAcwB0AC4AbQBpAGMAcGvBvAHMA
```

```
bwBmAHQALgBjAG8AbQAAAAAMAADkAAAAAAwD+DwYAAAAADAARAaAwACQAMADkA=</m:Data>
</m:ExportItemsResponseMessage>
<m:ExportItemsResponseMessage ResponseClass="Success">
  <ResponseCode>NoError</m:ResponseCode>
  <m:ItemId Id="AAMkAGYzZjZmRiUsidkC+NAAAAAY89FAAA=" ChangeKey="FwAAAA==" />
  <m:Data>AQAAAAgAAAAAAAAAAQAAAAAMAAAAYAAAAQAAAAcDagAAAAAAwAAAAAAAEYAJACA
  QAAyAAAh9Spr08oBAwAEQAMAFkANABMOAwAAQAMAIQ4AAAAAsIQSN0oAAAAyAGEAYGxADYA
  MQA2ADYALQBhAGUANQBKAC0ANAAyAGUAZgAtAGEANQA1ADkALQBjADgAOQAwADgANwBkADIA
  MwBkADgANAAAAAMACzf/////AwAgDmQEAAADAPcPAAAAEAABzBPMXstUdPKAUAAACDBPMXst
  UdPKAQMBTcFAAAAsIQONx4AAABtAGUAcwBzAGEAZwBlAC8AcgBmAGMAOAAyADIAAACwhAEw
  IgAAAE0AbwBzAHQAIABmAGEAcwBjAGkAbgBhAHQAaQBAGcAAAAACAFkPBAAAAAAAADAAFA
  FABkZ3QrAAAAZF2mAwXAAEAAAACwhBoAEgAAAEkAUABNAC4ATgBvAHQAZQAAAAAMNgAAAAA
  sIQ3ACIAAABNAG8AcwB0ACAAZgBhAHMAYwBpAG4AYQB0AGkAbgBnAAAAQAA5AACq+za80coB
  AgE7AGUAAABFWDovTz1GSVJTVCBPUkdBTk1aQVRJT04vT1U9RVhdDSEFOR0UgQURNSU5JU1RS
  QVRJVkUgR1JpVVAwAgKEZZRE1CT0hGMjNTUERMVckvQ049UkVDSVBjRU5UUy9DTj1VU0VST05F
  ALCEPQACAAAAAAACAUeAfgAAAAAADcp0DIwEIQGrS5CAArL+GCAQAAAAAAAAvTz1GSVJTV
  VCBPUkdBTk1aQVRJT04vT1U9RVhdDSEFOR0UgQURNSU5JU1RSQVRJVkUgR1JpVVAwAgKEZZRE1C
  T0hGMjNTUERMVckvQ049UkVDSVBjRU5UUy9DTj1VU0VST05FALCEQgAQAAAAVQB</m:Data>
</m:ExportItemsResponseMessage>
<m:ExportItemsResponseMessage ResponseClass="Success">
  <ResponseCode>NoError</m:ResponseCode>
  <m:ItemId Id="AAMkAGYzZjZmRiUsidkC+NAAAAAY87NAAA=" ChangeKey="CQAAAA==" />
  <m:Data>AQAAAAgAAAAAAAAAAQAAAAAMAAAAYAAAAQAAAAcDagAAAAAAwAAAAAAAEYAJACA
  BAAAAAYAAABDouAAAACAAAAEiAAAOSECEBbAAAAAL089Rk1SU1QgT1JHQU5JWkFUSU9OL09V
  PUVYQ0hBTkdFIEFETU1OSVNUUkFUSVZFIEdST1VQIChGWURJQk9IRjIzU1BETFQpL0NOPVJF
  Q01QSUVOVFMvQ049AAMAFwABAAAAAsIQaABIAAABJAFaATQAUAE4AbwB0AGUAAAAALACMAAAAL
  ACkAAADADYAAAAAALCENwAyAAAAASQBUAHQAZQByAGUAcwB0AGkAbgBnACAALQAgAGYAcgBv
  AG0AIABFAFcAUwBNAEEAAAABAADkAAHZeFxfRygeCATsAZQAAAEVYoi9PPUZJU1NUIE9SR0FO
  SVpBVE1PTi9PVT1FWENIQU5HRSBBRE1JTk1TVFJBVE1WRSBHUK9VUCaor11ESUJJPSEYyM1NQ
  REXUKS9DTj1SRUNJUE1FT1RTL0NOPVVTRVJPTkUAsIQ9AAIAAAAAAIBPwB+AAAAAAAANyn
  QMjAQhAatLkIACsv4YIBAAAAAAAAC9PPUZJU1NUIE9SR0FOSVpBVE1PTi9PVT1FWENIQU5H
  </m:Data>
</m:ExportItemsResponseMessage>
</m:ResponseMessages>
</m:ExportItemsResponse>
</s:Body>
</s:Envelope>
```

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

Preliminary

6 Appendix A: Full WSDL

The XML files that are listed in the following table are required in order to implement the functionality described in this document.

| File name | Description | Section |
|--------------------------|---|---------------------|
| MS-OXWSBTRF.wsdl | Contains the WSDL for the implementation of this protocol. | 6 |
| MS-OXWSBTRF-messages.xsd | Contains the XML schema message definitions that are used in this protocol. | 7.1 |
| MS-OXWSBTRF-types.xsd | Contains the XML schema type definitions that are used in this protocol. | 7.2 |

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSBTRF-types.xsd or MS-OXWSBTRF-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

This section contains the contents of the MS-OXWSBTRF.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wSDL:definitions xmlns:soap="http://schemas.xmlsoap.org/wSDL/soap/"
  xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:wSDL="http://schemas.xmlsoap.org/wSDL/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <wSDL:types>
    <xs:schema id="messages"
      elementFormDefault="qualified"
      version="Exchange2012"
      xmlns:xs="http://www.w3.org/2001/XMLSchema"
      targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
      <xs:include schemaLocation="MS-OXWSBTRF-messages.xsd"/>
    </xs:schema>
  </wSDL:types>
  <wSDL:message name="UploadItemsSoapIn">
    <wSDL:part name="request" element="tns:UploadItems"/>
    <wSDL:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wSDL:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wSDL:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wSDL:message>
  <wSDL:message name="UploadItemsSoapOut">
    <wSDL:part name="UploadItemsResult" element="tns:UploadItemsResponse"/>
    <wSDL:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wSDL:message>
  <wSDL:message name="ExportItemsSoapIn">
    <wSDL:part name="request" element="tns:ExportItems"/>
    <wSDL:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wSDL:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wSDL:part name="RequestVersion" element="t:RequestServerVersion"/>
    <wSDL:part name="ManagementRole" element="t:ManagementRole"/>
  </wSDL:message>
  <wSDL:message name="ExportItemsSoapOut">
    <wSDL:part name="ExportItemsResult" element="tns:ExportItemsResponse"/>
    <wSDL:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wSDL:message>
</wSDL:definitions>
```

```

</wsdl:message>
<wsdl:portType name="ExchangeServicePortType">
  <wsdl:operation name="UploadItems">
    <wsdl:input message="tns:UploadItemsSoapIn"/>
    <wsdl:output message="tns:UploadItemsSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="ExportItems">
    <wsdl:input message="tns:ExportItemsSoapIn"/>
    <wsdl:output message="tns:ExportItemsSoapOut"/>
  </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
  <wsdl:documentation>
    <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim/" />
  </wsdl:documentation>
  <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
  <wsdl:operation name="UploadItems">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UploadItems"/>
    <wsdl:input>
      <soap:header message="tns:UploadItemsSoapIn" part="Impersonation" use="literal"/>
      <soap:header message="tns:UploadItemsSoapIn" part="MailboxCulture" use="literal"/>
      <soap:header message="tns:UploadItemsSoapIn" part="RequestVersion" use="literal"/>
      <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="UploadItemsResult" use="literal"/>
      <soap:header message="tns:UploadItemsSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="ExportItems">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ExportItems"/>
    <wsdl:input>
      <soap:header message="tns:ExportItemsSoapIn" part="Impersonation" use="literal"/>
      <soap:header message="tns:ExportItemsSoapIn" part="MailboxCulture" use="literal"/>
      <soap:header message="tns:ExportItemsSoapIn" part="RequestVersion" use="literal"/>
      <soap:header message="tns:ExportItemsSoapIn" part="ManagementRole" use="literal"/>
      <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="ExportItemsResult" use="literal"/>
      <soap:header message="tns:ExportItemsSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

| Schema name | Prefix | Section |
|-----------------|--------|---------------------|
| Messages schema | m: | 7.1 |
| Types schema | t: | 7.2 |

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSBTRF-types.xsd or MS-OXWSBTRF-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

7.1 Messages Schema

This section contains the contents of the MS-OXWSBTRF-messages.xsd file and information about additional files that this schema file requires to operate correctly.

The MS-OXWSBTRF-messages.xsd includes the files listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

| File name | Defining specification |
|---------------------------|--|
| MS-OXWSBTRF-types.xsd | 7.2 |
| MS-OXWSCDATA-messages.xsd | [MS-OXWSCDATA] section 7.1 |

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema id="messages" elementFormDefault="qualified" version="Exchange2012"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSBTRF-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:complexType name="UploadItemsType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="Items" type="t:NonEmptyArrayOfUploadItemsType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="UploadItems" type="m:UploadItemsType"/>
  <xs:complexType name="UploadItemsResponseMessageType">
    <xs:complexContent>
      <xs:extension base="m:ResponseMessageType">
        <xs:sequence>
          <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:schema>
```

```

</xs:complexType>
<xs:complexType name="UploadItemsResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="UploadItemsResponse" type="m:UploadItemsResponseType"/>
<xs:complexType name="ExportItemsType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ItemIds" type="t:NonEmptyArrayOfItemIdsType" minOccurs="1"
maxOccurs="1"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="ExportItems" type="m:ExportItemsType"/>
<xs:complexType name="ExportItemsResponseMessageType">
  <xs:complexContent>
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0" maxOccurs="1"/>
        <xs:element name="Data" type="xs:base64Binary" minOccurs="0" maxOccurs="1"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="ExportItemsResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="ExportItemsResponse" type="m:ExportItemsResponseType"/>
</xs:schema>

```

7.2 Types Schema

This section contains the contents of the MS-OXWSBTRF-types.xsd and information about additional files that this schema file requires to operate correctly.

MS-OXWSBTRF-types.xsd includes the file listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

| File name | Defining specification |
|------------------------|--|
| MS-OXWSCDATA-types.xsd | [MS-OXWSCDATA] section 7.2 |

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema id="types"
  elementFormDefault="qualified"
  version="Exchange2012"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>

```

```

<xs:complexType name="NonEmptyArrayOfUploadItemsType">
  <xs:sequence>
    <xs:element name="Item" type="t:UploadItemType" maxOccurs="unbounded" minOccurs="1"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="UploadItemType">
  <xs:sequence>
    <xs:element name="ParentFolderId" type="t:FolderIdType" maxOccurs="1" minOccurs="1"/>
    <xs:element name="ItemId" type="t:ItemIdType" maxOccurs="1" minOccurs="0"/>
    <xs:element name="Data" type="xs:base64Binary" maxOccurs="1" minOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="CreateAction" type="t:CreateActionType" use="required"/>
  <xs:attribute name="IsAssociated" type="xs:boolean" use="optional"/>
</xs:complexType>
<xs:simpleType name="CreateActionType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="CreateNew"/>
    <xs:enumeration value="Update"/>
    <xs:enumeration value="UpdateOrCreate"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="CompleteActionType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Commit"/>
    <xs:enumeration value="Abandon"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="NonEmptyArrayOfItemIdsType">
  <xs:sequence>
    <xs:element name="ItemId" type="t:ItemIdType" maxOccurs="unbounded" minOccurs="1"/>
  </xs:sequence>
</xs:complexType>
</xs:schema>

```


8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2010 Service Pack 1 (SP1)
- Microsoft® Exchange Server 2013 Preview
- Microsoft® SharePoint® Server 2013 Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 3.1.4.1:](#) Exchange 2010 does not implement the **ManagementRole** part.

[<2> Section 3.1.4.1.1.1:](#) Exchange 2010 does not implement the **ManagementRole** part.

9 Change Tracking

This section identifies changes that were made to the [MS-OXWSBTRF] protocol document between the April 2012 and July 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

| Section | Tracking number (if applicable) and description | Major change (Y or N) | Change type |
|--|--|-----------------------|--|
| 1.1 Glossary | Added "SOAP fault" to the list of terms defined in [MS-OXGLOS]. | N | Content updated. |
| 1.4 Relationship to Other Protocols | Added description of support for SOAP over HTTP. | N | Content updated. |
| 2.1 Transport | Specified support for SOAP over HTTP. | N | Content updated. |
| 3.1.4.1 ExportItems | Added information about the content of the response. | N | Content updated. |
| 3.1.4.1 ExportItems | Added a behavior note to indicate that Exchange 2010 does not implement the ManagementRole part. | N | New product behavior note added. |
| 3.1.4.1.1 tns:ExportItemsSoapIn Message | Added a behavior note to indicate that Exchange 2010 does not implement the ManagementRole part. | N | Content updated. |
| 3.1.4.1.1.2 tns:ExportItemsSoapOut Message | Added information about the content of the response. | N | Content updated. |
| 3.1.4.1.4 Simple Types | Added section. | Y | New content added for template compliance. |
| 3.1.4.1.5 | Added section. | Y | New content added |

| Section | Tracking number (if applicable) and description | Major change (Y or N) | Change type |
|--|--|-----------------------|--|
| Attributes | | | for template compliance. |
| 3.1.4.1.6 Groups | Added section. | Y | New content added for template compliance. |
| 3.1.4.1.7 Attribute Groups | Added section. | Y | New content added for template compliance. |
| 3.1.4.2 UploadItems | Added information about the content of the response. | N | Content updated. |
| 3.1.4.2.1.2 tns:UploadItemsSoapOut Message | Added information about the content of the response. | N | Content updated. |
| 3.1.4.2.5 Attributes | Added section. | Y | New content added for template compliance. |
| 3.1.4.2.6 Groups | Added section. | Y | New content added for template compliance. |
| 3.1.4.2.7 Attribute Groups | Added section. | Y | New content added for template compliance. |
| 6 Appendix A: Full WSDL | Updated WSDL. | N | Content updated. |
| 6 Appendix A: Full WSDL | Updated WSDL. | N | Content updated. |
| 7.1 Messages Schema | Updated XML schema for messages. | N | Content updated. |
| 7.2 Types Schema | Updated XML schema for types. | N | Content updated. |
| | Removed the "Common Data Structures" section. | Y | Content removed for template compliance. |

10 Index

A

Abstract data model
 [server](#) 11
[Applicability](#) 7
[Attribute groups](#) 10
[Attributes](#) 10

C

[Capability negotiation](#) 7
[Change tracking](#) 34
[Complex types](#) 10

D

Data model - abstract
 [server](#) 11

E

Events
 [local - server](#) 24
 [timer - server](#) 24

F

[Fields - vendor-extensible](#) 8
[Full WSDL](#) 28
[Full XML Schema](#) 30
 [Messages Schema](#) 30
 [Types Schema](#) 31

G

[Glossary](#) 5
[Groups](#) 10

I

[Implementer - security considerations](#) 27
[Index of security parameters](#) 27
[Informative references](#) 6
Initialization
 [server](#) 11
[Introduction](#) 5

L

Local events
 [server](#) 24

M

Message processing
 [server](#) 11
Messages
 [attribute groups](#) 10

[attributes](#) 10
[complex types](#) 10
[elements](#) 9
[enumerated](#) 9
[groups](#) 10
[namespaces](#) 9
[simple types](#) 10
[syntax](#) 9
[transport](#) 9

N

[Namespaces](#) 9
[Normative references](#) 5

O

Operations
 [ExportItems](#) 11
 [UploadItems](#) 17
[Overview \(synopsis\)](#) 6

P

[Parameters - security index](#) 27
[Preconditions](#) 7
[Prerequisites](#) 7
[Product behavior](#) 33

R

[References](#) 5
 [informative](#) 6
 [normative](#) 5
[Relationship to other protocols](#) 6

S

Security
 [implementer considerations](#) 27
 [parameter index](#) 27
Sequencing rules
 [server](#) 11
Server
 [abstract data model](#) 11
 [ExportItems operation](#) 11
 [initialization](#) 11
 [local events](#) 24
 [message processing](#) 11
 [sequencing rules](#) 11
 [timer events](#) 24
 [timers](#) 11
 [UploadItems operation](#) 17
[Simple types](#) 10
[Standards assignments](#) 8
Syntax
 [messages - overview](#) 9

T

Timer events

[server](#) 24

Timers

[server](#) 11

[Tracking changes](#) 34

[Transport](#) 9

Types

[complex](#) 10

[simple](#) 10

V

[Vendor-extensible fields](#) 8

[Versioning](#) 7

W

[WSDL](#) 28

X

[XML Schema](#) 30

[Messages Schema](#) 30

[Types Schema](#) 31