

# [MS-OXWScore]: Core Items Web Service Protocol Specification

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

**Preliminary Documentation.** This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final

documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

## Revision Summary

Date	Revision History	Revision Class	Comments
07/15/2009	1.0	Major	Initial Availability.
11/04/2009	1.1.0	Minor	1.1.0
02/10/2010	1.1.0	None	Version 1.1.0 release
05/05/2010	1.1.1	Editorial	Revised and edited the technical content.
08/04/2010	2.0	Major	Significantly changed the technical content.
11/03/2010	3.0	Major	Significantly changed the technical content.
03/18/2011	4.0	Major	Significantly changed the technical content.
08/05/2011	4.1	Minor	Clarified the meaning of the technical content.
10/07/2011	5.0	Major	Significantly changed the technical content.
01/20/2012	6.0	Major	Significantly changed the technical content.
04/27/2012	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	6.1	Minor	Clarified the meaning of the technical content.

# Table of Contents

<b>1 Introduction .....</b>	<b>7</b>
1.1 Glossary .....	7
1.2 References .....	7
1.2.1 Normative References .....	8
1.2.2 Informative References .....	8
1.3 Overview .....	9
1.4 Relationship to Other Protocols .....	9
1.5 Prerequisites/Preconditions .....	10
1.6 Applicability Statement .....	10
1.7 Versioning and Capability Negotiation .....	10
1.8 Vendor-Extensible Fields .....	10
1.9 Standards Assignments .....	10
<b>2 Messages.....</b>	<b>11</b>
2.1 Transport .....	11
2.2 Common Message Syntax .....	11
2.2.1 Namespaces .....	11
2.2.2 Messages .....	11
2.2.3 Elements .....	11
2.2.3.1 t:BaseItemId Element .....	12
2.2.3.2 t:ManagementRole Element .....	12
2.2.4 Complex Types .....	12
2.2.4.1ArrayOfOccurrenceRangesType .....	14
2.2.4.2 FlagType .....	14
2.2.4.3 m:BaseMoveCopyItemType Complex Type .....	14
2.2.4.4 m:SendItemResponseType Complex Type .....	15
2.2.4.5 m:SendItemType Complex Type .....	16
2.2.4.6 m:UpdateItemResponseMessageType Complex Type .....	16
2.2.4.7 t:ConflictResultsType Complex Type .....	17
2.2.4.8 t:ItemType Complex Type .....	17
2.2.4.9 t:ManagementRoleType Complex Type .....	23
2.2.4.10 t:MimeContentType Complex Type .....	23
2.2.4.11 t:NonEmptyArrayOfBaseItemIdsType Complex Type .....	24
2.2.4.12 t:NonEmptyArrayOfInternetHeadersType Complex Type .....	24
2.2.4.13 t:NonEmptyArrayOfResponseObjectsType Complex Type .....	25
2.2.4.14 t:NonEmptyArrayOfRoleType Complex Type .....	26
2.2.4.15 t:OccurrenceItemIdType Complex Type .....	27
2.2.4.16 OccurrencesRangeType .....	27
2.2.4.17 t:RecurringMasterItemIdType Complex Type .....	28
2.2.4.18 t:ItemIdType Complex Type .....	29
2.2.4.19 t:ReferenceItemResponseType Complex Type .....	29
2.2.4.20 t:SmartResponseBaseType Complex Type .....	30
2.2.4.21 t:SmartResponseType Complex Type .....	32
2.2.4.22 ArrayOfAddressesType .....	32
2.2.4.23 ArrayOfMeetingSuggestionsType .....	32
2.2.4.24 MeetingSuggestionType .....	33
2.2.4.25 ArrayOfTaskSuggestionsType .....	33
2.2.4.26 ArrayOfContactsType .....	33
2.2.4.27 ContactType .....	34
2.2.4.28 ArrayOfUrlsType .....	34

2.2.4.29	ArrayOfPhonesType.....	35
2.2.4.30	PhoneType .....	35
2.2.4.31	ArrayOfEmailUsersType .....	35
2.2.4.32	EmailUserType .....	35
2.2.4.33	TaskSuggestionType .....	36
2.2.4.34	ArrayOfExtractedEmailAddresses .....	36
2.2.4.35	EntityExtractionResultType.....	36
2.2.4.36	RightsManagementLicenseDataType .....	37
2.2.5	Simple Types .....	38
2.2.5.1	t:DerivedItemIdType Simple Type .....	38
2.2.5.2	t:ImportanceChoicesType Simple Type.....	38
2.2.5.3	t:ItemClassType Simple Type.....	39
2.2.5.4	t:ReminderMinutesBeforeStartType Simple Type .....	39
2.2.6	Attributes .....	40
2.2.7	Groups.....	40
2.2.8	Attribute Groups .....	40
<b>3</b>	<b>Protocol Details .....</b>	<b>41</b>
3.1	ExchangeServicePortType Server Details .....	41
3.1.1	Abstract Data Model .....	41
3.1.2	Timers .....	41
3.1.3	Initialization .....	41
3.1.4	Message Processing Events and Sequencing Rules.....	41
3.1.4.1	CopyItem Operation.....	41
3.1.4.1.1	Messages .....	42
3.1.4.1.1.1	tns:CopyItemSoapIn Message.....	42
3.1.4.1.1.2	tns:CopyItemSoapOut Message.....	43
3.1.4.1.2	Elements.....	43
3.1.4.1.2.1	CopyItem Element .....	43
3.1.4.1.2.2	CopyItemResponse Element.....	44
3.1.4.1.3	Complex Types .....	44
3.1.4.1.3.1	m:CopyItemResponseType Complex Type .....	44
3.1.4.1.3.2	m:CopyItemType Complex Type.....	44
3.1.4.2	CreateItem Operation .....	45
3.1.4.2.1	Messages .....	45
3.1.4.2.1.1	tns:CreateItemSoapIn Message.....	45
3.1.4.2.1.2	tns:CreateItemSoapOut Message.....	46
3.1.4.2.2	Elements.....	47
3.1.4.2.2.1	CreateItem Element.....	47
3.1.4.2.2.2	CreateItemResponse Element .....	47
3.1.4.2.3	Complex Types .....	47
3.1.4.2.3.1	m:CreateItemResponseType Complex Type .....	47
3.1.4.2.3.2	m:CreateItemType Complex Type .....	48
3.1.4.3	DeleteItem Operation .....	49
3.1.4.3.1	Messages .....	49
3.1.4.3.1.1	tns:DeleteItemSoapIn Message.....	49
3.1.4.3.1.2	tns:DeleteItemSoapOut Message.....	50
3.1.4.3.2	Elements.....	51
3.1.4.3.2.1	DeleteItem Element .....	51
3.1.4.3.2.2	DeleteItemResponse Element.....	51
3.1.4.3.3	Complex Types .....	51
3.1.4.3.3.1	m:DeleteItemResponseType Complex Type .....	51
3.1.4.3.3.2	m:DeleteItemType Complex Type.....	52

3.1.4.4 GetItem Operation .....	53
3.1.4.4.1 Messages .....	53
3.1.4.4.1.1 tns:GetItemSoapIn Message .....	54
3.1.4.4.1.2 tns:GetItemSoapOut Message.....	55
3.1.4.4.2 Elements.....	55
3.1.4.4.2.1 GetItem Element .....	55
3.1.4.4.2.2 GetItemResponse Element.....	55
3.1.4.4.3 Complex Types .....	56
3.1.4.4.3.1 m:GetItemResponseType Complex Type .....	56
3.1.4.4.3.2 m:GetItemType Complex Type.....	56
3.1.4.5 MarkAllItemsAsRead Operation.....	57
3.1.4.5.1 Messages .....	57
3.1.4.5.1.1 tns:MarkAllItemsAsReadSoapIn Message.....	58
3.1.4.5.1.2 tns:MarkAllItemsAsReadSoapOut Message.....	58
3.1.4.5.2 Elements.....	59
3.1.4.5.2.1 MarkAllItemsAsRead Element.....	59
3.1.4.5.2.2 MarkAllItemsAsReadResponse Element .....	59
3.1.4.5.3 Complex Types .....	60
3.1.4.5.3.1 m:MarkAllItemsAsReadType Complex Type.....	60
3.1.4.5.3.2 m:MarkAllItemsAsReadResponseType Complex Type .....	60
3.1.4.6 MoveItem Operation .....	61
3.1.4.6.1 Messages .....	61
3.1.4.6.1.1 tns:MoveItemSoapIn Message.....	61
3.1.4.6.1.2 tns:MoveItemSoapOut Message .....	62
3.1.4.6.2 Elements.....	62
3.1.4.6.2.1 MoveItem Element.....	62
3.1.4.6.2.2 MoveItemResponse Element .....	63
3.1.4.6.3 Complex Types .....	63
3.1.4.6.3.1 m:MoveItemResponseType Complex Type .....	63
3.1.4.6.3.2 m:MoveItemType Complex Type .....	63
3.1.4.7 SendItem Operation.....	64
3.1.4.7.1 Messages .....	64
3.1.4.7.1.1 tns:SendItemSoapIn Message.....	64
3.1.4.7.1.2 tns:SendItemSoapOut Message.....	65
3.1.4.7.2 Elements.....	65
3.1.4.7.2.1 SendItem Element.....	66
3.1.4.7.2.2 SendItemResponse Element.....	66
3.1.4.7.3 Complex Types .....	66
3.1.4.7.3.1 m:SendItemResponseType Complex Type .....	66
3.1.4.7.3.2 m:SendItemType Complex Type .....	66
3.1.4.8 UpdateItem Operation.....	67
3.1.4.8.1 Messages .....	68
3.1.4.8.1.1 tns:UpdateItemSoapIn Message .....	68
3.1.4.8.1.2 tns:UpdateItemSoapOut Message .....	69
3.1.4.8.2 Elements.....	69
3.1.4.8.2.1 UpdateItem Element .....	69
3.1.4.8.2.2 UpdateItemResponse Element.....	70
3.1.4.8.3 Complex Types .....	70
3.1.4.8.3.1 m:UpdateItemResponseType Complex Type .....	70
3.1.4.8.3.2 m:UpdateItemType Complex Type .....	71
3.1.4.8.3.3 t:AppendToItemType Complex Type .....	72
3.1.4.8.3.4 t:ChangeDescriptionType Complex Type.....	74
3.1.4.8.3.5 t:DeleteItemType Complex Type .....	74

3.1.4.8.3.6	t:ItemChangeDescriptionType Complex Type .....	74
3.1.4.8.3.7	t:ItemChangeType Complex Type.....	75
3.1.4.8.3.8	t:NonEmptyArrayOfItemChangeDescriptionsType Complex Type .....	76
3.1.4.8.3.9	t:NonEmptyArrayOfItemChangesType Complex Type .....	76
3.1.4.8.3.10	t:SetItemFieldType Complex Type .....	77
3.1.4.8.4	Simple Types.....	78
3.1.4.8.4.1	t:ConflictResolutionType Simple Type.....	78
3.1.5	Timer Events .....	79
3.1.6	Other Local Events .....	79
<b>4</b>	<b>Protocol Examples.....</b>	<b>80</b>
<b>5</b>	<b>Security.....</b>	<b>81</b>
5.1	Security Considerations for Implementers.....	81
5.2	Index of Security Parameters .....	81
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>82</b>
<b>7</b>	<b>Appendix B: Full XML Schema .....</b>	<b>88</b>
7.1	Messages Schema.....	88
7.2	Types Schema.....	92
<b>8</b>	<b>Appendix C: Product Behavior .....</b>	<b>101</b>
<b>9</b>	<b>Change Tracking.....</b>	<b>105</b>
<b>10</b>	<b>Index .....</b>	<b>109</b>

# 1 Introduction

The Core Items Web Service Protocol enables clients to create, update, and delete items on the server.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**Hypertext Transfer Protocol (HTTP)**

**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**

The following terms are defined in [\[MS-OXGLOS\]](#):

**base64 encoding**

**blind carbon copy (Bcc) recipient**

**carbon copy (Cc) recipient**

**delivery receipt**

**endpoint**

**mailbox**

**meeting**

**MIME message**

**Multipurpose Internet Mail Extensions (MIME)**

**Outbox folder**

**read receipt**

**recipient**

**SOAP action**

**SOAP body**

**SOAP header**

**SOAP message**

**To recipient**

**Uniform Resource Locator (URL)**

**Web Services Description Language (WSDL)**

**WSDL message**

**WSDL port type**

**XML namespace**

**XML schema**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

## 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCONT] Microsoft Corporation, "[Contacts Web Service Protocol Specification](#)".

[MS-OXWSDLIST] Microsoft Corporation, "[Distribution List Creation and Usage Web Service Protocol Specification](#)".

[MS-OXWSFOLD] Microsoft Corporation, "[Folders and Folder Permissions Web Service Protocol Specification](#)".

[MS-OXWSGTZ] Microsoft Corporation, "[Get Server Time Zone Web Service Protocol Specification](#)".

[MS-OXWSMSG] Microsoft Corporation, "[E-Mail Message Types Web Service Protocol Specification](#)".

[MS-OXWSMTGS] Microsoft Corporation, "[Calendaring Web Service Protocol Specification](#)".

[MS-OXWSPOST] Microsoft Corporation, "[Post Items Web Service Protocol Specification](#)".

[MS-OXWSTASK] Microsoft Corporation, "[Tasks Web Service Protocol Specification](#)".

[MS-OXWSXPROP] Microsoft Corporation, "[Extended Properties Structure](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Language", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmleschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmleschema-2-20010502/>

## 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

---

*[MS-OXWSCORE] — v20120630  
Core Items Web Service Protocol Specification*

*Copyright © 2012 Microsoft Corporation.*

*Release: July 16, 2012*

[MS-OXDSCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol Specification](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol Specification](#)".

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

## 1.3 Overview


The Core Items Web Service Protocol provides clients with the ability to create items such as messages, tasks, and **meetings**, or to get the properties of an existing item. Clients can also use this protocol to update, delete, move, or copy items on the server.

## 1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), to identify the target **endpoint (4)** to use for each operation.

The Core Items Web Service Protocol uses the SOAP Protocol, as described in [\[SOAP1.1\]](#), to specify the structure information exchanged between the client and server. Additionally, this protocol uses the XML Protocol, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

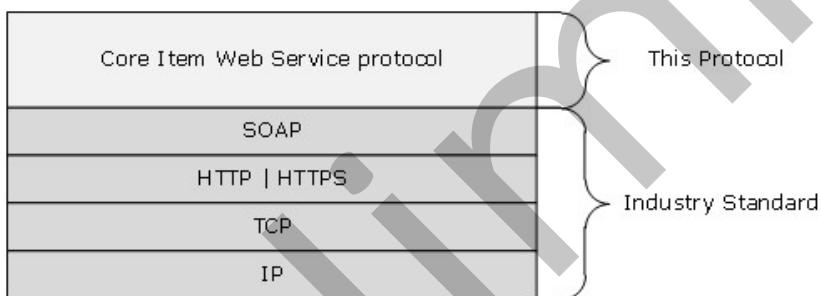

**Figure 1: This protocol in relation to other protocols**

The item information that is returned by the Core Items Web Service Protocol is used when requests are made by using the following protocols:

- Contacts Web Service Protocol, as described in [\[MS-OXWSCONT\]](#)
- Distribution List Creation and Usage Web Service Protocol, as described in [\[MS-OXWSDLIST\]](#)
- E-Mail Message Types Web Service Protocol, as described in [\[MS-OXWSMSG\]](#)
- Calendaring Web Service Protocol, as described in [\[MS-OXWSMTGS\]](#)
- Post Items Web Service Protocol, as described in [\[MS-OXWSPOST\]](#)

- Tasks Web Service Protocol, as described in [\[MS-OXWSTASK\]](#)

## 1.5 Prerequisites/Preconditions

The endpoint (4) **URL** that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), is required to form the HTTP request to the Web server that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP Web requests that target this protocol.

## 1.6 Applicability Statement

This protocol is applicable to environments that create, delete, get, copy, move, or update items by using the server's Web services.

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol has only one **WSDL port type** version. The **WSDL** version of the request is identified by using the **t:RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.5.9. The version of the server responding to the request is identified by using the **t:ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.5.10.
- **Security and Authentication Methods:** This protocol relies on the Web server that is hosting it to perform authentication.
- **Localization:** This protocol includes text strings in various messages. Localization considerations for such strings are specified in sections [2.2](#) and [3.1.4](#).
- **Capability Negotiation:** None.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

### 2.1 Transport

The SOAP version supported is SOAP 1.1. For details, see [\[SOAP1.1\]](#).

This protocol relies on the Web server that hosts the application to perform authentication. The protocol SHOULD use secure communications via HTTPS, as defined in [\[RFC2818\]](#).

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language (WSDL), as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
s	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a>
targetNamespace	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
t	<a href="http://schemas.microsoft.com/exchange/services/2006/types">http://schemas.microsoft.com/exchange/services/2006/types</a>	

#### 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

#### 2.2.3 Elements

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The following table lists the set of common XML schema element definitions that are defined by this specification. XML schema element definitions that are specific to a particular operation are defined with the operation.

Element name	Description
<b>BaseItemId</b>	Specifies the base class for IDs that represent items in a <b>mailbox</b> .
<b>ManagementRole</b>	Specifies the roles the user or application wants to use.

### 2.2.3.1 t:BaseItemId Element

The **BaseItemId** element specifies the base class for IDs that represent items in a mailbox.

```
<xss:element name="t:BaseItemId"
  type="t:BaseItemIdType"
  abstract="true"
/>
```

### 2.2.3.2 t:ManagementRole Element

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **ManagementRole** element specifies the roles the user or application wants to use. [<1>](#)

```
<xss:element name="MailboxCulture" type="t:MailboxCultureType"/>
```

## 2.2.4 Complex Types

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The following table lists the set of common XML schema complex type definitions that are defined by this specification. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

Complex type	Description
<b>ArrayOfOccurrenceRangesType</b>	Specifies an array of occurrence ranges <a href="#">&lt;2&gt;</a>
<b>FlagType</b>	Specifies a flag indicating status, start date, due date or completion date for an item. <a href="#">&lt;3&gt;</a>
<b>BaseMoveCopyItemType</b>	Specifies the base type for the <b>CopyItemType</b> complex type (section <a href="#">3.1.4.1.3.2</a> ) and the <b>MoveItemType</b> complex type (section <a href="#">3.1.4.6.3.2</a> ).
<b>SendItemResponseType</b>	Specifies a response to a call to the <b>SendItem</b> operation ( <a href="#">[MS-OXWSMSG]</a> section 3.1.4.7).
<b>SendItemType</b>	Specifies a request to send a message.

<b>Complex type</b>	<b>Description</b>
<b>UpdateItemResponseMessageType</b>	Specifies the status and result of a single call to the <b>UpdateItem</b> operation (section <a href="#">3.1.4.8</a> ).
<b>ConflictResultsType</b>	Specifies the number of conflicts in an <b>UpdateItem</b> operation response.
<b>ItemType</b>	Specifies a generic item in the server data store.
<b>ManagementRoleType</b>	Specifies the roles that are associated with a user or application.
<b>MimeContentType</b>	Specifies the native <b>MIME</b> stream of an object that is represented in base64-encoded binary format.
<b>NonEmptyArrayOfBaseItemIdsType</b>	Specifies a collection of items.
<b>NonEmptyArrayOfInternetHeadersType</b>	Specifies the collection of all Internet message headers that are contained in an item.
<b>NonEmptyArrayOfResponseObjectsType</b>	Specifies an array of response objects.
<b>NonEmptyArrayOfRoleType</b>	Specifies an array of role types.
<b>OccurrenceItemIdType</b>	Specifies a single occurrence of a recurring item.
<b>OccurrencesRangeType</b>	Specifies a range of occurrences. <a href="#">&lt;4&gt;</a>
<b>RecurringMasterItemIdType</b>	Specifies a recurrence master item by identifying the identifiers of one of its related occurrence items.
<b>ItemIdType</b>	Specifies the item identifier (ID) of an item.
<b>ReferenceItemResponseType</b>	Specifies a referenced item for a response object.
<b>SmartResponseBaseType</b>	Specifies the base type for <b>ReplyToItem</b> , <b>ReplyAllToItem</b> , <b>ForwardItem</b> , and <b>CancelCalendarItem</b> operation response objects.
<b>SmartResponseType</b>	Specifies the base type for <b>ReplyToItem</b> , <b>ReplyAllToItem</b> , <b>ForwardItem</b> , and <b>CancelCalendarItem</b> operation response objects.
<b>ArrayOfAddressesType</b>	Specifies an array of addresses. <a href="#">&lt;5&gt;</a>
<b>ArrayOfMeetingSuggestionsType</b>	Specifies an array of meeting suggestions. <a href="#">&lt;6&gt;</a>
<b>MeetingSuggestionType</b>	Specifies a meeting suggestion. <a href="#">&lt;7&gt;</a>
<b>ArrayOfTaskSuggestionsType</b>	Specifies an array of task suggestions. <a href="#">&lt;8&gt;</a>
<b>ArrayOfContactsType</b>	Specifies an array of contacts. <a href="#">&lt;9&gt;</a>
<b>ContactType</b>	Specifies the type of a contact. <a href="#">&lt;10&gt;</a>
<b>ArrayOfUrlsType</b>	Specifies an array of URLs. <a href="#">&lt;11&gt;</a>
<b>ArrayOfPhonesType</b>	Specifies an array of phone numbers. <a href="#">&lt;12&gt;</a>
<b>PhoneType</b>	Specifies a phone number and its type. <a href="#">&lt;13&gt;</a>

Complex type	Description
<b>ArrayOfEmailUsersType</b>	Specifies an array of email users. <a href="#">&lt;14&gt;</a>
<b>RightsManagementLicenseDataType</b>	Specifies information about the rights management license. <a href="#">&lt;15&gt;</a>

#### 2.2.4.1 ArrayOfOccurrenceRangesType

The **ArrayOfOccurrenceRangesType** complex type specifies an array of occurrence ranges.[<16>](#)

```
<xs:complexType name="ArrayOfOccurrenceRangesType">
  <xs:sequence>
    <xs:element name="Range" type="t:OccurrencesRangeType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

**Range:** Represents a single occurrence range.

#### 2.2.4.2 FlagType

The **FlagType** complex type specifies a flag indicating status, start date, due date or completion date for an item.[<17>](#)

```
<xs:complexType name="FlagType">
  <xs:sequence>
    <xs:element name="FlagStatus" type="t:FlagStatusType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="StartDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="DueDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="CompleteDate" type="xs:dateTime" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

**FlagStatus:** A **FlagStatusType** element that represents the flag status.

**StartDate:** A **dateTime** element that represents the start date.

**DueDate:** A **dateTime** element that represents the due date.

**CompleteDate:** A **dateTime** element that represents the completion date.

#### 2.2.4.3 m:BaseMoveCopyItemType Complex Type

The **BaseMoveCopyItemType** complex type specifies the base type for the **CopyItemType** complex type, as specified in section [3.1.4.1.3.2](#), and the **MoveItemType** complex type, as specified in section [3.1.4.6.3.2](#). The **BaseMoveCopyItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="BaseMoveCopyItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
      <xs:sequence>
```

```

<xs:element name="ToFolderId"
    type="t:TargetFolderIdType"
/>
<xs:element name="ItemIds"
    type="t:NonEmptyArrayOfBaseItemIdsType"
/>
<xs:element name="ReturnNewItemIds"
    type="xs:boolean"
    minOccurs="0"
/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **BaseMoveCopyItemType** complex type.

Element name	Type	Description
<b>ToFolderId</b>	<b>t:TargetFolderIdType</b> ( <a href="#">[MS-OXWSFOLD]</a> section 2.2.4.14)	Specifies an instance of the <b>TargetFolderIdType</b> complex type that specifies the folder to which the items specified by the <b>ItemIds</b> property are to be moved or copied.
<b>ItemIds</b>	<b>t:NonEmptyArrayOfBaseItemIdsType</b> (section <a href="#">2.2.4.11</a> )	Specifies an array of elements of type <b>BaseItemIdType</b> that specifies a set of items to be moved or copied.
<b>ReturnNewItemIds</b>	<b>xs:boolean</b> ( <a href="#">XMLSCHEMA2</a> )	Specifies a Boolean return value that indicates whether the <b>ItemId</b> element is to be returned for new items. This element SHOULD <a href="#"><code>&lt;18&gt;</code></a> be included.

#### 2.2.4.4 m:SendItemResponseType Complex Type

The **SendItemResponseType** complex type specifies a response to a call to the **SendItem** operation, as specified in section [3.1.4.7](#). The **SendItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```

<xs:complexType name="SendItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>

```

## 2.2.4.5 m:SendItemType Complex Type

The **SendItemType** complex type specifies a request to send a message. The **SendItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="SendItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
      <xs:sequence>
        <xs:element name="ItemIds"
          type="t:NonEmptyArrayOfBaseItemIdsType"
        />
        <xs:element name="SavedItemFolderId"
          type="t:TargetFolderIdType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **SendItemType** complex type.

Element name	Type	Description
<b>ItemIds</b>	<b>t:NonEmptyArrayOfBaseItemIdsType</b> ( <a href="#">section 2.2.4.11</a> )	Specifies an array of item identifiers for the items to try to send.
<b>SavedItemFolderId</b>	<b>t:TargetFolderIdType</b> ( <a href="#">[MS-OXWSFOLD]</a> section 2.2.4.14)	Specifies the identity of the folder that contains a saved version of a sent item.

## 2.2.4.6 m:UpdateItemResponseType Complex Type

The **UpdateItemResponseType** complex type specifies the status and result of a single call to the **UpdateItem** operation, as specified in section [3.1.4.8](#). The **UpdateItemResponseType** complex type extends the **ItemInfoResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.37).

```
<xs:complexType name="UpdateItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:ItemInfoResponseMessageType"
    >
      <xs:sequence>
        <xs:element name="ConflictResults"
          type="t:ConflictResultsType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```
</xs:complexType>
```

The following table lists and describes the child elements of the **UpdateItemResponseType** complex type.

Element name	Type	Description
<b>ConflictResults</b>	<b>t:ConflictResultsType</b> (section <a href="#">2.2.4.7</a> )	Specifies the number of conflicts in the result of a single call.

## 2.2.4.7 t:ConflictResultsType Complex Type

The **ConflictResultsType** complex type specifies the number of conflicts in an **UpdateItem** operation response, as specified in section [3.1.4.8](#).

```
<xs:complexType name="ConflictResultsType">
  <xs:sequence>
    <xs:element name="Count"
      type="xs:int"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists and describes the child elements of the **ConflictResultsType** complex type.

Element name	Type	Description
<b>Count</b>	<b>xs:int</b> <a href="#">[XMLSCHEMA2]</a>	Specifies an integer value that indicates the number of conflicts in an <b>UpdateItem</b> operation response.

## 2.2.4.8 t:ItemType Complex Type

The **ItemType** complex type specifies a generic item on the server.

```
<xs:complexType name="ItemType">
  <xs:sequence>
    <xs:element name="MimeType" type="t:MimeType" minOccurs="0"/>
    <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0"/>
    <xs:element name="ParentFolderId" type="t:FolderIdType" minOccurs="0"/>
    <xs:element name="ItemClass" type="t:ItemClassType" minOccurs="0"/>
    <xs:element name="Subject" type="xs:string" minOccurs="0"/>
    <xs:element name="Sensitivity" type="t:SensitivityChoicesType" minOccurs="0"/>
    <xs:element name="Body" type="t:BodyType" minOccurs="0"/>
    <xs:element name="Attachments" type="t:NonEmptyArrayOfTypeName" minOccurs="0"/>
    <xs:element name="DateTimeReceived" type="xs:date" minOccurs="0"/>
    <xs:element name="Size" type="xs:int" minOccurs="0"/>
    <xs:element name="Categories" type="t:ArrayOfStringsType" minOccurs="0"/>
    <xs:element name="Importance" type="t:ImportanceChoicesType" minOccurs="0"/>
    <xs:element name="InReplyTo" type="xs:string" minOccurs="0"/>
    <xs:element name="IsSubmitted" type="xs:boolean" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

```

<xs:element name="IsDraft" type="xs:boolean" minOccurs="0"/>
<xs:element name="IsFromMe" type="xs:boolean" minOccurs="0"/>
<xs:element name="IsResend" type="xs:boolean" minOccurs="0"/>
<xs:element name="IsUnmodified" type="xs:boolean" minOccurs="0"/>
<xs:element name="InternetMessageHeaders" type="t:NonEmptyArrayOfInternetHeadersType"
minOccurs="0"/>
<xs:element name="DateTimeSent" type="xs:dateTime" minOccurs="0"/>
<xs:element name="DateTimeCreated" type="xs:dateTime" minOccurs="0"/>
<xs:element name="ResponseObjects" type="t:NonEmptyArrayOfResponseObjectsType"
minOccurs="0"/>
<xs:element name="ReminderDueBy" type="xs:dateTime" minOccurs="0"/>
<xs:element name="ReminderIsSet" type="xs:boolean" minOccurs="0"/>
<xs:element name="ReminderNextTime" type="xs:dateTime" minOccurs="0"/>
<xs:element name="ReminderMinutesBeforeStart" type="t:ReminderMinutesBeforeStartType"
minOccurs="0"/>
<xs:element name="DisplayCc" type="xs:string" minOccurs="0"/>
<xs:element name="DisplayTo" type="xs:string" minOccurs="0"/>
<xs:element name="HasAttachments" type="xs:boolean" minOccurs="0"/>
<xs:element name="ExtendedProperty" type="t:ExtendedPropertyType" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="Culture" type="xs:language" minOccurs="0"/>
<xs:element name="EffectiveRights" type="t:EffectiveRightsType" minOccurs="0"/>
<xs:element name="LastModifiedName" type="xs:string" minOccurs="0"/>
<xs:element name="LastModifiedTime" type="xs:dateTime" minOccurs="0"/>
<xs:element name="IsAssociated" type="xs:boolean" minOccurs="0"/>
<xs:element name="WebClientReadFormQueryString" type="xs:string" minOccurs="0"/>
<xs:element name="WebClientEditFormQueryString" type="xs:string" minOccurs="0"/>
<xs:element name="ConversationId" type="t:ItemIdType" minOccurs="0"/>
<xs:element name="UniqueBody" type="t:BodyType" minOccurs="0"/>
<xs:element name="Flag" type="t:FlagType" minOccurs="0"/>
<xs:element name="StoreEntryId" type="xs:base64Binary" minOccurs="0"/>
<xs:element name="InstanceKey" type="xs:base64Binary" minOccurs="0"/>
<xs:element name="NormalizedBody" type="t:BodyType" minOccurs="0"/>
<xs:element name="EntityExtractionResult" type="t:EntityExtractionResultType"
minOccurs="0" />
<xs:element name="PolicyTag" type="t:RetentionTagType" minOccurs="0"/>
<xs:element name="ArchiveTag" type="t:RetentionTagType" minOccurs="0"/>
<xs:element name="RetentionDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="Preview" type="xs:string" minOccurs="0"/>
<xs:element name="RightsManagementLicenseData"
type="t:RightsManagementLicenseDataType" minOccurs="0" />
<xs:element name="NextPredictedAction" type="t:PredictedMessageActionType"
minOccurs="0" />
<xs:element name="BlockStatus" type="xs:boolean" minOccurs="0" />
<xs:element name="HasBlockedImages" type="xs:boolean" minOccurs="0" />
</xs:sequence>
</xs:complexType>

```

The following table lists and describes the child elements of the **ItemType** complex type.

Element name	Type	Description
<b>MimeContent</b>	<b>t:MimeContentType</b> ( <a href="#">section 2.2.4.10</a> )	Specifies an instance of the <b>MimeContentType</b> class that contains the native MIME stream of an object that is represented in <b>base64Binary</b> format.

Element name	Type	Description
<b>ItemId</b>	<b>t:ItemIdType</b> ( <a href="#">section 2.2.4.18</a> )	Specifies an instance of the <b>ItemIdType</b> class that represents the unique identifier and change key of an item in the server data store.
<b>ParentFolderId</b>	<b>t:FolderIdType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.31)	Specifies an instance of the <b>FolderIdType</b> class that represents the identifier of the parent folder that contains an item or folder.
<b>ItemClass</b>	<b>t:ItemClassType</b> ( <a href="#">section 2.2.5.3</a> )	Specifies a string value that indicates the message class of an item.
<b>Subject</b>	<b>xs:string</b> ( <a href="#">[XMLSCHEMA2]</a> )	Specifies a string value that represents the subject property of items. This value is limited to 255 characters.
<b>Sensitivity</b>	<b>t:SensitivityChoicesType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.23)	Specifies one of the valid <b>SensitivityChoicesType</b> simple type enumeration values that indicates the sensitivity level of an item.
<b>Body</b>	<b>t:BodyType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.17)	Specifies the body content of an item.
<b>Attachments</b>	<b>t:NonEmptyArrayOfAttachmentsType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.43)	Specifies an <b>AttachmentType</b> array that contains the items or files that are attached to an item.
<b>DateTimeReceived</b>	<b>xs:dateTime</b> ( <a href="#">[XMLSCHEMA2]</a> )	Specifies the date and time that an item was received in a mailbox.
<b>Size</b>	<b>xs:int</b> ( <a href="#">[XMLSCHEMA2]</a> )	Specifies an integer value that represents the size of an item, in bytes.
<b>Categories</b>	<b>t:ArrayOfStringsType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.11)	Specifies a string array that identifies the categories to which an item in a mailbox belongs.
<b>Importance</b>	<b>t:ImportanceChoicesType</b> ( <a href="#">section 2.2.5.2</a> )	Specifies one of the valid <b>ImportanceChoicesType</b> values to indicate the importance of an item.
<b>InReplyTo</b>	<b>xs:string</b>	Specifies a string value that contains the identifier of the item to which this item is a reply.

Element name	Type	Description
<b>IsSubmitted</b>	<b>xs:boolean</b> <a href="#">[XMLSCHEMA2]</a>	Specifies a Boolean value that indicates whether an item has been submitted to the <b>Outbox folder</b> .
<b>IsDraft</b>	<b>xs:boolean</b>	Specifies a Boolean value that indicates whether an item has been sent.
<b>IsFromMe</b>	<b>xs:boolean</b>	Specifies a Boolean value that indicates whether a user sent an item to himself or herself.
<b>IsResend</b>	<b>xs:boolean</b>	Specifies a Boolean value that indicates whether an item has previously been sent.
<b>IsUnmodified</b>	<b>xs:boolean</b>	Specifies a Boolean value that indicates whether an item has been modified.
<b>InternetMessageHeaders</b>	<b>t:NonEmptyArrayOfInternetHeadersType</b> (section <a href="#">2.2.4.12</a> )	Specifies an array of the type <b>InternetHeaderType</b> that represents the collection of all Internet message headers that are contained in an item in a mailbox.
<b>DateTimeSent</b>	<b>xs:dateTime</b>	Specifies the date and time when an item in a mailbox was sent.
<b>DateTimeCreated</b>	<b>xs:dateTime</b>	Specifies the date and time when an item in a mailbox was created.
<b>ResponseObjects</b>	<b>t:NonEmptyArrayOfResponseObjectsType</b> (section <a href="#">2.2.4.13</a> )	Specifies an array of type <b>ResponseObjectType</b> that contains a collection of all the response objects that are associated with an item.
<b>ReminderDueBy</b>	<b>xs:dateTime</b>	Specifies an instance of the <b>DateTime</b> structure that represents the date and time when an event is to occur. This is used by the <b>ReminderMinutesBeforeStart</b> element to determine when the reminder is displayed.
<b>ReminderIsSet</b>	<b>xs:boolean</b>	Specifies a Boolean value that indicates whether a reminder has been set for an item.

Element name	Type	Description
<b>ReminderMinutesBeforeStart</b>	<b>t:ReminderMinutesBeforeStartType</b> (section <a href="#">2.2.5.4</a> )	Specifies a string value that indicates the number of minutes before an event occurs when a reminder is displayed.
<b>ReminderNextTime</b>	<b>xs:dateTime</b>	Specifies the date and time for the next reminder. <a href="#"><b>&lt;19&gt;</b></a>
<b>DisplayCc</b>	<b>xs:string</b>	Specifies the display string that is used for the contents of the Cc box. This is the concatenated string of all <b>Cc recipient</b> display names.
<b>DisplayTo</b>	<b>xs:string</b>	Specifies the display string that is used for the contents of the To box. This is the concatenated string of all <b>To recipient</b> display names.
<b>HasAttachments</b>	<b>xs:boolean</b>	Specifies a Boolean value that indicates whether an item has at least one attachment.
<b>ExtendedProperty</b>	<b>t:ExtendedPropertyType</b> ( <a href="#">[MS-OXWSXPROP]</a> section 2.1.5)	Specifies an array of <b>ExtendedPropertyType</b> elements that identify extended MAPI properties.
<b>Culture</b>	<b>xs:language</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the culture for an item in a mailbox.
<b>EffectiveRights</b>	<b>t:EffectiveRightsType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.25)	Specifies an <b>EffectiveRightsType</b> element that represents the client's rights based on the permission settings for an item or folder.
<b>LastModifiedName</b>	<b>xs:string</b>	Specifies a string value that contains the name of the user who last modified an item.
<b>LastModifiedTime</b>	<b>xs:dateTime</b>	Specifies an instance of the <b>DateTime</b> structure that represents the date and time when an item was last modified.
<b>IsAssociated</b>	<b>xs:boolean</b>	Specifies a value that indicates whether this is an associated item.
<b>WebClientReadFormQueryString</b>	<b>xs:string</b>	Specifies the query string that should be appended to the Web client URL to open

Element name	Type	Description
		an item by using the appropriate read form in a Web browser.
<b>WebClientEditFormQueryString</b>	<b>xs:string</b>	Specifies the query string that should be appended to the Web client URL to open an item by using the appropriate edit form in a Web browser.
<b>ConversationId</b>	<b>t:ItemIdType</b>	Specifies the ID of the conversation that an item is part of.
<b>UniqueBody</b>	<b>t:BodyType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.17)	Specifies the body part that is unique to the conversation that an item is part of.
<b>Flag</b>	<b>FlagType</b> (section <a href="#">2.2.4.2</a> )	Specifies a flag indicating status, start date, due date or completion date for an item . <a href="#"><u>&lt;20&gt;</u></a>
<b>StoreEntryId</b>	<b>xs:base64Binary</b> ( <a href="#">[XMLSCHEMA2]</a> )	Specifies the entry ID of the store that hosts an item. This element SHOULD <a href="#"><u>&lt;21&gt;</u></a> be included.
<b>InstanceKey</b>	<b>xs:base64Binary</b> ( <a href="#">[XMLSCHEMA2]</a> )	Specifies the key for an instance. <a href="#"><u>&lt;22&gt;</u></a>
<b>NormalizedBody</b>	<b>BodyType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.17)	Specifies the version of the body of a message visible in the preview pane when accessing a message over the Internet. <a href="#"><u>&lt;23&gt;</u></a>
<b>EntityExtractionResult</b>	<b>EntityExtractionResultType</b> (section <a href="#">2.2.4.35</a> )	Specifies the result of an entity extraction . <a href="#"><u>&lt;24&gt;</u></a>
<b>PolicyTag</b>	<b>RetentionTagType</b>	Specifies the retention policy for the item. <a href="#"><u>&lt;25&gt;</u></a>
<b>ArchiveTag</b>	<b>RetentionTagType</b>	Specifies an archive tag. <a href="#"><u>&lt;26&gt;</u></a>
<b>RetentionDate</b>	<b>xs:dateTime</b>	Specifies the retention date for an item. <a href="#"><u>&lt;27&gt;</u></a>
<b>Preview</b>	<b>xs:string</b>	Specifies the first 256 characters of the body of a message for preview without opening the message. <a href="#"><u>&lt;28&gt;</u></a>
<b>RightsManagementLicenseData</b>	<b>RightsManagementLicenseDataType</b> (section <a href="#">2.2.4.36</a> )	Specifies rights management license data. <a href="#"><u>&lt;29&gt;</u></a>
<b>NextPredictedAction</b>	<b>PredictedMessageActionType</b> <a href="#">[MS-</a>	Specifies the next predicted

Element name	Type	Description
	<a href="#">OXWSCDATA</a> section 2.2.3.20	action for the item. <a href="#">30</a>
<b>BlockStatus</b>	<b>xs:boolean</b>	Indicates whether images are blocked. <a href="#">31</a>
<b>HasBlockedImages</b>	<b>xs:boolean</b>	Indicates whether the item has blocked images. <a href="#">32</a>

#### 2.2.4.9 t:ManagementRoleType Complex Type

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **ManagementRoleType** complex type specifies the roles that are associated with a user or application.[33](#)

```
<xs:complexType name="ManagementRoleType">
  <xs:sequence>
    <xs:element name="UserRoles" type="t:NonEmptyArrayOfRoleType" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="ApplicationRoles" type="t:NonEmptyArrayOfRoleType" minOccurs="0"
maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

The following table lists and describes the elements of the **ManagementRoleType** complex type.

Element name	Type	Description
<b>UserRoles</b>	<b>t:NonEmptyArrayOfRoleType</b> (section <a href="#">2.2.4.14</a> )	Specifies an array of elements of type <b>string</b> that specifies a set of user roles.
<b>ApplicationRoles</b>	<b>t:NonEmptyArrayOfRoleType</b> (section <a href="#">2.2.4.14</a> )	Specifies an array of elements of type <b>string</b> that specifies a set of application roles.

#### 2.2.4.10 t:MimeContentType Complex Type

The **MimeContentType** complex type specifies the native MIME stream of an object that is represented in **base64 encoding**.

```
<xs:complexType name="MimeContentType">
  <xs:simpleContent>
    <xs:extension
      base="xs:string"
    >
      <xs:attribute name="CharacterSet"
        type="xs:string"
        use="optional"
      />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

The following table lists and describes the attributes of the **MimeContentType** complex type.

<b>Attribute name</b>	<b>Type</b>	<b>Description</b>
<b>CharacterSet</b>	<b>xs:string</b> [XMLSCHEMA2]	Specifies the International Standards Organization (ISO) name of the character set that is used in a <b>MIME message</b> .

#### 2.2.4.11 t:NonEmptyArrayOfBaseItemIdsType Complex Type

The **NonEmptyArrayOfBaseItemIdsType** complex type specifies a collection of items.

```
<xs:complexType name="NonEmptyArrayOfBaseItemIdsType">
  <xs:choice maxOccurs="unbounded">
    <xs:element name="ItemId" type="t:ItemIdType"/>
    <xs:element name="OccurrenceItemId" type="t:OccurrenceItemIdType"/>
    <xs:element name="RecurringMasterItemId" type="t:RecurringMasterItemIdType"/>
    <xs:element name="RecurringMasterItemIdRanges"
      type="t:RecurringMasterItemIdRangesType"/>
  </xs:choice>
</xs:complexType>
```

The following table lists and describes the child elements of the **NonEmptyArrayOfBaseItemIdsType** complex type.

<b>Element name</b>	<b>Type</b>	<b>Description</b>
<b>ItemId</b>	<b>t:ItemIdType</b> (section <a href="#">2.2.4.18</a> )	Specifies the item identifier.
<b>OccurrenceItemId</b>	<b>t:OccurrenceItemIdType</b> (section <a href="#">2.2.4.15</a> )	Specifies a single occurrence of a recurring item.
<b>RecurringMasterItemId</b>	<b>t:RecurringMasterItemIdType</b> (section <a href="#">2.2.4.17</a> )	Specifies a recurrence master item by indicating the identifier of one of the master item's related occurrence items.
<b>RecurringMasterItemIdRanges</b>	<b>RecurringMasterItemIdRangesType</b>	Specifies a union of all occurrences of a recurring master, which fit into at least one of the specified ranges. <a href="#">34</a>

#### 2.2.4.12 t:NonEmptyArrayOfInternetHeadersType Complex Type

The **NonEmptyArrayOfInternetHeadersType** complex type specifies the collection of all Internet message headers that are contained in an item.

```
<xs:complexType name="NonEmptyArrayOfInternetHeadersType">
  <xs:sequence>
    <xs:element name="InternetMessageHeader"

```

```

        type="t:InternetHeaderType"
        maxOccurs="unbounded"
    />
</xs:sequence>
</xs:complexType>

```

The following table lists and describes the child elements of the **NonEmptyArrayOfInternetHeadersType** complex type.

Element name	Type	Description
<b>InternetMessageHeader</b>	<b>t:InternetHeaderType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.35)	Specifies a single Internet message header.

### 2.2.4.13 t:NonEmptyArrayOfResponseObjectsType Complex Type

The **NonEmptyArrayOfResponseObjectsType** complex type specifies an array of response objects.

```

<xs:complexType name="NonEmptyArrayOfResponseObjectsType">
<xs:choice
    maxOccurs="unbounded"
    minOccurs="0"
>
<xs:element name="AcceptItem"
    type="t:AcceptItemType"
/>
<xs:element name="TentativelyAcceptItem"
    type="t:TentativelyAcceptItemType"
/>
<xs:element name="DeclineItem"
    type="t:DeclineItemType"
/>
<xs:element name="ReplyToItem"
    type="t:ReplyToItemType"
/>
<xs:element name="ForwardItem"
    type="t:ForwardItemType"
/>
<xs:element name="ReplyAllToItem"
    type="t:ReplyAllToItemType"
/>
<xs:element name="CancelCalendarItem"
    type="t:CancelCalendarItemType"
/>
<xs:element name="RemoveItem"
    type="t:RemoveItemType"
/>
<xs:element name="SuppressReadReceipt"
    type="t:SuppressReadReceiptType"
/>
<xs:element name="PostReplyItem"
    type="t:PostReplyItemType"
/>
<xs:element name="AcceptSharingInvitation"

```

```

        type="t:AcceptSharingInvitationType"
    />
</xs:choice>
</xs:complexType>

```

The following table lists and describes the child elements of the **NonEmptyArrayOfResponseObjectsType** complex type.

Element name	Type	Description
<b>AcceptItem</b>	<b>t:AcceptItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.1)	Specifies an Accept reply to a meeting request.
<b>TentativelyAcceptItem</b>	<b>t:TentativelyAcceptItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.21)	Specifies a Tentative reply to a meeting request.
<b>DeclineItem</b>	<b>t:DeclineItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.9)	Specifies a Decline reply to a meeting request.
<b>ReplyToItem</b>	<b>t:ReplyToItemType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.56)	Specifies a reply to the sender of an item.
<b>ForwardItem</b>	<b>t:ForwardItemType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.33)	Specifies a server store item to be forwarded to <b>recipients</b> .
<b>ReplyAllToItem</b>	<b>t:ReplyAllToItemType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.54)	Specifies a reply to the sender and all identified recipients of an item in the server store.
<b>CancelCalendarItem</b>	<b>t:CancelCalendarItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.8)	Specifies the response object that is used to cancel a meeting.
<b>RemoveItem</b>	<b>t:RemoveItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.20)	Specifies a response object that is used to remove a meeting item when a <b>MeetingCancellation</b> message is received.
<b>SuppressReadReceipt</b>	<b>t:SuppressReadReceiptType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.61)	Specifies that read receipts are to be suppressed.
<b>PostReplyItem</b>	<b>t:PostReplyItemType</b> ( <a href="#">[MS-OXWSPOST]</a> section 2.2.4.3)	Specifies a reply to a post item.
<b>AcceptSharingInvitation</b>	<b>t:AcceptSharingInvitationType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.3)	Specifies that sharing invitations are to be accepted.

#### 2.2.4.14 t:NonEmptyArrayOfRoleType Complex Type

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **NonEmptyArrayOfRoleType** complex type specifies an array of role types.[<35>](#)

```

<xs:complexType name="NonEmptyArrayOfRoleType">
    <xs:sequence>
        <xs:element name="Role" type="xs:string" maxOccurs="unbounded"/>
    </xs:sequence>

```

```
</xs:complexType>
```

The following table lists and describes the child elements of the **NonEmptyArrayOfRoleType** complex type.

Element name	Type	Description
Role	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the name of a role.

#### 2.2.4.15 t:OccurrenceItemIdType Complex Type

The **OccurrenceItemIdType** complex type specifies a single occurrence of a recurring item. The **OccurrenceItemIdType** complex type extends the **BaseItemIdType** complex type ([IMS-OXWSCDATA](#) section 2.2.4.13).

```
<xs:complexType name="OccurrenceItemIdType">
  <xs:complexContent>
    <xs:extension
      base="t:BaseItemIdType"
    >
      <xs:attribute name="RecurringMasterId"
        type="t:DerivedItemIdType"
        use="required"
      />
      <xs:attribute name="ChangeKey"
        type="xs:string"
        use="optional"
      />
      <xs:attribute name="InstanceIndex"
        type="xs:int"
        use="required"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the attributes of the **OccurrenceItemIdType** complex type.

Attribute name	Type	Description
<b>RecurringMasterId</b>	<b>t:DerivedItemIdType</b> ( <a href="#">section 2.2.5.1</a> )	Specifies the identifier of the recurring master of a recurring item.
<b>ChangeKey</b>	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies a specific version of a single occurrence of a recurring master item.
<b>InstanceIndex</b>	<b>xs:int</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the index of an item occurrence.

#### 2.2.4.16 OccurrencesRangeType

The **OccurrencesRangeType** complex type specifies a range of occurrences. [<36>](#)

```

<xs:complexType name="OccurrencesRangeType">
    <xs:attribute name="Start" type="xs:dateTime" use="optional"/>
    <xs:attribute name="End" type="xs:dateTime" use="optional"/>
    <xs:attribute name="Count" type="xs:int" use="optional"/>
    <xs:attribute name="CompareOriginalStartTime" type="xs:boolean" use="optional"/>
</xs:complexType>

```

**Start:** A **dateTime** element that represents the start of the range.

**End:** A **dateTime** element that represents the end of the range.

**Count:** An integer that represents the number of occurrences.

**CompareOriginalStartTime:** Contains a Boolean value that indicates whether to compare the specified ranges to either an **OriginalStartTime** or a pair of **Start** and **End** values. The default value is "false".

#### 2.2.4.17 t:RecurringMasterItemIdType Complex Type

The **RecurringMasterItemIdType** complex type specifies a recurrence master item by indicating the identifiers of one of the master item's related occurrence items. The **RecurringMasterItemIdType** complex type extends the **BaseItemIdType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.13).

```

<xs:complexType name="RecurringMasterItemIdType">
    <xs:complexContent>
        <xs:extension
            base="t:BaseItemIdType"
        >
            <xs:attribute name="OccurrenceId"
                type="t:DerivedItemIdType"
                use="required"
            />
            <xs:attribute name="ChangeKey"
                type="xs:string"
                use="optional"
            />
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

The following table lists and describes the attributes of the **RecurringMasterItemIdType** complex type.

Attribute name	Type	Description
<b>OccurrenceId</b>	<b>t:DerivedItemIdType</b> ( <a href="#">section 2.2.5.1</a> )	Specifies a single occurrence of a recurring master item.
<b>ChangeKey</b>	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies a specific version of a single occurrence of a recurring master item.

#### 2.2.4.18 t:ItemIdType Complex Type

The **ItemIdType** complex type specifies an item identifier of an item. The **ItemIdType** complex type extends the **BaseItemIdType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.13).

```
<xs:complexType name="ItemIdType">
  <xs:complexContent>
    <xs:extension
      base="t:BaseItemIdType"
    >
      <xs:attribute name="Id"
        type="xs:string"
        use="required"
      />
      <xs:attribute name="ChangeKey"
        type="xs:string"
        use="optional"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the attributes of the **ItemIdType** complex type.

Attribute name	Type	Description
<b>Id</b>	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies an item identifier. The maximum size of this attribute is 512 bytes after base64 encoding.
<b>ChangeKey</b>	<b>xs:string</b>	Specifies a change key. The maximum size of this attribute is 512 bytes after base64 encoding.

#### 2.2.4.19 t:ReferenceItemResponseType Complex Type

The **ReferenceItemResponseType** complex type specifies a referenced item for a response object. The **ReferenceItemResponseType** complex type extends the **responseObject** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.59).

```
<xs:complexType name="ReferenceItemResponseType">
  <xs:complexContent>
    <xs:restriction
      base="t:responseObject"
    >
      <xs:sequence>
        <xs:element name="ReferenceItemId"
          type="t:ItemIdType"
          minOccurs="0"
        />
      </xs:sequence>
      <xs:attribute name="ObjectName"
        type="xs:string"
        use="prohibited"
      />
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
```

```
</xs:complexType>
```

The following table lists and describes the child elements of the **ReferenceItemResponseType** complex type.

Element name	Type	Description
<b>ReferenceItemId</b>	<b>t:ItemIdType</b> (section <a href="#">2.2.4.18</a> )	Specifies the referenced item identifier.
<b>ObjectName</b>	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the name of the reply object class as a string.

#### 2.2.4.20 t:SmartResponseBaseType Complex Type

The **SmartResponseBaseType** complex type specifies the base type for the **ReplyToItemType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.56), the **ReplyAllToItemType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.54), the **ForwardItemType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.33), and the **CancelCalendarItemType** complex type, as specified in [\[MS-OXWSMTGS\]](#) section 2.2.4.8. The **SmartResponseBaseType** complex type extends the **responseObject** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.59).

```
<xs:complexType name="SmartResponseBaseType">
  <xs:complexContent>
    <xs:restriction
      base="t:responseObject"
    >
      <xs:sequence>
        <xs:element name="Subject"
          type="xs:string"
          minOccurs="0"
        />
        <xs:element name="Body"
          type="t:BodyType"
          minOccurs="0"
        />
        <xs:element name="ToRecipients"
          type="t:ArrayOfRecipientsType"
          minOccurs="0"
        />
        <xs:element name="CcRecipients"
          type="t:ArrayOfRecipientsType"
          minOccurs="0"
        />
        <xs:element name="BccRecipients"
          type="t:ArrayOfRecipientsType"
          minOccurs="0"
        />
        <xs:element name="IsReadReceiptRequested"
          type="xs:boolean"
          minOccurs="0"
        />
        <xs:element name="IsDeliveryReceiptRequested"
          type="xs:boolean"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
```

```

<xs:element name="From"
    type="t:SingleRecipientType"
    minOccurs="0"
/>
<xs:element name="ReferenceItemId"
    type="t:ItemIdType"
    minOccurs="0"
/>
</xs:sequence>
<xs:attribute name="ObjectName"
    type="xs:string"
    use="prohibited"
/>
</xs:restriction>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **SmartResponseBaseType** complex type.

Element name	Type	Description
<b>Subject</b>	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the subject.
<b>Body</b>	<b>t:BodyType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.17)	Specifies the body content of an item.
<b>ToRecipients</b>	<b>t:ArrayOfRecipientsType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.9)	Specifies a collection of recipients of an e-mail message. This property is required for sending a message.
<b>CcRecipients</b>	<b>t:ArrayOfRecipientsType</b>	Specifies a collection of carbon copy (Cc) recipients of an e-mail message.
<b>BccRecipients</b>	<b>t:ArrayOfRecipientsType</b>	Specifies a collection of <b>blind carbon copy (Bcc) recipients</b> of an e-mail message.
<b>IsReadReceiptRequested</b>	<b>xs:boolean</b> <a href="#">[XMLSCHEMA2]</a>	Specifies whether a <b>read receipt</b> is requested.
<b>IsDeliveryReceiptRequested</b>	<b>xs:boolean</b>	Specifies whether a <b>delivery receipt</b> is requested.
<b>From</b>	<b>t:SingleRecipientType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.60)	Specifies the addressee from whom a message was sent.
<b>ReferenceItemId</b>	<b>t:ItemIdType</b> (section <a href="#">2.2.4.18</a> )	Specifies the item identifier that is related to a response object.

The following table lists and describes the attributes of the **SmartResponseBaseType** complex type.

Attribute name	Type	Description
<b>ObjectName</b>	<b>xs:string</b> [XMLSCHEMA2]	Specifies the name of the reply object class as an English-language string.

#### 2.2.4.21 t:SmartResponseType Complex Type

The **SmartResponseType** complex type specifies the base type for the **ReplyToItemType** complex type ([MS-OXWSCDATA] section 2.2.4.56), the **ReplyAllToItemType** complex type ([MS-OXWSCDATA] section 2.2.4.54), the **ForwardItemType** complex type ([MS-OXWSCDATA] section 2.2.4.33), and the **CancelCalendarItemType** complex type, as specified in [MS-OXWSMTGS] section 2.2.4.8. The **SmartResponseType** complex type extends the **SmartResponseBaseType** complex type, as specified in section 2.2.4.20.

```
<xs:complexType name="SmartResponseType">
  <xs:complexContent>
    <xs:extension
      base="t:SmartResponseBaseType"
    >
      <xs:sequence>
        <xs:element name="NewBodyContent"
          type="t:BodyType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **SmartResponseType** complex type.

Element name	Type	Description
<b>NewBodyContent</b>	<b>t:BodyType</b> ([MS-OXWSCDATA] section 2.2.4.17)	Specifies the new body content of a message response object.

#### 2.2.4.22 ArrayOfAddressesType

The **ArrayOfAddressesType** complex type specifies an array of addresses. [<37>](#)

```
<xs:complexType name="ArrayOfAddressesType">
  <xs:sequence>
    <xs:element name="Address" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

**Address:** A string that represents a single address.

#### 2.2.4.23 ArrayOfMeetingSuggestionsType

The **ArrayOfMeetingSuggestionsType** complex type specifies an array of meeting suggestions. [<38>](#)

```

<xs:complexType name="ArrayOfMeetingSuggestionsType">
  <xs:sequence>
    <xs:element name="MeetingSuggestion" type="t:MeetingSuggestionType"
maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>

```

**MeetingSuggestion:** A **MeetingSuggestionType** element that represents a single meeting suggestion.

#### 2.2.4.24 MeetingSuggestionType

The **MeetingSuggestionType** complex type specifies a meeting suggestion.[\(39\)](#)

```

<xs:complexType name="MeetingSuggestionType">
  <xs:sequence>
    <xs:element name="Attendees" type="t:ArrayOfEmailUsersType" minOccurs="0" maxOccurs="1"
/>
    <xs:element name="Location" type="xs:string" minOccurs="0" />
    <xs:element name="Subject" type="xs:string" minOccurs="0" />
    <xs:element name="MeetingString" type="xs:string" minOccurs="0" />
    <xs:element name="StartTime" type="xs:dateTime" minOccurs="0" />
    <xs:element name="EndTime" type="xs:dateTime" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

```

**Attendees:** An **ArrayOfEmailUsersType** element that represents those invited to the meeting.

**Location:** A string element that represents the location of the meeting.

**Subject:** A string element that represents the subject of the meeting.

**MeetingString:** A string element that represents the name of the meeting.

**StartTime:** A **dateTime** element that represents the start time of the meeting.

**EndTime:** A **dateTime** element that represents the ending time of the meeting.

#### 2.2.4.25 ArrayOfTaskSuggestionsType

The **ArrayOfTaskSuggestionsType** complex type specifies an array of task suggestions.[\(40\)](#)

```

<xs:complexType name="ArrayOfTaskSuggestionsType">
  <xs:sequence>
    <xs:element name="TaskSuggestion" type="t:TaskSuggestionType" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>

```

**TaskSuggestion:** A **TaskSuggestionType** element that represents a single task suggestion.

#### 2.2.4.26 ArrayOfContactsType

The **ArrayOfContactsType** complex type specifies an array of contacts.[\(41\)](#)

```

<xs:complexType name="ArrayOfContactsType">
  <xs:sequence>
    <xs:element name="Contact" type="t>ContactType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

```

**Contact:** A **ContactType** element that represents a single contact.

#### 2.2.4.27 ContactType

The **ContactType** complex type specifies the type of a contact.[\(42\)](#)

```

<xs:complexType name="ContactType">
  <xs:sequence>
    <xs:element name="PersonName" type="xs:string" minOccurs="0" />
    <xs:element name="BusinessName" type="xs:string" minOccurs="0" />
    <xs:element name="PhoneNumbers" type="t:ArrayOfPhonesType" minOccurs="0" maxOccurs="1"
  />
    <xs:element name="Urls" type="t:ArrayOfUrlsType" minOccurs="0" maxOccurs="1" />
    <xs:element name="EmailAddresses" type="t:ArrayOfExtractedEmailAddresses" minOccurs="0"
maxOccurs="1" />
    <xs:element name="Addresses" type="t:ArrayOfAddressesType" minOccurs="0" maxOccurs="1"
  />
    <xs:element name="ContactString" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

```

**PersonName:** A string element that represents the name of a person.

**BusinessName:** A string element that represents the name of a business.

**PhoneNumbers:** An **ArrayOfPhonesType** element that represents phone number contacts.

**Urls:** An **ArrayOfUrlsType** element that represents URL contacts.

**EmailAddresses:** An **ArrayOfExtractedEmailAddresses** element that represents email contacts.

**Addresses:** An **ArrayOfAddressesType** element that represents postal addresses of contacts.

**ContactString:** A string element that represents the display name of a contact.

#### 2.2.4.28 ArrayOfUrlsType

The **ArrayOfUrlsType** complex type specifies an array of URLs.[\(43\)](#)

```

<xs:complexType name="ArrayOfUrlsType">
  <xs:sequence>
    <xs:element name="Url" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

```

**Url:** A string element that specifies a single URL.

#### 2.2.4.29 ArrayOfPhonesType

The **ArrayOfPhonesType** complex type specifies an array of phone numbers.[\(44\)](#)

```
<xs:complexType name="ArrayOfPhonesType">
  <xs:sequence>
    <xs:element name="Phone" type="t:PhoneType" minOccurs="0" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
```

**Phone:** A **PhoneType** complex type that represents a single phone number.

#### 2.2.4.30 PhoneType

The **PhoneType** complex type specifies a phone number and its type.[\(45\)](#)

```
<xs:complexType name="PhoneType">
  <xs:sequence>
    <xs:element name="OriginalPhoneString" type="xs:string" minOccurs="0" />
    <xs:element name="PhoneString" type="xs:string" minOccurs="0" />
    <xs:element name="Type" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>
```

**OriginalPhoneString:** A string element that represents the original phone number.

**PhoneString:** A string element that represents the current phone number.

**Type:** A string element that represents the type of phone, for example, "Business" or "Home".

#### 2.2.4.31 ArrayOfEmailUsersType

The **ArrayOfEmailUsersType** complex type specifies an array of email users.[\(46\)](#)

```
<xs:complexType name="ArrayOfEmailUsersType">
  <xs:sequence>
    <xs:element name="EmailUser" type="t:EmailUserType" minOccurs="0" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
```

**EmailUser:** An **EmailUserType** element that represents a single email user.

#### 2.2.4.32 EmailUserType

The **EmailUserType** complex type specifies an email user.[\(47\)](#)

```
<xs:complexType name="EmailUserType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" />
    <xs:element name="UserId" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>
```

**Name:** A string element that represents the name of the email user.

**UserId:** A string that represents the user identifier of the email user.

#### 2.2.4.33 TaskSuggestionType

The **TaskSuggestionType** complex type specifies a task suggestion.[\(48\)](#)

```
<xs:complexType name="TaskSuggestionType">
  <xs:sequence>
    <xs:element name="TaskString" type="xs:string" minOccurs="0" />
    <xs:element name="Assignees" type="t:EmailUserType" minOccurs="0" maxOccurs="1" />
  </xs:sequence>
</xs:complexType>
```

**TaskString:** A string element that represents the name of the task.

**Assignees:** An **EmailUserType** element that represents the persons that are to accomplish the task.

#### 2.2.4.34 ArrayOfExtractedEmailAddresses

The **ArrayOfExtractedEmailAddress** complex type specifies an array of email addresses.[\(49\)](#)

```
<xs:complexType name="ArrayOfExtractedEmailAddresses">
  <xs:sequence>
    <xs:element name="EmailAddress" type="xs:string" minOccurs="0" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
```

**EmailAddress:** A string element that represents a single email address.

#### 2.2.4.35 EntityExtractionResultType

The **EntityExtractionResultType** complex type specifies the result of an entity extraction.[\(50\)](#)

```
<xs:complexType name="EntityExtractionResultType">
  <xs:sequence>
    <xs:element name="Addresses" type="t:ArrayOfAddressesType" minOccurs="0" maxOccurs="1" />
    <xs:element name="MeetingSuggestions" type="t:ArrayOfMeetingSuggestionsType" minOccurs="0" maxOccurs="1" />
    <xs:element name="TaskSuggestions" type="t:ArrayOfTaskSuggestionsType" minOccurs="0" maxOccurs="1" />
    <xs:element name="EmailAddresses" type="t:ArrayOfExtractedEmailAddresses" minOccurs="0" maxOccurs="1" />
    <xs:element name="Contacts" type="t:ArrayOfContactsType" minOccurs="0" maxOccurs="1" />
    <xs:element name="Urls" type="t:ArrayOfUrlsType" minOccurs="0" maxOccurs="1" />
    <xs:element name="PhoneNumbers" type="t:ArrayOfPhonesType" minOccurs="0" maxOccurs="1" />
  </xs:sequence>
</xs:complexType>
```

**Addresses:** An **ArrayOfAddressesType** element that represents the addresses returned.

**MeetingSuggestions:** An **ArrayOfMeetingSuggestionsType** element that represents the meeting suggestions returned.

**TaskSuggestions:** An **ArrayOfTaskSuggestionsType** element that represents the task suggestions returned.

**EmailAddresses:** An **ArrayOfExtractedEmailAddresses** element that represents the email addresses returned.

**Contacts:** An **ArrayOfContactsType** element that represents the contacts returned.

**Urls:** An **ArrayOfUrlsType** element that represents the URLs returned.

**PhoneNumbers:** An **ArrayOfPhonesType** element that represents the phone numbers returned.

#### 2.2.4.36 RightsManagementLicenseDataType

The **RightsManagementLicenseDataType** complex type specifies information about the rights management license.[<51>](#)

```
<xs:complexType name="RightsManagementLicenseDataType">
  <xs:sequence>
    <xs:element name="RightsManagedMessageDecryptionStatus" type="xs:int" minOccurs="0" />
    <xs:element name="RmsTemplateId" type="xs:string" minOccurs="0" />
    <xs:element name="TemplateName" type="xs:string" minOccurs="0" />
    <xs:element name="TemplateDescription" type="xs:string" minOccurs="0" />
    <xs:element name="EditAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ReplyAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ReplyAllAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ForwardAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ModifyRecipientsAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ExtractAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="PrintAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ExportAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ProgrammaticAccessAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="IsOwner" type="xs:boolean" minOccurs="0" />
    <xs:element name="ContentOwner" type="xs:string" minOccurs="0" />
    <xs:element name="ContentExpiryDate" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>
```

**EditAllowed:** A Boolean element that indicates whether the information is editable.

**ReplyAllowed:** A Boolean element that indicates whether replying is enabled.

**ReplyAllAllowed:** A Boolean element that indicates whether replying to all recipients is enabled.

**ForwardAllowed:** A Boolean element that indicates whether forwarding is enabled.

**ModifyRecipientsAllowed:** A Boolean element that indicates whether modifying the list of recipients is enabled.

**ExtractAllowed:** A Boolean element that indicates whether extracting is enabled.

**PrintAllowed:** A Boolean element that indicates whether printing is enabled.

**ExportAllowed:** A Boolean element that indicates whether exporting is enabled.

**ProgrammaticAccessAllowed:** A Boolean element that indicates whether programmatic access is enabled.

**IsOwner:** A Boolean element that indicates whether a user is the owner.

**ContentOwner:** A string element that represents the name of the content owner.

**ContentExpiryDate:** A string that represents the expiration date of the content.

## 2.2.5 Simple Types

The following table lists the set of common XML schema simple type definitions that are defined by this specification. XML schema simple type definitions that are specific to a particular operation are defined with the operation.

Simple type	Description
<b>DerivedItemIdType</b>	Specifies the identifier of the recurring master of a recurring item.
<b>ImportanceChoicesType</b>	Specifies the levels of importance for an item.
<b>ItemClassType</b>	Specifies an item class.
<b>ReminderMinutesBeforeStartType</b>	Specifies the number of minutes before an event occurs when a reminder is displayed.

### 2.2.5.1 t:DerivedItemIdType Simple Type

The **DerivedItemIdType** simple type specifies the identifier of the recurring master of a recurring item.

```
<xs:simpleType name="DerivedItemIdType">
  <xs:restriction
    base="xs:string"
  />
</xs:simpleType>
```

### 2.2.5.2 t:ImportanceChoicesType Simple Type

The **ImportanceChoicesType** simple type specifies the levels of importance for an item.

```
<xs:simpleType name="ImportanceChoicesType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="High"
    />
    <xs:enumeration
      value="Low"
    />
    <xs:enumeration
      value="Normal"
    />
  </xs:restriction>
```

```
</xs:simpleType>
```

The following table lists the values that are defined by the **ImportanceChoicesType** simple type.

Value	Meaning
<b>High</b>	Specifies high importance.
<b>Low</b>	Specifies low importance.
<b>Normal</b>	Specifies normal importance.

### 2.2.5.3 t:ItemClassType Simple Type

The **ItemClassType** simple type specifies an item class.

```
<xs:simpleType name="ItemClassType">
  <xs:restriction
    base="xs:string"
  />
</xs:simpleType>
```

### 2.2.5.4 t:ReminderMinutesBeforeStartType Simple Type

The **ReminderMinutesBeforeStartType** simple type specifies the number of minutes before an event occurs when a reminder is displayed.

```
<xs:simpleType name="ReminderMinutesBeforeStartType">
  <xs:union>
    <xs:simpleType
      id="ReminderMinutesBeforeStartType"
    >
      <xs:restriction
        base="xs:int"
      >
        <xs:minInclusive
          value="0"
        />
        <xs:maxInclusive
          value="2629800"
        />
      </xs:restriction>
    </xs:simpleType>
    <xs:simpleType
      id="ReminderMinutesBeforeStartMarkerType"
    >
      <xs:restriction
        base="xs:int"
      >
        <xs:minInclusive
          value="1525252321"
        />
        <xs:maxInclusive
```

```
    value="1525252321"
  />
</xs:restriction>
</xs:simpleType>
</xs:union>
</xs:simpleType>
```

## 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

## 2.2.7 Groups

This specification does not define any common XML schema group definitions.

## 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

### 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly back to the higher-layer protocol or application.

#### 3.1 ExchangeServicePortType Server Details

The Core Items Web Service Protocol defines a single port type with six operations. Those operations enable client implementations to update, delete, move, or copy items on the server.

##### 3.1.1 Abstract Data Model

None.

##### 3.1.2 Timers

None.

##### 3.1.3 Initialization

None.

##### 3.1.4 Message Processing Events and Sequencing Rules

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The following table summarizes the WSDL operations as defined by this specification.

Operation name	Description
<b>GetItem</b>	Gets items on the server.
<b>CreateItem</b>	Creates items on the server.
<b>DeleteItem</b>	Deletes items on the server.
<b>UpdateItem</b>	Updates items on the server.
<b>MoveItem</b>	Moves items on the server.
<b>CopyItem</b>	Copies items on the server.
<b>MarkAllItemsAsRead</b>	Marks all the items in a folder as read.

###### 3.1.4.1 CopyItem Operation

The CopyItem operation copies items on the server.

The following is the WSDL port type specification for the **CopyItem** operation.

```
<wsdl:operation name="CopyItem" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

<wsdl:input message="tns:CopyItemSoapIn" />
<wsdl:output message="tns:CopyItemSoapOut" />
</wsdl:operation>

```

The following is the WSDL binding specification for the **CopyItem** operation.

```

<wsdl:operation name="CopyItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem"/>
  <wsdl:input>
    <soap:header message="tns:CopyItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:CopyItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:CopyItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="CopyItemResult" use="literal"/>
    <soap:header message="tns:CopyItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

### 3.1.4.1.1 Messages

The following table lists the WSDL message definitions that are specific to the **CopyItem** operation.

Message name	Description
<b>CopyItemSoapIn</b>	Specifies the <b>SOAP message</b> that requests to copy an item in a mailbox.
<b>CopyItemSoapOut</b>	Specifies the SOAP message that is returned by the server in response.

#### 3.1.4.1.1.1 tns:CopyItemSoapIn Message

The **CopyItemSoapIn** WSDL message specifies the **CopyItem** operation request to copy an item on the server.

```

<wsdl:message name="CopyItemSoapIn">
  <wsdl:part name="request" element="tns:CopyItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>--

```

The **CopyItemSoapIn** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem>.

The parts of the **CopyItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:CopyItem</b> (section <a href="#">3.1.4.1.2.1</a> )	Specifies the <b>SOAP body</b> of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">IMS-</a>	Specifies a <b>SOAP header</b> that identifies the user whom the client application is

Part name	Element/type	Description
	<a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing the mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>CopyItem</b> operation request.

### 3.1.4.1.1.2 tns:CopyItemSoapOut Message

The **CopyItemSoapOut** WSDL message specifies the server response to the **CopyItem** operation request to copy an item on the server.

```
<wsdl:message name="CopyItemSoapOut">
    <wsdl:part name="CopyItemResult" element="tns:CopyItemResponse"/>
    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **CopyItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem>.

The parts of the **CopyItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>CopyItemResult</b>	<b>tns:CopyItemResponse</b> (section <a href="#">3.1.4.1.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for a response.

### 3.1.4.1.2 Elements

The following table lists the XML schema element definitions that are specific to the **CopyItem** operation.

Element name	Description
<b>CopyItem</b>	Specifies a request to copy an item in a mailbox.
<b>CopyItemResponse</b>	Specifies a response to a <b>CopyItem</b> operation request.

#### 3.1.4.1.2.1 CopyItem Element

The **CopyItem** element specifies a request to copy an item in a mailbox.

```
<xss:element name="CopyItem"
    type="m:CopyItemType"
/>
```

### 3.1.4.1.2.2 CopyItemResponse Element

The **CopyItemResponse** element specifies a response to a **CopyItem** operation request.

```
<xs:element name="CopyItemResponse"
    type="m:CopyItemResponseType"
/>
```

### 3.1.4.1.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the CopyItem operation.

Complex type name	Description
<b>CopyItemResponseType</b>	Specifies the response that is returned by the <b>CopyItem</b> operation.
<b>CopyItemType</b>	Specifies an operation to copy items in a mailbox.

#### 3.1.4.1.3.1 m:CopyItemResponseType Complex Type

The **CopyItemResponseType** complex type specifies the response that is returned by the **CopyItem** operation. The **CopyItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="CopyItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>
```

#### 3.1.4.1.3.2 m:CopyItemType Complex Type

The **CopyItemType** complex type specifies an operation to copy items in a mailbox. The **CopyItemType** complex type extends the **BaseMoveCopyItemType** complex type, as specified in section [2.2.4.3](#).

```
<xs:complexType name="CopyItemType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseMoveCopyItemType"
        />
    </xs:complexContent>
</xs:complexType>
```

### 3.1.4.2 CreateItem Operation

The **CreateItem** operation creates items on the server.

The following is the WSDL port type specification for the **CreateItem** operation.

```
<wsdl:operation name="CreateItem" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
    <wsdl:input message="tns:CreateItemSoapIn" />
    <wsdl:output message="tns:CreateItemSoapOut" />
</wsdl:operation>
```

The following is the WSDL binding specification for the **CreateItem** operation.

```
<wsdl:operation name="CreateItem">
    <soap:operation
        soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem"/>
    <wsdl:input>
        <soap:header message="tns:CreateItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:CreateItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:CreateItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:header message="tns:CreateItemSoapIn" part="TimeZoneContext" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="CreateItemResult" use="literal"/>
        <soap:header message="tns:CreateItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.2.1 Messages

The following table lists the WSDL message definitions that are specific to the **CreateItem** operation.

Message name	Description
<b>CreateItemSoapIn</b>	Specifies the SOAP message that requests to create an item.
<b>CreateItemSoapOut</b>	Specifies the SOAP message that is returned by the server in response to a <b>CreateItemSoapIn</b> operation request.

##### 3.1.4.2.1.1 tns:CreateItemSoapIn Message

The **CreateItemSoapIn** WSDL message specifies the **CreateItem** operation request to create items on the server.

```
<wsdl:message name="CreateItemSoapIn">
    <wsdl:part name="request" element="tns:CreateItem"/>
    <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
```

The **CreateItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem>.

The parts of the **CreateItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:CreateItem</b> (section <a href="#">3.1.4.2.3.2</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>CreateItem</b> operation (section <a href="#">3.1.4.2</a> ) request.
<b>TimeZoneContext</b>	<b>t:TimeZoneContext</b> ( <a href="#">[MS-OXWSGTZ]</a> section 2.2.4.11)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone.

### 3.1.4.2.1.2 tns:CreateItemSoapOut Message

The **CreateItemSoapOut** WSDL message specifies the server response to a **CreateItem** operation request to create items on the server.

```
<wsdl:message name="CreateItemSoapOut">
  <wsdl:part name="CreateItemResult" element="tns:CreateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **CreateItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem>.

The parts of the **CreateItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>CreateItemResult</b>	<b>tns:CreateItemResponse</b> (section <a href="#">3.1.4.2.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response to a <b>CreateItem</b> operation request.

### 3.1.4.2.2 Elements

The following table lists the XML schema element definitions that are specific to the **CreateItem** operation.

Element name	Description
<b>CreateItem</b>	Specifies a request to create an item.
<b>CreateItemResponse</b>	Specifies a response to a <b>CreateItem</b> operation request.

#### 3.1.4.2.2.1 CreateItem Element

The **CreateItem** element specifies a request to create an item.

```
<xs:element name="CreateItem"
    type="m:CreateItemType"
/>
```

#### 3.1.4.2.2.2 CreateItemResponse Element

The **CreateItemResponse** element specifies a response to a **CreateItem** operation request.

```
<xs:element name="CreateItemResponse"
    type="m:CreateItemResponseType"
/>
```

### 3.1.4.2.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **CreateItem** operation.

Complex type name	Description
<b>CreateItemResponseType</b>	Specifies a response to a <b>CreateItem</b> operation request.
<b>CreateItemType</b>	Specifies a request to create an item or response object.

#### 3.1.4.2.3.1 m:CreateItemResponseType Complex Type

The **CreateItemResponseType** complex type specifies a response to a **CreateItem** operation request. The **CreateItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="CreateItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>
```

### 3.1.4.2.3.2 m:CreateItemType Complex Type

The **CreateItemType** complex type specifies a request to create an item or response object. The **CreateItemTYpe** complex type extends the **BaseRequestType** complex type ([MS-OXWSCDATA] section 2.2.4.15).

```
<xs:complexType name="CreateItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
      <xs:sequence>
        <xs:element name="SavedItemFolderId"
          type="t:TargetFolderIdType"
          minOccurs="0"
        />
        <xs:element name="Items"
          type="t:NonEmptyArrayOfAllItemsType"
        />
      </xs:sequence>
      <xs:attribute name="MessageDisposition"
        type="t:MessageDispositionType"
        use="optional"
      />
      <xs:attribute name="SendMeetingInvitations"
        type="t:CalendarItemCreateOrDeleteOperationType"
        use="optional"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **CreateItemType** complex type.

Element name	Type	Description
<b>SavedItemFolderId</b>	<b>t:TargetFolderIdType</b> ([MS-OXWSFOLD] section 2.2.4.14)	Specifies the folder in which new items are saved.
<b>Items</b>	<b>t:NonEmptyArrayOfAllItemsType</b> ([MS-OXWSCDATA] section 2.2.4.42)	Specifies the collection of items to be created.

The following table lists and describes the attributes of the **CreateItemType** complex type.

Attribute name	Type	Description
<b>MessageDisposition</b>	<b>t:MessageDispositionType</b> ([MS-OXWSMSG] section 2.2.5.1)	Specifies an enumeration that describes how an item is handled after it is created.

Attribute name	Type	Description
<b>SendMeetingInvitations</b>	<b>t:CalendarItemCreateOrDeleteOperationType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.5.1)	Specifies an enumeration that describes how meeting requests are handled after they are created.

### 3.1.4.3 DeleteItem Operation

The **DeleteItem** operation deletes items on the server.

The following is the WSDL port type specification for the **DeleteItem** operation.

```
<wsdl:operation name="DeleteItem">
  <wsdl:input message="tns:DeleteItemSoapIn"/>
  <wsdl:output message="tns:DeleteItemSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **DeleteItem** operation.

```
<wsdl:operation name="DeleteItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem"/>
  <wsdl:input>
    <soap:header message="tns:DeleteItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="DeleteItemResult" use="literal"/>
    <soap:header message="tns:DeleteItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.3.1 Messages

The following table lists the WSDL message definitions that are specific to the **DeleteItem** operation.

Message name	Description
<b>DeleteItemSoapIn</b>	Specifies the SOAP message that requests an item be deleted from a mailbox.
<b>DeleteItemSoapOut</b>	Specifies the SOAP message that is returned by the server in response to a <b>DeleteItemSoapIn</b> operation request.

##### 3.1.4.3.1.1 tns:DeleteItemSoapIn Message

The **DeleteItemSoapIn** WSDL message specifies the **DeleteItem** operation request to delete an item on the server.

```

<wsdl:message name="DeleteItemSoapIn">
  <wsdl:part name="request" element="tns:DeleteItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **DeleteItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem>.

The parts of the **DeleteItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:DeleteItem</b> ( <a href="#">section 3.1.4.3.2.1</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>DeleteItem</b> operation request.

### 3.1.4.3.1.2 tns:DeleteItemSoapOut Message

The **DeleteItemSoapOut** WSDL message specifies the server response to the **DeleteItem** operation request to delete an item on the server.

```

<wsdl:message name="DeleteItemSoapOut">
  <wsdl:part name="DeleteItemResult" element="tns:DeleteItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The **DeleteItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem>.

The parts of the **DeleteItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>DeleteItemResult</b>	<b>tns:DeleteItemResponse</b> ( <a href="#">section 3.1.4.3.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for a response.

### 3.1.4.3.2 Elements

The following table lists the XML schema element definitions that are specific to the **DeleteItem** operation.

Element name	Description
<b>DeleteItem</b>	Specifies a request to delete an item from a mailbox.
<b>DeleteItemResponse</b>	Specifies a response to a single <b>DeleteItem</b> operation request.

#### 3.1.4.3.2.1 DeleteItem Element

The **DeleteItem** element specifies a request to delete an item from a mailbox.

```
<xs:element name="DeleteItem"
    type="m:DeleteItemType"
/>
```

#### 3.1.4.3.2.2 DeleteItemResponse Element

The **DeleteItemResponse** element specifies a response to a single **DeleteItem** operation request.

```
<xs:element name="DeleteItemResponse"
    type="m:DeleteItemResponseType"
/>
```

### 3.1.4.3.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **DeleteItem** operation.

Complex type name	Description
<b>DeleteItemResponseType</b>	Specifies a response to a single <b>DeleteItem</b> operation request.
<b>DeleteItemType</b>	Specifies a request to delete items.

#### 3.1.4.3.3.1 m:DeleteItemResponseType Complex Type

The **DeleteItemResponseType** complex type specifies a response to a single **DeleteItem** operation request. The **DeleteItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="DeleteItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>
```

### 3.1.4.3.3.2 m:DeleteItemType Complex Type

The **DeleteItemType** complex type specifies a request to delete items. The **DeleteItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="DeleteItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
      <xs:sequence>
        <xs:element name="ItemIds"
          type="t:NonEmptyArrayOfBaseItemIdsType"
        />
      </xs:sequence>
      <xs:attribute name="DeleteType"
        type="t:DisposalType"
        use="required"
      />
      <xs:attribute name="SendMeetingCancellations"
        type="t:CalendarItemCreateOrDeleteOperationType"
        use="optional"
      />
      <xs:attribute name="AffectedTaskOccurrences"
        type="t:AffectedTaskOccurrencesType"
        use="optional"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **DeleteItemType** complex type.

Element name	Type	Description
<b>ItemIds</b>	<b>t:NonEmptyArrayOfBaseItemIdsType</b> ( <a href="#">section 2.2.4.11</a> )	Specifies the collection of items to be deleted.

The following table lists and describes the attributes of the **DeleteItemType** complex type.

Attribute name	Type	Description
<b>DeleteType</b>	<b>t:DisposalType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.9)	Specifies an enumeration value that describes how an item is to be deleted.
<b>SendMeetingCancellations</b>	<b>t:CalendarItemCreateOrDeleteOperationType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.5.1)	Specifies an enumeration that describes how

Attribute name	Type	Description
		cancellations are to be handled for deleted meetings.
<b>AffectedTaskOccurrences</b>	<b>t:AffectedTaskOccurrencesType</b> ( <a href="#">IMS-OXWSTASK</a> section 3.1.4.3.1.1)	Specifies an enumeration value that indicates whether a task instance or a task master is to be deleted.

### 3.1.4.4 GetItem Operation

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The **GetItem** operation gets items on the server.

The following is the WSDL port type specification for the **GetItem** operation.

```
<wsdl:operation name="GetItem">
  <wsdl:input message="tns:.GetItemSoapIn"/>
  <wsdl:output message="tns:.GetItemSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **GetItem** operation.

```
<wsdl:operation name="GetItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetItem"/>
  <wsdl:input>
    <soap:header message="tns:FormItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:FormItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:FormItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:FormItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:header message="tns:FormItemSoapIn" part="DateTimePrecision" use="literal" />
    <soap:header message="tns:FormItemSoapIn" part="ManagementRole" use="literal" />
  <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="FormItemResult" use="literal"/>
    <soap:header message="tns:FormItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.4.1 Messages

The following table lists the WSDL message definitions that are specific to the **GetItem** operation.

Message name	Description
<b>GetItemSoapIn</b>	Specifies the SOAP message that requests to get an item from a mailbox.
<b>GetItemSoapOut</b>	Specifies the SOAP message that is returned by the server in response to a <b>GetItem</b> operation request.

### 3.1.4.4.1.1 tns:.GetItemSoapIn Message

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The **GetItemSoapIn** WSDL message specifies the **GetItem** operation request to get an item from the server.

```
<wsdl:message name="GetItemSoapIn">
  <wsdl:part name="request" element="tns:.GetItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="DateTimePrecision" element="t:DateTimePrecision" />
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>
```

The **GetItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetItem>.

The parts of the **GetItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:.GetItem</b> ( <a href="#">section 3.1.4.4.2.1</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>GetItem</b> operation request.
<b>TimeZoneContext</b>	<b>t:TimeZoneContex</b> ( <a href="#">[MS-OXWSGTZ]</a> section 2.2.4.11)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone.
<b>DateTimePrecision</b>	<b>t:DateTimePrecision</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.1)	Specifies a SOAP header that identifies the resolution of date/time values in responses from the server, either in seconds or in milliseconds. This header SHOULD <a href="#"><code>&lt;52&gt;</code></a> be

Part name	Element/type	Description
		included.
<b>ManagementRole</b>	<b>t:ManagementRole</b> (section <a href="#">2.2.3.2</a> )	Specifies the roles the user or application wants to use. <a href="#">&lt;53&gt;</a>

### 3.1.4.4.1.2 tns:.GetItemSoapOut Message

The **GetItemSoapOut** WSDL message specifies the server response to the **GetItem** operation request to get an item from the server.

```
<wsdl:message name="GetItemSoapOut">
  <wsdl:part name="GetItemResult" element="tns:.GetItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **GetItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetItem>.

The parts of the **GetItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>GetItemResult</b>	<b>tns:.GetItemResponse</b> (section <a href="#">3.1.4.4.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for a response.

### 3.1.4.4.2 Elements

The following table lists the XML schema element definitions that are specific to the **GetItem** operation.

Element name	Description
<b>GetItem</b>	Specifies a request to get an item from a mailbox.
<b>GetItemResponse</b>	Specifies a response to a <b>GetItem</b> operation request.

#### 3.1.4.4.2.1 GetItem Element

The **GetItem** element specifies a request to get an item from a mailbox.

```
<xss:element name="GetItem"
  type="m:GetItemType"
/>
```

#### 3.1.4.4.2.2 GetItemResponse Element

The **GetItemResponse** element specifies a response to a **GetItem** operation request.

```

<xs:element name="GetItemResponse"
    type="m:GetItemResponseType"
/>

```

### 3.1.4.4.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **GetItem** operation.

Complex type name	Description
<b>GetItemResponseType</b>	Specifies a response to a <b>GetItem</b> operation request.
<b>GetItemType</b>	Specifies a request to get items from a mailbox.

#### 3.1.4.4.3.1 m:GetItemResponseType Complex Type

The **GetItemResponseType** complex type specifies a response to a **GetItem** operation request. The **GetItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```

<xs:complexType name="GetItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>

```

#### 3.1.4.4.3.2 m:GetItemType Complex Type

The **GetItemType** complex type specifies a request to get items from a mailbox. The **GetItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```

<xs:complexType name="GetItemType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseRequestType"
        />
        <xs:sequence>
            <xs:element name="ItemShape"
                type="t:ItemResponseShapeType"
            />
            <xs:element name="ItemIds"
                type="t:NonEmptyArrayOfBaseItemIdsType"
            />
        </xs:sequence>
    </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **GetItemType** complex type.

Element name	Type	Description
<b>ItemShape</b>	<b>t:ItemResponseShapeType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.38)	Specifies the response shape of a <b>GetItem</b> operation response.
<b>ItemIds</b>	<b>t:NonEmptyArrayOfBaseItemIdsType</b> ( <a href="#">section 2.2.4.11</a> )	Specifies the collection of items that a <b>GetItem</b> operation is to get.

### 3.1.4.5 MarkAllItemsAsRead Operation

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsRead** operation marks all items in a folder as read. [<54>](#)

The following is the WSDL port type specification for the **MarkAllItemsAsRead** operation.

```
<wsdl:operation name="MarkAllItemsAsRead">
  <wsdl:input message="tns:MarkAllItemsAsReadSoapIn"/>
  <wsdl:output message="tns:MarkAllItemsAsReadSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **MarkAllItemsAsRead** operation.

```
<wsdl:operation name="MarkAllItemsAsRead">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead"/>
  <wsdl:input>
    <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="MarkAllItemsAsReadResult" use="literal"/>
    <soap:header message="tns:MarkAllItemsAsReadSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.5.1 Messages

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The following table lists the WSDL message definitions that are specific to the **MarkAllItemsAsRead** operation.

Message name	Description
<b>MarkAllItemsAsReadSoapIn</b>	Specifies the SOAP message that requests to mark all items as read.
<b>MarkAllItemsAsReadSoapOut</b>	Specifies the SOAP message that is returned by the server in response to a <b>MarkAllItemsAsRead</b> operation request.

### 3.1.4.5.1.1 tns:MarkAllItemsAsReadSoapIn Message

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsReadSoapIn** WSDL message specifies the **MarkAllItemsAsRead** operation request to mark all items as read.

```
<wsdl:message name="MarkAllItemsAsReadSoapIn">
  <wsdl:part name="request" element="tns:MarkAllItemsAsRead"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **MarkAllItemsAsReadSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead>.

The parts of the **MarkAllItemsAsReadSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:MarkAllItemsAsRead</b> ( <a href="#">section 3.1.4.5.2.1</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>MarkAllItemsAsRead</b> operation request.

### 3.1.4.5.1.2 tns:MarkAllItemsAsReadSoapOut Message

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsReadSoapOut** WSDL message specifies the server response to the **MarkAllItemsAsRead** operation request to mark all items as read.

```
<wsdl:message name="MarkAllItemsAsReadSoapOut">
  <wsdl:part name="MarkAllItemsAsReadResult" element="tns:MarkAllItemsAsReadResponse"/>
```

```

<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The **MarkAllItemsAsReadSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead>.

The parts of the **MarkAllItemsAsReadSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>MarkAllItemsAsReadResult</b>	<b>tns:MarkAllItemsAsReadResponse</b> (section <a href="#">3.1.4.5.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response to a <b>MarkAllItemsAsRead</b> operation request.

### 3.1.4.5.2 Elements

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The following table lists the XML schema element definitions that are specific to the **MarkAllItemsAsRead** operation.

Element name	Description
<b>MarkAllItemsAsRead</b>	Specifies a request to mark all items as read.
<b>MarkAllItemsAsReadResponse</b>	Specifies a response to a <b>MarkAllItemsAsRead</b> operation request.

#### 3.1.4.5.2.1 MarkAllItemsAsRead Element

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsRead** element specifies a request to mark all items as read.

```
<xss:element name="MarkAllItemsAsRead" type="m:MarkAllItemsAsReadType"/>
```

#### 3.1.4.5.2.2 MarkAllItemsAsReadResponse Element

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsReadResponse** element specifies a response to a **MarkAllItemsAsRead** operation request.

```
<xss:element name="MarkAllItemsAsReadResponse" type="m:MarkAllItemsAsReadResponseType"/>
```

### 3.1.4.5.3 Complex Types

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The following table lists the XML schema complex type definitions that are specific to the **MarkAllItemsAsRead** operation.

Complex type name	Description
<b>MarkAllItemsAsReadResponseType</b>	Specifies a response to a call to the <b>MarkAllItemsAsRead</b> operation.
<b>MarkAllItemsAsReadType</b>	Specifies an operation to mark all items as read.

#### 3.1.4.5.3.1 m:MarkAllItemsAsReadType Complex Type

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsReadType** complex type specifies a request to mark all items as read. The **MarkAllItemsAsReadType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="MarkAllItemsAsReadType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ReadFlag" type="xs:boolean" minOccurs="1" maxOccurs="1"/>
        <xs:element name="SuppressReadReceipts" type="xs:boolean" minOccurs="1" maxOccurs="1"/>
        <xs:element name="FolderIds" type="t:NonEmptyArrayOfBaseFolderIdsType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

#### 3.1.4.5.3.2 m:MarkAllItemsAsReadResponseType Complex Type

**Note** All of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure.

The **MarkAllItemsAsReadResponseType** complex type specifies a response to a call to the **MarkAllItemsAsRead** operation. The **MarkAllItemsAsReadResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="MarkAllItemsAsReadResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

### 3.1.4.6 MoveItem Operation

The **MoveItem** operation moves items on the server.

The following is the WSDL port type specification for the **MoveItem** operation.

```
<wsdl:operation name="MoveItem">
  <wsdl:input message="tns:MoveItemSoapIn"/>
  <wsdl:output message="tns:MoveItemSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **MoveItem** operation.

```
<wsdl:operation name="MoveItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem"/>
  <wsdl:input>
    <soap:header message="tns:MoveItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:MoveItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:MoveItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="MoveItemResult" use="literal"/>
    <soap:header message="tns:MoveItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.6.1 Messages

The following table lists the WSDL message definitions that are specific to the **MoveItem** operation.

Message name	Description
<b>MoveItemSoapIn</b>	Specifies the SOAP message that requests to move an item in a mailbox.
<b>MoveItemSoapOut</b>	Specifies the SOAP message that is returned by the server in response to a <b>MoveItem</b> operation request.

##### 3.1.4.6.1.1 tns:MoveItemSoapIn Message

The **MoveItemSoapIn** WSDL message specifies the **MoveItem** operation request to move an item on the server.

```
<wsdl:message name="MoveItemSoapIn">
  <wsdl:part name="request" element="tns:MoveItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **MoveItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem>.

The parts of the **MoveItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:MoveItem</b> (section <a href="#">3.1.4.6.2.1</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>MoveItem</b> operation request.

### 3.1.4.6.1.2 tns:MoveItemSoapOut Message

The **MoveItemSoapOut** WSDL message specifies the server response to the **MoveItem** operation request to move an item on the server.

The **MoveItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem>.

The parts of the **MoveItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>MoveItemResult</b>	<b>tns:MoveItemResponse</b> (section <a href="#">3.1.4.6.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response to a <b>MoveItem</b> operation request.

## 3.1.4.6.2 Elements

The following table lists the XML schema element definitions that are specific to the **MoveItem** operation.

Element name	Description
<b>MoveItem</b>	Specifies a request to move an item.
<b>MoveItemResponse</b>	Specifies a response to a <b>MoveItem</b> operation request.

### 3.1.4.6.2.1 MoveItem Element

The **MoveItem** element specifies a request to move an item.

```
<xss:element name="MoveItem"
  type="m:MoveItemType"
/>
```

### 3.1.4.6.2.2 MoveItemResponse Element

The **MoveItemResponse** element specifies a response to a **MoveItem** operation request.

```
<xs:element name="MoveItemResponse"
    type="m:MoveItemResponseType"
/>
```

### 3.1.4.6.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **MoveItem** operation.

Complex type name	Description
<b>MoveItemResponseType</b>	Specifies a response to a call to the <b>MoveItem</b> operation.
<b>MoveItemType</b>	Specifies an operation to move items in a mailbox.

#### 3.1.4.6.3.1 m:MoveItemResponseType Complex Type

The **MoveItemResponseType** complex type specifies a response to a call to the **MoveItem** operation. The **MoveItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="MoveItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>
```

#### 3.1.4.6.3.2 m:MoveItemType Complex Type

The **MoveItemType** complex type specifies an operation to move items in a mailbox. The **MoveItemType** complex type extends the **BaseMoveCopyItemType** complex type, as specified in section [2.2.4.3](#).

```
<xs:complexType name="MoveItemType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseMoveCopyItemType"
        />
    </xs:complexContent>
</xs:complexType>
```

### 3.1.4.7 SendItem Operation

The **SendItem** operation sends messages and post items on the server.

The following is the WSDL port type specification for the **SendItem** operation.

```
<wsdl:operation name="SendItem">
  <wsdl:input message="tns:SendItemSoapIn" />
  <wsdl:output message="tns:SendItemSoapOut" />
</wsdl:operation>
```

The following is the WSDL binding specification for the **SendItem** operation.

```
<wsdl:operation name="SendItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SendItem" />
  <wsdl:input>
    <soap:header message="tns:SendItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:SendItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:SendItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="SendItemResult" use="literal" />
    <soap:header message="tns:SendItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.7.1 Messages

The following table lists the WSDL message definitions that are specific to the **SendItem** operation.

Message name	Description
<b>SendItemSoapIn</b>	Specifies the SOAP message that requests to send an item.
<b>SendItemSoapOut</b>	Specifies the SOAP message that is sent by the server in response to a <b>SendItem</b> operation request.

##### 3.1.4.7.1.1 tns:SendItemSoapIn Message

The **SendItemSoapIn** WSDL message specifies the **SendItem** operation request to post items on the server.

```
<wsdl:message name="SendItemSoapIn">
  <wsdl:part name="request" element="tns:SendItem" />
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **SendItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SendItem>.

The parts of the **SendItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:SendItem</b> (section <a href="#">3.1.4.7.2.1</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">IMS-OXWSCDATA</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">IMS-OXWSCDATA</a> section 2.2.5.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in <a href="#">RFC3066</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">IMS-OXWSCDATA</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for a <b>SendItem</b> operation request.

### 3.1.4.7.1.2 tns:SendItemSoapOut Message

The **SendItemSoapOut** WSDL message specifies the server response to a **SendItem** operation request to post items on the server.

```
<wsdl:message name="SendItemSoapOut">
  <wsdl:part name="SendItemResult" element="tns:SendItemResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **SendItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SendItem>.

The parts of the **SendItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>SendItemResult</b>	<b>tns:SendItemResponse</b> (section <a href="#">3.1.4.7.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">IMS-OXWSCDATA</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response to a <b>SendItem</b> operation request.

### 3.1.4.7.2 Elements

The following table lists the XML schema element definitions that are specific to the **SendItem** operation.

Element name	Description
<b>SendItem</b>	Specifies a request to send an item.
<b>SentItemResponse</b>	Specifies a response to a <b>SendItem</b> operation request.

### 3.1.4.7.2.1 SendItem Element

The **SendItem** element specifies the root element in a request to send an item.

```
<xs:element name="SendItem"
    type="m:SendItemType"
/>
```

### 3.1.4.7.2.2 SendItemResponse Element

The **SendItemResponse** element specifies a response to a **SendItem** operation request.

```
<xs:element name="SendItemResponse"
    type="m:SendItemResponseType"
/>
```

### 3.1.4.7.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **SendItem** operation.

Complex type name	Description
<b>SendItemResponseType</b>	Specifies a response to a <b>SendItem</b> operation request.
<b>SendItemType</b>	Specifies a request to send messages and post items on the server.

#### 3.1.4.7.3.1 m:SendItemResponseType Complex Type

The **SendItemResponseType** complex type specifies a response to a **SendItem** operation request. The **SendItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="SendItemResponseType">
    <xs:complexContent>
        <xs:extension
            base="m:BaseResponseMessageType"
        />
    </xs:complexContent>
</xs:complexType>
```

#### 3.1.4.7.3.2 m:SendItemType Complex Type

The **SendItemType** complex type specifies a request to send messages and post items on the server. The **SendItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="SendItemType">
    <xs:complexContent>
```

```

<xs:extension
  base="m:BaseRequestType"
>
  <xs:sequence>
    <xs:element name="ItemIds"
      type="t:NonEmptyArrayOfBaseItemIdsType"
    />
    <xs:element name="SavedItemFolderId"
      type="t:TargetFolderIdType"
      minOccurs="0"
    />
  </xs:sequence>
  <xs:attribute name="SaveItemToFolder"
    type="xs:boolean"
    use="required"
  />
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **SendItemType** complex type.

Element name	Type	Description
<b>ItemIds</b>	<b>t:NonEmptyArrayOfBaseItemIdsType</b> (section <a href="#">2.2.4.11</a> )	Specifies an array of item identifiers for the items to try to send.
<b>SavedItemFolderId</b>	<b>t:TargetFolderIdType</b> ( <a href="#">[MS-OXWSFOLD]</a> section 2.2.4.14)	Specifies the identity of the folder that contains a saved version of a sent item.

The following table lists and describes the attributes of the **SendItemType** complex type.

Attribute name	Type	Description
<b>SaveItemToFolder</b>	<b>xs:boolean</b> <a href="#">[XMLSCHEMA2]</a>	Specifies a Boolean value that indicates whether a copy of a sent item is saved.

### 3.1.4.8 UpdateItem Operation

The **UpdateItem** operation updates items on the server.

The following is the WSDL port type specification for the **UpdateItem** operation.

```

<wsdl:operation name="UpdateItem">
  <wsdl:input message="tns:UpdateItemSoapIn"/>
  <wsdl:output message="tns:UpdateItemSoapOut"/>
</wsdl:operation>

```

The following is the WSDL binding specification for the **UpdateItem** operation.

```
<wsdl:operation name="UpdateItem">
```

```

<soap:operation
  soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem"/>
  <wsdl:input>
    <soap:header message="tns:UpdateItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UpdateItemResult" use="literal"/>
    <soap:header message="tns:UpdateItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

### 3.1.4.8.1 Messages

The following table lists the WSDL message definitions that are specific to the **UpdateItem** operation.

Message name	Description
<b>UpdateItemSoapIn</b>	Specifies the SOAP message that requests that an item be updated.
<b>UpdateItemSoapOut</b>	Specifies the SOAP message that is returned in response to an <b>UpdateItem</b> operation request.

#### 3.1.4.8.1.1 tns:UpdateItemSoapIn Message

The **UpdateItemSoapIn** WSDL message specifies the **UpdateItem** operation request to update items on the server.

```

<wsdl:message name="UpdateItemSoapIn">
  <wsdl:part name="request" element="tns:UpdateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>

```

The **UpdateItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem>.

The parts of the **UpdateItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:UpdateItem</b> (section <a href="#">3.1.4.8.2.1</a> )	Specifies the SOAP body of a request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.3)	Specifies a SOAP header that identifies the mailbox culture.

Part name	Element/type	Description
	<a href="#">[MS-OXWSCDATA]</a> section 2.2.5.6)	culture to be used for accessing a mailbox. The cultures are defined in <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for an <b>UpdateItem</b> operation request.
<b>TimeZoneContext</b>	<b>t:TimeZoneContext</b> ( <a href="#">[MS-OXWSGTZ]</a> section 2.2.4.11)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone.

### 3.1.4.8.1.2 tns:UpdateItemSoapOut Message

The **UpdateItemSoapOut** WSDL message specifies the server response to an **UpdateItem** operation request to update items on the server.

```
<wsdl:message name="UpdateItemSoapOut">
  <wsdl:part name="UpdateItemResult" element="tns:UpdateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **UpdateItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem>.

The parts of the **UpdateItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
<b>UpdateItemResult</b>	<b>tns:UpdateItemResponse</b> (section <a href="#">3.1.4.8.2.2</a> )	Specifies the SOAP body of a response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.10)	Specifies a SOAP header that identifies the server version for a response to an <b>UpdateItem</b> operation request.

### 3.1.4.8.2 Elements

The following table lists the XML schema element definitions that are specific to the **UpdateItem** operation.

Element name	Description
<b>UpdateItem</b>	Specifies a request to update an item in a mailbox.
<b>UpdateItemResponse</b>	Specifies a response to an <b>UpdateItem</b> operation request.

#### 3.1.4.8.2.1 UpdateItem Element

The **UpdateItem** element specifies a request to update an item in a mailbox.

```
<xs:element name="UpdateItem"
    type="m:UpdateItemType"
/>
```

### 3.1.4.8.2.2 UpdateItemResponse Element

The **UpdateItemResponse** element specifies a response to an **UpdateItem** operation request.

```
<xs:element name="UpdateItemResponse"
    type="m:UpdateItemResponseType"
/>
```

### 3.1.4.8.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to this operation.

Complex type name	Description
<b>UpdateItemResponseType</b>	Specifies the response to a call to the <b>UpdateItem</b> operation.
<b>UpdateItemType</b>	Specifies a request to update a set of items.
<b>AppendToItemFieldType</b>	Specifies data to append to a single property of an item during and <b>UpdateItem</b> operation.
<b>ChangeDescriptionType</b>	Specifies the base type that is used to describe changes in <b>UpdateFolder</b> operations, as specified in <a href="#">[MS-OXWSFOLD]</a> section 3.1.4.8, and <b>UpdateItem</b> operations.
<b>DeleteItemFieldType</b>	Specifies a property to delete from an item.
<b>ItemChangeDescriptionType</b>	Specifies data that describes changes that are applied by using the <b>UpdateItem</b> operation.
<b>ItemChangeType</b>	Specifies an item identifier and the updates to apply to the item.
<b>NonEmptyArrayOfItemChangeDescriptionsType</b>	Specifies an array of items and their change types.
<b>NonEmptyArrayOfItemChangesType</b>	Specifies an array of items and their changes.
<b>SetItemFieldType</b>	Specifies an update to a single property of an item.

### 3.1.4.8.3.1 m:UpdateItemResponseType Complex Type

The **UpdateItemResponseType** complex type specifies the response to a call to the **UpdateItem** operation. The **UpdateItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="UpdateItemResponseType">
```

```

<xs:complexContent>
  <xs:extension
    base="m:BaseResponseMessageType"
  />
</xs:complexContent>
</xs:complexType>

```

### 3.1.4.8.3.2 m:UpdateItemType Complex Type

The **UpdateItemType** complex type specifies a request to update a set of items. The **UpdateItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```

<xs:complexType name="UpdateItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    />
    <xs:sequence>
      <xs:element name="SavedItemFolderId"
        type="t:TargetFolderIdType"
        minOccurs="0"
      />
      <xs:element name="ItemChanges"
        type="t:NonEmptyArrayOfItemChangesType"
      />
    </xs:sequence>
    <xs:attribute name="ConflictResolution"
      type="t:ConflictResolutionType"
      use="required"
    />
    <xs:attribute name="MessageDisposition"
      type="t:MessageDispositionType"
      use="optional"
    />
    <xs:attribute name="SendMeetingInvitationsOrCancellations"
      type="t:CalendarItemUpdateOperationType"
      use="optional"
    />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **UpdateItemType** complex type.

Element name	Type	Description
<b>SavedItemFolderId</b>	<b>t:TargetFolderIdType</b> ( <a href="#">[MS-OXWSFOLD]</a> section 2.2.4.14)	Specifies the target folder for saved items.
<b>ItemChanges</b>	<b>t:NonEmptyArrayOfItemChangesType</b> (section <a href="#">3.1.4.8.3.9</a> )	Specifies an array of item changes.

The following table lists the attributes of the **UpdateItemType** complex type.

Attribute name	Type	Description
<b>ConflictResolution</b>	<b>t:ConflictResolutionType</b> ( <a href="#">section 3.1.4.8.4.1</a> )	Specifies an enumeration value that represents the type of conflict resolution that is performed during an update.
<b>MessageDisposition</b>	<b>t:MessageDispositionType</b> ( <a href="#">[MS-OXWSMSG]</a> section 2.2.5.1)	Specifies an enumeration value that describes how a message item is handled after it is updated.
<b>SendMeetingInvitationsOrCancellations</b>	<b>t:CalendarItemUpdateOperationType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.5.3)	Specifies an enumeration value that describes how a calendar item is handled after it is updated.

### 3.1.4.8.3.3 t:AppendToItemFieldType Complex Type

The **AppendToItemFieldType** complex type specifies data to append to a single property of an item during an **UpdateItem** operation. The **AppendToItemFieldType** complex type extends the **ItemChangeDescriptionType** complex type, as specified in section [3.1.4.8.3.6](#).

```

<xs:complexType name="AppendToItemFieldType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemChangeDescriptionType"
    >
      <xs:choice>
        <xs:element name="Item"
          type="t:ItemType"
        />
        <xs:element name="Message"
          type="t:MessageType"
        />
        <xs:element name="CalendarItem"
          type="t:CalendarItemType"
        />
        <xs:element name="Contact"
          type="t>ContactItemType"
        />
        <xs:element name="DistributionList"
          type="t:DistributionListType"
        />
      </xs:choice>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

<xs:element name="MeetingMessage"
    type="t:MeetingMessageType"
/>
<xs:element name="MeetingRequest"
    type="t:MeetingRequestMessageType"
/>
<xs:element name="MeetingResponse"
    type="t:MeetingResponseMessageType"
/>
<xs:element name="MeetingCancellation"
    type="t:MeetingCancellationMessageType"
/>
<xs:element name="Task"
    type="t:TaskType"
/>
<xs:element name="PostItem"
    type="t:PostItemType"
/>
</xs:choice>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **AppendToItemFieldType** complex type.

<b>Element name</b>	<b>Type</b>	<b>Description</b>
<b>Item</b>	<b>t:ItemType</b> ( <a href="#">section 2.2.4.8</a> )	Specifies a generic item.
<b>Message</b>	<b>t:MessageType</b> ( <a href="#">[MS-OXWSMSG]</a> section 2.2.4.1)	Specifies an e-mail message or non-IPM.Note item.
<b>CalendarItem</b>	<b>t:CalendarItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.4)	Specifies a calendar item.
<b>Contact</b>	<b>t:ContactItemType</b> ( <a href="#">[MS-OXWSCONT]</a> section 2.2.4.2)	Specifies a contact item.
<b>DistributionList</b>	<b>t:DistributionListType</b> ( <a href="#">[MS-OXWSDLIST]</a> section 2.2.4.3)	Specifies a distribution list.
<b>MeetingMessage</b>	<b>t:MeetingMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.12)	Specifies a meeting.
<b>MeetingRequest</b>	<b>t:MeetingRequestMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.13)	Specifies a meeting request.
<b>MeetingResponse</b>	<b>t:MeetingResponseMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.14)	Specifies a meeting response.
<b>MeetingCancellation</b>	<b>t:MeetingCancellationMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.11)	Specifies a meeting cancellation.
<b>Task</b>	<b>t:TaskType</b> ( <a href="#">[MS-OXWSTASK]</a> section 2.2.4.3)	Specifies a task.
<b>PostItem</b>	<b>t:PostItemType</b> ( <a href="#">[MS-OXWSPOST]</a> section 2.2.4.1)	Specifies a post item.

### 3.1.4.8.3.4 t:ChangeDescriptionType Complex Type

The **ChangeDescriptionType** complex type specifies the base type that is used to describe changes in **UpdateFolder** operation, as specified in [\[MS-OXWSFOLD\]](#) section 3.1.4.8 ,and **UpdateItem** operation, as specified in (section [3.1.4.8](#)).

```
<xs:complexType name="ChangeDescriptionType"
    abstract="true"
>
<xs:sequence>
    <xs:element
        ref="t:Path"
    />
</xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **ChangeDescriptionType** complex type.

Element	Type	Description
<b>Path</b>	<b>t:Path</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.8)	Specifies a substitution group that specifies the property to update.

### 3.1.4.8.3.5 t:DeleteItemFieldType Complex Type

The **DeleteItemFieldType** complex type specifies a property to delete from an item. The **DeleteItemFieldType** complex type extends the **ItemChangeDescriptionType** complex type, as specified in section [3.1.4.8.3.6](#).

```
<xs:complexType name="DeleteItemFieldType">
    <xs:complexContent>
        <xs:extension
            base="t:ItemChangeDescriptionType"
        >
            <xs:sequence />
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
```

### 3.1.4.8.3.6 t:ItemChangeDescriptionType Complex Type

The **ItemChangeDescriptionType** complex type specifies data that describes changes that are applied by using the **UpdateItem** operation. The **ItemChangeDescriptionType** complex type extends the **ChangeDescriptionType** complex type, as specified in section [3.1.4.8.3.4](#).

```
<xs:complexType name="ItemChangeDescriptionType">
    <xs:complexContent>
        <xs:extension
            base="t:ChangeDescriptionType"
        />
    </xs:complexContent>
</xs:complexType>
```

### 3.1.4.8.3.7 t:ItemChangeType Complex Type

The **ItemChangeType** complex type specifies an item identifier and the updates to apply to the item.

```
<xs:complexType name="ItemChangeType">
  <xs:sequence>
    <xs:choice>
      <xs:element name="ItemId"
        type="t:ItemIdType"
      />
      <xs:element name="OccurrenceItemId"
        type="t:OccurrenceItemIdType"
      />
      <xs:element name="RecurringMasterItemId"
        type="t:RecurringMasterItemIdType"
      />
    </xs:choice>
    <xs:element name="Updates"
      type="t:NonEmptyArrayOfItemChangeDescriptionsType"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **ItemChangeType** complex type.

Element name	Type	Description
<b>ItemId</b>	<b>t:ItemIdType</b> (section <a href="#">2.2.4.18</a> )	Specifies an item identifier of an item in a mailbox.
<b>OccurrenceItemId</b>	<b>t:OccurrenceItemIdType</b> (section <a href="#">2.2.4.15</a> )	Specifies a single occurrence of a recurring item.
<b>RecurringMasterItemId</b>	<b>t:RecurringMasterItemIdType</b> (section <a href="#">2.2.4.17</a> )	Specifies a recurrence master item by identifying the identifiers of one of its related occurrence items.
<b>Updates</b>	<b>t:NonEmptyArrayOfItemChangeDescriptionsType</b> (section <a href="#">3.1.4.8.3.8</a> )	Specifies an array that defines append, set, and delete changes to item properties.

### 3.1.4.8.3.8 t:NonEmptyArrayOfItemChangeDescriptionsType Complex Type

The **NonEmptyArrayOfItemChangeDescriptionsType** complex type specifies an array of items and their change types.

```
<xs:complexType name="NonEmptyArrayOfItemChangeDescriptionsType">
  <xs:choice
    maxOccurs="unbounded"
  >
    <xs:element name="AppendToItemField"
      type="t:AppendToItemFieldType"
    />
    <xs:element name="SetItemField"
      type="t:SetItemFieldType"
    />
    <xs:element name="DeleteItemField"
      type="t:DeleteItemFieldType"
    />
  </xs:choice>
</xs:complexType>
```

The following table lists the child elements of the **NonEmptyArrayOfItemChangeDescriptionsType** complex type.

Element name	Type	Description
<b>AppendToItemField</b>	<b>t:AppendToItemFieldType</b> (section <a href="#">3.1.4.8.3.3</a> )	Specifies data to append to a single property of an item during an <b>UpdateItem</b> operation.
<b>SetItemField</b>	<b>t:SetItemFieldType</b> (section <a href="#">3.1.4.8.3.10</a> )	Specifies an update to a single property of an item in an <b>UpdateItem</b> operation.
<b>DeleteItemField</b>	<b>t:DeleteItemFieldType</b> (section <a href="#">3.1.4.8.3.5</a> )	Specifies an operation to delete a given property from an item during an <b>UpdateItem</b> operation.

### 3.1.4.8.3.9 t:NonEmptyArrayOfItemChangesType Complex Type

The **NonEmptyArrayOfItemChangesType** complex type specifies an array of items and their changes.

```
<xs:complexType name="NonEmptyArrayOfItemChangesType">
  <xs:sequence>
    <xs:element name="ItemChange"
      type="t:ItemChangeType"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **NonEmptyArrayOfItemChangesType** complex type.

<b>Element name</b>	<b>Type</b>	<b>Description</b>
<b>ItemChange</b>	<b>t:ItemChangeType</b> (section <a href="#">3.1.4.8.3.7</a> )	Specifies an item identifier and the updates to apply to the item.

### 3.1.4.8.3.10 t:SetItemFieldType Complex Type

The **SetItemFieldType** complex type specifies an update to a single property of an item. The **SetItemFieldType** complex type extends the **ItemChangeDescription** complex type, as specified in section [3.1.4.8.3.6](#).

```

<xs:complexType name="SetItemFieldType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemChangeDescriptionType"
    >
      <xs:choice>
        <xs:element name="Item"
          type="t:ItemType"
        />
        <xs:element name="Message"
          type="t:MessageType"
        />
        <xs:element name="CalendarItem"
          type="t:CalendarItemType"
        />
        <xs:element name="Contact"
          type="t>ContactItemType"
        />
        <xs:element name="DistributionList"
          type="t:DistributionListType"
        />
        <xs:element name="MeetingMessage"
          type="t:MeetingMessageType"
        />
        <xs:element name="MeetingRequest"
          type="t:MeetingRequestMessageType"
        />
        <xs:element name="MeetingResponse"
          type="t:MeetingResponseMessageType"
        />
        <xs:element name="MeetingCancellation"
          type="t:MeetingCancellationMessageType"
        />
        <xs:element name="Task"
          type="t:TaskType"
        />
        <xs:element name="PostItem"
          type="t:PostItemType"
        />
      </xs:choice>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **SetItemType** complex type.

Element name	Type	Description
<b>Item</b>	<b>t:ItemType</b> ( <a href="#">section 2.2.4.8</a> )	Specifies a generic item.
<b>Message</b>	<b>t:MessageType</b> ( <a href="#">[MS-OXWSMSG]</a> section 2.2.4.1)	Specifies an e-mail message or non-IPM.Note item.
<b>CalendarItem</b>	<b>t:CalendarItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.4)	Specifies a calendar item.
<b>Contact</b>	<b>t:ContactItemType</b> ( <a href="#">[MS-OXWSCONT]</a> section 2.2.4.2)	Specifies a contact item.
<b>DistributionList</b>	<b>t:DistributionListType</b> ( <a href="#">[MS-OXWSDLIST]</a> section 2.2.4.3)	Specifies a distribution list.
<b>MeetingMessage</b>	<b>t:MeetingMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.12)	Specifies a meeting.
<b>MeetingRequest</b>	<b>t:MeetingRequestMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.13)	Specifies a meeting request.
<b>MeetingResponse</b>	<b>t:MeetingResponseMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.14)	Specifies meeting response.
<b>MeetingCancellation</b>	<b>t:MeetingCancellationMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.11)	Specifies meeting cancellation.
<b>Task</b>	<b>t:TaskType</b> ( <a href="#">[MS-OXWSTASK]</a> section 2.2.4.3)	Specifies a task.
<b>PostItem</b>	<b>t:PostItemType</b> ( <a href="#">[MS-OXWSPOST]</a> section 2.2.4.1)	Specifies a post item.

### 3.1.4.8.4 Simple Types

The following table lists the XML schema simple type definitions that are specific to the **UpdateItem** operation.

Simple type name	Description
<b>ConflictResolutionType</b>	Specifies how a conflict is to be handled during an <b>UpdateItem</b> operation.

#### 3.1.4.8.4.1 t:ConflictResolutionType Simple Type

The **ConflictResolutionType** simple type specifies how a conflict is to be handled during an **UpdateItem** operation.

```
<xs:simpleType name="ConflictResolutionType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="AlwaysOverwrite"
    />
  <xs:enumeration
```

```

        value="AutoResolve"
    />
<xss:enumeration
    value="NeverOverwrite"
    />
</xss:restriction>
</xss:simpleType>

```

The following table lists the values that are defined by the **ConflictResolutionType** simple type.

<b>Value</b>	<b>Meaning</b>
<b>AlwaysOverwrite</b>	If there is a conflict, the <b>UpdateItem</b> operation will overwrite information.
<b>AutoResolve</b>	The <b>UpdateItem</b> operation automatically resolves any conflict. The "AutoResolve" option will in most cases overwrite the existing value for a property. In some cases, the new value is ignored and the original value is retained. For example, user A changes the value of the <b>Sensitivity</b> property from "Normal" to "Confidential", and then user B sets that value to "Public". In this example, the "Confidential" setting is retained and user B's update is ignored.
<b>NeverOverwrite</b>	If there is a conflict, the <b>UpdateItem</b> operation fails and an error is returned.

### 3.1.5 Timer Events

None.

### 3.1.6 Other Local Events

None.

## 4 Protocol Examples

This section provides a simplified example of a request-response sequence for the **CreateItem** operation, as specified in section [3.1.4.2](#).

The following example shows a **CreateItem** request to create a message, send it, and save a copy in the SentItems folder.

```
<?xml version="1.0" encoding="utf-8" ?>
<CreateItem xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
             xmlns:xsd="http://www.w3.org/2001/XMLSchema"
             MessageDisposition="SendAndSaveCopy">
  <SavedItemId xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
    <DistinguishedFolderId Id="sentitems"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
  </SavedItemId>
  <Items xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
    <Message xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
      <ItemClass>IPM.Note</ItemClass>
      <Subject>Daily Report</Subject>
      <Body BodyType="Text">(1) Handled customer issues, (2) Saved the world.</Body>
      <Sender>
        <Mailbox>
          <EmailAddress>user1@example.com</EmailAddress>
        </Mailbox>
      </Sender>
      <ToRecipients>
        <Mailbox>
          <EmailAddress>user2@example.com</EmailAddress>
        </Mailbox>
      </ToRecipients>
    </Message>
  </Items>
</CreateItem>
```

The following example shows a **CreateItem** response to the request to create a message, send it, and save a copy in the SentItems folder.

```
<?xml version="1.0" encoding="utf-8" ?>
<CreateItemType xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
                 xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <ResponseMessages xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
    <CreateItemResponseMessage ResponseClass="Success">
      <ResponseCode>NoError</ResponseCode>
      <Items />
    </CreateItemResponseMessage>
  </ResponseMessages>
</CreateItemType>
```

## 5 Security

### 5.1 Security Considerations for Implementers

None.

### 5.2 Index of Security Parameters

None.

## 6 Appendix A: Full WSDL

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

The XML files that are listed in the following table are required in order to implement the functionality described in this document.

File name	Description	Section
MS-OXWScore.wsdl	Contains the WSDL for the implementation of this protocol.	<a href="#">6</a>
MS-OXWScore-messages.xsd	Contains the XML schema message definitions used in this protocol.	<a href="#">7.1</a>
MS-OXWScore-types.xsd	Contains the XML schema type definitions used in this protocol.	<a href="#">7.2</a>

These files have to be placed in a common folder for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWScore-types.xsd or MS-OXWScore-messages.xsd schemas have to be placed in the common folder with the files named in the table.

This section provides the contents of the MS-OXWScore.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
    xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
    xmlns:ss="http://www.w3.org/2001/XMLSchema" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
    xmlns:ts="http://schemas.microsoft.com/exchange/services/2006/types"
    targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
    <wsdl:types>
        <xss:schema id="messages" elementFormDefault="qualified" version="Exchange2012"
            xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
            xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
            xmlns:ts="http://schemas.microsoft.com/exchange/services/2006/types"
            xmlns:xs="http://www.w3.org/2001/XMLSchema"
            targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
            xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
            <xss:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
                schemaLocation="MS-OXWScore-types.xsd"/>
            <xss:include schemaLocation="MS-OXWScore-messages.xsd"/>
            <!-- Add global elements and types from messages.xsd -->
        </xss:schema>
        <xss:schema id="types" elementFormDefault="qualified" version="Exchange2012"
            xmlns:ts="http://schemas.microsoft.com/exchange/services/2006/types"
            targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
            xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
            xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
            xmlns:xs="http://www.w3.org/2001/XMLSchema">
            <xss:import namespace="http://www.w3.org/XML/1998/namespaces"/>
            <!-- Add global elements and types from types.xsd -->
        </xss:schema>
    </wsdl:types>
    <wsdl:portType name="ExchangeServicePortType">
        <wsdl:operation name="GetItem">
            <wsdl:input message="tns:.GetItemSoapIn"/>
            <wsdl:output message="tns:.GetItemSoapOut"/>
        </wsdl:operation>
```

```

<wsdl:operation name="CreateItem">
  <wsdl:input message="tns:CreateItemSoapIn"/>
  <wsdl:output message="tns:CreateItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="DeleteItem">
  <wsdl:input message="tns:DeleteItemSoapIn"/>
  <wsdl:output message="tns:DeleteItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="UpdateItem">
  <wsdl:input message="tns:UpdateItemSoapIn"/>
  <wsdl:output message="tns:UpdateItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="UpdateItemInRecoverableItems">
  <wsdl:input message="tns:UpdateItemInRecoverableItemsSoapIn"/>
  <wsdl:output message="tns:UpdateItemInRecoverableItemsSoapOut"/>
</wsdl:operation>
<wsdl:operation name="MarkAllItemsAsRead">
  <wsdl:input message="tns:MarkAllItemsAsReadSoapIn"/>
  <wsdl:output message="tns:MarkAllItemsAsReadSoapOut"/>
</wsdl:operation>
<wsdl:operation name="MoveItem">
  <wsdl:input message="tns:MoveItemSoapIn"/>
  <wsdl:output message="tns:MoveItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="CopyItem">
  <wsdl:input message="tns:CopyItemSoapIn"/>
  <wsdl:output message="tns:CopyItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="SendItem">
  <wsdl:input message="tns:SendItemSoapIn"/>
  <wsdl:output message="tns:SendItemSoapOut"/>
</wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
  <wsdl:documentation>
    <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-i.org/schemas/conformanceClaim"/>
  </wsdl:documentation>
  <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
  <wsdl:operation name="GetItem">
    <soap:operation
      soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetItem"/>
    <wsdl:input>
      <soap:header message="tns:.GetItemSoapIn" part="Impersonation" use="literal"/>
      <soap:header message="tns:.GetItemSoapIn" part="MailboxCulture" use="literal"/>
      <soap:header message="tns:.GetItemSoapIn" part="RequestVersion" use="literal"/>
      <soap:header message="tns:.GetItemSoapIn" part="TimeZoneContext" use="literal"/>
      <soap:header message="tns:.GetItemSoapIn" part="DateTimePrecision" use="literal"/>
      <soap:header message="tns:.GetItemSoapIn" part="ManagementRole" use="literal" />
      <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="GetItemResult" use="literal"/>
      <soap:header message="tns:.GetItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="CreateItem">
    <soap:operation
      soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem"/>
  </wsdl:operation>

```

```

<wsdl:input>
  <soap:header message="tns:CreateItemSoapIn" part="Impersonation" use="literal"/>
  <soap:header message="tns:CreateItemSoapIn" part="MailboxCulture" use="literal"/>
  <soap:header message="tns:CreateItemSoapIn" part="RequestVersion" use="literal"/>
  <soap:header message="tns:CreateItemSoapIn" part="TimeZoneContext" use="literal"/>
  <soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
  <soap:body parts="CreateItemResult" use="literal"/>
  <soap:header message="tns:CreateItemSoapOut" part="ServerVersion" use="literal"/>
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="DeleteItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem"/>
  <wsdl:input>
    <soap:header message="tns:DeleteItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="DeleteItemResult" use="literal"/>
    <soap:header message="tns:DeleteItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem"/>
  <wsdl:input>
    <soap:header message="tns:UpdateItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UpdateItemResult" use="literal"/>
    <soap:header message="tns:UpdateItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateItemInRecoverableItems">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItemInRecoverableItems"/>
  <wsdl:input>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="ManagementRole" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UpdateItemInRecoverableItemsResult" use="literal"/>
  </wsdl:output>

```

```

<soap:header message="tns:UpdateItemInRecoverableItemsSoapOut" part="ServerVersion"
use="literal"/>
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="MarkAllItemsAsRead">
<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead"/>
<wsdl:input>
<soap:header message="tns:MarkAllItemsAsReadSoapIn" part="Impersonation"
use="literal"/>
<soap:header message="tns:MarkAllItemsAsReadSoapIn" part="MailboxCulture"
use="literal"/>
<soap:header message="tns:MarkAllItemsAsReadSoapIn" part="RequestVersion"
use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
<soap:body parts="MarkAllItemsAsReadResult" use="literal"/>
<soap:header message="tns:MarkAllItemsAsReadSoapOut" part="ServerVersion"
use="literal"/>
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="MoveItem">
<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem"/>
<wsdl:input>
<soap:header message="tns:MoveItemSoapIn" part="Impersonation" use="literal"/>
<soap:header message="tns:MoveItemSoapIn" part="MailboxCulture" use="literal"/>
<soap:header message="tns:MoveItemSoapIn" part="RequestVersion" use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
<soap:body parts="MoveItemResult" use="literal"/>
<soap:header message="tns:MoveItemSoapOut" part="ServerVersion" use="literal"/>
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="CopyItem">
<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem"/>
<wsdl:input>
<soap:header message="tns:CopyItemSoapIn" part="Impersonation" use="literal"/>
<soap:header message="tns:CopyItemSoapIn" part="MailboxCulture" use="literal"/>
<soap:header message="tns:CopyItemSoapIn" part="RequestVersion" use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
<soap:body parts="CopyItemResult" use="literal"/>
<soap:header message="tns:CopyItemSoapOut" part="ServerVersion" use="literal"/>
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="SendItem">
<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SendItem"/>
<wsdl:input>
<soap:header message="tns:SendItemSoapIn" part="Impersonation" use="literal"/>
<soap:header message="tns:SendItemSoapIn" part="MailboxCulture" use="literal"/>
<soap:header message="tns:SendItemSoapIn" part="RequestVersion" use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>

```

```

<wsdl:output>
  <soap:body parts="SendItemResult" use="literal"/>
  <soap:header message="tns:SendItemSoapOut" part="ServerVersion" use="literal"/>
</wsdl:output>
</wsdl:operation>
</wsdl:binding>
<wsdl:message name="GetItemSoapIn">
  <wsdl:part name="request" element="tns:.GetItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="DateTimePrecision" element="t:DateTimePrecision"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>
<wsdl:message name=".GetItemSoapOut">
  <wsdl:part name="GetItemResult" element="tns:.GetItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="CreateItemSoapIn">
  <wsdl:part name="request" element="tns:CreateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
<wsdl:message name="CreateItemSoapOut">
  <wsdl:part name="CreateItemResult" element="tns:CreateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="DeleteItemSoapIn">
  <wsdl:part name="request" element="tns:DeleteItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="DeleteItemSoapOut">
  <wsdl:part name="DeleteItemResult" element="tns:DeleteItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="UpdateItemSoapIn">
  <wsdl:part name="request" element="tns:UpdateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
<wsdl:message name="UpdateItemSoapOut">
  <wsdl:part name="UpdateItemResult" element="tns:UpdateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="UpdateItemInRecoverableItemsSoapIn">
  <wsdl:part name="request" element="tns:UpdateItemInRecoverableItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>

```

```
<wsdl:message name="UpdateItemInRecoverableItemsSoapOut">
  <wsdl:part name="UpdateItemInRecoverableItemsResult"
  element="tns:UpdateItemInRecoverableItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="MarkAllItemsAsReadSoapIn">
  <wsdl:part name="request" element="tns:MarkAllItemsAsRead"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="MarkAllItemsAsReadSoapOut">
  <wsdl:part name="MarkAllItemsAsReadResult" element="tns:MarkAllItemsAsReadResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="MoveItemSoapIn">
  <wsdl:part name="request" element="tns:MoveItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="MoveItemSoapOut">
  <wsdl:part name="MoveItemResult" element="tns:MoveItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="CopyItemSoapIn">
  <wsdl:part name="request" element="tns:CopyItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="CopyItemSoapOut">
  <wsdl:part name="CopyItemResult" element="tns:CopyItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="SendItemSoapIn">
  <wsdl:part name="request" element="tns:SendItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="SendItemSoapOut">
  <wsdl:part name="SendItemResult" element="tns:SendItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
</wsdl:definitions>
```

## 7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
Messages schema	m:	<a href="#">7.1</a>
Types schema	t:	<a href="#">7.2</a>

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSNTIF-types.xsd or MS-OXWSNTIF-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

### 7.1 Messages Schema

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

This section provides the contents of the MS-OXWSCORE-messages.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSCORE-messages.xsd includes the files listed in the following table. To operate correctly, these files have to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-messages.xsd	[MS-OXWSCDATA] section 7.1
MS-OXWSCDATA-types.xsd	[MS-OXWSCDATA] section 7.2
MS-OXWSMSG-types.xsd	[MS-OXWSMSG] section 7.1

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
  elementFormDefault="qualified" version="Exchange2012" id="messages">
  <!-- Import common types. -->
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
    schemaLocation="MS-OXWSCDATA-types.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
    schemaLocation="MS-OXWSCORE-types.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
    schemaLocation="MS-OXWSMSG-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:complexType name="BaseMoveCopyItemType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="ToFolderId" type="t:TargetFolderIdType"/>
          <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
</xs:schema>
```

```

        <xs:element name="ReturnNewItemIds" type="xs:boolean" minOccurs="0"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="CopyItem" type="m:CopyItemType"/>
<xs:complexType name="CopyItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseMoveCopyItemType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CopyItemResponse" type="m:CopyItemResponseType"/>
<xs:complexType name="CopyItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="CreateItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="CreateItemResponse" type="m:CreateItemResponseType"/>
<xs:complexType name="CreateItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="SavedItemFolderId" type="t:TargetFolderIdType" minOccurs="0"/>
                <xs:element name="Items" type="t:NonEmptyArrayOfAllItemsType"/>
            </xs:sequence>
            <xs:attribute name="MessageDisposition" type="t:MessageDispositionType"
use="optional"/>
                <xs:attribute name="SendMeetingInvitations"
type="t:CalendarItemCreateOrDeleteOperationType" use="optional"/>
            </xs:extension>
        </xs:complexContent>
    </xs:complexType>
<xs:element name="CreateItem" type="m:CreateItemType"/>
<xs:complexType name="DeleteItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
            </xs:sequence>
                <xs:attribute name="DeleteType" type="t:DisposalType" use="required"/>
                <xs:attribute name="SendMeetingCancellations"
type="t:CalendarItemCreateOrDeleteOperationType" use="optional"/>
                    <xs:attribute name="AffectedTaskOccurrences" type="t:AffectedTaskOccurrencesType"
use="optional"/>
                </xs:extension>
            </xs:complexContent>
        </xs:complexType>
<xs:element name="DeleteItem" type="m:DeleteItemType"/>
<xs:complexType name="DeleteItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteItemResponse" type="m:DeleteItemResponseType"/>

```

```

<xs:complexType name="GetItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ItemShape" type="t:ItemResponseShapeType"/>
        <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetItem" type="m:GetItemType"/>
<xs:complexType name="GetItemResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetItemResponse" type="m:GetItemResponseType"/>
<xs:complexType name="MarkAllItemsAsReadType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ReadFlag" type="xs:boolean" minOccurs="1" maxOccurs="1"/>
        <xs:element name="SuppressReadReceipts" type="xs:boolean" minOccurs="1" maxOccurs="1"/>
        <xs:element name="FolderIds" type="t:NonEmptyArrayOfBaseFolderIdsType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="MarkAllItemsAsRead" type="m:MarkAllItemsAsReadType"/>
<xs:complexType name="MarkAllItemsAsReadResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="MarkAllItemsAsReadResponse" type="m:MarkAllItemsAsReadResponseType"/>
<xs:complexType name="MoveItemResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="MoveItemResponse" type="m:MoveItemResponseType"/>
<xs:complexType name="MoveItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseMoveCopyItemType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="MoveItem" type="m:MoveItemType"/>
<xs:complexType name="SendItemResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="SendItemResponse" type="m:SendItemResponseType"/>
<xs:complexType name="SendItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        <xs:element name="SavedItemFolderId" type="t:TargetFolderIdType" minOccurs="0"/>
    </xs:sequence>
    <xs:attribute name="SaveItemToFolder" type="xs:boolean" use="required"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="SendItem" type="m:SendItemType"/>
<xs:complexType name="UpdateItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateItemResponse" type="m:UpdateItemResponseType"/>
<xs:complexType name="UpdateItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="SavedItemFolderId" type="t:TargetFolderIdType" minOccurs="0"/>
                <xs:element name="ItemChanges" type="t:NonEmptyArrayOfItemChangesType"/>
            </xs:sequence>
                <xs:attribute name="ConflictResolution" type="t:ConflictResolutionType"
use="required"/>
                <xs:attribute name="MessageDisposition" type="t:MessageDispositionType"
use="optional"/>
                <xs:attribute name="SendMeetingInvitationsOrCancellations"
type="t:CalendarItemUpdateOperationType" use="optional"/>
            </xs:extension>
        </xs:complexContent>
    </xs:complexType>
<xs:element name="UpdateItem" type="m:UpdateItemType"/>
<xs:complexType name="UpdateItemResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ItemInfoResponseMessageType">
            <xs:sequence>
                <xs:element name="ConflictResults" type="t:ConflictResultsType" minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateItemInRecoverableItems" type="m:UpdateItemInRecoverableItemsType"/>
<xs:complexType name="UpdateItemInRecoverableItemsType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="ItemId" type="t:ItemIdType"/>
                <xs:element name="Updates" type="t:NonEmptyArrayOfItemChangeDescriptionsType"
minOccurs="0"/>
                    <xs:element name="Attachments" type="t:NonEmptyArrayOfAttachmentsType"
minOccurs="0"/>
                </xs:sequence>
            </xs:extension>
        </xs:complexContent>
    </xs:complexType>
<xs:complexType name="UpdateItemInRecoverableItemsResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ItemInfoResponseMessageType">
            <xs:sequence>
                <xs:element name="Attachments" type="t:ArrayOfAttachmentsType" minOccurs="0"/>
                <xs:element name="ConflictResults" type="t:ConflictResultsType" minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>

```

```

        </xs:sequence>
    </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="UpdateItemInRecoverableItemsResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateItemInRecoverableItemsResponse"
type="m:UpdateItemInRecoverableItemsResponseMessageType"/>
</xs:schema>

```

## 7.2 Types Schema

**Note** Some of the information in this section is subject to change because it applies to a preliminary implementation of the protocol or structure. For information about specific differences between versions, see the behavior notes that are provided in the Product Behavior appendix.

This section provides the contents of the MS-OXWS-CORE-types.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWS-CORE-types.xsd includes the following file. To operate correctly, this file has to be included in the folder that contains the WSDL, types, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-types.xsd	<a href="#">[MS-OXWSCDATA]</a> section 7.2

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2012" id="types">
    <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    <xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>
    <xs:include schemaLocation="MS-OXWSURPT-types.xsd"/>
    <xs:complexType name="AppendToItemFieldType">
        <xs:complexContent>
            <xs:extension base="t:ItemChangeDescriptionType">
                <xs:choice>
                    <xs:element name="Item" type="t:ItemType"/>
                    <xs:element name="Message" type="t:MessageType"/>
                    <xs:element name="CalendarItem" type="t:CalendarItemType"/>
                    <xs:element name="Contact" type="t>ContactItemType"/>
                    <xs:element name="DistributionList" type="t:DistributionListType"/>
                    <xs:element name="MeetingMessage" type="t:MeetingMessageType"/>
                    <xs:element name="MeetingRequest" type="t:MeetingRequestMessageType"/>
                    <xs:element name="MeetingResponse" type="t:MeetingResponseMessageType"/>
                    <xs:element name="MeetingCancellation" type="t:MeetingCancellationMessageType"/>
                    <xs:element name="Task" type="t:TaskType"/>
                    <xs:element name="PostItem" type="t:PostItemType"/>
                </xs:choice>
            </xs:extension>
        </xs:complexContent>
    </xs:complexType>
</xs:schema>

```

```

<xs:complexType name="ArrayOfOccurrenceRangesType">
  <xs:sequence>
    <xs:element name="Range" type="t:OccurrencesRangeType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="BaseItemId" type="t:BaseItemIdType"/>
<xs:complexType name="ChangeDescriptionType" abstract="true">
  <xs:sequence>
    <xs:element ref="t:Path"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="ConflictResolutionType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="NeverOverwrite"/>
    <xs:enumeration value="AutoResolve"/>
    <xs:enumeration value="AlwaysOverwrite"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="ConflictResultsType">
  <xs:sequence>
    <xs:element name="Count" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="DeleteItemFieldType">
  <xs:complexContent>
    <xs:extension base="t:ItemChangeDescriptionType">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="DerivedItemIdType">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
<xs:complexType name="FlagType">
  <xs:sequence>
    <xs:element name="FlagStatus" type="t:FlagStatusType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="StartDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="DueDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="CompleteDate" type="xs:dateTime" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="ImportanceChoicesType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Low"/>
    <xs:enumeration value="Normal"/>
    <xs:enumeration value="High"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="InferredImportanceReasonType">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="UserOverride" />
        <xs:enumeration value="IsMarkedHighImportanceBySender" />
        <xs:enumeration value="Sender" />
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>

```

```

<xs:complexType name="ItemChangeDescriptionType">
  <xs:complexContent>
    <xs:extension base="t:ChangeDescriptionType"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="ItemChangeType">
  <xs:sequence>
    <xs:choice>
      <xs:element name="ItemId" type="t:ItemIdType"/>
      <xs:element name="OccurrenceItemId" type="t:OccurrenceItemIdType"/>
      <xs:element name="RecurringMasterItemId" type="t:RecurringMasterItemIdType"/>
    </xs:choice>
    <xs:element name="Updates" type="t:NonEmptyArrayOfItemChangeDescriptionsType"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="ItemClassType">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
<xs:complexType name="ItemIdType">
  <xs:annotation>
    <xs:documentation>Identifier for a fully resolved item</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="t:BaseItemIdType">
      <xs:attribute name="Id" type="xs:string" use="required"/>
      <xs:attribute name="ChangeKey" type="xs:string" use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="ItemType">
  <xs:sequence>
    <xs:element name="MimeType" type="t:MimeContentType" minOccurs="0"/>
    <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0"/>
    <xs:element name="ParentFolderId" type="t:FolderIdType" minOccurs="0"/>
    <xs:element name="ItemClass" type="t:ItemClassType" minOccurs="0"/>
    <xs:element name="Subject" type="xs:string" minOccurs="0"/>
    <xs:element name="Sensitivity" type="t:SensitivityChoicesType" minOccurs="0"/>
    <xs:element name="Body" type="t:BodyType" minOccurs="0"/>
    <xs:element name="Attachments" type="t:NonEmptyArrayOfAttachmentsType" minOccurs="0"/>
    <xs:element name="DateTimeReceived" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="Size" type="xs:int" minOccurs="0"/>
    <xs:element name="Categories" type="t:ArrayOfStringsType" minOccurs="0"/>
    <xs:element name="Importance" type="t:ImportanceChoicesType" minOccurs="0"/>
    <xs:element name="InReplyTo" type="xs:string" minOccurs="0"/>
    <xs:element name="IsSubmitted" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsDraft" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsFromMe" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsResend" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsUnmodified" type="xs:boolean" minOccurs="0"/>
    <xs:element name="InternetMessageHeaders" type="t:NonEmptyArrayOfInternetHeadersType" minOccurs="0"/>
    <xs:element name="DateTimeSent" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="DateTimeCreated" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="ResponseObjects" type="t:NonEmptyArrayOfResponseObjectsType" minOccurs="0"/>
    <xs:element name="ReminderDueBy" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="ReminderIsSet" type="xs:boolean" minOccurs="0"/>
    <xs:element name="ReminderNextTime" type="xs:dateTime" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>

```

```

<xs:element name="ReminderMinutesBeforeStart" type="t:ReminderMinutesBeforeStartType"
minOccurs="0"/>
<xs:element name="DisplayCc" type="xs:string" minOccurs="0"/>
<xs:element name="DisplayTo" type="xs:string" minOccurs="0"/>
<xs:element name="HasAttachments" type="xs:boolean" minOccurs="0"/>
<xs:element name="ExtendedProperty" type="t:ExtendedPropertyType" minOccurs="0"
maxOccurs="unbounded"/>
<xs:element name="Culture" type="xs:language" minOccurs="0"/>
<xs:element name="EffectiveRights" type="t:EffectiveRightsType" minOccurs="0"/>
<xs:element name="LastModifiedName" type="xs:string" minOccurs="0"/>
<xs:element name="LastModifiedTime" type="xs:dateTime" minOccurs="0"/>
<xs:element name="IsAssociated" type="xs:boolean" minOccurs="0"/>
<xs:element name="WebClientReadFormQueryString" type="xs:string" minOccurs="0"/>
<xs:element name="WebClientEditFormQueryString" type="xs:string" minOccurs="0"/>
<xs:element name="ConversationId" type="t:ItemIdType" minOccurs="0"/>
<xs:element name="UniqueBody" type="t:BodyType" minOccurs="0"/>
<xs:element name="InferredImportance" type="t:InferredImportanceType" minOccurs="0"/>
<xs:element name="InferredImportanceReason" type="t:InferredImportanceReasonType"
minOccurs="0"/>
<xs:element name="Flag" type="t:FlagType" minOccurs="0"/>
<xs:element name="StoreEntryId" type="xs:base64Binary" minOccurs="0"/>
<xs:element name="InstanceKey" type="xs:base64Binary" minOccurs="0"/>
<xs:element name="NormalizedBody" type="t:BodyType" minOccurs="0"/>
<xs:element name="EntityExtractionResult" type="t:EntityExtractionResultType"
minOccurs="0" />
<xs:element name="PolicyTag" type="t:RetentionTagType" minOccurs="0"/>
<xs:element name="ArchiveTag" type="t:RetentionTagType" minOccurs="0"/>
<xs:element name="RetentionDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="Preview" type="xs:string" minOccurs="0"/>
    <xs:element name="RightsManagementLicenseData"
type="t:RightsManagementLicenseDataType" minOccurs="0" />
        <xs:element name="NextPredictedAction" type="t:PredictedMessageActionType"
minOccurs="0" />
            <xs:element name="BlockStatus" type="xs:boolean" minOccurs="0" />
            <xs:element name="HasBlockedImages" type="xs:boolean" minOccurs="0" />
        </xs:sequence>
    </xs:complexType>
<xs:complexType name="MimeTypeContentType">
    <xs:simpleContent>
        <xs:extension base="xs:string">
            <xs:attribute name="CharacterSet" type="xs:string" use="optional"/>
        </xs:extension>
    </xs:simpleContent>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfTypeIdsType">
    <xs:choice maxOccurs="unbounded">
        <xs:element name="ItemId" type="t:ItemIdType"/>
        <xs:element name="OccurrenceItemId" type="t:OccurrenceItemIdType"/>
        <xs:element name="RecurringMasterItemId" type="t:RecurringMasterItemIdType"/>
        <xs:element name="RecurringMasterItemIdRanges"
type="t:RecurringMasterItemIdRangesType"/>
    </xs:choice>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfInternetHeadersType">
    <xs:sequence>
        <xs:element name="InternetMessageHeader" type="t:InternetHeaderType"
maxOccurs="unbounded"/>
    </xs:sequence>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfItemChangeDescriptionsType">

```

```

<xs:choice maxOccurs="unbounded">
  <xs:element name="AppendToItemField" type="t:AppendToItemFieldType"/>
  <xs:element name="SetItemField" type="t:SetItemFieldType"/>
  <xs:element name="DeleteItemField" type="t:DeleteItemFieldType"/>
</xs:choice>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfItemChangesType">
  <xs:sequence>
    <xs:element name="ItemChange" type="t:ItemChangeType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfResponseObjectsType">
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:element name="AcceptItem" type="t:AcceptItemType"/>
    <xs:element name="TentativelyAcceptItem" type="t:TentativelyAcceptItemType"/>
    <xs:element name="DeclineItem" type="t:DeclineItemType"/>
    <xs:element name="ReplyToItem" type="t:ReplyToItemType"/>
    <xs:element name="ForwardItem" type="t:ForwardItemType"/>
    <xs:element name="ReplyAllToItem" type="t:ReplyAllToItemType"/>
    <xs:element name="CancelCalendarItem" type="t:CancelCalendarItemType"/>
    <xs:element name="RemoveItem" type="t:RemoveItemType"/>
    <xs:element name="SuppressReadReceipt" type="t:SuppressReadReceiptType"/>
    <xs:element name="PostReplyItem" type="t:PostReplyItemType"/>
    <xs:element name="AcceptSharingInvitation" type="t:AcceptSharingInvitationType"/>
  </xs:choice>
</xs:complexType>
<xs:complexType name="OccurrenceItemIdType">
  <xs:complexContent>
    <xs:extension base="t:BaseItemIdType">
      <xs:attribute name="RecurringMasterId" type="t:DerivedItemIdType" use="required"/>
      <xs:attribute name="ChangeKey" type="xs:string" use="optional"/>
      <xs:attribute name="InstanceIndex" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="OccurrencesRangeType">
  <xs:attribute name="Start" type="xs:dateTime" use="optional"/>
  <xs:attribute name="End" type="xs:dateTime" use="optional"/>
  <xs:attribute name="Count" type="xs:int" use="optional"/>
  <xs:attribute name="CompareOriginalStartTime" type="xs:boolean" use="optional"/>
</xs:complexType>

<xs:complexType name="RecurringMasterItemIdType">
  <xs:complexContent>
    <xs:extension base="t:BaseItemIdType">
      <xs:attribute name="OccurrenceId" type="t:DerivedItemIdType" use="required"/>
      <xs:attribute name="ChangeKey" type="xs:string" use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="RecurringMasterItemIdRangesType">
  <xs:complexContent>
    <xs:extension base="t:ItemIdType">
      <xs:sequence>
        <xs:element name="Ranges" type="t:ArrayOfOccurrenceRangesType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

<xs:complexType name="ReferenceItemResponseType">
  <xs:complexContent>
    <xs:restriction base="t:ResponseObjectType">
      <xs:sequence>
        <xs:element name="ReferenceItemId" type="t:ItemIdType" minOccurs="0"/>
      </xs:sequence>
      <xs:attribute name="ObjectName" type="xs:string" use="prohibited"/>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="ReminderMinutesBeforeStartType">
  <xs:union>
    <xs:simpleType id="ReminderMinutesBeforeStartType">
      <xs:restriction base="xs:int">
        <xs:minInclusive value="0"/>
        <xs:maxInclusive value="2629800"/>
      </xs:restriction>
    </xs:simpleType>
    <xs:simpleType id="ReminderMinutesBeforeStartMarkerType">
      <xs:restriction base="xs:int">
        <xs:minInclusive value="1525252321"/>
        <xs:maxInclusive value="1525252321"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:union>
</xs:simpleType>
<xs:complexType name="SetItemFieldType">
  <xs:complexContent>
    <xs:extension base="t:ItemChangeDescriptionType">
      <xs:choice>
        <xs:element name="Item" type="t:ItemType"/>
        <xs:element name="Message" type="t:MessageType"/>
        <xs:element name="CalendarItem" type="t:CalendarItemType"/>
        <xs:element name="Contact" type="t:ContactItemType"/>
        <xs:element name="DistributionList" type="t:DistributionListType"/>
        <xs:element name="MeetingMessage" type="t:MeetingMessageType"/>
        <xs:element name="MeetingRequest" type="t:MeetingRequestMessageType"/>
        <xs:element name="MeetingResponse" type="t:MeetingResponseMessageType"/>
        <xs:element name="MeetingCancellation" type="t:MeetingCancellationMessageType"/>
        <xs:element name="Task" type="t:TaskType"/>
        <xs:element name="PostItem" type="t:PostItemType"/>
      </xs:choice>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="SmartResponseBaseType">
  <xs:complexContent>
    <xs:restriction base="t:ResponseObjectType">
      <xs:sequence>
        <xs:element name="Subject" type="xs:string" minOccurs="0"/>
        <xs:element name="Body" type="t:BodyType" minOccurs="0"/>
        <xs:element name="ToRecipients" type="t:ArrayOfRecipientsType" minOccurs="0"/>
        <xs:element name="CcRecipients" type="t:ArrayOfRecipientsType" minOccurs="0"/>
        <xs:element name="BccRecipients" type="t:ArrayOfRecipientsType" minOccurs="0"/>
        <xs:element name="IsReadReceiptRequested" type="xs:boolean" minOccurs="0"/>
        <xs:element name="IsDeliveryReceiptRequested" type="xs:boolean" minOccurs="0"/>
        <xs:element name="From" type="t:SingleRecipientType" minOccurs="0"/>
        <xs:element name="ReferenceItemId" type="t:ItemIdType" minOccurs="0"/>
      </xs:sequence>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>

```

```

        <xs:attribute name="ObjectName" type="xs:string" use="prohibited"/>
    </xs:restriction>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="SmartResponseType">
    <xs:complexContent>
        <xs:extension base="t:SmartResponseBaseType">
            <xs:sequence>
                <xs:element name="NewBodyContent" type="t:BodyType" minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

<!-- Begin Entity Extraction --&gt;

&lt;xs:complexType name="ArrayOfAddressesType"&gt;
    &lt;xs:sequence&gt;
        &lt;xs:element name="Address" type="xs:string" minOccurs="0" maxOccurs="unbounded"/&gt;
    &lt;/xs:sequence&gt;
&lt;/xs:complexType&gt;

&lt;xs:complexType name="ArrayOfMeetingSuggestionsType"&gt;
    &lt;xs:sequence&gt;
        &lt;xs:element name="MeetingSuggestion" type="t:MeetingSuggestionType"
maxOccurs="unbounded" /&gt;
    &lt;/xs:sequence&gt;
&lt;/xs:complexType&gt;

&lt;xs:complexType name="MeetingSuggestionType"&gt;
    &lt;xs:sequence&gt;
        &lt;xs:element name="Attendees" type="t:ArrayOfEmailUsersType" minOccurs="0" maxOccurs="1"
/&gt;
        &lt;xs:element name="Location" type="xs:string" minOccurs="0" /&gt;
        &lt;xs:element name="Subject" type="xs:string" minOccurs="0" /&gt;
        &lt;xs:element name="MeetingString" type="xs:string" minOccurs="0" /&gt;
        &lt;xs:element name="StartTime" type="xs:dateTime" minOccurs="0" /&gt;
        &lt;xs:element name="EndTime" type="xs:dateTime" minOccurs="0" /&gt;
    &lt;/xs:sequence&gt;
&lt;/xs:complexType&gt;

&lt;xs:complexType name="ArrayOfTaskSuggestionsType"&gt;
    &lt;xs:sequence&gt;
        &lt;xs:element name="TaskSuggestion" type="t:TaskSuggestionType" maxOccurs="unbounded" /&gt;
    &lt;/xs:sequence&gt;
&lt;/xs:complexType&gt;

&lt;xs:complexType name="ArrayOfContactsType"&gt;
    &lt;xs:sequence&gt;
        &lt;xs:element name="Contact" type="t>ContactType" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="ContactType">
    <xs:sequence>
        <xs:element name="PersonName" type="xs:string" minOccurs="0" />
        <xs:element name="BusinessName" type="xs:string" minOccurs="0" />
        <xs:element name="PhoneNumbers" type="t:ArrayOfPhonesType" minOccurs="0" maxOccurs="1"
/>
    </xs:sequence>
</xs:complexType>

```

```

<xs:element name="Urls" type="t:ArrayOfUrlsType" minOccurs="0" maxOccurs="1" />
<xs:element name="EmailAddresses" type="t:ArrayOfExtractedEmailAddresses" minOccurs="0"
maxOccurs="1" />
<xs:element name="Addresses" type="t:ArrayOfAddressesType" minOccurs="0" maxOccurs="1"
/>
<xs:element name="ContactString" type="xs:string" minOccurs="0" />
</xs:sequence>
</xs:complexType>

<xs:complexType name="ArrayOfUrlsType">
<xs:sequence>
<xs:element name="Url" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="ArrayOfPhonesType">
<xs:sequence>
<xs:element name="Phone" type="t:PhoneType" minOccurs="0" maxOccurs="unbounded" />
</xs:sequence>
</xs:complexType>

<xs:complexType name="PhoneType">
<xs:sequence>
<xs:element name="OriginalPhoneString" type="xs:string" minOccurs="0" />
<xs:element name="PhoneString" type="xs:string" minOccurs="0" />
<xs:element name="Type" type="xs:string" minOccurs="0" />
</xs:sequence>
</xs:complexType>

<xs:complexType name="ArrayOfEmailUsersType">
<xs:sequence>
<xs:element name="EmailUser" type="t:EmailUserType" minOccurs="0" maxOccurs="unbounded"
/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="EmailUserType">
<xs:sequence>
<xs:element name="Name" type="xs:string" minOccurs="0" />
<xs:element name="UserId" type="xs:string" minOccurs="0" />
</xs:sequence>
</xs:complexType>

<xs:complexType name="TaskSuggestionType">
<xs:sequence>
<xs:element name="TaskString" type="xs:string" minOccurs="0" />
<xs:element name="Assignees" type="t:EmailUserType" minOccurs="0" maxOccurs="1" />
</xs:sequence>
</xs:complexType>

<xs:complexType name="ArrayOfExtractedEmailAddresses">
<xs:sequence>
<xs:element name="EmailAddress" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>

<xs:complexType name="EntityExtractionResultType">
<xs:sequence>

```

```

        <xs:element name="Addresses" type="t:ArrayOfAddressesType" minOccurs="0" maxOccurs="1"
/>
        <xs:element name="MeetingSuggestions" type="t:ArrayOfMeetingSuggestionsType"
minOccurs="0" maxOccurs="1" />
        <xs:element name="TaskSuggestions" type="t:ArrayOfTaskSuggestionsType" minOccurs="0"
maxOccurs="1" />
        <xs:element name="EmailAddresses" type="t:ArrayOfExtractedEmailAddresses" minOccurs="0"
maxOccurs="1" />
        <xs:element name="Contacts" type="t:ArrayOfContactsType" minOccurs="0" maxOccurs="1" />
        <xs:element name="Urls" type="t:ArrayOfUrlsType" minOccurs="0" maxOccurs="1" />
        <xs:element name="PhoneNumbers" type="t:ArrayOfPhonesType" minOccurs="0" maxOccurs="1"
/>
    />
</xs:sequence>
</xs:complexType>

<!-- End Entity Extraction --&gt;

&lt;xs:complexType name="RightsManagementLicenseDataType"&gt;
&lt;xs:sequence&gt;
    &lt;xs:element name="RightsManagedMessageDecryptionStatus" type="xs:int" minOccurs="0" /&gt;
    &lt;xs:element name="RmsTemplateId" type="xs:string" minOccurs="0" /&gt;
    &lt;xs:element name="TemplateName" type="xs:string" minOccurs="0" /&gt;
    &lt;xs:element name="TemplateDescription" type="xs:string" minOccurs="0" /&gt;
    &lt;xs:element name="EditAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ReplyAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ReplyAllAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ForwardAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ModifyRecipientsAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ExtractAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="PrintAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ExportAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ProgrammaticAccessAllowed" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="IsOwner" type="xs:boolean" minOccurs="0" /&gt;
    &lt;xs:element name="ContentOwner" type="xs:string" minOccurs="0" /&gt;
    &lt;xs:element name="ContentExpiryDate" type="xs:string" minOccurs="0" /&gt;
&lt;/xs:sequence&gt;
&lt;/xs:complexType&gt;
&lt;/xs:schema&gt;
</pre>

```

## 8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2007
- Microsoft® Exchange Server 2010
- Microsoft® Exchange Server 2013 Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.3.2:](#) Exchange 2007 and Exchange 2010 do not support the **ManagementRole** element.

[<2> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfOccurrenceRangesType** complex type.

[<3> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **FlagType** complex type.

[<4> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **OccurrencesRangeType** complex type.

[<5> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfAddressesType** complex type.

[<6> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfMeetingSuggestionsType** complex type.

[<7> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **MeetingSuggestionType** complex type.

[<8> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfTaskSuggestionsType** complex type.

[<9> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfContactsType** complex type.

[<10> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ContactType** complex type.

[<11> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfUrlsType** complex type.

[<12> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfPhonesType** complex type.

[<13> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **PhoneType** complex type.

[<14> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfEmailUsersType** complex type.

[<15> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **RightsManagementLicenseData** complex type.

[<16> Section 2.2.4.1:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfOccurrenceRangesType** complex type.

[<17> Section 2.2.4.2:](#) Exchange 2007 and Exchange 2010 do not support the **FlagType** complex type.

[<18> Section 2.2.4.3:](#) Exchange 2007, Exchange 2010, and Exchange 2010 SP1 do not include the **ReturnNewItemIds** element. The **ReturnNewItemIds** element was introduced in Exchange 2010 SP2.

[<19> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **ReminderNextTime** element.

[<20> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **Flag** element.

[<21> Section 2.2.4.8:](#) Exchange 2007, Exchange 2010 and Exchange 2010 SP1 do not support the **StoreEntryId** element. The **StoreEntryId** element was introduced in Exchange 2010 SP2.

[<22> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **InstanceKey** element.

[<23> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **NormalizedBody** element.

[<24> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **EntityExtractionResult** element.

[<25> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **PolicyTag** element.

[<26> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **ArchiveTag** element.

[<27> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **RetentionDate** element.

[<28> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **Preview** element.

[<29> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **RightsManagementLicenseData** element.

[<30> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **NextPredictedAction** element.

[<31> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **BlockStatus** element.

[<32> Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **HasBlockedImages** element.

[<33> Section 2.2.4.9:](#) Exchange 2007 and Exchange 2010 do not support the **ManagementRoleType** complex type.

[<34> Section 2.2.4.11:](#) Exchange 2007 and Exchange 2010 do not support the **RecurringMasterItemIdRanges** element.

[<35> Section 2.2.4.14:](#) Exchange 2007 and Exchange 2010 do not support the **NonEmptyArrayOfRoleType** complex type.

[<36> Section 2.2.4.16:](#) Exchange 2007 and Exchange 2010 do not support the **OccurrencesRangeType** complex type.

[<37> Section 2.2.4.22:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfAddressesType** complex type.

[<38> Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfMeetingSuggestionsType** complex type.

[<39> Section 2.2.4.24:](#) Exchange 2007 and Exchange 2010 do not support the **MeetingSuggestionType** complex type.

[<40> Section 2.2.4.25:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfTaskSuggestionsType** complex type.

[<41> Section 2.2.4.26:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfContactsType** complex type.

[<42> Section 2.2.4.27:](#) Exchange 2007 and Exchange 2010 do not support the **ContactType** complex type.

[<43> Section 2.2.4.28:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfUrlsType** complex type.

[<44> Section 2.2.4.29:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfPhonesType** complex type.

[<45> Section 2.2.4.30:](#) Exchange 2007 and Exchange 2010 do not support the **PhoneType** complex type.

[<46> Section 2.2.4.31:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfEmailUsersType** complex type.

[<47> Section 2.2.4.32:](#) Exchange 2007 and Exchange 2010 do not support the **EmailUserType** complex type.

[<48> Section 2.2.4.33:](#) Exchange 2007 and Exchange 2010 do not support the **TaskSuggestionType** complex type.

[<49> Section 2.2.4.34:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfExtractedEmailAddresses** complex type.

[<50> Section 2.2.4.35:](#) Exchange 2007 and Exchange 2010 do not support the **EntityExtractionResultType** complex type.

[<51> Section 2.2.4.36:](#) Exchange 2007 and Exchange 2010 do not support the **RightsManagementLicenseData-Type** complex type.

[<52> Section 3.1.4.4.1.1:](#) Exchange 2007, Exchange 2010 and Exchange 2010 SP1 do not support the **DateTimePrecision** SOAP header. The **DateTimePrecision** SOAP header was introduced in Exchange 2010 SP2.

[<53> Section 3.1.4.4.1.1:](#) Exchange 2007 and Exchange 2010 do not support the **ManagementRole** SOAP header. The **ManagementRole** SOAP header was introduced in ex15.

[<54> Section 3.1.4.5:](#) Exchange 2007 and Exchange 2010 do not support the **MarkAllItemsAsRead** operation.

## 9 Change Tracking

This section identifies changes that were made to the [MS-OXWSOCE] protocol document between the April 2012 and July 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">2.2.4 Complex Types</a>	Added new type.	N	New content added.
<a href="#">2.2.4 Complex Types</a>	Added a new complex type and product behavior note.	N	New content added.
<a href="#">2.2.4 Complex Types</a>	Added type description.	N	New content added.
<a href="#">2.2.4.8 t:ItemType Complex Type</a>	Added new elements.	N	New content added.
<a href="#">2.2.4.8 t:ItemType Complex Type</a>	Added references.	N	New content added.
<a href="#">2.2.4.8 t:ItemType Complex Type</a>	Added element descriptions.	N	New content added.
<a href="#">2.2.4.8 t:ItemType Complex Type</a>	Added element description.	N	New content added.
<a href="#">2.2.4.8 t:ItemType Complex Type</a>	Updated elements.	N	Content updated.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<a href="#">2.2.4.8 t:ItemType Complex Type</a>	Removed elements.	N	Content removed.
<a href="#">2.2.4.11 t:NonEmptyArrayOfBaseItemIdsType Complex Type</a>	Added new element.	N	New content added.
<a href="#">2.2.4.16 OccurrencesRangeType</a>	Added new type.	N	New content added.
<a href="#">2.2.4.22 ArrayOfAddressesType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.23 ArrayOfMeetingSuggestionsType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.24 MeetingSuggestionType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.24 MeetingSuggestionType</a>	Added element description.	N	New content added.
<a href="#">2.2.4.25 ArrayOfTaskSuggestionsType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.26 ArrayOfContactsType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.27 ContactType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.28 ArrayOfUrlsType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.29 ArrayOfPhonesType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.30 PhoneType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.31 ArrayOfEmailUsersType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.32</a>	Added a new complex type.	N	New

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<a href="#">EmailUserType</a>			content added.
<a href="#">2.2.4.33 TaskSugestionType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.34 ArrayOfExtractedEmailAddresses</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.35 EntityExtractionResultType</a>	Added a new complex type.	N	New content added.
<a href="#">2.2.4.36 RightsManagementLicenseDataType</a>	Added new complex type.	N	New content added.
<a href="#">2.2.5 Simple Types</a>	Added new type.	N	New content added.
<a href="#">2.2.5 Simple Types</a>	Removed type.	N	Content removed.
<a href="#">2.2.5.2 t:ImportanceChoicesType Simple Type</a>	Removed type.	N	Content removed.
<a href="#">2.2.8 Attribute Groups</a>	Deleted section 2.2.9.	N	Content removed.
<a href="#">6 Appendix A: Full WSDL</a>	Updates WSDL.	N	Content updated.
<a href="#">7.1 Messages Schema</a>	Updates messages schema.	N	Content updated.
<a href="#">7.2 Types Schema</a>	Updates types schema.	N	Content updated.
<a href="#">7.2 Types Schema</a>	Removed InferredImportance and InferredImportanceReason.	N	Content removed.
<a href="#">7.2 Types Schema</a>	Added GroupingAction and TextBody.	N	New content added.
<a href="#">7.2 Types Schema</a>	Updated schema.	N	Content updated.

## 10 Index

### A

Abstract data model  
[server](#) 41  
[Applicability](#) 10  
[ArrayOfAddressesType complex type](#) 32  
[ArrayOfContactsType complex type](#) 33  
[ArrayOfEmailUsersType complex type](#) 35  
[ArrayOfExtractedEmailAddresses complex type](#) 36  
[ArrayOfMeetingSuggestionsType complex type](#) 32  
[ArrayOfOccurrenceRangesType complex type](#) 14  
[ArrayOfPhonesType complex type](#) 35  
[ArrayOfTaskSuggestionsType complex type](#) 33  
[ArrayOfUrlsType complex type](#) 34  
[Attribute groups](#) 40  
[Attributes](#) 40

### C

[Capability negotiation](#) 10  
[Change tracking](#) 105  
[Complex types](#) 12  
[ArrayOfAddressesType](#) 32  
[ArrayOfContactsType](#) 33  
[ArrayOfEmailUsersType](#) 35  
[ArrayOfExtractedEmailAddresses](#) 36  
[ArrayOfMeetingSuggestionsType](#) 32  
[ArrayOfOccurrenceRangesType](#) 14  
[ArrayOfPhonesType](#) 35  
[ArrayOfTaskSuggestionsType](#) 33  
[ArrayOfUrlsType](#) 34  
[ContactType](#) 34  
[EmailUserType](#) 35  
[EntityExtractionResultType](#) 36  
[FlagType](#) 14  
[m:BaseMoveCopyItemType Complex Type](#) 14  
[m:SendItemResponseType Complex Type](#) 15  
[m:SendItemType Complex Type](#) 16  
[m:UpdateItemResponseMessageType Complex Type](#) 16  
[MeetingSuggestionType](#) 33  
[OccurrencesRangeType](#) 27  
[PhoneType](#) 35  
[RightsManagementLicenseDataType](#) 37  
[t:ConflictResultsType Complex Type](#) 17  
[t:ItemIdType Complex Type](#) 29  
[t:ItemType Complex Type](#) 17  
[t:ManagementRoleType Complex Type](#) 23  
[t:MimeContentType Complex Type](#) 23  
[t:NonEmptyArrayOfBaseItemIdsType Complex Type](#) 24  
[t:NonEmptyArrayOfInternetHeadersType Complex Type](#) 24  
[t:NonEmptyArrayOfResponseObjectsType Complex Type](#) 25  
[t:NonEmptyArrayOfRoleType Complex Type](#) 26  
[t:OccurrenceItemIdType Complex Type](#) 27  
[t:RecurringMasterItemIdType Complex Type](#) 28

[t:ReferenceItemResponseType Complex Type](#) 29  
[t:SmartResponseBaseType Complex Type](#) 30  
[t:SmartResponseType Complex Type](#) 32  
[TaskSuggestionType](#) 36  
[ContactType complex type](#) 34

### D

Data model - abstract  
[server](#) 41

### E

Elements  
[t:BaseItemId Element](#) 12  
[t:ManagementRole Element](#) 12  
[EmailUserType complex type](#) 35  
[EntityExtractionResultType complex type](#) 36

### Events

[local - server](#) 79  
[timer - server](#) 79

### F

Fields - vendor-extensible 10  
[FlagType complex type](#) 14  
[Full WSDL](#) 82  
[Full XML Schema](#) 88  
[Messages Schema](#) 88  
[Types Schema](#) 92

### G

[Glossary](#) 7  
[Groups](#) 40

### I

[Implementer - security considerations](#) 81  
[Index of security parameters](#) 81  
[Informative references](#) 8  
Initialization  
[server](#) 41  
[Introduction](#) 7

### L

Local events  
[server](#) 79

### M

[m:BaseMoveCopyItemType Complex Type complex type](#) 14  
[m:SendItemResponseType Complex Type complex type](#) 15  
[m:SendItemType Complex Type complex type](#) 16

[m:UpdateItemResponseType Complex Type](#)  
[complex type](#) 16  
[MeetingSuggestionType complex type](#) 33  
Message processing  
[server](#) 41  
Messages  
[ArrayOfAddressesType complex type](#) 32  
[ArrayOfContactsType complex type](#) 33  
[ArrayOfEmailUsersType complex type](#) 35  
[ArrayOfExtractedEmailAddresses complex type](#) 36  
[ArrayOfMeetingSuggestionsType complex type](#) 32  
[ArrayOfOccurrenceRangesType complex type](#) 14  
[ArrayOfPhonesType complex type](#) 35  
[ArrayOfTaskSuggestionsType complex type](#) 33  
[ArrayOfUrlsType complex type](#) 34  
[attribute groups](#) 40  
[attributes](#) 40  
[complex types](#) 12  
[ContactType complex type](#) 34  
[elements](#) 11  
[EmailUserType complex type](#) 35  
[EntityExtractionResultType complex type](#) 36  
[enumerated](#) 11  
[FlagType complex type](#) 14  
[groups](#) 40  
[m:BaseMoveCopyItemType Complex Type](#)  
[complex type](#) 14  
[m:SendItemResponseType Complex Type](#)  
[complex type](#) 15  
[m:SendItemType Complex Type complex type](#) 16  
[m:UpdateItemResponseType Complex](#)  
[Type complex type](#) 16  
[MeetingSuggestionType complex type](#) 33  
[namespaces](#) 11  
[OccurrencesRangeType complex type](#) 27  
[PhoneType complex type](#) 35  
[RightsManagementLicenseDataType complex type](#)  
37  
[simple types](#) 38  
[syntax](#) 11  
[t:BaseItemId Element element](#) 12  
[t:ConflictResultsType Complex Type complex](#)  
[type](#) 17  
[t:DerivedItemId Simple Type simple type](#) 38  
[t:ImportanceChoicesType Simple Type simple](#)  
[type](#) 38  
[t:ItemClassType Simple Type simple type](#) 39  
[t:ItemIdType Complex Type complex type](#) 29  
[t:ItemType Complex Type complex type](#) 17  
[t:ManagementRole Element element](#) 12  
[t:ManagementRoleType Complex Type complex](#)  
[type](#) 23  
[t:MimeContentType Complex Type complex type](#)  
23  
[t:NonEmptyArrayOfBaseItemIdsType Complex](#)  
[Type complex type](#) 24  
[t:NonEmptyArrayOfInternetHeadersType](#)  
[Complex Type complex type](#) 24  
[t:NonEmptyArrayOfResponseObjectsType](#)  
[Complex Type complex type](#) 25

[t:NonEmptyArrayOfRoleType Complex Type](#)  
[complex type](#) 26  
[t:OccurrenceItemIdType Complex Type complex](#)  
[type](#) 27  
[t:RecurringMasterItemIdType Complex Type](#)  
[complex type](#) 28  
[t:ReferenceItemResponseType Complex Type](#)  
[complex type](#) 29  
[t:ReminderMinutesBeforeStartType Simple Type](#)  
[simple type](#) 39  
[t:SmartResponseBaseType Complex Type](#)  
[complex type](#) 30  
[t:SmartResponseType Complex Type complex](#)  
[type](#) 32  
[TaskSuggestionType complex type](#) 36  
[transport](#) 11

## N

[Namespaces](#) 11  
[Normative references](#) 8

## O

[OccurrencesRangeType complex type](#) 27  
Operations  
[CopyItem Operation](#) 41  
[CreateItem Operation](#) 45  
[DeleteItem Operation](#) 49  
[GetItem Operation](#) 53  
[MarkAllItemsAsRead Operation](#) 57  
[MoveItem Operation](#) 61  
[SendItem Operation](#) 64  
[UpdateItem Operation](#) 67  
[Overview \(synopsis\)](#) 9

## P

[Parameters - security index](#) 81  
[PhoneType complex type](#) 35  
[Product behavior](#) 101

## R

[References](#) 7  
[informative](#) 8  
[normative](#) 8  
[Relationship to other protocols](#) 9  
[RightsManagementLicenseDataType complex type](#)  
37

## S

Security  
[implementer considerations](#) 81  
[parameter index](#) 81  
Sequencing rules  
[server](#) 41  
Server  
[abstract data model](#) 41  
[CopyItem Operation operation](#) 41  
[CreateItem Operation operation](#) 45

[DeleteItem Operation](#) [operation](#) 49  
[GetItem Operation](#) [operation](#) 53  
[initialization](#) 41  
[local events](#) 79  
[MarkAllItemsAsRead Operation](#) [operation](#) 57  
[message processing](#) 41  
[MoveItem Operation](#) [operation](#) 61  
[SendItem Operation](#) [operation](#) 64  
[sequencing rules](#) 41  
[timer events](#) 79  
[timers](#) 41  
[UpdateItem Operation](#) [operation](#) 67  
[Simple types](#) 38  
[t:DerivedItemIdType Simple Type](#) 38  
[t:ImportanceChoicesType Simple Type](#) 38  
[t:ItemClassType Simple Type](#) 39  
[t:ReminderMinutesBeforeStartType Simple Type](#) 39  
[Standards assignments](#) 10  
Syntax  
[messages - overview](#) 11

## T

[t:BaseItemId Element](#) [element](#) 12  
[t:ConflictResultsType Complex Type](#) [complex type](#) 17  
[t:DerivedItemIdType Simple Type](#) [simple type](#) 38  
[t:ImportanceChoicesType Simple Type](#) [simple type](#) 38  
[t:ItemClassType Simple Type](#) [simple type](#) 39  
[t:ItemIdType Complex Type](#) [complex type](#) 29  
[t:ItemType Complex Type](#) [complex type](#) 17  
[t:ManagementRole Element](#) [element](#) 12  
[t:ManagementRoleType Complex Type](#) [complex type](#) 23  
[t:MimeContentType Complex Type](#) [complex type](#) 23  
[t:NonEmptyArrayOfBaseItemIdsType Complex Type](#) [complex type](#) 24  
[t:NonEmptyArrayOfInternetHeadersType Complex Type](#) [complex type](#) 24  
[t:NonEmptyArrayOfResponseObjectsType Complex Type](#) [complex type](#) 25  
[t:NonEmptyArrayOfRoleType Complex Type](#) [complex type](#) 26  
[t:OccurrenceItemIdType Complex Type](#) [complex type](#) 27  
[t:RecurringMasterItemIdType Complex Type](#) [complex type](#) 28  
[t:ReferenceItemResponseType Complex Type](#) [complex type](#) 29  
[t:ReminderMinutesBeforeStartType Simple Type](#) [simple type](#) 39  
[t:SmartResponseBaseType Complex Type](#) [complex type](#) 30  
[t:SmartResponseType Complex Type](#) [complex type](#) 32  
[TaskSuggestionType complex type](#) 36  
Timer events  
[server](#) 79  
Timers  
[server](#) 41

[Tracking changes](#) 105  
[Transport](#) 11

Types  
[complex](#) 12  
[simple](#) 38

## V

[Vendor-extensible fields](#) 10  
[Versioning](#) 10

## W

[WSDL](#) 82

## X

[XML Schema](#) 88  
[Messages Schema](#) 88  
[Types Schema](#) 92