

[MS-OXWSCORE]: Core Items Web Service Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
07/15/2009	1.0	Major	Initial Availability.
11/04/2009	1.1.0	Minor	1.1.0
02/10/2010	1.1.0	None	Version 1.1.0 release
05/05/2010	1.1.1	Editorial	Revised and edited the technical content.
08/04/2010	2.0	Major	Significantly changed the technical content.
11/03/2010	3.0	Major	Significantly changed the technical content.
03/18/2011	4.0	Major	Significantly changed the technical content.
08/05/2011	4.1	Minor	Clarified the meaning of the technical content.
10/07/2011	5.0	Major	Significantly changed the technical content.
01/20/2012	6.0	Major	Significantly changed the technical content.
04/27/2012	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	6.1	Minor	Clarified the meaning of the technical content.
10/08/2012	7.0	Major	Significantly changed the technical content.
02/11/2013	8.0	Major	Significantly changed the technical content.
07/26/2013	9.0	Major	Significantly changed the technical content.
11/18/2013	9.1	Minor	Clarified the meaning of the technical content.
02/10/2014	9.1	No change	No changes to the meaning, language, or formatting of the technical content.
04/30/2014	10.0	Major	Significantly changed the technical content.
07/31/2014	10.1	Minor	Clarified the meaning of the technical content.
10/30/2014	11.0	Major	Significantly changed the technical content.

Table of Contents

1 Introduction	8
1.1 Glossary	8
1.2 References.....	9
1.2.1 Normative References.....	9
1.2.2 Informative References	10
1.3 Overview	10
1.4 Relationship to Other Protocols.....	10
1.5 Prerequisites/Preconditions	11
1.6 Applicability Statement.....	11
1.7 Versioning and Capability Negotiation.....	11
1.8 Vendor-Extensible Fields.....	12
1.9 Standards Assignments	12
2 Messages	13
2.1 Transport.....	13
2.2 Common Message Syntax	13
2.2.1 Namespaces	13
2.2.2 Messages	13
2.2.3 Elements.....	14
2.2.3.1 t:ManagementRole Element	14
2.2.4 Complex Types	14
2.2.4.1 t:AddressEntityType Complex Type	16
2.2.4.2 t:ArrayOfAddressEntitiesType Complex Type	16
2.2.4.3 t:ArrayOfAddressesType Complex Type	16
2.2.4.4 t:ArrayOfContactsType Complex Type	17
2.2.4.5 t:ArrayOfEmailAddressEntitiesType Complex Type	17
2.2.4.6 t:ArrayOfEmailUsersType Complex Type.....	17
2.2.4.7 t:ArrayOfExtractedEmailAddresses Complex Type	17
2.2.4.8 t:ArrayOfMeetingSuggestionsType Complex Type	18
2.2.4.9 t:ArrayOfPhoneEntitiesType Complex Type	18
2.2.4.10 t:ArrayOfPhonesType Complex Type.....	18
2.2.4.11 t:ArrayOfOccurrenceRangesType Complex Type.....	18
2.2.4.12 t:ArrayOfTaskSuggestionsType Complex Type	19
2.2.4.13 t:ArrayOfUrlEntitiesType Complex Type	19
2.2.4.14 t:ArrayOfUrlsType Complex Type	19
2.2.4.15 m:BaseMoveCopyItemType Complex Type	19
2.2.4.16 t:ConflictResultsType Complex Type.....	20
2.2.4.17 t:ContactType Complex Type.....	21
2.2.4.18 t:EmailAddressEntityType Complex Type	21
2.2.4.19 t:EmailUserType Complex Type	22
2.2.4.20 t:EntityExtractionResultType Complex Type	22
2.2.4.21 t:EntityType Complex Type	23
2.2.4.22 t:FlagType Complex Type	23
2.2.4.23 t:ItemType Complex Type.....	24
2.2.4.24 t:ItemIdType Complex Type.....	30
2.2.4.25 t:ManagementRoleType Complex Type	31
2.2.4.26 t:MeetingSuggestionType Complex Type.....	31
2.2.4.27 t:MimeContentType Complex Type.....	32
2.2.4.28 t:NonEmptyArrayOfBaseItemIdsType Complex Type	32
2.2.4.29 t:NonEmptyArrayOfInternetHeadersType Complex Type	33

2.2.4.30	t:NonEmptyArrayOfResponseObjectType Complex Type	33
2.2.4.31	t:NonEmptyArrayOfRoleType Complex Type	35
2.2.4.32	t:OccurrenceItemIdType Complex Type	35
2.2.4.33	t:OccurrencesRangeType Complex Type	36
2.2.4.34	t:PhoneType Complex Type	37
2.2.4.35	t:PhoneEntityType Complex Type	37
2.2.4.36	t:RecurringMasterItemIdType Complex Type	37
2.2.4.37	t:RecurringMasterItemIdRangesType Complex Type	38
2.2.4.38	t:RightsManagementLicenseDataType Complex Type	38
2.2.4.39	t:SmartResponseBaseType Complex Type	40
2.2.4.40	t:SmartResponseType Complex Type	41
2.2.4.41	t:TaskSuggestionType Complex Type	41
2.2.4.42	m:UpdateItemResponseMessageType	42
2.2.4.43	t:UrlEntityType Complex Type	42
2.2.5	Simple Types	43
2.2.5.1	t:DerivedItemIdType Simple Type	43
2.2.5.2	t:EmailPositionType Simple Type	43
2.2.5.3	t:ImportanceChoicesType Simple Type	44
2.2.5.4	t:ItemClassType Simple Type	44
2.2.5.5	t:ReminderMinutesBeforeStartType Simple Type	45
2.2.6	Attributes	45
2.2.7	Groups	45
2.2.8	Attribute Groups	45
3	Protocol Details	46
3.1	ExchangeServicePortType Server Details	46
3.1.1	Abstract Data Model	46
3.1.2	Timers	46
3.1.3	Initialization	46
3.1.4	Message Processing Events and Sequencing Rules	46
3.1.4.1	CopyItem Operation	46
3.1.4.1.1	Messages	47
3.1.4.1.1.1	tns:CopyItemSoapIn Message	47
3.1.4.1.1.2	tns:CopyItemSoapOut Message	48
3.1.4.1.2	Elements	48
3.1.4.1.2.1	m:CopyItem Element	48
3.1.4.1.2.2	m:CopyItemResponse Element	49
3.1.4.1.3	Complex Types	49
3.1.4.1.3.1	m:CopyItemResponseType Complex Type	49
3.1.4.1.3.2	m:CopyItemType Complex Type	49
3.1.4.1.4	Simple Types	50
3.1.4.1.5	Attributes	50
3.1.4.1.6	Groups	50
3.1.4.1.7	Attribute Groups	50
3.1.4.2	CreateItem Operation	50
3.1.4.2.1	Messages	50
3.1.4.2.1.1	tns:CreateItemSoapIn Message	51
3.1.4.2.1.2	tns:CreateItemSoapOut Message	51
3.1.4.2.2	Elements	52
3.1.4.2.2.1	m:CreateItem Element	52
3.1.4.2.2.2	m:CreateItemResponse Element	52
3.1.4.2.3	Complex Types	53
3.1.4.2.3.1	m:CreateItemResponseType Complex Type	53

3.1.4.2.3.2	m:CreateItemType Complex Type	53
3.1.4.2.4	Simple Types	54
3.1.4.2.5	Attributes	54
3.1.4.2.6	Groups	54
3.1.4.2.7	Attribute Groups	54
3.1.4.3	DeleteItem Operation	54
3.1.4.3.1	Messages	55
3.1.4.3.1.1	tns>DeleteItemSoapIn Message	55
3.1.4.3.1.2	tns>DeleteItemSoapOut Message	56
3.1.4.3.2	Elements	56
3.1.4.3.2.1	m>DeleteItem Element	56
3.1.4.3.2.2	m>DeleteItemResponse Element	57
3.1.4.3.3	Complex Types	57
3.1.4.3.3.1	m>DeleteItemResponseType Complex Type	57
3.1.4.3.3.2	m>DeleteItemType Complex Type	57
3.1.4.3.4	Simple Types	59
3.1.4.3.5	Attributes	59
3.1.4.3.6	Groups	59
3.1.4.3.7	Attribute Groups	59
3.1.4.4	GetItem Operation	59
3.1.4.4.1	Messages	59
3.1.4.4.1.1	tns:GetItemSoapIn Message	60
3.1.4.4.1.2	tns:GetItemSoapOut Message	61
3.1.4.4.2	Elements	61
3.1.4.4.2.1	m:GetItem Element	61
3.1.4.4.2.2	m:GetItemResponse Element	61
3.1.4.4.3	Complex Types	62
3.1.4.4.3.1	m:GetItemResponseType Complex Type	62
3.1.4.4.3.2	m:GetItemType Complex Type	62
3.1.4.4.4	Simple Types	63
3.1.4.4.5	Attributes	63
3.1.4.4.6	Groups	63
3.1.4.4.7	Attribute Groups	63
3.1.4.5	MarkAllItemsAsRead Operation	63
3.1.4.5.1	Messages	64
3.1.4.5.1.1	tns:MarkAllItemsAsReadSoapIn Message	64
3.1.4.5.1.2	tns:MarkAllItemsAsReadSoapOut Message	64
3.1.4.5.2	Elements	65
3.1.4.5.2.1	m:MarkAllItemsAsRead Element	65
3.1.4.5.2.2	m:MarkAllItemsAsReadResponse Element	65
3.1.4.5.3	Complex Types	65
3.1.4.5.3.1	m:MarkAllItemsAsReadType Complex Type	66
3.1.4.5.3.2	m:MarkAllItemsAsReadResponseType Complex Type	66
3.1.4.5.4	Simple Types	67
3.1.4.5.5	Attributes	67
3.1.4.5.6	Groups	67
3.1.4.5.7	Attribute Groups	67
3.1.4.6	MarkAsJunk Operation	67
3.1.4.6.1	Messages	67
3.1.4.6.1.1	tns:MarkAsJunkSoapIn Message	68
3.1.4.6.1.2	tns:MarkAsJunkSoapOut Message	68
3.1.4.6.2	Elements	69
3.1.4.6.2.1	m:MarkAsJunk Element	69

3.1.4.6.2.2	m:MarkAsJunkResponse Element.....	69
3.1.4.6.3	Complex Types	69
3.1.4.6.3.1	m:MarkAsJunkType Complex Type.....	69
3.1.4.6.3.2	m:MarkAsJunkResponseType Complex Type	70
3.1.4.6.3.3	m:MarkAsJunkResponseMessageType Complex Type	71
3.1.4.6.4	Simple Types.....	71
3.1.4.6.5	Attributes.....	71
3.1.4.6.6	Groups.....	71
3.1.4.6.7	Attribute Groups	71
3.1.4.7	MoveItem Operation	71
3.1.4.7.1	Messages	72
3.1.4.7.1.1	tns:MoveItemSoapIn Message.....	72
3.1.4.7.1.2	tns:MoveItemSoapOut Message	73
3.1.4.7.2	Elements.....	73
3.1.4.7.2.1	m:MoveItem Element.....	73
3.1.4.7.2.2	m:MoveItemResponse Element	74
3.1.4.7.3	Complex Types	74
3.1.4.7.3.1	m:MoveItemResponseType Complex Type	74
3.1.4.7.3.2	m:MoveItemType Complex Type	74
3.1.4.7.4	Simple Types.....	75
3.1.4.7.5	Attributes.....	75
3.1.4.7.6	Groups.....	75
3.1.4.7.7	Attribute Groups	75
3.1.4.8	SendItem Operation.....	75
3.1.4.8.1	Messages	75
3.1.4.8.1.1	tns:SendItemSoapIn Message.....	76
3.1.4.8.1.2	tns:SendItemSoapOut Message.....	76
3.1.4.8.2	Elements.....	77
3.1.4.8.2.1	m:SendItem Element.....	77
3.1.4.8.2.2	m:SendItemResponse Element.....	77
3.1.4.8.3	Complex Types	77
3.1.4.8.3.1	m:SendItemResponseType Complex Type	77
3.1.4.8.3.2	m:SendItemType Complex Type.....	78
3.1.4.8.4	Simple Types.....	79
3.1.4.8.5	Attributes.....	79
3.1.4.8.6	Groups.....	79
3.1.4.8.7	Attribute Groups	79
3.1.4.9	UpdateItem Operation.....	79
3.1.4.9.1	Messages	79
3.1.4.9.1.1	tns:UpdateItemSoapIn Message	80
3.1.4.9.1.2	tns:UpdateItemSoapOut Message	80
3.1.4.9.2	Elements.....	81
3.1.4.9.2.1	m:UpdateItem Element	81
3.1.4.9.2.2	m:UpdateItemResponse Element.....	81
3.1.4.9.3	Complex Types	81
3.1.4.9.3.1	m:UpdateItemResponseType Complex Type	82
3.1.4.9.3.2	m:UpdateItemType Complex Type.....	82
3.1.4.9.3.3	t:AppendToItemFieldType Complex Type	84
3.1.4.9.3.4	t:ChangeDescriptionType Complex Type.....	85
3.1.4.9.3.5	t>DeleteItemFieldType Complex Type.....	86
3.1.4.9.3.6	t:ItemChangeDescriptionType Complex Type	86
3.1.4.9.3.7	t:ItemChangeType Complex Type.....	86
3.1.4.9.3.8	t:NonEmptyArrayOfItemChangeDescriptionsType Complex Type	87

3.1.4.9.3.9	t:NonEmptyArrayOfItemChangesType Complex Type	88
3.1.4.9.3.10	t:SetItemFieldType Complex Type	88
3.1.4.9.4	Simple Types	90
3.1.4.9.4.1	t:ConflictResolutionType Simple Type.....	90
3.1.4.9.5	Attributes.....	91
3.1.4.9.6	Groups.....	91
3.1.4.9.7	Attribute Groups	91
3.1.4.10	UpdateItemInRecoverableItems Operation	91
3.1.4.10.1	Messages	92
3.1.4.10.1.1	tns:UpdateItemInRecoverableItemsSoapIn	92
3.1.4.10.1.2	tns:UpdateItemInRecoverableItemsSoapOut	93
3.1.4.10.2	Elements.....	93
3.1.4.10.2.1	m:UpdateItemInRecoverableItems Element	94
3.1.4.10.2.2	m:UpdateItemInRecoverableItemsResponse Element	94
3.1.4.10.3	Complex Types	94
3.1.4.10.3.1	m:UpdateItemInRecoverableItemsType Complex Type	94
3.1.4.10.3.2	m:UpdateItemInRecoverableItemsResponseType Complex Type.....	95
3.1.4.10.3.3	UpdateItemInRecoverableItemsResponseMessageType Complex Type	95
3.1.4.10.4	Simple Types	96
3.1.4.10.5	Attributes	96
3.1.4.10.6	Groups.....	96
3.1.4.10.7	Attribute Groups.....	96
3.1.5	Timer Events	96
3.1.6	Other Local Events	96
4	Protocol Examples.....	97
5	Security.....	98
5.1	Security Considerations for Implementers.....	98
5.2	Index of Security Parameters	98
6	Appendix A: Full WSDL	99
7	Appendix B: Full XML Schema	106
7.1	Messages Schema.....	106
7.2	Types Schema.....	110
8	Appendix C: Product Behavior	121
9	Change Tracking.....	127
10	Index	130

1 Introduction

The Core Items Web Service Protocol enables clients to create, get, update, delete, move, send, or copy items on the server.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [MS-OXGLOS]:

- base64 encoding**
- blind carbon copy (Bcc) recipient**
- carbon copy (Cc) recipient**
- delivery receipt**
- Drafts folder**
- endpoint**
- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- Inbox folder**
- Inter-Personal Mail (IPM)**
- Junk Email folder**
- mailbox**
- meeting**
- message class**
- Messaging Application Programming Interface (MAPI)**
- MIME message**
- Multipurpose Internet Mail Extensions (MIME)**
- Outbox folder**
- read receipt**
- recipient**
- SOAP**
- SOAP action**
- SOAP body**
- SOAP header**
- SOAP message**
- To recipient**
- Uniform Resource Locator (URL)**
- web service**
- Web Services Description Language (WSDL)**
- WSDL message**
- WSDL operation**
- WSDL port type**
- XML namespace**
- XML schema**

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-OXWSATT] Microsoft Corporation, "[Attachment Handling Web Service Protocol](#)".

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCONT] Microsoft Corporation, "[Contacts Web Service Protocol](#)".

[MS-OXWSCONV] Microsoft Corporation, "[Conversations Web Service Protocol](#)".

[MS-OXWSDLIST] Microsoft Corporation, "[Distribution List Creation and Usage Web Service Protocol](#)".

[MS-OXWSFOLD] Microsoft Corporation, "[Folders and Folder Permissions Web Service Protocol](#)".

[MS-OXWSGTZ] Microsoft Corporation, "[Get Server Time Zone Web Service Protocol](#)".

[MS-OXWSMSG] Microsoft Corporation, "[Email Message Types Web Service Protocol](#)".

[MS-OXWSMTGS] Microsoft Corporation, "[Calendaring Web Service Protocol](#)".

[MS-OXWSPOST] Microsoft Corporation, "[Post Items Web Service Protocol](#)".

[MS-OXWSTASK] Microsoft Corporation, "[Tasks Web Service Protocol](#)".

[MS-OXWSURPT] Microsoft Corporation, "[Retention Tag Web Service Protocol](#)".

[MS-OXWSXPROP] Microsoft Corporation, "[Extended Properties Structure](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", BCP 47, RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol](#)".

[MS-OXWSMSHR] Microsoft Corporation, "[Folder Sharing Web Service Protocol](#)".

[MS-OXWSSRCH] Microsoft Corporation, "[Mailbox Search Web Service Protocol](#)".

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2822] Resnick, P., Ed., "Internet Message Format", RFC 2822, April 2001, <http://www.ietf.org/rfc/rfc2822.txt>

1.3 Overview

The Core Items Web Service Protocol provides clients with the ability to create items such as messages, tasks, and **meetings**, or to get the properties of an existing item. Clients can also use this protocol to update, delete, move, send, or copy items on the server.

1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#), to identify the target **endpoint** (4) to use for each operation.

This protocol can use the item identifiers returned by the Mailbox Search Web Service Protocol, as described in [\[MS-OXWSSRCH\]](#), to manipulate items.

The Core Items Web Service Protocol uses the SOAP Protocol, as described in [\[SOAP1.1\]](#), to specify the structure information exchanged between the client and server. Additionally, this protocol uses the XML Protocol, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

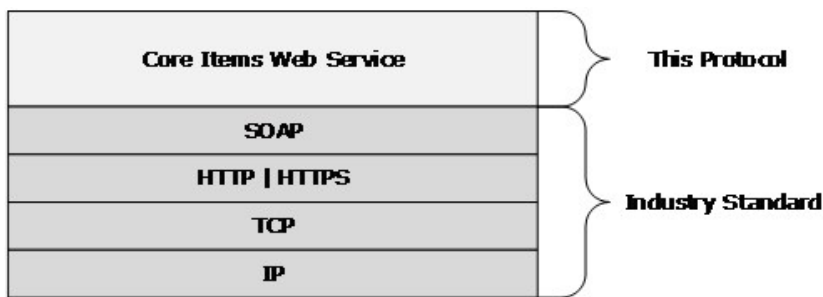


Figure 1: This protocol in relation to other protocols

The item information that is returned by the Core Items Web Service Protocol is used when requests are made by using the following protocols:

- Contacts Web Service Protocol, as described in [\[MS-OXWSCONT\]](#)
- Distribution List Creation and Usage Web Service Protocol, as described in [\[MS-OXWSDLIST\]](#)
- Email Message Types Web Service Protocol, as described in [\[MS-OXWSMSG\]](#)
- Calendaring Web Service Protocol, as described in [\[MS-OXWSMTGS\]](#)
- Post Items Web Service Protocol, as described in [\[MS-OXWSPOST\]](#)
- Tasks Web Service Protocol, as described in [\[MS-OXWSTASK\]](#)
- Folder Sharing Web Service Protocol, as described in [\[MS-OXWSMSHR\]](#)

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

1.5 Prerequisites/Preconditions

The endpoint (4) **URL** that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#), is required to form the HTTP request to the Web server that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP Web requests that target this protocol.

1.6 Applicability Statement

This protocol is applicable to environments that create, get, update, delete, move, send, or copy items by using the server's **web services**.

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as described in section [2.1](#).
- **Protocol Versions:** This protocol has only one **WSDL port type** version. The **WSDL** version of the request is identified by using the **t:RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.3.9. The version of the server responding to the request is identified by using the **t:ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.3.10.

- **Security and Authentication Methods:** This protocol relies on the Web server that is hosting it to perform authentication.
- **Localization:** This protocol includes text strings in various messages. Localization considerations for such strings are described in sections [2.2](#) and [3.1.4](#).
- **Capability Negotiation:** None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

2.1 Transport

The SOAP version supported is SOAP 1.1. For details, see [\[SOAP1.1\]](#).

This protocol relies on the Web server that hosts the application to perform authentication. Protocol servers **MUST** support SOAP over HTTP. The protocol servers **SHOULD** additionally support secure communications via HTTPS, as defined in [\[RFC2818\]](#).

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language (WSDL), as defined in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
soap	http://schemas.xmlsoap.org/wsdl/soap/	[SOAP1.1]
tns	http://schemas.microsoft.com/exchange/services/2006/messages	
(none)	http://schemas.microsoft.com/exchange/services/2006/messages	
s	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA1]
wsdl	http://schemas.xmlsoap.org/wsdl/	[WSDL]
t	http://schemas.microsoft.com/exchange/services/2006/types	
m	http://schemas.microsoft.com/exchange/services/2006/messages	
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA1]

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

The following table lists the set of common XML schema element definitions that are defined by this specification. XML schema element definitions that are specific to a particular operation are defined with the operation.

Element name	Description
ManagementRole	Specifies the roles the user or application wants to use.

2.2.3.1 t:ManagementRole Element

The **ManagementRole** element specifies the roles the user or application wants to use. [<1>](#)

```
<xs:element name="ManagementRole" type="t:ManagementRoleType"/>
```

2.2.4 Complex Types

The following table lists the set of common XML schema complex type definitions that are defined by this specification. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

Complex type	Description
AddressEntityType	Specifies an address entity. <2>
ArrayOfAddressEntitiesType	Specifies an array of address entities. <3>
ArrayOfAddressesType	Specifies an array of addresses. <4>
ArrayOfContactsType	Specifies an array of contacts. <5>
ArrayOfEmailAddressEntitiesType	Specifies an array of email address entities. <6>
ArrayOfEmailUsersType	Specifies an array of email users. <7>
ArrayOfExtractedEmailAddresses	Specifies an array of email addresses. <8>
ArrayOfMeetingSuggestionsType	Specifies an array of meeting suggestions. <9>
ArrayOfPhoneEntitiesType	Specifies an array of phone entities. <10>
ArrayOfPhonesType	Specifies an array of phone numbers. <11>
ArrayOfOccurrenceRangesType	Specifies an array of occurrence ranges. <12>
ArrayOfTaskSuggestionsType	Specifies an array of task suggestions. <13>
ArrayOfUrlEntitiesType	Specifies an array of URL entities. <14>
ArrayOfUrlsType	Specifies an array of URLs. <15>
BaseMoveCopyItemType	Specifies the base type for the CopyItemType complex type (section 3.1.4.1.3.2) and the MoveItemType complex type (section 3.1.4.7.3.2).
ContactType	Specifies the type of a contact. <16>

Complex type	Description
EmailAddressEntityType	Specifies an email address entity. .<17>
EmailUserType	Specifies an email user. .<18>
EntityExtractionResultType	Specifies the result of an entity extraction. .<19>
EntityType	Specifies a single entity. .<20>
FlagType	Specifies a flag indicating status, start date, due date, or completion date for an item. .<21>
ItemType	Specifies a generic item in the server data store. .<22>
ItemIDType	Specifies the item identifier (ID) of an item.
ManagementRoleType	Specifies the roles that are associated with a user or application.
MeetingSuggestionType	Specifies a meeting suggestion. .<23>
MimeContentType	Specifies the native MIME stream of an object that is represented in base64-encoded binary format.
NonEmptyArrayOfBaseItemIdsType	Specifies a collection of items.
NonEmptyArrayOfInternetHeadersType	Specifies the collection of all Internet message headers that are contained in an item.
NonEmptyArrayOfResponseObjectsType	Specifies an array of response objects.
NonEmptyArrayOfRoleType	Specifies an array of role types.
OccurrenceItemIdType	Specifies a single occurrence of a recurring item.
OccurrencesRangeType	Specifies a range of occurrences. .<24>
PhoneType	Specifies a phone number and its type. .<25>
PhoneEntityType	Specifies a phone entity. .<26>
RecurringMasterItemIdType	Specifies a recurring master item by identifying the identifiers of one of its related occurrence items. A recurring master item is the item that anchors the recurring series and holds all recurrence pattern and recurrence range information. Each recurring series has one recurring master item.
RecurringMasterItemIdRangesType	Specifies a union of all occurrences of a recurring master item, which fit into at least one of the specified ranges. .<27>
RightsManagementLicenseDataType	Specifies information about the rights management license. .<28>
SendItemType	Specifies a request to send a message.
SendItemResponseType	Specifies a response to a call to the SendItem operation [MS-OXWSMSG] .

Complex type	Description
TaskSuggestionType	Specifies a task suggestion. <29>
UrlEntityType	Specifies a URL entity. <30>

2.2.4.1 t:AddressEntityType Complex Type

The **AddressEntityType** complex type specifies a street address. This type extends the **EntityType** complex type, as specified by section [2.2.4.21.<31>](#)

```

xs:complexType name="AddressEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="Address" type="xs:string" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>.

```

Address: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents a street address.

2.2.4.2 t:ArrayOfAddressEntitiesType Complex Type

The **ArrayOfAddressEntitiesType** complex type represents an array of address entities. [<32>](#)

```

<xs:complexType name="ArrayOfAddressEntitiesType">
  <xs:sequence>
    <xs:element name="AddressEntity" type="t:AddressEntityType"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

```

AddressEntity: An element of type **AddressEntityType**, as defined in section [2.2.4.1](#), that specifies an address.

2.2.4.3 t:ArrayOfAddressesType Complex Type

The **ArrayOfAddressesType** complex type specifies an array of addresses. [<33>](#)

```

<xs:complexType name="ArrayOfAddressesType">
  <xs:sequence>
    <xs:element name="Address" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

```

Address: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents a single address.

2.2.4.4 t:ArrayOfContactsType Complex Type

The **ArrayOfContactsType** complex type specifies an array of contacts. [<34>](#)

```
<xs:complexType name="ArrayOfContactsType">
  <xs:sequence>
    <xs:element name="Contact" type="t:ContactType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Contact: An element of type **ContactType**, as defined in section [2.2.4.17](#), that represents a single contact.

2.2.4.5 t:ArrayOfEmailAddressEntitiesType Complex Type

The **ArrayOfEmailAddressEntitiesType** complex type specifies an array of email addresses. [<35>](#)

```
xs:complexType name="ArrayOfEmailAddressEntitiesType">
  <xs:sequence>
    <xs:element name="EmailAddressEntity" type="t:EmailAddressEntityType"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
/xs:complexType>
```

EmailAddressEntity: An element of type **EmailAddressEntityType**, as defined in section [2.2.4.18](#), that represents an email address.

2.2.4.6 t:ArrayOfEmailUsersType Complex Type

The **ArrayOfEmailUsersType** complex type specifies an array of email users. [<36>](#)

```
<xs:complexType name="ArrayOfEmailUsersType">
  <xs:sequence>
    <xs:element name="EmailUser" type="t:EmailUserType" minOccurs="0" maxOccurs="unbounded"
  />
  </xs:sequence>
</xs:complexType>
```

EmailUser: An element of type **EmailUserType**, as defined in section [2.2.4.19](#), that represents a single email user.

2.2.4.7 t:ArrayOfExtractedEmailAddresses Complex Type

The **ArrayOfExtractedEmailAddresses** complex type specifies an array of email addresses. [<37>](#)

```
<xs:complexType name="ArrayOfExtractedEmailAddresses">
  <xs:sequence>
    <xs:element name="EmailAddress" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

EmailAddress: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents a single email address.

2.2.4.8 t:ArrayOfMeetingSuggestionsType Complex Type

The **ArrayOfMeetingSuggestionsType** complex type specifies an array of meeting suggestions. [<38>](#)

```
<xs:complexType name="ArrayOfMeetingSuggestionsType">
  <xs:sequence>
    <xs:element name="MeetingSuggestion" type="t:MeetingSuggestionType"
maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
```

MeetingSuggestion: An element of type **MeetingSuggestionType**, as defined in section [2.2.4.26](#), that represents a single meeting suggestion.

2.2.4.9 t:ArrayOfPhoneEntitiesType Complex Type

The **ArrayOfPhoneEntitiesType** complex type specifies an array of phone entities. [<39>](#)

```
<xs:complexType name="ArrayOfPhoneEntitiesType">
  <xs:sequence>
    <xs:element name="Phone" type="t:PhoneEntityType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Phone: An element of type **PhoneEntityType**, as defined in section [2.2.4.35](#), that specifies a phone entity.

2.2.4.10 t:ArrayOfPhonesType Complex Type

The **ArrayOfPhonesType** complex type specifies an array of phone numbers. [<40>](#)

```
<xs:complexType name="ArrayOfPhonesType">
  <xs:sequence>
    <xs:element name="Phone" type="t:PhoneType" minOccurs="0" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
```

Phone: An element of type **PhoneType**, as defined in section [2.2.4.34](#), that represents a single phone number.

2.2.4.11 t:ArrayOfOccurrenceRangesType Complex Type

The **ArrayOfOccurrenceRangesType** complex type specifies an array of occurrence ranges. [<41>](#)

```
<xs:complexType name="ArrayOfOccurrenceRangesType">
  <xs:sequence>
    <xs:element name="Range" type="t:OccurrencesRangeType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Range: An element of type **OccurrencesRangeType**, as defined in section [2.2.4.33](#), that represents a single occurrence range.

2.2.4.12 t:ArrayOfTaskSuggestionsType Complex Type

The **ArrayOfTaskSuggestionsType** complex type specifies an array of task suggestions. [<42>](#)

```
<xs:complexType name="ArrayOfTaskSuggestionsType">
  <xs:sequence>
    <xs:element name="TaskSuggestion" type="t:TaskSuggestionType" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>
```

TaskSuggestion: An element of type **TaskSuggestionType**, as defined in section [2.2.4.41](#), that represents a single task suggestion.

2.2.4.13 t:ArrayOfUrlEntitiesType Complex Type

The **ArrayOfUrlEntitiesType** complex type specifies an array of URL entities. [<43>](#)

```
<xs:complexType name="ArrayOfUrlEntitiesType">
  <xs:sequence>
    <xs:element name="UrlEntity" type="t:UrlEntityType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

UrlEntity: An element of type **UrlEntityType**, as defined in section [2.2.4.43](#), that specifies a URL entity.

2.2.4.14 t:ArrayOfUrlsType Complex Type

The **ArrayOfUrlsType** complex type specifies an array of URLs. [<44>](#)

```
<xs:complexType name="ArrayOfUrlsType">
  <xs:sequence>
    <xs:element name="Url" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Url: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that specifies a single URL.

2.2.4.15 m:BaseMoveCopyItemType Complex Type

The **BaseMoveCopyItemType** complex type specifies the base type for the **CopyItemType** complex type, as specified in section [3.1.4.1.3.2](#), and the **MoveItemType** complex type, as specified in section [3.1.4.7.3.2](#). The **BaseMoveCopyItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="BaseMoveCopyItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="ToFolderId"
```

```

        type="t:TargetFolderIdType"
      />
    <xs:element name="ItemIds"
      type="t:NonEmptyArrayOfBaseItemIdsType"
    />
    <xs:element name="ReturnNewItemIds"
      type="xs:boolean"
      minOccurs="0"
    />
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **BaseMoveCopyItemType** complex type.

Element name	Type	Description
ToFolderId	t:TargetFolderIdType ([MS-OXWSFOLD] section 2.2.4.14)	Specifies an instance of the TargetFolderIdType complex type that specifies the folder to which the items specified by the ItemIds property (as specified below) are to be moved or copied.
ItemIds	t:NonEmptyArrayOfBaseItemIdsType (section 2.2.4.28)	Specifies an array of elements of type BaseItemIdType ([MS-OXWSCDATA] section 2.2.4.13) that specifies a set of items to be moved or copied.
ReturnNewItemIds	xs:boolean [XMLSCHEMA2]	Specifies a Boolean return value that indicates whether the ItemIds element is to be returned for new items. This element will be ignored by server. A text value of true indicates that the ItemIds element is to be returned for new items. <45>

2.2.4.16 t:ConflictResultsType Complex Type

The **ConflictResultsType** complex type specifies the number of conflicts in an **UpdateItem** operation response, as specified in section [3.1.4.9](#).

```

<xs:complexType name="ConflictResultsType">
  <xs:sequence>
    <xs:element name="Count" type="xs:int"/>
  </xs:sequence>
</xs:complexType>

```

The following table lists and describes the child elements of the **ConflictResultsType** complex type.

Element name	Type	Description
Count	[XMLSCHEMA2]	Specifies an integer value that indicates the number of conflicts in an UpdateItem operation response.

2.2.4.17 t:ContactType Complex Type

The **ContactType** complex type specifies the type of a contact. This type extends the **EntityType** complex type, as specified in section [2.2.4.21](#). [<46>](#)

```
<xs:complexType name="ContactType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="PersonName" type="xs:string" minOccurs="0" />
        <xs:element name="BusinessName" type="xs:string" minOccurs="0" />
        <xs:element name="PhoneNumbers" type="t:ArrayOfPhonesType" minOccurs="0"
maxOccurs="1" />
        <xs:element name="Urls" type="t:ArrayOfUrlsType" minOccurs="0" maxOccurs="1" />
        <xs:element name="EmailAddresses" type="t:ArrayOfExtractedEmailAddresses"
minOccurs="0" maxOccurs="1" />
        <xs:element name="Addresses" type="t:ArrayOfAddressesType" minOccurs="0"
maxOccurs="1" />
        <xs:element name="ContactString" type="xs:string" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

PersonName: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) 3.2.1, that represents the name of a person.

BusinessName: An element of type **string** that represents the name of a business.

PhoneNumbers: An element of type **ArrayOfPhonesType**, as defined in section [2.2.4.10](#), that represents phone number contacts.

Urls: An element of type **ArrayOfUrlsType**, as defined in section [2.2.4.14](#), that represents URL contacts.

EmailAddresses: An element of type **ArrayOfExtractedEmailAddresses**, as defined in section [2.2.4.7](#), that represents email contacts.

Addresses: An element of type **ArrayOfAddressesType**, as defined in section [2.2.4.3](#), that represents postal addresses of contacts.

ContactString: An element of type **string** that represents the display name of a contact.

2.2.4.18 t:EmailAddressEntityType Complex Type

The **EmailAddressEntityType** complex type specifies an email address. This type extends the **EntityType** complex type, as specified in section [2.2.4.21](#). [<47>](#)

```
<xs:complexType name="EmailAddressEntityType">
  <xs:complexContent>
```

```

<xs:extension base="t:EntityType">
  <xs:sequence>
    <xs:element name="EmailAddress" type="xs:string" minOccurs="0"/>
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

EmailAddress: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that specifies an email address.

2.2.4.19 t:EmailUserType Complex Type

The **EmailUserType** complex type specifies an email user. [<48>](#)

```

<xs:complexType name="EmailUserType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" />
    <xs:element name="UserId" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

```

Name: A element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents the name of the email user.

UserId: An element of type **string** that represents the user identifier of the email user.

2.2.4.20 t:EntityExtractionResultType Complex Type

The **EntityExtractionResultType** complex type specifies the result of an entity extraction. [<49>](#)

```

<xs:complexType name="EntityExtractionResultType">
  <xs:sequence>
    <xs:element name="Addresses" type="t:ArrayOfAddressEntitiesType" minOccurs="0"
maxOccurs="1" />
    <xs:element name="MeetingSuggestions" type="t:ArrayOfMeetingSuggestionsType"
minOccurs="0" maxOccurs="1" />
    <xs:element name="TaskSuggestions" type="t:ArrayOfTaskSuggestionsType" minOccurs="0"
maxOccurs="1" />
    <xs:element name="EmailAddresses" type="t:ArrayOfEmailAddressEntitiesType"
minOccurs="0" maxOccurs="1" />
    <xs:element name="Contacts" type="t:ArrayOfContactsType" minOccurs="0" maxOccurs="1" />
    <xs:element name="Urls" type="t:ArrayOfUrlEntitiesType" minOccurs="0" maxOccurs="1" />
    <xs:element name="PhoneNumbers" type="t:ArrayOfPhoneEntitiesType" minOccurs="0"
maxOccurs="1" />
  </xs:sequence>
</xs:complexType>

```

Addresses: An element of type **ArrayOfAddressEntitiesType**, as defined in section [2.2.4.2](#), that represents the address entities returned.

MeetingSuggestions: An element of type **ArrayOfMeetingSuggestionsType**, as defined in section [2.2.4.8](#), that represents the meeting suggestions returned.

TaskSuggestions: An element of type **ArrayOfTaskSuggestionsType**, as defined in section [2.2.4.12](#), that represents the task suggestions returned.

EmailAddresses: An element of type **ArrayOfEmailAddressEntitiesType**, as defined in section [2.2.4.5](#), that represents the email address entities returned.

Contacts: An element of type **ArrayOfContactsType**, as defined in section [2.2.4.4](#), that represents the contacts returned.

Urls: An element of type **ArrayOfUrlEntitiesType**, as defined in section [2.2.4.13](#), that represents the URL entities returned.

PhoneNumbers: An element of type **ArrayOfPhoneEntitiesType**, as defined in section [2.2.4.9](#), that represents the phone entities returned.

2.2.4.21 t:EntityType Complex Type

The **EntityType** complex type represents a single entity. Entities are text found in certain parts of a message, such as the subject or the body. [<50>](#)

```
<xs:complexType name="EntityType">
  <xs:sequence>
    <xs:element name="Position" type="t:EmailPositionType"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

Position: An element of type **EmailPositionType**, as defined in section [2.2.5.2](#), that specifies where the entity was found in the message.

2.2.4.22 t:FlagType Complex Type

The **FlagType** complex type specifies a flag indicating status, start date, due date, or completion date for an item. [<51>](#)

```
<xs:complexType name="FlagType">
  <xs:sequence>
    <xs:element name="FlagStatus" type="t:FlagStatusType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="StartDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="DueDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="CompleteDate" type="xs:dateTime" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

FlagStatus: An element of type **FlagStatusType**, as defined in [\[MS-OXWSOCONV\]](#) section 3.1.4.1.4.2, that represents the flag status.

StartDate: An element of type **dateTime**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.7, that represents the start date.

DueDate: An element of type **dateTime** that represents the due date.

CompleteDate: An element of type **dateTime** that represents the completion date.

If the **FlagStatus** element is set to **Flagged**, the **CompleteDate** element MUST not be set in the request, and the **StartDate** and **DueDate** elements MUST be set or unset in pair; if the **FlagStatus** element is set to **Complete**, the **StartDate** and **DueDate** elements MUST not be set in the request; if the **FlagStatus** element is set to **NotFlagged**, the **CompleteDate**, **StartDate**, and **DueDate** elements MUST not be set in the request. Otherwise, **ErrorInvalidArgument** ([\[MS-OXWSCDATA\]](#) section 2.2.5.23) will be returned.

2.2.4.23 t:ItemType Complex Type

The **ItemType** complex type specifies a generic item on the server. [<52>](#)

```
<xs:complexType name="ItemType">
  <xs:sequence>
    <xs:element name="MimeContent" type="t:MimeContentType" minOccurs="0"/>
    <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0"/>
    <xs:element name="ParentFolderId" type="t:FolderIdType" minOccurs="0"/>
    <xs:element name="ItemClass" type="t:ItemClassType" minOccurs="0"/>
    <xs:element name="Subject" type="xs:string" minOccurs="0"/>
    <xs:element name="Sensitivity" type="t:SensitivityChoicesType" minOccurs="0"/>
    <xs:element name="Body" type="t:BodyType" minOccurs="0"/>
    <xs:element name="Attachments" type="t:NonEmptyArrayOfAttachmentsType"
minOccurs="0"/>
    <xs:element name="DateTimeReceived" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="Size" type="xs:int" minOccurs="0"/>
    <xs:element name="Categories" type="t:ArrayOfStringsType" minOccurs="0"/>
    <xs:element name="Importance" type="t:ImportanceChoicesType" minOccurs="0"/>
    <xs:element name="InReplyTo" type="xs:string" minOccurs="0"/>
    <xs:element name="IsSubmitted" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsDraft" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsFromMe" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsResend" type="xs:boolean" minOccurs="0"/>
    <xs:element name="IsUnmodified" type="xs:boolean" minOccurs="0"/>
    <xs:element name="InternetMessageHeaders" type="t:NonEmptyArrayOfInternetHeadersType"
minOccurs="0"/>
    <xs:element name="DateTimeSent" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="DateTimeCreated" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="ResponseObjects" type="t:NonEmptyArrayOfResponseObjectsType"
minOccurs="0"/>
    <xs:element name="ReminderDueBy" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="ReminderIsSet" type="xs:boolean" minOccurs="0"/>
    <xs:element name="ReminderNextTime" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="ReminderMinutesBeforeStart" type="t:ReminderMinutesBeforeStartType"
minOccurs="0"/>
    <xs:element name="DisplayCc" type="xs:string" minOccurs="0"/>
    <xs:element name="DisplayTo" type="xs:string" minOccurs="0"/>
    <xs:element name="HasAttachments" type="xs:boolean" minOccurs="0"/>
    <xs:element name="ExtendedProperty" type="t:ExtendedPropertyType" minOccurs="0"
maxOccurs="unbounded"/>
    <xs:element name="Culture" type="xs:language" minOccurs="0"/>
    <xs:element name="EffectiveRights" type="t:EffectiveRightsType" minOccurs="0"/>
    <xs:element name="LastModifiedName" type="xs:string" minOccurs="0"/>
    <xs:element name="LastModifiedTime" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="IsAssociated" type="xs:boolean" minOccurs="0"/>
    <xs:element name="WebClientReadFormQueryString" type="xs:string" minOccurs="0"/>
    <xs:element name="WebClientEditFormQueryString" type="xs:string" minOccurs="0"/>
    <xs:element name="ConversationId" type="t:ItemIdType" minOccurs="0"/>
    <xs:element name="UniqueBody" type="t:BodyType" minOccurs="0"/>
    <xs:element name="Flag" type="t:FlagType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```



```

<xs:element name="StoreEntryId" type="xs:base64Binary" minOccurs="0"/>
<xs:element name="InstanceKey" type="xs:base64Binary" minOccurs="0"/>
<xs:element name="NormalizedBody" type="t:BodyType" minOccurs="0"/>
<xs:element name="EntityExtractionResult" type="t:EntityExtractionResultType"
minOccurs="0" />
<xs:element name="PolicyTag" type="t:RetentionTagType" minOccurs="0"/>
<xs:element name="ArchiveTag" type="t:RetentionTagType" minOccurs="0"/>
<xs:element name="RetentionDate" type="xs:dateTime" minOccurs="0"/>
<xs:element name="Preview" type="xs:string" minOccurs="0"/>
<xs:element name="RightsManagementLicenseData"
type="t:RightsManagementLicenseData" minOccurs="0" />
<xs:element name="NextPredictedAction" type="t:PredictedMessageType"
minOccurs="0" />
<xs:element name="GroupingAction" type="t:PredictedMessageType" minOccurs="0"/>
<xs:element name="BlockStatus" type="xs:boolean" minOccurs="0" />
<xs:element name="HasBlockedImages" type="xs:boolean" minOccurs="0" />
<xs:element name="TextBody" type="t:BodyType" minOccurs="0"/>
<xs:element name="IconIndex" type="t:IconIndexType" minOccurs="0"/>
</xs:sequence>
</xs:complexType>

```

The following table lists and describes the child elements of the **ItemType** complex type.

Element name	Type	Description
MimeContent	t:MimeContentType (section 2.2.4.27)	Specifies an instance of the MimeContentType complex type that contains the native MIME stream of an object that is represented in base64 encoding . This element is only applicable to PostItemType , MessageType , and CalendarItemType object. Or ErrorUnsupportedMimeConversion ([MS-OXWSCDATA] section 2.2.5.23) will be returned.
ItemId	t:ItemIdType (section 2.2.4.24)	Specifies an instance of the ItemIdType complex type that represents the unique identifier and specific version of an item in the server data store.
ParentFolderId	t:FolderIdType ([MS-OXWSCDATA] section 2.2.4.31)	Specifies an instance of the FolderIdType complex type that represents the identifier of the parent folder that contains an item or folder.
ItemClass	t:ItemClassType (section 2.2.5.4)	Specifies a string value that indicates the message class of an item. This value is "IPM.Contact" for contact item, "IPM.Appointment" for calendar item, "IPM.Post" for post item, "IPM.Task" for task item and

Element name	Type	Description
		"IPM.DistList" for distribution list item. If invalid values are set for these items in the CreateItem request, an ErrorObjectTypeChanged ([MS-OXWSCDATA] section 2.2.5.23) response code will be returned in the CreateItem response.
Subject	xs:string [XMLSCHEMA2]	Specifies a string value that represents the subject property of items. This value is limited to 255 characters. If the calendar item is a room mailbox, the Subject element contains the organizer's name.
Sensitivity	t:SensitivityChoicesType ([MS-OXWSCDATA] section 2.2.5.24)	Specifies one of the valid SensitivityChoicesType simple type enumeration values that indicate the sensitivity level of an item.
Body	t:BodyType ([MS-OXWSCDATA] section 2.2.4.17)	Specifies the body content and body content format of an item.
Attachments	t:NonEmptyArrayOfAttachmentsType ([MS-OXWSCDATA] section 2.2.4.43)	Specifies an array of items or files that are attached to an item. <53>
DateTimeReceived	xs:dateTime [XMLSCHEMA2]	Specifies the date and time that an item was received in a mailbox .
Size	xs:int [XMLSCHEMA2]	Specifies an integer value that represents the size of an item, in bytes.
Categories	t:ArrayOfStringsType ([MS-OXWSCDATA] section 2.2.4.11)	Specifies a string array that identifies the categories to which an item in a mailbox belongs.
Importance	t:ImportanceChoicesType (section 2.2.5.3)	Specifies one of the valid ImportanceChoicesType values to indicate the importance of an item.
InReplyTo	xs:string	Specifies a string value that contains the identifier of the item to which this item is a reply.
IsSubmitted	xs:boolean [XMLSCHEMA2]	Specifies a Boolean value that indicates whether an item has been submitted to the folder which is used for submission. Such as Outbox folder or Drafts folder . A text value of

Element name	Type	Description
		true indicates that an item has been submitted to the folder which is used for submission.
IsDraft	xs:boolean	Specifies a Boolean value that indicates whether an item has been sent. A text value of true indicates that an item has not been sent.
IsFromMe	xs:boolean	Specifies a Boolean value that indicates whether a user sent an item to himself or herself. A text value of true indicates that a user sent an item to himself or herself.
IsResend	xs:boolean	Specifies a Boolean value that indicates whether an item has previously been sent. A text value of true indicates that an item has previously been sent.
IsUnmodified	xs:boolean	Specifies a Boolean value that indicates whether an item has been modified. A text value of true indicates that an item has not been modified.
InternetMessageHeaders	t:NonEmptyArrayOfInternetHeader sType (section 2.2.4.29)	Specifies an array of the type InternetHeaderType ([MS-OXWSCDATA] section 2.2.4.35) that represents the collection of all Internet message headers, as described in [RFC2822] section 2.2, that are contained in an item in a mailbox. It can only be retrieved by GetItem (section 3.1.4.4) operation.
DateTimeSent	xs:dateTime	Specifies the date and time when an item in a mailbox was sent.
DateTimeCreated	xs:dateTime	Specifies the date and time when an item in a mailbox was created.
ResponseObjects	t:NonEmptyArrayOfResponseObject sType (section 2.2.4.30)	Specifies an array of type ResponseObjectType ([MS-OXWSCDATA] section 2.2.4.59) that contains a collection of all the response objects that represent the applicable actions for an item.
ReminderDueBy	xs:dateTime	Specifies an instance of the dateTime structure that represents the date and time

Element name	Type	Description
		when an event is to occur. This is used by the ReminderMinutesBeforeStart element (as specified below) to determine when the reminder is displayed.
ReminderIsSet	xs:boolean	Specifies a Boolean value that indicates whether a reminder has been set for an item. A text value of true indicates that a reminder has been set for an item.
ReminderNextTime	xs:dateTime	Specifies the date and time for the next reminder. <54>
ReminderMinutesBeforeStart	t:ReminderMinutesBeforeStartType (section 2.2.5.5)	Specifies an int value that indicates the number of minutes before an event occurs when a reminder is displayed.
DisplayCc	xs:string	Specifies the display string that is used for the contents of the Cc box. This is the concatenated string of all carbon copy (Cc) recipient display names, separated by "; ".
DisplayTo	xs:string	Specifies the display string that is used for the contents of the To box. This is the concatenated string of all To recipient display names, separated by "; ".
HasAttachments	xs:boolean	Specifies a Boolean value that indicates whether an item has at least one attachment. A text value of true indicates that an item has at least one attachment.
ExtendedProperty	t:ExtendedPropertyType ([MS-OXWSXPROP] section 2.1.5)	Specifies an array of ExtendedPropertyType elements that identify extended Messaging Application Programming Interface (MAPI) properties.
Culture	xs:language ([XMLSCHEMA2])	Specifies the culture for an item in a mailbox.
EffectiveRights	t:EffectiveRightsType ([MS-OXWSCDATA] section 2.2.4.25)	Specifies an EffectiveRightsType element that represents the client's rights based on the permission settings for an item or folder.
LastModifiedName	xs:string	Specifies a string value that

Element name	Type	Description
		contains the name of the user who last modified an item.
LastModifiedTime	xs:dateTime	Specifies an instance of the dateTime structure that represents the date and time when an item was last modified.
IsAssociated	xs:boolean	Specifies a value that indicates whether the item is associated with a folder. A text value of true indicates that the item is associated with a folder. .<55>
WebClientReadFormQueryString	xs:string	Specifies a query string that identifies a read form accessible by using a Web browser. It is read-only for client. .<56>
WebClientEditFormQueryString	xs:string	Specifies a query string that identifies an edit form accessible by using a Web browser. It is read-only for client. .<57>
ConversationId	t:ItemIdType	Specifies the ID of the conversation that an item is part of. For more information on conversations, see [MS-OXWSCONV]
UniqueBody	t:BodyType ([MS-OXWSCDATA] section 2.2.4.17)	Specifies the body part that is unique to the conversation that an item is part of. .<58> For more information on conversations, see [MS-OXWSCONV]
Flag	t:FlagType (section 2.2.4.22)	Specifies a flag indicating status, start date, due date or completion date for an item. .<59>
StoreEntryId	xs:base64Binary ([XMLSCHEMA2])	Specifies the entry ID of the store that hosts an item. This element SHOULD .<60> be included. It is read-only for the client.
InstanceKey	xs:base64Binary	Specifies the key for an instance. .<61>
NormalizedBody	t:BodyType ([MS-OXWSCDATA] section 2.2.4.17)	Specifies the version of the body of a message visible in the preview pane when accessing a message over the Internet. .<62>
EntityExtractionResult	t:EntityExtractionResultType (section 2.2.4.20)	Specifies the result of an entity extraction. .<63>

Element name	Type	Description
PolicyTag	t:RetentionTagType ([MS-OXWSURPT] section 2.2.4.1)	Specifies the retention policy for the item. <64>
ArchiveTag	t:RetentionTagType	Specifies an archive tag. <65>
RetentionDate	xs:dateTime	Specifies the retention date for an item. <66>
Preview	xs:string	Specifies the first 256 characters of the body of a message for preview without opening the message. <67>
RightsManagementLicenseData	t:RightsManagementLicenseDataType (section 2.2.4.38)	Specifies rights management license data. <68>
NextPredictedAction	t:PredictedMessageActionType ([MS-OXWSCDATA] section 2.2.5.21)	Specifies the next predicted action for the item. <69>
GroupingAction	t:PredictedMessageActionType	Specifies that the next predicted action is grouping items. <70>
BlockStatus	xs:boolean	Indicates whether images are blocked. <71>
HasBlockedImages	xs:boolean	Indicates whether the item has blocked images. <72>
TextBody	t:BodyType	Specifies the text body of the item. <73>
IconIndex	t:IconIndexType ([MS-OXWSCDATA] section 2.2.5.16)	Specifies the index of the icon for the item. <74>

2.2.4.24 t:ItemIdType Complex Type

The **ItemIdType** complex type specifies an item identifier of an item. The **ItemIdType** complex type extends the **BaseItemIdType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.13).

```
<xs:complexType name="ItemIdType">
  <xs:complexContent>
    <xs:extension
      base="t:BaseItemIdType"
      >
      <xs:attribute name="Id"
        type="xs:string"
        use="required"
        />
      <xs:attribute name="ChangeKey"
        type="xs:string"
        use="optional"
        />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the attributes of the **ItemIdType** complex type.

Attribute name	Type	Description
Id	xs:string [XMLSCHEMA2]	Specifies an item identifier. The maximum size of this attribute is 512 bytes after base64 encoding.
ChangeKey	xs:string	Specifies a specific version of an item. The maximum size of this attribute is 512 bytes after base64 encoding.

2.2.4.25 t:ManagementRoleType Complex Type

The **ManagementRoleType** complex type specifies the roles that are associated with a user or application. [<75>](#)

```
<xs:complexType name="ManagementRoleType">
  <xs:sequence>
    <xs:element name="UserRoles" type="t:NonEmptyArrayOfRoleType" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="ApplicationRoles" type="t:NonEmptyArrayOfRoleType" minOccurs="0"
maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>
```

The following table lists and describes the elements of the **ManagementRoleType** complex type.

Element name	Type	Description
UserRoles	t:NonEmptyArrayOfRoleType (section 2.2.4.31)	Specifies an array of elements of type string that specifies a set of user roles.
ApplicationRoles	t:NonEmptyArrayOfRoleType (section 2.2.4.31)	Specifies an array of elements of type string that specifies a set of application roles.

2.2.4.26 t:MeetingSuggestionType Complex Type

The **MeetingSuggestionType** complex type specifies a meeting suggestion. This type extends the **EntityType** complex type, as specified in section [2.2.4.21](#). [<76>](#)

```
<xs:complexType name="MeetingSuggestionType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="Attendees" type="t:ArrayOfEmailUsersType" minOccurs="0"
maxOccurs="1" />
        <xs:element name="Location" type="xs:string" minOccurs="0" />
        <xs:element name="Subject" type="xs:string" minOccurs="0" />
        <xs:element name="MeetingString" type="xs:string" minOccurs="0" />
        <xs:element name="StartTime" type="xs:dateTime" minOccurs="0" />
        <xs:element name="EndTime" type="xs:dateTime" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
```

```
</xs:complexType>
```

Attendees: An element of type **ArrayOfEmailUsersType**, as defined in section [2.2.4.6](#), that represents those invited to the meeting.

Location: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents the location of the meeting.

Subject: An element of type **string** that represents the subject of the meeting.

MeetingString: An element of type **string** that represents the name of the meeting.

StartTime: An element of type **dateTime**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.7, that represents the start time of the meeting.

EndTime: An element of type **dateTime** that represents the ending time of the meeting.

2.2.4.27 t:MimeContentType Complex Type

The **MimeContentType** complex type specifies the native MIME stream of an object that is represented in base64 encoding.

```
<xs:complexType name="MimeContentType">
  <xs:simpleContent>
    <xs:extension
      base="xs:string"
    >
      <xs:attribute name="CharacterSet"
        type="xs:string"
        use="optional"
      />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

The following table lists and describes the attributes of the **MimeContentType** complex type.

Attribute name	Type	Description
CharacterSet	xs:string [XMLSCHEMA2]	Specifies the International Standards Organization (ISO) name of the character set that is used in a MIME message .

2.2.4.28 t:NonEmptyArrayOfBaseItemIdsType Complex Type

The **NonEmptyArrayOfBaseItemIdsType** complex type specifies a collection of items.

```
<xs:complexType name="NonEmptyArrayOfBaseItemIdsType">
  <xs:choice maxOccurs="unbounded">
    <xs:element name="ItemId" type="t:ItemIdType"/>
    <xs:element name="OccurrenceItemId" type="t:OccurrenceItemIdType"/>
    <xs:element name="RecurringMasterItemId" type="t:RecurringMasterItemIdType"/>
    <xs:element name="RecurringMasterItemIdRanges"
      type="t:RecurringMasterItemIdRangesType"/>
  </xs:choice>
```



```
</xs:complexType>
```

The following table lists and describes the child elements of the **NonEmptyArrayOfBaseItemIdsType** complex type.

Element name	Type	Description
ItemId	t:ItemIdType (section 2.2.4.24)	Specifies the item identifier.
OccurrenceItemId	t:OccurrenceItemIdType (section 2.2.4.32)	Specifies a single occurrence of a recurring item.
RecurringMasterItemId	t:RecurringMasterItemIdType (section 2.2.4.36)	Specifies a recurring master item by indicating the identifier of one of the master item's related occurrence items.
RecurringMasterItemIdRanges	RecurringMasterItemIdRangesType (section 2.2.4.37)	Specifies a union of all occurrences of a recurring master, which fit into at least one of the specified ranges. <77>

2.2.4.29 t:NonEmptyArrayOfInternetHeadersType Complex Type

The **NonEmptyArrayOfInternetHeadersType** complex type specifies the collection of all Internet message headers that are contained in an item.

```
<xs:complexType name="NonEmptyArrayOfInternetHeadersType">
  <xs:sequence>
    <xs:element name="InternetMessageHeader"
      type="t:InternetHeaderType"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists and describes the child elements of the **NonEmptyArrayOfInternetHeadersType** complex type.

Element name	Type	Description
InternetMessageHeader	t:InternetHeaderType ([MS-OXWSCDATA] section 2.2.4.35)	Specifies a single Internet message header.

2.2.4.30 t:NonEmptyArrayOfResponseObjectsType Complex Type

The **NonEmptyArrayOfResponseObjectsType** complex type specifies an array of response objects.

```

<xs:complexType name="NonEmptyArrayOfResponseObjectsType">
  <xs:choice
    maxOccurs="unbounded"
    minOccurs="0"
  >
    <xs:element name="AcceptItem"
      type="t:AcceptItemType"
    />
    <xs:element name="TentativelyAcceptItem"
      type="t:TentativelyAcceptItemType"
    />
    <xs:element name="DeclineItem"
      type="t:DeclineItemType"
    />
    <xs:element name="ReplyToItem"
      type="t:ReplyToItemType"
    />
    <xs:element name="ForwardItem"
      type="t:ForwardItemType"
    />
    <xs:element name="ReplyAllToItem"
      type="t:ReplyAllToItemType"
    />
    <xs:element name="CancelCalendarItem"
      type="t:CancelCalendarItemType"
    />
    <xs:element name="RemoveItem"
      type="t:RemoveItemType"
    />
    <xs:element name="SuppressReadReceipt"
      type="t:SuppressReadReceiptType"
    />
    <xs:element name="PostReplyItem"
      type="t:PostReplyItemType"
    />
    <xs:element name="AcceptSharingInvitation"
      type="t:AcceptSharingInvitationType"
    />
  </xs:choice>
</xs:complexType>

```

The following table lists and describes the child elements of the **NonEmptyArrayOfResponseObjectsType** complex type.

Element name	Type	Description
AcceptItem	t:AcceptItemType ([MS-OXWSMTGS] section 2.2.4.1)	Specifies an Accept reply to a meeting request.
TentativelyAcceptItem	t:TentativelyAcceptItemType ([MS-OXWSMTGS] section 2.2.4.22)	Specifies a Tentative reply to a meeting request.
DeclineItem	t:DeclineItemType ([MS-OXWSMTGS] section 2.2.4.9)	Specifies a Decline reply to a meeting request.
ReplyToItem	t:ReplyToItemType ([MS-OXWSCDATA] section 2.2.4.56)	Specifies a reply to the sender of an item.

Element name	Type	Description
ForwardItem	t:ForwardItemType ([MS- OXWSCDATA] section 2.2.4.33)	Specifies a server store item to be forwarded to recipients (2).
ReplyAllToItem	t:ReplyAllToItemType ([MS- OXWSCDATA] section 2.2.4.54)	Specifies a reply to the sender and all identified recipients (2) of an item in the server store.
CancelCalendarItem	t:CancelCalendarItemType ([MS- OXWSMTGS] section 2.2.4.8)	Specifies the response object that is used to cancel a meeting.
RemoveItem	t:RemoveItemType ([MS- OXWSMTGS] section 2.2.4.21)	Specifies a response object that is used to remove a meeting item when a meeting cancellation message is received.
SuppressReadReceipt	t:SuppressReadReceiptType ([MS- OXWSCDATA] section 2.2.4.61)	Specifies that read receipts are to be suppressed.
PostReplyItem	t:PostReplyItemType ([MS- OXWSPOST] section 2.2.4.3)	Specifies a reply to a post item.
AcceptSharingInvitation	t:AcceptSharingInvitationType ([MS- OXWSCDATA] section 2.2.4.3)	Specifies a response object that is used to accept an invitation that allows access to another user's calendar or contacts data.

2.2.4.31 t:NonEmptyArrayOfRoleType Complex Type

The **NonEmptyArrayOfRoleType** complex type specifies an array of role types. [<78>](#)

```
<xs:complexType name="NonEmptyArrayOfRoleType">
  <xs:sequence>
    <xs:element name="Role" type="xs:string" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
```

The following table lists and describes the child elements of the **NonEmptyArrayOfRoleType** complex type.

Element name	Type	Description
Role	xs:string [XMLSCHEMA2]	Specifies the name of a role.

2.2.4.32 t:OccurrenceItemIdType Complex Type

The **OccurrenceItemIdType** complex type specifies a single occurrence of a recurring item. The **OccurrenceItemIdType** complex type extends the **BaseItemIdType** complex type ([MS-[OXWSCDATA](#)] section 2.2.4.13).

```
<xs:complexType name="OccurrenceItemIdType">
  <xs:complexContent>
```

```

<xs:extension
  base="t:BaseItemIdType"
>
  <xs:attribute name="RecurringMasterId"
    type="t:DerivedItemIdType"
    use="required"
  />
  <xs:attribute name="ChangeKey"
    type="xs:string"
    use="optional"
  />
  <xs:attribute name="InstanceIndex"
    type="xs:int"
    use="required"
  />
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the attributes of the **OccurrenceItemIdType** complex type.

Attribute name	Type	Description
RecurringMasterId	t:DerivedItemIdType (section 2.2.5.1)	Specifies the identifier of the recurring master of a recurring item.
ChangeKey	xs:string [XMLSCHEMA2]	Specifies a specific version of a single occurrence of a recurring master item.
InstanceIndex	xs:int [XMLSCHEMA2]	Specifies the index of an item occurrence.

2.2.4.33 t:OccurrencesRangeType Complex Type

The **OccurrencesRangeType** complex type specifies a range of occurrences. [<79>](#)

```

<xs:complexType name="OccurrencesRangeType">
  <xs:attribute name="Start" type="xs:dateTime" use="optional"/>
  <xs:attribute name="End" type="xs:dateTime" use="optional"/>
  <xs:attribute name="Count" type="xs:int" use="optional"/>
  <xs:attribute name="CompareOriginalStartTime" type="xs:boolean" use="optional"/>
</xs:complexType>

```

Start: An attribute of type **dateTime**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.7, that represents the start of the range.

End: An attribute of type **dateTime** that represents the end of the range.

Count: An attribute of type **integer**, as defined in [\[XMLSCHEMA2\]](#) section 3.3.13, that represents the number of occurrences. The default value is 1.

CompareOriginalStartTime: An attribute of type **boolean**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.2, that indicates whether to compare the specified ranges to either an original start time or a pair of start and end values. The default value of the **CompareOriginalStartTime** attribute is "false".

2.2.4.34 t:PhoneType Complex Type

The **PhoneType** complex type specifies a phone number and its type. [<80>](#)

```
<xs:complexType name="PhoneType">
  <xs:sequence>
    <xs:element name="OriginalPhoneString" type="xs:string" minOccurs="0" />
    <xs:element name="PhoneString" type="xs:string" minOccurs="0" />
    <xs:element name="Type" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>
```

OriginalPhoneString: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents the original phone number.

PhoneString: An element of type **string** that represents the current phone number.

Type: An element of type **string** that represents the type of phone, for example, "Business" or "Home".

2.2.4.35 t:PhoneEntityType Complex Type

The **PhoneEntityType** complex type specifies a phone entity. This type extends the **EntityType** complex type, as specified in section [2.2.4.21.<81>](#)

```
<xs:complexType name="PhoneEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="OriginalPhoneString" type="xs:string" minOccurs="0"/>
        <xs:element name="PhoneString" type="xs:string" minOccurs="0"/>
        <xs:element name="Type" type="xs:string" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

OriginalPhoneString: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents the original phone number.

PhoneString: An element of type **string** that represents the current phone number.

Type: An element of type **string** that represents the type of phone number, for example, "Business" or "Home".

2.2.4.36 t:RecurringMasterItemIdType Complex Type

The **RecurringMasterItemIdType** complex type specifies a recurring master item by indicating the identifiers of one of the master item's related occurrence items. The **RecurringMasterItemIdType** complex type extends the **BaseItemIdType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.13).

```
<xs:complexType name="RecurringMasterItemIdType">
  <xs:complexContent>
    <xs:extension
      base="t:BaseItemIdType"
```

```

    >
    <xs:attribute name="OccurrenceId"
      type="t:DerivedItemIdType"
      use="required"
    />
    <xs:attribute name="ChangeKey"
      type="xs:string"
      use="optional"
    />
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the attributes of the **RecurringMasterItemIdType** complex type.

Attribute name	Type	Description
OccurrenceId	t:DerivedItemIdType (section 2.2.5.1)	Specifies a single occurrence of a recurring master item.
ChangeKey	xs:string [XMLSCHEMA2]	Specifies a specific version of a single occurrence of a recurring master item.

2.2.4.37 t:RecurringMasterItemIdRangesType Complex Type

The **RecurringMasterItemIdRangesType** complex type specifies a union of all occurrences of a recurring master item, which fit into at least one of the specified ranges. This type extends the **ItemIdType** complex type, as specified by section [2.2.4.24.<82>](#)

```

<xs:complexType name="RecurringMasterItemIdRangesType">
  <xs:complexContent>
    <xs:extension base="t:ItemIdType">
      <xs:sequence>
        <xs:element name="Ranges" type="t:ArrayOfOccurrenceRangesType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table describes the child element of the **RecurringMasterItemIdRangesType** complex type.

Element	Type	Description
Ranges	t:ArrayOfOccurrenceRangesType (section 2.2.4.11)	Specifies an array of occurrence ranges.

2.2.4.38 t:RightsManagementLicenseDataType Complex Type

The **RightsManagementLicenseDataType** complex type specifies information about the rights management license. [<83>](#)

```

<xs:complexType name="RightsManagementLicenseDataType">
  <xs:sequence>
    <xs:element name="RightsManagedMessageDecryptionStatus" type="xs:int" minOccurs="0" />
    <xs:element name="RmsTemplateId" type="xs:string" minOccurs="0" />
    <xs:element name="TemplateName" type="xs:string" minOccurs="0" />
    <xs:element name="TemplateDescription" type="xs:string" minOccurs="0" />
    <xs:element name="EditAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ReplyAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ReplyAllAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ForwardAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ModifyRecipientsAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ExtractAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="PrintAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ExportAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ProgrammaticAccessAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="IsOwner" type="xs:boolean" minOccurs="0" />
    <xs:element name="ContentOwner" type="xs:string" minOccurs="0" />
    <xs:element name="ContentExpiryDate" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

```

RightsManagedMessageDecryptionStatus: An element of type **int**, as defined in [\[XMLSCHEMA2\]](#), that specifies the decryption status of the message.

RmsTemplateId: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that specifies the identifier of the Rights Management template.

TemplateName: An element of type **string** that specifies the name of the Rights Management template.

TemplateDescription: An element of type **string** that specifies the description of the Rights Management template.

EditAllowed: An element of type **boolean**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.2, that indicates whether the information is editable.

ReplyAllowed: An element of type **boolean** that indicates whether replying is enabled.

ReplyAllAllowed: An element of type **boolean** that indicates whether replying to all recipients (2) is enabled.

ForwardAllowed: An element of type **boolean** that indicates whether forwarding is enabled.

ModifyRecipientsAllowed: An element of type **boolean** that indicates whether modifying the list of recipients (2) is enabled.

ExtractAllowed: An element of type **boolean** that indicates whether extracting is enabled.

PrintAllowed: An element of type **boolean** that indicates whether printing is enabled.

ExportAllowed: An element of type **boolean** that indicates whether exporting is enabled.

ProgrammaticAccessAllowed: An element of type **boolean** that indicates whether programmatic access is enabled.

IsOwner: An element of type **boolean** that indicates whether a user is the owner.

ContentOwner: An element of type **string** that represents the name of the content owner.

ContentExpiryDate: An element of type **string** represents the expiration date of the content.

2.2.4.39 t:SmartResponseBaseType Complex Type

The **SmartResponseBaseType** complex type specifies the base type for the **ReplyToItemType** complex type ([MS-OXWSCDATA] section 2.2.4.56), the **ReplyAllToItemType** complex type ([MS-OXWSCDATA] section 2.2.4.54), the **ForwardItemType** complex type ([MS-OXWSCDATA] section 2.2.4.33), and the **CancelCalendarItemType** complex type, as specified in [MS-OXWSMTGS] section 2.2.4.8. The **SmartResponseBaseType** complex type extends the **ResponseObjectType** complex type ([MS-OXWSCDATA] section 2.2.4.59).

```
<xs:complexType name="SmartResponseBaseType">
  <xs:complexContent>
    <xs:restriction base="t:ResponseObjectType">
      <xs:sequence>
        <xs:element name="Subject" type="xs:string" minOccurs="0" />
        <xs:element name="Body" type="t:BodyType" minOccurs="0" />
        <xs:element name="ToRecipients" type="t:ArrayOfRecipientsType" minOccurs="0" />
        <xs:element name="CcRecipients" type="t:ArrayOfRecipientsType" minOccurs="0" />
        <xs:element name="BccRecipients" type="t:ArrayOfRecipientsType" minOccurs="0" />
        <xs:element name="IsReadReceiptRequested" type="xs:boolean" minOccurs="0" />
        <xs:element name="IsDeliveryReceiptRequested" type="xs:boolean" minOccurs="0" />
        <xs:element name="From" type="t:SingleRecipientType" minOccurs="0" />
        <xs:element name="ReferenceItemId" type="t:ItemIdType" minOccurs="0" />
      </xs:sequence>
      <xs:attribute name="ObjectName" type="xs:string" use="prohibited" />
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **SmartResponseBaseType** complex type.

Element name	Type	Description
Subject	xs:string [XMLSCHEMA2]	Specifies the subject.
Body	t:BodyType ([MS-OXWSCDATA] section 2.2.4.17)	Specifies the body content of an item.
ToRecipients	t:ArrayOfRecipientsType ([MS-OXWSCDATA] section 2.2.4.9)	Specifies a collection of recipients of an email message. This property is required for sending a message.
CcRecipients	t:ArrayOfRecipientsType	Specifies a collection of carbon copy (Cc) recipients of an email message.
BccRecipients	t:ArrayOfRecipientsType	Specifies a collection of blind carbon copy (Bcc) recipients of an email message.
IsReadReceiptRequested	xs:boolean [XMLSCHEMA2]	Specifies whether a read receipt is requested. A text value of true indicates that a read receipt is requested.

Element name	Type	Description
IsDeliveryReceiptRequested	xs:boolean	Specifies whether a delivery receipt is requested. A text value of true indicates that a delivery receipt is requested.
From	t:SingleRecipientType ([MS-OXWSCDATA] section 2.2.4.60)	Specifies the addressee from whom a message was sent.
ReferenceItemId	t:ItemIdType (section 2.2.4.24)	Specifies the item identifier that is related to a response object.

The following table lists and describes the attributes of the **SmartResponseBaseType** complex type.

Attribute name	Type	Description
ObjectName	xs:string [XMLSCHEMA2]	Specifies the name of the reply object class as an English language string.

2.2.4.40 t:SmartResponseType Complex Type

The **SmartResponseType** complex type specifies the base type for the **ReplyToItemType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.56), the **ReplyAllToItemType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.54), the **ForwardItemType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.33), and the **CancelCalendarItemType** complex type, as specified in [\[MS-OXWSMTGS\]](#) section 2.2.4.8. The **SmartResponseType** complex type extends the **SmartResponseBaseType** complex type, as specified in section [2.2.4.39](#).

```
<xs:complexType name="SmartResponseType">
  <xs:complexContent>
    <xs:extension base="t:SmartResponseBaseType">
      <xs:sequence>
        <xs:element name="NewBodyContent" type="t:BodyType" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **SmartResponseType** complex type.

Element name	Type	Description
NewBodyContent	t:BodyType ([MS-OXWSCDATA] section 2.2.4.17)	Specifies the new body content of a message response object.

2.2.4.41 t:TaskSuggestionType Complex Type

The **TaskSuggestionType** complex type specifies a task suggestion. This type extends the **EntityType** complex type, as specified in section [2.2.4.21](#).<84>

```

<xs:complexType name="TaskSuggestionType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="TaskString" type="xs:string" minOccurs="0" />
        <xs:element name="Assignees" type="t:ArrayOfEmailUsersType" minOccurs="0"
maxOccurs="1" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

TaskString: A element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that represents the name of the task.

Assignees: An element of type **ArrayOfEmailUsersType**, as defined in section 2.2.4.31, that represents the persons that are to accomplish the task.

2.2.4.42 m:UpdateItemResponseMessageType

The **UpdateItemResponseMessageType** complex type specifies the status and result of a single call to the **UpdateItem** operation, as specified in section [2.2.4.37](#). The

UpdateItemResponseMessageType complex type extends the **ItemInfoResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.37).

```

<xs:complexType name="UpdateItemResponseMessageType">
  <xs:complexContent>
    <xs:extension base="m:ItemInfoResponseMessageType">
      <xs:sequence>
        <xs:element name="ConflictResults" type="t:ConflictResultsType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **UpdateItemResponseMessageType** complex type.

Element name	Type	Description
ConflictResults	t:ConflictResultsType (section 2.2.4.16)	Specifies the number of conflicts in the result of a single call.

2.2.4.43 t:UrlEntityType Complex Type

The **UrlEntityType** complex type specifies a URL entity. This type extends the **EntityType** complex type, as specified in section [2.2.4.21.<85>](#)

```

<xs:complexType name="UrlEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="Url" type="xs:string" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

URL: An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that specifies a URL.

2.2.5 Simple Types

The following table lists the set of common XML schema simple type definitions that are defined by this specification. XML schema simple type definitions that are specific to a particular operation are defined with the operation.

Simple type	Description
DerivedItemIdType	Specifies the identifier of the recurring master of a recurring item.
EmailPositionType	Specifies a position in an email item.
ImportanceChoicesType	Specifies the levels of importance for an item.
ItemClassType	Specifies an item class.
ReminderMinutesBeforeStartType	Specifies the number of minutes before an event occurs when a reminder is displayed.

2.2.5.1 t:DerivedItemIdType Simple Type

The **DerivedItemIdType** simple type specifies the identifier of the recurring master of a recurring item.

```

<xs:simpleType name="DerivedItemIdType">
  <xs:restriction
    base="xs:string"
  />
</xs:simpleType>

```

2.2.5.2 t:EmailPositionType Simple Type

The **EmailPositionType** simple type specifies where an entity was found in a message.

```

xs:simpleType name="EmailPositionType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="LatestReply"/>
    <xs:enumeration value="Other"/>
    <xs:enumeration value="Subject"/>
    <xs:enumeration value="Signature"/>
  </xs:restriction>
</xs:simpleType>

```

The following table lists and describes the values defined by the **EmailPositionType** simple type.

Value	Meaning
LatestReply	Specifies the latest reply.
Other	Specifies an unlisted position.
Subject	Specifies the subject of the email.
Signature	Specifies the signature of the email.

2.2.5.3 t:ImportanceChoicesType Simple Type

The **ImportanceChoicesType** simple type specifies the levels of importance for an item.

```
<xs:simpleType name="ImportanceChoicesType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="High"
    />
    <xs:enumeration
      value="Low"
    />
    <xs:enumeration
      value="Normal"
    />
  </xs:restriction>
</xs:simpleType>
```

The following table lists the values that are defined by the **ImportanceChoicesType** simple type.

Value	Meaning
High	Specifies high importance.
Low	Specifies low importance.
Normal	Specifies normal importance.

2.2.5.4 t:ItemClassType Simple Type

The **ItemClassType** simple type specifies an item class.

```
<xs:simpleType name="ItemClassType">
  <xs:restriction
    base="xs:string"
  />
</xs:simpleType>
```

2.2.5.5 t:ReminderMinutesBeforeStartType Simple Type

The **ReminderMinutesBeforeStartType** simple type specifies the number of minutes before an event occurs when a reminder is displayed.

```
<xs:simpleType name="ReminderMinutesBeforeStartType">
  <xs:union>
    <xs:simpleType
      id="ReminderMinutesBeforeStartType"
    >
      <xs:restriction
        base="xs:int"
      >
        <xs:minInclusive
          value="0"
        />
        <xs:maxInclusive
          value="2629800"
        />
      </xs:restriction>
    </xs:simpleType>
    <xs:simpleType
      id="ReminderMinutesBeforeStartMarkerType"
    >
      <xs:restriction
        base="xs:int"
      >
        <xs:minInclusive
          value="0"
        />
        <xs:maxInclusive
          value="1525252321"
        />
      </xs:restriction>
    </xs:simpleType>
  </xs:union>
</xs:simpleType>
```

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 ExchangeServicePortType Server Details

The Core Items Web Service Protocol defines a single WSDL port type with seven operations. Those operations enable client implementations to create, get, update, delete, move, send, or copy items on the server.

3.1.1 Abstract Data Model

None.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the **WSDL operations** as defined by this specification.

Operation name	Description
CopyItem	Copies items on the server.
CreateItem	Creates items on the server.
DeleteItem	Deletes items on the server.
GetItem	Gets items on the server.
MarkAllItemsAsRead	Marks all the items in a folder as read or unread.
MarkAsJunk	Marks an item as junk. <86>
MoveItem	Moves items on the server.
SendItem	Sends messages and post items on the server.
UpdateItem	Updates items on the server.
UpdateItemInRecoverableItems	Updates an item in the recoverable items folder. <87>

3.1.4.1 CopyItem Operation

The **CopyItem** operation copies items on the server.

The following is the WSDL port type specification for the **CopyItem** operation.

```

<wsdl:operation name="CopyItem">
  <wsdl:input message="tns:CopyItemSoapIn" />
  <wsdl:output message="tns:CopyItemSoapOut" />
</wsdl:operation>

```

The following is the WSDL binding specification for the **CopyItem** operation.

```

<wsdl:operation name="CopyItem">
  <soap:operation
  soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem"/>
  <wsdl:input>
    <soap:header message="tns:CopyItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:CopyItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:CopyItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="CopyItemResult" use="literal"/>
    <soap:header message="tns:CopyItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

3.1.4.1.1 Messages

The following table lists the WSDL message definitions that are specific to the **CopyItem** operation.

Message name	Description
CopyItemSoapIn	Specifies the SOAP message that requests to copy items in a mailbox.
CopyItemSoapOut	Specifies the SOAP message that is returned by the server in response.

3.1.4.1.1.1 tns:CopyItemSoapIn Message

The **CopyItemSoapIn** WSDL message specifies the **CopyItem** operation request to copy items on the server.

```

<wsdl:message name="CopyItemSoapIn">
  <wsdl:part name="request" element="tns:CopyItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **CopyItemSoapIn** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem>.

The parts of the **CopyItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:CopyItem (section 3.1.4.1.2.1)	Specifies the SOAP body of a request.

Part name	Element/type	Description
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a CopyItem operation request.

3.1.4.1.1.2 tns:CopyItemSoapOut Message

The **CopyItemSoapOut** WSDL message specifies the server response to the **CopyItem** operation request to copy items on the server.

```
<wsdl:message name="CopyItemSoapOut">
  <wsdl:part name="CopyItemResult" element="tns:CopyItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **CopyItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem>.

The parts of the **CopyItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
CopyItemResult	tns:CopyItemResponse (section 3.1.4.1.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for a response.

3.1.4.1.2 Elements

The following table lists the XML schema element definitions that are specific to the **CopyItem** operation.

Element name	Description
CopyItem	Specifies a request to copy items in a mailbox.
CopyItemResponse	Specifies a response to a CopyItem operation request.

3.1.4.1.2.1 m:CopyItem Element

The **CopyItem** element specifies a request to copy items in a mailbox.

```
<xs:element name="CopyItem"
  type="m:CopyItemType"/>
```



```
</>
```

3.1.4.1.2.2 m:CopyItemResponse Element

The **CopyItemResponse** element specifies a response to a **CopyItem** operation request.

```
<xs:element name="CopyItemResponse"
  type="m:CopyItemResponseType"
/>
```

3.1.4.1.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **CopyItem** operation.

Complex type name	Description
CopyItemResponseType	Specifies the response that is returned by the CopyItem operation.
CopyItemType	Specifies an operation to copy items in a mailbox.

3.1.4.1.3.1 m:CopyItemResponseType Complex Type

The **CopyItemResponseType** complex type specifies the response that is returned by the **CopyItem** operation. The **CopyItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="CopyItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.1.3.2 m:CopyItemType Complex Type

The **CopyItemType** complex type specifies a request to copy items in a mailbox. The **CopyItemType** complex type extends the **BaseMoveCopyItemType** complex type, as specified in section [2.2.4.15](#).

```
<xs:complexType name="CopyItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseMoveCopyItemType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 CreateItem Operation

The **CreateItem** operation creates items on the server.

The following is the WSDL port type specification for the **CreateItem** operation.

```
<wsdl:operation name="CreateItem">
  <wsdl:input message="tns:CreateItemSoapIn" />
  <wsdl:output message="tns:CreateItemSoapOut" />
</wsdl:operation>
```

The following is the WSDL binding specification for the **CreateItem** operation.

```
<wsdl:operation name="CreateItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem"/>
  <wsdl:input>
    <soap:header message="tns:CreateItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:CreateItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:CreateItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:CreateItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="CreateItemResult" use="literal"/>
    <soap:header message="tns:CreateItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.2.1 Messages

The following table lists the WSDL message definitions that are specific to the **CreateItem** operation.

Message name	Description
CreateItemSoapIn	Specifies the SOAP message request to create items.

Message name	Description
CreateItemSoapOut	Specifies the SOAP message that is returned by the server in response to a CreateItemSoapIn operation request.

3.1.4.2.1.1 tns:CreateItemSoapIn Message

The **CreateItemSoapIn** WSDL message specifies the **CreateItem** operation request to create items on the server.

```
<wsdl:message name="CreateItemSoapIn">
  <wsdl:part name="request" element="tns:CreateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
```

The **CreateItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem>.

The parts of the **CreateItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:CreateItem (section 3.1.4.2.3.2)	Specifies the SOAP body of a request.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a CreateItem operation (section 3.1.4.2) request.
TimeZoneContext	t:TimeZoneContext ([MS-OXWGTZ] section 2.2.4.11)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone.

3.1.4.2.1.2 tns:CreateItemSoapOut Message

The **CreateItemSoapOut** WSDL message specifies the server response to a **CreateItem** operation request to create items on the server.

```
<wsdl:message name="CreateItemSoapOut">
  <wsdl:part name="CreateItemResult" element="tns:CreateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **CreateItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem>.

The parts of the **CreateItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
CreateItemResult	tns:CreateItemResponse (section 3.1.4.2.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo (IMS-OXWSCDATA section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response to a CreateItem operation request.

If the request is successful, the **CreateItem** operation returns a **CreateItemResponse** element with the **ResponseClass** attribute of the **CreateItemResponseMessage** element set to "Success". The **ResponseCode** element of the **CreateItemResponseMessage** element is set to "NoError".

If the request is unsuccessful, the **CreateItem** operation returns a **CreateItemResponse** element with the **ResponseClass** attribute of the **CreateItemResponseMessage** element set to "Error". The **ResponseCode** element of the **CreateItemResponseMessage** element is set to a value of the **ResponseCodeType** simple type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.5.23.

3.1.4.2.2 Elements

The following table lists the XML schema element definitions that are specific to the **CreateItem** operation.

Element name	Description
CreateItem	Specifies a request to create items.
CreateItemResponse	Specifies a response to a CreateItem operation request.

3.1.4.2.2.1 m:CreateItem Element

The **CreateItem** element specifies a request to create items.

```
<xs:element name="CreateItem"
  type="m:CreateItemType"
 />
```

3.1.4.2.2.2 m:CreateItemResponse Element

The **CreateItemResponse** element specifies a response to a **CreateItem** operation request.

```
<xs:element name="CreateItemResponse"
  type="m:CreateItemResponseType"
 />
```

3.1.4.2.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **CreateItem** operation.

Complex type name	Description
CreateItemResponseType	Specifies a response to a CreateItem operation request.
CreateItemType	Specifies a request to create an item.

3.1.4.2.3.1 m:CreateItemResponseType Complex Type

The **CreateItemResponseType** complex type specifies a response to a **CreateItem** operation request. The **CreateItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="CreateItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.2.3.2 m:CreateItemType Complex Type

The **CreateItemType** complex type specifies a request to create an item. The **CreateItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="CreateItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="SavedItemFolderId"
        type="t:TargetFolderIdType"
        minOccurs="0"
      />
      <xs:element name="Items"
        type="t:NonEmptyArrayOfAllItemsType"
      />
    </xs:sequence>
    <xs:attribute name="MessageDisposition"
      type="t:MessageDispositionType"
      use="optional"
    />
    <xs:attribute name="SendMeetingInvitations"
      type="t:CalendarItemCreateOrDeleteOperationType"
      use="optional"
    />
  </xs:extension>
</xs:complexContent>
```

</xs:complexType>

The following table lists and describes the child elements of the **CreateItemType** complex type. <88>

Element name	Type	Description
SavedItemFolderId	t:TargetFolderIdType ([MS-OXWSFOLD] section 2.2.4.14)	Specifies the folder in which new items are saved.
Items	t:NonEmptyArrayOfAllItemsType ([MS-OXWSCDATA] section 2.2.4.42)	Specifies the collection of items to be created.

The following table lists and describes the attributes of the **CreateItemType** complex type.

Attribute name	Type	Description
MessageDisposition	t:MessageDispositionType ([MS-OXWSMSG] section 2.2.5.1)	Specifies an enumeration that describes how an item is handled after it is created.
SendMeetingInvitations	t:CalendarItemCreateOrDeleteOperationType ([MS-OXWSMTGS] section 2.2.5.1)	Specifies an enumeration that describes how meeting requests are handled after they are created.

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 DeleteItem Operation

The **DeleteItem** operation deletes items on the server.

The following is the WSDL port type specification for the **DeleteItem** operation.

```
<wsdl:operation name="DeleteItem">
  <wsdl:input message="tns:DeleteItemSoapIn"/>
</wsdl:operation>
```

```

    <wsdl:output message="tns:DeleteItemSoapOut"/>
</wsdl:operation>

```

The following is the WSDL binding specification for the **DeleteItem** operation.

```

<wsdl:operation name="DeleteItem">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem"/>
  <wsdl:input>
    <soap:header message="tns:DeleteItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="DeleteItemResult" use="literal"/>
    <soap:header message="tns:DeleteItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

3.1.4.3.1 Messages

The following table lists the WSDL message definitions that are specific to the **DeleteItem** operation.

Message name	Description
DeleteItemSoapIn	Specifies the SOAP message that requests that items be deleted from a mailbox.
DeleteItemSoapOut	Specifies the SOAP message that is returned by the server in response to a DeleteItemSoapIn operation request.

3.1.4.3.1.1 tns:DeleteItemSoapIn Message

The **DeleteItemSoapIn** WSDL message specifies the **DeleteItem** operation request to delete items on the server.

```

<wsdl:message name="DeleteItemSoapIn">
  <wsdl:part name="request" element="tns:DeleteItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **DeleteItemSoapIn** WSDL message is the input message for the SOAP action `http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem`.

The parts of the **DeleteItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:DeleteItem (section 3.1.4.3.2.1)	Specifies the SOAP body of a request.

Part name	Element/type	Description
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a DeleteItem operation request.

3.1.4.3.1.2 tns>DeleteItemSoapOut Message

The **DeleteItemSoapOut** WSDL message specifies the server response to the **DeleteItem** operation request to delete items on the server.

```
<wsdl:message name="DeleteItemSoapOut">
  <wsdl:part name="DeleteItemResult" element="tns>DeleteItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **DeleteItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem>.

The parts of the **DeleteItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
DeleteItemResult	tns>DeleteItemResponse (section 3.1.4.3.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for a response.

3.1.4.3.2 Elements

The following table lists the XML schema element definitions that are specific to the **DeleteItem** operation.

Element name	Description
DeleteItem	Specifies a request to delete items from a mailbox.
DeleteItemResponse	Specifies a response to a single DeleteItem operation request.

3.1.4.3.2.1 m>DeleteItem Element

The **DeleteItem** element specifies a request to delete items from a mailbox.

```
<xs:element name="DeleteItem"
```



```

    type="m:DeleteItemType"
  />

```

3.1.4.3.2.2 m:DeleteItemResponse Element

The **DeleteItemResponse** element specifies a response to a single **DeleteItem** operation request.

```

<xs:element name="DeleteItemResponse"
  type="m:DeleteItemResponseType"
 />

```

3.1.4.3.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **DeleteItem** operation.

Complex type name	Description
DeleteItemResponseType	Specifies a response to a single DeleteItem operation request.
DeleteItemType	Specifies a request to delete items.

3.1.4.3.3.1 m:DeleteItemResponseType Complex Type

The **DeleteItemResponseType** complex type specifies a response to a single **DeleteItem** operation request. The **DeleteItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```

<xs:complexType name="DeleteItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>

```

3.1.4.3.3.2 m:DeleteItemType Complex Type

The **DeleteItemType** complex type specifies a request to delete items. The **DeleteItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```

<xs:complexType name="DeleteItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="ItemIds"
        type="t:NonEmptyArrayOfBaseItemIdsType"
      />
    </xs:sequence>
  </xs:complexContent>
</xs:complexType>

```

```

    />
  </xs:sequence>
  <xs:attribute name="DeleteType"
    type="t:DisposalType"
    use="required"
  />
  <xs:attribute name="SendMeetingCancellations"
    type="t:CalendarItemCreateOrDeleteOperationType"
    use="optional"
  />
  <xs:attribute name="AffectedTaskOccurrences"
    type="t:AffectedTaskOccurrencesType"
    use="optional"
  />
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **DeleteItemType** complex type.

Element name	Type	Description
ItemIds	t:NonEmptyArrayOfBaseItemIdsType (section 2.2.4.28)	Specifies the collection of items to be deleted.

The following table lists and describes the attributes of the **DeleteItemType** complex type.

Attribute name	Type	Description
DeleteType	t:DisposalType ([MS-OXWSCDATA] section 2.2.5.9)	Specifies an enumeration value that describes how an item is to be deleted.
SendMeetingCancellations	t:CalendarItemCreateOrDeleteOperationType ([MS-OXWSMTGS] section 2.2.5.1)	Specifies an enumeration that describes how cancellations are to be handled for deleted meetings.
AffectedTaskOccurrences	t:AffectedTaskOccurrencesType ([MS-OXWSTASK] section 3.1.4.3.4.1)	Specifies an enumeration value that indicates whether an occurrence of a task or a master task with all recurring tasks associated with the master task is deleted.

3.1.4.3.4 Simple Types

None.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 GetItem Operation

The **GetItem** operation gets items on the server.

The following is the WSDL port type specification for the **GetItem** operation.

```
<wsdl:operation name="GetItem">
  <wsdl:input message="tns:GetItemSoapIn"/>
  <wsdl:output message="tns:GetItemSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **GetItem** operation.

```
<wsdl:operation name="GetItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetItem"/>
  <wsdl:input>
    <soap:header message="tns:GetItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:GetItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:GetItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:GetItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:header message="tns:GetItemSoapIn" part="DateTimePrecision" use="literal"/>
    <soap:header message="tns:GetItemSoapIn" part="ManagementRole" use="literal" />
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="GetItemResult" use="literal"/>
    <soap:header message="tns:GetItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.4.1 Messages

The following table lists the WSDL message definitions that are specific to the **GetItem** operation.

Message name	Description
GetItemSoapIn	Specifies the SOAP message that requests to get items from a mailbox.

Message name	Description
GetItemSoapOut	Specifies the SOAP message that is returned by the server in response to a GetItem operation request.

3.1.4.4.1.1 tns:GetItemSoapIn Message

The **GetItemSoapIn** WSDL message specifies the **GetItem** operation request to get items from the server.

```
<wsdl:message name="GetItemSoapIn">
  <wsdl:part name="request" element="tns:GetItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="DateTimePrecision" element="t:DateTimePrecision" />
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>
```

The **GetItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetItem>.

The parts of the **GetItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:GetItem (section 3.1.4.4.2.1)	Specifies the SOAP body of a request.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a GetItem operation request.
TimeZoneContext	t:TimeZoneContext ([MS-OXWSGTZ] section 2.2.4.11)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone. <89>
DateTimePrecision	t:DateTimePrecision ([MS-OXWSCDATA] section 2.2.3.1)	Specifies a SOAP header that identifies the resolution of date/time values in responses from the server, either in seconds or in milliseconds. This header SHOULD <90> be included.
ManagementRole	t:ManagementRole (section 2.2.3.1)	Specifies the roles the user or application wants to use. <91>

3.1.4.4.1.2 tns:GetItemSoapOut Message

The **GetItemSoapOut** WSDL message specifies the server response to the **GetItem** operation request to get items from the server.

```
<wsdl:message name="GetItemSoapOut">
  <wsdl:part name="GetItemResult" element="tns:GetItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **GetItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetItem>.

The parts of the **GetItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
GetItemResult	tns:GetItemResponse (section 3.1.4.4.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for a response.

3.1.4.4.2 Elements

The following table lists the XML schema element definitions that are specific to the **GetItem** operation.

Element name	Description
GetItem	Specifies a request to get items from a mailbox.
GetItemResponse	Specifies a response to a GetItem operation request.

3.1.4.4.2.1 m:GetItem Element

The **GetItem** element specifies a request to get items from a mailbox.

```
<xs:element name="GetItem"
  type="m:GetItemType"
/>
```

3.1.4.4.2.2 m:GetItemResponse Element

The **GetItemResponse** element specifies a response to a **GetItem** operation request.

```
<xs:element name="GetItemResponse"
  type="m:GetItemResponseType"
/>
```

3.1.4.4.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **GetItem** operation.

Complex type name	Description
GetItemResponseType	Specifies a response to a GetItem operation request.
GetItemType	Specifies a request to get items from a mailbox.

3.1.4.4.3.1 m:GetItemResponseType Complex Type

The **GetItemResponseType** complex type specifies a response to a **GetItem** operation request. The **GetItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="GetItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
      />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.4.3.2 m:GetItemType Complex Type

The **GetItemType** complex type specifies a request to get items from a mailbox. The **GetItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="GetItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
      >
      <xs:sequence>
        <xs:element name="ItemShape"
          type="t:ItemResponseShapeType"
          />
        <xs:element name="ItemIds"
          type="t:NonEmptyArrayOfBaseItemIdsType"
          />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists and describes the child elements of the **GetItemType** complex type.

Element name	Type	Description
ItemShape	t:ItemResponseShapeType ([MS-OXWSCDATA] section 2.2.4.38)	Specifies the response shape of a GetItem operation response.
ItemIds	t:NonEmptyArrayOfBaseItemIdsType (section 2.2.4.28)	Specifies the collection of items that a GetItem operation is to get.

3.1.4.4.4 Simple Types

None.

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.4.5 MarkAllItemsAsRead Operation

The **MarkAllItemsAsRead** operation marks all items in a folder as read or unread. [<92>](#)

The following is the WSDL port type specification for the **MarkAllItemsAsRead** operation.

```
<wsdl:operation name="MarkAllItemsAsRead">
  <wsdl:input message="tns:MarkAllItemsAsReadSoapIn"/>
  <wsdl:output message="tns:MarkAllItemsAsReadSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **MarkAllItemsAsRead** operation.

```
<wsdl:operation name="MarkAllItemsAsRead">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead"/>
  <wsdl:input>
    <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="MarkAllItemsAsReadResult" use="literal"/>
    <soap:header message="tns:MarkAllItemsAsReadSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.5.1 Messages

The following table lists the WSDL message definitions that are specific to the **MarkAllItemsAsRead** operation.

Message name	Description
MarkAllItemsAsReadSoapIn	Specifies the SOAP message that requests to mark all items as read or unread.
MarkAllItemsAsReadSoapOut	Specifies the SOAP message that is returned by the server in response to a MarkAllItemsAsRead operation request.

3.1.4.5.1.1 tns:MarkAllItemsAsReadSoapIn Message

The **MarkAllItemsAsReadSoapIn** WSDL message specifies the **MarkAllItemsAsRead** operation request to mark all items as read or unread.

```
<wsdl:message name="MarkAllItemsAsReadSoapIn">
  <wsdl:part name="request" element="tns:MarkAllItemsAsRead"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **MarkAllItemsAsReadSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead>.

The parts of the **MarkAllItemsAsReadSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:MarkAllItemsAsRead (section 3.1.4.5.2.1)	Specifies the SOAP body of a request.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a MarkAllItemsAsRead operation request.

3.1.4.5.1.2 tns:MarkAllItemsAsReadSoapOut Message

The **MarkAllItemsAsReadSoapOut** WSDL message specifies the server response to the **MarkAllItemsAsRead** operation request to mark all items as read or unread.

```
<wsdl:message name="MarkAllItemsAsReadSoapOut">
  <wsdl:part name="MarkAllItemsAsReadResult" element="tns:MarkAllItemsAsReadResponse"/>
</wsdl:message>
```



```
<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **MarkAllItemsAsReadSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead>.

The parts of the **MarkAllItemsAsReadSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
MarkAllItemsAsReadResult	tns:MarkAllItemsAsReadResponse (section 3.1.4.5.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response to a MarkAllItemsAsRead operation request.

3.1.4.5.2 Elements

The following table lists the XML schema element definitions that are specific to the **MarkAllItemsAsRead** operation.

Element name	Description
MarkAllItemsAsRead	Specifies a request to mark all items as read or unread.
MarkAllItemsAsReadResponse	Specifies a response to a MarkAllItemsAsRead operation request.

3.1.4.5.2.1 m:MarkAllItemsAsRead Element

The **MarkAllItemsAsRead** element specifies a request to mark all items as read or unread.

```
<xs:element name="MarkAllItemsAsRead" type="m:MarkAllItemsAsReadType"/>
```

3.1.4.5.2.2 m:MarkAllItemsAsReadResponse Element

The **MarkAllItemsAsReadResponse** element specifies a response to a **MarkAllItemsAsRead** operation request.

```
<xs:element name="MarkAllItemsAsReadResponse" type="m:MarkAllItemsAsReadResponseType"/>
```

3.1.4.5.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **MarkAllItemsAsRead** operation.

Complex type name	Description
MarkAllItemsAsReadResponseType	Specifies a response to a call to the MarkAllItemsAsRead

Complex type name	Description
	operation.
MarkAllItemsAsReadType	Specifies an operation to mark all items as read or unread.

3.1.4.5.3.1 m:MarkAllItemsAsReadType Complex Type

The **MarkAllItemsAsReadType** complex type specifies a request to mark all items as read or unread. The **MarkAllItemsAsReadType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="MarkAllItemsAsReadType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ReadFlag" type="xs:boolean" minOccurs="1" maxOccurs="1"/>
        <xs:element name="SuppressReadReceipts" type="xs:boolean" minOccurs="1"
maxOccurs="1"/>
        <xs:element name="FolderIds" type="t:NonEmptyArrayOfBaseFolderIdsType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **MarkAllItemsAsReadType** complex type.

Messages	Type	Description
ReadFlag	xs:boolean ([XMLSCHEMA2] section 3.2.2)	Specifies whether items are to be marked as read/unread.
SuppressReadReceipts	xs:boolean	Specifies whether read receipts are to be suppressed for items.
FolderIds	NonEmptyArrayOfBaseFolderIdsType ([MS-OXWSFOLD] section 3.1.4.6.3.3)	Specifies IDs of the folders in which the items are to be marked as read/unread.

3.1.4.5.3.2 m:MarkAllItemsAsReadResponseType Complex Type

The **MarkAllItemsAsReadResponseType** complex type specifies a response to a call to the **MarkAllItemsAsRead** operation. The **MarkAllItemsAsReadResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="MarkAllItemsAsReadResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.5.4 Simple Types

None.

3.1.4.5.5 Attributes

None.

3.1.4.5.6 Groups

None.

3.1.4.5.7 Attribute Groups

None.

3.1.4.6 MarkAsJunk Operation

The **MarkAsJunk** operation marks message items as junk. [<93>](#)

The following is the WSDL port type specification of the **MarkAsJunk** operation.

```
<wsdl:operation name="MarkAsJunk">
  <wsdl:input message="tns:MarkAsJunkSoapIn"/>
  <wsdl:output message="tns:MarkAsJunkSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **MarkAsJunk** operation

```
<wsdl:operation name="MarkAsJunk">
  <soap:operation
  soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MarkAsJunk"/>
  <wsdl:input>
    <soap:header message="tns:MarkAsJunkSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:MarkAsJunkSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:MarkAsJunkSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="MarkAsJunkResult" use="literal"/>
    <soap:header message="tns:MarkAsJunkSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.6.1 Messages

The following table summarizes the WSDL message definitions that are specific to this operation.

Messages	Description
MarkAsJunkSoapIn	Specifies the request to mark message items as junk.
MarkAsJunkSoapOut	Specifies the response to the MarkAsJunkSoapIn message.

3.1.4.6.1.1 tns:MarkAsJunkSoapIn Message

The **MarkAsJunkSoapIn** WSDL message specifies the request to mark message items as junk.

The following is the **MarkAsJunkSoapIn** WSDL message specification.

```
<wsdl:message name="MarkAsJunkSoapIn">
  <wsdl:part name="request" element="tns:MarkAsJunk"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **MarkAsJunkSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MarkAsJunk>.

The parts of the **MarkAsJunkSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	tns:MarkAsJunk	Specifies the SOAP body of the request to mark message items as junk.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use for accessing the mailbox. The cultures are defined by [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for the request.

3.1.4.6.1.2 tns:MarkAsJunkSoapOut Message

The **MarkAsJunkSoapOut** WSDL message specifies the server response to a **MarkAsJunkSoapIn** operation request to mark message items as junk.

```
<wsdl:message name="MarkAsJunkSoapOut">
  <wsdl:part name="MarkAsJunkResult" element="tns:MarkAsJunkResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **MarkAsJunkSoapOut** WSDL message is the output message for the following **SOAP** action: <http://schemas.microsoft.com/exchange/services/2006/messages/MarkAsJunk>.

The **MarkAsJunkSoapOut** WSDL message contains two parts, as listed and described in the following table.

Part name	Element/type	Description
MarkAsJunkResult	tns:MarkAsJunkResponse (section 3.1.4.6.2.2)	Specifies the SOAP body of the response to a MarkAsJunk operation request.

Part name	Element/type	Description
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response to a MarkAsJunk operation request.

3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
MarkAsJunk	The input data for the MarkAsJunk WSDL operation.
MarkAsJunkResponse	The result data for the MarkAsJunk WSDL operation.

3.1.4.6.2.1 m:MarkAsJunk Element

The **MarkAsJunk** element specifies the base element for a **MarkAsJunk** operation, as specified in section [3.1.4.6](#).

```
<xs:element name="MarkAsJunk" type="m:MarkAsJunkType" />
```

3.1.4.6.2.2 m:MarkAsJunkResponse Element

The **MarkAsJunkResponse** element specifies the response for a **MarkAsJunk** operation, as specified in section [3.1.4.6](#).

```
<xs:element name="MarkAsJunkResponse" type="m:MarkAsJunkResponseType" />
```

3.1.4.6.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
MarkAsJunkType	Specifies a request to mark an item as junk.
MarkAsJunkResponseType	Specifies the response to a MarkAsJunk operation.
MarkAsJunkResponseMessageType	Specifies the response message to a MarkAsJunk operation.

3.1.4.6.3.1 m:MarkAsJunkType Complex Type

The **MarkAsJunkType** complex type specifies the request to mark items as junk. The **MarkAsJunkType** complex type extends the **BaseRequestType**, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="MarkAsJunkType">
```

```

<xs:complexContent mixed="false">
  <xs:extension base="m:BaseRequestType">
    <xs:sequence>
      <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType" minOccurs="1"
maxOccurs="1"/>
    </xs:sequence>
    <xs:attribute name="IsJunk" type="xs:boolean" use="required" />
    <xs:attribute name="MoveItem" type="xs:boolean" use="required" />
  </xs:extension>
</xs:complexContent>
</xs:complexType>.

```

The following table lists the child element of the **MarkAsJunkType** complex type.

Element	Type	Description
ItemIds	NonEmptyArrayOfBaseItemIdsType (section 2.2.4.28)	Specifies an array of item identifiers.

The following table lists the attributes of the **MarkAsJunkType** complex type.

Attribute name	Type	Description
IsJunk	xs:boolean ([XMLSCHEMA2] section 3.2.2)	Specifies whether to mark the item as junk and add the sender to the blocked sender list.
MoveItem	xs:boolean	Specifies whether to move the item to another folder, as described in the next table.

The following table describes how the attributes affect the behavior of the **MarkAsJunk** operation.

IsJunk attribute value	MoveItem attribute value	Behavior
True	True	The operation adds the sender of the email to the blocked sender list and moves the email item to the Junk Email folder .
True	False	The operation adds the sender of the email to the blocked sender list. The email item is not moved.
False	True	The operation removes the sender from the blocked sender list and moves the email item back to the Inbox folder .
False	False	The operation removes the sender from the blocked sender list. The email item is not moved.

3.1.4.6.3.2 m:MarkAsJunkResponseType Complex Type

The **MarkAsJunkResponseType** complex type specifies the response from the **MarkAsJunk** operation specified in section [3.1.4.6](#). This type extends the **BaseResponseMessageType**, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.16.

```

<xs:complexType name="MarkAsJunkResponseType">
  <xs:complexContent>

```

```

    <xs:extension base="m:BaseResponseMessageType" />
  </xs:complexContent>
</xs:complexType>

```

3.1.4.6.3.3 m:MarkAsJunkResponseMessageType Complex Type

The **MarkAsJunkResponseMessageType** complex type specifies the response message from the **MarkAsJunk** operation specified in section 3.1.4.6. This type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```

<xs:complexType name="MarkAsJunkResponseMessageType">
  <xs:complexContent>
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:sequence>
          <xs:element name="MovedItemId" type="t:ItemIdType" minOccurs="0" maxOccurs="1"/>
        </xs:sequence>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child element of the **MarkAsJunkResponseMessageType** complex type.

Element	Type	Description
MovedItemId	t:ItemIdType (section 2.2.4.24)	Specifies the item identifier of the moved item.

3.1.4.6.4 Simple Types

None.

3.1.4.6.5 Attributes

None.

3.1.4.6.6 Groups

None.

3.1.4.6.7 Attribute Groups

None.

3.1.4.7 MoveItem Operation

The **MoveItem** operation moves items on the server.

The following is the WSDL port type specification for the **MoveItem** operation.

```

<wsdl:operation name="MoveItem">

```

```

    <wsdl:input message="tns:MoveItemSoapIn"/>
    <wsdl:output message="tns:MoveItemSoapOut"/>
</wsdl:operation>

```

The following is the WSDL binding specification for the **MoveItem** operation.

```

<wsdl:operation name="MoveItem">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem"/>
  <wsdl:input>
    <soap:header message="tns:MoveItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:MoveItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:MoveItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="MoveItemResult" use="literal"/>
    <soap:header message="tns:MoveItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

3.1.4.7.1 Messages

The following table lists the WSDL message definitions that are specific to the **MoveItem** operation.

Message name	Description
MoveItemSoapIn	Specifies the SOAP message that requests to move items in a mailbox.
MoveItemSoapOut	Specifies the SOAP message that is returned by the server in response to a MoveItem operation request.

3.1.4.7.1.1 tns:MoveItemSoapIn Message

The **MoveItemSoapIn** WSDL message specifies the **MoveItem** operation request to move items on the server.

```

<wsdl:message name="MoveItemSoapIn">
  <wsdl:part name="request" element="tns:MoveItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **MoveItemSoapIn** WSDL message is the input message for the SOAP action `http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem`.

The parts of the **MoveItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:MoveItem (section 3.1.4.7.2.1)	Specifies the SOAP body of a request.

Part name	Element/type	Description
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a MoveItem operation request.

3.1.4.7.1.2 tns:MoveItemSoapOut Message

The **MoveItemSoapOut** WSDL message specifies the server response to the **MoveItem** operation request to move items on the server.

```
<wsdl:message name="MoveItemSoapOut">
  <wsdl:part name="MoveItemResult" element="tns:MoveItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **MoveItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem>.

The parts of the **MoveItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
MoveItemResult	tns:MoveItemResponse (section 3.1.4.7.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response to a MoveItem operation request.

3.1.4.7.2 Elements

The following table lists the XML schema element definitions that are specific to the **MoveItem** operation.

Element name	Description
MoveItem	Specifies a request to move items.
MoveItemResponse	Specifies a response to a MoveItem operation request.

3.1.4.7.2.1 m:MoveItem Element

The **MoveItem** element specifies a request to move items.

```
<xs:element name="MoveItem"
  type="m:MoveItemType">
```

```
/>
```

3.1.4.7.2.2 m:MoveItemResponse Element

The **MoveItemResponse** element specifies a response to a **MoveItem** operation request.

```
<xs:element name="MoveItemResponse"
  type="m:MoveItemResponseType"
/>
```

3.1.4.7.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **MoveItem** operation.

Complex type name	Description
MoveItemResponseType	Specifies a response to a call to the MoveItem operation.
MoveItemType	Specifies an operation to move items in a mailbox.

3.1.4.7.3.1 m:MoveItemResponseType Complex Type

The **MoveItemResponseType** complex type specifies a response to a call to the **MoveItem** operation. The **MoveItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="MoveItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.7.3.2 m:MoveItemType Complex Type

The **MoveItemType** complex type specifies a request to move items in a mailbox. The **MoveItemType** complex type extends the **BaseMoveCopyItemType** complex type, as specified in section [2.2.4.15](#).

```
<xs:complexType name="MoveItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseMoveCopyItemType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.7.4 Simple Types

None.

3.1.4.7.5 Attributes

None.

3.1.4.7.6 Groups

None.

3.1.4.7.7 Attribute Groups

None.

3.1.4.8 SendItem Operation

The **SendItem** operation sends message items on the server.

The following is the WSDL port type specification for the **SendItem** operation.

```
<wsdl:operation name="SendItem">
  <wsdl:input message="tns:SendItemSoapIn" />
  <wsdl:output message="tns:SendItemSoapOut" />
</wsdl:operation>
```

The following is the WSDL binding specification for the **SendItem** operation.

```
<wsdl:operation name="SendItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SendItem" />
  <wsdl:input>
    <soap:header message="tns:SendItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:SendItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:SendItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="SendItemResult" use="literal"/>
    <soap:header message="tns:SendItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.8.1 Messages

The following table lists the WSDL message definitions that are specific to the **SendItem** operation.

Message name	Description
SendItemSoapIn	Specifies the SOAP message that requests to send items.
SendItemSoapOut	Specifies the SOAP message that is sent by the server in response to a SendItem operation request.

3.1.4.8.1.1 tns:SendItemSoapIn Message

The **SendItemSoapIn** WSDL message specifies the **SendItem** operation request to send items on the server.

```
<wsdl:message name="SendItemSoapIn">
  <wsdl:part name="request" element="tns:SendItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **SendItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SendItem>.

The parts of the **SendItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:SendItem (section 3.1.4.8.2.1)	Specifies the SOAP body of a request.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for a SendItem operation request.

3.1.4.8.1.2 tns:SendItemSoapOut Message

The **SendItemSoapOut** WSDL message specifies the server response to a **SendItem** operation request to send items on the server.

```
<wsdl:message name="SendItemSoapOut">
  <wsdl:part name="SendItemResult" element="tns:SendItemResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **SendItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SendItem>.

The parts of the **SendItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
SendItemResult	tns:SendItemResponse (section 3.1.4.8.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response to a

Part name	Element/type	Description
		SendItem operation request.

3.1.4.8.2 Elements

The following table lists the XML schema element definitions that are specific to the **SendItem** operation.

Element name	Description
SendItem	Specifies a request to send items.
SendItemResponse	Specifies a response to a SendItem operation request.

3.1.4.8.2.1 m:SendItem Element

The **SendItem** element specifies the root element in a request to send items.

```
<xs:element name="SendItem"
  type="m:SendItemType"
 />
```

3.1.4.8.2.2 m:SendItemResponse Element

The **SendItemResponse** element specifies a response to a **SendItem** operation request.

```
<xs:element name="SendItemResponse"
  type="m:SendItemResponseType"
 />
```

3.1.4.8.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to the **SendItem** operation.

Complex type name	Description
SendItemResponseType	Specifies a response to a SendItem operation request.
SendItemType	Specifies a request to send message items on the server.

3.1.4.8.3.1 m:SendItemResponseType Complex Type

The **SendItemResponseType** complex type specifies a response to a **SendItem** operation request. The **SendItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="SendItemResponseType">
  <xs:complexContent>
```

```

<xs:extension
  base="m:BaseResponseMessageType"
  />
</xs:complexContent>
</xs:complexType>

```

3.1.4.8.3.2 m:SendItemType Complex Type

The **SendItemType** complex type specifies a request to send message items on the server. The **SendItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```

<xs:complexType name="SendItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
      >
      <xs:sequence>
        <xs:element name="ItemIds"
          type="t:NonEmptyArrayOfBaseItemIdsType"
          />
        <xs:element name="SavedItemFolderId"
          type="t:TargetFolderIdType"
          minOccurs="0"
          />
      </xs:sequence>
      <xs:attribute name="SaveItemToFolder"
        type="xs:boolean"
        use="required"
        />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **SendItemType** complex type.

Element name	Type	Description
ItemIds	t:NonEmptyArrayOfBaseItemIdsType (section 2.2.4.28)	Specifies an array of item identifiers for the items to try to send.
SavedItemFolderId	t:TargetFolderIdType ([MS-OXWSFOLD] section 2.2.4.14)	Specifies the identity of the folder that contains a saved version of a sent item.

The following table lists and describes the attributes of the **SendItemType** complex type.

Attribute name	Type	Description
SaveItemToFolder	xs:boolean [XMLSCHEMA2]	Specifies a Boolean value that indicates whether a copy of a sent item is saved. A text value of true indicates that a copy of a sent item is saved.

3.1.4.8.4 Simple Types

None.

3.1.4.8.5 Attributes

None.

3.1.4.8.6 Groups

None.

3.1.4.8.7 Attribute Groups

None.

3.1.4.9 UpdateItem Operation

The **UpdateItem** operation updates items on the server.

The following is the WSDL port type specification for the **UpdateItem** operation.

```
<wsdl:operation name="UpdateItem">
  <wsdl:input message="tns:UpdateItemSoapIn"/>
  <wsdl:output message="tns:UpdateItemSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **UpdateItem** operation.

```
<wsdl:operation name="UpdateItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem"/>
  <wsdl:input>
    <soap:header message="tns:UpdateItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UpdateItemResult" use="literal"/>
    <soap:header message="tns:UpdateItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

3.1.4.9.1 Messages

The following table lists the WSDL message definitions that are specific to the **UpdateItem** operation.

Message name	Description
UpdateItemSoapIn	Specifies the SOAP message that requests that items be updated.

Message name	Description
UpdateItemSoapOut	Specifies the SOAP message that is returned in response to an UpdateItem operation request.

3.1.4.9.1.1 tns:UpdateItemSoapIn Message

The **UpdateItemSoapIn** WSDL message specifies the **UpdateItem** operation request to update items on the server.

```
<wsdl:message name="UpdateItemSoapIn">
  <wsdl:part name="request" element="tns:UpdateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
```

The **UpdateItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem>.

The parts of the **UpdateItemSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:UpdateItem (section 3.1.4.9.2.1)	Specifies the SOAP body of a request.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for an UpdateItem operation request.
TimeZoneContext	t:TimeZoneContext ([MS-OXWGTZ] section 2.2.4.11)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone.

3.1.4.9.1.2 tns:UpdateItemSoapOut Message

The **UpdateItemSoapOut** WSDL message specifies the server response to an **UpdateItem** operation request to update items on the server.

```
<wsdl:message name="UpdateItemSoapOut">
  <wsdl:part name="UpdateItemResult" element="tns:UpdateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```


The **UpdateItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem>.

The parts of the **UpdateItemSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
UpdateItemResult	tns:UpdateItemResponse (section 3.1.4.9.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for a response to an UpdateItem operation request.

3.1.4.9.2 Elements

The following table lists the XML schema element definitions that are specific to the **UpdateItem** operation.

Element name	Description
UpdateItem	Specifies a request to update items in a mailbox.
UpdateItemResponse	Specifies a response to an UpdateItem operation request.

3.1.4.9.2.1 m:UpdateItem Element

The **UpdateItem** element specifies a request to update items in a mailbox.

```
<xs:element name="UpdateItem"
  type="m:UpdateItemType"
 />
```

3.1.4.9.2.2 m:UpdateItemResponse Element

The **UpdateItemResponse** element specifies a response to an **UpdateItem** operation request.

```
<xs:element name="UpdateItemResponse"
  type="m:UpdateItemResponseType"
 />
```

3.1.4.9.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to this operation.

Complex type name	Description
UpdateItemResponseType	Specifies the response to a call to the UpdateItem operation.

Complex type name	Description
UpdateItemType	Specifies a request to update a set of items.
AppendToItemFieldType	Specifies data to append to a single property of an item during and UpdateItem operation.
ChangeDescriptionType	Specifies the base type that is used to describe changes in UpdateFolder operations, as specified in [MS-OXWSFOLD] section 3.1.4.8, and UpdateItem operations.
DeleteItemFieldType	Specifies a property to delete from an item.
ItemChangeDescriptionType	Specifies data that describes changes that are applied by using the UpdateItem operation.
ItemChangeType	Specifies an item identifier and the updates to apply to the item.
NonEmptyArrayOfItemChangeDescriptionsType	Specifies an array of items and their change types.
NonEmptyArrayOfItemChangesType	Specifies an array of items and their changes.
SetItemFieldType	Specifies an update to a single property of an item.

3.1.4.9.3.1 m:UpdateItemResponseType Complex Type

The **UpdateItemResponseType** complex type specifies the response to a call to the **UpdateItem** operation. The **UpdateItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="UpdateItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.9.3.2 m:UpdateItemType Complex Type

The **UpdateItemType** complex type specifies a request to update a set of items. The **UpdateItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="UpdateItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="SavedItemFolderId"
        type="t:TargetFolderIdType"
        minOccurs="0"
      />
    </xs:sequence>
  </xs:complexContent>
</xs:complexType>
```

```

    />
    <xs:element name="ItemChanges"
      type="t:NonEmptyArrayOfItemChangesType"
    />
  </xs:sequence>
  <xs:attribute name="ConflictResolution"
    type="t:ConflictResolutionType"
    use="required"
  />
  <xs:attribute name="MessageDisposition"
    type="t:MessageDispositionType"
    use="optional"
  />
  <xs:attribute name="SendMeetingInvitationsOrCancellations"
    type="t:CalendarItemUpdateOperationType"
    use="optional"
  />
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **UpdateItemType** complex type.

Element name	Type	Description
SavedItemFolderId	t:TargetFolderIdType ([MS-OXWSFOLD] section 2.2.4.14)	Specifies the target folder for saved items.
ItemChanges	t:NonEmptyArrayOfItemChangesType (section 3.1.4.9.3.9)	Specifies an array of item changes.

The following table lists the attributes of the **UpdateItemType** complex type.

Attribute name	Type	Description
ConflictResolution	t:ConflictResolutionType (section 3.1.4.9.4.1)	Specifies an enumeration value that represents the type of conflict resolution that is performed during an update.
MessageDisposition	t:MessageDispositionType ([MS-OXWSMSG] section 2.2.5.1)	Specifies an enumeration value that describes how a message item is handled after it is updated.
SendMeetingInvitationsOrCancellations	t:CalendarItemUpdateOperationType	Specifies an enumeration

Attribute name	Type	Description
	(MS-OXWSMTGS) section 2.2.5.3)	value that describes how a calendar item is handled after it is updated.

3.1.4.9.3.3 t:AppendToItemFieldType Complex Type

The **AppendToItemFieldType** complex type specifies data to append to a single property of an item during an **UpdateItem** operation. The **AppendToItemFieldType** complex type extends the **ItemChangeDescriptionType** complex type, as specified in section [3.1.4.9.3.6](#).

```
<xs:complexType name="AppendToItemFieldType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemChangeDescriptionType"
    >
      <xs:choice>
        <xs:element name="Item"
          type="t:ItemType"
        />
        <xs:element name="Message"
          type="t:MessageType"
        />
        <xs:element name="CalendarItem"
          type="t:CalendarItemType"
        />
        <xs:element name="Contact"
          type="t:ContactItemType"
        />
        <xs:element name="DistributionList"
          type="t:DistributionListType"
        />
        <xs:element name="MeetingMessage"
          type="t:MeetingMessageType"
        />
        <xs:element name="MeetingRequest"
          type="t:MeetingRequestMessageType"
        />
        <xs:element name="MeetingResponse"
          type="t:MeetingResponseMessageType"
        />
        <xs:element name="MeetingCancellation"
          type="t:MeetingCancellationMessageType"
        />
        <xs:element name="Task"
          type="t:TaskType"
        />
        <xs:element name="PostItem"
          type="t:PostItemType"
        />
      </xs:choice>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **AppendToItemFieldType** complex type.

Element name	Type	Description
Item	t:ItemType (section 2.2.4.23)	Specifies a generic item.
Message	t:MessageType ([MS-OXWSMSG] section 2.2.4.1)	Specifies an email message or non-IPM.Note item. IPM.Note is a subclass of Inter-Personal Mail (IPM) , which describes a note message.
CalendarItem	t:CalendarItemType ([MS-OXWSMTGS] section 2.2.4.4)	Specifies a calendar item.
Contact	t:ContactItemType ([MS-OXWSCONT] section 2.2.4.2)	Specifies a contact item.
DistributionList	t:DistributionListType ([MS-OXWSDLIST] section 2.2.4.1)	Specifies a distribution list.
MeetingMessage	t:MeetingMessageType ([MS-OXWSMTGS] section 2.2.4.12)	Specifies a meeting.
MeetingRequest	t:MeetingRequestMessageType ([MS-OXWSMTGS] section 2.2.4.13)	Specifies a meeting request.
MeetingResponse	t:MeetingResponseMessageType ([MS-OXWSMTGS] section 2.2.4.14)	Specifies a meeting response.
MeetingCancellation	t:MeetingCancellationMessageType ([MS-OXWSMTGS] section 2.2.4.11)	Specifies a meeting cancellation.
Task	t:TaskType ([MS-OXWSTASK] section 2.2.4.6)	Specifies a task.
PostItem	t:PostItemType ([MS-OXWSPOST] section 2.2.4.1)	Specifies a post item.

3.1.4.9.3.4 t:ChangeDescriptionType Complex Type

The **ChangeDescriptionType** complex type specifies the base type that is used to describe changes in **UpdateFolder** operation, as specified in [\[MS-OXWSFOLD\]](#) section 3.1.4.8 ,and **UpdateItem** operation, as specified in (section [3.1.4.9](#)).

```
<xs:complexType name="ChangeDescriptionType"
  abstract="true"
>
  <xs:sequence>
    <xs:element
      ref="t:Path"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **ChangeDescriptionType** complex type.

Element	Type	Description
Path	t:Path ([MS-OXWSCDATA] section 2.2.3.8)	Specifies a substitution group that specifies the property to update.

3.1.4.9.3.5 t:DeleteItemFieldType Complex Type

The **DeleteItemFieldType** complex type specifies a property to delete from an item. The **DeleteItemFieldType** complex type extends the **ItemChangeDescriptionType** complex type, as specified in section [3.1.4.9.3.6](#).

```
<xs:complexType name="DeleteItemFieldType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemChangeDescriptionType"
    >
      <xs:sequence />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.9.3.6 t:ItemChangeDescriptionType Complex Type

The **ItemChangeDescriptionType** complex type specifies data that describes changes that are applied by using the **UpdateItem** operation. The **ItemChangeDescriptionType** complex type extends the **ChangeDescriptionType** complex type, as specified in section [3.1.4.9.3.4](#).

```
<xs:complexType name="ItemChangeDescriptionType">
  <xs:complexContent>
    <xs:extension
      base="t:ChangeDescriptionType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.9.3.7 t:ItemChangeType Complex Type

The **ItemChangeType** complex type specifies an item identifier and the updates to apply to the item.

```
<xs:complexType name="ItemChangeType">
  <xs:sequence>
    <xs:choice>
      <xs:element name="ItemId"
        type="t:ItemIdType"
      />
      <xs:element name="OccurrenceItemId"
        type="t:OccurrenceItemIdType"
      />
      <xs:element name="RecurringMasterItemId"

```

```

        type="t:RecurringMasterItemIdType"
      />
    </xs:choice>
    <xs:element name="Updates"
      type="t:NonEmptyArrayOfItemChangeDescriptionsType"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **ItemChangeType** complex type.

Element name	Type	Description
ItemId	t:ItemIdType (section 2.2.4.24)	Specifies an item identifier of an item in a mailbox.
OccurrenceItemId	t:OccurrenceItemIdType (section 2.2.4.32)	Specifies a single occurrence of a recurring item.
RecurringMasterItemId	t:RecurringMasterItemIdType (section 2.2.4.36)	Specifies a recurring master item by identifying the identifiers of one of its related occurrence items.
Updates	t:NonEmptyArrayOfItemChangeDescriptionsType (section 3.1.4.9.3.8)	Specifies an array that defines append, set, and delete changes to item properties.

3.1.4.9.3.8 t:NonEmptyArrayOfItemChangeDescriptionsType Complex Type

The **NonEmptyArrayOfItemChangeDescriptionsType** complex type specifies an array of items and their change types.

```

<xs:complexType name="NonEmptyArrayOfItemChangeDescriptionsType">
  <xs:choice
    maxOccurs="unbounded"
  >
    <xs:element name="AppendToItemField"
      type="t:AppendToItemFieldType"
    />
    <xs:element name="SetItemField"
      type="t:SetItemFieldType"
    />
    <xs:element name="DeleteItemField"
      type="t>DeleteItemFieldType"
    />
  </xs:choice>
</xs:complexType>

```

The following table lists the child elements of the **NonEmptyArrayOfItemChangeDescriptionsType** complex type.

Element name	Type	Description
AppendToItemField	t:AppendToItemFieldType (section 3.1.4.9.3.3)	Specifies data to append to a single property of an item during an UpdateItem operation.
SetItemField	t:SetItemFieldType (section 3.1.4.9.3.10)	Specifies an update to a single property of an item in an UpdateItem operation.
DeleteItemField	t>DeleteItemFieldType (section 3.1.4.9.3.5)	Specifies an operation to delete a given property from an item during an UpdateItem operation.

3.1.4.9.3.9 t:NonEmptyArrayOfItemChangesType Complex Type

The **NonEmptyArrayOfItemChangesType** complex type specifies an array of items and their changes.

```
<xs:complexType name="NonEmptyArrayOfItemChangesType">
  <xs:sequence>
    <xs:element name="ItemChange"
      type="t:ItemChangeType" maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **NonEmptyArrayOfItemChangesType** complex type.

Element name	Type	Description
ItemChange	t:ItemChangeType (section 3.1.4.9.3.7)	Specifies an item identifier and the updates to apply to the item.

3.1.4.9.3.10 t:SetItemFieldType Complex Type

The **SetItemFieldType** complex type specifies an update to a single property of an item. The **SetItemFieldType** complex type extends the **ItemChangeDescriptionType** complex type, as specified in section [3.1.4.9.3.6](#).

```
<xs:complexType name="SetItemFieldType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemChangeDescriptionType"
    >
    <xs:choice>
      <xs:element name="Item"

```



```

        type="t:ItemType"
      />
    <xs:element name="Message"
      type="t:MessageType"
    />
    <xs:element name="CalendarItem"
      type="t:CalendarItemType"
    />
    <xs:element name="Contact"
      type="t:ContactItemType"
    />
    <xs:element name="DistributionList"
      type="t:DistributionListType"
    />
    <xs:element name="MeetingMessage"
      type="t:MeetingMessageType"
    />
    <xs:element name="MeetingRequest"
      type="t:MeetingRequestMessageType"
    />
    <xs:element name="MeetingResponse"
      type="t:MeetingResponseMessageType"
    />
    <xs:element name="MeetingCancellation"
      type="t:MeetingCancellationMessageType"
    />
    <xs:element name="Task"
      type="t:TaskType"
    />
    <xs:element name="PostItem"
      type="t:PostItemType"
    />
  </xs:choice>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **SetItemFieldType** complex type.

Element name	Type	Description
Item	t:ItemType (section 2.2.4.23)	Specifies a generic item.
Message	t:MessageType ([MS-OXWSMSG] section 2.2.4.1)	Specifies an email message or non-IPM.Note item.
CalendarItem	t:CalendarItemType ([MS-OXWSMTGS] section 2.2.4.4)	Specifies a calendar item.
Contact	t:ContactItemType ([MS-OXWSCONT] section 2.2.4.2)	Specifies a contact item.
DistributionList	t:DistributionListType ([MS-OXWSDLIST] section 2.2.4.1)	Specifies a distribution list.
MeetingMessage	t:MeetingMessageType ([MS-OXWSMTGS])	Specifies a meeting.

Element name	Type	Description
	section 2.2.4.12)	
MeetingRequest	t:MeetingRequestMessageType ([MS- OXWSMTGS] section 2.2.4.13)	Specifies a meeting request.
MeetingResponse	t:MeetingResponseMessageType ([MS- OXWSMTGS] section 2.2.4.14)	Specifies meeting response.
MeetingCancellation	t:MeetingCancellationMessageType ([MS- OXWSMTGS] section 2.2.4.11)	Specifies meeting cancellation.
Task	t:TaskType ([MS- OXWSTASK] section 2.2.4.6)	Specifies a task.
PostItem	t:PostItemType ([MS- OXWSPOST] section 2.2.4.1)	Specifies a post item.

3.1.4.9.4 Simple Types

The following table lists the XML schema simple type definitions that are specific to the **UpdateItem** operation.

Simple type name	Description
ConflictResolutionType	Specifies how a conflict is to be handled during an UpdateItem operation.

3.1.4.9.4.1 t:ConflictResolutionType Simple Type

The **ConflictResolutionType** simple type specifies how a conflict is to be handled during an **UpdateItem** operation.

```
<xs:simpleType name="ConflictResolutionType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="AlwaysOverwrite"
    />
    <xs:enumeration
      value="AutoResolve"
    />
    <xs:enumeration
      value="NeverOverwrite"
    />
  </xs:restriction>
</xs:simpleType>
```

The following table lists the values that are defined by the **ConflictResolutionType** simple type.

Value	Meaning
AlwaysOverwrite	If there is a conflict, the UpdateItem operation will overwrite the existing property value.

Value	Meaning
AutoResolve	The UpdateItem operation automatically resolves any conflict. The "AutoResolve" option will in most cases overwrite the existing value for a property. In some cases, the new value is ignored and the original value is retained. For example, user A changes the value of the Sensitivity property from "Normal" to "Confidential", and then user B sets that value to "Public". In this example, the "Confidential" setting is retained and user B's update is ignored.
NeverOverwrite	If there is a conflict, the UpdateItem operation fails and ErrorIrresolvableConflict ([MS-OXWSCDATA] section 2.2.5.23) will be returned.

3.1.4.9.5 Attributes

None.

3.1.4.9.6 Groups

None.

3.1.4.9.7 Attribute Groups

None.

3.1.4.10 UpdateItemInRecoverableItems Operation

The **UpdateItemInRecoverableItems** operation updates an item in the recoverable items folder. [<94>](#)

The following is the WSDL port type specification for the **UpdateItemInRecoverableItems** operation.

```
<wsdl:operation name="UpdateItemInRecoverableItems">
  <wsdl:input message="tns:UpdateItemInRecoverableItemsSoapIn" />
  <wsdl:output message="tns:UpdateItemInRecoverableItemsSoapOut" />
</wsdl:operation>
```

The following is the WSDL binding specification for the **UpdateItemInRecoverableItems** operation.

```
<wsdl:operation name="UpdateItemInRecoverableItems">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItemInRecoverableItems" />
  <wsdl:input>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="Impersonation"
      use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="MailboxCulture"
      use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="RequestVersion"
      use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="TimeZoneContext"
      use="literal"/>
    <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="ManagementRole"
      use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
</wsdl:operation>
```

```

</wsdl:input>
<wsdl:output>
  <soap:body parts="UpdateItemInRecoverableItemsResult" use="literal" />
  <soap:header message="tns:UpdateItemInRecoverableItemsSoapOut" part="ServerVersion"
use="literal"/>
</wsdl:output>
</wsdl:operation>

```

3.1.4.10.1 Messages

The following table lists the WSDL message definitions that are specific to the **UpdateItemInRecoverableItems** operation.

Message Name	Description
UpdateItemInRecoverableItemsSoapIn	Specifies the SOAP message that requests that recoverable items be updated.
UpdateItemInRecoverableItemsSoapOut	Specifies the SOAP message that is returned in response to an UpdateItemInRecoverableItems operation request.

3.1.4.10.1.1 tns:UpdateItemInRecoverableItemsSoapIn

The **UpdateItemInRecoverableItemsSoapIn** WSDL message specifies the **UpdateItemInRecoverableItems** operation request to update an item in the recoverable items folder.

```

<wsdl:message name="UpdateItemInRecoverableItemsSoapIn">
  <wsdl:part name="request" element="tns:UpdateItemInRecoverableItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>

```

The **UpdateItemInRecoverableItemsSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem>.

The parts of the **UpdateItemInRecoverableItemsSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:UpdateItemInRecoverableItems (section 3.1.4.10.2.1)	Specifies the SOAP body of a request.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.6)	Specifies a SOAP header that identifies the culture to be used for accessing a mailbox. The cultures

Part name	Element/type	Description
		are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for an UpdateItem operation request.
TimeZoneContext	t:TimeZoneContext ([MS-OXWSGTZ] section 2.2.3.4)	Specifies a SOAP header that identifies the time zone to be used for all responses from the server. All times that are returned from the server will be converted to the specified time zone.
ManagementRole	t:ManagementRole (section 2.2.3.1)	Specifies the roles the user or application wants to use.

3.1.4.10.1.2 tns:UpdateItemInRecoverableItemsSoapOut

The **UpdateItemInRecoverableItemsSoapOut** WSDL message specifies the server response to an **UpdateItemInRecoverableItems** operation request to update an item in the recoverable items folder.

```
<wsdl:message name="UpdateItemInRecoverableItemsSoapOut">
  <wsdl:part name="UpdateItemInRecoverableItemsResult"
    element="tns:UpdateItemInRecoverableItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **UpdateItemInRecoverableItemsSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem>.

The parts of the **UpdateItemInRecoverableItemsSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
UpdateItemInRecoverableItemsResult	tns:UpdateItemInRecoverableItemsResponse (section 3.1.4.10.2.2)	Specifies the SOAP body of a response message.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.10)	Specifies a SOAP header that identifies the server version for a response to an UpdateItemInRecoverableItems operation request.

3.1.4.10.2 Elements

The following table lists the XML schema element definitions that are specific to the **UpdateItemInRecoverableItems** operation.

Element	Description
UpdateItemInRecoverableItems	Specifies a request to update an item in the recoverable items folder

Element	Description
UpdateItemInRecoverableItemsResponse	Specifies a response to a UpdateItemInRecoverableItems operation request.

3.1.4.10.2.1 m:UpdateItemInRecoverableItems Element

The **UpdateItemInRecoverableItems** element specifies a request to update an item in the recoverable items folder.

```
<xs:element name="UpdateItemInRecoverableItems" type="m:UpdateItemInRecoverableItemsType"/>
```

3.1.4.10.2.2 m:UpdateItemInRecoverableItemsResponse Element

The **UpdateItemInRecoverableItemsResponse** element specifies the response to a **UpdateItemInRecoverableItems** operation request.

```
<xs:element name="UpdateItemInRecoverableItemsResponse"
type="m:UpdateItemInRecoverableItemsResponseType"/>
```

3.1.4.10.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to this operation.

Complex type name	Description
UpdateItemInRecoverableItemsType	Specifies a request to update an item in the recoverable items folder.
UpdateItemInRecoverableItemsResponseType	Specifies the response to a call to the UpdateItemInRecoverableItems operation.
UpdateItemInRecoverableItemsResponseMessageType	Specifies the response message from the UpdateItemInRecoverableItems operation.

3.1.4.10.3.1 m:UpdateItemInRecoverableItemsType Complex Type

The **UpdateItemInRecoverableItemsType** complex type specifies a request to update an item in the recoverable items folder. **UpdateItemInRecoverableItemsType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="UpdateItemInRecoverableItemsType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ItemId" type="t:ItemIdType"/>
        <xs:element name="Updates" type="t:NonEmptyArrayOfItemChangeDescriptionsType"
minOccurs="0"/>
        <xs:element name="Attachments" type="t:NonEmptyArrayOfAttachmentsType"
minOccurs="0"/>
        <xs:element name="MakeItemImmutable" type="xs:boolean" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **UpdateItemInRecoverableItemsType** complex type.

Element name	Type	Description
ItemId	t:ItemIdType (section 2.2.4.24)	Specifies the unique identifier and change key of an item.
Updates	t:NonEmptyArrayOfItemChangeDescriptionsType (section 3.1.4.9.3.8)	Specifies a set of elements that define append, set, and delete changes to item properties.
Attachments	t:NonEmptyArrayOfAttachmentsType ([MS-OXWSCDATA] section 2.2.4.43)	Specifies the items or files that are attached to an item.
MakeItemImmutable	xs:boolean ([XMLSCHEMA2] section 3.2.2)	Specifies whether an item should be made read-only.

3.1.4.10.3.2 m:UpdateItemInRecoverableItemsResponseType Complex Type

The **UpdateItemInRecoverableItemsResponseType** complex type specifies the response to a call to the **UpdateItemInRecoverableItems** operation. The **UpdateItemInRecoverableItemsResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

<

```

xs:complexType name="UpdateItemInRecoverableItemsResponseType">
  <complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </complexContent>
</xs:complexType>

```

3.1.4.10.3.3 UpdateItemInRecoverableItemsResponseMessageType Complex Type

The **UpdateItemInRecoverableItemsResponseMessageType** complex type specifies the response message from the **UpdateItemInRecoverableItems** operation specified in section [2.2.4.37](#). This type extends the **m:ItemInfoResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.37.

```

<xs:complexType name="UpdateItemInRecoverableItemsResponseMessageType">
  <complexContent>
    <xs:extension base="m:ItemInfoResponseMessageType">

```

```

<xs:sequence>
  <xs:element name="Attachments" type="t:ArrayOfAttachmentsType" minOccurs="0"/>
  <xs:element name="ConflictResults" type="t:ConflictResultsType" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists and describes the child elements of the **UpdateItemInRecoverableItemsResponseMessageType** complex type.

Element	Type	Description
Attachments	t:ArrayOfAttachmentsType ([MS-OXWSATT] section 2.2.4.1)	An array of attachments on the item.
ConflictResults	t:ConflictResultsType (section 2.2.4.16)	Specifies the number of conflicts in the response.

3.1.4.10.4 Simple Types

None.

3.1.4.10.5 Attributes

None.

3.1.4.10.6 Groups

None.

3.1.4.10.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

This section provides a simplified example of a request-response sequence for the **CreateItem** operation, as specified in section [3.1.4.2](#).

The following example shows a **CreateItem** request to create a message, send it, and save a copy in the SentItems folder.

```
<?xml version="1.0" encoding="utf-8" ?>
<CreateItem xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
            xmlns:xsd="http://www.w3.org/2001/XMLSchema"
            MessageDisposition="SendAndSaveCopy">
  <SavedItemFolderId xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
    <DistinguishedFolderId Id="sentitems"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
  </SavedItemFolderId>
  <Items xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
    <Message xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
      <ItemClass>IPM.Note</ItemClass>
      <Subject>Daily Report</Subject>
      <Body BodyType="Text">(1) Handled customer issues, (2) Saved the world.</Body>
      <Sender>
        <Mailbox>
          <EmailAddress>user1@example.com</EmailAddress>
        </Mailbox>
      </Sender>
      <ToRecipients>
        <Mailbox>
          <EmailAddress>user2@example.com</EmailAddress>
        </Mailbox>
      </ToRecipients>
    </Message>
  </Items>
</CreateItem>
```

The following example shows a **CreateItem** response to the request to create a message, send it, and save a copy in the SentItems folder.

```
<?xml version="1.0" encoding="utf-8" ?>
<CreateItemResponseType xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
                       xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <ResponseMessages xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
    <CreateItemResponseMessage ResponseClass="Success">
      <ResponseCode>NoError</ResponseCode>
    </CreateItemResponseMessage>
  </ResponseMessages>
</CreateItemResponseType>
```

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Full WSDL

The XML files that are listed in the following table are required in order to implement the functionality described in this document.

File name	Description	Section
MS-OXWSCORE.wsdl	Contains the WSDL for the implementation of this protocol.	6
MS-OXWSCORE-messages.xsd	Contains the XML schema message definitions used in this protocol.	7.1
MS-OXWSCORE-types.xsd	Contains the XML schema type definitions used in this protocol.	7.2

These files have to be placed in a common folder for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSCORE-types.xsd or MS-OXWSCORE-messages.xsd schemas have to be placed in the common folder with the files named in the table.

This section provides the contents of the MS-OXWSCORE.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:s="http://www.w3.org/2001/XMLSchema" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <wsdl:types>
    <xs:schema id="messages" elementFormDefault="qualified" version="Exchange2013"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCORE-types.xsd"/>
      <xs:include schemaLocation="MS-OXWSCORE-messages.xsd"/>
      <!-- Add global elements and types from messages.xsd -->
    </xs:schema>
    <xs:schema id="types" elementFormDefault="qualified" version="Exchange2013"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
      <!-- Add global elements and types from types.xsd -->
    </xs:schema>
  </wsdl:types>
  <wsdl:message name="GetItemSoapIn">
    <wsdl:part name="request" element="tns:GetItem"/>
    <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
    <wsdl:part name="DateTimePrecision" element="t:DateTimePrecision"/>
    <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
  </wsdl:message>
```

```

<wsdl:message name="GetItemSoapOut">
  <wsdl:part name="GetItemResult" element="tns:GetItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="CreateItemSoapIn">
  <wsdl:part name="request" element="tns:CreateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
<wsdl:message name="CreateItemSoapOut">
  <wsdl:part name="CreateItemResult" element="tns:CreateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="DeleteItemSoapIn">
  <wsdl:part name="request" element="tns>DeleteItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="DeleteItemSoapOut">
  <wsdl:part name="DeleteItemResult" element="tns>DeleteItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="UpdateItemSoapIn">
  <wsdl:part name="request" element="tns:UpdateItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
<wsdl:message name="UpdateItemSoapOut">
  <wsdl:part name="UpdateItemResult" element="tns:UpdateItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="UpdateItemInRecoverableItemsSoapIn">
  <wsdl:part name="request" element="tns:UpdateItemInRecoverableItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole"/>
</wsdl:message>
<wsdl:message name="UpdateItemInRecoverableItemsSoapOut">
  <wsdl:part name="UpdateItemInRecoverableItemsResult"
element="tns:UpdateItemInRecoverableItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="MarkAllItemsAsReadSoapIn">
  <wsdl:part name="request" element="tns:MarkAllItemsAsRead"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="MarkAllItemsAsReadSoapOut">
  <wsdl:part name="MarkAllItemsAsReadResult" element="tns:MarkAllItemsAsReadResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

```

<wsdl:message name="MarkAsJunkSoapIn">
  <wsdl:part name="request" element="tns:MarkAsJunk" />
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="MarkAsJunkSoapOut">
  <wsdl:part name="MarkAsJunkResult" element="tns:MarkAsJunkResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="MoveItemSoapIn">
  <wsdl:part name="request" element="tns:MoveItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="MoveItemSoapOut">
  <wsdl:part name="MoveItemResult" element="tns:MoveItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="CopyItemSoapIn">
  <wsdl:part name="request" element="tns:CopyItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="CopyItemSoapOut">
  <wsdl:part name="CopyItemResult" element="tns:CopyItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="SendItemSoapIn">
  <wsdl:part name="request" element="tns:SendItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="SendItemSoapOut">
  <wsdl:part name="SendItemResult" element="tns:SendItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:portType name="ExchangeServicePortType">
  <wsdl:operation name="GetItem">
    <wsdl:input message="tns:GetItemSoapIn"/>
    <wsdl:output message="tns:GetItemSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="CreateItem">
    <wsdl:input message="tns:CreateItemSoapIn"/>
    <wsdl:output message="tns:CreateItemSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="DeleteItem">
    <wsdl:input message="tns>DeleteItemSoapIn"/>
    <wsdl:output message="tns>DeleteItemSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="UpdateItem">
    <wsdl:input message="tns:UpdateItemSoapIn"/>
    <wsdl:output message="tns:UpdateItemSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="UpdateItemInRecoverableItems">
    <wsdl:input message="tns:UpdateItemInRecoverableItemsSoapIn"/>
  </wsdl:operation>

```

```

    <wsdl:output message="tns:UpdateItemInRecoverableItemsSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="MarkAllItemsAsRead">
    <wsdl:input message="tns:MarkAllItemsAsReadSoapIn"/>
    <wsdl:output message="tns:MarkAllItemsAsReadSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="MarkAsJunk">
    <wsdl:input message="tns:MarkAsJunkSoapIn" />
    <wsdl:output message="tns:MarkAsJunkSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="MoveItem">
    <wsdl:input message="tns:MoveItemSoapIn"/>
    <wsdl:output message="tns:MoveItemSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="CopyItem">
    <wsdl:input message="tns:CopyItemSoapIn"/>
    <wsdl:output message="tns:CopyItemSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="SendItem">
    <wsdl:input message="tns:SendItemSoapIn"/>
    <wsdl:output message="tns:SendItemSoapOut"/>
  </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
  <wsdl:documentation>
    <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim/" />
  </wsdl:documentation>
  <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
  <wsdl:operation name="GetItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetItem"/>
    <wsdl:input>
      <soap:header message="tns:GetItemSoapIn" part="Impersonation" use="literal"/>
      <soap:header message="tns:GetItemSoapIn" part="MailboxCulture" use="literal"/>
      <soap:header message="tns:GetItemSoapIn" part="RequestVersion" use="literal"/>
      <soap:header message="tns:GetItemSoapIn" part="TimeZoneContext" use="literal"/>
      <soap:header message="tns:GetItemSoapIn" part="DateTimePrecision" use="literal"/>
      <soap:header message="tns:GetItemSoapIn" part="ManagementRole" use="literal" />
      <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="GetItemResult" use="literal"/>
      <soap:header message="tns:GetItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="CreateItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem"/>
    <wsdl:input>
      <soap:header message="tns:CreateItemSoapIn" part="Impersonation" use="literal"/>
      <soap:header message="tns:CreateItemSoapIn" part="MailboxCulture" use="literal"/>
      <soap:header message="tns:CreateItemSoapIn" part="RequestVersion" use="literal"/>
      <soap:header message="tns:CreateItemSoapIn" part="TimeZoneContext" use="literal"/>
      <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="CreateItemResult" use="literal"/>
      <soap:header message="tns:CreateItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
  </wsdl:operation>

```

```

        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="DeleteItem">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem"/>
        <wsdl:input>
            <soap:header message="tns:DeleteItemSoapIn" part="Impersonation" use="literal"/>
            <soap:header message="tns:DeleteItemSoapIn" part="MailboxCulture" use="literal"/>
            <soap:header message="tns:DeleteItemSoapIn" part="RequestVersion" use="literal"/>
            <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="DeleteItemResult" use="literal"/>
            <soap:header message="tns:DeleteItemSoapOut" part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateItem">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem"/>
        <wsdl:input>
            <soap:header message="tns:UpdateItemSoapIn" part="Impersonation" use="literal"/>
            <soap:header message="tns:UpdateItemSoapIn" part="MailboxCulture" use="literal"/>
            <soap:header message="tns:UpdateItemSoapIn" part="RequestVersion" use="literal"/>
            <soap:header message="tns:UpdateItemSoapIn" part="TimeZoneContext" use="literal"/>
            <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="UpdateItemResult" use="literal"/>
            <soap:header message="tns:UpdateItemSoapOut" part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateItemInRecoverableItems">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItemInRecoverableItems"/>
        <wsdl:input>
            <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="Impersonation"
use="literal"/>
            <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="MailboxCulture"
use="literal"/>
            <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="RequestVersion"
use="literal"/>
            <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="TimeZoneContext"
use="literal"/>
            <soap:header message="tns:UpdateItemInRecoverableItemsSoapIn" part="ManagementRole"
use="literal"/>
            <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="UpdateItemInRecoverableItemsResult" use="literal"/>
            <soap:header message="tns:UpdateItemInRecoverableItemsSoapOut" part="ServerVersion"
use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="MarkAllItemsAsRead">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MarkAllItemsAsRead"/
>
        <wsdl:input>

```

```

        <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="Impersonation"
use="literal"/>
        <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="MailboxCulture"
use="literal"/>
        <soap:header message="tns:MarkAllItemsAsReadSoapIn" part="RequestVersion"
use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="MarkAllItemsAsReadResult" use="literal"/>
        <soap:header message="tns:MarkAllItemsAsReadSoapOut" part="ServerVersion"
use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="MarkAsJunk">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MarkAsJunk" />
    <wsdl:input>
        <soap:header message="tns:MarkAsJunkSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:MarkAsJunkSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:MarkAsJunkSoapIn" part="RequestVersion" use="literal"/>
        <soap:body parts="request" use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="MarkAsJunkResult" use="literal" />
        <soap:header message="tns:MarkAsJunkSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="MoveItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem"/>
    <wsdl:input>
        <soap:header message="tns:MoveItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:MoveItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:MoveItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="MoveItemResult" use="literal"/>
        <soap:header message="tns:MoveItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CopyItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem"/>
    <wsdl:input>
        <soap:header message="tns:CopyItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:CopyItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:CopyItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="CopyItemResult" use="literal"/>
        <soap:header message="tns:CopyItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SendItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SendItem"/>
    <wsdl:input>

```



```
<soap:header message="tns:SendItemSoapIn" part="Impersonation" use="literal"/>
<soap:header message="tns:SendItemSoapIn" part="MailboxCulture" use="literal"/>
<soap:header message="tns:SendItemSoapIn" part="RequestVersion" use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
  <soap:body parts="SendItemResult" use="literal"/>
  <soap:header message="tns:SendItemSoapOut" part="ServerVersion" use="literal"/>
</wsdl:output>
</wsdl:operation>
</wsdl:binding>
</wsdl:definitions>
```

7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
Messages schema	m:	7.1
Types schema	t:	7.2

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSNTIF-types.xsd or MS-OXWSNTIF-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

7.1 Messages Schema

This section provides the contents of the MS-OXWSCORE-messages.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSCORE-messages.xsd includes the files listed in the following table. To operate correctly, these files have to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-messages.xsd	[MS-OXWSCDATA] section 7.1
MS-OXWSCDATA-types.xsd	[MS-OXWSCDATA] section 7.2
MS-OXWSMSG-types.xsd	[MS-OXWSMSG] section 7

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
elementFormDefault="qualified" version="Exchange2013" id="messages">
  <!-- Import common types. -->
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCDATA-types.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCORE-types.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSMSG-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:complexType name="BaseMoveCopyItemType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="ToFolderId" type="t:TargetFolderIdType"/>
          <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
          <xs:element name="ReturnNewItemIds" type="xs:boolean" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
```

```

<xs:element name="CopyItem" type="m:CopyItemType"/>
<xs:complexType name="CopyItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseMoveCopyItemType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="CopyItemResponse" type="m:CopyItemResponseType"/>
<xs:complexType name="CopyItemResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="CreateItemResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="CreateItemResponse" type="m:CreateItemResponseType"/>
<xs:complexType name="CreateItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="SavedItemFolderId" type="t:TargetFolderIdType" minOccurs="0"/>
        <xs:element name="Items" type="t:NonEmptyArrayOfAllItemsType"/>
      </xs:sequence>
      <xs:attribute name="MessageDisposition" type="t:MessageDispositionType"
use="optional"/>
      <xs:attribute name="SendMeetingInvitations"
type="t:CalendarItemCreateOrDeleteOperationType" use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="CreateItem" type="m:CreateItemType"/>
<xs:complexType name="DeleteItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
      </xs:sequence>
      <xs:attribute name="DeleteType" type="t:DisposalType" use="required"/>
      <xs:attribute name="SendMeetingCancellations"
type="t:CalendarItemCreateOrDeleteOperationType" use="optional"/>
      <xs:attribute name="AffectedTaskOccurrences" type="t:AffectedTaskOccurrencesType"
use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteItem" type="m:DeleteItemType"/>
<xs:complexType name="DeleteItemResponseType">
  <xs:complexContent>
    <xs:extension base="m:BaseResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteItemResponse" type="m:DeleteItemResponseType"/>
<xs:complexType name="GetItemType">
  <xs:complexContent>
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ItemShape" type="t:ItemResponseShapeType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="GetItem" type="m:GetItemType"/>
<xs:complexType name="GetItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetItemResponse" type="m:GetItemResponseType"/>
<xs:complexType name="MarkAllItemsAsReadType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="ReadFlag" type="xs:boolean" minOccurs="1" maxOccurs="1"/>
                <xs:element name="SuppressReadReceipts" type="xs:boolean" minOccurs="1"
maxOccurs="1"/>
                <xs:element name="FolderIds" type="t:NonEmptyArrayOfBaseFolderIdsType"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="MarkAllItemsAsRead" type="m:MarkAllItemsAsReadType"/>
<xs:complexType name="MarkAllItemsAsReadResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="MarkAllItemsAsReadResponse" type="m:MarkAllItemsAsReadResponseType"/>
<xs:complexType name="MarkAsJunkType">
    <xs:complexContent mixed="false">
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType" minOccurs="1"
maxOccurs="1"/>
            </xs:sequence>
            <xs:attribute name="IsJunk" type="xs:boolean" use="required" />
            <xs:attribute name="MoveItem" type="xs:boolean" use="required" />
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="MarkAsJunk" type="m:MarkAsJunkType" />
<!-- MarkAsJunk response -->
<xs:complexType name="MarkAsJunkResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType" />
    </xs:complexContent>
</xs:complexType>
<xs:element name="MarkAsJunkResponse" type="m:MarkAsJunkResponseType" />
<xs:complexType name="MarkAsJunkResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ResponseMessageType">
            <xs:sequence>
                <xs:sequence>
                    <xs:element name="MovedItemId" type="t:ItemIdType" minOccurs="0" maxOccurs="1"/>
                </xs:sequence>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

```

        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="MoveItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="MoveItemResponse" type="m:MoveItemResponseType"/>
<xs:complexType name="MoveItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseMoveCopyItemType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="MoveItem" type="m:MoveItemType"/>
<xs:complexType name="SendItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SendItemResponse" type="m:SendItemResponseType"/>
<xs:complexType name="SendItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="ItemIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
                <xs:element name="SavedItemFolderId" type="t:TargetFolderIdType" minOccurs="0"/>
            </xs:sequence>
            <xs:attribute name="SaveItemToFolder" type="xs:boolean" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="SendItem" type="m:SendItemType"/>
<xs:complexType name="UpdateItemResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateItemResponse" type="m:UpdateItemResponseType"/>
<xs:complexType name="UpdateItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="SavedItemFolderId" type="t:TargetFolderIdType" minOccurs="0"/>
                <xs:element name="ItemChanges" type="t:NonEmptyArrayOfItemChangesType"/>
            </xs:sequence>
            <xs:attribute name="ConflictResolution" type="t:ConflictResolutionType"
use="required"/>
            <xs:attribute name="MessageDisposition" type="t:MessageDispositionType"
use="optional"/>
            <xs:attribute name="SendMeetingInvitationsOrCancellations"
type="t:CalendarItemUpdateOperationType" use="optional"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateItem" type="m:UpdateItemType"/>
<xs:complexType name="UpdateItemResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ItemInfoResponseMessageType">

```

```

        <xs:sequence>
          <xs:element name="ConflictResults" type="t:ConflictResultsType" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="UpdateItemInRecoverableItems" type="m:UpdateItemInRecoverableItemsType"/>
  <xs:complexType name="UpdateItemInRecoverableItemsType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="ItemId" type="t:ItemIdType"/>
          <xs:element name="Updates" type="t:NonEmptyArrayOfItemChangeDescriptionsType"
minOccurs="0"/>
          <xs:element name="Attachments" type="t:NonEmptyArrayOfAttachmentsType"
minOccurs="0"/>
          <xs:element name="MakeItemImmutable" type="xs:boolean" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="UpdateItemInRecoverableItemsResponseMessageType">
    <xs:complexContent>
      <xs:extension base="m:ItemInfoResponseMessageType">
        <xs:sequence>
          <xs:element name="Attachments" type="t:ArrayOfAttachmentsType" minOccurs="0"/>
          <xs:element name="ConflictResults" type="t:ConflictResultsType" minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="UpdateItemInRecoverableItemsResponseType">
    <xs:complexContent>
      <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="UpdateItemInRecoverableItemsResponse"
type="m:UpdateItemInRecoverableItemsResponseMessageType"/>
</xs:schema>

```

7.2 Types Schema

This section provides the contents of the MS-OXWSCORE-types.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSCORE-types.xsd includes the following file. To operate correctly, this file has to be included in the folder that contains the WSDL, types, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-types.xsd	[MS-OXWSCDATA] section 7.2
MS-OXWSURPT-types.xsd	[MS-OXWSURPT] section 7.2
MS-OXWSXPROP-types.xsd	[MS-OXWSXPROP] section 2.1

File name	Defining specification
MS-OXWSMTGS-types.xsd	[MS-OXWSMTGS] section 7.2
MS-OXWSPOST-types.xsd	[MS-OXWSPOST] section 7.2
MS-OXWSGTZ-types.xsd	[MS-OXWSGTZ] section 7.2
MS-OXWSCONT-types.xsd	[MS-OXWSCONT] section 7

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2013" id="types">
  <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
  <xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSURPT-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSXPROP-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSMTGS-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSPOST-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSGTZ-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSCONT-types.xsd"/>
  <xs:complexType name="AppendToItemFieldType">
    <xs:complexContent>
      <xs:extension base="t:ItemChangeDescriptionType">
        <xs:choice>
          <xs:element name="Item" type="t:ItemType"/>
          <xs:element name="Message" type="t:MessageType"/>
          <xs:element name="CalendarItem" type="t:CalendarItemType"/>
          <xs:element name="Contact" type="t:ContactItemType"/>
          <xs:element name="DistributionList" type="t:DistributionListType"/>
          <xs:element name="MeetingMessage" type="t:MeetingMessageType"/>
          <xs:element name="MeetingRequest" type="t:MeetingRequestMessageType"/>
          <xs:element name="MeetingResponse" type="t:MeetingResponseMessageType"/>
          <xs:element name="MeetingCancellation" type="t:MeetingCancellationMessageType"/>
          <xs:element name="Task" type="t:TaskType"/>
          <xs:element name="PostItem" type="t:PostItemType"/>
        </xs:choice>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="ArrayOfOccurrenceRangesType">
    <xs:sequence>
      <xs:element name="Range" type="t:OccurrencesRangeType" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="ChangeDescriptionType" abstract="true">
    <xs:sequence>
      <xs:element ref="t:Path"/>
    </xs:sequence>
  </xs:complexType>
  <xs:simpleType name="ConflictResolutionType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="NeverOverwrite"/>
      <xs:enumeration value="AutoResolve"/>
      <xs:enumeration value="AlwaysOverwrite"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="ConflictResultsType">

```

```

    <xs:sequence>
      <xs:element name="Count" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
<xs:complexType name="DeleteItemFieldType">
  <xs:complexContent>
    <xs:extension base="t:ItemChangeDescriptionType">
      <xs:sequence/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="DerivedItemIdType">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
<xs:complexType name="EntityType">
  <xs:sequence>
    <xs:element name="Position" type="t:EmailPositionType" minOccurs="0"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="FlagType">
  <xs:sequence>
    <xs:element name="FlagStatus" type="t:FlagStatusType" minOccurs="1" maxOccurs="1"/>
    <xs:element name="StartDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="DueDate" type="xs:dateTime" minOccurs="0"/>
    <xs:element name="CompleteDate" type="xs:dateTime" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="ImportanceChoicesType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Low"/>
    <xs:enumeration value="Normal"/>
    <xs:enumeration value="High"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="ItemChangeDescriptionType">
  <xs:complexContent>
    <xs:extension base="t:ChangeDescriptionType"/>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="ItemChangeType">
  <xs:sequence>
    <xs:choice>
      <xs:element name="ItemId" type="t:ItemIdType"/>
      <xs:element name="OccurrenceItemId" type="t:OccurrenceItemIdType"/>
      <xs:element name="RecurringMasterItemId" type="t:RecurringMasterItemIdType"/>
    </xs:choice>
    <xs:element name="Updates" type="t:NonEmptyArrayOfItemChangeDescriptionsType"/>
  </xs:sequence>
</xs:complexType>
<xs:simpleType name="ItemClassType">
  <xs:restriction base="xs:string"/>
</xs:simpleType>
<xs:complexType name="ItemIdType">
  <xs:annotation>
    <xs:documentation>Identifier for a fully resolved item</xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:extension base="t:BaseItemIdType">

```



```

        <xs:attribute name="Id" type="xs:string" use="required"/>
        <xs:attribute name="ChangeKey" type="xs:string" use="optional"/>
    </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="ItemType">
    <xs:sequence>
        <xs:element name="MimeContent" type="t:MimeContentType" minOccurs="0"/>
        <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0"/>
        <xs:element name="ParentFolderId" type="t:FolderIdType" minOccurs="0"/>
        <xs:element name="ItemClass" type="t:ItemClassType" minOccurs="0"/>
        <xs:element name="Subject" type="xs:string" minOccurs="0"/>
        <xs:element name="Sensitivity" type="t:SensitivityChoicesType" minOccurs="0"/>
        <xs:element name="Body" type="t:BodyType" minOccurs="0"/>
        <xs:element name="Attachments" type="t:NonEmptyArrayOfAttachmentsType" minOccurs="0"/>
        <xs:element name="DateTimeReceived" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="Size" type="xs:int" minOccurs="0"/>
        <xs:element name="Categories" type="t:ArrayOfStringsType" minOccurs="0"/>
        <xs:element name="Importance" type="t:ImportanceChoicesType" minOccurs="0"/>
        <xs:element name="InReplyTo" type="xs:string" minOccurs="0"/>
        <xs:element name="IsSubmitted" type="xs:boolean" minOccurs="0"/>
        <xs:element name="IsDraft" type="xs:boolean" minOccurs="0"/>
        <xs:element name="IsFromMe" type="xs:boolean" minOccurs="0"/>
        <xs:element name="IsResend" type="xs:boolean" minOccurs="0"/>
        <xs:element name="IsUnmodified" type="xs:boolean" minOccurs="0"/>
        <xs:element name="InternetMessageHeaders" type="t:NonEmptyArrayOfInternetHeadersType"
minOccurs="0"/>
        <xs:element name="DateTimeSent" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="DateTimeCreated" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="ResponseObjects" type="t:NonEmptyArrayOfResponseObjectsType"
minOccurs="0"/>
        <xs:element name="ReminderDueBy" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="ReminderIsSet" type="xs:boolean" minOccurs="0"/>
        <xs:element name="ReminderNextTime" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="ReminderMinutesBeforeStart" type="t:ReminderMinutesBeforeStartType"
minOccurs="0"/>
        <xs:element name="DisplayCc" type="xs:string" minOccurs="0"/>
        <xs:element name="DisplayTo" type="xs:string" minOccurs="0"/>
        <xs:element name="HasAttachments" type="xs:boolean" minOccurs="0"/>
        <xs:element name="ExtendedProperty" type="t:ExtendedPropertyType" minOccurs="0"
maxOccurs="unbounded"/>
        <xs:element name="Culture" type="xs:language" minOccurs="0"/>
        <xs:element name="EffectiveRights" type="t:EffectiveRightsType" minOccurs="0"/>
        <xs:element name="LastModifiedName" type="xs:string" minOccurs="0"/>
        <xs:element name="LastModifiedTime" type="xs:dateTime" minOccurs="0"/>
        <xs:element name="IsAssociated" type="xs:boolean" minOccurs="0"/>
        <xs:element name="WebClientReadFormQueryString" type="xs:string" minOccurs="0"/>
        <xs:element name="WebClientEditFormQueryString" type="xs:string" minOccurs="0"/>
        <xs:element name="ConversationId" type="t:ItemIdType" minOccurs="0"/>
        <xs:element name="UniqueBody" type="t:BodyType" minOccurs="0"/>
        <xs:element name="Flag" type="t:FlagType" minOccurs="0"/>
        <xs:element name="StoreEntryId" type="xs:base64Binary" minOccurs="0"/>
        <xs:element name="InstanceKey" type="xs:base64Binary" minOccurs="0"/>
        <xs:element name="NormalizedBody" type="t:BodyType" minOccurs="0"/>
        <xs:element name="EntityExtractionResult" type="t:EntityExtractionResultType"
minOccurs="0" />
        <xs:element name="PolicyTag" type="t:RetentionTagType" minOccurs="0"/>
        <xs:element name="ArchiveTag" type="t:RetentionTagType" minOccurs="0"/>
        <xs:element name="RetentionDate" type="xs:dateTime" minOccurs="0"/>
    </xs:sequence>
</xs:complexType>

```

```

    <xs:element name="Preview" type="xs:string" minOccurs="0"/>
    <xs:element name="RightsManagementLicenseData"
type="t:RightsManagementLicenseDataType" minOccurs="0" />
    <xs:element name="NextPredictedAction" type="t:PredictedMessageType"
minOccurs="0" />
    <xs:element name="GroupingAction" type="t:PredictedMessageType" minOccurs="0"/>
    <xs:element name="BlockStatus" type="xs:boolean" minOccurs="0" />
    <xs:element name="HasBlockedImages" type="xs:boolean" minOccurs="0" />
    <xs:element name="TextBody" type="t:BodyType" minOccurs="0"/>
    <xs:element name="IconIndex" type="t:IconIndexType" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="MimeContentType">
  <xs:simpleContent>
    <xs:extension base="xs:string">
      <xs:attribute name="CharacterSet" type="xs:string" use="optional"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfBaseItemIdsType">
  <xs:choice maxOccurs="unbounded">
    <xs:element name="ItemId" type="t:ItemIdType"/>
    <xs:element name="OccurrenceItemId" type="t:OccurrenceItemIdType"/>
    <xs:element name="RecurringMasterItemId" type="t:RecurringMasterItemIdType"/>
    <xs:element name="RecurringMasterItemIdRanges"
type="t:RecurringMasterItemIdRangesType"/>
  </xs:choice>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfInternetHeadersType">
  <xs:sequence>
    <xs:element name="InternetMessageHeader" type="t:InternetHeaderType"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfItemChangeDescriptionsType">
  <xs:choice maxOccurs="unbounded">
    <xs:element name="AppendToItemField" type="t:AppendToItemFieldType"/>
    <xs:element name="SetItemField" type="t:SetItemFieldType"/>
    <xs:element name="DeleteItemField" type="t>DeleteItemFieldType"/>
  </xs:choice>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfItemChangesType">
  <xs:sequence>
    <xs:element name="ItemChange" type="t:ItemChangeType" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="NonEmptyArrayOfResponseObjectsType">
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:element name="AcceptItem" type="t:AcceptItemType"/>
    <xs:element name="TentativelyAcceptItem" type="t:TentativelyAcceptItemType"/>
    <xs:element name="DeclineItem" type="t:DeclineItemType"/>
    <xs:element name="ReplyToItem" type="t:ReplyToItemType"/>
    <xs:element name="ForwardItem" type="t:ForwardItemType"/>
    <xs:element name="ReplyAllToItem" type="t:ReplyAllToItemType"/>
    <xs:element name="CancelCalendarItem" type="t:CancelCalendarItemType"/>
    <xs:element name="RemoveItem" type="t:RemoveItemType"/>
    <xs:element name="SuppressReadReceipt" type="t:SuppressReadReceiptType"/>
    <xs:element name="PostReplyItem" type="t:PostReplyItemType"/>
    <xs:element name="AcceptSharingInvitation" type="t:AcceptSharingInvitationType"/>
  </xs:choice>
</xs:complexType>

```

```

    </xs:choice>
</xs:complexType>
<xs:complexType name="OccurrenceItemIdType">
  <xs:complexContent>
    <xs:extension base="t:BaseItemIdType">
      <xs:attribute name="RecurringMasterId" type="t:DerivedItemIdType" use="required"/>
      <xs:attribute name="ChangeKey" type="xs:string" use="optional"/>
      <xs:attribute name="InstanceIndex" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="OccurrencesRangeType">
  <xs:attribute name="Start" type="xs:dateTime" use="optional"/>
  <xs:attribute name="End" type="xs:dateTime" use="optional"/>
  <xs:attribute name="Count" type="xs:int" use="optional"/>
  <xs:attribute name="CompareOriginalStartTime" type="xs:boolean" use="optional"/>
</xs:complexType>

<xs:complexType name="RecurringMasterItemIdType">
  <xs:complexContent>
    <xs:extension base="t:BaseItemIdType">
      <xs:attribute name="OccurrenceId" type="t:DerivedItemIdType" use="required"/>
      <xs:attribute name="ChangeKey" type="xs:string" use="optional"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="RecurringMasterItemIdRangesType">
  <xs:complexContent>
    <xs:extension base="t:ItemIdType">
      <xs:sequence>
        <xs:element name="Ranges" type="t:ArrayOfOccurrenceRangesType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="ReminderMinutesBeforeStartType">
  <xs:union>
    <xs:simpleType id="ReminderMinutesBeforeStartType">
      <xs:restriction base="xs:int">
        <xs:minInclusive value="0"/>
        <xs:maxInclusive value="2629800"/>
      </xs:restriction>
    </xs:simpleType>
    <xs:simpleType id="ReminderMinutesBeforeStartMarkerType">
      <xs:restriction base="xs:int">
        <xs:minInclusive value="0"/>
        <xs:maxInclusive value="1525252321"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:union>
</xs:simpleType>
<xs:complexType name="SetItemFieldType">
  <xs:complexContent>
    <xs:extension base="t:ItemChangeDescriptionType">
      <xs:choice>
        <xs:element name="Item" type="t:ItemType"/>
        <xs:element name="Message" type="t:MessageType"/>
        <xs:element name="CalendarItem" type="t:CalendarItemType"/>
        <xs:element name="Contact" type="t:ContactItemType"/>
      </xs:choice>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

    <xs:element name="DistributionList" type="t:DistributionListType"/>
    <xs:element name="MeetingMessage" type="t:MeetingMessageType"/>
    <xs:element name="MeetingRequest" type="t:MeetingRequestMessageType"/>
    <xs:element name="MeetingResponse" type="t:MeetingResponseMessageType"/>
    <xs:element name="MeetingCancellation" type="t:MeetingCancellationMessageType"/>
    <xs:element name="Task" type="t:TaskType"/>
    <xs:element name="PostItem" type="t:PostItemType"/>
  </xs:choice>
</xs:extension>
</xs:complexType>
<xs:complexType name="SmartResponseBaseType">
  <xs:complexContent>
    <xs:restriction base="t:ResponseObjectType">
      <xs:sequence>
        <xs:element name="Subject" type="xs:string" minOccurs="0" />
        <xs:element name="Body" type="t:BodyType" minOccurs="0" />
        <xs:element name="ToRecipients" type="t:ArrayOfRecipientsType" minOccurs="0" />
        <xs:element name="CcRecipients" type="t:ArrayOfRecipientsType" minOccurs="0" />
        <xs:element name="BccRecipients" type="t:ArrayOfRecipientsType" minOccurs="0" />
        <xs:element name="IsReadReceiptRequested" type="xs:boolean" minOccurs="0" />
        <xs:element name="IsDeliveryReceiptRequested" type="xs:boolean" minOccurs="0" />
        <xs:element name="From" type="t:SingleRecipientType" minOccurs="0" />
        <xs:element name="ReferenceItemId" type="t:ItemIdType" minOccurs="0" />
      </xs:sequence>
      <xs:attribute name="ObjectName" type="xs:string" use="prohibited" />
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="SmartResponseType">
  <xs:complexContent>
    <xs:extension base="t:SmartResponseBaseType">
      <xs:sequence>
        <xs:element name="NewBodyContent" type="t:BodyType" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="UrlEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="Url" type="xs:string" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<!-- Begin Entity Extraction -->
<xs:complexType name="ArrayOfAddressEntitiesType">
  <xs:sequence>
    <xs:element name="AddressEntity" type="t:AddressEntityType"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="AddressEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="Address" type="xs:string" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
<xs:complexType name="ArrayOfEmailAddressEntityType">
  <xs:sequence>
    <xs:element name="EmailAddressEntity" type="t:EmailAddressEntityType"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="EmailAddressEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="EmailAddress" type="xs:string" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="ArrayOfAddressesType">
  <xs:sequence>
    <xs:element name="Address" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="ArrayOfUrlEntitiesType">
  <xs:sequence>
    <xs:element name="UrlEntity" type="t:UrlEntityType"
      minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="ArrayOfMeetingSuggestionsType">
  <xs:sequence>
    <xs:element name="MeetingSuggestion" type="t:MeetingSuggestionType"
      maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>

  <xs:complexType name="MeetingSuggestionType">
    <xs:complexContent>
      <xs:extension base="t:EntityType">
        <xs:sequence>
          <xs:element name="Attendees" type="t:ArrayOfEmailUsersType" minOccurs="0"
            maxOccurs="1" />
          <xs:element name="Location" type="xs:string" minOccurs="0" />
          <xs:element name="Subject" type="xs:string" minOccurs="0" />
          <xs:element name="MeetingString" type="xs:string" minOccurs="0" />
          <xs:element name="StartTime" type="xs:dateTime" minOccurs="0" />
          <xs:element name="EndTime" type="xs:dateTime" minOccurs="0" />
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

  <xs:complexType name="ArrayOfTaskSuggestionsType">
    <xs:sequence>
      <xs:element name="TaskSuggestion" type="t:TaskSuggestionType" maxOccurs="unbounded" />
    </xs:sequence>
  </xs:complexType>

```

```

<xs:complexType name="ArrayOfContactsType">
  <xs:sequence>
    <xs:element name="Contact" type="t:ContactType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="ContactType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="PersonName" type="xs:string" minOccurs="0" />
        <xs:element name="BusinessName" type="xs:string" minOccurs="0" />
        <xs:element name="PhoneNumbers" type="t:ArrayOfPhonesType" minOccurs="0"
maxOccurs="1" />
        <xs:element name="Urls" type="t:ArrayOfUrlsType" minOccurs="0" maxOccurs="1" />
        <xs:element name="EmailAddresses" type="t:ArrayOfExtractedEmailAddresses"
minOccurs="0" maxOccurs="1" />
        <xs:element name="Addresses" type="t:ArrayOfAddressesType" minOccurs="0"
maxOccurs="1" />
        <xs:element name="ContactString" type="xs:string" minOccurs="0" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

<xs:complexType name="ArrayOfUrlsType">
  <xs:sequence>
    <xs:element name="Url" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="ArrayOfPhonesType">
  <xs:sequence>
    <xs:element name="Phone" type="t:PhoneType" minOccurs="0" maxOccurs="unbounded" />
  </xs:sequence>
</xs:complexType>

<xs:complexType name="PhoneType">
  <xs:sequence>
    <xs:element name="OriginalPhoneString" type="xs:string" minOccurs="0" />
    <xs:element name="PhoneString" type="xs:string" minOccurs="0" />
    <xs:element name="Type" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>
<xs:complexType name="ArrayOfPhoneEntitiesType">
  <xs:sequence>
    <xs:element name="Phone" type="t:PhoneEntityType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="PhoneEntityType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="OriginalPhoneString" type="xs:string" minOccurs="0"/>
        <xs:element name="PhoneString" type="xs:string" minOccurs="0"/>
        <xs:element name="Type" type="xs:string" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

</xs:complexType>
<xs:simpleType name="EmailPositionType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="LatestReply"/>
    <xs:enumeration value="Other"/>
    <xs:enumeration value="Subject"/>
    <xs:enumeration value="Signature"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="ArrayOfEmailUsersType">
  <xs:sequence>
    <xs:element name="EmailUser" type="t:EmailUserType" minOccurs="0" maxOccurs="unbounded"
  />
  </xs:sequence>
</xs:complexType>

<xs:complexType name="EmailUserType">
  <xs:sequence>
    <xs:element name="Name" type="xs:string" minOccurs="0" />
    <xs:element name="UserId" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>

<xs:complexType name="TaskSuggestionType">
  <xs:complexContent>
    <xs:extension base="t:EntityType">
      <xs:sequence>
        <xs:element name="TaskString" type="xs:string" minOccurs="0" />
        <xs:element name="Assignees" type="t:ArrayOfEmailUsersType" minOccurs="0"
maxOccurs="1" />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

<xs:complexType name="ArrayOfExtractedEmailAddresses">
  <xs:sequence>
    <xs:element name="EmailAddress" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>

<xs:complexType name="EntityExtractionResultType">
  <xs:sequence>
    <xs:element name="Addresses" type="t:ArrayOfAddressEntitiesType" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="MeetingSuggestions" type="t:ArrayOfMeetingSuggestionsType"
minOccurs="0" maxOccurs="1"/>
    <xs:element name="TaskSuggestions" type="t:ArrayOfTaskSuggestionsType" minOccurs="0"
maxOccurs="1"/>
    <xs:element name="EmailAddresses" type="t:ArrayOfEmailAddressEntitiesType"
minOccurs="0" maxOccurs="1"/>
    <xs:element name="Contacts" type="t:ArrayOfContactsType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="Urls" type="t:ArrayOfUrlEntitiesType" minOccurs="0" maxOccurs="1"/>
    <xs:element name="PhoneNumbers" type="t:ArrayOfPhoneEntitiesType" minOccurs="0"
maxOccurs="1"/>
  </xs:sequence>
</xs:complexType>

<!-- End Entity Extraction -->

```

```
<xs:complexType name="RightsManagementLicenseDataType">
  <xs:sequence>
    <xs:element name="RightsManagedMessageDecryptionStatus" type="xs:int" minOccurs="0" />
    <xs:element name="RmsTemplateId" type="xs:string" minOccurs="0" />
    <xs:element name="TemplateName" type="xs:string" minOccurs="0" />
    <xs:element name="TemplateDescription" type="xs:string" minOccurs="0" />
    <xs:element name="EditAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ReplyAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ReplyAllAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ForwardAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ModifyRecipientsAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ExtractAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="PrintAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ExportAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="ProgrammaticAccessAllowed" type="xs:boolean" minOccurs="0" />
    <xs:element name="IsOwner" type="xs:boolean" minOccurs="0" />
    <xs:element name="ContentOwner" type="xs:string" minOccurs="0" />
    <xs:element name="ContentExpiryDate" type="xs:string" minOccurs="0" />
  </xs:sequence>
</xs:complexType>
</xs:schema>
```


8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft Exchange Server 2007
- Microsoft Exchange Server 2010
- Microsoft Exchange Server 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.3.1:](#) Exchange 2007 and Exchange 2010 do not support the **ManagementRole** element.

[<2> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **AddressEntityType** complex type.

[<3> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfAddressEntitiesType** complex type.

[<4> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfAddressesType** complex type.

[<5> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfContactsType** complex type.

[<6> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfEmailAddressEntitiesType** complex type.

[<7> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfEmailUsersType** complex type.

[<8> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfExtractedEmailAddresses** complex type.

[<9> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfMeetingSuggestionsType** complex type.

[<10> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfPhoneEntitiesType** complex type.

[<11> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfPhonesType** complex type.

[<12> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfOccurrenceRangesType** complex type.

<13> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfTaskSuggestionsType** complex type.

<14> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfUrlEntitiesType** complex type.

<15> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfUrlsType** complex type.

<16> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfContactsType** complex type.

<17> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **EmailAddressEntityType** complex type.

<18> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **EmailUserType** complex type.

<19> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **EntityExtractionResultType** complex type.

<20> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **EntityType** complex type.

<21> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **FlagType** complex type.

<22> [Section 2.2.4:](#) Exchange 2007 SP1, Exchange 2010, and Exchange 2013 do not support the **ItemType** complex type.

<23> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **MeetingSuggestionType** complex type.

<24> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **OccurrencesRangeType** complex type.

<25> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **PhoneType** complex type.

<26> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **PhoneEntityType** complex type.

<27> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **RecurringMasterItemIdRangesType** complex type.

<28> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **RightsManagementLicenseDataType** complex type.

<29> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **TaskSuggestionType** complex type.

<30> [Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not support the **UrlEntityType** complex type.

<31> [Section 2.2.4.1:](#) Exchange 2007 and Exchange 2010 do not use the **AddressEntityType** complex type.

- <32> [Section 2.2.4.2:](#) Exchange 2007 and Exchange 2010 do not use the **ArrayOfAddressEntityType** complex type.
- <33> [Section 2.2.4.3:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfAddressesType** complex type.
- <34> [Section 2.2.4.4:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfContactsType** complex type.
- <35> [Section 2.2.4.5:](#) Exchange 2007 and Exchange 2010 do not use the **ArrayOfEmailAddressEntitiesType** complex type.
- <36> [Section 2.2.4.6:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfEmailUsersType** complex type.
- <37> [Section 2.2.4.7:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfExtractedEmailAddresses** complex type.
- <38> [Section 2.2.4.8:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfMeetingSuggestionsType** complex type.
- <39> [Section 2.2.4.9:](#) Exchange 2007 and Exchange 2010 do not use the **ArrayOfPhoneEntitiesType** complex type.
- <40> [Section 2.2.4.10:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfPhonesType** complex type.
- <41> [Section 2.2.4.11:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfOccurrenceRangesType** complex type.
- <42> [Section 2.2.4.12:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfTaskSuggestionsType** complex type.
- <43> [Section 2.2.4.13:](#) Exchange 2007 and Exchange 2010 do not use the **ArrayOfUrlEntitiesType** complex type.
- <44> [Section 2.2.4.14:](#) Exchange 2007 and Exchange 2010 do not support the **ArrayOfUrlsType** complex type.
- <45> [Section 2.2.4.15:](#) Exchange 2007 and Exchange 2010 do not include the **ReturnNewItemIds** element. The **ReturnNewItemIds** element was introduced in Exchange 2010 SP1.
- <46> [Section 2.2.4.17:](#) Exchange 2007 and Exchange 2010 do not support the **ContactType** complex type.
- <47> [Section 2.2.4.18:](#) Exchange 2007 and Exchange 2010 do not use the **EmailAddressEntityType** complex type.
- <48> [Section 2.2.4.19:](#) Exchange 2007 and Exchange 2010 do not support the **EmailUserType** complex type.
- <49> [Section 2.2.4.20:](#) Exchange 2007 and Exchange 2010 do not support the **EntityExtractionResultType** complex type.
- <50> [Section 2.2.4.21:](#) Exchange 2007 and Exchange 2010 do not use the **EntityType** complex type.

<51> [Section 2.2.4.22:](#) Exchange 2007 and Exchange 2010 do not support the **FlagType** complex type.

<52> [Section 2.2.4.23:](#) Exchange 2007 SP1, Exchange 2010, and Exchange 2013 do not support the **ItemType** complex type.

<53> [Section 2.2.4.23:](#) Exchange 2007, Exchange 2010 and Exchange 2010 SP1 do not use the **Attachments** element in **CreateItem** operation request.

<54> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **ReminderNextTime** element.

<55> [Section 2.2.4.23:](#) Exchange 2007 does not support the **IsAssociated** element.

<56> [Section 2.2.4.23:](#) Exchange 2007 does not support the **WebClientReadFormQueryString** element.

<57> [Section 2.2.4.23:](#) Exchange 2007 does not support the **WebClientEditFormQueryString** element.

<58> [Section 2.2.4.23:](#) Exchange 2007 does not support the **UniqueBody** element.

<59> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **Flag** element.

<60> [Section 2.2.4.23:](#) Exchange 2007, Exchange 2010 and Exchange 2010 SP1 do not support the **StoreEntryId** element.

<61> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **InstanceKey** element.

<62> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **NormalizedBody** element.

<63> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **EntityExtractionResult** element.

<64> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **PolicyTag** element.

<65> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **ArchiveTag** element.

<66> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **RetentionDate** element.

<67> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **Preview** element.

<68> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **RightsManagementLicenseData** element.

<69> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **NextPredictedAction** element.

<70> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **GroupingAction** element.

<71> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **BlockStatus** element.

- <72> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **HasBlockedImages** element.
- <73> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **TextBody** element
- <74> [Section 2.2.4.23:](#) Exchange 2007 and Exchange 2010 do not support the **IconIndex** element.
- <75> [Section 2.2.4.25:](#) Exchange 2007 and Exchange 2010 do not support the **ManagementRoleType** complex type.
- <76> [Section 2.2.4.26:](#) Exchange 2007 and Exchange 2010 do not support the **MeetingSuggestionType** complex type.
- <77> [Section 2.2.4.28:](#) Exchange 2007 and Exchange 2010 do not support the **RecurringMasterItemIdRanges** element.
- <78> [Section 2.2.4.31:](#) Exchange 2007 and Exchange 2010 do not support the **NonEmptyArrayOfRoleType** complex type.
- <79> [Section 2.2.4.33:](#) Exchange 2007 and Exchange 2010 do not support the **OccurrencesRangeType** complex type.
- <80> [Section 2.2.4.34:](#) Exchange 2007 and Exchange 2010 do not support the **PhoneType** complex type.
- <81> [Section 2.2.4.35:](#) Exchange 2007 and Exchange 2010 do not use the **PhoneEntityType** complex type.
- <82> [Section 2.2.4.37:](#) Exchange 2007 and Exchange 2010 do not support the **RecurringMasterItemIdRangesType** complex type.
- <83> [Section 2.2.4.38:](#) Exchange 2007, Exchange 2010, and Exchange 2013 do not support the **RightsManagementLicenseDataType** complex type.
- <84> [Section 2.2.4.41:](#) Exchange 2007 and Exchange 2010 do not support the **TaskSuggestionType** complex type.
- <85> [Section 2.2.4.43:](#) Exchange 2007 and Exchange 2010 do not use the **UrlEntityType** complex type.
- <86> [Section 3.1.4:](#) Exchange 2007 and Exchange 2010 do not use the **MarkAsJunk** operation.
- <87> [Section 3.1.4:](#) Exchange 2007 and Exchange 2010 do not support the **UpdateItemInRecoverableItems** operation.
- <88> [Section 3.1.4.2.3.2:](#) Exchange 2007 does not support the **DistributionListType** item in the **CreateItem** operation.
- <89> [Section 3.1.4.4.1.1:](#) Exchange 2007 *Test- and Access for Windows 95 *Test will not convert the times in **GetItem** response even if the **TimeZoneContext** SOAP header is set in request.
- <90> [Section 3.1.4.4.1.1:](#) Exchange 2007, Exchange 2010 and Exchange 2010 SP1 do not support the **DateTimePrecision** SOAP header. The **DateTimePrecision** SOAP header was introduced in Exchange 2010 SP2.

[<91> Section 3.1.4.4.1.1:](#) Exchange 2007 and Exchange 2010 do not support the **ManagementRole** SOAP header. The **ManagementRole** SOAP header was introduced in Exchange 2013.

[<92> Section 3.1.4.5:](#) Exchange 2007 and Exchange 2010 do not support the **MarkAllItemsAsRead** operation.

[<93> Section 3.1.4.6:](#) Exchange 2007 and Exchange 2010 do not use the **MarkAsJunk** operation.

[<94> Section 3.1.4.10:](#) Exchange 2007 and Exchange 2010 do not support the **UpdateItemInRecoverableItems** operation.

9 Change Tracking

This section identifies changes that were made to the [MS-OXWSCORE] protocol document between the July 2014 and October 2014 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.

- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
1 Introduction	Added "send" to the introductory statement about the protocol.	N	Content updated.
3.1.4 Message Processing Events and Sequencing Rules	Added UpdateItemInRecoverableItems operation.	Y	New content added.
3.1.4.1 CopyItem Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.2 CreateItem Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.3 DeleteItem Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.4 GetItem Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.5 MarkAllItemsAsRead Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.7 MoveItem Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.8 SendItem Operation	Added sections for Simple Types, Attributes, Groups, and Attribute Groups.	N	New content added for template

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
			compliance.
3.1.4.9 UpdateItem Operation	Added sections for Attributes, Groups, and Attribute Groups.	N	New content added for template compliance.
3.1.4.10 UpdateItemInRecoverableItems Operation	Added new section and associated subsections for UpdateItemInRecoverableItems operation.	Y	New content added.

10 Index

A

Abstract data model
[server](#) 46
[Applicability](#) 11
[Attribute groups](#) 45
[Attributes](#) 45

C

[Capability negotiation](#) 11
[Change tracking](#) 127
[Complex types](#) 14
[m:BaseMoveCopyItemType Complex Type](#) 19
[m:UpdateItemResponseMessageType](#) 42
[t:AddressEntityType Complex Type](#) 16
[t:ArrayOfAddressEntitiesType Complex Type](#) 16
[t:ArrayOfAddressesType Complex Type](#) 16
[t:ArrayOfContactsType Complex Type](#) 17
[t:ArrayOfEmailAddressEntitiesType Complex Type](#) 17
[t:ArrayOfEmailUsersType Complex Type](#) 17
[t:ArrayOfExtractedEmailAddresses Complex Type](#) 17
[t:ArrayOfMeetingSuggestionsType Complex Type](#) 18
[t:ArrayOfOccurrenceRangesType Complex Type](#) 18
[t:ArrayOfPhoneEntitiesType Complex Type](#) 18
[t:ArrayOfPhonesType Complex Type](#) 18
[t:ArrayOfTaskSuggestionsType Complex Type](#) 19
[t:ArrayOfUrlEntitiesType Complex Type](#) 19
[t:ArrayOfUrlsType Complex Type](#) 19
[t:ConflictResultsType Complex Type](#) 20
[t:ContactType Complex Type](#) 21
[t:EmailAddressEntityType Complex Type](#) 21
[t:EmailUserType Complex Type](#) 22
[t:EntityExtractionResultType Complex Type](#) 22
[t:EntityType Complex Type](#) 23
[t:FlagType Complex Type](#) 23
[t:ItemIdType Complex Type](#) 30
[t:ItemType Complex Type](#) 24
[t:ManagementRoleType Complex Type](#) 31
[t:MeetingSuggestionType Complex Type](#) 31
[t:MimeContentType Complex Type](#) 32
[t:NonEmptyArrayOfBaseItemIdsType Complex Type](#) 32
[t:NonEmptyArrayOfInternetHeadersType Complex Type](#) 33
[t:NonEmptyArrayOfResponseObjectsType Complex Type](#) 33
[t:NonEmptyArrayOfRoleType Complex Type](#) 35
[t:OccurrenceItemIdType Complex Type](#) 35
[t:OccurrencesRangeType Complex Type](#) 36
[t:PhoneEntityType Complex Type](#) 37
[t:PhoneType Complex Type](#) 37
[t:RecurringMasterItemIdRangesType Complex Type](#) 38

[t:RecurringMasterItemIdType Complex Type](#) 37
[t:RightsManagementLicenseDataType Complex Type](#) 38
[t:SmartResponseBaseType Complex Type](#) 40
[t:SmartResponseType Complex Type](#) 41
[t:TaskSuggestionType Complex Type](#) 41
[t:UrlEntityType Complex Type](#) 42

D

Data model - abstract
[server](#) 46

E

Elements
[t:ManagementRole Element](#) 14
Events
[local - server](#) 96
[timer - server](#) 96

F

[Fields - vendor-extensible](#) 12
[Full WSDL](#) 99
[Full XML Schema](#) 106
[Messages Schema](#) 106
[Types Schema](#) 110

G

[Glossary](#) 8
[Groups](#) 45

I

[Implementer - security considerations](#) 98
[Index of security parameters](#) 98
[Informative references](#) 10
Initialization
[server](#) 46
[Introduction](#) 8

L

Local events
[server](#) 96

M

[m:BaseMoveCopyItemType Complex Type complex type](#) 19
[m:UpdateItemResponseMessageType complex type](#) 42
Message processing
[server](#) 46
Messages
[attribute groups](#) 45

[attributes](#) 45
[complex types](#) 14
[elements](#) 14
[enumerated](#) 13
[groups](#) 45
[m:BaseMoveCopyItemType Complex Type complex type](#) 19
[m:UpdateItemResponseMessageType complex type](#) 42
[namespaces](#) 13
[simple types](#) 43
[syntax](#) 13
[t:AddressEntityType Complex Type complex type](#) 16
[t:ArrayOfAddressEntitiesType Complex Type complex type](#) 16
[t:ArrayOfAddressesType Complex Type complex type](#) 16
[t:ArrayOfContactsType Complex Type complex type](#) 17
[t:ArrayOfEmailAddressEntitiesType Complex Type complex type](#) 17
[t:ArrayOfEmailUsersType Complex Type complex type](#) 17
[t:ArrayOfExtractedEmailAddresses Complex Type complex type](#) 17
[t:ArrayOfMeetingSuggestionsType Complex Type complex type](#) 18
[t:ArrayOfOccurrenceRangesType Complex Type complex type](#) 18
[t:ArrayOfPhoneEntitiesType Complex Type complex type](#) 18
[t:ArrayOfPhonesType Complex Type complex type](#) 18
[t:ArrayOfTaskSuggestionsType Complex Type complex type](#) 19
[t:ArrayOfUrlEntitiesType Complex Type complex type](#) 19
[t:ArrayOfUrlsType Complex Type complex type](#) 19
[t:ConflictResultsType Complex Type complex type](#) 20
[t:ContactType Complex Type complex type](#) 21
[t:DerivedItemIdType Simple Type simple type](#) 43
[t:EmailAddressEntityType Complex Type complex type](#) 21
[t:EmailPositionType Simple Type simple type](#) 43
[t:EmailUserType Complex Type complex type](#) 22
[t:EntityExtractionResultType Complex Type complex type](#) 22
[t:EntityType Complex Type complex type](#) 23
[t:FlagType Complex Type complex type](#) 23
[t:ImportanceChoicesType Simple Type simple type](#) 44
[t:ItemClassType Simple Type simple type](#) 44
[t:ItemIdType Complex Type complex type](#) 30
[t:ItemType Complex Type complex type](#) 24
[t:ManagementRole Element element](#) 14
[t:ManagementRoleType Complex Type complex type](#) 31

[t:MeetingSuggestionType Complex Type complex type](#) 31
[t:MimeContentType Complex Type complex type](#) 32
[t:NonEmptyArrayOfBaseItemIdsType Complex Type complex type](#) 32
[t:NonEmptyArrayOfInternetHeadersType Complex Type complex type](#) 33
[t:NonEmptyArrayOfResponseObjectsType Complex Type complex type](#) 33
[t:NonEmptyArrayOfRoleType Complex Type complex type](#) 35
[t:OccurrenceItemIdType Complex Type complex type](#) 35
[t:OccurrencesRangeType Complex Type complex type](#) 36
[t:PhoneEntityType Complex Type complex type](#) 37
[t:PhoneType Complex Type complex type](#) 37
[t:RecurringMasterItemIdRangesType Complex Type complex type](#) 38
[t:RecurringMasterItemIdType Complex Type complex type](#) 37
[t:ReminderMinutesBeforeStartType Simple Type simple type](#) 45
[t:RightsManagementLicenseDataType Complex Type complex type](#) 38
[t:SmartResponseBaseType Complex Type complex type](#) 40
[t:SmartResponseType Complex Type complex type](#) 41
[t:TaskSuggestionType Complex Type complex type](#) 41
[t:UrlEntityType Complex Type complex type](#) 42
[transport](#) 13

N

[Namespaces](#) 13
[Normative references](#) 9

O

Operations
[CopyItem Operation](#) 46
[CreateItem Operation](#) 50
[DeleteItem Operation](#) 54
[GetItem Operation](#) 59
[MarkAllItemsAsRead Operation](#) 63
[MarkAsJunk Operation](#) 67
[MoveItem Operation](#) 71
[SendItem Operation](#) 75
[UpdateItem Operation](#) 79
[UpdateItemInRecoverableItems Operation](#) 91
[Overview \(synopsis\)](#) 10

P

[Parameters - security index](#) 98
[Preconditions](#) 11
[Prerequisites](#) 11
[Product behavior](#) 121

Protocol Details
[overview](#) 46

R

[References](#) 9
[informative](#) 10
[normative](#) 9
[Relationship to other protocols](#) 10

S

Security
[implementer considerations](#) 98
[parameter index](#) 98

Sequencing rules
[server](#) 46

Server
[abstract data model](#) 46
[CopyItem Operation operation](#) 46
[CreateItem Operation operation](#) 50
[DeleteItem Operation operation](#) 54
[GetItem Operation operation](#) 59
[initialization](#) 46
[local events](#) 96
[MarkAllItemsAsRead Operation operation](#) 63
[MarkAsJunk Operation operation](#) 67
[message processing](#) 46
[MoveItem Operation operation](#) 71
[SendItem Operation operation](#) 75
[sequencing rules](#) 46
[timer events](#) 96
[timers](#) 46
[UpdateItem Operation operation](#) 79
[UpdateItemInRecoverableItems Operation operation](#) 91

[Simple types](#) 43
[t:DerivedItemIdType Simple Type](#) 43
[t:EmailPositionType Simple Type](#) 43
[t:ImportanceChoicesType Simple Type](#) 44
[t:ItemClassType Simple Type](#) 44
[t:ReminderMinutesBeforeStartType Simple Type](#) 45

[Standards assignments](#) 12

Syntax
[messages - overview](#) 13

T

[t:AddressEntityType Complex Type complex type](#) 16
[t:ArrayOfAddressEntitiesType Complex Type complex type](#) 16
[t:ArrayOfAddressesType Complex Type complex type](#) 16
[t:ArrayOfContactsType Complex Type complex type](#) 17
[t:ArrayOfEmailAddressEntitiesType Complex Type complex type](#) 17
[t:ArrayOfEmailUsersType Complex Type complex type](#) 17
[t:ArrayOfExtractedEmailAddresses Complex Type complex type](#) 17

[t:ArrayOfMeetingSuggestionsType Complex Type complex type](#) 18
[t:ArrayOfOccurrenceRangesType Complex Type complex type](#) 18
[t:ArrayOfPhoneEntitiesType Complex Type complex type](#) 18
[t:ArrayOfPhonesType Complex Type complex type](#) 18
[t:ArrayOfTaskSuggestionsType Complex Type complex type](#) 19
[t:ArrayOfUrlEntitiesType Complex Type complex type](#) 19
[t:ArrayOfUrlsType Complex Type complex type](#) 19
[t:ConflictResultsType Complex Type complex type](#) 20
[t:ContactType Complex Type complex type](#) 21
[t:DerivedItemIdType Simple Type simple type](#) 43
[t:EmailAddressEntityType Complex Type complex type](#) 21
[t:EmailPositionType Simple Type simple type](#) 43
[t:EmailUserType Complex Type complex type](#) 22
[t:EntityExtractionResultType Complex Type complex type](#) 22
[t:EntityType Complex Type complex type](#) 23
[t:FlagType Complex Type complex type](#) 23
[t:ImportanceChoicesType Simple Type simple type](#) 44
[t:ItemClassType Simple Type simple type](#) 44
[t:ItemIdType Complex Type complex type](#) 30
[t:ItemType Complex Type complex type](#) 24
[t:ManagementRole Element element](#) 14
[t:ManagementRoleType Complex Type complex type](#) 31
[t:MeetingSuggestionType Complex Type complex type](#) 31
[t:MimeContentType Complex Type complex type](#) 32
[t:NonEmptyArrayOfBaseItemIdsType Complex Type complex type](#) 32
[t:NonEmptyArrayOfInternetHeadersType Complex Type complex type](#) 33
[t:NonEmptyArrayOfResponseObjectsType Complex Type complex type](#) 33
[t:NonEmptyArrayOfRoleType Complex Type complex type](#) 35
[t:OccurrenceItemIdType Complex Type complex type](#) 35
[t:OccurrencesRangeType Complex Type complex type](#) 36
[t:PhoneEntityType Complex Type complex type](#) 37
[t:PhoneType Complex Type complex type](#) 37
[t:RecurringMasterItemIdRangesType Complex Type complex type](#) 38
[t:RecurringMasterItemIdType Complex Type complex type](#) 37
[t:ReminderMinutesBeforeStartType Simple Type simple type](#) 45
[t:RightsManagementLicenseDataType Complex Type complex type](#) 38
[t:SmartResponseBaseType Complex Type complex type](#) 40

[t:SmartResponseType Complex Type complex type](#)
41
[t:TaskSuggestionType Complex Type complex type](#)
41
[t:UrlEntityType Complex Type complex type](#) 42
Timer events
 [server](#) 96
Timers
 [server](#) 46
[Tracking changes](#) 127
[Transport](#) 13
Types
 [complex](#) 14
 [simple](#) 43

V

[Vendor-extensible fields](#) 12
[Versioning](#) 11

W

[WSDL](#) 99

X

[XML Schema](#) 106
 [Messages Schema](#) 106
 [Types Schema](#) 110