

[MS-OXWSCOS]: Unified Contact Store Web Service Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
07/16/2012	0.1	New	Released new document.
10/08/2012	1.0	Major	Significantly changed the technical content.

Table of Contents

1 Introduction	8
1.1 Glossary	8
1.2 References	8
1.2.1 Normative References	9
1.2.2 Informative References	9
1.3 Overview	10
1.4 Relationship to Other Protocols	10
1.5 Prerequisites/Preconditions	10
1.6 Applicability Statement	11
1.7 Versioning and Capability Negotiation	11
1.8 Vendor-Extensible Fields	11
1.9 Standards Assignments	11
2 Messages	12
2.1 Transport	12
2.2 Common Message Syntax	12
2.2.1 Namespaces	12
2.2.2 Messages	12
2.2.3 Elements	12
2.2.4 Complex Types	13
2.2.4.1 ArrayOfImGroupType	13
2.2.4.2 ImGroupType	13
2.2.4.3 ImItemListType	14
2.2.4.4 NonEmptyArrayOfExtendedFieldURIs	14
2.2.5 Simple Types	15
2.2.6 Attributes	15
2.2.7 Groups	15
2.2.8 Attribute Groups	15
3 Protocol Details	16
3.1 ExchangeServicePortType Server Details	16
3.1.1 Abstract Data Model	16
3.1.2 Timers	16
3.1.3 Initialization	16
3.1.4 Message Processing Events and Sequencing Rules	16
3.1.4.1 AddDistributionGroupToImList	17
3.1.4.1.1 Messages	18
3.1.4.1.1.1 AddDistributionGroupToImListSoapIn	18
3.1.4.1.1.2 AddDistributionGroupToImListSoapOut	19
3.1.4.1.2 Elements	20
3.1.4.1.2.1 AddDistributionGroupToImList	20
3.1.4.1.2.2 AddDistributionGroupToImListResponse	20
3.1.4.1.3 Complex Types	20
3.1.4.1.3.1 AddDistributionGroupToImListType	20
3.1.4.1.3.2 AddDistributionGroupToImListResponseMessageType	21
3.1.4.1.4 Simple Types	21
3.1.4.1.5 Attributes	21
3.1.4.1.6 Groups	21
3.1.4.1.7 Attribute Groups	22
3.1.4.2 AddImContactToGroup	22

3.1.4.2.1	Messages	22
3.1.4.2.1.1	AddImContactToGroupSoapIn	23
3.1.4.2.1.2	AddImContactToGroupSoapOut	23
3.1.4.2.2	Elements	24
3.1.4.2.2.1	AddImContactToGroup	24
3.1.4.2.2.2	AddImContactToGroupResponse	24
3.1.4.2.3	Complex Types	25
3.1.4.2.3.1	AddImContactToGroupType	25
3.1.4.2.3.2	AddImContactToGroupResponseMessageType	25
3.1.4.2.4	Simple Types	26
3.1.4.2.5	Attributes	26
3.1.4.2.6	Groups	26
3.1.4.2.7	Attribute Groups	26
3.1.4.3	AddImGroup	26
3.1.4.3.1	Messages	27
3.1.4.3.1.1	AddImGroupSoapIn	27
3.1.4.3.1.2	AddImGroupSoapOut	27
3.1.4.3.2	Elements	28
3.1.4.3.2.1	AddImGroup	28
3.1.4.3.2.2	AddImGroupResponse	28
3.1.4.3.3	Complex Types	29
3.1.4.3.3.1	AddImGroupType	29
3.1.4.3.3.2	AddImGroupResponseMessageType	29
3.1.4.3.4	Simple Types	30
3.1.4.3.5	Attributes	30
3.1.4.3.6	Groups	30
3.1.4.3.7	Attribute Groups	30
3.1.4.4	AddNewImContactToGroup	30
3.1.4.4.1	Messages	31
3.1.4.4.1.1	AddNewImContactToGroupSoapIn	31
3.1.4.4.1.2	AddNewImContactToGroupSoapOut	31
3.1.4.4.2	Elements	32
3.1.4.4.2.1	AddNewImContactToGroup	32
3.1.4.4.2.2	AddNewImContactToGroupResponse	33
3.1.4.4.3	Complex Types	33
3.1.4.4.3.1	AddNewImContactToGroupType	33
3.1.4.4.3.2	AddNewImContactToGroupResponseMessageType	34
3.1.4.4.4	Simple Types	34
3.1.4.4.5	Attributes	34
3.1.4.4.6	Groups	34
3.1.4.4.7	Attribute Groups	34
3.1.4.5	AddNewTelUriContactToGroup	34
3.1.4.5.1	Messages	35
3.1.4.5.1.1	AddNewTelUriContactToGroupSoapIn	35
3.1.4.5.1.2	AddNewTelUriContactToGroupSoapOut	36
3.1.4.5.2	Elements	37
3.1.4.5.2.1	AddNewTelUriContactToGroup	37
3.1.4.5.2.2	AddNewTelUriContactToGroupResponse	37
3.1.4.5.3	Complex Types	37
3.1.4.5.3.1	AddNewTelUriContactToGroupType	38
3.1.4.5.3.2	AddNewTelUriContactToGroupResponseMessageType	38
3.1.4.5.4	Simple Types	39
3.1.4.5.5	Attributes	39

3.1.4.5.6	Groups.....	39
3.1.4.5.7	Attribute Groups	39
3.1.4.6	GetImItemList.....	39
3.1.4.6.1	Messages	40
3.1.4.6.1.1	GetImItemListSoapIn.....	40
3.1.4.6.1.2	GetImItemListSoapOut.....	41
3.1.4.6.2	Elements.....	41
3.1.4.6.2.1	GetImItemList.....	42
3.1.4.6.2.2	GetImItemListResponse	42
3.1.4.6.3	Complex Types	42
3.1.4.6.3.1	GetImItemListType	42
3.1.4.6.3.2	GetImItemListResponseMessageType.....	43
3.1.4.6.4	Simple Types.....	43
3.1.4.6.5	Attributes.....	43
3.1.4.6.6	Groups.....	43
3.1.4.6.7	Attribute Groups	43
3.1.4.7	GetImItems	43
3.1.4.7.1	Messages	44
3.1.4.7.1.1	GetImItemsSoapIn	44
3.1.4.7.1.2	GetImItemsSoapOut	45
3.1.4.7.2	Elements.....	45
3.1.4.7.2.1	GetImItems	46
3.1.4.7.2.2	GetImItemsResponse.....	46
3.1.4.7.3	Complex Types	46
3.1.4.7.3.1	GetImItemsType	46
3.1.4.7.3.2	GetImItemsResponseMessageType	47
3.1.4.7.4	Simple Types.....	47
3.1.4.7.5	Attributes.....	47
3.1.4.7.6	Groups.....	47
3.1.4.7.7	Attribute Groups	47
3.1.4.8	RemoveContactFromImList	47
3.1.4.8.1	Messages	48
3.1.4.8.1.1	RemoveContactFromImListSoapIn	48
3.1.4.8.1.2	RemoveContactFromImListSoapOut	49
3.1.4.8.2	Elements.....	50
3.1.4.8.2.1	RemoveContactFromImList	50
3.1.4.8.2.2	RemoveContactFromImListResponse.....	50
3.1.4.8.3	Complex Types	50
3.1.4.8.3.1	RemoveContactFromImListType	51
3.1.4.8.3.2	RemoveContactFromImListResponseMessageType	51
3.1.4.8.4	Simple Types.....	51
3.1.4.8.5	Attributes.....	51
3.1.4.8.6	Groups.....	51
3.1.4.8.7	Attribute Groups	52
3.1.4.9	RemoveDistributionGroupFromImList	52
3.1.4.9.1	Messages	52
3.1.4.9.1.1	RemoveDistributionGroupFromImListSoapIn	53
3.1.4.9.1.2	RemoveDistributionGroupFromImListSoapOut	53
3.1.4.9.2	Elements.....	54
3.1.4.9.2.1	RemoveDistributionGroupFromImList	55
3.1.4.9.2.2	RemoveDistributionGroupFromImListResponse.....	55
3.1.4.9.3	Complex Types	55
3.1.4.9.3.1	RemoveDistributionGroupFromImListType	55

3.1.4.9.3.2	RemoveDistributionGroupFromImListResponseMessageType	56
3.1.4.9.4	Simple Types	56
3.1.4.9.5	Attributes	56
3.1.4.9.6	Groups	56
3.1.4.9.7	Attribute Groups	56
3.1.4.10	RemoveImContactFromGroup	56
3.1.4.10.1	Messages	57
3.1.4.10.1.1	RemoveImContactFromGroupSoapIn	57
3.1.4.10.1.2	RemoveImContactFromGroupSoapOut	58
3.1.4.10.2	Elements	59
3.1.4.10.2.1	RemoveImContactFromGroup	59
3.1.4.10.2.2	RemoveImContactFromGroupResponse	59
3.1.4.10.3	Complex Types	59
3.1.4.10.3.1	RemoveImContactFromGroupType	60
3.1.4.10.3.2	RemoveImContactFromGroupResponseMessageType	60
3.1.4.10.4	Simple Types	60
3.1.4.10.5	Attributes	60
3.1.4.10.6	Groups	60
3.1.4.10.7	Attribute Groups	61
3.1.4.11	RemoveImGroup	61
3.1.4.11.1	Messages	61
3.1.4.11.1.1	RemoveImGroupSoapIn	62
3.1.4.11.1.2	RemoveImGroupSoapOut	62
3.1.4.11.2	Elements	63
3.1.4.11.2.1	RemoveImGroup	63
3.1.4.11.2.2	RemoveImGroupResponse	63
3.1.4.11.3	Complex Types	63
3.1.4.11.3.1	RemoveImGroupType	64
3.1.4.11.3.2	RemoveImGroupResponseMessageType	64
3.1.4.11.4	Simple Types	64
3.1.4.11.5	Attributes	64
3.1.4.11.6	Groups	64
3.1.4.11.7	Attribute Groups	65
3.1.4.12	SetImGroup	65
3.1.4.12.1	Messages	65
3.1.4.12.1.1	SetImGroupSoapIn	65
3.1.4.12.1.2	SetImGroupSoapOut	66
3.1.4.12.2	Elements	67
3.1.4.12.2.1	SetImGroup	67
3.1.4.12.2.2	SetImGroupResponse	67
3.1.4.12.3	Complex Types	67
3.1.4.12.3.1	SetImGroupType	67
3.1.4.12.3.2	SetImGroupResponseMessageType	68
3.1.4.12.4	Simple Types	68
3.1.4.12.5	Attributes	68
3.1.4.12.6	Groups	68
3.1.4.12.7	Attribute Groups	68
3.1.4.13	SetImListMigrationCompleted	69
3.1.4.13.1	Messages	69
3.1.4.13.1.1	SetImListMigrationCompletedSoapIn	70
3.1.4.13.1.2	SetImListMigrationCompletedSoapOut	70
3.1.4.13.2	Elements	71
3.1.4.13.2.1	SetImListMigrationCompleted	71

3.1.4.13.2.2	SetImListMigrationCompletedResponse	72
3.1.4.13.3	Complex Types	72
3.1.4.13.3.1	SetImListMigrationCompletedType	72
3.1.4.13.3.2	SetImListMigrationCompletedResponseMessageType	72
3.1.4.13.4	Simple Types	73
3.1.4.13.5	Attributes	73
3.1.4.13.6	Groups.....	73
3.1.4.13.7	Attribute Groups.....	73
3.1.5	Timer Events	73
3.1.6	Other Local Events	73
4	Protocol Examples.....	74
5	Security.....	77
5.1	Security Considerations for Implementers.....	77
5.2	Index of Security Parameters	77
6	Appendix A: Full WSDL	78
7	Appendix B: Full XML Schema	86
7.1	http://schemas.microsoft.com/exchange/services/2006/messages Schema	86
7.2	http://schemas.microsoft.com/exchange/services/2006/types Schema	91
8	Appendix C: Product Behavior	92
9	Change Tracking.....	93
10	Index	98

1 Introduction

The Unified Contact Store Web Service Protocol enables clients to use a **web service** to create, retrieve, update, and delete **instant messaging contacts (3)** and groups.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

Hypertext Transfer Protocol (HTTP)
Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)

The following terms are defined in [\[MS-OXGLOS\]](#):

contact
endpoint
instant messaging
mailbox
Simple Mail Transfer Protocol (SMTP)
Simple Object Access Protocol (SOAP)
SOAP action
SOAP body
SOAP header
SOAP message
Uniform Resource Identifier (URI)
web server
web service
Web Services Description Language (WSDL)
WSDL message
WSDL operation
WSDL port type
XML namespace
XML namespace prefix
XML schema

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol Specification](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol Specification](#)".

[MS-OXWSBTRF] Microsoft Corporation, "[Bulk Transfer Web Service Protocol Specification](#)".

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol Specification](#)".

[MS-OXWSPERS] Microsoft Corporation, "[Persona Web Service Protocol Specification](#)".

[MS-OXWSXPROP] Microsoft Corporation, "[Extended Properties Structure](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Language", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[WSIBASIC] Ballinger, K., Ehnebuske, D., Gudgin, M., Eds., et al., "Basic Profile Version 1.0", Final Material, April 2004, <http://www.ws-i.org/Profiles/BasicProfile-1.0-2004-04-16.html>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

1.3 Overview

The Unified Contact Store is a centralized storage mechanism for contacts (3) for instant messaging clients. It provides two folders: ImContactList and QuickContacts. The ImContactList folder contains groups, which in turn contain contacts (3). In a typical contact list, a user-created distribution list represents the groups in the contact list. The contacts are stored in the QuickContacts folder. These contacts contain the information displayed in the contact list; for example, display name, instant messaging address, phone number, and so on.

Unified Contact Store Web Service Protocol simplifies integration with the Unified Contact Store. This protocol provides operations for adding and removing instant messaging groups by adding and removing user-created distribution lists in the ImContactList folder. It also provides operations for adding, removing, and changing the group of a contact (3) in the instant messaging groups by adding or removing a contact in the QuickContact folder, and then modifying the membership in the user-created distribution list in the ImContactList folder. This enables instant messaging clients to store, access, and make changes to instant messaging contact lists without requiring additional calls and business logic.

1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), to identify the target **endpoint (4)** to use for each operation.

This protocol uses **SOAP**, as described in [\[SOAP1.1\]](#), to specify the structure information that is exchanged between the client and the server. This protocol uses the **XML schema**, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content that is sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

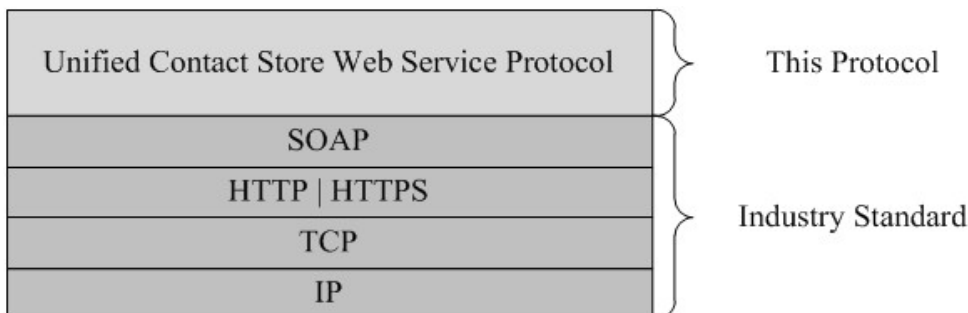


Figure 1: This protocol in relation to other protocols

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

1.5 Prerequisites/Preconditions

The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP web requests that target this protocol. This endpoint (4) URL is returned by

either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as specified in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as specified in [\[MS-OXDSCLI\]](#).

1.6 Applicability Statement

This protocol is applicable to environments that use web services to implement the Unified Contact Store. This protocol is applicable to all SOAP-based clients, as described in [\[SOAP1.1\]](#).

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as described in section [2.1](#).
- **Protocol Versions:** This protocol describes only one **WSDL port type** version. The **RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.5.9, identifies the WSDL port type version of the request. The **ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.5.10, identifies the version of the server that is responding to the request.
- **Security and Authentication Methods:** This protocol relies on the **web server** that is hosting it to perform authentication.
- **Localization:** This protocol uses the **MailboxCulture** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.4.39, to specify the culture of a **mailbox**.
- **Capability Negotiation:** This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The **Web Services Description Language (WSDL)** in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null, or present.

2.1 Transport

This protocol uses SOAP 1.1, as specified in [\[SOAP1.1\]](#).

This protocol MUST support SOAP over HTTP, as specified in [\[RFC2616\]](#). The protocol SHOULD use secure communications by means of HTTPS, as specified in [\[RFC2818\]](#).

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses XML schema, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and WSDL, as specified in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
m	http://schemas.microsoft.com/exchange/services/2006/messages	
soap	http://schemas.xmlsoap.org/wsdl/soap/	[SOAP1.1]
t	http://schemas.microsoft.com/exchange/services/2006/types	
wsdl	http://schemas.xmlsoap.org/wsdl/	[WSDL]
wsi	http://ws-i.org/schemas/conformanceClaim/	[WSIBASIC]
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA1] [XMLSCHEMA2]

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

This specification does not define any common XML schema element definitions.

2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
ArrayOfImGroupType	The ArrayOfImGroupType complex type specifies an array of instant messaging groups.
ImGroupType	The ImGroupType complex type specifies an instant messaging group.
ImItemListType	The ImItemListType complex type specifies an array of groups of ImGroupType complex types and an array of personas.
NonEmptyArrayOfExtendedFieldURIs	The NonEmptyArrayOfExtendedFieldURIs complex type specifies an array of extended URIs .

2.2.4.1 ArrayOfImGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/types>

The **ArrayOfImGroupType** complex type specifies an array of instant messaging groups.

```
<xs:complexType name="ArrayOfImGroupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:choice minOccurs="0" maxOccurs="unbounded">
    <xs:element name="ImGroup" type="t:ImGroupType"/>
  </xs:choice>
</xs:complexType>
```

ImGroup: An element of type **ImGroupType**, as defined in section [2.2.4.2](#), that represents a single instant messaging group.

2.2.4.2 ImGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/types>

The **ImGroupType** complex type specifies an instant messaging group.

```
<xs:complexType name="ImGroupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element name="DisplayName" type="t:NonEmptyStringType"/>
    <xs:element name="GroupType" type="t:NonEmptyStringType"/>
    <xs:element minOccurs="0" name="ExchangeStoreId" type="t:ItemIdType"/>
    <xs:element minOccurs="0" name="MemberCorrelationKey"
type="t:NonEmptyArrayOfItemIdsType"/>
    <xs:element minOccurs="0" name="ExtendedProperties"
type="t:NonEmptyArrayOfExtendedPropertyType"/>
    <xs:element minOccurs="0" name="SmtAddress" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

DisplayName: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the display name for a new instant messaging group.

GroupType: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that identifies the group class. The following table lists the allowable values for this string.

Value	Description
IPM.DistList.MOC.Tagged	Represents the Tagged group.
IPM.DistList.MOC.OtherContacts	Represents the OtherContacts group.
IPM.DistList.MOC.UserGroup	Represents any user-created group that is not a distribution group.
IPM.DistList.MOC.DG	Represents any user-created distribution group.
IPM.DistList.MOC.Favorites	Represents the Favorites group.

The value can contain only one Tagged group, one OtherContacts group, and one Favorites group.

ExchangeStoreId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the instant messaging group identifier.

MemberCorrelationKey: An element of type **NonEmptyArrayOfItemIdsType**, as defined in [\[MS-OXWSBTRF\]](#) section 3.1.4.1.3.4, that represents the identifiers of the contacts (3) that are part of the group.

ExtendedProperties: An element of type **NonEmptyArrayOfExtendedPropertyType**, as defined in [\[MS-OXWSXPROP\]](#) section 2.1.3, that contains an array of additional properties.

SmtpAddress: An element of type **xs:string**, as defined in [\[XMLSCHEMA2\]](#), that represents the **SMTP** address of the group.

2.2.4.3 ImItemListType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/types>

The **ImItemListType** complex type specifies an array of groups of **ImGroupType** complex types and an array of personas.

```
<xs:complexType name="ImItemListType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Groups" type="t:ArrayOfImGroupType"/>
    <xs:element minOccurs="0" name="Personas" type="t:ArrayOfPeopleType"/>
  </xs:sequence>
</xs:complexType>
```

Groups: An element of type **ArrayOfImGroupType**, as defined in section [2.2.4.1](#), that represents an array of instant messaging groups.

Personas: An element of type **ArrayOfPeopleType**, as defined in [\[MS-OXWSPERS\]](#) section 3.1.4.1.3.4, that represents an array of contacts (3).

2.2.4.4 NonEmptyArrayOfExtendedFieldURIs

Namespace: <http://schemas.microsoft.com/exchange/services/2006/types>

The **NonEmptyArrayOfExtendedFieldURIs** complex type specifies an array of extended URIs.

```
<xs:complexType name="NonEmptyArrayOfExtendedFieldURIs"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:choice maxOccurs="unbounded">
    <xs:element name="ExtendedProperty" type="t:PathToExtendedFieldType"/>
  </xs:choice>
</xs:complexType>
```

ExtendedProperty: An element of type **PathToExtendedFieldType**, as defined in [\[MS-OXWSXPROP\]](#) section 2.1.6, that represents an extended property for the Unified Contact Store. Extended properties are typically private properties on contacts (3) that are used for application-specific functions.

2.2.5 Simple Types

This specification does not define any common XML schema simple type definitions.

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null and present.

3.1 ExchangeServicePortType Server Details

This protocol defines a single WSDL port type and operations to manage instant messaging contacts and distribution groups.

3.1.1 Abstract Data Model

None.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

Operation	Description
AddDistributionGroupToImList	The AddDistributionGroupToImList WSDL operation creates a new instant messaging distribution group.
AddImContactToGroup	The AddImContactToGroup WSDL operation adds an existing contact (3) to an instant messaging group.
AddImGroup	The AddIMGroup WSDL operation creates a new instant messaging group in a mailbox.
AddNewImContactToGroup	The AddNewIMContactToGroup WSDL operation adds a new contact (3) to an instant messaging group.
AddNewTelUriContactToGroup	The AddNewTelUriContactToGroup WSDL operation adds a new TEL URI contact (3) to a group.
GetImItemList	The GetImItemList WSDL operation retrieves all data for instant messaging groups and contacts (3) in the contact list.
GetImItems	The GetImItems WSDL operation retrieves groups and

Operation	Description
	contacts (3) for the specified identifiers.
RemoveContactFromImList	The RemoveContactFromImList WSDL operation removes the specified contact (3) from all instant messaging groups.
RemoveDistributionGroupFromImList	The RemoveDistributionGroupFromImList WSDL operation removes a distribution group from an instant messaging list.
RemoveImContactFromGroup	The RemoveImContactFromGroup WSDL operation removes an instant messaging contact (3) from a group if the contact (3) is only a member of the specified group, excluding the Tagged group. If the Tagged group is the specified group, and the contact (3) is a member of the Tagged group only, the contact (3) is removed.
RemoveImGroup	The RemoveImGroup WSDL operation removes the instant messaging group and all the contacts (3) in the group. A contact (3) is deleted if it is a member of only the specified group, excluding the Tagged group. If the Tagged group is the specified group and the contact (3) is a member of the Tagged group only, the contact (3) is removed.
SetImGroup	The SetImGroup WSDL operation changes the display name of an instant messaging group.
SetImListMigrationCompleted	The SetImListMigrationCompleted WSDL operation indicates whether the instant messaging contacts (3) in a mailbox have been migrated to the server.

3.1.4.1 AddDistributionGroupToImList

The **AddDistributionGroupToImList** WSDL operation creates a new instant messaging distribution group.

```
<wsdl:operation name="AddDistributionGroupToImList"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:AddDistributionGroupToImListSoapIn"/>
  <wsdl:output message="m:AddDistributionGroupToImListSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **AddDistributionGroupToImList** WSDL operation.

```
<wsdl:operation name="AddDistributionGroupToImList"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddDistributionGroupToImList"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  <wsdl:input>
    <soap:header message="m:AddDistributionGroupToImListSoapIn" part="Impersonation"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:AddDistributionGroupToImListSoapIn" part="MailboxCulture"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:AddDistributionGroupToImListSoapIn" part="RequestVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
```

```

    <soap:body use="literal" parts="request"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:input>
    <wsdl:output>
    <soap:body use="literal" parts="AddDistributionGroupToImListResult"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:AddDistributionGroupToImListSoapOut" part="ServerVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:output>
</wsdl:operation>

```

This operation does not create a distribution group if a distribution group exists that has the same SMTP address.

The protocol client sends an **AddDistributionGroupToImListSoapIn** request WSDL message and the protocol server responds with an **AddDistributionGroupToImListSoapOut** response WSDL message.

3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
AddDistributionGroupToImListSoapIn	Specifies the request to add a distribution group to the instant messaging list.
AddDistributionGroupToImListSoapOut	Specifies the response to the AddDistributionGroupToImListSoapIn request WSDL message.

3.1.4.1.1.1 AddDistributionGroupToImListSoapIn

The **AddDistributionGroupToImListSoapIn** WSDL message specifies the request to add a distribution group to the instant messaging list.

The following is the **AddDistributionGroupToImListSoapIn** WSDL message specification.

```

<wsdl:message name="AddDistributionGroupToImListSoapIn"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:AddDistributionGroupToImList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **AddDistributionGroupToImListSoapIn** WSDL message is the input message for the **SOAP action**

<http://schemas.microsoft.com/exchange/services/2006/messages/AddDistributionGroupToImList>.

The parts of the **AddDistributionGroupToImListSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:AddDistributionGroupToImList	Specifies the SOAP body of the request to add a distribution group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use when accessing the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the AddDistributionGroupToImList WSDL operation request.

3.1.4.1.1.2 AddDistributionGroupToImListSoapOut

The **AddDistributionGroupToImListSoapOut** WSDL message specifies the response to the **AddDistributionGroupToImListSoapIn** request WSDL message.

The following is the **AddDistributionGroupToImListSoapOut** WSDL message specification.

```
<wsdl:message name="AddDistributionGroupToImListSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="AddDistributionGroupToImListResult"
element="m:AddDistributionGroupToImListResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **AddDistributionGroupToImListSoapOut** WSDL message is the output message for the SOAP action

<http://schemas.microsoft.com/exchange/services/2006/messages/AddDistributionGroupToImList>.

The parts of the **AddDistributionGroupToImListSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
AddDistributionGroupToImListResult	m:AddDistributionGroupToImListResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **AddDistributionGroupToImList** WSDL operation request returns an **AddDistributionGroupToImListResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **AddDistributionGroupToImListResponse** element is set to "NoError".

If the **AddDistributionGroupToImList** WSDL operation is not successful, it returns an **AddDistributionGroupToImListResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **AddDistributionGroupToImListResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddDistributionGroupToImList	The input data for the AddDistributionGroupToImList WSDL operation.
AddDistributionGroupToImListResponse	The result data for the AddDistributionGroupToImList WSDL operation.

3.1.4.1.2.1 AddDistributionGroupToImList

The **AddDistributionGroupToImList** element specifies the input data for the **AddDistributionGroupToImList** WSDL operation.

```
<xs:element name="AddDistributionGroupToImList" type="m:AddDistributionGroupToImListType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.1.2.2 AddDistributionGroupToImListResponse

The **AddDistributionGroupToImListResponse** element specifies the result data for the **AddDistributionGroupToImList** WSDL operation.

```
<xs:element name="AddDistributionGroupToImListResponse"
type="m:AddDistributionGroupToImListResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
AddDistributionGroupToImListType	Specifies a distribution group to be added to the instant messaging list.
AddDistributionGroupToImListResponseMessageType	Specifies the response message for the AddDistributionGroupToImList operation.

3.1.4.1.3.1 AddDistributionGroupToImListType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddDistributionGroupToImListType** complex type specifies a distribution group to be added to the instant messaging list.

```
<xs:complexType name="AddDistributionGroupToImListType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="SmtpAddress" type="t:NonEmptyStringType"/>
        <xs:element name="DisplayName" type="t:NonEmptyStringType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

SmtpAddress: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the SMTP address of the group.

DisplayName: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the display name of the group.

3.1.4.1.3.2 AddDistributionGroupToImListResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddDistributionGroupToImListResponseMessageType** complex type specifies the response message for the **AddDistributionGroupToImList** operation. The **AddDistributionGroupToImListResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="AddDistributionGroupToImListResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImGroup" type="t:ImGroupType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ImGroup: An element of type **ImGroupType**, as defined in section [2.2.4.2](#), that represents a single instant messaging group.

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 AddImContactToGroup

The **AddImContactToGroup** WSDL operation adds an existing contact (3) to an instant messaging group.

```
<wsdl:operation name="AddImContactToGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:AddImContactToGroupSoapIn"/>
  <wsdl:output message="m:AddImContactToGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **AddImContactToGroup** WSDL operation.

```
<wsdl:operation name="AddImContactToGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddImContactToGroup"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <wsdl:input>
    <soap:header message="m:AddImContactToGroupSoapIn" part="Impersonation" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:AddImContactToGroupSoapIn" part="MailboxCulture" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:AddImContactToGroupSoapIn" part="RequestVersion" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:body use="literal" parts="request"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="AddImContactToGroupResult"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:AddImContactToGroupSoapOut" part="ServerVersion" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:output>
</wsdl:operation>
```

This operation accepts only existing contacts. The **AddNewImContactToGroup** or the **AddNewTelUriContactToGroup** operation can be used to add a new instant messaging contact (3) to the Unified Contact Store.

The protocol client sends an **AddImContactToGroupSoapIn** request WSDL message and the protocol server responds with an **AddImContactToGroupSoapOut** response WSDL message.

3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
AddImContactToGroupSoapIn	Specifies the request to add an instant messaging contact (3) to a group.
AddImContactToGroupSoapOut	Specifies the response to the AddImContactToGroupSoapIn

Message	Description
	request WSDL message.

3.1.4.2.1.1 AddImContactToGroupSoapIn

The **AddImContactToGroupSoapIn** WSDL message specifies the request to add an instant messaging contact (3) to a group.

The following is the **AddImContactToGroupSoapIn** WSDL message specification.

```
<wsdl:message name="AddImContactToGroupSoapIn" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:AddImContactToGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **AddImContactToGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddImContactToGroup>.

The parts of the **AddImContactToGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:AddImContactToGroup	Specifies the SOAP body of the request to add an instant messaging contact (3) to a group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the AddImContactToGroup WSDL operation request.

3.1.4.2.1.2 AddImContactToGroupSoapOut

The **AddImContactToGroupSoapOut** WSDL message specifies the response to the **AddImContactToGroupSoapIn** request WSDL message.

The following is the **AddImContactToGroupSoapOut** WSDL message specification.

```
<wsdl:message name="AddImContactToGroupSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="AddImContactToGroupResult" element="m:AddImContactToGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **AddImContactToGroupSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddImContactToGroup>.

The parts of the **AddImContactToGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
AddImContactToGroupResult	m:AddImContactToGroupResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **AddImContactToGroup** WSDL operation request returns an **AddImContactToGroupResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **AddImContactToGroupResponse** element is set to "NoError".

If the **AddImContactToGroup** WSDL operation is not successful, it returns an **AddImContactToGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **AddImContactToGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddImContactToGroup	The input data for the AddImContactToGroup WSDL operation.
AddImContactToGroupResponse	The result data for the AddImContactToGroup WSDL operation.

3.1.4.2.2.1 AddImContactToGroup

The **AddImContactToGroup** element specifies the input data for the **AddImContactToGroup** WSDL operation.

```
<xs:element name="AddImContactToGroup" type="m:AddImContactToGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.2.2.2 AddImContactToGroupResponse

The **AddImContactToGroupResponse** element specifies the result data for the **AddImContactToGroup** WSDL operation.

```
<xs:element name="AddImContactToGroupResponse"
type="m:AddImContactToGroupResponseMessageType" xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```


3.1.4.2.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
AddImContactToGroupType	Specifies a request to add an instant messaging contact (3) to a group.
AddImContactToGroupResponseMessageType	Specifies the response message for the AddImContactToGroup operation.

3.1.4.2.3.1 AddImContactToGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddImContactToGroupType** complex type specifies a request to add an instant messaging contact (3) to a group. The **AddImContactToGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="AddImContactToGroupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ContactId" type="t:ItemIdType"/>
        <xs:element minOccurs="0" name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ContactId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the contact (3).

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the group.

3.1.4.2.3.2 AddImContactToGroupResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddImContactToGroupResponseMessageType** complex type specifies the response message for the **AddImContactToGroup** operation. The **AddImContactToGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="AddImContactToGroupResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 AddImGroup

The **AddIMGroup** WSDL operation creates a new instant messaging group in a mailbox.

```
<wsdl:operation name="AddImGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:AddImGroupSoapIn"/>
  <wsdl:output message="m:AddImGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **AddImGroup** WSDL operation.

```
<wsdl:operation name="AddImGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddImGroup"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <wsdl:input>
      <soap:header message="m:AddImGroupSoapIn" part="Impersonation" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:AddImGroupSoapIn" part="MailboxCulture" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:AddImGroupSoapIn" part="RequestVersion" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:body use="literal" parts="request"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" parts="AddImGroupResult"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:AddImGroupSoapOut" part="ServerVersion" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:output>
  </wsdl:operation>
```

This operation takes only a single display name parameter. This operation returns the display name, group type, and store identifier of the new group.

If an instant messaging group with the same display name exists, this operation returns information about that group. The operation fails if the maximum 64 groups already exist, excluding Tagged, OtherContacts, and Favorites groups.

The protocol client sends an **AddImGroupSoapIn** request WSDL message and the protocol server responds with an **AddImGroupSoapIn** response.

3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
AddImGroupSoapIn	Specifies the request to add an instant messaging group.
AddImGroupSoapOut	Specifies the response to the AddImGroupSoapIn request WSDL message.

3.1.4.3.1.1 AddImGroupSoapIn

The **AddImGroupSoapIn** WSDL message specifies the request to add an instant messaging group.

The following is the **AddImGroupSoapIn** WSDL message specification.

```
<wsdl:message name="AddImGroupSoapIn" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:AddImGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **AddImGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddImGroup>.

The parts of the **AddImGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:AddImGroup	Specifies the SOAP body of the request to add an instant messaging group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the AddImGroup WSDL operation request.

3.1.4.3.1.2 AddImGroupSoapOut

The **AddImGroupSoapOut** WSDL message specifies the response to the **AddImGroupSoapIn** request WSDL message.

The following is the **AddImGroupSoapOut** WSDL message specification.

```
<wsdl:message name="AddImGroupSoapOut" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="AddImGroupResult" element="m:AddImGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **AddImGroupSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddImGroup>.

The parts of the **AddImGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
AddImGroupResult	m:AddImGroupResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **AddImGroup** WSDL operation request returns an **AddImGroupResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **AddImGroupResponse** element is set to "NoError".

If the **AddImGroup** WSDL operation is not successful, it returns an **AddImGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **AddImGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddImGroup	The input data for the AddImGroup WSDL operation.
AddImGroupResponse	The result data for the AddImGroup WSDL operation.

3.1.4.3.2.1 AddImGroup

The **AddImGroup** element specifies the input data for the **AddImGroup** WSDL operation.

```
<xs:element name="AddImGroup" type="m:AddImGroupType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.3.2.2 AddImGroupResponse

The **AddImGroupResponse** element specifies the result data for the **AddImGroup** WSDL operation.

```
<xs:element name="AddImGroupResponse" type="m:AddImGroupResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.3.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
AddImGroupType	Specifies a request to add an instant messaging group.
AddImGroupResponseMessageType	Specifies the response message for the AddImGoup WSDL operation.

3.1.4.3.3.1 AddImGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddImGroupType** complex type specifies a request to add an instant messaging group. The **AddImGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="AddImGroupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="DisplayName" type="t:NonEmptyStringType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

DisplayName: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the display name of the contact (3).

3.1.4.3.3.2 AddImGroupResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddImGroupResponseMessageType** complex type specifies the response message for the **AddImGoup** WSDL operation. The **AddImGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="AddImGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImGroup" type="t:ImGroupType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ImGroup: An element of type **ImGroupType**, as defined in section [2.2.4.2](#), that represents a single instant messaging group.

3.1.4.3.4 Simple Types

None.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 AddNewImContactToGroup

The **AddNewIMContactToGroup** WSDL operation adds a new contact (3) to an instant messaging group.

```
<wsdl:operation name="AddNewImContactToGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:AddNewImContactToGroupSoapIn"/>
  <wsdl:output message="m:AddNewImContactToGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **AddNewImContactToGroup** WSDL operation.

```
<wsdl:operation name="AddNewImContactToGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddNewImContactToGroup"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <wsdl:input>
    <soap:header message="m:AddNewImContactToGroupSoapIn" part="Impersonation" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:AddNewImContactToGroupSoapIn" part="MailboxCulture" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:AddNewImContactToGroupSoapIn" part="RequestVersion" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:body use="literal" parts="request"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="AddNewImContactToGroupResult"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:AddNewImContactToGroupSoapOut" part="ServerVersion" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:output>
</wsdl:operation>
```

If the group contains more than the maximum 1000 contacts (3), this operation fails. If a contact (3) already exists that has the same instant messaging address, this operation does nothing.

The protocol client sends an **AddNewImContactToGroupSoapIn** request WSDL message and the protocol server responds with an **AddNewImContactToGroupSoapOut** response WSDL message.

3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
AddNewImContactToGroupSoapIn	Specifies the request to add a new instant messaging contact (3) to a group.
AddNewImContactToGroupSoapOut	Specifies the response to the AddNewImContactToGroupSoapIn request WSDL message.

3.1.4.4.1.1 AddNewImContactToGroupSoapIn

The **AddNewImContactToGroupSoapIn** WSDL message specifies the request to add a new instant messaging contact (3) to a group.

The following is the **AddNewImContactToGroupSoapIn** WSDL message specification.

```
<wsdl:message name="AddNewImContactToGroupSoapIn"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:AddNewImContactToGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **AddNewImContactToGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddNewImContactToGroup>.

The parts of the **AddNewImContactToGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:AddNewImContactToGroup	Specifies the SOAP body of the request to add an instant messaging contact (3) to a group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the AddNewImContactToGroup WSDL operation request.

3.1.4.4.1.2 AddNewImContactToGroupSoapOut

The **AddNewImContactToGroupSoapOut** WSDL message specifies the response to the **AddNewImContactToGroupSoapIn** request WSDL message.

The following is the **AddNewImContactToGroupSoapOut** WSDL message specification.

```
<wsdl:message name="AddNewImContactToGroupSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="AddNewImContactToGroupResult" element="m:AddNewImContactToGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **AddNewImContactToGroupSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddNewImContactToGroup>.

The parts of the **AddNewImContactToGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
AddNewImContactToGroupResult	m:AddNewImContactToGroupResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **AddNewImContactToGroup** WSDL operation request returns an **AddNewImContactToGroupResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **AddNewImContactToGroupResponse** element is set to "NoError".

If the **AddNewImContactToGroup** WSDL operation is not successful, it returns an **AddNewImContactToGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **AddNewImContactToGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddNewImContactToGroup	The input data for the AddNewImContactToGroup WSDL operation.
AddNewImContactToGroupResponse	The result data for the AddNewImContactToGroup WSDL operation.

3.1.4.4.2.1 AddNewImContactToGroup

The **AddNewImContactToGroup** element specifies the input data for the **AddNewImContactToGroup** WSDL operation.


```
<xs:element name="AddNewImContactToGroup" type="m:AddNewImContactToGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.4.2 AddNewImContactToGroupResponse

The **AddNewImContactToGroupResponse** element specifies the result data for the **AddNewImContactToGroup** WSDL operation.

```
<xs:element name="AddNewImContactToGroupResponse"
type="m:AddNewImContactToGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.4.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
AddNewImContactToGroupType	Specifies a request to add a new instant messaging contact (3) to a group.
AddNewImContactToGroupResponseMessageType	Specifies the response message for an AddNewImContactToGroup WSDL operation.

3.1.4.4.3.1 AddNewImContactToGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddNewImContactToGroupType** complex type specifies a request to add a new instant messaging contact (3) to a group. The **AddNewImContactToGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="AddNewImContactToGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ImAddress" type="t:NonEmptyStringType"/>
        <xs:element minOccurs="0" name="DisplayName" type="t:NonEmptyStringType"/>
        <xs:element minOccurs="0" name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ImAddress: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the instant messaging address of the contact (3).

DisplayName: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the display name of the contact (3).

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the group. If this element is not specified, the contact is added to the OtherContacts group.

3.1.4.4.3.2 AddNewImContactToGroupResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddNewImContactToGroupResponseMessageType** complex type specifies the response message for an **AddNewImContactToGroup** WSDL operation. The **AddNewImContactToGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="AddNewImContactToGroupResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="Persona" type="t:PersonaType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Persona: An element of type **PersonaType**, as specified in [\[MS-OXWSPERS\]](#) section 2.2.4.19, that represents an instant messaging contact (3).

3.1.4.4.4 Simple Types

None.

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.4.5 AddNewTelUriContactToGroup

The **AddNewTelUriContactToGroup** WSDL operation adds a new TEL URI contact (3) to a group.

```
<wsdl:operation name="AddNewTelUriContactToGroup"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:AddNewTelUriContactToGroupSoapIn"/>
  <wsdl:output message="m:AddNewTelUriContactToGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **AddNewTelUriContactToGroup** WSDL operation.

```
<wsdl:operation name="AddNewTelUriContactToGroup"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddNewTelUriContactToGroup"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  <wsdl:input>
    <soap:header message="m:AddNewTelUriContactToGroupSoapIn" part="Impersonation"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:AddNewTelUriContactToGroupSoapIn" part="MailboxCulture"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:AddNewTelUriContactToGroupSoapIn" part="RequestVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:body use="literal" parts="request"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="AddNewTelUriContactToGroupResult"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:AddNewTelUriContactToGroupSoapOut" part="ServerVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends an **AddNewTelUriContactToGroupSoapIn** request WSDL message and the protocol server responds with an **AddNewTelUriContactToGroupSoapOut** response WSDL message.

This operation fails if the maximum 1000 contacts (3) already exist. If a contact (3) exists with the same TEL URI address, this operation fails.

3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
AddNewTelUriContactToGroupSoapIn	Specifies the request to add a new TelUri contact (3) to a group.
AddNewTelUriContactToGroupSoapOut	Specifies the response to the AddNewTelUriContactToGroupSoapIn request WSDL message.

3.1.4.5.1.1 AddNewTelUriContactToGroupSoapIn

The **AddNewTelUriContactToGroupSoapIn** WSDL message specifies the request to add a new TEL URI contact (3) to a group.

The following is the **AddNewTelUriContactToGroupSoapIn** WSDL message specification.

```
<wsdl:message name="AddNewTelUriContactToGroupSoapIn"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:AddNewTelUriContactToGroup"/>
```

```

<wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
<wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
<wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **AddNewTelUriContactToGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddNewTelUriContactToGroup>.

The parts of the **AddNewTelUriContactToGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:AddNewTelUriContactToGroup	Specifies the SOAP body of the request to add a new TEL URI contact (3).
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.5.6)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the AddNewTelUriContactToGroup WSDL operation request.

3.1.4.5.1.2 AddNewTelUriContactToGroupSoapOut

The **AddNewTelUriContactToGroupSoapOut** WSDL message specifies the response to the **AddNewTelUriContactToGroupSoapIn** request WSDL message.

The following is the **AddNewTelUriContactToGroupSoapOut** WSDL message specification.

```

<wsdl:message name="AddNewTelUriContactToGroupSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="AddNewTelUriContactToGroupResult"
element="m:AddNewTelUriContactToGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The **AddNewTelUriContactToGroupSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/AddNewTelUriContactToGroup>.

The parts of the **AddNewTelUriContactToGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
AddNewTelUriContactToGroupResult	m:AddNewTelUriContactToGroupResponse	Specifies the SOAP body of the

Part name	Element/type	Description
		response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **AddNewTelUriContactToGroup** WSDL operation request returns an **AddNewTelUriContactToGroupResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **AddNewTelUriContactToGroupResponse** element is set to "NoError".

If the **AddNewTelUriContactToGroup** WSDL operation is not successful, it returns an **AddNewTelUriContactToGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **AddNewTelUriContactToGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
AddNewTelUriContactToGroup	The input data for the AddNewTelUriContactToGroup WSDL operation.
AddNewTelUriContactToGroupResponse	The result data for the AddNewTelUriContactToGroup WSDL operation.

3.1.4.5.2.1 AddNewTelUriContactToGroup

The **AddNewTelUriContactToGroup** element specifies the input data for the **AddNewTelUriContactToGroup** WSDL operation.

```
<xs:element name="AddNewTelUriContactToGroup" type="m:AddNewTelUriContactToGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.5.2.2 AddNewTelUriContactToGroupResponse

The **AddNewTelUriContactToGroupResponse** element specifies the result data for the **AddNewTelUriContactToGroup** WSDL operation.

```
<xs:element name="AddNewTelUriContactToGroupResponse"
type="m:AddNewTelUriContactToGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.5.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
AddNewTelUriContactToGroupType	Specifies a request to add a new TEL URI contact (3) to a group.
AddNewTelUriContactToGroupResponseMessageType	Specifies the response message for an AddNewTelUriContactToGroup WSDL operation.

3.1.4.5.3.1 AddNewTelUriContactToGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddNewTelUriContactToGroupType** complex type specifies a request to add a new contact (3) to a group. The **AddNewTelUriContactToGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="AddNewTelUriContactToGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="TelUriAddress" type="t:NonEmptyStringType"/>
        <xs:element name="ImContactSipUriAddress" type="t:NonEmptyStringType"/>
        <xs:element name="ImTelephoneNumber" type="t:NonEmptyStringType"/>
        <xs:element minOccurs="0" name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

TelUriAddress: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the TEL URI address of the contact (3).

ImContactSipUriAddress: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the SIP URI address of the contact.

ImTelephoneNumber: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the telephone number for the contact.

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCSCORE\]](#) section 2.2.4.19, that represents the identifier of the group. If this element is not specified, the contact is added to the OtherContacts group.

3.1.4.5.3.2 AddNewTelUriContactToGroupResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **AddNewTelUriContactToGroupResponseMessageType** complex type specifies the response message for an **AddNewImTelUriContactToGroup** WSDL operation. The **AddNewTelUriContactToGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="AddNewTelUriContactToGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
```

```

<xs:extension base="m:ResponseMessageType">
  <xs:sequence>
    <xs:element minOccurs="0" name="Persona" type="t:PersonaType"/>
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

Persona: An element of type **PersonaType**, as defined in [\[MS-OXWSPERS\]](#) section 2.2.4.19, that represents the TEL URI contact (3).

3.1.4.5.4 Simple Types

None.

3.1.4.5.5 Attributes

None.

3.1.4.5.6 Groups

None.

3.1.4.5.7 Attribute Groups

None.

3.1.4.6 GetImItemList

The **GetImItemList** WSDL operation retrieves all data for instant messaging groups and contacts (3) in the contact list.

```

<wsdl:operation name="GetImItemList" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:GetImItemListSoapIn"/>
  <wsdl:output message="m:GetImItemListSoapOut"/>
</wsdl:operation>

```

The following is the WSDL binding specification of the **GetImItemList** WSDL operation.

```

<wsdl:operation name="GetImItemList" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetImItemList"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <wsdl:input>
      <soap:header message="m:GetImItemListSoapIn" part="Impersonation" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:GetImItemListSoapIn" part="MailboxCulture" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:GetImItemListSoapIn" part="RequestVersion" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:body use="literal" parts="request"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:input>
    <wsdl:output>

```

```

    <soap:body use="literal" parts="GetImItemListResult"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:GetImItemListSoapOut" part="ServerVersion" use="literal"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:output>
</wsdl:operation>

```

This operation will not return contact (3) groups in the `ImContactList` folder if the user manually creates a group that is not recognized. This operation will not return contacts (3) in the `QuickContacts` folder that are not members of any of the groups in the `ImContactList` folder that are returned.

The protocol client sends a **GetImItemListSoapIn** request WSDL message and the protocol server responds with a **GetImItemListSoapOut** response WSDL message.

3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
GetImItemListSoapIn	Specifies the request to retrieve an instant messaging item list.
GetImItemListSoapOut	Specifies the response to the GetItemListSoapIn request WSDL message.

3.1.4.6.1.1 GetImItemListSoapIn

The **GetImItemListSoapIn** WSDL message specifies the request to retrieve an instant messaging item list.

The following is the **GetImItemListSoapIn** WSDL message specification.

```

<wsdl:message name="GetImItemListSoapIn" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:GetImItemList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **GetImItemListSoapIn** WSDL message is the input message for the SOAP action `http://schemas.microsoft.com/exchange/services/2006/messages/GetImItemList`.

The parts of the **GetImItemListSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	<code>m:GetImItemList</code>	Specifies the SOAP body of the request to retrieve an instant messaging item list.
Impersonation	<code>t:ExchangeImpersonation</code> ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.

Part name	Element/type	Description
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the GetImItemList WSDL operation request.

3.1.4.6.1.2 GetImItemListSoapOut

The **GetImItemListSoapOut** WSDL message specifies the response to the **GetImItemListSoapIn** request WSDL message.

The following is the **GetImItemListSoapOut** WSDL message specification.

```
<wsdl:message name="GetImItemListSoapOut" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="GetImItemListResult" element="m:GetImItemListResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **GetImItemListSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetImItemList>.

The parts of the **GetImItemListSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
GetImItemListResult	m:GetImItemListResponse	Specifies the SOAP body of the response that contains the requested information.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **GetImItemList** operation request returns a **GetImItemListResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **GetImItemListResponse** element is set to "NoError".

If the **GetImItemList** operation is not successful, it returns a **GetImItemListResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **GetImItemListResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetImItemList	The input data for the GetImItemList WSDL operation.

Element	Description
GetImItemListResponse	The result data for the GetImItemList WSDL operation.

3.1.4.6.2.1 GetImItemList

The **GetImItemList** element specifies the input data for the **GetImItemList** WSDL operation.

```
<xs:element name="GetImItemList" type="m:GetImItemListType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.6.2.2 GetImItemListResponse

The **GetImItemListResponse** element specifies the result data for the **GetImItemList** WSDL operation.

```
<xs:element name="GetImItemListResponse" type="m:GetImItemListResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.6.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
GetImItemListType	Specifies a request to retrieve an instant messaging item list.
GetImItemListResponseMessageType	Specifies the response message for a GetImItemList WSDL operation.

3.1.4.6.3.1 GetImItemListType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **GetImItemListType** complex type specifies a request to retrieve an instant messaging item list. The **GetImItemListType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="GetImItemListType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ExtendedProperties"
type="t:NonEmptyArrayOfExtendedFieldURIs"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ExtendedProperties: An element of type **NonEmptyArrayOfExtendedFieldURIs**, as defined in section [2.2.4.4](#), that contains an array of additional properties.

3.1.4.6.3.2 GetImItemListResponseMessageType

Namespace: http://schemas.microsoft.com/exchange/services/2006/messages

The **GetImItemListResponseMessageType** complex type specifies the response message for a **GetImItemList** WSDL operation. The **GetImItemListResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="GetImItemListResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImItemList" type="t:ImItemListType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ImItemList: An element of type **ImItemListType**, as defined in section [2.2.4.3](#), that represents a list of instant messaging contacts (3).

3.1.4.6.4 Simple Types

None.

3.1.4.6.5 Attributes

None.

3.1.4.6.6 Groups

None.

3.1.4.6.7 Attribute Groups

None.

3.1.4.7 GetImItems

The **GetImItems** WSDL operation retrieves groups and contacts (3) for the specified identifiers.

```
<wsdl:operation name="GetImItems" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:GetImItemsSoapIn"/>
  <wsdl:output message="m:GetImItemsSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **GetImItems** WSDL operation.

```
<wsdl:operation name="GetImItems" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetImItems"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
</wsdl:operation>
```

```

<wsdl:input>
  <soap:header message="m:GetImItemsSoapIn" part="Impersonation" use="literal"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <soap:header message="m:GetImItemsSoapIn" part="MailboxCulture" use="literal"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <soap:header message="m:GetImItemsSoapIn" part="RequestVersion" use="literal"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <soap:body use="literal" parts="request"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
</wsdl:input>
<wsdl:output>
  <soap:body use="literal" parts="GetImItemsResult"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <soap:header message="m:GetImItemsSoapOut" part="ServerVersion" use="literal"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
</wsdl:output>
</wsdl:operation>

```

The protocol client sends a **GetImItemsSoapIn** request WSDL message and the protocol server responds with a **GetImItemListsSoapOut** response WSDL message.

3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
GetImItemsSoapIn	Specifies the request to retrieve instant messaging items.
GetImItemsSoapOut	Specifies the response to the GetImItemsSoapIn request WSDL message.

3.1.4.7.1.1 GetImItemsSoapIn

The **GetImItemsSoapIn** WSDL message specifies the request to retrieve instant messaging items.

The following is the **GetImItemsSoapIn** WSDL message specification.

```

<wsdl:message name="GetImItemsSoapIn" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:GetImItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **GetImItemsSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetImItems>.

The parts of the **GetImItemsSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:GetImItems	Specifies the SOAP body of the request to retrieve instant messaging items.

Part name	Element/type	Description
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the GetImItems WSDL operation request.

3.1.4.7.1.2 GetImItemsSoapOut

The **GetImItemsSoapOut** WSDL message specifies the response to the **GetImItemsSoapIn** request WSDL message.

The following is the **GetImItemsSoapOut** WSDL message specification.

```
<wsdl:message name="GetImItemsSoapOut" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="GetImItemsResult" element="m:GetImItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **GetImItemsSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetImItems>.

The parts of the **GetImItemsSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
GetImItemsResult	m:GetImItemsResponse	Specifies the SOAP body of the response that contains the requested information.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **GetImItems** WSDL operation request returns a **GetImItemsResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **GetImItemsResponse** element is set to "NoError".

If the **GetImItems** WSDL operation is not successful, it returns a **GetImItemsResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **GetImItemsResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetImItems	The input data for the GetImItems WSDL operation.
GetImItemsResponse	The result data for the GetImItems WSDL operation.

3.1.4.7.2.1 GetImItems

The **GetImItems** element specifies the input data for the **GetImItems** WSDL operation.

```
<xs:element name="GetImItems" type="m:GetImItemsType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.7.2.2 GetImItemsResponse

The **GetImItemsResponse** element specifies the result data for the **GetImItems** WSDL operation.

```
<xs:element name="GetImItemsResponse" type="m:GetImItemsResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.7.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
GetImItemsType	Specifies a request to retrieve instant messaging items.
GetImItemsResponseMessageType	Specifies the response message for the GetImItems WSDL operation.

3.1.4.7.3.1 GetImItemsType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **GetImItemsType** complex type specifies a request to retrieve instant messaging items. The **GetImItemsType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="GetImItemsType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ContactIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
        <xs:element minOccurs="0" name="GroupIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
        <xs:element minOccurs="0" name="ExtendedProperties"
type="t:NonEmptyArrayOfExtendedFieldURIs"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ContactIds: An element of type **NonEmptyArrayOfBaseItemIdsType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.11, that represents the identifiers of the contacts (3).

GroupIds: An element of type **NonEmptyArrayOfBaseItemIdsType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.11, that represents the identifiers of the groups.

ExtendedProperties: An element of type **NonEmptyArrayOfExtendedFieldURIs**, as defined in section [2.2.4.4](#), that contains an array of additional properties for the contacts (3) or the groups.

3.1.4.7.3.2 GetImItemsResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **GetImItemsResponseMessageType** complex type specifies the response message for the **GetImItems** WSDL operation. The **GetImItemsResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="GetImItemsResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImItemList" type="t:ImItemListType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ImItemList: An element of type **ImItemListType**, as defined in section [2.2.4.3](#), that represents a list of instant messaging contacts (3).

3.1.4.7.4 Simple Types

None.

3.1.4.7.5 Attributes

None.

3.1.4.7.6 Groups

None.

3.1.4.7.7 Attribute Groups

None.

3.1.4.8 RemoveContactFromImList

The **RemoveContactFromImList** WSDL operation removes the specified contact (3) from all instant messaging groups.

```
<wsdl:operation name="RemoveContactFromImList" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:RemoveContactFromImListSoapIn"/>
  <wsdl:output message="m:RemoveContactFromImListSoapOut"/>
</wsdl:operation>
```

```
</wsdl:operation>
```

The following is the WSDL binding specification of the **RemoveContactFromImList** WSDL operation.

```
<wsdl:operation name="RemoveContactFromImList" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveContactFromImList"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <wsdl:input>
    <soap:header message="m:RemoveContactFromImListSoapIn" part="Impersonation" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:RemoveContactFromImListSoapIn" part="MailboxCulture"
      use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:RemoveContactFromImListSoapIn" part="RequestVersion"
      use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:body use="literal" parts="request"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="RemoveContactFromImListResult"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:RemoveContactFromImListSoapOut" part="ServerVersion"
      use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **RemoveContactFromImListSoapIn** request WSDL message and the protocol server responds with a **RemoveContactFromImListSoapOut** response WSDL message.

3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
RemoveContactFromImListSoapIn	Specifies the request to remove a contact (3) from the instant messaging list.
RemoveContactFromImListSoapOut	Specifies the response to the RemoveContactFromImListSoapIn request WSDL message.

3.1.4.8.1.1 RemoveContactFromImListSoapIn

The **RemoveContactFromImListSoapIn** WSDL message specifies the request to remove a contact from the instant messaging list.

The following is the **RemoveContactFromImListSoapIn** WSDL message specification.

```
<wsdl:message name="RemoveContactFromImListSoapIn"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:RemoveContactFromImList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
```



```
<wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **RemoveContactFromImListSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveContactFromImList>.

The parts of the **RemoveContactFromImListSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:RemoveContactFromImList	Specifies the SOAP body of the request to remove a contact (3).
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the RemoveContactFromList WSDL operation request.

3.1.4.8.1.2 RemoveContactFromImListSoapOut

The **RemoveContactFromImListSoapOut** WSDL message specifies the response to the **RemoveContactFromImListSoapIn** request WSDL message.

The following is the **RemoveContactFromImListSoapOut** WSDL message specification.

```
<wsdl:message name="RemoveContactFromImListSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="RemoveContactFromImListResult"
element="m:RemoveContactFromImListResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **RemoveContactFromImListSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveContactFromImList>.

The parts of the **RemoveContactFromImListSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
RemoveContactFromImListResult	m:RemoveContactFromImListResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for

Part name	Element/type	Description
		the response.

A successful **RemoveContactFromImList** WSDL operation request returns a **RemoveContactFromImListResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **RemoveContactFromImListResponse** element is set to "NoError".

If the **RemoveContactFromImList** operation is not successful, it returns a **RemoveContactFromImListResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **RemoveContactFromImListResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveContactFromImList	The input data for the RemoveContactFromImList WSDL operation.
RemoveContactFromImListResponse	The result data for the RemoveContactFromImList WSDL operation.

3.1.4.8.2.1 RemoveContactFromImList

The **RemoveContactFromImList** element specifies the input data for the **RemoveContactFromImList** WSDL operation.

```
<xs:element name="RemoveContactFromImList" type="m:RemoveContactFromImListType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.8.2.2 RemoveContactFromImListResponse

The **RemoveContactFromImListResponse** element specifies the result data for the **RemoveContactFromImList** WSDL operation.

```
<xs:element name="RemoveContactFromImListResponse"
type="m:RemoveContactFromImListResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.8.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
RemoveContactFromImListType	Specifies a request to remove a contact (3) from an instant messaging list.

Complex type	Description
RemoveContactFromImListResponseMessageType	Specifies the response message for a RemoveContactFromImList WSDL operation.

3.1.4.8.3.1 RemoveContactFromImListType

Namespace: http://schemas.microsoft.com/exchange/services/2006/messages

The **RemoveContactFromImListType** complex type specifies a request to remove a contact (3) from an instant messaging list. The **RemoveContactFromImListType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="RemoveContactFromImListType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ContactId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ContactId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the contact (3).

3.1.4.8.3.2 RemoveContactFromImListResponseMessageType

Namespace: http://schemas.microsoft.com/exchange/services/2006/messages

The **RemoveContactFromImListResponseMessageType** complex type specifies the response message for a **RemoveContactFromImList** WSDL operation. The **RemoveContactFromImListResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="RemoveContactFromImListResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.8.4 Simple Types

None.

3.1.4.8.5 Attributes

None.

3.1.4.8.6 Groups

None.

3.1.4.8.7 Attribute Groups

None.

3.1.4.9 RemoveDistributionGroupFromImList

The **RemoveDistributionGroupFromImList** WSDL operation removes a distribution group from an instant messaging list.

```
<wsdl:operation name="RemoveDistributionGroupFromImList"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:RemoveDistributionGroupFromImListSoapIn"/>
  <wsdl:output message="m:RemoveDistributionGroupFromImListSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **RemoveDistributionGroupFromImList** WSDL operation.

```
<wsdl:operation name="RemoveDistributionGroupFromImList"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveDistributionGr
oupFromImList" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  <wsdl:input>
    <soap:header message="m:RemoveDistributionGroupFromImListSoapIn" part="Impersonation"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:RemoveDistributionGroupFromImListSoapIn" part="MailboxCulture"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:RemoveDistributionGroupFromImListSoapIn" part="RequestVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:body use="literal" parts="request"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="RemoveDistributionGroupFromImListResult"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:RemoveDistributionGroupFromImListSoapOut" part="ServerVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **RemoveDistributionGroupFromImListSoapIn** request WSDL message and the protocol server responds with a **RemoveDistributionGroupFromImListSoapOut** response WSDL message.

3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
RemoveDistributionGroupFromImListSoapIn	Specifies the request to remove a distribution group from the instant messaging list.
RemoveDistributionGroupFromImListSoapOut	Specifies the response to the

Message	Description
	RemoveDistributionGroupFromImListSoapIn request WSDL message.

3.1.4.9.1.1 RemoveDistributionGroupFromImListSoapIn

The **RemoveDistributionGroupFromImListSoapIn** WSDL message specifies the request to remove a distribution group from the instant messaging list.

The following is the **RemoveDistributionGroupFromImListSoapIn** WSDL message specification.

```
<wsdl:message name="RemoveDistributionGroupFromImListSoapIn"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:RemoveDistributionGroupFromImList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **RemoveDistributionGroupFromImListSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveDistributionGroupFromImList>.

The parts of the **RemoveDistributionGroupFromImListSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:RemoveDistributionGroupFromImList	Specifies the SOAP body of the request to remove the distribution group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the RemoveDistributionGroupFromImList WSDL operation request.

3.1.4.9.1.2 RemoveDistributionGroupFromImListSoapOut

The **RemoveDistributionGroupFromImListSoapOut** WSDL message specifies the response to the **RemoveDistributionGroupFromImListSoapIn** request WSDL message.

The following is the **RemoveDistributionGroupFromImListSoapOut** WSDL message specification.

```
<wsdl:message name="RemoveDistributionGroupFromImListSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:part name="RemoveDistributionGroupFromImListResult"
    element="m:RemoveDistributionGroupFromImListResponse"/>
    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wsdl:message>

```

The **RemoveDistributionGroupFromImListSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveDistributionGroupFromImList>.

The parts of the **RemoveDistributionGroupFromImListSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
RemoveDistributionGroupFromImListResult	m:RemoveDistributionGroupFromImListResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **RemoveDistributionGroupFromImList** WSDL operation request returns a **RemoveDistributionGroupFromImListResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **RemoveDistributionGroupFromImListResponse** element is set to "NoError".

If the **RemoveDistributionGroupFromImList** WSDL operation is not successful, it returns a **RemoveDistributionGroupFromImListResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **RemoveDistributionGroupFromImListResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveDistributionGroupFromImList	The input data for the RemoveDistributionGroupFromImList WSDL operation.
RemoveDistributionGroupFromImListResponse	The result data for the RemoveDistributionGroupFromImList WSDL operation.

3.1.4.9.2.1 RemoveDistributionGroupFromImList

The **RemoveDistributionGroupFromImList** element specifies the input data for the **RemoveDistributionGroupFromImList** WSDL operation.

```
<xs:element name="RemoveDistributionGroupFromImList"
type="m:RemoveDistributionGroupFromImListType" xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.9.2.2 RemoveDistributionGroupFromImListResponse

The **RemoveDistributionGroupFromImListResponse** element specifies the result data for the **RemoveDistributionGroupFromImList** WSDL operation.

```
<xs:element name="RemoveDistributionGroupFromImListResponse"
type="m:RemoveDistributionGroupFromImListResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.9.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
RemoveDistributionGroupFromImListType	Specifies a request to remove a distribution group from an instant messaging list.
RemoveDistributionGroupFromImListResponseMessageType	Specifies the response message for a RemoveDistributionGroupFromImList WSDL operation.

3.1.4.9.3.1 RemoveDistributionGroupFromImListType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **RemoveDistributionGroupFromImListType** complex type specifies a request to remove a distribution group from an instant messaging list. The **RemoveDistributionGroupFromImListType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="RemoveDistributionGroupFromImListType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the group.

3.1.4.9.3.2 RemoveDistributionGroupFromImListResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **RemoveDistributionGroupFromImListResponseMessageType** complex type specifies the response message for a **RemoveDistributionGroupFromImList** WSDL operation. The **RemoveDistributionGroupFromImListResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="RemoveDistributionGroupFromImListResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.9.4 Simple Types

None.

3.1.4.9.5 Attributes

None.

3.1.4.9.6 Groups

None.

3.1.4.9.7 Attribute Groups

None.

3.1.4.10 RemoveImContactFromGroup

The **RemoveImContactFromGroup** WSDL operation removes an instant messaging contact (3) from a group if the contact (3) is only a member of the specified group, excluding the Tagged group. If the Tagged group is the specified group, and the contact (3) is a member of the Tagged group only, the contact (3) is removed.

```
<wsdl:operation name="RemoveImContactFromGroup"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:RemoveImContactFromGroupSoapIn"/>
  <wsdl:output message="m:RemoveImContactFromGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **RemoveImContactFromGroup** WSDL operation.

```
<wsdl:operation name="RemoveImContactFromGroup"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```



```

    <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImContactFromGroup"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <wsdl:input>
        <soap:header message="m:RemoveImContactFromGroupSoapIn" part="Impersonation"
        use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
          <soap:header message="m:RemoveImContactFromGroupSoapIn" part="MailboxCulture"
          use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
            <soap:header message="m:RemoveImContactFromGroupSoapIn" part="RequestVersion"
            use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
              <soap:body use="literal" parts="request"
              xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
                </wsdl:input>
              <wsdl:output>
                <soap:body use="literal" parts="RemoveImContactFromGroupResult"
                xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
                  <soap:header message="m:RemoveImContactFromGroupSoapOut" part="ServerVersion"
                  use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
                    </wsdl:output>
                  </wsdl:operation>

```

The protocol client sends a **RemoveImContactFromGroupSoapIn** request WSDL message and the protocol server responds with a **RemoveImContactFromGroupSoapOut** response WSDL message.

3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
RemoveImContactFromGroupSoapIn	Contains the inbound SOAP message .
RemoveImContactFromGroupSoapOut	Contains the outbound SOAP message.

3.1.4.10.1.1 RemoveImContactFromGroupSoapIn

The **RemoveImContactFromGroupSoapIn** WSDL message specifies the request to remove an instant messaging contact (3) from a group.

The following is the **RemoveImContactFromGroupSoapIn** WSDL message specification.

```

<wsdl:message name="RemoveImContactFromGroupSoapIn"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:RemoveImContactFromGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **RemoveImContactFromGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImContactFromGroup>.

The parts of the **RemoveImContactFromGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:RemoveImContactFromGroup	Specifies the SOAP body of the request to remove an instant messaging contact (3).
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.5.6)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the RemoveImContactFromGroup WSDL operation request.

3.1.4.10.1.2 RemoveImContactFromGroupSoapOut

The **RemoveImContactFromGroupSoapOut** WSDL message specifies the response to the **RemoveImContactFromGroupSoapIn** request.

The following is the **RemoveImContactFromGroupSoapOut** WSDL message specification.

```
<wsdl:message name="RemoveImContactFromGroupSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="RemoveImContactFromGroupResult"
element="m:RemoveImContactFromGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **RemoveImContactFromGroupSoapOut** WSDL message is the output message for the SOAP action

<http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImContactFromGroup>.

The parts of the **RemoveImContactFromGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
RemoveImContactFromGroupResult	m:RemoveImContactFromGroupResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **RemoveImContactFromGroup** WSDL operation request returns a **RemoveImContactFromGroupResponse** element with the **ResponseClass** attribute set to

"Success". The **ResponseCode** element of the **RemoveImContactFromGroupResponse** element is set to "NoError".

If the **RemoveImContactFromGroup** WSDL operation is not successful, it returns a **RemoveImContactFromGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **RemoveImContactFromGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveImContactFromGroup	The input data for the RemoveImContactFromGroup WSDL operation.
RemoveImContactFromGroupResponse	The result data for the RemoveImContactFromGroup WSDL operation.

3.1.4.10.2.1 RemoveImContactFromGroup

The **RemoveImContactFromGroup** element specifies the input data for the **RemoveImContactFromGroup** WSDL operation.

```
<xs:element name="RemoveImContactFromGroup" type="m:RemoveImContactFromGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.10.2.2 RemoveImContactFromGroupResponse

The **RemoveImContactFromGroupResponse** element specifies the result data for the **RemoveImContactFromGroup** WSDL operation.

```
<xs:element name="RemoveImContactFromGroupResponse"
type="m:RemoveImContactFromGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.10.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
RemoveImContactFromGroupType	Specifies a request to remove an instant messaging contact (3) from a group.
RemoveImContactFromGroupResponseMessageType	Specifies the response message for a RemoveImContactFromGroup WSDL operation.

3.1.4.10.3.1 RemoveImContactFromGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **RemoveImContactFromGroupType** complex type specifies a request to remove an instant messaging contact (3) from a group. The **RemoveImContactFromGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="RemoveImContactFromGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ContactId" type="t:ItemIdType"/>
        <xs:element name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ContactId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the contact (3).

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the group.

3.1.4.10.3.2 RemoveImContactFromGroupResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **RemoveImContactFromGroupResponseMessageType** complex type specifies the response message for a **RemoveImContactFromGroup** WSDL operation. The **RemoveImContactFromGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="RemoveImContactFromGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.10.4 Simple Types

None.

3.1.4.10.5 Attributes

None.

3.1.4.10.6 Groups

None.

3.1.4.10.7 Attribute Groups

None.

3.1.4.11 RemoveImGroup

The **RemoveImGroup** WSDL operation removes the instant messaging group and all the contacts (3) in the group. A contact (3) is deleted if it is a member of only the specified group, excluding the Tagged group. If the Tagged group is the specified group and the contact (3) is a member of the Tagged group only, the contact (3) is removed.

```
<wsdl:operation name="RemoveImGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:RemoveImGroupSoapIn"/>
  <wsdl:output message="m:RemoveImGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **RemoveImGroup** WSDL operation.

```
<wsdl:operation name="RemoveImGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImGroup"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <wsdl:input>
      <soap:header message="m:RemoveImGroupSoapIn" part="Impersonation" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:RemoveImGroupSoapIn" part="MailboxCulture" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:RemoveImGroupSoapIn" part="RequestVersion" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:body use="literal" parts="request"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" parts="RemoveImGroupResult"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:RemoveImGroupSoapOut" part="ServerVersion" use="literal"
        xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:output>
  </soap:operation>
</wsdl:operation>
```

The protocol client sends a **RemoveImGroupSoapIn** request WSDL message and the protocol server responds with a **RemoveImGroupSoapOut** response WSDL message.

3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
RemoveImGroupSoapIn	Specifies the request to remove an instant messaging group.
RemoveImGroupSoapOut	Specifies the response to the RemoveImGroupSoapIn request WSDL message.

3.1.4.11.1.1 RemoveImGroupSoapIn

The **RemoveImGroupSoapIn** WSDL message specifies the request to remove an instant messaging group.

The following is the **RemoveImGroupSoapIn** WSDL message specification.

```
<wsdl:message name="RemoveImGroupSoapIn" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:RemoveImGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **RemoveImGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImGroup>.

The parts of the **RemoveImGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:RemoveImGroup	Specifies the SOAP body of the request to remove an instant messaging group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.5.6)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the RemoveImGroup WSDL operation request.

3.1.4.11.1.2 RemoveImGroupSoapOut

The **RemoveImGroupSoapOut** WSDL message specifies the response to the **RemoveImGroupSoapIn** request WSDL message.

The following is the **RemoveImGroupSoapOut** WSDL message specification.

```
<wsdl:message name="RemoveImGroupSoapOut" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="RemoveImGroupResult" element="m:RemoveImGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **RemoveImGroupSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImGroup>.

The parts of the **RemoveImGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
RemoveImGroupResult	m:RemoveImGroupResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **RemoveImGroup** WSDL operation request returns a **RemoveImGroupResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **RemoveImGroupResponse** element is set to "NoError".

If the **RemoveImGroup** WSDL operation is not successful, it returns a **RemoveImGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **RemoveImGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
RemoveImGroup	The input data for the RemoveImGroup WSDL operation.
RemoveImGroupResponse	The result data for the RemoveImGroup WSDL operation.

3.1.4.11.2.1 RemoveImGroup

The **RemoveImGroup** element specifies the input data for the **RemoveImGroup** WSDL operation.

```
<xs:element name="RemoveImGroup" type="m:RemoveImGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.11.2.2 RemoveImGroupResponse

The **RemoveImGroupResponse** element specifies the result data for the **RemoveImGroup** WSDL operation.

```
<xs:element name="RemoveImGroupResponse" type="m:RemoveImGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.11.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
RemoveImGroupType	Specifies a request to remove an instant messaging group.

Complex type	Description
RemoveImGroupResponseType	Specifies the response message for a RemoveImGroup WSDL operation.

3.1.4.11.3.1 RemoveImGroupType

Namespace: http://schemas.microsoft.com/exchange/services/2006/messages

The **RemoveImGroupType** complex type specifies a request to remove an instant messaging group. The **RemoveImGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="RemoveImGroupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the group.

3.1.4.11.3.2 RemoveImGroupResponseMessageType

Namespace: http://schemas.microsoft.com/exchange/services/2006/messages

The **RemoveImGroupResponseMessageType** complex type specifies the response message for a **RemoveImGroup** WSDL operation. The **RemoveImGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="RemoveImGroupResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.11.4 Simple Types

None.

3.1.4.11.5 Attributes

None.

3.1.4.11.6 Groups

None.

3.1.4.11.7 Attribute Groups

None.

3.1.4.12 SetImGroup

The **SetImGroup** WSDL operation changes the display name of an instant messaging group.

```
<wsdl:operation name="SetImGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:SetImGroupSoapIn"/>
  <wsdl:output message="m:SetImGroupSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **SetImGroup** WSDL operation.

```
<wsdl:operation name="SetImGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SetImGroup"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  <wsdl:input>
    <soap:header message="m:SetImGroupSoapIn" part="Impersonation" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:SetImGroupSoapIn" part="MailboxCulture" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:SetImGroupSoapIn" part="RequestVersion" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:body use="literal" parts="request"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="SetImGroupResult"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
    <soap:header message="m:SetImGroupSoapOut" part="ServerVersion" use="literal"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" />
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **SetImGroupSoapIn** request WSDL message and the protocol server responds with a **SetImGroupSoapOut** response WSDL message.

3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
SetImGroupSoapIn	Specifies the request to set an instant messaging group.
SetImGroupSoapOut	Specifies the response to the SetImGroupSoapIn request WSDL message.

3.1.4.12.1.1 SetImGroupSoapIn

The **SetImGroupSoapIn** WSDL message specifies the request to set an instant messaging group.

The following is the **SetImGroupSoapIn** WSDL message specification.

```
<wsdl:message name="SetImGroupSoapIn" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:SetImGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **SetImGroupSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SetImGroup>.

The parts of the **SetImGroupSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:SetImGroup	Specifies the SOAP body of the request to set an instant messaging group.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.4.39)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the SetImGroup WSDL message request.

3.1.4.12.1.2 SetImGroupSoapOut

The **SetImGroupSoapOut** WSDL message specifies the response to the **SetImGroupSoapIn** request WSDL message.

The following is the **SetImGroupSoapOut** WSDL message specification.

```
<wsdl:message name="SetImGroupSoapOut" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="SetImGroupResult" element="m:SetImGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **SetImGroupSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SetImGroup>.

The parts of the **SetImGroupSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
SetImGroupResult	m:SetImGroupResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section)	Specifies a SOAP header that identifies the server version for the response.

Part name	Element/type	Description
	2.2.5.10)	

A successful **SetImGroup** WSDL operation request returns a **SetImGroupResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **SetImGroupResponse** element is set to "NoError".

If the **SetImGroup** WSDL operation is not successful, it returns a **SetImGroupResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **SetImGroupResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetImGroup	The input data for the SetImGroup WSDL operation.
SetImGroupResponse	The result data for the SetImGroup WSDL operation.

3.1.4.12.2.1 SetImGroup

The **SetImGroup** element specifies the input data for the **SetImGroup** WSDL operation.

```
<xs:element name="SetImGroup" type="m:SetImGroupType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.12.2.2 SetImGroupResponse

The **SetImGroupResponse** element specifies the result data for the **SetImGroup** WSDL operation.

```
<xs:element name="SetImGroupResponse" type="m:SetImGroupResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.12.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
SetImGroupType	Specifies a request to set an instant messaging group.
SetImGroupResponseMessageType	Specifies the response message for a SetImGroup WSDL operation.

3.1.4.12.3.1 SetImGroupType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **SetImGroupType** complex type specifies a request to set an instant messaging group. The **SetImGroupType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="SetImGroupType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="GroupId" type="t:ItemIdType"/>
        <xs:element name="NewDisplayName" type="t:NonEmptyStringType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

GroupId: An element of type **ItemIdType**, as defined in [\[MS-OXWSCORE\]](#) section 2.2.4.19, that represents the identifier of the group.

NewDisplayName: An element of type **NonEmptyStringType**, as defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.20, that represents the new display name of the contact.

3.1.4.12.3.2 SetImGroupResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **SetImGroupResponseMessageType** complex type specifies the response message for a **SetImGroup** WSDL operation. The **SetImGroupResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.

```
<xs:complexType name="SetImGroupResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.12.4 Simple Types

None.

3.1.4.12.5 Attributes

None.

3.1.4.12.6 Groups

None.

3.1.4.12.7 Attribute Groups

None.

3.1.4.13 SetImListMigrationCompleted

The **SetImListMigrationCompleted** WSDL operation indicates whether the instant messaging contacts (3) in a mailbox have been migrated to the server.

```
<wsdl:operation name="SetImListMigrationCompleted"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input message="m:SetImListMigrationCompletedSoapIn"/>
  <wsdl:output message="m:SetImListMigrationCompletedSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the **SetImListMigrationCompleted** WSDL operation.

```
<wsdl:operation name="SetImListMigrationCompleted"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SetImListMigrationCompleted"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  <wsdl:input>
    <soap:header message="m:SetImListMigrationCompletedSoapIn" part="Impersonation"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:SetImListMigrationCompletedSoapIn" part="MailboxCulture"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:SetImListMigrationCompletedSoapIn" part="RequestVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:body use="literal" parts="request"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  </wsdl:input>
  <wsdl:output>
    <soap:body use="literal" parts="SetImListMigrationCompletedResult"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <soap:header message="m:SetImListMigrationCompletedSoapOut" part="ServerVersion"
use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
  </wsdl:output>
</wsdl:operation>
```

When the user's mailbox has been migrated to Unified Contact Store (UCS) mode, the **ImListMigrationCompleted** property is set on the user's Active Directory object.

The protocol client sends a **SetImListMigrationCompletedSoapIn** request WSDL message and the protocol server responds with a **SetImListMigrationCompletedSoapOut** response WSDL message.

3.1.4.13.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
SetImListMigrationCompletedSoapIn	Specifies the request to indicate whether the migration of the instant messaging contacts (3) to the server is complete.
SetImListMigrationCompletedSoapOut	Specifies the response to the SetImListMigrationCompletedSoapIn request WSDL

Message	Description
	message.

3.1.4.13.1.1 SetImListMigrationCompletedSoapIn

The **SetImListMigrationCompletedSoapIn** WSDL message specifies the request to indicate whether the migration of the instant messaging contacts (3) to the server is complete.

The following is the **SetImListMigrationCompletedSoapIn** WSDL message specification.

```
<wsdl:message name="SetImListMigrationCompletedSoapIn"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:SetImListMigrationCompleted"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **SetImListMigrationCompletedSoapIn** WSDL message is the input message for the SOAP action

<http://schemas.microsoft.com/exchange/services/2006/messages/SetImListMigrationCompleted>.

The parts of the **SetImListMigrationCompletedSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
request	m:SetImListMigrationCompleted	Specifies the SOAP body of the request to indicate if the migration is complete.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.5.3)	Specifies a SOAP header that identifies the user whom the client is impersonating.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.5.6)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined in [RFC3066] .
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.5.9)	Specifies a SOAP header that identifies the schema version for the SetImListMigrationCompleted WSDL operation request.

3.1.4.13.1.2 SetImListMigrationCompletedSoapOut

The **SetImListMigrationCompletedSoapOut** WSDL message specifies the response to the **SetImListMigrationCompletedSoapIn** request WSDL message.

The following is the **SetImListMigrationCompletedSoapOut** WSDL message specification.

```
<wsdl:message name="SetImListMigrationCompletedSoapOut"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="SetImListMigrationCompletedResult"
element="m:SetImListMigrationCompletedResponse"/>
</wsdl:message>
```

```
<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **SetImListMigrationCompletedSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/SetImListMigrationCompleted>.

The parts of the **SetImListMigrationCompletedSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
SetImListMigrationCompletedResult	m:SetImListMigrationCompletedResponse	Specifies the SOAP body of the response.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.5.10)	Specifies a SOAP header that identifies the server version for the response.

A successful **SetImListMigrationCompleted** WSDL operation request returns a **SetImListMigrationCompletedResponse** element with the **ResponseClass** attribute set to "Success". The **ResponseCode** element of the **SetImListMigrationCompletedResponse** element is set to "NoError".

If the **SetImListMigrationCompleted** WSDL operation is not successful, it returns a **SetImListMigrationCompletedResponse** element with the **ResponseClass** attribute set to "Error". The **ResponseCode** element of the **SetImListMigrationCompletedResponse** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.3.23.

3.1.4.13.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetImListMigrationCompleted	The input data for the SetImListMigrationCompleted WSDL operation.
SetImListMigrationCompletedResponse	The result data for the SetImListMigrationCompleted WSDL operation.

3.1.4.13.2.1 SetImListMigrationCompleted

The **SetImListMigrationCompleted** element specifies the input data for the **SetImListMigrationCompleted** WSDL operation.

```
<xs:element name="SetImListMigrationCompleted" type="m:SetImListMigrationCompletedType"
xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.13.2 SetImListMigrationCompletedResponse

The **SetImListMigrationCompletedResponse** element specifies the result data for the **SetImListMigrationCompleted** WSDL operation.

```
<xs:element name="SetImListMigrationCompletedResponse"
  type="m:SetImListMigrationCompletedResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

3.1.4.13.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
SetImListMigrationCompletedType	Specifies whether the migration of a contact (3) list from the server to an instant messaging system is complete.
SetImListMigrationCompletedResponseMessageType	Specifies the response message for the SetImListMigrationCompleted WSDL operation.

3.1.4.13.3.1 SetImListMigrationCompletedType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **SetImListMigrationCompletedType** complex type specifies whether the migration of a contact (3) list from the server to an instant messaging system is complete. The **SetImListMigrationCompletedType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.15.

```
<xs:complexType name="SetImListMigrationCompletedType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ImListMigrationCompleted" type="xs:boolean"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

ImListMigrationCompleted: An element of type **xs:boolean**, as defined in [\[XMLSCHEMA2\]](#), that indicates whether the migration is complete.

3.1.4.13.3.2 SetImListMigrationCompletedResponseMessageType

Namespace: <http://schemas.microsoft.com/exchange/services/2006/messages>

The **SetImListMigrationCompletedResponseMessageType** complex type specifies the response message for the **SetImListMigrationCompleted** WSDL operation. The **SetImListMigrationCompletedResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.57.


```
<xs:complexType name="SetImListMigrationCompletedResponseMessageType"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
```

3.1.4.13.4 Simple Types

None.

3.1.4.13.5 Attributes

None.

3.1.4.13.6 Groups

None.

3.1.4.13.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

The following example of an **AddImGroup** WSDL operation request shows how to create an instant messaging group named MyCustomerGroup.

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
  <soap:Header>
    <t:RequestServerVersion Version="Exchange2013" />
    <t:MailboxCulture>en-US</t:MailboxCulture>
    <t:TimeZoneContext>
      <t:TimeZoneDefinition Id="GMT Standard Time"/>
    </t:TimeZoneContext>
  </soap:Header>
  <soap:Body >
    <m:AddImGroup>
      <m:DisplayName>MyCustomGroup</m:DisplayName>
    </m:AddImGroup>
  </soap:Body>
</soap:Envelope>
```

The following example shows a successful response to an **AddImGroup** WSDL operation request. The store identifier has been shortened to preserve readability.

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15"
      MinorVersion="0"
      MajorBuildNumber="349"
      MinorBuildNumber="0"
      Version="Exchange2013"

      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <AddImGroupResponse ResponseClass="Success"

      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseCode>NoError</ResponseCode>
      <ImGroup>
        <DisplayName
          xmlns="http://schemas.microsoft.com/exchange/services/2006/types">MyCustomGroup</DisplayName>
        <GroupType
          xmlns="http://schemas.microsoft.com/exchange/services/2006/types">IPM.DistList.MOC.UserGroup</GroupType>
        <ExchangeStoreId Id="AAMkAGQ1MjJjMTBkLTc4Y2UtdNDk5Ny04ZjU5LWI3MAAA="
          ChangeKey="EgAAAA=="
        </ImGroup>
      </AddImGroupResponse>
    </s:Body>
  </s:Envelope>
```

```

    </AddImGroupResponse>
  </s:Body>
</s:Envelope>

```

The following example shows how to add a contact (3) to an instant messaging group. The group and contact identifiers have been shortened to preserve readability.

```

<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
  <soap:Header>
    <t:RequestServerVersion Version="Exchange2013" />
    <t:MailboxCulture>en-US</t:MailboxCulture>
  </soap:Header>
  <soap:Body >
    <m:AddImContactToGroup>
      <m:ContactId Id="AAMkAGQ1MjJjMTBkLTc4Y2AA="
        ChangeKey="EQAAABYAAABtF8oI7i"/>
      <m:GroupId Id="AAMkAGQ1MjJjMTBkzzAAAQKAAA="
        ChangeKey="EgAAAA==" />
    </m:AddImContactToGroup>
  </soap:Body>
</soap:Envelope>

```

The following example shows a successful response to an **AddImContactToGroup** WSDL operation request.

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15"
      MinorVersion="0"
      MajorBuildNumber="349"
      MinorBuildNumber="0"
      Version="Exchange2013"

      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <AddImContactToGroupResponse ResponseClass="Success"

      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseCode>NoError</ResponseCode>
    </AddImContactToGroupResponse>
  </s:Body>
</s:Envelope>

```

The following example of a **RemoveImGroup** WSDL operation request shows how to remove an instant messaging group. The group identifier has been shortened to preserve readability,

```

<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
  <soap:Header>
    <t:RequestServerVersion Version="Exchange2013" />
    <t:MailboxCulture>en-US</t:MailboxCulture>
    <t:TimeZoneContext>
      <t:TimeZoneDefinition Id="GMT Standard Time"/>
    </t:TimeZoneContext>
  </soap:Header>
  <soap:Body >
    <m:RemoveImGroup>
      <m:GroupId Id="AAMkAGQ1MjJjMTBkLTc4Y2UtNDA5hQoTbWAAAAAQRAAA="
        ChangeKey="EgAAAA==" />
    </m:RemoveImGroup>
  </soap:Body>
</soap:Envelope>

```

The following example shows a successful response to a **RemoveImGroup** WSDL operation request.

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15"
      MinorVersion="0"
      MajorBuildNumber="349"
      MinorBuildNumber="0"
      Version="Exchange2013"

      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <RemoveImGroupResponse ResponseClass="Success"

      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseCode>NoError</ResponseCode>
    </RemoveImGroupResponse>
  </s:Body>
</s:Envelope>

```

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0"?>
<wSDL:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/">
  <wSDL:types>
    <xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
version="Exchange2013" id="messages" xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xs:include schemaLocation="MS-OXWSCOS-messages.xsd"/>
    </xs:schema>
  </wSDL:types>
  <wSDL:message name="AddDistributionGroupToImListSoapIn">
    <wSDL:part name="request" element="m:AddDistributionGroupToImList"/>
    <wSDL:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wSDL:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wSDL:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wSDL:message>
  <wSDL:message name="AddDistributionGroupToImListSoapOut">
    <wSDL:part name="AddDistributionGroupToImListResult"
element="m:AddDistributionGroupToImListResponse"/>
    <wSDL:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wSDL:message>
  <wSDL:message name="AddImContactToGroupSoapIn">
    <wSDL:part name="request" element="m:AddImContactToGroup"/>
    <wSDL:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wSDL:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wSDL:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wSDL:message>
  <wSDL:message name="AddImContactToGroupSoapOut">
    <wSDL:part name="AddImContactToGroupResult" element="m:AddImContactToGroupResponse"/>
    <wSDL:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wSDL:message>
  <wSDL:message name="AddImGroupSoapIn">
    <wSDL:part name="request" element="m:AddImGroup"/>
    <wSDL:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wSDL:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wSDL:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wSDL:message>
  <wSDL:message name="AddImGroupSoapOut">
    <wSDL:part name="AddImGroupResult" element="m:AddImGroupResponse"/>
    <wSDL:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wSDL:message>
  <wSDL:message name="AddNewImContactToGroupSoapIn">
    <wSDL:part name="request" element="m:AddNewImContactToGroup"/>
    <wSDL:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wSDL:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wSDL:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wSDL:message>
  <wSDL:message name="AddNewImContactToGroupSoapOut">
    <wSDL:part name="AddNewImContactToGroupResult"
element="m:AddNewImContactToGroupResponse"/>
    <wSDL:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wSDL:message>

```

```

<wsdl:message name="AddNewTelUriContactToGroupSoapIn">
  <wsdl:part name="request" element="m:AddNewTelUriContactToGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="AddNewTelUriContactToGroupSoapOut">
  <wsdl:part name="AddNewTelUriContactToGroupResult"
element="m:AddNewTelUriContactToGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="GetImItemListSoapIn">
  <wsdl:part name="request" element="m:GetImItemList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="GetImItemListSoapOut">
  <wsdl:part name="GetImItemListResult" element="m:GetImItemListResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="GetImItemsSoapIn">
  <wsdl:part name="request" element="m:GetImItems"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="GetImItemsSoapOut">
  <wsdl:part name="GetImItemsResult" element="m:GetImItemsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="RemoveContactFromImListSoapIn">
  <wsdl:part name="request" element="m:RemoveContactFromImList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="RemoveContactFromImListSoapOut">
  <wsdl:part name="RemoveContactFromImListResult"
element="m:RemoveContactFromImListResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="RemoveDistributionGroupFromImListSoapIn">
  <wsdl:part name="request" element="m:RemoveDistributionGroupFromImList"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="RemoveDistributionGroupFromImListSoapOut">
  <wsdl:part name="RemoveDistributionGroupFromImListResult"
element="m:RemoveDistributionGroupFromImListResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="RemoveImContactFromGroupSoapIn">
  <wsdl:part name="request" element="m:RemoveImContactFromGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

```

<wsdl:message name="RemoveImContactFromGroupSoapOut">
  <wsdl:part name="RemoveImContactFromGroupResult"
element="m:RemoveImContactFromGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="RemoveImGroupSoapIn">
  <wsdl:part name="request" element="m:RemoveImGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="RemoveImGroupSoapOut">
  <wsdl:part name="RemoveImGroupResult" element="m:RemoveImGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="SetImGroupSoapIn">
  <wsdl:part name="request" element="m:SetImGroup"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="SetImGroupSoapOut">
  <wsdl:part name="SetImGroupResult" element="m:SetImGroupResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="SetImListMigrationCompletedSoapIn">
  <wsdl:part name="request" element="m:SetImListMigrationCompleted"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="SetImListMigrationCompletedSoapOut">
  <wsdl:part name="SetImListMigrationCompletedResult"
element="m:SetImListMigrationCompletedResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:portType name="ExchangeServicePortType">
  <wsdl:operation name="AddDistributionGroupToImList">
    <wsdl:input message="m:AddDistributionGroupToImListSoapIn"/>
    <wsdl:output message="m:AddDistributionGroupToImListSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="AddImContactToGroup">
    <wsdl:input message="m:AddImContactToGroupSoapIn"/>
    <wsdl:output message="m:AddImContactToGroupSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="AddImGroup">
    <wsdl:input message="m:AddImGroupSoapIn"/>
    <wsdl:output message="m:AddImGroupSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="AddNewImContactToGroup">
    <wsdl:input message="m:AddNewImContactToGroupSoapIn"/>
    <wsdl:output message="m:AddNewImContactToGroupSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="AddNewTelUriContactToGroup">
    <wsdl:input message="m:AddNewTelUriContactToGroupSoapIn"/>
    <wsdl:output message="m:AddNewTelUriContactToGroupSoapOut"/>
  </wsdl:operation>
  <wsdl:operation name="GetImItemList">
    <wsdl:input message="m:GetImItemListSoapIn"/>

```



```

        <wsdl:output message="m:GetImItemListSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="GetImItems">
        <wsdl:input message="m:GetImItemsSoapIn"/>
        <wsdl:output message="m:GetImItemsSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="RemoveContactFromImList">
        <wsdl:input message="m:RemoveContactFromImListSoapIn"/>
        <wsdl:output message="m:RemoveContactFromImListSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="RemoveDistributionGroupFromImList">
        <wsdl:input message="m:RemoveDistributionGroupFromImListSoapIn"/>
        <wsdl:output message="m:RemoveDistributionGroupFromImListSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="RemoveImContactFromGroup">
        <wsdl:input message="m:RemoveImContactFromGroupSoapIn"/>
        <wsdl:output message="m:RemoveImContactFromGroupSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="RemoveImGroup">
        <wsdl:input message="m:RemoveImGroupSoapIn"/>
        <wsdl:output message="m:RemoveImGroupSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="SetImGroup">
        <wsdl:input message="m:SetImGroupSoapIn"/>
        <wsdl:output message="m:SetImGroupSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="SetImListMigrationCompleted">
        <wsdl:input message="m:SetImListMigrationCompletedSoapIn"/>
        <wsdl:output message="m:SetImListMigrationCompletedSoapOut"/>
    </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ExchangeServiceBinding" type="m:ExchangeServicePortType">
    <wsdl:documentation>
        <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim/" />
    </wsdl:documentation>
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="AddDistributionGroupToImList">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddDistributionGroup
ToImList"/>
        <wsdl:input>
            <soap:header message="m:AddDistributionGroupToImListSoapIn" part="Impersonation"
use="literal"/>
            <soap:header message="m:AddDistributionGroupToImListSoapIn" part="MailboxCulture"
use="literal"/>
            <soap:header message="m:AddDistributionGroupToImListSoapIn" part="RequestVersion"
use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="AddDistributionGroupToImListResult"/>
            <soap:header message="m:AddDistributionGroupToImListSoapOut" part="ServerVersion"
use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddImContactToGroup">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddImContactToGroup"
/>
    </wsdl:operation>

```

```

        <wsdl:input>
            <soap:header message="m:AddImContactToGroupSoapIn" part="Impersonation"
            use="literal"/>
            <soap:header message="m:AddImContactToGroupSoapIn" part="MailboxCulture"
            use="literal"/>
            <soap:header message="m:AddImContactToGroupSoapIn" part="RequestVersion"
            use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="AddImContactToGroupResult"/>
            <soap:header message="m:AddImContactToGroupSoapOut" part="ServerVersion"
            use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddImGroup">
        <soap:operation
        soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddImGroup"/>
        <wsdl:input>
            <soap:header message="m:AddImGroupSoapIn" part="Impersonation" use="literal"/>
            <soap:header message="m:AddImGroupSoapIn" part="MailboxCulture" use="literal"/>
            <soap:header message="m:AddImGroupSoapIn" part="RequestVersion" use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="AddImGroupResult"/>
            <soap:header message="m:AddImGroupSoapOut" part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddNewImContactToGroup">
        <soap:operation
        soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddNewImContactToGroup"/>
        <wsdl:input>
            <soap:header message="m:AddNewImContactToGroupSoapIn" part="Impersonation"
            use="literal"/>
            <soap:header message="m:AddNewImContactToGroupSoapIn" part="MailboxCulture"
            use="literal"/>
            <soap:header message="m:AddNewImContactToGroupSoapIn" part="RequestVersion"
            use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="AddNewImContactToGroupResult"/>
            <soap:header message="m:AddNewImContactToGroupSoapOut" part="ServerVersion"
            use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddNewTelUriContactToGroup">
        <soap:operation
        soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/AddNewTelUriContactToGroup"/>
        <wsdl:input>
            <soap:header message="m:AddNewTelUriContactToGroupSoapIn" part="Impersonation"
            use="literal"/>
            <soap:header message="m:AddNewTelUriContactToGroupSoapIn" part="MailboxCulture"
            use="literal"/>
            <soap:header message="m:AddNewTelUriContactToGroupSoapIn" part="RequestVersion"
            use="literal"/>
            <soap:body use="literal" parts="request"/>

```

```

        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="AddNewTelUriContactToGroupResult"/>
            <soap:header message="m:AddNewTelUriContactToGroupSoapOut" part="ServerVersion"
use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetImItemList">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetImItemList"/>
        <wsdl:input>
            <soap:header message="m:GetImItemListSoapIn" part="Impersonation" use="literal"/>
            <soap:header message="m:GetImItemListSoapIn" part="MailboxCulture" use="literal"/>
            <soap:header message="m:GetImItemListSoapIn" part="RequestVersion" use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="GetImItemListResult"/>
            <soap:header message="m:GetImItemListSoapOut" part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetImItems">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetImItems"/>
        <wsdl:input>
            <soap:header message="m:GetImItemsSoapIn" part="Impersonation" use="literal"/>
            <soap:header message="m:GetImItemsSoapIn" part="MailboxCulture" use="literal"/>
            <soap:header message="m:GetImItemsSoapIn" part="RequestVersion" use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="GetImItemsResult"/>
            <soap:header message="m:GetImItemsSoapOut" part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RemoveContactFromImList">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveContactFromImL
ist"/>
        <wsdl:input>
            <soap:header message="m:RemoveContactFromImListSoapIn" part="Impersonation"
use="literal"/>
            <soap:header message="m:RemoveContactFromImListSoapIn" part="MailboxCulture"
use="literal"/>
            <soap:header message="m:RemoveContactFromImListSoapIn" part="RequestVersion"
use="literal"/>
            <soap:body use="literal" parts="request"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" parts="RemoveContactFromImListResult"/>
            <soap:header message="m:RemoveContactFromImListSoapOut" part="ServerVersion"
use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RemoveDistributionGroupFromImList">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveDistributionGr
oupFromImList"/>
        <wsdl:input>

```

```

        <soap:header message="m:RemoveDistributionGroupFromImListSoapIn" part="Impersonation"
use="literal"/>
        <soap:header message="m:RemoveDistributionGroupFromImListSoapIn"
part="MailboxCulture" use="literal"/>
        <soap:header message="m:RemoveDistributionGroupFromImListSoapIn"
part="RequestVersion" use="literal"/>
        <soap:body use="literal" parts="request"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" parts="RemoveDistributionGroupFromImListResult"/>
        <soap:header message="m:RemoveDistributionGroupFromImListSoapOut"
part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="RemoveImContactFromGroup">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImContactFromG
roup"/>
    <wsdl:input>
        <soap:header message="m:RemoveImContactFromGroupSoapIn" part="Impersonation"
use="literal"/>
        <soap:header message="m:RemoveImContactFromGroupSoapIn" part="MailboxCulture"
use="literal"/>
        <soap:header message="m:RemoveImContactFromGroupSoapIn" part="RequestVersion"
use="literal"/>
        <soap:body use="literal" parts="request"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" parts="RemoveImContactFromGroupResult"/>
        <soap:header message="m:RemoveImContactFromGroupSoapOut" part="ServerVersion"
use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="RemoveImGroup">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/RemoveImGroup"/>
    <wsdl:input>
        <soap:header message="m:RemoveImGroupSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="m:RemoveImGroupSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="m:RemoveImGroupSoapIn" part="RequestVersion" use="literal"/>
        <soap:body use="literal" parts="request"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" parts="RemoveImGroupResult"/>
        <soap:header message="m:RemoveImGroupSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SetImGroup">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SetImGroup"/>
    <wsdl:input>
        <soap:header message="m:SetImGroupSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="m:SetImGroupSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="m:SetImGroupSoapIn" part="RequestVersion" use="literal"/>
        <soap:body use="literal" parts="request"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" parts="SetImGroupResult"/>
        <soap:header message="m:SetImGroupSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>

```

```
</wsdl:operation>
  <wsdl:operation name="SetImListMigrationCompleted">
    <soap:operation
      soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/SetImListMigrationCompleted"/>
    <wsdl:input>
      <soap:header message="m:SetImListMigrationCompletedSoapIn" part="Impersonation"
        use="literal"/>
      <soap:header message="m:SetImListMigrationCompletedSoapIn" part="MailboxCulture"
        use="literal"/>
      <soap:header message="m:SetImListMigrationCompletedSoapIn" part="RequestVersion"
        use="literal"/>
      <soap:body use="literal" parts="request"/>
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" parts="SetImListMigrationCompletedResult"/>
      <soap:header message="m:SetImListMigrationCompletedSoapOut" part="ServerVersion"
        use="literal"/>
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>
</wsdl:definitions>
```

7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
http://schemas.microsoft.com/exchange/services/2006/messages	m	7.1
http://schemas.microsoft.com/exchange/services/2006/types	t	7.2

7.1 <http://schemas.microsoft.com/exchange/services/2006/messages> Schema

This section contains the MS-OXWSCOS-messages.xsd and information about additional files that this schema file requires to operate correctly.

MS-OXWSCOS-messages.xsd includes the files listed in the following table. To operate correctly, these files have to be present in the folder that contains the WSDL, types schema, and messages schema for this protocol.

File name	Defining specification/section
MS-OXWSCDATA-messages.xsd	[MS-OXWSCDATA] section 7.1
MS-OXWSCOS-types.xsd	7.2

```
<?xml version="1.0"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
version="Exchange2013" id="messages" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:import schemaLocation="MS-OXWSCOS-types.xsd"
namespace="http://schemas.microsoft.com/exchange/services/2006/types"/>
  <xs:complexType name="AddDistributionGroupToImListType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="SmtAddress" type="t:NonEmptyStringType"/>
          <xs:element name="DisplayName" type="t:NonEmptyStringType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="AddDistributionGroupToImListResponseMessageType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:ResponseMessageType">
        <xs:sequence>
          <xs:element minOccurs="0" name="ImGroup" type="t:ImGroupType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="AddDistributionGroupToImListResponse"
type="m:AddDistributionGroupToImListResponseMessageType"/>
  <xs:element name="AddDistributionGroupToImList" type="m:AddDistributionGroupToImListType"/>
  <xs:complexType name="AddImContactToGroupType">
```

```

<xs:complexContent mixed="false">
  <xs:extension base="m:BaseRequestType">
    <xs:sequence>
      <xs:element name="ContactId" type="t:ItemIdType"/>
      <xs:element minOccurs="0" name="GroupId" type="t:ItemIdType"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="AddImContactToGroupResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AddImContactToGroupResponse"
type="m:AddImContactToGroupResponseMessageType"/>
<xs:element name="AddImContactToGroup" type="m:AddImContactToGroupType"/>
<xs:element name="AddImGroup" type="m:AddImGroupType"/>
<xs:complexType name="AddImGroupResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImGroup" type="t:ImGroupType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="AddImGroupType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="DisplayName" type="t:NonEmptyStringType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AddImGroupResponse" type="m:AddImGroupResponseMessageType"/>
<xs:element name="AddNewImContactToGroup" type="m:AddNewImContactToGroupType"/>
<xs:element name="AddNewImContactToGroupResponse"
type="m:AddNewImContactToGroupResponseMessageType"/>
<xs:complexType name="AddNewImContactToGroupResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="Persona" type="t:PersonaType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="AddNewImContactToGroupType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ImAddress" type="t:NonEmptyStringType"/>
        <xs:element minOccurs="0" name="DisplayName" type="t:NonEmptyStringType"/>
        <xs:element minOccurs="0" name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>

```

```

</xs:complexType>
<xs:complexType name="AddNewTelUriContactToGroupType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="TelUriAddress" type="t:NonEmptyStringType"/>
        <xs:element name="ImContactSipUriAddress" type="t:NonEmptyStringType"/>
        <xs:element name="ImTelephoneNumber" type="t:NonEmptyStringType"/>
        <xs:element minOccurs="0" name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AddNewTelUriContactToGroup" type="m:AddNewTelUriContactToGroupType"/>
<xs:complexType name="AddNewTelUriContactToGroupResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="Persona" type="t:PersonaType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="AddNewTelUriContactToGroupResponse"
type="m:AddNewTelUriContactToGroupResponseMessageType"/>
<xs:complexType name="GetImItemListType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ExtendedProperties"
type="t:NonEmptyArrayOfExtendedFieldURIs"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetImItemList" type="m:GetImItemListType"/>
<xs:complexType name="GetImItemListResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImItemList" type="t:ImItemListType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetImItemListResponse" type="m:GetImItemListResponseMessageType"/>
<xs:complexType name="GetImItemsType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ContactIds"
type="t:NonEmptyArrayOfBaseItemIdsType"/>
        <xs:element minOccurs="0" name="GroupIds" type="t:NonEmptyArrayOfBaseItemIdsType"/>
        <xs:element minOccurs="0" name="ExtendedProperties"
type="t:NonEmptyArrayOfExtendedFieldURIs"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```



```

<xs:element name="GetImItems" type="m:GetImItemsType"/>
<xs:complexType name="GetImItemsResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType">
      <xs:sequence>
        <xs:element minOccurs="0" name="ImItemList" type="t:ImItemListType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="GetImItemsResponse" type="m:GetImItemsResponseMessageType"/>
<xs:complexType name="RemoveContactFromImListType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ContactId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RemoveContactFromImList" type="m:RemoveContactFromImListType"/>
<xs:complexType name="RemoveContactFromImListResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RemoveContactFromImListResponse"
type="m:RemoveContactFromImListResponseMessageType"/>
<xs:complexType name="RemoveDistributionGroupFromImListType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RemoveDistributionGroupFromImList"
type="m:RemoveDistributionGroupFromImListType"/>
<xs:complexType name="RemoveDistributionGroupFromImListResponseMessageType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseMessageType"/>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RemoveDistributionGroupFromImListResponse"
type="m:RemoveDistributionGroupFromImListResponseMessageType"/>
<xs:complexType name="RemoveImContactFromGroupType">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType">
      <xs:sequence>
        <xs:element name="ContactId" type="t:ItemIdType"/>
        <xs:element name="GroupId" type="t:ItemIdType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="RemoveImContactFromGroupResponse"
type="m:RemoveImContactFromGroupResponseMessageType"/>
<xs:complexType name="RemoveImContactFromGroupResponseMessageType">

```

```

    <xs:complexContent mixed="false">
      <xs:extension base="m:ResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="RemoveImContactFromGroup" type="m:RemoveImContactFromGroupType"/>
  <xs:complexType name="RemoveImGroupType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="GroupId" type="t:ItemIdType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="RemoveImGroup" type="m:RemoveImGroupType"/>
  <xs:complexType name="RemoveImGroupResponseMessageType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:ResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="RemoveImGroupResponse" type="m:RemoveImGroupResponseMessageType"/>
  <xs:complexType name="SetImGroupType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="GroupId" type="t:ItemIdType"/>
          <xs:element name="NewDisplayName" type="t:NonEmptyStringType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="SetImGroup" type="m:SetImGroupType"/>
  <xs:complexType name="SetImGroupResponseMessageType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:ResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="SetImGroupResponse" type="m:SetImGroupResponseMessageType"/>
  <xs:complexType name="SetImListMigrationCompletedType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="ImListMigrationCompleted" type="xs:boolean"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="SetImListMigrationCompleted" type="m:SetImListMigrationCompletedType"/>
  <xs:complexType name="SetImListMigrationCompletedResponseMessageType">
    <xs:complexContent mixed="false">
      <xs:extension base="m:ResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="SetImListMigrationCompletedResponse"
type="m:SetImListMigrationCompletedResponseMessageType"/>
</xs:schema>

```

7.2 <http://schemas.microsoft.com/exchange/services/2006/types> Schema

This section contains the MS-OXWSCOS-types.xsd and information about additional files that this schema file requires to operate correctly.

MS-OXWSCOS-types.xsd includes the files listed in the following table. To operate correctly, these files have to be present in the folder that contains the WSDL, types schema, and messages schema for this protocol.

File name	Defining specification/section
MS-OXWSCDATA-types.xsd	[MS-OXWSCDATA] section 7.2
MS-OXWSBTRF-types.xsd	[MS-OXWSBTRF] section 7.2

```
<?xml version="1.0"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
  version="Exchange2013" id="types" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
  <xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSBTRF-types.xsd"/>
  <xs:complexType name="ArrayOfImGroupType">
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:element name="ImGroup" type="t:ImGroupType"/>
    </xs:choice>
  </xs:complexType>
  <xs:complexType name="ImGroupType">
    <xs:sequence>
      <xs:element name="DisplayName" type="t:NonEmptyStringType"/>
      <xs:element name="GroupType" type="t:NonEmptyStringType"/>
      <xs:element minOccurs="0" name="ExchangeStoreId" type="t:ItemIdType"/>
      <xs:element minOccurs="0" name="MemberCorrelationKey"
type="t:NonEmptyArrayOfItemIdsType"/>
      <xs:element minOccurs="0" name="ExtendedProperties"
type="t:NonEmptyArrayOfExtendedPropertyType"/>
      <xs:element minOccurs="0" name="SmtpAddress" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="ImItemListType">
    <xs:sequence>
      <xs:element minOccurs="0" name="Groups" type="t:ArrayOfImGroupType"/>
      <xs:element minOccurs="0" name="Personas" type="t:ArrayOfPeopleType"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="NonEmptyArrayOfExtendedFieldURIs">
    <xs:choice maxOccurs="unbounded">
      <xs:element name="ExtendedProperty" type="t:PathToExtendedFieldType"/>
    </xs:choice>
  </xs:complexType>
</xs:schema>
```

8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2013
- Microsoft® Lync® 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

9 Change Tracking

This section identifies changes that were made to the [MS-OXWSCOS] protocol document between the July 2012 and October 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
1.2.1 Normative References	Added the reference [WSIBASIC].	Y	Content updated
1.2.2 Informative References	Added the reference [MS-OXPROTO].	N	Content updated
1.4 Relationship to Other Protocols	Added informative reference information for overview of relationships between this and other protocols.	N	Content updated
1.7 Versioning and Capability Negotiation	Added localization information.	N	Content updated
2.2.1 Namespaces	Added the normative reference information for wsi.	Y	Content updated
2.2.4 Complex Types	Added values for the Groupype element.	N	Content updated
3.1.4 Message Processing Events and Sequencing Rules	Added the AddNewTelUriContactToGroup WSDL operation.	Y	New content added.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.1.1.1 AddDistributionGroupToImListSoapIn	Removed two product behavior notes pertaining to an out-of-scope product version.	Y	Product behavior note removed.
3.1.4.2.1.1 AddImContactToGroupSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.3.1.1 AddImGroupSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.3.1.2 AddImGroupSoapOut	Removed a product behavior note pertaining to an out-of-scope product version.	Y	Product behavior note removed.
3.1.4.4.1.1 AddNewImContactToGroupSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.5 AddNewTelUriContactToGroup	Added a section that specifies the AddNewTelUriContactToGroup WSDL operation.	Y	New content added.
3.1.4.6.1.1 GetImItemListSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.7.1.1 GetImItemsSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.8.1.1 RemoveContactFromImListSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.9.1.1 RemoveDistributionGroupFromImListSoapIn	Removed product behavior notes pertaining	Y	Product behavior

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	to out-of-scope product versions.		r note removed.
3.1.4.10.1.1 RemoveImContactFromGroupSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.11.1.1 RemoveImGroupSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.12.1.1 SetImGroupSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
3.1.4.13.1.1 SetImListMigrationCompletedSoapIn	Removed product behavior notes pertaining to out-of-scope product versions.	Y	Product behavior note removed.
4 Protocol Examples	Changed the version identifier from Exchange2012 to Exchange2013.	N	Content updated.
5.1 Security Considerations for Implementers	Changes the contents of the section to "None".	N	Content updated.
6 Appendix A: Full WSDL	Updated the WSDL.	N	Content updated.
6 Appendix A: Full WSDL	Changed the version identifier from Exchange2012 to Exchange2013.	N	Content updated.
7.1 <u>http://schemas.microsoft.com/exchange/services/2006/messages Schema</u>	Updated the schema.	N	Content updated.
7.1 <u>http://schemas.microsoft.com/exchange/services/2006/messages Schema</u>	Changed the version identifier from Exchange2012 to Exchange2013.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
7.2 http://schemas.microsoft.com/exchange/services/2006/types Schema	Changed the version identifier from Exchange2012 to Exchange2013.	N	Content updated .

10 Index

A

Abstract data model
[server](#) 16
[Applicability](#) 11
[ArrayOfImGroupType complex type](#) 13
[Attribute groups](#) 15
[Attributes](#) 15

C

[Capability negotiation](#) 11
[Change tracking](#) 93
[Complex types](#) 13
 [ArrayOfImGroupType](#) 13
 [ImGroupType](#) 13
 [ImItemListType](#) 14
 [NonEmptyArrayOfExtendedFieldURIs](#) 14

D

Data model - abstract
[server](#) 16

E

Events
 [local - server](#) 73
 [timer - server](#) 73

F

[Fields - vendor-extensible](#) 11
[Full WSDL](#) 78
[Full XML Schema](#) 86
 <http://schemas.microsoft.com/exchange/services/2006/messages.Schema> 86
 <http://schemas.microsoft.com/exchange/services/2006/types.Schema> 91

G

[Glossary](#) 8
[Groups](#) 15

I

[ImGroupType complex type](#) 13
[ImItemListType complex type](#) 14
[Implementer - security considerations](#) 77
[Index of security parameters](#) 77
[Informative references](#) 9
Initialization
 [server](#) 16
[Introduction](#) 8

L

Local events
 [server](#) 73

M

Message processing
 [server](#) 16
Messages
 [ArrayOfImGroupType complex type](#) 13
 [attribute groups](#) 15
 [attributes](#) 15
 [complex types](#) 13
 [elements](#) 12
 [enumerated](#) 12
 [groups](#) 15
 [ImGroupType complex type](#) 13
 [ImItemListType complex type](#) 14
 [namespaces](#) 12
 [NonEmptyArrayOfExtendedFieldURIs complex type](#) 14
 [simple types](#) 15
 [syntax](#) 12
 [transport](#) 12

N

[Namespaces](#) 12
[NonEmptyArrayOfExtendedFieldURIs complex type](#) 14
[Normative references](#) 9

O

Operations
 [AddDistributionGroupToImList](#) 17
 [AddImContactToGroup](#) 22
 [AddImGroup](#) 26
 [AddNewImContactToGroup](#) 30
 [AddNewTelUriContactToGroup](#) 34
 [GetImItemList](#) 39
 [GetImItems](#) 43
 [RemoveContactFromImList](#) 47
 [RemoveDistributionGroupFromImList](#) 52
 [RemoveImContactFromGroup](#) 56
 [RemoveImGroup](#) 61
 [SetImGroup](#) 65
 [SetImListMigrationCompleted](#) 69
[Overview \(synopsis\)](#) 10

P

[Parameters - security index](#) 77
[Preconditions](#) 10
[Prerequisites](#) 10
[Product behavior](#) 92

R

[References](#) 8
 [informative](#) 9
 [normative](#) 9
[Relationship to other protocols](#) 10

[XML Schema](#) 86
 <http://schemas.microsoft.com/exchange/services/2006/messages> [Schema](#) 86
 <http://schemas.microsoft.com/exchange/services/2006/types> [Schema](#) 91

S

Security
 [implementer considerations](#) 77
 [parameter index](#) 77
Sequencing rules
 [server](#) 16
Server
 [abstract data model](#) 16
 [AddDistributionGroupToImList operation](#) 17
 [AddImContactToGroup operation](#) 22
 [AddImGroup operation](#) 26
 [AddNewImContactToGroup operation](#) 30
 [AddNewTelUriContactToGroup operation](#) 34
 [GetImItemList operation](#) 39
 [GetImItems operation](#) 43
 [initialization](#) 16
 [local events](#) 73
 [message processing](#) 16
 [RemoveContactFromImList operation](#) 47
 [RemoveDistributionGroupFromImList operation](#)
 52
 [RemoveImContactFromGroup operation](#) 56
 [RemoveImGroup operation](#) 61
 [sequencing rules](#) 16
 [SetImGroup operation](#) 65
 [SetImListMigrationCompleted operation](#) 69
 [timer events](#) 73
 [timers](#) 16
[Simple types](#) 15
[Standards assignments](#) 11
Syntax
 [messages - overview](#) 12

T

Timer events
 [server](#) 73
Timers
 [server](#) 16
[Tracking changes](#) 93
[Transport](#) 12
Types
 [complex](#) 13
 [simple](#) 15

V

[Vendor-extensible fields](#) 11
[Versioning](#) 11

W

[WSDL](#) 78

X