

[MS-OXWSDLIST]: Distribution List Creation and Usage Web Service Protocol Specification

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.mspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplq@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

| Date | Revision History | Revision Class | Comments |
|------------|------------------|----------------|---|
| 07/15/2009 | 1.0 | Major | Initial Availability. |
| 11/04/2009 | 1.0.1 | Editorial | Revised and edited the technical content. |
| 02/10/2010 | 2.0.0 | Major | Updated and revised the technical content. |
| 05/05/2010 | 2.0.1 | Editorial | Revised and edited the technical content. |
| 08/04/2010 | 2.1 | Minor | Clarified the meaning of the technical content. |

Contents

| | |
|--|-----------|
| 1 Introduction | 5 |
| 1.1 Glossary | 5 |
| 1.2 References | 5 |
| 1.2.1 Normative References | 5 |
| 1.2.2 Informative References | 6 |
| 1.3 Overview | 6 |
| 1.4 Relationship to Other Protocols | 6 |
| 1.5 Prerequisites/Preconditions | 7 |
| 1.6 Applicability Statement | 7 |
| 1.7 Versioning and Capability Negotiation | 7 |
| 1.8 Vendor-Extensible Fields | 7 |
| 1.9 Standards Assignments | 7 |
| 2 Messages | 8 |
| 2.1 Transport | 8 |
| 2.2 Common Message Syntax | 8 |
| 2.2.1 Namespaces | 8 |
| 2.2.2 Messages | 8 |
| 2.2.3 Elements | 8 |
| 2.2.4 Complex Types | 8 |
| 2.2.4.1 m:ExpandDLResponseMessageType Complex Type | 9 |
| 2.2.4.2 t:ArrayOfDLExpansionType Complex Type | 9 |
| 2.2.4.3 t:DistributionListType Complex Type | 10 |
| 2.2.4.4 t:MembersListType Complex Type | 11 |
| 2.2.4.5 t:MemberType Complex Type | 11 |
| 2.2.5 Simple Types | 12 |
| 2.2.5.1 t:MemberStatusType Simple Type | 12 |
| 2.2.6 Attributes | 13 |
| 2.2.7 Groups | 13 |
| 2.2.8 Attribute Groups | 13 |
| 3 Protocol Details | 14 |
| 3.1 ExchangeServicePortType Server Details | 14 |
| 3.1.1 Abstract Data Model | 14 |
| 3.1.2 Timers | 14 |
| 3.1.3 Initialization | 14 |
| 3.1.4 Message Processing Events and Sequencing Rules | 14 |
| 3.1.4.1 ExpandDL | 15 |
| 3.1.4.1.1 Complex Types | 15 |
| 3.1.4.1.1.1 m:ExpandDLResponseType Complex Type | 15 |
| 3.1.4.1.1.2 m:ExpandDLType Complex Type | 15 |
| 3.1.4.1.2 Elements | 16 |
| 3.1.4.1.2.1 ExpandDL Element | 16 |
| 3.1.4.1.2.2 ExpandDLResponse Element | 16 |
| 3.1.4.1.3 Messages | 16 |
| 3.1.4.1.3.1 tns:ExpandDLSoapIn | 17 |
| 3.1.4.1.3.2 tns:ExpandDLSoapOut | 17 |
| 3.1.4.2 GetItem | 17 |
| 3.1.4.3 DeleteItem | 18 |
| 3.1.4.4 UpdateItem | 18 |

| | | |
|----------|---|-----------|
| 3.1.4.5 | MoveItem | 19 |
| 3.1.4.6 | CopyItem | 19 |
| 3.1.4.7 | CreateItem | 20 |
| 3.1.5 | Timer Events | 20 |
| 3.1.6 | Other Local Events | 20 |
| 3.2 | Client Details..... | 20 |
| 3.2.1 | Client Abstract Data Model | 20 |
| 3.2.2 | Client Timers | 20 |
| 3.2.3 | Client Initialization | 20 |
| 3.2.4 | Client Message Processing Events and Sequencing | 21 |
| 3.2.5 | Client Timer Events | 21 |
| 3.2.6 | Client Other Local Events | 21 |
| 4 | Protocol Examples..... | 22 |
| 5 | Security..... | 23 |
| 5.1 | Security Considerations for Implementers..... | 23 |
| 5.2 | Index of Security Parameters | 23 |
| 6 | Appendix A: Full WSDL..... | 24 |
| 6.1 | WSDL..... | 24 |
| 6.2 | Types Schema..... | 28 |
| 6.3 | Messages Schema..... | 29 |
| 7 | Appendix B: Product Behavior..... | 31 |
| 8 | Change Tracking..... | 32 |
| 9 | Index | 35 |

1 Introduction

This document specifies the Distribution List Creation and Usage Web Service protocol.

1.1 Glossary

The following terms are defined in [\[MS-OXGLOS\]](#):

contact
distribution list
folder
identifier
mailbox
property
SOAP body
SOAP fault
SOAP header
SOAP message
store
Web server
Web Services Description Language (WSDL)
WSDL message
WSDL port type
XML
XML namespace
XML schema

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)", July 2009.

[MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol Specification](#)", July 2009.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", BCP 47, RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", W3C Note, May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., Eds., et al., "Namespaces in XML 1.0 (Third Edition)", December 2009, <http://www.w3.org/TR/REC-xml-names/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)", April 2008.

1.3 Overview

The Distribution List Creation and Usage Web Service protocol provides clients with the ability to query the server for **distribution lists** and to expand a distribution list into the constituent e-mail addresses. In addition, it provides the capability to create, delete, get, move, update, and copy distribution lists.

1.4 Relationship to Other Protocols

The Distribution List Creations and Usage Web Service protocol uses SOAP over HTTP and SOAP over HTTPS [\[RFC2818\]](#), as shown in the following figures.

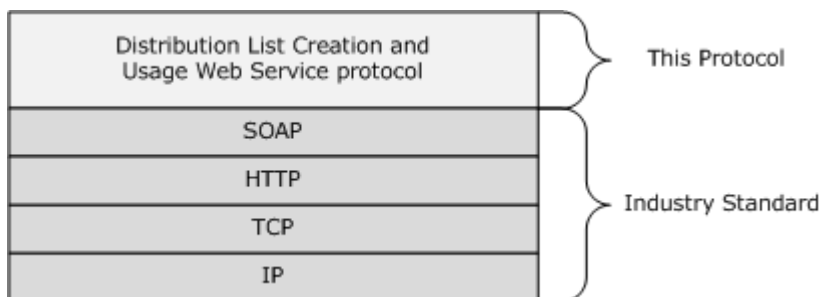


Figure 1: Distribution List Creations and Usage Web Service protocol HTTP stack

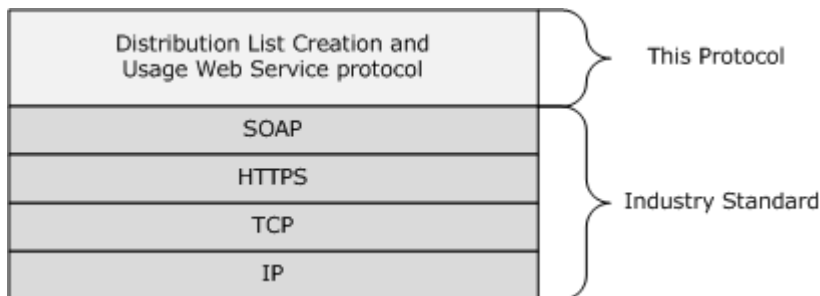


Figure 2: Distribution List Creations and Usage Web Service protocol HTTPS stack

1.5 Prerequisites/Preconditions

None.

1.6 Applicability Statement

This protocol is applicable to client programs that use distribution lists for directing items to multiple e-mail addresses.

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol specifies only one **WSDL port type** version.
- **Security and Authentication Methods:** This protocol relies on the **Web server** that is hosting it to perform authentication.
- **Localization:** This protocol includes text strings in various messages. Localization considerations for such strings are specified in section [3.1.4](#).
- **Capability Negotiation:** None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

The SOAP version supported is SOAP 1.1, as specified in [\[SOAP1.1\]](#).

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **Web Services Description Language (WSDL)**, as defined in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

| Prefix | Namespace URI | Reference |
|-----------------|---|------------------------------|
| soap | http://schemas.xmlsoap.org/wsdl/soap/ | [SOAP1.1] |
| tns | http://schemas.microsoft.com/exchange/services/2006/messages | [MS-OXWSDLIST] |
| s | http://www.w3.org/2001/XMLSchema | [XMLSCHEMA2] |
| xs | http://www.w3.org/2001/XMLSchema | [XMLSCHEMA2] |
| targetNamespace | http://schemas.microsoft.com/exchange/services/2006/messages | [MS-OXWSDLIST] |
| wsdl | http://schemas.xmlsoap.org/wsdl/ | [WSDL] |
| t | http://schemas.microsoft.com/exchange/services/2006/types | [MS-OXWSDLIST] |

2.2.2 Messages

This specification does not define any common XML schema message syntax definitions.

2.2.3 Elements

This specification does not define any common XML schema element definitions.

2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions that are defined by this specification. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

| Complex Type | Description |
|---|---|
| m:ExpandDLResponseMessageType | Contains the status and result of a single ExpandDL request. |

| Complex Type | Description |
|--|--|
| t:ArrayOfDLExpansionType | Contains an array of mailboxes that are contained in a distribution list. |
| t:DistributionListType | Represents a distribution list. |
| t:MembersListType | Represents the member type. |
| t:MemberType | Provides an identifier for a fully resolved e-mail address, and the status of that address on the server. |

2.2.4.1 m:ExpandDLResponseMessageType Complex Type

The **ExpandDLResponseMessageType** complex type contains the status and result of a single **ExpandDL** request.

```
<xs:complexType name="ExpandDLResponseMessageType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
      <xs:sequence>
        <xs:element name="DLExpansion"
          type="t:ArrayOfDLExpansionType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

Child Elements

| Element | Type | Description |
|-------------|--|---|
| DLExpansion | t:ArrayOfDLExpansionType | Contains an array of mailboxes that are contained in a distribution list. |

2.2.4.2 t:ArrayOfDLExpansionType Complex Type

The **ArrayOfDLExpansionType** complex type contains an array of mailboxes that are contained in a distribution list.

```
<xs:complexType name="ArrayOfDLExpansionType">
  <xs:sequence>
    <xs:element name="Mailbox"
      type="t:EmailAddressType"
      maxOccurs="unbounded"
      minOccurs="0"
    />
  </xs:sequence>
  <xs:attributeGroup
    ref="t:FindResponsePagingAttributes"
  />
</xs:complexType>
```

```

/>
</xs:complexType>

```

Child Elements

| Element | Type | Description |
|---------|------------------------------------|-------------------------------|
| Mailbox | t:EmailAddressType | Represents an e-mail address. |

Attribute Groups

| Name |
|--------------------------------|
| t:FindResponsePagingAttributes |

2.2.4.3 t:DistributionListType Complex Type

The **DistributionListType** complex type represents a distribution list.

```

<xs:complexType name="DistributionListType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemType"
    >
      <xs:sequence>
        <xs:element name="DisplayName"
          type="xs:string"
          minOccurs="0"
        />
        <xs:element name="FileAs"
          type="xs:string"
          minOccurs="0"
        />
        <xs:element name="ContactSource"
          type="t:ContactSourceType"
          minOccurs="0"
        />
        <xs:element name="Members"
          type="t:MembersListType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Child Elements

| Element | Type | Description |
|-------------|---------------------------|--|
| DisplayName | xs:string | Contains the display name for the distribution list. |
| FileAs | xs:string | Represents how a distribution list is filed in the Contacts |

| Element | Type | Description |
|---------------|-------------------------------------|--|
| | | folder. |
| ContactSource | t:ContactSourceType | Describes whether the distribution list is located in the messaging server store or in the directory service. |
| Members | t:MembersListType | Contains a list of members in a distribution list. |

2.2.4.4 t:MembersListType Complex Type

The **MembersListType** complex type represents the collection of distribution list members.

```
<xs:complexType name="MembersListType">
  <xs:sequence>
    <xs:element name="Member"
      type="t:MemberType"
      maxOccurs="unbounded"
      minOccurs="0"
    />
  </xs:sequence>
</xs:complexType>
```

Child Elements

| Element | Type | Description |
|---------|------------------------------|---|
| Member | t:MemberType | Provides information about each member of the members collection. |

2.2.4.5 t:MemberType Complex Type

The **MemberType** complex type provides information about each member of the members collection of the distribution list, containing a member's mailbox address, status and optional member's identifier in the collection.

```
<xs:complexType name="MemberType">
  <xs:sequence>
    <xs:element name="Mailbox"
      type="t:EmailAddressType"
      minOccurs="0"
    />
    <xs:element name="Status"
      type="t:MemberStatusType"
      minOccurs="0"
    />
  </xs:sequence>
  <xs:attribute name="Key"
    type="xs:string"
  />
</xs:complexType>
```

Child Elements

| Element | Type | Description |
|---------|------------------------------------|---|
| Mailbox | t:EmailAddressType | Represents an e-mail address of a member. |
| Status | t:MemberStatusType | Provides information about the status of a distribution list member in the members' collection. |

Attributes

| Name | Type | Description |
|------|---------------------------|---|
| Key | xs:string | Represents a unique identification of the member in the members collection. |

2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

| Simple Type | Description |
|------------------------------------|--|
| t:MemberStatusType | Provides information as to the status of a distribution list member on the server. |

2.2.5.1 t:MemberStatusType Simple Type

The **MemberStatusType** simple type provides information as to the status of a distribution list member on the server.

```
<xs:simpleType>
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Unrecognized"
    />
    <xs:enumeration
      value="Normal"
    />
    <xs:enumeration
      value="Demoted"
    />
  </xs:restriction>
</xs:simpleType>
```

Enumeration

The following values are defined by the simple type:

| Value | Description |
|--------------|--|
| Unrecognized | Member information is invalid or unrecognized. |
| Normal | Member information in a distribution list is in sync with the referenced object. |

| Value | Description |
|---------|-------------------------------------|
| Demoted | Referenced object is not available. |

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 ExchangeServicePortType Server Details

This protocol defines a single port type.

| Operation | Description |
|----------------------------|---|
| ExpandDL | Defines a request to expand a distribution list. |
| GetItem | Defines a request to get an item from a mailbox in the server. |
| DeleteItem | Defines a request to delete an item from a mailbox in the server. |
| UpdateItem | Defines a request to update an item in a mailbox. |
| MoveItem | Defines a request to move an item in the server. |
| CopyItem | Defines a request to copy an item in a mailbox in the server. |
| CreateItem | Defines a request to create an item in the server. |

3.1.1 Abstract Data Model

This protocol is a stateless protocol.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

This protocol includes the operations listed in the following table.

| Operation | Description |
|----------------------------|------------------------------|
| ExpandDL | Expands a distribution list. |
| GetItem | Gets items in the server. |
| DeleteItem | Deletes items in the server. |
| UpdateItem | Updates items in the server |
| MoveItem | Moves items in the server. |
| CopyItem | Copies items in the server. |
| CreateItem | Creates items in the server. |

3.1.4.1 ExpandDL

ExpandDL defines a request to expand a distribution list.

Request

| Message Format | Description |
|------------------------------------|--|
| tns:ExpandDLSoapIn | Specifies the SOAP message that requests an expanded distribution list. |

Response

| Message Format | Description |
|-------------------------------------|--|
| tns:ExpandDLSoapOut | Specifies the SOAP message returned by the server in response. |

3.1.4.1.1 Complex Types

The following XML schema complex type definitions are specific to this operation.

| Type | Description |
|--|--|
| m:ExpandDLResponseType | Defines a response to a request to expand a distribution list. |
| m:ExpandDLType | Represents a request to expand a distribution list. |

3.1.4.1.1.1 m:ExpandDLResponseType Complex Type

The **ExpandDLResponseType** complex type defines a response to a request to expand a distribution list.

```
<xs:complexType name="ExpandDLResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.1.1.2 m:ExpandDLType Complex Type

The **ExpandDLType** complex type represents a request to expand a distribution list.

```
<xs:complexType name="ExpandDLType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="Mailbox"
        type="t:EmailAddressType"
      />
    </xs:sequence>
  </xs:complexContent>
</xs:complexType>
```

```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

Child Elements

| Element | Type | Description |
|---------|------------------------------------|---|
| Mailbox | t:EmailAddressType | Represents an e-mail address of a distribution list member. |

3.1.4.1.2 Elements

The following XML schema element definitions are specific to this operation.

| Element | Description |
|--------------------------------------|--|
| tns:ExpandDL | Contains a request to expand a distribution list. |
| tns:ExpandDLResponse | Defines a response to a request to expand a distribution list. |

3.1.4.1.2.1 ExpandDL Element

The **ExpandDL** element defines a request to expand a distribution list.

```

<xs:element name="ExpandDL"
  type="m:ExpandDLType"
/>

```

3.1.4.1.2.2 ExpandDLResponse Element

The **ExpandDLResponse** element defines a response to a request to expand a distribution list.

```

<xs:element name="ExpandDLResponse"
  type="m:ExpandDLResponseType"
/>

```

3.1.4.1.3 Messages

The following XML schema message definitions are specific to this operation.

| Message | Description |
|-------------------------------------|--|
| tns:ExpandDLSoapIn | Contains the request information, the user whom the client application is impersonating, the culture to use for accessing the mailbox, and the schema version for the request. |
| tns:ExpandDLSoapOut | Contains the response message and the schema version for the response message. |

3.1.4.1.3.1 tns:ExpandDLSoapIn

The **ExpandDLSoapIn** message contains four parts, as described in the following table.

| Part Name | Element/Type | Description |
|----------------|---|---|
| Request | tns:ExpandDL | Specifies the request. |
| Impersonation | t:ExchangeImpersonation | Specifies the user whom the client application is impersonating. |
| MailboxCulture | t:MailboxCulture | Specifies the culture to use for accessing the mailbox. The cultures are defined by [RFC3066] . |
| RequestVersion | t:RequestServerVersion | Specifies the schema version for the ExpandDL request. |

3.1.4.1.3.2 tns:ExpandDLSoapOut

The **ExpandDLSoapOut** message contains two parts, as described in the following table.

| Part Name | Element/Type | Description |
|----------------|--------------------------------------|--|
| ExpandDLResult | tns:ExpandDLResponse | Specifies the response message. |
| ServerVersion | t:ServerVersionInfo | Specifies the schema version for the tns:ExpandDLResponse message. |

3.1.4.2 GetItem

This protocol uses the **GetItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.4 to get distribution list item elements.

```
<wsdl:operation name="GetItem">
  <wsdl:input message="tns:GetItemSoapIn" />
  <wsdl:output message="tns:GetItemSoapOut" />
</wsdl:operation>
```

Request

| Message Format | Description |
|-----------------------------------|---|
| tns:GetItemSoapIn | Specifies the SOAP message that defines the distribution list item to get. The Items child element of the GetItem child element that specifies the XML request MUST contain the following elements: t:ItemResponseShapeType and t:ItemIdType . All other elements MUST be empty. |

Response

| Message Format | Description |
|------------------------------------|--|
| tns:GetItemSoapOut | Specifies the SOAP message returned by the server in response. The server returns a t:ItemResponseShapeType element that contains properties associated with the distribution list item. |

3.1.4.3 DeleteItem

This protocol uses the **DeleteItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.3 to delete distribution list item elements.

```
<wsdl:operation name="DeleteItem">
  <wsdl:input message="tns:DeleteItemSoapIn" />
  <wsdl:output message="tns:DeleteItemSoapOut" />
</wsdl:operation>
```

Request

| Message Format | Description |
|--------------------------------------|--|
| tns:DeleteItemSoapIn | Specifies the SOAP message that defines the distribution list item to delete. The Items child element of the DeleteItem child element that specifies the XML request MUST contain one or more t:ItemIdType elements. All other elements MUST be empty. |

Response

| Message Format | Description |
|---------------------------------------|--|
| tns:DeleteItemSoapOut | Specifies the SOAP message returned by the server in response. |

3.1.4.4 UpdateItem

This protocol uses the **UpdateItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.7 to update distribution list item elements.

```
<wsdl:operation name="UpdateItem">
  <wsdl:input message="tns:UpdateItemSoapIn" />
  <wsdl:output message="tns:UpdateItemSoapOut" />
</wsdl:operation>
```

Request

| Message Format | Description |
|--------------------------------------|--|
| tns:UpdateItemSoapIn | Specifies the SOAP message that defines the distribution list item to update. The Items child element of the UpdateItem child element that specifies the XML request MUST contain one or more t:DistributionListType elements. All other elements MUST be empty. |

Response

| Message Format | Description |
|---------------------------------------|--|
| tns:UpdateItemSoapOut | Specifies the SOAP message returned by the server in response. |

3.1.4.5 MoveItem

This protocol uses the **MoveItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.4 to move distribution list item elements.

```
<wsdl:operation name="MoveItem">
  <wsdl:input message="tns:MoveItemSoapIn" />
  <wsdl:output message="tns:MoveItemSoapOut" />
</wsdl:operation>
```

Request

| Message Format | Description |
|------------------------------------|---|
| tns:MoveItemSoapIn | Specifies the SOAP message that defines the distribution list item to move. The Items child element of the MoveItem child element that specifies the XML request MUST contain the following elements: t:TargetFolderIdType and t:ItemIdType . All other elements MUST be empty. |

Response

| Message Format | Description |
|-------------------------------------|--|
| tns:MoveItemSoapOut | Specifies the SOAP message returned by the server in response. |

3.1.4.6 CopyItem

This protocol uses the **CopyItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.1 to copy distribution list item elements.

```
<wsdl:operation name="CopyItem">
  <wsdl:input message="tns:CopyItemSoapIn" />
  <wsdl:output message="tns:CopyItemSoapOut" />
</wsdl:operation>
```

Request

| Message Format | Description |
|------------------------------------|---|
| tns:CopyItemSoapIn | Specifies the SOAP message that defines the distribution list item to copy. The Items child element of the CopyItem child element that specifies the XML request MUST contain the following elements: t:TargetFolderIdType and t:ItemIdType . All other elements MUST be empty. |

Response

| Message Format | Description |
|-------------------------------------|--|
| tns:CopyItemSoapOut | Specifies the SOAP message returned by the server in response. |

3.1.4.7 CreateItem

This protocol uses the **CreateItem** operation specified in [\[MS-OXWScore\]](#) section 3.1.4.2 to create distribution list item elements.

```
<wsdl:operation name="CreateItem">
  <wsdl:input message="tns:CreateItemSoapIn" />
  <wsdl:output message="tns:CreateItemSoapOut" />
</wsdl:operation>
```

Request

| Message Format | Description |
|--------------------------------------|--|
| tns:CreateItemSoapIn | Specifies the SOAP message that defines the distribution list item to create. The Items child element of the CreateItem child element that specifies the XML request MUST contain one or more t:DistributionListType elements. All other elements MUST be empty. |

Response

| Message Format | Description |
|---------------------------------------|--|
| tns:CreateItemSoapOut | Specifies the SOAP message returned by the server in response. |

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

3.2 Client Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.2.1 Client Abstract Data Model

None.

3.2.2 Client Timers

None.

3.2.3 Client Initialization

None.

3.2.4 Client Message Processing Events and Sequencing

None.

3.2.5 Client Timer Events

None.

3.2.6 Client Other Local Events

None.

4 Protocol Examples

None.

5 Security

5.1 Security Considerations for Implementers

This protocol does not use additional security mechanisms.

5.2 Index of Security Parameters

None.

6 Appendix A: Full WSDL

The following table lists the XML files that are required to implement the functionality that is specified in this document. The contents of each file are included in this section.

| File name | Description | Section |
|---------------------------|---|---------------------|
| MS-OXWSDLIST.wsdl | Contains the WSDL for the implementation of this protocol. | 6.1 |
| MS-OXWSDLIST-types.xsd | Contains the XML schema type definitions that are used in this protocol. | 6.2 |
| MS-OXWSDLIST-messages.xsd | Contains the XML schema message definitions that are used in this protocol. | 6.3 |

These files need to be placed in a common folder for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSGTRM-types.xsd or MS-OXWSGTRM-messages.xsd schemas need to be placed in the common folder with these files.

For ease of implementation, the full WSDL and schemas are provided in the following sections.

6.1 WSDL

This section contains the contents of the MS-OXWSDLIST.wsdl file.

MS-OXWSDLIST.wsdl file:

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:s="http://www.w3.org/2001/XMLSchema" xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
<wsdl:types>
<xs:schema id="messages" elementFormDefault="qualified" version="Exchange2010"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
<xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCORE-types.xsd"/>
<xs:include schemaLocation="MS-OXWSDLIST-messages.xsd"/>
</xs:schema>
<xs:schema id="types" elementFormDefault="qualified" version="Exchange2010"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
<xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
</xs:schema>
</wsdl:types>
<wsdl:portType name="ExchangeServicePortType">
<wsdl:operation name="ExpandDL">
<wsdl:input message="tns:ExpandDLSoapIn" />
<wsdl:output message="tns:ExpandDLSoapOut" />
</wsdl:operation>
```



```

<wsdl:operation name="GetItem">
<wsdl:input message="tns:GetItemSoapIn"/>
<wsdl:output message="tns:GetItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="CreateItem">
<wsdl:input message="tns:CreateItemSoapIn"/>
<wsdl:output message="tns:CreateItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="DeleteItem">
<wsdl:input message="tns>DeleteItemSoapIn"/>
<wsdl:output message="tns>DeleteItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="UpdateItem">
<wsdl:input message="tns:UpdateItemSoapIn"/>
<wsdl:output message="tns:UpdateItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="MoveItem">
<wsdl:input message="tns:MoveItemSoapIn"/>
<wsdl:output message="tns:MoveItemSoapOut"/>
</wsdl:operation>
<wsdl:operation name="CopyItem">
<wsdl:input message="tns:CopyItemSoapIn"/>
<wsdl:output message="tns:CopyItemSoapOut"/>
</wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
<wsdl:documentation>
<wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim/">
</wsi:documentation>
<soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
<wsdl:operation name="GetItem">
<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetItem"/>
<wsdl:input>
<soap:header message="tns:GetItemSoapIn" part="Impersonation" use="literal"/>
<soap:header message="tns:GetItemSoapIn" part="MailboxCulture" use="literal"/>
<soap:header message="tns:GetItemSoapIn" part="RequestVersion" use="literal"/>
<soap:header message="tns:GetItemSoapIn" part="TimeZoneContext" use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
<soap:body parts="GetItemResult" use="literal"/>
<soap:header message="tns:GetItemSoapOut" part="ServerVersion" use="literal"/>
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="CreateItem">
<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem"/>
<wsdl:input>
<soap:header message="tns:CreateItemSoapIn" part="Impersonation" use="literal"/>
<soap:header message="tns:CreateItemSoapIn" part="MailboxCulture" use="literal"/>
<soap:header message="tns:CreateItemSoapIn" part="RequestVersion" use="literal"/>
<soap:header message="tns:CreateItemSoapIn" part="TimeZoneContext" use="literal"/>
<soap:body parts="request" use="literal"/>
</wsdl:input>
<wsdl:output>
<soap:body parts="CreateItemResult" use="literal"/>
<soap:header message="tns:CreateItemSoapOut" part="ServerVersion" use="literal"/>

```

```

</wsdl:output>
</wsdl:operation>
<wsdl:operation name="DeleteItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem"/>
  <wsdl:input>
    <soap:header message="tns:DeleteItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:DeleteItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="DeleteItemResult" use="literal"/>
    <soap:header message="tns:DeleteItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem"/>
  <wsdl:input>
    <soap:header message="tns:UpdateItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:UpdateItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UpdateItemResult" use="literal"/>
    <soap:header message="tns:UpdateItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="MoveItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem"/>
  <wsdl:input>
    <soap:header message="tns:MoveItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:MoveItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:MoveItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="MoveItemResult" use="literal"/>
    <soap:header message="tns:MoveItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CopyItem">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem"/>
  <wsdl:input>
    <soap:header message="tns:CopyItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:CopyItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:CopyItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:body parts="request" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="CopyItemResult" use="literal"/>
    <soap:header message="tns:CopyItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

```

        <wsdl:operation name="ExpandDL">
            <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ExpandDL" />
            <wsdl:input>
                <soap:header message="tns:ExpandDLSoapIn" part="Impersonation"
use="literal"/>
                <soap:header message="tns:ExpandDLSoapIn" part="MailboxCulture"
use="literal"/>
                <soap:header message="tns:ExpandDLSoapIn" part="RequestVersion"
use="literal"/>
                <soap:body parts="request" use="literal" />
            </wsdl:input>
            <wsdl:output>
                <soap:body parts="ExpandDLResult" use="literal" />
                <soap:header message="tns:ExpandDLSoapOut" part="ServerVersion"
use="literal"/>
            </wsdl:output>
        </wsdl:operation>
</wsdl:binding>
    <wsdl:message name="ExpandDLSoapIn">
        <wsdl:part name="request" element="tns:ExpandDL" />
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="ExpandDLSoapOut">
        <wsdl:part name="ExpandDLResult" element="tns:ExpandDLResponse" />
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="GetItemSoapIn">
        <wsdl:part name="request" element="tns:GetItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
        <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
    </wsdl:message>
    <wsdl:message name="GetItemSoapOut">
        <wsdl:part name="GetItemResult" element="tns:GetItemResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="CreateItemSoapIn">
        <wsdl:part name="request" element="tns:CreateItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
        <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
    </wsdl:message>
    <wsdl:message name="CreateItemSoapOut">
        <wsdl:part name="CreateItemResult" element="tns:CreateItemResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="DeleteItemSoapIn">
        <wsdl:part name="request" element="tns>DeleteItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="DeleteItemSoapOut">
        <wsdl:part name="DeleteItemResult" element="tns>DeleteItemResponse"/>

```

```

<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="UpdateItemSoapIn">
<wsdl:part name="request" element="tns:UpdateItem"/>
<wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
<wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
<wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
<wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
</wsdl:message>
<wsdl:message name="UpdateItemSoapOut">
<wsdl:part name="UpdateItemResult" element="tns:UpdateItemResponse"/>
<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="MoveItemSoapIn">
<wsdl:part name="request" element="tns:MoveItem"/>
<wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
<wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
<wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="MoveItemSoapOut">
<wsdl:part name="MoveItemResult" element="tns:MoveItemResponse"/>
<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
<wsdl:message name="CopyItemSoapIn">
<wsdl:part name="request" element="tns:CopyItem"/>
<wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
<wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
<wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
<wsdl:message name="CopyItemSoapOut">
<wsdl:part name="CopyItemResult" element="tns:CopyItemResponse"/>
<wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
</wsdl:definitions>

```

6.2 Types Schema

This section contains the contents of the MS-OXWSDLIST-types.xsd file and information about additional files that this schema file requires to operate correctly.

For MS-OXWSDLIST-types.xsd to operate correctly the file shown in the following table needs to be present in the folder that contains the WSDL, types schema and messages schema files for this protocol.

| Defining specification | File name |
|--|-----------------------|
| [MS-OXWSCDATA] , section 6.3 | MS-OXWSDATA-types.xsd |

MS-OXWSDLIST-types.xsd file:

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2010" id="types">

```

```

<xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
<xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>
<xs:complexType name="ArrayOfDLExpansionType">
  <xs:sequence>
    <xs:element name="Mailbox" type="t:EmailAddressType" minOccurs="0"
maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
</xs:complexType>
<xs:complexType name="DistributionListType">
  <xs:complexContent>
    <xs:extension base="t:ItemType">
      <xs:sequence>
        <xs:element name="DisplayName" type="xs:string" minOccurs="0"/>
        <xs:element name="FileAs" type="xs:string" minOccurs="0"/>
        <xs:element name="ContactSource" type="t:ContactSourceType"
minOccurs="0"/>
        <xs:element name="Members" type="t:MembersListType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="MemberStatusType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unrecognized"/>
    <xs:enumeration value="Normal"/>
    <xs:enumeration value="Demoted"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="MembersListType">
  <xs:sequence>
    <xs:element name="Member" type="t:MemberType" minOccurs="0"
maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="MemberType">
  <xs:sequence>
    <xs:element name="Mailbox" type="t:EmailAddressType" minOccurs="0"/>
    <xs:element name="Status" type="t:MemberStatusType" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="Key" type="xs:string" use="optional"/>
</xs:complexType>
</xs:schema>

```

6.3 Messages Schema

This section contains the contents of the MS-OXWSDLIST-messages.xsd file and information about additional files that this schema file requires to operate correctly.

For MS-OXWSDLIST-messages.xsd to operate correctly the file shown in the following table needs to be present in the folder that contains the WSDL, types schema and messages schema files for this protocol.

| Defining specification | File name |
|--|---------------------------|
| [MS-OXWSCDATA] , section 6.2 | MS-OXWSCDATA-messages.xsd |

MS-OXWSDLIST-Messages.xsd file:

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
elementFormDefault="qualified" version="Exchange2010" id="messages">
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCDATA-types.xsd"/>
  <xs:complexType name="ExpandDLType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="Mailbox" type="t:EmailAddressType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ExpandDL" type="m:ExpandDLType"/>
  <xs:complexType name="ExpandDLResponseMessageType">
    <xs:complexContent>
      <xs:extension base="m:ResponseMessageType">
        <xs:sequence>
          <xs:element name="DLExpansion" type="t:ArrayOfDLExpansionType"
minOccurs="0"/>
        </xs:sequence>
        <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="ExpandDLResponseType">
    <xs:complexContent>
      <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ExpandDLResponse" type="m:ExpandDLResponseType"/>
</xs:schema>
```

7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products:

- Microsoft® Exchange Server 2010

Exceptions, if any, are noted below. If a service pack number appears with the product version, behavior changed in that service pack. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that product does not follow the prescription.

8 Change Tracking

This section identifies changes that were made to the [MS-OXWSDLIST] protocol document between the May 2010 and August 2010 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type "Editorially updated."

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

| Section | Tracking number (if applicable) and description | Major change (Y or N) | Change type |
|--|--|-----------------------|------------------|
| 1.1 Glossary | 57318 Added "contact", "distribution list", "folder", "identifier", "mailbox", "property", "SOAP message", "store", and "Web server" to the list of terms defined in [MS-OXGLOS]. | N | Content update. |
| 1.2.1 Normative References | 55751 Moved [MS-OXGLOS] from Normative References section to Informative References section. | N | Content update. |
| 1.2.1 Normative References | 57732 Removed unused references [RFC2396], [RFC2616], and [RFC2818]. | N | Content removed. |
| 2.2.2 Messages | 57176 Changed section title from "Message Syntax" to "Messages". | N | Content update. |
| 3.1.1 Abstract Data Model | 57176 Changed section title from "Server Abstract Data Model" to "Abstract Data Model". | N | Content update. |
| 3.1.4 Message Processing Events and Sequencing Rules | 57176 Changed section title from "Server Message Processing Events and Sequencing" to "Message Processing Events and Sequencing Rules per template. | N | Content update. |
| 3.1.5 Timer Events | 57176 Removed "Server" from section title per template. | N | Content update. |

| Section | Tracking number (if applicable) and description | Major change (Y or N) | Change type |
|--|--|-----------------------|-----------------|
| 3.1.6 Other Local Events | 57176 Removed "Server" from section title per template. | N | Content update. |
| 6 Appendix A: Full WSDL | 57176 Updated introductory text per template. | N | Content update. |

9 Index

A

[Applicability](#) 7

C

[Capability negotiation](#) 7

[Change tracking](#) 32

Client

[abstract data model](#) 20

[initialization](#) 20

[message processing](#) 21

[overview](#) 20

[sequencing rules](#) 21

[timers](#) 20

F

[Full WSDL](#) 24

G

[Glossary](#) 5

I

[Introduction](#) 5

M

Messages

[overview](#) 8

[syntax](#) 8

[transport](#) 8

O

[Overview \(synopsis\)](#) 6

P

[Preconditions](#) 7

[Prerequisites](#) 7

[Product behavior](#) 31

R

References

[informative](#) 6

[normative](#) 5

[Relationship to other protocols](#) 6

S

Security

[implementer considerations](#) 23

[overview](#) 23

[parameter index](#) 23

Server

[abstract data model](#) 14

[initialization](#) 14

[local events](#) 20

[message processing](#) 20

[overview](#) 14

[sequencing rules](#) 20

[timer events](#) 14

[timers](#) 14

[Standards assignments](#) 7

T

[Tracking changes](#) 32

V

[Vendor-extensible fields](#) 7

[Versioning](#) 7