

# [MS-OXWSDLIST]: Distribution List Creation and Usage Web Service Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
07/15/2009	1.0	Major	Initial Availability.
11/04/2009	1.0.1	Editorial	Revised and edited the technical content.
02/10/2010	2.0.0	Major	Updated and revised the technical content.
05/05/2010	2.0.1	Editorial	Revised and edited the technical content.
08/04/2010	2.1	Minor	Clarified the meaning of the technical content.
11/03/2010	2.1	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	2.1	No change	No changes to the meaning, language, or formatting of the technical content.
08/05/2011	2.2	Minor	Clarified the meaning of the technical content.
10/07/2011	2.2	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	3.0	Major	Significantly changed the technical content.
04/27/2012	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	3.1	Minor	Clarified the meaning of the technical content.
10/08/2012	3.2	Minor	Clarified the meaning of the technical content.
02/11/2013	3.2	No change	No changes to the meaning, language, or formatting of the technical content.
07/26/2013	4.0	Major	Significantly changed the technical content.
11/18/2013	4.1	Minor	Clarified the meaning of the technical content.
02/10/2014	4.1	No change	No changes to the meaning, language, or formatting of the technical content.
04/30/2014	5.0	Major	Significantly changed the technical content.
07/31/2014	5.0	No change	No changes to the meaning, language, or formatting of the technical content.
10/30/2014	5.1	Minor	Clarified the meaning of the technical content.

# Table of Contents

<b>1 Introduction</b>	<b>5</b>
1.1 Glossary	5
1.2 References	5
1.2.1 Normative References	5
1.2.2 Informative References	6
1.3 Overview	6
1.4 Relationship to Other Protocols	6
1.5 Prerequisites/Preconditions	7
1.6 Applicability Statement	7
1.7 Versioning and Capability Negotiation	7
1.8 Vendor-Extensible Fields	8
1.9 Standards Assignments	8
<b>2 Messages</b>	<b>9</b>
2.1 Transport	9
2.2 Common Message Syntax	9
2.2.1 Namespaces	9
2.2.2 Messages	9
2.2.3 Elements	9
2.2.4 Complex Types	10
2.2.4.1 t:DistributionListType Complex Type	10
2.2.4.2 t:MembersListType Complex Type	11
2.2.4.3 t:MemberType Complex Type	11
2.2.5 Simple Types	12
2.2.5.1 t:MemberStatusType Simple Type	12
2.2.6 Attributes	13
2.2.7 Groups	13
2.2.8 Attribute Groups	13
<b>3 Protocol Details</b>	<b>14</b>
3.1 ExchangeServicePortType Server Details	14
3.1.1 Abstract Data Model	14
3.1.2 Timers	14
3.1.3 Initialization	14
3.1.4 Message Processing Events and Sequencing Rules	14
3.1.4.1 ExpandDL	14
3.1.4.1.1 Complex Types	15
3.1.4.1.1.1 m:ExpandDLResponseMessageType Complex Type	15
3.1.4.1.1.2 m:ExpandDLResponseType Complex Type	16
3.1.4.1.1.3 m:ExpandDLType Complex Type	16
3.1.4.1.1.4 t:ArrayOfDLExpansionType Complex Type	17
3.1.4.1.2 Elements	18
3.1.4.1.2.1 ExpandDL Element	18
3.1.4.1.2.2 ExpandDLResponse Element	18
3.1.4.1.3 Messages	18
3.1.4.1.3.1 tns:ExpandDLSoapIn	18
3.1.4.1.3.2 tns:ExpandDLSoapOut	19
3.1.4.2 GetItem	19
3.1.4.3 DeleteItem	20
3.1.4.4 UpdateItem	20

3.1.4.5	MoveItem .....	21
3.1.4.6	CopyItem .....	22
3.1.4.7	CreateItem .....	22
3.1.5	Timer Events .....	23
3.1.6	Other Local Events .....	23
3.2	Client Details.....	23
3.2.1	Client Abstract Data Model .....	23
3.2.2	Client Timers .....	23
3.2.3	Client Initialization .....	23
3.2.4	Client Message Processing Events and Sequencing .....	23
3.2.5	Client Timer Events .....	23
3.2.6	Client Other Local Events .....	23
<b>4</b>	<b>Protocol Examples.....</b>	<b>24</b>
<b>5</b>	<b>Security.....</b>	<b>25</b>
5.1	Security Considerations for Implementers.....	25
5.2	Index of Security Parameters .....	25
<b>6</b>	<b>Appendix A: Full WSDL.....</b>	<b>26</b>
6.1	WSDL.....	26
6.2	Types Schema.....	30
6.3	Messages Schema.....	31
<b>7</b>	<b>Appendix B: Product Behavior.....</b>	<b>33</b>
<b>8</b>	<b>Change Tracking.....</b>	<b>34</b>
<b>9</b>	<b>Index .....</b>	<b>36</b>

# 1 Introduction

The Distribution List Creation and Usage Web Service protocol enables clients to create, delete, get, move, update, and copy and to expand a distribution list.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [MS-OXGLOS]:

**distribution list**  
**endpoint**  
**Hypertext Transfer Protocol (HTTP)**  
**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**  
**mailbox**  
**message store**  
**SOAP**  
**SOAP message**  
**web server**  
**Web Services Description Language (WSDL)**  
**WSDL message**  
**WSDL port type**  
**XML**  
**XML namespace**  
**XML schema**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCONT] Microsoft Corporation, "[Contacts Web Service Protocol](#)".

[MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol](#)".

[MS-OXWSFOLD] Microsoft Corporation, "[Folders and Folder Permissions Web Service Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", BCP 47, RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

## 1.2.2 Informative References

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol](#)".

[MS-OXWSSRCH] Microsoft Corporation, "[Mailbox Search Web Service Protocol](#)".

## 1.3 Overview

The Distribution List Creation and Usage Web Service protocol provides clients with the ability to query the server for **distribution lists** and to expand a distribution list into the constituent e-mail addresses. In addition, it provides the capability to create, delete, get, move, update, and copy distribution lists.


## 1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#), to identify the target **endpoint** (4) to use for each operation.

This protocol uses **SOAP**, as described in [\[SOAP1.1\]](#), to specify the structure information that is exchanged between the client and the server. This protocol uses the **XML schema**, as described in

[\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content that is sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following diagram.

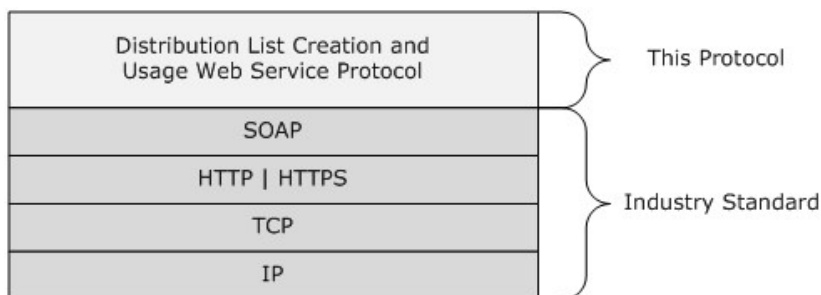

**Figure 1: This protocol in relation to other protocols**

This protocol can use the Mailbox Search Web Service Protocol, as described in [\[MS-OXWSSRCH\]](#), to search a distribution list.

This protocol uses the **GetItem**, **DeleteItem**, **UpdateItem**, **MoveItem**, **CopyItem**, and **CreateItem** operations, as described in [\[MS-OXWSCORE\]](#), to manipulate distribution lists.

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

## 1.5 Prerequisites/Preconditions

The endpoint (4) URL that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#); the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#); or known by the protocol client, is required to form the HTTP request to the **web server** that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP requests that target this protocol.

## 1.6 Applicability Statement

This protocol is applicable to client programs that use distribution lists for directing items to multiple e-mail addresses.

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol specifies only one **WSDL port type** version.
- **Security and Authentication Methods:** This protocol relies on the Web server that is hosting it to perform authentication.
- **Localization:** This protocol includes text strings in various messages. Localization considerations for such strings are specified in section [3.1.4](#).

- **Capability Negotiation:** None.

## **1.8 Vendor-Extensible Fields**

None.

## **1.9 Standards Assignments**

None.



## 2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The **WSDL** in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

### 2.1 Transport

The SOAP version supported is SOAP 1.1, as specified in [\[SOAP1.1\]](#).

The protocol server **MUST** support SOAP over HTTP, as defined in [\[RFC2616\]](#). The protocol server **SHOULD** additionally support SOAP over HTTPS, as defined in [\[RFC2818\]](#), for securing communication with clients.

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses XML schema, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language (WSDL), as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
s	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA2]</a>
xs	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA2]</a>
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
t	<a href="http://schemas.microsoft.com/exchange/services/2006/types">http://schemas.microsoft.com/exchange/services/2006/types</a>	
m	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	

#### 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

#### 2.2.3 Elements

This specification does not define any common XML schema element definitions.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions that are defined by this specification. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

Complex type	Description
<b>t:DistributionListType</b>	Represents a distribution list.
<b>t:MembersListType</b>	Represents the member type.
<b>t:MemberType</b>	Provides an identifier for a fully resolved e-mail address, and the status of that address on the server.

### 2.2.4.1 t:DistributionListType Complex Type

The **DistributionListType** complex type represents a distribution list. The **DistributionListType** complex type extends the **ItemType** complex type, as specified in [\[MS-OXWSCORE\]](#) section 2.2.4.6.

```
<xs:complexType name="DistributionListType">
  <xs:complexContent>
    <xs:extension
      base="t:ItemType"
    >
      <xs:sequence>
        <xs:element name="DisplayName"
          type="xs:string"
          minOccurs="0"
        />
        <xs:element name="FileAs"
          type="xs:string"
          minOccurs="0"
        />
        <xs:element name="ContactSource"
          type="t:ContactSourceType"
          minOccurs="0"
        />
        <xs:element name="Members"
          type="t:MembersListType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **DistributionListType** complex type.

Element	Type	Description
DisplayName	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Contains the display name for the distribution list.

Element	Type	Description
FileAs	<b>xs:string</b>	Represents how a distribution list is filed in the Contacts folder. This element is read-only for the client.
ContactSource	<b>t:ContactSourceType</b> ( <a href="#">[MS-OXWSCONT]</a> section 2.2.5.1)	Describes whether the distribution list is located in the <b>message store</b> or in the directory service.
Members	<b>t:MembersListType</b> (section <a href="#">2.2.4.2</a> )	Contains a list of members in a distribution list.

#### 2.2.4.2 t:MembersListType Complex Type

The **MembersListType** complex type represents the collection of distribution list members.

```
<xs:complexType name="MembersListType">
  <xs:sequence>
    <xs:element name="Member"
      type="t:MemberType"
      maxOccurs="unbounded"
      minOccurs="0"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **MembersListType** complex type.

Element	Type	Description
Member	<b>t:MemberType</b> (section <a href="#">2.2.4.3</a> )	Provides information about each member of the members collection.

#### 2.2.4.3 t:MemberType Complex Type

The **MemberType** complex type provides information about each member of the members collection of the distribution list, containing a member's mailbox address, status and optional member's identifier in the collection.

```
<xs:complexType name="MemberType">
  <xs:sequence>
    <xs:element name="Mailbox"
      type="t:EmailAddressType"
      minOccurs="0"
    />
    <xs:element name="Status"
      type="t:MemberStatusType"
      minOccurs="0"
    />
  </xs:sequence>
  <xs:attribute name="Key"
    type="xs:string"
    use="optional"
  />
</xs:complexType>
```

```

/>
</xs:complexType>

```

The following table lists the child elements of the **MemberType** complex type.

Element	Type	Description
Mailbox	<b>t:EmailAddressType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.27)	Represents an e-mail address of a member. At least one of <b>EmailAddress</b> and <b>ItemId</b> in this element SHOULD be present. Otherwise, <b>ErrorInvalidMailbox</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.5.23) will be returned.
Status	<b>t:MemberStatusType</b> (section <a href="#">2.2.5.1</a> )	Provides information about the status of a distribution list member in the members' collection.

The following table lists the attributes of the **MemberType** complex type.

Name	Type	Description
Key	<b>xs:string</b> ( <a href="#">[XMLSCHEMA2]</a> )	Represents a unique identification of the member in the members collection.

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple Type	Description
<b>t:MemberStatusType</b>	Provides information as to the status of a distribution list member on the server.

### 2.2.5.1 t:MemberStatusType Simple Type

The **MemberStatusType** simple type provides information as to the status of a distribution list member on the server. The **MemberStatusType** simple type extends the xs:string data type ([\[XMLSCHEMA2\]](#) section 3.2.1).

```

<xs:simpleType name="MemberStatusType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Unrecognized"
    />
    <xs:enumeration
      value="Normal"
    />
    <xs:enumeration
      value="Demoted"
    />
  </xs:restriction>
</xs:simpleType>

```

Enumeration

The following values are defined by the **MemberStatusType** simple type.

Value	Description
Unrecognized	Member information is invalid or unrecognized.
Normal	Member information in a distribution list is in sync with the referenced object.
Demoted	Referenced object is not available.

### 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

### 2.2.7 Groups

This specification does not define any common XML schema group definitions.

### 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

## 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

### 3.1 ExchangeServicePortType Server Details

This protocol defines a single port type.

#### 3.1.1 Abstract Data Model

This protocol is a stateless protocol.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Message Processing Events and Sequencing Rules

This protocol includes the operations listed in the following table.

Operation	Description
<b>ExpandDL</b>	Expands a distribution list into the constituent email addresses.
<b>GetItem</b>	Gets a distribution list on the server.
<b>DeleteItem</b>	Deletes a distribution list on the server.
<b>UpdateItem</b>	Updates a distribution list on the server.
<b>MoveItem</b>	Moves a distribution list on the server.
<b>CopyItem</b>	Copies a distribution list on the server.
<b>CreateItem</b>	Creates a distribution list on the server.

##### 3.1.4.1 ExpandDL

**ExpandDL** defines an operation to expand a distribution list.

The following is the WSDL port type specification for the **ExpandDL** operation.

```
<wsdl:operation name="ExpandDL">
  <wsdl:input message="tns:ExpandDLSoapIn" />
  <wsdl:output message="tns:ExpandDLSoapOut" />
</wsdl:operation>
```

The following is the WSDL binding specification for the **ExpandDL** operation.

```

<wsdl:operation name="ExpandDL">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ExpandDL" />
  <wsdl:input>
    <soap:header message="tns:ExpandDLSoapIn" part="Impersonation"
      use="literal"/>
    <soap:header message="tns:ExpandDLSoapIn" part="MailboxCulture"
      use="literal"/>
    <soap:header message="tns:ExpandDLSoapIn" part="RequestVersion"
      use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="ExpandDLResult" use="literal" />
    <soap:header message="tns:ExpandDLSoapOut" part="ServerVersion"
      use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

#### Request

Message format	Description
<b>tns:ExpandDLSoapIn</b>	Specifies the <b>SOAP message</b> that requests an expanded distribution list.

#### Response

Message format	Description
<b>tns:ExpandDLSoapOut</b>	Specifies the SOAP message returned by the server in response.

### 3.1.4.1.1 Complex Types

The following XML schema complex type definitions are specific to this operation.

Type	Description
<b>m:ExpandDLResponseMessageType</b>	Contains the status and result of a single <b>ExpandDL</b> request.
<b>m:ExpandDLResponseType</b>	Defines a response to a request to expand a distribution list.
<b>m:ExpandDLType</b>	Represents a request to expand a distribution list.
<b>t:ArrayOfDLExpansionType</b>	Contains an array of <b>mailboxes</b> that are contained in a distribution list.

#### 3.1.4.1.1.1 m:ExpandDLResponseMessageType Complex Type

The **ExpandDLResponseMessageType** complex type contains the status and result of a single **ExpandDL** request. The **ExpandDLResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.52. **ExpandDLResponseMessage** is used in the sub-element of **BaseResponseMessageType**, which is the base type of **ExpandDLResponseType** defined in section [3.1.4.1.1.2](#).

```
<xs:complexType name="ExpandDLResponseMessageType">
```

```

<xs:complexContent>
  <xs:extension
    base="m:ResponseMessageType"
  >
    <xs:sequence>
      <xs:element name="DLExpansion"
        type="t:ArrayOfDLExpansionType"
        minOccurs="0"
      />
    </xs:sequence>
    <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child element of the **ExpandDLResponseMessageType** complex type.

Element	Type	Description
DLExpansion	<b>t:ArrayOfDLExpansionType</b> (section <a href="#">3.1.4.1.1.4</a> )	Contains an array of mailboxes that are contained in a distribution list.

The following table lists the attributes of the **ExpandDLResponseMessageType** complex type.

Name	Description
t:FindResponsePagingAttributes ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.8.1)	Specifies zero or more attributes that describe the result set.

### 3.1.4.1.1.2 m:ExpandDLResponseType Complex Type

The **ExpandDLResponseType** complex type defines a response to a request to expand a distribution list. The **ExpandDLResponseType** complex type extends the **BaseResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.15.

```

<xs:complexType name="ExpandDLResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>

```

### 3.1.4.1.1.3 m:ExpandDLType Complex Type

The **ExpandDLType** complex type represents a request to expand a distribution list. The **ExpandDLType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.14.

```

<xs:complexType name="ExpandDLType">
  <xs:complexContent>
    <xs:extension

```



```

    base="m:BaseRequestType"
  >
    <xs:sequence>
      <xs:element name="Mailbox"
        type="t:EmailAddressType"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

#### Child Elements

Element	Type	Description
Mailbox	<b>t:EmailAddressType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.27)	Represents an e-mail address of a distribution list member.

#### 3.1.4.1.1.4 t:ArrayOfDLExpansionType Complex Type

The **ArrayOfDLExpansionType** complex type contains an array of mailboxes that are contained in a distribution list.

```

<xs:complexType name="ArrayOfDLExpansionType">
  <xs:sequence>
    <xs:element name="Mailbox"
      type="t:EmailAddressType"
      maxOccurs="unbounded"
      minOccurs="0"
    />
  </xs:sequence>
  <xs:attributeGroup
    ref="t:FindResponsePagingAttributes"
  />
</xs:complexType>

```

The following table lists the child element of the **ArrayOfDLExpansionType** complex type.

Element	Type	Description
Mailbox	<b>t:EmailAddressType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.27)	Represents an e-mail address.

The following table lists and describes the attributes of the **ArrayOfDLExpansionType** complex type.

Name	Description
t:FindResponsePagingAttributes ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.8.1)	Specifies zero or more attributes that describe the result set.

### 3.1.4.1.2 Elements

The following XML schema element definitions are specific to this operation.

Element	Description
<b>tns:ExpandDL</b>	Contains a request to expand a distribution list.
<b>tns:ExpandDLResponse</b>	Defines a response to a request to expand a distribution list.

#### 3.1.4.1.2.1 ExpandDL Element

The **ExpandDL** element defines a request to expand a distribution list.

```
<xs:element name="ExpandDL"  
  type="m:ExpandDLType"  
/>
```

#### 3.1.4.1.2.2 ExpandDLResponse Element

The **ExpandDLResponse** element defines a response to a request to expand a distribution list.

```
<xs:element name="ExpandDLResponse"  
  type="m:ExpandDLResponseType"  
/>
```

### 3.1.4.1.3 Messages

The following XML schema message definitions are specific to this operation.

Message	Description
<b>tns:ExpandDLSoapIn</b>	Contains the request information, the user whom the client application is impersonating, the culture to use for accessing the mailbox, and the schema version for the request.
<b>tns:ExpandDLSoapOut</b>	Contains the response message and the schema version for the response message.

#### 3.1.4.1.3.1 tns:ExpandDLSoapIn

The **ExpandDLSoapIn** WSDL message specifies the **ExpandDL** operation request to expand a distribution list item into the constituent e-mail addresses.

```
<wsdl:message name="ExpandDLSoapIn">  
  <wsdl:part name="Request" element="tns:ExpandDL" />  
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>  
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>  
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>  
</wsdl:message>
```

The **ExpandDLSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/ExpandDL>.

The **ExpandDLSoapIn** message contains four parts, as described in the following table.

Part Name	Element/Type	Description
Request	<b>tns:ExpandDL</b>	Specifies the request.
Impersonation	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.3)	Specifies the user whom the client application is impersonating.
MailboxCulture	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.6)	Specifies the culture to use for accessing the mailbox. The cultures are defined by <a href="#">[RFC3066]</a> .
RequestVersion	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.9)	Specifies the schema version for the <b>ExpandDL</b> request.

### 3.1.4.1.3.2 tns:ExpandDLSoapOut

The **ExpandDLSoapOut** WSDL message specifies the server response to the **ExpandDL** operation request to expand a distribution list item into the constituent e-mail addresses.

```
<wsdl:message name="ExpandDLSoapOut">
  <wsdl:part name="ExpandDLResult" element="tns:ExpandDLResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **ExpandDLSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/ExpandDL>.

The **ExpandDLSoapOut** message contains two parts, as described in the following table.

Part Name	Element/Type	Description
ExpandDLResult	<b>tns:ExpandDLResponse</b>	Specifies the response message.
ServerVersion	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.10)	Specifies the schema version for the <b>tns:ExpandDLResponse</b> message.

### 3.1.4.2 GetItem

This protocol uses the **GetItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.4 to get a distribution list.

```
<wsdl:operation name="GetItem">
  <wsdl:input message="tns:GetItemSoapIn" />
  <wsdl:output message="tns:GetItemSoapOut" />
</wsdl:operation>
```

Request

Message Format	Description
<b>tns:GetItemSoapIn</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.4.1.1)	Specifies the SOAP message that defines the distribution list item to get. The <b>GetItem</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.4.2.1) element that specifies the XML request MUST contain the following elements: the <b>ItemShape</b> element ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.4.3.2), whose type is <b>t:ItemResponseShapeType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.38) and the <b>ItemIds</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.4.3.2) element, whose type is <b>t:NonEmptyArrayOfBaseItemIdsType</b> ( <a href="#">[MS-OXWSCORE]</a> section 2.2.4.8). The <b>ItemIds</b> element MUST contain one or more <b>ItemId</b> elements with type <b>t:ItemIdType</b> ( <a href="#">[MS-OXWSCORE]</a> section 2.2.4.13). All other elements of <b>ItemIds</b> MUST NOT be specified.

Response

Message Format	Description
<b>tns:GetItemSoapOut</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.4.1.2)	Specifies the SOAP message returned by the server in response. The server returns a <b>GetItemResponseMessage</b> element that contains properties associated with the distribution list item.

### 3.1.4.3 DeleteItem

This protocol uses the **DeleteItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.3 to delete a distribution list.

```
<wsdl:operation name="DeleteItem">
  <wsdl:input message="tns:DeleteItemSoapIn" />
  <wsdl:output message="tns:DeleteItemSoapOut" />
</wsdl:operation>
```

Request

Message Format	Description
<b>tns:DeleteItemSoapIn</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.3.1.1)	Specifies the SOAP message that defines the distribution list item to delete. The <b>ItemIds</b> child element of the <b>DeleteItem</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.3.2.1) element that specifies the XML request MUST contain one or more <b>ItemId</b> elements of type <b>t:ItemIdType</b> ( <a href="#">[MS-OXWSCORE]</a> section 2.2.4.24). All other elements of <b>ItemIds</b> MUST NOT be specified.

Response

Message Format	Description
<b>tns:DeleteItemSoapOut</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.3.1.2)	Specifies the SOAP message returned by the server in response.

### 3.1.4.4 UpdateItem

This protocol uses the **UpdateItem** operation specified in [\[MS-OXWSCORE\]](#) section 3.1.4.9 to update a distribution list.

```

<wsdl:operation name="UpdateItem">
  <wsdl:input message="tns:UpdateItemSoapIn" />
  <wsdl:output message="tns:UpdateItemSoapOut" />
</wsdl:operation>

```

#### Request

Message Format	Description
<b>tns:UpdateItemSoapIn</b> ([MS-OXWSCORE] section 3.1.4.9.1.1)	The <b>UpdateItem</b> ([MS-OXWSCORE] section 3.1.4.9) element that specifies the XML request MUST contain an <b>ItemChanges</b> ([MS-OXWSCORE] section 3.1.4.9.3.2) element with the <b>t:NonEmptyArrayOfItemChangesType</b> ([MS-OXWSCORE] section 3.1.4.9.3.9) type. The <b>ItemChanges</b> element MUST contain one or more <b>ItemChange</b> elements with the <b>t:ItemChangeType</b> ([MS-OXWSCORE] section 3.1.4.9.3.7) type. The <b>ItemChange</b> element MUST contain an <b>ItemId</b> element with the <b>t:ItemIdType</b> ([MS-OXWSCORE] section 2.2.4.24) type and an <b>Updates</b> element with the <b>t:NonEmptyArrayOfItemChangeDescriptionsType</b> ([MS-OXWSCORE] section 3.1.4.9.3.8) type. If the update is to append to an item or to set the item, the <b>AppendToItemField</b> or <b>SetItemField</b> elements of <b>Updates</b> element MUST contain a <b>DistributionList</b> element with the <b>t:DistributionListType</b> (section 2.2.4.1) type. All other elements of the elements <b>AppendToItemField</b> or <b>SetItemField</b> MUST NOT be specified.

#### Response

Message Format	Description
<b>tns:UpdateItemSoapOut</b> ([MS-OXWSCORE] section 3.1.4.9.1.2)	Specifies the SOAP message returned by the server in response.

### 3.1.4.5 MoveItem

This protocol uses the **MoveItem** operation specified in [MS-OXWSCORE] section 3.1.4.7 to move a distribution list.

```

<wsdl:operation name="MoveItem">
  <wsdl:input message="tns:MoveItemSoapIn" />
  <wsdl:output message="tns:MoveItemSoapOut" />
</wsdl:operation>

```

#### Request

Message Format	Description
<b>tns:MoveItemSoapIn</b> ([MS-OXWSCORE] section 3.1.4.7.1.1)	The <b>MoveItem</b> element ([MS-OXWSCORE] section 3.1.4.7) that specifies the XML request MUST contain the following elements: the <b>ToFolderId</b> element ([MS-OXWSCORE] section 2.2.4.15), whose type is <b>t:TargetFolderIdType</b> ([MS-OXWFSFOLD] section 2.2.4.14), and the <b>ItemIds</b> element ([MS-OXWSCORE] section 2.2.4.15), whose type is <b>t:NonEmptyArrayOfBaseItemIdsType</b> ([MS-OXWSCORE] section 2.2.4.28). The <b>ItemIds</b> element MUST contain one or more <b>ItemId</b> elements with the <b>t:ItemIdType</b> type ([MS-OXWSCORE] section 2.2.4.24). All other elements of <b>ItemIds</b> MUST NOT be specified.

Response

Message Format	Description
<b>tns:MoveItemSoapOut</b> ([MS-OXWSCORE] section 3.1.4.7.1.2)	Specifies the SOAP message returned by the server in response.

### 3.1.4.6 CopyItem

This protocol uses the **CopyItem** operation specified in [MS-OXWSCORE] section 3.1.4.1 to copy a distribution list.

```
<wsdl:operation name="CopyItem">  
  <wsdl:input message="tns:CopyItemSoapIn" />  
  <wsdl:output message="tns:CopyItemSoapOut" />  
</wsdl:operation>
```

Request

Message Format	Description
<b>tns:CopyItemSoapIn</b> ([MS-OXWSCORE] section 3.1.4.1.1.1)	The <b>CopyItem</b> ([MS-OXWSCORE] section 3.1.4.1.2.1) element that specifies the XML request MUST contain the following elements: the <b>ToFolderId</b> ([MS-OXWSCORE] section 2.2.4.15) element, whose type is <b>t:TargetFolderIdType</b> ([MS-OXWFSFOLD] section 2.2.4.14), and the <b>ItemIds</b> ([MS-OXWSCORE] section 3.1.4.4.3.2) element, whose type is <b>t:NonEmptyArrayOfBaseItemIdsType</b> ([MS-OXWSCORE] section 2.2.4.28). The <b>ItemIds</b> element MUST contain one or more <b>ItemId</b> element with the <b>t:ItemIdType</b> ([MS-OXWSCORE] section 2.2.4.24) type. All other elements of <b>ItemIds</b> MUST NOT be specified.

Response

Message Format	Description
<b>tns:CopyItemSoapOut</b> ([MS-OXWSCORE] section 3.1.4.1.1.2)	Specifies the SOAP message returned by the server in response.

### 3.1.4.7 CreateItem

This protocol uses the **CreateItem** operation specified in [MS-OXWSCORE] section 3.1.4.2 to create a distribution list.

```
<wsdl:operation name="CreateItem">  
  <wsdl:input message="tns:CreateItemSoapIn" />  
  <wsdl:output message="tns:CreateItemSoapOut" />  
</wsdl:operation>
```

Request

Message Format	Description
<b>tns:CreateItemSoapIn</b> ([MS-	Specifies the SOAP message that defines the distribution list item to

Message Format	Description
<a href="#">OXWSCORE</a> section 3.1.4.2.1.1)	create. The <b>Items</b> child element of the <b>CreateItem</b> child element that specifies the XML request MUST contain one or more <b>t:DistributionListType</b> elements (section <a href="#">2.2.4.1</a> ). All other elements of <b>Items</b> MUST NOT be specified.

Response

Message Format	Description
<b>tns:CreateItemSoapOut</b> ( <a href="#">[MS-OXWSCORE]</a> section 3.1.4.2.1.2)	Specifies the SOAP message returned by the server in response.

### 3.1.5 Timer Events

None.

### 3.1.6 Other Local Events

None.

## 3.2 Client Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

### 3.2.1 Client Abstract Data Model

None.

### 3.2.2 Client Timers

None.

### 3.2.3 Client Initialization

None.

### 3.2.4 Client Message Processing Events and Sequencing

None.

### 3.2.5 Client Timer Events

None.

### 3.2.6 Client Other Local Events

None.

## 4 Protocol Examples

None.



## **5 Security**

### **5.1 Security Considerations for Implementers**

This protocol does not use additional security mechanisms.

### **5.2 Index of Security Parameters**

None.

## 6 Appendix A: Full WSDL

The following table lists the XML files that are required to implement the functionality that is specified in this document. The contents of each file are included in this section.

File name	Description	Section
MS-OXWSDLIST.wsdl	Contains the WSDL for the implementation of this protocol.	<a href="#">6.1</a>
MS-OXWSDLIST-types.xsd	Contains the XML schema type definitions that are used in this protocol.	<a href="#">6.2</a>
MS-OXWSDLIST-messages.xsd	Contains the XML schema message definitions that are used in this protocol.	<a href="#">6.3</a>

These files need to be placed in a common folder for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSDLIST-types.xsd or MS-OXWSDLIST-messages.xsd schemas need to be placed in the common folder with these files.

For ease of implementation, the full WSDL and schemas are provided in the following sections.

### 6.1 WSDL

This section contains the contents of the MS-OXWSDLIST.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:s="http://www.w3.org/2001/XMLSchema" xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <wsdl:types>
    <xs:schema id="messages" elementFormDefault="qualified" version="Exchange2013"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCORE-types.xsd"/>
      <xs:include schemaLocation="MS-OXWSDLIST-messages.xsd"/>

      <!-- Add global elements and types from messages.xsd -->
    </xs:schema>
    <xs:schema id="types" elementFormDefault="qualified" version="Exchange2013"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
      <!-- Add global elements and types from types.xsd -->
    </xs:schema>
  </wsdl:types>
  <wsdl:message name="ExpandDLSoapIn">
    <wsdl:part name="request" element="tns:ExpandDL" />
  </wsdl:message>
</wsdl:definitions>
```

```

        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="ExpandDLSoapOut">
        <wsdl:part name="ExpandDLResult" element="tns:ExpandDLResponse" />
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="GetItemSoapIn">
        <wsdl:part name="request" element="tns:GetItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
        <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
    </wsdl:message>
    <wsdl:message name="GetItemSoapOut">
        <wsdl:part name="GetItemResult" element="tns:GetItemResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="CreateItemSoapIn">
        <wsdl:part name="request" element="tns:CreateItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
        <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
    </wsdl:message>
    <wsdl:message name="CreateItemSoapOut">
        <wsdl:part name="CreateItemResult" element="tns:CreateItemResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="DeleteItemSoapIn">
        <wsdl:part name="request" element="tns>DeleteItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="DeleteItemSoapOut">
        <wsdl:part name="DeleteItemResult" element="tns>DeleteItemResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="UpdateItemSoapIn">
        <wsdl:part name="request" element="tns:UpdateItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
        <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
    </wsdl:message>
    <wsdl:message name="UpdateItemSoapOut">
        <wsdl:part name="UpdateItemResult" element="tns:UpdateItemResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="MoveItemSoapIn">
        <wsdl:part name="request" element="tns:MoveItem"/>
        <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
        <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
        <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="MoveItemSoapOut">
        <wsdl:part name="MoveItemResult" element="tns:MoveItemResponse"/>

```

```

    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wsdl:message>
  <wsdl:message name="CopyItemSoapIn">
    <wsdl:part name="request" element="tns:CopyItem"/>
    <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wsdl:message>
  <wsdl:message name="CopyItemSoapOut">
    <wsdl:part name="CopyItemResult" element="tns:CopyItemResponse"/>
    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wsdl:message>
  <wsdl:portType name="ExchangeServicePortType">
    <wsdl:operation name="ExpandDL">
      <wsdl:input message="tns:ExpandDLSoapIn" />
      <wsdl:output message="tns:ExpandDLSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetItem">
      <wsdl:input message="tns:GetItemSoapIn"/>
      <wsdl:output message="tns:GetItemSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="CreateItem">
      <wsdl:input message="tns:CreateItemSoapIn"/>
      <wsdl:output message="tns:CreateItemSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="DeleteItem">
      <wsdl:input message="tns>DeleteItemSoapIn"/>
      <wsdl:output message="tns>DeleteItemSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="UpdateItem">
      <wsdl:input message="tns:UpdateItemSoapIn"/>
      <wsdl:output message="tns:UpdateItemSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="MoveItem">
      <wsdl:input message="tns:MoveItemSoapIn"/>
      <wsdl:output message="tns:MoveItemSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="CopyItem">
      <wsdl:input message="tns:CopyItemSoapIn"/>
      <wsdl:output message="tns:CopyItemSoapOut"/>
    </wsdl:operation>
  </wsdl:portType>
  <wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
    <wsdl:documentation>
      <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim"/>
    </wsdl:documentation>
    <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="GetItem">
      <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetItem"/>
      <wsdl:input>
        <soap:header message="tns:GetItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:GetItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:GetItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:header message="tns:GetItemSoapIn" part="TimeZoneContext" use="literal"/>
        <soap:body parts="request" use="literal"/>
      </wsdl:input>
      <wsdl:output>

```

```

        <soap:body parts="GetItemResult" use="literal"/>
        <soap:header message="tns:GetItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CreateItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateItem"/>
    <wsdl:input>
        <soap:header message="tns:CreateItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:CreateItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:CreateItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:header message="tns:CreateItemSoapIn" part="TimeZoneContext" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="CreateItemResult" use="literal"/>
        <soap:header message="tns:CreateItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="DeleteItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteItem"/>
    <wsdl:input>
        <soap:header message="tns>DeleteItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns>DeleteItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns>DeleteItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="DeleteItemResult" use="literal"/>
        <soap:header message="tns>DeleteItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateItem"/>
    <wsdl:input>
        <soap:header message="tns:UpdateItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:UpdateItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:UpdateItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:header message="tns:UpdateItemSoapIn" part="TimeZoneContext" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="UpdateItemResult" use="literal"/>
        <soap:header message="tns:UpdateItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="MoveItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/MoveItem"/>
    <wsdl:input>
        <soap:header message="tns:MoveItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:MoveItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:MoveItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="MoveItemResult" use="literal"/>

```

```

        <soap:header message="tns:MoveItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CopyItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CopyItem"/>
    <wsdl:input>
        <soap:header message="tns:CopyItemSoapIn" part="Impersonation" use="literal"/>
        <soap:header message="tns:CopyItemSoapIn" part="MailboxCulture" use="literal"/>
        <soap:header message="tns:CopyItemSoapIn" part="RequestVersion" use="literal"/>
        <soap:body parts="request" use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body parts="CopyItemResult" use="literal"/>
        <soap:header message="tns:CopyItemSoapOut" part="ServerVersion" use="literal"/>
    </wsdl:output>
</wsdl:operation>
    <wsdl:operation name="ExpandDL">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ExpandDL" />
        <wsdl:input>
            <soap:header message="tns:ExpandDLSoapIn" part="Impersonation"
use="literal"/>
            <soap:header message="tns:ExpandDLSoapIn" part="MailboxCulture"
use="literal"/>
            <soap:header message="tns:ExpandDLSoapIn" part="RequestVersion"
use="literal"/>
            <soap:body parts="request" use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="ExpandDLResult" use="literal" />
            <soap:header message="tns:ExpandDLSoapOut" part="ServerVersion"
use="literal"/>
        </wsdl:output>
    </wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

## 6.2 Types Schema

This section contains the contents of the MS-OXWSDLIST-types.xsd file and information about additional files that this schema file requires to operate correctly.

For MS-OXWSDLIST-types.xsd to operate correctly the file shown in the following table needs to be present in the folder that contains the WSDL, types schema and messages schema files for this protocol.

Defining specification	File name
<a href="#">[MS-OXWSCDATA]</a> section 7.2	MS-OXWSCDATA-types.xsd

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2013" id="types">
    <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    <xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>

```

```

<xs:complexType name="ArrayOfDLExpansionType">
  <xs:sequence>
    <xs:element name="Mailbox" type="t:EmailAddressType" minOccurs="0"
maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
</xs:complexType>
<xs:complexType name="DistributionListType">
  <xs:complexContent>
    <xs:extension base="t:ItemType">
      <xs:sequence>
        <xs:element name="DisplayName" type="xs:string" minOccurs="0"/>
        <xs:element name="FileAs" type="xs:string" minOccurs="0"/>
        <xs:element name="ContactSource" type="t:ContactSourceType" minOccurs="0"/>
        <xs:element name="Members" type="t:MembersListType" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:simpleType name="MemberStatusType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Unrecognized"/>
    <xs:enumeration value="Normal"/>
    <xs:enumeration value="Demoted"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="MembersListType">
  <xs:sequence>
    <xs:element name="Member" type="t:MemberType" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="MemberType">
  <xs:sequence>
    <xs:element name="Mailbox" type="t:EmailAddressType" minOccurs="0"/>
    <xs:element name="Status" type="t:MemberStatusType" minOccurs="0"/>
  </xs:sequence>
  <xs:attribute name="Key" type="xs:string" use="optional"/>
</xs:complexType>
</xs:schema>

```

### 6.3 Messages Schema

This section contains the contents of the MS-OXWSDLIST-messages.xsd file and information about additional files that this schema file requires to operate correctly.

For MS-OXWSDLIST-messages.xsd to operate correctly the file shown in the following table needs to be present in the folder that contains the WSDL, types schema and messages schema files for this protocol.

Defining specification	File name
<a href="#">[MS-OXWSCDATA]</a> section 7.1	MS-OXWSCDATA-messages.xsd

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"

```

```

targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
elementFormDefault="qualified" version="Exchange2013" id="messages">
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSCDATA-types.xsd"/>
  <xs:complexType name="ExpandDLType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="Mailbox" type="t:EmailAddressType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ExpandDL" type="m:ExpandDLType"/>
  <xs:complexType name="ExpandDLResponseMessageType">
    <xs:complexContent>
      <xs:extension base="m:ResponseMessageType">
        <xs:sequence>
          <xs:element name="DLExpansion" type="t:ArrayOfDLExpansionType" minOccurs="0"/>
        </xs:sequence>
        <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="ExpandDLResponseType">
    <xs:complexContent>
      <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="ExpandDLResponse" type="m:ExpandDLResponseType"/>
</xs:schema>

```



## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft Exchange Server 2010
- Microsoft Exchange Server 2013
- Microsoft Exchange Server 2007

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 8 Change Tracking

This section identifies changes that were made to the [MS-OXWSDLIST] protocol document between the July 2014 and October 2014 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.

- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">3.1.4.1.1.1</a> <a href="#">m:ExpandDLResponseMessageType</a> <a href="#">Complex Type</a>	Added description of FindResponsePagingAttributes.	N	New content added.
<a href="#">3.1.4.5</a> <a href="#">MoveItem</a>	Added reference for the ItemIds element in the description of the of MoveItemSoapIn message format.	N	Content updated.

## 9 Index

### A

Abstract data model  
[client](#) 23  
[server](#) 14  
[Applicability](#) 7  
[Attribute groups](#) 13  
[Attributes](#) 13

### C

[Capability negotiation](#) 7  
[Change tracking](#) 34  
Client  
  [abstract data model](#) 23  
  ExchangeServicePortType  
    Port type  
      [ExchangeServicePortType](#) 23  
  [initialization](#) 23  
  [local events](#) 23  
  [timer events](#) 23  
  [timers](#) 23  
[Complex types](#) 10  
  [t:DistributionListType Complex Type](#) 10  
  [t:MembersListType Complex Type](#) 11  
  [t:MemberType Complex Type](#) 11

### D

Data model - abstract  
[client](#) 23  
[server](#) 14

### E

Events  
[local - client](#) 23  
[local - server](#) 23  
[timer - client](#) 23  
[timer - server](#) 23

### F

[Fields - vendor-extensible](#) 8  
[Full WSDL](#) 26  
  [Messages Schema](#) 31  
  [Types Schema](#) 30  
[WSDL](#) 26

### G

[Glossary](#) 5  
[Groups](#) 13

### I

[Implementer - security considerations](#) 25  
[Index of security parameters](#) 25

[Informative references](#) 6  
Initialization  
  [client](#) 23  
  [server](#) 14  
[Introduction](#) 5

### L

Local events  
[client](#) 23  
[server](#) 23

### M

Message processing  
[server](#) 14  
Messages  
  [attribute groups](#) 13  
  [attributes](#) 13  
  [complex types](#) 10  
  [elements](#) 9  
  [enumerated](#) 9  
  [groups](#) 13  
  [namespaces](#) 9  
  [simple types](#) 12  
  [syntax](#) 9  
  [t:DistributionListType Complex Type complex type](#) 10  
  [t:MembersListType Complex Type complex type](#) 11  
  [t:MemberStatusType Simple Type simple type](#) 12  
  [t:MemberType Complex Type complex type](#) 11  
  [transport](#) 9

### N

[Namespaces](#) 9  
[Normative references](#) 5

### O

Operations  
  [CopyItem](#) 22  
  [CreateItem](#) 22  
  [DeleteItem](#) 20  
  [ExpandDL](#) 14  
  [GetItem](#) 19  
  [MoveItem](#) 21  
  [UpdateItem](#) 20  
[Overview \(synopsis\)](#) 6

### P

[Parameters - security index](#) 25  
[Preconditions](#) 7  
[Prerequisites](#) 7  
[Product behavior](#) 33  
Protocol Details

[overview](#) 14

## R

[References](#) 5

[informative](#) 6

[normative](#) 5

[Relationship to other protocols](#) 6

## S

Security

[implementer considerations](#) 25

[parameter index](#) 25

Sequencing rules

[server](#) 14

Server

[abstract data model](#) 14

[CopyItem operation](#) 22

[CreateItem operation](#) 22

[DeleteItem operation](#) 20

ExchangeServicePortType port type

Port type

[ExchangeServicePortType](#) 14

[ExpandDL operation](#) 14

[GetItem operation](#) 19

[initialization](#) 14

[local events](#) 23

[message processing](#) 14

[MoveItem operation](#) 21

[sequencing rules](#) 14

[timer events](#) 23

[timers](#) 14

[UpdateItem operation](#) 20

[Simple types](#) 12

[t:MemberStatusType Simple Type](#) 12

[Standards assignments](#) 8

Syntax

[messages - overview](#) 9

## T

[t:DistributionListType Complex Type complex type](#)

10

[t:MembersListType Complex Type complex type](#) 11

[t:MemberStatusType Simple Type simple type](#) 12

[t:MemberType Complex Type complex type](#) 11

Timer events

[client](#) 23

[server](#) 23

Timers

[client](#) 23

[server](#) 14

[Tracking changes](#) 34

[Transport](#) 9

Types

[complex](#) 10

[simple](#) 12

## V

[Vendor-extensible fields](#) 8

[Versioning](#) 7

## W

[WSDL](#) 26

[Messages Schema](#) 31

[Types Schema](#) 30

[WSDL](#) 26