

# [MS-OXWSGTRM]: Get Rooms List Web Service Protocol Specification

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.aspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
07/15/2009	1.0	Major	Initial Availability.
11/04/2009	1.1.0	Minor	Updated the technical content.
02/10/2010	1.1.0	None	Version 1.1.0 release
05/05/2010	1.1.1	Editorial	Revised and edited the technical content.
08/04/2010	1.2	Minor	Clarified the meaning of the technical content.
11/03/2010	1.2	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	1.2	No change	No changes to the meaning, language, and formatting of the technical content.
08/05/2011	1.3	Minor	Clarified the meaning of the technical content.
10/07/2011	2.0	Major	Significantly changed the technical content.

# Table of Contents

<b>1 Introduction</b>	<b>5</b>
1.1 Glossary	5
1.2 References	5
1.2.1 Normative References	5
1.2.2 Informative References	6
1.3 Overview	6
1.4 Relationship to Other Protocols	6
1.5 Prerequisites/Preconditions	7
1.6 Applicability Statement	7
1.7 Versioning and Capability Negotiation	7
1.8 Vendor-Extensible Fields	7
1.9 Standards Assignments	8
<b>2 Messages</b>	<b>9</b>
2.1 Transport	9
2.2 Common Message Syntax	9
2.2.1 Namespaces	9
2.2.2 Messages	9
2.2.3 Elements	9
2.2.4 Complex Types	9
2.2.5 Simple Types	10
2.2.6 Attributes	10
2.2.7 Groups	10
2.2.8 Attribute Groups	10
<b>3 Protocol Details</b>	<b>11</b>
3.1 ExchangeServicePortType Server Details	11
3.1.1 Abstract Data Model	11
3.1.2 Timers	11
3.1.3 Initialization	11
3.1.4 Message Processing Events and Sequencing Rules	11
3.1.4.1 GetRoomLists Operation	11
3.1.4.1.1 Messages	12
3.1.4.1.1.1 tns:GetRoomListsSoapIn Message	12
3.1.4.1.1.2 tns:GetRoomListsSoapOut Message	13
3.1.4.1.1.2 Elements	13
3.1.4.1.2.1 m:GetRoomLists Element	13
3.1.4.1.2.2 m:GetRoomListsResponse Element	14
3.1.4.1.3 Complex Types	14
3.1.4.1.3.1 m:GetRoomListsResponseMessageType Complex Type	14
3.1.4.1.3.2 m:GetRoomListsType Complex Type	15
3.1.4.2 GetRooms Operation	15
3.1.4.2.1 Messages	16
3.1.4.2.1.1 tns:GetRoomsSoapIn Message	16
3.1.4.2.1.2 tns:GetRoomsSoapOut Message	16
3.1.4.2.2 Elements	17
3.1.4.2.2.1 tns:GetRooms Element	17
3.1.4.2.2.2 tns:GetRoomsResponse Element	17
3.1.4.2.3 Complex Types	18
3.1.4.2.3.1 m:GetRoomsResponseMessageType Complex Type	18

3.1.4.2.3.2	m:GetRoomsType Complex Type .....	19
3.1.4.2.3.3	t:ArrayOfRoomsType Complex Type.....	19
3.1.4.2.3.4	t:DirectoryEntryType Complex Type.....	20
3.1.4.2.3.5	t:RoomType Complex Type .....	20
3.1.5	Timer Events .....	20
3.1.6	Other Local Events .....	20
<b>4</b>	<b>Protocol Examples.....</b>	<b>21</b>
4.1	Getting Room Lists.....	21
4.2	Getting Rooms within a Room List.....	22
<b>5</b>	<b>Security.....</b>	<b>24</b>
5.1	Security Considerations for Implementers.....	24
5.2	Index of Security Parameters .....	24
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>25</b>
<b>7</b>	<b>Appendix B: Full XML Schema .....</b>	<b>28</b>
7.1	Messages Schema.....	28
7.2	Types Schema.....	29
<b>8</b>	<b>Appendix C: Product Behavior .....</b>	<b>31</b>
<b>9</b>	<b>Change Tracking.....</b>	<b>32</b>
<b>10</b>	<b>Index .....</b>	<b>38</b>

# 1 Introduction

The Get Rooms List Web Service Protocol enables clients to retrieve information about meeting rooms from the server.

Sections [1.8](#), [2](#), and [3](#) of this specification are normative and contain RFC 2119 language. Sections [1.5](#) and [1.9](#) are also normative but cannot contain RFC 2119 language. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**Hypertext Transfer Protocol (HTTP)**  
**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**  
**XML**

The following terms are defined in [\[MS-OXGLOS\]](#):

**endpoint**  
**mailbox**  
**Simple Object Access Protocol (SOAP)**  
**SOAP action**  
**SOAP body**  
**SOAP header**  
**SOAP message**  
**Web server**  
**Web Services Description Language (WSDL)**  
**WSDL message**  
**WSDL port type**  
**XML namespace**  
**XML schema**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Language", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

## 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol Specification](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol Specification](#)".

## 1.3 Overview


This protocol enables clients to retrieve information about meeting rooms from the server. Clients can use the data types and operations described by this protocol to retrieve the collection of room lists that exist within the server organization, and to retrieve the collection of rooms that belong to a specific room list.

## 1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#), to identify the target **endpoint (4)** to use for each operation.

This protocol uses the **SOAP** protocol, as described in [\[SOAP1.1\]](#), to specify the structure information exchanged between the client and the server. This protocol uses the **XML** protocol, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

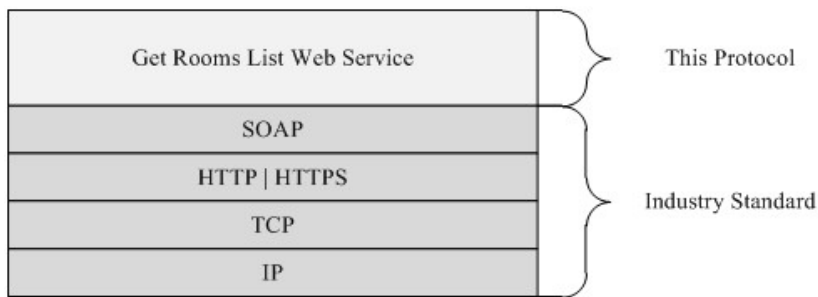

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

The endpoint (4) that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#), is required to form the HTTP request to the Web server that hosts this protocol. To retrieve the endpoint (4) as described in either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol or the Autodiscover Publishing and Lookup Protocol, the client needs to have a valid mail-enabled account. The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP Web requests that target this protocol.

## 1.6 Applicability Statement

This protocol is applicable to client applications that use Web services to retrieve information about meeting rooms for use in scheduling meetings.

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as described in section [2.1](#) and in [\[SOAP1.1\]](#).
- **Protocol Versions:** This protocol specifies only one **WSDL port type** version. The WSDL version of the request is identified by using the **RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.4.8, and the version of the server responding to the request is identified by using the **ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.4.9.
- **Security and Authentication Methods:** This protocol relies on the **Web server** that is hosting it to perform authentication.
- **Localization:** This protocol includes text strings in various messages.
- **Capability Negotiation:** This protocol does not support version negotiation.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.



## 2 Messages

### 2.1 Transport

Messages are transported by using SOAP version 1.1, as specified in [\[SOAP1.1\]](#).

This protocol relies on the Web server that hosts the application to perform authentication. The protocol MUST support SOAP over HTTP, as specified in [\[RFC2616\]](#), and SHOULD support SOAP over HTTPS, as specified in [\[RFC2818\]](#).

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **WSDL**, as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix with each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and is not significant for interoperability.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
s	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA2]</a>
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
t	<a href="http://schemas.microsoft.com/exchange/services/2006/types">http://schemas.microsoft.com/exchange/services/2006/types</a>	
targetNamespace	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
m	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
xs	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA2]</a>

#### 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

#### 2.2.3 Elements

This specification does not define any common XML schema element definitions.

#### 2.2.4 Complex Types

This specification does not define any common XML schema complex type definitions.

### **2.2.5 Simple Types**

This specification does not define any common XML schema simple type definitions.

### **2.2.6 Attributes**

This specification does not define any common XML schema attribute definitions.

### **2.2.7 Groups**

This specification does not define any common XML schema group definitions.

### **2.2.8 Attribute Groups**

This specification does not define any common XML schema attribute group definitions.

## 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

### 3.1 ExchangeServicePortType Server Details

This protocol defines a single port type with two operations. These operations enable client implementations to retrieve a collection of rooms or room lists from the server.

#### 3.1.1 Abstract Data Model

None.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

Operation name	Description
<b>GetRoomLists</b> (section <a href="#">3.1.4.1</a> )	Retrieves a collection of all room lists in the organization.
<b>GetRooms</b> (section <a href="#">3.1.4.2</a> )	Retrieves a collection of all rooms in the specified room list in the organization.

##### 3.1.4.1 GetRoomLists Operation

The **GetRoomLists** operation retrieves a collection of all room lists in the organization.

The following is the WSDL port type specification for the **GetRoomLists** operation.

```
<wsdl:operation name="GetRoomLists">
  <wsdl:input message="tns:GetRoomListsSoapIn"/>
  <wsdl:output message="tns:GetRoomListsSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **GetRoomLists** operation.

```
<wsdl:operation name="GetRoomLists">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetRoomLists"/>
  <wsdl:input>
    <soap:body parts="GetRoomListsRequest" use="literal"/>
  </wsdl:input>
</wsdl:operation>
```

```

    <soap:header message="tns:GetRoomListsSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:GetRoomListsSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:GetRoomListsSoapIn" part="RequestVersion" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="GetRoomListsResult" use="literal"/>
    <soap:header message="tns:GetRoomListsSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to the **GetRoomLists** operation, as specified in section [3.1.4.1](#).

Message name	Description
<b>GetRoomListsSoapIn</b> (section <a href="#">3.1.4.1.1.1</a> )	Specifies the <b>SOAP message</b> that requests a collection of all room lists in the organization.
<b>GetRoomListsSoapOut</b> (section <a href="#">3.1.4.1.1.2</a> )	Specifies the SOAP message returned by the server in the response.

#### 3.1.4.1.1.1 tns:GetRoomListsSoapIn Message

The **GetRoomListsSoapIn** WSDL message specifies the **GetRoomLists** operation request to retrieve a collection of all room lists in the organization. For more details about the **GetRoomLists** operation, see section [3.1.4.1](#).

```

<wsdl:message name="GetRoomListsSoapIn">
  <wsdl:part name="GetRoomListsRequest" element="tns:GetRoomLists"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **GetRoomListsSoapIn** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/services/2006/messages/GetRoomLists>.

The parts of the **GetRoomListsSoapIn** message are described in the following table.

Part name	Element/type	Description
<b>GetRoomListsRequest</b>	<b>tns:GetRoomLists</b> (section <a href="#">3.1.4.1.2.1</a> )	Specifies the <b>SOAP body</b> of the request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.3)	Specifies a <b>SOAP header</b> that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.6)	Specifies a SOAP header that identifies the culture to use for accessing the <b>mailbox</b> . The cultures are defined by <a href="#">[RFC3066]</a> .

Part name	Element/type	Description
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.8)	Specifies a SOAP header that identifies the schema version for the <b>GetRoomLists</b> operation request.

### 3.1.4.1.1.2 tns:GetRoomListsSoapOut Message

The **GetRoomListsSoapOut** WSDL message specifies the server response to the **GetRoomLists** operation request to retrieve a collection of all room lists in the organization. For more details about the **GetRoomLists** operation, see section [3.1.4.1](#).

```
<wsdl:message name="GetRoomListsSoapOut">
  <wsdl:part name="GetRoomListsResult" element="tns:GetRoomListsResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **GetRoomListsSoapOut** WSDL message is the output for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetRoomLists>.

The parts of the **GetRoomListsSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
<b>GetRoomListsResult</b>	<b>tns:GetRoomListsResponse</b> (section <a href="#">3.1.4.1.2.2</a> )	Specifies the SOAP body of the response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.9)	Specifies a SOAP header that identifies the schema version for the <b>GetRoomListsSOAPOut</b> message.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to the **GetRoomLists** operation, as specified in section [3.1.4.1](#).

Element name	Description
<b>GetRoomLists</b> (section <a href="#">3.1.4.1.2.1</a> )	Specifies the request for the <b>GetRoomLists</b> operation that is used by clients to retrieve a collection of all room lists in the organization.
<b>GetRoomListsResponse</b> (section <a href="#">3.1.4.1.2.2</a> )	Specifies a response to a <b>GetRoomLists</b> operation request.

#### 3.1.4.1.2.1 m:GetRoomLists Element

The **GetRoomLists** element is used by the client in a **GetRoomLists** operation request to retrieve a collection of all room lists in the organization. For more details about the **GetRoomLists** operation, see section [3.1.4.1](#).

```
<xs:element name="GetRoomLists"
  type="m:GetRoomListsType"
/>
```

### 3.1.4.1.2.2 m:GetRoomListsResponse Element

The **GetRoomListsResponse** element specifies the server response to a **GetRoomLists** operation request. For more details about the **GetRoomLists** operation, see section [3.1.4.1](#).

```
<xs:element name="GetRoomListsResponse"
  type="m:GetRoomListsResponseMessageType"
/>
```

### 3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **GetRoomLists** operation, as specified in section [3.1.4.1](#).

Complex type	Description
<b>GetRoomListsResponseMessageType</b> (section <a href="#">3.1.4.1.3.1</a> )	Specifies the server response to a <b>GetRoomLists</b> operation request.
<b>GetRoomListsType</b> (section <a href="#">3.1.4.1.3.2</a> )	Specifies a request to retrieve the room lists available within the server organization.

#### 3.1.4.1.3.1 m:GetRoomListsResponseMessageType Complex Type

The **GetRoomListsResponseMessageType** complex type specifies the server response to a **GetRoomLists** operation request. For more details about the **GetRoomLists** operation, see section [3.1.4.1](#). This complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.52.

```
<xs:complexType name="m:GetRoomListsResponseMessageType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
      <xs:sequence>
        <xs:element name="RoomLists"
          type="t:ArrayOfEmailAddressesType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **GetRoomListsResponseMessageType** complex type.

Element name	Type	Description
<b>RoomLists</b>	<b>t:ArrayOfEmailAddressesType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.5)	Contains the collection of room lists available within the organization.

### 3.1.4.1.3.2 m:GetRoomListsType Complex Type

The **GetRoomListsType** complex type specifies a request to retrieve the room lists available within the server organization. This complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.14.

```
<xs:complexType name="m:GetRoomListsType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
      />
  </xs:complexContent>
</xs:complexType>
```

### 3.1.4.2 GetRooms Operation

The **GetRooms** operation retrieves a collection of all rooms in the specified room list in the organization.

The following is the WSDL port type specification for the **GetRoomLists** operation.

```
<wsdl:operation name="GetRooms">
  <wsdl:input message="tns:GetRoomsSoapIn"/>
  <wsdl:output message="tns:GetRoomsSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the **GetRoomLists** operation.

```
<wsdl:operation name="GetRooms">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetRooms"/>
  <wsdl:input>
    <soap:body parts="GetRoomsRequest" use="literal"/>
    <soap:header message="tns:GetRoomsSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:GetRoomsSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:GetRoomsSoapIn" part="RequestVersion" use="literal"/>
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="GetRoomsResult" use="literal"/>
    <soap:header message="tns:GetRoomsSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to the **GetRooms** operation, as specified in section [3.1.4.2](#).

Message name	Description
<b>GetRoomsSoapIn</b> (section <a href="#">3.1.4.2.1.1</a> )	Specifies the SOAP message that requests the collection of rooms that belong to a particular room list.
<b>GetRoomsSoapOut</b> (section <a href="#">3.1.4.2.1.2</a> )	Specifies the SOAP message returned by the server in the response.

#### 3.1.4.2.1.1 tns:GetRoomsSoapIn Message

The **GetRoomsSoapIn** WSDL message specifies the **GetRooms** operation request to retrieve a collection of all rooms in the specified room list. For more details about the **GetRooms** operation, see section [3.1.4.2](#).

```
<wsdl:message name="GetRoomsSoapIn">
  <wsdl:part name="GetRoomsRequest" element="tns:GetRooms"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **GetRoomsSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetRooms>.

The parts of the **GetRoomsSoapIn** message are described in the following table.

Part name	Element/type	Description
<b>GetRoomsRequest</b>	<b>tns:GetRooms</b> (section <a href="#">3.1.4.2.2.1</a> )	Specifies the SOAP body of the request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.6)	Specifies a SOAP header that identifies the culture to use for accessing the mailbox. The cultures are defined by <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.8)	Specifies a SOAP header that identifies the schema version for the <b>GetRooms</b> operation request.

#### 3.1.4.2.1.2 tns:GetRoomsSoapOut Message

The **GetRoomsSoapOut** WSDL message specifies the server response to the **GetRooms** operation request to retrieve a collection of all rooms in a specified room list. For more details about the **GetRooms** operation, see section [3.1.4.2](#).

```
<wsdl:message name="GetRoomsSoapOut">
```



```

    <wsdl:part name="GetRoomsResult" element="tns:GetRoomsResponse"/>
    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The **GetRoomsSoapOut** WSDL message is the output for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetRooms>.

The parts of the **GetRoomsSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
<b>GetRoomsResult</b>	<b>tns:GetRoomsResponse</b> (section <a href="#">3.1.4.2.2.2</a> )	Specifies the SOAP body of the response message.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.9)	Specifies a SOAP header that identifies the schema version for the <b>GetRoomsSoapOut</b> message.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to the **GetRooms** operation, as specified in section [3.1.4.2](#).

Element name	Description
<b>GetRooms</b> (section <a href="#">3.1.4.2.2.1</a> )	Specifies the request for the <b>GetRooms</b> operation that is used by clients to retrieve a collection of all rooms within a particular room list.
<b>GetRoomsResponse</b> (section <a href="#">3.1.4.2.2.2</a> )	Specifies a response to the <b>GetRooms</b> operation request.

#### 3.1.4.2.2.1 tns:GetRooms Element

The **GetRooms** element is used by the client in a **GetRooms** operation request to retrieve all of the rooms within a particular room list. For more details about the **GetRooms** operation, see section [3.1.4.2](#).

```

<xs:element name="tns:GetRooms"
  type="m:GetRoomsType"
/>

```

#### 3.1.4.2.2.2 tns:GetRoomsResponse Element

The **GetRoomsResponse** element specifies the server response to a **GetRooms** operation request. For more details about the **GetRooms** operation, see section [3.1.4.2](#).

```

<xs:element name="tns:GetRoomsResponse"
  type="m:GetRoomsResponseMessageType"
/>

```

### 3.1.4.2.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **GetRooms** operation, as specified in section [3.1.4.2](#).

Complex type	Description
<b>GetRoomsResponseMessageType</b> (section <a href="#">3.1.4.2.3.1</a> )	Specifies the server response to a <b>GetRoomLists</b> operation request.
<b>GetRoomsType</b> (section <a href="#">3.1.4.2.3.2</a> )	Specifies a request to retrieve the collection of rooms within a particular room list.
<b>ArrayOfRoomsType</b> (section <a href="#">3.1.4.2.3.3</a> )	Specifies the collection of rooms that belong to the requested room list.
<b>DirectoryEntryType</b> (section <a href="#">3.1.4.2.3.4</a> )	Specifies the item identifier for the e-mail address of a room.
<b>RoomType</b> (section <a href="#">3.1.4.2.3.5</a> )	Specifies the name and e-mail address of a room.

#### 3.1.4.2.3.1 m:GetRoomsResponseMessageType Complex Type

The **GetRoomsResponseMessageType** complex type specifies the server response to a **GetRooms** operation request. For more details about the **GetRooms** operation, see section [3.1.4.2](#). This complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.52.

```
<xs:complexType name="m:GetRoomsResponseMessageType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
      <xs:sequence>
        <xs:element name="Rooms"
          type="t:ArrayOfRoomsType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **GetRoomsResponseMessageType** complex type.

Element name	Type	Description
<b>Rooms</b>	<b>t:ArrayOfRoomsType</b> (section <a href="#">3.1.4.2.3.3</a> )	Specifies a collection of rooms that belong to the requested room list.

### 3.1.4.2.3.2 m:GetRoomsType Complex Type

The **GetRoomsType** complex type specifies a request to retrieve the collection rooms within a particular room list. This complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.3.14.

```
<xs:complexType name="GetRoomsType"
  mixed="false"
>
  <xs:complexContent
    mixed="false"
  >
    <xs:extension
      base="m:BaseRequestType"
    >
      <xs:sequence>
        <xs:element name="RoomList"
          type="t:EmailAddressType"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **GetRoomsType** complex type.

Element name	Type	Description
<b>RoomList</b>	<b>t:EmailAddressType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.25)	Specifies the requested room list.

### 3.1.4.2.3.3 t:ArrayOfRoomsType Complex Type

The **ArrayOfRoomsType** complex type specifies the collection of rooms that belong to the requested room list.

```
<xs:complexType name="t:ArrayOfRoomsType">
  <xs:sequence>
    <xs:element name="Room"
      type="t:RoomType"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child element of the **ArrayOfRoomsType** complex type.

Element	Type	Description
<b>Room</b>	<b>t:RoomType</b> (section <a href="#">3.1.4.2.3.5</a> )	Specifies the name and e-mail address of a room.

### 3.1.4.2.3.4 t:DirectoryEntryType Complex Type

The **DirectoryEntryType** complex type specifies the item identifier for the e-mail address of a room.

```
<xs:complexType name="DirectoryEntryType">
  <xs:sequence>
    <xs:element name="Id"
      type="t:EmailAddressType"
      minOccurs="0"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child element of the **DirectoryEntryType** complex type.

Element	Type	Description
<b>Id</b>	<b>t:EmailAddressType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.25)	Specifies the item identifier for the e-mail address of a room.

### 3.1.4.2.3.5 t:RoomType Complex Type

The **RoomType** complex type specifies the name and e-mail address of a room. This complex type extends the **DirectoryEntryType** complex type, as specified in section [3.1.4.2.3.4](#).

```
<xs:complexType name="t:RoomType">
  <xs:complexContent>
    <xs:extension
      base="t:DirectoryEntryType"
    />
  </xs:complexContent>
</xs:complexType>
```

## 3.1.5 Timer Events

None.

## 3.1.6 Other Local Events

None.

## 4 Protocol Examples

### 4.1 Getting Room Lists

The following example demonstrates a client request to retrieve a collection of all room lists in the organization, and the server response. In this example, there is only one room list in the organization.

Request:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
  <soap:Header>
    <t:RequestServerVersion Version="Exchange2010_SP1"/>
  </soap:Header>
  <soap:Body>
    <m:GetRoomLists />
  </soap:Body>
</soap:Envelope>
```

Response:

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="14" MinorVersion="1" MajorBuildNumber="164"
      MinorBuildNumber="0" Version="Exchange2010_SP1"
      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"/>
    </s:Header>
    <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema">
      <GetRoomListsResponse ResponseClass="Success"
        xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
        <ResponseCode>NoError</ResponseCode>
        <m:RoomLists xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
          <t:Address xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
            <t:Name>Room List</t:Name>
            <t:EmailAddress>RoomList@contoso.com</t:EmailAddress>
            <t:RoutingType>SMTP</t:RoutingType>
            <t:MailboxType>PublicDL</t:MailboxType>
          </t:Address>
        </m:RoomLists>
      </GetRoomListsResponse>
    </s:Body>
  </s:Envelope>
```

## 4.2 Getting Rooms within a Room List

The following example demonstrates a client request to retrieve a collection of the rooms in the specified room list, and the server response. In this example, there are two rooms in the specified room list.

Request:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
  <soap:Header>
    <t:RequestServerVersion Version="Exchange2010_SP1"/>
  </soap:Header>
  <soap:Body>
    <m:GetRooms>
      <m:RoomList>
        <t:EmailAddress>RoomList@contoso.com</t:EmailAddress>
      </m:RoomList>
    </m:GetRooms>
  </soap:Body>
</s:Envelope>
```

Response:

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="14" MinorVersion="1" MajorBuildNumber="164"
      MinorBuildNumber="0" Version="Exchange2010_SP1"
      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <GetRoomsResponse ResponseClass="Success"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <ResponseCode>NoError</ResponseCode>
      <m:Rooms xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
        <t:Room xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
          <t:Id>
            <t:Name>Room01</t:Name>
            <t:EmailAddress>Room01@contoso.com</t:EmailAddress>
            <t:RoutingType>SMTP</t:RoutingType>
            <t:MailboxType>Mailbox</t:MailboxType>
          </t:Id>
        </t:Room>
        <t:Room xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
          <t:Id>
            <t:Name>Room02</t:Name>
            <t:EmailAddress>Room02@contoso.com</t:EmailAddress>
            <t:RoutingType>SMTP</t:RoutingType>
            <t:MailboxType>Mailbox</t:MailboxType>
          </t:Id>
        </t:Room>
      </m:Rooms>
    </GetRoomsResponse>
  </s:Body>
</s:Envelope>
```

```
</t:Room>  
</m:Rooms>  
</GetRoomsResponse>  
</s:Body>  
</s:Envelope>
```

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.



## 6 Appendix A: Full WSDL

The XML files that are listed in the following table are required in order to implement the functionality specified in this document.

File name	Description	Section
MS-OXWSGTRM.wsdl	Contains the WSDL for the implementation of this protocol.	<a href="#">6</a>
MS-OXWSGTRM-messages.xsd	Contains the XML schema message definitions that are used in this protocol.	<a href="#">7.1</a>
MS-OXWSGTRM-types.xsd	Contains the XML schema type definitions that are used in this protocol.	<a href="#">7.2</a>

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSGTRM-types.xsd or MS-OXWSGTRM-messages.xsd schemas have to be placed in the common folder with these files.

This section contains the contents of the MS-OXWSGTRM.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:s="http://www.w3.org/2001/XMLSchema" xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <wsdl:types>
    <xs:schema id="messages" elementFormDefault="qualified" version="Exchange2010"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <xs:import
namespace="http://schemas.microsoft.com/exchange/services/2006/types"/>
      <xs:include schemaLocation="MS-OXWSGTRM-messages.xsd"/>
    </xs:schema>
    <xs:schema id="types" elementFormDefault="qualified" version="Exchange2010"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
      <!-- Add global elements and types from types.xsd -->
    </xs:schema>
  </wsdl:types>
  <wsdl:portType name="ExchangeServicePortType">
    <wsdl:operation name="GetRoomLists">
      <wsdl:input message="tns:GetRoomListsSoapIn"/>
      <wsdl:output message="tns:GetRoomListsSoapOut"/>
    </wsdl:operation>
    <wsdl:operation name="GetRooms">
      <wsdl:input message="tns:GetRoomsSoapIn"/>
      <wsdl:output message="tns:GetRoomsSoapOut"/>
    </wsdl:operation>
  </wsdl:portType>
```

```

    <wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
      <wsdl:documentation>
        <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0"
xmlns:wsi="http://ws-i.org/schemas/conformanceClaim/" />
      </wsdl:documentation>
      <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http" />
      <wsdl:operation name="GetRoomLists">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetRoomLists" />
        <wsdl:input>
          <soap:body parts="GetRoomListsRequest" use="literal" />
          <soap:header message="tns:GetRoomListsSoapIn" part="Impersonation"
use="literal" />
          <soap:header message="tns:GetRoomListsSoapIn" part="MailboxCulture"
use="literal" />
          <soap:header message="tns:GetRoomListsSoapIn" part="RequestVersion"
use="literal" />
        </wsdl:input>
        <wsdl:output>
          <soap:body parts="GetRoomListsResult" use="literal" />
          <soap:header message="tns:GetRoomListsSoapOut" part="ServerVersion"
use="literal" />
        </wsdl:output>
      </wsdl:operation>
      <wsdl:operation name="GetRooms">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetRooms" />
        <wsdl:input>
          <soap:body parts="GetRoomsRequest" use="literal" />
          <soap:header message="tns:GetRoomsSoapIn" part="Impersonation"
use="literal" />
          <soap:header message="tns:GetRoomsSoapIn" part="MailboxCulture"
use="literal" />
          <soap:header message="tns:GetRoomsSoapIn" part="RequestVersion"
use="literal" />
        </wsdl:input>
        <wsdl:output>
          <soap:body parts="GetRoomsResult" use="literal" />
          <soap:header message="tns:GetRoomsSoapOut" part="ServerVersion"
use="literal" />
        </wsdl:output>
      </wsdl:operation>
    </wsdl:binding>
    <wsdl:message name="GetRoomListsSoapIn">
      <wsdl:part name="GetRoomListsRequest" element="tns:GetRoomLists" />
      <wsdl:part name="Impersonation" element="t:ExchangeImpersonation" />
      <wsdl:part name="MailboxCulture" element="t:MailboxCulture" />
      <wsdl:part name="RequestVersion" element="t:RequestServerVersion" />
    </wsdl:message>
    <wsdl:message name="GetRoomListsSoapOut">
      <wsdl:part name="GetRoomListsResult" element="tns:GetRoomListsResponse" />
      <wsdl:part name="ServerVersion" element="t:ServerVersionInfo" />
    </wsdl:message>
    <wsdl:message name="GetRoomsSoapIn">
      <wsdl:part name="GetRoomsRequest" element="tns:GetRooms" />
      <wsdl:part name="Impersonation" element="t:ExchangeImpersonation" />
      <wsdl:part name="MailboxCulture" element="t:MailboxCulture" />
      <wsdl:part name="RequestVersion" element="t:RequestServerVersion" />
    </wsdl:message>
    <wsdl:message name="GetRoomsSoapOut">

```

```
        <wsdl:part name="GetRoomsResult" element="tns:GetRoomsResponse"/>
        <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
</wsdl:definitions>
```

## 7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
Messages schema	m:	<a href="#">7.1</a>
Types schema	t:	<a href="#">7.2</a>

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSGTRM-types.xsd or MS-OXWSGTRM-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

### 7.1 Messages Schema

This section contains the contents of the MS-OXWSGTRM-messages.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSGTRM-messages.xsd includes the file listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-messages.xsd	<a href="#">[MS-OXWSCDATA]</a> section 7.1

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
  elementFormDefault="qualified" version="Exchange2010" id="messages">
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
    schemaLocation="MS-OXWSGTRM-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:complexType name="GetRoomListsType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetRoomLists" type="m:GetRoomListsType"/>
  <xs:complexType name="GetRoomListsResponseMessageType">
    <xs:complexContent>
      <xs:extension base="m:ResponseMessageType">
        <xs:sequence>
          <xs:element name="RoomLists" type="t:ArrayOfEmailAddressesType"
            minOccurs="0"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="GetRoomListsResponse" type="m:GetRoomListsResponseMessageType"/>
  <xs:complexType name="GetRoomsType" mixed="false">
    <xs:complexContent mixed="false">
```

```

        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="RoomList" type="t:EmailAddressType"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetRooms" type="m:GetRoomsType"/>
<xs:complexType name="GetRoomsResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ResponseMessageType">
            <xs:sequence>
                <xs:element name="Rooms" type="t:ArrayOfRoomsType" minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetRoomsResponse" type="m:GetRoomsResponseMessageType"/>
</xs:schema>

```

## 7.2 Types Schema

This section contains the contents of the MS-OXWSGTRM-types.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSGTRM-types.xsd includes the file listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-types.xsd	<a href="#">[MS-OXWSCORE]</a> section 7.2

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2010" id="types">
    <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    <xs:include schemaLocation="MS-OXWSCORE-types.xsd"/>
    <xs:complexType name="DirectoryEntryType">
        <xs:sequence>
            <xs:element name="Id" type="t:EmailAddressType" minOccurs="0"/>
        </xs:sequence>
    </xs:complexType>
    <xs:complexType name="RoomType">
        <xs:complexContent>
            <xs:extension base="t:DirectoryEntryType"/>
        </xs:complexContent>
    </xs:complexType>
    <xs:complexType name="ArrayOfRoomsType">
        <xs:sequence>
            <xs:element name="Room" type="t:RoomType" minOccurs="0"
maxOccurs="unbounded"/>

```

```
        </xs:sequence>
    </xs:complexType>
</xs:schema>
```

## 8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2010

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 9 Change Tracking

This section identifies changes that were made to the [MS-OXWSGTRM] protocol document between the August 2011 and October 2011 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.



- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">1 Introduction</a>	Added information about which sections of the specification are normative and can contain RFC 2119 language.	Y	Content updated.
<a href="#">1 Introduction</a>	Revised the introductory paragraph to state the purpose of the protocol.	N	Content updated.
<a href="#">1.3 Overview</a>	Updated content to include a basic usage scenario for this protocol.	N	Content updated.
<a href="#">1.4 Relationship to Other Protocols</a>	Updated content to describe this protocol's relationship to [MS-OXWSADISC], [MS-OXDSCLI], [SOAP1.1], [XMLSCHEMA1], [XMLSCHEMA2], and [RFC2616].	Y	Content updated.
<a href="#">1.5 Prerequisites/Preconditions</a>	Added information about the requirement to include the correct endpoint (4) in HTTP Web requests that target this protocol.	Y	New content added.
<a href="#">1.7 Versioning and Capability Negotiation</a>	Removed the link to the glossary from the word "messages".	N	Content updated.
<a href="#">1.7 Versioning and Capability Negotiation</a>	Updated content to add a reference to [SOAP1.1].	N	Content updated.
<a href="#">1.7 Versioning and Capability Negotiation</a>	Updated content to add information about how the version of the request	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
	and the version of the server are identified.		
<a href="#">2.1 Transport</a>	Added information about support for HTTP and HTTPS.	N	New content added.
<a href="#">2.2.1 Namespaces</a>	Updated table to remove content from Reference column for namespaces that are defined in this document.	N	Content updated.
<a href="#">2.2.1 Namespaces</a>	Updated the reference for table entry with Prefix "s".	N	Content updated.
<a href="#">2.2.1 Namespaces</a>	Added new namespace entries for Prefixes "m" and "xs".	N	New content added.
<a href="#">3.1 ExchangeServicePortType Server Details</a>	Updated content to remove information about operations that are specified elsewhere in the document.	N	Content updated.
<a href="#">3.1.1 Abstract Data Model</a>	Added "None" to indicate that content is not applicable in this section.	N	Content updated.
<a href="#">3.1.4.1 GetRoomLists Operation</a>	Updated content to include the WSDL port type specification and the WSDL binding specification for the operation.	Y	Content updated.
<a href="#">3.1.4.1.1 Messages</a>	Updated the description of the GetRoomListsSoapIn message and the GetRoomListsSoapOut message.	N	Content updated.
<a href="#">3.1.4.1.1.1 tns:GetRoomListsSoapIn Message</a>	Updated content to add a description of the GetRoomListsSoapIn message, specify the syntax that shows the message parts, and specify the SOAP action.	Y	New content added.
<a href="#">3.1.4.1.1.1 tns:GetRoomListsSoapIn Message</a>	Updated the description of each part listed in the table.	N	Content updated.
<a href="#">3.1.4.1.1.2 tns:GetRoomListsSoapOut Message</a>	Updated content to add a description of the GetRoomListsSoapOut message, specify the syntax that shows the message parts, and specify the SOAP action.	Y	New content added.
<a href="#">3.1.4.1.1.2 tns:GetRoomListsSoapOut Message</a>	Updated the description of each part listed in the table.	N	Content updated.
<a href="#">3.1.4.1.2 Elements</a>	Updated the description of each element listed in the table.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">3.1.4.1.2.1</a> <a href="#">m:GetRoomLists Element</a>	Updated the section name to include namespace prefix.	N	Content updated.
<a href="#">3.1.4.1.2.1</a> <a href="#">m:GetRoomLists Element</a>	Updated the element description.	N	Content updated.
<a href="#">3.1.4.1.2.2</a> <a href="#">m:GetRoomListsResponse Element</a>	Updated the section name to include namespace prefix.	N	Content updated.
<a href="#">3.1.4.1.2.2</a> <a href="#">m:GetRoomListsResponse Element</a>	Updated the element description.	N	Content updated.
<a href="#">3.1.4.1.3</a> <a href="#">Complex Types</a>	Updated the description of each complex type listed in the table.	N	Content updated.
<a href="#">3.1.4.1.3.1</a> <a href="#">m:GetRoomListsResponseMessageType</a> <a href="#">Complex Type</a>	Updated the description of the complex type.	N	Content updated.
<a href="#">3.1.4.1.3.2</a> <a href="#">m:GetRoomListsType</a> <a href="#">Complex Type</a>	Updated the description of the complex type.	N	Content updated.
<a href="#">3.1.4.2</a> <a href="#">GetRooms Operation</a>	Updated content to include the WSDL port type specification and the WSDL binding specification for the operation.	Y	Content updated.
<a href="#">3.1.4.2.1</a> <a href="#">Messages</a>	Updated the description of the GetRoomsSoapIn message and the GetRoomsSoapOut message.	N	Content updated.
<a href="#">3.1.4.2.1.1</a> <a href="#">tns:GetRoomsSoapIn Message</a>	Updated content to add a description of the GetRoomsSoapIn message, specify the syntax that shows the message parts, and specify the SOAP action.	Y	New content added.
<a href="#">3.1.4.2.1.1</a> <a href="#">tns:GetRoomsSoapIn Message</a>	Updated the description of each part listed in the table.	N	Content updated.
<a href="#">3.1.4.2.1.2</a> <a href="#">tns:GetRoomsSoapOut Message</a>	Updated content to add a description of the GetRoomsSoapOut message, specify the syntax that shows the message parts, and specify the SOAP action.	Y	New content added.
<a href="#">3.1.4.2.1.2</a> <a href="#">tns:GetRoomsSoapOut Message</a>	Updated the description of each part listed in the table.	N	Content updated.
<a href="#">3.1.4.2.2</a> <a href="#">Elements</a>	Updated the description of each element listed in the table.	N	Content updated.
<a href="#">3.1.4.2.2.1</a> <a href="#">tns:GetRooms Element</a>	Updated the element description.	N	Content updated.
<a href="#">3.1.4.2.2.2</a>	Updated the element description.	N	Content

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">tns:GetRoomsResponse Element</a>			updated.
<a href="#">3.1.4.2.3 Complex Types</a>	Removed the link to the glossary from the word "identifier".	N	Content updated.
<a href="#">3.1.4.2.3 Complex Types</a>	Updated the description of each complex type listed in the table.	N	Content updated.
<a href="#">3.1.4.2.3.1 m:GetRoomsResponseMessageType Complex Type</a>	Updated the description of the complex type.	N	Content updated.
<a href="#">3.1.4.2.3.1 m:GetRoomsResponseMessageType Complex Type</a>	Updated the complex type definition to add the name attribute to the xs:complexType element.	N	Content updated.
<a href="#">3.1.4.2.3.2 m:GetRoomsType Complex Type</a>	Updated the description of the complex type.	N	Content updated.
<a href="#">3.1.4.2.3.3 t:ArrayOfRoomsType Complex Type</a>	Updated the description of the complex type.	N	Content updated.
<a href="#">3.1.4.2.3.5 t:RoomType Complex Type</a>	Updated the description of the complex type.	N	Content updated.
<a href="#">4.1 Getting Room Lists</a>	Added a section to demonstrate the XML request and response for the GetRoomLists operation.	N	New content added.
<a href="#">4.2 Getting Rooms within a Room List</a>	Added a section to demonstrate the XML request and response for the GetRooms operation.	N	New content added.
<a href="#">5.1 Security Considerations for Implementers</a>	Added "None" to indicate that content is not applicable in this section.	N	Content updated.
<a href="#">6 Appendix A: Full WSDL</a>	Removed the link to the glossary from the word "folder".	N	Content updated.
<a href="#">6 Appendix A: Full WSDL</a>	Moved the contents of the MS-OXWSGTRM.wsdl file from the WSDL section.	N	Content updated.
<a href="#">6 Appendix A: Full WSDL</a>	Moved the Messages Schema section to the Appendix B: Full XML Schema section.	N	Content updated.
<a href="#">6 Appendix A: Full WSDL</a>	Moved the Types Schema section to the Appendix B: Full XML Schema section.	N	Content updated.
<a href="#">7 Appendix B: Full XML Schema</a>	Moved the Types Schema section from the Appendix A: Full WSDL section.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">Z</a> <a href="#">Appendix B: Full XML Schema</a>	Moved the Messages Schema section from the Appendix A: Full WSDL section.	N	Content updated.
<a href="#">Z</a> <a href="#">Appendix B: Full XML Schema</a>	Added a section that specifies the full XML schema for this protocol.	N	New content added.
<a href="#">Z.1</a> <a href="#">Messages Schema</a>	Updated the table's introductory text to change the file name "MS-OXWSGTRM-types.xsd" to "MS-OXWSGTRM-messages.xsd".	N	Content updated.

## 10 Index

### A

Abstract data model  
    [server](#) 11  
[Applicability](#) 7  
[Attribute groups](#) 10  
[Attributes](#) 10

### C

[Capability negotiation](#) 7  
[Change tracking](#) 32  
[Complex types](#) 9

### D

Data model - abstract  
    [server](#) 11

### E

Events  
    [local - server](#) 20  
    [timer - server](#) 20

### F

[Fields - vendor-extensible](#) 7  
[Full WSDL](#) 25

### G

[Glossary](#) 5  
[Groups](#) 10

### I

[Implementer - security considerations](#) 24  
[Index of security parameters](#) 24  
[Informative references](#) 6  
Initialization  
    [server](#) 11  
[Introduction](#) 5

### L

Local events  
    [server](#) 20

### M

Message processing  
    [server](#) 11  
Messages  
    [attribute groups](#) 10  
    [attributes](#) 10  
    [complex types](#) 9  
    [elements](#) 9

[enumerated](#) 9  
    [groups](#) 10  
    [namespaces](#) 9  
    [simple types](#) 10  
    [syntax](#) 9  
    [transport](#) 9

### N

[Namespaces](#) 9  
[Normative references](#) 5

### O

Operations  
    [GetRoomLists Operation](#) 11  
    [GetRooms Operation](#) 15  
    [Overview \(synopsis\)](#) 6

### P

[Parameters - security index](#) 24  
[Preconditions](#) 7  
[Prerequisites](#) 7  
[Product behavior](#) 31

### R

References  
    [informative](#) 6  
    [normative](#) 5  
[Relationship to other protocols](#) 6

### S

Security  
    [implementer considerations](#) 24  
    [parameter index](#) 24  
Sequencing rules  
    [server](#) 11  
Server  
    [abstract data model](#) 11  
    [GetRoomLists Operation operation](#) 11  
    [GetRooms Operation operation](#) 15  
    [initialization](#) 11  
    [local events](#) 20  
    [message processing](#) 11  
    [sequencing rules](#) 11  
    [timer events](#) 20  
    [timers](#) 11  
    [Simple types](#) 10  
    [Standards assignments](#) 8  
Syntax  
    [messages - overview](#) 9

### T

Timer events

[server](#) 20  
Timers  
[server](#) 11  
[Tracking changes](#) 32  
[Transport](#) 9  
Types  
[complex](#) 9  
[simple](#) 10

## **V**

[Vendor-extensible fields](#) 7  
[Versioning](#) 7

## **W**

[WSDL](#) 25