

# [MS-OXWSSRCH]: Mailbox Search Web Service Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
07/15/2009	1.0	Major	Initial Availability.
11/04/2009	1.1.0	Minor	Updated the technical content.
02/10/2010	1.1.0	None	Version 1.1.0 release
05/05/2010	1.1.1	Editorial	Revised and edited the technical content.
08/04/2010	2.0	Major	Significantly changed the technical content.
11/03/2010	2.1	Minor	Clarified the meaning of the technical content.
03/18/2011	3.0	Major	Significantly changed the technical content.
08/05/2011	4.0	Major	Significantly changed the technical content.
10/07/2011	5.0	Major	Significantly changed the technical content.
01/20/2012	6.0	Major	Significantly changed the technical content.
04/27/2012	6.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	7.0	Major	Significantly changed the technical content.
10/08/2012	8.0	Major	Significantly changed the technical content.
02/11/2013	8.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/26/2013	8.1	Minor	Clarified the meaning of the technical content.
11/18/2013	8.2	Minor	Clarified the meaning of the technical content.
02/10/2014	8.2	No change	No changes to the meaning, language, or formatting of the technical content.

# Table of Contents

<b>1 Introduction</b>	<b>6</b>
1.1 Glossary	6
1.2 References	6
1.2.1 Normative References	7
1.2.2 Informative References	8
1.3 Overview	8
1.4 Relationship to Other Protocols	8
1.5 Prerequisites/Preconditions	9
1.6 Applicability Statement	9
1.7 Versioning and Capability Negotiation	9
1.8 Vendor-Extensible Fields	9
1.9 Standards Assignments	9
<b>2 Messages</b>	<b>10</b>
2.1 Transport	10
2.2 Common Message Syntax	10
2.2.1 Namespaces	10
2.2.2 Messages	10
2.2.3 Elements	10
2.2.3.1 tns:And Element	11
2.2.3.2 tns:Contains Element	12
2.2.3.3 tns:Excludes Element	12
2.2.3.4 tns:Exists Element	12
2.2.3.5 tns:IsEqualTo Element	12
2.2.3.6 tns:IsGreaterThan Element	12
2.2.3.7 tns:IsGreaterThanOrEqualTo Element	13
2.2.3.8 tns:IsLessThan Element	13
2.2.3.9 tns:IsLessThanOrEqualTo Element	13
2.2.3.10 tns:IsNotEqualTo Element	13
2.2.3.11 tns:Not Element	13
2.2.3.12 tns:Or Element	14
2.2.3.13 tns:SearchExpression Element	14
2.2.4 Complex Types	14
2.2.4.1 m:FindFolderResponseMessageType Complex Type	16
2.2.4.2 m:FindItemResponseMessageType Complex Type	16
2.2.4.3 t:AndType Complex Type	17
2.2.4.4 t:ArrayOfGroupedItemsType Complex Type	17
2.2.4.5 t:BasePagingType Complex Type	18
2.2.4.6 t:ContainsExpressionType Complex Type	18
2.2.4.7 t:ExcludesType Complex Type	19
2.2.4.8 t:ExcludesValueType Complex Type	20
2.2.4.9 t:ExistsType Complex Type	20
2.2.4.10 t:FindFolderParentType Complex Type	21
2.2.4.11 t:FindItemParentType Complex Type	21
2.2.4.12 t:FractionalPageViewType Complex Type	22
2.2.4.13 t:GroupedItemsType Complex Type	23
2.2.4.14 t:IndexedPageViewType Complex Type	23
2.2.4.15 t:IsEqualToType Complex Type	24
2.2.4.16 t:IsGreaterThanOrEqualToType Complex Type	24
2.2.4.17 t:IsGreaterThanType Complex Type	25

2.2.4.18	t:IsLessThanOrEqualToType Complex Type	25
2.2.4.19	t:IsLessThanType Complex Type	25
2.2.4.20	t:IsNotEqualToType Complex Type	25
2.2.4.21	t:MultipleOperandBooleanExpressionType Complex Type	26
2.2.4.22	t:NotType Complex Type	26
2.2.4.23	t:OrType Complex Type	27
2.2.4.24	t:RestrictionType Complex Type	27
2.2.4.25	t:SearchExpressionType Complex Type	28
2.2.4.26	t:SearchFolderType Complex Type	28
2.2.4.27	t:SearchParametersType Complex Type	28
2.2.4.28	t:SeekToConditionPageViewType Complex Type	29
2.2.4.29	t:TwoOperandExpressionType Complex Type	30
2.2.4.30	m:QueryStringType Complex Type	31
2.2.5	Simple Types	31
2.2.5.1	t:ContainmentComparisonType Simple Type	31
2.2.5.2	t:ContainmentModeType Simple Type	32
2.2.5.3	t:FolderQueryTraversalType Simple Type	33
2.2.5.4	t:IndexBasePointType Simple Type	34
2.2.5.5	t:ItemQueryTraversalType Simple Type	34
2.2.5.6	t:SearchFolderTraversalType Simple Type	35
2.2.6	Attributes	35
2.2.7	Groups	36
2.2.8	Attribute Groups	36

**3 Protocol Details ..... 37**

3.1	ExchangeServicePortType Server Details	37
3.1.1	Abstract Data Model	37
3.1.2	Timers	37
3.1.3	Initialization	37
3.1.4	Message Processing Events and Sequencing Rules	37
3.1.4.1	FindFolder Operation	37
3.1.4.1.1	Messages	38
3.1.4.1.1.1	tns:FindFolderSoapIn Message	38
3.1.4.1.1.2	tns:FindFolderSoapOut Message	39
3.1.4.1.2	Elements	39
3.1.4.1.2.1	tns:FindFolder Element	39
3.1.4.1.2.2	tns:FindFolderResponse Element	40
3.1.4.1.3	Complex Types	40
3.1.4.1.3.1	m:FindFolderResponseType Complex Type	40
3.1.4.1.3.2	m:FindFolderType Complex Type	40
3.1.4.2	FindItem Operation	42
3.1.4.2.1	Messages	42
3.1.4.2.1.1	tns:FindItemSoapIn Message	43
3.1.4.2.1.2	tns:FindItemSoapOut Message	43
3.1.4.2.2	Elements	44
3.1.4.2.2.1	tns:FindItem Element	44
3.1.4.2.2.2	tns:FindItemResponse Element	44
3.1.4.2.3	Complex Types	44
3.1.4.2.3.1	m:FindItemResponseType Complex Type	45
3.1.4.2.3.2	m:FindItemType Complex Type	45
3.1.4.2.3.3	t:AggregateOnType Complex Type	48
3.1.4.2.3.4	t:BaseGroupByType Complex Type	49
3.1.4.2.3.5	t:DistinguishedGroupByType Complex Type	50

3.1.4.2.3.6	t:FieldOrderType Complex Type .....	50
3.1.4.2.3.7	t:GroupByType Complex Type .....	51
3.1.4.2.3.8	t:NonEmptyArrayOfFieldOrdersType Complex Type .....	52
3.1.4.2.4	Simple Types .....	52
3.1.4.2.4.1	t:AggregateType Simple Type .....	52
3.1.4.2.4.2	t:SortDirectionType Simple Type .....	53
3.1.4.2.4.3	t:StandardGroupByType Simple Type .....	53
3.1.5	Timer Events .....	54
3.1.6	Other Local Events .....	54
<b>4</b>	<b>Protocol Examples .....</b>	<b>55</b>
<b>5</b>	<b>Security .....</b>	<b>56</b>
5.1	Security Considerations for Implementers .....	56
5.2	Index of Security Parameters .....	56
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>57</b>
<b>7</b>	<b>Appendix B: Full XML Schema .....</b>	<b>60</b>
7.1	Messages Schema .....	60
7.2	Types Schema .....	62
<b>8</b>	<b>Appendix C: Product Behavior .....</b>	<b>68</b>
<b>9</b>	<b>Change Tracking .....</b>	<b>69</b>
<b>10</b>	<b>Index .....</b>	<b>70</b>

# 1 Introduction

The Mailbox Search Web Service Protocol is used to search the contents of a server and return items and groups of items.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- SOAP**
- SOAP action**
- SOAP body**
- SOAP header**
- SOAP message**
- XML namespace**

The following terms are defined in [\[MS-OXGLOS\]](#):

- Deleted Items folder**
- endpoint**
- mailbox**
- message store**
- Root folder**
- search folder**
- Uniform Resource Identifier (URI)**
- Uniform Resource Locator (URL)**
- web server**
- Web Services Description Language (WSDL)**
- WSDL message**
- WSDL port type**
- XML schema**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

## 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCONT] Microsoft Corporation, "[Contacts Web Service Protocol](#)".

[MS-OXWSDLIST] Microsoft Corporation, "[Distribution List Creation and Usage Web Service Protocol](#)".

[MS-OXWSFOLD] Microsoft Corporation, "[Folders and Folder Permissions Web Service Protocol](#)".

[MS-OXWSGTZ] Microsoft Corporation, "[Get Server Time Zone Web Service Protocol](#)".

[MS-OXWSMSG] Microsoft Corporation, "[Email Message Types Web Service Protocol](#)".

[MS-OXWSMTGS] Microsoft Corporation, "[Calendaring Web Service Protocol](#)".

[MS-OXWSPOST] Microsoft Corporation, "[Post Items Web Service Protocol](#)".

[MS-OXWSTASK] Microsoft Corporation, "[Tasks Web Service Protocol](#)".

[MS-OXWSXPROP] Microsoft Corporation, "[Extended Properties Structure](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Language", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[WSIBASIC] Ballinger, K., Ehnebuske, D., Gudgin, M., et al., Eds., "Basic Profile Version 1.0", Final Material, April 2004, <http://www.ws-i.org/Profiles/BasicProfile-1.0-2004-04-16.html>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA0] Fallside, D., and Walmsley, P., Eds., "XML Schema Part 0: Primer, Second Edition", W3C Recommendation, October 2004, <http://www.w3.org/TR/2004/REC-xmlschema-0-20041028/>

[XMLSCHEMA1] Thompson, H.S., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

## 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OXDCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

[MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol](#)".

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

## 1.3 Overview


This protocol provides clients with operations that enable them to search the contents of a server **message store** and to return the results of that search.

## 1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDCLI\]](#), to identify the target **endpoint (4)** to use for each operation.

This protocol uses the SOAP Protocol, as described in [\[SOAP1.1\]](#), to describe the structure information that is exchanged between the client and server. This protocol uses the XML Protocol, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content that is sent to and from the server.

This protocol uses the **Simple Object Access Protocol (SOAP)** over the **Hypertext Transfer Protocol (HTTP)**, as described in [\[RFC2616\]](#), and SOAP over the **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

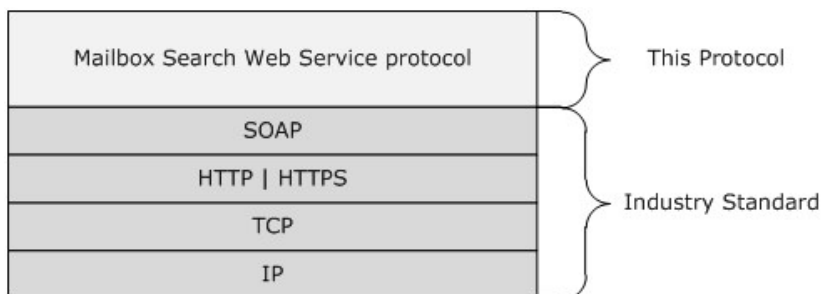

**Figure 1: This protocol in relation to other protocols**

This protocol specifies searches that identify items in the server message store. After the item identifier is returned, one of the following protocols is used to return the information from the message store:

- Folders and Folder Permissions Web Service Protocol, as described in [\[MS-OXWSFOLD\]](#)



- Email Message Types Web Service Protocol, as described in [\[MS-OXWSMSG\]](#)
- Calendaring Web Service Protocol, as described in [\[MS-OXWSMTGS\]](#)
- Post Items Web Service Protocol, as described in [\[MS-OXWSPOST\]](#)
- Tasks Web Service Protocol, as described in [\[MS-OXWSTASK\]](#)

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

## 1.5 Prerequisites/Preconditions

The endpoint (4) **URL** that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), is required to form the HTTP request to the Web server that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint (4) is identified in the HTTP Web requests that target this protocol.

## 1.6 Applicability Statement

This protocol is applicable to client applications that search the contents of the server message store.

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses multiple transports with SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol specifies only one **WSDL port type** version. The WSDL version of the request is identified by using the **RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.3.9, and the version of the server responding to the request is identified by using the **ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.3.10.
- **Security and Authentication Methods:** This protocol relies on the Web server that is hosting it to perform authentication.
- **Localization:** This protocol includes text strings in various messages. Localization considerations for such strings are specified in section [3.1.4](#).
- **Capability Negotiation:** This protocol does not support version negotiation.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The **WSDL** in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

### 2.1 Transport

The SOAP version that is supported is SOAP 1.1. For details, see [\[SOAP1.1\]](#).

This protocol relies on the **web server** that hosts the application to perform authentication. The protocol SHOULD use secure communications via HTTPS, as defined in [\[RFC2818\]](#).

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and Web Services Description Language (WSDL), as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific XML namespace prefix with each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and is not significant for interoperability.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/exchange/services/2006/messages">http://schemas.microsoft.com/exchange/services/2006/messages</a>	
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
wsi	<a href="http://ws-i.org/schemas/conformanceClaim/">http://ws-i.org/schemas/conformanceClaim/</a>	<a href="#">[WSIBASIC]</a>
t	<a href="http://schemas.microsoft.com/exchange/services/2006/types">http://schemas.microsoft.com/exchange/services/2006/types</a>	
xs	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a> , <a href="#">[XMLSCHEMA2]</a>

#### 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

#### 2.2.3 Elements

The following table summarizes the set of common XML schema element definitions that are defined by this specification. XML schema element definitions that are specific to a particular operation are defined with the operation.

Element name	Description
<b>And</b>	Specifies a search expression that performs a Boolean <b>AND</b> operation between two or more search expressions.
<b>Contains</b>	Specifies a search expression that determines whether a given property contains the supplied constant string value.
<b>Excludes</b>	Specifies a search expression that performs a bitwise mask of the specified property and a supplied value.
<b>Exists</b>	Specifies a search expression that determines whether the specified property exists on an item.
<b>IsEqualTo</b>	Specifies a search expression that compares a property value with either a constant value or another property value and evaluates to true if the two are equal.
<b>IsGreaterThan</b>	Specifies a search expression that compares a property with either a constant value or another property value and evaluates to true if the first property is greater than the second.
<b>IsGreaterThanOrEqualTo</b>	Specifies a search expression that compares a property with either a constant value or another property and evaluates to true if the first property is greater than or equal to the second.
<b>IsLessThan</b>	Specifies a search expression that compares a property to either a constant value or another property and evaluates to true if the first property is less than the second.
<b>IsLessThanOrEqualTo</b>	Specifies a search expression that compares a property to either a constant value or another property and evaluates to true if the first property is less than or equal to the second.
<b>IsNotEqualTo</b>	Specifies a search expression that compares a property value with either a constant value or another property value and evaluates to true if the two are not the same.
<b>Not</b>	Specifies a search expression that negates the Boolean value of a search expression that it contains.
<b>Or</b>	Specifies a search expression that performs a Boolean <b>OR</b> operation on two or more search expressions.
<b>SearchExpression</b>	Specifies the base schema type for all search expressions. This type is abstract and will never occur directly within instance documents.

### 2.2.3.1 tns:And Element

The **And** element specifies a search expression that performs a Boolean **AND** operation between two or more search expressions. The **AND** operation evaluates to **TRUE** if all the search expressions that are contained within the **And** element are **TRUE**.

```
<xs:element name="And"
  type="t:AndType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.2 tns:Contains Element

The **Contains** element specifies a search expression that determines whether a given property contains the supplied constant string value.

```
<xs:element name="Contains"
  type="t:ContainsExpressionType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.3 tns:Excludes Element

The **Excludes** element specifies a search expression that performs a bitwise mask of the specified property and a supplied value.

```
<xs:element name="Excludes"
  type="t:ExcludesType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.4 tns:Exists Element

The **Exists** element specifies a search expression that determines whether the specified property exists on an item. The **Exists** element evaluates to true if the specified property exists on the item.

```
<xs:element name="Exists"
  type="t:ExistsType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.5 tns:IsEqualTo Element

The **IsEqualTo** element specifies a search expression that compares a property value with either a constant value or another property value and evaluates to true if they are equal.

```
<xs:element name="IsEqualTo"
  type="t:IsEqualToType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.6 tns:IsGreaterThan Element

The **IsGreaterThan** element specifies a search expression that compares a property with either a constant value or another property and evaluates to true if the first property is greater.

```
<xs:element name="IsGreaterThan"
  type="t:IsGreaterThanType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.7 tns:IsGreaterThanOrEqualTo Element

The **IsGreaterThanOrEqualTo** element specifies a search expression that compares a property with either a constant value or another property and evaluates to true if the first property is greater than or equal to the second.

```
<xs:element name="IsGreaterThanOrEqualTo"
  type="t:IsGreaterThanOrEqualToType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.8 tns:IsLessThan Element

The **IsLessThan** element specifies a search expression that compares a property to either a constant value or another property and evaluates to true if the first property is less than the second.

```
<xs:element name="IsLessThan"
  type="t:IsLessThanType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.9 tns:IsLessThanOrEqualTo Element

The **IsLessThanOrEqualTo** element specifies a search expression that compares a property to either a constant value or another property and evaluates to true if the first property is less than or equal to the second.

```
<xs:element name="IsLessThanOrEqualTo"
  type="t:IsLessThanOrEqualToType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.10 tns:IsNotEqualTo Element

The **IsNotEqualTo** element specifies a search expression that compares a property value with either a constant value or another property value and evaluates to true if they are not the same.

```
<xs:element name="IsNotEqualTo"
  type="t:IsNotEqualToType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.11 tns:Not Element

The **Not** element specifies a search expression that negates the Boolean value of a search expression that it contains.

```
<xs:element name="Not"
  type="t:NotType"
/>
```

### 2.2.3.12 tns:Or Element

The **Or** element specifies a search expression that performs a logical **OR** on the search expressions that it contains and evaluates to true if any of the search expressions evaluate to true.

```
<xs:element name="Or"
  type="t:OrType"
  substitutionGroup="t:SearchExpression"
/>
```

### 2.2.3.13 tns:SearchExpression Element

The **SearchExpression** element specifies the base schema type for all search expressions. This type is abstract and will never occur directly within instance documents. This type defines a substitution group.

```
<xs:element name="SearchExpression"
  type="t:SearchExpressionType"
/>
```

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions that are defined by this specification. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

Complex type name	Description
<b>FindFolderResponseMessageType</b>	Specifies the result body for the <b>FindFolder</b> operation (section <a href="#">3.1.4.1</a> ).
<b>FindItemResponseMessageType</b>	Specifies the result body from the <b>FindItem</b> operation (section <a href="#">3.1.4.2</a> ).
<b>AndType</b>	Specifies a search expression that performs a Boolean <b>AND</b> operation between two or more search expressions.
<b>ArrayOfGroupedItemsType</b>	Specifies an array of items that are returned by the <b>FindItem</b> operation.
<b>BasePagingType</b>	Specifies the base type for derived types that specify paged views.
<b>ContainsExpressionType</b>	Specifies a search expression that determines whether a given property contains the supplied constant string value.
<b>ExcludesType</b>	Specifies a bitwise mask of a property for an exclude search restriction.
<b>ExcludesValueType</b>	Specifies a hexadecimal or decimal mask for an exclude search restriction.

Complex type name	Description
<b>ExistsType</b>	Specifies a search restriction that resolves to true if the supplied property exists on an item.
<b>FindFolderParentType</b>	Specifies the results of searching a single <b>Root folder</b> .
<b>FindItemParentType</b>	Specifies the results of searching a single Root folder.
<b>FractionalPageViewType</b>	Specifies where a paged view starts and the maximum number of items that are returned.
<b>GroupedItemsType</b>	Specifies a collection of items that are the result of a grouped <b>FindItem</b> operation.
<b>IndexedPageViewType</b>	Specifies how paged item information is returned by the <b>FindItem</b> or the <b>FindFolder</b> operation.
<b>IsEqualToType</b>	Specifies a search expression that compares a property with either a constant value or another property and evaluates to "true" if they are equal.
<b>IsGreaterThanOrEqualToType</b>	Specifies a search expression that compares a property with either a constant value or another property and evaluates to "true" if the first property is greater than or equal to the second.
<b>IsGreaterThanType</b>	Specifies a search expression that compares a property with either a constant value or another property and returns "true" if the first property is greater.
<b>IsLessThanOrEqualToType</b>	Specifies a search expression that compares a property with either a constant value or another property and evaluates to true if the first property is less than or equal to the second.
<b>IsLessThanType</b>	Specifies a search expression that compares a property with either a constant value or another property and evaluates to true if the first property is less than the second.
<b>IsNotEqualToType</b>	Specifies a search expression that compares a property with either a constant value or another property and evaluates to true if the values are not the same.
<b>MultipleOperandBooleanExpressionType</b>	Specifies the base type for search expressions that are formed by two or more Boolean operands.
<b>NotType</b>	Specifies a search expression that negates the Boolean value of the search expression that it contains.
<b>OrType</b>	Specifies a search expression that performs a logical <b>OR</b> on the search expression that it contains.
<b>RestrictionType</b>	Specifies a search restriction or query for the <b>FindItem</b> operation or the <b>FindFolder</b> operation.
<b>SearchExpressionType</b>	Specifies the base type for all search expressions.
<b>SearchFolderType</b>	Specifies a representation of a <b>search folder (1)</b> that is contained in a <b>mailbox</b> .

Complex type name	Description
<b>SearchParametersType</b>	Specifies the search parameters that define the contents of a search folder (1).
<b>SeekToConditionPageViewType</b>	Specifies a condition that has to be met in order for an item to be included in the result set that is returned by the <b>FindItem</b> operation or the <b>FindFolder</b> operation. <1>
<b>TwoOperandExpressionType</b>	Specifies the base type for derived classes that represent a restriction that is formed by comparing two values against one another.
<b>QueryStringType</b>	Specifies a query string. <2>

### 2.2.4.1 m:FindFolderResponseType Complex Type

The **FindFolderResponseType** complex type specifies the response message for the **FindFolder** operation, as specified in section 3.1.4.1. The **FindFolderResponseType** complex type extends the **ResponseMessageType** complex type, as specified in [MS-OXWSCDATA] section 2.2.4.57.

```
<xs:complexType name="FindFolderResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
      <xs:sequence>
        <xs:element name="RootFolder" type="t:FindFolderParentType" minOccurs="0"
          />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **FindFolderResponseType** complex type.

Element name	Type	Description
<b>RootFolder</b>	<b>t:FindFolderParentType</b> (section 2.2.4.10)	Specifies an array of folders and paging information that is returned by the <b>FindFolder</b> operation.

### 2.2.4.2 m:FindItemResponseType Complex Type

The **FindItemResponseType** complex type specifies the result body from the **FindItem** operation, as specified in section 3.1.4.2. The **FindItemResponseType** complex type extends the **ResponseMessageType** complex type, as specified in [MS-OXWSCDATA] section 2.2.4.57.

```
<xs:complexType name="FindItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```



```

    >
    <xs:sequence>
      <xs:element name="RootFolder" type="t:FindFolderParentType" minOccurs="0"
        />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child element of the **FindItemResponseMessageType** complex type.

Element name	Type	Description
<b>RootFolder</b>	<b>t:FindFolderParentType</b> (section <a href="#">2.2.4.10</a> )	Specifies the Root folder of the response.

### 2.2.4.3 t:AndType Complex Type

The **AndType** complex type specifies a search expression that performs a Boolean **AND** operation between two or more search expressions. The result of the **AND** operation is **TRUE** if all the search expressions that are contained within the **AndType** complex type are true. The **AndType** complex type extends the **MultipleOperandBooleanExpressionType** complex type, as specified in section [2.2.4.21](#).

```

<xs:complexType name="AndType">
  <xs:complexContent>
    <xs:extension
      base="t:MultipleOperandBooleanExpressionType"
      />
  </xs:complexContent>
</xs:complexType>

```

### 2.2.4.4 t:ArrayOfGroupedItemsType Complex Type

The **ArrayOfGroupedItemsType** complex type specifies an array of items that are returned by the **FindItem** operation, as specified in section [3.1.4.2](#).

```

<xs:complexType name="ArrayOfGroupedItemsType">
  <xs:choice>
    <xs:element name="GroupedItems" type="t:GroupedItemsType" minOccurs="0"/>
  </xs:choice>
</xs:complexType>

```

The following table lists the child element of the **ArrayOfGroupedItemsType** complex type.

Element name	Type	Description
<b>GroupedItems</b>	<b>t:GroupedItemsType</b> (section <a href="#">2.2.4.13</a> )	Specifies an array of items that are returned by the <b>FindItem</b> operation.

### 2.2.4.5 t:BasePagingType Complex Type

The **BasePagingType** complex type specifies the base type for derived types that specify paged views.

```
<xs:complexType name="BasePagingType"
  abstract="true"
>
  <xs:attribute name="MaxEntriesReturned"
    type="xs:int"
    use="optional"
  />
</xs:complexType>
```

The following table lists the attribute definition for the **BasePagingType** complex type.

Attribute name	Type	Description
<b>MaxEntriesReturned</b>	<b>xs:int</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the maximum number of entries that are returned with each page of the response. This attribute can be specified.

### 2.2.4.6 t:ContainsExpressionType Complex Type

The **ContainsExpressionType** complex type specifies a search expression that determines whether a given property contains the supplied constant string value.

```
<xs:complexType name="ContainsExpressionType">
  <xs:complexContent>
    <xs:extension
      base="t:SearchExpressionType"
    >
      <xs:sequence>
        <xs:element
          ref="t:Path"
        />
        <xs:element name="Constant"
          type="t:ConstantValueType"
        />
      </xs:sequence>
      <xs:attribute name="ContainmentMode"
        type="t:ContainmentModeType"
        use="optional"
      />
      <xs:attribute name="ContainmentComparison"
        type="t:ContainmentComparisonType"
        use="optional"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **ContainsExpressionType** complex type.

Element name	Type	Description
<b>Path</b>	<b>t:Path</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.8)	Specifies the property to use in a <b>contains</b> search expression. The <b>Path</b> element specifies a substitution group, as specified in <a href="#">[XMLSCHEMA0]</a> . An element that is represented by the <b>Path</b> element <b>substitutionGroup</b> attribute MUST be present.
<b>Constant</b>	<b>t:ConstantValueType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.20)	Specifies a constant value for a search restriction.

The following table lists the attribute definitions for the **ContainsExpressionType** complex type.

Attribute name	Type	Description
<b>ContainmentMode</b>	<b>t:ContainmentModeType</b> (section <a href="#">2.2.5.2</a> )	Specifies the boundaries of a search.
<b>ContainmentComparison</b>	<b>t:ContainmentComparisonType</b> (section <a href="#">2.2.5.1</a> )	Specifies whether a search ignores cases and spaces.

### 2.2.4.7 t:ExcludesType Complex Type

The **ExcludesType** complex type specifies a bitwise mask of a property for an **exclude** search restriction.

```
<xs:complexType name="ExcludesType">
  <xs:complexContent>
    <xs:extension
      base="t:SearchExpressionType"
    >
      <xs:sequence>
        <xs:element
          ref="t:Path"
        />
        <xs:element name="Bitmask"
          type="t:ExcludesValueType"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **ExcludesType** complex type.

Element name	Type	Description
<b>Path</b>	<b>t:Path</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.8)	Specifies the property to use in an <b>excludes</b> search expression. The <b>Path</b> element specifies a substitution group, as specified in <a href="#">[XMLSCHEMA0]</a> . An element that is represented by the <b>Path</b> element <b>substitutionGroup</b> attribute MUST be present.

Element name	Type	Description
<b>Bitmask</b>	<b>t:ExcludesValueType</b> (section <a href="#">2.2.4.8</a> )	Specifies a hexadecimal or decimal mask for an <b>excludes</b> restriction.

An **excludes** restriction can only be applied to a property that has an integer value.

### 2.2.4.8 t:ExcludesValueType Complex Type

The **ExcludesValueType** complex type specifies a hexadecimal or decimal mask for a restriction that excludes some results.

```
<xs:complexType name="ExcludesValueType">
  <xs:attribute name="Value"
    type="t:ExcludesAttributeType"
    use="required"
  />
</xs:complexType>
```

The following table lists the attribute definition for the **ExcludesValueType** complex type.

Attribute name	Type	Description
<b>Value</b>	<b>t:ExcludesAttributeType</b> ( <a href="#">IMS-OXWSCDATA</a> section 2.2.5.15)	Specifies a decimal or hexadecimal bitmask for an exclude restriction. This attribute SHOULD be present for an <b>excludes</b> restriction.

### 2.2.4.9 t:ExistsType Complex Type

The **ExistsType** complex type specifies a search restriction that resolves to true if the supplied property exists on an item. The **ExistsType** complex type extends the **SearchExpressionType** complex type, as specified in section [2.2.4.25](#).

```
<xs:complexType name="ExistsType">
  <xs:complexContent>
    <xs:extension
      base="t:SearchExpressionType"
    >
      <xs:sequence>
        <xs:element
          ref="t:Path"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **ExistsType** complex type.

Element name	Type	Description
<b>Path</b>	<b>Path</b> ([MS-OXWSCDATA] section 2.2.3.8)	Specifies the property to use in an <b>excludes</b> search expression. The <b>Path</b> element specifies a substitution group, as specified in [XMLSCHEMA0]. An element that is represented by the <b>Path</b> element <b>substitutionGroup</b> attribute <b>MUST</b> be present.

#### 2.2.4.10 t:FindFolderParentType Complex Type

The **FindFolderParentType** complex type specifies an array of folders that are returned in the results of a call to the **FindFolder** operation, as specified in section 3.1.4.1.

```
<xs:complexType name="FindFolderParentType">
  <xs:sequence>
    <xs:element name="Folders" type="t:ArrayOfFoldersType" minOccurs="0"/>
  </xs:sequence>
  <xs:attributeGroup
    ref="t:FindResponsePagingAttributes"
  />
</xs:complexType>
```

The following table lists the child element of the **FindFolderParentType** complex type.

Element name	Type	Description
<b>Folders</b>	<b>t:ArrayOfFoldersType</b> ([MS-OXWSFOLD] section 2.2.4.1)	Specifies the folders in the result set.

The following table lists the attribute group that is defined for the **FindFolderParentType** complex type.

Attribute group name	Description
<b>t:FindResponsePagingAttributes</b> ([MS-OXWSCDATA] section 2.2.8.1)	Specifies zero or more attributes that describe the result set.

#### 2.2.4.11 t:FindItemParentType Complex Type

The **FindItemParentType** complex type specifies the results of a search of a single Root folder.

```
<xs:complexType name="FindItemParentType">
  <xs:choice>
    <xs:element name="Items"
      type="t:ArrayOfRealItemsType"
    />
    <xs:element name="Groups"
      type="t:ArrayOfGroupedItemsType"
    />
  </xs:choice>
  <xs:attributeGroup
    ref="t:FindResponsePagingAttributes"
  />
</xs:complexType>
```

```

/>
</xs:complexType>

```

The following table lists the child elements of the **FindItemParentType** complex type.

Element name	Type	Description
<b>Items</b>	<b>t:ArrayOfRealItemsType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.8)	Specifies the results of a search in which the items returned are not grouped.
<b>Groups</b>	<b>t:ArrayOfGroupedItemsType</b> (section <a href="#">2.2.4.4</a> )	Specifies the grouped results of a search.

The following table lists the attribute group that is defined for the **FindItemParentType** complex type.

Attribute group name	Description
<b>t:FindResponsePagingAttributes</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.8.1)	Specifies zero or more attributes that describe the result set.

If a **GroupBy** or **DistinguishedGroupBy** element was specified in the **FindItemType** complex type, as specified in section [3.1.4.2.3.2](#), instance that was sent to the **FindItem** operation, as specified in section [3.1.4.2](#), any results of the operation are returned in the **Groups** element; otherwise, the results are returned in the **Items** element.

## 2.2.4.12 t:FractionalPageViewType Complex Type

The **FractionalPageViewType** complex type specifies where a paged view starts and the maximum number of items that are returned. The **FractionalPageViewType** complex type extends the **BasePagingType** complex type, as specified in section [2.2.4.5](#).

```

<xs:complexType name="FractionalPageViewType">
  <xs:complexContent>
    <xs:extension
      base="t:BasePagingType"
    >
      <xs:attribute name="Denominator"
        type="xs:int"
        use="required"
      />
      <xs:attribute name="Numerator"
        type="xs:int"
        use="required"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the attributes that are defined for the **FractionalPageViewType** complex type.

Attribute name	Type	Description
<b>Denominator</b>	<b>xs:int</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the denominator of the fractional offset from the start of the total number of items in the result set.
<b>Numerator</b>	<b>xs:int</b>	Specifies the numerator of the fractional offset from the start of the total number of items in the result set.

### 2.2.4.13 t:GroupedItemsType Complex Type

The **GroupedItemsType** complex type specifies a collection of items that are the result of a grouped **FindItem** operation, as specified in section [3.1.4.2](#).

```
<xs:complexType name="GroupedItemsType">
  <xs:sequence>
    <xs:element name="GroupIndex"
      type="xs:string"
    />
    <xs:element name="Items"
      type="t:ArrayOfRealItemsType"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child elements of the **GroupedItemsType** complex type.

Element name	Type	Description
<b>GroupIndex</b>	<b>xs:string</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the property value that is used to group the items.
<b>Items</b>	<b>t:ArrayOfRealItemsType</b> ( <a href="#">IMS-OXWSCDATA</a> section 2.2.4.8)	Specifies the group of items that correspond to the specified group value.

### 2.2.4.14 t:IndexedPageViewType Complex Type

The **IndexedPageViewType** complex type specifies how paged item information is returned by the **FindItem** operation, as specified in section [3.1.4.2](#), or the **FindFolder** operation, as specified in section [3.1.4.1](#). The **IndexedPageViewType** complex type extends the **BasePagingType** complex type, as specified in section [2.2.4.5](#).

```
<xs:complexType name="IndexedPageViewType">
  <xs:complexContent>
    <xs:extension
      base="t:BasePagingType"
    >
      <xs:attribute name="Offset"
        type="xs:int"
        use="required"
      />
      <xs:attribute name="BasePoint"
        type="t:IndexBasePointType"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

```

        use="required"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the attributes that are defined for the **IndexedPageViewType** complex type.

Attribute name	Type	Description
<b>Offset</b>	<b>xs:int</b> <a href="#">[XMLSCHEMA2]</a>	Specifies the offset from the <b>BasePoint</b> element. This attribute <b>MUST</b> be specified.
<b>BasePoint</b>	<b>t:IndexBasePointType</b> (section <a href="#">2.2.5.4</a> )	Specifies whether the page of items starts at the beginning or end of the set of items that were found by the search. This attribute <b>MUST</b> be specified.

#### 2.2.4.15 t:IsEqualToType Complex Type

The **IsEqualToType** complex type specifies a search expression that compares a property with either a constant value or another property and evaluates to true if they are equal. The **IsEqualToType** complex type extends the **TwoOperandExpressionType** complex type, as specified in section [2.2.4.29](#).

```

<xs:complexType name="IsEqualToType">
  <xs:complexContent>
    <xs:extension
      base="t:TwoOperandExpressionType"
    />
  </xs:complexContent>
</xs:complexType>

```

#### 2.2.4.16 t:IsGreaterThanOrEqualToType Complex Type

The **IsGreaterThanOrEqualToType** complex type specifies a search expression that compares a property with either a constant value or another property and evaluates to "true" if the first property is greater than or equal to the second. The **IsGreaterThanOrEqualToType** complex type extends the **TwoOperandExpressionType** complex type, as specified in section [2.2.4.29](#).

```

<xs:complexType name="IsGreaterThanOrEqualToType">
  <xs:complexContent>
    <xs:extension
      base="t:TwoOperandExpressionType"
    />
  </xs:complexContent>
</xs:complexType>

```



#### 2.2.4.17 t:IsGreaterThanType Complex Type

The **IsGreaterThanType** complex type specifies a search expression that compares a property with either a constant value or another property and returns "true" if the first property is greater. The **IsGreaterThanType** complex type extends the **TwoOperandExpressionType** complex type, as specified in section [2.2.4.29](#).

```
<xs:complexType name="IsGreaterThanType">
  <xs:complexContent>
    <xs:extension
      base="t:TwoOperandExpressionType"
    />
  </xs:complexContent>
</xs:complexType>
```

#### 2.2.4.18 t:IsLessThanOrEqualToType Complex Type

The **IsLessThanOrEqualToType** complex type specifies a search expression that compares a property with either a constant value or another property and evaluates to "true" if the first property is less than or equal to the second. The **IsLessThanOrEqualToType** complex type extends the **TwoOperandExpressionType** complex type, as specified in section [2.2.4.29](#).

```
<xs:complexType name="IsLessThanOrEqualToType">
  <xs:complexContent>
    <xs:extension
      base="t:TwoOperandExpressionType"
    />
  </xs:complexContent>
</xs:complexType>
```

#### 2.2.4.19 t:IsLessThanType Complex Type

The **IsLessThanType** complex type specifies a search expression that compares a property with either a constant value or another property and evaluates to "true" if the first property is less than the second. The **IsLessThanType** complex type extends the **TwoOperandExpressionType** complex type, as specified in section [2.2.4.29](#).

```
<xs:complexType name="IsLessThanType">
  <xs:complexContent>
    <xs:extension
      base="t:TwoOperandExpressionType"
    />
  </xs:complexContent>
</xs:complexType>
```

#### 2.2.4.20 t:IsNotEqualToType Complex Type

The **IsNotEqualToType** complex type specifies a search expression that compares a property with either a constant value or another property and evaluates to "true" if the values are not the same.

The **IsNotEqualToType** complex type extends the **TwoOperandExpressionType** complex type, as specified in section [2.2.4.29](#).

```
<xs:complexType name="IsNotEqualToType">
  <xs:complexContent>
    <xs:extension
      base="t:TwoOperandExpressionType"
    />
  </xs:complexContent>
</xs:complexType>
```

### 2.2.4.21 t:MultipleOperandBooleanExpressionType Complex Type

The **MultipleOperandBooleanExpressionType** complex type specifies the base type for search expressions that are formed by two or more Boolean operands. The **MultipleOperandBooleanExpressionType** complex type extends the **SearchExpressionType** complex type, as specified in section [2.2.4.25](#).

```
<xs:complexType name="SearchExpressionType"
  abstract="true"
>
  <xs:complexContent>
    <xs:extension
      base="t:SearchExpressionType"
    >
      <xs:sequence>
        <xs:element
          minOccurs="1"
          maxOccurs="unbounded"
          ref="t:SearchExpression"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **MultipleOperandBooleanExpressionType** complex type.

Element name	Type	Description
<b>SearchExpression</b>	<b>t:SearchExpression</b> (section <a href="#">2.2.3.13</a> )	Specifies an array of search expressions that represents a set of operands.

### 2.2.4.22 t:NotType Complex Type

The **NotType** complex type specifies a search expression that negates the Boolean value of the search expression that it contains. The **NotType** complex type extends the **SearchExpressionType** complex type, as specified in section [2.2.4.25](#).

```
<xs:complexType name="NotType">
  <xs:complexContent>
```

```

<xs:extension
  base="t:SearchExpressionType"
>
  <xs:sequence>
    <xs:element
      ref="t:SearchExpression"
    />
  </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child element of the **NotType** complex type.

Element name	Type	Description
<b>SearchExpression</b>	<b>t:SearchExpression</b> (section <a href="#">2.2.3.13</a> )	Specifies a search expression.

### 2.2.4.23 t:OrType Complex Type

The **OrType** complex type specifies a search expression that performs a logical **OR** on the search expression that it contains. The result of the **OR** operation is **TRUE** if all of the search expressions that are contained with the **OrType** complex type are true. The **OrType** complex type extends the **MultipleOperandBooleanExpressionType** complex type, as specified in section [2.2.4.21](#).

```

<xs:complexType name="OrType">
  <xs:complexContent>
    <xs:extension
      base="t:MultipleOperandBooleanExpressionType"
    />
  </xs:complexContent>
</xs:complexType>

```

### 2.2.4.24 t:RestrictionType Complex Type

The **RestrictionType** complex type specifies a search restriction or query for a **FindItem** operation, as specified in section [3.1.4.2](#), or a **FindFolder** operation, as specified in section [3.1.4.1](#).

```

<xs:complexType name="RestrictionType">
  <xs:sequence>
    <xs:element
      ref="t:SearchExpression"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child element of the **RestrictionType** complex type.

Element name	Type	Description
<b>SearchExpression</b>	<b>t:SearchExpression</b> (section <a href="#">2.2.3.13</a> )	Specifies the search term that defines the restriction.

#### 2.2.4.25 t:SearchExpressionType Complex Type

The **SearchExpressionType** complex type specifies the base type for all search expressions.

```
<xs:complexType name="SearchExpressionType"
  abstract="true"
/>
```

#### 2.2.4.26 t:SearchFolderType Complex Type

The **SearchFolderType** complex type specifies a representation of a search folder (1) that is contained in a mailbox.

```
<xs:complexType name="SearchFolderType">
  <xs:complexContent>
    <xs:extension
      base="t:FolderType"
    >
      <xs:sequence>
        <xs:element name="SearchParameters" type="t:SearchParametersType"
          minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **SearchFolderType** complex type.

Element name	Type	Description
<b>SearchParameters</b>	<b>t:SearchParametersType</b> (section <a href="#">2.2.4.27</a> )	Specifies the search parameters that define the contents of the search folder (1). This element can be present.

#### 2.2.4.27 t:SearchParametersType Complex Type

The **SearchParametersType** complex type specifies the search parameters that define the contents of a search folder (1).

```
<xs:complexType name="SearchParametersType">
  <xs:sequence>
    <xs:element name="Restriction"
      type="t:RestrictionType"
    />
    <xs:element name="BaseFolderIds"
      type="t:NonEmptyArrayOfBaseFolderIdsType"
    />
  </xs:sequence>
</xs:complexType>
```

```

    />
  </xs:sequence>
  <xs:attribute name="Traversal" type="t:SearchFolderTraversalType" use="optional"
  />
</xs:complexType>

```

The following table lists the child elements of the **SearchParametersType** complex type.

Element name	Type	Description
<b>Restriction</b>	<b>t:RestrictionType</b> (section <a href="#">2.2.4.24</a> )	Specifies the query that defines the contents of a search folder (1).
<b>BaseFolderIds</b>	<b>t:NonEmptyArrayOfBaseFolderIdsType</b> (section <a href="#">3.1.4.2.3.8</a> )	Specifies an array of folder identifiers that identify the folders that are searched.

The following table lists the attribute that is defined for the **SearchParametersType** complex type.

Attribute name	Type	Description
<b>Traversal</b>	<b>t:SearchFolderTraversalType</b> (section <a href="#">2.2.5.6</a> )	Specifies the depth of a search folder (1) subtree traversal.

#### 2.2.4.28 t:SeekToConditionPageViewType Complex Type

The **SeekToConditionPageViewType** complex type specifies a condition that has to be satisfied in order to include an item in the result set from the **FindItem** operation, as specified in section [3.1.4.2](#), or the **FindFolder** operation, as specified in section [3.1.4.1](#). The **SeekToConditionPageViewType** complex type extends the **BasePagingType** complex type, as specified in section [2.2.4.5.<3>](#)

```

<xs:complexType name="SeekToConditionPageViewType">
  <xs:complexContent>
    <xs:extension base="t:BasePagingType">
      <xs:sequence>
        <xs:element name="Condition" type="t:RestrictionType"
          minOccurs="1"
        />
      </xs:sequence>
      <xs:attribute name="BasePoint" type="t:IndexBasePointType"
        use="required"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the child element of the **SeekToConditionPageViewType** complex type.

Element name	Type	Description
<b>Condition</b>	<b>t:RestrictionType</b> (section <a href="#">2.2.4.24</a> )	Specifies the search term used to determine if an item is to be included in the result set.

The following table lists the attribute of the **SeekToConditionPageViewType** complex type.

Attribute name	Type	Description
<b>BasePoint</b>	<b>t:IndexBasePointType</b> (section <a href="#">2.2.5.4</a> )	Specifies whether the search term should be applied from the beginning or end of the result set.

### 2.2.4.29 t:TwoOperandExpressionType Complex Type

The **TwoOperandExpressionType** complex type specifies the base type for derived classes that represent a restriction that is formed by comparing two values against one another. The **TwoOperandExpressionType** complex type extends the **SearchExpressionType** complex type, as specified in section [2.2.4.25](#).

```
<xs:complexType name="TwoOperandExpressionType"
  abstract="true"
>
  <xs:complexContent>
    <xs:extension
      base="t:SearchExpressionType"
    >
      <xs:sequence>
        <xs:element
          ref="t:Path"
        />
        <xs:element name="FieldURIOrConstant"
          type="t:FieldURIOrConstantType"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **TwoOperandExpressionType** complex type.

Element name	Type	Description
<b>Path</b>	<b>t:Path</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.8)	Specifies the property path that is searched on for each item or folder in a search.
<b>FieldURIOrConstant</b>	<b>t:FieldURIOrConstantType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.30)	Specifies the property or constant that is compared with each item or folder in a restriction.

### 2.2.4.30 m:QueryStringType Complex Type

The **QueryStringType** complex type specifies a query string.

```
<xs:complexType name="QueryStringType">
  <xs:simpleContent>
    <xs:extension base="xs:string">
      <xs:attribute name="ResetCache" type="xs:boolean" use="optional"/>
      <xs:attribute name="ReturnHighlightTerms" type="xs:boolean" use="optional"/>
      <xs:attribute name="ReturnDeletedItems" type="xs:boolean" use="optional"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

The following table lists and describes the attributes of the **QueryStringType** complex type.

Attribute name	Type	Description
<b>ResetCache</b>	<b>xs:boolean</b> ( <a href="#">XMLSCHEMA21</a> )	Specifies whether to clear the cache.
<b>ReturnHighlightTerms</b>	<b>xs:boolean</b>	Specifies whether to return highlighted terms in the search.
<b>ReturnDeletedItems</b>	<b>xs:boolean</b>	Specifies whether to return deleted items in the search.

### 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions that are defined by this specification. XML schema simple type definitions that are specific to a particular operation are defined with the operation.

Simple type name	Description
<b>ContainmentComparisonType</b>	Specifies whether a search is exact or whether it ignores casing and spaces.
<b>ContainmentModeType</b>	Specifies the search boundaries.
<b>FolderQueryTraversalType</b>	Specifies the types of subtree traversals for deletion and enumeration.
<b>IndexBasePointType</b>	Specifies whether a page of items that are returned starts at the beginning or at the end of the set of items that are found by the search.
<b>ItemQueryTraversalType</b>	Specifies whether a search finds items in folders or in the <b>Deleted Items folder</b> .
<b>SearchFolderTraversalType</b>	Specifies the options for how a folder hierarchy is searched when the contents of a search folder (1) are identified.

#### 2.2.5.1 t:ContainmentComparisonType Simple Type

The **ContainmentComparisonType** simple type specifies whether a search is exact or whether it ignores casing and spaces.

```

<xs:simpleType name="ContainmentComparisonType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Exact"
    />
    <xs:enumeration
      value="IgnoreCase"
    />
    <xs:enumeration
      value="IgnoreCaseAndNonSpacingCharacters"
    />
    <xs:enumeration
      value="IgnoreNonSpacingCharacters"
    />
    <xs:enumeration
      value="Loose"
    />
    <xs:enumeration
      value="LooseAndIgnoreCase"
    />
    <xs:enumeration
      value="LooseAndIgnoreCaseAndIgnoreNonSpace"
    />
    <xs:enumeration
      value="LooseAndIgnoreNonSpace"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **ContainmentComparisonType** simple type.

Value	Meaning
Exact	Specifies that the comparison must be exact.
IgnoreCase	Specifies that the comparison ignores casing.
IgnoreCaseAndNonSpacingCharacters	Specifies that the comparison ignores casing and non-spacing characters.
IgnoreNonSpacingCharacters	Specifies that the comparison ignores non-spacing characters.
Loose	This value MUST NOT be used.
LooseAndIgnoreCase	This value MUST NOT be used.
LooseAndIgnoreCaseAndIgnoreNonSpace	This value MUST NOT be used.
LooseAndIgnoreNonSpace	This value MUST NOT be used.

### 2.2.5.2 t:ContainmentModeType Simple Type

The **ContainmentModeType** simple type specifies the search boundaries.



```

<xs:simpleType name="ContainmentModeType">
  <xs:restriction>
    <xs:enumeration
      value="ExactPhrase"
    />
    <xs:enumeration
      value="FullString"
    />
    <xs:enumeration
      value="Prefixed"
    />
    <xs:enumeration
      value="PrefixOnWords"
    />
    <xs:enumeration
      value="Substring"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **ContainmentModeType** simple type.

Value	Meaning
ExactPhrase	Specifies that the comparison is between the exact phrase in the property and the constant. If the phrase and the supplied constant are the same, the expression resolves to true.
FullString	Specifies that the comparison is between the full string value of the property and the constant. If the property value and the supplied constant are the same, the expression resolves to true.
Prefixed	Specifies that the comparison is between the prefix of the property and the constant. If the prefix of the property value matches the value that is provided in the constant, the expression resolves to true.
PrefixOnWords	Specifies that the comparison is between a prefix on any individual word in the property value and the constant. If any of the words are prefixed with a value that matches the value that is provided in the constant, the expression resolves to true.
Substring	Specifies that the comparison is between a substring of the property value and the constant. If the substring exists anywhere in the property value, the expression resolves to true.

### 2.2.5.3 t:FolderQueryTraversalType Simple Type

The **FolderQueryTraversalType** simple type specifies the types of subtree traversals for deletion and enumeration.

```

<xs:simpleType name="FolderQueryTraversalType">
  <xs:restriction>
    <xs:enumeration
      value="Deep"
    />
    <xs:enumeration
      value="Shallow"
    />
  </xs:restriction>
</xs:simpleType>

```

```

    />
    <xs:enumeration
      value="SoftDeleted"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **FolderQueryTraversalType** simple type.

Value	Meaning
Deep	Specifies a search in all subfolders of the identified parent folder and returns only the folder IDs for items that have not been deleted.
Shallow	Specifies a search in only the identified folder and returns only the folder IDs for items that have not been deleted.
SoftDeleted	Specifies a shallow traversal search for items that are in the Deleted Items folder.

#### 2.2.5.4 t:IndexBasePointType Simple Type

The **IndexBasePointType** simple type specifies whether a page of items that are returned by the **FindFolder** operation, as specified in section [3.1.4.1](#), or **FindItem** operation, as specified in section [3.1.4.2](#), start at the beginning or at the end of the set of items that are found by the search.

```

<xs:simpleType name="IndexBasePointType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Beginning"
    />
    <xs:enumeration
      value="End"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **IndexBasePointType** simple type.

Value	Meaning
Beginning	Specifies that the page of items starts from the beginning of the set of items that are returned by the search.
End	Specifies that the page of items starts from the end of the set of items that are returned by the search.

#### 2.2.5.5 t:ItemQueryTraversalType Simple Type

The **ItemQueryTraversalType** simple type specifies whether the search finds items in folders or in the Deleted Items folder.

```

<xs:simpleType name="ItemQueryTraversalType">
  <xs:restriction>
    <xs:enumeration
      value="Shallow"
    />
    <xs:enumeration
      value="SoftDeleted"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **ItemQueryTraversalType** simple type.

Value	Description
Shallow	Specifies that only the items in the folder are returned.
SoftDeleted	Specifies that only the items in the Deleted Items folder are returned.

### 2.2.5.6 t:SearchFolderTraversalType Simple Type

The **SearchFolderTraversalType** simple type specifies the options for how a folder hierarchy is searched when the contents of a search folder (1) are identified.

```

<xs:simpleType name="SearchFolderTraversalType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Deep"
    />
    <xs:enumeration
      value="Shallow"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **SearchFolderTraversalType** simple type.

Value	Meaning
Deep	Specifies that a deep search is used to traverse the folder hierarchy.
Shallow	Specifies that a shallow search is used to traverse the folder hierarchy.

### 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

### **2.2.7 Groups**

This specification does not define any common XML schema group definitions.

### **2.2.8 Attribute Groups**

This specification does not define any common XML schema attribute group definitions.

## 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly back to the higher-layer protocol or application.

### 3.1 ExchangeServicePortType Server Details

The Mailbox Search Web Service Protocol defines a single port type with two operations. These operations enable client applications to search for items in the mailbox and folders.

#### 3.1.1 Abstract Data Model

None.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of WSDL operations as defined by this specification.

Operation name	Description
<b>FindFolder</b>	Searches the message store and returns a folder or folders that match the specified search criteria.
<b>FindItem</b>	Searches the message store and returns the item or items that match the specified search criteria.

##### 3.1.4.1 FindFolder Operation

The **FindFolder** operation obtains a list of folders that meet specified search criteria by searching the subfolders of a specified folder.

The following is the WSDL port type specification of the operation.

```
<wsdl:operation name="FindFolder">
  <wsdl:input message="tns:FindFolderSoapIn"/>
  <wsdl:output message="tns:FindFolderSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification of the operation.

```
<wsdl:operation name="FindFolder">
```

```

<soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/FindFolder"/>
  <wsdl:input>
    <soap:header message="tns:FindFolderSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:FindFolderSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:FindFolderSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:FindFolderSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="FindFolderResult" use="literal" />
    <soap:header message="tns:FindFolderSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>

```

### 3.1.4.1.1 Messages

The following table lists the WSDL message definitions that are specific to this operation.

Message name	Description
<b>FindFolderSoapIn</b>	Specifies the <b>SOAP message</b> that defines the folder or folders to search for.
<b>FindFolderSoapOut</b>	Specifies the SOAP message that is returned by the server in response.

#### 3.1.4.1.1.1 tns:FindFolderSoapIn Message

The **FindFolderSoapIn** WSDL message specifies the search criteria for the folder or folders that are to be returned by the **FindFolder** operation.

```

<wsdl:message name="FindFolderSoapIn">
  <wsdl:part name="request" element="tns:FindFolder"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole" />
</wsdl:message>

```

The **FindFolderSoapIn** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/services/2006/messages/FindFolder>.

The parts of the **FindFolderSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:FindFolder</b> (section <a href="#">3.1.4.1.2.1</a> )	Specifies the <b>SOAP body</b> of the request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.3)	Specifies a <b>SOAP header</b> that identifies the user whom the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.6)	Specifies a SOAP header that identifies the culture to use for accessing the mailbox. The

Part name	Element/type	Description
		cultures are defined by <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for the <b>FindFolder</b> operation request.
<b>TimeZoneContext</b>	<b>t:TimeZoneContext</b> ( <a href="#">[MS-OXWSGTZ]</a> section 2.2.3.4)	Specifies a SOAP header that identifies the time zone to use for all responses from the server. All times that are returned from the server will be converted to the specified time zone.
<b>ManagementRole</b>	<b>t:ManagementRole</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.7)	Specifies a SOAP header that identifies the server roles that are necessary in order for the caller to make the request. <a href="#">&lt;4&gt;</a>

### 3.1.4.1.1.2 tns:FindFolderSoapOut Message

The **FindFolderSoapOut** WSDL message specifies the server response to the **FindFolder** operation request to find a folder or folders.

```
<wsdl:message name="FindFolderSoapOut">
  <wsdl:part name="FindFolderResult" element="tns:FindFolderResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **FindFolderSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/FindFolder>.

The parts of the **FindFolderSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
<b>FindFolderResult</b>	<b>tns:FindFolderResponse</b> (section <a href="#">3.1.4.1.2.2</a> )	Specifies SOAP body to a <b>FindFolder</b> operation request..
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response.

### 3.1.4.1.2 Elements

The following table lists the XML schema element definitions that are specific to this operation.

Element name	Description
<b>FindFolder</b>	Specifies the criteria required to search for a folder or folders.
<b>FindFolderResponse</b>	Specifies the response body from a request to search for a folder or folders.

#### 3.1.4.1.2.1 tns:FindFolder Element

The **FindFolder** element specifies the base element for a **FindFolder** operation request.

```
<xs:element name="FindFolder"
  type="m:FindFolderType"
/>
```

### 3.1.4.1.2.2 tns:FindFolderResponse Element

The **FindFolderResponse** element specifies the response message for a **FindFolder** operation.

```
<xs:element name="FindFolderResponse"
  type="m:FindFolderResponseType"
/>
```

### 3.1.4.1.3 Complex Types

The following table lists the XML schema complex type definitions that are specific to this operation.

Complex type name	Description
<b>FindFolderResponseType</b>	Specifies the response from the <b>FindFolder</b> operation.
<b>FindFolderType</b>	Specifies the criteria for searching for a folder or folders with the <b>FindFolder</b> operation.

#### 3.1.4.1.3.1 m:FindFolderResponseType Complex Type

The **FindFolderResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="FindFolderResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

#### 3.1.4.1.3.2 m:FindFolderType Complex Type

The **FindFolderType** complex type specifies a request to find folders in a mailbox. The **FindFolderType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="FindFolderType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="FolderShape"
        type="t:FolderResponseShapeType"
      />
    </xs:sequence>
  </xs:complexContent>
</xs:complexType>
```



```

/>
<xs:choice
  maxOccurs="1"
  minOccurs="01"
>
  <xs:element name="IndexedPageFolderView"
    type="t:IndexedPageViewType"
  />
  <xs:element name="FractionalPageFolderView"
    type="t:FractionalPageViewType"
  />
</xs:choice>
<xs:element name="Restriction"
  type="t:RestrictionType"
  minOccurs="0"
/>
<xs:element name="ParentFolderIds"
  type="t:NonEmptyArrayOfBaseFolderIdsType"
/>
</xs:sequence>
<xs:attribute name="Traversal"
  type="t:FolderQueryTraversalType"
  use="required"
/>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **FindFolderType** complex type.

Element name	Type	Description
<b>FolderShape</b>	<b>t:FolderResponseShapeType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.32)	Specifies the contents of the query response.
<b>IndexedPageFolderView</b>	<b>t:IndexedPageViewType</b> (section <a href="#">2.2.4.14</a> )	Specifies how paged information is returned by the query.
<b>FractionalPageFolderView</b>	<b>t:FractionalPageViewType</b> (section <a href="#">2.2.4.12</a> )	Specifies the starting item and the number of items that are returned by a paged query.
<b>Restriction</b>	<b>t:RestrictionType</b> (section <a href="#">2.2.4.24</a> )	Specifies the search parameters that define the folder query.
<b>ParentFolderIds</b>	<b>t:NonEmptyArrayOfBaseFolderIdsType</b> ( <a href="#">[MS-OXWSFOLD]</a> section 3.1.4.6.3.3)	Specifies the folders that the query searches.

The following table lists the attribute that is defined for the **FindFolderType** complex type.

Attribute name	Type	Description
<b>Traversal</b>	<b>t:FolderQueryTraversalType</b> (section <a href="#">2.2.5.3</a> )	Specifies the traversal scheme that is used to search for folders.

The **FindFolderType** complex type specifies the folders to search for as well as the structure of the response.

Either the **IndexedPageFolderView** or the **FractionalPageFolderView** element can be specified to paginate the items that are returned in the response. If an element is included, all required subelements **MUST** be included in the request; if an element is not included, its required subelements **MUST NOT** be included in the request.

### 3.1.4.2 FindItem Operation

The **FindItem** operation searches the mailbox and folders and returns items that meet a specified search criteria.

The following is the WSDL port type specification for the operation.

```
<wsdl:operation name="FindItem">
  <wsdl:input message="tns:FindItemSoapIn"/>
  <wsdl:output message="tns:FindItemSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the operation. [<5>](#)

```
<wsdl:operation name="FindItem">
  <soap:operation
  soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/FindItem"/>
  <wsdl:input>
    <soap:header message="tns:FindItemSoapIn" part="Impersonation" use="literal"/>
    <soap:header message="tns:FindItemSoapIn" part="MailboxCulture" use="literal"/>
    <soap:header message="tns:FindItemSoapIn" part="RequestVersion" use="literal"/>
    <soap:header message="tns:FindItemSoapIn" part="TimeZoneContext" use="literal"/>
    <soap:header message="tns:FindItemSoapIn" part="DateTimePrecision" use="literal" />
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="FindItemResult" use="literal" />
    <soap:header message="tns:FindItemSoapOut" part="ServerVersion" use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

#### 3.1.4.2.1 Messages

The following table lists the WSDL message definitions that are specific to this operation.

Message name	Description
<b>FindItemSoapIn</b>	Specifies the SOAP message that contains the criteria required to search for items.
<b>FindItemSoapOut</b>	Specifies the SOAP message that is returned by the server in response.

### 3.1.4.2.1.1 tns:FindItemSoapIn Message

The **FindItemSoapIn** WSDL message specifies the search criteria for the items or items that the **FindItem** operation returns.

```
<wsdl:message name="FindItemSoapIn">
  <wsdl:part name="request" element="tns:FindItem"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="DateTimePrecision" element="t:DateTimePrecision" />
  <wsdl:part name="ManagementRole" element="t:ManagementRole" />
</wsdl:message>
```

The **FindItemSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/FindItem>.

The parts of the **FindItemSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
<b>request</b>	<b>tns:FindItem</b> (section <a href="#">3.1.4.2.2.1</a> )	Specifies SOAP body of the request.
<b>Impersonation</b>	<b>t:ExchangeImpersonation</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.3)	Specifies a SOAP header that identifies the user that the client application is impersonating.
<b>MailboxCulture</b>	<b>t:MailboxCulture</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.6)	Specifies a SOAP header that identifies the culture to use to access the mailbox. The cultures are defined by <a href="#">[RFC3066]</a> .
<b>RequestVersion</b>	<b>t:RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.9)	Specifies a SOAP header that identifies the schema version for the <b>FindItem</b> operation request.
<b>TimeZoneContext</b>	<b>t:TimeZoneContext</b> ( <a href="#">[MS-OXWSTZ]</a> section 2.2.3.4)	Specifies a SOAP header that identifies the time zone to use for all responses from the server. All times that are returned from the server will be converted to the specified time zone.
<b>DateTimePrecision</b>	<b>t:DateTimePrecision</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.1)	Specifies a SOAP header that identifies the resolution of date/time values in responses from the server, either in seconds or in milliseconds. <a href="#">&lt;6&gt;</a>
<b>ManagementRole</b>	<b>t:ManagementRole</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.7)	Specifies a SOAP header that identifies the server roles that are necessary in order for the caller to make the request. <a href="#">&lt;7&gt;</a>

### 3.1.4.2.1.2 tns:FindItemSoapOut Message

The **FindItemSoapOut** WSDL message specifies the server response to the **FindItem** operation request.

```

<wsdl:message name="FindItemSoapOut">
  <wsdl:part name="FindItemResult" element="tns:FindItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The **FindItemSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/FindItem>.

The parts of the **FindItemSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
<b>FindItemResult</b>	<b>tns:FindItemResponse</b> (section <a href="#">3.1.4.2.2.2</a> )	Specifies SOAP body of the response to a <b>FindItem</b> operation request.
<b>ServerVersion</b>	<b>t:ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.10)	Specifies a SOAP header that identifies the server version for the response.

### 3.1.4.2.2 Elements

The following table lists the XML schema element definitions are specific to this operation.

Element name	Description
FindItem	Specifies the base element for the FindItem operation.
FindItemResponse	Specifies the response element for the FindItem operation.

#### 3.1.4.2.2.1 tns:FindItem Element

The **FindItem** element specifies the base element for a **FindItem** operation.

```

<xs:element name="FindItem"
  type="m:FindItemType"
/>

```

#### 3.1.4.2.2.2 tns:FindItemResponse Element

The **FindItemResponse** element specifies the response message for the **FindItem** operation.

```

<xs:element name="FindItemResponse"
  type="m:FindItemResponseType"
/>

```

#### 3.1.4.2.3 Complex Types

The following table lists the XML schema complex type definitions are specific to this operation.

Complex type name	Description
FindItemResponseType	Specifies the response to the FindItem operation request.
FindItemType	Specifies the request to the FindItem operation.
AggregateOnType	Specifies the property that is used to determine the order of grouped items for a grouped result set.
BaseGroupBy	Specifies the base class for derived complex types that specify grouped queries to the FindItem and FindFolder operations.
DistinguishedGroupByType	Specifies a standard grouping for the FindItem operation.
FieldOrderType	Specifies a single field by which to sort results and specifies the direction of the sort.
GroupByType	Specifies the grouping for items returned by the FindItem operation.
NonEmptyArrayOfFieldOrdersType	Specifies an array of FieldOrderType complex type elements that contains at least one member.

### 3.1.4.2.3.1 m:FindItemResponseType Complex Type

The **FindItemResponseType** complex type extends the **BaseResponseMessageType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.16).

```
<xs:complexType name="FindItemResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

### 3.1.4.2.3.2 m:FindItemType Complex Type

The **FindItemType** complex type specifies the search criteria to use for the **FindItem** operation. The **FindItemType** complex type extends the **BaseRequestType** complex type ([\[MS-OXWSCDATA\]](#) section 2.2.4.15).

```
<xs:complexType name="FindItemType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="ItemShape"
        type="t:ItemResponseShapeType"
      />
      <xs:choice
        minOccurs="0"
      >
        <xs:element name="IndexedPageItemView"
          type="t:IndexedPageViewType"
        />
      </xs:choice>
    </xs:sequence>
  </xs:complexContent>
</xs:complexType>
```

```

    <xs:element name="FractionalPageItemView"
      type="t:FractionalPageViewType"
    />
    <xs:element name="CalendarView"
      type="t:CalendarViewType"
    />
    <xs:element name="ContactsView"
      type="t:ContactsViewType"
    />
  </xs:choice>
  <xs:choice
    minOccurs="0"
  >
    <xs:element name="GroupBy"
      type="t:GroupByType"
    />
    <xs:element name="DistinguishedGroupBy"
      type="t:DistinguishedGroupByType"
    />
  </xs:choice>
  <xs:element name="Restriction"
    type="t:RestrictionType"
    minOccurs="0"
  />
  <xs:element name="SortOrder"
    type="t:NonEmptyArrayOfFieldOrdersType"
    minOccurs="0"
  />
  <xs:element name="ParentFolderIds"
    type="t:NonEmptyArrayOfBaseFolderIdsType"
    minOccurs="0"
  />
  <xs:element name="QueryString"
    type="xs:QueryStringType"
    minOccurs="0"
  />
</xs:sequence>
<xs:attribute name="Traversal"
  type="t:ItemQueryTraversalType"
/>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

The following table lists the child elements of the **FindItemType** complex type

Element name	Type	Description
<b>ItemShape</b>	<b>t:ItemResponseShapeType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.38)	Specifies the array of items that are returned by the query.
<b>IndexedPageItemView</b>	<b>t:IndexedPageViewType</b> (section <a href="#">2.2.4.14</a> )	Specifies how paged item information is returned in the response.
<b>FractionalPageItemView</b>	<b>t:FractionalPageViewType</b> (section	Specifies the starting item

Element name	Type	Description
	<a href="#">2.2.4.12</a> )	and number of items to return by the query.
<b>CalendarView</b>	<b>t:CalendarViewType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.7)	Specifies the settings that are used to return calendar items as they appear in a calendar.
<b>ContactsView</b>	<b>t:ContactsViewType</b> ( <a href="#">[MS-OXWSCONT]</a> section 3.1.4.1.1.3)	Specifies the settings that are used to return contact items based on their alphabetical display names.
<b>GroupBy</b>	<b>t:GroupByType</b> (section <a href="#">3.1.4.2.3.7</a> )	Specifies the grouping for items that are returned by a query.
<b>DistinguishedGroupBy</b>	<b>t:DistinguishedGroupByType</b> (section <a href="#">3.1.4.2.3.5</a> )	Specifies a standard grouping.
<b>Restriction</b>	<b>t:RestrictionType</b> (section <a href="#">2.2.4.24</a> )	Specifies a search restriction or query.
<b>SortOrder</b>	<b>t:NonEmptyArrayOfFieldOrdersType</b> (section <a href="#">3.1.4.2.3.8</a> )	Specifies one or more <b>FieldOrderType</b> complex type (section <a href="#">3.1.4.2.3.6</a> ) elements that specify how the results should be sorted.
<b>ParentFolderIds</b>	<b>t:NonEmptyArrayOfBaseFolderIdsType</b> ( <a href="#">[MS-OXWSFOLD]</a> section 3.1.4.6.3.3)	Specifies one or more folders that are the root of the search.
<b>QueryString</b>	<b>m:QueryStringType</b> (section <a href="#">2.2.4.30</a> )	Specifies the query that is used for the search.

The following table lists the attribute that is defined for the **FindItemType** complex type.

Attribute name	Type	Description
<b>Traversal</b>	<b>t:ItemQueryTraversalType</b> (section <a href="#">2.2.5.5</a> )	Specifies whether the search finds items in folders or in the Deleted Items folder.

The **FindItemType** complex type specifies the search criteria to find a set of items by using the **FindItem** operation as well as the structure of the response.

One of the following elements can be included in the request to specify how the returned items are viewed. If an element is included, all required subelements **MUST** be included in the request; if an element is not included, its required subelements **MUST NOT** be included in the request.

- **IndexedPageItemView**
- **FractionalPageItemView**

- **CalendarView**
- **ContactsView**

One of the following elements can be included in the request to specify how the results, if any, are to be grouped:

- **GroupBy**
- **DistinguishedGroupBy**

When the **ItemShape** element is set to "All" or "Default", the properties that are returned by the **FindItem** operation depend on the folder that is searched for the items. The properties that are returned are defined by the complex type element or combination of complex type elements that represent the item stored in the folder, as shown in the following table. <8>

Folder name	Complex type
Calendar	<b>CalendarItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.4).
Contacts	<b>ContactItemType</b> ( <a href="#">[MS-OXWSCONT]</a> section 2.2.4.2). <b>t:DistributionListType</b> ( <a href="#">[MS-OXWSDLIST]</a> section 2.2.4.3).
Folder	<b>MessageType</b> ( <a href="#">[MS-OXWSMSG]</a> section 2.2.4.1). <b>PostItemType</b> ( <a href="#">[MS-OXWSPOST]</a> section 2.2.4.1). <b>MeetingCancellationMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.11). <b>MeetingMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.12). <b>MeetingRequestMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.13). <b>MeetingResponseMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.14).
Search	<b>CalendarItemType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.4). <b>ContactItemType</b> ( <a href="#">[MS-OXWSCONT]</a> section 2.2.4.2). <b>DistributionListType</b> ( <a href="#">[MS-OXWSDLIST]</a> section 2.2.4.3). <b>MessageType</b> ( <a href="#">[MS-OXWSMSG]</a> section 2.2.4.1). <b>PostItemType</b> ( <a href="#">[MS-OXWSPOST]</a> section 2.2.4.1). <b>MeetingCancellationMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.11). <b>MeetingMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.12). <b>MeetingRequestMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.13). <b>MeetingResponseMessageType</b> ( <a href="#">[MS-OXWSMTGS]</a> section 2.2.4.14). <b>TaskType</b> ( <a href="#">[MS-OXWSTASK]</a> section 2.2.4.3).
Tasks	<b>TaskType</b> ( <a href="#">[MS-OXWSTASK]</a> section 2.2.4.3).

### 3.1.4.2.3.3 t:AggregateOnType Complex Type

The **AggregateOnType** complex type specifies the property that is used to determine the order of grouped items for a grouped result set. When an **AggregateOnType** complex type element is specified, one of the following child elements **MUST** be specified:

- **FieldURI**
- **IndexedFieldURI**
- **ExtendedFieldURI**



```

<xs:complexType name="AggregateOnType">
  <xs:choice>
    <xs:element name="FieldURI"
      type="t:PathToUnindexedFieldType"
    />
    <xs:element name="IndexedFieldURI"
      type="t:PathToIndexedFieldType"
    />
    <xs:element name="ExtendedFieldURI"
      type="t:PathToExtendedFieldType"
    />
  </xs:choice>
  <xs:attribute name="Aggregate"
    type="t:AggregateType"
    use="required"
  />
</xs:complexType>

```

The following table lists the child elements of the **AggregateOnType** complex type.

Element name	Type	Description
<b>FieldURI</b>	<b>t:PathToUnindexedFieldType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.49)	Specifies a well-known message store property that is used to group the items.
<b>IndexedFieldURI</b>	<b>t:PathToIndexedFieldType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.48)	Specifies an individual member of a dictionary that is used to group the items.
<b>ExtendedFieldURI</b>	<b>t:PathToExtendedFieldType</b> ( <a href="#">[MS-OXWSXPROP]</a> section 2.1.6)	Specifies an extended property that is used to group the items.

The following table lists the attribute that is defined for the **AggregateOnType** complex type.

Attribute name	Type	Description
<b>Aggregate</b>	<b>t:AggregateType</b> (section <a href="#">3.1.4.2.4.1</a> )	Specifies the value that indicates whether the maximum or minimum value of the property specified is used for ordering a group of items. This attribute <b>MUST</b> be set.

### 3.1.4.2.3.4 t:BaseGroupByType Complex Type

The **BaseGroupByType** complex type specifies the base class for derived complex types that specify grouped queries to the FindItem operation, as specified in section [3.1.4.2](#), and the FindFolder operation, as specified in section [3.1.4.1](#).

```

<xs:complexType name="BaseGroupByType"
  abstract="true"
>
  <xs:attribute name="Order"
    type="t:SortDirectionType"
  />
</xs:complexType>

```

The following table lists the attribute that is defined for the **BaseGroupByType** complex type.

Attribute name	Type	Description
<b>Order</b>	<b>t:SortDirectionType</b> (section <a href="#">3.1.4.2.4.2</a> )	Specifies the sort order of the returned grouped items. This attribute <b>MUST</b> be specified.

### 3.1.4.2.3.5 t:DistinguishedGroupByType Complex Type

The DistinguishedGroupByType complex type specifies a standard grouping for the FindItem operation. The **DistinguishedGroupByType** complex type extends the BaseGroupByType complex type, as specified in section [3.1.4.2.3.4](#).

```
<xs:complexType name="DistinguishedGroupByType">
  <xs:complexContent>
    <xs:extension
      base="t:BaseGroupByType"
    >
      <xs:sequence>
        <xs:element name="StandardGroupBy"
          type="t:StandardGroupByType"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child element of the **DistinguishedGroupByType** complex type.

Element name	Type	Description
<b>StandardGroupBy</b>	<b>t:StandardGroupByType</b> (section <a href="#">3.1.4.2.4.3</a> )	Specifies one of the standard groupings for returned items.

### 3.1.4.2.3.6 t:FieldOrderType Complex Type

The **FieldOrderType** complex type specifies a single field by which to sort results and specifies the direction of the sort.

```
<xs:complexType name="FieldOrderType">
  <xs:sequence>
    <xs:element
      ref="t:Path"
    />
  </xs:sequence>
  <xs:attribute name="Order"
    type="t:SortDirectionType"
  />
</xs:complexType>
```

The following table lists the child element of the **FieldOrderType** complex type.

Element name	Type	Description
<b>Path</b>	<b>t:Path</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.8)	Specifies the <b>URI</b> that describes the field by which the results are sorted.

The following table lists the attribute that is defined for the **FieldOrderType** complex type.

Attribute name	Type	Description
<b>Order</b>	<b>t:SortDirectionType</b> (section <a href="#">3.1.4.2.4.2</a> )	Specifies the direction of the sort. This attribute <b>MUST</b> be specified.

### 3.1.4.2.3.7 t:GroupByType Complex Type

The **GroupByType** complex type specifies the grouping for items that are returned by the **FindItem** operation. The **GroupByType** complex type extends the **BaseGroupByType** complex type, as specified in section [3.1.4.2.3.4](#).

```
<xs:complexType name="GroupByType">
  <xs:complexContent>
    <xs:extension
      base="t:BaseGroupByType"
    >
      <xs:sequence>
        <xs:choice>
          <xs:element name="FieldURI"
            type="t:PathToUnindexedFieldType"
          />
          <xs:element name="IndexedFieldURI"
            type="t:PathToIndexedFieldType"
          />
          <xs:element name="ExtendedFieldURI"
            type="t:PathToExtendedFieldType"
          />
        </xs:choice>
        <xs:element name="AggregateOn"
          type="t:AggregateOnType"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table lists the child elements of the **GroupByType** complex type.

Element name	Type	Description
<b>FieldURI</b>	<b>t:PathToUnindexedFieldType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.49)	Specifies the URI to an unindexed item property.
<b>IndexedFieldURI</b>	<b>t:PathToIndexedFieldType</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.4.48)	Specifies the URI to an indexed item property.
<b>ExtendedFieldURI</b>	<b>t:PathToExtendedFieldType</b> ( <a href="#">[MS-OXWSXPROP]</a> section 2.1.6)	Specifies an extended item property.
<b>AggregateOn</b>	<b>t:AggregateOnType</b> (section <a href="#">3.1.4.2.3.3</a> )	Specifies the item property that is used to determine the order of groups in a response.

### 3.1.4.2.3.8 t:NonEmptyArrayOfFieldOrdersType Complex Type

The **NonEmptyArrayOfFieldOrdersType** complex type specifies an array of **FieldOrderType** complex type, as specified in section [3.1.4.2.3.6](#), elements that contains at least one member.

```
<xs:complexType name="NonEmptyArrayOfFieldOrdersType">
  <xs:sequence>
    <xs:element name="FieldOrder"
      type="t:FieldOrderType"
      maxOccurs="unbounded"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists the child element of the **NonEmptyArraOfFieldOrdersType** complex type.

Element name	Type	Description
<b>FieldOrder</b>	<b>t:FieldOrderType</b> (section <a href="#">3.1.4.2.3.6</a> )	Specifies one or more <b>FieldOrderType</b> complex types.

### 3.1.4.2.4 Simple Types

The following XML schema simple type definitions are specific to this operation.

Simple type name	Description
<b>AggregateType</b>	Specifies the maximum or minimum value used to order items in a group.
<b>SortDirectionType</b>	Specifies the ordering options for a group.
<b>StandardGroupByType</b>	Specifies standard grouping and aggregating mechanisms.

#### 3.1.4.2.4.1 t:AggregateType Simple Type

The **AggregateType** simple type specifies whether the maximum or minimum value of a representative property is used to order the items in a group that is returned by the **FindItem** operation.

```

<xs:simpleType name="AggregateType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="Maximum"
    />
    <xs:enumeration
      value="Minimum"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **AggregateType** simple type.

Value	Meaning
<b>Maximum</b>	Specifies that the groups are sorted starting with the maximum value for a specified aggregation property.
<b>Minimum</b>	Specifies that the groups are sorted starting with the minimum value for a specified aggregation property.

#### 3.1.4.2.4.2 t:SortDirectionType Simple Type

The **SortDirectionType** simple type specifies the ordering options for the groups in the grouped item array that is returned in the response.

```

<xs:simpleType name="SortDirectionType">
  <xs:restriction>
    <xs:enumeration
      value="Ascending"
    />
    <xs:enumeration
      value="Descending"
    />
  </xs:restriction>
</xs:simpleType>

```

The following table lists the values that are defined by the **SortDirectionType** simple type.

Value	Meaning
<b>Ascending</b>	Specifies that the items are sorted in ascending order.
<b>Descending</b>	Specifies that the items are sorted in descending order.

#### 3.1.4.2.4.3 t:StandardGroupByType Simple Type

The **StandardGroupByType** simple type specifies the standard grouping and aggregating mechanisms for a grouped response to the FindItem operation.

```
<xs:simpleType name="StandardGroupByType">
  <xs:restriction>
    <xs:enumeration
      value="ConversationTopic"
    />
  </xs:restriction>
</xs:simpleType>
```

The following table lists the value that is defined by the **StandardGroupByType** simple type.

Value	Meaning
<b>ConversationTopic</b>	Specifies that results are grouped by the conversation topic and aggregated on the date and time at which the item was received.

### 3.1.5 Timer Events

None.

### 3.1.6 Other Local Events

None.

## 4 Protocol Examples

None.

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.



## 6 Appendix A: Full WSDL

The XML files that are listed in the following table are required in order to implement the functionality specified in this document. The contents of each file are included in this section.

File name	Description	Section
MS-OXWSSRCH.wsdl	Contains the WSDL for the implementation of this protocol.	<a href="#">6</a>
MS-OXWSSRCH-messages.xsd	Contains the XML schema message definitions that are used in this protocol.	<a href="#">7.1</a>
MS-OXWSSRCH-types.xsd	Contains the XML schema type definitions that are used in this protocol.	<a href="#">7.2</a>

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSSRCH-types.xsd or MS-OXWSSRCH-messages.xsd schemas have to be placed in the common folder along with the files.

This section contains the contents of the MS-OXWSSRCH.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wSDL:definitions xmlns:soap="http://schemas.xmlsoap.org/wSDL/soap/"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:s="http://www.w3.org/2001/XMLSchema" xmlns:wSDL="http://schemas.xmlsoap.org/wSDL/"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <wSDL:types>
    <xs:schema id="messages" elementFormDefault="qualified" version="Exchange2013"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"/>
      <xs:include schemaLocation="MS-OXWSSRCH-messages.xsd" />
      <xs:include schemaLocation="MS-OXWSSRCH-messages.xsd" />
    </xs:schema>
    <xs:schema id="types" elementFormDefault="qualified" version="Exchange2013"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    </xs:schema>
  </wSDL:types>
  <wSDL:portType name="ExchangeServicePortType">
    <wSDL:operation name="FindFolder">
      <wSDL:input message="tns:FindFolderSoapIn"/>
      <wSDL:output message="tns:FindFolderSoapOut"/>
    </wSDL:operation>
    <wSDL:operation name="FindItem">
      <wSDL:input message="tns:FindItemSoapIn"/>
      <wSDL:output message="tns:FindItemSoapOut"/>
    </wSDL:operation>
  </wSDL:portType>
</wSDL:definitions>
```

```

</wsdl:portType>
<wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
  <wsdl:documentation>
    <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-
i.org/schemas/conformanceClaim/" />
  </wsdl:documentation>
  <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http" />
  <wsdl:operation name="FindFolder">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/FindFolder" />
    <wsdl:input>
      <soap:header message="tns:FindFolderSoapIn" part="Impersonation"
use="literal" />
      <soap:header message="tns:FindFolderSoapIn" part="MailboxCulture"
use="literal" />
      <soap:header message="tns:FindFolderSoapIn" part="RequestVersion"
use="literal" />
      <soap:header message="tns:FindFolderSoapIn" part="TimeZoneContext"
use="literal" />
      <soap:header message="tns:FindFolderSoapIn" part="ManagementRole"
use="literal" />
      <soap:body parts="request" use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="FindFolderResult" use="literal" />
      <soap:header message="tns:FindFolderSoapOut" part="ServerVersion"
use="literal" />
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="FindItem">
    <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/FindItem" />
    <wsdl:input>
      <soap:header message="tns:FindItemSoapIn" part="Impersonation"
use="literal" />
      <soap:header message="tns:FindItemSoapIn" part="MailboxCulture"
use="literal" />
      <soap:header message="tns:FindItemSoapIn" part="RequestVersion"
use="literal" />
      <soap:header message="tns:FindItemSoapIn" part="TimeZoneContext"
use="literal" />
      <soap:header message="tns:FindItemSoapIn" part="DateTimePrecision"
use="literal" />
      <soap:header message="tns:FindItemSoapIn" part="ManagementRole"
use="literal" />
      <soap:body parts="request" use="literal" />
    </wsdl:input>
    <wsdl:output>
      <soap:body parts="FindItemResult" use="literal" />
      <soap:header message="tns:FindItemSoapOut" part="ServerVersion"
use="literal" />
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>
<wsdl:message name="FindItemSoapIn">
  <wsdl:part name="request" element="tns:FindItem" />
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation" />
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture" />
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion" />

```

```
<wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="DateTimePrecision" element="t:DateTimePrecision" />
  <wsdl:part name="ManagementRole" element="t:ManagementRole" />
</wsdl:message>
<wsdl:message name="FindItemSoapOut">
  <wsdl:part name="FindItemResult" element="tns:FindItemResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

<wsdl:message name="FindFolderSoapIn">
  <wsdl:part name="request" element="tns:FindFolder"/>
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  <wsdl:part name="TimeZoneContext" element="t:TimeZoneContext"/>
  <wsdl:part name="ManagementRole" element="t:ManagementRole" />
</wsdl:message>
<wsdl:message name="FindFolderSoapOut">
  <wsdl:part name="FindFolderResult" element="tns:FindFolderResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
</wsdl:definitions>
```

## 7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
Messages schema	m:	<a href="#">7.1</a>
Types schema	T:	<a href="#">7.2</a>

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSSRCH-types.xsd or MS-OXWSSRCH-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

### 7.1 Messages Schema

This section contains the full XML schema for messages.

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
  elementFormDefault="qualified" version="Exchange2013" id="messages">
  <!-- CHANGE THE SCHEMA LOCATION TO REFLECT THE TYPES XSD ASSOCIATED WITH THIS DOCUMENT -->
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
    schemaLocation="types.xsd"/>
  <xs:include/>
-->
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
    schemaLocation="MS-OXWSSRCH-types.xsd"/>
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:complexType name="FindFolderType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="FolderShape" type="t:FolderResponseShapeType"/>
          <xs:choice minOccurs="0">
            <xs:element name="IndexedPageFolderView"
              type="t:IndexedPageViewType"/>
            <xs:element name="FractionalPageFolderView"
              type="t:FractionalPageViewType"/>
          </xs:choice>
          <xs:element name="Restriction" type="t:RestrictionType" minOccurs="0"/>
          <xs:element name="ParentFolderIds"
            type="t:NonEmptyArrayOfBaseFolderIdsType"/>
        </xs:sequence>
        <xs:attribute name="Traversal" type="t:FolderQueryTraversalType"
          use="required"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="FindFolder" type="m:FindFolderType"/>
  <xs:complexType name="FindFolderResponseMessageType">
    <xs:complexContent>
```

```

        <xs:extension base="m:ResponseMessageType">
            <xs:sequence>
                <xs:element name="RootFolder" type="t:FindFolderParentType"
minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="FindFolderResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="FindFolderResponse" type="m:FindFolderResponseType"/>
<xs:complexType name="FindItemType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="ItemShape" type="t:ItemResponseShapeType"/>
                <xs:choice minOccurs="0">
                    <xs:element name="IndexedPageItemView" type="t:IndexedPageViewType"/>
                    <xs:element name="FractionalPageItemView"
type="t:FractionalPageViewType"/>
                    <xs:element name="SeekToConditionPageItemView"
type="t:SeekToConditionPageViewType"/>
                    <xs:element name="CalendarView" type="t:CalendarViewType"/>
                    <xs:element name="ContactsView" type="t:ContactsViewType"/>
                </xs:choice>
                <xs:choice minOccurs="0">
                    <xs:element name="GroupBy" type="t:GroupByType"/>
                    <xs:element name="DistinguishedGroupBy"
type="t:DistinguishedGroupByType"/>
                </xs:choice>
                <xs:element name="Restriction" type="t:RestrictionType" minOccurs="0"/>
                <xs:element name="SortOrder" type="t:NonEmptyArrayOfFieldOrdersType"
minOccurs="0"/>
                <xs:element name="ParentFolderIds"
type="t:NonEmptyArrayOfBaseFolderIdsType"/>
                <xs:element name="QueryString" type="m:QueryStringType" minOccurs="0"
maxOccurs="1"/>
            </xs:sequence>
            <xs:attribute name="Traversal" type="t:ItemQueryTraversalType"
use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="FindItem" type="m:FindItemType"/>
<xs:complexType name="FindItemResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ResponseMessageType">
            <xs:sequence>
                <xs:element name="RootFolder" type="t:FindItemParentType" minOccurs="0"/>
                <xs:element name="HighlightTerms" type="t:ArrayOfHighlightTermsType"
minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="FindItemResponseType">
    <xs:complexContent>

```

```

        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="FindItemResponse" type="m:FindItemResponseType"/>
<xs:complexType name="QueryStringType">
    <xs:simpleContent>
        <xs:extension base="xs:string">
            <xs:attribute name="ResetCache" type="xs:boolean" use="optional"/>
            <xs:attribute name="ReturnHighlightTerms" type="xs:boolean" use="optional"/>
            <xs:attribute name="ReturnDeletedItems" type="xs:boolean" use="optional"/>
        </xs:extension>
    </xs:simpleContent>
</xs:complexType>
</xs:schema>

```

## 7.2 Types Schema

This section contains the contents of the MS-OXWSSRCH-types.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSSRCH-types.xsd includes the file listed in the following table. For the schema file to operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-types.xsd	<a href="#">[MS-OXWSCDATA]</a> section 7.2

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2013" id="types">
    <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    <xs:include schemaLocation="MS-OXWSCDATA-types.xsd"/>
    <xs:complexType name="AggregateOnType">
        <xs:choice>
            <xs:element name="FieldURI" type="t:PathToUnindexedFieldType"/>
            <xs:element name="IndexedFieldURI" type="t:PathToIndexedFieldType"/>
            <xs:element name="ExtendedFieldURI" type="t:PathToExtendedFieldType"/>
        </xs:choice>
        <xs:attribute name="Aggregate" type="t:AggregateType" use="required"/>
    </xs:complexType>
    <xs:simpleType name="AggregateType">
        <xs:restriction base="xs:string">
            <xs:enumeration value="Minimum"/>
            <xs:enumeration value="Maximum"/>
        </xs:restriction>
    </xs:simpleType>
    <xs:complexType name="AndType">
        <xs:complexContent>
            <xs:extension base="t:MultipleOperandBooleanExpressionType"/>
        </xs:complexContent>
    </xs:complexType>
    <xs:element name="And" type="t:AndType" substitutionGroup="t:SearchExpression"/>
    <xs:complexType name="ArrayOfGroupedItemsType">

```

```

    <xs:choice>
      <xs:element name="GroupedItems" type="t:GroupedItemsType" minOccurs="0"
maxOccurs="unbounded"/>
    </xs:choice>
  </xs:complexType>
  <xs:complexType name="BaseGroupByType" abstract="true">
    <xs:attribute name="Order" type="t:SortDirectionType" use="required"/>
  </xs:complexType>
  <xs:complexType name="BasePagingType" abstract="true">
    <xs:attribute name="MaxEntriesReturned" type="xs:int" use="optional"/>
  </xs:complexType>
  <xs:simpleType name="ContainmentModeType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="FullString"/>
      <xs:enumeration value="Prefixed"/>
      <xs:enumeration value="Substring"/>
      <xs:enumeration value="PrefixOnWords"/>
      <xs:enumeration value="ExactPhrase"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:simpleType name="ContainmentComparisonType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Exact"/>
      <xs:enumeration value="IgnoreCase"/>
      <xs:enumeration value="IgnoreNonSpacingCharacters"/>
      <xs:enumeration value="Loose"/>
      <xs:enumeration value="IgnoreCaseAndNonSpacingCharacters"/>
      <xs:enumeration value="LooseAndIgnoreCase"/>
      <xs:enumeration value="LooseAndIgnoreNonSpace"/>
      <xs:enumeration value="LooseAndIgnoreCaseAndIgnoreNonSpace"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="ContainsExpressionType">
    <xs:complexContent>
      <xs:extension base="t:SearchExpressionType">
        <xs:sequence>
          <xs:element ref="t:Path"/>
          <xs:element name="Constant" type="t:ConstantValueType"/>
        </xs:sequence>
        <xs:attribute name="ContainmentMode" type="t:ContainmentModeType" use="optional"/>
        <xs:attribute name="ContainmentComparison" type="t:ContainmentComparisonType"
use="optional"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="Contains" type="t:ContainsExpressionType"
substitutionGroup="t:SearchExpression"/>
  <xs:complexType name="DistinguishedGroupByType">
    <xs:complexContent>
      <xs:extension base="t:BaseGroupByType">
        <xs:sequence>
          <xs:element name="StandardGroupBy" type="t:StandardGroupByType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="ExcludesValueType">
    <xs:attribute name="Value" type="t:ExcludesAttributeType" use="required"/>
  </xs:complexType>

```

```

<xs:complexType name="ExcludesType">
  <xs:complexContent>
    <xs:extension base="t:SearchExpressionType">
      <xs:sequence>
        <xs:element ref="t:Path"/>
        <xs:element name="Bitmask" type="t:ExcludesValueType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="Excludes" type="t:ExcludesType" substitutionGroup="t:SearchExpression"/>
<xs:complexType name="ExistsType">
  <xs:complexContent>
    <xs:extension base="t:SearchExpressionType">
      <xs:sequence>
        <xs:element ref="t:Path"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:element name="Exists" type="t:ExistsType" substitutionGroup="t:SearchExpression"/>
<xs:complexType name="FieldOrderType">
  <xs:sequence>
    <xs:element ref="t:Path"/>
  </xs:sequence>
  <xs:attribute name="Order" type="t:SortDirectionType" use="required"/>
</xs:complexType>
<xs:complexType name="FindFolderParentType">
  <xs:sequence>
    <xs:element name="Folders" type="t:ArrayOfFoldersType" minOccurs="0"/>
  </xs:sequence>
  <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
</xs:complexType>
<xs:complexType name="FindItemParentType">
  <xs:choice>
    <xs:element name="Items" type="t:ArrayOfRealItemsType"/>
    <xs:element name="Groups" type="t:ArrayOfGroupedItemsType"/>
  </xs:choice>
  <xs:attributeGroup ref="t:FindResponsePagingAttributes"/>
</xs:complexType>
<xs:simpleType name="FolderQueryTraversalType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Shallow"/>
    <xs:enumeration value="Deep"/>
    <xs:enumeration value="SoftDeleted"/>
  </xs:restriction>
</xs:simpleType>
<xs:complexType name="FractionalPageViewType">
  <xs:complexContent>
    <xs:extension base="t:BasePagingType">
      <xs:attribute name="Numerator" type="xs:int" use="required"/>
      <xs:attribute name="Denominator" type="xs:int" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="GroupByType">
  <xs:complexContent>
    <xs:extension base="t:BaseGroupByType">
      <xs:sequence>

```



```

        <xs:choice>
            <xs:element name="FieldURI" type="t:PathToUnindexedFieldType"/>
            <xs:element name="IndexedFieldURI" type="t:PathToIndexedFieldType"/>
            <xs:element name="ExtendedFieldURI" type="t:PathToExtendedFieldType"/>
        </xs:choice>
        <xs:element name="AggregateOn" type="t:AggregateOnType"/>
    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="GroupedItemsType">
    <xs:sequence>
        <xs:element name="GroupIndex" type="xs:string"/>
        <xs:element name="Items" type="t:ArrayOfRealItemsType"/>
    </xs:sequence>
</xs:complexType>
<xs:simpleType name="IndexBasePointType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Beginning"/>
        <xs:enumeration value="End"/>
    </xs:restriction>
</xs:simpleType>
<xs:complexType name="IndexedPageViewType">
    <xs:complexContent>
        <xs:extension base="t:BasePagingType">
            <xs:attribute name="Offset" type="xs:int" use="required"/>
            <xs:attribute name="BasePoint" type="t:IndexBasePointType" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="IsEqualToType">
    <xs:complexContent>
        <xs:extension base="t:TwoOperandExpressionType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="IsEqualTo" type="t:IsEqualToType"
substitutionGroup="t:SearchExpression"/>
<xs:complexType name="IsNotEqualToType">
    <xs:complexContent>
        <xs:extension base="t:TwoOperandExpressionType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="IsNotEqualTo" type="t:IsNotEqualToType"
substitutionGroup="t:SearchExpression"/>
<xs:complexType name="IsGreaterThanType">
    <xs:complexContent>
        <xs:extension base="t:TwoOperandExpressionType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="IsGreaterThan" type="t:IsGreaterThanType"
substitutionGroup="t:SearchExpression"/>
<xs:complexType name="IsGreaterThanOrEqualToType">
    <xs:complexContent>
        <xs:extension base="t:TwoOperandExpressionType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="IsGreaterThanOrEqualTo" type="t:IsGreaterThanOrEqualToType"
substitutionGroup="t:SearchExpression"/>
<xs:complexType name="IsLessThanType">

```

```

    <xs:complexContent>
      <xs:extension base="t:TwoOperandExpressionType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="IsLessThan" type="t:IsLessThanType"
substitutionGroup="t:SearchExpression"/>
  <xs:complexType name="IsLessThanOrEqualToType">
    <xs:complexContent>
      <xs:extension base="t:TwoOperandExpressionType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="IsLessThanOrEqualTo" type="t:IsLessThanOrEqualToType"
substitutionGroup="t:SearchExpression"/>
  <xs:simpleType name="ItemQueryTraversalType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Shallow"/>
      <xs:enumeration value="SoftDeleted"/>
      <xs:enumeration value="Associated"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="NotType">
    <xs:complexContent>
      <xs:extension base="t:SearchExpressionType">
        <xs:sequence>
          <xs:element ref="t:SearchExpression"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="Not" type="t:NotType" substitutionGroup="t:SearchExpression"/>
  <xs:complexType name="MultipleOperandBooleanExpressionType" abstract="true">
    <xs:complexContent>
      <xs:extension base="t:SearchExpressionType">
        <xs:sequence>
          <xs:element ref="t:SearchExpression" minOccurs="1" maxOccurs="unbounded"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:complexType name="OrType">
    <xs:complexContent>
      <xs:extension base="t:MultipleOperandBooleanExpressionType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="Or" type="t:OrType" substitutionGroup="t:SearchExpression"/>
  <xs:complexType name="NonEmptyArrayOfFieldOrdersType">
    <xs:sequence>
      <xs:element name="FieldOrder" type="t:FieldOrderType" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="RestrictionType">
    <xs:sequence>
      <xs:element ref="t:SearchExpression"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="SearchExpressionType" abstract="true"/>
  <xs:element name="SearchExpression" type="t:SearchExpressionType"/>
  <xs:simpleType name="SearchFolderTraversalType">
    <xs:restriction base="xs:string">

```

```

        <xs:enumeration value="Shallow"/>
        <xs:enumeration value="Deep"/>
    </xs:restriction>
</xs:simpleType>
<xs:complexType name="SearchFolderType">
    <xs:complexContent>
        <xs:extension base="t:FolderType">
            <xs:sequence>
                <xs:element name="SearchParameters" type="t:SearchParametersType" minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:complexType name="SearchParametersType">
    <xs:sequence>
        <xs:element name="Restriction" type="t:RestrictionType"/>
        <xs:element name="BaseFolderIds" type="t:NonEmptyArrayOfBaseFolderIdsType"/>
    </xs:sequence>
    <xs:attribute name="Traversal" type="t:SearchFolderTraversalType" use="optional"/>
</xs:complexType>
<xs:complexType name="SeekToConditionPageViewType">
    <xs:complexContent>
        <xs:extension base="t:BasePagingType">
            <xs:sequence>
                <xs:element name="Condition" type="t:RestrictionType" minOccurs="1"/>
            </xs:sequence>
            <xs:attribute name="BasePoint" type="t:IndexBasePointType" use="required"/>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:simpleType name="SortDirectionType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="Ascending"/>
        <xs:enumeration value="Descending"/>
    </xs:restriction>
</xs:simpleType>
<xs:simpleType name="StandardGroupByType">
    <xs:restriction base="xs:string">
        <xs:enumeration value="ConversationTopic"/>
    </xs:restriction>
</xs:simpleType>
<xs:complexType name="TwoOperandExpressionType" abstract="true">
    <xs:complexContent>
        <xs:extension base="t:SearchExpressionType">
            <xs:sequence>
                <xs:element ref="t:Path"/>
                <xs:element name="FieldURIOrConstant" type="t:FieldURIOrConstantType"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
</xs:schema>

```

## 8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft Exchange Server 2007
- Microsoft Exchange Server 2010
- Microsoft Exchange Server 2013
- Microsoft Lync 2010
- Microsoft Lync 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not implement the **SeekToConditionPageViewType** complex type.

[<2> Section 2.2.4:](#) Exchange 2007 and Exchange 2010 do not implement the **QueryStringType** complex type.

[<3> Section 2.2.4.28:](#) Exchange 2007 and Exchange 2010 do not implement the **SeekToConditionPageViewType**.

[<4> Section 3.1.4.1.1.1:](#) Exchange 2007 and Exchange 2010 do not use the **ManagementRole** part.

[<5> Section 3.1.4.2:](#) Exchange 2007, Exchange 2010, and Exchange 2010 SP1 do not include the **DateTimePrecision** part.

[<6> Section 3.1.4.2.1.1:](#) Exchange 2007, the initial release version of Exchange 2010, and Exchange 2010 SP1 do not use the **DateTimePrecision** part.

[<7> Section 3.1.4.2.1.1:](#) Exchange 2007 and Exchange 2010 do not use the **ManagementRole** part.

[<8> Section 3.1.4.2.3.2:](#) Exchange 2007 and the initial release version of Exchange 2010 return all properties defined for any item in the specified folder.

## 9 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

## 10 Index

### A

Abstract data model  
  [server](#) 37  
[Applicability](#) 9  
[Attribute groups](#) 36  
[Attributes](#) 35

### C

[Capability negotiation](#) 9  
[Change tracking](#) 69  
[Complex types](#) 14  
  [m:FindFolderResponseMessageType Complex Type](#) 16  
  [m:FindItemResponseMessageType Complex Type](#) 16  
  [m:QueryStringType Complex Type](#) 31  
  [t:AndType Complex Type](#) 17  
  [t:ArrayOfGroupedItemsType Complex Type](#) 17  
  [t:BasePagingType Complex Type](#) 18  
  [t:ContainsExpressionType Complex Type](#) 18  
  [t:ExcludesType Complex Type](#) 19  
  [t:ExcludesValueType Complex Type](#) 20  
  [t:ExistsType Complex Type](#) 20  
  [t:FindFolderParentType Complex Type](#) 21  
  [t:FindItemParentType Complex Type](#) 21  
  [t:FractionalPageViewType Complex Type](#) 22  
  [t:GroupedItemsType Complex Type](#) 23  
  [t:IndexedPageViewType Complex Type](#) 23  
  [t:IsEqualToType Complex Type](#) 24  
  [t:IsGreaterThanOrEqualToType Complex Type](#) 24  
  [t:IsGreaterThanType Complex Type](#) 25  
  [t:IsLessThanOrEqualToType Complex Type](#) 25  
  [t:IsLessThanType Complex Type](#) 25  
  [t:IsNotEqualToType Complex Type](#) 25  
  [t:MultipleOperandBooleanExpressionType Complex Type](#) 26  
  [t:NotType Complex Type](#) 26  
  [t:OrType Complex Type](#) 27  
  [t:RestrictionType Complex Type](#) 27  
  [t:SearchExpressionType Complex Type](#) 28  
  [t:SearchFolderType Complex Type](#) 28  
  [t:SearchParametersType Complex Type](#) 28  
  [t:SeekToConditionPageViewType Complex Type](#) 29  
  [t:TwoOperandExpressionType Complex Type](#) 30

### D

Data model - abstract  
  [server](#) 37

### E

Elements  
  [tns:And Element](#) 11  
  [tns:Contains Element](#) 12  
  [tns:Excludes Element](#) 12

[tns:Exists Element](#) 12  
  [tns:IsEqualTo Element](#) 12  
  [tns:IsGreaterThan Element](#) 12  
  [tns:IsGreaterThanOrEqualTo Element](#) 13  
  [tns:IsLessThan Element](#) 13  
  [tns:IsLessThanOrEqualTo Element](#) 13  
  [tns:IsNotEqualTo Element](#) 13  
  [tns:Not Element](#) 13  
  [tns:Or Element](#) 14  
  [tns:SearchExpression Element](#) 14

### Events

[local - server](#) 54  
  [timer - server](#) 54

### F

[Fields - vendor-extensible](#) 9  
[Full WSDL](#) 57  
[Full XML Schema](#) 60  
  [Messages Schema](#) 60  
  [Types Schema](#) 62

### G

[Glossary](#) 6  
[Groups](#) 36

### I

[Implementer - security considerations](#) 56  
[Index of security parameters](#) 56  
[Informative references](#) 8  
Initialization  
  [server](#) 37  
[Introduction](#) 6

### L

Local events  
  [server](#) 54

### M

[m:FindFolderResponseMessageType Complex Typecomplex type](#) 16  
  [m:FindItemResponseMessageType Complex Typecomplex type](#) 16  
  [m:QueryStringType Complex Typecomplex type](#) 31  
Message processing  
  [server](#) 37  
Messages  
  [attribute groups](#) 36  
  [attributes](#) 35  
  [complex types](#) 14  
  [elements](#) 10  
  [enumerated](#) 10  
  [groups](#) 36  
  [m:FindFolderResponseMessageType Complex Typecomplex type](#) 16

[m:FindItemResponseMessageType Complex Typecomplex type](#) 16  
[m:QueryStringType Complex Typecomplex type](#) 31  
[namespaces](#) 10  
[simple types](#) 31  
[syntax](#) 10  
[t:AndType Complex Typecomplex type](#) 17  
[t:ArrayOfGroupedItemsType Complex Typecomplex type](#) 17  
[t:BasePagingType Complex Typecomplex type](#) 18  
[t:ContainmentComparisonType Simple Typesimple type](#) 31  
[t:ContainmentModeType Simple Typesimple type](#) 32  
[t:ContainsExpressionType Complex Typecomplex type](#) 18  
[t:ExcludesType Complex Typecomplex type](#) 19  
[t:ExcludesValueType Complex Typecomplex type](#) 20  
[t:ExistsType Complex Typecomplex type](#) 20  
[t:FindFolderParentType Complex Typecomplex type](#) 21  
[t:FindItemParentType Complex Typecomplex type](#) 21  
[t:FolderQueryTraversalType Simple Typesimple type](#) 33  
[t:FractionalPageViewType Complex Typecomplex type](#) 22  
[t:GroupedItemsType Complex Typecomplex type](#) 23  
[t:IndexBasePointType Simple Typesimple type](#) 34  
[t:IndexedPageViewType Complex Typecomplex type](#) 23  
[t:IsEqualToType Complex Typecomplex type](#) 24  
[t:IsGreaterThanOrEqualToType Complex Typecomplex type](#) 24  
[t:IsGreaterThanType Complex Typecomplex type](#) 25  
[t:IsLessThanOrEqualToType Complex Typecomplex type](#) 25  
[t:IsLessThanType Complex Typecomplex type](#) 25  
[t:IsNotEqualToType Complex Typecomplex type](#) 25  
[t:ItemQueryTraversalType Simple Typesimple type](#) 34  
[t:MultipleOperandBooleanExpressionType Complex Typecomplex type](#) 26  
[t:NotType Complex Typecomplex type](#) 26  
[t:OrType Complex Typecomplex type](#) 27  
[t:RestrictionType Complex Typecomplex type](#) 27  
[t:SearchExpressionType Complex Typecomplex type](#) 28  
[t:SearchFolderTraversalType Simple Typesimple type](#) 35  
[t:SearchFolderType Complex Typecomplex type](#) 28  
[t:SearchParametersType Complex Typecomplex type](#) 28  
[t:SeekToConditionPageViewType Complex Typecomplex type](#) 29

[t:TwoOperandExpressionType Complex Typecomplex type](#) 30  
[tns:And Elementelement](#) 11  
[tns:Contains Elementelement](#) 12  
[tns:Excludes Elementelement](#) 12  
[tns:Exists Elementelement](#) 12  
[tns:IsEqualTo Elementelement](#) 12  
[tns:IsGreaterThan Elementelement](#) 12  
[tns:IsGreaterThanOrEqualTo Elementelement](#) 13  
[tns:IsLessThan Elementelement](#) 13  
[tns:IsLessThanOrEqualTo Elementelement](#) 13  
[tns:IsNotEqualTo Elementelement](#) 13  
[tns:Not Elementelement](#) 13  
[tns:Or Elementelement](#) 14  
[tns:SearchExpression Elementelement](#) 14  
[transport](#) 10

## N

[Namespaces](#) 10  
[Normative references](#) 7

## O

Operations  
[FindFolder Operation](#) 37  
[FindItem Operation](#) 42  
[Overview \(synopsis\)](#) 8

## P

[Parameters - security index](#) 56  
[Preconditions](#) 9  
[Prerequisites](#) 9  
[Product behavior](#) 68  
 Protocol Details  
[overview](#) 37

## R

[References](#) 6  
[informative](#) 8  
[normative](#) 7  
[Relationship to other protocols](#) 8

## S

Security  
[implementer considerations](#) 56  
[parameter index](#) 56  
 Sequencing rules  
[server](#) 37  
 Server  
[abstract data model](#) 37  
[FindFolder Operation operation](#) 37  
[FindItem Operation operation](#) 42  
[initialization](#) 37  
[local events](#) 54  
[message processing](#) 37  
[sequencing rules](#) 37  
[timer events](#) 54  
[timers](#) 37

[Simple types](#) 31  
[t:ContainmentComparisonType Simple Type](#) 31  
[t:ContainmentModeType Simple Type](#) 32  
[t:FolderQueryTraversalType Simple Type](#) 33  
[t:IndexBasePointType Simple Type](#) 34  
[t:ItemQueryTraversalType Simple Type](#) 34  
[t:SearchFolderTraversalType Simple Type](#) 35

[Standards assignments](#) 9  
Syntax  
[messages - overview](#) 10

## T

[t:AndType Complex Typecomplex type](#) 17  
[t:ArrayOfGroupedItemsType Complex Typecomplex type](#) 17  
[t:BasePagingType Complex Typecomplex type](#) 18  
[t:ContainmentComparisonType Simple Typesimple type](#) 31  
[t:ContainmentModeType Simple Typesimple type](#) 32  
[t:ContainsExpressionType Complex Typecomplex type](#) 18  
[t:ExcludesType Complex Typecomplex type](#) 19  
[t:ExcludesValueType Complex Typecomplex type](#) 20  
[t:ExistsType Complex Typecomplex type](#) 20  
[t:FindFolderParentType Complex Typecomplex type](#) 21  
[t:FindItemParentType Complex Typecomplex type](#) 21  
[t:FolderQueryTraversalType Simple Typesimple type](#) 33  
[t:FractionalPageViewType Complex Typecomplex type](#) 22  
[t:GroupedItemsType Complex Typecomplex type](#) 23  
[t:IndexBasePointType Simple Typesimple type](#) 34  
[t:IndexedPageViewType Complex Typecomplex type](#) 23  
[t:IsEqualToType Complex Typecomplex type](#) 24  
[t:IsGreaterThanOrEqualToType Complex Typecomplex type](#) 24  
[t:IsGreaterThanType Complex Typecomplex type](#) 25  
[t:IsLessThanOrEqualToType Complex Typecomplex type](#) 25  
[t:IsLessThanType Complex Typecomplex type](#) 25  
[t:IsNotEqualToType Complex Typecomplex type](#) 25  
[t:ItemQueryTraversalType Simple Typesimple type](#) 34  
[t:MultipleOperandBooleanExpressionType Complex Typecomplex type](#) 26  
[t:NotType Complex Typecomplex type](#) 26  
[t:OrType Complex Typecomplex type](#) 27  
[t:RestrictionType Complex Typecomplex type](#) 27  
[t:SearchExpressionType Complex Typecomplex type](#) 28  
[t:SearchFolderTraversalType Simple Typesimple type](#) 35  
[t:SearchFolderType Complex Typecomplex type](#) 28  
[t:SearchParametersType Complex Typecomplex type](#) 28  
[t:SeekToConditionPageViewType Complex Typecomplex type](#) 29

[t:TwoOperandExpressionType Complex Typecomplex type](#) 30  
Timer events  
[server](#) 54  
Timers  
[server](#) 37  
[tns:And Elementelement](#) 11  
[tns:Contains Elementelement](#) 12  
[tns:Excludes Elementelement](#) 12  
[tns:Exists Elementelement](#) 12  
[tns:IsEqualTo Elementelement](#) 12  
[tns:IsGreaterThan Elementelement](#) 12  
[tns:IsGreaterThanOrEqualTo Elementelement](#) 13  
[tns:IsLessThan Elementelement](#) 13  
[tns:IsLessThanOrEqualTo Elementelement](#) 13  
[tns:IsNotEqualTo Elementelement](#) 13  
[tns:Not Elementelement](#) 13  
[tns:Or Elementelement](#) 14  
[tns:SearchExpression Elementelement](#) 14  
[Tracking changes](#) 69  
[Transport](#) 10  
Types  
[complex](#) 14  
[simple](#) 31

## V

[Vendor-extensible fields](#) 9  
[Versioning](#) 9

## W

[WSDL](#) 57

## X

[XML Schema](#) 60  
[Messages Schema](#) 60  
[Types Schema](#) 62