

## [MS-OXWSURPT]:

# Retention Tag Web Service Protocol

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

**Preliminary Documentation.** This Open Specification provides documentation for past and current releases and/or for the pre-release version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional

development obligations or any other costs as a result of relying on this preliminary documentation,  
you do so at your own risk.

Preliminary

## Revision Summary

Date	Revision History	Revision Class	Comments
7/16/2012	0.1	New	Released new document.
10/8/2012	1.0	Major	Significantly changed the technical content.
2/11/2013	2.0	Major	Significantly changed the technical content.
7/26/2013	2.0	No Change	No changes to the meaning, language, or formatting of the technical content.
11/18/2013	2.0	No Change	No changes to the meaning, language, or formatting of the technical content.
2/10/2014	2.0	No Change	No changes to the meaning, language, or formatting of the technical content.
4/30/2014	2.0	No Change	No changes to the meaning, language, or formatting of the technical content.
7/31/2014	2.1	Minor	Clarified the meaning of the technical content.
10/30/2014	2.1	No Change	No changes to the meaning, language, or formatting of the technical content.
5/26/2015	3.0	Major	Significantly changed the technical content.

# Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>6</b>
1.1	Glossary .....	6
1.2	References .....	8
1.2.1	Normative References .....	8
1.2.2	Informative References .....	8
1.3	Overview .....	9
1.4	Relationship to Other Protocols .....	9
1.5	Prerequisites/Preconditions .....	10
1.6	Applicability Statement .....	10
1.7	Versioning and Capability Negotiation .....	10
1.8	Vendor-Extensible Fields .....	10
1.9	Standards Assignments.....	10
<b>2</b>	<b>Messages.....</b>	<b>11</b>
2.1	Transport.....	11
2.2	Common Message Syntax .....	11
2.2.1	Namespaces .....	11
2.2.2	Messages.....	11
2.2.3	Elements .....	11
2.2.4	Complex Types.....	12
2.2.4.1	RetentionTagType .....	12
2.2.5	Simple Types .....	12
2.2.5.1	RetentionType .....	12
2.2.6	Attributes .....	13
2.2.7	Groups .....	13
2.2.8	Attribute Groups.....	13
<b>3</b>	<b>Protocol Details .....</b>	<b>14</b>
3.1	ExchangeServicePortType Server Details.....	14
3.1.1	Abstract Data Model.....	14
3.1.2	Timers .....	14
3.1.3	Initialization.....	14
3.1.4	Message Processing Events and Sequencing Rules .....	14
3.1.4.1	GetUserRetentionPolicyTags .....	14
3.1.4.1.1	Messages .....	15
3.1.4.1.1.1	GetUserRetentionPolicyTagsSoapIn .....	15
3.1.4.1.1.2	GetUserRetentionPolicyTagsSoapOut .....	16
3.1.4.1.2	Elements.....	16
3.1.4.1.2.1	GetUserRetentionPolicyTags .....	17
3.1.4.1.2.2	GetUserRetentionPolicyTagsResponse .....	17
3.1.4.1.3	Complex Types .....	17
3.1.4.1.3.1	ArrayOfRetentionPolicyTagsType .....	17
3.1.4.1.3.2	GetUserRetentionPolicyTagsResponseMessageType .....	18
3.1.4.1.3.3	GetUserRetentionPolicyTagsType .....	18
3.1.4.1.3.4	RetentionPolicyTagType .....	18
3.1.4.1.4	Simple Types .....	19
3.1.4.1.4.1	ElcFolderType .....	19
3.1.4.1.4.2	RetentionActionType .....	21
3.1.4.1.5	Attributes .....	21
3.1.4.1.6	Groups.....	21
3.1.4.1.7	Attribute Groups.....	21
3.1.5	Timer Events.....	22
3.1.6	Other Local Events.....	22

<b>4</b>	<b>Protocol Examples.....</b>	<b>23</b>
<b>5</b>	<b>Security.....</b>	<b>26</b>
5.1	Security Considerations for Implementers .....	26
5.2	Index of Security Parameters .....	26
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>27</b>
<b>7</b>	<b>Appendix B: Full XML Schema.....</b>	<b>28</b>
7.1	http://schemas.microsoft.com/exchange/services/2006/messages Schema .....	28
7.2	http://schemas.microsoft.com/exchange/services/2006/types Schema.....	29
<b>8</b>	<b>Appendix C: Product Behavior .....</b>	<b>31</b>
<b>9</b>	<b>Change Tracking.....</b>	<b>32</b>
<b>10</b>	<b>Index.....</b>	<b>34</b>

Preliminary

# 1 Introduction

The Retention Tag Web Service Protocol enables clients to use a **web service** to retrieve **retention policy** information for items in a **mailbox**.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are specific to this document:

**Calendar folder:** A Folder object that contains Calendar objects.

**Contacts folder:** A Folder object that contains Contact objects.

**Deleted Items folder:** A special folder that is the default location for objects that have been deleted.

**Drafts folder:** A special folder that is the default location for Message objects that have been saved but not sent.

**endpoint:** A communication port that is exposed by an application server for a specific shared service and to which messages can be addressed.

**Hypertext Transfer Protocol (HTTP):** An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS):** An extension of **HTTP** that securely encrypts and decrypts webpage requests.

**Inbox folder:** A special folder that is the default location for Message objects received by a user or resource.

**Inter-Personal Mail (IPM):** Typical user messaging items, such as email and calendar items.

**Journal folder:** A Folder object that contains Journal objects.

**Junk Email folder:** A special folder that is the default location for Message objects that are determined to be junk email by a Junk Email rule.

**mailbox:** A message store that contains email, calendar items, and other Message objects for a single recipient.

**Notes folder:** A Folder object that contains Note objects.

**Outbox folder:** A special folder that contains Message objects that are submitted to be sent.

**retention policy:** A policy that specifies the length of time during which data, documents, and other records must be available for recovery.

**retention tag:** An element that contains information about the **retention policy** of a Message object or folder.

**Sent Items folder:** A special folder that is the default location for storing copies of Message objects after they are submitted or sent.

**SOAP**: A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses XML technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [\[SOAP1.2-1/2003\]](#).

**SOAP action**: The HTTP request header field used to indicate the intent of the **SOAP** request, using a URI value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

**SOAP body**: A container for the payload data being delivered by a SOAP message to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

**SOAP header**: A mechanism for implementing extensions to a SOAP message in a decentralized manner without prior agreement between the communicating parties. See [\[SOAP1.2-1/2007\]](#) section 5.2 for more information.

**Tasks folder**: A Folder object that contains Task objects.

**web server**: A server computer that hosts websites and responds to requests from applications.

**web service**: A unit of application logic that provides data and services to other applications and can be called by using standard Internet transport protocols such as **HTTP**, Simple Mail Transfer Protocol (SMTP), or File Transfer Protocol (FTP). Web services can perform functions that range from simple requests to complicated business processes.

**Web Services Description Language (WSDL)**: An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

**WSDL message**: An abstract, typed definition of the data that is communicated during a **WSDL operation** [\[WSDL\]](#). Also, an element that describes the data being exchanged between web service providers and clients.

**WSDL operation**: A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

**WSDL port type**: A named set of logically-related, abstract **Web Services Description Language (WSDL)** operations and messages.

**XML namespace**: A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [\[RFC3986\]](#). A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [\[XMLNS-2ED1\]](#).

**XML namespace prefix**: An abbreviated form of an **XML namespace**, as described in [\[XML\]](#).

**XML schema**: A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by XML itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT**: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

- [MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".
- [MS-OXWSXPROP] Microsoft Corporation, "[Extended Properties Structure](#)".
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>
- [RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>
- [RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>
- [SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>
- [WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>
- [WSIBASIC] Ballinger, K., Ehnebuske, D., Gudgin, M., et al., Eds., "Basic Profile Version 1.0", Final Material, April 2004, <http://www.ws-i.org/Profiles/BasicProfile-1.0-2004-04-16.html>
- [XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>
- [XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmleschema-1-20010502/>
- [XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmleschema-2-20010502/>

### 1.2.2 Informative References

- [MS-OXDSCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol](#)".
- [MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".
- [MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol](#)".
- [MS-OXWSCONV] Microsoft Corporation, "[Conversations Web Service Protocol](#)".
- [MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol](#)".

[MS-OXWSFOLD] Microsoft Corporation, "[Folders and Folder Permissions Web Service Protocol](#)".

### 1.3 Overview

This protocol defines retention policies that are applied to folders, mailboxes, or individual items such as email and voice-mail messages.

There are three types of **retention tags**:

- Default policy tags that apply to mailbox items that have no other type of retention tag applied.
- System folder policy tags that are applied to default folders, such as the **Inbox folder**.
- Personal tags that users can apply to folders that they create or to individual items.


Only one retention policy can be assigned to a mailbox, but the policy can have one or more retention tags of various types linked to it. Retention tags can be linked to or unlinked from a retention policy at any time. This protocol provides an operation that lists all the retention tags that are associated with a user. These include retention tags linked to the retention policy applied on the user and retention tags that were selected by the user.

### 1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISCI\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), to identify the target **endpoint** to use for each operation.

This protocol uses **SOAP**, as described in [\[SOAP1.1\]](#), to specify the structure information that is exchanged between the client and the server. This protocol uses the **XML schema**, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content that is sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

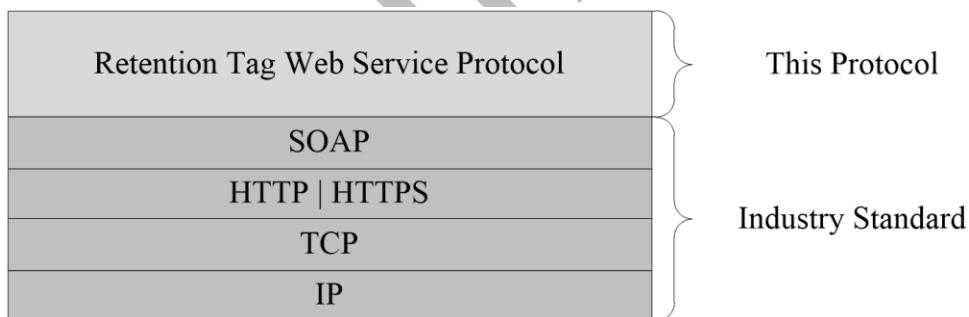

**Figure 1: This protocol in relation to other protocols**

The following protocols use the retention tag and retention action information provided by this protocol:

- Conversations Web Service Protocol, as described in [\[MS-OXWSCONV\]](#)
- Core Items Web Service Protocol, as described in [\[MS-OXWSCORE\]](#)
- Folders and Folder Permissions Web Service Protocol, as described in [\[MS-OXWSFOLD\]](#)

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

## 1.5 Prerequisites/Preconditions

The endpoint URL that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as specified in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as specified in [\[MS-OXDSCLI\]](#), forms the HTTP request to the **web server** that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint is identified in the HTTP web requests that target this protocol.

## 1.6 Applicability Statement

This protocol is applicable to environments that use web services to implement retention policies for a user's mailbox. This protocol is applicable to all SOAP-based clients, as described in [\[SOAP1.1\]](#).

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as described in section [2.1](#).
- **Protocol Versions:** This protocol describes only one **WSDL port type** version. The **RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.4.7, identifies the WSDL port type version of the request. The **ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.4.8, identifies the version of the server responding to the request.
- **Security and Authentication Methods:** This protocol relies on the web server that is hosting it to perform authentication.
- **Capability Negotiation:** This protocol does not support version negotiation.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The **Web Services Description Language (WSDL)** in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null, or present.

### 2.1 Transport

This protocol uses SOAP 1.1, as specified in [\[SOAP1.1\]](#).

This protocol MUST use SOAP over HTTP, as specified in [\[RFC2616\]](#). The protocol SHOULD use secure communications by means of HTTPS, as specified in [\[RFC2818\]](#).

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses XML schema, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and WSDL, as defined in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
m	http://schemas.microsoft.com/exchange/services/2006/messages	
soap	http://schemas.xmlsoap.org/wsdl/soap/	<a href="#">[SOAP1.1]</a>
t	http://schemas.microsoft.com/exchange/services/2006/types	
wsdl	http://schemas.xmlsoap.org/wsdl/	<a href="#">[WSDL]</a>
wsi	http://ws-i.org/schemas/conformanceClaim/	<a href="#">[WSIBASIC]</a>
xs	http://www.w3.org/2001/XMLSchema	<a href="#">[XMLSCHEMA1]</a> <a href="#">[XMLSCHEMA2]</a>

#### 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

#### 2.2.3 Elements

This specification does not define any common XML schema element definitions.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
<b>RetentionTagType</b>	The <b>RetentionTagType</b> complex type specifies the retention policy tag applied to a folder or an item. This type extends the <b>GuidType</b> simple type, as specified by <a href="#">[MS-OXWSXPROP]</a> section 2.1.7.

### 2.2.4.1 RetentionTagType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/types>

The **RetentionTagType** complex type specifies the retention policy tag applied to a folder or an item. This type extends the **GuidType** simple type, as specified by [\[MS-OXWSXPROP\]](#) section 2.1.7.

```
<xs:complexType name="RetentionTagType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:simpleContent>
    <xs:extension base="t:GuidType">
      <xs:attribute name="IsExplicit" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

**IsExplicit:** An attribute of type **boolean**, as defined in [\[XMLSCHEMA2\]](#), that indicates whether the retention policy tag associated with a folder or an item was applied explicitly.

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
<b>RetentionType</b>	The <b>RetentionType</b> simple type specifies the type of the retention action.

### 2.2.5.1 RetentionType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/types>

The **RetentionType** simple type specifies the type of the retention action.

```
<xs:simpleType name="RetentionType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Delete"/>
    <xs:enumeration value="Archive"/>
  </xs:restriction>
```

```
</xs:simpleType>
```

The following table specifies the allowable values for the **RetentionType** simple type.

Value	Meaning
Delete	Specifies deletion.
Archive	Specifies archiving.

## 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

## 2.2.7 Groups

This specification does not define any common XML schema group definitions.

## 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

### 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null and present.

#### 3.1 ExchangeServicePortType Server Details

This protocol defines a single WSDL port type, ExchangeServicePortType. This port type has one operation, the  **GetUserRetentionPolicyTags** operation, which retrieves retention policy tags.

##### 3.1.1 Abstract Data Model

None.

##### 3.1.2 Timers

None.

##### 3.1.3 Initialization

None.

##### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

Operation	Description
<b> GetUserRetentionPolicyTags</b>	The <b> GetUserRetentionPolicyTags</b> operation retrieves a list of all default, system folder, and personal tags that are associated with a user by means of a system policy or that were applied by the user.

###### 3.1.4.1 GetUserRetentionPolicyTags

The  **GetUserRetentionPolicyTags** operation retrieves a list of all default, system folder, and personal tags that are associated with a user by means of a system policy or that were applied by the user.

The following is the WSDL port type specification of the  **GetUserRetentionPolicyTags WSDL operation**.

```
<wsdl:operation name=" GetUserRetentionPolicyTags"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

<wsdl:input message="m:GetUserRetentionPolicyTagsSoapIn"/>
<wsdl:output message="m:GetUserRetentionPolicyTagsSoapOut"/>
</wsdl:operation>

```

The following is the WSDL binding specification of the  **GetUserRetentionPolicyTags**  operation.

```

<wsdl:operation name=" GetUserRetentionPolicyTags "
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ GetUserRetentionPolicyTags"
    cyTags" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    <wsdl:input>
      <soap:header message="m:GetUserRetentionPolicyTagsSoapIn" part="RequestVersion"
      use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:body use="literal" parts="request"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:input>
    <wsdl:output>
      <soap:body use="literal" parts=" GetUserRetentionPolicyTagsResult"
      xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
      <soap:header message="m:GetUserRetentionPolicyTagsSoapOut" part="ServerVersion"
      use="literal" xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">
    </wsdl:output>
  </wsdl:operation>

```

The protocol client sends a  **GetUserRetentionPolicyTagsSoapIn**  request WSDL message and the protocol server responds with a  **GetUserRetentionPolicyTagsSoapOut**  response.

### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b> GetUserRetentionPolicyTagsSoapIn </b>	Specifies the request to retrieve user retention policy tags.
<b> GetUserRetentionPolicyTagsSoapOut </b>	Specifies the response to the <b> GetUserRetentionPolicyTagsSoapIn </b> request.

#### 3.1.4.1.1.1 **GetUserRetentionPolicyTagsSoapIn**

The  **GetUserRetentionPolicyTagsSoapIn**  WSDL message specifies the request to retrieve user retention policy tags.

The following is the  **GetUserRetentionPolicyTagsSoapIn**  WSDL message specification.

```

<wsdl:message name=" GetUserRetentionPolicyTagsSoapIn "
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name="request" element="m:GetUserRetentionPolicyTags"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The  **GetUserRetentionPolicyTagsSoapIn**  WSDL message is the input message for the  **SOAP action**

<http://schemas.microsoft.com/exchange/services/2006/messages/ GetUserRetentionPolicyTags>.

The parts of the  **GetUserRetentionPolicyTagsSoapIn** WSDL message are described in the following table.

Part name	Element/type	Description
<b>request</b>	<b> GetUserRetentionPolicyTags</b> (section <a href="#">3.1.4.1.2.1</a> )	Specifies the <b>SOAP body</b> of the request to retrieve retention policy tags.
<b>RequestVersion</b>	<b>RequestServerVersion</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.11)	Specifies a <b>SOAP header</b> that identifies the schema version for the <b> GetUserRetentionPolicyTags</b> operation request.

### 3.1.4.1.1.2 GetUserRetentionPolicyTagsSoapOut

The  **GetUserRetentionPolicyTagsSoapOut** WSDL message specifies the response to the  **GetUserRetentionPolicyTagsSoapIn** request.

The following is the  **GetUserRetentionPolicyTagsSoapOut** WSDL message specification.

```
<wsdl:message name=" GetUserRetentionPolicyTagsSoapOut"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:part name=" GetUserRetentionPolicyTagsResult"
    element="m: GetUserRetentionPolicyTagsResponse"/>
  <wsdl:part name=" ServerVersion" element="t: ServerVersionInfo"/>
</wsdl:message>
```

The  **GetUserRetentionPolicyTagsSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/ GetUserRetentionPolicyTags>.

The parts of the  **GetUserRetentionPolicyTagsSoapOut** WSDL message are described in the following table.

Part name	Element/type	Description
<b> GetUserRetentionPolicyTagsResult</b>	<b> GetUserRetentionPolicyTagsResponse</b> (section <a href="#">3.1.4.1.2.2</a> )	Specifies the SOAP body of the response that contains the requested information.
<b> ServerVersion</b>	<b> ServerVersionInfo</b> ( <a href="#">[MS-OXWSCDATA]</a> section 2.2.3.12)	Specifies a SOAP header that identifies the server version for the response.

A successful  **GetUserRetentionPolicyTags** operation request returns a  **GetUserRetentionPolicyTagsResponse** element with the  **ResponseClass** attribute, as defined in [MS-OXWSCDATA] section 2.2.4.65, set to "Success". The  **ResponseCode** element of the  **GetUserRetentionPolicyTagsResponse** element, as defined in [MS-OXWSCDATA] section 2.2.4.65, is set to "NoError".

If the  **GetUserRetentionPolicyTags** operation is not successful, the operation returns a  **GetUserRetentionPolicyTagsResponse** element with the  **ResponseClass** attribute set to "Error". The  **ResponseCode** element of the  **GetUserRetentionPolicyTagsResponse** element is set to one of the common errors defined in [MS-OXWSCDATA] section 2.2.5.24.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b> GetUserRetentionPolicyTags</b>	The input data for the <b> GetUserRetentionPolicyTags</b> WSDL operation.
<b> GetUserRetentionPolicyTagsResponse</b>	The result data for the <b> GetUserRetentionPolicyTags</b> WSDL operation.

### 3.1.4.1.2.1 GetUserRetentionPolicyTags

The  **GetUserRetentionPolicyTags** element specifies the input data for the  **GetUserRetentionPolicyTags** WSDL operation.

```
<xs:element name=" GetUserRetentionPolicyTags" type="m:GetUserRetentionPolicyTagsType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

### 3.1.4.1.2.2 GetUserRetentionPolicyTagsResponse

The  **GetUserRetentionPolicyTagsResponse** element specifies the result data for the  **GetUserRetentionPolicyTags** WSDL operation.

```
<xs:element name=" GetUserRetentionPolicyTagsResponse"
  type="m:GetUserRetentionPolicyTagsResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"/>
```

## 3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfRetentionPolicyTagsType</b>	Specifies an array of retention policy tags that are returned by the <b> GetUserRetentionPolicyTags</b> operation.
<b> GetUserRetentionPolicyTagsResponseMessageType</b>	Specifies a response message for the <b> GetUserRetentionPolicyTags</b> operation.
<b> GetUserRetentionPolicyTagsType</b>	Specifies a request to retrieve user retention policy tags.
<b> RetentionPolicyTagType</b>	Specifies a retention policy tag.

### 3.1.4.1.3.1 ArrayOfRetentionPolicyTagsType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/types>

The **ArrayOfRetentionPolicyTagsType** complex type specifies an array of retention policy tags that are returned by the  **GetUserRetentionPolicyTags** operation.

```

<xs:complexType name="ArrayOfRetentionPolicyTagsType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="RetentionPolicyTag"
      type="t:RetentionPolicyTagType"/>
  </xs:sequence>
</xs:complexType>

```

**RetentionPolicyTag:** An element of type **RetentionPolicyTagType**, as defined in section [3.1.4.1.3.4](#), that represents a single retention policy tag.

### 3.1.4.1.3.2 GetUserRetentionPolicyTagsResponseMessageType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/messages>

The **GetUserRetentionPolicyTagsResponseMessageType** complex type specifies a response message for the  **GetUserRetentionPolicyTags** operation. This complex type extends the **ResponseType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.65.

```

<xs:complexType name="GetUserRetentionPolicyTagsResponseMessageType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:ResponseType">
      <xs:sequence>
        <xs:element name="RetentionPolicyTags" type="t:ArrayOfRetentionPolicyTagsType"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

**RetentionPolicyTags:** An element that is of the **ArrayOfRetentionPolicyTagsType** complex type, as defined in section [3.1.4.1.3.1](#), that represents an array of retention policy tags.

### 3.1.4.1.3.3 GetUserRetentionPolicyTagsType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/messages>

The **GetUserRetentionPolicyTagsType** complex type specifies a request to retrieve user retention policy tags. This complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.17.

```

<xs:complexType name=" GetUserRetentionPolicyTagsType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexContent mixed="false">
    <xs:extension base="m:BaseRequestType"/>
  </xs:complexContent>
</xs:complexType>

```

### 3.1.4.1.3.4 RetentionPolicyTagType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/types>

The **RetentionPolicyTagType** complex type specifies a retention policy tag.

```

<xs:complexType name="RetentionPolicyTagType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="1" maxOccurs="1" name="DisplayName" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

```

<xs:element minOccurs="1" maxOccurs="1" name="RetentionId" type="t:GuidType"/>
<xs:element minOccurs="1" maxOccurs="1" name="RetentionPeriod" type="xs:int"/>
<xs:element minOccurs="1" maxOccurs="1" name="Type" type="t:ElcFolderType"/>
<xs:element minOccurs="1" maxOccurs="1" name="RetentionAction"
type="t:RetentionActionType"/>
<xs:element minOccurs="0" maxOccurs="1" name="Description" type="xs:string"/>
<xs:element minOccurs="1" maxOccurs="1" name="IsVisible" type="xs:boolean"/>
<xs:element minOccurs="1" maxOccurs="1" name="OptedInto" type="xs:boolean"/>
<xs:element minOccurs="1" maxOccurs="1" name="IsArchive" type="xs:boolean"/>
</xs:sequence>
</xs:complexType>

```

**DisplayName:** An element of type **string**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.1, that specifies the name of the retention policy.

**RetentionId:** An element of type **GuidType**, as defined in [\[MS-OXWSXPROP\]](#) section 2.1.7, that contains the retention tag identifier.

**RetentionPeriod:** An element of type **int**, as defined in [\[XMLSCHEMA2\]](#) section 3.3.17, that contains the number of days the retention is in effect.

**Type:** An element of type **ElcFolderType**, as defined in section [3.1.4.1.4.1](#), that indicates the type of the folder being used in a retention policy.

**RetentionAction:** An element that is of the **RetentionActionType** simple type, as defined in section [3.1.4.1.4.2](#), that contains the action performed by the retention tag.

**Description:** An element of type **string** that contains the descriptive text for the retention policy.

**IsVisible:** An element of type **boolean**, as defined in [\[XMLSCHEMA2\]](#) section 3.2.2, that indicates whether the retention policy is visible to users.

**OptedInto:** An element of type **boolean** that indicates whether the user opted in to the retention policy.

**IsArchive:** An element of type **boolean** that indicates whether this is a move to archive the tag.

### 3.1.4.1.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
<b>ElcFolderType</b>	Identifies folders that accept messaging records management (MRM) policies. MRM is a records management technology that helps organizations manage email lifecycle and reduce the legal risks associated with email.
<b>RetentionActionType</b>	Identifies retention actions.

#### 3.1.4.1.4.1 ElcFolderType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/types>

The **ElcFolderType** enumeration identifies folders that accept messaging records management (MRM) policies. In a retention policy tag, this indicates which folder to apply the policy to.

```

<xs:simpleType name="ElcFolderType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Calendar"/>
    <xs:enumeration value="Contacts"/>
    <xs:enumeration value="DeletedItems"/>
    <xs:enumeration value="Drafts"/>
    <xs:enumeration value="Inbox"/>
    <xs:enumeration value="JunkEmail"/>
    <xs:enumeration value="Journal"/>
    <xs:enumeration value="Notes"/>
    <xs:enumeration value="Outbox"/>
    <xs:enumeration value="SentItems"/>
    <xs:enumeration value="Tasks"/>
    <xs:enumeration value="All"/>
    <xs:enumeration value="ManagedCustomFolder"/>
    <xs:enumeration value="RssSubscriptions"/>
    <xs:enumeration value="SyncIssues"/>
    <xs:enumeration value="ConversationHistory"/>
    <xs:enumeration value="Personal"/>
    <xs:enumeration value="RecoverableItems"/>
    <xs:enumeration value="NonIpmRoot"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **ElcFolderType** simple type.

<b>Value</b>	<b>Meaning</b>
Calendar	<b>Calendar folder.</b>
Contacts	<b>Contacts folder.</b>
DeletedItems	<b>Deleted Items folder.</b>
Drafts	<b>Drafts folder.</b>
Inbox	Inbox folder.
JunkEmail	<b>Junk Email folder.</b>
Journal	<b>Journal folder.</b>
Notes	<b>Notes folder.</b>
Outbox	<b>Outbox folder.</b>
SentItems	<b>Sent Items folder.</b>
Tasks	<b>Tasks folder.</b>
All	All folders. This indicates the default policy tag.
ManagedCustomFolder	Managed custom folder.
RssSubscriptions	RSS subscriptions folder.
SyncIssues	Synchronization issues folder.
ConversationHistory	Conversation history folder.
Personal	Personal folder. This is folder created by the user.
RecoverableItems	Recoverable items folder.

Value	Meaning
NonIpmRoot	Root folder that is not an <b>Inter-Personal Mail (IPM)</b> folder.

### 3.1.4.1.4.2 RetentionActionType

**Namespace:** <http://schemas.microsoft.com/exchange/services/2006/types>

The **RetentionActionType** enumeration identifies the action for expired items.

```
<xs:simpleType name="RetentionActionType" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="MoveToDeleteItems"/>
    <xs:enumeration value="MoveToFolder"/>
    <xs:enumeration value="DeleteAndAllowRecovery"/>
    <xs:enumeration value="PermanentlyDelete"/>
    <xs:enumeration value="MarkAsPastRetentionLimit"/>
    <xs:enumeration value="MoveToArchive"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **RetentionActionType** simple type.

Value	Meaning
None	No action.
MoveToDeleteItems	The expired item is moved to the Deleted Items folder.
MoveToFolder	The expired item is moved to a folder.
DeleteAndAllowRecovery	The expired item is deleted but can be recovered.
PermanentlyDelete	The expired item is permanently deleted.
MarkAsPastRetentionLimit	The expired item is marked as expired.
MoveToArchive	The expired item is moved to the archive mailbox.

### 3.1.4.1.5 Attributes

None.

### 3.1.4.1.6 Groups

None.

### 3.1.4.1.7 Attribute Groups

None.

### **3.1.5 Timer Events**

None.

### **3.1.6 Other Local Events**

None.

Preliminary

## 4 Protocol Examples

In this example, the client sends a request to retrieve user retention policy tags.

```
<?xml version="1.0" encoding="utf-8" ?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xs="http://www.w3.org/2001/XMLSchema"
    xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
    xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
    xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages">
    <soap:Header>
        <t:RequestServerVersion Version="Exchange2013"/>
        <t:TimeZoneContext>
            <t:TimeZoneDefinition Id="Pacific Standard Time"/>
        </t:TimeZoneContext>
    </soap:Header>
    <soap:Body>
        <m:GetUserRetentionPolicyTags/>
    </soap:Body>
</soap:Envelope>
```

In this response example, the server responds with all personal, system, and default retention tags.

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
    <s:Header>
        <h:ServerVersionInfo MajorVersion="15" MinorVersion="0" MajorBuildNumber="430"
            MinorBuildNumber="0" Version="Exchange2013"
            xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
            xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
            xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
            instance"/>
    </s:Header>
    <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
        xmlns:xs="http://www.w3.org/2001/XMLSchema">
        < GetUserRetentionPolicyTagsResponse ResponseClass="Success"
            xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
            <ResponseCode>NoError</ResponseCode>
            <RetentionPolicyTags>
                <RetentionPolicyTag xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
                    <DisplayName>Recoverable Items 14 days move to archive</DisplayName>
                    <RetentionId>80feb2e9-8e6f-4f67-06ae585982</RetentionId>
                    <RetentionPeriod>14</RetentionPeriod>
                    <Type>Personal</Type>
                    <RetentionAction>MoveToArchive</RetentionAction>
                    <IsVisible>false</IsVisible>
                    <OptedInto>false</OptedInto>
                    <IsArchive>true</IsArchive>
                </RetentionPolicyTag>
                <RetentionPolicyTag xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
                    <DisplayName>Never Delete</DisplayName>
                    <RetentionId>414c6a14-3ed5-432e-620a8278f0</RetentionId>
                    <RetentionPeriod>0</RetentionPeriod>
                    <Type>Personal</Type>
                    <RetentionAction>None</RetentionAction>
                    <IsVisible>true</IsVisible>
                    <OptedInto>false</OptedInto>
                    <IsArchive>false</IsArchive>
                </RetentionPolicyTag>
                <RetentionPolicyTag
                    xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
                    <DisplayName>5 Year Delete</DisplayName>
                    <RetentionId>1d128b50-14f2-4417-cb7d015fd7</RetentionId>
                </RetentionPolicyTag>
            </RetentionPolicyTags>
        </GetUserRetentionPolicyTagsResponse>
    </s:Body>
</s:Envelope>
```

```

<RetentionPeriod>1825</RetentionPeriod>
<Type>Personal</Type>
<RetentionAction>DeleteAndAllowRecovery</RetentionAction>
<IsVisible>true</IsVisible>
<OptedInto>false</OptedInto>
<IsArchive>false</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
  xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
  <DisplayName>1 Year Delete</DisplayName>
  <RetentionId>9a3c36dd-c0eb-424a-8bd17f855</RetentionId>
  <RetentionPeriod>365</RetentionPeriod>
  <Type>Personal</Type>
  <RetentionAction>DeleteAndAllowRecovery</RetentionAction>
  <IsVisible>true</IsVisible>
  <OptedInto>false</OptedInto>
  <IsArchive>false</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
  xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
  <DisplayName>6 Month Delete</DisplayName>
  <RetentionId>d94993b5-e987-4275-2057cfb2b8</RetentionId>
  <RetentionPeriod>180</RetentionPeriod>
  <Type>Personal</Type>
  <RetentionAction>DeleteAndAllowRecovery</RetentionAction>
  <IsVisible>true</IsVisible>
  <OptedInto>false</OptedInto>
  <IsArchive>false</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
  xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
  <DisplayName>1 Month Delete</DisplayName>
  <RetentionId>fc92a703-51e3-411f-966668ee49c</RetentionId>
  <RetentionPeriod>30</RetentionPeriod>
  <Type>Personal</Type>
  <RetentionAction>DeleteAndAllowRecovery</RetentionAction>
  <IsVisible>true</IsVisible>
  <OptedInto>false</OptedInto>
  <IsArchive>false</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
  xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
  <DisplayName>1 Week Delete</DisplayName>
  <RetentionId>2d26745c-8566-4dc3-88f56443b7b</RetentionId>
  <RetentionPeriod>7</RetentionPeriod>
  <Type>Personal</Type>
  <RetentionAction>DeleteAndAllowRecovery</RetentionAction>
  <IsVisible>true</IsVisible>
  <OptedInto>false</OptedInto>
  <IsArchive>false</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
  xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
  <DisplayName>Personal never move to archive</DisplayName>
  <RetentionId>c6c9ad12-9e46-053-e1ea189ab0cc</RetentionId>
  <RetentionPeriod>0</RetentionPeriod>
  <Type>Personal</Type>
  <RetentionAction>None</RetentionAction>
  <IsVisible>true</IsVisible>
  <OptedInto>false</OptedInto>
  <IsArchive>true</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
  xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
  <DisplayName>Personal 5 year move to archive</DisplayName>
  <RetentionId>790300f2-2ffd-4380-2daadc05c8</RetentionId>
  <RetentionPeriod>1825</RetentionPeriod>
  <Type>Personal</Type>

```

```
<RetentionAction>MoveToArchive</RetentionAction>
<IsVisible>true</IsVisible>
<OptedInto>false</OptedInto>
<IsArchive>true</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
<DisplayName>Personal 1 year move to archive</DisplayName>
<RetentionId>66904d6f-bf73-4460-fad894a0f</RetentionId>
<RetentionPeriod>365</RetentionPeriod>
<Type>Personal</Type>
<RetentionAction>MoveToArchive</RetentionAction>
<IsVisible>true</IsVisible>
<OptedInto>false</OptedInto>
<IsArchive>true</IsArchive>
</RetentionPolicyTag>
<RetentionPolicyTag
xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
<DisplayName>Default 2 year move to archive</DisplayName>
<RetentionId>9acbb441-faf8-b3867bdf399c</RetentionId>
<RetentionPeriod>730</RetentionPeriod>
<Type>All</Type>
<RetentionAction>MoveToArchive</RetentionAction>
<IsVisible>false</IsVisible>
<OptedInto>false</OptedInto>
<IsArchive>true</IsArchive>
</RetentionPolicyTag>
</RetentionPolicyTags>
</ GetUserRetentionPolicyTagsResponse>
</s:Body>
</s:Envelope>
```

Preliminary

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.

Preliminary

## 6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdl:definitions xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xss:schema elementFormDefault="qualified"
      targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
      version="Exchange2016" id="messages" xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xss:include schemaLocation="MS-OXWSURPT-messages.xsd"/>
    </xss:schema>
  </wsdl:types>
  <wsdl:portType name="ExchangeServicePortType">
    <wsdl:operation name=" GetUserRetentionPolicyTags">
      <wsdl:input message="m:GetUserRetentionPolicyTagsSoapIn"/>
      <wsdl:output message="m:GetUserRetentionPolicyTagsSoapOut"/>
    </wsdl:operation>
  </wsdl:portType>
  <wsdl:binding name="ExchangeServiceBinding" type="m:ExchangeServicePortType">
    <wsdl:documentation>
      <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0" xmlns:wsi="http://ws-i.org/schemas/conformanceClaim"/>
    </wsdl:documentation>
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name=" GetUserRetentionPolicyTags">
      <soap:operation
        soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/ GetUserRetentionPolicyTags"/>
      <wsdl:input>
        <soap:header message="m:GetUserRetentionPolicyTagsSoapIn" part="RequestVersion"
          use="literal"/>
        <soap:body use="literal" parts="request"/>
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal" parts=" GetUserRetentionPolicyTagsResult"/>
        <soap:header message="m:GetUserRetentionPolicyTagsSoapOut" part="ServerVersion"
          use="literal"/>
      </wsdl:output>
    </wsdl:operation>
  </wsdl:binding>
  <wsdl:message name=" GetUserRetentionPolicyTagsSoapIn">
    <wsdl:part name="request" element="m:GetUserRetentionPolicyTags"/>
    <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wsdl:message>
  <wsdl:message name=" GetUserRetentionPolicyTagsSoapOut">
    <wsdl:part name=" GetUserRetentionPolicyTagsResult"
      element="m:GetUserRetentionPolicyTagsResponse"/>
    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wsdl:message>
</wsdl:definitions>
```

## 7 Appendix B: Full XML Schema

Schema name	Prefix	Section
http://schemas.microsoft.com/exchange/services/2006/messages	m	<a href="#">7.1</a>
http://schemas.microsoft.com/exchange/services/2006/types	t	<a href="#">7.2</a>

For ease of implementation, the following sections provide the full XML schema for this protocol.

### 7.1 http://schemas.microsoft.com/exchange/services/2006/messages Schema

This section contains the contents of the MS-OXWSURPT-messages.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSURPT-messages.xsd includes the files listed in the following table. To operate correctly, these files have to be present in the folder that contains the WSDL, types schema, and messages schema for this protocol.

File name	Defining specification/section
MS-OXWSCDATA-messages.xsd	[MS-OXWSCDATA] section 7.1
MS-OXWSURPT-types.xsd	<a href="#">7.2</a>

```
<?xml version="1.0" encoding="UTF-8"?>
<xss:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
  version="Exchange2016" id="messages" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xss:import schemaLocation="MS-OXWSURPT-types.xsd"
    namespace="http://schemas.microsoft.com/exchange/services/2006/types"/>
  <xss:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xss:complexType name=" GetUserRetentionPolicyTagsType">
    <xss:complexContent mixed="false">
      <xss:extension base="m:BaseRequestType"/>
    </xss:complexContent>
  </xss:complexType>
  <xss:element name=" GetUserRetentionPolicyTags" type="m:GetUserRetentionPolicyTagsType"/>
  <xss:complexType name=" GetUserRetentionPolicyTagsResponseMessageType">
    <xss:complexContent mixed="false">
      <xss:extension base="m:ResponseMessageType">
        <xss:sequence>
          <xss:element name=" RetentionPolicyTags" type="t:ArrayOfRetentionPolicyTagsType"/>
        </xss:sequence>
      </xss:extension>
    </xss:complexContent>
  </xss:complexType>
  <xss:element name=" GetUserRetentionPolicyTagsResponse"
    type="m:GetUserRetentionPolicyTagsResponseMessageType"/>
</xss:schema>
```

## 7.2 <http://schemas.microsoft.com/exchange/services/2006/types> Schema

This section contains the contents of the MS-OXWSURPT-types.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSURPT-types.xsd includes the file listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema for this protocol.

File name	Defining specification/section
MS-OXWSXPROP-types.xsd	<a href="#">[MS-OXWSXPROP]</a> section 2.1

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
version="Exchange2016" id="types" xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    <xs:include schemaLocation="MS-OXWSXPROP-types.xsd"/>
    <xs:complexType name="ArrayOfRetentionPolicyTagsType">
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="unbounded" name="RetentionPolicyTag"
type="t:RetentionPolicyTagType"/>
        </xs:sequence>
    </xs:complexType>
    <xs:simpleType name="ElcFolderType">
        <xs:restriction base="xs:string">
            <xs:enumeration value="Calendar"/>
            <xs:enumeration value="Contacts"/>
            <xs:enumeration value="DeletedItems"/>
            <xs:enumeration value="Drafts"/>
            <xs:enumeration value="Inbox"/>
            <xs:enumeration value="JunkEmail"/>
            <xs:enumeration value="Journal"/>
            <xs:enumeration value="Notes"/>
            <xs:enumeration value="Outbox"/>
            <xs:enumeration value="SentItems"/>
            <xs:enumeration value="Tasks"/>
            <xs:enumeration value="All"/>
            <xs:enumeration value="ManagedCustomFolder"/>
            <xs:enumeration value="RssSubscriptions"/>
            <xs:enumeration value="SyncIssues"/>
            <xs:enumeration value="ConversationHistory"/>
            <xs:enumeration value="Personal"/>
            <xs:enumeration value="RecoverableItems"/>
            <xs:enumeration value="NonIpmRoot"/>
        </xs:restriction>
    </xs:simpleType>
    <xs:simpleType name="RetentionActionType">
        <xs:restriction base="xs:string">
            <xs:enumeration value="None"/>
            <xs:enumeration value="MoveToDeleteItems"/>
            <xs:enumeration value="MoveToFolder"/>
            <xs:enumeration value="DeleteAndAllowRecovery"/>
            <xs:enumeration value="PermanentlyDelete"/>
            <xs:enumeration value="MarkAsPastRetentionLimit"/>
            <xs:enumeration value="MoveToArchive"/>
        </xs:restriction>
    </xs:simpleType>
    <xs:complexType name="RetentionPolicyTagType">
```

```
<xs:sequence>
<xs:element minOccurs="1" maxOccurs="1" name="DisplayName" type="xs:string"/>
<xs:element minOccurs="1" maxOccurs="1" name="RetentionId" type="t:GuidType"/>
<xs:element minOccurs="1" maxOccurs="1" name="RetentionPeriod" type="xs:int"/>
<xs:element minOccurs="1" maxOccurs="1" name="Type" type="t:ElcFolderType"/>
<xs:element minOccurs="1" maxOccurs="1" name="RetentionAction"
type="t:Retention ActionType"/>
<xs:element minOccurs="0" maxOccurs="1" name="Description" type="xs:string"/>
<xs:element minOccurs="1" maxOccurs="1" name="IsVisible" type="xs:boolean"/>
<xs:element minOccurs="1" maxOccurs="1" name="OptedInto" type="xs:boolean"/>
<xs:element minOccurs="1" maxOccurs="1" name="IsArchive" type="xs:boolean"/>
</xs:sequence>
</xs:complexType>
<xs:complexType name="RetentionTagType">
<xs:simpleContent>
<xs:extension base="t:GuidType">
<xs:attribute name="IsExplicit" type="xs:boolean" use="required"/>
</xs:extension>
</xs:simpleContent>
</xs:complexType>
<xs:simpleType name="RetentionType">
<xs:restriction base="xs:string">
<xs:enumeration value="Delete"/>
<xs:enumeration value="Archive"/>
</xs:restriction>
</xs:simpleType>
</xs:schema>
```

Preliminary

## **8 Appendix C: Product Behavior**

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Microsoft Exchange Server 2013
- Microsoft Exchange Server 2016 Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 9 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">8 Appendix C: Product Behavior</a>	Added Exchange 2016 to list of supported products.	Y	Content update.

## 10 Index

### A

Abstract data model  
  [server](#) 14  
[Applicability](#) 10  
[Attribute groups](#) 13  
[Attributes](#) 13

### C

[Capability negotiation](#) 10  
[Change tracking](#) 32  
Client  
  [overview](#) 14  
[Complex types](#) 12  
  [RetentionTagType](#) 12

### D

Data model - abstract  
  [server](#) 14

### E

Events  
  [local - server](#) 22  
  [timer - server](#) 22  
[ExchangeServicePortType port type](#) 14

### F

[Fields - vendor-extensible](#) 10  
[Full WSDL](#) 27  
[Full XML schema](#) 28  
  <http://schemas.microsoft.com/exchange/service/s/2006/messages Schema> 28  
  <http://schemas.microsoft.com/exchange/service/s/2006/types Schema> 29

### G

[Glossary](#) 6  
[Groups](#) 13

### I

[Implementer - security considerations](#) 26  
[Index of security parameters](#) 26  
[Informative references](#) 8  
Initialization  
  [server](#) 14  
[Introduction](#) 6

### L

Local events  
  [server](#) 22

### M

Message processing  
  [server](#) 14  
Messages  
  [attribute groups](#) 13  
  [attributes](#) 13  
  [complex types](#) 12  
  [elements](#) 11  
  [enumerated](#) 11  
  [groups](#) 13  
  [namespaces](#) 11  
  [overview](#) 11  
  [RetentionTagType complex type](#) 12  
  [RetentionType simple type](#) 12  
  [simple types](#) 12  
  [syntax](#) 11  
  [transport](#) 11

### N

[Namespaces](#) 11  
[Normative references](#) 8

### O

Operations  
   [GetUserRetentionPolicyTags](#) 14  
[Overview \(synopsis\)](#) 9

### P

[Parameters - security index](#) 26  
Port types  
  [ExchangeServicePortType](#) 14  
[Preconditions](#) 10  
[Prerequisites](#) 10  
[Product behavior](#) 31  
Protocol Details  
  [overview](#) 14

### R

[References](#) 8  
  [informative](#) 8  
  [normative](#) 8  
[Relationship to other protocols](#) 9  
[RetentionTagType complex type](#) 12  
[RetentionType simple type](#) 12

### S

Security  
  [implementer considerations](#) 26  
  [parameter index](#) 26  
Sequencing rules  
  [server](#) 14  
Server

[abstract data model](#) 14  
[ExchangeServicePortType port type](#) 14  
 [GetUserRetentionPolicyTags operation](#) 14  
initialization 14  
local events 22  
message processing 14  
overview 14  
sequencing rules 14  
timer events 22  
timers 14  
[Simple types](#) 12  
  [RetentionType](#) 12  
[Standards assignments](#) 10  
Syntax  
  [messages - overview](#) 11

## T

Timer events  
  [server](#) 22  
Timers  
  [server](#) 14  
[Tracking changes](#) 32  
[Transport](#) 11  
Types  
  [complex](#) 12  
  [simple](#) 12

## V

[Vendor-extensible fields](#) 10  
[Versioning](#) 10

## W

[WSDL](#) 27

## X

[XML schema](#) 28

<http://schemas.microsoft.com/exchange/service>  
s/2006/messages Schema 28

<http://schemas.microsoft.com/exchange/service>  
s/2006/types Schema 29