

[MS-OXWSUSRCFG]:

User Configuration Web Service Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Preliminary Documentation. This Open Specification provides documentation for past and current releases and/or for the pre-release version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional

development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

Preliminary

Revision Summary

Date	Revision History	Revision Class	Comments
7/15/2009	1.0	Major	Initial Availability.
11/4/2009	1.0.1	Editorial	Revised and edited the technical content.
2/10/2010	1.2.0	Minor	Updated the technical content.
5/5/2010	1.2.1	Editorial	Revised and edited the technical content.
8/4/2010	1.3	Minor	Clarified the meaning of the technical content.
11/3/2010	1.3	No change	No changes to the meaning, language, or formatting of the technical content.
3/18/2011	2.0	Major	Significantly changed the technical content.
8/5/2011	3.0	Major	Significantly changed the technical content.
10/7/2011	3.0	No Change	No changes to the meaning, language, or formatting of the technical content.
1/20/2012	4.0	Major	Significantly changed the technical content.
4/27/2012	4.0	No Change	No changes to the meaning, language, or formatting of the technical content.
7/16/2012	4.0	No Change	No changes to the meaning, language, or formatting of the technical content.
10/8/2012	4.1	Minor	Clarified the meaning of the technical content.
2/11/2013	4.1	No Change	No changes to the meaning, language, or formatting of the technical content.
7/26/2013	5.0	Major	Significantly changed the technical content.
11/18/2013	6.0	Major	Significantly changed the technical content.
2/10/2014	6.0	No Change	No changes to the meaning, language, or formatting of the technical content.
4/30/2014	7.0	Major	Significantly changed the technical content.
7/31/2014	7.0	No Change	No changes to the meaning, language, or formatting of the technical content.
10/30/2014	7.0.1	Editorial	Changed language and formatting in the technical content.
5/26/2015	8.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	7
1.1	Glossary	7
1.2	References	8
1.2.1	Normative References	8
1.2.2	Informative References	9
1.3	Overview	9
1.4	Relationship to Other Protocols	9
1.5	Prerequisites/Preconditions	10
1.6	Applicability Statement	10
1.7	Versioning and Capability Negotiation	10
1.8	Vendor-Extensible Fields	10
1.9	Standards Assignments.....	10
2	Messages.....	11
2.1	Transport.....	11
2.2	Common Message Syntax	11
2.2.1	Namespaces	11
2.2.2	Messages.....	11
2.2.3	Elements	11
2.2.4	Complex Types.....	12
2.2.4.1	t:UserConfigurationDictionaryEntryType Complex Type.....	12
2.2.4.2	t:UserConfigurationDictionaryObjectType Complex Type	12
2.2.4.3	t:UserConfigurationDictionaryType Complex Type	13
2.2.4.4	t:UserConfigurationNameType Complex Type	13
2.2.4.5	t:UserConfigurationType Complex Type	14
2.2.5	Simple Types	15
2.2.5.1	t:UserConfigurationDictionaryObjectTypesType Simple Type	15
2.2.6	Attributes	16
2.2.7	Groups	16
2.2.8	Attribute Groups.....	16
3	Protocol Details.....	17
3.1	ExchangeServicePortType Server Details.....	17
3.1.1	Abstract Data Model.....	17
3.1.2	Timers	17
3.1.3	Initialization.....	17
3.1.4	Message Processing Events and Sequencing Rules	17
3.1.4.1	CreateUserConfiguration	17
3.1.4.1.1	Messages	18
3.1.4.1.1.1	CreateUserConfigurationSoapIn	18
3.1.4.1.1.2	CreateUserConfigurationSoapOut	19
3.1.4.1.2	Elements.....	20
3.1.4.1.2.1	CreateUserConfiguration Element.....	20
3.1.4.1.2.2	CreateUserConfigurationResponse Element	20
3.1.4.1.3	Complex Types	20
3.1.4.1.3.1	m:CreateUserConfigurationResponseType Complex Type	21
3.1.4.1.3.2	m:CreateUserConfigurationType Complex Type	21
3.1.4.1.4	Simple Types	21
3.1.4.1.5	Attributes	22
3.1.4.1.6	Groups.....	22
3.1.4.1.7	Attribute Groups.....	22
3.1.4.2	DeleteUserConfiguration	22
3.1.4.2.1	Messages	22
3.1.4.2.1.1	DeleteUserConfigurationSoapIn	23

3.1.4.2.1.2	DeleteUserConfigurationSoapOut	23
3.1.4.2.2	Elements	24
3.1.4.2.2.1	DeleteUserConfiguration Element	24
3.1.4.2.2.2	DeleteUserConfigurationResponse Element	24
3.1.4.2.3	Complex Types	25
3.1.4.2.3.1	m:DeleteUserConfigurationResponseType Complex Type	25
3.1.4.2.3.2	m:DeleteUserConfigurationType Complex Type	25
3.1.4.2.4	Simple Types	26
3.1.4.2.5	Attributes	26
3.1.4.2.6	Groups	26
3.1.4.2.7	Attribute Groups	26
3.1.4.3	GetUserConfiguration	26
3.1.4.3.1	Messages	27
3.1.4.3.1.1	GetUserConfigurationSoapIn	27
3.1.4.3.1.2	GetUserConfigurationSoapOut	28
3.1.4.3.2	Elements	28
3.1.4.3.2.1	GetUserConfiguration Element	28
3.1.4.3.2.2	GetUserConfigurationResponse Element	29
3.1.4.3.3	Complex Types	29
3.1.4.3.3.1	m:GetUserConfigurationResponseMessageType Complex Type	29
3.1.4.3.3.2	m:GetUserConfigurationType Complex Type	30
3.1.4.3.4	Simple Types	30
3.1.4.3.4.1	t:UserConfigurationPropertyType Simple Type	31
3.1.4.3.5	Attributes	31
3.1.4.3.6	Groups	31
3.1.4.3.7	Attribute Groups	31
3.1.4.4	UpdateUserConfiguration	32
3.1.4.4.1	Messages	32
3.1.4.4.1.1	UpdateUserConfigurationSoapIn	32
3.1.4.4.1.2	UpdateUserConfigurationSoapOut	33
3.1.4.4.2	Elements	34
3.1.4.4.2.1	UpdateUserConfiguration Element	34
3.1.4.4.2.2	UpdateUserConfigurationResponse Element	34
3.1.4.4.3	Complex Types	34
3.1.4.4.3.1	m:UpdateUserConfigurationResponseType Complex Type	35
3.1.4.4.3.2	m:UpdateUserConfigurationType Complex Type	35
3.1.4.4.4	Simple Types	35
3.1.4.4.5	Attributes	36
3.1.4.4.6	Groups	36
3.1.4.4.7	Attribute Groups	36
3.1.5	Timer Events	36
3.1.6	Other Local Events	36
4	Protocol Examples	37
4.1	CreateUserConfiguration Operation	37
4.2	DeleteUserConfiguration Operation	38
4.3	GetUserConfiguration Operation	39
4.4	UpdateUserConfiguration Operation	40
5	Security	42
5.1	Security Considerations for Implementers	42
5.2	Index of Security Parameters	42
6	Appendix A: Full WSDL	43
7	Appendix B: Full XML Schema	46
7.1	Messages Schema	46
7.2	Types Schema	47

8 Appendix C: Product Behavior 50
9 Change Tracking..... 51
10 Index..... 53

Preliminary

1 Introduction

The User Configuration Web Service Protocol is used to access user configuration objects. Clients use the SOAP Protocol, as described in [\[SOAP1.1\]](#), to contact the user configuration service.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are specific to this document:

endpoint: A communication port that is exposed by an application server for a specific shared service and to which messages can be addressed.

folder associated information (FAI): A collection of Message objects that are stored in a Folder object and are typically hidden from view by email applications. An FAI Message object is used to store a variety of settings and auxiliary data, including forms, views, calendar options, favorites, and category lists.

Hypertext Transfer Protocol (HTTP): An application-level protocol for distributed, collaborative, hypermedia information systems (text, graphic images, sound, video, and other multimedia files) on the World Wide Web.

Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS): An extension of **HTTP** that securely encrypts and decrypts webpage requests.

mailbox: A message store that contains email, calendar items, and other Message objects for a single recipient.

SOAP: A lightweight protocol for exchanging structured information in a decentralized, distributed environment. **SOAP** uses **XML** technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [\[SOAP1.2-1/2003\]](#).

SOAP action: The HTTP request header field used to indicate the intent of the **SOAP** request, using a URI value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

SOAP body: A container for the payload data being delivered by a **SOAP message** to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

SOAP header: A mechanism for implementing extensions to a **SOAP message** in a decentralized manner without prior agreement between the communicating parties. See [\[SOAP1.2-1/2007\]](#) section 5.2 for more information.

SOAP message: An **XML** document consisting of a mandatory SOAP envelope, an optional **SOAP header**, and a mandatory **SOAP body**. See [\[SOAP1.2-1/2007\]](#) section 5 for more information.

Uniform Resource Locator (URL): A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

web server: A server computer that hosts websites and responds to requests from applications.

Web Services Description Language (WSDL): An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

WSDL message: An abstract, typed definition of the data that is communicated during a WSDL operation [[WSDL](#)]. Also, an element that describes the data being exchanged between web service providers and clients.

WSDL port type: A named set of logically-related, abstract **Web Services Description Language (WSDL)** operations and messages.

XML: The Extensible Markup Language, as described in [[XML1.0](#)].

XML namespace: A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [[RFC3986](#)]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [[XMLNS-2ED](#)].

XML namespace prefix: An abbreviated form of an **XML namespace**, as described in [[XML](#)].

XML schema: A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by **XML** itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [[RFC2119](#)]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-OXWSCDATA] Microsoft Corporation, "[Common Web Service Data Types](#)".

[MS-OXWSCORE] Microsoft Corporation, "[Core Items Web Service Protocol](#)".

[MS-OXWSFOLD] Microsoft Corporation, "[Folders and Folder Permissions Web Service Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", BCP 47, RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[WSIBASIC] Ballinger, K., Ehnebuske, D., Gudgin, M., et al., Eds., "Basic Profile Version 1.0", Final Material, April 2004, <http://www.ws-i.org/Profiles/BasicProfile-1.0-2004-04-16.html>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-OXDSCLI] Microsoft Corporation, "[Autodiscover Publishing and Lookup Protocol](#)".

[MS-OXPROTO] Microsoft Corporation, "[Exchange Server Protocols System Overview](#)".

[MS-OXWSADISC] Microsoft Corporation, "[Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol](#)".

1.3 Overview

The User Configuration Web Service Protocol specifies the messages that are used to create, delete, get, and update user configuration objects, also known as **folder associated information (FAI)**.

1.4 Relationship to Other Protocols

A client that implements this protocol can use the Autodiscover Publishing and Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), to identify the target **endpoint** to use for each operation.

This protocol uses **SOAP**, as described in [\[SOAP1.1\]](#), to specify the structure information exchanged between the client and the server. This protocol uses the **XML schema**, as described in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), to describe the message content sent to and from the server.

This protocol uses SOAP over **HTTP**, as described in [\[RFC2616\]](#), and SOAP over **HTTPS**, as described in [\[RFC2818\]](#), as shown in the following layering diagram.

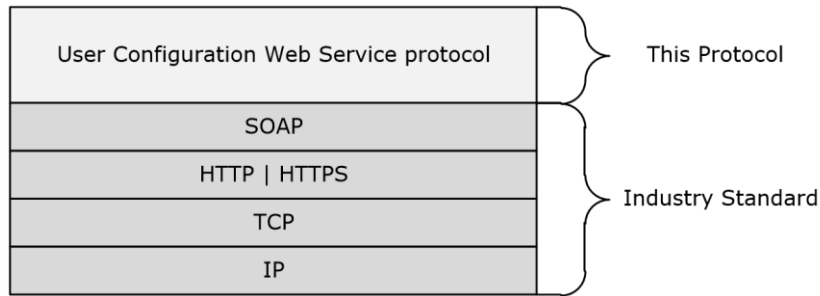


Figure 2: This protocol in relation to other protocols

For conceptual background information and overviews of the relationships and interactions between this and other protocols, see [\[MS-OXPROTO\]](#).

1.5 Prerequisites/Preconditions

The endpoint **URL** that is returned by either the Autodiscover Publishing Lookup SOAP-Based Web Service Protocol, as described in [\[MS-OXWSADISC\]](#), or the Autodiscover Publishing and Lookup Protocol, as described in [\[MS-OXDSCLI\]](#), is required to form the HTTP request to the **web server** that hosts this protocol. The operations that this protocol defines cannot be accessed unless the correct endpoint is identified in the HTTP web requests that target this protocol.

1.6 Applicability Statement

The protocol specified in this document is applicable to client applications that create, delete, get, or update folder associated information (FAI). This Web service protocol is applicable to SOAP-based clients, as described in [\[SOAP1.1\]](#).

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol uses SOAP 1.1, as specified in section [2.1](#).
- **Protocol Versions:** This protocol specifies only one **WSDL port type** version. The **WSDL** version of the request is identified by using the **t:RequestServerVersion** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.3.11, and the version of the server responding to the request is identified by using the **t:ServerVersionInfo** element, as described in [\[MS-OXWSCDATA\]](#) section 2.2.3.12.
- **Security and Authentication Methods:** This protocol relies on the web server that is hosting it to perform authentication.
- **Capability Negotiation:** This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

This protocol consists of extensible fields. The applicable property types for extended fields are specified in section [3.1.4.3.4.1](#).

1.9 Standards Assignments

None.

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification provides a base description of the protocol. The schema in this specification provides a base description of the message syntax. The text that specifies the WSDL and schema might specify restrictions that reflect actual protocol behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, or **present**.

2.1 Transport

The SOAP version supported is SOAP 1.1. For details, see [\[SOAP1.1\]](#).

This protocol **MUST** support SOAP over HTTP, as specified in [\[RFC2616\]](#). The protocol **SHOULD** use secure communications by means of HTTPS, as defined in [\[RFC2818\]](#).

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses XML schema, as defined in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and WSDL, as defined in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
soap	http://schemas.xmlsoap.org/wsdl/soap/	[SOAP1.1]
m	http://schemas.microsoft.com/exchange/services/2006/messages	
t	http://schemas.microsoft.com/exchange/services/2006/types	
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA1]
wsdl	http://schemas.xmlsoap.org/wsdl/	[WSDL]
tns	http://schemas.microsoft.com/exchange/services/2006/messages	
wsi	http://ws-i.org/schemas/conformanceClaim/	[WSIBASIC]

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

This specification does not define any common XML schema element definitions.

2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions that are defined by this specification. XML schema complex type definitions that are specific to a particular operation are defined with the operation.

Complex type name	Description
UserConfigurationDictionaryEntryType	Specifies the contents of a single dictionary entry property.
UserConfigurationDictionaryObjectType	Specifies a dictionary object.
UserConfigurationDictionaryType	Specifies a set of dictionary properties.
UserConfigurationNameType	Specifies the name and the associated folder for a user configuration object.
UserConfigurationType	Specifies a single user configuration object.

2.2.4.1 t:UserConfigurationDictionaryEntryType Complex Type

The **UserConfigurationDictionaryEntryType** complex type specifies the contents of a single dictionary entry property.

```
<xs:complexType name="UserConfigurationDictionaryEntryType">
  <xs:sequence>
    <xs:element name="DictionaryKey"
      type="t:UserConfigurationDictionaryObjectType"
    />
    <xs:element name="DictionaryValue"
      type="t:UserConfigurationDictionaryObjectType"
      nillable="true"
    />
  </xs:sequence>
</xs:complexType>
```

The following table lists and describes the child elements of the **UserConfigurationDictionaryEntryType** complex type.

Element name	Type	Description
DictionaryKey	t:UserConfigurationDictionaryObjectType (section 2.2.4.2)	Specifies the dictionary key for a dictionary property.
DictionaryValue	t:UserConfigurationDictionaryObjectType (section 2.2.4.2)	Specifies the dictionary value for a dictionary property.

2.2.4.2 t:UserConfigurationDictionaryObjectType Complex Type

The **UserConfigurationDictionaryObjectType** complex type specifies a dictionary object.

```
<xs:complexType name="UserConfigurationDictionaryObjectType">
  <xs:sequence>
```

```

<xs:element name="Type"
  type="t:UserConfigurationDictionaryObjectTypesType"
  />
<xs:element name="Value"
  type="xs:string"
  maxOccurs="unbounded"
  />
</xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **UserConfigurationDictionaryObjectType** complex type.

Element name	Type	Description
Type	t:UserConfigurationDictionaryObjectTypesType (section 2.2.5.1)	Specifies the dictionary object type.
Value	xs:string ([XMLSCHEMA2])	Specifies the dictionary object value as a string.

2.2.4.3 t:UserConfigurationDictionaryType Complex Type

The **UserConfigurationDictionaryType** complex type specifies a set of dictionary properties.

```

<xs:complexType name="UserConfigurationDictionaryType">
  <xs:sequence>
    <xs:element name="DictionaryEntry"
      type="t:UserConfigurationDictionaryEntryType"
      minOccurs="0"
      maxOccurs="unbounded"
      />
  </xs:sequence>
</xs:complexType>

```

The following table lists and describes the child elements of the **UserConfigurationDictionaryType** complex type.

Element name	Type	Description
DictionaryEntry	t:UserConfigurationDictionaryEntryType (section 2.2.4.1)	Specifies the properties of the dictionary entry.

2.2.4.4 t:UserConfigurationNameType Complex Type

The **UserConfigurationNameType** complex type specifies the name and the associated folder for a user configuration object. This type extends the **TargetFolderIdType** complex type, as specified in [\[MS-OXWSFOLD\]](#) section 2.2.4.14.

```

<xs:complexType name="UserConfigurationNameType">
  <xs:complexContent>
    <xs:extension
      base="t:TargetFolderIdType"
    >
      <xs:attribute name="Name"
        type="t:NonEmptyStringType"
        use="required"
      />
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

The following table lists the attributes of the **UserConfigurationNameType** complex type.

Attribute name	Type	Description
Name	t:NonEmptyStringType ([MS-OXWSCDATA] section 2.2.5.20)	Specifies the name of a user configuration object. This attribute MUST be present.

2.2.4.5 t:UserConfigurationType Complex Type

The **UserConfigurationType** complex type specifies a single user configuration object.

```

<xs:complexType name="UserConfigurationType">
  <xs:sequence>
    <xs:element name="UserConfigurationName"
      type="t:UserConfigurationNameType"
    />
    <xs:element name="ItemId"
      type="t:ItemIdType"
      minOccurs="0"
    />
    <xs:element name="Dictionary"
      type="t:UserConfigurationDictionaryType"
      minOccurs="0"
    />
    <xs:element name="XmlData"
      type="xs:base64Binary"
      minOccurs="0"
    />
    <xs:element name="BinaryData"
      type="xs:base64Binary"
      minOccurs="0"
    />
  </xs:sequence>
</xs:complexType>

```

The following table lists the child elements of the **UserConfigurationType** complex type.

Element name	Type	Description
UserConfigurationName	t:UserConfigurationNameType (section 2.2.4.4)	Specifies the name and the associated folder for a user configuration object. The user configuration object name

Element name	Type	Description
		MUST be present.
ItemId	t:ItemIdType ([MS-OXWSCORE] section 2.2.4.24)	Specifies the user configuration object item identifier.
Dictionary	t:UserConfigurationDictionaryType (section 2.2.4.3)	Specifies a set of dictionary property entries.
XmlData	xs:base64Binary ([XMLSCHEMA2])	Specifies XML data property content.
BinaryData	xs:base64Binary ([XMLSCHEMA2])	Specifies binary data property content.

2.2.5 Simple Types

The following table summarizes the common XML schema simple type definition that is defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type name	Description
UserConfigurationDictionaryObjectTypesType	Specifies the data type for a user configuration object dictionary property.

2.2.5.1 t:UserConfigurationDictionaryObjectTypesType Simple Type

The **UserConfigurationDictionaryObjectTypesType** simple type specifies the data type for a user configuration object dictionary property.

```
<xs:simpleType name="UserConfigurationDictionaryObjectTypesType">
  <xs:restriction
    base="xs:string"
  >
    <xs:enumeration
      value="DateTime"
    />
    <xs:enumeration
      value="Boolean"
    />
    <xs:enumeration
      value="Byte"
    />
    <xs:enumeration
      value="String"
    />
    <xs:enumeration
      value="Integer32"
    />
    <xs:enumeration
      value="UnsignedInteger32"
    />
    <xs:enumeration
      value="Integer64"
    />
    <xs:enumeration
      value="UnsignedInteger64"
    />
  </xs:restriction>
</xs:simpleType>
```

```

/>
<xs:enumeration
  value="StringArray"
/>
<xs:enumeration
  value="ByteArray"
/>
</xs:restriction>
</xs:simpleType>

```

The following table lists and describes the values that are defined by the **UserConfigurationDictionaryObjectTypesType** simple type.

Value name	Description
DateTime	Specifies a DateTime data type for a dictionary entry.
Boolean	Specifies a Boolean data type for a dictionary entry.
Byte	Specifies a byte data type for a dictionary entry.
String	Specifies a string data type for a dictionary entry.
Integer32	Specifies a signed 32-bit integer data type for a dictionary entry.
UnsignedInteger32	Specifies an unsigned 32-bit integer data type for a dictionary entry.
Integer64	Specifies a signed 64-bit integer data type for a dictionary entry.
UnsignedInteger64	Specifies an unsigned 64-bit integer data type for a dictionary entry.
StringArray	Specifies a string array data type for a dictionary entry.
ByteArray	Specifies a byte array data type for a dictionary entry.

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 ExchangeServicePortType Server Details

The User Configuration Web Service Protocol defines a single WSDL port type with four operations. These operations allow users to create, delete, retrieve, and update users configuration objects.

3.1.1 Abstract Data Model

The User Configuration Web Service Protocol is a stateless protocol. The server maintains the user configuration object data.

The client is not required to maintain the state of the user configuration objects on the server and can retrieve the current set of configuration objects at any time. If more than one client accesses user configuration objects at the same time, there is no requirement that the server lock the existing set of permissions for changes.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the WSDL operations as defined by this specification.

Operation	Description
CreateUserConfiguration (section 3.1.4.1)	Specifies the WSDL messages for creating user configuration objects.
DeleteUserConfiguration (section 3.1.4.2)	Specifies the WSDL messages for deleting user configuration objects.
GetUserConfiguration (section 3.1.4.3)	Specifies the WSDL messages for getting user configuration objects.
UpdateUserConfiguration (section 3.1.4.4)	Specifies the WSDL messages for updating user configuration objects.

3.1.4.1 CreateUserConfiguration

The **CreateUserConfiguration** operation specifies the WSDL messages for creating user configuration objects.

The following is the WSDL port type definition of this operation.

```
<wsdl:operation name="CreateUserConfiguration">
  <wsdl:input message="tns:CreateUserConfigurationSoapIn"/>
  <wsdl:output message="tns:CreateUserConfigurationSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for this operation.

```
<wsdl:operation name="CreateUserConfiguration">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateUserConfiguration" />
  <wsdl:input>
    <soap:header message="tns:CreateUserConfigurationSoapIn" part="Impersonation"
      use="literal"/>
    <soap:header message="tns:CreateUserConfigurationSoapIn" part="MailboxCulture"
      use="literal"/>
    <soap:header message="tns:CreateUserConfigurationSoapIn" part="RequestVersion"
      use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="CreateUserConfigurationResult" use="literal" />
    <soap:header message="tns:CreateUserConfigurationSoapOut" part="ServerVersion"
      use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **CreateUserConfigurationSoapIn** request WSDL message, as specified in section [3.1.4.1.1.1](#), and the protocol server responds with a **CreateUserConfigurationSoapOut** response message, as defined in section [3.1.4.1.1.2](#).

3.1.4.1.1 Messages

The following table lists and describes the WSDL message definitions that are specific to the **CreateUserConfiguration** operation.

Message	Description
CreateUserConfigurationSoapIn	Specifies the SOAP message that creates a user configuration object.
CreateUserConfigurationSoapOut	Specifies the SOAP message that is returned by the server in response to a CreateUserConfiguration operation request.

3.1.4.1.1.1 CreateUserConfigurationSoapIn

The **CreateUserConfigurationSoapIn** WSDL message specifies the **CreateUserConfiguration** operation request to create a user configuration object.

```
<wsdl:message name="CreateUserConfigurationSoapIn">
  <wsdl:part name="request" element="tns:CreateUserConfiguration" />
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

```
</wsdl:message>
```

The **CreateUserConfigurationSoapIn** WSDL message is the input message for the **SOAP action** <http://schemas.microsoft.com/exchange/services/2006/messages/CreateUserConfiguration>.

The parts of the **CreateUserConfigurationSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:CreateUserConfiguration (section 3.1.4.1.2.1)	Specifies the SOAP body of the request to create a user configuration object. This part is required.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating. This part is optional.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.7)	Specifies a SOAP header that identifies the culture to use for accessing the mailbox . The cultures are defined in [RFC3066] . This part is optional.
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.11)	Specifies a SOAP header that identifies the schema version for the CreateUserConfiguration operation request.

3.1.4.1.1.2 CreateUserConfigurationSoapOut

The **CreateUserConfigurationSoapOut** WSDL message specifies the server response to a **CreateUserConfiguration** operation request to create a user configuration object.

```
<wsdl:message name="CreateUserConfigurationSoapOut">
  <wsdl:part name="CreateUserConfigurationResult"
    element="tns:CreateUserConfigurationResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **CreateUserConfigurationSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/CreateUserConfiguration>.

The parts of the **CreateUserConfigurationSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
CreateUserConfigurationResult	tns:CreateUserConfigurationResponse (section 3.1.4.1.2.2)	Specifies the SOAP body of the response to a CreateUserConfiguration operation request.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.12)	Specifies the SOAP header that identifies the server version for the response to a CreateUserConfiguration request.

A successful **CreateUserConfiguration** operation request returns a **CreateUserConfigurationResponse** element, as specified in section 3.1.4.1.2.2, with the **ResponseClass** attribute of the **CreateUserConfigurationResponseMessage** element set to "Success". The **ResponseCode** element of the **CreateUserConfigurationResponseMessage** element is set to "NoError". The **CreateUserConfigurationResponseMessage** element is a child element of the **ArrayOfResponseMessagesType** complex type, as specified in [MS-OXWSCDATA] section 2.2.4.12.

If the **CreateUserConfiguration** operation request is not successful, it returns a **CreateUserConfigurationResponse** element with the **ResponseClass** attribute of the **CreateUserConfigurationResponseMessage** element set to "Error". The **ResponseCode** element of the **CreateUserConfigurationResponseMessage** element is set to one of the common errors defined in [MS-OXWSCDATA] section 2.2.5.24.

3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to the **CreateUserConfiguration** operation.

Element	Description
CreateUserConfiguration	Specifies a request to create a user configuration object.
CreateUserConfigurationResponse	Specifies a response to a CreateUserConfiguration operation request.

3.1.4.1.2.1 CreateUserConfiguration Element

The **CreateUserConfiguration** element specifies a request to create a user configuration object.

```
<xs:element name="CreateUserConfiguration"
  type="m:CreateUserConfigurationType"
  />
```

3.1.4.1.2.2 CreateUserConfigurationResponse Element

The **CreateUserConfigurationResponse** element specifies a response to a **CreateUserConfiguration** operation request (section [3.1.4.1](#)).

```
<xs:element name="CreateUserConfigurationResponse"
  type="m:CreateUserConfigurationResponseType"
  />
```

3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **CreateUserConfiguration** operation.

Complex type	Description
CreateUserConfigurationResponseType	Specifies a response to a CreateUserConfiguration operation request.
CreateUserConfigurationType	Specifies a CreateUserConfiguration operation request.

3.1.4.1.3.1 m:CreateUserConfigurationResponseType Complex Type

The **CreateUserConfigurationResponseType** complex type specifies the response to a **CreateUserConfiguration** operation request (section [3.1.4.1](#)). The **CreateUserConfigurationResponseType** complex type extends the **BaseResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.18.

```
<xs:complexType name="CreateUserConfigurationResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.1.3.2 m:CreateUserConfigurationType Complex Type

The **CreateUserConfigurationType** complex type specifies a **CreateUserConfiguration** operation request (section [3.1.4.1](#)). The **CreateUserConfigurationType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.17.

```
<xs:complexType name="CreateUserConfigurationType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="UserConfiguration"
        type="t:UserConfigurationType"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

The following table summarizes the child element of the **CreateUserConfigurationType** complex type.

Element	Type	Description
UserConfiguration	t: UserConfigurationType (section 2.2.4.5)	Specifies the user configuration object to be created.

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 DeleteUserConfiguration

The **DeleteUserConfiguration** operation specifies the WSDL messages for deleting user configuration objects.

The following is the WSDL port type definition of this operation.

```
<wsdl:operation name="DeleteUserConfiguration">
  <wsdl:input message="tns:DeleteUserConfigurationSoapIn"/>
  <wsdl:output message="tns:DeleteUserConfigurationSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for this operation.

```
<wsdl:operation name="DeleteUserConfiguration">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteUserConfiguration" />
  <wsdl:input>
    <soap:header message="tns:DeleteUserConfigurationSoapIn" part="Impersonation"
      use="literal"/>
    <soap:header message="tns:DeleteUserConfigurationSoapIn" part="MailboxCulture"
      use="literal"/>
    <soap:header message="tns:DeleteUserConfigurationSoapIn" part="RequestVersion"
      use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="DeleteUserConfigurationResult" use="literal" />
    <soap:header message="tns:DeleteUserConfigurationSoapOut" part="ServerVersion"
      use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a CreateUserConfigurationSoapIn request WSDL message, as specified in section 3.1.4.1.1.1, and the protocol server responds with a CreateUserConfigurationSoapOut response message, as defined in

3.1.4.2.1 Messages

The following table lists and describes the WSDL message definitions that are specific to the **DeleteUserConfiguration** operation.

Message	Description
DeleteUserConfigurationSoapIn	Specifies the SOAP message that deletes a user configuration object.
DeleteUserConfigurationSoapOut	Specifies the SOAP message that is returned by the server in response to a DeleteUserConfiguration operation request.

3.1.4.2.1.1 DeleteUserConfigurationSoapIn

The **DeleteUserConfigurationSoapIn** WSDL message specifies a **DeleteUserConfiguration** operation request to delete a user configuration object.

```
<wsdl:message name="DeleteUserConfigurationSoapIn">
  <wsdl:part name="request" element="tns:DeleteUserConfiguration" />
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>
```

The **DeleteUserConfigurationSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/DeleteUserConfiguration>.

The parts of the **DeleteUserConfigurationSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:DeleteUserConfiguration (section 3.1.4.2.2.1)	Specifies the SOAP body of a request to delete a user configuration object. This part is required.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating. This part is optional.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.7)	Specifies a SOAP header that identifies the culture to be used for accessing the mailbox. The cultures are defined in [RFC3066] . This part is optional.
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.11)	Specifies a SOAP header that identifies the schema version for the DeleteUserConfiguration operation request (section 3.1.4.2).

3.1.4.2.1.2 DeleteUserConfigurationSoapOut

The **DeleteUserConfigurationSoapOut** WSDL message specifies the server response to a **DeleteUserConfiguration** operation request to delete a user configuration object.

```
<wsdl:message name="DeleteUserConfigurationSoapOut">
  <wsdl:part name="DeleteUserConfigurationResult"
    element="tns:DeleteUserConfigurationResponse" />
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The **DeleteUserConfigurationSoapOut** WSDL message is the output message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/DeleteUserConfiguration>.

The parts of the **DeleteUserConfigurationSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
DeleteUserConfigurationResult	tns>DeleteUserConfigurationResponse (section 3.1.4.2.2.2)	Specifies the SOAP body of the response to a DeleteUserConfiguration operation request.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.12)	Specifies the SOAP header that identifies the server version for the response.

A successful **DeleteUserConfiguration** operation request returns a **DeleteUserConfigurationResponse** element, as specified in section 3.1.4.2.2.2, with the **ResponseClass** attribute of the **DeleteUserConfigurationResponseMessage** element set to "Success". The **ResponseCode** element of the **DeleteUserConfigurationResponseMessage** element is set to "NoError". The **DeleteUserConfigurationResponseMessage** element is a child element of the **ArrayOfResponseMessagesType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.12.

If the **DeleteUserConfiguration** operation request is not successful, it returns a **DeleteUserConfigurationResponse** element with the **ResponseClass** attribute of the **DeleteUserConfigurationResponseMessage** element set to "Error". The **ResponseCode** element of the **DeleteUserConfigurationResponseMessage** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.5.24.

3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to the **DeleteUserConfiguration** operation.

Element	Description
DeleteUserConfiguration	Specifies a request to delete a user configuration object.
DeleteUserConfigurationResponse	Specifies the response to a DeleteUserConfiguration operation request.

3.1.4.2.2.1 DeleteUserConfiguration Element

The **DeleteUserConfiguration** element specifies a request to delete a user configuration object.

```
<xs:element name="DeleteUserConfiguration"
  type="m:DeleteUserConfigurationType"
  />
```

3.1.4.2.2.2 DeleteUserConfigurationResponse Element

The **DeleteUserConfigurationResponse** element specifies the response to a **DeleteUserConfiguration** operation request (section [3.1.4.2](#)).

```
<xs:element name="DeleteUserConfigurationResponse"
  type="m:DeleteUserConfigurationResponseType"
  />
```

3.1.4.2.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **DeleteUserConfiguration** operation.

Complex type	Description
DeleteUserConfigurationResponseType	Specifies the response to a DeleteUserConfiguration operation request.
DeleteUserConfigurationType	Specifies a DeleteUserConfiguration operation request.

3.1.4.2.3.1 m:DeleteUserConfigurationResponseType Complex Type

The **DeleteUserConfigurationResponseType** complex type specifies the response for a **DeleteUserConfiguration** operation request (section [3.1.4.2](#)). The **DeleteUserConfigurationResponseType** complex type extends the **BaseResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.18.

```
<xs:complexType name="DeleteUserConfigurationResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
      />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.2.3.2 m:DeleteUserConfigurationType Complex Type

The **DeleteUserConfigurationType** complex type specifies a **DeleteUserConfiguration** operation request (section [3.1.4.2](#)). The **DeleteUserConfigurationType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.17.

```
<xs:complexType name="DeleteUserConfigurationType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
      >
    <xs:sequence>
      <xs:element name="UserConfigurationName"
        type="t:UserConfigurationNameType"
        />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

The following table summarizes the child element of the **DeleteUserConfigurationType** complex type.

Element	Type	Description
UserConfigurationName	t:UserConfigurationNameType (section 2.2.4.4)	Specifies the name and the associated folder for the user configuration object to be deleted. The user configuration object name MUST be present.

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 GetUserConfiguration

The **GetUserConfiguration** operation specifies the WSDL messages that are used to get user configuration objects.

The following is the WSDL port type definition of this operation.

```
<wsdl:operation name="GetUserConfiguration">
  <wsdl:input message="tns:GetUserConfigurationSoapIn"/>
  <wsdl:output message="tns:GetUserConfigurationSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for this operation.

```
<wsdl:operation name="GetUserConfiguration">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetUserConfiguration"
  />
  <wsdl:input>
    <soap:header message="tns:GetUserConfigurationSoapIn" part="Impersonation"
      use="literal"/>
    <soap:header message="tns:GetUserConfigurationSoapIn" part="MailboxCulture"
      use="literal"/>
    <soap:header message="tns:GetUserConfigurationSoapIn" part="RequestVersion"
      use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="GetUserConfigurationResult" use="literal" />
  </wsdl:output>
</wsdl:operation>
```

```

        <soap:header message="tns:GetUserConfigurationSoapOut" part="ServerVersion"
use="literal"/>
    </wsdl:output>
</wsdl:operation>

```

The protocol client sends a CreateUserConfigurationSoapIn request WSDL message, as specified in section 3.1.4.1.1.1, and the protocol server responds with a CreateUserConfigurationSoapOut response message, as defined in

3.1.4.3.1 Messages

The following table lists and describes the WSDL message definitions that are specific to the **GetUserConfiguration** operation.

Message	Description
GetUserConfigurationSoapIn	Specifies the SOAP message that gets a user configuration object.
GetUserConfigurationSoapOut	Specifies the SOAP message that is returned by the server in response to the GetUserConfiguration operation request.

3.1.4.3.1.1 GetUserConfigurationSoapIn

The **GetUserConfigurationSoapIn** WSDL message specifies a **GetUserConfiguration** operation request to retrieve a user configuration object.

```

<wsdl:message name="GetUserConfigurationSoapIn">
  <wsdl:part name="request" element="tns:GetUserConfiguration" />
  <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
  <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
  <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **GetUserConfigurationSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/GetUserConfiguration>.

The parts of the **GetUserConfigurationSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:GetUserConfiguration (section 3.1.4.3.2.1)	Specifies the SOAP body of a request to get a user configuration object. This part is required.
Impersonation	t:ExchangeImpersonation ([MS- OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating. This part is optional.
MailboxCulture	t:MailboxCulture ([MS- OXWSCDATA] section 2.2.3.7)	Specifies a SOAP header that identifies the culture to be used for accessing the mailbox. The cultures are defined in [RFC3066] . This part is optional.
RequestVersion	t:RequestServerVersion ([MS- OXWSCDATA] section 2.2.3.11)	Specifies a SOAP header that identifies the schema version for the GetUserConfiguration operation request (section 3.1.4.3).

3.1.4.3.1.2 GetUserConfigurationSoapOut

The **GetUserConfigurationSoapOut** WSDL message specifies the server response to a **GetUserConfiguration** operation request to get a user configuration object.

```
<wsdl:message name="GetUserConfigurationSoapOut">
  <wsdl:part name="GetUserConfigurationResult" element="tns:GetUserConfigurationResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>
```

The parts of the **GetUserConfigurationSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
GetUserConfigurationResult	tns:GetUserConfigurationResponse (section 3.1.4.3.2.2)	Specifies the SOAP body of the response to a GetUserConfiguration operation request.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.12)	Specifies the SOAP header that identifies the server version for the response.

A successful **GetUserConfiguration** operation request returns a **GetUserConfigurationResponse** element, as specified in section 3.1.4.3.2.2, with the **ResponseClass** attribute of the **GetUserConfigurationResponseMessage** element set to "Success". The **ResponseCode** element of the **GetUserConfigurationResponseMessage** element is set to "NoError". The **GetUserConfigurationResponseMessage** element is a child element of the **ArrayOfResponseMessagesType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.12.

If the **GetUserConfiguration** operation request is not successful, it returns a **GetUserConfigurationResponse** element with the **ResponseClass** attribute of the **GetUserConfigurationResponseMessage** element set to "Error". The **ResponseCode** element of the **GetUserConfigurationResponseMessage** element is set to one of the common errors defined in [\[MS-OXWSCDATA\]](#) section 2.2.5.24.

3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to the **GetUserConfiguration** operation.

Element	Description
GetUserConfiguration	Specifies a request to get a user configuration object.
GetUserConfigurationResponse	Specifies the response to a GetUserConfiguration operation request.

3.1.4.3.2.1 GetUserConfiguration Element

The **GetUserConfiguration** element specifies a request to get a user configuration object.

```
<xs:element name="GetUserConfiguration"
  type="m:GetUserConfigurationType"
/>
```

3.1.4.3.2 GetUserConfigurationResponse Element

The **GetUserConfigurationResponse** element specifies the response to a **GetUserConfiguration** operation request (section [3.1.4.3](#)).

```
<xs:element name="GetUserConfigurationResponse"
  type="m:GetUserConfigurationResponseType"
/>
```

3.1.4.3.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **GetUserConfiguration** operation.

Complex type	Description
GetUserConfigurationResponseMessageType	Specifies a user configuration object returned in a response.
GetUserConfigurationResponseType	Specifies a response to a GetUserConfiguration operation request.
GetUserConfigurationType	Specifies a GetUserConfiguration operation request.

3.1.4.3.3.1 m:GetUserConfigurationResponseMessageType Complex Type

The **GetUserConfigurationResponseMessageType** complex type specifies a user configuration object that is returned in a response to a **GetUserConfiguration** operation request. The **GetUserConfigurationResponseMessageType** complex type extends the **ResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.65.

```
<xs:complexType name="GetUserConfigurationResponseMessageType">
  <xs:complexContent>
    <xs:extension
      base="m:ResponseMessageType"
    >
      <xs:sequence>
        <xs:element name="UserConfiguration"
          type="t:UserConfigurationType"
          minOccurs="0"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table summarizes the child element of the **GetUserConfigurationResponseMessageType** complex type.

Element	Type	Description
UserConfiguration	t:UserConfigurationType (section 2.2.4.5)	Specifies a single user configuration object.

3.1.4.3.3.2 m:GetUserConfigurationType Complex Type

The GetUserConfigurationType complex type specifies a GetUserConfiguration operation request (section [3.1.4.3](#)). The GetUserConfigurationType complex type extends the BaseRequestType complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.17.

```
<xs:complexType name="GetUserConfigurationType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
      <xs:sequence>
        <xs:element name="UserConfigurationName"
          type="t:UserConfigurationNameType"
        />
        <xs:element name="UserConfigurationProperties"
          type="t:UserConfigurationPropertyType"
        />
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

The following table summarizes the child elements of the GetUserConfigurationType complex type.

Element	Type	Description
UserConfigurationName	t:UserConfigurationNameType (section 2.2.4.4)	Specifies the name and the associated folder for a user configuration object. The user configuration object name MUST be present.
UserConfigurationProperties	t:UserConfigurationPropertyType (section 3.1.4.3.4.1)	Specifies the property types to get in a GetUserConfiguration operation (section 3.1.4.3).

3.1.4.3.4 Simple Types

The following table summarizes the XML schema complex type definition that is specific to the **GetUserConfiguration** operation.

Simple type name	Description
UserConfigurationPropertyType	Specifies the property types to get in a GetUserConfiguration operation, as specified in section 3.1.4.3 .

3.1.4.3.4.1 t:UserConfigurationPropertyType Simple Type

The **UserConfigurationPropertyType** simple type specifies the property types to get in a **GetUserConfiguration** operation, as specified in section [3.1.4.3](#).

```
<xs:simpleType name="UserConfigurationPropertyType">
  <xs:list>
    <xs:simpleType>
      <xs:restriction
        base="xs:string"
      >
        <xs:enumeration
          value="Id"
        />
        <xs:enumeration
          value="Dictionary"
        />
        <xs:enumeration
          value="XmlData"
        />
        <xs:enumeration
          value="BinaryData"
        />
        <xs:enumeration
          value="All"
        />
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
```

The following table lists and describes the values that are defined by the **UserConfigurationPropertyType** simple type.

Value name	Description
Id	Specifies the identifier property.
Dictionary	Specifies dictionary property types.
XmlData	Specifies XML data property types.
BinaryData	Specifies binary data property types.
All	Specifies the identifier, dictionary, XML data, and binary property types.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 UpdateUserConfiguration

The **UpdateUserConfiguration** operation specifies the WSDL messages for updating user configuration objects.

The following is the WSDL port type definition of this operation.

```
<wsdl:operation name="UpdateUserConfiguration">
  <wsdl:input message="tns:UpdateUserConfigurationSoapIn"/>
  <wsdl:output message="tns:UpdateUserConfigurationSoapOut"/>
</wsdl:operation>
```

The following is the WSDL binding specification for the operation.



```
<wsdl:operation name="UpdateUserConfiguration">
  <soap:operation
    soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateUserConfiguration" />
  <wsdl:input>
    <soap:header message="tns:UpdateUserConfigurationSoapIn" part="Impersonation"
      use="literal"/>
    <soap:header message="tns:UpdateUserConfigurationSoapIn" part="MailboxCulture"
      use="literal"/>
    <soap:header message="tns:UpdateUserConfigurationSoapIn" part="RequestVersion"
      use="literal"/>
    <soap:body parts="request" use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap:body parts="UpdateUserConfigurationResult" use="literal" />
    <soap:header message="tns:UpdateUserConfigurationSoapOut" part="ServerVersion"
      use="literal"/>
  </wsdl:output>
</wsdl:operation>
```

The protocol client sends a **CreateUserConfigurationSoapIn** request WSDL message, as specified in section 3.1.4.1.1.1, and the protocol server responds with a **CreateUserConfigurationSoapOut** response message, as defined in

3.1.4.4.1 Messages

The following table lists and describes the WSDL message definitions that are specific to the **UpdateUserConfiguration** operation.

Message	Description
UpdateUserConfigurationSoapIn	Specifies the SOAP message that updates a user configuration object.
UpdateUserConfigurationSoapOut	Specifies the SOAP message that is returned by the server in response to an UpdateUserConfiguration operation request.

3.1.4.4.1.1 UpdateUserConfigurationSoapIn

The **UpdateUserConfigurationSoapIn** WSDL message specifies an **UpdateUserConfiguration** operation request to update a user configuration object.

```
<wsdl:message name="UpdateUserConfigurationSoapIn">
```



```

<wsdl:part name="request" element="tns:UpdateUserConfiguration" />
<wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
<wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
<wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
</wsdl:message>

```

The **UpdateUserConfigurationSoapIn** WSDL message is the input message for the SOAP action <http://schemas.microsoft.com/exchange/services/2006/messages/UpdateUserConfiguration>.

The parts of the **UpdateUserConfigurationSoapIn** WSDL message are listed and described in the following table.

Part name	Element/type	Description
request	tns:UpdateUserConfiguration (section 3.1.4.4.2.1)	Specifies the SOAP body of a request to update a user configuration object. This part is required.
Impersonation	t:ExchangeImpersonation ([MS-OXWSCDATA] section 2.2.3.3)	Specifies a SOAP header that identifies the user whom the client application is impersonating. This part is optional.
MailboxCulture	t:MailboxCulture ([MS-OXWSCDATA] section 2.2.3.7)	Specifies a SOAP header that identifies the culture to be used for accessing the mailbox. The cultures are defined in [RFC3066] . This part is optional.
RequestVersion	t:RequestServerVersion ([MS-OXWSCDATA] section 2.2.3.11)	Specifies a SOAP header that identifies the schema version for a UpdateUserConfiguration operation (section 3.1.4.4) request.

3.1.4.4.1.2 UpdateUserConfigurationSoapOut

The **UpdateUserConfigurationSoapOut** WSDL message specifies the server response to an **UpdateUserConfiguration** operation request to update a user configuration object.

```

<wsdl:message name="UpdateUserConfigurationSoapOut">
  <wsdl:part name="UpdateUserConfigurationResult"
    element="tns:UpdateUserConfigurationResponse"/>
  <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
</wsdl:message>

```

The parts of the **UpdateUserConfigurationSoapOut** WSDL message are listed and described in the following table.

Part name	Element/type	Description
UpdateUserConfigurationResult	tns:UpdateUserConfigurationResponse (section 3.1.4.4.2.2)	Specifies the SOAP body of the response to an UpdateUserConfiguration operation request.
ServerVersion	t:ServerVersionInfo ([MS-OXWSCDATA] section 2.2.3.12)	Specifies the SOAP header that identifies the server version for the response to an UpdateUserConfiguration operation request.

A successful **UpdateUserConfiguration** operation request returns an **UpdateUserConfigurationResponse** element, as specified in section 3.1.4.4.2.2, with the **ResponseClass** attribute of the **UpdateUserConfigurationResponseMessage** element set to "Success". The **ResponseCode** element of the **UpdateUserConfigurationResponseMessage** element is set to "NoError". The **UpdateUserConfigurationResponseMessage** element is a child element of the **ArrayOfResponseMessagesType** complex type, as specified in [MS-OXWSCDATA] section 2.2.4.12.

If the **UpdateUserConfiguration** operation request is not successful, it returns an **UpdateUserConfigurationResponse** element with the **ResponseClass** attribute of the **UpdateUserConfigurationResponseMessage** element set to "Error". The **ResponseCode** element of the **UpdateUserConfigurationResponseMessage** element is set to one of the common errors defined in [MS-OXWSCDATA] section 2.2.5.24.

3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to the **UpdateUserConfiguration** operation.

Element	Description
UpdateUserConfiguration	Specifies a request to update a user configuration object.
UpdateUserConfigurationResponse	Specifies the response to an UpdateUserConfiguration operation request.

3.1.4.4.2.1 UpdateUserConfiguration Element

The **UpdateUserConfiguration** element specifies a request to update a user configuration object.

```
<xs:element name="UpdateUserConfiguration"
  type="m:UpdateUserConfigurationType"
  />
```

3.1.4.4.2.2 UpdateUserConfigurationResponse Element

The **UpdateUserConfigurationResponse** element specifies the response to an **UpdateUserConfiguration** operation request (section [3.1.4.4](#)).

```
<xs:element name="UpdateUserConfigurationResponse"
  type="m:UpdateUserConfigurationResponseType"
  />
```

3.1.4.4.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to the **UpdateUserConfiguration** operation.

Complex type	Description
UpdateUserConfigurationResponseType	Specifies the response to an UpdateUserConfiguration operation request.
UpdateUserConfigurationType	Specifies an UpdateUserConfiguration operation request.

3.1.4.4.3.1 m:UpdateUserConfigurationResponseType Complex Type

The **UpdateUserConfigurationResponseType** complex type specifies the response to an **UpdateUserConfiguration** operation request (section [3.1.4.4](#)). The **UpdateUserConfigurationResponseType** complex type extends the **BaseResponseMessageType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.18.

```
<xs:complexType name="UpdateUserConfigurationResponseType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseResponseMessageType"
    />
  </xs:complexContent>
</xs:complexType>
```

3.1.4.4.3.2 m:UpdateUserConfigurationType Complex Type

The **UpdateUserConfigurationType** complex type specifies an **UpdateUserConfiguration** operation request (section [3.1.4.4](#)). The **UpdateUserConfigurationType** complex type extends the **BaseRequestType** complex type, as specified in [\[MS-OXWSCDATA\]](#) section 2.2.4.17.

```
<xs:complexType name="UpdateUserConfigurationType">
  <xs:complexContent>
    <xs:extension
      base="m:BaseRequestType"
    >
    <xs:sequence>
      <xs:element name="UserConfiguration"
        type="t:UserConfigurationType"
      />
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

The following table summarizes the child element of the **UpdateUserConfigurationType** complex type.

Element	Type	Description
UserConfiguration	t:UserConfigurationType (section 2.2.4.5)	Specifies the user configuration object that contains updated data.

3.1.4.4.4 Simple Types

None.

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

Preliminary

4 Protocol Examples

The following examples show the request and response XML for the User Configuration Web Service Protocol operations.

4.1 CreateUserConfiguration Operation

The following example of a **CreateUserConfiguration** operation request, as described in section [3.1.4.1](#), shows how to form a request to create a user configuration object on the Inbox folder.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <RequestServerVersion Version="Exchange2013"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <CreateUserConfiguration
      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <UserConfiguration>
        <UserConfigurationName Name="PersonalDetails"
          xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
          <DistinguishedFolderId Id="inbox" />
        </UserConfigurationName>
        <Dictionary xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
          <DictionaryEntry>
            <DictionaryKey>
              <Type>String</Type>
              <Value>Birthday</Value>
            </DictionaryKey>
            <DictionaryValue>
              <Type>DateTime</Type>
              <Value>2000-01-01</Value>
            </DictionaryValue>
          </DictionaryEntry>
        </Dictionary>
      </UserConfiguration>
    </CreateUserConfiguration>
  </soap:Body>
</soap:Envelope>
```

The following example shows a successful response to the **CreateUserConfiguration** operation request.

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15" MinorVersion="0" MajorBuildNumber="1054"
      MinorBuildNumber="12" Version="Exchange2013"
      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
```

```

<m:CreateUserConfigurationResponse
  xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
  xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
  <m:ResponseMessages>
    <m:CreateUserConfigurationResponseMessage ResponseClass="Success">
      <m:ResponseCode>NoError</m:ResponseCode>
    </m:CreateUserConfigurationResponseMessage>
  </m:ResponseMessages>
</m:CreateUserConfigurationResponse>
</s:Body>
</s:Envelope>

```

4.2 DeleteUserConfiguration Operation

The following example of a **DeleteUserConfiguration** operation request, as described in section [3.1.4.2](#), shows how to form a request to delete a user configuration object on the Inbox folder.

```

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <RequestServerVersion Version="Exchange2013"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <DeleteUserConfiguration
      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <UserConfigurationName Name="PersonalDetails">
        <DistinguishedFolderId Id="inbox"
          xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
      </UserConfigurationName>
    </DeleteUserConfiguration>
  </soap:Body>
</soap:Envelope>

```

The following example shows a successful response to the **DeleteUserConfiguration** operation request.

```

<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15" MinorVersion="0" MajorBuildNumber="1054"
      MinorBuildNumber="12" Version="Exchange2013"
      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <m:DeleteUserConfigurationResponse
      xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
      xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
      <m:ResponseMessages>
        <m:DeleteUserConfigurationResponseMessage ResponseClass="Success">
          <m:ResponseCode>NoError</m:ResponseCode>
        </m:DeleteUserConfigurationResponseMessage>
      </m:ResponseMessages>
    </m:DeleteUserConfigurationResponse>
  </s:Body>
</s:Envelope>

```

```
</s:Body>
</s:Envelope>
```

4.3 GetUserConfiguration Operation

The following example of a **GetUserConfiguration** operation request, as described in section [3.1.4.3](#), shows how to form a request to get a user configuration object on the Inbox folder.

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <RequestServerVersion Version="Exchange2013"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <GetUserConfiguration
      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <UserConfigurationName Name="PersonalDetails">
        <DistinguishedFolderId Id="inbox"
          xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
      </UserConfigurationName>
      <UserConfigurationProperties>All</UserConfigurationProperties>
    </GetUserConfiguration>
  </soap:Body>
</soap:Envelope>
```

The following example shows a successful response to the **GetUserConfiguration** operation request.

In this example, **Id** and **ChangeKey** attributes of the **ItemId** element, encoded with base64 encoding, have been shortened to preserve the readability.

```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15" MinorVersion="0" MajorBuildNumber="1054"
      MinorBuildNumber="12" Version="Exchange2013"
      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <m:GetUserConfigurationResponse
      xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
      xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
      <m:ResponseMessages>
        <m:GetUserConfigurationResponseMessage ResponseClass="Success">
          <m:ResponseCode>NoError</m:ResponseCode>
          <m:UserConfiguration>
            <t:UserConfigurationName Name="PersonalDetails">
              <t:DistinguishedFolderId Id="inbox"/>
            </t:UserConfigurationName>
            <t:ItemId Id="AAMGUxYmU1Zj=" ChangeKey="CQAAAABYAUKH"/>
            <t:Dictionary>
```

```

    <t:DictionaryEntry>
      <t:DictionaryKey>
        <t:Type>String</t:Type>
        <t:Value>Birthday</t:Value>
      </t:DictionaryKey>
      <t:DictionaryValue>
        <t:Type>DateTime</t:Type>
        <t:Value>2000-01-01T00:00:00Z</t:Value>
      </t:DictionaryValue>
    </t:DictionaryEntry>
  </t:Dictionary>
</m:UserConfiguration>
</m:GetUserConfigurationResponseMessage>
</m:ResponseMessages>
</m:GetUserConfigurationResponse>
</s:Body>
</s:Envelope>

```

4.4 UpdateUserConfiguration Operation

The following example of an **UpdateUserConfiguration** operation request, as described in section [3.1.4.4](#), shows how to form a request to update a user configuration object on the Inbox folder.

```

<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Header>
    <RequestServerVersion Version="Exchange2013"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types" />
  </soap:Header>
  <soap:Body>
    <UpdateUserConfiguration
      xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <UserConfiguration>
        <UserConfigurationName Name="PersonalDetails"
          xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
          <DistinguishedFolderId Id="inbox" />
        </UserConfigurationName>
        <Dictionary xmlns="http://schemas.microsoft.com/exchange/services/2006/types">
          <DictionaryEntry>
            <DictionaryKey>
              <Type>String</Type>
              <Value>Birthday</Value>
            </DictionaryKey>
            <DictionaryValue>
              <Type>DateTime</Type>
              <Value>1990-09-09</Value>
            </DictionaryValue>
          </DictionaryEntry>
        </Dictionary>
      </UserConfiguration>
    </UpdateUserConfiguration>
  </soap:Body>
</soap:Envelope>

```

The following example shows a successful response to the **UpdateUserConfiguration** operation request.


```
<?xml version="1.0" encoding="utf-8"?>
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Header>
    <h:ServerVersionInfo MajorVersion="15" MinorVersion="0" MajorBuildNumber="1054"
      MinorBuildNumber="12" Version="Exchange2013"
      xmlns:h="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
      xmlns:xsd="http://www.w3.org/2001/XMLSchema"
      xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"/>
  </s:Header>
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <m:UpdateUserConfigurationResponse
      xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
      xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types">
      <m:ResponseMessages>
        <m:UpdateUserConfigurationResponseMessage ResponseClass="Success">
          <m:ResponseCode>NoError</m:ResponseCode>
        </m:UpdateUserConfigurationResponseMessage>
      </m:ResponseMessages>
    </m:UpdateUserConfigurationResponse>
  </s:Body>
</s:Envelope>
```

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

Preliminary

6 Appendix A: Full WSDL

The XML files that are listed in the following table are required in order to implement the functionality specified in this document.

File name	Description	Section
MS-OXWSUSRCFG.wsdl	Contains the WSDL for the implementation of this protocol.	6
MS-OXWSUSRCFG-messages.xsd	Contains the XML schema message definitions that are used in this protocol.	7.1
MS-OXWSUSRCFG-types.xsd	Contains the XML schema type definitions that are used in this protocol.	7.2

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSUSRCFG-types.xsd or MS-OXWSUSRCFG-messages.xsd schemas have to be placed in the common folder with these files.

This section contains the contents of the MS-OXWSUSRCFG.wsdl file.

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:s="http://www.w3.org/2001/XMLSchema" xmlns:wSDL="http://schemas.xmlsoap.org/wsdl/"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages">
  <wsdl:types>
    <xs:schema id="messages" elementFormDefault="qualified" version="Exchange2016"
xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns="http://schemas.microsoft.com/exchange/services/2006/messages">
      <xs:include schemaLocation="MS-OXWSUSRCFG-messages.xsd"/>
    </xs:schema>
    <xs:schema id="types" elementFormDefault="qualified" version="Exchange2016"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
      <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
    </xs:schema>
  </wsdl:types>
  <wsdl:message name="CreateUserConfigurationSoapIn">
    <wsdl:part name="request" element="tns:CreateUserConfiguration"/>
    <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wsdl:message>
  <wsdl:message name="CreateUserConfigurationSoapOut">
    <wsdl:part name="CreateUserConfigurationResult"
element="tns:CreateUserConfigurationResponse"/>
    <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
  </wsdl:message>
  <wsdl:message name="DeleteUserConfigurationSoapIn">
    <wsdl:part name="request" element="tns>DeleteUserConfiguration"/>
    <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
    <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
    <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
  </wsdl:message>

```

```

    <wsdl:message name="DeleteUserConfigurationSoapOut">
      <wsdl:part name="DeleteUserConfigurationResult"
element="tns:DeleteUserConfigurationResponse"/>
      <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="GetUserConfigurationSoapIn">
      <wsdl:part name="request" element="tns:GetUserConfiguration"/>
      <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
      <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
      <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="GetUserConfigurationSoapOut">
      <wsdl:part name="GetUserConfigurationResult"
element="tns:GetUserConfigurationResponse"/>
      <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:message name="UpdateUserConfigurationSoapIn">
      <wsdl:part name="request" element="tns:UpdateUserConfiguration"/>
      <wsdl:part name="Impersonation" element="t:ExchangeImpersonation"/>
      <wsdl:part name="MailboxCulture" element="t:MailboxCulture"/>
      <wsdl:part name="RequestVersion" element="t:RequestServerVersion"/>
    </wsdl:message>
    <wsdl:message name="UpdateUserConfigurationSoapOut">
      <wsdl:part name="UpdateUserConfigurationResult"
element="tns:UpdateUserConfigurationResponse"/>
      <wsdl:part name="ServerVersion" element="t:ServerVersionInfo"/>
    </wsdl:message>
    <wsdl:portType name="ExchangeServicePortType">
      <wsdl:operation name="CreateUserConfiguration">
        <wsdl:input message="tns:CreateUserConfigurationSoapIn"/>
        <wsdl:output message="tns:CreateUserConfigurationSoapOut"/>
      </wsdl:operation>
      <wsdl:operation name="DeleteUserConfiguration">
        <wsdl:input message="tns:DeleteUserConfigurationSoapIn"/>
        <wsdl:output message="tns:DeleteUserConfigurationSoapOut"/>
      </wsdl:operation>
      <wsdl:operation name="GetUserConfiguration">
        <wsdl:input message="tns:GetUserConfigurationSoapIn"/>
        <wsdl:output message="tns:GetUserConfigurationSoapOut"/>
      </wsdl:operation>
      <wsdl:operation name="UpdateUserConfiguration">
        <wsdl:input message="tns:UpdateUserConfigurationSoapIn"/>
        <wsdl:output message="tns:UpdateUserConfigurationSoapOut"/>
      </wsdl:operation>
    </wsdl:portType>
    <wsdl:binding name="ExchangeServiceBinding" type="tns:ExchangeServicePortType">
      <wsdl:documentation>
        <wsi:Claim conformsTo="http://ws-i.org/profiles/basic/1.0"
xmlns:wsi="http://ws-i.org/schemas/conformanceClaim"/>
      </wsdl:documentation>
      <soap:binding style="document" transport="http://schemas.xmlsoap.org/soap/http"/>
      <wsdl:operation name="CreateUserConfiguration">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/CreateUserConfigurat
ion"/>
        <wsdl:input>
          <soap:header message="tns:CreateUserConfigurationSoapIn"
part="Impersonation" use="literal"/>
          <soap:header message="tns:CreateUserConfigurationSoapIn"
part="MailboxCulture" use="literal"/>
          <soap:header message="tns:CreateUserConfigurationSoapIn"
part="RequestVersion" use="literal"/>
          <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
          <soap:body parts="CreateUserConfigurationResult" use="literal"/>
          <soap:header message="tns:CreateUserConfigurationSoapOut"
part="ServerVersion" use="literal"/>

```

```

        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="DeleteUserConfiguration">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/DeleteUserConfigurat
ion"/>
        <wsdl:input>
            <soap:header message="tns:DeleteUserConfigurationSoapIn"
part="Impersonation" use="literal"/>
            <soap:header message="tns:DeleteUserConfigurationSoapIn"
part="MailboxCulture" use="literal"/>
            <soap:header message="tns:DeleteUserConfigurationSoapIn"
part="RequestVersion" use="literal"/>
            <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="DeleteUserConfigurationResult" use="literal"/>
            <soap:header message="tns:DeleteUserConfigurationSoapOut"
part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetUserConfiguration">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/GetUserConfiguration
"/>
        <wsdl:input>
            <soap:header message="tns:GetUserConfigurationSoapIn"
part="Impersonation" use="literal"/>
            <soap:header message="tns:GetUserConfigurationSoapIn"
part="MailboxCulture" use="literal"/>
            <soap:header message="tns:GetUserConfigurationSoapIn"
part="RequestVersion" use="literal"/>
            <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="GetUserConfigurationResult" use="literal"/>
            <soap:header message="tns:GetUserConfigurationSoapOut"
part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateUserConfiguration">
        <soap:operation
soapAction="http://schemas.microsoft.com/exchange/services/2006/messages/UpdateUserConfigurat
ion"/>
        <wsdl:input>
            <soap:header message="tns:UpdateUserConfigurationSoapIn"
part="Impersonation" use="literal"/>
            <soap:header message="tns:UpdateUserConfigurationSoapIn"
part="MailboxCulture" use="literal"/>
            <soap:header message="tns:UpdateUserConfigurationSoapIn"
part="RequestVersion" use="literal"/>
            <soap:body parts="request" use="literal"/>
        </wsdl:input>
        <wsdl:output>
            <soap:body parts="UpdateUserConfigurationResult" use="literal"/>
            <soap:header message="tns:UpdateUserConfigurationSoapOut"
part="ServerVersion" use="literal"/>
        </wsdl:output>
    </wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

7 Appendix B: Full XML Schema

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
Messages schema	m:	7.1
Types schema	t:	7.2

These files have to be placed in a common folder in order for the WSDL to validate and operate. Also, any schema files that are included in or imported into the MS-OXWSUSRCFG-types.xsd or MS-OXWSUSRCFG-messages.xsd schemas have to be placed in the common folder along with the files listed in the table.

7.1 Messages Schema

This section contains the contents of the MS-OXWSUSRCFG-messages.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSUSRCFG-messages.xsd includes the file listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types schema, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSCDATA-messages.xsd	[MS-OXWSCDATA] section 7.1

```
<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:m="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/messages"
xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/messages"
elementFormDefault="qualified" version="Exchange2016" id="messages">
  <xs:include schemaLocation="MS-OXWSCDATA-messages.xsd"/>
  <xs:import namespace="http://schemas.microsoft.com/exchange/services/2006/types"
schemaLocation="MS-OXWSUSRCFG-types.xsd"/>
  <xs:complexType name="CreateUserConfigurationType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="UserConfiguration"
type="t:UserConfigurationType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="CreateUserConfiguration" type="m:CreateUserConfigurationType"/>
  <xs:complexType name="CreateUserConfigurationResponseType">
    <xs:complexContent>
      <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
  </xs:complexType>
  <xs:element name="CreateUserConfigurationResponse"
type="m:CreateUserConfigurationResponseType"/>
  <xs:complexType name="DeleteUserConfigurationType">
    <xs:complexContent>
      <xs:extension base="m:BaseRequestType">
        <xs:sequence>
          <xs:element name="UserConfigurationName"
type="t:UserConfigurationNameType"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
```

```

        </xs:sequence>
    </xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:element name="DeleteUserConfiguration" type="m:DeleteUserConfigurationType"/>
<xs:complexType name="DeleteUserConfigurationResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="DeleteUserConfigurationResponse"
type="m:DeleteUserConfigurationResponseType"/>
<xs:complexType name="GetUserConfigurationType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="UserConfigurationName"
type="t:UserConfigurationNameType"/>
                <xs:element name="UserConfigurationProperties"
type="t:UserConfigurationPropertyType"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="GetUserConfiguration" type="m:GetUserConfigurationType"/>
<xs:complexType name="GetUserConfigurationResponseMessageType">
    <xs:complexContent>
        <xs:extension base="m:ResponseMessageType">
            <xs:sequence>
                <xs:element name="UserConfiguration" type="t:UserConfigurationType"
minOccurs="0"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
"<xs:element name="GetUserConfigurationResponse" type="m:
GetUserConfigurationResponseMessageType"/>
<xs:complexType name="UpdateUserConfigurationType">
    <xs:complexContent>
        <xs:extension base="m:BaseRequestType">
            <xs:sequence>
                <xs:element name="UserConfiguration"
type="t:UserConfigurationType"/>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateUserConfiguration" type="m:UpdateUserConfigurationType"/>
<xs:complexType name="UpdateUserConfigurationResponseType">
    <xs:complexContent>
        <xs:extension base="m:BaseResponseMessageType"/>
    </xs:complexContent>
</xs:complexType>
<xs:element name="UpdateUserConfigurationResponse"
type="m:UpdateUserConfigurationResponseType"/>
</xs:schema>

```

7.2 Types Schema

This section contains the contents of the MS-OXWSUSRCFG-types.xsd file and information about additional files that this schema file requires to operate correctly.

MS-OXWSUSRCFG-types.xsd includes the file listed in the following table. To operate correctly, this file has to be present in the folder that contains the WSDL, types, and messages schema files for this protocol.

File name	Defining specification
MS-OXWSFOLD-types.xsd	[MS-OXWSFOLD] section 7.2

```

<?xml version="1.0" encoding="utf-8"?>
<xs:schema xmlns:t="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:tns="http://schemas.microsoft.com/exchange/services/2006/types"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
targetNamespace="http://schemas.microsoft.com/exchange/services/2006/types"
elementFormDefault="qualified" version="Exchange2016" id="types">
  <xs:import namespace="http://www.w3.org/XML/1998/namespace"/>
  <xs:include schemaLocation="MS-OXWSFOLD-types.xsd"/>
  <xs:complexType name="UserConfigurationNameType">
    <xs:complexContent>
      <xs:extension base="t:TargetFolderIdType">
        <xs:attribute name="Name" type="t:NonEmptyStringType" use="required"/>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>
  <xs:simpleType name="UserConfigurationDictionaryObjectTypesType">
    <xs:restriction base="xs:string">
      <xs:enumeration value="DateTime"/>
      <xs:enumeration value="Boolean"/>
      <xs:enumeration value="Byte"/>
      <xs:enumeration value="String"/>
      <xs:enumeration value="Integer32"/>
      <xs:enumeration value="UnsignedInteger32"/>
      <xs:enumeration value="Integer64"/>
      <xs:enumeration value="UnsignedInteger64"/>
      <xs:enumeration value="StringArray"/>
      <xs:enumeration value="ByteArray"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:complexType name="UserConfigurationDictionaryObjectType">
    <xs:sequence>
      <xs:element name="Type" type="t:UserConfigurationDictionaryObjectTypesType"/>
      <xs:element name="Value" type="xs:string" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="UserConfigurationDictionaryEntryType">
    <xs:sequence>
      <xs:element name="DictionaryKey"
type="t:UserConfigurationDictionaryObjectType"/>
      <xs:element name="DictionaryValue"
type="t:UserConfigurationDictionaryObjectType" nillable="true"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="UserConfigurationDictionaryType">
    <xs:sequence>
      <xs:element name="DictionaryEntry"
type="t:UserConfigurationDictionaryEntryType" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:complexType>
  <xs:complexType name="UserConfigurationType">
    <xs:sequence>
      <xs:element name="UserConfigurationName" type="t:UserConfigurationNameType"/>
      <xs:element name="ItemId" type="t:ItemIdType" minOccurs="0"/>
      <xs:element name="Dictionary" type="t:UserConfigurationDictionaryType"
minOccurs="0"/>
      <xs:element name="XmlData" type="xs:base64Binary" minOccurs="0"/>
      <xs:element name="BinaryData" type="xs:base64Binary" minOccurs="0"/>
    </xs:sequence>
  </xs:complexType>
  <xs:simpleType name="UserConfigurationPropertyType">
    <xs:list>
      <xs:simpleType>
        <xs:restriction base="xs:string">

```



```
        <xs:enumeration value="Id"/>
        <xs:enumeration value="Dictionary"/>
        <xs:enumeration value="XmlData"/>
        <xs:enumeration value="BinaryData"/>
        <xs:enumeration value="All"/>
    </xs:restriction>
</xs:simpleType>
</xs:list>
</xs:simpleType>
</xs:schema>
```

Preliminary

8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

- Microsoft Exchange Server 2010
- Microsoft Exchange Server 2013
- Microsoft Exchange Server 2016 Preview

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

Preliminary

9 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
8 Appendix C: Product Behavior	Added Exchange 2016 to list of supported products.	Y	Content update.

Preliminary

10 Index

A

Abstract data model
[server](#) 17
[Applicability](#) 10
[Attribute groups](#) 16
[Attributes](#) 16

C

[Capability negotiation](#) 10
[Change tracking](#) 51
[Complex types](#) 12
[t:UserConfigurationDictionaryEntryType Complex Type](#) 12
[t:UserConfigurationDictionaryObjectType Complex Type](#) 12
[t:UserConfigurationDictionaryType Complex Type](#) 13
[t:UserConfigurationNameType Complex Type](#) 13
[t:UserConfigurationType Complex Type](#) 14

D

Data model - abstract
[server](#) 17

E

Events
[local - server](#) 36
[timer - server](#) 36

F

[Fields - vendor-extensible](#) 10
[Full WSDL](#) 43
[Full XML schema](#) 46
[Messages Schema](#) 46
[Types Schema](#) 47

G

[Glossary](#) 7
[Groups](#) 16

I

[Implementer - security considerations](#) 42
[Index of security parameters](#) 42
[Informative references](#) 9
Initialization
[server](#) 17
[Introduction](#) 7

L

Local events
[server](#) 36

M

Message processing
[server](#) 17
Messages
[attribute groups](#) 16
[attributes](#) 16
[complex types](#) 12
[elements](#) 11
[enumerated](#) 11
[groups](#) 16
[namespaces](#) 11
[simple types](#) 15
[syntax](#) 11
[t:UserConfigurationDictionaryEntryType Complex Type complex type](#) 12
[t:UserConfigurationDictionaryObjectType Complex Type complex type](#) 12
[t:UserConfigurationDictionaryObjectTypesType Simple Type simple type](#) 15
[t:UserConfigurationDictionaryType Complex Type complex type](#) 13
[t:UserConfigurationNameType Complex Type complex type](#) 13
[t:UserConfigurationType Complex Type complex type](#) 14
[transport](#) 11

N

[Namespaces](#) 11
[Normative references](#) 8

O

Operations
[CreateUserConfiguration](#) 17
[DeleteUserConfiguration](#) 22
[GetUserConfiguration](#) 26
[UpdateUserConfiguration](#) 32
[Overview \(synopsis\)](#) 9

P

[Parameters - security index](#) 42
[Preconditions](#) 10
[Prerequisites](#) 10
[Product behavior](#) 50
Protocol Details
[overview](#) 17

R

[References](#) 8
[informative](#) 9
[normative](#) 8
[Relationship to other protocols](#) 9

S

Security

- [implementer considerations](#) 42
- [parameter index](#) 42

Sequencing rules

- [server](#) 17

Server

- [abstract data model](#) 17
- [CreateUserConfiguration operation](#) 17
- [DeleteUserConfiguration operation](#) 22
- [GetUserConfiguration operation](#) 26
- [initialization](#) 17
- [local events](#) 36
- [message processing](#) 17
- [sequencing rules](#) 17
- [timer events](#) 36
- [timers](#) 17
- [UpdateUserConfiguration operation](#) 32

Simple types 15

- [t:UserConfigurationDictionaryObjectTypesType Simple Type](#) 15

Standards assignments 10

Syntax

- [messages - overview](#) 11

T

- [t:UserConfigurationDictionaryEntryType Complex Type complex type](#) 12

- [t:UserConfigurationDictionaryObjectType Complex Type complex type](#) 12

- [t:UserConfigurationDictionaryObjectTypesType Simple Type simple type](#) 15

- [t:UserConfigurationDictionaryType Complex Type complex type](#) 13

- [t:UserConfigurationNameType Complex Type complex type](#) 13

- [t:UserConfigurationType Complex Type complex type](#) 14

Timer events

- [server](#) 36

Timers

- [server](#) 17

[Tracking changes](#) 51

[Transport](#) 11

Types

- [complex](#) 12
- [simple](#) 15

V

[Vendor-extensible fields](#) 10

[Versioning](#) 10

W

[WSDL](#) 43

X

[XML schema](#) 46

- [Messages Schema](#) 46