

# [MS-PUBCSOM]: Publishing Client-Side Object Model Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
01/20/2012	0.1	New	Released new document.
04/11/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
09/12/2012	0.1	No change	No changes to the meaning, language, or formatting of the technical content.
10/08/2012	1.0	Major	Significantly changed the technical content.
02/11/2013	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/30/2013	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
11/18/2013	1.1	Minor	Clarified the meaning of the technical content.
02/10/2014	1.1	No change	No changes to the meaning, language, or formatting of the technical content.
04/30/2014	1.2	Minor	Clarified the meaning of the technical content.
07/31/2014	1.2	No change	No changes to the meaning, language, or formatting of the technical content.
10/30/2014	1.3	Minor	Clarified the meaning of the technical content.

# Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>11</b>
1.1	Glossary .....	11
1.2	References.....	12
1.2.1	Normative References.....	12
1.2.2	Informative References .....	13
1.3	Overview .....	13
1.4	Relationship to Other Protocols.....	13
1.5	Prerequisites/Preconditions .....	14
1.6	Applicability Statement.....	14
1.7	Versioning and Capability Negotiation.....	14
1.8	Vendor-Extensible Fields.....	14
1.9	Standards Assignments .....	14
<b>2</b>	<b>Messages.....</b>	<b>15</b>
2.1	Transport.....	15
2.2	Message Syntax .....	15
<b>3</b>	<b>Protocol Details .....</b>	<b>16</b>
3.1	Server Details .....	16
3.1.1	Abstract Data Model .....	16
3.1.1.1	Parent Type .....	16
3.1.2	Timers .....	16
3.1.3	Initialization .....	16
3.1.4	Higher-Layer Triggered Events.....	16
3.1.5	Message Processing Events and Sequencing Rules.....	16
3.1.5.1	Microsoft.SharePoint.Client.Publishing.VariationLabel .....	16
3.1.5.1.1	Properties .....	17
3.1.5.1.1.1	Scalar Properties .....	17
3.1.5.1.1.1.1	DisplayName .....	17
3.1.5.1.1.1.2	IsSource .....	17
3.1.5.1.1.1.3	Language.....	17
3.1.5.1.1.1.4	Locale.....	17
3.1.5.1.1.1.5	Title .....	18
3.1.5.1.1.1.6	TopWebUrl .....	18
3.1.5.1.1.2	ObjectPath Properties.....	18
3.1.5.1.2	Methods.....	18
3.1.5.1.2.1	Scalar Methods.....	18
3.1.5.1.2.2	ObjectPath Methods.....	18
3.1.5.2	Microsoft.SharePoint.Client.Publishing.Variations .....	18
3.1.5.2.1	Properties .....	18
3.1.5.2.1.1	Scalar Properties .....	18
3.1.5.2.1.2	ObjectPath Properties.....	18
3.1.5.2.2	Methods.....	19
3.1.5.2.2.1	Scalar Methods.....	19
3.1.5.2.2.1.1	GetPeerUrl .....	19
3.1.5.2.2.1.2	UpdateListItems.....	19
3.1.5.2.2.2	ObjectPath Methods.....	20
3.1.5.2.2.2.1	GetLabels.....	20
3.1.5.3	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType .....	20
3.1.5.3.1	Field Values .....	20

3.1.5.3.1.1	Root .....	20
3.1.5.3.1.2	FriendlyUrl .....	20
3.1.5.3.1.3	SimpleLink .....	20
3.1.5.4	Microsoft.SharePoint.Client.Publishing.Navigation.TaxonomyNavigation .....	20
3.1.5.4.1	Properties .....	21
3.1.5.4.1.1	Scalar Properties .....	21
3.1.5.4.1.2	ObjectPath Properties .....	21
3.1.5.4.2	Methods .....	21
3.1.5.4.2.1	Scalar Methods .....	21
3.1.5.4.2.1.1	FlushSiteFromCache .....	21
3.1.5.4.2.1.2	FlushTermSetFromCache .....	21
3.1.5.4.2.1.3	FlushWebFromCache .....	22
3.1.5.4.2.1.4	GetNavigationLcidForWeb .....	22
3.1.5.4.2.1.5	SetCrawlAsFriendlyUrlPage .....	22
3.1.5.4.2.2	ObjectPath Methods .....	23
3.1.5.4.2.2.1	GetTermSetForWeb .....	23
3.1.5.4.2.2.2	GetWebNavigationSettings .....	23
3.1.5.5	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm .....	24
3.1.5.5.1	Properties .....	24
3.1.5.5.1.1	Scalar Properties .....	24
3.1.5.5.1.1.1	AssociatedFolderUrl .....	24
3.1.5.5.1.1.2	ExcludeFromCurrentNavigation .....	25
3.1.5.5.1.1.3	ExcludeFromGlobalNavigation .....	25
3.1.5.5.1.1.4	HoverText .....	25
3.1.5.5.1.1.5	Id .....	25
3.1.5.5.1.1.6	IsDeprecated .....	25
3.1.5.5.1.1.7	LinkType .....	25
3.1.5.5.1.1.8	SimpleLinkUrl .....	26
3.1.5.5.1.1.9	TaxonomyName .....	26
3.1.5.5.1.1.10	IsPinned .....	26
3.1.5.5.1.1.11	IsPinnedRoot .....	26
3.1.5.5.1.1.12	IsReadOnly .....	27
3.1.5.5.1.1.13	CategoryImageUrl .....	27
3.1.5.5.1.2	ObjectPath Properties .....	27
3.1.5.5.1.2.1	CatalogTargetUrl .....	27
3.1.5.5.1.2.2	CatalogTargetUrlForChildTerms .....	28
3.1.5.5.1.2.3	FriendlyUrlSegment .....	28
3.1.5.5.1.2.4	Parent .....	28
3.1.5.5.1.2.5	TargetUrl .....	29
3.1.5.5.1.2.6	TargetUrlForChildTerms .....	29
3.1.5.5.1.2.7	Terms .....	29
3.1.5.5.1.2.8	TermSet .....	29
3.1.5.5.1.2.9	Title .....	30
3.1.5.5.1.2.10	View .....	30
3.1.5.5.1.2.11	ExcludedProviders .....	30
3.1.5.5.2	Methods .....	30
3.1.5.5.2.1	Scalar Methods .....	30
3.1.5.5.2.1.1	DeleteObject .....	30
3.1.5.5.2.1.2	GetResolvedAssociatedFolderUrl .....	30
3.1.5.5.2.1.3	GetResolvedDisplayUrl .....	31
3.1.5.5.2.1.4	GetResolvedTargetUrl .....	31
3.1.5.5.2.1.5	GetWebRelativeFriendlyUrl .....	31
3.1.5.5.2.1.6	Move .....	32

3.1.5.5.2.1.7	GetResolvedTargetUrlWithoutQuery .....	32
3.1.5.5.2.2	ObjectPath Methods .....	32
3.1.5.5.2.2.1	CreateTerm .....	32
3.1.5.5.2.2.2	GetAsEditable .....	33
3.1.5.5.2.2.3	GetTaxonomyTerm .....	33
3.1.5.5.2.2.4	GetWithNewView .....	33
3.1.5.5.2.2.5	GetAsResolvedByView .....	34
3.1.5.5.2.2.6	GetAsResolvedByWeb .....	34
3.1.5.5.2.2.7	GetTaxonomyTermStore .....	35
3.1.5.5.2.2.8	GetAllParentTerms .....	35
3.1.5.6	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection ....	35
3.1.5.6.1	Properties .....	35
3.1.5.6.1.1	Scalar Properties .....	35
3.1.5.6.1.2	ObjectPath Properties.....	35
3.1.5.6.2	Methods.....	35
3.1.5.6.2.1	Scalar Methods.....	35
3.1.5.6.2.2	ObjectPath Methods.....	35
3.1.5.7	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet .....	35
3.1.5.7.1	Properties .....	36
3.1.5.7.1.1	Scalar Properties .....	36
3.1.5.7.1.1.1	Id .....	36
3.1.5.7.1.1.2	IsNavigationTermSet .....	36
3.1.5.7.1.1.3	Lcid .....	36
3.1.5.7.1.1.4	LinkType .....	37
3.1.5.7.1.1.5	TaxonomyName.....	37
3.1.5.7.1.1.6	TermGroupId .....	37
3.1.5.7.1.1.7	TermStoreId.....	37
3.1.5.7.1.1.8	IsReadOnly .....	37
3.1.5.7.1.1.9	LoadedFromPersistedData .....	37
3.1.5.7.1.2	ObjectPath Properties.....	38
3.1.5.7.1.2.1	CatalogTargetUrlForChildTerms.....	38
3.1.5.7.1.2.2	TargetUrlForChildTerms .....	38
3.1.5.7.1.2.3	Terms.....	38
3.1.5.7.1.2.4	Title .....	38
3.1.5.7.1.2.5	View .....	38
3.1.5.7.2	Methods.....	39
3.1.5.7.2.1	Scalar Methods.....	39
3.1.5.7.2.1.1	GetResolvedDisplayUrl .....	39
3.1.5.7.2.2	ObjectPath Methods.....	39
3.1.5.7.2.2.1	CreateTerm .....	39
3.1.5.7.2.2.2	FindTermForUrl .....	39
3.1.5.7.2.2.3	GetAllTerms .....	40
3.1.5.7.2.2.4	GetAsEditable .....	40
3.1.5.7.2.2.5	GetTaxonomyTermSet .....	40
3.1.5.7.2.2.6	GetWithNewView.....	40
3.1.5.7.2.2.7	GetAsResolvedByView .....	41
3.1.5.7.2.2.8	GetAsResolvedByWeb .....	41
3.1.5.7.2.2.9	GetTaxonomyTermStore .....	42
3.1.5.8	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem .....	42
3.1.5.8.1	Properties .....	42
3.1.5.8.1.1	Scalar Properties .....	42
3.1.5.8.1.1.1	Id .....	42
3.1.5.8.1.1.2	LinkType .....	42

3.1.5.8.1.1.3	TaxonomyName.....	43
3.1.5.8.1.1.4	IsReadOnly .....	43
3.1.5.8.1.2	ObjectPath Properties.....	43
3.1.5.8.1.2.1	CatalogTargetUrlForChildTerms.....	43
3.1.5.8.1.2.2	TargetUrlForChildTerms .....	43
3.1.5.8.1.2.3	Terms.....	44
3.1.5.8.1.2.4	Title .....	44
3.1.5.8.1.2.5	View .....	44
3.1.5.8.2	Methods.....	44
3.1.5.8.2.1	Scalar Methods.....	44
3.1.5.8.2.1.1	GetResolvedDisplayUrl .....	44
3.1.5.8.2.2	ObjectPath Methods.....	45
3.1.5.8.2.2.1	CreateTerm .....	45
3.1.5.8.2.2.2	GetTaxonomyTermStore .....	46
3.1.5.9	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView .....	46
3.1.5.9.1	Properties .....	46
3.1.5.9.1.1	Scalar Properties .....	46
3.1.5.9.1.1.1	ExcludeDeprecatedTerms .....	46
3.1.5.9.1.1.2	ExcludeTermsByPermissions .....	47
3.1.5.9.1.1.3	ExcludeTermsByProvider .....	47
3.1.5.9.1.1.4	ServerRelativeSiteUrl.....	47
3.1.5.9.1.1.5	ServerRelativeWebUrl .....	48
3.1.5.9.1.1.6	SiteMapProviderName.....	48
3.1.5.9.1.1.7	WebId .....	48
3.1.5.9.1.1.8	WebTitle .....	48
3.1.5.9.1.2	ObjectPath Properties.....	49
3.1.5.9.2	Methods.....	49
3.1.5.9.2.1	Scalar Methods.....	49
3.1.5.9.2.2	ObjectPath Methods.....	49
3.1.5.9.2.2.1	CreateEmptyInstance .....	49
3.1.5.9.2.2.2	GetCopy .....	49
3.1.5.9.2.2.3	CSOM Constructor.....	49
3.1.5.10	Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSetting s.....	50
3.1.5.10.1	Properties.....	50
3.1.5.10.1.1	Scalar Properties .....	50
3.1.5.10.1.1.1	Source .....	50
3.1.5.10.1.1.2	TermSetId .....	50
3.1.5.10.1.1.3	TermStoreId .....	51
3.1.5.10.1.2	ObjectPath Properties.....	51
3.1.5.10.2	Methods.....	51
3.1.5.10.2.1	Scalar Methods.....	51
3.1.5.10.2.2	ObjectPath Methods .....	51
3.1.5.11	Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSource .	51
3.1.5.11.1	Field Values .....	51
3.1.5.11.1.1	Unknown .....	51
3.1.5.11.1.2	PortalProvider .....	51
3.1.5.11.1.3	TaxonomyProvider .....	52
3.1.5.11.1.4	InheritFromParentWeb .....	52
3.1.5.12	Microsoft.SharePoint.Client.Publishing.Navigation.WebNavigationSettings .....	52
3.1.5.12.1	Properties.....	52
3.1.5.12.1.1	Scalar Properties .....	52

3.1.5.12.1.1.1	AddNewPagesToNavigation .....	52
3.1.5.12.1.1.2	CreateFriendlyUrlsForNewPages .....	52
3.1.5.12.1.2	ObjectPath Properties .....	53
3.1.5.12.1.2.1	CurrentNavigation .....	53
3.1.5.12.1.2.2	GlobalNavigation .....	53
3.1.5.12.2	Methods .....	53
3.1.5.12.2.1	Scalar Methods .....	53
3.1.5.12.2.1.1	Update .....	53
3.1.5.12.2.1.2	ResetToDefaults .....	54
3.1.5.12.2.2	ObjectPath Methods .....	54
3.1.5.12.2.2.1	CSOM Constructor .....	54
3.1.5.13	Microsoft.SharePoint.Client.Publishing.AddinPlugin .....	54
3.1.5.13.1	Properties .....	54
3.1.5.13.1.1	Scalar Properties .....	54
3.1.5.13.1.1.1	Description .....	54
3.1.5.13.1.1.2	Markup .....	54
3.1.5.13.1.1.3	Title .....	55
3.1.5.13.1.2	ObjectPath Properties .....	55
3.1.5.13.2	Methods .....	55
3.1.5.13.2.1	Scalar Methods .....	55
3.1.5.13.2.2	ObjectPath Methods .....	55
3.1.5.13.2.2.1	CSOM Constructor .....	55
3.1.5.14	Microsoft.SharePoint.Client.Publishing.AddinSettings .....	55
3.1.5.14.1	Properties .....	55
3.1.5.14.1.1	Scalar Properties .....	55
3.1.5.14.1.1.1	Description .....	55
3.1.5.14.1.1.2	Enabled .....	56
3.1.5.14.1.1.3	HeadScript .....	56
3.1.5.14.1.1.4	HtmlEndBody .....	56
3.1.5.14.1.1.5	HtmlStartBody .....	56
3.1.5.14.1.1.6	Id .....	56
3.1.5.14.1.1.7	MetaTagPagePropertyMappings .....	56
3.1.5.14.1.1.8	Namespace .....	57
3.1.5.14.1.1.9	Title .....	57
3.1.5.14.1.2	ObjectPath Properties .....	57
3.1.5.14.2	Methods .....	57
3.1.5.14.2.1	Scalar Methods .....	57
3.1.5.14.2.2	ObjectPath Methods .....	57
3.1.5.14.2.2.1	CSOM Constructor .....	57
3.1.5.15	Microsoft.SharePoint.Client.Publishing.CustomizableString .....	57
3.1.5.15.1	Properties .....	58
3.1.5.15.1.1	Scalar Properties .....	58
3.1.5.15.1.1.1	DefaultValue .....	58
3.1.5.15.1.1.2	UsesDefaultValue .....	58
3.1.5.15.1.1.3	Value .....	58
3.1.5.15.1.2	ObjectPath Properties .....	58
3.1.5.15.2	Methods .....	58
3.1.5.15.2.1	Scalar Methods .....	58
3.1.5.15.2.2	ObjectPath Methods .....	59
3.1.5.16	Microsoft.SharePoint.Client.Publishing.DesignPackage .....	59
3.1.5.16.1	Properties .....	59
3.1.5.16.1.1	Scalar Properties .....	59
3.1.5.16.1.2	ObjectPath Properties .....	59

3.1.5.16.2	Methods .....	59
3.1.5.16.2.1	Scalar Methods .....	59
3.1.5.16.2.1.1	Apply .....	59
3.1.5.16.2.1.2	ExportEnterprise .....	59
3.1.5.16.2.1.3	ExportSmallBusiness .....	60
3.1.5.16.2.1.4	Install .....	60
3.1.5.16.2.1.5	UnInstall .....	60
3.1.5.16.2.2	ObjectPath Methods .....	61
3.1.5.17	Microsoft.SharePoint.Client.Publishing.DesignPackageInfo .....	61
3.1.5.17.1	Properties .....	61
3.1.5.17.1.1	Scalar Properties .....	61
3.1.5.17.1.1.1	MajorVersion .....	61
3.1.5.17.1.1.2	MinorVersion .....	61
3.1.5.17.1.1.3	PackageGuid .....	61
3.1.5.17.1.1.4	PackageName .....	62
3.1.5.17.1.2	ObjectPath Properties .....	62
3.1.5.18	Microsoft.SharePoint.Client.Publishing.ImageRendition .....	62
3.1.5.18.1	Properties .....	62
3.1.5.18.1.1	Scalar Properties .....	62
3.1.5.18.1.1.1	Height .....	62
3.1.5.18.1.1.2	Id .....	62
3.1.5.18.1.1.3	IdCsom .....	63
3.1.5.18.1.1.4	Name .....	63
3.1.5.18.1.1.5	Version .....	63
3.1.5.18.1.1.6	Width .....	63
3.1.5.18.1.2	ObjectPath Properties .....	63
3.1.5.19	Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermProviderNameCollection .....	64
3.1.5.19.1	Properties .....	64
3.1.5.19.1.1	Scalar Properties .....	64
3.1.5.19.1.2	ObjectPath Properties .....	64
3.1.5.19.2	Methods .....	64
3.1.5.19.2.1	Scalar Methods .....	64
3.1.5.19.2.1.1	Add .....	64
3.1.5.19.2.1.2	Clear .....	64
3.1.5.19.2.1.3	Remove .....	64
3.1.5.19.2.2	ObjectPath Methods .....	65
3.1.5.20	Microsoft.SharePoint.Client.Publishing.PublishingPage .....	65
3.1.5.20.1	Properties .....	65
3.1.5.20.1.1	Scalar Properties .....	65
3.1.5.20.1.1.1	EndDate .....	65
3.1.5.20.1.1.2	StartDate .....	65
3.1.5.20.1.2	ObjectPath Properties .....	65
3.1.5.20.1.2.1	ListItem .....	65
3.1.5.20.2	Methods .....	66
3.1.5.20.2.1	Scalar Methods .....	66
3.1.5.20.2.1.1	AddFriendlyUrl .....	66
3.1.5.20.2.1.2	Schedule .....	66
3.1.5.20.2.2	ObjectPath Methods .....	67
3.1.5.20.2.2.1	GetPublishingPage .....	67
3.1.5.21	Microsoft.SharePoint.Client.Publishing.PublishingPageInformation .....	68
3.1.5.21.1	Properties .....	68



3.1.5.21.1.1	Scalar Properties .....	68
3.1.5.21.1.1.1	Name.....	68
3.1.5.21.1.2	ObjectPath Properties.....	68
3.1.5.21.1.2.1	Folder .....	68
3.1.5.21.1.2.2	PageLayoutListItem .....	68
3.1.5.22	Microsoft.SharePoint.Client.Publishing.PublishingWeb .....	69
3.1.5.22.1	Properties.....	69
3.1.5.22.1.1	Scalar Properties .....	69
3.1.5.22.1.2	ObjectPath Properties.....	69
3.1.5.22.1.2.1	Web .....	69
3.1.5.22.2	Methods.....	69
3.1.5.22.2.1	Scalar Methods.....	69
3.1.5.22.2.2	ObjectPath Methods .....	69
3.1.5.22.2.2.1	AddPublishingPage .....	69
3.1.5.22.2.2.2	GetPublishingWeb .....	70
3.1.5.23	Microsoft.SharePoint.Client.Publishing.ScheduledItem .....	70
3.1.5.23.1	Properties.....	71
3.1.5.23.1.1	Scalar Properties .....	71
3.1.5.23.1.1.1	EndDate.....	71
3.1.5.23.1.1.2	StartDate .....	71
3.1.5.23.1.2	ObjectPath Properties.....	71
3.1.5.23.1.2.1	ListItem .....	71
3.1.5.23.2	Methods.....	71
3.1.5.23.2.1	Scalar Methods.....	71
3.1.5.23.2.1.1	Schedule .....	71
3.1.5.23.2.2	ObjectPath Methods .....	71
3.1.5.24	Microsoft.SharePoint.Client.Publishing.SiteImageRenditions .....	72
3.1.5.24.1	Properties.....	72
3.1.5.24.1.1	Scalar Properties .....	72
3.1.5.24.1.2	ObjectPath Properties.....	72
3.1.5.24.2	Methods.....	72
3.1.5.24.2.1	Scalar Methods.....	72
3.1.5.24.2.1.1	GetRenditions .....	72
3.1.5.24.2.1.2	SetRenditions .....	72
3.1.5.24.2.2	ObjectPath Methods .....	73
3.1.5.25	Microsoft.SharePoint.Client.Publishing.SiteServicesAddins .....	73
3.1.5.25.1	Properties.....	73
3.1.5.25.1.1	Scalar Properties .....	73
3.1.5.25.1.2	ObjectPath Properties.....	73
3.1.5.25.2	Methods.....	73
3.1.5.25.2.1	Scalar Methods.....	73
3.1.5.25.2.1.1	DeletePlugin .....	73
3.1.5.25.2.1.2	DeleteSettings .....	73
3.1.5.25.2.1.3	SetPlugin.....	74
3.1.5.25.2.1.4	SetSettings.....	74
3.1.5.25.2.2	ObjectPath Methods .....	74
3.1.5.25.2.2.1	GetPlugin .....	74
3.1.5.25.2.2.2	GetSettings .....	75
3.1.5.26	Microsoft.SharePoint.Client.Publishing.PageLayoutCreationInformation .....	75
3.1.5.26.1	Properties.....	75
3.1.5.26.1.1	Scalar Properties .....	75
3.1.5.26.1.1.1	AssociatedContentTypeId .....	75
3.1.5.26.1.1.2	MasterPageUrl.....	75

3.1.5.26.1.1.3	NewPageLayoutEditablePath .....	75
3.1.5.26.1.1.4	NewPageLayoutNameWithoutExtension .....	75
3.1.5.26.1.2	ObjectPath Properties.....	76
3.1.5.26.1.2.1	Web .....	76
3.1.5.27	Microsoft.SharePoint.Client.Publishing.PublishingSite.....	76
3.1.5.27.1	Properties.....	76
3.1.5.27.1.1	Scalar Properties .....	76
3.1.5.27.1.2	ObjectPath Properties.....	76
3.1.5.27.2	Methods.....	76
3.1.5.27.2.1	Scalar Methods.....	76
3.1.5.27.2.1.1	CreatePageLayout .....	76
3.1.5.27.2.2	ObjectPath Methods .....	76
3.1.6	Timer Events .....	77
3.1.7	Other Local Events .....	77
<b>4</b>	<b>Protocol Examples.....</b>	<b>78</b>
4.1	Create a New Navigation Hierarchy .....	78
4.2	Resolve URLs .....	83
4.3	Changing a View.....	89
<b>5</b>	<b>Security.....</b>	<b>95</b>
5.1	Security Considerations for Implementers.....	95
5.2	Index of Security Parameters .....	95
<b>6</b>	<b>Appendix A: Product Behavior.....</b>	<b>96</b>
<b>7</b>	<b>Change Tracking.....</b>	<b>97</b>
<b>8</b>	<b>Index .....</b>	<b>99</b>

# 1 Introduction

The Publishing Client-Side Object Model Protocol defines types, methods, and properties that a protocol client uses to manage publishing **Web sites** (2) on a protocol server, for example operations involving the navigation hierarchy or URLs.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [MS-OFCGLOS]:

- Boolean**
- catalog friendly URL**
- catalog friendly URL suffix**
- content type identifier**
- Coordinated Universal Time (UTC)**
- CSOM array**
- CSOM Boolean**
- CSOM DateTime**
- CSOM dictionary**
- CSOM GUID**
- CSOM Int32**
- CSOM String**
- current navigation menu**
- deprecated term**
- empty GUID**
- empty string**
- global navigation menu**
- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- item**
- JavaScript Object Notation (JSON)**
- language code identifier (LCID)**
- list**
- list item**
- locale**
- major version**
- master page**
- minor version**
- navigation node**
- page**
- page layout**
- parent site**
- pinned term**
- portal site map provider**
- published version**
- publishing page**
- server-relative URL**
- site**
- site collection**

site map provider  
site subscription  
site template  
site-relative URL  
solution gallery  
solution package  
switchable site map provider  
taxonomy navigation  
taxonomy site map provider  
term  
term set  
term store  
Uniform Resource Locator (URL)  
URI query  
variation label  
variations  
website

The following terms are specific to this document:

**root node:** The highest-ranking or uppermost node in a hierarchy of information.

**static CSOM method:** A class method that is accessed through the type name rather than an instance of the class.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [RFC2119](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[ISO-3166] International Organization for Standardization, "Codes for the representation of names of countries and their subdivisions -- Part1: Country codes", ISO 3166-1:2013, November 2013, [http://www.iso.org/iso/home/store/catalogue\\_tc/catalogue\\_detail.htm?csnumber=63545](http://www.iso.org/iso/home/store/catalogue_tc/catalogue_detail.htm?csnumber=63545)

**Note** There is a charge to download the specification.

[ISO-639-1] International Organization for Standardization, "Codes for the representation of names of languages -- Part 1: Alpha-2 code", 2002, [http://www.iso.org/iso/catalogue\\_detail?csnumber=22109](http://www.iso.org/iso/catalogue_detail?csnumber=22109)

[MS-CSOM] Microsoft Corporation, "[SharePoint Client Query Protocol](#)".

[MS-CSOMSPT] Microsoft Corporation, "[SharePoint Client-Side Object Model Protocol](#)".

[MS-EMMSOM] Microsoft Corporation, "[Enterprise Managed Metadata Client-Side Object Model Protocol](#)".

[MS-WSSTS] Microsoft Corporation, "[Windows SharePoint Services](#)".

[RFC1766] Alvestrand, H., "Tags for the Identification of Languages", RFC 1766, March 1995, <http://www.ietf.org/rfc/rfc1766.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC3986] Berners-Lee, T., Fielding, R., and Masinter, L., "Uniform Resource Identifier (URI): Generic Syntax", STD 66, RFC 3986, January 2005, <http://www.ietf.org/rfc/rfc3986.txt>

[RFC4627] Crockford, D., "The application/json Media Type for JavaScript Object Notation (JSON)", RFC 4627, July 2006, <http://www.ietf.org/rfc/rfc4627.txt>

### 1.2.2 Informative References


[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

## 1.3 Overview

This protocol defines types, methods, and properties that a protocol client uses to manage publishing Web sites (2) on a protocol server. For example, a protocol client can retrieve a tree of menu entries from the protocol server. The menu data could be used to provide custom rendering for various scenarios, such as custom menus for a mobile device. Also, a protocol client can update the managed navigation data on the protocol server. This enables a protocol client to modify URLs, the hierarchy, and other aspects of menu navigation.

## 1.4 Relationship to Other Protocols

The Publishing Client-Side Object Model Protocol is a set of types, properties, and methods that can be accessed by using the SharePoint Client Query Protocol as described in [\[MS-CSOM\]](#). This protocol uses **JavaScript Object Notation (JSON)** as described in [\[RFC4627\]](#) to format data returned to a protocol client. This protocol also uses **Hypertext Transfer Protocol (HTTP)**, as described in [\[RFC2616\]](#), and **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#). The dependencies for this protocol are shown in the following layering diagram.

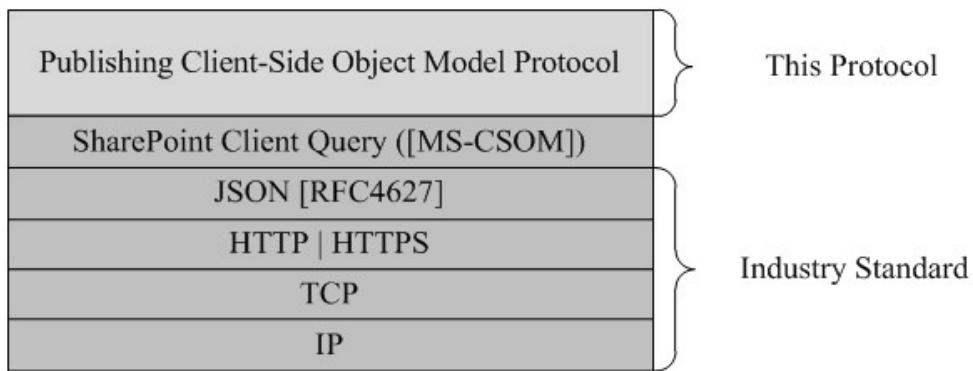

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

This protocol operates against a [site](#) (2) that is identified by a [Uniform Resource Locator \(URL\)](#) that is known by protocol clients. This protocol assumes that authentication has been performed by underlying protocols.

## 1.6 Applicability Statement

This protocol can be used by a protocol client to manage publishing Web sites (2) on a protocol server, for example operations involving the navigation hierarchy or URLs. This protocol is optimized to enable a protocol client to specify the exact set of data and operations to perform in a single batch, making it suitable for situations where the connection speed between the protocol client and the protocol server can be slow. This protocol is not suitable and is inefficient if both the protocol client and protocol server are on the same computer. In this case, the client uses an API that does not require communication over a network.

## 1.7 Versioning and Capability Negotiation

None.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

### 2.1 Transport

Messages are transported by using the SharePoint Client Query Protocol, as specified in [\[MS-CSOM\]](#).

### 2.2 Message Syntax

None.

## 3 Protocol Details

### 3.1 Server Details

#### 3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

This protocol deals with various structures associated with sites (2), **items**, navigation, and other structures as specified in [\[MS-WSSTS\]](#).

This protocol also deals with **terms**, **term sets**, and other Enterprise managed metadata as specified in [\[MS-EMMCOSM\]](#). Changes by types in this protocol that affect underlying terms do not apply until the protocol client calls the **TermStore.CommitAll** ([\[MS-EMMCOSM\]](#) section 3.1.5.23.2.1.1) method.

##### 3.1.1.1 Parent Type

This protocol deals with various types that are logically derived from a parent type. The following table lists the relationship between such types.

Parent type	Derived type(s)
<b>Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem</b> (section <a href="#">3.1.5.8</a> )	<b>Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm</b> (section <a href="#">3.1.5.5</a> ) <b>Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet</b> (section <a href="#">3.1.5.7</a> )

##### 3.1.2 Timers

None.

##### 3.1.3 Initialization

None.

##### 3.1.4 Higher-Layer Triggered Events

None.

##### 3.1.5 Message Processing Events and Sequencing Rules

###### 3.1.5.1 Microsoft.SharePoint.Client.Publishing.VariationLabel

**TypeId:** {FD2E4D24-40A9-4E14-9233-05AFE7BCA149}

**ShortName:** SP.Publishing.VariationLabel

Represents a **variation label**.



### 3.1.5.1.1 Properties

#### 3.1.5.1.1.1 Scalar Properties

##### 3.1.5.1.1.1.1 DisplayName

**Type:** CSOM String

**Accessibility:** Read Only

Gets the UI display name of the label.

**Remarks:**

The default value for this property is the value of the **Title** (section [3.1.5.1.1.1.5](#)) property.

##### 3.1.5.1.1.1.2 IsSource

**Type:** CSOM Boolean

**Accessibility:** Read Only

Gets whether the **VariationLabel** (section [3.1.5.1](#)) is set as the source label.

**Remarks:**

Returns true if the **VariationLabel** is a source label; otherwise, false. A source label represents the site (2) or pages that are the source of authoring and publishing and are used to copy changes to target variation sites (2).

##### 3.1.5.1.1.1.3 Language

**Type:** CSOM String

**Accessibility:** Read Only

Gets the language of the **VariationLabel** (section [3.1.5.1](#)).

**Remarks:**

This property specifies the language value in the format "languagecode2-country/regioncode2" as specified in [\[RFC1766\]](#), where "languagecode2" is a lowercase two-letter code derived as specified in [\[ISO-639-1\]](#) and "country/regioncode2" is an uppercase two-letter code derived as specified in [\[ISO-3166\]](#).

##### 3.1.5.1.1.1.4 Locale

**Type:** CSOM String

**Accessibility:** Read Only

Gets the **locale** of the **VariationLabel** (section [3.1.5.1](#)).

**Remarks:**

The locale is specified in the format of the **language code identifier (LCID)**.

#### 3.1.5.1.1.1.5 Title

**Type:** CSOM String

**Accessibility:** Read Only

Gets the title of the **VariationLabel** (section [3.1.5.1](#)), that is the unique string identifier of the label.

#### 3.1.5.1.1.1.6 TopWebUrl

**Type:** CSOM String

**Accessibility:** Read Only

Gets the URL of the top site (2) that is used to publish the hierarchy of sites and pages associated with this **VariationLabel** (section [3.1.5.1](#)).

#### 3.1.5.1.1.2 ObjectPath Properties

None.

#### 3.1.5.1.2 Methods

##### 3.1.5.1.2.1 Scalar Methods

None.

##### 3.1.5.1.2.2 ObjectPath Methods

None.

#### 3.1.5.2 Microsoft.SharePoint.Client.Publishing.Variations

**TypeId:** {1339CD8A-5DC8-4932-9BB3-32A5BC2C0D48}

**ShortName:** SP.Publishing.Variations

The **Variations** class exposes essential information for managing **variations**.

##### 3.1.5.2.1 Properties

###### 3.1.5.2.1.1 Scalar Properties

None.

###### 3.1.5.2.1.2 ObjectPath Properties

None.

### 3.1.5.2.2 Methods

#### 3.1.5.2.2.1 Scalar Methods

##### 3.1.5.2.2.1.1 GetPeerUrl

This method is a **static CSOM method**.

**Return Type:** CSOM String

Retrieves the URL of the object that corresponds to the requested page in the specified label.

**Parameters:**

*currentUrl*: The **server-relative URL** of the page whose corresponding object in the specified label is requested.

Type: CSOM String

*labelTitle*: The *Title* of the target label that the page is requested in.

Type: CSOM String

**Remarks:**

This method returns the server-relative URL of the corresponding page in the indicated label if there is one. If the server-relative URL is not found, then this method returns the corresponding Web site (2) URL in that label. Finally, if the Web site (2) URL is not found, then this method returns the corresponding URL of the label.

##### 3.1.5.2.2.1.2 UpdateListItems

This method is a static CSOM method.

**Return Type:** None

Copies the content of the selected items into all variation labels that the **list** (1) is nominated to.

**Parameters:**

*listId*: Identifies the list (1) that contains the items referenced in the *itemIds* parameter.

Type: **CSOM GUID**

*itemIds*: An array of list item identifiers to update in the target labels that this list (1) is nominated to.

Type: **CSOM array** of **CSOM Int32**

**Remarks:**

When a variation is created, the entire hierarchy of Web sites (2) is copied to the new variation for translation. Lists (1) are excluded unless a user nominates them to the new variation. Items in lists (1) that are nominated are updated by this method.

### 3.1.5.2.2.2 ObjectPath Methods

#### 3.1.5.2.2.2.1 GetLabels

This method is a static CSOM method.

**Return Type:** CSOM array of Microsoft.SharePoint.Client.Publishing.VariationLabel

Returns the list of **VariationLabels** (section [3.1.5.1](#)) that are available for the Web site (2) in the context.

**Parameters:** None

### 3.1.5.3 Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

**ShortName:** SP.Publishing.Navigation.NavigationLinkType

**Flag:** false

**NavigationLinkType** is an enumeration that describes the type of **navigation node** for the **NavigationTerm** (section [3.1.5.5](#)) class.

#### 3.1.5.3.1 Field Values

##### 3.1.5.3.1.1 Root

**Value:** 0

The navigation node is a **root node** in the navigation tree that corresponds to the **NavigationTermSet** (section [3.1.5.7](#)) class.

##### 3.1.5.3.1.2 FriendlyUrl

**Value:** 1

The navigation node defines a friendly URL that maps to an existing **page** on the site (2).

##### 3.1.5.3.1.3 SimpleLink

**Value:** 2

The navigation node has a URL that is not restricted in any way and is not required to map to an existing page on the site (2) . This value is also used to define a navigation node with no associated URL.

### 3.1.5.4 Microsoft.SharePoint.Client.Publishing.Navigation.TaxonomyNavigation

**TypeId:** {F3724139-55ED-4C05-8576-2C3830831C10}

**ShortName:** SP.Publishing.Navigation.TaxonomyNavigation

Provides common operations related to the **NavigationTermSet** (section [3.1.5.7](#)), **NavigationTerm** (section [3.1.5.5](#)), and **WebNavigationSettings** (section [3.1.5.12](#)) classes, as well as basic management and querying of the taxonomy navigation cache.

### 3.1.5.4.1 Properties

#### 3.1.5.4.1.1 Scalar Properties

None.

#### 3.1.5.4.1.2 ObjectPath Properties

None.

### 3.1.5.4.2 Methods

#### 3.1.5.4.2.1 Scalar Methods

##### 3.1.5.4.2.1.1 FlushSiteFromCache

This method is a static CSOM method.

**Return Type:** None

Removes the indicated site (2) and all of its associated Web sites (2) from the taxonomy navigation cache. Note this method does not flush the associated navigation term sets.

**Parameters:**

*site*: The site (2) to remove from the taxonomy navigation cache.

Type: Microsoft.SharePoint.Client.Site

The *site* ([\[MS-CSOMSPT\]](#) section 3.2.5.119) parameter is used to locate the taxonomy navigation cache item to flush.

##### 3.1.5.4.2.1.2 FlushTermSetFromCache

This method is a static CSOM method.

**Return Type:** None

Removes the indicated term set from the taxonomy navigation cache, for a specific **site subscription**.

**Parameters:**

*webForPermissions*: A Web site (2) used for permissions checks.

Type: Microsoft.SharePoint.Client.Web

The *webForPermissions* parameter ([\[MS-CSOMSPT\]](#) section 3.2.5.143) is used to provide a user identity that will be used to determine whether the caller has permissions to flush the cache. This parameter also identifies the site subscription whose cache will be flushed.

*termStoreId*: The identifier of the **term store** that contains the term set.

Type: CSOM GUID

*termSetId*: The identifier of the term set to flush from the taxonomy navigation cache.

Type: CSOM GUID

#### 3.1.5.4.2.1.3 FlushWebFromCache

This method is a static CSOM method.

**Return Type:** None

Removes the indicated Web site (2) from the taxonomy navigation cache.

**Parameters:**

*web*: A Web site (2) associated with the taxonomy navigation cache.

Type: Microsoft.SharePoint.Client.Web

The *web* parameter ([\[MS-CSOMSPT\]](#) section 3.2.5.143) is used to identify the taxonomy navigation cache item to flush.

#### 3.1.5.4.2.1.4 GetNavigationLcidForWeb

This method is a static CSOM method.

**Return Type:** CSOM Int32

Returns the language code identifier (LCID) that is in use for **taxonomy navigation** when retrieving a **Term** ([\[MS-EMMCOSM\]](#) section 3.1.5.16) object for the specified Web site (2). The client SHOULD assign this LCID as the **TermStore.WorkingLanguage** ([\[MS-EMMCOSM\]](#) section 3.1.5.23.1.1.6) when making changes to taxonomy navigation.

**Parameters:**

*web*: The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) from which to retrieve the LCID.

Type: Microsoft.SharePoint.Client.Web

#### 3.1.5.4.2.1.5 SetCrawlAsFriendlyUrlPage

This method is a static CSOM method.

**Return Type:** CSOM Boolean

This method assigns a **Boolean** property stored with the specified **publishing page**: If this property is true, then the search crawler will omit the page's physical URL from the search index, because the search index already contains one or more friendly URLs for the page. If this property is false, then the page is indexed in the normal manner.

If the update was performed successfully, or if the page property was already in the specified state, then the return value MUST be true. The return value MUST be false otherwise, including cases such as: the *navigationTerm* is null, the *navigationTerm* is not a friendly URL, the target page is invalid, the target page cannot be found, the caller does not have permissions to perform the change, and so on.

**Parameters:**

*navigationTerm*: A navigation term indicating the publishing page to be updated.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

The *navigationTerm* property should have **NavigationTerm.LinkType** property (section [3.1.5.5.1.1.7](#)) equal to **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)), and its **NavigationTerm.TargetUrl** property (section [3.1.5.5.1.2.5](#)) is used to identify the publishing page to be updated. (The page is specified in this way because it is convenient for a specific editing surface.)

*crawlAsFriendlyUrlPage*: The new value of the publishing page property.

Type: CSOM Boolean

### 3.1.5.4.2.2 ObjectPath Methods

#### 3.1.5.4.2.2.1 GetTermSetForWeb

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

Returns a cached **NavigationTermSet** (section [3.1.5.7](#)) object for the specified Web site (2). If the object is not already in the taxonomy navigation cache, it will be added.

**Parameters:**

*web*: The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) from which to retrieve the **NavigationTermSet** object

Type: Microsoft.SharePoint.Client.Web

*siteMapProviderName*: The name of the **site map provider** associated with the **NavigationTermSet**.

Type: CSOM String

*includeInheritedSettings*: If true, then the returned term set MAY be inherited from a parent Web site (2), for example as specified by the **StandardNavigationSource.InheritFromParentWeb** setting (section [3.1.5.11.1.4](#)). If false, then this method will only return term sets bound to the Web site (2) indicated by the *web* parameter.

Type: CSOM Boolean

#### 3.1.5.4.2.2.2 GetWebNavigationSettings

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.WebNavigationSettings

Returns a cached **WebNavigationSettings** (section [3.1.5.12](#)) object. If the object is not already in the taxonomy navigation cache, it will be added. This method returns null if there are no navigation settings defined for the Web site (2), or if the settings data is not valid (such as a user entering a wrong value for a setting).

**Parameters:**

*web*: The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) from which to retrieve the navigation settings.

Type: Microsoft.SharePoint.Client.Web

**Remarks:**

Because the object is fetched from the cache, this method is more efficient than explicitly constructing an instance of **WebNavigationSettings**.

**3.1.5.5 Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm**

**TypeId:** {74B7367A-E303-43E8-891E-DAC764C96E53}

**ShortName:** SP.Publishing.Navigation.NavigationTerm

Specifies navigation behavior and properties for a term that is used for taxonomy navigation. The **NavigationTerm** class is based on the **Term** class ([\[MS-EMMCSOM\]](#) section 3.1.5.16).

**NavigationTerm** inherits from the **NavigationTermSetItem** class (section [3.1.5.8](#)).

**Remarks:**

The properties of the **NavigationTerm** class MAY be stored in **TermSet.CustomProperties** ([\[MS-EMMCSOM\]](#) section 3.1.5.20.1.1.3). However, this protocol intends that the properties be accessed through the **NavigationTerm** class for clarity and efficiency.

Each **NavigationTerm** object belongs to a **NavigationTermSet** object (section [3.1.5.7](#)).

The **NavigationTerm** object has two modes: an "editable" mode that is required in order to make updates to the object, and a "read-only" mode that, when used, improves performance by retrieving the object from the taxonomy navigation cache. The read-only mode is indicated by the **NavigationTermSetItem.IsReadOnly** property (section [3.1.5.8.1.1.4](#)).

If the **NavigationTerm** is read-only and the protocol client attempts to assign any property or call any method that would change the object state, then the protocol server MUST return an **InvalidOperationException** error.

**3.1.5.5.1 Properties****3.1.5.5.1.1 Scalar Properties****3.1.5.5.1.1.1 AssociatedFolderUrl**

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets a URL value that is used to associate certain page URLs with this object, associating it with a particular location in the site map provider hierarchy.

**Remarks:**

This property is used to help calculate the current node for a site map provider. The current node indicates a page's location in the navigation hierarchy, for example as displayed by a breadcrumb control "Investor Relations > News > Press Releases". Typically the current node is determined by searching the navigation hierarchy to find a node whose link matches the URL of the page being viewed, for example "/Pages/PressReleases/January2010.aspx". If a current node cannot be found (for example, the January2010.aspx page is not linked by any navigation node), then the breadcrumb would be empty. This problem could be solved by assigning the containing folder "/Pages/PressReleases" to the **AssociatedFolderUrl** property of the "Press Releases" term; the



breadcrumb will now show "Investor Relations > News > Press Releases" for any page in that folder (unless the page is explicitly linked by a navigation node).

#### 3.1.5.5.1.1.2 ExcludeFromCurrentNavigation

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets whether this navigation term (and its child terms) will be hidden from the **current navigation menu**. The current navigation menu (also called the "left nav") is the contextual navigation pane typically on the left side of the page.

#### 3.1.5.5.1.1.3 ExcludeFromGlobalNavigation

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether this navigation term (and its child terms) will be hidden from the **global navigation menu**. Global navigation (also called "top nav") is the unchanging menu bar along the top of the page.

#### 3.1.5.5.1.1.4 HoverText

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets an informational description that is typically displayed by menu and bread crumb controls when the cursor hovers over the navigation link.

#### 3.1.5.5.1.1.5 Id

**Type:** CSOM GUID

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.ID**, specified in section [3.1.5.8.1.1.1](#).

#### 3.1.5.5.1.1.6 IsDeprecated

**Type:** CSOM Boolean

**Accessibility:** Read Only

Gets a value that indicates whether the underlying term is a **deprecated term**.

**Remarks:**

This property returns the underlying **Term.IsDeprecated** ([\[MS-EMMCSON\]](#) section 3.1.5.16.1.1.6) property. It is true if the term is deprecated; otherwise, false.

#### 3.1.5.5.1.1.7 LinkType

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

**Accessibility:** Read/Write

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.LinkType**, specified in section [3.1.5.8.1.1.2](#).

#### 3.1.5.5.1.1.8 SimpleLinkUrl

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets a URL that this **NavigationTerm** (section [3.1.5.5](#)) object links to.

**Remarks:**

This property is only used when **LinkType** (section [3.1.5.5.1.1.7](#)) is set to **NavigationLinkType.SimpleLink** (section [3.1.5.3.1.3](#)). If the protocol client attempts to assign the property for a different link type, then the protocol server MAY return an **InvalidOperationException** error.

#### 3.1.5.5.1.1.9 TaxonomyName

**Type:** CSOM String

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.TaxonomyName**, specified in section [3.1.5.8.1.1.3](#).

#### 3.1.5.5.1.1.10 IsPinned

**Type:** CSOM Boolean

**Accessibility:** Read Only

Gets a value that indicates whether the term is pinned.

**Remarks:**

Returns true if the term is a **pinned term**; otherwise false. This property returns the **Term.IsPinned** property ([\[MS-EMMCOSM\]](#) section 3.1.5.16.1.1.15) for the underlying term.

#### 3.1.5.5.1.1.11 IsPinnedRoot

**Type:** CSOM Boolean

**Accessibility:** Read Only

Gets a value that indicates whether the term is the root of a subtree of pinned terms.

**Remarks:**

Returns true if the term is the root of a hierarchy of pinned terms; otherwise, false. This property returns the **Term.IsPinnedRoot** ([\[MS-EMMCOSM\]](#) section 3.1.5.16.1.1.20) property for the underlying term.

### 3.1.5.5.1.1.12 IsReadOnly

**Type:** CSOM Boolean

**Accessibility:** Read Only

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.IsReadOnly**, specified in section [3.1.5.8.1.1.4](#).

### 3.1.5.5.1.1.13 CategoryImageUrl

**Type:** CSOM String

**Accessibility:** Read/Write

Specifies the URL for an image resource that may be used by controls on the target publishing page. The usage of this property is application-defined.

## 3.1.5.5.1.2 ObjectPath Properties

### 3.1.5.5.1.2.1 CatalogTargetUrl

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

Gets the target URL used when performing URL rewriting for **catalog friendly URLs** based on this term.

#### Remarks:

Normally the protocol server performs URL rewriting to render the friendly URL for a navigation term using the page specified by the **TargetUrl** property (section [3.1.5.5.1.2.5](#)). For example, for the term "Cameras" the URLs might look like this:

friendly URL:            <http://example.com/products/cameras>

target URL:             </store/Pages/TopicTemplate.aspx>

However, if a **catalog friendly URL suffix** is appended, then the **CatalogTargetUrl** property will be used instead. Continuing the example term "Cameras":

catalog friendly URL: <http://example.com/products/cameras/nice-pix-35mm/sku12345>

URL suffix:             nice-pix-35mm/sku12345

catalog target URL:    </store/Pages/CatalogItemTemplate.aspx>

Typically catalog friendly URLs are used for products such as the hypothetical "Nice Pix 35mm camera" in the preceding example, which do not have a corresponding navigation term, but belong to the category represented by that term. However, the interpretation of the catalog friendly URL suffix is left to the target URL and other usage scenarios are possible.

If the **CatalogTargetUrl** value is an **empty string** (1), then URL rewriting will not be performed for the term and the catalog friendly URL MAY result in an HTTP 404 error.

The protocol server MAY support implementation-specific relative URL syntaxes such as "~site/Pages/TopicTemplate.aspx" or "~sitecollection/Pages/TopicTemplate.aspx".

The **CatalogTargetUrl** property is a **CustomizableString** (section [3.1.5.6](#)) object. The default value is inherited from the **CatalogTargetUrlForChildTerms.Value** (section [3.1.5.6.1.1.3](#)) property of the immediate parent node.

This property is only used when the **LinkType** (section [3.1.5.5.1.1.7](#)) is **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)). If the protocol client attempts to assign the property for a different link type, then the protocol server MAY return an **InvalidOperationException** error.

#### 3.1.5.5.1.2.2 CatalogTargetUrlForChildTerms

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.CatalogTargetUrlForChildTerms**, specified in section [3.1.5.8.1.2.1](#).

#### 3.1.5.5.1.2.3 FriendlyUrlSegment

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

Gets a friendly URL segment for the node represented by the **NavigationTerm** (section [3.1.5.5](#)) object.

**Remarks:**

This property is a **CustomizableString** (section [3.1.5.6](#)) object. The default value can be based on the **Term.Name** ([\[MS-EMMCSON\]](#) section 3.1.5.16.1.1.12) property. The value MUST exclude reserved characters as specified in [\[RFC3986\]](#), and the value MUST not be percent-encoded as specified in [\[RFC3986\]](#).

This property is only used when the **LinkType** (section [3.1.5.5.1.1.7](#)) is **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)). If the protocol client attempts to assign the property for a different link type, then the protocol server MAY return an **InvalidOperationException** error.

#### 3.1.5.5.1.2.4 Parent

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

**Accessibility:** Read Only

Gets the parent **NavigationTerm** (section [3.1.5.5](#)) object.

**Remarks:**

If this **NavigationTerm** object is a top-level term in the **NavigationTermSet** (section [3.1.5.7](#)), then null is returned.

#### 3.1.5.5.1.2.5 TargetUrl

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

Gets the URL of a publishing page that will be used to render the friendly URL.

**Remarks:**

The protocol server performs URL rewriting to render the friendly URL for a navigation term using the page specified by the **TargetUrl** property (section [3.1.5.5.1.2.5](#)). For example, for the term "Cameras" the URLs might look like this:

friendly URL: `http://example.com/products/cameras`

target URL: `/store/Pages/TopicTemplate.aspx`

The protocol server MAY support implementation-specific relative URL syntaxes such as "`~site/Pages/TopicTemplate.aspx`" or "`~sitecollection/Pages/TopicTempalte.aspx`".

The **TargetUrl** property is a **CustomizableString** (section [3.1.5.6](#)) object. The default value is inherited from the **TargetUrlForChildTerms.Value** (section [3.1.5.6.1.1.3](#)) property of the immediate parent node.

This property is only used when the **LinkType** (section [3.1.5.5.1.1.7](#)) is **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)). If the protocol client attempts to assign the property for a different link type, then the protocol server MAY return an **InvalidOperationException** error.

#### 3.1.5.5.1.2.6 TargetUrlForChildTerms

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.TargetUrlForChildTerms**, specified in section [3.1.5.8.1.2.2](#).

#### 3.1.5.5.1.2.7 Terms

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.Terms**, specified in section [3.1.5.8.1.2.3](#).

#### 3.1.5.5.1.2.8 TermSet

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

**Accessibility:** Read Only

Gets the associated **NavigationTermSet** (section [3.1.5.7](#)) object that this **NavigationTerm** (section [3.1.5.5](#)) object belongs to.

#### 3.1.5.5.1.2.9 Title

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.Title**, specified in section [3.1.5.8.1.2.4](#).

#### 3.1.5.5.1.2.10 View

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.View**, specified in section [3.1.5.8.1.2.5](#).

#### 3.1.5.5.1.2.11 ExcludedProviders

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermProviderNameCollection

**Accessibility:** Read Only

A collection of site map provider names that will exclude this navigation term from their results when **NavigationTermSetView.ExcludeTermsByProvider** (section [3.1.5.9.1.1.3](#)) is true. This collection includes the names corresponding to **NavigationTerm.ExcludeFromGlobalNavigation** (section [3.1.5.5.1.1.3](#)) and **NavigationTerm.ExcludeFromCurrentNavigation** (section [3.1.5.5.1.1.2](#)).

### 3.1.5.5.2 Methods

#### 3.1.5.5.2.1 Scalar Methods

##### 3.1.5.5.2.1.1 DeleteObject

**Return Type:** None

Deletes this **NavigationTerm** (section [3.1.5.5](#)) object and its child objects from the **TermStore** ([\[MS-EMMCSON\]](#) section 3.1.5.23) object.

**Remarks:**

This operation is equivalent to calling the **Term.DeleteObject** method ([\[MS-EMMCSON\]](#) section 3.1.5.16.2.1.2) for the underlying term.

**Parameters:** None

##### 3.1.5.5.2.1.2 GetResolvedAssociatedFolderUrl

**Return Type:** CSOM String

Uses the **NavigationTerm.View** (section [3.1.5.5.1.2.10](#)) property to calculate and return a resolved server-relative URL from the **NavigationTerm.AssociatedFolderUrl** (section [3.1.5.5.1.1.1](#)) property.

**Remarks:**

This property returns null if no associated folder URL is specified.

**Parameters:** None

### 3.1.5.5.2.1.3 GetResolvedDisplayUrl

**Return Type:** CSOM String

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.GetResolvedDisplayUrl**, specified in section [3.1.5.8.2.1.1](#).

**Parameters:**

*browserQueryString*: Optional. If it is provided, this query string is used as the query string part of the resulting URL. If this parameter is not **null** or an empty string, it must be prefixed with the ? character.

Type: CSOM String

### 3.1.5.5.2.1.4 GetResolvedTargetUrl

**Return Type:** CSOM String

Uses the **NavigationTerm.View** (section [3.1.5.5.1.2.10](#)) property to calculate and return a resolved server-relative URL from the **NavigationTerm.TargetUrl** (section [3.1.5.5.1.2.5](#)) property.

**Remarks:**

This property is only used when the **LinkType** (section [3.1.5.5.1.1.7](#)) is **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)).

**Parameters:**

*browserQueryString*: A query string that, if specified, is merged into the resulting URL.

Type: CSOM String

*remainingUrlSegments*: Specifies a catalog friendly URL suffix, as an array of URL segments. The segments will be assigned as the value of the "UrlSuffix=" **URI query** parameter.

Type: CSOM array of CSOM String

If *remainingUrlSegments* is specified, then the **NavigationTerm.CatalogTargetUrl** (section [3.1.5.5.1.2.1](#)) property is used as the basis for the returned URL instead of the **NavigationTerm.TargetUrl** property.

### 3.1.5.5.2.1.5 GetWebRelativeFriendlyUrl

**Return Type:** CSOM String

Returns a friendly URL relative to the Web site (2) in use.

**Remarks:**

This method is intended for advanced operations that need to consider the underlying technical details for how a URL is calculated. A protocol client can also call **GetResolvedDisplayUrl** (section [3.1.5.5.2.1.3](#)) to obtain a friendly URL. **GetWebRelativeFriendlyUrl** returns the portion of the friendly URL that SHOULD be appended to the **Web.Url** ([\[MS-CSOMSPT\]](#) section 3.2.5.143.1.1.22). It does not include any query parameters.

**Parameters:** None

**3.1.5.5.2.1.6 Move**

**Return Type:** None

Moves this **NavigationTerm** (section [3.1.5.5](#)) object to be a child of the specified **NavigationTerm** or **NavigationTermSet** (section [3.1.5.7](#)).

**Parameters:**

*newParent:* The **NavigationTerm** or **NavigationTermSet** that becomes the new parent of this **NavigationTerm** object.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem

**Remarks:**

If this **NavigationTerm** object is editable, then this method performs an operation analogous to **Term.Move** ([\[MS-EMMCSOM\]](#) section 3.1.5.16.2.1.7).

**3.1.5.5.2.1.7 GetResolvedTargetUrlWithoutQuery**

**Return Type:** CSOM String

This method is similar to **NavigationTerm.GetResolvedTargetUrl** (section [3.1.5.5.2.1.4](#)) except that the returned URL does not include the query string, and the **NavigationTerm.CatalogTargetUrl** property (section [3.1.5.5.1.2.1](#)) is not considered. If there is no target URL, or if **NavigationTerm.LinkType** (section [3.1.5.5.1.1.7](#)) is not **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)), then the return value is the empty string. This method never returns a null string.

**Parameters:** None

**3.1.5.5.2.2 ObjectPath Methods****3.1.5.5.2.2.1 CreateTerm**

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.CreateTerm**, specified in section [3.1.5.8.2.2.1](#).

**Parameters:**

*termName:* Default label for the LCID.

Type: CSOM String



*linkType*: LCID to create the label on.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

*termId*: GUID for the term.

Type: CSOM GUID

### 3.1.5.5.2.2.2 GetAsEditable

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

Returns an editable copy of this **NavigationTerm** (section [3.1.5.5](#)) object.

Remarks:

After calling this method, the protocol client can update properties on the returned **NavigationTerm** object. Save the changes by calling the **TermStore.CommitAll** ([\[MS-EMMCSOM\]](#) section 3.1.5.23.2.1.1) method.

**Parameters:**

*taxonomySession*: The container for all of the associated **TermStore** ([\[MS-EMMCSOM\]](#) section 3.1.5.23) objects for a **site collection**.

Type: Microsoft.SharePoint.Client.Taxonomy.TaxonomySession

This parameter is defined in [\[MS-EMMCSOM\]](#) section 3.1.5.15.

### 3.1.5.5.2.2.3 GetTaxonomyTerm

**Return Type:** Microsoft.SharePoint.Client.Taxonomy.Term

If this **NavigationTerm** (section [3.1.5.5](#)) object is in the "editable" mode, then this method returns the underlying **Term** ([\[MS-EMMCSOM\]](#) section 3.1.5.16) object.

If the protocol client calls this method when the **NavigationTerm** object is read-only, then the protocol server MUST return an **InvalidOperationException** error.

**Parameters:** None

### 3.1.5.5.2.2.4 GetWithNewView

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

This method returns a **NavigationTerm** (section [3.1.5.5](#)) object that refers to the same underlying term, but replaces its view with the **NavigationTermSetView** (section [3.1.5.9](#)) object specified by *newView*. For example, to enable security trimming while traversing the navigation hierarchy, a *newView* could be provided with **NavigationTermSetView.ExcludeTermsByPermissions** (section [3.1.5.9.1.1.2](#)) changed to true.

**Parameters:**

*newView*: The **NavigationTermSetView** object to apply to the **NavigationTerm** (section [3.1.5.5](#)) object.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

### 3.1.5.5.2.2.5 GetAsResolvedByView

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

This method returns a **NavigationTerm** (section [3.1.5.5](#)) object that is editable and bound to the specified *term* object, using the specified *view*.

**Parameters:**

*term*: The **Term** ([\[MS-EMMCOSM\]](#) section 3.1.5.16) object that the new **NavigationTerm** object will be bound to.

Type: Microsoft.SharePoint.Client.Taxonomy.Term

*view*: The **NavigationTermSetView** (section [3.1.5.9](#)) used to resolve the properties of the new **NavigationTerm** object.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

**Remarks:**

This method supports editing of **NavigationTerm** objects that are not yet in use by a Web site (2). If a **NavigationTerm** object is in use, then a simpler approach is to call the **GetAsEditable** (section [3.1.5.5.2.2.2](#)) method to obtain a copy of the **NavigationTerm** object that can be edited.

### 3.1.5.5.2.2.6 GetAsResolvedByWeb

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

This method returns a **NavigationTerm** (section [3.1.5.5](#)) object that is editable and bound to the specified *term* object, using a new **NavigationTermSetView** (section [3.1.5.9](#)) instance that is constructed from the provided *web*.

**Parameters:**

*term*: The **Term** ([\[MS-EMMCOSM\]](#) section 3.1.5.16) object that the new **NavigationTerm** object will be bound to.

Type: Microsoft.SharePoint.Client.Taxonomy.Term

*web*: The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) that will be used to construct the **NavigationTermSetView** (section [3.1.5.9](#)) object.

Type: Microsoft.SharePoint.Client.Web

*siteMapProviderName*: The name of the site map provider to be used for the new **NavigationTerm** object.

Type: CSOM String

This method supports editing of **NavigationTerm** objects that are not yet in use by a Web site (2). If a **NavigationTerm** object is in use, then the preferred approach is to call the **GetAsEditable** (section [3.1.5.5.2.2.2](#)) method to obtain a copy of the **NavigationTerm** object that can be edited.

### 3.1.5.5.2.2.7 GetTaxonomyTermStore

**Return Type:** Microsoft.SharePoint.Client.Taxonomy.TermStore

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.GetTaxonomyTermStore**, specified in section [3.1.5.8.2.2.2](#).

**Parameters:** None

### 3.1.5.5.2.2.8 GetAllParentTerms

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection

Returns the **NavigationTerm.Parent** (section [3.1.5.5.1.2.4](#)) object and all of its parents. If there is no parent, then the collection will be empty.

**Parameters:** None

## 3.1.5.6

### Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection

**TypeId:** {E651F3AF-BF88-44BA-8208-798EBF7D4F1F}

**ShortName:** SP.Publishing.Navigation.NavigationTermCollection

Represents a collection of **NavigationTerm** (section [3.1.5.5](#)) objects.

#### 3.1.5.6.1 Properties

##### 3.1.5.6.1.1 Scalar Properties

None.

##### 3.1.5.6.1.2 ObjectPath Properties

None.

#### 3.1.5.6.2 Methods

##### 3.1.5.6.2.1 Scalar Methods

None.

##### 3.1.5.6.2.2 ObjectPath Methods

None.

### 3.1.5.7 Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

**TypeId:** {5ED5AE4C-8E92-4E56-AF6E-D349611614D8}

**ShortName:** SP.Publishing.Navigation.NavigationTermSet

Specifies navigation behavior and properties for a term set that is used for taxonomy navigation. The **NavigationTermSet** class is based on the **TermSet** class ([\[MS-EMMC SOM\]](#) section 3.1.5.20). **NavigationTermSet** inherits from the **NavigationTermSetItem** class (section [3.1.5.8](#)).

**Remarks:**

The properties of the **NavigationTermSet** class MAY be stored in **TermSet.CustomProperties** ([\[MS-EMMC SOM\]](#) section 3.1.5.20.1.1.3). However, this protocol intends that the properties be accessed through the **NavigationTermSet** class for clarity and efficiency.

The **NavigationTermSet** object has two modes: an "editable" mode that is required in order to make updates to the object, and a "read-only" mode that, when used, improves performance by retrieving the object from the taxonomy navigation cache. The read-only mode is indicated by the **NavigationTermSetItem.IsReadOnly** property (section [3.1.5.8.1.1.4](#)). Use the **GetAsEditable** (section [3.1.5.7.2.2.4](#)) method to obtain an editable instance.

If the **NavigationTermSet** is read-only and the protocol client attempts to assign any property or call any method that would change the object state, then the protocol server MUST return an **InvalidOperationException** error.

### 3.1.5.7.1 Properties

#### 3.1.5.7.1.1 Scalar Properties

##### 3.1.5.7.1.1.1 Id

**Type:** CSOM GUID

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.Id**, specified in section [3.1.5.8.1.1.1](#).

##### 3.1.5.7.1.1.2 IsNavigationTermSet

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether the underlying term set is intended to be used for taxonomy navigation.

**Remarks:**

True if the term set is intended to be used for taxonomy navigation; otherwise, false. This property is used by to affect the appearance of the term set in administrative screens. A value of true does not guarantee that the term set is currently in use by any **taxonomy site map provider**, nor does a value of false guarantee that the term set is not in use.

##### 3.1.5.7.1.1.3 Lcid

**Type:** CSOM Int32

**Accessibility:** Read Only

Gets the language code identifier (LCID) that is used when accessing properties on the **NavigationTermSet** (section [3.1.5.7](#)) object that have multiple representations based on language or culture.

#### 3.1.5.7.1.1.4 LinkType

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

**Accessibility:** Read/Write

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.LinkType**, specified in section [3.1.5.8.1.1.2](#).

#### 3.1.5.7.1.1.5 TaxonomyName

**Type:** CSOM String

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.TaxonomyName**, specified in section [3.1.5.8.1.1.3](#).

#### 3.1.5.7.1.1.6 TermGroupId

**Type:** CSOM GUID

**Accessibility:** Read Only

Gets the underlying **TermGroupId** ([\[MS-EMMCSON\]](#) section 3.1.5.18.1.1.3) value.

#### 3.1.5.7.1.1.7 TermStoreId

**Type:** CSOM GUID

**Accessibility:** Read Only

Gets the underlying **TermStoreId** ([\[MS-EMMCSON\]](#) section 3.1.5.23.1.1.2) value.

#### 3.1.5.7.1.1.8 IsReadOnly

**Type:** CSOM Boolean

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.IsReadOnly**, specified in section [3.1.5.8.1.1.4](#).

#### 3.1.5.7.1.1.9 LoadedFromPersistedData

**Type:** CSOM Boolean

**Accessibility:** Read Only

Indicates whether the term set was loaded from persisted storage, rather than obtained from the taxonomy service. If true, this indicates that the contents of the **NavigationTermSet** may be outdated, and cannot be relied upon for security purposes.

### 3.1.5.7.1.2 ObjectPath Properties

#### 3.1.5.7.1.2.1 CatalogTargetUrlForChildTerms

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.CatalogTargetUrlForChildTerms**, specified in section [3.1.5.8.1.2.1](#).

#### 3.1.5.7.1.2.2 TargetUrlForChildTerms

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.TargetUrlForChildTerms**, specified in section [3.1.5.8.1.2.2](#).

#### 3.1.5.7.1.2.3 Terms

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.Terms**, specified in section [3.1.5.8.1.2.3](#).

#### 3.1.5.7.1.2.4 Title

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.Title**, specified in section [3.1.5.8.1.2.4](#).

#### 3.1.5.7.1.2.5 View

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

**Accessibility:** Read Only

See **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.View**, specified in section [3.1.5.8.1.2.5](#).

### 3.1.5.7.2 Methods

#### 3.1.5.7.2.1 Scalar Methods

##### 3.1.5.7.2.1.1 GetResolvedDisplayUrl

**Return Type:** CSOM String

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.GetResolvedDisplayUrl**, specified in section [3.1.5.8.2.1.1](#).

**Parameters:**

*browserQueryString*: Optional. If it is provided, this query string is used as the query string part of the resulting URL. If this parameter is not **null** or an empty string, it must be prefixed with the ? character.

Type: CSOM String

#### 3.1.5.7.2.2 ObjectPath Methods

##### 3.1.5.7.2.2.1 CreateTerm

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.CreateTerm**, specified in section [3.1.5.8.2.2.1](#).

**Parameters:**

*termName*: Default label for the LCID.

Type: CSOM String

*linkType*: LCID to create the label on.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

*termId*: GUID for the term.

Type: CSOM GUID

##### 3.1.5.7.2.2.2 FindTermForUrl

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

This method is used for example by breadcrumb controls to determine the location of the current page in the navigation hierarchy. It searches all child **NavigationTerm** objects for a navigation node whose hyperlink URL matches the specified URL. The matching algorithm used by the protocol server is implementation-defined, and MAY ignore certain query parameters or character casing/encoding differences, and MAY normalize relative URL syntaxes (for example "/Pages/Example.aspx" or "~site/Pages/Example.aspx"), but MUST honor the **NavigationTerm.AssociatedFolderUrl** property (section [3.1.5.5.1.1.1](#)). If a match is not found, then null is returned.

**Parameters:**

*url*: The URL to search for.

Type: CSOM String

**3.1.5.7.2.2.3 GetAllTerms**

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection

Returns a collection of the complete tree of child **NavigationTerm** (section [3.1.5.5](#)) objects in the **NavigationTermSet** (section [3.1.5.7](#)).

**Parameters:** None

**3.1.5.7.2.2.4 GetAsEditable**

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

Returns an editable copy of the **NavigationTermSet** (section [3.1.5.7](#)) object.

**Parameters:**

*taxonomySession*: A **TaxonomySession** ([\[MS-EMMCSOM\]](#) section 3.1.5.15) object that is used to help construct the editable underlying **Term** object ([\[MS-EMMCSOM\]](#) section 3.1.5.16).

Type: Microsoft.SharePoint.Client.Taxonomy.TaxonomySession

**3.1.5.7.2.2.5 GetTaxonomyTermSet**

**Return Type:** Microsoft.SharePoint.Client.Taxonomy.TermSet

Returns the underlying **TermSet** ([\[MS-EMMCSOM\]](#) section 3.1.5.20) object.

**Remarks:**

If the **NavigationTermSet** (section [3.1.5.7](#)) object is in the "editable" mode, then this method returns the underlying **TermSet** object. If the protocol client calls this method when the **NavigationTerm** object is read-only, then the protocol server MUST return an **InvalidOperationException** error.

**Parameters:** None

**3.1.5.7.2.2.6 GetWithNewView**

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

Returns a **NavigationTermSet** (section [3.1.5.7](#)) object that will reflect the **NavigationTermSetView** (section [3.1.5.9](#)) object specified by *newView*.

**Parameters:**

*newView*: The **NavigationTermSetView** object to apply to the **NavigationTermSet** (section [3.1.5.7](#)) object.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView



### 3.1.5.7.2.2.7 GetAsResolvedByView

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

Creates and returns a **NavigationTermSet** (section [3.1.5.7](#)) object that can be edited.

**Parameters:**

*termSet:* The **TermSet** ([\[MS-EMMCSON\]](#) section 3.1.5.20) object that the new **NavigationTermSet** object will be bound to.

Type: Microsoft.SharePoint.Client.Taxonomy.TermSet

*view:* The **NavigationTermSetView** (section [3.1.5.9](#)) used to resolve the properties of the new **NavigationTermSet** object.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

**Remarks:**

This method supports editing of **NavigationTermSet** objects that are not yet in use by a Web site (2). If a **NavigationTermSet** object is in use, then a simpler approach is to call the **GetAsEditable** (section [3.1.5.7.2.2.4](#)) method to obtain a copy of the **NavigationTermSet** object that can be edited.

### 3.1.5.7.2.2.8 GetAsResolvedByWeb

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSet

Creates and returns a **NavigationTermSet** (section [3.1.5.7](#)) object that can be edited.

**Parameters:**

*termSet:* The **TermSet** ([\[MS-EMMCSON\]](#) section 3.1.5.20) object that the new **NavigationTermSet** object will be bound to.

Type: Microsoft.SharePoint.Client.Taxonomy.TermSet

*web:* The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) that is a context for URLs for the new **NavigationTermSet** object.

Type: Microsoft.SharePoint.Client.Web

*siteMapProviderName:* The name of the site map provider to be used for the new **NavigationTermSet** object.

Type: CSOM String

**Remarks:**

This method supports editing of **NavigationTermSet** objects that are not yet in use by a Web site (2). If a **NavigationTermSet** object is in use, then the preferred approach is to call the **GetAsEditable** (section [3.1.5.7.2.2.4](#)) method to obtain a copy of the **NavigationTermSet** object that can be edited.

### 3.1.5.7.2.2.9 GetTaxonomyTermStore

**Return Type:** Microsoft.SharePoint.Client.Taxonomy.TermStore

See

**Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem.GetTaxonomyTermStore**, specified in section [3.1.5.8.2.2.2](#).

**Parameters:** None

### 3.1.5.8 Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem

**TypeId:** {F99351D7-E3F3-4185-A0CA-D0426FF83FDE}

**ShortName:** SP.Publishing.Navigation.NavigationTermSetItem

The **NavigationTermSetItem** class is an abstract base class for the **NavigationTermSet** (section [3.1.5.7](#)) and **NavigationTerm** (section [3.1.5.5](#)) classes.

#### Remarks:

The **NavigationTermSetItem** class is analogous to the **TermSetItem** ([\[MS-EMMCOSOM\]](#) section 3.1.5.22) class.

The **NavigationTerm** and **NavigationTermSet** objects have two modes: an "editable" mode that is required in order to make updates to the object, and a "read-only" mode that, when used, improves performance by retrieving the object from the taxonomy navigation cache. The read-only mode is indicated by the **NavigationTermSetItem.IsReadOnly** property (section [3.1.5.8.1.1.4](#)).

If the **NavigationTermSetItem** is read-only and the protocol client attempts to assign any property or call any method that would change the object state, then the protocol server MUST return an **InvalidOperationException** error.

#### 3.1.5.8.1 Properties

##### 3.1.5.8.1.1 Scalar Properties

###### 3.1.5.8.1.1.1 Id

**Type:** CSOM GUID

**Accessibility:** Read Only

Gets the underlying **Term.Id** ([\[MS-EMMCOSOM\]](#) section 3.1.5.16.1.1.4) or **TermSet.Id** ([\[MS-EMMCOSOM\]](#) section 3.1.5.20.1.1.6) property.

###### 3.1.5.8.1.1.2 LinkType

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

**Accessibility:** Read/Write

Gets or sets a value that indicates what kind of link is used by the navigation node that the taxonomy site map provider creates for a **NavigationTerm**. For a **NavigationTermSet** (section [3.1.5.7](#)) object, the value is always **NavigationLinkType.Root** (section [3.1.5.3.1.1](#)).

**Remarks:**

The link type is specified by the **NavigationLinkType** (section [3.1.5.3](#)) enumeration. The link type also determines whether the protocol server will use URL rewriting to implement a friendly URL or catalog friendly URL for a **NavigationTerm**. The URL rewriting is implementation-specific.

**3.1.5.8.1.1.3 TaxonomyName**

**Type:** CSOM String

**Accessibility:** Read Only

Gets the underlying **Term.Name** ([\[MS-EMMCSON\]](#) section 3.1.5.16.1.1.12) or **TermSet.Name** ([\[MS-EMMCSON\]](#) section 3.1.5.20.1.1.10) property.

**3.1.5.8.1.1.4 IsReadOnly**

**Type:** CSOM Boolean

**Accessibility:** Read Only

This returns true if the object is in "read-only" mode; otherwise it is in "editable" mode. See the **NavigationTermSetItem** documentation (section [3.1.5.8](#)) for a discussion of these two modes.

**3.1.5.8.1.2 ObjectPath Properties****3.1.5.8.1.2.1 CatalogTargetUrlForChildTerms**

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

Gets the default value of the **CatalogTargetUrl** property for child **NavigationTerm** (section [3.1.5.5](#)) objects.

**Remarks:**

This property does not affect the current node.

This property is a **CustomizableString** (section [3.1.5.6](#)) object. The default value is inherited from the **CatalogTargetUrlForChildTerms.Value** (section [3.1.5.6.1.1.3](#)) property of the immediate parent node. In the case of a **NavigationTermSet** (section [3.1.5.7](#)) object, the default value is an empty string (1).

**3.1.5.8.1.2.2 TargetUrlForChildTerms**

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

Gets the default value that is to be used for the **TargetUrl** (section [3.1.5.5.1.2.5](#)) property on child **NavigationTerm** (section [3.1.5.5](#)) objects.

**Remarks:**

This property does not affect the current node.

This property is a **CustomizableString** (section [3.1.5.6](#)) object. The default value is inherited from the **TargetUrlForChildTerms.Value** (section [3.1.5.6.1.1.3](#)) property of the immediate parent node. In the case of a **NavigationTermSet** (section [3.1.5.7](#)) object, the default value is an empty string (1).

### 3.1.5.8.1.2.3 Terms

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermCollection

**Accessibility:** Read Only

Gets a collection of all immediate child **NavigationTerm** (section [3.1.5.5](#)) objects of this **NavigationTerm** or **NavigationTermSet** (section [3.1.5.7](#)) object.

**Remarks:**

The **Terms** collection excludes certain objects according to the trimming specified by the associated **NavigationTerm.View** (section [3.1.5.5.1.2.10](#)). For example, if **NavigationTermSetView.ExcludeDeprecatedTerms** (section [3.1.5.9.1.1.1](#)) is true, then objects will be trimmed (that is, excluded) from the collection if their **NavigationTerm.IsDeprecated** property (section [3.1.5.5.1.1.6](#)) is true.

### 3.1.5.8.1.2.4 Title

**Type:** Microsoft.SharePoint.Client.Publishing.CustomizableString

**Accessibility:** Read Only

Gets the title that menus and breadcrumbs will display for the navigation node.

**Remarks:**

This property is a **CustomizableString** (section [3.1.5.6](#)) object. For a **NavigationTerm** object, the default value MUST be the **Term.Name** ([\[MS-EMMCSON\]](#) section 3.1.5.16.1.1.12) property for the underlying term. For a **NavigationTermSet** object, this property SHOULD be the same as the Web site (2) title, as indicated by the **NavigationTermSetView.WebTitle** property (section [3.1.5.9.1.1.8](#)) for the current view.

### 3.1.5.8.1.2.5 View

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

**Accessibility:** Read Only

Gets the **NavigationTermSetView** (section [3.1.5.9](#)) object that is used to calculate certain properties for this **NavigationTerm**.

## 3.1.5.8.2 Methods

### 3.1.5.8.2.1 Scalar Methods

#### 3.1.5.8.2.1.1 GetResolvedDisplayUrl

**Return Type:** CSOM String

Returns the server-relative URL that is displayed for this **NavigationTermSet** (section [3.1.5.7](#)) or **NavigationTerm** (section [3.1.5.5](#)) object.

**Parameters:**

*browserQueryString*: A query string that, if specified, is included in the resolved URL.

Type: CSOM String

**Remarks:**

The URL MAY be resolved by expanding any implementation-specific tokens such as "~sitecollection/". If the *browserQueryString* parameter is provided, it is used as the query string part of the resulting URL.

The URL is derived differently depending on the **NavigationLinkType** (section [3.1.5.3](#)) value. If the term is of type **NavigationLinkType.SimpleLink** (section [3.1.5.3.1.3](#)) then the **NavigationTerm.SimpleLinkUrl** (section [3.1.5.5.1.1.8](#)) property MUST be returned. If the term is of type **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)), then the friendly URL MUST be returned. If a valid URL is not specified, then the protocol server MUST return null.

### 3.1.5.8.2.2 ObjectPath Methods

#### 3.1.5.8.2.2.1 CreateTerm

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTerm

Creates a new **NavigationTerm** (section [3.1.5.5](#)) object with the specified *termName* for the **Term.Name** property ([\[MS-EMMC SOM\]](#) section 3.1.5.16.1.1.12). This operation is similar to **TermSetItem.CreateTerm** method ([\[MS-EMMC SOM\]](#) section 3.1.5.22.2.2.1), but with two important differences:

1. If the **Terms** collection ([\[MS-EMMC SOM\]](#) section 3.1.5.22.1.2.1) already contains a sibling term whose **Term.Name** property would conflict with *termName*, then the protocol server MUST generate a unique name. For example, if the name "St. Louis" is already in use, the *termName* could be changed to "St. Louis (2)". The method for generating the unique value is implementation-specific and MAY depend on the active language code identifier (LCID).
2. If the *linkType* is **NavigationLinkType.FriendlyUrl** (section [3.1.5.3.1.2](#)), and if the **Terms** collection already contains a sibling term whose **NavigationTerm.FriendlyUrlSegment** (section [3.1.5.5.1.2.3](#)) would conflict with the default **FriendlyUrlSegment** for the newly created term, then the protocol server MUST generate a unique segment and assign it as the custom value for the **CustomizableString** object (section [3.1.5.6](#)). For example, suppose *termName* is "St. Louis" but there is already a friendly URL "http://example.com/locations/st-louis". In this case, the newly created term's URL segment could be assigned as "st-louis-2" instead of "st-louis". The method for generating the unique value is implementation-specific and MAY depend on the active language code identifier (LCID).

**Parameters:**

*termName*: The name for the new **NavigationTerm** object. The name to be stored in the **NavigationTerm.TaxonomyName** (section [3.1.5.5.1.1.9](#)) property.

Type: CSOM String

*linkType*: The type of link for the new **NavigationTerm** object as specified by the **NavigationLinktype** (section [3.1.5.3](#)) enumeration.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationLinkType

*termId*: A unique identifier for the new **NavigationTerm** object.

Type: CSOM GUID

**Remarks:**

The new **NavigationTerm** will be a child of this object.

### 3.1.5.8.2.2.2 GetTaxonomyTermStore

**Return Type:** Microsoft.SharePoint.Client.Taxonomy.TermStore

Returns the underlying **TermStore** ([\[MS-EMMCOSM\]](#) section 3.1.5.23) object.

**Remarks:**

If the **NavigationTermSet** (section [3.1.5.7](#)) object is in the "editable" mode, then this method returns the underlying **TermStore** object. If the protocol client calls this method when the **NavigationTermSet** object is read-only, then the protocol server MUST return an **InvalidOperationException** error.

**Parameters:** None

### 3.1.5.9 Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

**TypeId:** {097234E9-47DA-431F-BD12-173C296B187B}

**ShortName:** SP.Publishing.Navigation.NavigationTermSetView

The **NavigationTermSetView** class stores contextual information (for example the active Web site (2), site map provider, and policy for trimming child nodes) that affects the calculation of certain properties for the **NavigationTerm** (section [3.1.5.5](#)) objects in a **NavigationTermSet** (section [3.1.5.7](#)).

**Remarks:**

Resolving URLs depends on which Web site (2) is in use. For example, the **NavigationTerm.GetResolvedDisplayUrl** (section [3.1.5.5.2.1.3](#)) method resolves a relative URL differently when the **TermSet** ([\[MS-EMMCOSM\]](#) section 3.1.5.20) object is attached to a different Web site (2).

To minimize the size of **NavigationTermSet** objects in the taxonomy navigation cache, this additional contextual information is separated into the **NavigationTermSetView** class. This allows the protocol server to return different cached views of the **NavigationTermSet** without making expensive copies of the internal tree structure. The protocol client can call **NavigationTermSet.GetWithNewView** section [3.1.5.7.2.2.6](#)) to switch between views.

#### 3.1.5.9.1 Properties

##### 3.1.5.9.1.1 Scalar Properties

###### 3.1.5.9.1.1.1 ExcludeDeprecatedTerms

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether **NavigationTerm** (section [3.1.5.5](#)) objects are trimmed if the underlying term is a deprecated term.

**Remarks:**

When traversing a tree of **NavigationTerm** objects, if this property is true the objects MUST be excluded from the **NavigationTermSetItem.Terms** collection (section [3.1.5.8.1.2.3](#)) whenever the **NavigationTerm.IsDeprecated** property is true (section [3.1.5.5.1.1.6](#)).

### 3.1.5.9.1.1.2 ExcludeTermsByPermissions

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether **NavigationTerm** (section [3.1.5.5](#)) objects are trimmed if the current user does not have permission to view the linked URL.

**Remarks:**

When traversing a tree of **NavigationTerm** objects, if this property is true then objects MUST be excluded from the **NavigationTermSetItem.Terms** collection (section [3.1.5.8.1.2.3](#)) whenever the current user does not have permissions to view the page referenced by **NavigationTerm.GetResolvedTargetUrl** (section [3.1.5.5.2.1.4](#)). This property only applies to publishing pages within the current Web site (2).

### 3.1.5.9.1.1.3 ExcludeTermsByProvider

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether **NavigationTerm** (section [3.1.5.5](#)) objects are trimmed according to the active site map provider.

**Remarks:**

When traversing a tree of **NavigationTerm** objects, if this property is true then objects MUST be excluded from the **NavigationTermSetItem.Terms** collection (section [3.1.5.8.1.2.3](#)) whenever the term is marked as hidden for the site map provider indicated by the **NavigationTermSetView.SiteMapProviderName** property (section [3.1.5.9.1.1.6](#)). To mark a term as hidden, use the properties **NavigationTerm.ExcludeFromGlobalNavigation** (section [3.1.5.5.1.1.3](#)) and **NavigationTerm.ExcludeFromCurrentNavigation** (section [3.1.5.5.1.1.2](#)).

### 3.1.5.9.1.1.4 ServerRelativeSiteUrl

**Type:** CSOM String

**Accessibility:** Read Only

Returns the server-relative URL for the site collection associated with this view.

**Remarks:**

For example, this property MAY be used by the **NavigationTerm.GetResolvedTargetUrl** method (section [3.1.5.5.2.1.4](#)) to resolve an implementation-defined relative URL syntax. For example, if the **ServerRelativeSiteUrl** is "/sites/spsite", then the protocol server could resolve "~sitecollection/Pages/Example.aspx" as "/sites/spsite/Pages/Example.aspx".

This property's value can also be an empty string (1).

#### 3.1.5.9.1.1.5 ServerRelativeWebUrl

**Type:** CSOM String

**Accessibility:** Read Only

Returns the server-relative URL for the Web site (2) associated with this view.

**Remarks:**

For example, this property MAY be used by the **NavigationTerm.GetResolvedTargetUrl** method (section [3.1.5.5.2.1.4](#)) to resolve an implementation-defined relative URL syntax. For example, if the **ServerRelativeWebUrl** is "/sites/spsite/spweb", then the protocol server could resolve "~site/Pages/Example.aspx" as "/sites/spsite/spweb/Pages/Example.aspx".

This property's value can also be an empty string (1).

#### 3.1.5.9.1.1.6 SiteMapProviderName

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the name used to refer to the site map provider to be used for trimming **NavigationTerm** (section [3.1.5.5](#)) objects.

**Remarks:**

This property is used to trim child navigation nodes when **ExcludeTermsByProvider** (section [3.1.5.9.1.1.3](#)) is true. It is valid to assign an empty string (1) to **SiteMapProviderName**; in this case, no trimming is performed for the current view.

#### 3.1.5.9.1.1.7 WebId

**Type:** CSOM GUID

**Accessibility:** Read Only

Gets the unique identifier of the Web site (2) associated with this view.

#### 3.1.5.9.1.1.8 WebTitle

**Type:** CSOM String

**Accessibility:** Read Only

Gets the title of the Web site (2) associated with this view.

**Remarks:**



This property is used as the **NavigationTermSetItem.Title** property (section [3.1.5.8.1.2.4](#)) for the **NavigationTermSet** (section [3.1.5.7](#)) object that is the root of the navigation hierarchy.

This property's value can also be an empty string (1).

### 3.1.5.9.1.2 ObjectPath Properties

None.

### 3.1.5.9.2 Methods

#### 3.1.5.9.2.1 Scalar Methods

None.

#### 3.1.5.9.2.2 ObjectPath Methods

##### 3.1.5.9.2.2.1 CreateEmptyInstance

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

Creates and returns a new instance of the **NavigationTermSetView** (section [3.1.5.9](#)) class. The **WebId** property (section [3.1.5.9.1.1.7](#)) will be assigned the **empty GUID**, the string typed properties will be assigned as empty strings, and the Boolean typed properties will be initialized to false.

**Parameters:** None

##### 3.1.5.9.2.2.2 GetCopy

**Return Type:** Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetView

Returns a copy of this **NavigationTermSetView** (section [3.1.5.9](#)) object.

**Parameters:** None

##### 3.1.5.9.2.2.3 CSOM Constructor

Creates a new instance of the **NavigationTermSetView** class and initializes its properties. The Boolean typed properties will be initialized to false, and the other properties will be assigned according to the *web* and *siteMapProviderName* parameters.

**Parameters:**

*web*: The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) whose data will be used to initialize the **NavigationTermSetView** properties.

Type: Microsoft.SharePoint.Client.Web

*siteMapProviderName*: The site map provider name to be assigned to the **SiteMapProviderName** property (section [3.1.5.9.1.1.6](#)).

Type: CSOM String

### 3.1.5.10

#### Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSettings

**TypeId:** {5EBDD423-1350-43F9-AD8C-CBE0887C7C42}

**ShortName:** SP.Publishing.Navigation.StandardNavigationSettings

The **StandardNavigationSettings** class is used to manage the standard navigation schemes (global navigation and current navigation) for a site collection.

**Remarks:**

The protocol server's administrative user interface presents a simplified perspective with two standard schemes: global navigation and current navigation. Each standard scheme can be configured for only one of three navigation sources: taxonomy site map provider, **portal site map provider**, or inherit from **parent site**. These configurations correspond to predefined configurations of the underlying providers, that is, binding a specific switchable site map provider to a specific taxonomy site map provider and assigning the navigation term set. Other "nonstandard" configurations are possible by configuring the providers individually.

#### 3.1.5.10.1 Properties

##### 3.1.5.10.1.1 Scalar Properties

###### 3.1.5.10.1.1.1 Source

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSource

**Accessibility:** Read/Write

Gets or sets the navigation source for the site collection.

**Remarks:**

This property determines whether the switchable site map provider will use the taxonomy site map provider or the portal site map provider in the standard configurations. If the settings are in an advanced configuration, then this property returns **StandardNavigationSource.Unknown** (section [3.1.5.11.1.1](#)). If the protocol client attempts to assign the **StandardNavigationSource.Unknown** value to this property, the protocol server MUST return an **InvalidOperationException** error.

###### 3.1.5.10.1.1.2 TermSetId

**Type:** CSOM GUID

**Accessibility:** Read/Write

Gets or sets a unique identifier for the **TermSet** ([\[MS-EMMC SOM\]](#) section 3.1.5.20) object used by the taxonomy site map provider.

**Remarks:**

This property is ignored unless **StandardNavigationSource.TaxonomyProvider** (section [3.1.5.11.1.3](#)) is selected.

### 3.1.5.10.1.1.3 TermStoreId

**Type:** CSOM GUID

**Accessibility:** Read/Write

Gets or sets a unique identifier for the **TermStore** ([\[MS-EMMCOSM\]](#) section 3.1.5.23) object used by the taxonomy site map provider.

**Remarks:**

This property is ignored unless **StandardNavigationSource.TaxonomyProvider** (section [3.1.5.11.1.3](#)) is selected.

### 3.1.5.10.1.2 ObjectPath Properties

None.

### 3.1.5.10.2 Methods

#### 3.1.5.10.2.1 Scalar Methods

None.

#### 3.1.5.10.2.2 ObjectPath Methods

None.

### 3.1.5.11

#### Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSource

**ShortName:** SP.Publishing.Navigation.StandardNavigationSource

**Flag:** false

**StandardNavigationSource** is an enumeration that specifies the three configuration choices for the standard navigation schemes (global navigation and current navigation).

**Remarks:**

See the **StandardNavigationSettings** class (section [3.1.5.10](#)) for more information about the standard navigation schemes.

#### 3.1.5.11.1 Field Values

##### 3.1.5.11.1.1 Unknown

**Value:** 0

Indicates that the navigation scheme is in an advanced configuration that does not correspond to one of the standard configurations.

##### 3.1.5.11.1.2 PortalProvider

**Value:** 1

Indicates that the navigation scheme is configured so that the **switchable site map provider** is pointing to the portal site map provider, and the taxonomy site map provider is disabled so that the protocol server will not process its friendly URLs.

#### 3.1.5.11.1.3 TaxonomyProvider

**Value:** 2

Indicates that the navigation scheme is configured so that the switchable site map provider is pointing to the taxonomy site map provider.

#### 3.1.5.11.1.4 InheritFromParentWeb

**Value:** 3

Indicates that the navigation scheme is inheriting its settings from the parent site. If this value is used, then the switchable site map provider, portal site map provider, and taxonomy site map provider are all configured to inherit their settings from the parent site.

### 3.1.5.12

#### Microsoft.SharePoint.Client.Publishing.Navigation.WebNavigationSettings

**TypeId:** {00AC02AA-86E2-4D48-AA73-341ED7962374}

**ShortName:** SP.Publishing.Navigation.WebNavigationSettings

The **WebNavigationSettings** class manages navigation settings for a Web site (2).

#### 3.1.5.12.1 Properties

##### 3.1.5.12.1.1 Scalar Properties

##### 3.1.5.12.1.1.1 AddNewPagesToNavigation

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether clicking the **New Page** button will automatically create a **NavigationTerm** (section [3.1.5.5](#)) in the term set for the active taxonomy site map provider.

**Remarks:**

True if new pages will automatically create a **NavigationTerm** (section [3.1.5.5](#)); otherwise, false.

##### 3.1.5.12.1.1.2 CreateFriendlyUrlsForNewPages

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets a value that indicates whether clicking the **New Page** button will automatically create a friendly URL for the newly created page.

**Remarks:**

True if new pages will automatically create a friendly URL; otherwise, false.

### 3.1.5.12.1.2 ObjectPath Properties

#### 3.1.5.12.1.2.1 CurrentNavigation

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSettings

**Accessibility:** Read Only

Returns an object that manages the settings for "current navigation", one of the two standard navigation schemes. See the **StandardNavigationSettings** class (section [3.1.5.10](#)) for more information about the standard navigation schemes.

**Remarks:**

The protocol server MUST NOT return null.

It MUST NOT be NULL.

#### 3.1.5.12.1.2.2 GlobalNavigation

**Type:** Microsoft.SharePoint.Client.Publishing.Navigation.StandardNavigationSettings

**Accessibility:** Read Only

Returns an object that manages the settings for "global navigation", one of the two standard navigation schemes. See the **StandardNavigationSettings** class (section [3.1.5.10](#)) for more information about the standard navigation schemes.

**Remarks:**

The protocol server MUST NOT return null.

It MUST NOT be NULL.

### 3.1.5.12.2 Methods

#### 3.1.5.12.2.1 Scalar Methods

##### 3.1.5.12.2.1.1 Update

**Return Type:** None

Writes the new settings to the Web site (2) that was passed to the constructor (section [3.1.5.12.2.2.1](#)).

**Remarks:**

This method also checks whether the navigation term set is being changed for any taxonomy site map providers. If so, changes MAY be written to both the old term set and the new term set to indicate whether they are attached to (that is, in use by) this Web site (2).

**Parameters:**

*taxonomySession*: The **TaxonomySession** ([\[MS-EMMCOSM\]](#) section 3.1.5.15) object to use to make the update.

Type: Microsoft.SharePoint.Client.Taxonomy.TaxonomySession

### 3.1.5.12.2.1.2 ResetToDefaults

**Return Type:** None

This operation resets the **WebNavigationSettings** object to the default state that the protocol server would use for a newly created Web site (2). This default state MAY depend on whether the Web site (2) is located at the root of its site collection, for example because the **StandardNavigationSource.InheritFromParentWeb** setting (section [3.1.5.11.1.4](#)) is not applicable there.

**Parameters:** None

### 3.1.5.12.2.2 ObjectPath Methods

#### 3.1.5.12.2.2.1 CSOM Constructor

Creates a new instance of the **WebNavigationSettings** class that will be used to access the settings for the specified Web site (2).

**Parameters:**

*web*: The Web site (2) ([\[MS-CSOMSPT\]](#) section 3.2.5.143) whose settings will be accessed.

Type: Microsoft.SharePoint.Client.Web

### 3.1.5.13 Microsoft.SharePoint.Client.Publishing.AddinPlugin

**TypeId:** {698097B9-BBE7-4C07-A37B-23E2F07BC9A4}

**ShortName:** SP.Publishing.AddinPlugin

Class that represents the settings of a social plugin. A social plug-in contains HTML/JavaScript that will be rendered/executed on pages where the social plug-in is inserted. All social plug-ins are available in the "Social Plug-ins" WebPart category.

#### 3.1.5.13.1 Properties

##### 3.1.5.13.1.1 Scalar Properties

###### 3.1.5.13.1.1.1 Description

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the value of the **Description** property of the social plug-in.

###### 3.1.5.13.1.1.2 Markup

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the value of the **Markup** property which is the HTML/JavaScript codes contained in the social plug-in and will be rendered/executed when inserting the plug-in onto a page.

#### 3.1.5.13.1.1.3 Title

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the value of the **Title** property of the social plug-in.

The **Title** property is used as the identifier for setting and updating a social plug-in.

#### 3.1.5.13.1.2 ObjectPath Properties

None.

#### 3.1.5.13.2 Methods

##### 3.1.5.13.2.1 Scalar Methods

None.

##### 3.1.5.13.2.2 ObjectPath Methods

##### 3.1.5.13.2.2.1 CSOM Constructor

Constructor of **AddinPlugin**.

**Parameters:** None

#### 3.1.5.14 Microsoft.SharePoint.Client.Publishing.AddinSettings

**TypeId:** {7BC23BC0-CB63-4523-B967-A910C8B43668}

**ShortName:** SP.Publishing.AddinSettings

Class that represents the settings of a site services add-in.

The site services addin can be used to inject HTML/JavaScript on different locations on a page. The site services add-in will be applied on every site page in the site collection.

#### 3.1.5.14.1 Properties

##### 3.1.5.14.1.1 Scalar Properties

##### 3.1.5.14.1.1.1 Description

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the **Description** property of a site services add-in.

#### 3.1.5.14.1.1.2 Enabled

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets the **Enabled** property that indicates whether a site services add-in is enabled.

#### 3.1.5.14.1.1.3 HeadScript

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the **HeadScript** property which is the HTML and JavaScript that will be inserted within the <header> tag on every page in the site collection.

#### 3.1.5.14.1.1.4 HtmlEndBody

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the **HtmlEndBody** property which is HTML and JavaScript that will be inserted at the end of the <body> tag on every page in the site collection.

#### 3.1.5.14.1.1.5 HtmlStartBody

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the **HtmlStartBody** property which is HTML and JavaScript that will be inserted at the start of the <body> tag on every page in the site collection.

#### 3.1.5.14.1.1.6 Id

**Type:** CSOM GUID

**Accessibility:** Read Only

Gets or sets the **Id** property of the site services add-in.

The **Id** property is the unique identifier used for getting, setting, and deleting site services add-ins.

#### 3.1.5.14.1.1.7 MetaTagPagePropertyMappings

**Type:** CSOM dictionary

**Accessibility:** Read/Write

Gets or sets the **MetaTagPagePropertyMappings** property. The **MetaTagPagePropertyMappings** property is a dictionary that stores the meta tag and page property mappings. Mappings will be generated and inserted into <meta> tags which are located right after the <header> tag on every page in the site collection.



For example, the key value pair {"tag:newTag", "Title"} in the **MetaTagPagePropertyMappings** property will add the meta tag <meta property="tag:newTag" content="[Value]" /> after the <header> tag. "Title" in {"tag:newTag", "Title"} refers to the name of the page property. [Value] will be replaced with the value of the page property called "Title".

#### 3.1.5.14.1.1.8 Namespace

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the **Namespace** property that will add its content inside the <html> tag on every page in the site collection.

#### 3.1.5.14.1.1.9 Title

**Type:** CSOM String

**Accessibility:** Read/Write

Title of the site services addin.

#### 3.1.5.14.1.2 ObjectPath Properties

None.

#### 3.1.5.14.2 Methods

##### 3.1.5.14.2.1 Scalar Methods

None.

##### 3.1.5.14.2.2 ObjectPath Methods

###### 3.1.5.14.2.2.1 CSOM Constructor

Constructor of **AddinSettings**.

**Parameters:**

*id*: The **Id** property (section [3.1.5.14.1.1.6](#)) of the new **AddinSettings** (section [3.1.5.14](#)).

Type: CSOM GUID

#### 3.1.5.15 Microsoft.SharePoint.Client.Publishing.CustomizableString

**TypeId:** {13EBB0D0-559A-4248-BA69-C57D5FABF4C4}

**ShortName:** SP.Publishing.CustomizableString

This is a helper class used by the **NavigationTerm** (section [3.1.5.5](#)) class to represent properties that are string types, and that have a default value that can be optionally overridden by a custom value.

### 3.1.5.15.1 Properties

#### 3.1.5.15.1.1 Scalar Properties

##### 3.1.5.15.1.1.1 DefaultValue

**Type:** CSOM String

**Accessibility:** Read Only

Gets the default value for the property, as described in the documentation for the various instances of the **CustomizableString** object.

**Remarks:**

The protocol server MUST NOT return null for this property. The protocol server can return an empty string (1) as a valid value.

##### 3.1.5.15.1.1.2 UsesDefaultValue

**Type:** CSOM Boolean

**Accessibility:** Read/Write

Gets or sets whether the **CustomizableString** object uses the default value.

##### 3.1.5.15.1.1.3 Value

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the current value of the property. The protocol server MUST NOT return null for this property.

**Remarks:**

If the **UsesDefaultValue** (section [3.1.5.6.1.1.2](#)) property is true, then the **Value** property MUST return the default value, as specified by the **DefaultValue** (section [3.1.5.6.1.1.1](#)) property. If the **UsesDefaultValue** property is false, then the **Value** property returns the custom value.

If the protocol client makes an assignment to the **Value** property (even if the new value is the same as the current value), then the **UsesDefaultValue** property MUST change to false on the protocol server.

#### 3.1.5.15.1.2 ObjectPath Properties

None.

#### 3.1.5.15.2 Methods

##### 3.1.5.15.2.1 Scalar Methods

None.

### 3.1.5.15.2.2 ObjectPath Methods

None.

### 3.1.5.16 Microsoft.SharePoint.Client.Publishing.DesignPackage

**TypeId:** {D21214D9-63F5-488B-A665-2B7F9ABC1604}

**ShortName:** SP.Publishing.DesignPackage

Class that represents operations that can be used to perform around the design **solution package** for a site collection.

#### 3.1.5.16.1 Properties

##### 3.1.5.16.1.1 Scalar Properties

None.

##### 3.1.5.16.1.2 ObjectPath Properties

None.

#### 3.1.5.16.2 Methods

##### 3.1.5.16.2.1 Scalar Methods

###### 3.1.5.16.2.1.1 Apply

This method is a static CSOM method.

**Return Type:** None

Activates your design solution package on your site collection.

**Parameters:**

*site*: The site collection of the design solution package to activate.

Type: Microsoft.SharePoint.Client.Site

*info*: Information about the design solution package to activate.

Type: Microsoft.SharePoint.Client.Publishing.DesignPackageInfo

###### 3.1.5.16.2.1.2 ExportEnterprise

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.DesignPackageInfo

Exports the design solution package for a **site template** that is not a small business site template into the **solution gallery** and returns information about the design solution package.

**Parameters:**

*site*: The site collection that will be used to export the design solution package.

Type: Microsoft.SharePoint.Client.Site

*includeSearchConfiguration*: Indicates whether the search configuration will be exported in the design solution package.

Type: CSOM Boolean

### 3.1.5.16.2.1.3 ExportSmallBusiness

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.DesignPackageInfo

Exports the design solution package for a small business site template to the solution gallery and returns information about the design solution package.

**Parameters:**

*site*: The site collection that will be used to export the design solution package.

Type: Microsoft.SharePoint.Client.Site

*packageName*: The name of the design solution package.

Type: CSOM String

*includeSearchConfiguration*: Indicates whether the search configuration will be exported in the design solution package.

Type: CSOM Boolean

### 3.1.5.16.2.1.4 Install

This method is a static CSOM method.

**Return Type:** None

Installs the design solution package specified.

**Parameters:**

*site*: The site collection that will be used to install the design solution package.

Type: Microsoft.SharePoint.Client.Site

*info*: Information about the design solution package to install.

Type: Microsoft.SharePoint.Client.Publishing.DesignPackageInfo

*path*: The **site-relative URL** of the design solution package to install.

Type: CSOM String

### 3.1.5.16.2.1.5 UnInstall

This method is a static CSOM method.

**Return Type:** None

Uninstalls the design solution package specified.

**Parameters:**

*site*: The site collection of the design solution package to uninstall.

Type: Microsoft.SharePoint.Client.Site

*info*: Information about the design solution package to uninstall.

Type: Microsoft.SharePoint.Client.Publishing.DesignPackageInfo

### 3.1.5.16.2.2 ObjectPath Methods

None.

### 3.1.5.17 Microsoft.SharePoint.Client.Publishing.DesignPackageInfo

**TypeId:** {5332B37D-A6D1-4231-83CD-D7DD274540B7}

**ShortName:** SP.Publishing.DesignPackageInfo

Represents information about a design solution package.

#### 3.1.5.17.1 Properties

##### 3.1.5.17.1.1 Scalar Properties

###### 3.1.5.17.1.1.1 MajorVersion

**Type:** CSOM Int32

**Accessibility:** Read/Write

Represents the **major version** of the design solution package.

###### 3.1.5.17.1.1.2 MinorVersion

**Type:** CSOM Int32

**Accessibility:** Read/Write

Represents the **minor version** of the design solution package.

###### 3.1.5.17.1.1.3 PackageGuid

**Type:** CSOM GUID

**Accessibility:** Read/Write

Represents a unique identifier for the design solution package.

#### 3.1.5.17.1.1.4 **PackageName**

**Type:** CSOM String

**Accessibility:** Read/Write

Represents the name of the design solution package.

#### 3.1.5.17.1.2 **ObjectPath Properties**

None.

### 3.1.5.18 **Microsoft.SharePoint.Client.Publishing.ImageRendition**

**TypeId:** {CB63161F-1F15-446F-9BA9-AF89AE03CD45}

**ShortName:** SP.Publishing.ImageRendition

The **ImageRendition** object contains the configuration of an image rendition in a specific site (2). An image rendition **MUST** specify a width and/or height and **MUST** have a name associated with it.

The image rendition configuration is used to create copies of an image stored in a site (2) that are cropped and scaled to match the configuration specified.

When a rendition only specifies a width or a height, the output image **MUST** keep the original image aspect ratio.

#### 3.1.5.18.1 **Properties**

##### 3.1.5.18.1.1 **Scalar Properties**

###### 3.1.5.18.1.1.1 **Height**

**Type:** CSOM Int32

**Accessibility:** Read/Write

Gets or sets the image rendition height in pixels.

It **MUST** be greater than zero and less than or equal to 2048 to specify a height.

It **MUST** be 0 or -1 to not specify a height.

If the value is not set, **Width** (section [3.1.5.18.1.1.6](#)) **MUST** be specified.

###### 3.1.5.18.1.1.2 **Id**

**Type:** CSOM Int32

**Accessibility:** Read Only

Gets the unique identifier of the image rendition.

The **Id** **MUST** be assigned by the server when the rendition is first created.

### 3.1.5.18.1.1.3 IdCsom

**Type:** CSOM Int32

**Accessibility:** Read/Write

Internal property used by the server to identify the rendition when making updates.

It MUST be set to the same value as **Id** (section [3.1.5.18.1.1.2](#)).

The client MUST NOT change or set this value.

### 3.1.5.18.1.1.4 Name

**Type:** CSOM String

**Accessibility:** Read/Write

Gets or sets the name for the image rendition.

It MUST NOT be NULL or empty.

### 3.1.5.18.1.1.5 Version

**Type:** CSOM Int32

**Accessibility:** Read Only

Gets the current version of the image rendition.

It MUST be set by the server when the rendition is first created.

It MUST be incremented by the server when the **Width** (section [3.1.5.18.1.1.6](#)) or **Height** (section [3.1.5.18.1.1.1](#)) values of the rendition change.

### 3.1.5.18.1.1.6 Width

**Type:** CSOM Int32

**Accessibility:** Read/Write

Gets or sets the image rendition width in pixels.

MUST be greater than zero and less than or equal to 2048 to specify a width.

MUST be 0 or -1 to not specify a width.

If the value is not set, **Height** (section [3.1.5.18.1.1.1](#)) MUST be specified.

### 3.1.5.18.1.2 ObjectPath Properties

None.

### 3.1.5.19

#### **Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermProviderNameCollection**

**TypeId:** {4C6CC6D4-AEBF-4C8E-9575-BCBB7034AA92}

**ShortName:** SP.Publishing.Navigation.NavigationTermProviderNameCollection

Represents a collection of text strings stored by the **NavigationTerm.ExcludedProviders** property (section [3.1.5.5.1.2.11](#)).

#### **3.1.5.19.1 Properties**

##### **3.1.5.19.1.1 Scalar Properties**

None.

##### **3.1.5.19.1.2 ObjectPath Properties**

None.

#### **3.1.5.19.2 Methods**

##### **3.1.5.19.2.1 Scalar Methods**

###### **3.1.5.19.2.1.1 Add**

**Return Type:** None

Adds a text string to the collection. The value MUST NOT be null.

**Parameters:**

*item*: The text string to be added.

Type: CSOM String

###### **3.1.5.19.2.1.2 Clear**

**Return Type:** None

Removes all strings from the collection.

**Parameters:** None

###### **3.1.5.19.2.1.3 Remove**

**Return Type:** CSOM Boolean

Removes a text string from the collection. If the collection did not contain the specified string, then false is returned; otherwise true is returned.

**Parameters:**

*item*: The text string to be removed.



Type: CSOM String

### 3.1.5.19.2.2 ObjectPath Methods

None.

### 3.1.5.20 Microsoft.SharePoint.Client.Publishing.PublishingPage

**TypeId:** {E361280D-01DC-431A-9823-4AFACD06418B}

**ShortName:** SP.Publishing.PublishingPage

The **PublishingPage** class provides publishing-related behavior for an ASPX page that is stored in a **PublishingWeb** (section [3.1.5.22](#)).

Instantiate this class by using the static **GetPublishingPage** (section [3.1.5.20.2.2.1](#)) method.

This class also directly exposes the underlying **ListItem** ([\[MS-CSOMSPT\]](#) section 3.2.5.87) through the **ListItem** (section [3.1.5.20.1.2.1](#)) property, so that additional **ListItem** functionality can be easily accessed.

#### 3.1.5.20.1 Properties

##### 3.1.5.20.1.1 Scalar Properties

###### 3.1.5.20.1.1.1 EndDate

**Type:** CSOM DateTime

**Accessibility:** Read/Write

Represents the Coordinated Universal Time (UTC) at which the **ListItem** (section [3.1.5.20.1.2.1](#)) should no longer be a **published version**.

###### 3.1.5.20.1.1.2 StartDate

**Type:** CSOM DateTime

**Accessibility:** Read/Write

Represents the Coordinated Universal Time (UTC) at which the **ListItem** (section [3.1.5.20.1.2.1](#)) should start to be a published version.

##### 3.1.5.20.1.2 ObjectPath Properties

###### 3.1.5.20.1.2.1 ListItem

**Type:** Microsoft.SharePoint.Client.ListItem

**Accessibility:** Read Only

Represents the **list item** used to perform operations.

## 3.1.5.20.2 Methods

### 3.1.5.20.2.1 Scalar Methods

#### 3.1.5.20.2.1.1 AddFriendlyUrl

**Return Type:** CSOM String

Add a user-friendly URL for this **PublishingPage** (section [3.1.5.20](#)).

**Exceptions:**

Error Code	Error Type Name	Condition
- 2147024809	<b>ArgumentException</b>	The <i>friendlyUrlSegment</i> MUST NOT be <b>null</b> or empty.
- 2147467261	<b>ArgumentNullException</b>	The <i>editableParent</i> MUST NOT be <b>null</b> .
- 2147024891	<b>UnauthorizedAccessException</b>	The protocol client has insufficient permissions to perform this operation.

**Parameters:**

*friendlyUrlSegment*: The user-friendly text to use as the URL segment.

Type: CSOM String

*editableParent*: The parent **NavigationTermSetItem** (section [3.1.5.8](#)) under which this new friendly URL should be created.

Type: Microsoft.SharePoint.Client.Publishing.Navigation.NavigationTermSetItem

Note that it must be retrieved as an editable item (see *NavigationTermSet.GetAsEditable* (section [3.1.5.7.2.2.4](#)) and *NavigationTerm.GetAsEditable* (section [3.1.5.5.2.2.2](#))).

*doAddToNavigation*: Indicates whether to add the friendly URL into the managed navigation.

Type: CSOM Boolean

#### 3.1.5.20.2.1.2 Schedule

**Return Type:** None

Schedule a **ListItem** ([\[MS-CSOMSPT\]](#) section 3.2.5.87) to automatically be approved (start) and be unpublished (expire) on certain dates.

**Remarks:**

Scheduling a **ListItem** indicates that it has already been effectively approved.

The **StartDate** (section [3.1.5.20.1.1.2](#)) and **EndDate** (section [3.1.5.20.1.1.1](#)) values are used to determine the publication schedule. If the start date is earlier than now, the **ListItem** is published immediately. Otherwise, it is scheduled to publish at a future date. If the end date is specified, the **ListItem** is scheduled to unpublish at a future date.

**Exceptions:**

Error Code	Error Type Name	Condition
-1	<b>SPEXception</b>	Documents can be scheduled only in a minor version-enabled list (1).
-1	<b>SPEXception</b>	Documents can be scheduled only in a list (1) with content approval enabled.
-1	<b>SPEXception</b>	Scheduling a start date for a currently approved item is not supported. Items must be in the minor version state.
-1	<b>SPEXception</b>	Scheduling is not supported in this content database. Use <b>Approve</b> ( <a href="#">[MS-CSOMSPT]</a> section 3.2.5.64.2.1.13) or <b>UnPublish</b> ( <a href="#">[MS-CSOMSPT]</a> section 3.2.5.64.2.1.10) instead.
-2147024891	<b>UnauthorizedAccessException</b>	The protocol client has insufficient permissions to perform this operation.

**Parameters:**

*approvalComment*: Comments to be set when the **ListItem** is approved if the **StartDate** is in the future.

Type: CSOM String

**3.1.5.20.2.2 ObjectPath Methods****3.1.5.20.2.2.1 GetPublishingPage**

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.PublishingPage

Static method to retrieve a **PublishingPage** (section [3.1.5.20](#)) object that wraps the given **ListItem** ([\[MS-CSOMSPT\]](#) section 3.2.5.87) object.

Remarks:

The *sourceListItem* MUST be a non-**null ListItem** object.

**Exceptions:**

Error Code	Error Type Name	Condition
-2147024809	<b>ArgumentException</b>	Invalid <b>ListItem</b> . The <b>ListItem</b> provided is not compatible with a <b>PublishingPage</b> .
-2147467261	<b>ArgumentNullException</b>	The <i>sourceListItem</i> is <b>null</b> , which is not valid.

**Parameters:**

*sourceListItem*: A **ListItem** object for which to retrieve a **PublishingPage** wrapper.

Type: Microsoft.SharePoint.Client.ListItem

### 3.1.5.21 Microsoft.SharePoint.Client.Publishing.PublishingPageInformation

**TypeId:** {68F48886-1E99-4D5A-BE5C-F0F0D53F371B}

**ShortName:** SP.Publishing.PublishingPageInformation

This class is used as an input parameter for methods that create **PublishingPage** (section [3.1.5.20](#)) objects.

**Remarks:**

For details about how to set each value of this class please refer to the method that is using this class as an input parameter.

#### 3.1.5.21.1 Properties

##### 3.1.5.21.1.1 Scalar Properties

###### 3.1.5.21.1.1.1 Name

**Type:** CSOM String

**Accessibility:** Read/Write

The name for a **PublishingPage** (section [3.1.5.20](#)), or null if a default name SHOULD be used.

Defaults to null.

##### 3.1.5.21.1.2 ObjectPath Properties

###### 3.1.5.21.1.2.1 Folder

**Type:** Microsoft.SharePoint.Client.Folder

**Accessibility:** Read/Write

The **Folder** ([\[MS-CSOMSPT\]](#) section 3.2.5.72) object in which the **PublishingPage** (section [3.1.5.20](#)) should be created, or null if a folder SHOULD NOT be used.

Defaults to null.

###### 3.1.5.21.1.2.2 PageLayoutListItem

**Type:** Microsoft.SharePoint.Client.ListItem

**Accessibility:** Read/Write

**ListItem** ([\[MS-CSOMSPT\]](#) section 3.2.5.87) of the page layout to use for the **PublishingPage** (section [3.1.5.20](#)), or null if the default page layout SHOULD be used.

Defaults to null.

### 3.1.5.22 Microsoft.SharePoint.Client.Publishing.PublishingWeb

**TypeId:** {55927360-235B-4ACE-9DCF-C574D6E517EA}

**ShortName:** SP.Publishing.PublishingWeb

The **PublishingWeb** (section [3.1.5.22](#)) class provides publishing behavior for a **Web** ([\[MS-CSOMSPT\]](#) section 3.2.5.143) instance that supports publishing.

The **PublishingWeb** class includes support for creation of **PublishingPage** objects.

Instantiate this class by using the static **GetPublishingWeb** (section [3.1.5.22.2.2.2](#)) method.

This class also directly exposes the underlying **Web** through the **Web** (section [3.1.5.22.1.2.1](#)) property, so that additional **Web** functionality can be easily accessed.

#### 3.1.5.22.1 Properties

##### 3.1.5.22.1.1 Scalar Properties

None.

##### 3.1.5.22.1.2 ObjectPath Properties

###### 3.1.5.22.1.2.1 Web

**Type:** Microsoft.SharePoint.Client.Web

**Accessibility:** Read Only

Gets the **Web** ([\[MS-CSOMSPT\]](#) section 3.2.5.143) object that is wrapped by this **PublishingWeb** (section [3.1.5.22](#)) object.

The **PublishingWeb** class wraps the **Web** class. This property directly exposes the underlying **Web** so that additional **Web** functionality can be easily accessed.

#### 3.1.5.22.2 Methods

##### 3.1.5.22.2.1 Scalar Methods

None.

##### 3.1.5.22.2.2 ObjectPath Methods

###### 3.1.5.22.2.2.1 AddPublishingPage

**Return Type:** Microsoft.SharePoint.Client.Publishing.PublishingPage

Creates a new **PublishingPage** (section [3.1.5.20](#)) in the **PublishingWeb** (section [3.1.5.22](#)).

Remarks:

The following combination of **PublishingPageInformation** (section [3.1.5.21](#)) values can be set:

- **PublishingPageInformation** with all defaults.

- **PublishingPageInformation.Name** and **PublishingPageInformation.PageLayoutListItem**.
- **PublishingPageInformation.Name**, **PublishingPageInformation.PageLayoutListItem** and **PublishingPageInformation.Folder**.

If the combination of **PublishingPageInformation** values is invalid an **ArgumentException** will be thrown indicating the invalid setting.

#### Exceptions:

Error Code	Error Type Name	Condition
-2147024809	<b>ArgumentException</b>	Incorrect combination of <b>PublishingPageInformation</b> settings provided.
-2147024891	<b>UnauthorizedAccessException</b>	The current user has insufficient permissions to perform this operation.

#### Parameters:

*pageInformation*: Indicates the **PublishingPage** information to use when creating a new **PublishingPage**.

Type: Microsoft.SharePoint.Client.Publishing.PublishingPageInformation

### 3.1.5.22.2.2.2 GetPublishingWeb

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.PublishingWeb

Static method to retrieve a **PublishingWeb** instance that wraps the specified **Web** ([\[MS-CSOMSPT\]](#) section 3.2.5.143) object.

#### Exceptions:

Error Code	Error Type Name	Condition
-2147467261	<b>ArgumentNullException</b>	The <i>web</i> is <b>null</b> , which is not valid.

#### Parameters:

*web*: The **Web** object to wrap in a **PublishingWeb** instance.

Type: Microsoft.SharePoint.Client.Web

The *web* MUST NOT be **null**.

### 3.1.5.23 Microsoft.SharePoint.Client.Publishing.ScheduledItem

**TypeId:** {E4353749-4AA8-438C-8A8D-AC8052B60449}

**ShortName:** SP.Publishing.ScheduledItem

Represents a list item that can be scheduled to have a published version during a specified time span.

### 3.1.5.23.1 Properties

#### 3.1.5.23.1.1 Scalar Properties

##### 3.1.5.23.1.1.1 EndDate

**Type:** CSOM DateTime

**Accessibility:** Read/Write

Represents the **Coordinated Universal Time (UTC)** at which the **ListItem** (section [3.1.5.20.1.2.1](#)) should no longer be a published version.

##### 3.1.5.23.1.1.2 StartDate

**Type:** CSOM DateTime

**Accessibility:** Read/Write

Represents the Coordinated Universal Time (UTC) at which the **ListItem** (section [3.1.5.20.1.2.1](#)) should start to be a published version.

#### 3.1.5.23.1.2 ObjectPath Properties

##### 3.1.5.23.1.2.1 ListItem

**Type:** Microsoft.SharePoint.Client.ListItem

**Accessibility:** Read Only

The list item used to perform the scheduling operation.

#### 3.1.5.23.2 Methods

##### 3.1.5.23.2.1 Scalar Methods

###### 3.1.5.23.2.1.1 Schedule

**Return Type:** None

Schedules the **ListItem** (section [3.1.5.20.1.2.1](#)) to become a published version when the current time is between the specified **StartDate** (section [3.1.5.23.1.1.2](#)) and the specified **EndDate** (section [3.1.5.23.1.1.1](#)).

**Parameters:**

*approvalComment*: Represents the comments to describe the transaction of the list item when it becomes a published version.

Type: CSOM String

###### 3.1.5.23.2.2 ObjectPath Methods

None.

### 3.1.5.24 Microsoft.SharePoint.Client.Publishing.SiteImageRenditions

**TypeId:** {324675A4-AA0D-47DB-A937-C2E5DC53457E}

**ShortName:** SP.Publishing.SiteImageRenditions

The **SiteImageRenditions** object exposes the operations to get and modify the **ImageRendition** (section [3.1.5.18](#)) from a site collection.

#### 3.1.5.24.1 Properties

##### 3.1.5.24.1.1 Scalar Properties

None.

##### 3.1.5.24.1.2 ObjectPath Properties

None.

#### 3.1.5.24.2 Methods

##### 3.1.5.24.2.1 Scalar Methods

###### 3.1.5.24.2.1.1 GetRenditions

This method is a static CSOM method.

**Return Type:** CSOM array of Microsoft.SharePoint.Client.Publishing.ImageRendition

Returns the **ImageRendition** (section [3.1.5.18](#)) for the context site collection. If no image renditions exist for the site collection, it MUST return an empty array.

**Parameters:** None

###### 3.1.5.24.2.1.2 SetRenditions

This method is a static CSOM method.

**Return Type:** None

Sets the **ImageRenditions** (section [3.1.5.18](#)) for the context site collection.

**Exceptions:**

Error Code	Error Type Name	Condition
	<b>UnauthorizedAccessException</b>	The current user has insufficient permissions to perform this operation.
	<b>ArgumentException</b>	One of the specified renditions is not valid.

**Parameters:**

*renditions*: An array of **ImageRendition** (section [3.1.5.18](#)) objects to be set as the image renditions for the site collection.



Type: CSOM array of Microsoft.SharePoint.Client.Publishing.ImageRendition

It MUST NOT be NULL.

### 3.1.5.24.2.2 ObjectPath Methods

None.

### 3.1.5.25 Microsoft.SharePoint.Client.Publishing.SiteServicesAddins

**TypeId:** {31738358-BAAD-400C-9678-B5528C432AB5}

**ShortName:** SP.Publishing.SiteServicesAddins

Provides methods that manage site services addins and social plugins.

#### 3.1.5.25.1 Properties

##### 3.1.5.25.1.1 Scalar Properties

None.

##### 3.1.5.25.1.2 ObjectPath Properties

None.

#### 3.1.5.25.2 Methods

##### 3.1.5.25.2.1 Scalar Methods

###### 3.1.5.25.2.1.1 DeletePlugin

This method is a static CSOM method.

**Return Type:** None

Delete a social plugin by its **Title** property (section [3.1.5.13.1.1.3](#)).

**Parameters:**

*pluginName*: The **Title** property (section [3.1.5.13.1.1.3](#)) of the social plugin.

Type: CSOM String

This method requires site designer permission level.

###### 3.1.5.25.2.1.2 DeleteSettings

This method is a static CSOM method.

**Return Type:** None

Delete a site services addin by its **Id** property (section [3.1.5.14.1.1.6](#)).

**Parameters:**

*addinId*: The **Id** property (section [3.1.5.14.1.1.6](#)) of the site services addin.

Type: CSOM GUID

This method requires site owner permission level.

### **3.1.5.25.2.1.3 SetPlugin**

This method is a static CSOM method.

**Return Type:** None

Add a social plugin if it does not exist; otherwise, update it.

**Parameters:**

*plugin*: The social plugin to add or update.

Type: Microsoft.SharePoint.Client.Publishing.AddinPlugin

This method requires site designer permission level.

### **3.1.5.25.2.1.4 SetSettings**

This method is a static CSOM method.

**Return Type:** None

Add the site services addin if it does not exist; otherwise, update it.

**Parameters:**

*addin*: Site services addin to add or update.

Type: Microsoft.SharePoint.Client.Publishing.AddinSettings

This method requires site owner permission level.

## **3.1.5.25.2.2 ObjectPath Methods**

### **3.1.5.25.2.2.1 GetPlugin**

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.AddinPlugin

Gets the setting of a social plugin by its **Title** property (section [3.1.5.13.1.1.3](#)).

**Parameters:**

*pluginName*: The title of the social plugin.

Type: CSOM String

This method requires site designer permission level.

### 3.1.5.25.2.2.2 GetSettings

This method is a static CSOM method.

**Return Type:** Microsoft.SharePoint.Client.Publishing.AddinSettings

Gets the setting of a site services addin by its **Id** property (section [3.1.5.14.1.1.6](#)).

**Parameters:**

*addinId*: The ID property of the site services add-in.

Type: CSOM GUID

This method requires site designer permission level.

### 3.1.5.26 Microsoft.SharePoint.Client.Publishing.PageLayoutCreationInformation

**TypeId:** {D36987C1-DDF0-4E73-8B1A-E7E444EF3D3F}

**ShortName:** SP.Publishing.PageLayoutCreationInformation

A data structure representing information that is required to create a new **page layout**.

#### 3.1.5.26.1 Properties

##### 3.1.5.26.1.1 Scalar Properties

###### 3.1.5.26.1.1.1 AssociatedContentTypeId

**Type:** CSOM String

**Accessibility:** Read/Write

Represents the **content type identifier** associated with the new page layout.

###### 3.1.5.26.1.1.2 MasterPageUrl

**Type:** CSOM String

**Accessibility:** Read/Write

Represents the server-relative URL of the **master page** HTML design to be used to generate the new page layout.

###### 3.1.5.26.1.1.3 NewPageLayoutEditablePath

**Type:** CSOM String

**Accessibility:** Read/Write

Represents the server-relative URL location of the new page layout HTML design.

###### 3.1.5.26.1.1.4 NewPageLayoutNameWithoutExtension

**Type:** CSOM String

**Accessibility:** Read/Write

Represents the name of the page layout.

### 3.1.5.26.1.2 ObjectPath Properties

#### 3.1.5.26.1.2.1 Web

**Type:** Microsoft.SharePoint.Client.Web

**Accessibility:** Read/Write

Represents the site (2) to use to create the new page layout.

### 3.1.5.27 Microsoft.SharePoint.Client.Publishing.PublishingSite

**TypeId:** {8A896237-0D29-4A38-A399-C8FDE4B09D80}

**ShortName:** SP.Publishing.PublishingSite

Represents a publishing site collection.

#### 3.1.5.27.1 Properties

##### 3.1.5.27.1.1 Scalar Properties

None.

##### 3.1.5.27.1.2 ObjectPath Properties

None.

#### 3.1.5.27.2 Methods

##### 3.1.5.27.2.1 Scalar Methods

###### 3.1.5.27.2.1.1 CreatePageLayout

This method is a static CSOM method.

**Return Type:** None

Create a new page layout.

**Parameters:**

*parameters:* Specification of the page layout to create.

Type: Microsoft.SharePoint.Client.Publishing.PageLayoutCreationInformation

###### 3.1.5.27.2.2 ObjectPath Methods

None.

### **3.1.6 Timer Events**

None.

### **3.1.7 Other Local Events**

None.

## 4 Protocol Examples

### 4.1 Create a New Navigation Hierarchy

In this example, a new navigation hierarchy is created. The navigation hierarchy will be created using the menu names, link types, and URLs specified in the following table.

Menu name	Link type	URL
Home	Simple	http://www.contoso.com
Products	Friendly URL	/sites/site1/products
Bicycles	Friendly URL	/sites/site1/products/bicycles
Skis	Friendly URL	/sites/site1/products/skis
Events	Friendly URL	/sites/site1/events
Summer Expo	Friendly URL	/sites/site1/events/summer-expo

The operation is summarized in the following sequence of requests and responses.

The protocol client creates a **TaxonomySession** ([\[MS-EMMCOSOM\]](#) section 3.1.5.15) object, and queries for all **TermStore** ([\[MS-EMMCOSOM\]](#) section 3.1.5.23) objects.

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
  ApplicationName=".NET Library"
  xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="2" ObjectPathId="1" />
    <ObjectPath Id="4" ObjectPathId="3" />
    <ObjectPath Id="6" ObjectPathId="5" />
    <Query Id="7" ObjectPathId="5">
      <Query SelectAllProperties="false">
        <Properties>
          <Property Name="TermStores" SelectAll="true">
            <Query SelectAllProperties="false">
              <Properties />
            </Query>
          </Property>
        </Properties>
      </Query>
    </Query>
  </Actions>
  <ObjectPaths>
    <StaticProperty Id="1" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
    <Property Id="3" ParentId="1" Name="Site" />
    <Constructor Id="5" TypeId="{981cbc68-9edc-4f8d-872f-71146fcbb84f}">
      <Parameters>
        <Parameter ObjectPathId="3" />
        <Parameter Type="Boolean">true</Parameter>
      </Parameters>
    </Constructor>
  </ObjectPaths>
```

</Request>

The protocol server returns a collection of **TermStore** objects. In this case, there is only one.

#### Response:

```
[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },2,{
    "IsNull":false
  },4,{
    "IsNull":false
  },6,{
    "IsNull":false
  },7,{
    "_ObjectType_":"SP.Taxonomy.TaxonomySession","_ObjectIdentity_":"fec14c62-7c3b-481b-851b-c80d7802b224:ta:", "TermStores":{
    "_ObjectType_":"SP.Taxonomy.TermStoreCollection","_Child_Items_":[
      {
        "_ObjectType_":"SP.Taxonomy.TermStore","_ObjectIdentity_":"fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ==", "ContentTypePublishingHub":null, "DefaultLanguage":1033, "Id":"\\Guid(293aa14c-2740-4a96-bb05-8b3018900399) \\/", "IsOnline":true, "Languages":[
          1033
        ], "Name":"Managed Metadata Service Application Proxy", "WorkingLanguage":1033
      }
    ]
  }
}
]
```

The protocol client calls the **TermStore.GetSiteCollectionGroup** (as specified in [\[MS-EMMCSOM\]](#) section 3.1.5.23.2.2.8) method to retrieve a **TermGroup** object. Then it calls the **TermGroup.CreateTermSet** (as specified in [\[MS-EMMCSOM\]](#) section 3.1.5.18.2.2.1) method to create a new navigation term set. The name of the new term set is "Navigation Demo".

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="30" ObjectPathId="29" />
    <ObjectIdentityQuery Id="31" ObjectPathId="29" />
    <ObjectPath Id="33" ObjectPathId="32" />
    <ObjectIdentityQuery Id="34" ObjectPathId="32" />
    <Method Name="CommitAll" Id="35" ObjectPathId="11" />
  </Actions>
  <ObjectPaths>
    <Method Id="29" ParentId="11" Name="GetSiteCollectionGroup">
      <Parameters>
        <Parameter ObjectPathId="3" />
        <Parameter Type="Boolean">true</Parameter>
      </Parameters>
    </Method>
    <Method Id="32" ParentId="29" Name="CreateTermSet">
```

```

    <Parameters>
      <Parameter Type="String">Navigation Demo</Parameter>
      <Parameter Type="Guid">{e742cc24-69e6-428e-81ca-156119ff0979}</Parameter>
      <Parameter Type="Int32">1033</Parameter>
    </Parameters>
  </Method>
  <Identity Id="11" Name="fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ=="
/>
  <Property Id="3" ParentId="1" Name="Site" />
  <StaticProperty Id="1" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
</ObjectPaths>
</Request>

```

The protocol server returns the identifier of the new **TermSet** object.

#### Response:

```

[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },30,{
    "IsNull":false
  },31,{
    "_ObjectIdentity_":"fec14c62-7c3b-481b-851b-
c80d7802b224:gr:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMc="
  },33,{
    "IsNull":false
  },34,{
    "_ObjectIdentity_":"fec14c62-7c3b-481b-851b-
c80d7802b224:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5"
  }
]

```

The protocol client calls the **NavigationTermSet.GetAsResolvedByWeb** (section [3.1.5.7.2.2.8](#)) method to create a new **NavigationTermSet** (section [3.1.5.7](#)) object using the global navigation taxonomy provider. It sets the **IsNavigationTermSet** (section [3.1.5.7.1.1.2](#)) property to true, and the **TargetUrlForChildTerms.Value** (section [3.1.5.5.1.1.3](#)) property to "`~site/Pages/Topics/Topic.aspx`".

#### Request:

```

<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="39" ObjectPathId="38" />
    <ObjectPath Id="41" ObjectPathId="40" />
    <ObjectIdentityQuery Id="42" ObjectPathId="40" />
    <SetProperty Id="43" ObjectPathId="40" Name="IsNavigationTermSet">
      <Parameter Type="Boolean">true</Parameter>
    </SetProperty>
    <ObjectPath Id="45" ObjectPathId="44" />
    <SetProperty Id="46" ObjectPathId="44" Name="Value">
      <Parameter Type="String">~site/Pages/Topics/Topic.aspx</Parameter>
    </SetProperty>
    <Method Name="CommitAll" Id="47" ObjectPathId="11" />
  </Actions>
</Request>

```



```

    </Actions>
    <ObjectPaths>
      <Property Id="38" ParentId="1" Name="Web" />
      <StaticMethod Id="40" Name="GetAsResolvedByWeb" TypeId="{5ed5ae4c-8e92-4e56-af6e-
d349611614d8}">
        <Parameters>
          <Parameter ObjectPathId="32" />
          <Parameter ObjectPathId="38" />
          <Parameter Type="String">GlobalNavigationTaxonomyProvider</Parameter>
        </Parameters>
      </StaticMethod>
      <Property Id="44" ParentId="40" Name="TargetUrlForChildTerms" />
      <Identity Id="11" Name="fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ=="
/>
      <StaticProperty Id="1" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
      <Identity Id="32" Name="fec14c62-7c3b-481b-851b-
c80d7802b224:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ/w15" />
    </ObjectPaths>
  </Request>

```

The protocol server returns the identifier of the new **NavigationTermSet** object.

#### Response:

```

[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },39,{
    "IsNull":false
  },41,{
    "IsNull":false
  },42,{
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fw15;\u00
2fsites\u002fpub1||`1|0"
  },45,{
    "IsNull":false
  }
]

```

Finally the protocol client creates the navigation hierarchy of **NavigationTerm** (section [3.1.5.5](#)) objects. It calls the **NavigationTermSet.CreateTerm** (section [3.1.5.7.2.2.1](#)) and **NavigationTerm.CreateTerm** (section [3.1.5.5.2.2.1](#)) methods on objects to construct each node in the hierarchy. For the "Home" menu item, it sets the **SimpleLinkUrl** (section [3.1.5.5.1.1.8](#)) property to "http://www.contoso.com". All other **NavigationTerm** objects are configured to use a friendly URL.

#### Request:

```

<Request AddExpandFieldTypesuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="50" ObjectPathId="49" />
    <ObjectIdentityQuery Id="51" ObjectPathId="49" />
    <SetProperty Id="52" ObjectPathId="49" Name="SimpleLinkUrl">
      <Parameter Type="String">http://www.contoso.com</Parameter>
    </SetProperty>
  </Actions>
</Request>

```

```

</SetProperty>
<ObjectPath Id="54" ObjectPathId="53" />
<ObjectIdentityQuery Id="55" ObjectPathId="53" />
<ObjectPath Id="57" ObjectPathId="56" />
<ObjectIdentityQuery Id="58" ObjectPathId="56" />
<ObjectPath Id="60" ObjectPathId="59" />
<ObjectIdentityQuery Id="61" ObjectPathId="59" />
<ObjectPath Id="63" ObjectPathId="62" />
<ObjectIdentityQuery Id="64" ObjectPathId="62" />
<ObjectPath Id="66" ObjectPathId="65" />
<ObjectIdentityQuery Id="67" ObjectPathId="65" />
<Method Name="CommitAll" Id="68" ObjectPathId="11" />
</Actions>
<ObjectPaths>
  <Method Id="49" ParentId="40" Name="CreateTerm">
    <Parameters>
      <Parameter Type="String">Home</Parameter>
      <Parameter Type="Enum">2</Parameter>
      <Parameter Type="Guid">{33e12d60-2332-4612-917d-48b2896699b9}</Parameter>
    </Parameters>
  </Method>
  <Method Id="53" ParentId="40" Name="CreateTerm">
    <Parameters>
      <Parameter Type="String">Products</Parameter>
      <Parameter Type="Enum">1</Parameter>
      <Parameter Type="Guid">{87faa433-4e3e-4500-aa5b-e04330b12acd}</Parameter>
    </Parameters>
  </Method>
  <Method Id="56" ParentId="53" Name="CreateTerm">
    <Parameters>
      <Parameter Type="String">Bicycles</Parameter>
      <Parameter Type="Enum">1</Parameter>
      <Parameter Type="Guid">{da5e60a5-d339-44c9-8c8f-a7e6eaa2d587}</Parameter>
    </Parameters>
  </Method>
  <Method Id="59" ParentId="53" Name="CreateTerm">
    <Parameters>
      <Parameter Type="String">Skis</Parameter>
      <Parameter Type="Enum">1</Parameter>
      <Parameter Type="Guid">{d30a51bf-a71b-45b5-ae1e-945327df6f49}</Parameter>
    </Parameters>
  </Method>
  <Method Id="62" ParentId="40" Name="CreateTerm">
    <Parameters>
      <Parameter Type="String">Events</Parameter>
      <Parameter Type="Enum">1</Parameter>
      <Parameter Type="Guid">{7408f146-623e-4384-a53a-ec0a8c39a17a}</Parameter>
    </Parameters>
  </Method>
  <Method Id="65" ParentId="62" Name="CreateTerm">
    <Parameters>
      <Parameter Type="String">Summer Expo</Parameter>
      <Parameter Type="Enum">1</Parameter>
      <Parameter Type="Guid">{2236b9e8-5d6e-42fc-bf47-49a02af1ca4e}</Parameter>
    </Parameters>
  </Method>
<Identity Id="11" Name="fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ=="
/>

```

```

    <Identity Id="40" Name="c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ/wl5;/sites/pu
b1||`1|0" />
  </ObjectPaths>
</Request>

```

The protocol server returns the IDs of the new **NavigationTerm** objects.

#### Response:

```

[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  }, 50, {
    "IsNull":false
  }, 51, {
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5YC3hM
zIjEkaRfUiYiWaZuQ==;\u002fsites\u002fpub1||`1|0"
  }, 54, {
    "IsNull":false
  }, 55, {
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5M6T6h
z5OAEWqW+BDMLEqzQ==;\u002fsites\u002fpub1||`1|0"
  }, 57, {
    "IsNull":false
  }, 58, {
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5pWBe2
jnTyUSMj6fm6qLVhw==;\u002fsites\u002fpub1||`1|0"
  }, 60, {
    "IsNull":false
  }, 61, {
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5v1EK0
xuntUWuHpRTJ99vSQ==;\u002fsites\u002fpub1||`1|0"
  }, 63, {
    "IsNull":false
  }, 64, {
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5RvEId
D5ihEOlOuwKjDmheg==;\u002fsites\u002fpub1||`1|0"
  }, 66, {
    "IsNull":false
  }, 67, {
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl56Lk2I
m5d\u002fEK\u002fR0mgKvHKTg==;\u002fsites\u002fpub1||`1|0"
  }
]

```

## 4.2 Resolve URLs

In this example, URLs for navigation terms are resolved and returned to the protocol client. This is a useful operation in scenarios where the protocol client needs custom control over navigation. An

example is where the protocol client is a mobile application that is rendering the menus for a small screen.

Using the menu items described in section 4.1, this example shows how to resolve the URLs for each top-level menu item: Home, Products, and Events.

The operation is summarized in the following sequence of requests and responses.

The protocol client creates a **TaxonomySession** ([MS-EMMCSON] section 3.1.5.15) object, and queries for all **TermStore** ([MS-EMMCSON] section 3.1.5.23) objects.

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="2" ObjectPathId="1" />
    <ObjectPath Id="4" ObjectPathId="3" />
    <ObjectPath Id="6" ObjectPathId="5" />
    <Query Id="7" ObjectPathId="5">
      <Query SelectAllProperties="false">
        <Properties>
          <Property Name="TermStores" SelectAll="true">
            <Query SelectAllProperties="false">
              <Properties />
            </Query>
          </Property>
        </Properties>
      </Query>
    </Query>
  </Actions>
  <ObjectPaths>
    <StaticProperty Id="1" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
    <Property Id="3" ParentId="1" Name="Site" />
    <Constructor Id="5" TypeId="{981cbc68-9edc-4f8d-872f-71146fcbb84f}">
      <Parameters>
        <Parameter ObjectPathId="3" />
        <Parameter Type="Boolean">true</Parameter>
      </Parameters>
    </Constructor>
  </ObjectPaths>
</Request>
```

The protocol server returns a collection of **TermStore** objects. In this case, there is only one.

#### Response:

```
[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },2,{
    "IsNull":false
  },4,{
    "IsNull":false
  },6,{
    "IsNull":false
  },7,{
```

```

    "_ObjectType_": "SP.Taxonomy.TaxonomySession", "_ObjectIdentity_": "fec14c62-7c3b-481b-851b-c80d7802b224:ta:", "TermStores": {
      "_ObjectType_": "SP.Taxonomy.TermStoreCollection", "_Child_Items_": [
        {
          "_ObjectType_": "SP.Taxonomy.TermStore", "_ObjectIdentity_": "fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ=", "ContentTypePublishingHub": null, "DefaultLanguage": 1033, "Id": "\\Guid(293aa14c-2740-4a96-bb05-8b3018900399)\\", "IsOnline": true, "Languages": [
            1033
          ], "Name": "Managed Metadata Service Application Proxy", "WorkingLanguage": 1033
        }
      ]
    }
  }
}

```

The protocol client calls the **TermStore.GetTermSet** ([\[MS-EMMCSOM\]](#) section 3.1.5.23.2.2.6) passing the identifier of the "Navigation Demo" term set. It calls the **NavigationTermSet.GetAsResolvedByWeb** (section [3.1.5.7.2.2.8](#)) method to get the **NavigationTermSet** (section [3.1.5.7](#)) wrapper for the term set. Finally, it queries for all child **NavigationTerm** (section [3.1.5.5](#)) objects and their **Title** (section [3.1.5.5.1.2.9](#)) properties to be loaded into the new **NavigationTermSet** object.

**Request:**

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="13" ObjectPathId="12" />
    <ObjectIdentityQuery Id="14" ObjectPathId="12" />
    <ObjectPath Id="16" ObjectPathId="15" />
    <ObjectPath Id="18" ObjectPathId="17" />
    <ObjectIdentityQuery Id="19" ObjectPathId="17" />
    <Query Id="20" ObjectPathId="17">
      <Query SelectAllProperties="false">
        <Properties>
          <Property Name="Terms">
            <Query SelectAllProperties="false">
              <Properties />
            </Query>
            <ChildItemQuery SelectAllProperties="false">
              <Properties>
                <Property Name="Title">
                  <Query SelectAllProperties="false">
                    <Properties>
                      <Property Name="Value" ScalarProperty="true" />
                    </Properties>
                  </Query>
                </Property>
              </Properties>
            </ChildItemQuery>
          </Property>
        </Properties>
      </Query>
    </Query>
  </Actions>
  <ObjectPaths>
    <Method Id="12" ParentId="11" Name="GetTermSet">
```

```

    <Parameters>
      <Parameter Type="Guid">{e742cc24-69e6-428e-81ca-156119ff0979}</Parameter>
    </Parameters>
  </Method>
  <Property Id="15" ParentId="1" Name="Web" />
  <StaticMethod Id="17" Name="GetAsResolvedByWeb" TypeId="{5ed5ae4c-8e92-4e56-af6e-
d349611614d8}">
    <Parameters>
      <Parameter ObjectPathId="12" />
      <Parameter ObjectPathId="15" />
      <Parameter Type="String">GlobalNavigationTaxonomyProvider</Parameter>
    </Parameters>
  </StaticMethod>
  <Identity Id="11" Name="fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ=="
/>
  <StaticProperty Id="1" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
</ObjectPaths>
</Request>

```

The protocol server returns the identifier of the new **NavigationTermSet** object and loads it with the three child **NavigationTerm** objects: Events, Home, and Products.

### Response:

```

[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },13,{
    "IsNull":false
  },14,{
    "_ObjectIdentity_":"fec14c62-7c3b-481b-851b-
c80d7802b224:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fw15"
  },16,{
    "IsNull":false
  },18,{
    "IsNull":false
  },19,{
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fw15;\u00
2fsites\u002fpub1||`1|0"
  },20,{
    "_ObjectType_":"SP.Publishing.Navigation.NavigationTermSet","_ObjectIdentity_":"c9a9c738-
3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fw15;\u00
2fsites\u002fpub1||`1|0","Terms":{
    "_ObjectType_":"SP.Publishing.Navigation.NavigationTermCollection","_Child_Items_":[
      {
        "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm","_ObjectIdentity_":"c9a9c738-3bb7-
475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fw15Ho9S
KGXCuqbdjasJELQ==;\u002fsites\u002fpub1||`1|0","Title":{
        "_ObjectType_":"SP.Publishing.CustomizableString","Value":"Events"
      }
    ],{
        "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm","_ObjectIdentity_":"c9a9c738-3bb7-
475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fw15uTfpl
XVHWESrCvYXjTJJQA==;\u002fsites\u002fpub1||`1|0","Title":{
        "_ObjectType_":"SP.Publishing.CustomizableString","Value":"Home"
      }
    }
  }
]

```

```

    }
  }, {
    "_ObjectType_": "SP.Publishing.Navigation.NavigationTerm", "_ObjectIdentity_": "c9a9c738-3bb7-475b-83f4-7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFWEZ\u002fwl5M6T6hz5OAEWqW+BDMLEqzQ==;\u002fsites\u002fpubl||`1|0", "Title": {
      "_ObjectType_": "SP.Publishing.CustomizableString", "Value": "Products"
    }
  }
]
}
}
]

```

The protocol client iterates through the three child **NavigationTerm** objects. It calls the **GetResolvedTargetUrl** (section [3.1.5.5.2.1.4](#)) method on the Events **NavigationTerm** object.

#### Request:

```

<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <Method Name="GetResolvedTargetUrl" Id="34" ObjectPathId="28">
      <Parameters>
        <Parameter Type="Null" />
        <Parameter Type="Array" />
      </Parameters>
    </Method>
  </Actions>
  <ObjectPaths>
    <Identity Id="28" Name="c9a9c738-3bb7-475b-83f4-7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFWEZ/wl58Ho9SKGXCUqqbdjzasJELQ==;/sites/publ||`1|0" />
  </ObjectPaths>
</Request>

```

The protocol server returns the resolved URL for Events.

#### Response:

```

[
  {
    "SchemaVersion": "15.0.0.0", "LibraryVersion": "15.0.3410.1000", "ErrorInfo": null
  }, 34, "\u002fsites\u002fpubl\u002fPages\u002fTopics\u002fTopic.aspx?TermStoreId=293aa14c-2740-4a96-bb05-8b3018900399&TermSetId=e742cc24-69e6-428e-81ca-156119ff0979&TermId=483d7af0-97a1-4a09-aa6d-d8f36ac2442d"
]

```

Next, the protocol client calls the **GetResolvedTargetUrl** method on the Home **NavigationTerm** object.

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <Method Name="GetResolvedTargetUrl" Id="35" ObjectPathId="30">
      <Parameters>
        <Parameter Type="Null" />
        <Parameter Type="Array" />
      </Parameters>
    </Method>
  </Actions>
  <ObjectPaths>
    <Identity Id="30" Name="c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdFlGK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ/wl5uTfplXVHWE
SrCvYXjTJJQA==;/sites/publ||`l|0" />
  </ObjectPaths>
</Request>
```

Because the Home menu item is a simple link URL, the protocol server returns null.

#### Response:

```
[
{
  "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
},35,null
]
```

Finally the protocol client calls the **GetResolvedTargetUrl** method on the **Products NavigationTerm** object.

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <Method Name="GetResolvedTargetUrl" Id="36" ObjectPathId="32">
      <Parameters>
        <Parameter Type="Null" />
        <Parameter Type="Array" />
      </Parameters>
    </Method>
  </Actions>
  <ObjectPaths>
    <Identity Id="32" Name="c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdFlGK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ/wl5M6T6hz5OAE
WqW+BDMLEqzQ==;/sites/publ||`l|0" />
  </ObjectPaths>
</Request>
```

The protocol server returns the resolved URL for Products.

#### Response:

```
[
```



```
{
  "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
},36,"\\u002fsites\\u002fpub1\\u002fPages\\u002fTopics\\u002fTopic.aspx?TermStoreId=293aa14c-2740-4a96-bb05-8b3018900399&TermSetId=e742cc24-69e6-428e-81ca-156119ff0979&TermId=87faa433-4e3e-4500-aa5b-e04330b12acd"
]
```

### 4.3 Changing a View

In this example, the protocol client applies a **NavigationTermSetView** (section 3.1.5.9) object to a **NavigationTermSet** (section 3.1.5.7) object to exclude deprecated terms. This example uses the same menu items that are specified in section 4.1. The only change is that the **NavigationTerm** (section 3.1.5.5) object that represents the Events menu item is deprecated.

In the first query for **NavigationTerm** objects, the protocol client will receive the **NavigationTerm** objects for the Home, Products, and Events menu items. The protocol client then creates a **NavigationTermSetView** object that excludes deprecated terms. After applying the new **NavigationTermSetView** object, and querying again, the protocol client will receive only the **NavigationTerm** objects for Home and Products.

The operation is summarized in the following sequence of requests and responses.

The protocol client creates a **TaxonomySession** ([MS-EMMCSON] section 3.1.5.15) object, and queries for all **TermStore** ([MS-EMMCSON] section 3.1.5.23) objects.

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="2" ObjectPathId="1" />
    <ObjectPath Id="4" ObjectPathId="3" />
    <ObjectPath Id="6" ObjectPathId="5" />
    <Query Id="7" ObjectPathId="5">
      <Query SelectAllProperties="false">
        <Properties>
          <Property Name="TermStores" SelectAll="true">
            <Query SelectAllProperties="false">
              <Properties />
            </Query>
          </Property>
        </Properties>
      </Query>
    </Query>
  </Actions>
  <ObjectPaths>
    <StaticProperty Id="1" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
    <Property Id="3" ParentId="1" Name="Site" />
    <Constructor Id="5" TypeId="{981cbc68-9edc-4f8d-872f-71146fcbb84f}">
      <Parameters>
        <Parameter ObjectPathId="3" />
        <Parameter Type="Boolean">true</Parameter>
      </Parameters>
    </Constructor>
  </ObjectPaths>
```

</Request>

The protocol server returns a collection of **TermStore** objects. In this case, there is only one.

#### Response:

```
[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },2,{
    "IsNull":false
  },4,{
    "IsNull":false
  },6,{
    "IsNull":false
  },7,{
    "_ObjectType_":"SP.Taxonomy.TaxonomySession","_ObjectIdentity_":"fec14c62-7c3b-481b-851b-c80d7802b224:ta:", "TermStores":{
    "_ObjectType_":"SP.Taxonomy.TermStoreCollection","_Child_Items_":[
    {
      "_ObjectType_":"SP.Taxonomy.TermStore","_ObjectIdentity_":"fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUANlkq7BYswGJADmQ==","ContentTypePublishingHub":null,"DefaultLanguage":1033,"Id":"\\Guid(293aa14c-2740-4a96-bb05-8b3018900399) \\/","IsOnline":true,"Languages":[
      1033
    ],"Name":"Managed Metadata Service Application Proxy","WorkingLanguage":1033
    }
    ]
    }
  }
]
```

The protocol client calls the **GetAsResolvedByWeb** (section [3.1.5.7.2.2.8](#)) method to obtain a **NavigationTermSet** object. The protocol client queries to load the child **NavigationTerm** objects for the **NavigationTermSet**.

#### Request:

```
<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="13" ObjectPathId="12" />
    <ObjectIdentityQuery Id="14" ObjectPathId="12" />
    <ObjectPath Id="16" ObjectPathId="15" />
    <ObjectPath Id="18" ObjectPathId="17" />
    <ObjectIdentityQuery Id="19" ObjectPathId="17" />
    <Query Id="20" ObjectPathId="17">
      <Query SelectAllProperties="false">
        <Properties>
          <Property Name="Terms">
            <Query SelectAllProperties="false">
              <Properties />
            </Query>
          </Property>
          <ChildItemQuery SelectAllProperties="false">
            <Properties>
              <Property Name="Title">
                <Query SelectAllProperties="false">
```

```

        <Properties>
          <Property Name="Value" ScalarProperty="true" />
        </Properties>
      </Query>
    </Property>
    <Property Name="IsDeprecated" ScalarProperty="true" />
  </Properties>
</ChildItemQuery>
</Property>
</Properties>
</Query>
</Query>
</Actions>
<ObjectPaths>
  <Method Id="12" ParentId="11" Name="GetTermSet">
    <Parameters>
      <Parameter Type="Guid">{e742cc24-69e6-428e-81ca-156119ff0979}</Parameter>
    </Parameters>
  </Method>
  <Property Id="15" ParentId="1" Name="Web" />
  <StaticMethod Id="17" Name="GetAsResolvedByWeb" TypeId="{5ed5ae4c-8e92-4e56-af6e-d349611614d8}">
    <Parameters>
      <Parameter ObjectPathId="12" />
      <Parameter ObjectPathId="15" />
      <Parameter Type="String">GlobalNavigationTaxonomyProvider</Parameter>
    </Parameters>
  </StaticMethod>
  <Identity Id="11" Name="fec14c62-7c3b-481b-851b-c80d7802b224:st:TKE6KUAnlkq7BYswGJADmQ==" />
</ObjectPaths>
</Request>

```

The protocol server returns the new **NavigationTermSet**, and 3 **NavigationTerm** objects. The 3 **NavigationTerm** objects represent the 3 menu items: Home, Products, and Events.

### Response:

```

[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
  },13,{
    "IsNull":false
  },14,{
    "_ObjectIdentity_":"fec14c62-7c3b-481b-851b-c80d7802b224:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5"
  },16,{
    "IsNull":false
  },18,{
    "IsNull":false
  },19,{
    "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5;\u002fsites\u002fpubl|'|0"
  },20,{
    "_ObjectType_":"SP.Publishing.Navigation.NavigationTermSet","_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-

```

```
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRwDf1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFEZ\u002fwl5;\u002fsites\u002fpubl||`1|0","Title":{
  "_ObjectType_":"SP.Publishing.Navigation.NavigationTermCollection", "_Child_Items_":[
    {
      "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm", "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRwDf1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFEZ\u002fwl5Ez3RQ
qmod02eII2HbRGvzA==;\u002fsites\u002fpubl||`1|0","Title":{
  "_ObjectType_":"SP.Publishing.CustomizableString", "Value":"Events"
}, "IsDeprecated":true
}, {
  "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm", "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRwDf1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFEZ\u002fwl5fNhsJ
pWSxk22iH3zNA65Tw==;\u002fsites\u002fpubl||`1|0","Title":{
  "_ObjectType_":"SP.Publishing.CustomizableString", "Value":"Home"
}, "IsDeprecated":false
}, {
  "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm", "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRwDf1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFEZ\u002fwl5M6T6h
z5OAEWqW+BDMLEqzQ==;\u002fsites\u002fpubl||`1|0","Title":{
  "_ObjectType_":"SP.Publishing.CustomizableString", "Value":"Products"
}, "IsDeprecated":false
}
]
}
}
]
```

The protocol client calls the **CreateEmptyInstance** (section [3.1.5.9.2.2.1](#)) method to create a new **NavigationTermSetView** object. Then it sets the **ExcludeDeprecatedTerms** (section [3.1.5.9.1.1.1](#)) property to true on the new object. Then it calls **GetWithNewView** (section [3.1.5.7.2.2.6](#)) to obtain a new **NavigationTermSet** object that will exclude deprecated terms.

**Request:**

```
<Request AddExpandFieldTypesSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <ObjectPath Id="35" ObjectPathId="34" />
    <SetProperty Id="36" ObjectPathId="34" Name="ExcludeDeprecatedTerms">
      <Parameter Type="Boolean">true</Parameter>
    </SetProperty>
    <ObjectPath Id="38" ObjectPathId="37" />
    <ObjectIdentityQuery Id="39" ObjectPathId="37" />
  </Actions>
  <ObjectPaths>
    <StaticMethod Id="34" Name="CreateEmptyInstance" TypeId="{097234e9-47da-431f-bd12-
173c296b187b}" />
    <Method Id="37" ParentId="17" Name="GetWithNewView">
      <Parameters>
        <Parameter ObjectPathId="34" />
      </Parameters>
    </Method>
    <Identity Id="17" Name="c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRwDf1GK2tPuhG99p0rWMckzELn5mmOQoHKFWFEZ/wl5;/sites/pu
b1||`10" />
  </ObjectPaths>
</Request>
```

```

    </ObjectPaths>
</Request>

```

The protocol server returns the identifier of the new **NavigationTermSetView** object.

#### Response:

```

[
{
  "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
},35,{
  "IsNull":false
},38,{
  "IsNull":false
},39,{
  "_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5;|||1
"
}
]

```

The protocol client queries to load the child **NavigationTerm** objects that match the new **NavigationTermSetView** object.

#### Request:

```

<Request AddExpandoFieldTypeSuffix="true" SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0"
ApplicationName=".NET Library"
xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009">
  <Actions>
    <Query Id="41" ObjectPathId="37">
      <Query SelectAllProperties="false">
        <Properties>
          <Property Name="Terms">
            <Query SelectAllProperties="false">
              <Properties />
            </Query>
          <ChildItemQuery SelectAllProperties="false">
            <Properties>
              <Property Name="Title">
                <Query SelectAllProperties="false">
                  <Properties>
                    <Property Name="Value" ScalarProperty="true" />
                  </Properties>
                </Query>
              </Property>
              <Property Name="IsDeprecated" ScalarProperty="true" />
            </Properties>
          </ChildItemQuery>
        </Properties>
      </Query>
    </Query>
  </Actions>
  <ObjectPaths>
    <Identity Id="37" Name="c9a9c738-3bb7-475b-83f4-
7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ/wl5;|||1" />

```

```
</ObjectPaths>
</Request>
```

The protocol server returns 2 **NavigationTerm** objects that represent the menu items Home, and Products. Because the new view excludes deprecated terms, the **NavigationTerm** for Events is not returned.

### Response:

```
[
{
  "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3410.1000","ErrorInfo":null
},41,{
  "_ObjectType_":"SP.Publishing.Navigation.NavigationTermSet","_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-7edbc963099e:nt:se:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5;|||1",
  "Terms":{
    "_ObjectType_":"SP.Publishing.Navigation.NavigationTermCollection","_Child_Items_":[
      {
        "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm","_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5fNhsJpWSxk22iH3zNA65Tw==;|||1",
        "Title":{
          "_ObjectType_":"SP.Publishing.CustomizableString","Value":"Home"
        },
        "IsDeprecated":false
      },{
        "_ObjectType_":"SP.Publishing.Navigation.NavigationTerm","_ObjectIdentity_":"c9a9c738-3bb7-475b-83f4-7edbc963099e:nt:te:TKE6KUAnlkq7BYswGJADmeRWdF1GK2tPuhG99p0rWMckzELn5mmOQoHKFWEZ\u002fwl5M6T6hz5OAEWqW+BDMLEqzQ==;|||1",
        "Title":{
          "_ObjectType_":"SP.Publishing.CustomizableString","Value":"Products"
        },
        "IsDeprecated":false
      }
    ]
  }
}
]
```

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.

## 6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft SharePoint Server 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.



## 7 Change Tracking

This section identifies changes that were made to the [MS-PUBCSOM] protocol document between the July 2014 and October 2014 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- The removal of a document from the documentation set.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.

- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">3.1.5.5.2.1.3 GetResolvedDisplayUrl</a>	Added a description for the browserQueryString parameter.	N	New content added.
<a href="#">3.1.5.5.2.2.1 CreateTerm</a>	Added a description for the termName, linkType, and termId parameters.	N	New content added.
<a href="#">3.1.5.7.2.1.1 GetResolvedDisplayUrl</a>	Added a description for the browserQueryString parameter.	N	New content added.
<a href="#">3.1.5.7.2.2.1 CreateTerm</a>	Added a description for the termName, linkType, and termId parameters.	N	New content added.

## 8 Index

### A

Abstract data model  
[server](#) 16  
[Applicability](#) 14

### C

[Capability negotiation](#) 14  
[Change tracking](#) 97  
[changing a view example](#) 89  
[create a new navigation hierarchy example](#) 78

### D

Data model - abstract  
[server](#) 16

### E

Examples  
[changing a view](#) 89  
[create a new navigation hierarchy](#) 78  
[resolve URLs](#) 83

### F

[Fields - vendor-extensible](#) 14

### G

[Glossary](#) 11

### H

Higher-layer triggered events  
[server](#) 16

### I

[Implementer - security considerations](#) 95  
[Index of security parameters](#) 95  
[Informative references](#) 13  
Initialization  
[server](#) 16  
[Introduction](#) 11

### M

Message processing  
[server](#) 16  
Messages  
[syntax](#) 15  
[transport](#) 15

### N

[Normative references](#) 12

### O

Other local events  
[server](#) 77  
[Overview \(synopsis\)](#) 13

### P

[Parameters - security index](#) 95  
[Preconditions](#) 14  
[Prerequisites](#) 14  
[Product behavior](#) 96

### R

[References](#) 12  
[informative](#) 13  
[normative](#) 12  
[Relationship to other protocols](#) 13  
[resolve URLs example](#) 83

### S

Security  
[implementer considerations](#) 95  
[parameter index](#) 95  
Sequencing rules  
[server](#) 16  
Server  
[abstract data model](#) 16  
[higher-layer triggered events](#) 16  
[initialization](#) 16  
[message processing](#) 16  
[other local events](#) 77  
[sequencing rules](#) 16  
[timer events](#) 77  
[timers](#) 16  
[Standards assignments](#) 14  
[Syntax](#) 15

### T

Timer events  
[server](#) 77  
Timers  
[server](#) 16  
[Tracking changes](#) 97  
[Transport](#) 15  
Triggered events - higher-layer  
[server](#) 16

### V

[Vendor-extensible fields](#) 14  
[Versioning](#) 14