

# [MS-PWPHP]: PowerPoint Web Presentation Handler Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
10/08/2012	1.0	New	Released new document.
02/11/2013	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/30/2013	1.1	Minor	Clarified the meaning of the technical content.
11/18/2013	1.1	No change	No changes to the meaning, language, or formatting of the technical content.
02/10/2014	1.1	No change	No changes to the meaning, language, or formatting of the technical content.
04/30/2014	1.1	No change	No changes to the meaning, language, or formatting of the technical content.
07/31/2014	1.1	No change	No changes to the meaning, language, or formatting of the technical content.

# Table of Contents

<b>1 Introduction</b> .....	<b>4</b>
1.1 Glossary .....	4
1.2 References .....	4
1.2.1 Normative References .....	4
1.2.2 Informative References .....	5
1.3 Overview .....	5
1.4 Relationship to Other Protocols .....	5
1.5 Prerequisites/Preconditions .....	5
1.6 Applicability Statement .....	6
1.7 Versioning and Capability Negotiation .....	6
1.8 Vendor-Extensible Fields .....	6
1.9 Standards Assignments .....	6
<b>2 Messages</b> .....	<b>7</b>
2.1 Transport .....	7
2.2 Message Syntax .....	7
2.2.1 Request Syntax .....	7
2.2.1.1 Request HTTP Version .....	7
2.2.1.2 Request HTTP Method .....	7
2.2.1.3 Request-URI Syntax .....	7
2.2.1.3.1 Query Segment .....	7
2.2.1.4 Request Header Syntax .....	8
2.2.2 Response Syntax .....	8
2.2.2.1 Response Status .....	8
2.2.2.2 Response Header Syntax .....	8
2.2.2.3 Response Body Syntax .....	8
2.2.2.3.1 Slide .....	8
2.2.2.3.2 CT_Paragraph .....	8
2.2.2.3.3 ST_Alignment .....	9
<b>3 Protocol Details</b> .....	<b>10</b>
3.1 Common Details .....	10
3.1.1 Abstract Data Model .....	10
3.1.2 Timers .....	10
3.1.3 Initialization .....	10
3.1.4 Higher-Layer Triggered Events .....	10
3.1.5 Message Processing Events and Sequencing Rules .....	10
3.1.6 Timer Events .....	10
3.1.7 Other Local Events .....	10
<b>4 Protocol Examples</b> .....	<b>11</b>
<b>5 Security</b> .....	<b>12</b>
5.1 Security Considerations for Implementers .....	12
5.2 Index of Security Parameters .....	12
<b>6 Appendix A: Product Behavior</b> .....	<b>13</b>
<b>7 Change Tracking</b> .....	<b>14</b>
<b>8 Index</b> .....	<b>15</b>

# 1 Introduction

The PowerPoint Web Presentation Handler Protocol enables a protocol client to obtain information about presentation content on a protocol server.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but does not contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**Hypertext Transfer Protocol (HTTP)**  
**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**

The following terms are defined in [\[MS-OFCGLOS\]](#):

**horizontal alignment**  
**horizontal indent**  
**JavaScript Object Notation (JSON)**  
**permission**  
**presentation**  
**presentation slide**  
**Request-URI**  
**website**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[ISO/IEC29500-1:2011] ISO/IEC, "Information Technology -- Document description and processing languages -- Office Open XML File Formats -- Part 1: Fundamentals and Markup Language Reference", ISO/IEC 29500-1:2011, 2011, [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=59575](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=59575)

[RFC1738] Berners-Lee, T., Masinter, L., and McCahill, M., "Uniform Resource Locators (URL)", RFC 1738, December 1994, <http://www.ietf.org/rfc/rfc1738.txt>

[RFC1945] Berners-Lee, T., Fielding, R., and Frystyk, H., "Hypertext Transfer Protocol -- HTTP/1.0", RFC 1945, May 1996, <http://www.ietf.org/rfc/rfc1945.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2396] Berners-Lee, T., Fielding, R., and Masinter, L., "Uniform Resource Identifiers (URI): Generic Syntax", RFC 2396, August 1998, <http://www.ietf.org/rfc/rfc2396.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[RFC4627] Crockford, D., "The application/json Media Type for Javascript Object Notation (JSON)", RFC 4627, July 2006, <http://www.ietf.org/rfc/rfc4627.txt>

## 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".


## 1.3 Overview

This protocol enables a protocol client to send a request to retrieve information about **presentation** content from the protocol server. To facilitate this, the protocol allows the protocol client to request specific pieces of content from a presentation stored on the protocol server.

## 1.4 Relationship to Other Protocols

This protocol uses **HTTP** 1.0, as described in [\[RFC1945\]](#), HTTP 1.1, as described in [\[RFC2616\]](#), or **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#), for message transport.

The following diagram shows the underlying messaging and transport stack used by the protocol:

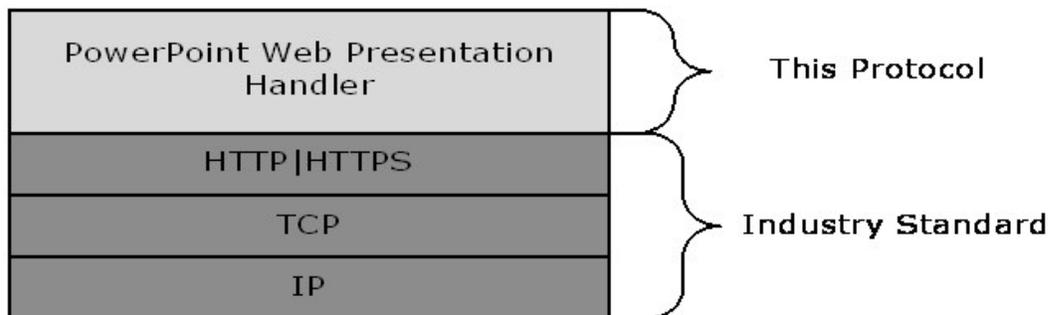

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

This protocol operates against a **website (1)** identified by a URL that is known by protocol clients. The protocol server endpoint is formed by appending /p/presentation.ashx to the URL of the website (1), for example: <http://www.contoso.com/p/presentation.ashx>.

The protocol assumes that authentication been performed by the underlying protocols.

## **1.6 Applicability Statement**

This protocol is designed to retrieve information about presentations that are stored on the protocol server.

## **1.7 Versioning and Capability Negotiation**

Versioning and capability negotiation for this protocol is handled by either the HTTP protocols as described in [\[RFC1945\]](#) and [\[RFC2616\]](#), or the HTTPS protocol as described in [\[RFC2818\]](#).

## **1.8 Vendor-Extensible Fields**

None.

## **1.9 Standards Assignments**

None.

## 2 Messages

### 2.1 Transport

All protocol messages MUST use HTTP 1.0 (as specified in [\[RFC1945\]](#)), HTTP 1.1 (as specified in [\[RFC2616\]](#)), or the HTTPS protocol (as specified in [\[RFC2818\]](#)) for message transport. Additionally, protocol servers MUST support JSON [\[RFC4627\]](#) over HTTP and HTTPS.

### 2.2 Message Syntax

All messages in this protocol MUST be valid HTTP requests and responses as specified in [\[RFC2616\]](#).

#### 2.2.1 Request Syntax

##### 2.2.1.1 Request HTTP Version

The HTTP version MUST be either HTTP 1.0 or HTTP 1.1, as specified in [\[RFC2616\]](#) section 3.1.

##### 2.2.1.2 Request HTTP Method

The protocol client MUST use the HTTP GET method as specified in [\[RFC2616\]](#) section 9.

##### 2.2.1.3 Request-URI Syntax

The **Request-URI** MUST adhere to the following rules:

- The Request-URI sent in the HTTP request MUST be a valid URI as specified in [\[RFC1738\]](#).
- The Scheme Component MUST be either HTTP or HTTPS, as specified in [\[RFC2396\]](#) section 3.1.
- The protocol client MUST generate the Request-URI by appending "/p/presentation.ashx" to the website (1) URI.

The Query Component of the Request-URI MUST be present and follow the rules specified in section [2.2.1.3.1](#) and [\[RFC2396\]](#) section 3.4.

##### 2.2.1.3.1 Query Segment

The Query Component of the Request-URI MUST contain three query string parameters with the following names:

- pid
- ct
- wdSlideId

The value for each query string parameter MUST be a non-empty string and a valid query string parameter value as specified in [\[RFC2396\]](#). The Query Component MUST NOT contain query string parameters other than the three required parameters, as specified in [\[RFC2396\]](#) section 3.4. The protocol server MUST NOT require the query string parameters to appear in any particular order.

The protocol client and protocol server MUST interpret the query string parameters as defined in the following table.

Parameter name	Description
pid	The identifier of the presentation to retrieve information about.
ct	The value for this parameter MUST be set to "slide".
wdSlideId	The identifier of the <b>presentation slide</b> to retrieve information about, as specified in <a href="#">[ISO/IEC29500-1:2011]</a> section 19.7.13.

#### 2.2.1.4 Request Header Syntax

The protocol client MUST provide valid Message Headers as specified in [\[RFC2616\]](#) section 4.2.

### 2.2.2 Response Syntax

#### 2.2.2.1 Response Status

The protocol server MUST provide a valid status code as specified in [\[RFC2616\]](#) section 6.1.1.

#### 2.2.2.2 Response Header Syntax

The protocol server MUST provide valid message headers as specified in [\[RFC2616\]](#) section 4.2.

#### 2.2.2.3 Response Body Syntax

The protocol server MUST provide a valid message body as specified in [\[RFC2616\]](#) section 4.3.

The content of the message body MUST be a **JSON** array for **Slide** as specified in section [2.2.2.3.1](#).

##### 2.2.2.3.1 Slide

A JSON object that specifies a presentation slide.

*Members:*

**FHidden:** A JSON true or false that specifies if the presentation slide is hidden.

**Id:** A JSON int that specifies the identifier of the presentation slide.

**Notes:** A JSON array of **CT\_Paragraph**, as specified in section [2.2.2.3.2](#), that specifies the notes for the presentation slide.

**Thumbnail:** A JSON string that specifies the URL of the thumbnail for the presentation slide.

**Title:** A JSON string that specifies the title of the presentation slide.

##### 2.2.2.3.2 CT\_Paragraph

A JSON object that specifies a paragraph with simple format information.

*Members:*

**t:** A JSON string that specifies the concatenation of the text of all the runs of the paragraph.

**level:** A JSON int that specifies level of **horizontal indent**. It ranges from 0 to 255.

**buChar:** A JSON string that specifies the bullet.

**align:** An **ST\_Alignment**, as specified in section [2.2.2.3.3](#), that specifies the **horizontal alignment** of text.

**rtl:** A JSON true or false that specifies whether the text goes from right to left.

### 2.2.2.3.3 ST\_Alignment

This type specifies the horizontal alignment of text. Must be one of the following values:

Parameter name	Description
l	The text is left aligned.
c	The text is center aligned.
r	The text is right aligned.
j	The text is justified aligned.
d	The text is distributed aligned.

## 3 Protocol Details

### 3.1 Common Details

The protocol client sends an HTTP request to the protocol server as specified in section [2.2.1](#). The protocol server responds with an HTTP response as specified in section [2.2.2](#).

#### 3.1.1 Abstract Data Model

None.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Higher-Layer Triggered Events

None.

#### 3.1.5 Message Processing Events and Sequencing Rules

The message processing events and sequencing rules are as follows:

- The protocol client MUST generate a valid Request-URI as specified in section [2.2.1.3](#).
- The protocol client MUST issue the HTTP GET request to the generated URL.
- The protocol server MUST verify that the client has **permission** to access the specified URL and MUST return the appropriate Status Code as specified in [\[RFC2616\]](#) section 6.1.1 if the protocol client does not have permissions. The client MUST be prepared to accept all status codes specified in [\[RFC2616\]](#) section 6.1.1.
- After performing any implementation specific processing, the protocol server MUST return a valid HTTP response as specified in section [2.2.2](#).

#### 3.1.6 Timer Events

None.

#### 3.1.7 Other Local Events

None.

## 4 Protocol Examples

The following is an example of this protocol usage. In this example, the identifier of the presentation is the following:

```
http://www.contoso.com/documents/loremipsum.pptx
```

The URL generated by the protocol client to get information about slide 256 is as follows:

```
http://  
www.contoso.com/p/presentation.ashx?Pid=http://www.contoso.com/documents/loremipsum.pptx&ct=s  
lide&wdSlideId=256
```

### HTTP request

```
GET http://  
www.contoso.com/p/presentation.ashx?Pid=http://www.contoso.com/documents/loremipsum.pptx&ct=s  
lide&wdSlideId=256 HTTP/1.1  
Accept: */*  
Host: contoso.com  
Connection: Keep-Alive
```

### HTTP response

```
HTTP/1.1 200 OK  
Cache-Control: no-cache, no-store  
Pragma: no-cache  
Content-Type: application/json; charset=UTF-8  
Expires: -1  
Vary: Accept-Encoding  
Server: Microsoft-IIS/7.5  
P3P: CP="CAO DSP COR ADMA DEV CONi TELi CUR PSA PSD TAI IVDi OUR SAMi BUS DEM NAV STA UNI COM  
INT PHY ONL FIN PUR"  
X-Content-Type-Options: nosniff  
X-Download-Options: noopen  
Content-Disposition: attachment  
X-AspNet-Version: 4.0.30319  
X-Powered-By: ASP.NET  
Date: Fri, 07 Sep 2012 17:51:48 GMT  
Content-Length: 1437
```

```
[{"FHHidden":false,"Id":256,"Notes":[{"align":0,"buChar":"","level":1,"rtl":false,"t":"Lorem  
ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut  
labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco  
laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in  
voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat  
cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est  
laborum."}], "Thumbnail": ".\\imagehandler.ashx?  
Pid=http://www.contoso.com/documents/loremipsum.pptx&Rid=img256.png", "Title": "Lorem ipsum  
dolor sit amet"}]
```

## 5 Security

### 5.1 Security Considerations for Implementers

When using this protocol over an untrusted network, an HTTPS (as described in [\[RFC2818\]](#)) connection can help mitigate risks of protocol messages being intercepted or tampered with.

The information contained in the presentation identified by the pid query string parameter is likely to be security sensitive. For example, it could contain confidential data such as financial records. Therefore it is recommended that the protocol server establish that the protocol client has permissions to access the presentation.

There are no restrictions on the protocol server regarding the message header content type, as described in [\[RFC2616\]](#) section 14.17. Therefore, it is recommended that the protocol client checks the Content-Type to avoid running any executable file that could pose a security risk.

### 5.2 Index of Security Parameters

None.

## 6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft PowerPoint 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 7 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

## 8 Index

### A

[Applicability](#) 6

### C

[Capability negotiation](#) 6

[Change tracking](#) 14

### E

Examples  
[overview](#) 11

### F

[Fields - vendor-extensible](#) 6

### G

[Glossary](#) 4

### I

[Implementer - security considerations](#) 12

[Index of security parameters](#) 12

[Informative references](#) 5

[Introduction](#) 4

### M

[Message processing](#) 10

[Message syntax](#) 7

Messages

[request header syntax message](#) 8

[request HTTP method message](#) 7

[request HTTP version message](#) 7

[request URI syntax message](#) 7

[response body syntax message](#) 8

[response header syntax message](#) 8

[response status message](#) 8

[syntax](#) 7

[transport](#) 7

### N

[Normative references](#) 4

### O

[Overview \(synopsis\)](#) 5

### P

[Parameters - security index](#) 12

[Preconditions](#) 5

[Prerequisites](#) 5

[Product behavior](#) 13

### R

[References](#) 4

[informative](#) 5

[normative](#) 4

[Relationship to other protocols](#) 5

[Request header syntax message](#) 8

[Request HTTP method message](#) 7

[Request HTTP version message](#) 7

[Request URI syntax message](#) 7

[Response body syntax message](#) 8

[Response header syntax message](#) 8

[Response status message](#) 8

### S

Security

[implementer considerations](#) 12

[parameter index](#) 12

[Sequencing rules](#) 10

[Standards assignments](#) 6

### T

[Tracking changes](#) 14

[Transport](#) 7

### V

[Vendor-extensible fields](#) 6

[Versioning](#) 6