

# [MS-RGWS]: Response Group Service Web Service Protocol Specification

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

**Preliminary Documentation.** This Open Specification provides documentation for past and current releases and/or for the pre-release (beta) version of this technology. This Open Specification is final documentation for past or current releases as specifically noted in the document, as applicable; it is preliminary documentation for the pre-release (beta) versions. Microsoft will release final documentation in connection with the commercial release of the updated or new version of this technology. As the documentation may change between this preliminary version and the final version of this technology, there are risks in relying on preliminary documentation. To the extent that you incur additional development obligations or any other costs as a result of relying on this preliminary documentation, you do so at your own risk.

## Revision Summary

Date	Revision History	Revision Class	Comments
03/31/2010	0.1	Major	Initial Availability
04/30/2010	0.2	Editorial	Revised and edited the technical content
06/07/2010	0.3	Editorial	Revised and edited the technical content
06/29/2010	0.4	Editorial	Changed language and formatting in the technical content.
07/23/2010	0.4	No change	No changes to the meaning, language, or formatting of the technical content.
09/27/2010	1.0	Major	Significantly changed the technical content.
11/15/2010	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	1.0	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	2.0	Major	Significantly changed the technical content.

# Table of Contents

<b>1 Introduction .....</b>	<b>6</b>
1.1 Glossary .....	6
1.2 References .....	7
1.2.1 Normative References .....	7
1.2.2 Informative References .....	7
1.3 Protocol Overview (Synopsis) .....	8
1.4 Relationship to Other Protocols .....	8
1.5 Prerequisites/Preconditions .....	9
1.6 Applicability Statement .....	9
1.7 Versioning and Capability Negotiation .....	9
1.8 Vendor-Extensible Fields .....	9
1.9 Standards Assignments .....	9
<b>2 Messages.....</b>	<b>10</b>
2.1 Transport .....	10
2.2 Common Message Syntax .....	10
2.2.1 Namespaces .....	10
2.2.2 Messages .....	10
2.2.3 Elements .....	10
2.2.4 Complex Types .....	10
2.2.4.1 AcdAgent .....	11
2.2.4.2 ArrayOfGuid .....	11
2.2.5 Simple Types .....	11
2.2.5.1 guid .....	12
2.2.6 Attributes .....	12
2.2.7 Groups .....	12
2.2.8 Attribute Groups .....	12
2.2.9 Common Data Structures .....	12
<b>3 Protocol Details .....</b>	<b>13</b>
3.1 RgsAgentService Server Details .....	13
3.1.1 Abstract Data Model .....	13
3.1.2 Timers .....	13
3.1.3 Initialization .....	13
3.1.4 Message Processing Events and Sequencing Rules .....	13
3.1.4.1 GetActiveResponseGroups .....	14
3.1.4.1.1 Messages .....	14
3.1.4.1.1.1 GetActiveResponseGroupsSoapIn .....	14
3.1.4.1.1.2 GetActiveResponseGroupsSoapOut .....	14
3.1.4.1.2 Elements .....	14
3.1.4.1.2.1 GetActiveResponseGroups .....	15
3.1.4.1.2.2 GetActiveResponseGroupsResponse .....	15
3.1.4.1.3 Complex Types .....	15
3.1.4.1.3.1 ArrayOfResponseGroupEntry .....	15
3.1.4.1.3.2 ResponseGroupEntry .....	16
3.1.4.1.4 Simple Types .....	16
3.1.4.1.5 Attributes .....	16
3.1.4.1.6 Groups .....	16
3.1.4.1.7 Attribute Groups .....	16
3.1.4.2 GetAgent .....	16

3.1.4.2.1	Messages .....	17
3.1.4.2.1.1	GetAgentSoapIn .....	17
3.1.4.2.1.2	GetAgentSoapOut.....	17
3.1.4.2.2	Elements.....	17
3.1.4.2.2.1	GetAgent.....	17
3.1.4.2.2.2	GetAgentResponse .....	18
3.1.4.2.3	Complex Types .....	18
3.1.4.2.4	Simple Types.....	18
3.1.4.2.5	Attributes.....	18
3.1.4.2.6	Groups.....	18
3.1.4.2.7	Attribute Groups .....	18
3.1.4.3	GetGroups .....	18
3.1.4.3.1	Messages .....	18
3.1.4.3.1.1	GetGroupsSoapIn .....	19
3.1.4.3.1.2	GetGroupsSoapOut .....	19
3.1.4.3.2	Elements.....	19
3.1.4.3.2.1	GetGroups .....	19
3.1.4.3.2.2	GetGroupsResponse.....	19
3.1.4.3.3	Complex Types .....	20
3.1.4.3.3.1	AcdGroup .....	20
3.1.4.3.3.2	ArrayOfAcdAgent.....	21
3.1.4.3.3.3	ArrayOfAcdGroup .....	21
3.1.4.3.4	Simple Types .....	21
3.1.4.3.4.1	SignInState .....	21
3.1.4.3.5	Attributes.....	22
3.1.4.3.6	Groups.....	22
3.1.4.3.7	Attribute Groups .....	22
3.1.4.4	IsAgent .....	22
3.1.4.4.1	Messages .....	22
3.1.4.4.1.1	IsAgentSoapIn .....	22
3.1.4.4.1.2	IsAgentSoapOut .....	22
3.1.4.4.2	Elements.....	22
3.1.4.4.2.1	IsAgent .....	23
3.1.4.4.2.2	IsAgentResponse.....	23
3.1.4.4.3	Complex Types .....	23
3.1.4.4.4	Simple Types.....	23
3.1.4.4.5	Attributes.....	23
3.1.4.4.6	Groups.....	23
3.1.4.4.7	Attribute Groups .....	24
3.1.4.5	SignIn .....	24
3.1.4.5.1	Messages .....	24
3.1.4.5.1.1	SignInSoapIn .....	24
3.1.4.5.1.2	SignInSoapOut .....	24
3.1.4.5.2	Elements.....	24
3.1.4.5.2.1	SignIn .....	24
3.1.4.5.2.2	SignInResponse .....	25
3.1.4.5.3	Complex Types .....	25
3.1.4.5.4	Simple Types.....	25
3.1.4.5.5	Attributes.....	25
3.1.4.5.6	Groups.....	25
3.1.4.5.7	Attribute Groups .....	25
3.1.4.6	SignInMultiple .....	25
3.1.4.6.1	Messages .....	26

3.1.4.6.1.1	SignInMultipleSoapIn .....	26
3.1.4.6.1.2	SignInMultipleSoapOut .....	26
3.1.4.6.2	Elements .....	26
3.1.4.6.2.1	SignInMultiple .....	26
3.1.4.6.2.2	SignInMultipleResponse .....	27
3.1.4.6.3	Complex Types .....	27
3.1.4.6.4	Simple Types .....	27
3.1.4.6.5	Groups .....	27
3.1.4.6.6	Attributes .....	27
3.1.4.6.7	Attribute Groups .....	27
3.1.4.7	SignOut .....	27
3.1.4.7.1	Messages .....	28
3.1.4.7.1.1	SignOutSoapIn .....	28
3.1.4.7.1.2	SignOutSoapOut .....	28
3.1.4.7.2	Elements .....	28
3.1.4.7.2.1	SignOut .....	28
3.1.4.7.2.2	SignOutResponse .....	29
3.1.4.7.3	Complex Types .....	29
3.1.4.7.4	Simple Types .....	29
3.1.4.7.5	Attributes .....	29
3.1.4.7.6	Groups .....	29
3.1.4.7.7	Attribute Groups .....	29
3.1.4.8	SignOutMultiple .....	29
3.1.4.8.1	Messages .....	29
3.1.4.8.1.1	SignOutMultipleSoapIn .....	30
3.1.4.8.1.2	SignOutMultipleSoapOut .....	30
3.1.4.8.2	Elements .....	30
3.1.4.8.2.1	SignOutMultiple .....	30
3.1.4.8.2.2	SignOutMultipleResponse .....	30
3.1.4.8.3	Complex Types .....	31
3.1.4.8.4	Simple Types .....	31
3.1.4.8.5	Attributes .....	31
3.1.4.8.6	Groups .....	31
3.1.4.8.7	Attribute Groups .....	31
3.1.5	Timer Events .....	31
3.1.6	Other Local Events .....	31
<b>4</b>	<b>Protocol Examples .....</b>	<b>32</b>
4.1	Successful GetActiveResponseGroups Request and Response .....	32
4.2	Successful SignIn Request and Response .....	32
4.3	Unsuccessful SignOut Request and Response .....	33
<b>5</b>	<b>Security .....</b>	<b>34</b>
5.1	Security Considerations for Implementers .....	34
5.2	Index of Security Parameters .....	34
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>35</b>
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>42</b>
<b>8</b>	<b>Change Tracking .....</b>	<b>43</b>
<b>9</b>	<b>Index .....</b>	<b>48</b>

# 1 Introduction

This document specifies the Response Group Web Service protocol, which enables third parties to build clients for the purpose of sign in or sign out an agent, find information about which response group an agent belongs to.

The service exposes several methods to enable agents to interact with the system. For example, one method enables the agent to sign in and out of agent groups, enabling control if the service can send the agent calls.

This document specifies the procedure to access agent information.

Sections 1.8, 2, and 3 of this specification are normative and contain RFC 2119 language. Sections 1.5 and 1.9 are also normative but cannot contain RFC 2119 language. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**authentication**

**GUID**

**Hypertext Transfer Protocol (HTTP)**

**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**

**Secure Sockets Layer (SSL)**

**security identifier (SID)**

The following terms are defined in [\[MS-OFCGLOS\]](#):

**agent**

**in-band provisioning**

**Session Initiation Protocol (SIP) address**

**Simple Object Access Protocol (SOAP)**

**SOAP body**

**SOAP envelope**

**SOAP message**

**Uniform Resource Locator (URL)**

**Web service**

**Web Services Description Language (WSDL)**

**XML namespace**

**XML namespace prefix**

**XML schema**

The following terms are specific to this document:

**response group:** An object that is used to route and queue incoming calls to a collection of agents who were designated to handle calls from a Response Group Service.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OCAUTHWS] Microsoft Corporation, "[OC Authentication Web Service Protocol Specification](#)".

[MS-SIPREGE] Microsoft Corporation, "[Session Initiation Protocol \(SIP\) Registration Extensions](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Ed., Beech, D., Ed., Maloney, M., Ed., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmleschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmleschema-2-20010502/>

### 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>

### 1.3 Protocol Overview (Synopsis)

This protocol enables a protocol client to access **agent** information exposed by a protocol server. The protocol client issues requests to a protocol server. The protocol server receives, processes, and responds to the requests of protocol clients.

This protocol provides the following functionality:

- Indicates if a user is an agent.
- Retrieves agent information.

The protocol client can get information about the current user from the protocol server through the **Web service** described in this protocol.

- Retrieves the list of agent groups.

The protocol client can retrieve the list of agent groups the currently logged-in user is part of. The object obtained contains information about the group.

- Signs in and signs out of agent groups.

The protocol client can send commands to the Web service described in this protocol to sign in and sign out the user from agent groups.

- Retrieves the list of active **response groups**.


The protocol client can retrieve the list of response groups the user is part of through agent groups. The object obtained contains information about the response groups.

The Web service methods are documented in detail in section [6](#).

### 1.4 Relationship to Other Protocols

This protocol uses the **Simple Object Access Protocol (SOAP)** message protocol for formatting requests and responses, as described in [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#). It transmits messages using the **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#).

The following figure shows the underlying messaging and transport stack that the protocol uses.

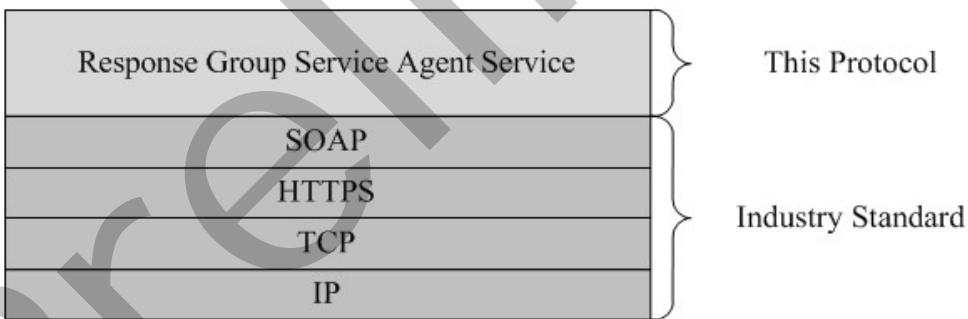

**Figure 1: Underlying message and transport stack**

## **1.5 Prerequisites/Preconditions**

The protocol client can obtain the **Uniform Resource Locator (URL)** of the protocol server by using the mechanism described in [\[MS-SIPREGE\]](#) section 2.2.2.

The protocol requires that the protocol client has the correct permissions to call the methods on the protocol server.

The protocol client and server are described in [\[MS-OCAUTHWS\]](#).

This protocol requires **authentication (2)** as described in [MS-OCAUTHWS].

## **1.6 Applicability Statement**

This protocol is used to retrieve agent information.

## **1.7 Versioning and Capability Negotiation**

None.

## **1.8 Vendor-Extensible Fields**

None.

## **1.9 Standards Assignments**

None.

## 2 Messages

### 2.1 Transport

Protocol servers MUST support SOAP over HTTPS. The client can obtain the address of the protocol server via an **in-band provisioning** response, as specified in [\[MS-SIPREG\]](#) section 2.2.2.5.1.

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **WSDL**, as specified in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This protocol specifies and references **XML namespace** using the mechanisms specified in [\[XMLNS\]](#). Although this document associates an **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

The following table specifies which XML namespace prefix is associated with each XML namespace that is used.

Prefix	Namespace URI	Reference
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
s	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a> <a href="#">[XMLSCHEMA2]</a>
tns	<a href="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy</a>	
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
s1	<a href="http://microsoft.com/wsdl/types/">http://microsoft.com/wsdl/types/</a>	

#### 2.2.2 Messages

This specification does not define any common WSDL message definitions.

#### 2.2.3 Elements

This specification does not define any common XML schema element definitions.

#### 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
<b>AcdAgent</b>	Information about the authenticated user.

Complex type	Description
<b>ArrayOfGuid</b>	A list of <b>GUID</b> instances.

### 2.2.4.1 AcdAgent

The **AcdAgent** complex type contains information related to an authenticated user.

```
<s:complexType name="AcdAgent">
  <s:sequence>
    <s:element minOccurs="1" maxOccurs="1" name="Id" type="s1:guid" />
    <s:element minOccurs="0" maxOccurs="1" name="UserSid" type="s:string" />
    <s:element minOccurs="0" maxOccurs="1" name="SipAddress" type="s:string" />
    <s:element minOccurs="0" maxOccurs="1" name="DisplayName" type="s:string" />
  </s:sequence>
</s:complexType>
```

**Id:** Unique identifier identifying the user.

**UserSid:** The **security identifier (SID)** of the authenticated user.

**SipAddress:** Is built from the **Session Initiation Protocol (SIP) address** of the authenticated user plus the "sip:" prefix.

**DisplayName:** Display name of the authenticated user.

Elements having *minOccurs="0"* are not present in case we fail to retrieve the information related to the authenticated user.

### 2.2.4.2 ArrayOfGuid

The **ArrayOfGuid** complex type is a list of **GUIDs** representing groups.

```
<s:complexType name="ArrayOfGuid">
  <s:sequence>
    <s:element minOccurs="0" maxOccurs="unbounded" name="guid" type="s1:guid" />
  </s:sequence>
</s:complexType>
```

**guid:** Identifier of a group. It is not present in case we fail to retrieve the information related to the authenticated user.

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
<b>SignInState</b>	The sign-in state of an agent in a given group.

### **2.2.5.1 guid**

**Namespace:** <http://microsoft.com/wsdl/types/>

A GUID that is defined as follows.

```
<xs:simpleType name="guid">
  <xs:restriction base="xs:string">
    <xs:pattern value="[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}" />
  </xs:restriction>
</xs:simpleType>
```

### **2.2.6 Attributes**

This specification does not define any common XML schema attribute definitions.

### **2.2.7 Groups**

This specification does not define any common XML schema group definitions.

### **2.2.8 Attribute Groups**

This specification does not define any common XML schema attribute group definitions.

### **2.2.9 Common Data Structures**

This specification does not define any common XML schema data structures.

### 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

There is no order in which methods are required to be called, except that at least one of the sign in methods **SignIn** and **SignInMultiple** MUST precede the sign out methods **SignOut** and **SignOutMultiple**. The sign in and sign out methods **SignIn**, **SignInMultiple**, **SignOut**, and **SignOutMultiple** require as input valid GUIDs that can be retrieved using the **GetGroups** method. If the user is not an agent, all the methods from the protocol having a Boolean as a return value will return false.

Except where specified, protocol clients SHOULD interpret HTTP status codes returned by the protocol server as specified in [RFC2616] (Section 10, Status Code Definitions). This protocol allows protocol servers to perform implementation-specific authorization checks and notify protocol clients of authorization faults using HTTP status codes.

#### 3.1 RgsAgentService Server Details

This protocol does not require the protocol server to keep any states and information about the protocol client, unless required by the authentication (2) mechanism defined in [\[MS-OCAUTHWS\]](#) section 3.

##### 3.1.1 Abstract Data Model

None.

##### 3.1.2 Timers

None.

##### 3.1.3 Initialization

None.

##### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of WSDL operations as defined by this specification:

Operation	Description
<b>GetActiveResponseGroups</b>	Retrieve the list of active response groups the authenticated user is part of.
<b>GetAgent</b>	Retrieve the information about the authenticated agent.
<b>GetGroups</b>	Retrieve the groups the authenticated user is part of.
<b>IsAgent</b>	Indicate if the authenticated user is an agent or not.
<b>SignIn</b>	Sign in the authenticated user to the specified group.
<b>SignInMultiple</b>	Sign in the authenticated user to the specified groups.

Operation	Description
<b>SignOut</b>	Sign out the authenticated user from the specified group.
<b>SignOutMultiple</b>	Sign out the authenticated user from the specified groups.

### 3.1.4.1 GetActiveResponseGroups

The following excerpt from this protocol's WSDL specifies the messages that constitute the **GetActiveResponseGroups** operation.[<1>](#)

```
<wsdl:operation name="GetActiveResponseGroups">
  <wsdl:input message="tns:GetActiveResponseGroupsSoapIn" />
  <wsdl:output message="tns:GetActiveResponseGroupsSoapOut" />
</wsdl:operation>
```

#### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetActiveResponseGroupsSoapIn</b>	Request from a client to retrieve the list of response groups the user is part of.
<b>GetActiveResponseGroupsSoapOut</b>	Response to a request to retrieve the list of response groups the user is part of.

##### 3.1.4.1.1.1 GetActiveResponseGroupsSoapIn

The **GetActiveResponseGroupsSoapIn** **SOAP message** is a request that is sent from the protocol client to retrieve the list of response groups the user is part of. The request information MUST be captured in the **GetActiveResponseGroups** element in the **SOAP body** of the message. The **GetActiveResponseGroups** element is specified in section [3.1.4.1.2.1](#).

##### 3.1.4.1.1.2 GetActiveResponseGroupsSoapOut

The **GetActiveResponseGroupsSoapOut** SOAP message is a response that is sent by the protocol server. This message contains information about the response groups the user is part of. The information is included in the complex type **ArrayOfResponseGroupEntry**, which is specified in section [2.2.4.6](#). If the user is not an agent, the response SHOULD NOT contain any complex type.

#### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetActiveResponseGroups</b>	The overall container of the request to retrieve response groups.

Element	Description
<b>GetActiveResponseGroupsResponse</b>	The overall container of the response to the request to retrieve response groups.

### 3.1.4.1.2.1 GetActiveResponseGroups

The **GetActiveResponseGroups** element is the overall container of the information that is sent in the SOAP request to retrieve the response groups the user is part of. A protocol client MUST adhere to the following schema.

```
<s:element name="GetActiveResponseGroups">
  <s:complexType />
</s:element>
```

### 3.1.4.1.2.2 GetActiveResponseGroupsResponse

The **GetActiveResponseGroupsResponse** element is the overall container in the response to the **GetActiveResponseGroups** request. **GetActiveResponseGroups** encapsulates the information about the authenticated user. A protocol server MUST adhere to the following schema for this element within the **SOAP envelope**.

```
<s:element name="GetActiveResponseGroupsResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="GetActiveResponseGroupsResult"
        type="tns:ArrayOfResponseGroupEntry" />
    </s:sequence>
  </s:complexType>
</s:element>
GetActiveResponseGroupsResult: An array of ResponseGroupEntry (section 3.1.4.1.3.2).
```

### 3.1.4.1.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>ArrayOfResponseGroupEntry</b>	A list of <b>ResponseGroupEntry</b> type objects.
<b>ResponseGroupEntry</b>	Information about a response group.

### 3.1.4.1.3.1 ArrayOfResponseGroupEntry

The **ArrayOfResponseGroupEntry** complex type is a list of **ResponseGroupEntry** types the current authenticated user is part of.

```
<s:complexType name="ArrayOfResponseGroupEntry">
  <s:sequence>
    <s:element minOccurs="0" maxOccurs="unbounded" name="ResponseGroupEntry" nillable="true"
      type="tns:ResponseGroupEntry"/>
  </s:sequence>
```

```
</s:complexType>
```

**ResponseGroupEntry:** See section [3.1.4.1.3.2](#).

### 3.1.4.1.3.2 ResponseGroupEntry

The **ResponseGroupEntry** complex type contains information related to a response group.

```
<s:complexType name="ResponseGroupEntry">
  <s:sequence>
    <s:element minOccurs="0" maxOccurs="1" name="Uri" type="s:string" />
    <s:element minOccurs="0" maxOccurs="1" name="DisplayName" type="s:string" />
    <s:element minOccurs="1" maxOccurs="1" name="IsAnonymized" type="s:boolean" />
    <s:element minOccurs="1" maxOccurs="1" name="IsOutboundAllowed" type="s:boolean" />
  </s:sequence>
</s:complexType>
```

**Uri:** Represents the Session Initiation Protocol (SIP) address of the response group plus the "sip:" prefix.

**DisplayName:** Display name of the response group.

**IsAnonymized:** **Boolean** indicating if the response group supports anonymization.

**IsOutboundAllowed:** **Boolean** indicating if the response group allows its agent to make outbound calls.

Elements having *minOccurs="0"* are not present in case we fail to retrieve the information related to the authenticated user.

### 3.1.4.1.4 Simple Types

None.

### 3.1.4.1.5 Attributes

None.

### 3.1.4.1.6 Groups

None.

### 3.1.4.1.7 Attribute Groups

None.

## 3.1.4.2 GetAgent

The following excerpt from this protocol's WSDL specifies the messages that constitute the **GetAgent** operation.

```
<wsdl:operation name="GetAgent">
  <wsdl:input message="tns:GetAgentSoapIn" />
  <wsdl:output message="tns:GetAgentSoapOut" />
```

```
</wsdl:operation>
```

### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetAgentSoapIn</b>	Request from a client to retrieve information about the authenticated user.
<b>GetAgentSoapOut</b>	Response to a request to retrieve information about the authenticated user.

#### 3.1.4.2.1.1 GetAgentSoapIn

The **GetAgentSoapIn** SOAP message is a request that is sent from the protocol client to retrieve information about the authenticated user. The request information MUST be captured in the **GetAgent** element in the SOAP body of the message. The **GetAgent** element is specified in section [3.1.4.2.2.1](#).

#### 3.1.4.2.1.2 GetAgentSoapOut

The **GetAgentSoapOut** SOAP message is a response that is sent by the protocol server. This message contains information about the authenticated user if the user is an agent. The information is included in the complex type **AcdAgent**, which is specified in section [2.2.4.1](#). If the user is not an agent, the response SHOULD NOT contain any complex type.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetAgent</b>	The overall container of the request to retrieve agent information.
<b>GetAgentResponse</b>	The overall container of the response to the request to retrieve agent information.

#### 3.1.4.2.2.1 GetAgent

The **GetAgent** element is the overall container of the information that is sent in the SOAP request to retrieve agent information. A protocol client MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="GetAgent">
  <s:complexType />
</s:element>
```

### 3.1.4.2.2.2 GetAgentResponse

The **GetAgentResponse** complex type is the overall container in the response to the **GetAgent** request. **GetAgentResponse** encapsulates the information about the authenticated user. A protocol server MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="GetAgentResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="GetAgentResult" type="tns:AcdAgent" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetAgentResult:** An **AcdAgent** object which describes the authenticated agent. **AcdAgent** is described in section [2.2.4.1](#).

### 3.1.4.2.3 Complex Types

None.

### 3.1.4.2.4 Simple Types

None.

### 3.1.4.2.5 Attributes

None.

### 3.1.4.2.6 Groups

None.

### 3.1.4.2.7 Attribute Groups

None.

## 3.1.4.3 GetGroups

The following excerpt from this protocol's WSDL specifies the messages that constitute the **GetGroups** operation.

```
<wsdl:operation name="GetGroups">
  <wsdl:input message="tns:GetGroupsSoapIn" />
  <wsdl:output message="tns:GetGroupsSoapOut" />
</wsdl:operation>
```

### 3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetGroupsSoapIn</b>	Request from a client to retrieve the groups of an authenticated user.
<b>GetGroupsSoapOut</b>	Response to a request to retrieve the groups of an authenticated user.

### 3.1.4.3.1.1 GetGroupsSoapIn

The **GetGroupsSoapIn** SOAP message is a request that is sent from the protocol client to retrieve the groups of an authenticated user. The request information MUST be captured in the **GetGroups** element in the SOAP body of the message. The **GetGroups** element is specified in section [3.1.4.3.2.1](#).

### 3.1.4.3.1.2 GetGroupsSoapOut

The **GetGroupsSoapOut** SOAP message is a response that is sent by the protocol server. This message contains a list of groups that the agent is member of. The information is included in the complex type **ArrayOfAcdGroup**, which is specified in section [2.2.4.4](#). If the user is not an agent, the **ArrayOfAcdGroup** complex type SHOULD be empty.

### 3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetGroups</b>	The overall container of the request to retrieve agent groups.
<b>GetGroupsResponse</b>	The overall container of the response to the request to retrieve agent groups.

### 3.1.4.3.2.1 GetGroups

The **GetGroups** element is the overall container of the information that is sent in the SOAP request to retrieve agent groups. A protocol client MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="GetGroups">
  <s:complexType />
</s:element>
```

### 3.1.4.3.2.2 GetGroupsResponse

The **GetGroupsResponse** complex type is the overall container in the response to the **GetGroups** request. **GetGroupsResponse** encapsulates the information about the groups an agent is part of. A protocol server MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="GetGroupsResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="GetGroupsResult" type="tns:ArrayOfAcdGroup"
    />
  </s:sequence>
```

```
</s:complexType>
</s:element>
```

**GetGroupsResult:** An array of **AcdGroup** objects which represent the groups where the authenticated agent is a member. **AcdGroup** is described in section [3.1.4.3.3.1](#).

### 3.1.4.3.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
<b>AcdGroup</b>	Information about a group.
<b>ArrayOfAcdAgent</b>	A list of agents belonging to a group.
<b>ArrayOfAcdGroup</b>	A list of <b>AcdGroups</b> .

#### 3.1.4.3.3.1 AcdGroup

The **AcdGroup** complex type contains information related to an agent group.

```
<s:complexType name="AcdGroup">
  <s:sequence>
    <s:element minOccurs="1" maxOccurs="1" name="Id" type="s1:guid" />
    <s:element minOccurs="0" maxOccurs="1" name="Name" type="s:string" />
    <s:element minOccurs="1" maxOccurs="1" name="NumberOfAgents" type="s:int" />
    <s:element minOccurs="1" maxOccurs="1" name="CanSignIn" type="s:boolean" />
    <s:element minOccurs="1" maxOccurs="1" name="SignInState" type="tns:SignInState" />
    <s:element minOccurs="0" maxOccurs="1" name="AllAgents" type="tns:ArrayOfAcdAgent" />
    <s:element minOccurs="1" maxOccurs="1" name="NumberOfCallsWaiting" type="s:int" />
    <s:element minOccurs="1" maxOccurs="1" name="LongestWaitingTime" type="s:int" />
  </s:sequence>
</s:complexType>
```

**Id:** Unique identifier identifying the group.

**Name:** Name of the group.

**NumberOfAgents:** Number of agents who are members of the group. **NumberOfAgents** SHOULD be greater than or equal to zero.

**CanSignIn:** **Boolean** that indicates if the group supports sign in and sign out.

**SignInState:** State of the current user for this group.

**AllAgents:** List of agents who are members of the group.

**NumberOfCallsWaiting:** Number of calls waiting in the queues served by the group.

**NumberOfCallsWaiting** SHOULD be greater than or equal to zero.

**LongestWaitingTime:** The longest waiting time in seconds among all the calls waiting in the queues served by the group. **LongestWaitingTime** SHOULD be greater than or equal to zero.

Elements having *minOccurs="0"* are not present in case we fail to retrieve the information related to the authenticated user.

### 3.1.4.3.3.2 ArrayOfAcdAgent

The **ArrayOfAcdAgent** complex type is a list of agents who are members of a group.

```
<s:complexType name="ArrayOfAcdAgent">
  <s:sequence>
    <s:element minOccurs="0" maxOccurs="unbounded" name="AcdAgent" nillable="true"
      type="tns:AcdAgent" />
  </s:sequence>
</s:complexType>
```

**AcdAgent:** See section [2.2.4.1](#).

### 3.1.4.3.3.3 ArrayOfAcdGroup

The **ArrayOfAcdGroup** complex type is a list of **AcdGroups** the current authenticated user is part of.

```
<s:complexType name="ArrayOfAcdGroup">
  <s:sequence>
    <s:element minOccurs="0" maxOccurs="unbounded" name="AcdGroup" nillable="true"
      type="tns:AcdGroup"/>
  </s:sequence>
</s:complexType>
```

**AcdGroup:** See section [3.1.4.3.3.1](#).

### 3.1.4.3.4 Simple Types

The following XML Schema simple type definitions are specific to this operation.

Simple type	Description
<b>SignInState</b>	The sign-in state of an agent in a given group.

#### 3.1.4.3.4.1 SignInState

The **SignInState** simple type represents the state of a user in a given group.

```
<s:simpleType name="SignInState">
  <s:restriction base="s:string">
    <s:enumeration value="SignedIn" />
    <s:enumeration value="SignedOut" />
    <s:enumeration value="Unknown" />
  </s:restriction>
</s:simpleType>
```

**SignedIn:** The user is currently signed in to the group.

**SignedOut:** The user is currently signed out of the group.

**Unknown:** The user's state cannot be retrieved.

### 3.1.4.3.5 Attributes

None.

### 3.1.4.3.6 Groups

None.

### 3.1.4.3.7 Attribute Groups

None.

## 3.1.4.4 IsAgent

The following excerpt from this protocol's WSDL specifies the messages that constitute the **IsAgent** operation:

```
<wsdl:operation name="IsAgent">
    <wsdl:input message="tns:IsAgentSoapIn" />
    <wsdl:output message="tns:IsAgentSoapOut" />
</wsdl:operation>
```

### 3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>IsAgentSoapIn</b>	Request from a client to retrieve information about whether the user is an agent.
<b>IsAgentSoapOut</b>	Response to a request to retrieve information about whether the user is an agent.

#### 3.1.4.4.1.1 IsAgentSoapIn

The **IsAgentSoapIn** SOAP message is a request that is sent from the protocol client to retrieve information about whether the user is an agent. The request information MUST be captured in the **IsAgent** element in the SOAP body of the message. The **IsAgent** element is specified in section [3.1.4.4.2.1](#).

#### 3.1.4.4.1.2 IsAgentSoapOut

The **IsAgentSoapOut** SOAP message is a response that is sent by the protocol server. This message MUST contain a **Boolean** that indicates if the user is an agent or not.

### 3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>IsAgent</b>	The overall container of the request to retrieve agent state.
<b>IsAgentResponse</b>	The overall container of the response to the request to retrieve agent state.

#### 3.1.4.4.2.1 IsAgent

The **IsAgent** element is the overall container of the information that is sent in the SOAP request to retrieve agent state. A protocol client MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="IsAgent">
  <s:complexType />
</s:element>
```

#### 3.1.4.4.2.2 IsAgentResponse

The **IsAgentResponse** element is the overall container in the response to the **IsAgent** request. **IsAgentResponse** encapsulates the information about the agent state. A protocol server MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="IsAgentResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="IsAgentResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**IsAgentResult:** Indicates whether the authenticated user is a Response Group agent.

#### 3.1.4.4.3 Complex Types

None.

#### 3.1.4.4.4 Simple Types

None.

#### 3.1.4.4.5 Attributes

None.

#### 3.1.4.4.6 Groups

None.

#### 3.1.4.4.7 Attribute Groups

#### 3.1.4.5 SignIn

The following excerpt from this protocol's WSDL specifies the messages that constitute the **SignIn** operation:

```
<wsdl:operation name="SignIn">
    <wsdl:input message="tns:SignInSoapIn" />
    <wsdl:output message="tns:SignInSoapOut" />
</wsdl:operation>
```

##### 3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SignInSoapIn</b>	A request from a client to sign in the user in the specified group.
<b>SignInSoapOut</b>	A response to a request to sign in the user in the specified group.

###### 3.1.4.5.1.1 SignInSoapIn

The **SignInSoapIn** SOAP message is a request that is sent from the protocol client to sign in the user in the specified group. The request information MUST be captured in the **SignIn** element in the SOAP body of the message. The **SignIn** element is specified in section [3.1.4.5.2.1](#).

###### 3.1.4.5.1.2 SignInSoapOut

This SOAP message is a response that is sent by the protocol server. This message MUST contain a **Boolean** indicating if the operation has succeeded.

#### 3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SignIn</b>	The overall container of the request to sign in the user to a group.
<b>SignInResponse</b>	The overall container of the response to the request to sign in the user to a group.

###### 3.1.4.5.2.1 SignIn

The **SignIn** element is the overall container of the information that is sent in the SOAP request to sign in the user in a group. A protocol client MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="SignIn">
    <s:complexType>
```

```
<s:sequence>
  <s:element minOccurs="1" maxOccurs="1" name="groupId" type="s1:guid" />
</s:sequence>
</s:complexType>
</s:element>
```

**groupId:** The identifier of the group to sign in the authenticated user.

#### 3.1.4.5.2.2 SignInResponse

The **SignInResponse** complex type is the overall container in the response to the **SignIn** request. **SignInResponse** contains the result of the operation. A protocol server MUST adhere to the following schema for this complex type within the SOAP envelope.

```
<s:element name="SignInResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="SignInResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**SignInResult:** Indicates whether the authenticated user successfully signed into the given group.

#### 3.1.4.5.3 Complex Types

None.

#### 3.1.4.5.4 Simple Types

None.

#### 3.1.4.5.5 Attributes

None.

#### 3.1.4.5.6 Groups

None.

#### 3.1.4.5.7 Attribute Groups

None.

#### 3.1.4.6 SignInMultiple

The following excerpt from this protocol's WSDL specifies the messages that constitute the **SignInMultiple** operation:

```
<wsdl:operation name="SignInMultiple">
  <wsdl:input message="tns:SignInMultipleSoapIn" />
  <wsdl:output message="tns:SignInMultipleSoapOut" />
</wsdl:operation>
```

### 3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SignInMultipleSoapIn</b>	A request from a client to sign in the user in the specified groups.
<b>SignInMultipleSoapOut</b>	A response to a request to sign in the user in the specified groups.

#### 3.1.4.6.1.1 SignInMultipleSoapIn

The **SignInMultipleSoapIn** SOAP message is a request that is sent from the protocol client to sign in the user in the specified groups. The request information MUST be captured in the **SignInMultiple** element in the SOAP body of the message. The **SignInMultiple** element is specified in section [3.1.4.6.2.1](#).

#### 3.1.4.6.1.2 SignInMultipleSoapOut

The **SignInMultipleSoapOut** SOAP message is a response that is sent by the protocol server. This message MUST contain a **Boolean** indicating if the operation succeeded.

### 3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SignInMultiple</b>	The overall container of the request to sign in the user in multiple groups.
<b>SignInMultipleResponse</b>	The overall container of the response to the request to sign in the user in multiple groups.

#### 3.1.4.6.2.1 SignInMultiple

The **SignInMultiple** element is the overall container of the information that is sent in the SOAP request to sign in the user in multiple groups. A protocol client MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="SignInMultiple">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="groupIds" type="tns:ArrayOfGuid" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**groupIds:** An array of identifiers of the groups to sign the authenticated user into.

### 3.1.4.6.2.2 SignInMultipleResponse

The **SignInMultipleResponse** element is the overall container in the response to the **SignInMultiple** request. **SignInMultipleResponse** contains the result of the operation. If the operation partially succeeded, the return value SHOULD be set to "false". Information about the current sign-in state can be retrieved using the **GetGroups** message, as defined in section [3.1.4.3](#). A protocol server MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="SignInMultipleResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="SignInMultipleResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**SignInMultipleResult:** Indicates whether the authenticated user successfully signed into all given groups.

### 3.1.4.6.3 Complex Types

None.

### 3.1.4.6.4 Simple Types

None.

### 3.1.4.6.5 Groups

None.

### 3.1.4.6.6 Attributes

None.

### 3.1.4.6.7 Attribute Groups

None.

## 3.1.4.7 SignOut

The following excerpt from this protocol's WSDL specifies the messages that constitute the **SignOut** operation:

```
<wsdl:operation name="SignOut">
  <wsdl:input message="tns:SignOutSoapIn" />
  <wsdl:output message="tns:SignOutSoapOut" />
</wsdl:operation>
```

### 3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SignOutSoapIn</b>	Request from a client to sign out the user from the specified group.
<b>SignOutSoapOut</b>	Response to a request to sign out the user from the specified group.

#### 3.1.4.7.1.1 SignOutSoapIn

The **SignOutSoapIn** SOAP message is a request that is sent from the protocol client to sign out the user from the specified group. The request information MUST be captured in the **SignOut** element in the SOAP body of the message. The **SignOut** element is specified in section [3.1.4.7.2.1](#).

#### 3.1.4.7.1.2 SignOutSoapOut

The **SignOutSoapOut** SOAP message is a response that is sent by the protocol server. This message MUST contain a **Boolean** indicating if the operation succeeded.

### 3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SignOut</b>	The overall container of the request to sign out the user from a group.
<b>SignOutResponse</b>	The overall container of the response to the request to sign out the user from a group.

#### 3.1.4.7.2.1 SignOut

The **SignOut** element is the overall container of the information that is sent in the SOAP request to sign out the user from a group. A protocol client MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="SignOut">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="groupId" type="s1:guid" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**groupId:** Identifier of the group to sign the authenticated user out of.

### 3.1.4.7.2.2 SignOutResponse

The **SignOutResponse** element is the overall container in the response to the **SignOut** request. **SignOutResponse** contains the result of the operation. A protocol server MUST adhere to the following schema for this element within the SOAP envelope.

```
<s:element name="SignOutResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="SignOutResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**SignOutResult:** Indicates whether the authenticated user successfully signed out from the given group.

### 3.1.4.7.3 Complex Types

None.

### 3.1.4.7.4 Simple Types

None.

### 3.1.4.7.5 Attributes

None.

### 3.1.4.7.6 Groups

None.

### 3.1.4.7.7 Attribute Groups

None.

### 3.1.4.8 SignOutMultiple

The following excerpt from this protocol's WSDL specifies the messages that constitute the **SignOutMultiple** operation.

```
<wsdl:operation name="SignOutMultiple">
  <wsdl:input message="tns:SignOutMultipleSoapIn" />
  <wsdl:output message="tns:SignOutMultipleSoapOut" />
</wsdl:operation>
```

#### 3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>SignOutMultipleSoapIn</b>	Request from a client to sign out the user from the specified groups.
<b>SignOutMultipleSoapOut</b>	Response to a request to sign out the user from the specified groups.

### 3.1.4.8.1.1 SignOutMultipleSoapIn

The **SignOutMultipleSoapIn** SOAP message is a request that is sent from the protocol client to sign out the user from the specified groups. The request information MUST be captured in the **SignOutMultiple** element in the SOAP body of the message. The **SignOutMultiple** element is specified in section [3.1.4.8.2.1](#).

### 3.1.4.8.1.2 SignOutMultipleSoapOut

The **SignOutMultipleSoapOut** SOAP message is a response that is sent by the protocol server. This message MUST contain a **Boolean** indicating if the operation succeeded.

## 3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>SignOutMultiple</b>	The overall container of the request to sign out the user from multiple groups.
<b>SignOutMultipleResponse</b>	The overall container of the response to the request to sign out the user from multiple groups.

### 3.1.4.8.2.1 SignOutMultiple

The **SignOutMultiple** complex type is the overall container of the information that is sent in the SOAP request to sign out the user from multiple groups. A protocol client MUST adhere to the following schema for this complex type within the SOAP envelope.

```
<s:element name="SignOutMultiple">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="groupIds" type="tns:ArrayOfGuid" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**groupIds** is an array of identifiers of the groups in which we request to sign out the authenticated user.

### 3.1.4.8.2.2 SignOutMultipleResponse

The **SignOutMultipleResponse** element is the overall container in the response to the **SignOutMultiple** request. **SignOutMultipleResponse** contains the result of the operation. If the operation partially succeeded, the return value SHOULD be set to "false". Information about the current sign-in state can be retrieved using the **GetGroups** message, as defined in section [3.1.4.3](#).

A protocol server MUST adhere to the following schema for this complex type within the SOAP envelope.

```
<s:element name="SignOutMultipleResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name=" SignOutMultipleResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**SignOutMultipleResult** is a boolean value which indicates if the authenticated user successfully sign out from the all given groups.

### 3.1.4.8.3 Complex Types

None.

### 3.1.4.8.4 Simple Types

None.

### 3.1.4.8.5 Attributes

None.

### 3.1.4.8.6 Groups

None.

### 3.1.4.8.7 Attribute Groups

None.

## 3.1.5 Timer Events

None.

## 3.1.6 Other Local Events

None.

## 4 Protocol Examples

### 4.1 Successful GetActiveResponseGroups Request and Response

The following example is a **GetActiveResponseGroups** request. This request is sent from a client to the server as a SOAP HTTPS request.

```
<soap:Body>
  <GetActiveResponseGroups
    xmlns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy"/>
</soap:Body>
```

This request results in the following successful SOAP HTTPS response.

```
<soap:Body>
  <GetActiveResponseGroupsResponse
    xmlns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">
    <GetActiveResponseGroupsResult>
      <ResponseGroupEntry>
        <Uri>sip:helpdesk@contoso.com</Uri>
        <DisplayName>Contoso Helpdesk</DisplayName>
        <IsAnonymized>true</IsAnonymized>
        <IsOutboundAllowed>true</IsOutboundAllowed>
      </ResponseGroupEntry>
      <ResponseGroupEntry>
        <Uri>sip:hr@contoso.com</Uri>
        <DisplayName>Contoso HR</DisplayName>
        <IsAnonymized>true</IsAnonymized>
        <IsOutboundAllowed>false</IsOutboundAllowed>
      </ResponseGroupEntry>
    </GetActiveResponseGroupsResult>
  </GetActiveResponseGroupsResponse>
</soap:Body>
```

### 4.2 Successful SignIn Request and Response

The following example is a **SignIn** request. This request is sent from a client to the server as a SOAP HTTPS request.

```
<soap:Body>
  <SignIn xmlns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">
    <groupId>0762e30f-a76c-4c75-9390-4c07a9f4e51f</groupId>
  </SignIn>
</soap:Body>
```

This request results in the following successful SOAP HTTPS response.

```
<soap:Body>
  <SignInResponse
    xmlns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">
    <SignInResult>true</SignInResult>
  </SignInResponse>
</soap:Body>
```

### 4.3 Unsuccessful SignOut Request and Response

The following example is a **SignOut** request. This request is sent from a client to the server as a SOAP HTTPS request.

```
<soap:Body>
  <SignOut xmlns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">
    <groupId>0762e30f-a76c-4c75-9390-4c07a9f4e51f</groupId>
  </SignOut>
</soap:Body>
```

This request results in the following SOAP HTTPS response.

```
<soap:Body>
  <SignOutResponse
    xmlns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">
    <SignOutResult>false</SignOutResult>
  </SignOutResponse>
</soap:Body>
```

## 5 Security

### 5.1 Security Considerations for Implementers

This protocol allows **Hypertext Transfer Protocol (HTTP)** connections only over **Secure Sockets Layer (SSL)**. Users are authenticated using the mechanism described in [\[MS-OCAUTHWS\]](#).

### 5.2 Index of Security Parameters

None.

## 6 Appendix A: Full WSDL

For ease of implementation, the full WSDL and schema are provided in this appendix.

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
  xmlns:tns="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy"
  xmlns:s1="http://microsoft.com/wsdl/types/" xmlns:s="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
<wsdl:types>
  <s:schema elementFormDefault="qualified"
    targetNamespace="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy">
    <s:import namespace="http://microsoft.com/wsdl/types/" />
    <s:element name="IsAgent">
      <ss:complexType />
    </s:element>
    <s:element name="IsAgentResponse">
      <ss:complexType>
        <s:sequence>
          <s:element minOccurs="1" maxOccurs="1" name="IsAgentResult" type="s:boolean" />
        </s:sequence>
      </ss:complexType>
    </s:element>
    <s:element name="GetAgent">
      <ss:complexType />
    </s:element>
    <s:element name="GetAgentResponse">
      <ss:complexType>
        <s:sequence>
          <s:element minOccurs="0" maxOccurs="1" name="GetAgentResult" type="tns:AcdAgent" />
        </s:sequence>
      </ss:complexType>
    </s:element>
    <s:complexType name="AcdAgent">
      <s:sequence>
        <s:element minOccurs="1" maxOccurs="1" name="Id" type="s1:guid" />
        <s:element minOccurs="0" maxOccurs="1" name="UserSid" type="s:string" />
        <s:element minOccurs="0" maxOccurs="1" name="SipAddress" type="s:string" />
        <s:element minOccurs="0" maxOccurs="1" name="DisplayName" type="s:string" />
      </s:sequence>
    </s:complexType>
    <s:element name="GetGroups">
      <ss:complexType />
    </s:element>
    <s:element name="GetGroupsResponse">
      <ss:complexType>
        <s:sequence>
          <s:element minOccurs="0" maxOccurs="1" name="GetGroupsResult"
            type="tns:ArrayOfAcdGroup" />
        </s:sequence>
      </ss:complexType>
    </s:element>
    <s:complexType name="ArrayOfAcdGroup">
      <s:sequence>
        <s:element minOccurs="0" maxOccurs="unbounded" name="AcdGroup" nillable="true"
          type="tns:AcdGroup" />
      </s:sequence>
    </s:complexType>
  </s:schema>
</wsdl:types>
```

```

<s:complexType name="AcdGroup">
  <s:sequence>
    <s:element minOccurs="1" maxOccurs="1" name="Id" type="s1:guid" />
    <s:element minOccurs="0" maxOccurs="1" name="Name" type="s:string" />
    <s:element minOccurs="1" maxOccurs="1" name="NumberOfAgents" type="s:int" />
    <s:element minOccurs="1" maxOccurs="1" name="CanSignIn" type="s:boolean" />
    <s:element minOccurs="1" maxOccurs="1" name="SignInState" type="tns:SignInState" />
    <s:element minOccurs="0" maxOccurs="1" name="AllAgents" type="tns:ArrayOfAcdAgent" />
    <s:element minOccurs="1" maxOccurs="1" name="NumberOfCallsWaiting" type="s:int" />
    <s:element minOccurs="1" maxOccurs="1" name="LongestWaitingTime" type="s:int" />

  </s:sequence>
</s:complexType>
<s:simpleType name="SignInState">
  <s:restriction base="s:string">
    <s:enumeration value="SignedIn" />
    <s:enumeration value="SignedOut" />
    <s:enumeration value="Unknown" />
  </s:restriction>
</s:simpleType>
<s:complexType name="ArrayOfAcdAgent">
  <s:sequence>
    <s:element minOccurs="0" maxOccurs="unbounded" name="AcdAgent" nillable="true"
      type="tns:AcdAgent" />
  </s:sequence>
</s:complexType>
<s:element name="SignIn">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="groupId" type="s1:guid" />
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="SignInResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="SignInResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="SignOut">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="groupId" type="s1:guid" />
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="SignOutResponse">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="1" maxOccurs="1" name="SignOutResult" type="s:boolean" />
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="SignInMultiple">
  <s:complexType>
    <s:sequence>
      <s:element minOccurs="0" maxOccurs="1" name="groupIds" type="tns:ArrayOfGuid" />
    </s:sequence>
  </s:complexType>
</s:element>

```

```

        </s:complexType>
    </s:element>
    <s:complexType name="ArrayOfGuid">
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="guid" type="s1:guid" />
        </s:sequence>
    </s:complexType>
    <s:element name="SignInMultipleResponse">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="1" maxOccurs="1" name="SignInMultipleResult" type="s:boolean"
/>
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:element name="SignOutMultiple">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="0" maxOccurs="1" name="groupIds" type="tns:ArrayOfGuid" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:element name="SignOutMultipleResponse">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="1" maxOccurs="1" name="SignOutMultipleResult"
type="s:boolean" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:element name="GetActiveResponseGroups">
        <s:complexType />
    </s:element>
    <s:element name="GetActiveResponseGroupsResponse">
        <s:complexType>
            <s:sequence>
                <s:element minOccurs="0" maxOccurs="1" name="GetActiveResponseGroupsResult"
type="tns:ArrayOfResponseGroupEntry" />
            </s:sequence>
        </s:complexType>
    </s:element>
    <s:complexType name="ArrayOfResponseGroupEntry">
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="unbounded" name="ResponseGroupEntry"
nillable="true" type="tns:ResponseGroupEntry" />
        </s:sequence>
    </s:complexType>
    <s:complexType name="ResponseGroupEntry">
        <s:sequence>
            <s:element minOccurs="0" maxOccurs="1" name="Uri" type="s:string" />
            <s:element minOccurs="0" maxOccurs="1" name="DisplayName" type="s:string" />
            <s:element minOccurs="1" maxOccurs="1" name="IsAnonymized" type="s:boolean" />
            <s:element minOccurs="1" maxOccurs="1" name="IsOutboundAllowed" type="s:boolean" />
        </s:sequence>
    </s:complexType>
</s:schema>
<s:schema elementFormDefault="qualified"
targetNamespace="http://microsoft.com/wsdl/types/">
    <s:simpleType name="guid">

```

```

        <s:restriction base="s:string">
            <s:pattern value="[0-9a-fA-F]{8}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{4}-[0-9a-fA-F]{12}" />
        </s:restriction>
    </s:simpleType>
</s:schema>
</wsdl:types>
<wsdl:message name="IsAgentSoapIn">
    <wsdl:part name="parameters" element="tns:IsAgent" />
</wsdl:message>
<wsdl:message name="IsAgentSoapOut">
    <wsdl:part name="parameters" element="tns:IsAgentResponse" />
</wsdl:message>
<wsdl:message name="GetAgentSoapIn">
    <wsdl:part name="parameters" element="tns:GetAgent" />
</wsdl:message>
<wsdl:message name="GetAgentSoapOut">
    <wsdl:part name="parameters" element="tns:GetAgentResponse" />
</wsdl:message>
<wsdl:message name="GetGroupsSoapIn">
    <wsdl:part name="parameters" element="tns:GetGroups" />
</wsdl:message>
<wsdl:message name="GetGroupsSoapOut">
    <wsdl:part name="parameters" element="tns:GetGroupsResponse" />
</wsdl:message>
<wsdl:message name="SignInSoapIn">
    <wsdl:part name="parameters" element="tns:SignIn" />
</wsdl:message>
<wsdl:message name="SignInSoapOut">
    <wsdl:part name="parameters" element="tns:SignInResponse" />
</wsdl:message>
<wsdl:message name="SignOutSoapIn">
    <wsdl:part name="parameters" element="tns:SignOut" />
</wsdl:message>
<wsdl:message name="SignOutSoapOut">
    <wsdl:part name="parameters" element="tns:SignOutResponse" />
</wsdl:message>
<wsdl:message name="SignInMultipleSoapIn">
    <wsdl:part name="parameters" element="tns:SignInMultiple" />
</wsdl:message>
<wsdl:message name="SignInMultipleSoapOut">
    <wsdl:part name="parameters" element="tns:SignInMultipleResponse" />
</wsdl:message>
<wsdl:message name="SignOutMultipleSoapIn">
    <wsdl:part name="parameters" element="tns:SignOutMultiple" />
</wsdl:message>
<wsdl:message name="SignOutMultipleSoapOut">
    <wsdl:part name="parameters" element="tns:SignOutMultipleResponse" />
</wsdl:message>
<wsdl:message name="GetActiveResponseGroupsSoapIn">
    <wsdl:part name="parameters" element="tns:GetActiveResponseGroups" />
</wsdl:message>
<wsdl:message name="GetActiveResponseGroupsSoapOut">
    <wsdl:part name="parameters" element="tns:GetActiveResponseGroupsResponse" />
</wsdl:message>
<wsdl:portType name="ProxyServiceSoap">
    <wsdl:operation name="IsAgent">
        <wsdl:input message="tns:IsAgentSoapIn" />
        <wsdl:output message="tns:IsAgentSoapOut" />

```

```

    </wsdl:operation>
    <wsdl:operation name="GetAgent">
        <wsdl:input message="tns:GetAgentSoapIn" />
        <wsdl:output message="tns:GetAgentSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetGroups">
        <wsdl:input message="tns:GetGroupsSoapIn" />
        <wsdl:output message="tns:GetGroupsSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="SignIn">
        <wsdl:input message="tns:SignInSoapIn" />
        <wsdl:output message="tns:SignInSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="SignOut">
        <wsdl:input message="tns:SignOutSoapIn" />
        <wsdl:output message="tns:SignOutSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="SignInMultiple">
        <wsdl:input message="tns:SignInMultipleSoapIn" />
        <wsdl:output message="tns:SignInMultipleSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="SignOutMultiple">
        <wsdl:input message="tns:SignOutMultipleSoapIn" />
        <wsdl:output message="tns:SignOutMultipleSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetActiveResponseGroups">
        <wsdl:input message="tns:GetActiveResponseGroupsSoapIn" />
        <wsdl:output message="tns:GetActiveResponseGroupsSoapOut" />
    </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="ProxyServiceSoap" type="tns:ProxyServiceSoap">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
    <wsdl:operation name="IsAgent">
        <soap:operation
            soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/IsAgent"
            style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetAgent">
        <soap:operation
            soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/GetAgent"
            style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetGroups">
        <soap:operation
            soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/GetGroups"
            style="document" />
        <wsdl:input>

```

```
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SignIn">
    <soap:operation
soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/SignIn"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SignOut">
    <soap:operation
soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/SignOut"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SignInMultiple">
    <soap:operation
soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/SignInMu
ltiple" style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="SignOutMultiple">
    <soap:operation
soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/SignOutM
ultiple" style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetActiveResponseGroups">
    <soap:operation
soapAction="http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy/GetActiv
eResponseGroups" style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
```

```
</wsdl:operation>  
</wsdl:binding>  
</wsdl:definitions>
```

Preliminary

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Lync Server 15 Technical Preview
- Microsoft® Lync 15 Technical Preview
- Microsoft® Lync™ Server 2010
- Microsoft® Lync™ 2010
- Microsoft® Office Communications Server 2007 R2
- Microsoft® Office Communicator 2007 R2

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 3.1.4.1:](#) The **GetActiveResponseGroups** method is not supported by Office Communicator 2007 R2 or Office Communications Server 2007 R2.

## 8 Change Tracking

This section identifies changes that were made to the [MS-RGSWS] protocol document between the June 2011 and January 2012 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major chan ge (Y or N)</b>	<b>Chang e type</b>
<a href="#">1 Introduction</a>	Clarified the introduction.	N	Content update d.
<a href="#">1.5 Prerequisites/Precondit ions</a>	Moved the information about authentication to this section from section 1.6.	N	Content update d.
<a href="#">2.2.1 Namespaces</a>	Added namespace prefix "s1" with namespace URI "http://microsoft.com/wsdl/types/".	Y	New content added.
<a href="#">2.2.1 Namespaces</a>	Clarified the XML namespace prefix for "http://www.w3.org/2001/XMLSchema".	Y	Content update d.
<a href="#">2.2.1 Namespaces</a>	Clarified that the namespace URI for the "tns" namespace prefix is "http://schemas.microsoft.com/acd/2007/12/Microsoft.Rtc.Acd.Clients.Proxy".	Y	Content update d.
<a href="#">2.2.4 Complex Types</a>	Moved descriptions of non-common complex types to appropriate operation sections.	Y	Content update d.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<a href="#">3 Protocol Details</a>	Clarified the order of method calls.	Y	Content updated.
<a href="#">3.1.4.1 GetActiveResponseGroups</a>	Added product behavior note regarding support for the "GetActiveResponseGroups" method.	Y	New product behavior note added.
<a href="#">3.1.4.1.1 Messages</a>	Added a table with summary descriptions of the messages.	N	New content added.
<a href="#">3.1.4.1.3 Complex Types</a>	Added a table with summary descriptions of the complex types.	N	New content added.
<a href="#">3.1.4.1.3.1 ArrayOfResponseGroupEntry</a>	Added new section "ArrayOfResponseGroupEntry"; moved from former location following "Complex Types".	Y	New content added.
<a href="#">3.1.4.1.3.2 ResponseGroupEntry</a>	Added new section "ResponseGroupEntry"; moved from former location following "Complex Types".	Y	New content added.
<a href="#">3.1.4.2.1 Messages</a>	Added a table with summary descriptions of the messages.	N	New content added.
<a href="#">3.1.4.3.1 Messages</a>	Added a table with summary descriptions of the messages.	N	New content added.
<a href="#">3.1.4.3.3 Complex Types</a>	Added a table with summary descriptions of the complex types.	N	New content added.
<a href="#">3.1.4.3.3.1 AcdGroup</a>	Added new section "AcdGroup"; moved from former location following "Complex Types".	Y	New content added.
<a href="#">3.1.4.3.3.2 ArrayOfAcdAgent</a>	Added new section "ArrayOfAcdAgent"; moved from former location following "Complex Types".	Y	New content added.
<a href="#">3.1.4.3.3.3 ArrayOfAcdGroup</a>	Added new section "ArrayOfAcdGroup"; moved from former location following "Complex Types".	Y	New content added.
<a href="#">3.1.4.3.4 Simple Types</a>	Added a table with summary descriptions of the simple types.	N	New content added.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<a href="#"><u>3.1.4.3.4.1 SignInState</u></a>	Added new section "SignInState"; moved from former location following "Simple Types".	Y	New content added.
<a href="#"><u>3.1.4.4.1 Messages</u></a>	Added a table with summary descriptions of the messages.	N	New content added.
<a href="#"><u>3.1.4.4.2.2 IsAgentResponse</u></a>	Added a description for IsAgentResult.	N	New content added.
<a href="#"><u>3.1.4.5.1 Messages</u></a>	Added a table with summary descriptions of the messages.	N	New content added.
<a href="#"><u>3.1.4.5.2.1 SignIn</u></a>	Added a description for groupId.	N	New content added.
<a href="#"><u>3.1.4.5.2.2 SignInResponse</u></a>	Added a desription for SignInResult.	N	New content added.
<a href="#"><u>3.1.4.6.1 Messages</u></a>	Added a table with summary descriptions of messages.	N	New content added.
<a href="#"><u>3.1.4.6.2.1 SignInMultiple</u></a>	Added a description for groupIds.	N	New content added.
<a href="#"><u>3.1.4.6.2.2 SignInMultipleResponse</u></a>	Added a description for SignInMultipleResult.	N	New content added.
<a href="#"><u>3.1.4.7.1 Messages</u></a>	Added a table with summary descriptions of messages.	N	New content added.
<a href="#"><u>3.1.4.7.2.1 SignOut</u></a>	Added a description for groupId.	N	New content added.
<a href="#"><u>3.1.4.7.2.2 SignOutResponse</u></a>	Added a description for SignOutResult.	N	New content added.
<a href="#"><u>3.1.4.8.1 Messages</u></a>	Added a table with summary descriptions of messages.	N	New content added.
<a href="#"><u>3.1.4.8.2.1 SignOutMultiple</u></a>	Added a description for groupIds.	N	New content added.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<a href="#">3.1.4.8.2.2 SignOutMultipleResponse</a>	Added a description for SignOutMultipleResult.	N	New content added.
<a href="#">6 Appendix A: Full WSDL</a>	Removed four unused namespaces.	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Removed section 2.2.5.1, "SignInState".	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Removed section 2.2.4.2, "AcdGroup".	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Removed section 2.2.4.3, "ArrayOfAcdAgent".	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Removed section 2.2.4.4, "ArrayOfAcdGroup".	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Removed section 2.2.4.7, "ResponseGroupEntry".	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Removed section 2.2.4.6, "ArrayOfResponseGroupEntry".	Y	Content removed.
<a href="#">7 Appendix B: Product Behavior</a>	Added "Office Communications Server 2007 R2" and "Office Communicator 2007 R2" to the list of applicable product versions.	Y	Content updated.
<a href="#">7 Appendix B: Product Behavior</a>	Updated products list.	N	New content added.

## 9 Index

### A

Abstract data model  
[server](#) 13  
[AcdAgent complex type](#) 11  
[Applicability](#) 9  
[ArrayOfGuid complex type](#) 11  
[Attribute groups](#) 12  
[Attributes](#) 12

### C

[Capability negotiation](#) 9  
[Change tracking](#) 43  
[Complex types](#) 10  
    [AcdAgent](#) 11  
    [ArrayOfGuid](#) 11

### D

Data model - abstract  
[server](#) 13

### E

Events  
    [local - server](#) 31  
    [timer - server](#) 31  
Examples  
    [GetActiveResponseGroups request and response](#)  
        32  
    [SignIn request and response](#) 32  
    [unsuccessful SignOut](#) 33

### F

[Fields - vendor-extensible](#) 9  
[Full WSDL](#) 35

### G

[Glossary](#) 6  
[Groups](#) 12  
[guid simple type](#) 12

### I

[Implementer - security considerations](#) 34  
[Index of security parameters](#) 34  
[Informative references](#) 7

Initialization  
    [server](#) 13

[Introduction](#) 6

### L

Local events  
    [server](#) 31

### M

Message processing  
[server](#) 13  
Messages  
    [AcdAgent complex type](#) 11  
    [ArrayOfGuid complex type](#) 11  
    [attribute groups](#) 12  
    [attributes](#) 12  
    [complex types](#) 10  
    [elements](#) 10  
    [enumerated](#) 10  
    [groups](#) 12  
    [guid simple type](#) 12  
    [namespaces](#) 10  
    [simple types](#) 11  
    [syntax](#) 10  
    [transport](#) 10

### N

[Namespaces](#) 10  
[Normative references](#) 7

### O

Operations  
    [GetActiveResponseGroups](#) 14  
        [example](#) 32  
    [GetAgent](#) 16  
    [GetGroups](#) 18  
    [IsAgent](#) 22  
    [SignIn](#) 24  
        [example](#) 32  
    [SignInMultiple](#) 25  
    [SignOut](#) 27  
        [example of unsuccessful](#) 33  
    [SignOutMultiple](#) 29  
    [Overview \(synopsis\)](#) 8

### P

[Parameters - security index](#) 34  
[Preconditions](#) 9  
[Prerequisites](#) 9  
[Product behavior](#) 42

### R

[References](#) 7  
    [informative](#) 7  
    [normative](#) 7  
[Relationship to other protocols](#) 8

### S

Security

[implementer considerations](#) 34  
[parameter index](#) 34  
Sequencing rules  
  [server](#) 13  
Server  
  [abstract data model](#) 13  
  [GetActiveResponseGroups operation](#) 14  
    [example](#) 32  
  [GetAgent operation](#) 16  
  [GetGroups operation](#) 18  
  [initialization](#) 13  
  [IsAgent operation](#) 22  
  [local events](#) 31  
  [message processing](#) 13  
  [overview](#) 13  
  [sequencing rules](#) 13  
  [SignIn operation](#) 24  
    [example](#) 32  
  [SignInMultiple operation](#) 25  
  [SignOut operation](#) 27  
    [example of unsuccessful](#) 33  
  [SignOutMultiple operation](#) 29  
  [timer events](#) 31  
  [timers](#) 13  
Simple types 11  
  [guid](#) 12  
Standards assignments 9  
Syntax  
  [messages - overview](#) 10

## T

Timer events  
  [server](#) 31  
Timers  
  [server](#) 13  
[Tracking changes](#) 43  
[Transport](#) 10  
Types  
  [complex](#) 10  
  [simple](#) 11

## V

[Vendor-extensible fields](#) 9  
[Versioning](#) 9

## W

[WSDL](#) 35