

[MS-SOCCSOM]:

SharePoint Social Client-Side Object Model Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **License Programs.** To see all of the protocols in scope under a specific license program and the associated patents, visit the [Patent Map](#).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

Support. For questions and support, please contact dochelp@microsoft.com.

Revision Summary

Date	Revision History	Revision Class	Comments
7/16/2012	0.1	New	Released new document.
9/12/2012	0.1	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2012	1.0	Major	Significantly changed the technical content.
2/11/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
7/30/2013	2.0	Major	Significantly changed the technical content.
11/18/2013	2.1	Minor	Clarified the meaning of the technical content.
2/10/2014	3.0	Major	Significantly changed the technical content.
4/30/2014	3.0	None	No changes to the meaning, language, or formatting of the technical content.
7/31/2014	3.1	Minor	Clarified the meaning of the technical content.
10/30/2014	3.1	None	No changes to the meaning, language, or formatting of the technical content.
2/26/2016	4.0	Major	Significantly changed the technical content.
7/15/2016	4.0	None	No changes to the meaning, language, or formatting of the technical content.
10/13/2016	5.0	Major	Significantly changed the technical content.
1/18/2017	5.1	Minor	Clarified the meaning of the technical content.
9/19/2017	5.1	None	No changes to the meaning, language, or formatting of the technical content.
7/24/2018	6.0	Major	Significantly changed the technical content.
10/1/2018	7.0	Major	Significantly changed the technical content.
12/11/2018	8.0	Major	Significantly changed the technical content.
7/20/2021	9.0	Major	Significantly changed the technical content.
10/5/2021	10.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	18
1.1	Glossary	18
1.2	References	20
1.2.1	Normative References	20
1.2.2	Informative References	20
1.3	Overview	21
1.4	Relationship to Other Protocols	21
1.5	Prerequisites/Preconditions	21
1.6	Applicability Statement	21
1.7	Versioning and Capability Negotiation	21
1.8	Vendor-Extensible Fields	21
1.9	Standards Assignments.....	21
2	Messages.....	22
2.1	Transport.....	22
2.2	Message Syntax.....	22
2.2.1	Namespaces	22
3	Protocol Details.....	23
3.1	Server Details.....	23
3.1.1	Abstract Data Model.....	23
3.1.2	Timers	23
3.1.3	Initialization.....	23
3.1.4	Higher-Layer Triggered Events	23
3.1.5	Message Processing Events and Sequencing Rules	23
3.1.5.1	Microsoft.Office.Server.ReputationModel.Reputation	23
3.1.5.1.1	Properties.....	24
3.1.5.1.1.1	Scalar Properties.....	24
3.1.5.1.1.2	ObjectPath Properties.....	24
3.1.5.1.2	Methods	24
3.1.5.1.2.1	Scalar Methods	24
3.1.5.1.2.1.1	SetLike	24
3.1.5.1.2.1.2	SetRating	24
3.1.5.1.2.2	ObjectPath Methods	25
3.1.5.2	Microsoft.SharePoint.Client.ResourcePath.....	25
3.1.5.2.1	Properties.....	25
3.1.5.2.1.1	Scalar Properties.....	25
3.1.5.2.1.1.1	DecodedUrl.....	25
3.1.5.3	Microsoft.SharePoint.Client.Social.SocialActor	25
3.1.5.3.1	Properties.....	25
3.1.5.3.1.1	Scalar Properties.....	25
3.1.5.3.1.1.1	AccountName.....	25
3.1.5.3.1.1.2	ActorType.....	25
3.1.5.3.1.1.3	EmailAddress	26
3.1.5.3.1.1.4	FollowedContentUri.....	26
3.1.5.3.1.1.5	Id.....	26
3.1.5.3.1.1.6	ImageUri	26
3.1.5.3.1.1.7	LibraryUri	26
3.1.5.3.1.1.8	Name.....	26
3.1.5.3.1.1.9	TagGuid	26
3.1.5.3.1.1.10	Title.....	27
3.1.5.3.1.1.11	Uri.....	27
3.1.5.3.1.1.12	ContentUri.....	27
3.1.5.3.1.1.13	IsFollowed	27
3.1.5.3.1.1.14	PersonalSiteUri.....	27

3.1.5.3.1.1.15	StatusText.....	27
3.1.5.3.1.1.16	Status.....	27
3.1.5.3.1.1.17	CanFollow.....	28
3.1.5.3.1.2	ObjectPath Properties.....	28
3.1.5.4	Microsoft.SharePoint.Client.Social.SocialActorInfo	28
3.1.5.4.1	Properties.....	28
3.1.5.4.1.1	Scalar Properties.....	28
3.1.5.4.1.1.1	AccountName.....	28
3.1.5.4.1.1.2	ActorType.....	28
3.1.5.4.1.1.3	ContentUri.....	28
3.1.5.4.1.1.4	Id.....	29
3.1.5.4.1.1.5	TagGuid	29
3.1.5.4.1.2	ObjectPath Properties.....	29
3.1.5.5	Microsoft.SharePoint.Client.Social.SocialActorType	29
3.1.5.5.1	Field Values	29
3.1.5.5.1.1	User	29
3.1.5.5.1.2	Document	29
3.1.5.5.1.3	Site.....	29
3.1.5.5.1.4	Tag	29
3.1.5.6	Microsoft.SharePoint.Client.Social.SocialActorTypes.....	30
3.1.5.6.1	Field Values	30
3.1.5.6.1.1	None	30
3.1.5.6.1.2	Users	30
3.1.5.6.1.3	Documents	30
3.1.5.6.1.4	Sites	30
3.1.5.6.1.5	Tags.....	30
3.1.5.6.1.6	All.....	30
3.1.5.6.1.7	ExcludeContentWithoutFeeds	30
3.1.5.6.1.8	IncludeGroupsSites	30
3.1.5.6.1.9	WithinLast24Hours	30
3.1.5.7	Microsoft.SharePoint.Client.Social.SocialAnnouncementManager	31
3.1.5.7.1	Properties.....	31
3.1.5.7.1.1	Scalar Properties.....	31
3.1.5.7.1.2	ObjectPath Properties.....	31
3.1.5.7.2	Methods	31
3.1.5.7.2.1	Scalar Methods.....	31
3.1.5.7.2.1.1	GetCurrentAnnouncements	31
3.1.5.7.2.2	ObjectPath Methods	31
3.1.5.8	Microsoft.SharePoint.Client.Social.SocialAttachment	31
3.1.5.8.1	Properties.....	31
3.1.5.8.1.1	Scalar Properties.....	31
3.1.5.8.1.1.1	AttachmentKind	32
3.1.5.8.1.1.2	ClickAction.....	32
3.1.5.8.1.1.3	ContentUri.....	32
3.1.5.8.1.1.4	Description	32
3.1.5.8.1.1.5	Height.....	32
3.1.5.8.1.1.6	Length	32
3.1.5.8.1.1.7	Name.....	32
3.1.5.8.1.1.8	PreviewHeight.....	32
3.1.5.8.1.1.9	PreviewUri	33
3.1.5.8.1.1.10	PreviewWidth.....	33
3.1.5.8.1.1.11	Uri.....	33
3.1.5.8.1.1.12	Width.....	33
3.1.5.8.1.2	ObjectPath Properties.....	33
3.1.5.9	Microsoft.SharePoint.Client.Social.SocialAttachmentAction	33
3.1.5.9.1	Properties.....	33
3.1.5.9.1.1	Scalar Properties.....	33
3.1.5.9.1.1.1	ActionKind	33

3.1.5.9.1.1.2	ActionUri	34
3.1.5.9.1.1.3	Height.....	34
3.1.5.9.1.1.4	Width.....	34
3.1.5.9.1.2	ObjectPath Properties.....	34
3.1.5.10	Microsoft.SharePoint.Client.Social.SocialAttachmentActionKind	34
3.1.5.10.1	Field Values	34
3.1.5.10.1.1	Navigate.....	34
3.1.5.10.1.2	AdHocAction.....	34
3.1.5.11	Microsoft.SharePoint.Client.Social.SocialAttachmentKind	35
3.1.5.11.1	Field Values	35
3.1.5.11.1.1	Image	35
3.1.5.11.1.2	Video	35
3.1.5.11.1.3	Document.....	35
3.1.5.12	Microsoft.SharePoint.Client.Social.SocialDataItem	35
3.1.5.12.1	Properties.....	35
3.1.5.12.1.1	Scalar Properties.....	35
3.1.5.12.1.1.1	AccountName.....	35
3.1.5.12.1.1.2	ItemType	35
3.1.5.12.1.1.3	TagGuid	36
3.1.5.12.1.1.4	Text.....	36
3.1.5.12.1.1.5	Uri.....	36
3.1.5.12.1.2	ObjectPath Properties.....	36
3.1.5.13	Microsoft.SharePoint.Client.Social.SocialDataItemType	36
3.1.5.13.1	Field Values	36
3.1.5.13.1.1	User.....	36
3.1.5.13.1.2	Document.....	36
3.1.5.13.1.3	Site.....	36
3.1.5.13.1.4	Tag	37
3.1.5.13.1.5	Link	37
3.1.5.14	Microsoft.SharePoint.Client.Social.SocialDataOverlay	37
3.1.5.14.1	Properties.....	37
3.1.5.14.1.1	Scalar Properties.....	37
3.1.5.14.1.1.1	ActorIndexes	37
3.1.5.14.1.1.2	Index.....	37
3.1.5.14.1.1.3	Length	37
3.1.5.14.1.1.4	LinkUri	37
3.1.5.14.1.1.5	OverlayType	38
3.1.5.14.1.2	ObjectPath Properties.....	38
3.1.5.15	Microsoft.SharePoint.Client.Social.SocialDataOverlayType	38
3.1.5.15.1	Field Values	38
3.1.5.15.1.1	Link	38
3.1.5.15.1.2	Actors	38
3.1.5.16	Microsoft.SharePoint.Client.Social.SocialExceptionDetails	38
3.1.5.16.1	Properties.....	38
3.1.5.16.1.1	Scalar Properties.....	38
3.1.5.16.1.1.1	InternalErrorCode.....	38
3.1.5.16.1.1.2	InternalMessage.....	39
3.1.5.16.1.1.3	InternalStackTrace	39
3.1.5.16.1.1.4	InternalTypeName	39
3.1.5.16.1.1.5	Status.....	39
3.1.5.16.1.2	ObjectPath Properties.....	39
3.1.5.17	Microsoft.SharePoint.Client.Social.SocialFeed	39
3.1.5.17.1	Properties.....	39
3.1.5.17.1.1	Scalar Properties.....	39
3.1.5.17.1.1.1	Attributes	40
3.1.5.17.1.1.2	NewestProcessed.....	40
3.1.5.17.1.1.3	OldestProcessed	40
3.1.5.17.1.1.4	Threads.....	40

3.1.5.17.1.1.5	UnreadMentionCount	40
3.1.5.17.1.2	ObjectPath Properties	40
3.1.5.18	Microsoft.SharePoint.Client.Social.SocialFeedAttributes	41
3.1.5.18.1	Field Values	41
3.1.5.18.1.1	None	41
3.1.5.18.1.2	MoreThreadsAvailable	41
3.1.5.18.1.3	ValidTimeRange	41
3.1.5.18.1.4	MovedToYammer	41
3.1.5.19	Microsoft.SharePoint.Client.Social.SocialFeedManager	41
3.1.5.19.1	Properties	41
3.1.5.19.1.1	Scalar Properties	41
3.1.5.19.1.1.1	Owner	41
3.1.5.19.1.1.2	PersonalSitePortalUri	42
3.1.5.19.1.2	ObjectPath Properties	42
3.1.5.19.2	Methods	42
3.1.5.19.2.1	Scalar Methods	42
3.1.5.19.2.1.1	CreatePost	42
3.1.5.19.2.1.2	DeletePost	42
3.1.5.19.2.1.3	GetAllLikers	42
3.1.5.19.2.1.4	GetFeed	43
3.1.5.19.2.1.5	GetFeedFor	43
3.1.5.19.2.1.6	GetFullThread	44
3.1.5.19.2.1.7	GetMentions	44
3.1.5.19.2.1.8	GetUnreadMentionCount	44
3.1.5.19.2.1.9	LikePost	44
3.1.5.19.2.1.10	LockThread	45
3.1.5.19.2.1.11	UnlikePost	45
3.1.5.19.2.1.12	UnlockThread	45
3.1.5.19.2.1.13	SuppressThreadNotifications	45
3.1.5.19.2.1.14	CreateImageAttachment	46
3.1.5.19.2.1.15	GetPreview	46
3.1.5.19.2.1.16	GetPreviewImage	46
3.1.5.19.2.1.17	CreateFileAttachment	46
3.1.5.19.2.2	ObjectPath Methods	47
3.1.5.19.2.2.1	CSOM Constructor	47
3.1.5.20	Microsoft.SharePoint.Client.Social.SocialFeedOptions	47
3.1.5.20.1	Properties	47
3.1.5.20.1.1	Scalar Properties	47
3.1.5.20.1.1.1	MaxThreadCount	47
3.1.5.20.1.1.2	NewerThan	47
3.1.5.20.1.1.3	OlderThan	47
3.1.5.20.1.1.4	SortOrder	48
3.1.5.20.1.2	ObjectPath Properties	48
3.1.5.21	Microsoft.SharePoint.Client.Social.SocialFeedSortOrder	48
3.1.5.21.1	Field Values	48
3.1.5.21.1.1	ByModifiedTime	48
3.1.5.21.1.2	ByCreatedTime	48
3.1.5.22	Microsoft.SharePoint.Client.Social.SocialFeedType	48
3.1.5.22.1	Field Values	48
3.1.5.22.1.1	Personal	48
3.1.5.22.1.2	News	49
3.1.5.22.1.3	Timeline	49
3.1.5.22.1.4	Likes	49
3.1.5.22.1.5	Everyone	49
3.1.5.23	Microsoft.SharePoint.Client.Social.SocialFollowingManager	49
3.1.5.23.1	Properties	49
3.1.5.23.1.1	Scalar Properties	49
3.1.5.23.1.1.1	FollowedDocumentsUri	49

3.1.5.23.1.1.2	FollowedSitesUri	49
3.1.5.23.1.2	ObjectPath Properties	50
3.1.5.23.2	Methods	50
3.1.5.23.2.1	Scalar Methods	50
3.1.5.23.2.1.1	Follow	50
3.1.5.23.2.1.2	GetFollowed	50
3.1.5.23.2.1.3	GetFollowedCount	50
3.1.5.23.2.1.4	GetFollowers	50
3.1.5.23.2.1.5	GetSuggestions	51
3.1.5.23.2.1.6	IsFollowed	51
3.1.5.23.2.1.7	StopFollowing	51
3.1.5.23.2.2	ObjectPath Methods	51
3.1.5.23.2.2.1	CSOM Constructor	51
3.1.5.24	Microsoft.SharePoint.Client.Social.SocialFollowResult	51
3.1.5.24.1	Field Values	52
3.1.5.24.1.1	OK	52
3.1.5.24.1.2	AlreadyFollowing	52
3.1.5.24.1.3	LimitReached	52
3.1.5.24.1.4	InternalError	52
3.1.5.25	Microsoft.SharePoint.Client.Social.SocialLink	52
3.1.5.25.1	Properties	52
3.1.5.25.1.1	Scalar Properties	52
3.1.5.25.1.1.1	Text	52
3.1.5.25.1.1.2	Uri	52
3.1.5.25.1.2	ObjectPath Properties	53
3.1.5.26	Microsoft.SharePoint.Client.Social.SocialPost	53
3.1.5.26.1	Properties	53
3.1.5.26.1.1	Scalar Properties	53
3.1.5.26.1.1.1	Attachment	53
3.1.5.26.1.1.2	Attributes	53
3.1.5.26.1.1.3	AuthorIndex	53
3.1.5.26.1.1.4	CreatedTime	53
3.1.5.26.1.1.5	Id	53
3.1.5.26.1.1.6	LikerInfo	54
3.1.5.26.1.1.7	ModifiedTime	54
3.1.5.26.1.1.8	Overlays	54
3.1.5.26.1.1.9	PostType	54
3.1.5.26.1.1.10	PreferredImageUri	54
3.1.5.26.1.1.11	Source	54
3.1.5.26.1.1.12	Text	54
3.1.5.26.1.2	ObjectPath Properties	55
3.1.5.27	Microsoft.SharePoint.Client.Social.SocialPostActorInfo	55
3.1.5.27.1	Properties	55
3.1.5.27.1.1	Scalar Properties	55
3.1.5.27.1.1.1	Indexes	55
3.1.5.27.1.1.2	TotalCount	55
3.1.5.27.1.1.3	IncludesCurrentUser	55
3.1.5.27.1.2	ObjectPath Properties	55
3.1.5.28	Microsoft.SharePoint.Client.Social.SocialPostAttributes	56
3.1.5.28.1	Field Values	56
3.1.5.28.1.1	None	56
3.1.5.28.1.2	CanLike	56
3.1.5.28.1.3	CanDelete	56
3.1.5.28.1.4	UseAuthorImage	56
3.1.5.28.1.5	UseSmallImage	56
3.1.5.28.1.6	CanFollowUp	56
3.1.5.29	Microsoft.SharePoint.Client.Social.SocialPostCreationData	56
3.1.5.29.1	Properties	56

3.1.5.29.1.1	Scalar Properties.....	57
3.1.5.29.1.1.1	Attachment.....	57
3.1.5.29.1.1.2	ContentItems.....	57
3.1.5.29.1.1.3	ContentText.....	57
3.1.5.29.1.1.4	DefinitionData.....	57
3.1.5.29.1.1.5	Source.....	57
3.1.5.29.1.1.6	SecurityUris.....	58
3.1.5.29.1.1.7	UpdateStatusText.....	58
3.1.5.29.1.2	ObjectPath Properties.....	58
3.1.5.30	Microsoft.SharePoint.Client.Social.SocialPostDefinitionData.....	58
3.1.5.30.1	Properties.....	58
3.1.5.30.1.1	Scalar Properties.....	58
3.1.5.30.1.1.1	Items.....	58
3.1.5.30.1.1.2	Name.....	58
3.1.5.30.1.2	ObjectPath Properties.....	58
3.1.5.31	Microsoft.SharePoint.Client.Social.SocialPostDefinitionDataItem.....	59
3.1.5.31.1	Properties.....	59
3.1.5.31.1.1	Scalar Properties.....	59
3.1.5.31.1.1.1	AccountName.....	59
3.1.5.31.1.1.2	ItemType.....	59
3.1.5.31.1.1.3	PlaceholderName.....	59
3.1.5.31.1.1.4	TagGuid.....	59
3.1.5.31.1.1.5	Text.....	59
3.1.5.31.1.1.6	Uri.....	59
3.1.5.31.1.2	ObjectPath Properties.....	60
3.1.5.32	Microsoft.SharePoint.Client.Social.SocialPostDefinitionDataItemType.....	60
3.1.5.32.1	Field Values.....	60
3.1.5.32.1.1	Text.....	60
3.1.5.32.1.2	User.....	60
3.1.5.32.1.3	Document.....	60
3.1.5.32.1.4	Site.....	60
3.1.5.32.1.5	Tag.....	60
3.1.5.32.1.6	Link.....	60
3.1.5.33	Microsoft.SharePoint.Client.Social.SocialPostReference.....	61
3.1.5.33.1	Properties.....	61
3.1.5.33.1.1	Scalar Properties.....	61
3.1.5.33.1.1.1	Digest.....	61
3.1.5.33.1.1.2	Post.....	61
3.1.5.33.1.1.3	ThreadId.....	61
3.1.5.33.1.1.4	ThreadOwnerIndex.....	61
3.1.5.33.1.2	ObjectPath Properties.....	61
3.1.5.34	Microsoft.SharePoint.Client.Social.SocialPostType.....	61
3.1.5.34.1	Field Values.....	62
3.1.5.34.1.1	Root.....	62
3.1.5.34.1.2	Reply.....	62
3.1.5.35	Microsoft.SharePoint.Client.Social.SocialRestActor.....	62
3.1.5.35.1	Properties.....	62
3.1.5.35.1.1	Scalar Properties.....	62
3.1.5.35.1.1.1	FollowableItem.....	62
3.1.5.35.1.1.2	FollowableItemActor.....	62
3.1.5.35.1.1.3	Me.....	62
3.1.5.35.1.2	ObjectPath Properties.....	63
3.1.5.35.2	Methods.....	63
3.1.5.35.2.1	Scalar Methods.....	63
3.1.5.35.2.1.1	UnreadMentionCount.....	63
3.1.5.35.2.2	ObjectPath Methods.....	63
3.1.5.35.2.2.1	CSOM Constructor.....	63
3.1.5.35.2.2.2	Feed.....	63

3.1.5.35.2.2.3	Likes.....	63
3.1.5.35.2.2.4	MentionFeed	64
3.1.5.35.2.2.5	News	64
3.1.5.35.2.2.6	OrganizationFeed	65
3.1.5.35.2.2.7	TimelineFeed	65
3.1.5.36	Microsoft.SharePoint.Client.Social.SocialRestFeed	66
3.1.5.36.1	Properties.....	66
3.1.5.36.1.1	Scalar Properties.....	66
3.1.5.36.1.1.1	SocialFeed	66
3.1.5.36.1.2	ObjectPath Properties.....	66
3.1.5.36.2	Methods	66
3.1.5.36.2.1	Scalar Methods.....	66
3.1.5.36.2.2	ObjectPath Methods	66
3.1.5.36.2.2.1	CSOM Constructor	66
3.1.5.36.2.2.2	ClearUnReadMentionCount	66
3.1.5.36.2.2.3	Post.....	67
3.1.5.37	Microsoft.SharePoint.Client.Social.SocialRestFeedManager	67
3.1.5.37.1	Properties.....	67
3.1.5.37.1.1	Scalar Properties.....	67
3.1.5.37.1.2	ObjectPath Properties	68
3.1.5.37.2	Methods	68
3.1.5.37.2.1	Scalar Methods	68
3.1.5.37.2.2	ObjectPath Methods	68
3.1.5.37.2.2.1	CSOM Constructor	68
3.1.5.37.2.2.2	Actor	68
3.1.5.37.2.2.3	My.....	68
3.1.5.37.2.2.4	Post.....	68
3.1.5.38	Microsoft.SharePoint.Client.Social.SocialRestFollowingManager	69
3.1.5.38.1	Properties.....	69
3.1.5.38.1.1	Scalar Properties.....	69
3.1.5.38.1.1.1	FollowedDocumentsUri	69
3.1.5.38.1.1.2	FollowedSitesUri.....	69
3.1.5.38.1.1.3	MyFollowedDocumentsUri	70
3.1.5.38.1.1.4	MyFollowedSitesUri.....	70
3.1.5.38.1.1.5	SocialActor	70
3.1.5.38.1.2	ObjectPath Properties.....	70
3.1.5.38.2	Methods	70
3.1.5.38.2.1	Scalar Methods.....	70
3.1.5.38.2.1.1	Follow	70
3.1.5.38.2.1.2	Followed.....	71
3.1.5.38.2.1.3	FollowedCount	71
3.1.5.38.2.1.4	Followers.....	71
3.1.5.38.2.1.5	IsFollowed	72
3.1.5.38.2.1.6	StopFollowing	72
3.1.5.38.2.1.7	Suggestions.....	73
3.1.5.38.2.2	ObjectPath Methods	73
3.1.5.38.2.2.1	CSOM Constructor	73
3.1.5.38.2.2.2	My.....	73
3.1.5.39	Microsoft.SharePoint.Client.Social.SocialRestPostCreationData.....	74
3.1.5.39.1	Properties.....	74
3.1.5.39.1.1	Scalar Properties.....	74
3.1.5.39.1.1.1	creationData	74
3.1.5.39.1.1.2	ID	74
3.1.5.39.1.2	ObjectPath Properties	74
3.1.5.40	Microsoft.SharePoint.Client.Social.SocialRestThread	74
3.1.5.40.1	Properties.....	74
3.1.5.40.1.1	Scalar Properties.....	74
3.1.5.40.1.1.1	ID	74

3.1.5.40.1.1.2	SocialThread	75
3.1.5.40.1.2	ObjectPath Properties	75
3.1.5.40.2	Methods	75
3.1.5.40.2.1	Scalar Methods	75
3.1.5.40.2.1.1	Delete	75
3.1.5.40.2.1.2	Likers	75
3.1.5.40.2.2	ObjectPath Methods	76
3.1.5.40.2.2.1	CSOM Constructor	76
3.1.5.40.2.2.2	Like	76
3.1.5.40.2.2.3	Lock	76
3.1.5.40.2.2.4	Reply	77
3.1.5.40.2.2.5	Unlike	77
3.1.5.40.2.2.6	Unlock	78
3.1.5.41	Microsoft.SharePoint.Client.Social.SocialStatusCode	78
3.1.5.41.1	Field Values	78
3.1.5.41.1.1	OK	78
3.1.5.41.1.2	InvalidRequest	78
3.1.5.41.1.3	AccessDenied	79
3.1.5.41.1.4	ItemNotFound	79
3.1.5.41.1.5	InvalidOperation	79
3.1.5.41.1.6	ItemNotModified	79
3.1.5.41.1.7	InternalServerError	79
3.1.5.41.1.8	CacheReadError	79
3.1.5.41.1.9	CacheUpdateError	79
3.1.5.41.1.10	PersonalSiteNotFound	79
3.1.5.41.1.11	FailedToCreatePersonalSite	79
3.1.5.41.1.12	NotAuthorizedToCreatePersonalSite	79
3.1.5.41.1.13	CannotCreatePersonalSite	80
3.1.5.41.1.14	LimitReached	80
3.1.5.41.1.15	AttachmentError	80
3.1.5.41.1.16	PartialData	80
3.1.5.41.1.17	FeatureDisabled	80
3.1.5.41.1.18	StorageQuotaExceeded	80
3.1.5.41.1.19	DatabaseError	80
3.1.5.42	Microsoft.SharePoint.Client.Social.SocialThread	80
3.1.5.42.1	Properties	80
3.1.5.42.1.1	Scalar Properties	80
3.1.5.42.1.1.1	Actors	80
3.1.5.42.1.1.2	Attributes	81
3.1.5.42.1.1.3	Id	81
3.1.5.42.1.1.4	OwnerIndex	81
3.1.5.42.1.1.5	Permalink	81
3.1.5.42.1.1.6	PostReference	81
3.1.5.42.1.1.7	Replies	81
3.1.5.42.1.1.8	RootPost	82
3.1.5.42.1.1.9	Status	82
3.1.5.42.1.1.10	ThreadType	82
3.1.5.42.1.1.11	TotalReplyCount	82
3.1.5.42.1.2	ObjectPath Properties	82
3.1.5.43	Microsoft.SharePoint.Client.Social.SocialThreadAttributes	82
3.1.5.43.1	Field Values	82
3.1.5.43.1.1	None	82
3.1.5.43.1.2	IsDigest	83
3.1.5.43.1.3	CanReply	83
3.1.5.43.1.4	CanLock	83
3.1.5.43.1.5	IsLocked	83
3.1.5.43.1.6	ReplyLimitReached	83
3.1.5.44	Microsoft.SharePoint.Client.Social.SocialThreadType	83

3.1.5.44.1	Field Values	83
3.1.5.44.1.1	Normal	83
3.1.5.44.1.2	LikeReference.....	83
3.1.5.44.1.3	ReplyReference.....	84
3.1.5.44.1.4	MentionReference	84
3.1.5.44.1.5	TagReference	84
3.1.5.45	Microsoft.SharePoint.Client.UserProfiles.ChangeTypes	84
3.1.5.45.1	Field Values	84
3.1.5.45.1.1	None	84
3.1.5.45.1.2	Add.....	84
3.1.5.45.1.3	Modify	84
3.1.5.45.1.4	Remove	84
3.1.5.45.1.5	Metadata	84
3.1.5.45.1.6	All.....	85
3.1.5.46	Microsoft.SharePoint.Client.UserProfiles.FollowedContent	85
3.1.5.46.1	Properties.....	85
3.1.5.46.1.1	Scalar Properties.....	85
3.1.5.46.1.1.1	FollowedDocumentsUrl	85
3.1.5.46.1.1.2	FollowedSitesUrl.....	85
3.1.5.46.1.2	ObjectPath Properties	85
3.1.5.46.2	Methods	85
3.1.5.46.2.1	Scalar Methods	85
3.1.5.46.2.1.1	FindAndUpdateFollowedItem	85
3.1.5.46.2.1.2	Follow	86
3.1.5.46.2.1.3	GetFollowedStatus.....	86
3.1.5.46.2.1.4	IsFollowed	86
3.1.5.46.2.1.5	StopFollowing	86
3.1.5.46.2.1.6	UpdateData	87
3.1.5.46.2.1.7	FollowItem	87
3.1.5.46.2.1.8	GetItem	87
3.1.5.46.2.1.9	GetItems.....	87
3.1.5.46.2.1.10	RefreshFollowedItem	88
3.1.5.46.2.2	ObjectPath Methods	88
3.1.5.46.2.2.1	CSOM Constructor	88
3.1.5.47	Microsoft.SharePoint.Client.UserProfiles.FollowedContentExceptionCode	88
3.1.5.47.1	Field Values	88
3.1.5.47.1.1	ItemAlreadyExists	88
3.1.5.47.1.2	ItemDoesNotExist	88
3.1.5.47.1.3	InvalidQueryString	89
3.1.5.47.1.4	InvalidSubtypeValue	89
3.1.5.47.1.5	UnsupportedItemType	89
3.1.5.47.1.6	FollowLimitReached.....	89
3.1.5.47.1.7	UntrustedSource.....	89
3.1.5.47.1.8	InternalError	89
3.1.5.47.1.9	UnsupportedSite	89
3.1.5.47.1.10	ItemNotFound	89
3.1.5.48	Microsoft.SharePoint.Client.UserProfiles.FollowedContentQueryOptions	89
3.1.5.48.1	Field Values	90
3.1.5.48.1.1	Unset	90
3.1.5.48.1.2	Sites	90
3.1.5.48.1.3	Documents	90
3.1.5.48.1.4	Hidden	90
3.1.5.48.1.5	NonFeed	90
3.1.5.48.1.6	DefaultOptions	90
3.1.5.48.1.7	All.....	90
3.1.5.48.1.8	IncludeGroupsSites	90
3.1.5.48.1.9	WithinLast24Hours.....	90
3.1.5.49	Microsoft.SharePoint.Client.UserProfiles.FollowedItem	90

3.1.5.49.1	Properties.....	91
3.1.5.49.1.1	Scalar Properties.....	91
3.1.5.49.1.1.1	Data	91
3.1.5.49.1.1.2	Title.....	91
3.1.5.49.1.1.3	Url.....	91
3.1.5.49.1.1.4	FileType	91
3.1.5.49.1.1.5	Hidden	91
3.1.5.49.1.1.6	IconUrl.....	91
3.1.5.49.1.1.7	ItemId	91
3.1.5.49.1.1.8	ItemType	92
3.1.5.49.1.1.9	ListId	92
3.1.5.49.1.1.10	ParentUrl.....	92
3.1.5.49.1.1.11	SiteId	92
3.1.5.49.1.1.12	Subtype	92
3.1.5.49.1.1.13	UniqueId	92
3.1.5.49.1.1.14	WebId.....	92
3.1.5.49.1.1.15	Flags.....	93
3.1.5.49.1.1.16	HasFeed	93
3.1.5.49.1.1.17	FileTypeProgid	93
3.1.5.49.1.1.18	ServerUrlProgid.....	93
3.1.5.49.1.1.19	Pinned	93
3.1.5.49.1.2	ObjectPath Properties	93
3.1.5.50	Microsoft.SharePoint.Client.UserProfiles.FollowedItemData	93
3.1.5.50.1	Properties.....	94
3.1.5.50.1.1	Scalar Properties.....	94
3.1.5.50.1.1.1	Properties.....	94
3.1.5.50.1.2	ObjectPath Properties	94
3.1.5.50.2	Methods	94
3.1.5.50.2.1	Scalar Methods.....	94
3.1.5.50.2.2	ObjectPath Methods	94
3.1.5.50.2.2.1	CSOM Constructor	94
3.1.5.51	Microsoft.SharePoint.Client.UserProfiles.FollowedItemType.....	94
3.1.5.51.1	Field Values	94
3.1.5.51.1.1	Unknown	94
3.1.5.51.1.2	Document	94
3.1.5.51.1.3	Site.....	95
3.1.5.51.1.4	All.....	95
3.1.5.52	Microsoft.SharePoint.Client.UserProfiles.FollowedStatus	95
3.1.5.52.1	Field Values	95
3.1.5.52.1.1	Followed	95
3.1.5.52.1.2	NotFollowed	95
3.1.5.52.1.3	NotFollowable.....	95
3.1.5.53	Microsoft.SharePoint.Client.UserProfiles.FollowResult.....	95
3.1.5.53.1	Properties.....	95
3.1.5.53.1.1	Scalar Properties.....	95
3.1.5.53.1.1.1	Item	95
3.1.5.53.1.1.2	ResultType	96
3.1.5.53.1.2	ObjectPath Properties	96
3.1.5.54	Microsoft.SharePoint.Client.UserProfiles.FollowResultType	96
3.1.5.54.1	Field Values	96
3.1.5.54.1.1	Unknown	96
3.1.5.54.1.2	Followed	96
3.1.5.54.1.3	Refollowed	96
3.1.5.54.1.4	HitFollowLimit.....	96
3.1.5.54.1.5	Failed	96
3.1.5.55	Microsoft.SharePoint.Client.UserProfiles.HashTag	97
3.1.5.55.1	Properties.....	97
3.1.5.55.1.1	Scalar Properties.....	97

3.1.5.55.1.1.1	Name	97
3.1.5.55.1.1.2	UseCount	97
3.1.5.55.1.2	ObjectPath Properties	97
3.1.5.56	Microsoft.SharePoint.Client.UserProfiles.HashTagCollection	97
3.1.5.56.1	Properties	97
3.1.5.56.1.1	Scalar Properties	97
3.1.5.56.1.2	ObjectPath Properties	97
3.1.5.56.2	Methods	97
3.1.5.56.2.1	Scalar Methods	97
3.1.5.56.2.2	ObjectPath Methods	97
3.1.5.57	Microsoft.SharePoint.Client.UserProfiles.ObjectTypes	98
3.1.5.57.1	Field Values	98
3.1.5.57.1.1	None	98
3.1.5.57.1.2	SingleValueProperty	98
3.1.5.57.1.3	MultiValueProperty	98
3.1.5.57.1.4	Anniversary	98
3.1.5.57.1.5	DLMembership	98
3.1.5.57.1.6	SiteMembership	98
3.1.5.57.1.7	QuickLink	98
3.1.5.57.1.8	Colleague	98
3.1.5.57.1.9	PersonalizationSite	99
3.1.5.57.1.10	UserProfile	99
3.1.5.57.1.11	WebLog	99
3.1.5.57.1.12	Custom	99
3.1.5.57.1.13	OrganizationProfile	99
3.1.5.57.1.14	OrganizationMembership	99
3.1.5.57.1.15	All	99
3.1.5.58	Microsoft.SharePoint.Client.UserProfiles.PeopleManager	99
3.1.5.58.1	Properties	99
3.1.5.58.1.1	Scalar Properties	99
3.1.5.58.1.1.1	EditProfileLink	99
3.1.5.58.1.1.2	IsMyPeopleListPublic	100
3.1.5.58.1.2	ObjectPath Properties	100
3.1.5.58.2	Methods	100
3.1.5.58.2.1	Scalar Methods	100
3.1.5.58.2.1.1	AmIFollowedBy	100
3.1.5.58.2.1.2	AmIFollowing	100
3.1.5.58.2.1.3	Follow	100
3.1.5.58.2.1.4	HideSuggestion	101
3.1.5.58.2.1.5	IsFollowing	101
3.1.5.58.2.1.6	StopFollowing	101
3.1.5.58.2.1.7	GetUserProfilePropertiesFor	101
3.1.5.58.2.1.8	GetUserProfilePropertyFor	101
3.1.5.58.2.1.9	SetMyProfilePicture	102
3.1.5.58.2.1.10	FollowTag	102
3.1.5.58.2.1.11	StopFollowingTag	102
3.1.5.58.2.1.12	GetFollowedTags	102
3.1.5.58.2.1.13	GetDefaultDocumentLibrary	103
3.1.5.58.2.1.14	SetMultiValuedProfileProperty	103
3.1.5.58.2.1.15	SetSingleValueProfileProperty	103
3.1.5.58.2.2	ObjectPath Methods	104
3.1.5.58.2.2.1	GetMyProperties	104
3.1.5.58.2.2.2	GetPropertiesFor	104
3.1.5.58.2.2.3	CSOM Constructor	104
3.1.5.58.2.2.4	GetFollowersFor	104
3.1.5.58.2.2.5	GetMyFollowers	104
3.1.5.58.2.2.6	GetMySuggestions	105
3.1.5.58.2.2.7	GetPeopleFollowedBy	105

3.1.5.58.2.2.8	GetPeopleFollowedByMe	105
3.1.5.58.2.2.9	GetTrendingTags	105
3.1.5.59	Microsoft.SharePoint.Client.UserProfiles.PersonalCache	105
3.1.5.59.1	Properties	105
3.1.5.59.1.1	Scalar Properties	105
3.1.5.59.1.2	ObjectPath Properties	106
3.1.5.59.2	Methods	106
3.1.5.59.2.1	Scalar Methods	106
3.1.5.59.2.1.1	DeleteCacheItemsAsync	106
3.1.5.59.2.1.2	LoadUserProfile	106
3.1.5.59.2.1.3	ReadCache	106
3.1.5.59.2.1.4	ReadCacheOrCreate	106
3.1.5.59.2.1.5	ReadCacheOrCreateOrderById	107
3.1.5.59.2.1.6	WriteCache	107
3.1.5.59.2.2	ObjectPath Methods	107
3.1.5.59.2.2.1	CSOM Constructor	107
3.1.5.60	Microsoft.SharePoint.Client.UserProfiles.PersonalCacheExceptionCode	107
3.1.5.60.1	Field Values	108
3.1.5.60.1.1	FolderNotFound	108
3.1.5.60.1.2	PersonalSiteNotFound	108
3.1.5.60.1.3	PersonalCacheListNotFound	108
3.1.5.60.1.4	PersonalCacheListProvisionFailed	108
3.1.5.60.1.5	PersonalCacheItemProvisionFailed	108
3.1.5.60.1.6	FailedToRetrieveCacheListItems	108
3.1.5.60.1.7	PersonalCacheItemInvalidListItemId	108
3.1.5.60.1.8	FailedToUpdateCacheListItem	108
3.1.5.61	Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem	108
3.1.5.61.1	Properties	109
3.1.5.61.1.1	Scalar Properties	109
3.1.5.61.1.1.1	CacheKey	109
3.1.5.61.1.1.2	CacheValue	109
3.1.5.61.1.1.3	CacheValueHash	109
3.1.5.61.1.1.4	CacheVersion	109
3.1.5.61.1.1.5	ListItemId	109
3.1.5.61.1.1.6	ListItemUniqueId	109
3.1.5.61.1.1.7	ModifiedTimeUtc	110
3.1.5.61.1.2	ObjectPath Properties	110
3.1.5.62	Microsoft.SharePoint.Client.UserProfiles.PersonalSiteCapabilities	110
3.1.5.62.1	Field Values	110
3.1.5.62.1.1	None	110
3.1.5.62.1.2	Profile	110
3.1.5.62.1.3	Social	110
3.1.5.62.1.4	Storage	110
3.1.5.62.1.5	MyTasksDashboard	110
3.1.5.62.1.6	Education	111
3.1.5.62.1.7	Guest	111
3.1.5.63	Microsoft.SharePoint.Client.UserProfiles.PersonalSiteCreationPriority	111
3.1.5.63.1	Field Values	111
3.1.5.63.1.1	Low	111
3.1.5.63.1.2	Medium	111
3.1.5.63.1.3	High	111
3.1.5.64	Microsoft.SharePoint.Client.UserProfiles.PersonalSiteInstantiationState	111
3.1.5.64.1	Field Values	111
3.1.5.64.1.1	Uninitialized	111
3.1.5.64.1.2	Enqueued	111
3.1.5.64.1.3	Created	112
3.1.5.64.1.4	Deleted	112
3.1.5.64.1.5	PermissionsGeneralFailure	112

3.1.5.64.1.6	PermissionsUPANotGranted	112
3.1.5.64.1.7	PermissionsUserNotLicensed	112
3.1.5.64.1.8	PermissionsSelfServiceSiteCreationDisabled	112
3.1.5.64.1.9	PermissionsNoMySitesInPeopleLight	112
3.1.5.64.1.10	PermissionsEmptyHostUrl	112
3.1.5.64.1.11	PermissionsHostFailedToInitializePersonalSiteContext	112
3.1.5.64.1.12	ErrorGeneralFailure	113
3.1.5.64.1.13	ErrorManagedPathDoesNotExist	113
3.1.5.64.1.14	ErrorLanguageNotInstalled	113
3.1.5.64.1.15	ErrorPartialCreate	113
3.1.5.64.1.16	ErrorPersonalSiteAlreadyExists	113
3.1.5.64.1.17	ErrorRootSiteNotPresent	113
3.1.5.64.1.18	ErrorSelfServiceSiteCreateCallFailed	113
3.1.5.65	Microsoft.SharePoint.Client.UserProfiles.PersonProperties.....	113
3.1.5.65.1	Properties.....	114
3.1.5.65.1.1	Scalar Properties.....	114
3.1.5.65.1.1.1	AccountName.....	114
3.1.5.65.1.1.2	DirectReports.....	114
3.1.5.65.1.1.3	DisplayName	114
3.1.5.65.1.1.4	Email	114
3.1.5.65.1.1.5	ExtendedManagers	114
3.1.5.65.1.1.6	ExtendedReports	114
3.1.5.65.1.1.7	IsFollowed	115
3.1.5.65.1.1.8	LatestPost	115
3.1.5.65.1.1.9	Peers	115
3.1.5.65.1.1.10	PersonalUrl	115
3.1.5.65.1.1.11	PictureUrl	115
3.1.5.65.1.1.12	Title.....	115
3.1.5.65.1.1.13	UserUrl	115
3.1.5.65.1.1.14	UserProfileProperties.....	115
3.1.5.65.1.1.15	PersonalSiteHostUrl	116
3.1.5.65.1.1.16	sharePointConversationsLinkFirstRun	116
3.1.5.65.1.1.17	sharePointFiltersPaneFirstRun	116
3.1.5.65.1.1.18	sharePointHomeFirstRun	116
3.1.5.65.1.1.19	sharePointLibrariesFirstRun.....	116
3.1.5.65.1.1.20	sharePointListsFirstRun	116
3.1.5.65.1.1.21	sharePointOneDriveBusinessFirstRun	117
3.1.5.65.1.1.22	sharePointPageAuthoringFirstRun	117
3.1.5.65.1.2	ObjectPath Properties	117
3.1.5.65.2	Methods	117
3.1.5.65.2.1	Scalar Methods	117
3.1.5.65.2.2	ObjectPath Methods	117
3.1.5.66	Microsoft.SharePoint.Client.UserProfiles.ProfileImageStore	117
3.1.5.66.1	Properties.....	117
3.1.5.66.1.1	Scalar Properties.....	117
3.1.5.66.1.2	ObjectPath Properties.....	117
3.1.5.66.2	Methods	117
3.1.5.66.2.1	Scalar Methods	117
3.1.5.66.2.1.1	SaveUploadedFile	117
3.1.5.66.2.2	ObjectPath Methods	118
3.1.5.66.2.2.1	CSOM Constructor	118
3.1.5.67	Microsoft.SharePoint.Client.UserProfiles.ProfileLoader	118
3.1.5.67.1	Properties.....	118
3.1.5.67.1.1	Scalar Properties.....	118
3.1.5.67.1.2	ObjectPath Properties.....	118
3.1.5.67.2	Methods	118
3.1.5.67.2.1	Scalar Methods	118
3.1.5.67.2.1.1	CreatePersonalSiteEnqueueBulk	119

3.1.5.67.2.2	ObjectPath Methods	119
3.1.5.67.2.2.1	GetOwnerUserProfile	119
3.1.5.67.2.2.2	GetProfileLoader	119
3.1.5.67.2.2.3	GetUserProfile	119
3.1.5.68	Microsoft.SharePoint.Client.UserProfiles.SocialDataStoreExceptionCode	119
3.1.5.68.1	Field Values	119
3.1.5.68.1.1	SocialListNotFound	119
3.1.5.68.1.2	PersonalSiteNotFound	120
3.1.5.68.1.3	CannotCreatePersonalSite	120
3.1.5.68.1.4	NoSocialFeatures	120
3.1.5.69	Microsoft.SharePoint.Client.UserProfiles.UserProfile	120
3.1.5.69.1	Properties	120
3.1.5.69.1.1	Scalar Properties	120
3.1.5.69.1.1.1	UrlToCreatePersonalSite	120
3.1.5.69.1.1.2	PersonalSiteCapabilities	120
3.1.5.69.1.1.3	PictureImportEnabled	120
3.1.5.69.1.1.4	PersonalSiteInstantiationState	121
3.1.5.69.1.1.5	AccountName	121
3.1.5.69.1.1.6	DisplayName	121
3.1.5.69.1.1.7	IsPeopleListPublic	121
3.1.5.69.1.1.8	IsPrivacySettingOn	121
3.1.5.69.1.1.9	IsSelf	121
3.1.5.69.1.1.10	JobTitle	121
3.1.5.69.1.1.11	MySiteFirstRunExperience	121
3.1.5.69.1.1.12	O15FirstRunExperience	122
3.1.5.69.1.1.13	PersonalSiteFirstCreationError	122
3.1.5.69.1.1.14	PersonalSiteFirstCreationTime	122
3.1.5.69.1.1.15	PersonalSiteLastCreationTime	122
3.1.5.69.1.1.16	PersonalSiteNumberOfRetries	122
3.1.5.69.1.1.17	PictureUrl	122
3.1.5.69.1.1.18	PublicUrl	122
3.1.5.69.1.1.19	SipAddress	123
3.1.5.69.1.1.20	MySiteHostUrl	123
3.1.5.69.1.1.21	FollowPersonalSiteUrl	123
3.1.5.69.1.1.22	IsDefaultDocumentLibraryBlocked	123
3.1.5.69.1.2	ObjectPath Properties	123
3.1.5.69.1.2.1	FollowedContent	123
3.1.5.69.1.2.2	PersonalSite	123
3.1.5.69.2	Methods	123
3.1.5.69.2.1	Scalar Methods	123
3.1.5.69.2.1.1	CreatePersonalSite	124
3.1.5.69.2.1.2	CreatePersonalSiteEnque	124
3.1.5.69.2.1.3	CreatePersonalSiteFromWorkItem	124
3.1.5.69.2.1.4	CreatePersonalSiteSyncFromWorkItem	124
3.1.5.69.2.1.5	SetMySiteFirstRunExperience	124
3.1.5.69.2.1.6	ShareAllSocialData	125
3.1.5.69.2.2	ObjectPath Methods	125
3.1.5.70	Microsoft.SharePoint.Client.UserProfiles.UserProfilePropertiesForUser	125
3.1.5.70.1	Properties	125
3.1.5.70.1.1	Scalar Properties	125
3.1.5.70.1.1.1	AccountName	125
3.1.5.70.1.2	ObjectPath Properties	125
3.1.5.70.2	Methods	125
3.1.5.70.2.1	Scalar Methods	125
3.1.5.70.2.1.1	GetPropertyNames	125
3.1.5.70.2.2	ObjectPath Methods	126
3.1.5.70.2.2.1	CSOM Constructor	126
3.1.5.71	Microsoft.SharePoint.Client.WebParts.TileData	126

3.1.5.71.1	Properties.....	126
3.1.5.71.1.1	Scalar Properties.....	126
3.1.5.71.1.1.1	BackgroundCollageImageLocations	126
3.1.5.71.1.1.2	BackgroundImageLocation.....	126
3.1.5.71.1.1.3	BackgroundImageRendersAsIcon.....	126
3.1.5.71.1.1.4	BodyText.....	126
3.1.5.71.1.1.5	Description	127
3.1.5.71.1.1.6	HoverDisabled.....	127
3.1.5.71.1.1.7	ID	127
3.1.5.71.1.1.8	IsWide	127
3.1.5.71.1.1.9	LinkLocation	127
3.1.5.71.1.1.10	TileOrder.....	127
3.1.5.71.1.1.11	Title.....	127
3.1.5.71.1.1.12	TransparentOverlay	128
3.1.6	Timer Events.....	128
3.1.7	Other Local Events.....	128
4	Protocol Examples	129
4.1	Making a New Root Post.....	129
4.2	Response from Server for New Root Post	129
4.3	Posting a New Reply	131
4.4	Server Response for a New Reply	132
4.5	Requesting a Feed.....	134
4.6	Server Response for Requesting a Feed	135
4.7	Liking a Post.....	137
4.8	Server Response to Liking a Post	138
4.9	Making a New Root Post Using REST.....	139
4.10	Server Response to Making a New Root Post Using REST	140
4.11	Posting a New Reply Using REST	142
4.12	Server Response to Posting a New Reply Using REST.....	143
4.13	Getting a Thread Using REST	145
4.14	Server Response to Getting a Thread Using REST.....	145
5	Security	148
5.1	Security Considerations for Implementers	148
5.2	Index of Security Parameters	148
6	Appendix A: Product Behavior	149
7	Change Tracking.....	150
8	Index.....	152

1 Introduction

The SharePoint Social Client-Side Object Model Protocol provides types, methods, and properties to enable a protocol client to access social data for the current user. Social data includes:

- User profiles
- Microblogging
- Activity Feeds
- Following people and content
- Sharing documents

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

1.1 Glossary

This document uses the following terms:

application programming interface (API): A set of routines used by an application program to direct the performance of procedures used by the computer's operating system. Also called application program interface.

Boolean: An operation or expression that can be evaluated only as either true or false.

Coordinated Universal Time (UTC): A high-precision atomic time standard that approximately tracks Universal Time (UT). It is the basis for legal, civil time all over the Earth. Time zones around the world are expressed as positive and negative offsets from UTC. In this role, it is also referred to as Zulu time (Z) and Greenwich Mean Time (GMT). In these specifications, all references to UTC refer to the time at UTC-0 (or GMT).

CSOM array: An ordered collection of values that can be used in an XML request or JSON response text. The values are identified by their position and their position is determined by a zero-based integer index.

CSOM Boolean: A **Boolean** value that can be used in an XML request or JSON response text. A CSOM Boolean value is either "true" or "false".

CSOM DateTime: An Int64 value that represents the number of 100-nanosecond time intervals that have elapsed since 12:00:00, January 1, 0001. It can be used in an XML request or as a string in JSON response text. The value can represent time intervals through 23:59:59.9999999, December 31, 9999. It can also specify whether a local, **UTC**, or no time zone applies.

CSOM dictionary: An object that contains an unordered collection of key/value pairs that can be used in an XML request or JSON response text. Each key in a CSOM dictionary has a unique name.

CSOM Double: A 64-bit, double-precision, floating-point value, which is the DOUBLE type described in [\[MS-DTYP\]](#), that can be used in an XML request or as a number in JSON response text. The range of CSOM Double values is from "-1.79769313486232e308" to "1.79769313486232e308".

CSOM GUID: A **GUID**, as described in [\[MS-DTYP\]](#), that can be used in an XML request or as a string in JSON response text.

CSOM Int32: A 32-bit, signed integer value, which is the INT32 type described in [MS-DTYP], that can be used in an XML request or as a number in JSON response text. The range of CSOM Int32 values is from "-2147483648" to "2147483647".

CSOM Stream: A series of bytes that is used to transfer data and that supports reading, writing, and seeking.

CSOM String: A representation of text as a series of Unicode characters. It can be used in an XML request or JSON response text.

CSOM UInt32: A 32-bit, unsigned integer value, which is the UINT32 type described in [MS-DTYP], that can be used in an XML request or as a number in JSON response text. The range of CSOM UInt32 values is from "0" to "4294967295".

default scalar property set: A set of properties that are retrieved by default for an object. The properties map to fields in a storage schema.

document library: A type of list that is a container for documents and folders.

email address: A string that identifies a user and enables the user to receive Internet messages.

folder: A container for files and other folders. A folder may be encrypted. The semantics of encrypting a folder are implementation-dependent. In the Windows implementation, encrypting a folder does not directly cause any data to be encrypted. Encrypting a folder in Windows has the following consequences of EFSRPC Metadata is created and stored with the folder and an NTFS attribute is set on the folder to signify that it is encrypted. NTFS checks this attribute when any new files or folders are created in the folder. NTFS will automatically encrypt any files or folders created within a folder that has this attribute set.

full URL: A string of characters in a standardized format that identifies a document or resource on the World Wide Web.

globally unique identifier (GUID): A term used interchangeably with **universally unique identifier (UUID)** in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms described in [\[RFC4122\]](#) or [\[C706\]](#) must be used for generating the **GUID**. See also **universally unique identifier (UUID)**.

list: A container within a SharePoint site that stores list items. A list has a customizable schema that is composed of one or more fields.

list item: An individual entry within a SharePoint list. Each list item has a schema that maps to fields in the list that contains the item, depending on the content type of the item.

personal site: A type of SharePoint site that is used by an individual user for personal productivity. The site appears to the user as My Site.

Session Initiation Protocol (SIP) address: A URI that does not include a "sip:" prefix and is used to establish multimedia communications sessions between two or more users over an IP network, as described in [\[RFC3261\]](#).

site: (1) A group of related webpages that is hosted by a server on the World Wide Web or an intranet. Each website has its own entry points, metadata, administration settings, and workflows. Also referred to as web site.

(2) A group of related pages and data within a SharePoint site collection. The structure and content of a site is based on a site definition. Also referred to as SharePoint site and web site.

site collection: A set of websites that are in the same content database, have the same owner, and share administration settings. A site collection can be identified by a **GUID** or the **URL** of

the top-level site for the site collection. Each site collection contains a top-level site, can contain one or more subsites, and can have a shared navigational structure.

static CSOM method: A class method that is accessed through the type name rather than an instance of the class.

Uniform Resource Locator (URL): A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

universally unique identifier (UUID): A 128-bit value. UUIDs can be used for multiple purposes, from tagging objects with an extremely short lifetime, to reliably identifying very persistent objects in cross-process communication such as client and server interfaces, manager entry-point vectors, and RPC objects. UUIDs are highly likely to be unique. UUIDs are also known as **globally unique identifiers (GUIDs)** and these terms are used interchangeably in the Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the UUID. Specifically, the use of this term does not imply or require that the algorithms described in [\[RFC4122\]](#) or [\[C706\]](#) must be used for generating the UUID.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-CSOMREST] Microsoft Corporation, "[SharePoint Client Query OData Protocol](#)".

[MS-CSOM] Microsoft Corporation, "[SharePoint Client Query Protocol](#)".

[MS-SITEDATS] Microsoft Corporation, "[Site Data Web Service Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC4627] Crockford, D., "The application/json Media Type for JavaScript Object Notation (JSON)", RFC 4627, July 2006, <http://www.rfc-editor.org/rfc/rfc4627.txt>

1.2.2 Informative References

None.

1.3 Overview

This protocol defines types, methods, and properties that protocol clients use to access feeds and social data on a protocol server. The set of types, properties, and methods provide the ability for remote clients to send and retrieve data from **site (2)** social features. Social features include getting and writing to feeds, getting user profile data, specifying what documents, users, tags, and sites that the user running on the protocol client system likes or follows, and getting information about the current user's social contacts.

1.4 Relationship to Other Protocols

The SharePoint Social Client-Side Object Model Protocol is a set of types, properties, and methods that can be accessed by using the SharePoint Client Query protocol as described in [\[MS-CSOM\]](#). This protocol uses JSON as described in [\[RFC4627\]](#) to format data returned to a protocol client. This protocol also uses HTTP, as described in [\[RFC2616\]](#), and HTTPS, as described in [\[RFC2818\]](#). The dependencies for this protocol are shown in the following layering diagram.

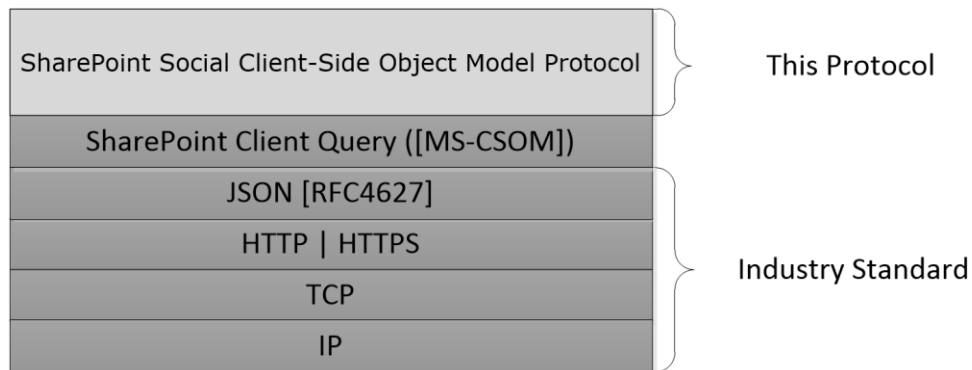


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

This protocol operates on a **site (2)** that is identified by a **Uniform Resource Locator (URL)** that is known by protocol clients. This protocol assumes that authentication has been performed by underlying protocols.

1.6 Applicability Statement

None

1.7 Versioning and Capability Negotiation

None

1.8 Vendor-Extensible Fields

None

1.9 Standards Assignments

None

2 Messages

2.1 Transport

Messages are transported by using the SharePoint Client Query Protocol, as specified in [\[MS-CSOM\]](#).

2.2 Message Syntax

2.2.1 Namespaces

The SharePoint Social Client-Side Object Model uses the following namespaces:

- Microsoft.Office.Server.ReputationModel
- Microsoft.SharePoint.Client.UserProfiles
- Microsoft.SharePoint.Client.Social

3 Protocol Details

3.1 Server Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The server maintains a set of social information for each user. This social information includes the following:

- Messages posted by a user, which can be a response to another message, can contain social mentions of a user, and can contain social tags.
- Social likes and follows specified by the user, which identify other users, message posts, documents, tags, and web sites that the user has selected.

Another set of information the server maintains per user is the Personal Cache. Personal cache can be used by the protocol client and server to optimize loading experience of the web applications. Personal cache can store previously returned data for various **API** issued by the client applications. Personal cache is organized by folder, where a separate folder can be used for different web page or client view, and contains a set of key/value pairs, where key would represent a corresponding API call for the client, and value representing the returned response. The schema of the key and value is completely opaque to the server implementation.

This protocol shares the abstract data model used by the SharePoint Client Query protocol as described in [\[MS-CSOM\]](#) section 3.1.1 to communicate with the protocol server.

3.1.2 Timers

None

3.1.3 Initialization

None

3.1.4 Higher-Layer Triggered Events

None

3.1.5 Message Processing Events and Sequencing Rules

3.1.5.1 Microsoft.Office.Server.ReputationModel.Reputation

TypeId: {D9C758A9-D32D-4C9C-AB60-46FD8B3C79B7}

ShortName: Microsoft.Office.Server.ReputationModel.Reputation

The **Reputation** static type includes methods to set the reputation properties on a **list item**.

3.1.5.1.1 Properties

3.1.5.1.1.1 Scalar Properties

None.

3.1.5.1.1.2 ObjectPath Properties

None.

3.1.5.1.2 Methods

3.1.5.1.2.1 Scalar Methods

3.1.5.1.2.1.1 SetLike

This method is a **static CSOM method**.

Return Type: CSOM Int32

The **SetLike** static method sets or unsets the like quality for the current user for an item within the specified **list**. The return value is the total number of likes for the specified **list item**.

Parameters:

listID: A string-represented **GUID** value specifying the list that the list item belongs to.

Type: **CSOM String**

itemID: An integer value that identifies a list item within the list it belongs to.

Type: CSOM Int32

like: A **Boolean** value that indicates the operation being either like or unlike. A True value indicates like.

Type: **CSOM Boolean**

3.1.5.1.2.1.2 SetRating

This method is a **static CSOM method**.

Return Type: CSOM Double

The **SetRating** static method rates an item within the specified list. The return value is the average rating for the specified **list item**.

Parameters:

listID: A string-represented **GUID** value specifying the **list** that the list item belongs to.

Type: **CSOM String**

itemID: An integer value that identifies a list item within the list it belongs to.

Type: **CSOM Int32**

rating: An integer value for the rating to be submitted.

Type: CSOM Int32

The rating value SHOULD be between **1** and **5**; otherwise, the server SHOULD return a **Microsoft.SharePoint.SPException**.

3.1.5.1.2.2 ObjectPath Methods

None.

3.1.5.2 Microsoft.SharePoint.Client.ResourcePath

TypeId: {A265A356-274B-4E6C-B0EF-BBC22BD0969A}

ShortName: SP.ResourcePath

Represents the full (absolute) or parts (relative) path of a site collection, web, file, folder or other artifacts in the database.

3.1.5.2.1 Properties

3.1.5.2.1.1 Scalar Properties

3.1.5.2.1.1.1 DecodedUrl

Type: CSOM String

Gets the path in the decoded form.

3.1.5.3 Microsoft.SharePoint.Client.Social.SocialActor

TypeId: {A9A8B6CF-B696-4DBC-BD62-B78D45149EB1}

ShortName: SP.Social.SocialActor

The **SocialActor** type contains information about an actor retrieved from server. An actor is a user, document, site, or tag.

3.1.5.3.1 Properties

3.1.5.3.1.1 Scalar Properties

3.1.5.3.1.1.1 AccountName

Type: CSOM String

Accessibility: Read Only

The **AccountName** property returns the user account name. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**.

3.1.5.3.1.1.2 ActorType

Type: Microsoft.SharePoint.Client.Social.SocialActorType

Accessibility: Read Only

The **ActorType** property identifies whether the actor is a user, document, site, or tag.

See section [3.1.5.5](#) for details on the **SocialActorType** type.

3.1.5.3.1.1.3 EmailAddress

Type: CSOM String

Accessibility: Read Only

The **EmailAddress** property returns the email address of the user. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**.

3.1.5.3.1.1.4 FollowedContentUri

Type: CSOM String

Accessibility: Read Only

The **FollowedContentUri** property returns the URI of the user's followed content folder. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**.

3.1.5.3.1.1.5 Id

Type: CSOM String

Accessibility: Read Only

The **Id** property returns the actor's unique identifier.

3.1.5.3.1.1.6 ImageUri

Type: CSOM String

Accessibility: Read Only

The **ImageUri** property returns the URI of the image representing the actor. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**, **Document**, or **Site**.

3.1.5.3.1.1.7 LibraryUri

Type: CSOM String

Accessibility: Read Only

The **LibraryUri** property returns the URI of the library containing the document. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **Document**.

3.1.5.3.1.1.8 Name

Type: CSOM String

Accessibility: Read Only

The **Name** property returns the actor's display name.

3.1.5.3.1.1.9 TagGuid

Type: CSOM GUID

Accessibility: Read Only

The **TagGuid** property returns the GUID of the tag. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **Tag**.

3.1.5.3.1.1.10 Title

Type: CSOM String

Accessibility: Read Only

The **Title** property returns the user's title. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**.

3.1.5.3.1.1.11 Uri

Type: CSOM String

Accessibility: Read Only

The **Uri** property returns the URI of the actor.

3.1.5.3.1.1.12 ContentUri

Type: CSOM String

Accessibility: Read Only

The **ContentUri** property returns the URI of the document or **site (2)** content. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **Document** or **Site**.

3.1.5.3.1.1.13 IsFollowed

Type: CSOM Boolean

Accessibility: Read Only

The **IsFollowed** property returns true if the current user is following the actor; otherwise, it returns false.

3.1.5.3.1.1.14 PersonalSiteUri

Type: CSOM String

Accessibility: Read Only

The **PersonalSiteUri** property returns the URI of the user's personal site. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**.

3.1.5.3.1.1.15 StatusText

Type: CSOM String

Accessibility: Read Only

The **StatusText** property returns the most recent post of the user. This property is only available if the **ActorType** property (see section [3.1.5.3.1.1.2](#)) has a value of **User**.

3.1.5.3.1.1.16 Status

Type: Microsoft.SharePoint.Client.Social.SocialStatusCode

Accessibility: Read Only

The **Status** property returns a status or error code for the actor.

When the **Status** property has a value other than **OK**, the actor can be returned with some properties set to default values. The property value indicates the error that occurred for that particular actor. For more information about **SocialStatusCode**, see section [3.1.5.41](#).

3.1.5.3.1.1.17 CanFollow

Type: CSOM Boolean

Accessibility: Read Only

The **CanFollow** property specifies if the current user can follow the actor. A **True** value indicates current user can follow the actor.

3.1.5.3.1.2 ObjectPath Properties

None.

3.1.5.4 Microsoft.SharePoint.Client.Social.SocialActorInfo

TypeId: {700A3260-5AFB-4CF9-B401-A8E1F2C89EFC}

ShortName: SP.Social.SocialActorInfo

The **SocialActorInfo** type identifies an actor to the server. An actor can be a user, document, site, or tag.

3.1.5.4.1 Properties

3.1.5.4.1.1 Scalar Properties

3.1.5.4.1.1.1 AccountName

Type: CSOM String

Accessibility: Read/Write

The **AccountName** property specifies the user's account name. Users can be identified by this property.

3.1.5.4.1.1.2 ActorType

Type: Microsoft.SharePoint.Client.Social.SocialActorType

Accessibility: Read/Write

The **ActorType** property identifies whether the actor is a user, document, site, or tag. If the **Id** property is not empty, the server ignores the **ActorType** property. See section [3.1.5.5](#) for details on the **SocialActorType** type.

3.1.5.4.1.1.3 ContentUri

Type: CSOM String

Accessibility: Read/Write

The **ContentUri** property identifies the actor by its URI. Documents and sites can be identified by this property.

3.1.5.4.1.1.4 Id

Type: CSOM String

Accessibility: Read/Write

The **Id** property identifies the actor by its unique identification. If the **Id** property is not empty, it is sufficient to identify the actor. Consequently, if the **Id** property is not empty, the server ignores all other properties. If the client cannot access the actor's unique identification, the client can use the other properties to identify the actor.

3.1.5.4.1.1.5 TagGuid

Type: CSOM GUID

Accessibility: Read/Write

The **TagGuid** identifies the actor by its GUID. Tags can be identified by this property.

3.1.5.4.1.2 ObjectPath Properties

None.

3.1.5.5 Microsoft.SharePoint.Client.Social.SocialActorType

ShortName: SP.Social.SocialActorType

Flag: false

The **SocialActorType** type identifies an actor as a user, document, site, or tag.

3.1.5.5.1 Field Values

3.1.5.5.1.1 User

Value: 0

The actor is a user.

3.1.5.5.1.2 Document

Value: 1

The actor is a document.

3.1.5.5.1.3 Site

Value: 2

The actor is a site.

3.1.5.5.1.4 Tag

Value: 3

The actor is a tag.

3.1.5.6 Microsoft.SharePoint.Client.Social.SocialActorTypes

ShortName: SP.Social.SocialActorTypes

Flag: true

The **SocialActorTypes** flag type specifies one or more actor types in a query to the server.

3.1.5.6.1 Field Values

3.1.5.6.1.1 None

Value: 0

This value specifies no actor type.

3.1.5.6.1.2 Users

Value: 1

This value specifies the actor type users.

3.1.5.6.1.3 Documents

Value: 2

This value specifies the actor type documents.

3.1.5.6.1.4 Sites

Value: 4

This value specifies the actor type sites.

3.1.5.6.1.5 Tags

Value: 8

This value specifies the actor type tags.

3.1.5.6.1.6 All

Value: 15

This value specifies the actor types users, documents, sites, and tags.

3.1.5.6.1.7 ExcludeContentWithoutFeeds

Value: 268435456

The set excludes documents and sites that do not have feeds.

3.1.5.6.1.8 IncludeGroupsSites

Value: 536870912

The set includes modern group sites.

3.1.5.6.1.9 WithinLast24Hours

Value: 1073741824

The set includes sites created within the last 24 hours.

3.1.5.7 Microsoft.SharePoint.Client.Social.SocialAnnouncementManager

TypeId: {9AE5A81A-A594-4EA0-A093-10B1B4053E61}

ShortName: SP.Social.SocialAnnouncementManager

Contains methods related to SharePoint Announcement Tiles

3.1.5.7.1 Properties

3.1.5.7.1.1 Scalar Properties

None.

3.1.5.7.1.2 ObjectPath Properties

None.

3.1.5.7.2 Methods

3.1.5.7.2.1 Scalar Methods

3.1.5.7.2.1.1 GetCurrentAnnouncements

This method is a **static CSOM method**.

Return Type: **CSOM array** of Microsoft.SharePoint.Client.WebParts.TileData

Gets the currently active announcements for a given site and returns them as a list of TileData objects. Announcement details are stored in Title, Description, BackgroundImageLocation, and LinkLocation properties of the TileData.

Parameters:

url: The Uri of the site to get announcements from

Type: **CSOM String**

3.1.5.7.2.2 ObjectPath Methods

None.

3.1.5.8 Microsoft.SharePoint.Client.Social.SocialAttachment

TypeId: {74C3AAFE-F743-415A-A839-EE0AB0F340A1}

ShortName: SP.Social.SocialAttachment

The **SocialAttachment** class represents an image, document preview, or video preview attachment.

3.1.5.8.1 Properties

3.1.5.8.1.1 Scalar Properties

3.1.5.8.1.1.1 AttachmentKind

Type: Microsoft.SharePoint.Client.Social.SocialAttachmentKind

Accessibility: Read/Write

The **AttachmentKind** property specifies the type of object that the attachment contains.

3.1.5.8.1.1.2 ClickAction

Type: Microsoft.SharePoint.Client.Social.SocialAttachmentAction

Accessibility: Read/Write

The **ClickAction** property specifies the action to take when the user selects the attachment. This property is only present if the **AttachmentKind** is **Video**.

3.1.5.8.1.1.3 ContentUri

Type: CSOM String

Accessibility: Read/Write

The **ContentUri** property specifies the URI of the attachment content.

3.1.5.8.1.1.4 Description

Type: CSOM String

Accessibility: Read/Write

The **Description** property provides a text description of the attachment.

3.1.5.8.1.1.5 Height

Type: CSOM UInt32

Accessibility: Read/Write

The **Height** property specifies the height of the attachment or of the attachment preview.

3.1.5.8.1.1.6 Length

Type: CSOM UInt32

Accessibility: Read/Write

The **Length** property specifies the duration of the attachment in seconds. This property is only present if the **AttachmentKind** is **Video**.

3.1.5.8.1.1.7 Name

Type: CSOM String

Accessibility: Read/Write

The **Name** property provides the attachment name.

3.1.5.8.1.1.8 PreviewHeight

Type: **CSOM UInt32**

Accessibility: Read/Write

Gets or sets the height of the attachment's preview thumbnail. This property is used only when AttachmentKind is Image. It can be unavailable and set to zero for some old image attachments.

3.1.5.8.1.1.9 PreviewUri

Type: **CSOM String**

Accessibility: Read/Write

The **PreviewUri** specifies the URI of the attachment's preview thumbnail. This property is only present if the **AttachmentKind** is **Document** or **Video**.

3.1.5.8.1.1.10 PreviewWidth

Type: **CSOM UInt32**

Accessibility: Read/Write

Gets or sets the width of the attachment's preview thumbnail. This property is used only when AttachmentKind is Image. It can be unavailable and set to zero for some old image attachments.

3.1.5.8.1.1.11 Uri

Type: **CSOM String**

Accessibility: Read/Write

The **Uri** property provides the attachment URI.

3.1.5.8.1.1.12 Width

Type: **CSOM UInt32**

Accessibility: Read/Write

The **Width** property specifies the width of the attachment or of the attachment preview.

3.1.5.8.1.2 ObjectPath Properties

None.

3.1.5.9 Microsoft.SharePoint.Client.Social.SocialAttachmentAction

TypeId: {CC022F3A-BF54-45EC-B6E9-8E2CDD9D0924}

ShortName: SP.Social.SocialAttachmentAction

The **SocialAttachmentAction** class specifies the user actions that are allowed for the attachment object.

3.1.5.9.1 Properties

3.1.5.9.1.1 Scalar Properties

3.1.5.9.1.1.1 ActionKind

Type: Microsoft.SharePoint.Client.Social.SocialAttachmentActionKind

Accessibility: Read/Write

The **ActionKind** property specifies whether the action is to navigate to a URI or an action that is dependent on the context in which the object is presented to the user.

3.1.5.9.1.1.2 ActionUri

Type: CSOM String

Accessibility: Read/Write

The **ActionUri** property specifies the URI associated with the action.

3.1.5.9.1.1.3 Height

Type: CSOM UInt32

Accessibility: Read/Write

Gets or sets the height of the image associated with the action.

3.1.5.9.1.1.4 Width

Type: CSOM UInt32

Accessibility: Read/Write

Gets or sets the width of the image associated with the action.

3.1.5.9.1.2 ObjectPath Properties

None.

3.1.5.10 Microsoft.SharePoint.Client.Social.SocialAttachmentActionKind

ShortName: SP.Social.SocialAttachmentActionKind

Flag: false

The **SocialAttachmentActionKind** specifies whether the action is to navigate to the attachment or to perform some action dependent on the context in which the attachment is presented to the user.

3.1.5.10.1 Field Values

3.1.5.10.1.1 Navigate

Value: 0

This value specifies that the action is to navigate to the attachment.

3.1.5.10.1.2 AdHocAction

Value: 1

This value specifies that the action is dependent on the context that the attachment is displayed to the user.

3.1.5.11 Microsoft.SharePoint.Client.Social.SocialAttachmentKind

ShortName: SP.Social.SocialAttachmentKind

Flag: false

The **SocialAttachmentKind** type specifies the kind of post that the attachment represents.

3.1.5.11.1 Field Values

3.1.5.11.1.1 Image

Value: 0

This value specifies an image post.

3.1.5.11.1.2 Video

Value: 1

This value specifies a video post.

3.1.5.11.1.3 Document

Value: 2

This value specifies a document post.

3.1.5.12 Microsoft.SharePoint.Client.Social.SocialDataItem

TypeId: {F6AEF1D2-6189-4848-9F6C-C4CCCF4D548D}

ShortName: SP.Social.SocialDataItem

The **SocialDataItem** class defines a user, document, site, tag, or link to be inserted in a new post. The **SocialPostCreationData** class (see section [3.1.5.29](#)) defines the content text that contains substitution strings. Each substitution string is replaced by a **SocialDataItem** value.

3.1.5.12.1 Properties

3.1.5.12.1.1 Scalar Properties

3.1.5.12.1.1.1 AccountName

Type: CSOM String

Accessibility: Read/Write

The **AccountName** property specifies the user by account name. This property is only used if the **ItemType** (see section [3.1.5.12.1.1.2](#)) has a value of **User**.

3.1.5.12.1.1.2 ItemType

Type: Microsoft.SharePoint.Client.Social.SocialDataItemType

Accessibility: Read/Write

The **ItemType** property specifies whether the item being inserted is a user, document, site, tag, or link. See section [3.1.5.13](#) for details on the **SocialDataItemType** type.

3.1.5.12.1.1.3 TagGuid

Type: CSOM GUID

Accessibility: Read/Write

The **TagGuid** property specifies the tag by its GUID. This property is only used if the **ItemType** (see section [3.1.5.12.1.1.2](#)) has a value of **Tag**.

3.1.5.12.1.1.4 Text

Type: CSOM String

Accessibility: Read/Write

The **Text** property specifies the plain text to be inserted in the created post. The server can use the specified text or can use text that identifies the item, for example the name specified in a user profile.

3.1.5.12.1.1.5 Uri

Type: CSOM String

Accessibility: Read/Write

The **Uri** property identifies the site, document, or link. This property is only used if the **ItemType** (see section [3.1.5.12.1.1.2](#)) has a value of **Document**, **Site**, or **Link**.

3.1.5.12.1.2 ObjectPath Properties

None.

3.1.5.13 Microsoft.SharePoint.Client.Social.SocialDataItemType

ShortName: SP.Social.SocialDataItemType

Flag: false

The **SocialDataItemType** type specifies whether the item being inserted is a user, document, site, tag, or link.

3.1.5.13.1 Field Values

3.1.5.13.1.1 User

Value: 0

The item is a user.

3.1.5.13.1.2 Document

Value: 1

The item is a document.

3.1.5.13.1.3 Site

Value: 2

The item is a site.

3.1.5.13.1.4 Tag

Value: 3

The item is a tag.

3.1.5.13.1.5 Link

Value: 4

The item is a link.

3.1.5.14 Microsoft.SharePoint.Client.Social.SocialDataOverlay

TypeId: {154BD33E-3BEA-40D6-B869-CAC54A473FE7}

ShortName: SP.Social.SocialDataOverlay

The **SocialDataOverlay** class provides information about an overlay. An overlay is a substring in a post that represents a user, document, site, tag, or link. The **SocialPost** class (see section [3.1.5.26](#)) contains an array of **SocialDataOverlay** objects. Each of the **SocialDataOverlay** objects specifies a link or one or more actors.

3.1.5.14.1 Properties

3.1.5.14.1.1 Scalar Properties

3.1.5.14.1.1.1 ActorIndexes

Type: CSOM array of CSOM Int32

Accessibility: Read Only

The **ActorIndexes** property specifies one or more actors as an array of integers where each integer specifies an index into the **SocialThread Actors** array (see section [3.1.5.42.1.1.1](#)). Each actor can be a user, document, site, or tag. This property is only available if the **OverlayType** (see section [3.1.5.14.1.1.5](#)) has a value of **Actors**.

3.1.5.14.1.1.2 Index

Type: CSOM Int32

Accessibility: Read Only

The **Index** property specifies the starting position of the overlay in the **SocialPost Text** string (see section [3.1.5.26.1.1.12](#)).

3.1.5.14.1.1.3 Length

Type: CSOM Int32

Accessibility: Read Only

The **Length** property specifies the number of characters in the overlay.

3.1.5.14.1.1.4 LinkUri

Type: CSOM String

Accessibility: Read Only

The **LinkUri** property specifies the URI of the link. This property is only available if the **OverlayType** (see section [3.1.5.14.1.1.5](#)) has a value of **Link**.

3.1.5.14.1.1.5 OverlayType

Type: Microsoft.SharePoint.Client.Social.SocialDataOverlayType

Accessibility: Read Only

The **OverlayType** property specifies whether the overlay is a link or one or more actors. If the overlay specifies one or more actors, the array entry in the **SocialThread Actors** array (see section [3.1.5.42.1.1.1](#)) specifies whether the actor is a user, document, site, or tag. See section [3.1.5.15](#) for details on the **SocialDataOverlayType** type.

3.1.5.14.1.2 ObjectPath Properties

None.

3.1.5.15 Microsoft.SharePoint.Client.Social.SocialDataOverlayType

ShortName: SP.Social.SocialDataOverlayType

Flag: false

The **SocialDataOverlayType** type specifies whether the overlay is a link or one or more actors.

3.1.5.15.1 Field Values

3.1.5.15.1.1 Link

Value: 0

The substring in the post represents a link.

3.1.5.15.1.2 Actors

Value: 1

The substring in the post represents one or more actors.

3.1.5.16 Microsoft.SharePoint.Client.Social.SocialExceptionDetails

TypeId: {36C795AA-1404-48D0-91E7-DA9DAA513AAF}

ShortName: SP.Social.SocialExceptionDetails

The **SocialExceptionDetails** class specifies information about errors that the server has encountered.

3.1.5.16.1 Properties

3.1.5.16.1.1 Scalar Properties

3.1.5.16.1.1.1 InternalErrorCode

Type: CSOM Int32

Accessibility: Read Only

The **InternalErrorCode** specifies a code for an internal error encountered by the server if the code is available.

3.1.5.16.1.1.2 InternalMessage

Type: CSOM String

Accessibility: Read Only

The **InternalMessage** property specifies a text message associated with the internal error if the message is available.

3.1.5.16.1.1.3 InternalStackTrace

Type: CSOM String

Accessibility: Read Only

The **InternalStackTrace** property specifies a stack trace associated with the internal error if a stack trace is available.

3.1.5.16.1.1.4 InternalTypeName

Type: CSOM String

Accessibility: Read Only

The **InternalTypeName** property specifies a type name associated with the internal error if a type name is available.

3.1.5.16.1.1.5 Status

Type: Microsoft.SharePoint.Client.Social.SocialStatusCode

Accessibility: Read Only

The **Status** property specifies a status code for the error if a status code is available. For information about the **SocialStatusCode** type, see section [3.1.5.41](#).

3.1.5.16.1.2 ObjectPath Properties

None.

3.1.5.17 Microsoft.SharePoint.Client.Social.SocialFeed

TypeId: {0EB7D3EA-3238-4CAA-9D34-7AD86514B18B}

ShortName: SP.Social.SocialFeed

The **SocialFeed** class specifies a feed, which contains an array of **SocialThread** (section [3.1.5.42](#)), each of which specifies a root **SocialPost** object (section [3.1.5.26](#)) and an array of response **SocialPost** objects.

3.1.5.17.1 Properties

3.1.5.17.1.1 Scalar Properties

3.1.5.17.1.1.1 Attributes

Type: Microsoft.SharePoint.Client.Social.SocialFeedAttributes

Accessibility: Read Only

The **Attributes** property specifies attributes of the returned feed. The attributes specify if the requested feed has additional threads that were not included in the returned thread. See section [3.1.5.18](#) for details on the **SocialFeedAttributes** type.

3.1.5.17.1.1.2 NewestProcessed

Type: CSOM DateTime

Accessibility: Read Only

The **NewestProcessed** property returns the date-time of the most recent post that was requested. If the current user does not have access to the post, the most recent post that was requested can be removed from the feed, and the feed does not contain the post with the date specified in this property.

3.1.5.17.1.1.3 OldestProcessed

Type: CSOM DateTime

Accessibility: Read Only

The **OldestProcessed** property returns the date-time of the oldest post that was requested. If the current user does not have access to the post, the oldest post that was requested can be removed from the feed and the feed does not contain the post with the date specified in this property.

3.1.5.17.1.1.4 Threads

Type: CSOM array of Microsoft.SharePoint.Client.Social.SocialThread

Accessibility: Read Only

The **Threads** property contains the social threads in the feed. See section [3.1.5.42](#) for details on the **SocialThread** class.

3.1.5.17.1.1.5 UnreadMentionCount

Type: CSOM Int32

Accessibility: Read Only

The **UnreadMentionCount** property returns the number of mentions of the current user that have been added to the feed on the server since the time that the unread mention count was cleared for the current user.

The **GetMentions** method (see section [3.1.5.19.2.1.7](#)) optionally clears the unread mention count for the current user.

The **UnreadMentionCount** property is available only for social feeds returned by the **GetFeed** method (see section [3.1.5.19.2.1.4](#)).

3.1.5.17.1.2 ObjectPath Properties

None.

3.1.5.18 Microsoft.SharePoint.Client.Social.SocialFeedAttributes

ShortName: SP.Social.SocialFeedAttributes

Flag: true

The **SocialFeedAttributes** type provides information about the feed. This type provides information about whether the feed on the server contains additional threads that were not returned.

3.1.5.18.1 Field Values

3.1.5.18.1.1 None

Value: 0

No attributes are specified for the feed.

3.1.5.18.1.2 MoreThreadsAvailable

Value: 1

There are additional threads in the feed on the server that were not returned to the client.

3.1.5.18.1.3 ValidTimeRange

Value: 2

The **OldestProcessed** and **NewestProcessed** feed properties are valid. When **ValidTimeRange** is not set, the client determines the time range based on the thread timestamps.

3.1.5.18.1.4 MovedToYammer

Value: 4

When this flag is set, it indicates that Yammer is the primary social platform in this context.

3.1.5.19 Microsoft.SharePoint.Client.Social.SocialFeedManager

TypeId: {C32F5230-2ED0-48FA-AC80-E2FFA22E3D28}

ShortName: SP.Social.SocialFeedManager

The **SocialFeedManager** class provides access to social feeds. It provides methods to create posts, delete posts, read posts, and perform other operations on posts.

The PersonalSitePortalUri property is not included in the **default scalar property set** for this type.

3.1.5.19.1 Properties

3.1.5.19.1.1 Scalar Properties

3.1.5.19.1.1.1 Owner

Type: Microsoft.SharePoint.Client.Social.SocialActor

Accessibility: Read Only

The **Owner** property returns the current user. See section [3.1.5.3](#) for details on the **SocialActor** type.

3.1.5.19.1.1.2 PersonalSitePortalUri

Type: **CSOM String**

Accessibility: Read Only

The **PersonalSitePortalUri** property specifies the URI of the personal site portal.

3.1.5.19.1.2 ObjectPath Properties

None.

3.1.5.19.2 Methods

3.1.5.19.2.1 Scalar Methods

3.1.5.19.2.1.1 CreatePost

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **CreatePost** method creates a post in the current user's feed, in the specified user's feed, or in the specified thread. This method returns a new or a modified thread. See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

targetId: Optional, specifies the target of the post. If this parameter is null, the post is created as a root post in the current user's feed. If this parameter is set to a **site (2)** URL or a site (2) actor identification, the post is created as a root post in the specified site (2) feed. If this parameter is set to a thread identification, the post is created as a reply post in the specified thread.

Type: **CSOM String**

If *targetId* is an empty string, the post is created as a new thread in the current user's feed.

creationData: Specifies the text and details of the post.

Type: Microsoft.SharePoint.Client.Social.SocialPostCreationData

CreationData specifies the format and content of the post, see section [3.1.5.29](#) for details on the **SocialPostCreationData** class.

3.1.5.19.2.1.2 DeletePost

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **DeletePost** method deletes the specified post. This method returns a digest of the modified thread. If the entire thread is deleted, this method returns null. See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

postId: Specifies the post to be deleted. The post identifier is specified in the **SocialPost.Id** property (see section [3.1.5.26.1.1.5](#)).

Type: **CSOM String**

If the post being deleted is the root post of a thread, all reply posts are also deleted.

3.1.5.19.2.1.3 GetAllLikers

Return Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

The **GetAllLikers** method returns the set of users who have liked the specified post. See section [3.1.5.3](#) for details on the **SocialActor** class.

Parameters:

postId: Specifies the post being queried for information about users that like the post. The post identifier is specified in the **SocialPost.Id** property (see section [3.1.5.26.1.1.5](#)).

Type: **CSOM String**

3.1.5.19.2.1.4 **GetFeed**

Return Type: Microsoft.SharePoint.Client.Social.SocialFeed

The **GetFeed** method returns a feed for the current user. The feed consists of an array of message threads. Each thread consists of a root post and an array of reply posts. See section [3.1.5.17](#) for details on the **SocialFeed** type. The server selects a set of posts to return in the feed based on the *type* and *options* parameters, but this protocol does not require any specific algorithm to select the set of posts from all posts that meet the specified *type* and *options*.

Parameters:

type: Specifies the type of feed to be returned. Feeds can be viewed using a personal view, news view, timeline view, or likes view. If the type is not specified, **GetFeed** returns the news view.

Type: Microsoft.SharePoint.Client.Social.SocialFeedType

See section [3.1.5.22](#) for details on the **SocialFeedType** type.

options: Specifies the maximum number of threads to get in the feed, the sort order of the threads, and how the threads are to be selected based on the date and time that the threads were created.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

See section [3.1.5.20](#) for details on the **SocialFeedOptions** type.

3.1.5.19.2.1.5 **GetFeedFor**

Return Type: Microsoft.SharePoint.Client.Social.SocialFeed

The **GetFeedFor** method returns the public feed for a user or for a site. The feed lists activity by the user and posts created by the server for that user. For example, the feed can include posts indicating the user's birthday or indicating that the user liked a post. See section [3.1.5.17](#) for details on the **SocialFeed** type. The server selects a set of posts to return in the feed based on the *options* parameter, but this protocol does not require any specific algorithm to select the returned set of posts from all posts on the server.

Parameters:

actorId: Specifies the user or site (2). The user is specified by an actor identification or an account name. The site (2) is specified by an actor identification or a site (2) URL.

Type: **CSOM String**

The actor identification is specified in the **Id** property of the **SocialActor** object. See section [3.1.5.3.1.1.5](#) for details. If the *actorId* specifies the current user, this method returns the public feed for the current user.

options: Specifies the maximum number of threads to get in the feed, the sort order of the threads, and how the threads are to be selected based on the date and time that the threads were created.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

See section [3.1.5.20](#) for details on **SocialFeedOptions**.

3.1.5.19.2.1.6 **GetFullThread**

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **GetFullThread** method returns the root post and all reply posts in the thread. See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

threadId: Specifies the identifier of the thread.

Type: **CSOM String**

The thread identifier is specified in the **Id** property of the **SocialThread** object. See section [3.1.5.42.1.1.3](#) for details.

3.1.5.19.2.1.7 **GetMentions**

Return Type: Microsoft.SharePoint.Client.Social.SocialFeed

The **GetMentions** method returns a feed containing mention reference threads from the current user's personal feed. See section [3.1.5.17](#) for details on the **SocialFeed** object.

Parameters:

clearUnreadMentions: If true, clear the count of unread mentions.

Type: **CSOM Boolean**

options: Specifies the maximum number of threads, dates of the posts, and the sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

See section [3.1.5.20](#) for details on the **SocialFeedOptions** type.

3.1.5.19.2.1.8 **GetUnreadMentionCount**

Return Type: **CSOM Int32**

The **GetUnreadMentionCount** method returns the server's count of unread mentions of the current user. The server maintains a count of unread mentions in posts, but does not track which mentions have been read. When a new mention is stored on the server, it increments the unread mention for the user specified by the mention. When the unread mention count is cleared by the **GetMentions** method (see section [3.1.5.19.2.1.7](#)), it is set to zero.

Parameters: None

3.1.5.19.2.1.9 **LikePost**

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **LikePost** method specifies that the current user likes the specified post. Returns a digest thread containing the specified post. A digest thread contains the root post and a selection of reply posts [<1>](#). See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

postId: Specifies the post being liked. The post identifier is specified in the **SocialPost.Id** property (see section [3.1.5.26.1.1.5](#)).

Type: **CSOM String**

3.1.5.19.2.1.10 LockThread

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **LockThread** method prevents any user from adding a new reply post to the specified thread. Once a thread is locked, no new reply posts can be added until after the thread has been unlocked with the **UnlockThread** method (see section [3.1.5.19.2.1.12](#)). This method returns a digest of the locked thread. See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

threadId: Specifies the thread to be locked. The thread identifier is specified in the **SocialThread.Id** property (see section [3.1.5.42.1.1.3](#)).

Type: **CSOM String**

3.1.5.19.2.1.11 UnlikePost

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **UnlikePost** method specifies that the current user does not like the specified post. Returns a digest thread containing the specified post. A digest thread contains the root post and a selection of reply posts <2>. See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

postId: Specifies the post being unliked. The post identifier is specified in the **SocialPost.Id** property (see section [3.1.5.26.1.1.5](#)).

Type: **CSOM String**

3.1.5.19.2.1.12 UnlockThread

Return Type: Microsoft.SharePoint.Client.Social.SocialThread

The **UnlockThread** method allows users to add new reply posts to the specified thread. See section [3.1.5.19.2.1.12](#) for details on the **LockThread** method. The **UnlockThread** method returns a digest thread. See section [3.1.5.42](#) for details on the **SocialThread** class.

Parameters:

threadId: Specifies the thread to be unlocked. The thread identifier is specified in the **SocialThread.Id** property (see section [3.1.5.42.1.1.3](#)).

Type: **CSOM String**

3.1.5.19.2.1.13 SuppressThreadNotifications

Return Type: None

The **SuppressThreadNotifications** method suppresses activity notifications for the current user of updates to the specified thread.

Parameters:

threadId: Specifies the thread for which to suppress update notifications.

Type: **CSOM String**

3.1.5.19.2.1.14 CreateImageAttachment

Return Type: Microsoft.SharePoint.Client.Social.SocialAttachment

The **CreateImageAttachment** method creates an image attachment for a future post.

Parameters:

name: The name of the image.

Type: **CSOM String**

description: An optional description of the image.

Type: CSOM String

imageData: A stream containing the image data.

Type: **CSOM Stream**

3.1.5.19.2.1.15 GetPreview

Return Type: Microsoft.SharePoint.Client.Social.SocialAttachment

The **GetPreview** method generates a preview for the content specified by the URL.

Parameters:

itemUrl: Specifies the URL of the item to have a preview generated.

Type: **CSOM String**

3.1.5.19.2.1.16 GetPreviewImage

Return Type: **CSOM Stream**

The **GetPreviewImage** method returns the preview image data for an image attachment.

Parameters:

url: Specifies the URL of the preview image relative to the personal site portal.

Type: **CSOM String**

key: Specifies the URL-encoded key to decrypt the image.

Type: CSOM String

iv: Specifies the URL-encoded initialization vector for decrypting the image.

Type: CSOM String

3.1.5.19.2.1.17 CreateFileAttachment

Return Type: Microsoft.SharePoint.Client.Social.SocialAttachment

Creates a file attachment for a future post.

Parameters:

name: The name of the file.

Type: **CSOM String**

description: An optional description of the file.

Type: CSOM String

fileData: A stream for reading the file data.

Type: **CSOM Stream**

3.1.5.19.2.2 ObjectPath Methods

3.1.5.19.2.2.1 CSOM Constructor

The constructor method initializes a new instance of **SocialFeedManager** (see section [3.1.5.19](#)).

Parameters: None

3.1.5.20 Microsoft.SharePoint.Client.Social.SocialFeedOptions

TypeId: {86CFC806-C9BB-448A-AED2-C7FF9A5B7EE6}

ShortName: SP.Social.SocialFeedOptions

The **SocialFeedOptions** class specifies selection criteria and sort options when retrieving threads from a feed on a server. The selection criteria are the maximum number of threads to return and the date-time range of threads to return. The sort options control whether the threads are sorted by creation time or modification time.

3.1.5.20.1 Properties

3.1.5.20.1.1 Scalar Properties

3.1.5.20.1.1.1 MaxThreadCount

Type: **CSOM Int32**

Accessibility: Read/Write

The **MaxThreadCount** property specifies the maximum number of threads that are to be returned in the feed.

3.1.5.20.1.1.2 NewerThan

Type: **CSOM DateTime**

Accessibility: Read/Write

The **NewerThan** property specifies a date; any thread older than this date is not returned. To specify a range of dates to select, specify the oldest date in the **NewerThan** property and the most recent date in the **OlderThan** property (see section [3.1.5.20.1.1.3](#)).

3.1.5.20.1.1.3 OlderThan

Type: CSOM DateTime

Accessibility: Read/Write

The **OlderThan** property specifies a date; any thread newer than this date is not returned. To specify a range of dates to select, specify the oldest date in the **NewerThan** property (see section [3.1.5.20.1.1.2](#)) and the most recent date in the **OlderThan** property.

3.1.5.20.1.1.4 SortOrder

Type: Microsoft.SharePoint.Client.Social.SocialFeedSortOrder

Accessibility: Read/Write

The **SortOrder** property specifies whether the threads are to be sorted in creation time or in modification time order. See section [3.1.5.21](#) for details on the **SocialFeedSortOrder** type.

3.1.5.20.1.2 ObjectPath Properties

None.

3.1.5.21 Microsoft.SharePoint.Client.Social.SocialFeedSortOrder

ShortName: SP.Social.SocialFeedSortOrder

Flag: false

The **SocialFeedSortOrder** type specifies whether the sort order is by creation time or modification time.

3.1.5.21.1 Field Values

3.1.5.21.1.1 ByModifiedTime

Value: 0

The sort order is by modification time.

3.1.5.21.1.2 ByCreatedTime

Value: 1

The sort order is by creation time.

3.1.5.22 Microsoft.SharePoint.Client.Social.SocialFeedType

ShortName: SP.Social.SocialFeedType

Flag: false

The **SocialFeedType** type identifies the kind of post to be retrieved.

3.1.5.22.1 Field Values

3.1.5.22.1.1 Personal

Value: 0

This value specifies a feed that contains posts that are activities by the current user, such as posts or likes by the current user.

3.1.5.22.1.2 News

Value: 1

This is the default value and specifies posts that are activities by the current user or by users and other actors that the current user is following.

3.1.5.22.1.3 Timeline

Value: 2

This value returns the same kinds of posts as the **News** value, but gives priority to selecting posts from more different actors. In contrast, **News** gives priority to selecting the most recent posts that meet the selection criteria.

3.1.5.22.1.4 Likes

Value: 3

This value specifies a feed consisting of reference posts that identify the posts that the current user likes.

3.1.5.22.1.5 Everyone

Value: 4

This value specifies a feed consisting of posts by all users in the current user's organization.

3.1.5.23 Microsoft.SharePoint.Client.Social.SocialFollowingManager

TypeId: {651F2511-B4A4-4C3D-8C12-B049C7F79D69}

ShortName: SP.Social.SocialFollowingManager

The **SocialFollowingManager** class provides properties and methods for managing a user's list of followed actors. Actors can be users, documents, sites, and tags.

3.1.5.23.1 Properties

3.1.5.23.1.1 Scalar Properties

3.1.5.23.1.1.1 FollowedDocumentsUri

Type: CSOM String

Accessibility: Read Only

The **FollowedDocumentsUri** property returns a URI to a site (2) that lists the current user's followed documents.

3.1.5.23.1.1.2 FollowedSitesUri

Type: CSOM String

Accessibility: Read Only

The **FollowedSitesUri** property returns a URI to a site (2) that lists the current user's followed sites.

3.1.5.23.1.2 ObjectPath Properties

None.

3.1.5.23.2 Methods

3.1.5.23.2.1 Scalar Methods

3.1.5.23.2.1.1 Follow

Return Type: Microsoft.SharePoint.Client.Social.SocialFollowResult

The **Follow** method adds the specified actor to the current user's list of followed items. This method returns information about whether the actor was successfully added to the current user's list. See section [3.1.5.24](#) for details on the **SocialFollowResult** type.

Parameters:

actor: Specifies the user, document, site, or tag to follow.

Type: Microsoft.SharePoint.Client.Social.SocialActorInfo

See section [3.1.5.4](#) for details on the **SocialActorInfo** type.

3.1.5.23.2.1.2 GetFollowed

Return Type: CSOM array of Microsoft.SharePoint.Client.Social.SocialActor

The **GetFollowed** method retrieves a list of the specified kind of actors being followed by the current user. For details on the **SocialActor** type, see section [3.1.5.3](#).

Parameters:

types: Specifies the kind of actors to select.

Type: Microsoft.SharePoint.Client.Social.SocialActorTypes

For details on the **SocialActorTypes** type, see section [3.1.5.6](#).

3.1.5.23.2.1.3 GetFollowedCount

Return Type: CSOM Int32

The **GetFollowedCount** method returns the number of the specified kind of actors being followed by the current user.

Parameters:

types: Specifies the kind of actors to select.

Type: Microsoft.SharePoint.Client.Social.SocialActorTypes

For details on the **SocialActorTypes** type, see section [3.1.5.6](#).

3.1.5.23.2.1.4 GetFollowers

Return Type: CSOM array of Microsoft.SharePoint.Client.Social.SocialActor

The **GetFollowers** method returns the users who are followers of the current user.

Parameters: None

3.1.5.23.2.1.5 **GetSuggestions**

Return Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

The **GetSuggestions** method returns a list of actors that are suggestions for the current user to follow.

Parameters: None

3.1.5.23.2.1.6 **IsFollowed**

Return Type: **CSOM Boolean**

The **IsFollowed** method returns true if the current user is following the specified actor, and otherwise returns false.

Parameters:

actor: Specifies the actor, which is a document, user, site, or tag.

Type: Microsoft.SharePoint.Client.Social.SocialActorInfo

For details on the **SocialActorInfo** type, see section [3.1.5.5](#).

3.1.5.23.2.1.7 **StopFollowing**

Return Type: **CSOM Boolean**

The **StopFollowing** method removes the specified actor from the list of actors that the current user is following. This method returns **true** if the specified actor was removed from the list; it returns **false** if the specified actor was not removed from the list. For example, if the current user is not following the specified actor, the method returns **false** because it is not necessary to remove the actor from the list.

Parameters:

actor: Specifies the actor, which is a document, user, site, or tag.

Type: Microsoft.SharePoint.Client.Social.SocialActorInfo

For details on the **SocialActorInfo** type, see section [3.1.5.5](#).

3.1.5.23.2.2 **ObjectPath Methods**

3.1.5.23.2.2.1 **CSOM Constructor**

The constructor method initializes a new instance of **SocialFollowingManager** (see section [3.1.5.23](#)).

Parameters: None

3.1.5.24 **Microsoft.SharePoint.Client.Social.SocialFollowResult**

ShortName: SP.Social.SocialFollowResult

Flag: false

The **SocialFollowResult** type specifies the result status of a request to follow an actor.

3.1.5.24.1 Field Values

3.1.5.24.1.1 OK

Value: 0

This value specifies that the request to follow the actor succeeded and the current user now follows the specified actor.

3.1.5.24.1.2 AlreadyFollowing

Value: 1

This value specifies that the current user was already following the specified actor and no actions were performed to meet the request.

3.1.5.24.1.3 LimitReached

Value: 2

This value specifies that the request to follow the actor failed because an internal limit was reached. The current user is not following the specified actor.

3.1.5.24.1.4 InternalError

Value: 3

This value specifies that the request to follow the actor failed because an internal error was encountered. The current user is not following the specified actor.

3.1.5.25 Microsoft.SharePoint.Client.Social.SocialLink

TypeId: {31B25401-CEC9-496E-A758-B0B280C1711E}

ShortName: SP.Social.SocialLink

The **SocialLink** class defines a link that includes a URI and text representation. This class is used to represent the location of a web site.

3.1.5.25.1 Properties

3.1.5.25.1.1 Scalar Properties

3.1.5.25.1.1.1 Text

Type: CSOM String

Accessibility: Read/Write

The **Text** property specifies the text to display for the link.

3.1.5.25.1.1.2 Uri

Type: CSOM String

Accessibility: Read/Write

The **Uri** property specifies the address of the post source.

3.1.5.25.1.2 ObjectPath Properties

None.

3.1.5.26 Microsoft.SharePoint.Client.Social.SocialPost

TypeId: {11386A5F-9543-44B8-8A96-1AA33D964F87}

ShortName: SP.Social.SocialPost

The **SocialPost** specifies a post read from the server.

3.1.5.26.1 Properties

3.1.5.26.1.1 Scalar Properties

3.1.5.26.1.1.1 Attachment

Type: Microsoft.SharePoint.Client.Social.SocialAttachment

Accessibility: Read Only

The **Attachment** property specifies an image, document preview, or video preview attachment. For details on the **SocialAttachment** type, see section [3.1.5.8](#).

3.1.5.26.1.1.2 Attributes

Type: Microsoft.SharePoint.Client.Social.SocialPostAttributes

Accessibility: Read Only

The **Attributes** property describes attributes about the post, such as whether the current user can delete or like the post. For details on the **SocialPostAttributes** type, see section [3.1.5.28](#).

3.1.5.26.1.1.3 AuthorIndex

Type: CSOM Int32

Accessibility: Read Only

Specifies the author of the post as an index to the social thread's **Actors** array (see section [3.1.5.42.1.1.1](#)).

3.1.5.26.1.1.4 CreatedTime

Type: CSOM DateTime

Accessibility: Read Only

The **CreatedTime** property specifies the date and time that the post was created on the server.

3.1.5.26.1.1.5 Id

Type: CSOM String

Accessibility: Read Only

The **Id** property specifies the unique identifier of the post.

3.1.5.26.1.1.6 LikerInfo

Type: Microsoft.SharePoint.Client.Social.SocialPostActorInfo

Accessibility: Read Only

The **LikerInfo** property specifies information about users who like the post. See section [3.1.5.27](#) for details on the **SocialPostActorInfo** type.

3.1.5.26.1.1.7 ModifiedTime

Type: CSOM DateTime

Accessibility: Read Only

The **ModifiedTime** property specifies the date and time that the post was last modified on the server. The **ModifiedTime** indicates the most recent time that the post was liked or unliked by a user.

3.1.5.26.1.1.8 Overlays

Type: CSOM array of Microsoft.SharePoint.Client.Social.SocialDataOverlay

Accessibility: Read Only

The **Overlays** property is an array of objects in a post, where each object represents a user, document, site, tag, or link. See section [3.1.5.14](#) for details on the **SocialDataOverlay** type.

3.1.5.26.1.1.9 PostType

Type: Microsoft.SharePoint.Client.Social.SocialPostType

Accessibility: Read Only

The **PostType** property specifies whether a post is the root post or a reply post in a thread. See section [3.1.5.34](#) for details on the **SocialPostType** type.

3.1.5.26.1.1.10 PreferredImageUri

Type: CSOM String

Accessibility: Read Only

The **PreferredImageUri** property specifies the URI of the image to be displayed with the post. If this property is not present, there is no preferred image.

3.1.5.26.1.1.11 Source

Type: Microsoft.SharePoint.Client.Social.SocialLink

Accessibility: Read Only

The **Source** property specifies the link to a web **site (1)** associated with the application that created the post. See section [3.1.5.25](#) for details on the **SocialLink** type.

3.1.5.26.1.1.12 Text

Type: CSOM String

Accessibility: Read Only

The Text property specifies the text of the post. The **Overlays** property (see section [3.1.5.26.1.1.8](#)) identifies substring in the text that represent users, documents, sites, tags, and links.

3.1.5.26.1.2 ObjectPath Properties

None.

3.1.5.27 Microsoft.SharePoint.Client.Social.SocialPostActorInfo

TypeId: {255E9B47-C24C-414E-9ECC-23E42CC7042B}

ShortName: SP.Social.SocialPostActorInfo

The **SocialPostActorInfo** class specifies a set of users, documents, sites, and tags by an index into the **SocialThread Actors** array (see section [3.1.5.42.1.1.1](#)). In the **SocialPost LikerInfo** property (see section [3.1.5.26.1.1.6](#)), this class represents a set of users that like the post.

3.1.5.27.1 Properties

3.1.5.27.1.1 Scalar Properties

3.1.5.27.1.1.1 Indexes

Type: CSOM array of CSOM Int32

Accessibility: Read Only

The **Indexes** property specifies an array of indexes into the **SocialThread Actors** array (see section [3.1.5.42.1.1.1](#)). The server can choose to return a limited set of actors. For example, the server can choose to return a subset of the users that like a post.

3.1.5.27.1.1.2 TotalCount

Type: CSOM Int32

Accessibility: Read Only

The **TotalCount** property returns the total number of actors. If the **Indexes** property returns a subset of actors, the **TotalCount** property returns to number of actors in the full set. For example, if the server returns a subset of the likers in the **Indexes** property, the **TotalCount** property specifies the number of users who like the post, and not the number of users returned in **Indexes**.

3.1.5.27.1.1.3 IncludesCurrentUser

Type: CSOM Boolean

Accessibility: Read Only

The **IncludesCurrentUser** property has a true value if the current user is included in the actors specified. For example, if the current user likes the post, this property has a true value in the **LikerInfo** property (see section [3.1.5.26.1.1.6](#)). The current user is omitted from the **Indexes** array.

3.1.5.27.1.2 ObjectPath Properties

None.

3.1.5.28 Microsoft.SharePoint.Client.Social.SocialPostAttributes

ShortName: SP.Social.SocialPostAttributes

Flag: true

The **SocialPostAttributes** flag type specifies attributes of the post, such as whether the current user can like or delete the post.

3.1.5.28.1 Field Values

3.1.5.28.1.1 None

Value: 0

There are no post attributes.

3.1.5.28.1.2 CanLike

Value: 1

The current user can like the post.

3.1.5.28.1.3 CanDelete

Value: 2

The current user can delete the post.

3.1.5.28.1.4 UseAuthorImage

Value: 4

The post is to be displayed with the author image.

3.1.5.28.1.5 UseSmallImage

Value: 8

The post is to be displayed with a small image.

3.1.5.28.1.6 CanFollowUp

Value: 16

The current user can create a task from the post.

3.1.5.29 Microsoft.SharePoint.Client.Social.SocialPostCreationData

TypeId: {2830DD33-271E-4091-A211-E88988E16B03}

ShortName: SP.Social.SocialPostCreationData

The **SocialPostCreationData** object specifies the content of a post in the **SocialFeedManager.CreatePost** method (see section [3.1.5.19.2.1.1](#)). The post consists of a text message, which can optionally include social tags, mentions of users, and links.

3.1.5.29.1 Properties

3.1.5.29.1.1 Scalar Properties

3.1.5.29.1.1.1 Attachment

Type: Microsoft.SharePoint.Client.Social.SocialAttachment

Accessibility: Read/Write

Specifies an image, document preview, or video preview to be used in the post. See section [3.1.5.8](#).

3.1.5.29.1.1.2 ContentItems

Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialDataItem

Accessibility: Read/Write

Specifies an array consisting of social tags, user mentions, links to documents, links to sites, and generic links. Each element in the array is inserted into the **ContentText** string if there is a substitution reference to the array element in the string. See section [3.1.5.12](#) for details on the **SocialDataItem** type and section [3.1.5.29.1.1.3](#) for details on the **ContentText** string.

3.1.5.29.1.1.3 ContentText

Type: **CSOM String**

Accessibility: Read/Write

The **ContentText** string contains the text body of the post. It can optionally contain one or more substitution references to elements in the zero-based **SocialDataItems** array. A substitution reference consists of a series of characters that consist of an open-brace character ({) followed by one or more digits in the range 0 to 9 and terminated by a close-brace character (}). The substitution reference is replaced by the text value of the element in the array at the offset specified by the value of the digits. For example, the text string "{0}" is replaced by the first element in the **SocialDataItems** array.

Although it is not required by this interchange protocol, substitution references to mentions can be preceded by an at sign (@) in the **ContentText** and substitution references to social tags can be preceded by a hash mark (#) in the **ContentText**. The at sign and hash mark are not required by the protocol but are helpful if the post is displayed to a user by a client.

3.1.5.29.1.1.4 DefinitionData

Type: Microsoft.SharePoint.Client.Social.SocialPostDefinitionData

Accessibility: Read/Write

The **DefinitionData** property specifies additional information when creating server-generated posts. This property can only be used in a server-to-server call. The client **MUST** set this property to the null value. This document does not define any behavior for the server if the client specifies a non-null value.

3.1.5.29.1.1.5 Source

Type: Microsoft.SharePoint.Client.Social.SocialLink

Accessibility: Read/Write

The **Source** property specifies the link to a web site (1) associated with the application that created the post. See section [3.1.5.25](#) for details on the **SocialLink** type.

3.1.5.29.1.1.6 SecurityUris

Type: **CSOM array** of **CSOM String**

Accessibility: Read/Write

The **SecurityUris** property specifies that access to the post SHOULD be restricted to users that have access to the objects identified by the array of URIs. <3>

3.1.5.29.1.1.7 UpdateStatusText

Type: **CSOM Boolean**

Accessibility: Read/Write

The **UpdateStatusText** property indicates whether the post is to be used as the current user's new status message. A **True** value indicates the post is to be used as the current user's new status message.

3.1.5.29.1.2 ObjectPath Properties

None.

3.1.5.30 Microsoft.SharePoint.Client.Social.SocialPostDefinitionData

TypeId: {0DEA3DB3-D522-4691-AB98-9B5FFE6A613F}

ShortName: SP.Social.SocialPostDefinitionData

The **SocialPostDefinitionData** type provides additional information about server-generated posts. This type can only be specified in a server-to-server call.

3.1.5.30.1 Properties

3.1.5.30.1.1 Scalar Properties

3.1.5.30.1.1.1 Items

Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialPostDefinitionDataItem

Accessibility: Read/Write

The **Items** property specifies an array of **SocialPostDefinitionDataItem** objects. See section [3.1.5.31](#) for details on the **SocialPostDefinitionDataItem** type.

3.1.5.30.1.1.2 Name

Type: **CSOM String**

Accessibility: Read/Write

The **Name** property specifies the name of the post definition to be used for the post.

3.1.5.30.1.2 ObjectPath Properties

None.

3.1.5.31 Microsoft.SharePoint.Client.Social.SocialPostDefinitionDataItem

TypeId: {C818A4F0-DB17-4E56-B741-4F473C108647}

ShortName: SP.Social.SocialPostDefinitionDataItem

The **SocialPostDefinitionDataItem** class specifies an item to be inserted in a post by replacing a token in the post definition. This type can only be specified in a server-to-server call.

3.1.5.31.1 Properties

3.1.5.31.1.1 Scalar Properties

3.1.5.31.1.1.1 AccountName

Type: CSOM String

Accessibility: Read/Write

The **AccountName** property specifies the name of the user. This property is only used if the **ItemType** property specifies that the item is a **User**.

3.1.5.31.1.1.2 ItemType

Type: Microsoft.SharePoint.Client.Social.SocialPostDefinitionDataItemType

Accessibility: Read/Write

The **ItemType** property specifies whether the item being formatted is a text element, a user, a document, a site, a tag, or a link. For details on the **SocialPostDefinitionDataItemType** type, see section [3.1.5.32](#).

3.1.5.31.1.1.3 PlaceholderName

Type: CSOM String

Accessibility: Read/Write

The **PlaceholderName** property specifies the post definition token to be replaced by the item.

3.1.5.31.1.1.4 TagGuid

Type: CSOM GUID

Accessibility: Read/Write

The **TagGuid** property specifies the GUID that identifies the tag. This property is only used if the **ItemType** property specifies that the item is a **Tag**.

3.1.5.31.1.1.5 Text

Type: CSOM String

Accessibility: Read/Write

The **Text** property specifies the text that is substituted for the placeholder.

3.1.5.31.1.1.6 Uri

Type: **CSOM String**

Accessibility: Read/Write

The **Uri** property specifies the URI of the document, site, or link. This property is only available if the **ItemType** property specifies that the item is a **Document**, **Link**, or **Site**.

3.1.5.31.1.2 ObjectPath Properties

None.

3.1.5.32 Microsoft.SharePoint.Client.Social.SocialPostDefinitionDataType

ShortName: SP.Social.SocialPostDefinitionDataType

Flag: false

The **SocialPostDefinitionDataType** type defines the type of item being specified in the **SocialPostDefinitionDataItem** (see section [3.1.5.31](#)). This type is only available in server-to-server calls.

3.1.5.32.1 Field Values

3.1.5.32.1.1 Text

Value: 0

The **SocialPostDefinitionDataItem** is a text element.

3.1.5.32.1.2 User

Value: 1

The **SocialPostDefinitionDataItem** is a user.

3.1.5.32.1.3 Document

Value: 2

The **SocialPostDefinitionDataItem** is a document.

3.1.5.32.1.4 Site

Value: 3

The **SocialPostDefinitionDataItem** is a site.

3.1.5.32.1.5 Tag

Value: 4

The **SocialPostDefinitionDataItem** is a tag.

3.1.5.32.1.6 Link

Value: 5

The **SocialPostDefinitionDataItem** is a link.

3.1.5.33 Microsoft.SharePoint.Client.Social.SocialPostReference

TypeId: {5952A7BE-5EF5-4246-8760-48544F41EAB9}

ShortName: SP.Social.SocialPostReference

The **SocialPostReference** class specifies a reference to a post in another thread. The referenced post can be a post with a tag, a post that is liked, a post that mentions a user, or a post that is a reply. Threads that contain a **SocialPostReference** in the **PostReference** property (see section [3.1.5.42.1.1.6](#)) are threads with root posts that are generated on the server and not created by a client.

3.1.5.33.1 Properties

3.1.5.33.1.1 Scalar Properties

3.1.5.33.1.1.1 Digest

Type: Microsoft.SharePoint.Client.Social.SocialThread

Accessibility: Read Only

The **Digest** property provides a digest of the thread containing the referenced post. See section [3.1.5.42](#) for details on the **SocialThread** class.

3.1.5.33.1.1.2 Post

Type: Microsoft.SharePoint.Client.Social.SocialPost

Accessibility: Read Only

The **Post** property provides access to the post being referenced. See section [3.1.5.26](#) for details on the **SocialPost** class.

3.1.5.33.1.1.3 ThreadId

Type: CSOM String

Accessibility: Read Only

The **ThreadId** property specifies the unique identifier of the thread containing the referenced post.

3.1.5.33.1.1.4 ThreadOwnerIndex

Type: CSOM Int32

Accessibility: Read Only

The **ThreadOwnerIndex** property specifies the current owner of the thread as an index into the **SocialThread Actors** array (see section [3.1.5.42.1.1.1](#)).

3.1.5.33.1.2 ObjectPath Properties

None.

3.1.5.34 Microsoft.SharePoint.Client.Social.SocialPostType

ShortName: SP.Social.SocialPostType

Flag: false

The **SocialPostType** type specifies whether a post is the root post or a reply post in a thread.

3.1.5.34.1 Field Values

3.1.5.34.1.1 Root

Value: 0

The post is the root post in the thread.

3.1.5.34.1.2 Reply

Value: 1

The post is a reply post in the thread.

3.1.5.35 Microsoft.SharePoint.Client.Social.SocialRestActor

TypeId: {76F18988-E6D7-470C-9421-A221BE0B951C}

ShortName: SP.Social.SocialRestActor

The **SocialRestActor** type contains information about an actor retrieved from server. An actor is a user, document, site, or tag. The **SocialRestActor** type is available when the protocol client sends an **OData** request to a protocol server using [\[MS-CSOMREST\]](#). It is not available using [\[MS-CSOM\]](#).

3.1.5.35.1 Properties

3.1.5.35.1.1 Scalar Properties

3.1.5.35.1.1.1 FollowableItem

Type: CSOM String

Accessibility: Read Only

The **FollowableItem** property provides access to the item described by the **SocialRestActor** object. The string can be a URI for a document, site, or tag or can be a user identifier.

3.1.5.35.1.1.2 FollowableItemActor

Type: Microsoft.SharePoint.Client.Social.SocialActor

Accessibility: Read Only

The **FollowableItemActor** provides access to the underlying **SocialActor** object (see section [3.1.5.3](#)).

3.1.5.35.1.1.3 Me

Type: Microsoft.SharePoint.Client.Social.SocialActor

Accessibility: Read Only

The **Me** property provides access to the current user. See section [3.1.5.3](#) for details on the **SocialActor** type.

3.1.5.35.1.2 ObjectPath Properties

None.

3.1.5.35.2 Methods

3.1.5.35.2.1 Scalar Methods

3.1.5.35.2.1.1 UnreadMentionCount

Return Type: CSOM Int32

The **UnreadMentionCount** method is only available on the **SocialRestActor** object that represents the current user. **UnreadMentionCount** returns the number of mentions of the current user that have been added to the feed on the server since the time that the unread mention count was cleared for the current user.

Parameters: None

3.1.5.35.2.2 ObjectPath Methods

3.1.5.35.2.2.1 CSOM Constructor

The constructor method creates a new instance of **SocialRestActor** (see section [3.1.5.35](#)).

Parameters: None

3.1.5.35.2.2.2 Feed

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **Feed** method gets a feed that lists activity by the current user. For details on the **SocialRestFeed** type, see section [3.1.5.36](#).

Parameters:

feedOptions: Specify the maximum number of threads, date-time values to use for selecting threads, and sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#)).

For example, the following REST HTTP_GET message calls the **Feed** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.feed/my/Feed(MaxThreadCount=25,SortOrder=0,NewerThan=@v)?@v=  
=datetime'2012-04-16T08:11'
```

The @v construct used in this message allows a colon (:) to be included in the date-time value.

3.1.5.35.2.2.3 Likes

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **Likes** method gets a feed that lists threads containing posts that the current user likes. For details on the **SocialRestFeed** type, see section [3.1.5.36](#).

Parameters:

feedOptions: Specifies the maximum number of threads, date-time values to use for selecting threads, and sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#).

For example, the following REST HTTP_GET message calls the **Likes** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.feed/my/Likes(MaxThreadCount=25,SortOrder=0,NewerThan=@v)?@v=datetime'2012-04-16T08:11'
```

The @v construct used in this message allows a colon (:) to be included in the date-time value.

3.1.5.35.2.2.4 MentionFeed

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **MentionFeed** method gets a feed consisting of threads that contain posts that mention the current user. For details on the **SocialRestFeed** type, see section [3.1.5.36](#).

Parameters:

feedOptions: Specify the maximum number of threads, date-time values to use for selecting threads, and sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#).

For example, the following REST HTTP_GET message calls the **MentionFeed** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.feed/my/MentionFeed(MaxThreadCount=25,SortOrder=0,NewerThan=@v)?@v=datetime'2012-04-16T08:11'
```

The @v construct used in this message allows a colon (:) to be included in the date-time value.

3.1.5.35.2.2.5 News

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **News** method gets a feed that contains posts by the current user and the users that are socially connected to the current user.

Parameters:

feedOptions: Specifies the maximum number of threads, date-time values to use for selecting threads, and sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#).

For example, the following REST HTTP_GET message calls the **News** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").


```
http://my.contoso.com/_api/social.feed/my/news(MaxThreadCount=25,SortOrder=0,NewerThan=@v)?@v=dateTime'2012-04-16T08:11'
```

The @v construct used in this message allows a colon (:) to be included in the date-time value.

3.1.5.35.2.2.6 OrganizationFeed

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **OrganizationFeed** method gets a feed that contains threads that are posted to this organization-wide feed.

Parameters:

feedOptions: Specifies the maximum number of threads, date-time values to use for selecting threads, and sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#).

For example, the following REST HTTP_GET message calls the **OrganizationFeed** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.feed/my/Organizationfeed(MaxThreadCount=25,SortOrder=0,NewerThan=@v)?@v=dateTime'2012-04-16T08:11'
```

The @v construct used in this message allows a colon (:) to be included in the date-time value.

3.1.5.35.2.2.7 TimelineFeed

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **Timelinefeed** method returns the same kind of information as the **News** method (see section [3.1.5.35.2.2.5](#)) but uses a different filter for selecting threads. The **News** method selects threads with the most recent reply post, but the **Timelinefeed** method selects threads with the most recent root post.

Parameters:

feedOptions: Specify the maximum number of threads, date-time values to use for selecting threads, and sort order.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#).

For example, the following REST HTTP_GET message calls the **Timelinefeed** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").

```
http://contoso.com/my/_api/social.feed/my/Timelinefeed(MaxThreadCount=25,SortOrder=0,NewerThan=@v)?@v=dateTime'2012-04-16T08:11'
```

The @v construct used in this message allows a colon (:) to be included in the date-time value.

3.1.5.36 Microsoft.SharePoint.Client.Social.SocialRestFeed

TypeId: {81C08601-C142-4364-B182-7A0B1052D341}

ShortName: SP.Social.SocialRestFeed

The **SocialRestFeed** class specifies a feed, which is an array of thread, each of which specifies a root post and an array of response posts. The **SocialRestFeed** type is available when the protocol client sends an **OData** request to a protocol server using [\[MS-CSOMREST\]](#). It is not available using [\[MS-CSOM\]](#).

3.1.5.36.1 Properties

3.1.5.36.1.1 Scalar Properties

3.1.5.36.1.1.1 SocialFeed

Type: Microsoft.SharePoint.Client.Social.SocialFeed

Accessibility: Read Only

The **SocialFeed** property provides the object that contains the feed. For details on the **SocialFeed** type, see section [3.1.5.17](#).

3.1.5.36.1.2 ObjectPath Properties

None.

3.1.5.36.2 Methods

3.1.5.36.2.1 Scalar Methods

None.

3.1.5.36.2.2 ObjectPath Methods

3.1.5.36.2.2.1 CSOM Constructor

The constructor method creates a new instance of **SocialRestFeed** (see section [3.1.5.36](#)).

Parameters: None

3.1.5.36.2.2.2 ClearUnReadMentionCount

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFeed

The **ClearUnReadMentionCount** method clears the count of unread mentions of the current user on the server. For details on the **SocialRestFeed** type, see section [3.1.5.36](#).

Parameters:

feedOptions: This parameter MUST be null. It is not specified in the REST call.

Type: Microsoft.SharePoint.Client.Social.SocialFeedOptions

For details on the **SocialFeedOptions** type, see section [3.1.5.20](#).

For example, the following REST HTTP_GET message calls the **ClearUnReadMentionCount** resource. This message has an entity body equal to the empty string ("").

`http://my.contoso.com/_api/social.feed/my/mentionfeed/ClearUnReadMentionCount`

The method returns a **SocialRestFeed** object with unabbreviated post and actor information.

3.1.5.36.2.2.3 Post

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Post** method creates a new post on the feed. The method returns the newly created thread with the new post. See section [3.1.5.40](#) for details on the **SocialRestThread** type.

Parameters:

restCreationData: Specifies the content of the post.

Type: Microsoft.SharePoint.Client.Social.SocialRestPostCreationData

See section [3.1.5.39](#) for details on the **SocialRestPostCreationData** type.

For example, the following REST HTTP_POST message calls the **Post** resource.

`http://my.contoso.com/_api/social.feed/my/Feed/Post`

The following is an example of the entity body for this message:

```
{
  'restCreationData': {
    '__metadata': {
      'type': 'SP.Social.SocialRestPostCreationData'
    },
    'ID': null,
    'creationData': {
      'metadata': {
        'type': 'SP.Social.SocialPostCreationData'
      },
      'ContentText': 'This is my first post',
      'UpdateStatusText': false
    }
  }
}
```

3.1.5.37 Microsoft.SharePoint.Client.Social.SocialRestFeedManager

TypeId: {0756D6A9-6830-4161-991D-E3CEC6C94E22}

ShortName: SP.Social.SocialRestFeedManager

The **SocialRestFeedManager** class provides REST methods for creating posts, modifying threads, and consuming feeds on behalf of the current user. The **SocialRestFeedManager** class is available when the protocol client sends an **OData** request to a protocol server using [\[MS-CSOMREST\]](#). It is not available using [\[MS-CSOM\]](#).

3.1.5.37.1 Properties

3.1.5.37.1.1 Scalar Properties

None.

3.1.5.37.1.2 ObjectPath Properties

None.

3.1.5.37.2 Methods

3.1.5.37.2.1 Scalar Methods

None.

3.1.5.37.2.2 ObjectPath Methods

3.1.5.37.2.2.1 CSOM Constructor

The constructor method creates a new instance of **SocialRestFeedManager** (see section [3.1.5.37](#)).

Parameters: None

3.1.5.37.2.2.2 Actor

Return Type: Microsoft.SharePoint.Client.Social.SocialRestActor

The **Actor** method accepts an identifier for an actor and returns a **SocialRestActor** entity representing the specified item. See section [3.1.5.35](#) for details on the **SocialRestActor** type.

Parameters:

item: URL identifying a document or **site (2)** or a user name in the form *domain\user-name*.

Type: **CSOM String**

For example, the following REST HTTP_GET message calls the **Actor** resource. The parameter is specified in the URL; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.feed/actor(item='CONTOSO\mhedland')
```

3.1.5.37.2.2.3 My

Return Type: Microsoft.SharePoint.Client.Social.SocialRestActor

The **My** method gets a **SocialRestActor** object that represents the current user. See section [3.1.5.35](#) for details on the **SocialRestActor** type.

For example, the following REST HTTP_GET message calls the **My** resource. There is no parameter; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.feed/my
```

Parameters: None

3.1.5.37.2.2.4 Post

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Post** method retrieves the specified thread or reply post with unabbreviated post and actor information.

Parameters:

ID: The unique identifier that identifies a thread by the root post identifier or a reply post.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Post** resource.

```
http://my.contoso.com/_api/social.feed/Post
```

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2
ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-
21-124525095-708259637-1543119021-565461'
}
```

3.1.5.38 Microsoft.SharePoint.Client.Social.SocialRestFollowingManager

TypeId: {2892E6D4-16DA-47BF-A33F-A3C8942503CF}

ShortName: SP.Social.SocialRestFollowingManager

The **SocialRestFollowingManager** class provides methods for managing a user's list of followed actors (users, documents, sites, and tags). The **SocialRestFollowingManager** type is available when the protocol client sends an **OData** request to a protocol server using [\[MS-CSOMREST\]](#). It is not available using [\[MS-CSOM\]](#).

The **FollowedDocumentsUri** and **FollowedSitesUri** properties are not included in the **default scalar property set** for this type.

3.1.5.38.1 Properties

3.1.5.38.1.1 Scalar Properties

3.1.5.38.1.1.1 FollowedDocumentsUri

Type: **CSOM String**

Accessibility: Read Only

The **FollowedDocumentsUri** property specifies a URI to a **site (2)** that lists the current user's followed documents.

For example, the following REST HTTP_GET message calls the **FollowedDocumentsUri** resource. There is no parameter; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my/FollowedDocumentsUri
```

3.1.5.38.1.1.2 FollowedSitesUri

Type: **CSOM String**

Accessibility: Read Only

The **FollowedSitesUri** property specifies a URI to a **site (2)** that lists the current user's followed sites.

For example, the following REST HTTP_GET message calls the **FollowedSitesUri** resource. There is no parameter; consequently, the entity body is equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my/FollowedSitesUri
```

3.1.5.38.1.1.3 MyFollowedDocumentsUri

Type: CSOM String

Accessibility: Read Only

The **MyFollowedDocumentsUri** property provides the URI of the page that lists the current user's followed documents.

3.1.5.38.1.1.4 MyFollowedSitesUri

Type: CSOM String

Accessibility: Read Only

The **MyFollowedSitesUri** property provides the URI of the page that lists the current user's followed sites.

3.1.5.38.1.1.5 SocialActor

Type: Microsoft.SharePoint.Client.Social.SocialActor

Accessibility: Read Only

The **SocialActor** property contains the **SocialActor** class for the owner of the **SocialRestFollowingManager**. Typically, this is the current user.

3.1.5.38.1.2 ObjectPath Properties

None.

3.1.5.38.2 Methods

3.1.5.38.2.1 Scalar Methods

3.1.5.38.2.1.1 Follow

Return Type: Microsoft.SharePoint.Client.Social.SocialFollowResult

The **Follow** method adds the specified actor to the current user's list of followed actors. For details on the **SocialFollowResult** type, see section [3.1.5.24](#).

Parameters:

actor: An object that specifies the actor to be added.

Type: Microsoft.SharePoint.Client.Social.SocialActorInfo

For details on the **SocialActorInfo** type, see section [3.1.5.4](#).

For example, the following REST HTTP_POST message calls the **Follow** resource.

```
http://my.contoso.com/_api/social.following/Follow
```

The following is an example of the entity body for this message:

```
{
  'actor':{
    'metadata':{
      'type':'SP.Social.SocialActorInfo'
    },
    'AccountName':contoso.com\\evacorets',
    'ActorType':0,
    'ContentUri':'http://my.contoso.com/evacorets',
    'Id':null,
    'TagGuid':'ff24780e-a35c-4d31-ae52-54afbb49ec6c'
  }
}
```

3.1.5.38.2.1.2 Followed

Return Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

The **Followed** method retrieves a list of actors being followed by the current user.

Parameters:

types: The actor types to retrieve.

Type: Microsoft.SharePoint.Client.Social.SocialActorTypes

For details on the section **SocialActorTypes** type, see section [3.1.5.6](#).

For example, the following REST HTTP_GET message calls the **Followed** resource. This message has an entity body equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my/Followed(types=1)
```

3.1.5.38.2.1.3 FollowedCount

Return Type: **CSOM Int32**

The **FollowedCount** method retrieves a count of actors being followed by the current user.

Parameters:

types: The types of actors to include in the count.

Type: Microsoft.SharePoint.Client.Social.SocialActorTypes

For details on the section **SocialActorTypes** type, see section [3.1.5.6](#).

For example, the following REST HTTP_GET message calls the **FollowedCount** resource. This message has an entity body equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my/FollowedCount(types=1)
```

3.1.5.38.2.1.4 Followers

Return Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

The **Followers** method retrieves the current user's list of followers. For details on the **SocialActor** type, see section [3.1.5.3](#).

For example, the following REST HTTP_GET message calls the **Followers** resource. This message has an entity body equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my/Followers
```

Parameters: None

3.1.5.38.2.1.5 IsFollowed

Return Type: CSOM Boolean

The **IsFollowed** method determines whether the current user is following the specified actor.

Parameters:

actor: An object that specifies the actor.

Type: Microsoft.SharePoint.Client.Social.SocialActorInfo

For details on the **SocialActorInfo** type, see section [3.1.5.4](#).

For example, the following REST HTTP_POST message calls the **IsFollowed** resource.

```
http://my.contoso.com/_api/social.following/IsFollowed
```

The following is an example of the entity body for this message:

```
{
  'actor': {
    '_metadata': {
      'type': 'SP.Social.SocialActorInfo'
    },
    'AccountName': 'contoso.com\\evacorets',
    'ActorType': 0,
    'ContentUri': 'http://my.contoso.com/',
    'Id': null,
    'TagGuid': 'ff24780e-a35c-4d31-ae52-54afbb49ec6c'
  }
}
```

3.1.5.38.2.1.6 StopFollowing

Return Type: None

The **StopFollowing** method removes the specified actor from the current user's list of followed actors.

Parameters:

actor: An object that specifies the actor to be removed.

Type: Microsoft.SharePoint.Client.Social.SocialActorInfo

For details on the **SocialActorInfo** type, see section [3.1.5.4](#).

For example, the following REST HTTP_POST message calls the **StopFollowing** resource.

```
http://my.contoso.com/_api/social.following/StopFollowing
```


The following is an example of the entity body for this message:

```
{
  'actor':{
    'metadata':{
      'type':'SP.Social.SocialActorInfo'
    },
    'AccountName':'contoso.com\evacorets',
    'ActorType':0,
    'ContentUri': 'http://my.contoso.com/',
    'Id':null,
    'TagGuid':'ff24780e-a35c-4d31-ae52-54afbb49ec6c'
  }
}
```

3.1.5.38.2.1.7 Suggestions

Return Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

The **Suggestions** method retrieves a list of suggested actors for the current user to follow. For details on the **SocialActor** type, see section [3.1.5.3](#).

For example, the following REST HTTP_GET message calls the **Suggestions** resource. This message has an entity body equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my/Suggestions
```

Parameters: None

3.1.5.38.2.2 ObjectPath Methods

3.1.5.38.2.2.1 CSOM Constructor

The constructor method creates a new instance of **SocialRestFollowingManager** (see section [3.1.5.38](#)).

For example, the following REST HTTP_GET message calls the **SocialRestFollowingManager** resource. This message has an entity body equal to the empty string ("").

```
http://my.contoso.com/_api/social.following
```

Parameters: None

3.1.5.38.2.2.2 My

Return Type: Microsoft.SharePoint.Client.Social.SocialRestFollowingManager

Gets an object that represents the current user.

For example, the following REST HTTP_GET message calls the **My** resource. This message has an entity body equal to the empty string ("").

```
http://my.contoso.com/_api/social.following/my
```

Parameters: None

3.1.5.39 Microsoft.SharePoint.Client.Social.SocialRestPostCreationData

TypeId: {330A9A57-2B1E-499D-B5DB-93953C5C5001}

ShortName: SP.Social.SocialRestPostCreationData

The **SocialRestPostCreationData** class defines the content of a new post. The **SocialRestPostCreationData** type is available when the protocol client sends an **OData** request to a protocol server using [\[MS-CSOMREST\]](#). It is not available using [\[MS-CSOM\]](#).

3.1.5.39.1 Properties

3.1.5.39.1.1 Scalar Properties

3.1.5.39.1.1.1 creationData

Type: Microsoft.SharePoint.Client.Social.SocialPostCreationData

Accessibility: Read/Write

The **creationData** property specifies the content of the post. See section [3.1.5.29](#) for details on the **SocialPostCreationData** type.

3.1.5.39.1.1.2 ID

Type: CSOM String

Accessibility: Read/Write

The **ID** property specifies the target thread for a response post or the target feed by the actor identification for a new root post. If the **ID** property is null, then the target is the current user's feed.

3.1.5.39.1.2 ObjectPath Properties

None.

3.1.5.40 Microsoft.SharePoint.Client.Social.SocialRestThread

TypeId: {10237333-95CE-447D-80F0-2025548F7DA5}

ShortName: SP.Social.SocialRestThread

The **SocialRestThread** class specifies a thread that is stored on the server. The thread contains a root post and zero or more reply posts. The **SocialRestThread** type is available when the protocol client sends an **OData** request to a protocol server using [\[MS-CSOMREST\]](#). It is not available using [\[MS-CSOM\]](#).

3.1.5.40.1 Properties

3.1.5.40.1.1 Scalar Properties

3.1.5.40.1.1.1 ID

Type: CSOM String

Accessibility: Read Only

The **ID** property returns the thread identifier.

3.1.5.40.1.1.2 SocialThread

Type: Microsoft.SharePoint.Client.Social.SocialThread

Accessibility: Read Only

The **SocialThread** property provides the object that contains the thread. For details on the **SocialThread** type, see section [3.1.5.42](#).

3.1.5.40.1.2 ObjectPath Properties

None.

3.1.5.40.2 Methods

3.1.5.40.2.1 Scalar Methods

3.1.5.40.2.1.1 Delete

Return Type: None

The **Delete** method deletes the specified post, either the root post or a reply post in the thread. If the root post is deleted, the entire thread is deleted.

Parameters:

ID: Specifies the post to delete.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Delete** resource.

```
http://my.contoso.com/_api/social.feed/post/Delete
```

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-21-124525095-708259637-1543119021-565461'
}
```

3.1.5.40.2.1.2 Likers

Return Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

The **Likers** method returns the complete set of users who like the specified post. Each **SocialActor** in the returned array identifies a user who likes the specified post. For details on the **SocialActor** type, see section [3.1.5.3](#).

Parameters:

ID: Specifies the post by its identifier.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Likers** resource.

```
http://my.contoso.com/_api/social.feed/post/Likers
```

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2
ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-
21-124525095-708259637-1543119021-565461'
}
```

3.1.5.40.2.2 ObjectPath Methods

3.1.5.40.2.2.1 CSOM Constructor

The constructor method creates a new instance of **SocialRestThread** (see section [3.1.5.40](#)).

Parameters: None

3.1.5.40.2.2.2 Like

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Like** method makes the current user a liker of the specified post. The method returns a thread digest of the thread containing the specified post. See section [3.1.5.40](#) for details on the **SocialRestThread** type.

Parameters:

ID: Specifies the post by its identifier.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Like** resource.

```
http://my.contoso.com/_api/social.feed/post/Like
```

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2
ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-
21-124525095-708259637-1543119021-565461'
}
```

3.1.5.40.2.2.3 Lock

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Lock** method locks the specified thread. Once the thread is locked, no reply posts can be added to the thread until it is unlocked. The Lock method returns a digest of the locked thread. For details on the **SocialRestThread** type, see section [3.1.5.40](#).

Parameters:

ID: Specifies the thread by its identifier, which is the identifier of the root post.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Lock** resource.

`http://my.contoso.com/_api/social.feed/post/Lock`

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2
ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-
21-124525095-708259637-1543119021-565461'
}
```

3.1.5.40.2.2.4 Reply

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Reply** method posts a reply to the specified root post. This method returns a digest thread. See section [3.1.5.40](#) for details on the **SocialRestThread** type.

Parameters:

restCreationData: Specifies the root post by identifier and specifies the content of the reply.

Type: Microsoft.SharePoint.Client.Social.SocialRestPostCreationData

See section [3.1.5.39](#) for details on the **SocialRestPostCreationData** type.

For example, the following REST HTTP_POST message calls the **Reply** resource.

`http://my.contoso.com/my/_api/social.feed/post/Reply`

The following is an example of the entity body for this message:

```
{
  'restCreationData': { '__metadata': { 'type': 'SP.Social.SocialRestPostCreationData' },
  'ID': '1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814
c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-
5-21-124525095-708259637-1543119021-565461', 'creationData': { ' metadata': {
  'type': 'SP.Social.SocialPostCreationData' }, 'ContentText': 'This is my first
reply', 'UpdateStatusText': false } }
}
```

3.1.5.40.2.2.5 Unlike

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Unlike** method removes the current user from the list of likers for the specified post. If the current is not a liker of the post, this method has no effect. This method returns a digest thread of the modified thread that includes the specified post. See section [3.1.5.40](#) for details on the **SocialRestThread** type.

Parameters:

ID: Specifies the post by identifier to unlike.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Unlike** resource.

`http://my.contoso.com/_api/social.feed/post/Unlike`

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2
ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-
21-124525095-708259637-1543119021-565461'
}
```

3.1.5.40.2.2.6 UnLock

Return Type: Microsoft.SharePoint.Client.Social.SocialRestThread

The **Unlock** method unlocks the specified thread. This method returns a digest of the locked thread. For details on the **SocialRestThread** type, see section [3.1.5.40](#).

Parameters:

ID: Specifies the thread by its identifier, which is the identifier of the root post.

Type: **CSOM String**

For example, the following REST HTTP_POST message calls the **Unlock** resource.

```
http://my.contoso.com/_api/social.feed/post/Unlock
```

The following is an example of the entity body for this message:

```
{
  'ID': '1.94fdcc5fc39b4a2c99ae4570caf02321.d0a03fb1761a404a9a8e7f9f5ec58e17.5a1067e8af65410b9e2
ba6a74a4b718a.0c37852b34d0418e91c62ac25af4be5b.9dbfb5598e2248d7b57eee57abf2e7c1.31.31.S-1-5-
21-124525095-708259637-1543119021-565461'
}
```

3.1.5.41 Microsoft.SharePoint.Client.Social.SocialStatusCode

ShortName: SP.Social.SocialStatusCode

Flag: false

The **SocialStatusCode** type specifies a status or error code.

3.1.5.41.1 Field Values

3.1.5.41.1.1 OK

Value: 0

This value specifies that there is no error.

3.1.5.41.1.2 InvalidRequest

Value: 1

This value specifies that an invalid request was encountered.

3.1.5.41.1.3 AccessDenied

Value: 2

This value specifies that access was denied to the current user.

3.1.5.41.1.4 ItemNotFound

Value: 3

This value specifies that the item was not found.

3.1.5.41.1.5 InvalidOperation

Value: 4

This value specifies that an invalid operation was attempted.

3.1.5.41.1.6 ItemNotModified

Value: 5

This value specifies that the item was not changed by the operation.

3.1.5.41.1.7 InternalError

Value: 6

This value specifies that an internal server error was encountered.

3.1.5.41.1.8 CacheReadError

Value: 7

This value specifies that there was an error reading the cache.

3.1.5.41.1.9 CacheUpdateError

Value: 8

This value specifies that there was an error updating the cache.

3.1.5.41.1.10 PersonalSiteNotFound

Value: 9

This value specifies that the personal site was not found.

3.1.5.41.1.11 FailedToCreatePersonalSite

Value: 10

This value specifies that the attempt to create a personal site failed.

3.1.5.41.1.12 NotAuthorizedToCreatePersonalSite

Value: 11

This value specifies that the current user is not authorized to create a personal site.

3.1.5.41.1.13CannotCreatePersonalSite

Value: 12

This value specifies that a personal site cannot be created.

3.1.5.41.1.14LimitReached

Value: 13

This value specifies that a server limit was reached.

3.1.5.41.1.15AttachmentError

Value: 14

This value specifies that the operation failed because there was an error handling an attachment.

3.1.5.41.1.16PartialData

Value: 15

This value specifies that the operation completed with recoverable errors and that the returned data is incomplete.

3.1.5.41.1.17FeatureDisabled

Value: 16

This value specifies that the operation failed because a required server feature was disabled by administrative action.

3.1.5.41.1.18StorageQuotaExceeded

Value: 17

The site's storage quota has been exceeded.

3.1.5.41.1.19DatabaseError

Value: 18

The operation failed because the server could not access the database.

3.1.5.42 Microsoft.SharePoint.Client.Social.SocialThread

TypeId: {2219E58B-DDDF-4D04-8F7B-171151704CC1}

ShortName: SP.Social.SocialThread

The **SocialThread** class specifies a thread that is stored on the server. The thread contains a root post and zero or more reply posts.

3.1.5.42.1 Properties

3.1.5.42.1.1 Scalar Properties

3.1.5.42.1.1.1 Actors

Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialActor

Accessibility: Read Only

The **Actors** property is an array that specifies the users who have created a post in the returned thread and also contains any users, documents, sites, and tags that are referenced in any of the posts in the returned thread. For details on the **SocialActor** type, see section [3.1.5.3](#).

3.1.5.42.1.1.2 **Attributes**

Type: Microsoft.SharePoint.Client.Social.SocialThreadAttributes

Accessibility: Read Only

The **Attributes** property specifies attributes of the thread, such as whether the current user can reply or lock the thread and whether the thread is a digest of a thread on the server, whether the number of replies has reached the maximum, and whether the thread is locked. See section [3.1.5.43](#) for details on the **SocialThreadAttributes** type.

3.1.5.42.1.1.3 **Id**

Type: **CSOM String**

Accessibility: Read Only

The **Id** property specifies the unique identification of the thread.

3.1.5.42.1.1.4 **OwnerIndex**

Type: **CSOM Int32**

Accessibility: Read Only

The **OwnerIndex** property specifies the thread owner as an index into the **Actors** array. Typically, the thread owner is the user who created the root post, but the thread owner can be any user included in the **Actors** array.

3.1.5.42.1.1.5 **Permalink**

Type: **CSOM String**

Accessibility: Read Only

The **Permalink** property specifies a URI that is a permanent reference to the thread, if such a permanent reference is available.

3.1.5.42.1.1.6 **PostReference**

Type: Microsoft.SharePoint.Client.Social.SocialPostReference

Accessibility: Read Only

The **PostReference** property specifies a reference to a post in another thread. The **PostReference** property is available only if the **ThreadType** (see section [3.1.5.42.1.1.10](#)) has a value of **ReplyReference**, **LikeReference**, **MentionReference**, or **TagReference**. See section [3.1.5.33](#) for details on the **SocialPostReference** type.

3.1.5.42.1.1.7 **Replies**

Type: **CSOM array** of Microsoft.SharePoint.Client.Social.SocialPost

Accessibility: Read Only

The **Replies** property returns an array of zero or more reply posts. The server can return a subset of the reply posts that are stored on the server. See section [3.1.5.26](#) for details on the **SocialPost** type.

3.1.5.42.1.1.8 RootPost

Type: Microsoft.SharePoint.Client.Social.SocialPost

Accessibility: Read Only

The **RootPost** property returns the root post. See section [3.1.5.26](#) for details on the **SocialPost** type.

3.1.5.42.1.1.9 Status

Type: Microsoft.SharePoint.Client.Social.SocialStatusCode

Accessibility: Read Only

The **Status** property provides information about conditions that were encountered retrieving the thread that did not prevent the operation from completing. See section [3.1.5.41](#) for details on the **SocialStatusCode** type.

3.1.5.42.1.1.10 ThreadType

Type: Microsoft.SharePoint.Client.Social.SocialThreadType

Accessibility: Read Only

The **ThreadType** property specifies if the thread is a normal thread created by one or more **CreatePost** calls (see section [3.1.5.19.2.1.1](#)) or a reference post generated by the server when a user replies to a post, likes a post, or creates a post with a tag or mention. The **PostReference** property (see section [3.1.5.42.1.1.6](#)) contains a reference to the post that generated the reference.

3.1.5.42.1.1.11 TotalReplyCount

Type: CSOM Int32

Accessibility: Read Only

The **TotalReplyCount** property specifies that number of reply posts in the thread as stored on the server. The **Replies** property (see section [3.1.5.42.1.1.7](#)) can contain a subset of the reply posts.

3.1.5.42.1.2 ObjectPath Properties

None.

3.1.5.43 Microsoft.SharePoint.Client.Social.SocialThreadAttributes

ShortName: SP.Social.SocialThreadAttributes

Flag: true

The **SocialThreadAttributes** flag type specifies properties of the thread.

3.1.5.43.1 Field Values

3.1.5.43.1.1 None

Value: 0

The **None** value specifies no properties.

3.1.5.43.1.2 IsDigest

Value: 1

If this flag is set, the thread is a digest thread. It can contain a subset<4> of the replies.

3.1.5.43.1.3 CanReply

Value: 2

If this flag is set, the current user can reply to the posts in the thread.

3.1.5.43.1.4 CanLock

Value: 4

If this flag is set, the current user can lock or unlock the thread.

3.1.5.43.1.5 IsLocked

Value: 8

If this flag is set, the thread is locked and no replies can be added to the thread until the thread is unlocked.

3.1.5.43.1.6 ReplyLimitReached

Value: 16

If this flag is set, the thread contains the maximum number of replies.

3.1.5.44 Microsoft.SharePoint.Client.Social.SocialThreadType

ShortName: SP.Social.SocialThreadType

Flag: false

The **SocialThreadType** type identifies the kind of thread that is returned by the server in a feed. The thread can be a normal thread that was created by one or more **CreatePost** calls (see section [3.1.5.19.2.1.1](#)) or it can be a reference thread that was created on the server. Reference threads are created to provide information when another user likes a post, replies to a post, mentions a user, or creates a post containing a tag.

3.1.5.44.1 Field Values

3.1.5.44.1.1 Normal

Value: 0

The thread consists of a root post and zero or more reply posts.

3.1.5.44.1.2 LikeReference

Value: 1

The thread indicates that a user liked a post. The thread contains a reference to the liked post.

3.1.5.44.1.3 ReplyReference

Value: 2

The thread indicates that a user replied to a post. The thread contains a reference to the reply.

3.1.5.44.1.4 MentionReference

Value: 3

The thread indicates that a user created a post that mentioned a user. The thread contains a reference to the post.

3.1.5.44.1.5 TagReference

Value: 4

The thread indicates that a user created a post with a tag. The thread contains a reference to the post.

3.1.5.45 Microsoft.SharePoint.Client.UserProfiles.ChangeTypes

ShortName: SP.UserProfiles.ChangeTypes

Flag: true

The **ChangeTypes** class indicates the type of change made on the object.

3.1.5.45.1 Field Values

3.1.5.45.1.1 None

Value: 0

This value indicates that no change was made to an object in the user profile store.

3.1.5.45.1.2 Add

Value: 1

This value indicates that an object was added to the user profile store.

3.1.5.45.1.3 Modify

Value: 2

This value indicates that an object was modified in the user profile store.

3.1.5.45.1.4 Remove

Value: 4

This value indicates that an object was deleted from the user profile store.

3.1.5.45.1.5 Metadata

Value: 8

This value indicates that the metadata of an object was modified in the user profile store.

3.1.5.45.1.6 All

Value: 15

This value indicates that multiple operations were performed on an object in the user profile store.

3.1.5.46 Microsoft.SharePoint.Client.UserProfiles.FollowedContent

TypeId: {D4B5E80E-3C1B-4153-A37F-BEF19B3BA1BB}

ShortName: SP.UserProfiles.FollowedContent

The **FollowedContent** class provides access to followed content items.

3.1.5.46.1 Properties

3.1.5.46.1.1 Scalar Properties

3.1.5.46.1.1.1 FollowedDocumentsUrl

Type: CSOM String

Accessibility: Read Only

The **FollowedDocumentsUrl** property gets the location of the followed documents view.

3.1.5.46.1.1.2 FollowedSitesUrl

Type: CSOM String

Accessibility: Read Only

The **FollowedSitesUrl** property gets the location of the followed sites view.

3.1.5.46.1.2 ObjectPath Properties

None.

3.1.5.46.2 Methods

3.1.5.46.2.1 Scalar Methods

3.1.5.46.2.1.1 FindAndUpdateFollowedItem

Return Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItem

The **FindAndUpdateFollowedItem** method finds the original item that is being pointed to in the Followed Content list and updates the **Title**, **Url**, and **IconUrl** fields if they have been changed.

Parameters:

url: The URL of the original item as stored in the Followed Content list.

Type: CSOM String

3.1.5.46.2.1.2 Follow

Return Type: Microsoft.SharePoint.Client.UserProfiles.FollowResult

The **Follow** method adds the specified document or **site (2)** to the list of followed content. The *url* parameter can identify an existing document or site (2) using the *url* property of the original item. The *url* parameter can also identify a document with the following format:

```
http://host/site?listId=listid&itemId=itemid
```

where *listid* is the parent list identifier and *itemid* is the item identifier.

See section [3.1.5.49](#) for details on **FollowedItem** type.

Parameters:

url: URL that identifies the item to follow.

Type: **CSOM String**

data: Optional parameter that holds application-defined data for the item.

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItemData

See section [3.1.5.50](#) for details on **FollowedItemData** type.

3.1.5.46.2.1.3 GetFollowedStatus

Return Type: Microsoft.SharePoint.Client.UserProfiles.FollowedStatus

The **GetFollowedStatus** method retrieves the followed status of the specified document or site. See **Follow** method in section [3.1.5.46.2.1.2](#) for the description of the *url* parameter. An item can be followed if the *url* parameter identifies a document or **site (2)** that the current user has access to. See section [3.1.5.52](#) for details on the **FollowedStatus** type.

Parameters:

url: URL that identifies the item.

Type: **CSOM String**

3.1.5.46.2.1.4 IsFollowed

Return Type: **CSOM Boolean**

The **IsFollowed** method determines if the specified document or **site (2)** is being followed. See **Follow** method in section [3.1.5.46.2.1.2](#) for the description of the *url* parameter.

Parameters:

url: URL that identifies the item.

Type: **CSOM String**

3.1.5.46.2.1.5 StopFollowing

Return Type: None

The **StopFollowing** method removes the specified document or **site (2)** from list of followed content. See **Follow** method in section [3.1.5.46.2.1.2](#) for the description of the *url* parameter.

Parameters:

url: URL that identifies the item to stop following.

Type: **CSOM String**

3.1.5.46.2.1.6 UpdateData

Return Type: None

The **UpdateData** method updates the properties for followed item with specified URL. See **Follow** method in section [3.1.5.46.2.1.2](#) for the description of the *url* parameter.

Parameters:

url: URL for the item to update.

Type: **CSOM String**

data: Application-defined data stored with the followed item.

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItemData

See section [3.1.5.50](#) for details on the **FollowedItemData** type.

3.1.5.46.2.1.7 FollowItem

Return Type: Microsoft.SharePoint.Client.UserProfiles.FollowResult

The **FollowItem** method is reserved for server-to-server use only. The server sets the specified item to be followed by the current user. This method cannot be called from the client.

Parameters:

item: Identifies the item to follow.

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItem

See section [3.1.5.49](#) for details on **FollowedItem** type.

3.1.5.46.2.1.8 GetItem

Return Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItem

The **GetItem** method returns the followed item identified by a given URL or returns null if the item does not exist. See the **Follow** method in section [3.1.5.46.2.1.2](#) for the description of the URL parameter.

Parameters:

url: URL that identifies the item to get.

Type: **CSOM String**

3.1.5.46.2.1.9 GetItems

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.FollowedItem

The **GetItems** method returns an array of zero or more followed items described by the *type* and *subtype* parameters. *subtype* is only valid if *options* is set to **FollowedContentQueryOptions.Sites** and SHOULD be -1 for other types.

Parameters:

options: Describes the type of item to return.

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedContentQueryOptions

See section [3.1.5.48](#) for details on the **FollowedContentQueryOptions** type.

subtype: Integer that identifies the sites to return by the web template.

Type: **CSOM Int32**

3.1.5.46.2.1.10 RefreshFollowedItem

Return Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItem

The **RefreshFollowedItem** method returns the refreshed item that is being pointed to in the **Social** list. See section [3.1.5.49](#) for details on the **FollowedItem** type.

Parameters:

item: The original item as stored in the Followed Content list.

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItem

See section 3.1.5.49 for details on the **FollowedItem** type.

3.1.5.46.2.2 ObjectPath Methods**3.1.5.46.2.2.1 CSOM Constructor**

The constructor method initializes a new instance of a **FollowedContent** object (see section [3.1.5.46](#)).

Parameters: None

3.1.5.47 Microsoft.SharePoint.Client.UserProfiles.FollowedContentExceptionCode

ShortName: SP.UserProfiles.FollowedContentExceptionCode

Flag: false

The **FollowedContentExceptionCode** class represents an exception code that is used by the **FollowedContent** class (see section [3.1.5.46](#)) to specify a reason for the error.

3.1.5.47.1 Field Values**3.1.5.47.1.1 ItemAlreadyExists**

Value: 3

The **ItemAlreadyExists** value specifies that the item is already followed and cannot be added to the followed list.

3.1.5.47.1.2 ItemDoesNotExist

Value: 4

The **ItemDoesNotExist** value specifies that the item does not exist or is not currently followed.

3.1.5.47.1.3 InvalidQueryString

Value: 5

The **InvalidQueryString** value specifies that an invalid query string was provided.

3.1.5.47.1.4 InvalidSubtypeValue

Value: 6

The **InvalidSubtypeValue** value specifies that an invalid subtype value was provided.

3.1.5.47.1.5 UnsupportedItemType

Value: 7

The **UnsupportedItemType** value specifies that the item is not supported.

3.1.5.47.1.6 FollowLimitReached

Value: 8

The **FollowLimitReached** value specifies that the user has reached their maximum number of followed items for the item type.

3.1.5.47.1.7 UntrustedSource

Value: 9

The **UntrustedSource** value specifies that a protected server-to-server API was called from a non-server context (that is, a client application).

3.1.5.47.1.8 InternalError

Value: 11

The **InternalError** value specifies that an internal error occurred.

3.1.5.47.1.9 UnsupportedSite

Value: 10

The **UnsupportedSite** value specifies that the **site (2)** cannot be followed. For example, personal sites cannot be followed.

3.1.5.47.1.10ItemNotFound

Value: 12

The **ItemNotFound** value specifies that no valid object in SharePoint could be found at the specified URL.

3.1.5.48 Microsoft.SharePoint.Client.UserProfiles.FollowedContentQueryOptions

ShortName: SP.UserProfiles.FollowedContentQueryOptions

Flag: false

The flag **FollowedContentQueryOptions** type specifies the query options.

3.1.5.48.1 Field Values

3.1.5.48.1.1 Unset

Value: 0

This value specifies that no query options are specified.

3.1.5.48.1.2 Sites

Value: 1

This value specifies that the query includes sites.

3.1.5.48.1.3 Documents

Value: 2

This value specifies that the query includes documents.

3.1.5.48.1.4 Hidden

Value: 4

This value specifies that the query includes hidden items.

3.1.5.48.1.5 NonFeed

Value: 8

This value specifies that the query includes items that do not have feeds.

3.1.5.48.1.6 DefaultOptions

Value: 15

This value specifies the default option values.

3.1.5.48.1.7 All

Value: 255

This value specifies all options.

3.1.5.48.1.8 IncludeGroupsSites

Value: 256

This value specifies that the set includes modern group sites.

3.1.5.48.1.9 WithinLast24Hours

Value: 512

This value specifies that the set includes **sites (2)** created within the last 24 hours.

3.1.5.49 Microsoft.SharePoint.Client.UserProfiles.FollowedItem

TypeId: {EE324D8C-2232-4163-BBA5-38138A571CA7}

ShortName: SP.UserProfiles.FollowedItem

The **FollowedItem** class represents a followed content resource.

3.1.5.49.1 Properties

3.1.5.49.1.1 Scalar Properties

3.1.5.49.1.1.1 Data

Type: CSOM dictionary

Accessibility: Read/Write

The **Data** property contains additional metadata associated with this item.

3.1.5.49.1.1.2 Title

Type: CSOM String

Accessibility: Read/Write

The **Title** property contains the title of this item.

3.1.5.49.1.1.3 Url

Type: CSOM String

Accessibility: Read/Write

The **Url** property contains the URL of this item.

3.1.5.49.1.1.4 FileType

Type: CSOM String

Accessibility: Read/Write

The **FileType** property specifies the type of the file if this item is a file. Otherwise, this property is the empty string.

3.1.5.49.1.1.5 Hidden

Type: CSOM Boolean

Accessibility: Read/Write

The **Hidden** property specifies if the item is hidden from the user. If true this item will not generate activity in the user's feed.

3.1.5.49.1.1.6 IconUrl

Type: CSOM String

Accessibility: Read/Write

The **IconUrl** property specifies the URL of an icon to represent this item.

3.1.5.49.1.1.7 ItemId

Type: CSOM Int32

Accessibility: Read/Write

The **ItemId** property specifies the identification for this item in the Content database.

3.1.5.49.1.1.8 **ItemType**

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItemType

Accessibility: Read/Write

The **ItemType** property specifies the type of this item.

3.1.5.49.1.1.9 **ListId**

Type: CSOM GUID

Accessibility: Read/Write

The **ListId** property specifies the list identification for this item in the Content database if this item is a list or the list identification for its parent list. If the **ItemType** (see section [3.1.5.49.1.1.8](#)) is **Document**, this property is specified, but if the **ItemType** is **Site**, then this property is not specified.

3.1.5.49.1.1.10 **ParentUrl**

Type: CSOM String

Accessibility: Read/Write

The **ParentUrl** property specifies the URL of this item's parent list or web.

3.1.5.49.1.1.11 **SiteId**

Type: CSOM GUID

Accessibility: Read/Write

The **SiteId** property specifies the **site (2)** identification in the Content database for this item if this item is a site, or for its parent site (2) if this item is not a site.

3.1.5.49.1.1.12 **Subtype**

Type: CSOM Int32

Accessibility: Read/Write

The **Subtype** property specifies the subtype of this item. If the **ItemType** is **Site**, the **Subtype** specifies the web template identification. If the **ItemType** is **Document**, the **Subtype** has a value of -1.

3.1.5.49.1.1.13 **UniqueId**

Type: CSOM GUID

Accessibility: Read/Write

The **UniqueId** property specifies the GUID for this item in the Content database.

3.1.5.49.1.1.14 **WebId**

Type: CSOM GUID

Accessibility: Read/Write

The **WebId** property specifies the **site (2)** identification in the Content database for this item if it is a site, or the identification of its parent site (2) if this item is a document.

3.1.5.49.1.1.15 Flags

Type: CSOM String

Accessibility: Read/Write

The **Flags** property allows the client to specify additional information about the followed item. The server stores the data so that it can return it to the client.

3.1.5.49.1.1.16 HasFeed

Type: CSOM Boolean

Accessibility: Read/Write

The **HasFeed** Boolean indicates whether the followed **site (2)** has a feed.

3.1.5.49.1.1.17 FileTypeProgid

Type: CSOM String

Accessibility: Read/Write

The **FileTypeProgid** property provides information about the application that opens a followed document.

3.1.5.49.1.1.18 ServerUriProgid

Type: CSOM String

Accessibility: Read/Write

The **ServerUriProgid** property provides information about the followed document to the application that opens it.

3.1.5.49.1.1.19 Pinned

Type: CSOM Int32

Accessibility: Read/Write

An integer value that identifies whether this item is pinned. Greater than 0 if this item is pinned.

3.1.5.49.1.2 ObjectPath Properties

None.

3.1.5.50 Microsoft.SharePoint.Client.UserProfiles.FollowedItemData

TypeId: {BFC2A2AC-07CD-4D35-AAE1-9BC7D41DA9CE}

ShortName: SP.UserProfiles.FollowedItemData

The **FollowedItemData** class contains additional data that can be attached to a **FollowedItem** (see section [3.1.5.49](#)).

3.1.5.50.1 Properties

3.1.5.50.1.1 Scalar Properties

3.1.5.50.1.1.1 Properties

Type: **CSOM dictionary**

Accessibility: Read Only

The **Properties** property is an unordered collection of key/value pairs for custom properties to be set on the item.

3.1.5.50.1.2 ObjectPath Properties

None.

3.1.5.50.2 Methods

3.1.5.50.2.1 Scalar Methods

None.

3.1.5.50.2.2 ObjectPath Methods

3.1.5.50.2.2.1 CSOM Constructor

The constructor method initializes a new instance of **FollowedItemData** (see section [3.1.5.50](#)).

Parameters:

props: Specifies an unordered collection of key/value pairs for custom properties to be set on the item.

Type: **CSOM dictionary**

3.1.5.51 Microsoft.SharePoint.Client.UserProfiles.FollowedItemType

ShortName: SP.UserProfiles.FollowedItemType

Flag: false

The **FollowedItemType** type represents the type of a followable content resource.

3.1.5.51.1 Field Values

3.1.5.51.1.1 Unknown

Value: 0

This value is not used.

3.1.5.51.1.2 Document

Value: 1

The followed item is a document.

3.1.5.51.1.3 Site

Value: 2

The followed item is a site.

3.1.5.51.1.4 All

Value: 3

The followed item can be any type. This value is used only in queries.

3.1.5.52 Microsoft.SharePoint.Client.UserProfiles.FollowedStatus

ShortName: SP.UserProfiles.FollowedStatus

Flag: false

The **FollowedStatus** type represents the followed status of a content resource.

3.1.5.52.1 Field Values

3.1.5.52.1.1 Followed

Value: 0

The item is followed.

3.1.5.52.1.2 NotFollowed

Value: 1

The item is not followed.

3.1.5.52.1.3 NotFollowable

Value: 2

The item cannot be followed.

3.1.5.53 Microsoft.SharePoint.Client.UserProfiles.FollowResult

TypeId: {39498102-06DB-49BC-9DF7-D8E91AD10ADF}

ShortName: SP.UserProfiles.FollowResult

The **FollowResult** class returns information about a request to follow an item.

3.1.5.53.1 Properties

3.1.5.53.1.1 Scalar Properties

3.1.5.53.1.1.1 Item

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedItem

Accessibility: Read/Write

The **Item** property contains the item being followed.

3.1.5.53.1.1.2 ResultType

Type: Microsoft.SharePoint.Client.UserProfiles.FollowResultType

Accessibility: Read/Write

The **ResultType** property provides information about the attempt to follow an item. For details on the **FollowResultType** type, see section [3.1.5.54](#).

3.1.5.53.1.2 ObjectPath Properties

None.

3.1.5.54 Microsoft.SharePoint.Client.UserProfiles.FollowResultType

ShortName: SP.UserProfiles.FollowResultType

Flag: false

The **FollowResultType** type specifies the result of a request to follow an item.

3.1.5.54.1 Field Values

3.1.5.54.1.1 Unknown

Value: 0

The result is unknown.

3.1.5.54.1.2 Followed

Value: 1

The request succeeded and the item is being followed.

3.1.5.54.1.3 Refollowed

Value: 2

The item was already being followed by the current user so there is no change in status.

3.1.5.54.1.4 HitFollowLimit

Value: 3

The request encountered the maximum follow limit.

3.1.5.54.1.5 Failed

Value: 4

The request failed.

3.1.5.55 Microsoft.SharePoint.Client.UserProfiles.HashTag

TypeId: {E9FC287A-1508-4D29-B69F-1806FB0C916D}

ShortName: SP.UserProfiles.HashTag

The **HashTag** type specifies a string that is being used as a hash tag and a count of the tags use.

3.1.5.55.1 Properties

3.1.5.55.1.1 Scalar Properties

3.1.5.55.1.1.1 Name

Type: CSOM String

Accessibility: Read Only

The **Name** property specifies the hash tag string.

3.1.5.55.1.1.2 UseCount

Type: CSOM UInt32

Accessibility: Read Only

The **UseCount** property specifies the number of times that the hash tag is used.

3.1.5.55.1.2 ObjectPath Properties

None.

3.1.5.56 Microsoft.SharePoint.Client.UserProfiles.HashTagCollection

TypeId: {FE04AF02-93FA-4FE5-ACEB-844A6B4721D8}

ShortName: SP.UserProfiles.HashTagCollection

The **HashTagCollection** class specifies a collection of **HashTags**. For information about the **HashTag** type, see section [3.1.5.55](#))

3.1.5.56.1 Properties

3.1.5.56.1.1 Scalar Properties

None.

3.1.5.56.1.2 ObjectPath Properties

None.

3.1.5.56.2 Methods

3.1.5.56.2.1 Scalar Methods

None.

3.1.5.56.2.2 ObjectPath Methods

None.

3.1.5.57 Microsoft.SharePoint.Client.UserProfiles.ObjectTypes

ShortName: SP.UserProfiles.ObjectTypes

Flag: true

Specifies the type of object represented.

3.1.5.57.1 Field Values

3.1.5.57.1.1 None

Value: 0

No object type has been specified.

3.1.5.57.1.2 SingleValueProperty

Value: 1

The type of object is a single value property.

3.1.5.57.1.3 MultiValueProperty

Value: 2

The type of object is a multiple value property.

3.1.5.57.1.4 Anniversary

Value: 4

The type of object is an anniversary.

3.1.5.57.1.5 DLMembership

Value: 8

The type of object is a distribution list (DL) membership.

3.1.5.57.1.6 SiteMembership

Value: 16

The type of object is a **site (2)** membership.

3.1.5.57.1.7 QuickLink

Value: 32

The type of object is a quick link.

3.1.5.57.1.8 Colleague

Value: 64

The type of object is a colleague.

3.1.5.57.1.9 PersonalizationSite

Value: 128

The type of object is a personalization site.

3.1.5.57.1.10UserProfile

Value: 256

The type of object is a profile of a user.

3.1.5.57.1.11WebLog

Value: 512

The type of object is a Web log.

3.1.5.57.1.12Custom

Value: 1024

The type of object is custom.

3.1.5.57.1.13OrganizationProfile

Value: 2048

The type of the object is a profile of an organization.

3.1.5.57.1.14OrganizationMembership

Value: 4096

The type of the object is an organization membership.

3.1.5.57.1.15All

Value: 8191

All types of objects.

3.1.5.58 Microsoft.SharePoint.Client.UserProfiles.PeopleManager

TypeId: {CF560D69-0FDB-4489-A216-B6B47ADF8EF8}

ShortName: SP.UserProfiles.PeopleManager

The **PeopleManager** class is used for operations related to people.

3.1.5.58.1 Properties

3.1.5.58.1.1 Scalar Properties

3.1.5.58.1.1.1 EditProfileLink

Type: CSOM String

Accessibility: Read Only

The **EditProfileLink** property is the URL to the edit profile page.

3.1.5.58.1.1.2 **IsMyPeopleListPublic**

Type: **CSOM Boolean**

Accessibility: Read Only

The **IsMyPeopleListPublic** property represents whether or not the people list is public.

3.1.5.58.1.2 **ObjectPath Properties**

None.

3.1.5.58.2 **Methods**

3.1.5.58.2.1 **Scalar Methods**

3.1.5.58.2.1.1 **AmIFollowedBy**

Return Type: **CSOM Boolean**

The **AmIFollowedBy** method tests whether the given user is following the current user. This method can result in exceptions for conditions such as null arguments or if the specified user cannot be found.

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

3.1.5.58.2.1.2 **AmIFollowing**

Return Type: **CSOM Boolean**

The **AmIFollowing** method tests whether the current user is following the given user. This method can result in exceptions for conditions such as null arguments or if the specified user cannot be found.

Parameters:

accountName: Specifies the user by account name. If the current user is following the specified user, the method returns true; otherwise, the method returns false.

Type: **CSOM String**

3.1.5.58.2.1.3 **Follow**

Return Type: None

The **Follow** method sets the current user to be following the specified user with default settings. This method can result in exceptions for conditions such as null arguments or if the specified user cannot be found.

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

3.1.5.58.2.1.4 HideSuggestion

Return Type: None

The **HideSuggestion** method adds the specified user to list of rejected suggestions.

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

3.1.5.58.2.1.5 IsFollowing

This method is a **static CSOM method**.

Return Type: **CSOM Boolean**

The **IsFollowing** method tests whether the first user is following the second user. This method can result in exceptions for conditions such as null arguments or if the specified user cannot be found.

Parameters:

possibleFollowerAccountName: Specifies the user by account name. This is the first user being tested if this user is following the second user.

Type: **CSOM String**

possibleFolloweeAccountName: Specifies the user by account name. This is the second user.

Type: CSOM String

3.1.5.58.2.1.6 StopFollowing

Return Type: None

The **StopFollowing** method sets the current user to no longer be following the specified user. This method can result in exceptions for conditions such as null arguments or if the specified user or specified privacy item cannot be found.

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

3.1.5.58.2.1.7 GetUserProfilePropertiesFor

Return Type: **CSOM array** of **CSOM String**

The **GetUserProfilePropertiesFor** method returns the specified user profile properties for the specified user.

Parameters:

propertiesForUser: Specifies the user and the properties to get for that user. For details on the **UserProfilePropertiesForUser** type, see section [3.1.5.70](#).

Type: Microsoft.SharePoint.Client.UserProfiles.UserProfilePropertiesForUser

3.1.5.58.2.1.8 GetUserProfilePropertyFor

Return Type: CSOM String

The **GetUserProfilePropertyFor** method returns a string representation of a user profile property for the specified user.

Parameters:

accountName: Specifies the user by account name.

Type: CSOM String

propertyName: Specifies a property in the user profile.

Type: CSOM String

3.1.5.58.2.1.9 SetMyProfilePicture**Return Type:** None

The **SetMyProfilePicture** method uploads and sets the user profile picture. Pictures in bmp, jpg and png formats and up to 5,000,000 bytes are supported. A user can upload a picture only to the user's own profile.

Parameters:

picture: Binary content of an image file

Type: **CSOM Stream**

3.1.5.58.2.1.10 FollowTag**Return Type:** None

The **FollowTag** method sets the current user to be following the specified tag.

Parameters:

value: Specifies the tag by its GUID.

Type: **CSOM GUID**

3.1.5.58.2.1.11 StopFollowingTag**Return Type:** None

The **StopFollowingTag** method sets the current user to no longer be following the specified tag.

Parameters:

value: Specifies the tag by its GUID.

Type: **CSOM GUID**

3.1.5.58.2.1.12 GetFollowedTags**Return Type:** **CSOM array** of **CSOM String**

The **GetFollowedTags** method returns the list of tags that the current user is following.

Parameters:

cTagsToFetch: Specifies the maximum number of tags to return.

Type: **CSOM Int32**

3.1.5.58.2.1.13 GetDefaultDocumentLibrary

Return Type: **CSOM String**

Gets the OneDrive Document library path for a given user.

Parameters:

accountName: The login name of the user whose OneDrive **URL** is required. For example, "i:0#.f|membership|admin@contoso.sharepoint.com".

Type: CSOM String

createSiteIfNotExists: If this value is set to true and the site doesn't exist, the site will get created.

Type: **CSOM Boolean**

For the site to be created, the caller SHOULD either be creating site for self, or a profile administrator.

siteCreationPriority: The priority for site creation.

Type: Microsoft.SharePoint.Client.UserProfiles.PersonalSiteCreationPriority

If the *createSiteIfNotExists* is set to true, then if *siteCreationPriority* is High, an attempt will be made to create the site synchronously, otherwise it will be put into the queue and will be processed offline.

3.1.5.58.2.1.14 SetMultiValuedProfileProperty

Return Type: None

Sets the value of a multivalued user profile property.

Parameters:

accountName: The account name of the target user.

Type: **CSOM String**

propertyName: The name of the property to set.

Type: CSOM String

propertyValues: The values being set on the property.

Type: **CSOM array** of CSOM String

3.1.5.58.2.1.15 SetSingleValueProfileProperty

Return Type: None

Sets the value of a user profile property.

Parameters:

accountName: The account name of the target user.

Type: **CSOM String**

propertyName: The name of the property to set.

Type: CSOM String

propertyValue: The value being set on the property.

Type: CSOM String

3.1.5.58.2.2 ObjectPath Methods

3.1.5.58.2.2.1 GetMyProperties

Return Type: Microsoft.SharePoint.Client.UserProfiles.PersonProperties

The **GetMyProperties** method gets the **PersonProperties** object corresponding to the current user. See section [3.1.5.65](#) for details on the **PersonProperties** type.

Parameters: None

3.1.5.58.2.2.2 GetPropertiesFor

Return Type: Microsoft.SharePoint.Client.UserProfiles.PersonProperties

The **GetPropertiesFor** method gets the **PersonProperties** object corresponding to the specified user. See section [3.1.5.65](#) for details on the **PersonProperties** type.

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

3.1.5.58.2.2.3 CSOM Constructor

The constructor method initializes a new instance of **PeopleManager** (see section [3.1.5.58](#)).

Parameters: None

3.1.5.58.2.2.4 GetFollowersFor

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonProperties

The **GetFollowersFor** method returns a list of **PersonProperties** objects for the people who are following the specified user. This method can result in exceptions for conditions such as null arguments or if the specified user cannot be found.

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

3.1.5.58.2.2.5 GetMyFollowers

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonProperties

This method returns a list of **PersonProperties** objects for the people who are following the current user.

Parameters: None

3.1.5.58.2.2.6 **GetMySuggestions**

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonProperties

The **GetMySuggestions** method returns a list of **PersonProperties** objects to suggest that the current user follows. The objects to select for this set are not determined by this document. The server implementation can use any information accessible to the current user including the people that other users are following.

Parameters: None

3.1.5.58.2.2.7 **GetPeopleFollowedBy**

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonProperties

The **GetPeopleFollowedBy** method returns a list of **PersonProperties** objects for people who the specified user is following. This method can result in exceptions for conditions such as null arguments or if the specified user cannot be found.

Parameters:

accountName: Account name of the specified user.

Type: **CSOM String**

3.1.5.58.2.2.8 **GetPeopleFollowedByMe**

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonProperties

The **GetPeopleFollowedByMe** method returns a list of **PersonProperties** objects for people who the current user is following.

Parameters: None

3.1.5.58.2.2.9 **GetTrendingTags**

This method is a **static CSOM method**.

Return Type: Microsoft.SharePoint.Client.UserProfiles.HashTagCollection

Gets a collection of the 20 (or fewer) most popular hash tags over the past week. The returned collection is sorted in descending order of frequency of use.

Parameters: None

3.1.5.59 **Microsoft.SharePoint.Client.UserProfiles.PersonalCache**

TypeId: {DCC0FCE3-9D79-438B-BC96-116011486A2F}

ShortName: SP.UserProfiles.PersonalCache

Per user cache of key/value pairs organized by **folders**. Personal cache MAY be used for optimizing initial load performance of the protocol client, if obtaining initial set of data from personal cache is faster than requesting the data from the server.

3.1.5.59.1 **Properties**

3.1.5.59.1.1 **Scalar Properties**

None.

3.1.5.59.1.2 ObjectPath Properties

None.

3.1.5.59.2 Methods

3.1.5.59.2.1 Scalar Methods

3.1.5.59.2.1.1 DeleteCacheItemsAsync

Return Type: None

Deletes the specified cache items.

Parameters:

cacheItems: Cache items to be deleted.

Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem

3.1.5.59.2.1.2 LoadUserProfile

Return Type: None

The server MAY implement this method as a warmup mechanism for loading user specific information into memory.

Parameters:

email: **Email address** of the user, for which personal cache is created.

Type: **CSOM String**

3.1.5.59.2.1.3 ReadCache

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem

Reads the specified cache values.

Parameters:

folderPath: Sequence of path segments separated by slash that specify the set of cache keys to retrieve.

Type: **CSOM String**

3.1.5.59.2.1.4 ReadCacheOrCreate

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem

Reads the specified cache entries. MUST create any missing entries with empty string values.

Parameters:

folderPath: Sequence of path segments separated by slash that specify the set of cache keys to retrieve.

Type: Microsoft.SharePoint.Client.ResourcePath

requiredCacheKeys: Keys to for which to retrieve values from PersonalCache.

Type: CSOM array of **CSOM String**

createIfMissing: If true, the server MUST create any cache entries with missing keys and store empty string value in those entries.

Type: **CSOM Boolean**

3.1.5.59.2.1.5 ReadCacheOrCreateOrderById

Return Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem

Reads the specified cache keys from the PersonalCache and returns the values sorted by **list item** identifiers.

Parameters:

folderPath: Sequence of path segments separated by slash that specify the set of cache keys to retrieve.

Type: Microsoft.SharePoint.Client.ResourcePath

requiredCacheKeys: Keys to for which to retrieve values from PersonalCache.

Type: CSOM array of **CSOM String**

createIfMissing: If true, the server MUST create any cache entries with missing keys and store empty string value in those entries.

Type: **CSOM Boolean**

3.1.5.59.2.1.6 WriteCache

Return Type: None

Writes specified cache items to the PersonalCache. The server MUST be able to retrieve the corresponding cache items with ReadCache methods after this method succeeds.

Parameters:

cacheItems: List of personal cache items to write.

Type: **CSOM array** of Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem

3.1.5.59.2.2 ObjectPath Methods

3.1.5.59.2.2.1 CSOM Constructor

Constructs the instance of the object

Parameters: None

3.1.5.60 Microsoft.SharePoint.Client.UserProfiles.PersonalCacheExceptionCode

ShortName: SP.UserProfiles.PersonalCacheExceptionCode

Flag: false

Defines exception codes for personal cache, which can be thrown by any of the personal cache methods.

3.1.5.60.1 Field Values

3.1.5.60.1.1 FolderNotFound

Value: 0

Specified folder path is not found in the personal cache.

3.1.5.60.1.2 PersonalSiteNotFound

Value: 1

Current user does not have a **personal site**.

3.1.5.60.1.3 PersonalCacheListNotFound

Value: 2

Personal cache hasn't been initialized on the server.

3.1.5.60.1.4 PersonalCacheListProvisionFailed

Value: 3

Failure to initialize personal cache on the server.

3.1.5.60.1.5 PersonalCacheItemProvisionFailed

Value: 4

Failure to store cache value.

3.1.5.60.1.6 FailedToRetrieveCacheListItems

Value: 5

Failure to retrieve cache keys.

3.1.5.60.1.7 PersonalCacheItemInvalidListItemId

Value: 6

Cache entry was corrupt or invalid.

3.1.5.60.1.8 FailedToUpdateCacheListItem

Value: 7

Failure to write a cache entry to personal cache.

3.1.5.61 Microsoft.SharePoint.Client.UserProfiles.PersonalCacheItem

TypeId: {FD0FF510-5EA2-434A-B797-6EFD7CE8F165}

ShortName: SP.UserProfiles.PersonalCacheItem

Object representing a PersonalCache item, returned from ReadCache methods of the PersonalCache.

3.1.5.61.1 Properties

3.1.5.61.1.1 Scalar Properties

3.1.5.61.1.1.1 CacheKey

Type: CSOM String

Accessibility: Read/Write

Key used to retrieve or store the cache item.

3.1.5.61.1.1.2 CacheValue

Type: CSOM String

Accessibility: Read/Write

Value of the corresponding cache item retrieved from cache or to be written to cache.

3.1.5.61.1.1.3 CacheValueHash

Type: CSOM String

Accessibility: Read/Write

Hash of the cache value. This property MAY be used by the protocol server to optimize cache updates. Hash value MUST be different for different values of the cache item, and MUST be the same for unchanged values.

3.1.5.61.1.1.4 CacheVersion

Type: CSOM String

Accessibility: Read/Write

Represents version of the cache. This property MAY be used by the client to decide if the format of the value is compatible with the client. This value MUST NOT be set by the client and MUST be specified the same way as it was returned from the server.

3.1.5.61.1.1.5 ListItemId

Type: CSOM Int32

Accessibility: Read/Write

List item identifier used to store the cache item. This value MUST NOT be set by the client and MUST be specified the same way as it was returned from the server.

3.1.5.61.1.1.6 ListItemUniqueId

Type: CSOM String

Accessibility: Read/Write

Universally Unique Identifier (UUID) of the **list item** used to store the cache item. This value MUST NOT be set by the client and MUST be specified the same way as it was returned from the server.

3.1.5.61.1.1.7 ModifiedTimeUtc

Type: CSOM DateTime

Accessibility: Read/Write

UTC timestamp of when the cache item was last modified. If the client wants to update the cache item, this property MUST be set to the current UTC time.

3.1.5.61.1.2 ObjectPath Properties

None.

3.1.5.62 Microsoft.SharePoint.Client.UserProfiles.PersonalSiteCapabilities

ShortName: SP.UserProfiles.PersonalSiteCapabilities

Flag: true

The **PersonalSiteCapabilities** enumeration specifies attributes that describe the state of a user's personal site.

3.1.5.62.1 Field Values

3.1.5.62.1.1 None

Value: 0

This value does not define any attributes.

3.1.5.62.1.2 Profile

Value: 1

The personal **site (2)** specifies a user profile.

3.1.5.62.1.3 Social

Value: 2

The personal **site (2)** contains a feed with social posts.

3.1.5.62.1.4 Storage

Value: 4

The personal **site (2)** contains document storage.

3.1.5.62.1.5 MyTasksDashboard

Value: 8

The personal **site (2)** contains a task dashboard.

3.1.5.62.1.6 Education

Value: 16

The personal **site (2)** contains education-specific features.

3.1.5.62.1.7 Guest

Value: 32

The personal **site (2)** contains guest access features.

3.1.5.63 Microsoft.SharePoint.Client.UserProfiles.PersonalSiteCreationPriority

ShortName: SP.UserProfiles.PersonalSiteCreationPriority

Flag: false

The **PersonalSiteCreationPriority** enumeration specifies the priority for creating personal **sites (2)**.

3.1.5.63.1 Field Values

3.1.5.63.1.1 Low

Value: 0

The priority for creating personal **sites (2)** is low.

3.1.5.63.1.2 Medium

Value: 1

The priority for creating personal **sites (2)** is medium.

3.1.5.63.1.3 High

Value: 2

The priority for creating personal **sites (2)** is high.

3.1.5.64 Microsoft.SharePoint.Client.UserProfiles.PersonalSiteInstantiationState

ShortName: SP.UserProfiles.PersonalSiteInstantiationState

Flag: false

The **PersonalSiteInstantiationState** specifies the state of the personal site.

3.1.5.64.1 Field Values

3.1.5.64.1.1 Uninitialized

Value: 0

This value indicates that the site has not been initialized or has not been upgraded from a previous version of a personal site.

3.1.5.64.1.2 Enqueued

Value: 1

This value indicates that the request to create a personal site has been made but not completed.

3.1.5.64.1.3 Created

Value: 2

This value indicates that the personal site has been created.

3.1.5.64.1.4 Deleted

Value: 3

This value indicates that the personal site has been deleted.

3.1.5.64.1.5 PermissionsGeneralFailure

Value: 4096

This value indicates that the personal site creation attempt failed because of permissions.

3.1.5.64.1.6 PermissionsUPANotGranted

Value: 4097

This value indicates that the personal site creation attempt failed because the User Profile Application(UPA) permission was not granted.

3.1.5.64.1.7 PermissionsUserNotLicensed

Value: 4098

This value indicates that the personal site creation attempt failed because the user was not licensed.

3.1.5.64.1.8 PermissionsSelfServiceSiteCreationDisabled

Value: 4099

This value indicates that the personal site creation attempt failed because personal site creation is disabled on the server.

3.1.5.64.1.9 PermissionsNoMySitesInPeopleLight

Value: 4100

This value indicates that the personal site creation attempt failed because personal site creation is disabled for the user.

3.1.5.64.1.10PermissionsEmptyHostUrl

Value: 4101

This value indicates that the personal site creation attempt failed because the host URL was empty.

3.1.5.64.1.11PermissionsHostFailedToInitializePersonalSiteContext

Value: 4102

This value indicates that the personal site creation attempt failed because the initialization failed.

3.1.5.64.1.12ErrorGeneralFailure

Value: 8192

This value indicates that the personal site creation attempt failed because of an error.

3.1.5.64.1.13ErrorManagedPathDoesNotExist

Value: 8193

This value indicates that the personal site creation attempt failed because the managed path does not exist.

3.1.5.64.1.14ErrorLanguageNotInstalled

Value: 8194

This value indicates that the personal site creation attempt failed because a language was not installed.

3.1.5.64.1.15ErrorPartialCreate

Value: 8195

This value indicates that the personal site creation attempt failed but was partially created.

3.1.5.64.1.16ErrorPersonalSiteAlreadyExists

Value: 8196

This value indicates that the personal site creation attempt failed because the personal site already exists.

3.1.5.64.1.17ErrorRootSiteNotPresent

Value: 8197

This value indicates that the personal site creation attempt failed because the root site was not present on the server.

3.1.5.64.1.18ErrorSelfServiceSiteCreateCallFailed

Value: 8198

This value indicates that the personal site creation attempt failed because the self-service request failed.

3.1.5.65 Microsoft.SharePoint.Client.UserProfiles.PersonProperties

TypeId: {9A467BF8-BBFB-4A76-9C41-0753ECF7218F}

ShortName: SP.UserProfiles.PersonProperties

The **PersonProperties** class contains the data about people and is returned by **PeopleManager** methods (see section [3.1.5.58](#)).

The `sharePointConversationsLinkFirstRun`, `sharePointFiltersPaneFirstRun`, `sharePointHomeFirstRun`, `sharePointLibrariesFirstRun`, `sharePointListsFirstRun`, `sharePointOneDriveBusinessFirstRun` and `sharePointPageAuthoringFirstRun` properties are not included in the **default scalar property set** for this type.

3.1.5.65.1 Properties

3.1.5.65.1.1 Scalar Properties

3.1.5.65.1.1.1 AccountName

Type: **CSOM String**

Accessibility: Read Only

The **AccountName** property specifies the person's account name.

3.1.5.65.1.1.2 DirectReports

Type: **CSOM array** of **CSOM String**

Accessibility: Read Only

The **DirectReports** property specifies an array of strings containing the account names of a person's direct reports.

3.1.5.65.1.1.3 DisplayName

Type: **CSOM String**

Accessibility: Read/Write

The **DisplayName** property specifies the person's name.

3.1.5.65.1.1.4 Email

Type: **CSOM String**

Accessibility: Read Only

The **Email** property specifies the person's email address.

3.1.5.65.1.1.5 ExtendedManagers

Type: **CSOM array** of **CSOM String**

Accessibility: Read Only

The **ExtendedManagers** property specifies an array of strings that specify the account names of a person's managers.

3.1.5.65.1.1.6 ExtendedReports

Type: **CSOM array** of **CSOM String**

Accessibility: Read Only

The **ExtendedReports** properties specifies an array of strings that specify the account names of person's extended reports.

3.1.5.65.1.1.7 IsFollowed

Type: CSOM Boolean

Accessibility: Read Only

The **IsFollowed** property represents whether or not the current user is following this person. <5>

3.1.5.65.1.1.8 LatestPost

Type: CSOM String

Accessibility: Read Only

The **LatestPost** property specifies the person's latest microblog post.

3.1.5.65.1.1.9 Peers

Type: CSOM array of CSOM String

Accessibility: Read Only

The **Peers** property specifies an array of strings that specify the account names of person's peers, that is, those who have the same manager.

3.1.5.65.1.1.10 PersonalUrl

Type: CSOM String

Accessibility: Read Only

The **PersonalUrl** property specifies the absolute URL of the person's personal page.

3.1.5.65.1.1.11 PictureUrl

Type: CSOM String

Accessibility: Read Only

The **PictureUrl** property specifies the URL for the person's profile picture.

3.1.5.65.1.1.12 Title

Type: CSOM String

Accessibility: Read Only

The **Title** property specifies the person's title.

3.1.5.65.1.1.13 UserUrl

Type: CSOM String

Accessibility: Read Only

The **UserUrl** property specifies the URL for the person's profile.

3.1.5.65.1.1.14 UserProfileProperties

Type: CSOM dictionary

Accessibility: Read Only

The **UserProfileProperties** property specifies the person's profile properties. The property returns a dictionary which is a set of keys and values, where both are provided as strings. The keys represent property names and the values represent the property values. The privacy settings affect which properties can be retrieved. Multiple values are delimited by the vertical bar "|". Null values are specified as empty strings.

3.1.5.65.1.1.15 PersonalSiteHostUrl

Type: CSOM String

Accessibility: Read Only

Full URL of the **site collection** containing all the Personal sites.

3.1.5.65.1.1.16 sharePointConversationsLinkFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for conversation link. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.1.17 sharePointFiltersPaneFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for the filters pane. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.1.18 sharePointHomeFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for sharepoint home. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.1.19 sharePointLibrariesFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for the sharepoint libraries. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.1.20 sharePointListsFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for the sharepoint lists. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.1.21 sharePointOneDriveBusinessFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for the onedrive. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.1.22 sharePointPageAuthoringFirstRun

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the user has seen the first run experience for the page authoring. The specific behavior of the corresponding UI experience is an implementation detail of the protocol client.

3.1.5.65.1.2 ObjectPath Properties

None.

3.1.5.65.2 Methods

3.1.5.65.2.1 Scalar Methods

None.

3.1.5.65.2.2 ObjectPath Methods

None.

3.1.5.66 Microsoft.SharePoint.Client.UserProfiles.ProfileImageStore

TypeId: {BF44B08E-8B09-4A8F-AF01-9492B8785D94}

ShortName: SP.UserProfiles.ProfileImageStore

The **ProfileImageStore** class specifies the user profile and service context.

3.1.5.66.1 Properties

3.1.5.66.1.1 Scalar Properties

None.

3.1.5.66.1.2 ObjectPath Properties

None.

3.1.5.66.2 Methods

3.1.5.66.2.1 Scalar Methods

3.1.5.66.2.1.1 SaveUploadedFile

Return Type: CSOM array of CSOM String

The **SaveUploadedFile** method saves an uploaded file as a profile image. This method returns an array of URLs that provide access to the saved profile image.

Parameters:

profileType: Specifies the profile type.

Type: **CSOM Int32**

fileNamePrefix: Specifies a prefix for the name of the saved file.

Type: CSOM String

isFeedAttachment: Has a **true** value if the file is being attached to a feed and, otherwise, has a **false** value.

Type: **CSOM Boolean**

clientFilePath: Specifies the path of the file on the client system.

Type: CSOM String

fileSize: Specifies the size of the file in bytes.

Type: CSOM Int32

fileStream: Specifies a stream to read the file.

Type: **CSOM Stream**

3.1.5.66.2.2 ObjectPath Methods

3.1.5.66.2.2.1 CSOM Constructor

The constructor initializes the profile image store.

Parameters: None

3.1.5.67 Microsoft.SharePoint.Client.UserProfiles.ProfileLoader

TypeId: {9C42543A-91B3-4902-B2FE-14CCDEFB6E2B}

ShortName: SP.UserProfiles.ProfileLoader

The **ProfileLoader** class provides access to the current user's profile.

3.1.5.67.1 Properties

3.1.5.67.1.1 Scalar Properties

None.

3.1.5.67.1.2 ObjectPath Properties

None.

3.1.5.67.2 Methods

3.1.5.67.2.1 Scalar Methods

3.1.5.67.2.1.1 CreatePersonalSiteEnqueueBulk

Return Type: CSOM array of CSOM String

Allows a My Site Host admin to enqueue other users for creating their personal sites for this user, which can be used to share documents, web pages, and other files.

Parameters:

emailIDs: An array of email IDs that need to be enqueued.

Type: CSOM array of CSOM String

Its length MUST be equal to or less than 200.

3.1.5.67.2.2 ObjectPath Methods

3.1.5.67.2.2.1 GetOwnerUserProfile

This method is a **static CSOM method**.

Return Type: Microsoft.SharePoint.Client.UserProfiles.UserProfile

Gets the user profile for the **Site (2)** owner.

Parameters: None

3.1.5.67.2.2.2 GetProfileLoader

This method is a **static CSOM method**.

Return Type: Microsoft.SharePoint.Client.UserProfiles.ProfileLoader

The **GetProfileLoader** method returns a profile loader.

Parameters: None

3.1.5.67.2.2.3 GetUserProfile

Return Type: Microsoft.SharePoint.Client.UserProfiles.UserProfile

The **GetUserProfile** method returns the user profile for the current user.

Parameters: None

3.1.5.68 Microsoft.SharePoint.Client.UserProfiles.SocialDataStoreExceptionCode

ShortName: SP.UserProfiles.SocialDataStoreExceptionCode

Flag: false

The **SocialDataStoreExceptionCode** class represents an exception code for a user's Social data storage to specify a reason for an error.

3.1.5.68.1 Field Values

3.1.5.68.1.1 SocialListNotFound

Value: 0

The Social list storage on the user's My Site could not be accessed.

3.1.5.68.1.2 PersonalSiteNotFound

Value: 1

The user does not have a personal site.

3.1.5.68.1.3 CannotCreatePersonalSite

Value: 2

The user does not have a personal site, and does not have permission to create one.

3.1.5.68.1.4 NoSocialFeatures

Value: 3

The requested content following operation failed because the user is not permitted to use social features.

3.1.5.69 Microsoft.SharePoint.Client.UserProfiles.UserProfile

TypeId: {A3B3B313-DF8C-4192-B623-57B8FA3872D9}

ShortName: SP.UserProfiles.UserProfile

The **UserProfile** class stores the profile of the individual user, which includes properties such as the user's account name, preferred name, and email address.

3.1.5.69.1 Properties

3.1.5.69.1.1 Scalar Properties

3.1.5.69.1.1.1 UrlToCreatePersonalSite

Type: CSOM String

Accessibility: Read Only

The **UrlToCreatePersonalSite** property specifies the URL to allow the current user to create a personal site.

3.1.5.69.1.1.2 PersonalSiteCapabilities

Type: Microsoft.SharePoint.Client.UserProfiles.PersonalSiteCapabilities

Accessibility: Read Only

The **PersonalSiteCapabilities** property specifies attributes of the user's personal site. See section [3.1.5.62](#) for details on the **PersonalSiteCapabilities** type.

3.1.5.69.1.1.3 PictureImportEnabled

Type: CSOM Boolean

Accessibility: Read/Write

The **PictureImportEnabled** property specifies whether the user can import pictures.

3.1.5.69.1.1.4 PersonalSiteInstantiationState

Type: Microsoft.SharePoint.Client.UserProfiles.PersonalSiteInstantiationState

Accessibility: Read Only

The **PersonalSiteInstantiationState** property provides the state of the user's personal site. For details on the **PersonalSiteInstantiationState** type, see section [3.1.5.64](#).

3.1.5.69.1.1.5 AccountName

Type: CSOM String

Accessibility: Read Only

The account name of the user.

3.1.5.69.1.1.6 DisplayName

Type: CSOM String

Accessibility: Read/Write

The title of the user.

3.1.5.69.1.1.7 IsPeopleListPublic

Type: CSOM Boolean

Accessibility: Read Only

Specifies whether the list of people that the user is following is public.

3.1.5.69.1.1.8 IsPrivacySettingOn

Type: CSOM Boolean

Accessibility: Read Only

Specifies whether the privacy setting has been set for the site.

3.1.5.69.1.1.9 IsSelf

Type: CSOM Boolean

Accessibility: Read Only

Specifies whether the user profile is for the current user.

3.1.5.69.1.1.10 JobTitle

Type: CSOM String

Accessibility: Read Only

Specifies the job title of the user.

3.1.5.69.1.1.11 MySiteFirstRunExperience

Type: CSOM Int32

Accessibility: Read/Write

Specifies the personal site First Run flag of the user.

3.1.5.69.1.1.12 O15FirstRunExperience

Type: CSOM Int32

Accessibility: Read/Write

Specifies the First Run flag of the user.

3.1.5.69.1.1.13 PersonalSiteFirstCreationError

Type: CSOM String

Accessibility: Read Only

Specifies the failure for the personal site first creation attempt.

3.1.5.69.1.1.14 PersonalSiteFirstCreationTime

Type: CSOM DateTime

Accessibility: Read Only

Specifies the time for the personal site first creation attempt.

3.1.5.69.1.1.15 PersonalSiteLastCreationTime

Type: CSOM DateTime

Accessibility: Read Only

Specifies the time for the personal site last creation attempt.

3.1.5.69.1.1.16 PersonalSiteNumberOfRetries

Type: CSOM Int32

Accessibility: Read Only

Specifies the number of times for the personal site creation attempt.

3.1.5.69.1.1.17 PictureUrl

Type: CSOM String

Accessibility: Read Only

Specifies the photo **URL** for the current user.

3.1.5.69.1.1.18 PublicUrl

Type: CSOM String

Accessibility: Read Only

Specifies the public **URL** for the personal site of the current user.

3.1.5.69.1.1.19 SipAddress

Type: CSOM String

Accessibility: Read Only

Specifies the **SIP address** of the current user.

3.1.5.69.1.1.20 MySiteHostUrl

Type: CSOM String

Accessibility: Read Only

Specifies the **URL** for the personal site of the current user.

3.1.5.69.1.1.21 FollowPersonalSiteUrl

Type: CSOM String

Accessibility: Read Only

The **FollowPersonalSiteUrl** property specifies the URL to allow the current user to create a personal site. If there is no hybrid & cross-geo setting, it will return the same value as **UriToCreatePersonalSite**, otherwise a URL to allow the current user to create a personal site on the remote host.

3.1.5.69.1.1.22 IsDefaultDocumentLibraryBlocked

Type: CSOM Boolean

Accessibility: Read Only

If true, indicates that the access of the user to the default **document library** in the user's OneDrive is blocked.

3.1.5.69.1.2 ObjectPath Properties

3.1.5.69.1.2.1 FollowedContent

Type: Microsoft.SharePoint.Client.UserProfiles.FollowedContent

Accessibility: Read Only

The **FollowedContent** property specifies the content that a user is following. See section [3.1.5.46](#) for details on the **FollowedContent** type.

3.1.5.69.1.2.2 PersonalSite

Type: Microsoft.SharePoint.Client.Site

Accessibility: Read Only

The **PersonalSite** property specifies the user's personal site. For details on the **Site** type, see the description of **SPSite** in [\[MS-SITEDATS\]](#) section 3.1.4.3.2.8.

3.1.5.69.2 Methods

3.1.5.69.2.1 Scalar Methods

3.1.5.69.2.1.1 CreatePersonalSite

Return Type: None

The **CreatePersonalSite** method creates a personal **site (2)** for this user, which can be used to share documents, web pages, and other files.

Parameters:

lcid: Specifies the locale identifier for the site.

Type: **CSOM Int32**

3.1.5.69.2.1.2 CreatePersonalSiteEnque

Return Type: None

The **CreatePersonalSiteEnque** method specifies if the attempt to create a personal site is from a web request or a client application.

Parameters:

isInteractive: Has a **true** value if the request is from a web browser and a **false** value if the request is from a client application.

Type: **CSOM Boolean**

3.1.5.69.2.1.3 CreatePersonalSiteFromWorkItem

Return Type: **CSOM Int32**

Creates a personal site for the current user using the work item.

Parameters:

workItemType: The work item to create the personal site.

Type: **CSOM GUID**

3.1.5.69.2.1.4 CreatePersonalSiteSyncFromWorkItem

This method is a **static CSOM method**.

Return Type: **CSOM Int32**

Creates a personal site for the current user with user profile synchronization using the work item.

Parameters:

workItemType: The work item to create the personal site.

Type: **CSOM GUID**

3.1.5.69.2.1.5 SetMySiteFirstRunExperience

Return Type: None

Sets the personal site First Run flag for the user.

Parameters:

value: The value to be set for the First Run flag.

Type: **CSOM Int32**

Only the upper half of the bit field of the value is set, the lower half is reserved for O15FirstRunExperience.

3.1.5.69.2.1.6 ShareAllSocialData

Return Type: None

The **ShareAllSocialData** method specifies whether the current user's social data is to be shared.

Parameters:

shareAll: If true, social data is shared; if false, social data is not shared.

Type: **CSOM Boolean**

3.1.5.69.2.2 ObjectPath Methods

None.

3.1.5.70 Microsoft.SharePoint.Client.UserProfiles.UserProfilePropertiesForUser

TypeId: {1ADD223C-FF83-471F-8E55-519FE8A0CA31}

ShortName: SP.UserProfiles.UserProfilePropertiesForUser

The **UserProfilePropertiesForUser** class represents a set of user profile properties for a user.

3.1.5.70.1 Properties

3.1.5.70.1.1 Scalar Properties

3.1.5.70.1.1.1 AccountName

Type: **CSOM String**

Accessibility: Read/Write

The **AccountName** property specifies the account name of the user.

3.1.5.70.1.2 ObjectPath Properties

None.

3.1.5.70.2 Methods

3.1.5.70.2.1 Scalar Methods

3.1.5.70.2.1.1 GetPropertyNames

Return Type: **CSOM array** of **CSOM String**

The **GetPropertyNames** method gets an array of strings that specify the user profile property names.

Parameters: None

3.1.5.70.2.2 ObjectPath Methods

3.1.5.70.2.2.1 CSOM Constructor

The constructor method creates a new instance of **UserProfilePropertiesForUser** (see section [3.1.5.70](#)).

Parameters:

accountName: Specifies the user by account name.

Type: **CSOM String**

propertyNames: Specifies an array of strings that specify the properties to set.

Type: **CSOM array** of CSOM String

3.1.5.71 Microsoft.SharePoint.Client.WebParts.TileData

TypeId: {9786D53B-4147-4E57-9D94-1D9F335D42B3}

ShortName: SP.WebParts.TileData

Represents a Tile that describes a graphical link the user can click.

3.1.5.71.1 Properties

3.1.5.71.1.1 Scalar Properties

3.1.5.71.1.1.1 BackgroundCollageImageLocations

Type: **CSOM array** of **CSOM String**

Accessibility: Read/Write

Specifies the location of the images used to render the tile background, if it is a tile with a split background.

Specifies the URL of the Tile background image.

3.1.5.71.1.1.2 BackgroundImageLocation

Type: **CSOM String**

Accessibility: Read/Write

Specifies the **URL** of the Tile background image

3.1.5.71.1.1.3 BackgroundImageRendersAsIcon

Type: **CSOM Boolean**

Accessibility: Read/Write

Specifies whether the background image renders as an icon, positioned just above the overlay.

3.1.5.71.1.1.4 BodyText

Type: CSOM String

Accessibility: Read/Write

Specifies the text written in the body of the tile.

3.1.5.71.1.1.5 Description

Type: CSOM String

Accessibility: Read/Write

Specifies the text that describes a Tile.

3.1.5.71.1.1.6 HoverDisabled

Type: CSOM Boolean

Accessibility: Read/Write

Specifies whether the tile's hover behavior SHOULD be disabled.

3.1.5.71.1.1.7 ID

Type: CSOM Int32

Accessibility: Read/Write

Species a unique number that represents the Tile in a list of Tiles.

3.1.5.71.1.1.8 IsWide

Type: CSOM Boolean

Accessibility: Read/Write

Specifies whether the tile is a wide tile.

3.1.5.71.1.1.9 LinkLocation

Type: CSOM String

Accessibility: Read/Write

Specifies the URL location of the navigation that happens on Tile click.

3.1.5.71.1.1.10 TileOrder

Type: CSOM Int32

Accessibility: Read/Write

Specifies a number that indicates the ordering of the Tile in a list of Tiles.

3.1.5.71.1.1.11 Title

Type: CSOM String

Accessibility: Read/Write

Specifies the title of the Tile.

3.1.5.71.1.1.12 TransparentOverlay

Type: CSOM String

Accessibility: Read/Write

Specifies whether the tile's title overlay SHOULD be completely transparent.

3.1.6 Timer Events

None

3.1.7 Other Local Events

None

4 Protocol Examples

4.1 Making a New Root Post

The following sample message from the client creates a new root post in the current user's feed.

```
POST http://my.contoso.com/ vti bin/client.svc/ProcessQuery HTTP/1.1
Accept: */*
X-Requested-With: XMLHttpRequest
Content-Type: text/xml
X-RequestDigest:
0x8A23682F5FE347966EEBB0546E1A5E22DDD21D8A587558D37CAC88897EA3BB0AC368E15BBBC9F5D48BC6FB9DCD
D611ADD264D9557C571F7BF03E336F90BD2AF,22 May 2012 12:38:53 -0000
Referer: http://my.contoso.com/default.aspx
Accept-Language: en-us
Accept-Encoding: gzip, deflate
User-Agent: Mozilla/4.0 (compatible; MSIE 7.0; Windows NT 6.1; WOW64; Trident/5.0; SLCC2;
.NET4.0C; .NET4.0E)
Host: social.contoso.com
Content-Length: 827
Connection: Keep-Alive
Pragma: no-cache
Cookie: WSS_FullScreenMode=false
Authorization: NTLM
TlRMTVNTUAADAAAAAAAAAFgAAAAAAAAAWAAAAAAAAABYAAAAAAAAAFgAAAAAAAAWAAAAAAAAABYAAAAABcKIogYBsR0AA
AAPzICGUnyqRfwQC6pz9b3t1Q==

<Request
  xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009"
  SchemaVersion="15.0.0.0"
  LibraryVersion="15.0.0.0"
  ApplicationName="Javascript Library"
>
  <Actions>
    <Method Name="CreatePost" Id="11" ObjectPathId="0">
      <Parameters>
        <Parameter Type="String">
        </Parameter>
        <Parameter TypeId="{2830dd33-271e-4091-a211-e88988e16b03}">
          <Property Name="Attachment" Type="Null" />
          <Property Name="ContentItems" Type="Array" />
          <Property Name="ContentText" Type="String">Hello, world.</Property>
          <Property Name="DefinitionData" Type="Null" />
          <Property Name="SecurityUris" Type="Null" />
          <Property Name="Source" Type="Null" />
          <Property Name="UpdateStatusText" Type="Boolean">true</Property>
        </Parameter>
      </Parameters>
    </Method>
  </Actions>
  <ObjectPaths>
    <Constructor Id="0"
      TypeId="{c32f5230-2ed0-48fa-ac80-e2ffa22e3d28}"
    />
  </ObjectPaths>
</Request>
```

4.2 Response from Server for New Root Post

The following is the response from the server for a new root post after decompressing from the zip compressed message.

```
Content-Type: application/json; charset=utf-8
```

Vary: Accept-Encoding
Server: Microsoft-IIS/7.5
X-SharePointHealthScore: 0
X-AspNet-Version: 4.0.30319
X-RequestDigest:
0xAA80E9414B7363A72635FDA35C4494B7446C39756C1B95881BA26D7A09AB05D4DF3CC809AE34711004FB5A8BC45
7691ADBA5B8FC5702252A1FABA75055A6C222,22 May 2012 12:44:18 -0000
X-FRAME-OPTIONS: SAMEORIGIN
SPRequestGuid: 066ca89b-bcde-5026-2451-a625463ec85e
request-id: 066ca89b-bcde-5026-2451-a625463ec85e
Persistent-Auth: true
X-Powered-By: ASP.NET
MicrosoftSharePointTeamServices: 15.0.0.4118
X-Content-Type-Options: nosniff
X-MS-InvokeApp: 1; RequireReadOnly
Date: Tue, 22 May 2012 12:44:20 GMT
Content-Length: 2178

```
[
  {
    "SchemaVersion": "15.0.0.0",
    "LibraryVersion": "15.0.4118.3001",
    "ErrorInfo": null,
    "TraceCorrelationId": "066ca89b-bcde-5026-2451-a625463ec85e"
  },
  11,
  {
    "_ObjectType_": "SP.Social.SocialThread",
    "Actors": [
      {
        "ObjectType": "SP.Social.SocialActor",
        "AccountName": "contoso.com\\evacorets",
        "ActorType": 0,
        "ContentUri": null,
        "EmailAddress": "Eva.Corets@contoso.com",
        "FollowedContentUri": null,
        "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296
c16747049989.0c37852b34d0418e91c62ac25af4be5b",
        "ImageUri": null,
        "IsFollowed": false,
        "LibraryUri": null,
        "Name": "Eva Corets",
        "PersonalSiteUri": "http://my.contoso.com/evacorets/personal/evacorets",
        "StatusText": "",
        "TagGuid": "/Guid(00000000-0000-0000-0000-000000000000)/",
        "Title": "SENIOR SDE",
        "Status": 0,
        "CanFollow": false,
        "Uri": "http://my.contoso.com/
evacorets:80/Person.aspx?accountname=contoso.com%5Cevacorets"
      }
    ],
    "Attributes": 6,
    "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296
c16747049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-
21-124525095-708259637-1543119021-565522",
    "OwnerIndex": 0,
    "Permalink":
"http://my.contoso.com/evacorets:80/ThreadView.aspx?ThreadID=1.1b73bf8d80eb4dbeab329c3bd2
32624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c16747049989.0c37852b34d0418e
91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-124525095-708259637-
1543119021-565522",
    "PostReference": null,
    "Replies": [],
    "RootPost": {
```

```

    "ObjectType": "SP.Social.SocialPost",
    "Attachment": null,
    "Attributes": 23,
    "AuthorIndex": 0,
    "CreatedTime": "/Date(1337690658345)/",
    "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296
c16747049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-
21-124525095-708259637-1543119021-565522",
    "LikerInfo": {
      "ObjectType": "SP.Social.SocialPostActorInfo",
      "IncludesCurrentUser": false,
      "Indexes": [],
      "TotalCount": 0
    },
    "ModifiedTime": "/Date(1337690658345)/",
    "Overlays": [],
    "PostType": 0,
    "PreferredImageUri": null,
    "Source": {
      "_ObjectType_": "SP.Social.SocialLink",
      "Text": null,
      "Uri": null
    },
    "Text": "Hello, world."
  },
  "Status": 0,
  "ThreadType": 0,
  "TotalReplyCount": 0
}
]

```

4.3 Posting a New Reply

The following sample message from the client creates a reply to an existing message. The headers are omitted from this and the following CSOM samples.

```

POST http://my.contoso.com/_vti_bin/client.svc/ProcessQuery HTTP/1.1
<Request
  xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009"
  SchemaVersion="15.0.0.0"
  LibraryVersion="15.0.0.0"
  ApplicationName="Javascript Library">
  <Actions>
    <ObjectPath Id="1" ObjectPathId="0" />
    <ObjectPath Id="3" ObjectPathId="2" />
    <Method Name="CreatePost" Id="4" ObjectPathId="0">
      <Parameters>
        <Parameter Type="String">

1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c1674
7049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-
124525095-708259637-1543119021-565522

        </Parameter>
        <Parameter TypeId="{2830dd33-271e-4091-a211-e88988e16b03}">
          <Property Name="Attachment" Type="Null" />
          <Property Name="ContentItems" Type="Array" />
          <Property Name="ContentText" Type="String">Hello yourself!</Property>
          <Property Name="DefinitionData" Type="Null" />
          <Property Name="SecurityUri" Type="Null" />
          <Property Name="Source" Type="Null" />
          <Property Name="UpdateStatusText" Type="Boolean">>false</Property>
        </Parameter>
      </Parameters>
    </Method>
    <ObjectPath Id="6" ObjectPathId="5" />
    <Query Id="7" ObjectPathId="5">
      <Query SelectAllProperties="false"><Properties /></Query>

```

```

    <ChildItemQuery SelectAllProperties="false">
      <Properties>
        <Property Name="DisplayName" SelectAll="true" />
        <Property Name="AccountName" SelectAll="true" />
        <Property Name="UserUrl" SelectAll="true" />
        <Property Name="PictureUrl" SelectAll="true" />
        <Property Name="Email" SelectAll="true" />
        <Property Name="LatestPost" SelectAll="true" />
        <Property Name="IsFollowed" SelectAll="true" />
      </Properties>
    </ChildItemQuery>
  </Query>
  <Query Id="9" ObjectPathId="0">
    <Query SelectAllProperties="true">
      <Properties />
    </Query>
  </Query>
</Actions>
<ObjectPaths>
  <Constructor Id="0"
    TypeId="{c32f5230-2ed0-48fa-ac80-e2ffa22e3d28}" />
  <Constructor Id="2"
    TypeId="{cf560d69-0fdb-4489-a216-b6b47adf8ef8}" />
  <Method Id="5" ParentId="2" Name="GetPeopleFollowedByMe" />
</ObjectPaths>
</Request>

```

4.4 Server Response for a New Reply

The following is the response from the server for a new reply post, after decompressing from the zip compressed message.

```

[
  {
    "SchemaVersion": "15.0.0.0",
    "LibraryVersion": "15.0.4118.3001",
    "ErrorInfo": null,
    "TraceCorrelationId": "766ca89b-9c75-5026-2451-a130aedb3fce"
  },
  1,
  {
    "IsNull": false
  },
  3,
  {
    "IsNull": false
  },
  4,
  {
    "_ObjectType_": "SP.Social.SocialThread",
    "Actors": [
      {
        "_ObjectType_": "SP.Social.SocialActor",
        "AccountName": "contoso.com\\evacorets",
        "ActorType": 0,
        "ContentUri": null,
        "EmailAddress": "eva.corets@contoso.com",
        "FollowedContentUri": null,
        "Id":
          "1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
          47049989.0c37852b34d0418e91c62ac25af4be5b",
        "ImageUri": null,
        "IsFollowed": false,
        "LibraryUri": null,
        "Name": "Eva Corets",

```

```

        "PersonalSiteUri": "http://my.contoso.com/evacorets/personal/evacorets",
        "StatusText": "Hello, world.",
        "TagGuid": "/Guid(00000000-0000-0000-0000-000000000000)/",
        "Title": "SENIOR SDE",
        "Status": 0,
        "CanFollow": false,
        "Uri":
"http://my.contoso.com/evacorets:80/Person.aspx?accountname=contoso.com%5Cevacorets"
    }
    ],
    "Attributes": 6,
    "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-
124525095-708259637-1543119021-565522",
    "OwnerIndex": 0,
    "Permalink":
"http://my.contoso.com/evacorets:80/ThreadView.aspx?ThreadID=1.1b73bf8d80eb4dbeab329c3bd23262
4c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c16747049989.0c37852b34d0418e91c62ac2
5af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-124525095-708259637-1543119021-
565522",
    "PostReference": null,
    "Replies": [
        {
            "_ObjectType_": "SP.Social.SocialPost",
            "Attachment": null,
            "Attributes": 23,
            "AuthorIndex": 0,
            "CreatedTime": "/Date(1337691115541)/",
            "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.6022554462e44325ac0b70dfc2636af7.3.4.S-1-5-21-
124525095-708259637-1543119021-565522",
            "LikerInfo": {
                "_ObjectType_": "SP.Social.SocialPostActorInfo",
                "IncludesCurrentUser": false,
                "Indexes": [],
                "TotalCount": 0
            },
            "ModifiedTime": "/Date(1337691115541)/",
            "Overlays": [],
            "PostType": 1,
            "PreferredImageUri": null,
            "Source": {
                "_ObjectType_": "SP.Social.SocialLink",
                "Text": null,
                "Uri": null
            },
            "Text": "Hello yourself!"
        }
    ],
    "RootPost": {
        "_ObjectType_": "SP.Social.SocialPost",
        "Attachment": null,
        "Attributes": 23,
        "AuthorIndex": 0,
        "CreatedTime": "/Date(1337690658000)/",
        "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-
124525095-708259637-1543119021-565522",
        "LikerInfo": {
            "ObjectType": "SP.Social.SocialPostActorInfo",
            "IncludesCurrentUser": false,
            "Indexes": [],
            "TotalCount": 0
        },
        "ModifiedTime": "/Date(1337691115790)/",
        "Overlays": [],
    }
}

```

```

        "PostType": 0,
        "PreferredImageUri": null,
        "Source": {
            "_ObjectType_": "SP.Social.SocialLink",
            "Text": null,
            "Uri": null
        },
        "Text": "Hello, world."
    },
    "Status": 0,
    "ThreadType": 0,
    "TotalReplyCount": 1
},
6,
{
    "IsNull": false
},
7,
{
    "_ObjectType_": "SP.ClientObjectList",
    "_Child_Items_": []
},
9,
{
    "_ObjectType_": "SP.Social.SocialFeedManager",
    "Owner": {
        "_ObjectType_": "SP.Social.SocialActor",
        "AccountName": "contoso.com\\evacorets",
        "ActorType": 0,
        "ContentUri": null,
        "EmailAddress": "evacorets@contoso.com",
        "FollowedContentUri": null,
        "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b",
        "ImageUri": null,
        "IsFollowed": false,
        "LibraryUri": null,
        "Name": "Eva Corets",
        "PersonalSiteUri": "http://my.contoso.com/evacorets/personal/evacorets",
        "StatusText": "Hello, world.",
        "TagGuid": "/Guid(00000000-0000-0000-0000-000000000000)/",
        "Title": "SENIOR SDE",
        "Uri":
"http://my.contoso.com/evacorets:80/Person.aspx?accountname=contoso.com%5Cevacorets"
    }
}
]

```

4.5 Requesting a Feed

The following sample message from the client requests a feed.

```

POST http://my.contoso.com/_vti_bin/client.svc/ProcessQuery HTTP/1.1

<Request

  xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009"
  SchemaVersion="15.0.0.0"
  LibraryVersion="15.0.0.0"
  ApplicationName="Javascript Library"
>
  <Actions>
    <ObjectPath Id="1" ObjectPathId="0" />
    <ObjectPath Id="3" ObjectPathId="2" />

```

```

<Method Name="GetFeed" Id="4" ObjectPathId="0">
  <Parameters>
    <Parameter Type="Number">1</Parameter>
    <Parameter TypeId="{86cfc806-c9bb-448a-aed2-c7ff9a5b7ee6}">
      <Property Name="MaxThreadCount" Type="Number">20</Property>
      <Property Name="NewerThan" Type="DateTime">
        2012-05-22T12:59:05.000Z
      </Property>
      <Property Name="OlderThan" Type="Null" />
      <Property Name="SortOrder" Type="Number">0</Property>
    </Parameter>
  </Parameters>
</Method>
<ObjectPath Id="6" ObjectPathId="5" />
<Query Id="7" ObjectPathId="5">
  <Query SelectAllProperties="false">
    <Properties />
  </Query>
  <ChildItemQuery SelectAllProperties="false">
    <Properties>
      <Property Name="DisplayName" SelectAll="true" />
      <Property Name="AccountName" SelectAll="true" />
      <Property Name="UserUrl" SelectAll="true" />
      <Property Name="PictureUrl" SelectAll="true" />
      <Property Name="Email" SelectAll="true" />
      <Property Name="LatestPost" SelectAll="true" />
      <Property Name="IsFollowed" SelectAll="true" />
    </Properties>
  </ChildItemQuery>
</Query>
<Query Id="9" ObjectPathId="0">
  <Query SelectAllProperties="true">
    <Properties />
  </Query>
</Query>
</Actions>
<ObjectPaths>
  <Constructor Id="0"
    TypeId="{c32f5230-2ed0-48fa-ac80-e2ffa22e3d28}" />
  <Constructor Id="2"
    TypeId="{cf560d69-0fdb-4489-a216-b6b47adf8ef8}"
  />
  <Method Id="5"
    ParentId="2"
    Name="GetPeopleFollowedByMe"
  />
</ObjectPaths>
</Request>

```

4.6 Server Response for Requesting a Feed

The following is the response from the server for a request for a feed, after decompressing from the zip compressed message.

```

[
  {
    "SchemaVersion": "15.0.0.0",
    "LibraryVersion": "15.0.4118.3001",
    "ErrorInfo": null,
    "TraceCorrelationId": "f06ca89b-fcb2-5026-2451-a351899b7132"
  },
  1,
  {
    "IsNull": false
  },
  3,

```

```

    {
      "IsNull": false
    },
    4,
    {
      "ObjectType": "SP.Social.SocialFeed",
      "Attributes": 0,
      "FailedActorIds": [],
      "NewestProcessed": "/Date(1,0,1,0,0,0,0,0)/",
      "OldestProcessed": "/Date(1,0,1,0,0,0,0,0)/",
      "Status": 0,
      "Threads": [
        {
          "_ObjectType_": "SP.Social.SocialThread",
          "Actors": [
            {
              "ObjectType": "SP.Social.SocialActor",
              "AccountName": "contoso.com\\evacorets",
              "ActorType": 0,
              "ContentUri": null,
              "EmailAddress": "evacorets@contoso.com",
              "FollowedContentUri":
"http://my.contoso.com/evacorets:80/ layouts/15/MySite.aspx?MySiteRedirect=FollowedDocuments"
,
              "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b",
              "ImageUri": null,
              "IsFollowed": true,
              "LibraryUri": null,
              "Name": "Eva Corets",
              "PersonalSiteUri":
"http://my.contoso.com/evacorets/personal/evacorets",
              "StatusText": "Путин является лучшим премьер-министром.",
              "TagGuid": "/Guid(00000000-0000-0000-0000-000000000000)/",
              "Title": "SENIOR SDE",
              "Status": 0,
              "CanFollow": false,
              "Uri":
"http://my.contoso.com/evacorets:80/Person.aspx?accountname=contoso.com%5Cevacorets"
            }
          ],
          "Attributes": 6,
          "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.28b078c64e3f4a6c9defc9a18b738c7d.5.5.S-1-5-21-
124525095-708259637-1543119021-565522",
          "OwnerIndex": 0,
          "Permalink":
"http://my.contoso.com/evacorets:80/ThreadView.aspx?ThreadID=1.1b73bf8d80eb4dbeab329c3bd23262
4c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c16747049989.0c37852b34d0418e91c62ac2
5af4be5b.28b078c64e3f4a6c9defc9a18b738c7d.5.5.S-1-5-21-124525095-708259637-1543119021-
565522",
          "PostReference": null,
          "Replies": [],
          "RootPost": {
            "ObjectType": "SP.Social.SocialPost",
            "Attachment": null,
            "Attributes": 23,
            "AuthorIndex": 0,
            "CreatedTime": "/Date(1337691545000)/",
            "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.28b078c64e3f4a6c9defc9a18b738c7d.5.5.S-1-5-21-
124525095-708259637-1543119021-565522",
            "LikerInfo": {
              "_ObjectType_": "SP.Social.SocialPostActorInfo",
              "IncludesCurrentUser": true,
              "Indexes": [],

```



```

        "TotalCount": 1
      },
      "ModifiedTime": "/Date(1337691545000)/",
      "Overlays": [],
      "PostType": 0,
      "PreferredImageUri": null,
      "Source": {
        "_ObjectType_": "SP.Social.SocialLink",
        "Text": null,
        "Uri": null
      },
      "Text": "Путин является лучшим премьер-министром."
    },
    "Status": 0,
    "ThreadType": 0,
    "TotalReplyCount": 0
  }
},
"UnreadMentionCount": 0
},
6,
{
  "IsNull": false
},
7,
{
  "_ObjectType_": "SP.ClientObjectList",
  "_Child_Items_": []
},
9,
{
  "_ObjectType_": "SP.Social.SocialFeedManager",
  "Owner": {
    "ObjectType": "SP.Social.SocialActor",
    "AccountName": "contoso.com\\evacorets",
    "ActorType": 0,
    "ContentUri": null,
    "EmailAddress": "evacorets@contoso.com",
    "FollowedContentUri": null,
    "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c16747049989.0c37852b34d0418e91c62ac25af4be5b",
    "ImageUri": null,
    "IsFollowed": false,
    "LibraryUri": null,
    "Name": "Eva Corets",
    "PersonalSiteUri": "http://my.contoso.com/evacorets/personal/evacorets",
    "StatusText": "Путин является лучшим премьер-министром.",
    "TagGuid": "/Guid(00000000-0000-0000-0000-000000000000)/",
    "Title": "SENIOR SDE",
    "Uri":
"http://my.contoso.com/evacorets:80/Person.aspx?accountname=contoso.com%5Cevacorets"
  }
}
]

```

4.7 Liking a Post

The following sample message from the client specifies that the current user likes a post.

```

POST http://my.contoso.com/_vti_bin/client.svc/ProcessQuery HTTP/1.1
<Request xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009"
SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0" ApplicationName="Javascript Library">
  <Actions>
    <Method Name="LikePost" Id="12" ObjectPathId="0">
      <Parameters>

```

```

    <Parameter
Type="String">1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201
c4db0a296c16747049989.0c37852b34d0418e91c62ac25af4be5b.6022554462e44325ac0b70dfc2636af7.3.4.S
-1-5-21-124525095-708259637-1543119021-565522</Parameter>
    </Parameters>
  </Method>
</Actions>
<ObjectPaths>
  <Constructor Id="0" TypeId="{c32f5230-2ed0-48fa-ac80-e2ffa22e3d28}" />
</ObjectPaths>
</Request>

```

4.8 Server Response to Liking a Post

The following is the response from the server for a message specifying that the current user likes a post, after decompressing from the zip compressed message.

```

[
  {
    "SchemaVersion": "15.0.0.0",
    "LibraryVersion": "15.0.4118.3001",
    "ErrorInfo": null,
    "TraceCorrelationId": "b76ca89b-1c49-5026-2451-aaelf6932f8e"
  },
  12,
  {
    "ObjectType": "SP.Social.SocialThread",
    "Actors": [
      {
        "_ObjectType": "SP.Social.SocialActor",
        "AccountName": "contoso.com\\evacorets",
        "ActorType": 0,
        "ContentUri": null,
        "EmailAddress": "evacorets@contoso.com",
        "FollowedContentUri": null,
        "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b",
        "ImageUri": null,
        "IsFollowed": false,
        "LibraryUri": null,
        "Name": "Eva Corets",
        "PersonalSiteUri": "http://my.contoso.com/evacorets/personal/evacorets",
        "StatusText": "Hello, world.",
        "TagGuid": "/Guid(00000000-0000-0000-0000-000000000000)/",
        "Title": "SENIOR SDE",
        "Status": 0,
        "CanFollow": false,
        "Uri":
"http://my.contoso.com/evacorets:80/Person.aspx?accountname=contoso.com%5Cevacorets"
      }
    ],
    "Attributes": 6,
    "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-
124525095-708259637-1543119021-565522",
    "OwnerIndex": 0,
    "Permalink":
"http://evacorets:80/ThreadView.aspx?ThreadID=1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e
4e819c247506f084bb6a.6aff918c201c4db0a296c16747049989.0c37852b34d0418e91c62ac25af4be5b.105b8d
84258e4a519f6c642f8891db37.3.3.S-1-5-21-124525095-708259637-1543119021-565522",
    "PostReference": null,
    "Replies": [
      {
        "_ObjectType": "SP.Social.SocialPost",

```

```

        "Attachment": null,
        "Attributes": 23,
        "AuthorIndex": 0,
        "CreatedTime": "/Date(1337691116000)/",
        "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.6022554462e44325ac0b70dfc2636af7.3.4.S-1-5-21-
124525095-708259637-1543119021-565522",
        "LikerInfo": {
            "_ObjectType_": "SP.Social.SocialPostActorInfo",
            "IncludesCurrentUser": true,
            "Indexes": [],
            "TotalCount": 1
        },
        "ModifiedTime": "/Date(1337691116000)/",
        "Overlays": [],
        "PostType": 1,
        "PreferredImageUri": null,
        "Source": {
            "_ObjectType_": "SP.Social.SocialLink",
            "Text": null,
            "Uri": null
        },
        "Text": "Hello yourself!"
    },
    },
    "RootPost": {
        "_ObjectType_": "SP.Social.SocialPost",
        "Attachment": null,
        "Attributes": 23,
        "AuthorIndex": 0,
        "CreatedTime": "/Date(1337690658000)/",
        "Id":
"1.1b73bf8d80eb4dbeab329c3bd232624c.a3088f9c195e4e819c247506f084bb6a.6aff918c201c4db0a296c167
47049989.0c37852b34d0418e91c62ac25af4be5b.105b8d84258e4a519f6c642f8891db37.3.3.S-1-5-21-
124525095-708259637-1543119021-565522",
        "LikerInfo": {
            "_ObjectType_": "SP.Social.SocialPostActorInfo",
            "IncludesCurrentUser": false,
            "Indexes": [],
            "TotalCount": 0
        },
        "ModifiedTime": "/Date(1337691115000)/",
        "Overlays": [],
        "PostType": 0,
        "PreferredImageUri": null,
        "Source": {
            "_ObjectType_": "SP.Social.SocialLink",
            "Text": null,
            "Uri": null
        },
        "Text": "Hello, world."
    },
    },
    "Status": 0,
    "ThreadType": 0,
    "TotalReplyCount": 1
}
]

```

4.9 Making a New Root Post Using REST

The following sample REST message creates a new root post in the current user's feed.

```

POST http://my.contoso.com/my/_api/social.feed/my/feed/Post HTTP/1.1
Content-Type: application/json

```

```

Accept-Language: en-us
x-requestdigest:
0x75BB236E02F26DF34658EF675052A5689CE204801F874ED1C9932D2E86E0CCB1D820ACA4AB3178501B1711225BC
B55C753074D935D20F48AEE96D97494F64CBD,15 May 2012 13:29:54 -0000
Accept: */*, application/json;odata=verbose
Accept-Encoding: gzip, deflate
User-Agent: Mozilla/5.0 (compatible; MSIE 9.0; Windows NT 6.1; WOW64; Trident/5.0)
Host: evacorets-z400
Content-Length: 250
Connection: Keep-Alive
Pragma: no-cache
Cookie: WSS_FullScreenMode=false; WSS_KeepSessionAuthenticated={fd97fc8e-c3f8-4b4b-8e65-ad8b72dd354f}; MSOWebPartPage_AnonymousAccessCookie={fd97fc8e-c3f8-4b4b-8e65-ad8b72dd354f}
Authorization: NTLM
TlRMTVNTUAADAAAAGAAYAI4AAACsAawBpgAAABgAGABYAAAAADAAMAHAAAAASABIAfAAAAAABSAGaAABYKIogYBsR0AA
AAP5lwRzp4YbtFFkSj3B26RWU4ATwBSAFQASABBAE0ARQBSAEkaQwBBAAEFABMAE8ATQBNAEUALQBaADQAMAaAAQAPgBuAG8AcgB0AGgAYQbt
AwAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAEtRme5OK3rUV+kZbcuTIBAQAAAAAGXeFbqHms0BAxy2QrDxvTUAAAA
AAgAYAE4ATwBSAFQASABBAE0ARQBSAEkaQwBBAAEFABMAE8ATQBNAEUALQBaADQAMAaAAQAPgBuAG8AcgB0AGgAYQbt
AGUAcgBpAGMAYQAUAGMabwByAHAALgBtAGkAYwByAG8AcwBvAGYAdAAuAGMabwBtAAMAVABsAG8AbQBtAGUALQB6ADQAM
AAwAC4AbgBvAHIAAbOAGEAbQB1AHIAaQBjAGEALgBjAG8AcgBwAC4AbQBpAGMAYQAUAGMabwByAHMAbWBMbAHQALgBjAG8AbQAFAC
QAYwBvAHIAAcAAuAG0AaQBjAHIAbWZAG8AZgB0AC4AYwBvAG0ABwIAGXeFbqHms0BBgAEAAIAAAAIADAAMAAAAAAAAA
BAAAAACAAAJHMVlK5CIZkRkGVbq+IHWv6H2g7ud3XAYSKPeQoWJdsCgAQAAAAAAAAAAAAAAAAAAAAAAAAAJAB4ASABUAFQs
UAAvAGwAbwBtAG0AZQAtAHOANAaWADAAAAAAAAAAAAAAAAAAAA
{
  'restCreationData': {
    '__metadata': {
      'type': 'SP.Social.SocialRestPostCreationData'
    },
    'ID': null,
    'creationData': {
      '__metadata': {
        'type': 'SP.Social.SocialPostCreationData'
      },
      'ContentText': 'ThisismyfirstMicrofeedpost',
      'UpdateStatusText': false
    }
  }
}
}}

```

4.10 Server Response to Making a New Root Post Using REST

The following is the response from the server for a REST message creating a new root post, after decompressing from the zip compressed message.

```

HTTP/1.1 200 OK
Cache-Control: private, max-age=0
Content-Type: application/json; charset=utf-8
Expires: Mon, 30 Apr 2012 13:50:45 GMT
Last-Modified: Tue, 15 May 2012 13:50:45 GMT
Vary: Accept-Encoding
Server: Microsoft-IIS/7.5
Set-Cookie: WSS_KeepSessionAuthenticated={fd97fc8e-c3f8-4b4b-8e65-ad8b72dd354f}; path=/
Set-Cookie: MSOWebPartPage_AnonymousAccessCookie={fd97fc8e-c3f8-4b4b-8e65-ad8b72dd354f};
expires=Tue, 15-May-2012 14:20:45 GMT; path=/
X-SharePointHealthScore: 0
X-AspNet-Version: 4.0.30319
X-RequestDigest:
0x0F3D7A760CE51C6FEF28B5E2909C265C5470B214F356430B43F9048507934F239160E4FA964D094B0363E07AC91
911DBE2476433F565922375864ABFA8C481FB,15 May 2012 13:50:45 -0000
X-FRAME-OPTIONS: SAMEORIGIN
SPRequestGuid: 0c2fa69b-061b-608f-f24b-45aa5e6013d8
request-id: 0c2fa69b-061b-608f-f24b-45aa5e6013d8
Persistent-Auth: true
X-Powered-By: ASP.NET
MicrosoftSharePointTeamServices: 15.0.0.4107

```

X-Content-Type-Options: nosniff
X-MS-InvokeApp: 1; RequireReadOnly
Date: Tue, 15 May 2012 13:50:45 GMT
Content-Length: 2717

```
{
  "d": {
    "__metadata": {
      "id": "2b20d950-f36d-4743-bcd9-a884b6f14d46",
      "uri":
"http://my.contoso.com/my/ api/social.feed/post(ID=@ai)/?@ai='1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461'",
      "type": "SP.Social.SocialRestThread"
    },
    "ID":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
    "SocialThread": {
      "__metadata": {
        "type": "SP.Social.SocialThread"
      },
      "Actors": {
        "results": [
          {
            "__metadata": {
              "type": "SP.Social.SocialActor"
            },
            "AccountName": "CONTOSO.COM\\evacorets",
            "ActorType": 0,
            "ContentUri": null,
            "EmailAddress": "evacorets@contoso.com",
            "FollowedContentUri": null,
            "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b",
            "ImageUri": null,
            "IsFollowed": false,
            "LibraryUri": null,
            "Name": "Eva Corets",
            "PersonalSiteUri": "http://my.contoso.com/my/personal/evacorets",
            "StatusText": "TestPost",
            "TagGuid": "00000000-0000-0000-0000-000000000000",
            "Title": "SENIOR SDE",
            "Status": 0,
            "CanFollow": false,
            "Uri":
"http://my.contoso.com:80/my/Person.aspx?accountname=CONTOSO>COM%evacorets"
          }
        ]
      },
      "Attributes": 6,
      "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
      "OwnerIndex": 0,
      "Permalink":
"http://my.contoso.com:80/my/ThreadView.aspx?ThreadID=1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
      "PostReference": null,
      "Replies": {
        "results": []
      },
      "RootPost": {
        "__metadata": {
```

```

        "type": "SP.Social.SocialPost"
      },
      "Attachment": null,
      "Attributes": 23,
      "AuthorIndex": 0,
      "CreatedTime": "2012-05-15T13:50:46.1071671Z",
      "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-
124525095-708259637-1543119021-565461",
      "LikerInfo": {
        "__metadata": {
          "type": "SP.Social.SocialPostActorInfo"
        },
        "IncludesCurrentUser": false,
        "Indexes": {
          "results": []
        },
        "TotalCount": 0
      },
      "ModifiedTime": "2012-05-15T13:50:46.1071671Z",
      "Overlays": {
        "results": []
      },
      "PostType": 0,
      "PreferredImageUri": null,
      "Source": {
        "__metadata": {
          "type": "SP.Social.SocialLink"
        },
        "Text": "web",
        "Uri": null
      },
      "Text": "This is my first Microfeed post"
    },
    "Status": 0,
    "ThreadType": 0,
    "TotalReplyCount": 0
  }
}
}
}

```

4.11 Posting a New Reply Using REST

The following sample REST message creates a new reply post.

```

POST http://my.contoso.com/my/_api/social.feed/post/Reply HTTP/1.1
{
  'restCreationData': {
    '__metadata': {
      'type': 'SP.Social.SocialRestPostCreationData'
    },
    'ID':
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-
124525095-708259637-1543119021-565461",
    'creationData': {
      '__metadata': {
        'type': 'SP.Social.SocialPostCreationData'
      },
      'ContentText': 'Thisismyfirstreply',
      'UpdateStatusText': false
    }
  }
}

```

4.12 Server Response to Posting a New Reply Using REST

The following is the response from the server for a REST message creating a new reply post, after decompressing from the zip compressed message.

```
{
  "d": {
    "metadata": {
      "id": "0193d96b-8af1-484c-bdd3-4c6c5adde8e7",
      "uri":
"http://my.contoso.com/my/ api/social.feed/post(ID=@ai)/?@ai='1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461'",
      "type": "SP.Social.SocialRestThread"
    },
    "ID":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
    "SocialThread": {
      "__metadata": {
        "type": "SP.Social.SocialThread"
      },
      "Actors": {
        "results": [
          {
            "__metadata": {
              "type": "SP.Social.SocialActor"
            },
            "AccountName": "CONTOSO.COM\\evacorets",
            "ActorType": 0,
            "ContentUri": null,
            "EmailAddress": "evacorets@contoso.com",
            "FollowedContentUri": null,
            "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b",
            "ImageUri": null,
            "IsFollowed": false,
            "LibraryUri": null,
            "Name": "Eva Corets",
            "PersonalSiteUri": "http://my.contoso.com/my/personal/evacorets",
            "StatusText": "TestPost",
            "TagGuid": "00000000-0000-0000-0000-000000000000",
            "Title": "SENIOR SDE",
            "Status": 0,
            "CanFollow": false,
            "Uri":
"http://my.contoso.com:80/my/Person.aspx?accountname=CONTOSO.COM%5Cevacorets"
          }
        ]
      },
      "Attributes": 6,
      "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
      "OwnerIndex": 0,
      "Permalink":
"http://my.contoso.com:80/my/ThreadView.aspx?ThreadID=1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
      "PostReference": null,
      "Replies": {
        "results": [
          {
            "__metadata": {
```

```

        "type": "SP.Social.SocialPost"
    },
    "Attachment": null,
    "Attributes": 23,
    "AuthorIndex": 0,
    "CreatedTime": "2012-05-15T13:54:54.9150454Z",
    "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.58651127efcd41d4b1c1dc137b2aada6.119.121.S-1-5-21-
124525095-708259637-1543119021-565461",
    "LikerInfo": {
        "__metadata": {
            "type": "SP.Social.SocialPostActorInfo"
        },
        "IncludesCurrentUser": false,
        "Indexes": {
            "results": []
        },
        "TotalCount": 0
    },
    "ModifiedTime": "2012-05-15T13:54:54.9150454Z",
    "Overlays": {
        "results": []
    },
    "PostType": 1,
    "PreferredImageUri": null,
    "Source": {
        "__metadata": {
            "type": "SP.Social.SocialLink"
        },
        "Text": "web",
        "Uri": null
    },
    "Text": "This is my first reply"
}
]
},
"RootPost": {
    "__metadata": {
        "type": "SP.Social.SocialPost"
    },
    "Attachment": null,
    "Attributes": 23,
    "AuthorIndex": 0,
    "CreatedTime": "2012-05-15T13:50:46Z",
    "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-
124525095-708259637-1543119021-565461",
    "LikerInfo": {
        "__metadata": {
            "type": "SP.Social.SocialPostActorInfo"
        },
        "IncludesCurrentUser": false,
        "Indexes": {
            "results": []
        },
        "TotalCount": 0
    },
    "ModifiedTime": "2012-05-15T13:54:55.2180757Z",
    "Overlays": {
        "results": []
    },
    "PostType": 0,
    "PreferredImageUri": null,
    "Source": {
        "__metadata": {
            "type": "SP.Social.SocialLink"
        },
    },

```



```

        "Text": "web",
        "Uri": null
    },
    "Text": "This is my first Microfeed post"
},
"Status": 0,
"ThreadType": 0,
"TotalReplyCount": 1
}
}
}
}
}

```

4.13 Getting a Thread Using REST

The following sample REST post requests a thread.

```

POST http://my.contoso.com/my/_api/social.feed/post HTTP/1.1
{
  'ID': '1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461'
}

```

4.14 Server Response to Getting a Thread Using REST

The following is the response from the server for a REST message requesting a thread, after decompressing from the zip compressed message.

```

{
  "d": {
    "__metadata": {
      "id": "84bcc697-7d9f-4b7e-95f5-fd51a8d53eca",
      "uri":
        "http://my.contoso.com/my/_api/social.feed/post(ID=@ai)/?@ai='1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461'",
      "type": "SP.Social.SocialRestThread"
    },
    "ID":
      "1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
    "SocialThread": {
      "metadata": {
        "type": "SP.Social.SocialThread"
      },
      "Actors": {
        "results": [
          {
            "metadata": {
              "type": "SP.Social.SocialActor"
            },
            "AccountName": "CONTOSO.COM\\evacorets",
            "ActorType": 0,
            "ContentUri": null,
            "EmailAddress": "evacorets@contoso.com",
            "FollowedContentUri": null,

```

```

        "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b",
        "ImageUri": null,
        "IsFollowed": false,
        "LibraryUri": null,
        "Name": "Eva Corets",
        "PersonalSiteUri": "http://my.contoso.com/my/personal/evacorets",
        "StatusText": "TestPost",
        "TagGuid": "00000000-0000-0000-0000-000000000000",
        "Title": "SENIOR SDE",
        "Status": 0,
        "CanFollow": false,
        "Uri":
"http://my.contoso.com:80/my/Person.aspx?accountname=CONTOSO.COM%5Cevacorets"
    }
    ]
},
"Attributes": 6,
"Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-
124525095-708259637-1543119021-565461",
"OwnerIndex": 0,
"Permalink":
"http://my.contoso.com:80/my/ThreadView.aspx?ThreadID=1.4975bef1e1bc42608c1dfae9f320c751.35c9
fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c000267d3e5e4.0c37852b34d0418e91c62ac25af4be5
b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-124525095-708259637-1543119021-565461",
"PostReference": null,
"Replies": {
    "results": [
        {
            "__metadata": {
                "type": "SP.Social.SocialPost"
            },
            "Attachment": null,
            "Attributes": 23,
            "AuthorIndex": 0,
            "CreatedTime": "2012-05-15T13:54:55Z",
            "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.58651127efcd41d4b1c1dc137b2aada6.119.121.S-1-5-21-
124525095-708259637-1543119021-565461",
            "LikerInfo": {
                "__metadata": {
                    "type": "SP.Social.SocialPostActorInfo"
                },
                "IncludesCurrentUser": false,
                "Indexes": {
                    "results": []
                },
                "TotalCount": 0
            },
            "ModifiedTime": "2012-05-15T13:54:55Z",
            "Overlays": {
                "results": []
            },
            "PostType": 1,
            "PreferredImageUri": null,
            "Source": {
                "__metadata": {
                    "type": "SP.Social.SocialLink"
                },
                "Text": "web",
                "Uri": null
            },
            "Text": "This is my first reply"
        }
    ]
}
]

```

```

    },
    "RootPost": {
      "_metadata": {
        "type": "SP.Social.SocialPost"
      },
      "Attachment": null,
      "Attributes": 23,
      "AuthorIndex": 0,
      "CreatedTime": "2012-05-15T13:50:46Z",
      "Id":
"1.4975bef1e1bc42608c1dfae9f320c751.35c9fd7b79904800aaa5f74684bf0f75.623664921f034e8d814c0002
67d3e5e4.0c37852b34d0418e91c62ac25af4be5b.230d3c5272fc499f88ac0b74b2f4512f.119.119.S-1-5-21-
124525095-708259637-1543119021-565461",
      "LikerInfo": {
        "_metadata": {
          "type": "SP.Social.SocialPostActorInfo"
        },
        "IncludesCurrentUser": false,
        "Indexes": {
          "results": []
        },
        "TotalCount": 0
      },
      "ModifiedTime": "2012-05-15T13:54:56Z",
      "Overlays": {
        "results": []
      },
      "PostType": 0,
      "PreferredImageUri": null,
      "Source": {
        "metadata": {
          "type": "SP.Social.SocialLink"
        },
        "Text": "web",
        "Uri": null
      },
      "Text": "This is my first Microfeed post"
    },
    "Status": 0,
    "ThreadType": 0,
    "TotalReplyCount": 1
  }
}
}
}

```

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include updates to those products.

- Microsoft SharePoint Server 2013
- Microsoft SharePoint Server 2016
- Microsoft SharePoint Server 2019
- Microsoft SharePoint Server Subscription Edition

Exceptions, if any, are noted in this section. If an update version, service pack or Knowledge Base (KB) number appears with a product name, the behavior changed in that update. The new behavior also applies to subsequent updates unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

[<1> Section 3.1.5.19.2.1.9](#): SharePoint Server 2013 returns the root post and at most two posts in the thread digest.

[<2> Section 3.1.5.19.2.1.11](#): SharePoint Server 2013 returns the root post and at most two posts in the thread digest.

[<3> Section 3.1.5.29.1.1.6](#): SharePoint Server 2013 allows you to create posts with a maximum of one element in the **SecurityUris** array.

[<4> Section 3.1.5.43.1.2](#): SharePoint Server 2013 includes the root post and at most two replies in a digest thread.

[<5> Section 3.1.5.65.1.1.7](#): SharePoint Server 2013 returns the value when this object was loaded. If the state has changed between the time the object was loaded and the time when the property value is accessed, the value represents the original state. The client can refresh the object to get a current value.

7 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as Major, Minor, or None.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements.
- A document revision that captures changes to protocol functionality.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **None** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the relevant technical content is identical to the last released version.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Description	Revision class
3.1.5.2 Microsoft.SharePoint.Client.ResourcePath	Added related sections for type "Microsoft.SharePoint.Client.ResourcePath".	Minor
3.1.5.2.1.1.1 DecodedUrl	Added glossary term for 'CSOM String'.	Minor
3.1.5.2.1.1.1 DecodedUrl	Added glossary term for 'CSOM String'.	Minor
3.1.5.59.2.1.6 WriteCache	Added specification for the parameter cacheItems.	Minor
3.1.5.64.1.6 PermissionsUPANotGranted	Changed 'UPA' to 'User Profile Application(UPA)'.	Minor
3.1.5.71 Microsoft.SharePoint.Client.WebParts.TileData	Added related sections for type "Microsoft.SharePoint.Client.WebParts.TileData".	Minor
3.1.5.71.1.1.1 BackgroundCollageImageLocations	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.1 BackgroundCollageImageLocations	Added glossary term for 'CSOM String' and 'CSOM array'.	Minor
3.1.5.71.1.1.2 BackgroundImageLocation	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.2 BackgroundImageLocation	Added glossary term for 'URL'.	Minor
3.1.5.71.1.1.2 BackgroundImageLocation	Added glossary term for 'URL'.	Minor
3.1.5.71.1.1.3 BackgroundImageRendersAsIcon	Added glossary term for 'CSOM Boolean'.	Minor
3.1.5.71.1.1.3 BackgroundImageRendersAsIcon	Added glossary term for 'CSOM Boolean'.	Minor
3.1.5.71.1.1.4 BodyText	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.4 BodyText	Added glossary term for 'CSOM String'.	Minor

Section	Description	Revision class
3.1.5.71.1.1.5 Description	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.6 HoverDisabled	Added glossary term for 'CSOM Boolean'.	Minor
3.1.5.71.1.1.6 HoverDisabled	Added glossary term for 'CSOM Boolean'.	Minor
3.1.5.71.1.1.7 ID	Added glossary term for 'CSOM Int32'.	Minor
3.1.5.71.1.1.7 ID	Added glossary term for 'CSOM Int32'.	Minor
3.1.5.71.1.1.8 IsWide	Added glossary term for 'CSOM Boolean'.	Minor
3.1.5.71.1.1.8 IsWide	Added glossary term for 'CSOM Boolean'.	Minor
3.1.5.71.1.1.9 LinkLocation	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.9 LinkLocation	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.10 TileOrder	Added glossary term for 'CSOM Int32'.	Minor
3.1.5.71.1.1.11 Title	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.12 TransparentOverlay	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.12 TransparentOverlay	Added glossary term for 'CSOM String'.	Minor
3.1.5.71.1.1.12 TransparentOverlay	Added glossary term for 'CSOM String'.	Minor
6 Appendix A: Product Behavior	Updated list of supported products.	Major

8 Index

A

Abstract data model
[server](#) 23
[Applicability](#) 21

C

[Capability negotiation](#) 21
[Change tracking](#) 150
[ChangeTypes](#) 84

D

Data model - abstract
[server](#) 23

E

Examples
[getting a thread using REST](#) 145
[liking a post](#) 137
[making a new root post](#) 129
[making a new root post using REST](#) 139
[overview](#) 129
[posting a new reply](#) 131
[posting a new reply using REST](#) 142
[Requesting a feed](#) 134
[response from server for new root post](#) 129
[server response for a new reply](#) 132
[server response for requesting a feed](#) 135
[server response to getting a thread using REST](#)
145
[server response to liking a post](#) 138
[server response to making a new root post using REST](#) 140
[server response to posting a new reply using REST](#)
143

F

[Fields - vendor-extensible](#) 21
[FollowedContent](#) 85
[FollowedContentExceptionCode](#) 88
[FollowedContentQueryOptions](#) 89
[FollowedItem](#) 90
[FollowedItemData](#) 93
[FollowedItemType](#) 94
[FollowedStatus](#) 95
[FollowResult](#) 95
[FollowResultType](#) 96

G

[Getting a thread using REST example](#) 145
[Glossary](#) 18

H

Higher-layer triggered events
[server](#) 23

I

[Implementer - security considerations](#) 148
[Index of security parameters](#) 148
[Informative references](#) 20
Initialization
[server](#) 23
[Introduction](#) 18

L

[Liking a post example](#) 137

M

[Making a new root post example](#) 129
[Making a new root post using REST example](#) 139
[Message processing - server](#) 23
Messages
[Namespaces](#) 22
[syntax](#) 22
[transport](#) 22

N

[Namespaces message](#) 22
[Normative references](#) 20

O

[ObjectTypes](#) 98
Other local events
[server](#) 128
[Overview \(synopsis\)](#) 21

P

[Parameters - security index](#) 148
[PeopleManager](#) 99
[PersonalSiteCapabilities](#) 110
[PersonProperties](#) 113
[Posting a new reply example](#) 131
[Posting a new reply using REST example](#) 142
[Preconditions](#) 21
[Prerequisites](#) 21
[Product behavior](#) 149
[ProfileLoader](#) 118

R

[References](#) 20
[informative](#) 20
[normative](#) 20
[Relationship to other protocols](#) 21
[Reputation](#) 23
[Requesting a feed example](#) 134
[Response from server for new root post example](#) 129

S

Security

[implementer considerations](#) 148
[parameter index](#) 148

[Sequencing rules - server](#) 23

Server

[abstract data model](#) 23
[higher-layer triggered events](#) 23
[initialization](#) 23
[other local events](#) 128
[timer events](#) 128
[timers](#) 23

[Server - message processing](#) 23

[Server - overview](#) 23

[Server - sequencing rules](#) 23

[Server response for a new reply example](#) 132

[Server response for requesting a feed example](#) 135

[Server response to getting a thread using REST example](#) 145

[Server response to liking a post example](#) 138

[Server response to making a new root post using REST example](#) 140

[Server response to posting a new reply using REST example](#) 143

[SocialActor](#) 25

[SocialActorInfo](#) 28

[SocialActorType](#) 29

[SocialActorTypes](#) 30

[SocialAttachment](#) 31

[SocialDataItem](#) 35

[SocialDataItemType](#) 36

[SocialDataOverlay](#) 37

[SocialDataOverlayType](#) 38

[SocialDataStoreExceptionCode](#) 119

[SocialFeed](#) 39

[SocialFeedAttributes](#) 41

[SocialFeedManager](#) 41

[SocialFeedOptions](#) 47

[SocialFeedSortOrder](#) 48

[SocialFeedType](#) 48

[SocialFollowingManager](#) 49

[SocialFollowResult](#) 51

[SocialLink](#) 52

[SocialPost](#) 53

[SocialPostActorInfo](#) 55

[SocialPostCreationData](#) 56

[SocialPostDefinitionData](#) 58

[SocialPostDefinitionDataItem](#) 59

[SocialPostDefinitionDataItemType](#) 60

[SocialPostReference](#) 61

[SocialPostType](#) 61

[SocialRestActor](#) 62

[SocialRestFeed](#) 66

[SocialRestFeedManager](#) 67

[SocialRestFollowingManager](#) 69

[SocialRestPostCreationData](#) 74

[SocialRestThread](#) 74

[SocialThread](#) 80

[SocialThreadAttributes](#) 82

[SocialThreadType](#) 83

[Standards assignments](#) 21

[Syntax](#) 22

T

Timer events

[server](#) 128

Timers

[server](#) 23

[Tracking changes](#) 150

[Transport](#) 22

Triggered events - higher-layer

[server](#) 23

U

[UserProfile](#) 120

[UserProfilePropertiesForUser](#) 125

V

[Vendor-extensible fields](#) 21

[Versioning](#) 21