

[MS-SPSETWS]: SharePoint Subscription Settings Web Service Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
07/13/2009	0.1	Major	Initial Availability
08/28/2009	0.2	Editorial	Revised and edited the technical content
11/06/2009	0.3	Editorial	Revised and edited the technical content
02/19/2010	1.0	Minor	Updated the technical content
03/31/2010	1.01	Editorial	Revised and edited the technical content
04/30/2010	1.02	Editorial	Revised and edited the technical content
06/07/2010	1.03	Editorial	Revised and edited the technical content
06/29/2010	1.04	Editorial	Changed language and formatting in the technical content.
07/23/2010	1.05	Minor	Clarified the meaning of the technical content.
09/27/2010	1.05	No change	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	1.05	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	1.05	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	1.05	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	1.05	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	2.0	Major	Significantly changed the technical content.
04/11/2012	2.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	2.0	No change	No changes to the meaning, language, or formatting of the technical content.
09/12/2012	2.0	No change	No changes to the meaning, language, or formatting of the technical content.
10/08/2012	2.0	No change	No changes to the meaning, language, or formatting of the technical content.
02/11/2013	2.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/30/2013	2.1	Minor	Clarified the meaning of the technical content.

Table of Contents

1 Introduction	10
1.1 Glossary	10
1.2 References	10
1.2.1 Normative References	11
1.2.2 Informative References	11
1.3 Protocol Overview (Synopsis)	11
1.4 Relationship to Other Protocols	12
1.5 Prerequisites/Preconditions	12
1.6 Applicability Statement	12
1.7 Versioning and Capability Negotiation	12
1.8 Vendor-Extensible Fields	13
1.9 Standards Assignments	13
2 Messages	14
2.1 Transport	14
2.2 Common Message Syntax	14
2.2.1 Namespaces	14
2.2.2 Messages	15
2.2.3 Elements	15
2.2.4 Complex Types	15
2.2.4.1 SPSubscriptionSettingsActionFault	15
2.2.4.2 SPSubscriptionSettingsPropertySet	15
2.2.4.3 SPSubscriptionSettingsPropertySetInfo	16
2.2.4.4 SPSubscriptionSettingsPropertySetResult	16
2.2.4.5 SPSubscriptionMetadata	17
2.2.4.6 Subscription Settings Property Set XML	17
2.2.4.6.1 nullEntry	18
2.2.4.6.2 stringEntry	18
2.2.4.6.3 intEntry	18
2.2.4.6.4 longEntry	19
2.2.4.6.5 booleanEntry	19
2.2.4.6.6 guidEntry	19
2.2.4.6.7 datetimeEntry	20
2.2.4.6.7.1 DateTime Bit Field	20
2.2.5 Simple Types	20
2.2.5.1 char	21
2.2.5.2 duration	21
2.2.5.3 guid	21
2.2.5.4 SPSubscriptionSettingsActionFaultType	22
2.2.6 Attributes	22
2.2.7 Groups	22
2.2.8 Attribute Groups	22
3 Protocol Details	23
3.1 Server Details	23
3.1.1 Abstract Data Model	23
3.1.2 Timers	23
3.1.3 Initialization	23
3.1.4 Message Processing Events and Sequencing Rules	23
3.1.4.1 DeleteMapping	24

3.1.4.1.1	Messages	25
3.1.4.1.1.1	ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage	25
3.1.4.1.1.2	ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage	26
3.1.4.1.2	Elements.....	26
3.1.4.1.2.1	DeleteMapping	26
3.1.4.1.2.2	DeleteMappingResponse	26
3.1.4.1.3	Complex Types	26
3.1.4.1.4	Simple Types.....	27
3.1.4.1.5	Attributes.....	27
3.1.4.1.6	Groups.....	27
3.1.4.1.7	Attribute Groups	27
3.1.4.2	DeletePropertySet	27
3.1.4.2.1	Messages	28
3.1.4.2.1.1	ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage	28
3.1.4.2.1.2	ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage	28
3.1.4.2.2	Elements.....	28
3.1.4.2.2.1	DeletePropertySet	29
3.1.4.2.2.2	DeletePropertySetResponse	29
3.1.4.2.3	Complex Types	29
3.1.4.2.4	Simple Types.....	29
3.1.4.2.5	Attributes.....	29
3.1.4.2.6	Groups.....	30
3.1.4.2.7	Attribute Groups	30
3.1.4.3	GetPropertySet.....	30
3.1.4.3.1	Messages	30
3.1.4.3.1.1	ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage	31
3.1.4.3.1.2	ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage	31
3.1.4.3.2	Elements.....	31
3.1.4.3.2.1	GetPropertySet	31
3.1.4.3.2.2	GetPropertySetResponse	32
3.1.4.3.3	Complex Types	32
3.1.4.3.4	Simple Types.....	32
3.1.4.3.5	Attributes.....	32
3.1.4.3.6	Groups.....	32
3.1.4.3.7	Attribute Groups	32
3.1.4.4	GetPropertySetIds	32
3.1.4.4.1	Messages	33
3.1.4.4.1.1	ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage	34

3.1.4.4.1.2	ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputM essage	34
3.1.4.4.2	Elements	34
3.1.4.4.2.1	GetPropertySetIds	34
3.1.4.4.2.2	GetPropertySetIdsResponse	34
3.1.4.4.3	Complex Types	35
3.1.4.4.3.1	ArrayOfguid	35
3.1.4.4.4	Simple Types	35
3.1.4.4.5	Attributes	35
3.1.4.4.6	Groups	35
3.1.4.4.7	Attribute Groups	35
3.1.4.5	GetSubscriptionPropertySet	35
3.1.4.5.1	Messages	36
3.1.4.5.1.1	ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet _InputMessage	37
3.1.4.5.1.2	ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet _OutputMessage	37
3.1.4.5.2	Elements	37
3.1.4.5.2.1	GetSubscriptionPropertySet	37
3.1.4.5.2.2	GetSubscriptionPropertySetResponse	38
3.1.4.5.3	Complex Types	38
3.1.4.5.4	Simple Types	38
3.1.4.5.5	Attributes	38
3.1.4.5.6	Groups	38
3.1.4.5.7	Attribute Groups	38
3.1.4.6	SetMapping	38
3.1.4.6.1	Messages	39
3.1.4.6.1.1	ISubscriptionSettingsServiceApplication_SetMapping_InputMessage	40
3.1.4.6.1.2	ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage	40
3.1.4.6.2	Elements	40
3.1.4.6.2.1	SetMapping	40
3.1.4.6.2.2	SetMappingResponse	41
3.1.4.6.3	Complex Types	41
3.1.4.6.4	Simple Types	41
3.1.4.6.5	Attributes	41
3.1.4.6.6	Groups	41
3.1.4.6.7	Attribute Groups	41
3.1.4.7	SetPropertySet	41
3.1.4.7.1	Messages	42
3.1.4.7.1.1	ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessa ge	43
3.1.4.7.1.2	ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMess age	43
3.1.4.7.2	Elements	43
3.1.4.7.2.1	SetPropertySet	43
3.1.4.7.2.2	SetPropertySetResponse	43
3.1.4.7.3	Complex Types	44
3.1.4.7.4	Simple Types	44

3.1.4.7.5	Attributes.....	44
3.1.4.7.6	Groups.....	44
3.1.4.7.7	Attribute Groups	44
3.1.4.8	SetSubscriptionPropertySet.....	44
3.1.4.8.1	Messages	45
3.1.4.8.1.1	ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet _InputMessage.....	46
3.1.4.8.1.2	ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet _OutputMessage.....	46
3.1.4.8.2	Elements.....	46
3.1.4.8.2.1	SetSubscriptionPropertySet	46
3.1.4.8.2.2	SetSubscriptionPropertySetResponse	47
3.1.4.8.3	Complex Types	47
3.1.4.8.4	Simple Types.....	47
3.1.4.8.5	Attributes.....	47
3.1.4.8.6	Groups.....	47
3.1.4.8.7	Attribute Groups	47
3.1.4.9	GetSubscriptionMetadata	47
3.1.4.9.1	Messages	48
3.1.4.9.1.1	ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_I nputMessage.....	49
3.1.4.9.1.2	ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_O utputMessage	49
3.1.4.9.2	Elements.....	49
3.1.4.9.2.1	GetSubscriptionMetadata.....	49
3.1.4.9.2.2	GetSubscriptionMetadataResponse	49
3.1.4.9.3	Complex Types	50
3.1.4.9.4	Simple Types.....	50
3.1.4.9.5	Attributes.....	50
3.1.4.9.6	Groups.....	50
3.1.4.9.7	Attribute Groups	50
3.1.4.10	DeleteSubscriptionMetadata	50
3.1.4.10.1	Messages	51
3.1.4.10.1.1	ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata _InputMessage.....	51
3.1.4.10.1.2	ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata _OutputMessage.....	51
3.1.4.10.2	Elements.....	52
3.1.4.10.2.1	DeleteSubscriptionMetadata	52
3.1.4.10.2.2	DeleteSubscriptionMetadataResponse.....	52
3.1.4.10.3	Complex Types	52
3.1.4.10.4	Simple Types.....	52
3.1.4.10.5	Attributes	52
3.1.4.10.6	Groups.....	53
3.1.4.10.7	Attribute Groups.....	53
3.1.4.11	PutSubscriptionMetadata	53
3.1.4.11.1	Messages	53

3.1.4.11.1.1	ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage	54
3.1.4.11.1.2	ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage	54
3.1.4.11.2	Elements	54
3.1.4.11.2.1	PutSubscriptionMetadata	54
3.1.4.11.2.2	PutSubscriptionMetadataResponse	55
3.1.4.11.3	Complex Types	55
3.1.4.11.4	Simple Types	55
3.1.4.11.5	Attributes	55
3.1.4.11.6	Groups	55
3.1.4.11.7	Attribute Groups	55
3.1.4.12	GetSubscriptionNextAppSiteDomainId	55
3.1.4.12.1	Messages	56
3.1.4.12.1.1	ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_InputMessage	56
3.1.4.12.1.2	ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_OutputMessage	56
3.1.4.12.2	Elements	56
3.1.4.12.2.1	GetSubscriptionNextAppSiteDomainId	57
3.1.4.12.2.2	GetSubscriptionNextAppSiteDomainIdResponse	57
3.1.4.12.3	Complex Types	57
3.1.4.12.4	Simple Types	57
3.1.4.12.5	Attributes	58
3.1.4.12.6	Groups	58
3.1.4.12.7	Attribute Groups	58
3.1.5	Timer Events	58
3.1.6	Other Local Events	58
4	Protocol Examples	59
4.1	Manage a Site Subscription Property Set	59
4.1.1	Create a New Property Set	59
4.1.2	Update a Property Set	61
4.1.3	Fetch a Property Set	62
4.1.4	Fetch Property Set Identifiers with Property Set Type	62
4.1.5	Create a Mapping Between a Property Set and a Site Subscription	63
4.1.6	Create a New Property Set and Mapping to a Site Subscription	63
4.1.7	Fetch a Site Subscription Property Set	64
4.1.8	Delete a Mapping Between a Property Set and a Site Subscription	65
4.1.9	Delete a Property Set	65
5	Security	67
5.1	Security Considerations for Implementers	67
5.2	Index of Security Parameters	67
6	Appendix A: Full WSDL	68
7	Appendix B: Full XML Schema	77
7.1	http://tempuri.org/ Schema	77
7.2	http://schemas.microsoft.com/2003/10/Serialization/ Schema	80

7.3 <http://schemas.datacontract.org/2004/07/Microsoft.SharePoint> Schema 81
7.4 <http://schemas.microsoft.com/2003/10/Serialization/Arrays> Schema 82
8 Appendix C: Product Behavior 84
9 Change Tracking..... 85
10 Index 88

1 Introduction

The SharePoint Subscription Settings Web Service Protocol enables configuration data sharing within a set of site collections. This protocol is typically used for hosting scenarios.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

- GUID**
- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- property set**
- SOAP**
- SOAP action**
- SOAP body**
- SOAP fault**
- XML namespace**

The following terms are defined in [\[MS-OFCGLOS\]](#):

- endpoint**
- root element**
- site collection**
- site subscription**
- site subscription identifier**
- Uniform Resource Identifier (URI)**
- version stamp**
- Web Services Description Language (WSDL)**
- WSDL message**
- WSDL operation**
- XML fragment**
- XML namespace prefix**
- XML schema**

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-SPSTWS] Microsoft Corporation, "[SharePoint Security Token Service Web Service Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Beech, D., Maloney, M., Eds., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[MS-SPTWS] Microsoft Corporation, "[Service Platform Topology Web Service Protocol](#)".

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>

1.3 Protocol Overview (Synopsis)

Site collections use shared configuration data in enterprise and hosting scenarios. This protocol enables delegation of certain configuration data for this group of site collections to additional administrators.

To facilitate these scenarios, this protocol can set, remove, and read **property sets** for a particular set of site collections.

1.4 Relationship to Other Protocols

This protocol uses the **SOAP** message protocol for formatting request and response messages, as described in [\[SOAP1.1\]](#), [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#). It transmits those messages by using **HTTP**, as described in [\[RFC2616\]](#), or **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#).

The following diagram shows the underlying messaging and transport stack used by the protocol:

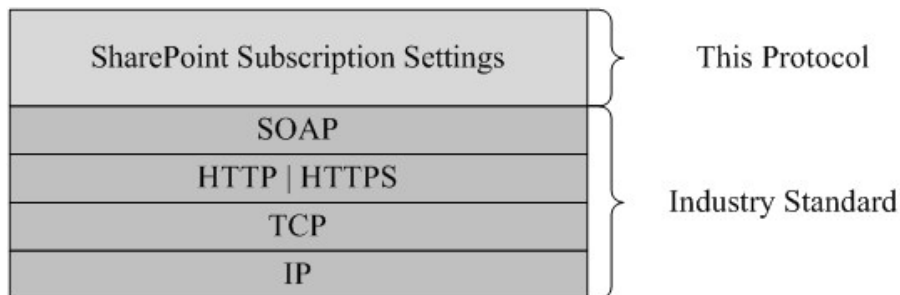


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

This protocol operates against a protocol server that exposes one or more **endpoint (4) URIs** that are known by protocol clients. The endpoint (4) URI of the protocol server and the transport that is used by the protocol server are either known by the protocol client or obtained by using the discovery mechanism that is described in [\[MS-SPTWS\]](#).

The protocol client obtains the requisite ApplicationClassId and ApplicationVersion values as described in [\[MS-SPTWS\]](#) section 3.1.4.1.3.3 and the endpoint (4) URI of the protocol server that provides the discovery mechanism, as described in [\[MS-SPSTWS\]](#), by means that are independent of either protocol.

This protocol requires the protocol client to have appropriate permission to call the methods on the protocol server.

The protocol client implements the token-based security mechanisms that are required by the protocol server and related security protocols, as described in [\[MS-SPSTWS\]](#).

1.6 Applicability Statement

None.

1.7 Versioning and Capability Negotiation

This specification covers versioning issues in the following areas:

- **Supported Transports:** This protocol can be implemented by using transports that support sending SOAP messages, as specified in section [2.1](#).
- **Protocol Versions:** This protocol is not versioned.

Capability Negotiation: This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

Protocol servers MUST support SOAP over HTTP or HTTPS.

All protocol messages MUST be transported by using HTTP bindings at the transport level.

Protocol messages MUST be formatted as specified in either [\[SOAP1.1\]](#) section 4 or [\[SOAP1.2/1\]](#) section 5. Protocol server faults MUST be returned by using either HTTP status codes, as specified in [\[RFC2616\]](#) section 10, or **SOAP faults**, as specified in [\[SOAP1.1\]](#) section 4.4 or [\[SOAP1.2/1\]](#) section 5.4.

If the HTTPS transport is used, a server certificate MUST be deployed.

This protocol MAY transmit an additional SOAP header, the **ServiceContext** header, as specified in [\[MS-SPSTWS\]](#).

This protocol does not define any means for activating a protocol server or protocol client. The protocol server MUST be configured and begin listening in an implementation-specific way. In addition, the protocol client MUST know the format and transport that is used by the protocol server, for example, the SOAP format over an HTTP transport.

2.2 Common Message Syntax

This section specifies messages that are used by several operations in this protocol. The syntax uses the XML Schema as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and the Web Services Description Language as specified in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
ser	http://schemas.microsoft.com/2003/10/Serialization/	
soap	http://schemas.xmlsoap.org/wsdl/soap/	[SOAP1.1]
tns	http://schemas.datacontract.org/2004/07/Microsoft.SharePoint	
tns1	http://schemas.microsoft.com/2003/10/Serialization/Arrays	
tns2	http://tempuri.org/	
tns3	http://tempuri.org/Imports	
wsaw	http://www.w3.org/2006/05/addressing/wsdl	
wsdl	http://schemas.xmlsoap.org/wsdl/	[WSDL]
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA1] [XMLSCHEMA2]

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

This specification does not define any common **XML schema** element definitions.

2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
SPSubscriptionMetadata	The SPSubscriptionMetadata identifies metadata about a subscription such as its name.
SPSubscriptionSettingsActionFault	The SPSubscriptionSettingsActionFault element specifies a SOAP fault.
SPSubscriptionSettingsPropertySet	The SPSubscriptionSettingsPropertySet element contains the set of information that specifies a property set.
SPSubscriptionSettingsPropertySetInfo	The SPSubscriptionSettingsPropertySetInfo element specifies the subset of metadata for a property set.
SPSubscriptionSettingsPropertySetResult	The SPSubscriptionSettingsPropertySetResult element specifies a subset of metadata for a property set.

2.2.4.1 SPSubscriptionSettingsActionFault

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.SharePoint

The **SPSubscriptionSettingsActionFault** element specifies a SOAP fault.

```
<xs:complexType name="SPSubscriptionSettingsActionFault"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_faultType"
      type="tns:SPSubscriptionSettingsActionFaultType"/>
    <xs:element minOccurs="0" name="m_message" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

m_faultType: This element contains the type of the SOAP fault. It MUST conform to the XML schema of the **SPSubscriptionSettingsActionFaultType** specified in section [2.2.5.4](#).

m_message: This element is a string that specifies the SOAP fault.

2.2.4.2 SPSubscriptionSettingsPropertySet

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.SharePoint

The **SPSubscriptionSettingsPropertySet** element contains the set of information that specifies a property set.

```
<xs:complexType name="SPSubscriptionSettingsPropertySet"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_PropertySetId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_TypeId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_Version" type="xs:long"/>
    <xs:element minOccurs="0" name="m_Xml" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

m_PropertySetId: This element contains the **GUID** of the property set.

m_TypeId: This element contains the GUID of the type of the property set.

m_Version: This element contains the **version stamp** of the property set.

m_Xml: This element contains the list of property names and values contained in the property set. It **MUST** conform to the Subscription Settings Property Set XML schema as specified in section [2.2.4.6](#).

2.2.4.3 SPSubscriptionSettingsPropertySetInfo

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.SharePoint

The **SPSubscriptionSettingsPropertySetInfo** element specifies the subset of metadata for a property set.

```
<xs:complexType name="SPSubscriptionSettingsPropertySetInfo"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_PropertySetId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_Version" type="xs:long"/>
  </xs:sequence>
</xs:complexType>
```

m_PropertySetId: This element contains the GUID of the property set.

m_Version: This element contains the version stamp of the property set.

2.2.4.4 SPSubscriptionSettingsPropertySetResult

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.SharePoint

The **SPSubscriptionSettingsPropertySetResult** element specifies a subset of metadata for a property set.

```
<xs:complexType name="SPSubscriptionSettingsPropertySetResult"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_Exists" type="xs:boolean"/>
    <xs:element minOccurs="0" name="m_PropertySetId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_Version" type="xs:long"/>
  </xs:sequence>
</xs:complexType>
```



```

    <xs:element minOccurs="0" name="m_Xml" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>

```

m_Exists: This element specifies whether the property set exists. If the value is **FALSE**, the remaining members in this structure **MUST** be ignored.

m_PropertySetId: This element contains the GUID of the property set.

m_Version: The version stamp of the property set.

m_Xml: This element contains the list of property names and values contained in the property set. It **MUST** conform to the Subscription Settings Property Set XML schema as specified in section [2.2.4.6](#).

2.2.4.5 SPSubscriptionMetadata

Namespace: <http://schemas.datacontract.org/2004/07/Microsoft.SharePoint>

The **SPSubscriptionMetadata** Identifies metadata about a subscription such as its name.

```

<xs:complexType name="SPSubscriptionMetadata" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="m_subscriptionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>

```

m_name: This element contains the **site subscription name** which is a series of characters uniquely identifying the implementation-specific **site subscription** for a **site collection**.

m_subscriptionId: This element contains the **site subscription identifier**.

2.2.4.6 Subscription Settings Property Set XML

A Unicode string which **MUST** conform to the following XML schema.

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema id="object" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="entries">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="entry" minOccurs="0" maxOccurs="unbounded" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

entries: The **root element** of the **XML fragment**.

entry: A name/value pair. The semantic meaning of the pair is defined by sub-protocols which implement this protocol.

Each **entry** element MUST conform to one of the XML schemas described in the following subsections.

2.2.4.6.1 nullEntry

An **entry** with no value.

```
<xs:complexType name="nullEntry">
  <xs:attribute name="name" type="xs:string" use="required" />
  <xs:attribute name="nil" type="xs:string" use="required" fixed="true" />
</xs:complexType>
```

name: The name of the **entry**.

nil: The attribute that indicates an entry with no value.

2.2.4.6.2 stringEntry

An **entry** that specifies a string value.

```
<xs:complexType name="stringEntry">
  <xs:simpleContent>
    <xs:extension base="xs:string" >
      <xs:attribute name="name" type="xs:string" use="required" />
      <xs:attribute name="type" type="xs:string" use="required" fixed="string" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

name: The name of the **entry**.

type: The type of the **entry**.

If the type identifier of a property set is "47EF919C-588D-4cfc-A552-762F746A5127", the value of this field MUST be a semi-colon delimited list of GUIDs or an empty string.

2.2.4.6.3 intEntry

An **entry** that specifies an integer value.

```
<xs:complexType name="intEntry">
  <xs:simpleContent>
    <xs:extension base="xs:int" >
      <xs:attribute name="name" type="xs:string" use="required" />
      <xs:attribute name="type" type="xs:string" use="required" fixed="int" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

name: The name of the **entry**.

type: The type of the **entry**.

2.2.4.6.4 longEntry

An **entry** that specifies a long value.

```
<xs:complexType name="longEntry">
  <xs:simpleContent>
    <xs:extension base="xs:long" >
      <xs:attribute name="name" type="xs:string" use="required" />
      <xs:attribute name="type" type="xs:string" use="required" fixed="long" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

name: The name of the **entry**.

type: The type of the **entry**.

2.2.4.6.5 booleanEntry

An **entry** that specifies a Boolean value.

```
<xs:complexType name="booleanEntry">
  <xs:simpleContent>
    <xs:extension base="xs:boolean" >
      <xs:attribute name="name" type="xs:string" use="required" />
      <xs:attribute name="type" type="xs:string" use="required" fixed="boolean" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

name: The name of the **entry**.

type: The type of the **entry**.

2.2.4.6.6 guidEntry

An **entry** that specifies a GUID value.

```
<xs:simpleType name="guid">
  <xs:restriction base="xs:string">
    <xs:pattern value="\{[0-9A-F]{8}-[0-9A-F]{4}-[0-9A-F]{4}-[0-9A-F]{4}-[0-9A-F]{12}\}" />
  </xs:restriction>
</xs:simpleType>

<xs:complexType name="guidEntry">
  <xs:simpleContent>
    <xs:extension base="guid" >
      <xs:attribute name="name" type="xs:string" use="required" />
      <xs:attribute name="type" type="xs:string" use="required" fixed="guid" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```

name: The name of the **entry**.

type: The type of the **entry**.

2.2.4.6.7 datetimeEntry

An **entry** that specifies a **DateTime** value.

```
<xs:complexType name="datetimeEntry">
  <xs:simpleContent>
    <xs:extension base="xs:long" >
      <xs:attribute name="name" type="xs:string" use="required" />
      <xs:attribute name="type" type="xs:string" use="required" fixed="sp-dateTime" />
    </xs:extension>
  </xs:simpleContent>
</xs:complexType>
```


name: The name of the **entry**.

type: The type of the **entry**.

The value of this field MUST conform to the **DateTime** bit field as specified in section [2.2.4.6.7.1](#).

2.2.4.6.7.1 DateTime Bit Field

The **DateTime** bit field is a 64-bit value that MUST conform to the following model.

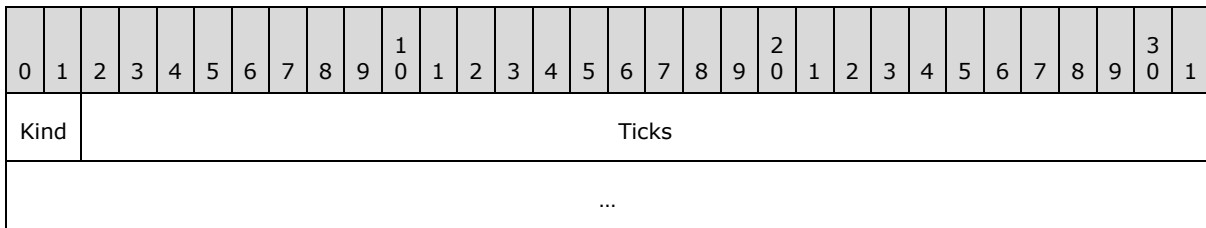

Kind (2 bits): The type of the **DateTime**. This value MUST be listed in the following table.

Value	Description
0x1	Coordinated Universal Time (UTC)
0x2	Local Time

Ticks (62 bits): The number of 100 nanosecond intervals that have elapsed between 12:00:00 midnight on January 1, 0001 and the date and time specified in Coordinated Universal Time (UTC).

2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
char	A simple type used to represent a Unicode character. This type MUST NOT be used by this protocol.

Simple type	Description
duration	The duration simple type specifies the time interval or duration of time measured as positive or negative number of days, hours, minutes, seconds and fractions of a second. This type MUST NOT be used by this protocol.
guid	The guid element specifies the unique identifier. <1>
SPSubscriptionSettingsActionFaultType	The SPSubscriptionSettingsActionFaultType element specifies the error condition that triggered the SOAP fault.

2.2.5.1 char

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/>

A simple type used to represent a Unicode character. This type MUST NOT be used by this protocol.

```
<xs:simpleType name="char" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:int"/>
</xs:simpleType>
```

2.2.5.2 duration

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/>

The **duration** simple type specifies the time interval or duration of time measured as positive or negative number of days, hours, minutes, seconds and fractions of a second. This type MUST NOT be used by this protocol.

```
<xs:simpleType name="duration" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:duration">
    <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?" />
    <xs:minInclusive value="-P10675199DT2H48M5.4775808S" />
    <xs:maxInclusive value="P10675199DT2H48M5.4775807S" />
  </xs:restriction>
</xs:simpleType>
```

2.2.5.3 guid

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/>

The **guid** element specifies the unique identifier. [<2>](#)

```
<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}" />
  </xs:restriction>
</xs:simpleType>
```

2.2.5.4 SPSubscriptionSettingsActionFaultType

Namespace: http://schemas.datacontract.org/2004/07/Microsoft.SharePoint

The **SPSubscriptionSettingsActionFaultType** element specifies the error condition that triggered the SOAP fault.

```
<xs:simpleType name="SPSubscriptionSettingsActionFaultType"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="ArgumentOutOfRangeException"/>
    <xs:enumeration value="ArgumentNullException"/>
    <xs:enumeration value="SPDatabaseException"/>
    <xs:enumeration value="SPDeletedConcurrencyException"/>
    <xs:enumeration value="SPUpdatedConcurrencyException"/>
    <xs:enumeration value="ArgumentException"/>
    <xs:enumeration value="SPException"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **SPSubscriptionSettingsActionFaultType** simple type.

Value	Meaning
ArgumentOutOfRangeException	An argument in the input WSDL message was not in the expected range of values.
ArgumentNullException	An argument in the input WSDL message was NULL.
SPDatabaseException	An unexpected database error occurred on the protocol server while processing the SOAP request.
SPDeletedConcurrencyException	The SOAP request attempted processing an object that was not found by the protocol server.
SPUpdatedConcurrencyException	The SOAP request attempted processing an object in the protocol server that was simultaneously updated by another request.
ArgumentException	An argument in the input WSDL message was invalid
SPException	An unexpected error occurred on the protocol server while processing the SOAP request.

2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

2.2.7 Groups

This specification does not define any common XML schema group definitions.

2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

3.1 Server Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

The protocol server maintains a list of property sets and their mappings to site subscription identifiers. The protocol server adds, changes, and deletes property set objects and their mappings from this list in response to messages from the protocol client.

There are three types of property sets: properties, administrative properties, and feature set. The properties type stores collections of settings, the administrative properties type stores values specifically for the system administrator(s), and the feature set type stores a list of identifiers that filter end user functionality. Each site subscription identifier can be associated with one of each property set type. The property set type is contained in the **m_TypeId** element.

Every property set is associated with exactly one identifier, type identifier, and version stamp. A property set is uniquely identified by the combination of its property set GUID and type identifier.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

Operation	Description
DeleteMapping	The DeleteMapping operation deletes the mapping of the site subscription identifier and the property set type identifier specified in the input message.
DeletePropertySet	The DeletePropertySet operation deletes the property set with the specified property set identifier and type identifier from the protocol server. It also deletes all associated mappings.
DeleteSubscriptionMetadata	The DeleteSubscriptionMetadata operation removes metadata associated with the subscription specified in the

Operation	Description
	input message.
GetPropertySet	The GetPropertySet operation returns the property set specified by the property set identifier and the type identifier in the input message.
GetPropertySetIds	The GetPropertySetId operation returns an array of property set identifiers of the property sets that contain the type identifier specified in the input message.
GetSubscriptionMetadata	The GetSubscriptionMetadata operation retrieves metadata associated with the subscription specified in the input message.
GetSubscriptionNextAppSiteDomainId	The GetSubscriptionNextAppSiteDomainId operation is deprecated from the protocol and MUST NOT be called.
GetSubscriptionPropertySet	The GetSubscriptionPropertySet operation returns the property set with the specified type identifier and maps to the site subscription identifier specified in the input message.
PutSubscriptionMetadata	The PutSubscriptionMetadata operation updates metadata associated with the subscription specified in the input message.
SetMapping	The SetMapping operation creates or updates the mapping of the property set type identifier and the site subscription identifier elements to the property set identifier specified in the input message.
SetPropertySet	The SetPropertySet operation creates a new property set or updates an existing property set.
SetSubscriptionPropertySet	The SetSubscriptionPropertySet operation creates a new property set and a new mapping between it and the site subscription identifier specified in the input message.

3.1.4.1 DeleteMapping

The **DeleteMapping** operation deletes the mapping of the site subscription identifier and the property set type identifier specified in the input message.

The following is the **WSDL** port type specification of the **DeleteMapping WSDL operation**.

```
<wsdl:operation name="DeleteMapping" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMapping"
    message="tns2:ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMappingResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMappingSPSubscri
    ptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
    message="tns2:ISubscriptionSettingsServiceApplication_DeleteMapping_SPSubscriptionSettingsAct
    ionFaultFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```


</wsdl:operation>

The protocol client sends an

ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage request WSDL message and the protocol server MUST respond with an **ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage** response WSDL message as follows:

1. If the specified site subscription identifier or type identifier are empty, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "ArgumentOutOfRangeException" as specified in section [2.2.5.4](#).
2. If the mapping between the specified site subscription identifier and type identifier exists, the protocol server MUST delete the mapping.
3. If the mapping between the specified site subscription identifier and the type identifier does not exist, the state of the protocol server MUST NOT change.
4. If the mapping exists and was not deleted, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "SPDatabaseException".

3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage	The request WSDL message for the DeleteMapping WSDL operation.
ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage	The response WSDL message for the DeleteMapping WSDL operation.

3.1.4.1.1.1

ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage

The request WSDL message for the **DeleteMapping** WSDL operation.

The **SOAP action** value is:

`http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMapping`

The **SOAP body** contains the **DeleteMapping** element.

3.1.4.1.1.2

ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage

The response WSDL message for the **DeleteMapping** WSDL operation.

The SOAP body contains the **DeleteMappingResponse** element.

3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeleteMapping	The input data for the DeleteMapping WSDL operation.
DeleteMappingResponse	The result data for the DeleteMapping WSDL operation.

3.1.4.1.2.1 DeleteMapping

The **DeleteMapping** element specifies the input data for the **DeleteMapping** WSDL operation.

```
<xs:element name="DeleteMapping" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="typeId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

subscriptionId: This element contains the site subscription identifier.

typeId: This element contains the property set type identifier.

3.1.4.1.2.2 DeleteMappingResponse

The **DeleteMappingResponse** element specifies the result data for the **DeleteMapping** WSDL operation.

```
<xs:element name="DeleteMappingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.1.3 Complex Types

None.

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 DeletePropertySet

The **DeletePropertySet** operation deletes the property set with the specified property set identifier and type identifier from the protocol server. It also deletes all associated mappings.

The following is the WSDL port type specification of the **DeletePropertySet** WSDL operation.

```
<wsdl:operation name="DeletePropertySet" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySet"
    message="tns2:ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySetResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySetSPSubscriptionSettingsActionFaultFault"
    name="SPSubscriptionSettingsActionFaultFault"
    message="tns2:ISubscriptionSettingsServiceApplication_DeletePropertySet_SPSubscriptionSettingsActionFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an

ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage request WSDL message and the protocol server MUST respond with an

ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage response WSDL message as follows:

1. If the specified property set identifier or type identifier are empty, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "ArgumentOutOfRangeException" as specified in section [2.2.5.4](#).
2. If a property set with the specified property set identifier and type identifier exists, and the specified version stamp does not match the version stamp of the stored property set, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "SPUpdatedConcurrencyException".

3. If a property set with the specified property set identifier and type identifier does not exist, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "SPDeletedConcurrencyException".
4. If the property set exists with the specified property set identifier, type identifier and version stamp, the protocol server MUST delete the property set. The protocol server MUST also delete all mappings associated with the property set.
5. If the property set or the associated mappings cannot be deleted, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "SPDatabaseException". The state of the protocol server MUST NOT change in this case.

3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage	The request WSDL message for the DeletePropertySet WSDL operation.
ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage	The response WSDL message for the DeletePropertySet WSDL operation.

3.1.4.2.1.1

ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage

The request WSDL message for the **DeletePropertySet** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySet
```

The SOAP body contains the **DeletePropertySet** element.

3.1.4.2.1.2

ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage

The response WSDL message for the **DeletePropertySet** WSDL operation.

The SOAP body contains the **DeletePropertySetResponse** element.

3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeletePropertySet	The input data for the DeletePropertySet WSDL operation.
DeletePropertySetResponse	The result data for the DeletePropertySet WSDL operation.

3.1.4.2.2.1 DeletePropertySet

The **DeletePropertySet** element specifies the input data for the **DeletePropertySet** WSDL operation.

```
<xs:element name="DeletePropertySet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="propertySetId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="typeId" type="ser:guid"/>
      <xs:element minOccurs="0" name="version" type="xs:long"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

propertySetId: This element contains the identifier of the property set.

typeId: This element contains the type identifier of the property set.

version: This element contains the version stamp of the property set.

3.1.4.2.2.2 DeletePropertySetResponse

The **DeletePropertySetResponse** element specifies the result data for the **DeletePropertySet** WSDL operation.

```
<xs:element name="DeletePropertySetResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.2.3 Complex Types

None.

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 GetPropertySet

The **GetPropertySet** operation returns the property set specified by the property set identifier and the type identifier in the input message.

The following is the WSDL port type specification of the **GetPropertySet** WSDL operation.

```
<wsdl:operation name="GetPropertySet" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySet"
    message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetSPSubsc
    riptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
    message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySet_SPSubscriptionSettingsAc
    tionFaultFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an

ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage request WSDL message and the protocol server MUST respond with an

ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage response WSDL message as follows:

1. If the property set identifier or the type identifier that are specified in the input message are empty, the protocol server MUST return an **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "ArgumentOutOfRangeException" as specified in section [2.2.5.4](#).
2. If the property set with the specified property set identifier and type identifier specified in the input message exists, the protocol server MUST return a response element of type **SPSubscriptionSettingsPropertySetResult** as specified in section [2.2.4.4](#). It contains information about the property set, and the **m_Exists** element is set to **TRUE**.
3. If the property set with the property set identifier and type identifier specified in the input message does not exist, the protocol server MUST return a response element of type **SPSubscriptionSettingsPropertySetResult** with the **m_Exists** element set to **FALSE**.

3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage	The request WSDL message for the GetPropertySet WSDL operation.
ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage	The response WSDL message for the GetPropertySet WSDL operation.

3.1.4.3.1.1

ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage

The request WSDL message for the **GetPropertySet** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySet
```

The SOAP body contains the **GetPropertySet** element.

3.1.4.3.1.2

ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage

The response WSDL message for the **GetPropertySet** WSDL operation.

The SOAP body contains the **GetPropertySetResponse** element.

3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetPropertySet	The input data for the GetPropertySet WSDL operation.
GetPropertySetResponse	The result data for the GetPropertySet WSDL operation.

3.1.4.3.2.1 **GetPropertySet**

The **GetPropertySet** element specifies the input data for the **GetPropertySet** WSDL operation.

```
<xs:element name="GetPropertySet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="propertySetId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="typeId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

propertySetId: This element contains the identifier of the property set.

typeId: This element contains the type identifier of the property set.

3.1.4.3.2.2 GetPropertySetResponse

The **GetPropertySetResponse** element specifies the result data for the **GetPropertySet** WSDL operation.

```
<xs:element name="GetPropertySetResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
        minOccurs="0" name="GetPropertySetResult" nillable="true"
        type="tns:SPSubscriptionSettingsPropertySetResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetPropertySetResult: This element contains information about the property set with the specified identifier and type identifier. This element MUST conform to the XML schema of the **SPSubscriptionSettingsPropertySetResult** element as specified in section [2.2.4.4](#).

3.1.4.3.3 Complex Types

None.

3.1.4.3.4 Simple Types

None.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 GetPropertySetIds

The **GetPropertySetId** operation returns an array of property set identifiers of the property sets that contain the type identifier specified in the input message.

The following is the WSDL port type specification of the **GetPropertySetIds** WSDL operation.

```
<wsdl:operation name="GetPropertySetIds" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```



```

    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIds"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIdsResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIdsSPSubscriptionSettingsActionFaultFault"
name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySetIds_SPSubscriptionSettingsActionFaultFault_Message"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage** request WSDL message and the protocol server MUST respond with an **ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputMessage** response WSDL message as follows:

1. If the property set type identifier specified in the input message is empty, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "ArgumentOutOfRangeException" as specified in section [2.2.5.4](#).
2. If an error occurs when retrieving property sets of the specified type identifier, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "SPDatabaseException" as specified in section [2.2.5.4](#).
3. If property sets of the specified type identifier exist, the protocol server MUST return an array of GUIDs of all such property sets as specified in section [3.1.4.4.3.1](#).
4. If a property set of the specified type identifier does not exist, the protocol server MUST return an empty array of GUIDs.

3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage	The request WSDL message for the GetPropertySetIds WSDL operation.
ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputMessage	The response WSDL message for the GetPropertySetIds WSDL operation.

3.1.4.4.1.1

ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage

The request WSDL message for the **GetPropertySetIds** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIds
```

The SOAP body contains the **GetPropertySetIds** element.

3.1.4.4.1.2

ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputMessage

The response WSDL message for the **GetPropertySetIds** WSDL operation.

The SOAP body contains the **GetPropertySetIdsResponse** element.

3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetPropertySetIds	The input data for the GetPropertySetIds WSDL operation.
GetPropertySetIdsResponse	The result data for the GetPropertySetIds WSDL operation.

3.1.4.4.2.1 GetPropertySetIds

The **GetPropertySetIds** element specifies the input data for the **GetPropertySetIds** WSDL operation.

```
<xs:element name="GetPropertySetIds" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="typeId" type="ser:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

typeId: This element contains the type identifier of the property sets.

3.1.4.4.2.2 GetPropertySetIdsResponse

The **GetPropertySetIdsResponse** element specifies the result data for the **GetPropertySetIds** WSDL operation.

```
<xs:element name="GetPropertySetIdsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>
```

```

    <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="GetPropertySetIdsResult" nillable="true" type="tns1:ArrayOfguid"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

GetPropertySetIdsResult: This element is an array of GUIDs of property sets with the type identifier specified in the input message. This element MUST conform to the XML schema of the **ArrayOfguid** element specified in section [3.1.4.4.3.1](#).

3.1.4.4.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfguid	An array of identifiers of property sets

3.1.4.4.3.1 ArrayOfguid

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

The **ArrayOfguid** element is an array of identifiers of property sets.

```

<xs:complexType name="ArrayOfguid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="guid" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>

```

guid: This element contains the identifier of a property set.

3.1.4.4.4 Simple Types

None.

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.4.5 GetSubscriptionPropertySet

The **GetSubscriptionPropertySet** operation returns the property set with the specified type identifier and maps to the site subscription identifier specified in the input message.

The following is the WSDL port type specification of the **GetSubscriptionPropertySet** WSDL operation.

```
<wsdl:operation name="GetSubscriptionPropertySet"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionPropertySet"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_InputMessage"
  xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionPropertySetResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_OutputMessage"
  xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionPropertySetSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_SPSubscriptionSettingsActionFaultFault_FaultMessage"
  xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_InputMessage** request WSDL message and the protocol server MUST respond with an **ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_OutputMessage** response WSDL message as follows:

1. If the property set type identifier or the site subscription identifier specified in the input message are null, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** set to the value "ArgumentOutOfRangeException" as specified in section [2.2.5.4](#).
2. If a property set with the type identifier specified in the input message exists, and the property set has a mapping to the specified site subscription identifier, the protocol server sets the **m_Exists** element set to **TRUE** and MUST return a response message of type **SPSubscriptionSettingsPropertySetResult** as specified in section [2.2.4.4](#). The response message contains information about the property set.
3. If a mapping for the specified type identifier and site subscription identifier specified in the input message does not exist, or if the property set associated with the mapping for the site subscription identifier and type identifier does not exist, the protocol server MUST return a response element of type **SPSubscriptionSettingsPropertySetResult** with the **m_Exists** element set to **FALSE**.

3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_InputMessage	The request WSDL message for the GetSubscriptionPropertySet WSDL operation.

Message	Description
ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_OutputMessage	The response WSDL message for the GetSubscriptionPropertySet WSDL operation.

3.1.4.5.1.1

ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_InputMessage

The request WSDL message for the **GetSubscriptionPropertySet** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionPropertySet
```

The SOAP body contains the **GetSubscriptionPropertySet** element.

3.1.4.5.1.2

ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_OutputMessage

The response WSDL message for the **GetSubscriptionPropertySet** WSDL operation.

The SOAP body contains the **GetSubscriptionPropertySetResponse** element.

3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetSubscriptionPropertySet	The input data for the GetSubscriptionPropertySet WSDL operation.
GetSubscriptionPropertySetResponse	The result data for the GetSubscriptionPropertySet WSDL operation.

3.1.4.5.2.1 GetSubscriptionPropertySet

The **GetSubscriptionPropertySet** element specifies the input data for the **GetSubscriptionPropertySet** WSDL operation.

```
<xs:element name="GetSubscriptionPropertySet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="typeId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

subscriptionId: The site subscription identifier.

typeId: The type identifier of the property set.

3.1.4.5.2.2 GetSubscriptionPropertySetResponse

The **GetSubscriptionPropertySetResponse** element specifies the result data for the **GetSubscriptionPropertySet** WSDL operation.

```
<xs:element name="GetSubscriptionPropertySetResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
        minOccurs="0" name="GetSubscriptionPropertySetResult" nillable="true"
        type="tns:SPSubscriptionSettingsPropertySetResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetSubscriptionPropertySetResult: This element contains information about the property set with the specified type identifier that has a mapping to the specified site subscription identifier. This element MUST conform to the XML schema of the **SPSubscriptionSettingsPropertySetResult** element specified in section [2.2.4.4](#).

3.1.4.5.3 Complex Types

None.

3.1.4.5.4 Simple Types

None.

3.1.4.5.5 Attributes

None.

3.1.4.5.6 Groups

None.

3.1.4.5.7 Attribute Groups

None.

3.1.4.6 SetMapping

The **SetMapping** operation creates or updates the mapping of the property set type identifier and the site subscription identifier elements to the property set identifier specified in the input message.

The following is the WSDL port type specification of the **SetMapping** WSDL operation.

```

<wsdl:operation name="SetMapping" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMapping"
    message="tns2:ISubscriptionSettingsServiceApplication_SetMapping_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMappingResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMappingSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
    message="tns2:ISubscriptionSettingsServiceApplication_SetMapping_SPSubscriptionSettingsActionFaultFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **ISubscriptionSettingsServiceApplication_SetMapping_InputMessage** request WSDL message and the protocol server MUST respond with an **ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage** response WSDL message as follows:

1. If the property set identifier, the property set type identifier or the site subscription identifier in the input message are empty, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "ArgumentOutOfRangeException" as specified in section [2.2.5.4](#).
2. If the property set identifier and property set type identifier are not empty, the property set identifier MUST be a property set identifier returned from a call to **GetPropertySetIds**.
3. If the mapping between the site subscription identifier and the specified property set type identifier does not exist, the protocol server MUST create a new mapping of the property set type identifier and the site subscription identifier elements to the specified property set identifier.
4. If the mapping between the site subscription identifier and the specified property set type identifier does exist, the protocol server MUST update the existing mapping to the specified property set identifier specified in the input message.
5. The protocol server MUST return an **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDatabaseException" if the mapping was not created or updated.

3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_SetMapping_InputMessage	The request WSDL message for the SetMapping WSDL operation.
ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage	The response WSDL message for the

Message	Description
	SetMapping WSDL operation.

3.1.4.6.1.1 ISubscriptionSettingsServiceApplication_SetMapping_InputMessage

The request WSDL message for the **SetMapping** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMapping
```

The SOAP body contains the **SetMapping** element.

3.1.4.6.1.2 ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage

The response WSDL message for the **SetMapping** WSDL operation.

The SOAP body contains the **SetMappingResponse** element.

3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetMapping	The input data for the SetMapping WSDL operation.
SetMappingResponse	The result data for the SetMapping WSDL operation.

3.1.4.6.2.1 SetMapping

The **SetMapping** element specifies the input data for the **SetMapping** WSDL operation.

```
<xs:element name="SetMapping" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="typeId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="propertySetId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

subscriptionId: This element contains the site subscription identifier.

typeId: This element contains the type identifier of the property set.

propertySetId: This element contains the property set identifier.

3.1.4.6.2 SetMappingResponse

The **SetMappingResponse** element specifies the result data for the **SetMapping** WSDL operation.

```
<xs:element name="SetMappingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.6.3 Complex Types

None.

3.1.4.6.4 Simple Types

None.

3.1.4.6.5 Attributes

None.

3.1.4.6.6 Groups

None.

3.1.4.6.7 Attribute Groups

None.

3.1.4.7 SetPropertySet

The **SetPropertySet** operation creates a new property set or updates an existing property set.

The following is the WSDL port type specification of the **SetPropertySet** WSDL operation.

```
<wsdl:operation name="SetPropertySet" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySet"
    message="tns2:ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySetResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySetSPSubsc
    riptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
    message="tns2:ISubscriptionSettingsServiceApplication_SetPropertySet_SPSubscriptionSettingsAc
    tionFaultFault_FaultMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessage** request WSDL message and the protocol server MUST respond with an

ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMessage response WSDL message, as follows:

1. If the property set in the input message is **NULL**, the protocol server **MUST** return a **SPSubscriptionSettingsActionFault** SOAP fault that contains a **SPSubscriptionSettingsActionFaultType** element set to the value "ArgumentNullException" as specified in section [2.2.5.4](#).
2. If the property set identifier in the input message is empty, the protocol server **MUST** create a new property set and assign a new GUID to the property set.
3. If a property set with the property set identifier specified in the input message does not exist, and the version stamp specified in the input message is not null, the protocol server **MUST** return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDeletedConcurrencyException" as specified in section [2.2.5.4](#).
4. If a property set with the identifier specified in the input message exists, and the version stamp in the input message does not match the version stamp of the property set, the protocol server **MUST** return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPUpdatedConcurrencyException" as specified in section [2.2.5.4](#).
5. If a property set with the property set identifier specified in the input message exists, and the version stamp in the input message matches the version stamp of the property set, the protocol server **MUST** update the properties of the property set to match the ones in the input message. In addition, the protocol server **MUST** also increment the version stamp of the stored property set by one.
6. If the protocol server did not create or update the property set, it **MUST** return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDatabaseException" as specified in section [2.2.5.4](#).
7. If the protocol server successfully created or updated the property set, it **MUST** return an **SPSubscriptionSettingsPropertySetInfo** element that contains the property set identifier and version stamp elements of the property set as specified in section [2.2.4.3](#).

3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessage	The request WSDL message for the SetPropertySet WSDL operation.
ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMessage	The response WSDL message for the SetPropertySet WSDL operation.

3.1.4.7.1.1

ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessage

The request WSDL message for the **SetPropertySet** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySet
```

The SOAP body contains the **SetPropertySet** element.

3.1.4.7.1.2

ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMessage

The response WSDL message for the **SetPropertySet** WSDL operation.

The SOAP body contains the **SetPropertySetResponse** element.

3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetPropertySet	The input data for the SetPropertySet WSDL operation.
SetPropertySetResponse	The result data for the SetPropertySet WSDL operation.

3.1.4.7.2.1 SetPropertySet

The **SetPropertySet** element specifies the input data for the **SetPropertySet** WSDL operation.

```
<xs:element name="SetPropertySet" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"  
minOccurs="0" name="propertySet" nillable="true"  
type="tns:SPSubscriptionSettingsPropertySet"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

propertySet: This element contains the property set to be created or updated. It MUST conform to the XML schema of the **SPSubscriptionSettingsPropertySet** element as specified in section [2.2.4.2](#).

3.1.4.7.2.2 SetPropertySetResponse

The **SetPropertySetResponse** element specifies the result data for the **SetPropertySet** WSDL operation.

```
<xs:element name="SetPropertySetResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

<xs:complexType>
  <xs:sequence>
    <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
      minOccurs="0" name="SetPropertySetResult" nillable="true"
      type="tns:SPSubscriptionSettingsPropertySetInfo"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

SetPropertySetResult: This element contains information about the property set that was created or updated. It MUST conform to the XML schema of the **SPSubscriptionSettingsPropertySetInfo** element as specified in section [2.2.4.3](#).

3.1.4.7.3 Complex Types

None.

3.1.4.7.4 Simple Types

None.

3.1.4.7.5 Attributes

None.

3.1.4.7.6 Groups

None.

3.1.4.7.7 Attribute Groups

None.

3.1.4.8 SetSubscriptionPropertySet

The **SetSubscriptionPropertySet** operation creates a new property set and a new mapping between it and the site subscription identifier specified in the input message.

The following is the WSDL port type specification of the **SetSubscriptionPropertySet** WSDL operation.

```

<wsdl:operation name="SetSubscriptionPropertySet"
  xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionPropertySet"
    message="tns2:ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionPropertySetResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionPropertySetSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"

```

```

message="tns2:ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_SPSubscripti
onSettingsActionFaultFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsd1"/>
</wsdl:operation>

```

The protocol client sends an

ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_InputMessage

request WSDL message and the protocol server MUST respond with an

ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_OutputMessage

response WSDL message as follows:

1. If the property set in the input message is **NULL**, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "ArgumentNullException" as specified in section [2.2.5.4](#).
2. If the site subscription identifier in the input message is empty, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "ArgumentOutOfRangeException".
3. The protocol server MUST generate a new GUID for the property set and store the property set in the list of property sets.
4. If the mapping does not exist between the property set type identifier and the site subscription identifier, the protocol server MUST create a new mapping, and then associate it with the input property set.
5. The protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDatabaseException" for each of the following cases. The state of the protocol server MUST NOT change for any of these cases.
 1. The property set was not created.
 2. A mapping between the property set type identifier and the site subscription identifier already exists.
 3. The mapping was not created.
6. If the protocol server creates the specified property set, and also creates the mapping between it and the site subscription identifier, then the protocol server MUST return a **SPSubscriptionSettingsPropertySetInfo** element that contains the property set identifier and version stamp elements as specified in section [2.2.4.3](#).

3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_InputMessage	The request WSDL message for the SetSubscriptionPropertySet WSDL operation.

Message	Description
ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_OutputMessage	The response WSDL message for the SetSubscriptionPropertySet WSDL operation.

3.1.4.8.1.1

ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_InputMessage

The request WSDL message for the **SetSubscriptionPropertySet** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionPropertySet
```

The SOAP body contains the **SetSubscriptionPropertySet** element.

3.1.4.8.1.2

ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_OutputMessage

The response WSDL message for the **SetSubscriptionPropertySet** WSDL operation.

The SOAP body contains the **SetSubscriptionPropertySetResponse** element.

3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
SetSubscriptionPropertySet	The input data for the SetSubscriptionPropertySet WSDL operation.
SetSubscriptionPropertySetResponse	The result data for the SetSubscriptionPropertySet WSDL operation.

3.1.4.8.2.1 SetSubscriptionPropertySet

The **SetSubscriptionPropertySet** element specifies the input data for the **SetSubscriptionPropertySet** WSDL operation.

```
<xs:element name="SetSubscriptionPropertySet" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
        minOccurs="0" name="propertySet" nillable="true"
        type="tns:SPSubscriptionSettingsPropertySet"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

subscriptionId: This element contains the site subscription identifier.

propertySet: This element contains the property set to create. It MUST conform to the XML schema of **SPSubscriptionSettingsPropertySet** element as specified in section [2.2.4.2](#).

3.1.4.8.2.2 SetSubscriptionPropertySetResponse

The **SetSubscriptionPropertySetResponse** element specifies the result data for the **SetSubscriptionPropertySet** WSDL operation.

```
<xs:element name="SetSubscriptionPropertySetResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
        minOccurs="0" name="SetSubscriptionPropertySetResult" nillable="true"
        type="tns:SPSubscriptionSettingsPropertySetInfo"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

SetSubscriptionPropertySetResult: This element contains information about the property set that was created. It MUST conform to the XML schema of the **SPSubscriptionSettingsPropertySetInfo** element as specified in section [2.2.4.3](#).

3.1.4.8.3 Complex Types

None.

3.1.4.8.4 Simple Types

None.

3.1.4.8.5 Attributes

None.

3.1.4.8.6 Groups

None.

3.1.4.8.7 Attribute Groups

None.

3.1.4.9 GetSubscriptionMetadata

The **GetSubscriptionMetadata** operation retrieves metadata associated with the subscription specified in the input message.

The following is the WSDL port type specification of the **GetSubscriptionMetadata** WSDL operation.

```
<wsdl:operation name="GetSubscriptionMetadata" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetad
ata"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetada
taResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_OutputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetada
taSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_SPSubscriptionS
ettingsActionFaultFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_InputMessage** request WSDL message and the protocol server MUST respond with an **ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_OutputMessage** response WSDL message as follows:

1. If the site subscription identifier in the input message is empty, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "ArgumentOutOfRangeException".
2. If the site subscription identifier in the input message is invalid, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDatabaseException".
3. The protocol server MUST return a **SPSubscriptionMetadata** element that contains the metadata associated with the given site subscription identifier.

3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_Input Message	The request WSDL message for the GetSubscriptionMetadata WSDL operation.
ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_Outpu tMessage	The response WSDL message for the GetSubscriptionMetadata WSDL operation.

3.1.4.9.1.1

ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_InputMessage

The request WSDL message for the **GetSubscriptionMetadata** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetadata
```

The SOAP body contains the **GetSubscriptionMetadata** element.

3.1.4.9.1.2

ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_OutputMessage

The response WSDL message for the **GetSubscriptionMetadata** WSDL operation.

The SOAP body contains the **GetSubscriptionMetadataResponse** element.

3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetSubscriptionMetadata	The input data for the GetSubscriptionMetadata WSDL operation.
GetSubscriptionMetadataResponse	The result data for the GetSubscriptionMetadata WSDL operation.

3.1.4.9.2.1 GetSubscriptionMetadata

The **GetSubscriptionMetadata** element specifies the input data for the **GetSubscriptionMetadata** WSDL operation.

```
<xs:element name="GetSubscriptionMetadata" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="subscriptionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

subscriptionId: This element contains the site subscription identifier.

3.1.4.9.2.2 GetSubscriptionMetadataResponse

The **GetSubscriptionMetadataResponse** element specifies the result data for the **GetSubscriptionMetadata** WSDL operation.

```

<xs:element name="GetSubscriptionMetadataResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
minOccurs="0" name="GetSubscriptionMetadataResult" nillable="true"
type="tns:SPSubscriptionMetadata"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

GetSubscriptionMetadataResult: This element contains the metadata associated with the subscription.

3.1.4.9.3 Complex Types

None.

3.1.4.9.4 Simple Types

None.

3.1.4.9.5 Attributes

None.

3.1.4.9.6 Groups

None.

3.1.4.9.7 Attribute Groups

None.

3.1.4.10 DeleteSubscriptionMetadata

The **DeleteSubscriptionMetadata** operation removes metadata associated with the subscription specified in the input message.

The following is the WSDL port type specification of the **DeleteSubscriptionMetadata** WSDL operation.

```

<wsdl:operation name="DeleteSubscriptionMetadata"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMet
adata"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_InputMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMet
adataResponse"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_OutputMessag
e" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMet

```

```

adataSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_SPSubscrip
tionSettingsActionFaultFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_InputMessage** request WSDL message and the protocol server MUST respond with an **ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_OutputMessage** response WSDL message as follows:

1. If the site subscription identifier in the input message is invalid, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDatabaseException".
2. The protocol server MUST return a null result.

3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_InputMessage	The request WSDL message for the DeleteSubscriptionMetadata WSDL operation.
ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_OutputMessage	The response WSDL message for the DeleteSubscriptionMetadata WSDL operation.

3.1.4.10.1.1

ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_InputMessage

The request WSDL message for the **DeleteSubscriptionMetadata** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMetadata
```

The SOAP body contains the **DeleteSubscriptionMetadata** element.

3.1.4.10.1.2

ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_OutputMessage

The response WSDL message for the **DeleteSubscriptionMetadata** WSDL operation.

The SOAP body contains the **DeleteSubscriptionMetadataResponse** element.

3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
DeleteSubscriptionMetadata	The input data for the DeleteSubscriptionMetadata WSDL operation.
DeleteSubscriptionMetadataResponse	The result data for the DeleteSubscriptionMetadata WSDL operation.

3.1.4.10.2.1 DeleteSubscriptionMetadata

The **DeleteSubscriptionMetadata** element specifies the input data for the **DeleteSubscriptionMetadata** WSDL operation.

```
<xs:element name="DeleteSubscriptionMetadata" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="subscriptionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

subscriptionId: This element contains the site subscription identifier.

3.1.4.10.2.2 DeleteSubscriptionMetadataResponse

The **DeleteSubscriptionMetadataResponse** element specifies the result data for the **DeleteSubscriptionMetadata** WSDL operation.

```
<xs:element name="DeleteSubscriptionMetadataResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.10.3 Complex Types

None.

3.1.4.10.4 Simple Types

None.

3.1.4.10.5 Attributes

None.

3.1.4.10.6 Groups

None.

3.1.4.10.7 Attribute Groups

None.

3.1.4.11 PutSubscriptionMetadata

The **PutSubscriptionMetadata** operation updates metadata associated with the subscription specified in the input message.

The following is the WSDL port type specification of the **PutSubscriptionMetadata** WSDL operation.

```
<wsdl:operation name="PutSubscriptionMetadata" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadata"
    message="tns2:ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadataResponse"
    message="tns2:ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadataSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
    message="tns2:ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_SPSubscriptionSettingsActionFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an

ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage request WSDL message and the protocol server MUST respond with an

ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage response WSDL message as follows:

1. If the metadata in the input message is invalid, the protocol server MUST return a **SPSubscriptionSettingsActionFault** SOAP fault with the **SPSubscriptionSettingsActionFaultType** element set to the value "SPDatabaseException".
2. The protocol server MUST update the metadata associated with the subscription and return an empty result.

3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage	The request WSDL message for the

Message	Description
	PutSubscriptionMetadata WSDL operation.
ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage	The response WSDL message for the PutSubscriptionMetadata WSDL operation.

3.1.4.11.1.1

ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage

The request WSDL message for the **PutSubscriptionMetadata** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadata
```

The SOAP body contains the **PutSubscriptionMetadata** element.

3.1.4.11.1.2

ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage

The response WSDL message for the **PutSubscriptionMetadata** WSDL operation.

The SOAP body contains the **PutSubscriptionMetadataResponse** element.

3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
PutSubscriptionMetadata	The input data for the PutSubscriptionMetadata WSDL operation.
PutSubscriptionMetadataResponse	The result data for the PutSubscriptionMetadata WSDL operation.

3.1.4.11.2.1 PutSubscriptionMetadata

The **PutSubscriptionMetadata** element specifies the input data for the **PutSubscriptionMetadata** WSDL operation.

```
<xs:element name="PutSubscriptionMetadata" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
        minOccurs="0" name="metadata" nillable="true" type="tns:SPSubscriptionMetadata"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

metadata: This element contains the metadata associated with the subscription.

3.1.4.11.2 PutSubscriptionMetadataResponse

The **PutSubscriptionMetadataResponse** element specifies the result data for the **PutSubscriptionMetadata** WSDL operation.

```
<xs:element name="PutSubscriptionMetadataResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.11.3 Complex Types

None.

3.1.4.11.4 Simple Types

None.

3.1.4.11.5 Attributes

None.

3.1.4.11.6 Groups

None.

3.1.4.11.7 Attribute Groups

None.

3.1.4.12 GetSubscriptionNextAppSiteDomainId

The **GetSubscriptionNextAppSiteDomainId** operation is deprecated from the protocol and MUST NOT be called.

The following is the WSDL port type specification of the **GetSubscriptionNextAppSiteDomainId** WSDL operation.

```
<wsdl:operation name="GetSubscriptionNextAppSiteDomainId"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextAppSiteDomainId"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_InputMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextApp
```

```

pSiteDomainIdResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_Outp
utMessage" xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsd1"/>
  <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextAp
pSiteDomainIdSPSubscriptionSettingsActionFaultFault"
name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_SPSu
bscriptionSettingsActionFaultFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsd1"/>
</wsdl:operation>

```

3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_InputMessage	The request WSDL message for the GetSubscriptionNextAppSiteDomainId WSDL operation.
ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_OutputMessage	The response WSDL message for the GetSubscriptionNextAppSiteDomainId WSDL operation.

3.1.4.12.1.1

ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_InputMessage

The request WSDL message for the **GetSubscriptionNextAppSiteDomainId** WSDL operation.

The SOAP action value is:

```
http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextAppSiteDomainId
```

The SOAP body contains the **GetSubscriptionNextAppSiteDomainId** element.

3.1.4.12.1.2

ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_OutputMessage

The response WSDL message for the **GetSubscriptionNextAppSiteDomainId** WSDL operation.

The SOAP body contains the **GetSubscriptionNextAppSiteDomainIdResponse** element.

3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
GetSubscriptionNextAppSiteDomainId	The input data for the GetSubscriptionNextAppSiteDomainId WSDL operation.
GetSubscriptionNextAppSiteDomainIdResponse	The result data for the GetSubscriptionNextAppSiteDomainId WSDL operation.

3.1.4.12.2.1 GetSubscriptionNextAppSiteDomainId

The **GetSubscriptionNextAppSiteDomainId** element specifies the input data for the **GetSubscriptionNextAppSiteDomainId** WSDL operation.

```
<xs:element name="GetSubscriptionNextAppSiteDomainId"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element minOccurs="0" name="numberOfAppSiteDomainIds" type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

subscriptionId: Deprecated.

numberOfAppSiteDomainIds: Deprecated.

3.1.4.12.2.2 GetSubscriptionNextAppSiteDomainIdResponse

The **GetSubscriptionNextAppSiteDomainIdResponse** element specifies the result data for the **GetSubscriptionNextAppSiteDomainId** WSDL operation.

```
<xs:element name="GetSubscriptionNextAppSiteDomainIdResponse"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetSubscriptionNextAppSiteDomainIdResult"
nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GetSubscriptionNextAppSiteDomainIdResult: Deprecated.

3.1.4.12.3 Complex Types

None.

3.1.4.12.4 Simple Types

None.

3.1.4.12.5 Attributes

None.

3.1.4.12.6 Groups

None.

3.1.4.12.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

The following examples show how to work with property sets for this protocol

4.1 Manage a Site Subscription Property Set

These examples describe the sequence of requests and responses between the protocol client and protocol server during operations that manage the property set of a **site subscription**.

4.1.1 Create a New Property Set

The following examples create a property set for each property set type: Properties, Admin Properties and Feature Set.

To create a new property set that is described by the type identifier that contains the value "d5c46399-6d04-4489-82cd-aa36b8accefb" for property sets of type "Properties", the protocol client constructs the following WSDL message.

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySet xmlns="http://tempuri.org/">
      <propertySet xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>00000000-0000-0000-0000-000000000000</m_PropertySetId>
        <m_TypeId>d5c46399-6d04-4489-82cd-aa36b8accefb</m_TypeId>
        <m_Version>0</m_Version>
        <m_Xml>
          <entries>
            <entry name="SamplePropertySet1" type="int">123</entry>
          </entries>
        </m_Xml>
      </propertySet>
    </SetPropertySet>
  </s:Body>
</s:Envelope>
```

On successful creation of the new property set for properties type "Properties", the protocol server returns the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySetResponse xmlns="http://tempuri.org/">
      <SetPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>a0c31f4a-5f92-4e6a-b954-42c5e22415d4</m_PropertySetId>
        <m_Version>1</m_Version>
      </SetPropertySetResult>
    </SetPropertySetResponse>
  </s:Body>
</s:Envelope>
```

To create a new property set that contains administrative properties, the type identifier that contains the value "83e6c4cb-8e96-4882-af00-421f586517f2" is used. The protocol client constructs the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySet xmlns="http://tempuri.org/">
      <propertySet xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>00000000-0000-0000-0000-000000000000</m_PropertySetId>
        <m_TypeId>83e6c4cb-8e96-4882-af00-421f586517f2</m_TypeId>
        <m_Version>0</m_Version>
        <m_Xml>
          <entries>
            <entry name="SampleAdminPropertySet1" type="int">456</entry>
          </entries>
        </m_Xml>
      </propertySet>
    </SetPropertySet>
  </s:Body>
</s:Envelope>

```

On successful creation of the new property set for administrative properties, the protocol server returns the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySetResponse xmlns="http://tempuri.org/">
      <SetPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>ba353017-18c4-4122-a613-f1bb3d55d34c</m_PropertySetId>
        <m_Version>1</m_Version>
      </SetPropertySetResult>
    </SetPropertySetResponse>
  </s:Body>
</s:Envelope>

```

To create a new property set that contains feature set properties, and the type identifier "47ef919c-588d-4cfc-a552-762f746a5127", the protocol client constructs the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySet xmlns="http://tempuri.org/">
      <propertySet xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>00000000-0000-0000-0000-000000000000</m_PropertySetId>
        <m_TypeId>47ef919c-588d-4cfc-a552-762f746a5127</m_TypeId>
        <m_Version>0</m_Version>
        <m_Xml>
          <entries>
            <entry name="FeatureIds" type="string" />
          </entries>
        </m_Xml>
      </propertySet>
    </SetPropertySet>
  </s:Body>
</s:Envelope>

```

On successful creation of the new property set of feature set properties, the protocol server returns the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySetResponse xmlns="http://tempuri.org/">
      <SetPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</m_PropertySetId>
        <m_Version>1</m_Version>
      </SetPropertySetResult>
    </SetPropertySetResponse>
  </s:Body>
</s:Envelope>
```

4.1.2 Update a Property Set

To update the property set retrieved with the GUID set to the value "ed7319ca-547b-4369-ad8f-dc5f5b3c1669" and is associated with feature set type identifier "47ef919c-588d-4cfc-a552-762f746a5127", the protocol client constructs the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySet xmlns="http://tempuri.org/">
      <propertySet xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</m_PropertySetId>
        <m_TypeId>47ef919c-588d-4cfc-a552-762f746a5127</m_TypeId>
        <m_Version>1</m_Version>
        <m_Xml>
          <entries>
            <entry name="FeatureIds" type="string">00bfea71-1c5e-4a24-b310-
ba51c3eb7a57;</entry>
          </entries>
        </m_Xml>
      </propertySet>
    </SetPropertySet>
  </s:Body>
</s:Envelope>
```

On successful update of the property set that is associated with the GUID "ed7319ca-547b-4369-ad8f-dc5f5b3c1669" and contains feature set properties, the protocol server returns the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetPropertySetResponse xmlns="http://tempuri.org/">
      <SetPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint">
        <m_PropertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</m_PropertySetId>
        <m_Version>2</m_Version>
      </SetPropertySetResult>
    </SetPropertySetResponse>
  </s:Body>
</s:Envelope>
```

4.1.3 Fetch a Property Set

To retrieve the property set that contains the GUID set to the value "ed7319ca-547b-4369-ad8f-dc5f5b3c1669" and whose type identifier contains the value "47ef919c-588d-4cfc-a552-762f746a5127" for feature set properties, the protocol client constructs the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope" >
  <s:Body>
    <GetPropertySet xmlns="http://tempuri.org/">
      <propertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</propertySetId>
      <typeId>47ef919c-588d-4cfc-a552-762f746a5127</typeId>
    </GetPropertySet>
  </s:Body>
</s:Envelope>
```

If the property set that contains the specified GUID and the type identifier exists, the protocol server returns the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <GetPropertySetResponse xmlns="http://tempuri.org/">
      <GetPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint" >
        <m_Exists>true</m_Exists>
        <m_PropertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</m_PropertySetId>
        <m_Version>2</m_Version>
        <m_Xml>
          <entries>
            <entry name="FeatureIds" type="string">00bfea71-1c5e-4a24-b310-
ba51c3eb7a57;</entry>
          </entries>
        </m_Xml>
      </GetPropertySetResult>
    </GetPropertySetResponse>
  </s:Body>
</s:Envelope>
```

4.1.4 Fetch Property Set Identifiers with Property Set Type

To retrieve the array of **GUIDs** of the property sets that are associated with type identifier "d5c46399-6d04-4489-82cd-aa36b8acceb" for property sets of type "properties", the protocol client constructs the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <GetPropertySetIds xmlns="http://tempuri.org/">
      <typeId>d5c46399-6d04-4489-82cd-aa36b8acceb</typeId>
    </GetPropertySetIds>
  </s:Body>
</s:Envelope>
```

If one or more property set elements that contain the specified type identifier exist, the protocol server returns the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <GetPropertySetIdsResponse xmlns="http://tempuri.org/">
      <GetPropertySetIdsResult
xmlns="http://schemas.microsoft.com/2003/10/Serialization/Arrays" >
        <guid>a0c31f4a-5f92-4e6a-b954-42c5e22415d4</guid>
      </GetPropertySetIdsResult>
    </GetPropertySetIdsResponse>
  </s:Body>
</s:Envelope>

```

4.1.5 Create a Mapping Between a Property Set and a Site Subscription

To create the mapping between the property set and the site subscription, the protocol client constructs the WSDL message as shown in the following example. The property set contains a GUID set to the value "ed7319ca-547b-4369-ad8f-dc5f5b3c1669" and type identifier is set to the value "47ef919c-588d-4cfc-a552-762f746a5127" for feature set properties. The site subscription is associated with the GUID that is set to the value "4e5836a1-478d-4e8c-a965-e0a99ccf1e9c".

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetMapping xmlns="http://tempuri.org/">
      <subscriptionId>4e5836a1-478d-4e8c-a965-e0a99ccf1e9c</subscriptionId>
      <typeId>47ef919c-588d-4cfc-a552-762f746a5127</typeId>
      <propertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</propertySetId>
    </SetMapping>
  </s:Body>
</s:Envelope>

```

On successful creation of the mapping between the property set and the site subscription, the protocol server returns the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetMappingResponse xmlns="http://tempuri.org/"></SetMappingResponse>
  </s:Body>
</s:Envelope>

```

4.1.6 Create a New Property Set and Mapping to a Site Subscription

To create a new property set that contains a type identifier set to the value "d5c46399-6d04-4489-82cd-aa36b8accefb" for properties of type "Properties", and also create a new mapping between it and the site subscription that contains the GUID that is set to the value "0e6b9180-6e6f-44d3-8573-4917ce77917e", the protocol client constructs the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetSubscriptionPropertySet xmlns="http://tempuri.org/">
      <subscriptionId>0e6b9180-6e6f-44d3-8573-4917ce77917e</subscriptionId>
      <propertySet xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint" >
        <m_PropertySetId>00000000-0000-0000-0000-000000000000</m_PropertySetId>
        <m_TypeId>d5c46399-6d04-4489-82cd-aa36b8accefb</m_TypeId>
        <m_Version>0</m_Version>
      </propertySet>
    </SetSubscriptionPropertySet>
  </s:Body>
</s:Envelope>

```

```

    <m_Xml>
      <entries>
        <entry name="SamplePropertySet2" type="int">789</entry>
      </entries>
    </m_Xml>
  </propertySet>
</SetSubscriptionPropertySet>
</s:Body>
</s:Envelope>

```

On successful creation of the property set of type "Properties" and a new mapping to the site subscription, the protocol server returns the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <SetSubscriptionPropertySetResponse xmlns="http://tempuri.org/">
      <SetSubscriptionPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint" >
        <m_PropertySetId>2ec06784-b04d-4ab1-b7c7-ee667e072dad</m_PropertySetId>
        <m_Version>1</m_Version>
      </SetSubscriptionPropertySetResult>
    </SetSubscriptionPropertySetResponse>
  </s:Body>
</s:Envelope>

```

4.1.7 Fetch a Site Subscription Property Set

To retrieve the property set that contains the type identifier that is set to the value "47ef919c-588d-4cfc-a552-762f746a5127" for feature set properties, and has a mapping to a site subscription that contains a GUID set to the value "4e5836a1-478d-4e8c-a965-e0a99ccf1e9c", the protocol client constructs the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <GetSubscriptionPropertySet xmlns="http://tempuri.org/">
      <subscriptionId>4e5836a1-478d-4e8c-a965-e0a99ccf1e9c</subscriptionId>
      <typeId>47ef919c-588d-4cfc-a552-762f746a5127</typeId>
    </GetSubscriptionPropertySet>
  </s:Body>
</s:Envelope>

```

If the property set that contains the specified type identifier exists and its mapping to the site subscription that contains the specified GUID exists, the protocol server returns the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <GetSubscriptionPropertySetResponse xmlns="http://tempuri.org/">
      <GetSubscriptionPropertySetResult
xmlns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint" >
        <m_Exists>true</m_Exists>
        <m_PropertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</m_PropertySetId>
        <m_Version>2</m_Version>
        <m_Xml>

```



```

        <entries>
          <entry name="FeatureIds" type="string">00bfea71-1c5e-4a24-b310-
ba51c3eb7a57;</entry>
        </entries>
      </m_Xml>
    </GetSubscriptionPropertySetResult>
  </GetSubscriptionPropertySetResponse>
</s:Body>
</s:Envelope>

```

4.1.8 Delete a Mapping Between a Property Set and a Site Subscription

To delete the mapping between the property set that contains a type identifier that is set to the value of "47ef919c-588d-4cfc-a552-762f746a5127" for feature set properties and the site subscription that contains a GUID that is set to the value of "4e5836a1-478d-4e8c-a965-e0a99ccf1e9c", the protocol client constructs the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <DeleteMapping xmlns="http://tempuri.org/">
      <subscriptionId>4e5836a1-478d-4e8c-a965-e0a99ccf1e9c</subscriptionId>
      <typeId>47ef919c-588d-4cfc-a552-762f746a5127</typeId>
    </DeleteMapping>
  </s:Body>
</s:Envelope>

```

If at least one property set that contains the specified type identifier exists, and the type identifier mapping to the site subscription that contains the specified GUID also exists, on successful delete the protocol server returns the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <DeleteMappingResponse xmlns="http://tempuri.org/"></DeleteMappingResponse>
  </s:Body>
</s:Envelope>

```

4.1.9 Delete a Property Set

To delete the property set that contains the GUID that is set to the value "ed7319ca-547b-4369-ad8f-dc5f5b3c1669" and also contains the type identifier that is set to the value "47ef919c-588d-4cfc-a552-762f746a5127" for feature set properties, and then delete all associated mappings, the protocol client constructs the following WSDL message:

```

<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <DeletePropertySet xmlns="http://tempuri.org/">
      <propertySetId>ed7319ca-547b-4369-ad8f-dc5f5b3c1669</propertySetId>
      <typeId>47ef919c-588d-4cfc-a552-762f746a5127</typeId>
      <version>2</version>
    </DeletePropertySet>
  </s:Body>
</s:Envelope>

```

If the property set exists that contains the specified GUID, type identifier, and version stamp, on successful delete the protocol server returns the following WSDL message:

```
<s:Envelope xmlns:s="http://www.w3.org/2003/05/soap-envelope">
  <s:Body>
    <DeletePropertySetResponse xmlns="http://tempuri.org/"></DeletePropertySetResponse>
  </s:Body>
</s:Envelope>
```

5 Security

5.1 Security Considerations for Implementers

There are no additional security considerations. Security assumptions for this protocol are documented in section [1.5](#).

5.2 Index of Security Parameters

None.

6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns2="http://tempuri.org/" xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl" targetNamespace="http://tempuri.org/"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xs:schema xmlns:tns3="http://tempuri.org/Imports"
targetNamespace="http://tempuri.org/Imports">
      <xs:import namespace="http://tempuri.org/" />
      <xs:import namespace="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint" />
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
    </xs:schema>
  </wsdl:types>
  <wsdl:message name="ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage">
    <wsdl:part name="parameters" element="tns2:GetPropertySet" />
  </wsdl:message>
  <wsdl:message name="ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage">
    <wsdl:part name="parameters" element="tns2:GetPropertySetResponse" />
  </wsdl:message>
  <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetPropertySet_SPSubscriptionSettingsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault" />
  </wsdl:message>
  <wsdl:message name="ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessage">
    <wsdl:part name="parameters" element="tns2:SetPropertySet" />
  </wsdl:message>
  <wsdl:message name="ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMessage">
    <wsdl:part name="parameters" element="tns2:SetPropertySetResponse" />
  </wsdl:message>
  <wsdl:message
name="ISubscriptionSettingsServiceApplication_SetPropertySet_SPSubscriptionSettingsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault" />
  </wsdl:message>
  <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage">
    <wsdl:part name="parameters" element="tns2:DeletePropertySet" />
  </wsdl:message>
  <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage">
    <wsdl:part name="parameters" element="tns2:DeletePropertySetResponse" />
  </wsdl:message>
  <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeletePropertySet_SPSubscriptionSettingsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault" />
  </wsdl:message>
  <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage">
    <wsdl:part name="parameters" element="tns2:GetPropertySetIds" />
  </wsdl:message>
</wsdl:definitions>
```

```

    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputMessage">
    <wsdl:part name="parameters" element="tns2:GetPropertySetIdsResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetPropertySetIds_SPSubscriptionSettingsActionF
aultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message name="ISubscriptionSettingsServiceApplication_SetMapping_InputMessage">
    <wsdl:part name="parameters" element="tns2:SetMapping"/>
    </wsdl:message>
    <wsdl:message name="ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage">
    <wsdl:part name="parameters" element="tns2:SetMappingResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_SetMapping_SPSubscriptionSettingsActionFaultFau
lt_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message name="ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage">
    <wsdl:part name="parameters" element="tns2>DeleteMapping"/>
    </wsdl:message>
    <wsdl:message name="ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage">
    <wsdl:part name="parameters" element="tns2>DeleteMappingResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeleteMapping_SPSubscriptionSettingsActionFault
Fault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_InputMessage">
    <wsdl:part name="parameters" element="tns2:GetSubscriptionPropertySet"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_OutputMessage">
    <wsdl:part name="parameters" element="tns2:GetSubscriptionPropertySetResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_SPSubscriptionSettin
gsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_InputMessage">
    <wsdl:part name="parameters" element="tns2:SetSubscriptionPropertySet"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_OutputMessage">
    <wsdl:part name="parameters" element="tns2:SetSubscriptionPropertySetResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_SPSubscriptionSettin
gsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>

```

```

    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_InputMessage">
    <wsdl:part name="parameters" element="tns2:GetSubscriptionMetadata"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_OutputMessage">
    <wsdl:part name="parameters" element="tns2:GetSubscriptionMetadataResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_SPSubscriptionSettingsA
ctionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage">
    <wsdl:part name="parameters" element="tns2:PutSubscriptionMetadata"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage">
    <wsdl:part name="parameters" element="tns2:PutSubscriptionMetadataResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_SPSubscriptionSettingsA
ctionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_InputMessage
">
    <wsdl:part name="parameters" element="tns2:GetSubscriptionNextAppSiteDomainId"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_OutputMessag
e">
    <wsdl:part name="parameters" element="tns2:GetSubscriptionNextAppSiteDomainIdResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_SPSubscripti
onSettingsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_InputMessage">
    <wsdl:part name="parameters" element="tns2>DeleteSubscriptionMetadata"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_OutputMessage">
    <wsdl:part name="parameters" element="tns2>DeleteSubscriptionMetadataResponse"/>
    </wsdl:message>
    <wsdl:message
name="ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_SPSubscriptionSettin
gsActionFaultFault_FaultMessage">
    <wsdl:part xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
name="detail" element="tns:SPSubscriptionSettingsActionFault"/>
    </wsdl:message>
    <wsdl:portType name="ISubscriptionSettingsServiceApplication">
    <wsdl:operation name="GetPropertySet">

```

```

    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySet"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySet_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySet_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetSPSubsc
riptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySet_SPSubscriptionSettingsAc
tionFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetPropertySet">
    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySet"
message="tns2:ISubscriptionSettingsServiceApplication_SetPropertySet_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySetResponse"
message="tns2:ISubscriptionSettingsServiceApplication_SetPropertySet_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySetSPSubsc
riptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_SetPropertySet_SPSubscriptionSettingsAc
tionFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="DeletePropertySet">
    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySet"
message="tns2:ISubscriptionSettingsServiceApplication_DeletePropertySet_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySetResp
onse"
message="tns2:ISubscriptionSettingsServiceApplication_DeletePropertySet_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySetSPSu
bscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_DeletePropertySet_SPSubscriptionSetting
sActionFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetPropertySetIds">
    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIds"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySetIds_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIdsResp
onse"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySetIds_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIdsSPSu
bscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetPropertySetIds_SPSubscriptionSetting
sActionFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SetMapping">
    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMapping"
message="tns2:ISubscriptionSettingsServiceApplication_SetMapping_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMappingResponse"
message="tns2:ISubscriptionSettingsServiceApplication_SetMapping_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMappingSPSubscrip
tionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"

```

```

message="tns2:ISubscriptionSettingsServiceApplication_SetMapping_SPSubscriptionSettingsAction
FaultFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="DeleteMapping">
    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMapping"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteMapping_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMappingResponse
" message="tns2:ISubscriptionSettingsServiceApplication_DeleteMapping_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMappingSPSubscr
ptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteMapping_SPSubscriptionSettingsAct
ionFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetSubscriptionPropertySet">
      <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionProper
tySet"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_InputMessage
"/>
      <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionProper
tySetResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_OutputMessag
e"/>
      <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionProper
tySetSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionPropertySet_SPSubscripti
onSettingsActionFaultFault_FaultMessage"/>
      </wsdl:operation>
      <wsdl:operation name="SetSubscriptionPropertySet">
        <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionProper
tySet"
message="tns2:ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_InputMessage
"/>
        <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionProper
tySetResponse"
message="tns2:ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_OutputMessag
e"/>
        <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionProper
tySetSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_SetSubscriptionPropertySet_SPSubscripti
onSettingsActionFaultFault_FaultMessage"/>
        </wsdl:operation>
        <wsdl:operation name="GetSubscriptionMetadata">
          <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetada
ta"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_InputMessage"/>
          <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetada
taResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_OutputMessage"/
>
          <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetada
taSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"

```



```

message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionMetadata_SPSubscriptionSettingsActionFaultFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="PutSubscriptionMetadata">
    <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadata"
message="tns2:ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_InputMessage"/>
    <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadataResponse"
message="tns2:ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_OutputMessage"/>
    <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadataSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_PutSubscriptionMetadata_SPSubscriptionSettingsActionFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetSubscriptionNextAppSiteDomainId">
      <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextAppSiteDomainId"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_InputMessage"/>
      <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextAppSiteDomainIdResponse"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_OutputMessage"/>
      <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextAppSiteDomainIdSPSubscriptionSettingsActionFaultFault"
name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_GetSubscriptionNextAppSiteDomainId_SPSubscriptionSettingsActionFaultFault_FaultMessage"/>
      </wsdl:operation>
      <wsdl:operation name="DeleteSubscriptionMetadata">
        <wsdl:input
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMetadata"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_InputMessage"/>
        <wsdl:output
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMetadataResponse"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_OutputMessage"/>
        <wsdl:fault
wsaw:Action="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMetadataSPSubscriptionSettingsActionFaultFault" name="SPSubscriptionSettingsActionFaultFault"
message="tns2:ISubscriptionSettingsServiceApplication_DeleteSubscriptionMetadata_SPSubscriptionSettingsActionFaultFault_FaultMessage"/>
        </wsdl:operation>
      </wsdl:portType>
      <wsdl:binding name="DefaultBinding_ISubscriptionSettingsServiceApplication"
type="tns2:ISubscriptionSettingsServiceApplication">
        <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
        <wsdl:operation name="GetPropertySet">
          <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySet"
style="document"/>
          <wsdl:input>

```

```

        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetPropertySet">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetPropertySet"
style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="DeletePropertySet">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeletePropertySet"
style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetPropertySetIds">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetPropertySetIds"
style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetMapping">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetMapping"
style="document"/>
    <wsdl:input>

```

```

        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="DeleteMapping">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteMapping"
style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetSubscriptionPropertySet">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionPropert
ySet" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="SetSubscriptionPropertySet">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/SetSubscriptionPropert
ySet" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace="/" />
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetSubscriptionMetadata">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionMetadat
a" style="document"/>
    <wsdl:input>

```

```

        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="PutSubscriptionMetadata">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/PutSubscriptionMetadat
a" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetSubscriptionNextAppSiteDomainId">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/GetSubscriptionNextApp
SiteDomainId" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="DeleteSubscriptionMetadata">
    <soap:operation
soapAction="http://tempuri.org/ISubscriptionSettingsServiceApplication/DeleteSubscriptionMeta
data" style="document"/>
    <wsdl:input>
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="SPSubscriptionSettingsActionFaultFault">
        <soap:fault use="literal" name="SPSubscriptionSettingsActionFaultFault"
namespace=""/>
    </wsdl:fault>
</wsdl:operation>
</wsdl:binding>
</wsdl:definitions>

```

7 Appendix B: Full XML Schema

Schema name	Prefix	Section
http://schemas.datacontract.org/2004/07/Microsoft.SharePoint	tns	7.1
http://schemas.microsoft.com/2003/10/Serialization/Arrays	tns1	7.2
http://schemas.microsoft.com/2003/10/Serialization/	ser	7.3
http://tempuri.org/	tns2	7.4

For ease of implementation, the following sections provide the full XML schema for this protocol.

7.1 http://tempuri.org/ Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified" targetNamespace="http://tempuri.org/"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import namespace="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint" />
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
  <xs:element name="GetPropertySet">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
          minOccurs="0" name="propertySetId" type="ser:guid" />
        <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
          minOccurs="0" name="typeId" type="ser:guid" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetPropertySetResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
          minOccurs="0" name="GetPropertySetResult" nillable="true"
          type="tns:SPSubscriptionSettingsPropertySetResult" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetPropertySet">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
          minOccurs="0" name="propertySet" nillable="true"
          type="tns:SPSubscriptionSettingsPropertySet" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="SetPropertySetResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
          minOccurs="0" name="SetPropertySetResult" nillable="true"
          type="tns:SPSubscriptionSettingsPropertySetInfo" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

```

</xs:element>
<xs:element name="DeletePropertySet">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="propertySetId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="typeId" type="ser:guid"/>
      <xs:element minOccurs="0" name="version" type="xs:long"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="DeletePropertySetResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="GetPropertySetIds">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="typeId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetPropertySetIdsResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="GetPropertySetIdsResult" nillable="true" type="tns1:ArrayOfguid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetMapping">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="typeId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="propertySetId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetMappingResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="DeleteMapping">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="typeId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

```

<xs:element name="DeleteMappingResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="GetSubscriptionPropertySet">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="typeId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetSubscriptionPropertySetResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
minOccurs="0" name="GetSubscriptionPropertySetResult" nillable="true"
type="tns:SPSubscriptionSettingsPropertySetResult"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetSubscriptionPropertySet">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
minOccurs="0" name="propertySet" nillable="true"
type="tns:SPSubscriptionSettingsPropertySet"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="SetSubscriptionPropertySetResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
minOccurs="0" name="SetSubscriptionPropertySetResult" nillable="true"
type="tns:SPSubscriptionSettingsPropertySetInfo"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetSubscriptionMetadata">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetSubscriptionMetadataResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
minOccurs="0" name="GetSubscriptionMetadataResult" nillable="true"
type="tns:SPSubscriptionMetadata"/>
    </xs:sequence>
  </xs:complexType>

```

```

</xs:element>
<xs:element name="PutSubscriptionMetadata">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
minOccurs="0" name="metadata" nillable="true" type="tns:SPSubscriptionMetadata"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="PutSubscriptionMetadataResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
<xs:element name="GetSubscriptionNextAppSiteDomainId">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
      <xs:element minOccurs="0" name="numberOfAppSiteDomainIds" type="xs:unsignedInt"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="GetSubscriptionNextAppSiteDomainIdResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GetSubscriptionNextAppSiteDomainIdResult"
nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="DeleteSubscriptionMetadata">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="subscriptionId" type="ser:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:element name="DeleteSubscriptionMetadataResponse">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
</xs:schema>

```

7.2 http://schemas.microsoft.com/2003/10/Serialization/ Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
attributeFormDefault="qualified" elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="anyType" nillable="true" type="xs:anyType"/>
  <xs:element name="anyURI" nillable="true" type="xs:anyURI"/>
  <xs:element name="base64Binary" nillable="true" type="xs:base64Binary"/>
  <xs:element name="boolean" nillable="true" type="xs:boolean"/>
  <xs:element name="byte" nillable="true" type="xs:byte"/>

```



```

<xs:element name="dateTime" nillable="true" type="xs:dateTime"/>
<xs:element name="decimal" nillable="true" type="xs:decimal"/>
<xs:element name="double" nillable="true" type="xs:double"/>
<xs:element name="float" nillable="true" type="xs:float"/>
<xs:element name="int" nillable="true" type="xs:int"/>
<xs:element name="long" nillable="true" type="xs:long"/>
<xs:element name="QName" nillable="true" type="xs:QName"/>
<xs:element name="short" nillable="true" type="xs:short"/>
<xs:element name="string" nillable="true" type="xs:string"/>
<xs:element name="unsignedByte" nillable="true" type="xs:unsignedByte"/>
<xs:element name="unsignedInt" nillable="true" type="xs:unsignedInt"/>
<xs:element name="unsignedLong" nillable="true" type="xs:unsignedLong"/>
<xs:element name="unsignedShort" nillable="true" type="xs:unsignedShort"/>
<xs:element name="char" nillable="true" type="ser:char"/>
<xs:simpleType name="char">
  <xs:restriction base="xs:int"/>
</xs:simpleType>
<xs:element name="duration" nillable="true" type="ser:duration"/>
<xs:simpleType name="duration">
  <xs:restriction base="xs:duration">
    <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?"/>
    <xs:minInclusive value="-P10675199DT2H48M5.4775808S"/>
    <xs:maxInclusive value="P10675199DT2H48M5.4775807S"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="guid" nillable="true" type="ser:guid"/>
<xs:simpleType name="guid">
  <xs:restriction base="xs:string">
    <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
  </xs:restriction>
</xs:simpleType>
<xs:attribute name="FactoryType" type="xs:QName"/>
<xs:attribute name="Id" type="xs:ID"/>
<xs:attribute name="Ref" type="xs:IDREF"/>
</xs:schema>

```

7.3 <http://schemas.datacontract.org/2004/07/Microsoft.SharePoint> Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
  xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.SharePoint"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">
  <xs:complexType name="SPSubscriptionSettingsPropertySetResult">
    <xs:sequence>
      <xs:element minOccurs="0" name="m_Exists" type="xs:boolean"/>
      <xs:element minOccurs="0" name="m_PropertySetId" type="ser:guid"/>
      <xs:element minOccurs="0" name="m_Version" type="xs:long"/>
      <xs:element minOccurs="0" name="m_Xml" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="SPSubscriptionSettingsPropertySetResult" nillable="true"
    type="tns:SPSubscriptionSettingsPropertySetResult"/>
  <xs:complexType name="SPSubscriptionSettingsActionFault">
    <xs:sequence>

```

```

    <xs:element minOccurs="0" name="m_faultType"
type="tns:SPSubscriptionSettingsActionFaultType"/>
    <xs:element minOccurs="0" name="m_message" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="SPSubscriptionSettingsActionFault" nillable="true"
type="tns:SPSubscriptionSettingsActionFault"/>
<xs:simpleType name="SPSubscriptionSettingsActionFaultType">
  <xs:restriction base="xs:string">
    <xs:enumeration value="ArgumentOutOfRangeException"/>
    <xs:enumeration value="ArgumentNullException"/>
    <xs:enumeration value="SPDatabaseException"/>
    <xs:enumeration value="SPDeletedConcurrencyException"/>
    <xs:enumeration value="SPUpdatedConcurrencyException"/>
    <xs:enumeration value="ArgumentException"/>
    <xs:enumeration value="SPException"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SPSubscriptionSettingsActionFaultType" nillable="true"
type="tns:SPSubscriptionSettingsActionFaultType"/>
<xs:complexType name="SPSubscriptionSettingsPropertySet">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_PropertySetId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_TypeId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_Version" type="xs:long"/>
    <xs:element minOccurs="0" name="m_Xml" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="SPSubscriptionSettingsPropertySet" nillable="true"
type="tns:SPSubscriptionSettingsPropertySet"/>
<xs:complexType name="SPSubscriptionSettingsPropertySetInfo">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_PropertySetId" type="ser:guid"/>
    <xs:element minOccurs="0" name="m_Version" type="xs:long"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="SPSubscriptionSettingsPropertySetInfo" nillable="true"
type="tns:SPSubscriptionSettingsPropertySetInfo"/>
<xs:complexType name="SPSubscriptionMetadata">
  <xs:sequence>
    <xs:element minOccurs="0" name="m_name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="m_subscriptionId" type="ser:guid"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="SPSubscriptionMetadata" nillable="true"
type="tns:SPSubscriptionMetadata"/>
</xs:schema>

```

7.4 <http://schemas.microsoft.com/2003/10/Serialization/Arrays> Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:ser="http://schemas.microsoft.com/2003/10/Serialization/"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:complexType name="ArrayOfguid">

```

```
<xs:sequence>
  <xs:element minOccurs="0" maxOccurs="unbounded" name="guid" type="ser:guid"/>
</xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfguid" nillable="true" type="tnsl:ArrayOfguid"/>
</xs:schema>
```

8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft SharePoint Foundation 2010
- Microsoft SharePoint Foundation 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.5:](#) This type is available only in SharePoint Foundation 2013.

[<2> Section 2.2.5.3:](#) This type is available only in SharePoint Foundation 2013.

9 Change Tracking

This section identifies changes that were made to the [MS-SPSETWS] protocol document between the February 2013 and July 2013 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
2.2.4.6.7 datetimeEntry	Updated the schema definition for datetimeEntry.	N	Content updated.
2.2.5.1 char	Added sentence "This type MUST NOT be used by this protocol" for "char".	N	Content updated.
2.2.5.2 duration	Added sentence "This type MUST NOT be used by this protocol" for "duration".	N	Content updated.
3.1.4.2 DeletePropertySet	Updated 'unique identifier' to 'property set identifier'.	N	Content updated.
3.1.4.2.1 DeletePropertySet	Updated description for propertySetId.	N	Content updated.
3.1.4.3 GetPropertySet	Updated 'unique' to 'property set'.	N	Content updated.
3.1.4.3.2.1 GetPropertySet	Updated description for propertySetId.	N	Content updated.
3.1.4.3.2.2 GetPropertySetResponse	Updated description for GetPropertySetResult.	N	Content updated.
3.1.4.4 GetPropertySetIds	Updated 'unique' to 'property set'.	N	Content updated.
3.1.4.4.3 Complex Types	Updated description for ArrayOfguid.	N	Content updated.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
3.1.4.4.3.1 ArrayOfguid	Updated description for ArrayOfguid.	N	Content updated.
3.1.4.4.3.1 ArrayOfguid	Updated description for guid.	N	Content updated.
3.1.4.7 SetPropertySet	Updated 'unique' to 'property set' .	N	Content updated.
3.1.4.10 DeleteSubscriptionMetadata	Updated the description of protocol server's behavior to correct grammatical mistakes.	N	Editorially updated.
3.1.4.12 GetSubscriptionNextAppSiteDomainId	Added description for GetSubscriptionNextAppSiteDomainId operation.	N	Content updated.
3.1.4.12.2.1 GetSubscriptionNextAppSiteDomainId	Added description for subscriptionId and numberOfAppSiteDomainIds elements.	N	Content updated.
3.1.4.12.2.2 GetSubscriptionNextAppSiteDomainIdResponse	Added description for GetSubscriptionNextAppSiteDomainIdResult element.	N	Content updated.

10 Index

A

Abstract data model
[server](#) 23
[Applicability](#) 12
[Attribute groups](#) 22
[Attributes](#) 22

C

[Capability negotiation](#) 12
[Change tracking](#) 85
[charsimple type](#) 21
Client
[overview](#) 23
[Complex types](#) 15
[SPSubscriptionMetadata](#) 17
[SPSubscriptionSettingsActionFault](#) 15
[SPSubscriptionSettingsPropertySet](#) 15
[SPSubscriptionSettingsPropertySetInfo](#) 16
[SPSubscriptionSettingsPropertySetResult](#) 16
[Subscription Settings Property Set XML](#) 17
[Create a mapping between a property set and a site subscription example](#) 63
[Create a new property set and mapping to a site subscription example](#) 63
[Create a new property set example](#) 59

D

Data model - abstract
[server](#) 23
[Delete a mapping between a property set and a site subscription example](#) 65
[Delete a property set example](#) 65
[durationsimple type](#) 21

E

Events
[local - server](#) 58
[timer - server](#) 58
Examples
[create a mapping between a property set and a site subscription](#) 63
[create a new property set](#) 59
[create a new property set and mapping to a site subscription](#) 63
[delete a mapping between a property set and a site subscription](#) 65
[delete a property set](#) 65
[fetch a property set](#) 62
[fetch a site subscription property set](#) 64
[fetch property set identifiers with property set type](#) 62
[manage a site subscription property set](#) 59
[overview](#) 59
[update a property set](#) 61

F

[Fetch a property set example](#) 62
[Fetch a site subscription property set example](#) 64
[Fetch property set identifiers with property set type example](#) 62
[Fields - vendor-extensible](#) 13
[Full WSDL](#) 68
[Full XML Schema](#) 77
[http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.Schema](#) 81
[http://schemas.microsoft.com/2003/10/Serialization/Schema](#) 80
[http://schemas.microsoft.com/2003/10/Serialization/Arrays.Schema](#) 82
[http://tempuri.org/Schema](#) 77

G

[Glossary](#) 10
[Groups](#) 22
[guidsimple type](#) 21

I

[Implementer - security considerations](#) 67
[Index of security parameters](#) 67
[Informative references](#) 11
Initialization
[server](#) 23
[Introduction](#) 10

L

Local events
[server](#) 58

M

[Manage a site subscription property set example](#) 59
Message processing
[server](#) 23
Messages
[attribute groups](#) 22
[attributes](#) 22
[charsimple type](#) 21
[complex types](#) 15
[durationsimple type](#) 21
[elements](#) 15
[enumerated](#) 15
[groups](#) 22
[guidsimple type](#) 21
[namespaces](#) 14
[simple types](#) 20
[SPSubscriptionMetadatacomplex type](#) 17
[SPSubscriptionSettingsActionFaultcomplex type](#) 15

[SPSubscriptionSettingsActionFaultTypesimple type](#) 22
[SPSubscriptionSettingsPropertySetcomplex type](#) 15
[SPSubscriptionSettingsPropertySetInfocomplex type](#) 16
[SPSubscriptionSettingsPropertySetResultcomplex type](#) 16
[Subscription Settings Property Set XMLcomplex type](#) 17
[syntax](#) 14
[transport](#) 14

N

[Namespaces](#) 14
[Normative references](#) 11

O

Operations

[DeleteMapping](#) 24
[DeletePropertySet](#) 27
[DeleteSubscriptionMetadata](#) 50
[GetPropertySet](#) 30
[GetPropertySetIds](#) 32
[GetSubscriptionMetadata](#) 47
[GetSubscriptionNextAppSiteDomainId](#) 55
[GetSubscriptionPropertySet](#) 35
[PutSubscriptionMetadata](#) 53
[SetMapping](#) 38
[SetPropertySet](#) 41
[SetSubscriptionPropertySet](#) 44
[Overview \(synopsis\)](#) 11

P

[Parameters - security index](#) 67
[Preconditions](#) 12
[Prerequisites](#) 12
[Product behavior](#) 84

R

[References](#) 10
[informative](#) 11
[normative](#) 11
[Relationship to other protocols](#) 12

S

Security

[implementer considerations](#) 67
[parameter index](#) 67

Sequencing rules

[server](#) 23

Server

[abstract data model](#) 23
[DeleteMapping operation](#) 24
[DeletePropertySet operation](#) 27
[DeleteSubscriptionMetadata operation](#) 50
[GetPropertySet operation](#) 30

[GetPropertySetIds operation](#) 32
[GetSubscriptionMetadata operation](#) 47
[GetSubscriptionNextAppSiteDomainId operation](#) 55
[GetSubscriptionPropertySet operation](#) 35
[initialization](#) 23
[local events](#) 58
[message processing](#) 23
[overview](#) 23
[PutSubscriptionMetadata operation](#) 53
[sequencing rules](#) 23
[SetMapping operation](#) 38
[SetPropertySet operation](#) 41
[SetSubscriptionPropertySet operation](#) 44
[timer events](#) 58
[timers](#) 23

Simple types

[char](#) 21
[duration](#) 21
[guid](#) 21

[SPSubscriptionSettingsActionFaultType](#) 22

SPSubscriptionMetadatacomplex type

[SPSubscriptionSettingsActionFaultcomplex type](#) 15
[SPSubscriptionSettingsActionFaultTypesimple type](#) 22

[SPSubscriptionSettingsPropertySetcomplex type](#) 15
[SPSubscriptionSettingsPropertySetInfocomplex type](#) 16

[SPSubscriptionSettingsPropertySetResultcomplex type](#) 16

[Standards assignments](#) 13

[Subscription Settings Property Set XMLcomplex type](#) 17

Syntax

[messages - overview](#) 14

T

Timer events

[server](#) 58

Timers

[server](#) 23

[Tracking changes](#) 85

[Transport](#) 14

Types

[complex](#) 15
[simple](#) 20

U

[Update a property set example](#) 61

V

[Vendor-extensible fields](#) 13

[Versioning](#) 12

W

[WSDL](#) 68

X

[XML Schema](#) 77

<http://schemas.datacontract.org/2004/07/Microsoft.SharePoint.Schema> 81

<http://schemas.microsoft.com/2003/10/Serialization/Schema> 80

<http://schemas.microsoft.com/2003/10/Serialization/Arrays.Schema> 82

<http://tempuri.org/Schema> 77