

[MS-SRCHCSOM]: Search Client Query Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

| Date | Revision History | Revision Class | Comments |
|------------|------------------|----------------|--|
| 01/20/2012 | 0.1 | New | Released new document. |
| 04/11/2012 | 0.1 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 07/16/2012 | 0.1 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 09/12/2012 | 0.1 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 10/08/2012 | 1.0 | Major | Significantly changed the technical content. |
| 02/11/2013 | 1.0 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 07/30/2013 | 2.0 | Major | Significantly changed the technical content. |
| 11/18/2013 | 2.0 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 02/10/2014 | 2.0 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 04/30/2014 | 2.0 | No change | No changes to the meaning, language, or formatting of the technical content. |
| 07/31/2014 | 2.1 | Minor | Clarified the meaning of the technical content. |
| 10/30/2014 | 2.1 | No change | No changes to the meaning, language, or formatting of the technical content. |

Table of Contents

| | |
|---|-----------|
| 1 Introduction | 13 |
| 1.1 Glossary | 13 |
| 1.2 References | 14 |
| 1.2.1 Normative References | 14 |
| 1.2.2 Informative References | 14 |
| 1.3 Overview | 14 |
| 1.4 Relationship to Other Protocols | 15 |
| 1.5 Prerequisites/Preconditions | 15 |
| 1.6 Applicability Statement | 15 |
| 1.7 Versioning and Capability Negotiation | 16 |
| 1.8 Vendor-Extensible Fields | 16 |
| 1.9 Standards Assignments | 16 |
| 2 Messages | 17 |
| 2.1 Transport | 17 |
| 2.2 Message Syntax | 17 |
| 2.2.1 Namespaces | 17 |
| 2.2.2 Common Exceptions | 17 |
| 3 Protocol Details | 18 |
| 3.1 Server Details | 18 |
| 3.1.1 Abstract Data Model | 18 |
| 3.1.2 Timers | 18 |
| 3.1.3 Initialization | 18 |
| 3.1.4 Higher-Layer Triggered Events | 18 |
| 3.1.5 Message Processing Events and Sequencing Rules | 18 |
| 3.1.5.1 Microsoft.Office.Server.Search.REST.CustomResult | 18 |
| 3.1.5.1.1 Properties | 18 |
| 3.1.5.1.1.1 Scalar Properties | 18 |
| 3.1.5.1.1.1.1 TableType | 18 |
| 3.1.5.1.1.1.2 Properties | 19 |
| 3.1.5.1.1.1.3 GroupTemplateId | 19 |
| 3.1.5.1.1.1.4 ItemTemplateId | 19 |
| 3.1.5.1.1.1.5 ResultTitle | 19 |
| 3.1.5.1.1.1.6 ResultTitleUrl | 19 |
| 3.1.5.1.1.1.7 Table | 19 |
| 3.1.5.1.1.2 ObjectPath Properties | 19 |
| 3.1.5.2 Microsoft.Office.Server.Search.REST.QueryResult | 20 |
| 3.1.5.2.1 Properties | 20 |
| 3.1.5.2.1.1 Scalar Properties | 20 |
| 3.1.5.2.1.1.1 CustomResults | 20 |
| 3.1.5.2.1.1.2 QueryId | 21 |
| 3.1.5.2.1.1.3 QueryRuleId | 21 |
| 3.1.5.2.1.1.4 RefinementResults | 21 |
| 3.1.5.2.1.1.5 RelevantResults | 21 |
| 3.1.5.2.1.1.6 SpecialTermResults | 21 |
| 3.1.5.2.1.2 ObjectPath Properties | 21 |
| 3.1.5.3 Microsoft.Office.Server.Search.REST.RefinementResults | 21 |
| 3.1.5.3.1 Properties | 22 |
| 3.1.5.3.1.1 Scalar Properties | 22 |

| | | |
|----------------|---|----|
| 3.1.5.3.1.1.1 | Refiners | 22 |
| 3.1.5.3.1.1.2 | Properties | 22 |
| 3.1.5.3.1.1.3 | GroupTemplateId | 22 |
| 3.1.5.3.1.1.4 | ItemTemplateId | 22 |
| 3.1.5.3.1.1.5 | ResultTitle | 22 |
| 3.1.5.3.1.1.6 | ResultTitleUrl | 22 |
| 3.1.5.3.1.2 | ObjectPath Properties..... | 22 |
| 3.1.5.4 | Microsoft.Office.Server.Search.REST.RelevantResults | 23 |
| 3.1.5.4.1 | Properties | 23 |
| 3.1.5.4.1.1 | Scalar Properties | 23 |
| 3.1.5.4.1.1.1 | RowCount | 23 |
| 3.1.5.4.1.1.2 | TotalRows | 23 |
| 3.1.5.4.1.1.3 | Properties | 23 |
| 3.1.5.4.1.1.4 | GroupTemplateId | 23 |
| 3.1.5.4.1.1.5 | ItemTemplateId | 23 |
| 3.1.5.4.1.1.6 | ResultTitle | 23 |
| 3.1.5.4.1.1.7 | ResultTitleUrl | 24 |
| 3.1.5.4.1.1.8 | Table | 24 |
| 3.1.5.4.1.1.9 | TotalRowsIncludingDuplicates | 24 |
| 3.1.5.4.1.2 | ObjectPath Properties..... | 24 |
| 3.1.5.5 | Microsoft.Office.Server.Search.REST.SearchRequest | 24 |
| 3.1.5.5.1 | Properties | 24 |
| 3.1.5.5.1.1 | Scalar Properties | 24 |
| 3.1.5.5.1.1.1 | Culture | 24 |
| 3.1.5.5.1.1.2 | EnableInterleaving | 25 |
| 3.1.5.5.1.1.3 | EnableNicknames | 25 |
| 3.1.5.5.1.1.4 | EnablePhonetic | 25 |
| 3.1.5.5.1.1.5 | EnableStemming | 25 |
| 3.1.5.5.1.1.6 | HiddenConstraints | 25 |
| 3.1.5.5.1.1.7 | Querytext | 25 |
| 3.1.5.5.1.1.8 | RankingModelId | 25 |
| 3.1.5.5.1.1.9 | RefinementFilters | 26 |
| 3.1.5.5.1.1.10 | Refiners | 26 |
| 3.1.5.5.1.1.11 | RowLimit | 26 |
| 3.1.5.5.1.1.12 | RowsPerPage | 26 |
| 3.1.5.5.1.1.13 | SelectProperties | 26 |
| 3.1.5.5.1.1.14 | SourceId | 26 |
| 3.1.5.5.1.1.15 | StartRow | 26 |
| 3.1.5.5.1.1.16 | Timeout | 27 |
| 3.1.5.5.1.1.17 | TrimDuplicates..... | 27 |
| 3.1.5.5.1.1.18 | EnableFQL | 27 |
| 3.1.5.5.1.1.19 | BypassResultTypes | 27 |
| 3.1.5.5.1.1.20 | ClientType | 27 |
| 3.1.5.5.1.1.21 | HitHighlightedProperties | 27 |
| 3.1.5.5.1.1.22 | ProcessBestBets | 27 |
| 3.1.5.5.1.1.23 | QueryTag | 28 |
| 3.1.5.5.1.1.24 | ResultsUrl..... | 28 |
| 3.1.5.5.1.1.25 | TrimDuplicatesIncludeId..... | 28 |
| 3.1.5.5.1.1.26 | BlockDedupeMode | 28 |
| 3.1.5.5.1.1.27 | CollapseSpecification | 28 |
| 3.1.5.5.1.1.28 | DesiredSnippetLength | 28 |
| 3.1.5.5.1.1.29 | EnableOrderingHitHighlightedProperty | 28 |
| 3.1.5.5.1.1.30 | EnableQueryRules | 29 |

| | | |
|----------------|---|----|
| 3.1.5.5.1.1.31 | EnableSorting | 29 |
| 3.1.5.5.1.1.32 | GenerateBlockRankLog | 29 |
| 3.1.5.5.1.1.33 | HitHighlightedMultivaluePropertyLimit | 29 |
| 3.1.5.5.1.1.34 | ImpressionId | 29 |
| 3.1.5.5.1.1.35 | MaxSnippetLength | 29 |
| 3.1.5.5.1.1.36 | PersonalizationData | 29 |
| 3.1.5.5.1.1.37 | ProcessPersonalFavorites | 30 |
| 3.1.5.5.1.1.38 | Properties | 30 |
| 3.1.5.5.1.1.39 | QueryTemplate | 30 |
| 3.1.5.5.1.1.40 | ReorderingRules | 30 |
| 3.1.5.5.1.1.41 | SortList | 30 |
| 3.1.5.5.1.1.42 | SummaryLength | 30 |
| 3.1.5.5.1.1.43 | TotalRowsExactMinimum | 30 |
| 3.1.5.5.1.1.44 | UILanguage | 31 |
| 3.1.5.5.1.1.45 | QueryTemplatePropertiesUrl | 31 |
| 3.1.5.5.1.2 | ObjectPath Properties | 31 |
| 3.1.5.6 | Microsoft.Office.Server.Search.REST.SearchResult | 31 |
| 3.1.5.6.1 | Properties | 31 |
| 3.1.5.6.1.1 | Scalar Properties | 31 |
| 3.1.5.6.1.1.1 | ElapsedTime | 31 |
| 3.1.5.6.1.1.2 | PrimaryQueryResult | 31 |
| 3.1.5.6.1.1.3 | SecondaryQueryResults | 32 |
| 3.1.5.6.1.1.4 | Properties | 32 |
| 3.1.5.6.1.1.5 | SpellingSuggestion | 32 |
| 3.1.5.6.1.1.6 | TriggeredRules | 32 |
| 3.1.5.6.1.2 | ObjectPath Properties | 32 |
| 3.1.5.7 | Microsoft.Office.Server.Search.REST.SearchService | 32 |
| 3.1.5.7.1 | Properties | 32 |
| 3.1.5.7.1.1 | Scalar Properties | 32 |
| 3.1.5.7.1.2 | ObjectPath Properties | 33 |
| 3.1.5.7.2 | Methods | 33 |
| 3.1.5.7.2.1 | Scalar Methods | 33 |
| 3.1.5.7.2.1.1 | postquery | 33 |
| 3.1.5.7.2.1.2 | query | 33 |
| 3.1.5.7.2.1.3 | suggest | 36 |
| 3.1.5.7.2.2 | ObjectPath Methods | 37 |
| 3.1.5.7.2.2.1 | CSOM Constructor | 37 |
| 3.1.5.8 | Microsoft.Office.Server.Search.REST.SpecialTermResult | 37 |
| 3.1.5.8.1 | Properties | 37 |
| 3.1.5.8.1.1 | Scalar Properties | 37 |
| 3.1.5.8.1.1.1 | Description | 37 |
| 3.1.5.8.1.1.2 | IsVisualBestBet | 38 |
| 3.1.5.8.1.1.3 | Title | 38 |
| 3.1.5.8.1.1.4 | Url | 38 |
| 3.1.5.8.1.1.5 | PiSearchResultId | 38 |
| 3.1.5.8.1.1.6 | RenderTemplateId | 38 |
| 3.1.5.8.1.2 | ObjectPath Properties | 38 |
| 3.1.5.9 | Microsoft.SharePoint.Client.Search.Query.KeywordQuery | 38 |
| 3.1.5.9.1 | Properties | 39 |
| 3.1.5.9.1.1 | Scalar Properties | 39 |
| 3.1.5.9.1.1.1 | BypassResultTypes | 39 |
| 3.1.5.9.1.1.2 | Culture | 39 |
| 3.1.5.9.1.1.3 | EnableInterleaving | 39 |

| | | |
|----------------|---|----|
| 3.1.5.9.1.1.4 | EnableNicknames | 39 |
| 3.1.5.9.1.1.5 | EnablePhonetic | 39 |
| 3.1.5.9.1.1.6 | EnableStemming | 39 |
| 3.1.5.9.1.1.7 | HiddenConstraints | 39 |
| 3.1.5.9.1.1.8 | QueryTag | 40 |
| 3.1.5.9.1.1.9 | QueryText | 40 |
| 3.1.5.9.1.1.10 | RankingModelId | 40 |
| 3.1.5.9.1.1.11 | Refiners | 40 |
| 3.1.5.9.1.1.12 | ResultsUrl | 40 |
| 3.1.5.9.1.1.13 | RowLimit | 40 |
| 3.1.5.9.1.1.14 | RowsPerPage | 40 |
| 3.1.5.9.1.1.15 | ShowPeopleNameSuggestions | 41 |
| 3.1.5.9.1.1.16 | SourceId | 41 |
| 3.1.5.9.1.1.17 | StartRow | 41 |
| 3.1.5.9.1.1.18 | Timeout | 41 |
| 3.1.5.9.1.1.19 | TrimDuplicates | 41 |
| 3.1.5.9.1.1.20 | ClientType | 41 |
| 3.1.5.9.1.1.21 | TrimDuplicatesIncludeId | 41 |
| 3.1.5.9.1.1.22 | ProcessBestBets | 42 |
| 3.1.5.9.1.1.23 | TotalRowsExactMinimum | 42 |
| 3.1.5.9.1.1.24 | EnableQueryRules | 42 |
| 3.1.5.9.1.1.25 | ImpressionID | 42 |
| 3.1.5.9.1.1.26 | BlockDedupeMode | 42 |
| 3.1.5.9.1.1.27 | CollapseSpecification | 42 |
| 3.1.5.9.1.1.28 | DesiredSnippetLength | 42 |
| 3.1.5.9.1.1.29 | EnableOrderingHitHighlightedProperty | 43 |
| 3.1.5.9.1.1.30 | EnableSorting | 43 |
| 3.1.5.9.1.1.31 | GenerateBlockRankLog | 43 |
| 3.1.5.9.1.1.32 | HitHighlightedMultivaluePropertyLimit | 43 |
| 3.1.5.9.1.1.33 | MaxSnippetLength | 43 |
| 3.1.5.9.1.1.34 | ProcessPersonalFavorites | 43 |
| 3.1.5.9.1.1.35 | QueryTemplate | 43 |
| 3.1.5.9.1.1.36 | QueryTemplateParameters | 44 |
| 3.1.5.9.1.1.37 | SummaryLength | 44 |
| 3.1.5.9.1.1.38 | UILanguage | 44 |
| 3.1.5.9.1.1.39 | IgnoreSafeQueryPropertiesTemplateUrl | 44 |
| 3.1.5.9.1.1.40 | SafeQueryPropertiesTemplateUrl | 44 |
| 3.1.5.9.1.2 | ObjectPath Properties | 44 |
| 3.1.5.9.1.2.1 | HitHighlightedProperties | 44 |
| 3.1.5.9.1.2.2 | PersonalizationData | 44 |
| 3.1.5.9.1.2.3 | Properties | 45 |
| 3.1.5.9.1.2.4 | RefinementFilters | 45 |
| 3.1.5.9.1.2.5 | SelectProperties | 45 |
| 3.1.5.9.1.2.6 | SortList | 45 |
| 3.1.5.9.1.2.7 | ReorderingRules | 45 |
| 3.1.5.9.2 | Methods | 45 |
| 3.1.5.9.2.1 | Scalar Methods | 45 |
| 3.1.5.9.2.1.1 | GetQuerySuggestionsWithResults | 45 |
| 3.1.5.9.2.2 | ObjectPath Methods | 46 |
| 3.1.5.9.2.2.1 | CSOM Constructor | 46 |
| 3.1.5.10 | Microsoft.SharePoint.Client.Search.Query.KeywordQueryProperties | 46 |
| 3.1.5.10.1 | Properties | 46 |
| 3.1.5.10.1.1 | Scalar Properties | 46 |

| | | |
|-----------------|--|----|
| 3.1.5.10.1.2 | ObjectPath Properties..... | 46 |
| 3.1.5.10.2 | Methods..... | 46 |
| 3.1.5.10.2.1 | Scalar Methods..... | 46 |
| 3.1.5.10.2.1.1 | GetQueryPropertyValue..... | 46 |
| 3.1.5.10.2.1.2 | SetQueryPropertyValue..... | 47 |
| 3.1.5.10.2.2 | ObjectPath Methods..... | 47 |
| 3.1.5.11 | Microsoft.SharePoint.Client.Search.Query.PersonalResultSuggestion..... | 47 |
| 3.1.5.11.1 | Properties..... | 47 |
| 3.1.5.11.1.1 | Scalar Properties..... | 47 |
| 3.1.5.11.1.1.1 | IsBestBet..... | 47 |
| 3.1.5.11.1.1.2 | Title..... | 47 |
| 3.1.5.11.1.1.3 | Url..... | 48 |
| 3.1.5.11.1.1.4 | HighlightedTitle..... | 48 |
| 3.1.5.11.1.2 | ObjectPath Properties..... | 48 |
| 3.1.5.12 | Microsoft.SharePoint.Client.Search.Query.Query..... | 48 |
| 3.1.5.12.1 | Properties..... | 48 |
| 3.1.5.12.1.1 | Scalar Properties..... | 48 |
| 3.1.5.12.1.1.1 | BypassResultTypes..... | 48 |
| 3.1.5.12.1.1.2 | Culture..... | 48 |
| 3.1.5.12.1.1.3 | EnableInterleaving..... | 48 |
| 3.1.5.12.1.1.4 | EnableNicknames..... | 49 |
| 3.1.5.12.1.1.5 | EnablePhonetic..... | 49 |
| 3.1.5.12.1.1.6 | EnableStemming..... | 49 |
| 3.1.5.12.1.1.7 | QueryTag..... | 49 |
| 3.1.5.12.1.1.8 | QueryText..... | 49 |
| 3.1.5.12.1.1.9 | RankingModelId..... | 49 |
| 3.1.5.12.1.1.10 | ResultsUrl..... | 49 |
| 3.1.5.12.1.1.11 | RowLimit..... | 50 |
| 3.1.5.12.1.1.12 | RowsPerPage..... | 50 |
| 3.1.5.12.1.1.13 | ShowPeopleNameSuggestions..... | 50 |
| 3.1.5.12.1.1.14 | SourceId..... | 50 |
| 3.1.5.12.1.1.15 | StartRow..... | 50 |
| 3.1.5.12.1.1.16 | Timeout..... | 50 |
| 3.1.5.12.1.1.17 | TrimDuplicates..... | 50 |
| 3.1.5.12.1.1.18 | ClientType..... | 51 |
| 3.1.5.12.1.1.19 | ProcessBestBets..... | 51 |
| 3.1.5.12.1.1.20 | TotalRowsExactMinimum..... | 51 |
| 3.1.5.12.1.1.21 | EnableQueryRules..... | 51 |
| 3.1.5.12.1.1.22 | ImpressionID..... | 51 |
| 3.1.5.12.1.1.23 | BlockDedupeMode..... | 51 |
| 3.1.5.12.1.1.24 | DesiredSnippetLength..... | 51 |
| 3.1.5.12.1.1.25 | EnableOrderingHitHighlightedProperty..... | 52 |
| 3.1.5.12.1.1.26 | GenerateBlockRankLog..... | 52 |
| 3.1.5.12.1.1.27 | HitHighlightedMultivaluePropertyLimit..... | 52 |
| 3.1.5.12.1.1.28 | MaxSnippetLength..... | 52 |
| 3.1.5.12.1.1.29 | ProcessPersonalFavorites..... | 52 |
| 3.1.5.12.1.1.30 | QueryTemplate..... | 52 |
| 3.1.5.12.1.1.31 | QueryTemplateParameters..... | 52 |
| 3.1.5.12.1.1.32 | SummaryLength..... | 53 |
| 3.1.5.12.1.1.33 | UILanguage..... | 53 |
| 3.1.5.12.1.1.34 | IgnoreSafeQueryPropertiesTemplateUrl..... | 53 |
| 3.1.5.12.1.1.35 | SafeQueryPropertiesTemplateUrl..... | 53 |
| 3.1.5.12.1.2 | ObjectPath Properties..... | 53 |

| | | |
|-----------------|---|----|
| 3.1.5.12.1.2.1 | HitHighlightedProperties | 53 |
| 3.1.5.12.1.2.2 | PersonalizationData | 53 |
| 3.1.5.12.2 | Methods | 54 |
| 3.1.5.12.2.1 | Scalar Methods | 54 |
| 3.1.5.12.2.1.1 | GetQuerySuggestionsWithResults | 54 |
| 3.1.5.12.2.2 | ObjectPath Methods | 54 |
| 3.1.5.13 | Microsoft.SharePoint.Client.Search.Query.QueryPersonalizationData | 54 |
| 3.1.5.13.1 | Properties | 54 |
| 3.1.5.13.1.1 | Scalar Properties | 54 |
| 3.1.5.13.1.2 | ObjectPath Properties | 54 |
| 3.1.5.13.2 | Methods | 55 |
| 3.1.5.13.2.1 | Scalar Methods | 55 |
| 3.1.5.13.2.2 | ObjectPath Methods | 55 |
| 3.1.5.13.2.2.1 | CSOM Constructor | 55 |
| 3.1.5.14 | Microsoft.SharePoint.Client.Search.Query.QueryPropertyValue | 55 |
| 3.1.5.14.1 | Properties | 55 |
| 3.1.5.14.1.1 | Scalar Properties | 55 |
| 3.1.5.14.1.1.1 | BoolVal | 55 |
| 3.1.5.14.1.1.2 | IntVal | 55 |
| 3.1.5.14.1.1.3 | QueryPropertyValueTypeId | 55 |
| 3.1.5.14.1.1.4 | StrArray | 56 |
| 3.1.5.14.1.1.5 | StrVal | 56 |
| 3.1.5.14.1.2 | ObjectPath Properties | 56 |
| 3.1.5.15 | Microsoft.SharePoint.Client.Search.Query.QuerySuggestionResults | 56 |
| 3.1.5.15.1 | Properties | 56 |
| 3.1.5.15.1.1 | Scalar Properties | 56 |
| 3.1.5.15.1.1.1 | PeopleNames | 56 |
| 3.1.5.15.1.1.2 | PersonalResults | 57 |
| 3.1.5.15.1.1.3 | Queries | 57 |
| 3.1.5.15.1.2 | ObjectPath Properties | 57 |
| 3.1.5.16 | Microsoft.SharePoint.Client.Search.Query.ResultTable | 57 |
| 3.1.5.16.1 | Properties | 57 |
| 3.1.5.16.1.1 | Scalar Properties | 57 |
| 3.1.5.16.1.1.1 | Properties | 57 |
| 3.1.5.16.1.1.2 | QueryId | 57 |
| 3.1.5.16.1.1.3 | ResultRows | 57 |
| 3.1.5.16.1.1.4 | RowCount | 58 |
| 3.1.5.16.1.1.5 | TableType | 58 |
| 3.1.5.16.1.1.6 | TotalRows | 58 |
| 3.1.5.16.1.1.7 | GroupTemplateId | 58 |
| 3.1.5.16.1.1.8 | ItemTemplateId | 58 |
| 3.1.5.16.1.1.9 | QueryRuleId | 58 |
| 3.1.5.16.1.1.10 | ResultTitle | 58 |
| 3.1.5.16.1.1.11 | ResultTitleUrl | 59 |
| 3.1.5.16.1.1.12 | TotalRowsIncludingDuplicates | 59 |
| 3.1.5.16.1.2 | ObjectPath Properties | 59 |
| 3.1.5.17 | Microsoft.SharePoint.Client.Search.Query.ResultTableCollection | 59 |
| 3.1.5.17.1 | Properties | 59 |
| 3.1.5.17.1.1 | Scalar Properties | 59 |
| 3.1.5.17.1.1.1 | ElapsedTime | 59 |
| 3.1.5.17.1.1.2 | Properties | 59 |
| 3.1.5.17.1.1.3 | QueryId | 59 |
| 3.1.5.17.1.1.4 | SpellingSuggestion | 60 |

| | | |
|----------------|---|----|
| 3.1.5.17.1.1.5 | TriggeredRules..... | 60 |
| 3.1.5.17.1.1.6 | QueryErrors..... | 60 |
| 3.1.5.17.1.2 | ObjectPath Properties..... | 60 |
| 3.1.5.18 | Microsoft.SharePoint.Client.Search.Query.SearchExecutor | 60 |
| 3.1.5.18.1 | Properties..... | 60 |
| 3.1.5.18.1.1 | Scalar Properties | 60 |
| 3.1.5.18.1.2 | ObjectPath Properties..... | 60 |
| 3.1.5.18.2 | Methods | 60 |
| 3.1.5.18.2.1 | Scalar Methods..... | 60 |
| 3.1.5.18.2.1.1 | ExecuteQueries | 60 |
| 3.1.5.18.2.1.2 | ExecuteQuery | 61 |
| 3.1.5.18.2.1.3 | RecordPageClick..... | 61 |
| 3.1.5.18.2.1.4 | ExportPopularQueries | 62 |
| 3.1.5.18.2.2 | ObjectPath Methods | 63 |
| 3.1.5.18.2.2.1 | CSOM Constructor | 63 |
| 3.1.5.19 | Microsoft.SharePoint.Client.Search.Query.Sort | 63 |
| 3.1.5.19.1 | Properties..... | 63 |
| 3.1.5.19.1.1 | Scalar Properties | 63 |
| 3.1.5.19.1.1.1 | Direction | 63 |
| 3.1.5.19.1.1.2 | Property..... | 63 |
| 3.1.5.19.1.2 | ObjectPath Properties..... | 63 |
| 3.1.5.20 | Microsoft.SharePoint.Client.Search.Query.SortCollection | 63 |
| 3.1.5.20.1 | Properties..... | 63 |
| 3.1.5.20.1.1 | Scalar Properties | 63 |
| 3.1.5.20.1.2 | ObjectPath Properties..... | 64 |
| 3.1.5.20.2 | Methods..... | 64 |
| 3.1.5.20.2.1 | Scalar Methods..... | 64 |
| 3.1.5.20.2.1.1 | Add | 64 |
| 3.1.5.20.2.1.2 | Clear | 64 |
| 3.1.5.20.2.2 | ObjectPath Methods | 64 |
| 3.1.5.21 | Microsoft.SharePoint.Client.Search.Query.SortDirection | 64 |
| 3.1.5.21.1 | Field Values | 64 |
| 3.1.5.21.1.1 | Ascending | 64 |
| 3.1.5.21.1.2 | Descending | 64 |
| 3.1.5.21.1.3 | FQLFormula | 65 |
| 3.1.5.22 | Microsoft.SharePoint.Client.Search.Query.StringCollection | 65 |
| 3.1.5.22.1 | Properties..... | 65 |
| 3.1.5.22.1.1 | Scalar Properties | 65 |
| 3.1.5.22.1.2 | ObjectPath Properties..... | 65 |
| 3.1.5.22.2 | Methods..... | 65 |
| 3.1.5.22.2.1 | Scalar Methods..... | 65 |
| 3.1.5.22.2.1.1 | Add | 65 |
| 3.1.5.22.2.1.2 | Clear | 65 |
| 3.1.5.22.2.2 | ObjectPath Methods | 65 |
| 3.1.5.22.2.2.1 | CSOM Constructor | 65 |
| 3.1.5.23 | Microsoft.SharePoint.Client.Search.Query.RankingLabeling | 66 |
| 3.1.5.23.1 | Properties..... | 66 |
| 3.1.5.23.1.1 | Scalar Properties | 66 |
| 3.1.5.23.1.2 | ObjectPath Properties..... | 66 |
| 3.1.5.23.2 | Methods..... | 66 |
| 3.1.5.23.2.1 | Scalar Methods..... | 66 |
| 3.1.5.23.2.1.1 | AddJudgment..... | 66 |
| 3.1.5.23.2.1.2 | GetJudgementsForQuery | 66 |

| | | |
|----------------|---|----|
| 3.1.5.23.2.1.3 | NormalizeResultUrl | 67 |
| 3.1.5.23.2.2 | ObjectPath Methods | 67 |
| 3.1.5.23.2.2.1 | CSOM Constructor | 67 |
| 3.1.5.24 | Microsoft.SharePoint.Client.Search.Query.QuerySuggestionQuery | 67 |
| 3.1.5.24.1 | Properties | 67 |
| 3.1.5.24.1.1 | Scalar Properties | 67 |
| 3.1.5.24.1.1.1 | IsPersonal | 67 |
| 3.1.5.24.1.1.2 | Query | 67 |
| 3.1.5.24.1.2 | ObjectPath Properties | 67 |
| 3.1.5.25 | Microsoft.Office.Server.Search.REST.SpecialTermResults | 68 |
| 3.1.5.25.1 | Properties | 68 |
| 3.1.5.25.1.1 | Scalar Properties | 68 |
| 3.1.5.25.1.1.1 | Properties | 68 |
| 3.1.5.25.1.1.2 | Results | 68 |
| 3.1.5.25.1.1.3 | GroupTemplateId | 68 |
| 3.1.5.25.1.1.4 | ItemTemplateId | 68 |
| 3.1.5.25.1.1.5 | ResultTitle | 68 |
| 3.1.5.25.1.1.6 | ResultTitleUrl | 69 |
| 3.1.5.25.1.2 | ObjectPath Properties | 69 |
| 3.1.5.26 | Microsoft.SharePoint.Client.Search.Query.ReorderingRule | 69 |
| 3.1.5.26.1 | Properties | 69 |
| 3.1.5.26.1.1 | Scalar Properties | 69 |
| 3.1.5.26.1.1.1 | Boost | 69 |
| 3.1.5.26.1.1.2 | MatchType | 69 |
| 3.1.5.26.1.1.3 | MatchValue | 69 |
| 3.1.5.26.1.2 | ObjectPath Properties | 69 |
| 3.1.5.27 | Microsoft.SharePoint.Client.Search.Query.ReorderingRuleCollection | 69 |
| 3.1.5.27.1 | Properties | 70 |
| 3.1.5.27.1.1 | Scalar Properties | 70 |
| 3.1.5.27.1.2 | ObjectPath Properties | 70 |
| 3.1.5.27.2 | Methods | 70 |
| 3.1.5.27.2.1 | Scalar Methods | 70 |
| 3.1.5.27.2.1.1 | Add | 70 |
| 3.1.5.27.2.1.2 | Clear | 70 |
| 3.1.5.27.2.2 | ObjectPath Methods | 70 |
| 3.1.5.28 | Microsoft.SharePoint.Client.Search.Query.ReorderingRuleMatchType | 70 |
| 3.1.5.28.1 | Field Values | 71 |
| 3.1.5.28.1.1 | ResultContainsKeyword | 71 |
| 3.1.5.28.1.2 | TitleContainsKeyword | 71 |
| 3.1.5.28.1.3 | TitleMatchesKeyword | 71 |
| 3.1.5.28.1.4 | UrlStartsWith | 71 |
| 3.1.5.28.1.5 | UrlExactlyMatches | 71 |
| 3.1.5.28.1.6 | ContentTypeIs | 71 |
| 3.1.5.28.1.7 | FileExtensionMatches | 71 |
| 3.1.5.28.1.8 | ResultHasTag | 71 |
| 3.1.5.28.1.9 | ManualCondition | 72 |
| 3.1.5.29 | Microsoft.Office.Server.Search.REST.QueryProperty | 72 |
| 3.1.5.29.1 | Properties | 72 |
| 3.1.5.29.1.1 | Scalar Properties | 72 |
| 3.1.5.29.1.1.1 | Name | 72 |
| 3.1.5.29.1.1.2 | Value | 72 |
| 3.1.5.29.1.2 | ObjectPath Properties | 72 |
| 3.1.5.30 | Microsoft.Office.Server.Search.REST.Refiner | 72 |

| | | |
|-----------------|---|----|
| 3.1.5.30.1 | Properties..... | 73 |
| 3.1.5.30.1.1 | Scalar Properties | 73 |
| 3.1.5.30.1.1.1 | Entries | 73 |
| 3.1.5.30.1.1.2 | Name..... | 73 |
| 3.1.5.30.1.2 | ObjectPath Properties..... | 73 |
| 3.1.5.31 | Microsoft.Office.Server.Search.REST.RefinerEntry | 73 |
| 3.1.5.31.1 | Properties..... | 73 |
| 3.1.5.31.1.1 | Scalar Properties | 73 |
| 3.1.5.31.1.1.1 | RefinementCount | 73 |
| 3.1.5.31.1.1.2 | RefinementName..... | 73 |
| 3.1.5.31.1.1.3 | RefinementToken | 73 |
| 3.1.5.31.1.1.4 | RefinementValue | 74 |
| 3.1.5.31.1.2 | ObjectPath Properties..... | 74 |
| 3.1.5.32 | Microsoft.Office.Server.Search.WebControls.ControlMessage | 74 |
| 3.1.5.32.1 | Properties..... | 74 |
| 3.1.5.32.1.1 | Scalar Properties | 74 |
| 3.1.5.32.1.1.1 | code | 74 |
| 3.1.5.32.1.1.2 | correlationID | 74 |
| 3.1.5.32.1.1.3 | encodeDetails | 74 |
| 3.1.5.32.1.1.4 | header | 74 |
| 3.1.5.32.1.1.5 | level | 75 |
| 3.1.5.32.1.1.6 | messageDetails | 75 |
| 3.1.5.32.1.1.7 | messageDetailsForViewers | 75 |
| 3.1.5.32.1.1.8 | serverTypeId | 75 |
| 3.1.5.32.1.1.9 | showForViewerUsers..... | 75 |
| 3.1.5.32.1.1.10 | showInEditModeOnly | 75 |
| 3.1.5.32.1.1.11 | stackTrace | 75 |
| 3.1.5.32.1.1.12 | type..... | 76 |
| 3.1.5.32.1.2 | ObjectPath Properties..... | 76 |
| 3.1.5.33 | Microsoft.Office.Server.Search.WebControls.MessageLevel | 76 |
| 3.1.5.33.1 | Field Values | 76 |
| 3.1.5.33.1.1 | Information..... | 76 |
| 3.1.5.33.1.2 | Warning | 76 |
| 3.1.5.33.1.3 | Error | 76 |
| 3.1.5.34 | Microsoft.SharePoint.Client.Search.Administration.DocumentCrawlLog | 76 |
| 3.1.5.34.1 | Properties..... | 77 |
| 3.1.5.34.1.1 | Scalar Properties | 77 |
| 3.1.5.34.1.2 | ObjectPath Properties..... | 77 |
| 3.1.5.34.2 | Methods..... | 77 |
| 3.1.5.34.2.1 | Scalar Methods..... | 77 |
| 3.1.5.34.2.1.1 | GetCrawledUrls | 77 |
| 3.1.5.34.2.2 | ObjectPath Methods | 78 |
| 3.1.5.34.2.2.1 | CSOM Constructor | 78 |
| 3.1.5.35 | Microsoft.SharePoint.Client.Search.Administration.SearchObjectLevel | 78 |
| 3.1.5.35.1 | Field Values | 78 |
| 3.1.5.35.1.1 | SPWeb | 78 |
| 3.1.5.35.1.2 | SPSite | 78 |
| 3.1.5.35.1.3 | SPSiteSubscription..... | 79 |
| 3.1.5.35.1.4 | Ssa | 79 |
| 3.1.5.36 | Microsoft.SharePoint.Client.Search.Administration.SearchObjectOwner | 79 |
| 3.1.5.36.1 | Properties..... | 79 |
| 3.1.5.36.1.1 | Scalar Properties | 79 |
| 3.1.5.36.1.2 | ObjectPath Properties..... | 79 |

| | | |
|----------------|---|------------|
| 3.1.5.36.2 | Methods | 79 |
| 3.1.5.36.2.1 | Scalar Methods..... | 79 |
| 3.1.5.36.2.2 | ObjectPath Methods | 79 |
| 3.1.5.36.2.2.1 | CSOM Constructor | 79 |
| 3.1.5.37 | Microsoft.SharePoint.Client.Search.Portability.SearchConfigurationPortability . | 79 |
| 3.1.5.37.1 | Properties..... | 80 |
| 3.1.5.37.1.1 | Scalar Properties | 80 |
| 3.1.5.37.1.1.1 | ImportWarnings | 80 |
| 3.1.5.37.1.2 | ObjectPath Properties..... | 80 |
| 3.1.5.37.2 | Methods..... | 80 |
| 3.1.5.37.2.1 | Scalar Methods..... | 80 |
| 3.1.5.37.2.1.1 | ExportSearchConfiguration | 80 |
| 3.1.5.37.2.1.2 | ImportSearchConfiguration..... | 80 |
| 3.1.5.37.2.1.3 | DeleteSearchConfiguration | 81 |
| 3.1.5.37.2.2 | ObjectPath Methods | 81 |
| 3.1.5.37.2.2.1 | CSOM Constructor | 81 |
| 3.1.5.38 | Microsoft.SharePoint.Client.Search.Query.PopularQuery | 81 |
| 3.1.5.38.1 | Properties..... | 81 |
| 3.1.5.38.1.1 | Scalar Properties | 81 |
| 3.1.5.38.1.1.1 | ClickCount | 81 |
| 3.1.5.38.1.1.2 | LCID | 81 |
| 3.1.5.38.1.1.3 | QueryCount | 82 |
| 3.1.5.38.1.1.4 | QueryText | 82 |
| 3.1.5.38.1.2 | ObjectPath Properties..... | 82 |
| 3.1.6 | Timer Events | 82 |
| 3.1.7 | Other Local Events | 82 |
| 4 | Protocol Examples..... | 83 |
| 4.1 | Search for the keyword "home" | 83 |
| 5 | Security..... | 102 |
| 5.1 | Security Considerations for Implementers..... | 102 |
| 5.2 | Index of Security Parameters | 102 |
| 6 | Appendix A: Product Behavior | 103 |
| 7 | Change Tracking..... | 104 |
| 8 | Index | 105 |

1 Introduction

The Search Client Query Protocol provides types, methods, and properties to enable a protocol client to issue search queries against a protocol server hosting a search service application.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [\[RFC2119\]](#). Sections 1.5 and 1.9 are also normative but do not contain those terms. All other sections and examples in this specification are informative.

1.1 Glossary

The following terms are defined in [MS-OFCGLOS]:

- content source**
- context**
- crawled property**
- CSOM array**
- CSOM Boolean**
- CSOM DateTime**
- CSOM dictionary**
- CSOM GUID**
- CSOM Int16**
- CSOM Int32**
- CSOM Int64**
- CSOM String**
- endpoint**
- GUID**
- Hypertext Markup Language (HTML)**
- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- JavaScript Object Notation (JSON)**
- language code identifier (LCID)**
- managed property**
- permission**
- post-query suggestions**
- pre-query suggestions**
- query**
- query result**
- query rule**
- ranking model**
- result source**
- search query**
- search service application**
- site**
- Uniform Resource Identifier (URI)**
- Uniform Resource Locator (URL)**

The following terms are specific to this document:

relevance judgment: A numeric evaluation of the applicability and correspondence of a search result to a search query that falls within the range of 1-5 inclusive with 5 being the most relevant and 1 being the least relevant.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

References to Microsoft Open Specification documents do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-CSOM] Microsoft Corporation, "[SharePoint Client Query Protocol](#)".

[MS-CSOMREST] Microsoft Corporation, "[SharePoint Client Query OData Protocol](#)".

[MS-CSOMSPT] Microsoft Corporation, "[SharePoint Client-Side Object Model Protocol](#)".

[MS-QSSWS] Microsoft Corporation, "[Search Query Shared Services Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.rfc-editor.org/rfc/rfc2616.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.rfc-editor.org/rfc/rfc2818.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", BCP 47, RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[RFC4627] Crockford, D., "The application/json Media Type for JavaScript Object Notation (JSON)", RFC 4627, July 2006, <http://www.ietf.org/rfc/rfc4627.txt>

1.2.2 Informative References

[MS-OFGLS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

1.3 Overview

This protocol allows a protocol client to issue **search queries** against a protocol server hosting a **search service application**.

Typical scenarios for using this protocol include:

- A protocol client issues a search query to the protocol server, and the protocol server responds with **query results**.
- A protocol client issues a search query to the protocol server, and the protocol server responds with **pre-query suggestions** or **post-query suggestions**.

- A protocol client notifies the protocol server of errors encountered on the protocol client and timing of protocol client processing stages. The protocol server records these errors and time intervals for logging.

1.4 Relationship to Other Protocols

The Search Client Query Protocol is a set of types, properties, and methods that can be accessed by using the SharePoint Client Query protocol as specified in [\[MS-CSOM\]](#). This protocol uses **JavaScript Object Notation (JSON)** as specified in [\[RFC4627\]](#) to format data returned to a protocol client. This protocol also uses **HTTP**, as specified in [\[RFC2616\]](#), and **HTTPS**, as specified in [\[RFC2818\]](#). The dependencies for this protocol are shown in the following layering diagram.

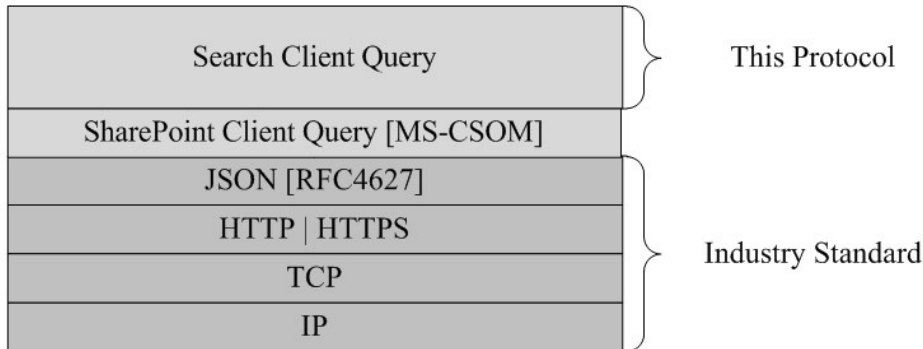


Figure 1: This protocol in relation to other protocols

1.5 Prerequisites/Preconditions

This protocol operates against a protocol server that exposes one or more **endpoint (4) Uniform Resource Identifiers (URIs)** that are known by protocol clients.

This protocol assumes that authentication has been performed by underlying protocols.

This protocol requires the protocol client to have appropriate **permission** to call the methods on the protocol server.

1.6 Applicability Statement

This protocol can be used by a protocol client to issue search queries against a protocol server hosting a search service application.

This protocol is optimized to enable a protocol client to specify the exact set of data and operations to perform in a single batch, making it suitable for situations where the connection speed between the protocol client and the protocol server can be slow.

This protocol is not suitable and is inefficient if both the protocol client and protocol server are on the same computer. In this case, the client should use an API that does not require communication over a network.

1.7 Versioning and Capability Negotiation

None.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

2.1 Transport

Messages are transported by using the SharePoint Client Query Protocol, as specified in [\[MS-CSOM\]](#).

2.2 Message Syntax

2.2.1 Namespaces

None.

2.2.2 Common Exceptions

A protocol server hosting the search service application MUST validate the request from the protocol client. When a protocol server processes a CSOM operation in the request, the following table lists common exceptions that could occur when accessing or updating a property or invoking a method.

| Error Code | Error Type Name | Condition |
|-----------------|------------------------------------|---|
| - 2147024891 | System.UnauthorizedAccessException | The user does not have permission to access a property, update a property or call a method. |

Besides the preceding exceptions and the exceptions that are listed for the specific properties or methods, the protocol server can return other exceptions to the protocol client, for which the protocol client could use the error message for display purpose but could not use the error code or error type to determine the causes of the exception.

Unless specified, exceptions listed for the specific properties are thrown for both read and write operations.

3 Protocol Details

3.1 Server Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

This protocol deals with various objects associated with Search Service to execute a search query for storing verbose query monitoring data or to store query log data and other objects as specified in [\[MS-QSSWS\]](#).

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

3.1.5.1 Microsoft.Office.Server.Search.REST.CustomResult

TypeId: {B3EB596A-C665-4B31-AFBE-BBF07EB1B70D}

ShortName: Microsoft.Office.Server.Search.REST.CustomResult

CustomResult is a ResultTable, as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

The TableType property MUST be of any result table type as specified in [\[MS-QSSWS\]](#) section 2.2.5.5 except:

- RelevantResults
- RefinementResults
- SpecialTermResults

3.1.5.1.1 Properties

3.1.5.1.1.1 Scalar Properties

3.1.5.1.1.1.1 TableType

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.1.1.1.2 Properties

Type: CSOM dictionary

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.1.1.1.3 GroupTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.1.1.1.4 ItemTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.1.1.1.5 ResultTitle

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.1.1.1.6 ResultTitleUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.1.1.1.7 Table

Type: Microsoft.SharePoint.Client.SimpleDataTable

Accessibility: Read/Write

As specified in [\[MS-CSOMREST\]](#) section 3.1.5.1.3.3

Contains the list of query result hits.

3.1.5.1.1.2 ObjectPath Properties

None.

3.1.5.2 Microsoft.Office.Server.Search.REST.QueryResult

TypeId: {5DA4B313-CA4A-4BC7-B9DE-98EA5F4E727B}

ShortName: Microsoft.Office.Server.Search.REST.QueryResult

The **QueryResult** type is a grouping of result tables, where each contained result table is a **ResultTable** as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

All result tables contained in the same **QueryResult** MUST share the same **QueryId** (section [3.1.5.2.1.1.2](#)).

A **QueryResult** structure accessed by the **PrimaryQueryResult** property (section [3.1.5.6.1.1.2](#)) of a **SearchResult** structure (section [3.1.5.6](#)) MUST NOT be associated with a **query rule**, and MUST have the **QueryRuleId** (section [3.1.5.2.1.1.3](#)) populated with the value {00000000-0000-0000-0000-000000000000}.

Each **QueryResult** structure contained in the **SecondaryQueryResults** (section [3.1.5.6.1.1.3](#)) of the **SearchResult** (section [3.1.5.6](#)) structure MUST be associated with an individual query rule, and MUST have the **QueryRuleId** (section [3.1.5.2.1.1.3](#)) populated with a value other than {00000000-0000-0000-0000-000000000000}.

A valid QueryResult MUST have one or more result tables accessed through one or more of the following properties:

- CustomResults
- RefinementResults
- RelevantResults
- SpecialTermResults

CustomResults is a CSOM Array that contains zero or more CustomResult instances. A CustomResult instance is a ResultTable with ResultType of any kind (except RefinementResults, RelevantResults, and SpecialTermResults), as specified in [\[MS-QSSWS\]](#) section 2.2.5.5.

RefinementResult is a ResultTable with ResultType RefinementResults as specified in [\[MS-QSSWS\]](#) section 2.2.5.5.

RelevantResults is a ResultTable with ResultType RelevantResults as specified in [\[MS-QSSWS\]](#) section 2.2.5.5.

SpecialTermResults is a ResultTable with ResultType SpecialTermResults as specified in [\[MS-QSSWS\]](#) section 2.2.5.5.

3.1.5.2.1 Properties

3.1.5.2.1.1 Scalar Properties

3.1.5.2.1.1.1 CustomResults

Type: **CSOM array** of Microsoft.Office.Server.Search.REST.CustomResult

Accessibility: Read/Write

An array of CustomResult as specified in section [3.1.5.1](#).

3.1.5.2.1.1.2 QueryId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.2.1.1.3 QueryRuleId

Type: CSOM GUID

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.2.1.1.4 RefinementResults

Type: Microsoft.Office.Server.Search.REST.RefinementResults

Accessibility: Read/Write

As specified in section [3.1.5.3](#).

3.1.5.2.1.1.5 RelevantResults

Type: Microsoft.Office.Server.Search.REST.RelevantResults

Accessibility: Read/Write

As specified in section [3.1.5.4](#).

3.1.5.2.1.1.6 SpecialTermResults

Type: Microsoft.Office.Server.Search.REST.SpecialTermResults

Accessibility: Read/Write

As specified in section [3.1.5.25](#).

3.1.5.2.1.2 ObjectPath Properties

None.

3.1.5.3 Microsoft.Office.Server.Search.REST.RefinementResults

TypeId: {F3B3BFC2-9DD9-4F5E-BC53-0EF63E0709F6}

ShortName: Microsoft.Office.Server.Search.REST.RefinementResults

RefinementResults is a RefinementResults Table, as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.3.1 Properties

3.1.5.3.1.1 Scalar Properties

3.1.5.3.1.1.1 Refiners

Type: CSOM array of Microsoft.Office.Server.Search.REST.Refiner

Accessibility: Read/Write

Contains the list of refiners, as specified in section [3.1.5.30](#), for the search results.

3.1.5.3.1.1.2 Properties

Type: CSOM dictionary

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.3.1.1.3 GroupTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.3.1.1.4 ItemTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.3.1.1.5 ResultTitle

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.3.1.1.6 ResultTitleUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.3.1.2 ObjectPath Properties

None.

3.1.5.4 Microsoft.Office.Server.Search.REST.RelevantResults

TypeId: {755270DF-820C-430A-A609-1A6C415E88F1}

ShortName: Microsoft.Office.Server.Search.REST.RelevantResults

RelevantResults is a RelevantResults Table, as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1 Properties

3.1.5.4.1.1 Scalar Properties

3.1.5.4.1.1.1 RowCount

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.2 TotalRows

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.3 Properties

Type: CSOM dictionary

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.4 GroupTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.5 ItemTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.6 ResultTitle

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.7 ResultTitleUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.1.8 Table

Type: Microsoft.SharePoint.Client.SimpleDataTable

Accessibility: Read/Write

As specified in [\[MS-CSOMREST\]](#) section 3.1.5.1.3.3

Contains the list of query result hits.

3.1.5.4.1.1.9 TotalRowsIncludingDuplicates

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.4.1.2 ObjectPath Properties

None.

3.1.5.5 Microsoft.Office.Server.Search.REST.SearchRequest

TypeId: {EFA6DBB5-FB02-41F8-B70F-E6C992FB86A9}

ShortName: Microsoft.Office.Server.Search.REST.SearchRequest

The **SearchRequest** structure defines the HTTP BODY of the HTTP POST postquery operation as specified in section [3.1.5.7.2.1.1](#). The postquery operation together with the **SearchRequest** structure is similar to the query operation as specified in section [3.1.5.7.2.1.2](#), and is provided as a means to overcome **Uniform Resource Locator (URL)** length limitations that some clients experience with HTTP GET operations.

3.1.5.5.1 Properties

3.1.5.5.1.1 Scalar Properties

3.1.5.5.1.1.1 Culture

Type: CSOM Int32

Accessibility: Read/Write

Specifies the identifier of the language culture of the search query. If present, the value MUST be a valid **language code identifier (LCID)** of a culture name, as specified in [\[RFC3066\]](#).

3.1.5.5.1.1.2 EnableInterleaving

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.3 EnableNicknames

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.4 EnablePhonetic

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.5 EnableStemming

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.6 HiddenConstraints

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.7 Querytext

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.8 RankingModelId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.9 RefinementFilters

Type: CSOM array of CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.10 Refiners

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.11 RowLimit

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.12 RowsPerPage

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.13 SelectProperties

Type: CSOM array of CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.14 SourceId

Type: CSOM GUID

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.15 StartRow

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.16 Timeout

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.17 TrimDuplicates

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.18 EnableFQL

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.19 BypassResultTypes

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.20 ClientType

Type: CSOM String

Accessibility: Read/Write

Specifies the type of the query client. It MUST be of **QueryLogClientType** data type as specified in [\[MS-QSWS\]](#) section 3.1.4.11.4.1.

3.1.5.5.1.1.21 HitHighlightedProperties

Type: CSOM array of CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.22 ProcessBestBets

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.23 QueryTag

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.24 ResultsUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.25 TrimDuplicatesIncludeId

Type: CSOM Int64

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.26 BlockDedupeMode

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.27 CollapseSpecification

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.28 DesiredSnippetLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11

3.1.5.5.1.1.29 EnableOrderingHitHighlightedProperty

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11

3.1.5.5.1.1.30 EnableQueryRules

Type: CSOM Boolean

Accessibility: Read/Write

Specifies whether query rules are included when a search query is executed. If the value is true, query rules are applied to the search query. If the value is false, query rules MUST NOT be applied in the search query.

3.1.5.5.1.1.31 EnableSorting

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.32 GenerateBlockRankLog

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11

3.1.5.5.1.1.33 HitHighlightedMultivaluePropertyLimit

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11

3.1.5.5.1.1.34 ImpressionId

Type: CSOM String

Accessibility: Read/Write

MUST NOT be used.

3.1.5.5.1.1.35 MaxSnippetLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11

3.1.5.5.1.1.36 PersonalizationData

Type: CSOM GUID

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.37 ProcessPersonalFavorites

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11

3.1.5.5.1.1.38 Properties

Type: CSOM array of Microsoft.Office.Server.Search.REST.QueryProperty

Accessibility: Read/Write

Used to transport additional and custom search query data, in a name-value structure, from the caller to the server.

As specified in section [3.1.5.29](#).

3.1.5.5.1.1.39 QueryTemplate

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.40 ReorderingRules

Type: CSOM array of Microsoft.SharePoint.Client.Search.Query.ReorderingRule

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.41 SortList

Type: CSOM array of Microsoft.SharePoint.Client.Search.Query.Sort

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.5.1.1.42 SummaryLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.43 TotalRowsExactMinimum

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.44 UILanguage

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.5.1.1.45 QueryTemplatePropertiesUrl

Type: CSOM String

Accessibility: Read/Write

Specifies an identifier which the protocol server MAY use to modify the client-specified **Properties** property (section [3.1.5.9.1.2.3](#)).

3.1.5.5.1.2 ObjectPath Properties

None.

3.1.5.6 Microsoft.Office.Server.Search.REST.SearchResult

TypeId: {C160DFA4-233A-4C58-88D4-9123B0A3D05B}

ShortName: Microsoft.Office.Server.Search.REST.SearchResult

The **SearchResult** structure resembles the **ResultTableCollection** structure (specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1). However, the individual result tables that share the same **QueryId** are grouped together in a **QueryResult** structure (specified in section [3.1.5.2](#)). The search result tables that have exactly the same **QueryId** value as specified by the protocol client are grouped in the same **QueryResult** structure accessed through the **PrimaryQueryResult** property. All other **QueryResult** buckets are organized in a CSOM array of **QueryResults** accessed through the **SecondaryQueryResults** property.

3.1.5.6.1 Properties

3.1.5.6.1.1 Scalar Properties

3.1.5.6.1.1.1 ElapsedTime

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.6.1.1.2 PrimaryQueryResult

Type: Microsoft.Office.Server.Search.REST.QueryResult

Accessibility: Read/Write

As specified in section [3.1.5.2](#).

3.1.5.6.1.1.3 SecondaryQueryResults

Type: CSOM array of Microsoft.Office.Server.Search.REST.QueryResult

Accessibility: Read/Write

Array of QueryResult as specified in section [3.1.5.2](#).

3.1.5.6.1.1.4 Properties

Type: CSOM dictionary

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.6.1.1.5 SpellingSuggestion

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.6.1.1.6 TriggeredRules

Type: CSOM array of CSOM GUID

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.6.1.2 ObjectPath Properties

None.

3.1.5.7 Microsoft.Office.Server.Search.REST.SearchService

TypeId: {1DBA45DD-4E29-4975-82EB-51A4ABF22707}

ShortName: Microsoft.Office.Server.Search.REST.SearchService

SearchService exposes three OData Service Operations.

- **postquery** supports HTTP POST and returns search results. The purpose of the **postquery** service operation is to overcome URI length restriction in the client or server, by transporting query parameters in the body section of the HTTP request.
- **query** supports HTTP GET and returns search results.
- **suggest** supports HTTP GET and returns search query suggestions.

3.1.5.7.1 Properties

3.1.5.7.1.1 Scalar Properties

None.

3.1.5.7.1.2 ObjectPath Properties

None.

3.1.5.7.2 Methods

3.1.5.7.2.1 Scalar Methods

3.1.5.7.2.1.1 postquery

Return Type: Microsoft.Office.Server.Search.REST.SearchResult

The operation is used to retrieve search results through the use of the HTTP protocol with method type POST.

Parameters:

request: As specified in section [3.1.5.5](#).

Type: Microsoft.Office.Server.Search.REST.SearchRequest

3.1.5.7.2.1.2 query

Return Type: Microsoft.Office.Server.Search.REST.SearchResult

The operation is used to retrieve search results by using the HTTP protocol with the GET method.

Parameters:

querytext: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM String

queryTemplate: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

enableInterleaving: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM Boolean

sourceId: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM GUID

rankingModelId: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM String

startRow: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

rowLimit: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

rowsPerPage: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

selectProperties: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

culture: Specifies the identifier of the language culture of the search query. If present, the value MUST be a valid LCID of a culture name, as specified in [\[RFC3066\]](#).

Type: CSOM Int32

refinementFilters: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

refiners: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

hiddenConstraints: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

sortList: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

enableStemming: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

trimDuplicates: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

timeout: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

enableNicknames: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

enablePhonetic: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

enableFQL: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM Boolean

hitHighlightedProperties: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM String

bypassResultTypes: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM Boolean

processBestBets: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM Boolean

clientType: Specifies the type of the query client. It MUST be of the **QueryLogClientType** data type as specified in [\[MS-QSSWS\]](#) section 3.1.4.11.4.1.

Type: CSOM String

personalizationData: As specified in [\[MS-QSSWS\]](#) section 2.2.4.10.

Type: CSOM GUID

resultsUrl: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

queryTag: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

trimDuplicatesIncludeId: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1

Type: CSOM Int64

totalRowsExactMinimum: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

impressionId: MUST NOT be used.

Type: CSOM String

properties: Allows transport of additional and custom properties structured as comma separated name-value pairs.

Type: CSOM String

See section [3.1.5.29](#)

enableQueryRules: Specifies whether query rules are included when a search query is executed. If the value is true, query rules are applied in the search query. If the value is false, query rules MUST NOT be applied in the search query.

Type: CSOM Boolean

summaryLength: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

maxSnippetLength: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

desiredSnippetLength: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

uiLanguage: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

blockDedupeMode: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

generateBlockRankLog: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

enableSorting: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM Boolean

collapseSpecification: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM String

processPersonalFavorites: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

enableOrderingHitHighlightedProperty: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

hitHighlightedMultivaluePropertyLimit: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Int32

queryTemplatePropertiesUrl: Specifies an identifier which the protocol server MAY use to modify the client-specified **Properties** property (section [3.1.5.9.1.2.3](#)).

Type: CSOM String

3.1.5.7.2.1.3 suggest

Return Type: Microsoft.SharePoint.Client.Search.Query.QuerySuggestionResults

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.

Parameters:

querytext: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM String

iNumberOfQuerySuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Int32

iNumberOfResultSuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Int32

fPreQuerySuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

fHitHighlighting: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

fCapitalizeFirstLetters: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

culture: Specifies the identifier of the language culture of the search suggestion. If present, the value MUST be a valid LCID of a culture name, as specified in [\[RFC3066\]](#).

Type: CSOM Int32

enableStemming: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

showPeopleNameSuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

Type: CSOM Boolean

enableQueryRules: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

fPrefixMatchAllTerms: As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

Type: CSOM Boolean

3.1.5.7.2.2 ObjectPath Methods

3.1.5.7.2.2.1 CSOM Constructor

Initializes a new instance of the **SearchService** object.

Parameters: None

3.1.5.8 Microsoft.Office.Server.Search.REST.SpecialTermResult

TypeId: {9D6EB278-1166-420E-8642-37887FEE2BDC}

ShortName: Microsoft.Office.Server.Search.REST.SpecialTermResult

SpecialTermResult is a row in the Table property of a SpecialTermResults Table, as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

A row in a SpecialTermResults Table maps to one instance of SpecialTermResults.

A row in a SpecialTermResults Table MUST have the columns *Title*, *Url*, and *Description*, and it MAY have the column *IsVisualBestBet*. Each of these columns maps to corresponding property of the SpecialTermResult type.

3.1.5.8.1 Properties

3.1.5.8.1.1 Scalar Properties

3.1.5.8.1.1.1 Description

Type: CSOM String

Accessibility: Read/Write

As specified in the SpecialTermResults Table in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.8.1.1.2 IsVisualBestBet

Type: CSOM Boolean

Accessibility: Read/Write

A value indicating whether the best bet should be rendered as an image.

3.1.5.8.1.1.3 Title

Type: CSOM String

Accessibility: Read/Write

As specified in the SpecialTermResults Table in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.8.1.1.4 Url

Type: CSOM String

Accessibility: Read/Write

As specified in the SpecialTermResults Table in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.8.1.1.5 PiSearchResultId

Type: CSOM String

Accessibility: Read/Write

As specified in the SpecialTermResults Table in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6

3.1.5.8.1.1.6 RenderTemplateId

Type: CSOM String

Accessibility: Read/Write

An identifier indicating a suggested rendering template for the **SpecialTermResult** entity.

3.1.5.8.1.2 ObjectPath Properties

None.

3.1.5.9 Microsoft.SharePoint.Client.Search.Query.KeywordQuery

TypeId: {80173281-FFFD-47B6-9A49-312E06FF8428}

ShortName: Microsoft.SharePoint.Client.Search.Query.KeywordQuery

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1 Properties

3.1.5.9.1.1 Scalar Properties

3.1.5.9.1.1.1 BypassResultTypes

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.2 Culture

Type: CSOM Int32

Accessibility: Read/Write

Specifies the identifier of the language culture of the search query. If present, the value MUST be a valid LCID of a culture name, as specified in [\[RFC3066\]](#).

3.1.5.9.1.1.3 EnableInterleaving

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.4 EnableNicknames

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.5 EnablePhonetic

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.6 EnableStemming

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.7 HiddenConstraints

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.8 QueryTag

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.9 QueryText

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.10 RankingModelId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.11 Refiners

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.12 ResultsUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.13 RowLimit

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.14 RowsPerPage

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.15 ShowPeopleNameSuggestions

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.16 SourceId

Type: CSOM GUID

Accessibility: Read/Write

Unique identifier of the result source.

3.1.5.9.1.1.17 StartRow

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.18 Timeout

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.19 TrimDuplicates

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.20 ClientType

Type: CSOM String

Accessibility: Read/Write

Specifies the type of the query client. It MUST be of **QueryLogClientType** data type as specified in [\[MS-QSSWS\]](#) section 3.1.4.11.4.1.

3.1.5.9.1.1.21 TrimDuplicatesIncludeId

Type: CSOM Int64

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.22 ProcessBestBets

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.23 TotalRowsExactMinimum

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.24 EnableQueryRules

Type: CSOM Boolean

Accessibility: Read/Write

Specifies whether query rules are included when a search query is executed. If the value is true, query rules MAY be included in the search query. If the value is false, query rules MUST not be included in the search query.

3.1.5.9.1.1.25 ImpressionID

Type: CSOM String

Accessibility: Read/Write

MUST NOT be used.

3.1.5.9.1.1.26 BlockDedupeMode

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.27 CollapseSpecification

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1

3.1.5.9.1.1.28 DesiredSnippetLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.29 EnableOrderingHitHighlightedProperty

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.30 EnableSorting

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.1.31 GenerateBlockRankLog

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.32 HitHighlightedMultivaluePropertyLimit

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.33 MaxSnippetLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.34 ProcessPersonalFavorites

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.35 QueryTemplate

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.36 QueryTemplateParameters

Type: CSOM dictionary

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.37 SummaryLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.38 UILanguage

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.1.39 IgnoreSafeQueryPropertiesTemplateUrl

Type: CSOM Boolean

Accessibility: Read/Write

Specifies whether the **SafeQueryPropertiesTemplateUrl** (section [3.1.5.9.1.1.40](#)) property MAY be ignored by the protocol server.

3.1.5.9.1.1.40 SafeQueryPropertiesTemplateUrl

Type: CSOM String

Accessibility: Read/Write

Specifies an identifier which the protocol server MAY use to modify the client-specified **Properties** property (section [3.1.5.9.1.2.3](#)).

3.1.5.9.1.2 ObjectPath Properties

3.1.5.9.1.2.1 HitHighlightedProperties

Type: Microsoft.SharePoint.Client.Search.Query.StringCollection

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.9.1.2.2 PersonalizationData

Type: Microsoft.SharePoint.Client.Search.Query.QueryPersonalizationData

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.9.1.2.3 Properties

Type: Microsoft.SharePoint.Client.Search.Query.KeywordQueryProperties

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.2.4 RefinementFilters

Type: Microsoft.SharePoint.Client.Search.Query.StringCollection

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.2.5 SelectProperties

Type: Microsoft.SharePoint.Client.Search.Query.StringCollection

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.2.6 SortList

Type: Microsoft.SharePoint.Client.Search.Query.SortCollection

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.1.2.7 ReorderingRules

Type: Microsoft.SharePoint.Client.Search.Query.ReorderingRuleCollection

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.9.2 Methods

3.1.5.9.2.1 Scalar Methods

3.1.5.9.2.1.1 GetQuerySuggestionsWithResults

Return Type: Microsoft.SharePoint.Client.Search.Query.QuerySuggestionResults

Specified in [\[MS-QSSWS\]](#) section 3.1.4.18.

Parameters:

numberOfQuerySuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Int32

iNumberOfResultSuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1

Type: CSOM Int32

fPreQuerySuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

fHitHighlighting: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1

Type: CSOM Boolean

fCapitalizeFirstLetters: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1

Type: CSOM Boolean

fPrefixMatchAllTerms: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1

Type: CSOM Boolean

3.1.5.9.2.2 ObjectPath Methods

3.1.5.9.2.2.1 CSOM Constructor

Initializes a new instance of the **KeywordQuery** object.

Parameters: None

3.1.5.10 Microsoft.SharePoint.Client.Search.Query.KeywordQueryProperties

TypeId: {8E0AB106-FBFE-43F1-9CB7-329130820F89}

ShortName: Microsoft.SharePoint.Client.Search.Query.KeywordQueryProperties

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1

3.1.5.10.1 Properties

3.1.5.10.1.1 Scalar Properties

None.

3.1.5.10.1.2 ObjectPath Properties

None.

3.1.5.10.2 Methods

3.1.5.10.2.1 Scalar Methods

3.1.5.10.2.1.1 GetQueryPropertyValue

Return Type: Microsoft.SharePoint.Client.Search.Query.QueryPropertyValue

Retrieves the value of a property based on the specified name

Parameters:

name: Name of a property in the KeywordQueryProperties complex type ([\[MS-QSSWS\]](#) section 3.1.4.7.3.1)

Type: CSOM String

3.1.5.10.2.1.2 SetQueryPropertyValue

Return Type: None

Sets the value of a property based on the specified name

Parameters:

name: Name of a property in the **KeywordQueryProperties** complex type ([\[MS-QSSWS\]](#) section 3.1.4.7.3.1)

Type: CSOM String

val: Value of the property to be set in the **KeywordQueryProperties** complex type ([\[MS-QSSWS\]](#) section 3.1.4.7.3.1). The value MUST conform to the specification in ([\[MS-QSSWS\]](#) section 3.1.4.7.3.1)

Type: Microsoft.SharePoint.Client.Search.Query.QueryPropertyValue

3.1.5.10.2.2 ObjectPath Methods

None.

3.1.5.11 Microsoft.SharePoint.Client.Search.Query.PersonalResultSuggestion

TypeId: {AAFD94AF-525A-4759-8410-F571A26F04BC}

ShortName: Microsoft.SharePoint.Client.Search.Query.PersonalResultSuggestion

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.3

3.1.5.11.1 Properties

3.1.5.11.1.1 Scalar Properties

3.1.5.11.1.1.1 IsBestBet

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.3

3.1.5.11.1.1.2 Title

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.3

3.1.5.11.1.1.3 Url

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.3

3.1.5.11.1.1.4 HighlightedTitle

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.3

3.1.5.11.1.2 ObjectPath Properties

None.

3.1.5.12 Microsoft.SharePoint.Client.Search.Query.Query

TypeId: {506FBB38-B10C-4CB3-80A0-9003A85B56ED}

ShortName: Microsoft.SharePoint.Client.Search.Query.Query

Specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1 Properties

3.1.5.12.1.1 Scalar Properties

3.1.5.12.1.1.1 BypassResultTypes

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.12.1.1.2 Culture

Type: CSOM Int32

Accessibility: Read/Write

Specifies the identifier of the language culture of the search query. If present, the value MUST be a valid LCID of a culture name, as specified in [\[RFC3066\]](#).

3.1.5.12.1.1.3 EnableInterleaving

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.12.1.1.4 EnableNicknames

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.5 EnablePhonetic

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.6 EnableStemming

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.7 QueryTag

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.12.1.1.8 QueryText

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.9 RankingModelId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.10 ResultsUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.12.1.1.11 RowLimit

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.12 RowsPerPage

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.13 ShowPeopleNameSuggestions

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 3.1.4.7.3.1.

3.1.5.12.1.1.14 SourceId

Type: CSOM GUID

Accessibility: Read/Write

Unique identifier of the **result source**.

3.1.5.12.1.1.15 StartRow

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.16 Timeout

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.17 TrimDuplicates

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.18 ClientType

Type: CSOM String

Accessibility: Read/Write

Specifies the type of the query client. It MUST be of **QueryLogClientType** data type as specified in [\[MS-QSSWS\]](#) section 3.1.4.11.4.1.

3.1.5.12.1.1.19 ProcessBestBets

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.12.1.1.20 TotalRowsExactMinimum

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.21 EnableQueryRules

Type: CSOM Boolean

Accessibility: Read/Write

Specifies whether query rules are included when a search query is executed. If the value is true, query rules MAY be included in the search query. If the value is false, query rules MUST not be included in the search query.

3.1.5.12.1.1.22 ImpressionID

Type: CSOM String

Accessibility: Read/Write

MUST NOT be used.

3.1.5.12.1.1.23 BlockDedupeMode

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.24 DesiredSnippetLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.25 EnableOrderingHitHighlightedProperty

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.26 GenerateBlockRankLog

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.27 HitHighlightedMultivaluePropertyLimit

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.28 MaxSnippetLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.29 ProcessPersonalFavorites

Type: CSOM Boolean

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.30 QueryTemplate

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.31 QueryTemplateParameters

Type: CSOM dictionary

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.32 SummaryLength

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.33 UILanguage

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.1.34 IgnoreSafeQueryPropertiesTemplateUrl

Type: CSOM Boolean

Accessibility: Read/Write

The value of this property MUST be ignored by the protocol server.

3.1.5.12.1.1.35 SafeQueryPropertiesTemplateUrl

Type: CSOM String

Accessibility: Read/Write

The value of this property MUST be ignored by the protocol server.

3.1.5.12.1.2 ObjectPath Properties

3.1.5.12.1.2.1 HitHighlightedProperties

Type: Microsoft.SharePoint.Client.Search.Query.StringCollection

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.1.2.2 PersonalizationData

Type: Microsoft.SharePoint.Client.Search.Query.QueryPersonalizationData

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 2.2.4.11.

3.1.5.12.2 Methods

3.1.5.12.2.1 Scalar Methods

3.1.5.12.2.1.1 GetQuerySuggestionsWithResults

Return Type: Microsoft.SharePoint.Client.Search.Query.QuerySuggestionResults

Specified in [\[MS-QSSWS\]](#) section 3.1.4.18.

Parameters:

iNumberOfQuerySuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Int32

iNumberOfResultSuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Int32

fPreQuerySuggestions: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

fHitHighlighting: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

fCapitalizeFirstLetters: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

fPrefixMatchAllTerms: As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.2.1.

Type: CSOM Boolean

3.1.5.12.2.2 ObjectPath Methods

None.

3.1.5.13 Microsoft.SharePoint.Client.Search.Query.QueryPersonalizationData

TypeId: {28D79F49-820A-4D51-BB2A-3309B3F4C54D}

ShortName: Microsoft.SharePoint.Client.Search.Query.QueryPersonalizationData

As specified in [\[MS-QSSWS\]](#) section 2.2.4.10.

3.1.5.13.1 Properties

3.1.5.13.1.1 Scalar Properties

None.

3.1.5.13.1.2 ObjectPath Properties

None.

3.1.5.13.2 Methods

3.1.5.13.2.1 Scalar Methods

None.

3.1.5.13.2.2 ObjectPath Methods

3.1.5.13.2.2.1 CSOM Constructor

Initializes a new instance of the **QueryPersonalizationData** object.

Parameters:

guidUserIdString: As specified by **UserId** in [\[MS-QSSWS\]](#) section 2.2.4.10.

Type: CSOM String

3.1.5.14 Microsoft.SharePoint.Client.Search.Query.QueryPropertyValue

TypeId: {B25BA502-71D7-4AE4-A701-4CA2FB1223BE}

ShortName: Microsoft.SharePoint.Client.Search.Query.QueryPropertyValue

This object is used to store values of predefined types. The object MUST have a value set for only one of the property.

3.1.5.14.1 Properties

3.1.5.14.1.1 Scalar Properties

3.1.5.14.1.1.1 BoolVal

Type: CSOM Boolean

Accessibility: Read/Write

Specifies any arbitrary value of type CSOM Boolean. This property MUST have a value only if **QueryPropertyValueTypeId** is set to 3.

3.1.5.14.1.1.2 IntVal

Type: CSOM Int32

Accessibility: Read/Write

Specifies any arbitrary value of type CSOM Int32. This property MUST have a value only if **QueryPropertyValueTypeId** is set to 2.

3.1.5.14.1.1.3 QueryPropertyValueTypeId

Type: CSOM Int32

Accessibility: Read/Write

Specifies the type of data stored in this object. This MUST be set to one of the following values.

- 0: Specifies that no value is stored in this object.
- 1: Specifies that a CSOM String value is stored.
- 2: Specifies that a CSOM Int32 value is stored.
- 3: Specifies that a CSOM Boolean value is stored.
- 4: Specifies that a CSOM array of type CSOM String is stored.
- 5: Specifies that the value is an unsupported type.

3.1.5.14.1.1.4 StrArray

Type: CSOM array of CSOM String

Accessibility: Read/Write

Specifies any arbitrary value of type CSOM array. This property **MUST** have a value only if **QueryPropertyValueTypeIndex** is set to 4.

3.1.5.14.1.1.5 StrVal

Type: CSOM String

Accessibility: Read/Write

Specifies any arbitrary value of type CSOM String. This property **MUST** have a value only if **QueryPropertyValueTypeIndex** is set to 1.

3.1.5.14.1.2 ObjectPath Properties

None.

3.1.5.15 Microsoft.SharePoint.Client.Search.Query.QuerySuggestionResults

TypeId: {EF071CB4-7FAB-4E8D-9480-F15D30DC696D}

ShortName: Microsoft.SharePoint.Client.Search.Query.QuerySuggestionResults

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.1.

3.1.5.15.1 Properties

3.1.5.15.1.1 Scalar Properties

3.1.5.15.1.1.1 PeopleNames

Type: CSOM array of CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.1.

3.1.5.15.1.1.2 PersonalResults

Type: CSOM array of Microsoft.SharePoint.Client.Search.Query.PersonalResultSuggestion

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.1.

3.1.5.15.1.1.3 Queries

Type: CSOM array of Microsoft.SharePoint.Client.Search.Query.QuerySuggestionQuery

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.1.

3.1.5.15.1.2 ObjectPath Properties

None.

3.1.5.16 Microsoft.SharePoint.Client.Search.Query.ResultTable

TypeId: {6780DF59-1036-4912-829B-432354F22656}

ShortName: Microsoft.SharePoint.Client.Search.Query.ResultTable

Specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1 Properties

3.1.5.16.1.1 Scalar Properties

3.1.5.16.1.1.1 Properties

Type: CSOM dictionary

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.2 QueryId

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.3 ResultRows

Type: CSOM array of CSOM dictionary

Accessibility: Read Only

Contains the list of query results.

3.1.5.16.1.1.4 RowCount

Type: CSOM Int32

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.5 TableType

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.6 TotalRows

Type: CSOM Int32

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.7 GroupTemplateId

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.8 ItemTemplateId

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.9 QueryRuleId

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.10 ResultTitle

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.11 ResultTitleUrl

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.1.12 TotalRowsIncludingDuplicates

Type: CSOM Int32

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.16.1.2 ObjectPath Properties

None.

3.1.5.17 Microsoft.SharePoint.Client.Search.Query.ResultTableCollection

TypeId: {11F20D08-7F42-49C1-8C0C-8EE4C32B203E}

ShortName: Microsoft.SharePoint.Client.Search.Query.ResultTableCollection

Specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1 Properties

3.1.5.17.1.1 Scalar Properties

3.1.5.17.1.1.1 ElapsedTime

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1.1.2 Properties

Type: CSOM dictionary

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1.1.3 QueryId

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1.1.4 SpellingSuggestion

Type: CSOM String

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1.1.5 TriggeredRules

Type: CSOM array of CSOM GUID

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1.1.6 QueryErrors

Type: CSOM dictionary

Accessibility: Read Only

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

3.1.5.17.1.2 ObjectPath Properties

None.

3.1.5.18 Microsoft.SharePoint.Client.Search.Query.SearchExecutor

TypeId: {8D2AC302-DB2F-46FE-9015-872B35F15098}

ShortName: Microsoft.SharePoint.Client.Search.Query.SearchExecutor

This object contains operations to execute a search query or a batch of search queries and retrieve a list of links to items and associated properties, crawled locally by the protocol server or by another search engine.

3.1.5.18.1 Properties

3.1.5.18.1.1 Scalar Properties

None.

3.1.5.18.1.2 ObjectPath Properties

None.

3.1.5.18.2 Methods

3.1.5.18.2.1 Scalar Methods

3.1.5.18.2.1.1 ExecuteQueries

Return Type: CSOM dictionary

This method is used to execute a batch of search queries and retrieve a list of links to items, crawled locally by the protocol server or by another search engine, that are relevant to the search query, together with associated properties, for all the search queries.

This method returns a dictionary where each row corresponds to a query object. Each row contains a *queryId* and query results that correspond to that *queryId*.

Parameters:

queryIds: Specifies a list of identifiers for the query objects in the *queries* parameter.

Type: CSOM array of CSOM String

queries: Specifies a list of query objects specified in section [3.1.5.12](#).

Type: CSOM array of Microsoft.SharePoint.Client.Search.Query.Query

handleExceptions: Specifies how the protocol server SHOULD handle errors encountered while executing the list of search queries. If the value is "true", then the protocol server MUST execute all the search queries. For each search query that encounters an error, the protocol server MUST set the **QueryErrors** property specified in section [3.1.5.17.1.1.6](#) of the corresponding query result in the returned dictionary. If the value is "false", and any search query encounters an error, the protocol server MUST throw an exception that represents the error for any one of the search queries.

Type: CSOM Boolean

3.1.5.18.2.1.2 ExecuteQuery

Return Type: Microsoft.SharePoint.Client.Search.Query.ResultTableCollection

This method is used to execute a search query and retrieve a list of links to items, crawled locally by the protocol server or by another search engine, that are relevant to the search query, together with associated properties.

This method returns a **ResultTableCollection** object that contains the query results for the search query

Parameters:

query: Specified in section [3.1.5.12](#).

Type: Microsoft.SharePoint.Client.Search.Query.Query

3.1.5.18.2.1.3 RecordPageClick

Return Type: None

Specified in [\[MS-QSSWS\]](#) section 3.1.4.16.

Parameters:

pageInfo: MUST be set to the value of the **piPageImpression** property of the **ResultTableCollection**. If the **piPageImpression** property does not exist or is an empty string, then the client MUST NOT call this method. See **piPageImpression** in [\[MS-QSSWS\]](#) section 3.1.4.1.3.1.

Type: CSOM String

Microsoft.SharePoint.Client.Web is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.143.

clickType: As specified in [\[MS-QSSWS\]](#) section 3.1.4.16.4.1

Type: CSOM String

blockType: MUST be set to the value of the **piPageImpressionBlockType** property of the **ResultTable**. If the **piPageImpressionBlockType** property does not exist or is an empty string then the client MUST NOT call this method. See **piPageImpressionBlockType** in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

Type: CSOM Int32

clickedResultId: MUST be set to the value of the **piSearchResultId** column of the **ResultTable**. If the **piSearchResultId** column does not exist or is an empty string, then the client MUST NOT call this method. See **piSearchResultId** in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

Type: CSOM String

subResultIndex: The index of the document associated with a search result. MUST be 0 if the search result is clicked or MUST be a 1-based index of a document returned in the **deeplinks** column of a corresponding **ResultTable**. Documents in the **deeplinks** column are represented as encoded URLs separated by spaces.

Type: CSOM Int32

immediacySourceId: See **SourceId** in section [3.1.5.12.1.1.14](#).

Type: CSOM String

immediacyQueryString: See **QueryText** in section [3.1.5.12.1.1.8](#).

Type: CSOM String

immediacyTitle: See **ResultTitle** in section [3.1.5.16.1.1.10](#).

Type: CSOM String

immediacyUrl: See **ResultTitleUrl** in section [3.1.5.16.1.1.11](#).

Type: CSOM String

3.1.5.18.2.1.4 ExportPopularQueries

Return Type: CSOM array of Microsoft.SharePoint.Client.Search.Query.PopularQuery

This method is used to get a list of popular search queries executed on the specified **site** (2).

Parameters:

web: The site (2) that is used by the protocol server to identify the **context** of the popular query export.

Type: Microsoft.SharePoint.Client.Web

sourceId: Specifies the unique identifier of the result source to use for exporting popular queries.

Type: CSOM GUID

3.1.5.18.2.2 ObjectPath Methods

3.1.5.18.2.2.1 CSOM Constructor

Initializes a new instance of the **SearchExecutor** object.

Parameters: None

3.1.5.19 Microsoft.SharePoint.Client.Search.Query.Sort

TypeId: {2CD54EF7-C2B3-4405-BCE3-EC521D35A7EB}

ShortName: Microsoft.SharePoint.Client.Search.Query.Sort

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.6.

3.1.5.19.1 Properties

3.1.5.19.1.1 Scalar Properties

3.1.5.19.1.1.1 Direction

Type: Microsoft.SharePoint.Client.Search.Query.SortDirection

Accessibility: Read/Write

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.6.

3.1.5.19.1.1.2 Property

Type: CSOM String

Accessibility: Read/Write

For details, see **strProperty**, as specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.6.

3.1.5.19.1.2 ObjectPath Properties

None.

3.1.5.20 Microsoft.SharePoint.Client.Search.Query.SortCollection

TypeId: {F5A89F94-DB5D-4ABE-B9EC-DC6B306DF93E}

ShortName: Microsoft.SharePoint.Client.Search.Query.SortCollection

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.4.

3.1.5.20.1 Properties

3.1.5.20.1.1 Scalar Properties

None.

3.1.5.20.1.2 ObjectPath Properties

None.

3.1.5.20.2 Methods

3.1.5.20.2.1 Scalar Methods

3.1.5.20.2.1.1 Add

Return Type: None

Adds a new element of type `Microsoft.SharePoint.Client.Search.Query.Sort` to the collection and returns a reference to the added `Microsoft.SharePoint.Client.Search.Query.Sort`.

Parameters:

strProperty: Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.6.

Type: CSOM String

direction: Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.6.

Type: `Microsoft.SharePoint.Client.Search.Query.SortDirection`

3.1.5.20.2.1.2 Clear

Return Type: None

Deletes all the elements in the collection.

Parameters: None

3.1.5.20.2.2 ObjectPath Methods

None.

3.1.5.21 Microsoft.SharePoint.Client.Search.Query.SortDirection

ShortName: `Microsoft.SharePoint.Client.Search.Query.SortDirection`

Flag: false

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.4.

3.1.5.21.1 Field Values

3.1.5.21.1.1 Ascending

Value: 0

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.4.

3.1.5.21.1.2 Descending

Value: 1

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.4.

3.1.5.21.1.3 FQLFormula

Value: 2

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.4.

3.1.5.22 Microsoft.SharePoint.Client.Search.Query.StringCollection

TypeId: {17C6C8BA-C570-4DB1-993A-FBACF4E4EF07}

ShortName: Microsoft.SharePoint.Client.Search.Query.StringCollection

Contains a collection of arbitrary string values.

3.1.5.22.1 Properties

3.1.5.22.1.1 Scalar Properties

None.

3.1.5.22.1.2 ObjectPath Properties

None.

3.1.5.22.2 Methods

3.1.5.22.2.1 Scalar Methods

3.1.5.22.2.1.1 Add

Return Type: None

Adds an arbitrary string value to the collections.

Parameters:

property: A single string value

Type: CSOM String

3.1.5.22.2.1.2 Clear

Return Type: None

Deletes all the string values in the collection.

Parameters: None

3.1.5.22.2.2 ObjectPath Methods

3.1.5.22.2.2.1 CSOM Constructor

Initializes a new instance of the **StringCollection** object.

Parameters: None

3.1.5.23 Microsoft.SharePoint.Client.Search.Query.RankingLabeling

TypeId: {E2533389-4387-4EBE-8DF7-11AF5568AED5}

ShortName: Microsoft.SharePoint.Client.Search.Query.RankingLabeling

Provides methods for getting and adding **relevance judgments**.

3.1.5.23.1 Properties

3.1.5.23.1.1 Scalar Properties

None.

3.1.5.23.1.2 ObjectPath Properties

None.

3.1.5.23.2 Methods

3.1.5.23.2.1 Scalar Methods

3.1.5.23.2.1.1 AddJudgment

Return Type: None

Adds a single relevance judgment for the specified **query** and URL pair.

Parameters:

userQuery: User query for which the relevance judgment is added.

Type: CSOM String

url: URL for which the relevance judgment is added.

Type: CSOM String

labelId: The judgment for this query-URL pair as represented by an **Int16**. This value MUST be between 1 and 5 inclusive.

Type: **CSOM Int16**

3.1.5.23.2.1.2 GetJudgementsForQuery

Return Type: CSOM dictionary

Retrieves all known relevance judgments for the specified query. The returned dictionary MUST map the URL of the document to the relevance judgment label. The label MUST be an integer value between 1 and 5 inclusive.

Parameters:

query: Query string for which relevance judgments are to be retrieved.

Type: CSOM String

3.1.5.23.2.1.3 NormalizeResultUrl

Return Type: CSOM String

A URL string after normalization. The input and output URL strings MUST resolve to the same document.

Parameters:

url: The URL for which the relevance judgment is added.

Type: CSOM String

3.1.5.23.2.2 ObjectPath Methods

3.1.5.23.2.2.1 CSOM Constructor

Initializes a new instance of the **RankingLabeling** object.

Parameters: None

3.1.5.24 Microsoft.SharePoint.Client.Search.Query.QuerySuggestionQuery

TypeId: {44908C33-C578-4342-905A-EE284B67B415}

ShortName: Microsoft.SharePoint.Client.Search.Query.QuerySuggestionQuery

Specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.5.

3.1.5.24.1 Properties

3.1.5.24.1.1 Scalar Properties

3.1.5.24.1.1.1 IsPersonal

Type: CSOM Boolean

Accessibility: Read/Write

Specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.5.

3.1.5.24.1.1.2 Query

Type: CSOM String

Accessibility: Read/Write

Specified in [\[MS-QSSWS\]](#) section 3.1.4.18.3.5.

3.1.5.24.1.2 ObjectPath Properties

None.

3.1.5.25 Microsoft.Office.Server.Search.REST.SpecialTermResults

TypeId: {185764A3-378A-4436-B87D-6B5CD50B8E6A}

ShortName: Microsoft.Office.Server.Search.REST.SpecialTermResults

SpecialTermResults is a SpecialTermResults Table, as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6

Each entry in the Table property from the SpecialResults Table is mapped to a SpecialTermResult entry accessible through the **Results** property.

3.1.5.25.1 Properties

3.1.5.25.1.1 Scalar Properties

3.1.5.25.1.1.1 Properties

Type: CSOM dictionary

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.25.1.1.2 Results

Type: CSOM array of Microsoft.Office.Server.Search.REST.SpecialTermResult

Accessibility: Read/Write

As specified in section [3.1.5.8](#).

Contains the list of **SpecialTermResult** entries.

3.1.5.25.1.1.3 GroupTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.25.1.1.4 ItemTemplateId

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.25.1.1.5 ResultTitle

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.25.1.1.6 ResultTitleUrl

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6.

3.1.5.25.1.2 ObjectPath Properties

None.

3.1.5.26 Microsoft.SharePoint.Client.Search.Query.ReorderingRule

TypeId: {D8566F46-74B1-4D92-BA88-0EFD23B36F71}

ShortName: Microsoft.SharePoint.Client.Search.Query.ReorderingRule

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.9.

3.1.5.26.1 Properties

3.1.5.26.1.1 Scalar Properties

3.1.5.26.1.1.1 Boost

Type: CSOM Int32

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.9.

3.1.5.26.1.1.2 MatchType

Type: Microsoft.SharePoint.Client.Search.Query.ReorderingRuleMatchType

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.9.

3.1.5.26.1.1.3 MatchValue

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.9.

3.1.5.26.1.2 ObjectPath Properties

None.

3.1.5.27 Microsoft.SharePoint.Client.Search.Query.ReorderingRuleCollection

TypeId: {B0522938-E1B7-4FC4-A6A8-BD3ED873E614}

ShortName: Microsoft.SharePoint.Client.Search.Query.ReorderingRuleCollection

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.3.7.

3.1.5.27.1 Properties

3.1.5.27.1.1 Scalar Properties

None.

3.1.5.27.1.2 ObjectPath Properties

None.

3.1.5.27.2 Methods

3.1.5.27.2.1 Scalar Methods

3.1.5.27.2.1.1 Add

Return Type: None

Adds a new element of type **Microsoft.SharePoint.Client.Search.Query.ReorderingRule** as specified in section [3.1.5.26](#) to the collection and returns a reference to the added Microsoft.SharePoint.Client.Search.Query.ReorderingRule element.

Parameters:

matchType: See section [3.1.5.28](#).

Type: Microsoft.SharePoint.Client.Search.Query.ReorderingRuleMatchType

matchValue: [\[MS-QSSWS\]](#) section 3.1.4.7.3.9.

Type: CSOM String

boost: [\[MS-QSSWS\]](#) section 3.1.4.7.3.9.

Type: CSOM Int32

3.1.5.27.2.1.2 Clear

Return Type: None

Deletes all the elements from the collection.

Parameters: None

3.1.5.27.2.2 ObjectPath Methods

None.

3.1.5.28 Microsoft.SharePoint.Client.Search.Query.ReorderingRuleMatchType

ShortName: Microsoft.SharePoint.Client.Search.Query.ReorderingRuleMatchType

Flag: false

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1 Field Values

3.1.5.28.1.1 ResultContainsKeyword

Value: 0

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.2 TitleContainsKeyword

Value: 1

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.3 TitleMatchesKeyword

Value: 2

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.4 UrlStartsWith

Value: 3

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.5 UriExactlyMatches

Value: 4

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.6 ContentTypeIs

Value: 5

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.7 FileExtensionMatches

Value: 6

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.8 ResultHasTag

Value: 7

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.28.1.9 ManualCondition

Value: 8

Specified in [\[MS-QSSWS\]](#) section 3.1.4.7.4.5.

3.1.5.29 Microsoft.Office.Server.Search.REST.QueryProperty

TypeId: {742338CA-8301-4574-9D77-BFF2AF39AD62}

ShortName: Microsoft.Office.Server.Search.REST.QueryProperty

This object stores additional or custom properties for a search query. A **QueryProperty** is structured as name-value pairs.

The value **MUST** conform to the specification in [\[MS-QSSWS\]](#) section 3.1.4.7.3.1.

3.1.5.29.1 Properties

3.1.5.29.1.1 Scalar Properties

3.1.5.29.1.1.1 Name

Type: CSOM String

Accessibility: Read/Write

Name of a property in **CSOM String** format.

This property stores the name part of the **QueryProperty** name-value pair.

3.1.5.29.1.1.2 Value

Type: Microsoft.SharePoint.Client.Search.Query.QueryPropertyValue

Accessibility: Read/Write

As specified in section [3.1.5.14](#).

This property stores the value part of the **QueryProperty** name-value pair.

3.1.5.29.1.2 ObjectPath Properties

None.

3.1.5.30 Microsoft.Office.Server.Search.REST.Refiner

TypeId: {63EEBA68-040C-4B26-8590-EB2E4153163F}

ShortName: Microsoft.Office.Server.Search.REST.Refiner

Refiner is an **ArrayOfRefinement** as specified in [\[MS-QSSWS\]](#) section [3.1.4.1.3.9](#).

A refiner contains a CSOM array, with entries, of the types as specified in section [3.1.5.2](#). All entries in the array **MUST** share the same **RefinerName**, as specified in [\[MS-QSSWS\]](#) section 3.1.4.1.3.6), accessed through the **Name** property of the refiner containing these entries.

3.1.5.30.1 Properties

3.1.5.30.1.1 Scalar Properties

3.1.5.30.1.1.1 Entries

Type: CSOM array of Microsoft.Office.Server.Search.REST.RefinerEntry

Accessibility: Read/Write

An array of **RefinerEntry** as specified in section [3.1.5.2](#).

3.1.5.30.1.1.2 Name

Type: CSOM String

Accessibility: Read/Write

As specified as Refinement.RefinerName in [\[MS-QSSWS\]](#) section [3.1.4.1.3.10](#).

3.1.5.30.1.2 ObjectPath Properties

None.

3.1.5.31 Microsoft.Office.Server.Search.REST.RefinerEntry

TypeId: {316905B6-359D-44A3-B728-25F2D292E1E8}

ShortName: Microsoft.Office.Server.Search.REST.RefinerEntry

As specified in [\[MS-QSSWS\]](#) section [3.1.4.1.3.10](#).

3.1.5.31.1 Properties

3.1.5.31.1.1 Scalar Properties

3.1.5.31.1.1.1 RefinementCount

Type: CSOM Int64

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section [3.1.4.1.3.10](#).

3.1.5.31.1.1.2 RefinementName

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section [3.1.4.1.3.10](#).

3.1.5.31.1.1.3 RefinementToken

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section [3.1.4.1.3.10](#).

3.1.5.31.1.1.4 RefinementValue

Type: CSOM String

Accessibility: Read/Write

As specified in [\[MS-QSSWS\]](#) section [3.1.4.1.3.10](#).

3.1.5.31.1.2 ObjectPath Properties

None.

3.1.5.32 Microsoft.Office.Server.Search.WebControls.ControlMessage

TypeId: {D3DFEF63-4D44-497D-B936-047135645AD7}

ShortName: Microsoft.Office.Server.Search.WebControls.ControlMessage

This object stores information about a search query exception.

3.1.5.32.1 Properties

3.1.5.32.1.1 Scalar Properties

3.1.5.32.1.1.1 code

Type: CSOM Int32

Accessibility: Read Only

This property is not used and MUST be -1.

3.1.5.32.1.1.2 correlationID

Type: CSOM String

Accessibility: Read Only

The **GUID** used to log all the information for a search query in diagnostic logs.

3.1.5.32.1.1.3 encodeDetails

Type: CSOM Boolean

Accessibility: Read Only

If TRUE, the protocol client MUST interpret the **messageDetails** as **HTML**.

3.1.5.32.1.1.4 header

Type: CSOM String

Accessibility: Read Only

This property is not used and MUST be null.

3.1.5.32.1.1.5 level

Type: Microsoft.Office.Server.Search.WebControls.MessageLevel

Accessibility: Read Only

MUST be **MessageLevel.Error** as specified in section [3.1.5.33.1.3](#).

3.1.5.32.1.1.6 messageDetails

Type: CSOM String

Accessibility: Read Only

The detailed message of the search query exception.

3.1.5.32.1.1.7 messageDetailsForViewers

Type: CSOM String

Accessibility: Read Only

This property is not used and MUST be an empty string.

3.1.5.32.1.1.8 serverTypeId

Type: CSOM String

Accessibility: Read Only

A unique identifier of the **ControlMessage** (section [3.1.5.32](#)) object. MUST have the value of "{D3DFEF63-4D44-497D-B936-047135645AD7}"

3.1.5.32.1.1.9 showForViewerUsers

Type: CSOM Boolean

Accessibility: Read Only

This property is not used and MUST be true.

3.1.5.32.1.1.10 showInEditModeOnly

Type: CSOM Boolean

Accessibility: Read Only

This property is not used and MUST be false.

3.1.5.32.1.1.11 stackTrace

Type: CSOM String

Accessibility: Read Only

The stack trace of the search query exception.

3.1.5.32.1.1.12 type

Type: CSOM String

Accessibility: Read Only

The class name of the search query exception.

3.1.5.32.1.2 ObjectPath Properties

None.

3.1.5.33 Microsoft.Office.Server.Search.WebControls.MessageLevel

ShortName: Microsoft.Office.Server.Search.WebControls.MessageLevel

Flag: false

Severity level of the **ControlMessage** as specified in section [3.1.5.32](#).

3.1.5.33.1 Field Values

3.1.5.33.1.1 Information

Value: 0

Indicates that the **ControlMessage** (section [3.1.5.32](#)) is informational.

3.1.5.33.1.2 Warning

Value: 1

Indicates that the **ControlMessage** (section [3.1.5.32](#)) is a warning.

3.1.5.33.1.3 Error

Value: 2

Indicates that the **ControlMessage** (section [3.1.5.32](#)) is an error.

3.1.5.34 Microsoft.SharePoint.Client.Search.Administration.DocumentCrawlLog

TypeId: {5C5CFD42-0712-4C00-AE49-23B33BA34ECC}

ShortName: Microsoft.SharePoint.Client.Search.Administration.DocumentCrawlLog

This object contains methods that can be used by the protocol client to retrieve information about items that were crawled.

3.1.5.34.1 Properties

3.1.5.34.1.1 Scalar Properties

None.

3.1.5.34.1.2 ObjectPath Properties

None.

3.1.5.34.2 Methods

3.1.5.34.2.1 Scalar Methods

3.1.5.34.2.1.1 GetCrawledUrls

Return Type: Microsoft.SharePoint.Client.SimpleDataTable

This method is used to retrieve information about all the contents that were crawled. Microsoft.SharePoint.Client.SimpleDataTable is specified in [\[MS-CSOMREST\]](#) section 3.1.5.1.3.3.

Parameters:

getCountOnly: If true, only the count of the contents crawled MUST be returned. If false, all the information about the crawled contents MUST be returned.

Type: CSOM Boolean

maxRows: maximum number of rows to be returned. If 0 is specified, all the rows are be returned. The protocol server MUST NOT return more rows than specified by the maxRows parameter, if it is not 0.

Type: CSOM Int64

queryString: Specifies the URL pattern for which crawled documents MUST be returned. The specified pattern MUST match all literal characters except for the character '*'. The '*' character MUST match any number of arbitrary characters.

Type: CSOM String

isLike: If true, the pattern specified in *queryString* MUST be used as the prefix while matching the URLs of the crawled content. If false, the pattern specified in *queryString* MUST be used to exactly match the URLs of the crawled content.

Type: CSOM Boolean

contentSourceID: Unique identifier of the **content source**. If specified, only the crawled contents that are associated with the content source MUST be returned.

Type: CSOM Int32

errorLevel: Specifies the type of crawled content that MUST be returned. MUST be set to one of the following values: **-1**: All the crawled content MUST be returned. **0**: Only contents that were successfully crawled MUST be returned. **1**: Only contents that generated a warning during a crawl MUST be returned. **2**: Only contents that generated an error during a crawl MUST be returned. **3**:

Only contents that were previously in the index but removed during the latest crawl MUST be returned.

Type: CSOM Int32

errorID: MUST be set to -1.

Type: CSOM Int32

startDateTime: If set to **DateTime.MinValue**, information about all the crawled contents MUST be returned. If not, only information about contents that were crawled after this datetime MUST be returned.

Type: **CSOM DateTime**

endDateTime: If set to **DateTime.MaxValue**, information about all the crawled contents MUST be returned. If not, only information about contents that were crawled before this datetime MUST be returned.

Type: CSOM DateTime

3.1.5.34.2.2 ObjectPath Methods

3.1.5.34.2.2.1 CSOM Constructor

Initializes a new instance of a **DocumentCrawlLog** object.

Parameters:

site: The site (2) for which information about items that were crawled is retrieved.

Type: Microsoft.SharePoint.Client.Site

Microsoft.SharePoint.Client.Site is specified in [\[MS-CSOMSPT\]](#) section 3.2.5.119.

3.1.5.35 Microsoft.SharePoint.Client.Search.Administration.SearchObjectLevel

ShortName: Microsoft.SharePoint.Client.Search.Administration.SearchObjectLevel

Flag: false

This enumeration represents a site (2) server level.

3.1.5.35.1 Field Values

3.1.5.35.1.1 SPWeb

Value: 0

Represents the level of a site (2) server site.

3.1.5.35.1.2 SPSite

Value: 1

Represents the level of a site (2) server site collection.

3.1.5.35.1.3 SPSiteSubscription

Value: 2

Represents the level of a site (2) server tenant.

3.1.5.35.1.4 Ssa

Value: 3

Represents the level of a site (2) server search service application.

3.1.5.36 Microsoft.SharePoint.Client.Search.Administration.SearchObjectOwner

TypeId: {E6834C69-54C1-4BFC-9805-4B88406C28BB}

ShortName: Microsoft.SharePoint.Client.Search.Administration.SearchObjectOwner

This object represents a site (2) server owner.

3.1.5.36.1 Properties

3.1.5.36.1.1 Scalar Properties

None.

3.1.5.36.1.2 ObjectPath Properties

None.

3.1.5.36.2 Methods

3.1.5.36.2.1 Scalar Methods

None.

3.1.5.36.2.2 ObjectPath Methods

3.1.5.36.2.2.1 CSOM Constructor

Initializes a new **SearchObjectOwner** object.

Parameters:

lowestCurrentLevelToUse: Specifies the site (2) server level to use.

Type: Microsoft.SharePoint.Client.Search.Administration.SearchObjectLevel

3.1.5.37

Microsoft.SharePoint.Client.Search.Portability.SearchConfigurationPortability

TypeId: {F44B2C90-DDC4-49C8-8D4D-4FB56DCC3247}

ShortName: Microsoft.SharePoint.Client.Search.Portability.SearchConfigurationPortability

This object contains methods that can be used to import, export, or delete search settings, which includes query rules, result sources, **managed properties**, **crawled properties**, and **ranking models**, to a site, site collection, tenant level, or search service application.

3.1.5.37.1 Properties

3.1.5.37.1.1 Scalar Properties

3.1.5.37.1.1.1 ImportWarnings

Type: CSOM String

Accessibility: Read Only

Specifies the warning messages that were generated during the import.

3.1.5.37.1.2 ObjectPath Properties

None.

3.1.5.37.2 Methods

3.1.5.37.2.1 Scalar Methods

3.1.5.37.2.1.1 ExportSearchConfiguration

Return Type: CSOM String

This method exports the search settings at the specified site (2) server level. This method **MUST** only export the search setting added by the user and **MUST NOT** export the out-of-box search settings.

Parameters:

owningScope: Specifies the site (2) server level at which to export the search settings.

Type: Microsoft.SharePoint.Client.Search.Administration.SearchObjectOwner

3.1.5.37.2.1.2 ImportSearchConfiguration

Return Type: None

This method imports the search settings at the specified site (2) server level.

Parameters:

owningScope: Specifies the site (2) server level at which to import the search settings.

Type: Microsoft.SharePoint.Client.Search.Administration.SearchObjectOwner

searchConfiguration: Specifies the search settings to be imported at the specified site (2) server level. This is obtained by exporting the search setting using the **ExportSearchConfiguration** (section [3.1.5.37.2.1.1](#)) method.

Type: CSOM String

3.1.5.37.2.1.3 DeleteSearchConfiguration

Return Type: None

This method deletes the search settings at the specified site (2) server level.

Parameters:

owningScope: Specifies the site (2) server level at which to delete the search settings.

Type: Microsoft.SharePoint.Client.Search.Administration.SearchObjectOwner

searchConfiguration: Specifies the search settings that MUST be deleted.

Type: CSOM String

3.1.5.37.2.2 ObjectPath Methods

3.1.5.37.2.2.1 CSOM Constructor

Initializes a new instance of the **SearchConfigurationPortability** object.

Parameters: None

3.1.5.38 Microsoft.SharePoint.Client.Search.Query.PopularQuery

TypeId: {CEA115D6-87EC-4E1C-AA4A-B8D44D6CD10D}

ShortName: Microsoft.SharePoint.Client.Search.Query.PopularQuery

This object is used by the **ExportPopularQuery** method (section [3.1.5.18.2.1.4](#)) and contains data about a popular query. Popular queries are used by query rules to trigger popular query conditions.

3.1.5.38.1 Properties

3.1.5.38.1.1 Scalar Properties

3.1.5.38.1.1.1 ClickCount

Type: CSOM Int32

Accessibility: Read/Write

Specifies the number of times a user clicked at least once on any of the search results returned by this query.

3.1.5.38.1.1.2 LCID

Type: CSOM Int32

Accessibility: Read/Write

Specifies the language of the query text as a language code identifier (LCID).

3.1.5.38.1.1.3 QueryCount

Type: CSOM Int32

Accessibility: Read/Write

Specifies the number of times this query was issued.

3.1.5.38.1.1.4 QueryText

Type: CSOM String

Accessibility: Read/Write

Specifies the text of this search query.

3.1.5.38.1.2 ObjectPath Properties

None.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

4 Protocol Examples

4.1 Search for the keyword "home"

In this example a search is issued for the keyword "home".

Request

```
<Request xmlns="http://schemas.microsoft.com/sharepoint/clientquery/2009"
SchemaVersion="15.0.0.0" LibraryVersion="15.0.0.0" ApplicationName="Javascript Library">
  <Actions>
    <ObjectPath Id="191" ObjectPathId="190" />
    <SetProperty Id="192" ObjectPathId="190" Name="QueryText">
      <Parameter Type="String">home</Parameter>
    </SetProperty>
    <ObjectPath Id="194" ObjectPathId="193" />
    <Method Name="Clear" Id="195" ObjectPathId="193" />
    <SetProperty Id="196" ObjectPathId="190" Name="StartRow">
      <Parameter Type="Number">0</Parameter>
    </SetProperty>
    <ObjectPath Id="198" ObjectPathId="197" />
    <Method Name="Clear" Id="199" ObjectPathId="197" />
    <SetProperty Id="200" ObjectPathId="190" Name="HiddenConstraints">
      <Parameter Type="String"></Parameter>
    </SetProperty>
    <SetProperty Id="201" ObjectPathId="190" Name="Culture">
      <Parameter Type="Number">1033</Parameter>
    </SetProperty>
    <SetProperty Id="202" ObjectPathId="190" Name="RowsPerPage">
      <Parameter Type="Number">10</Parameter>
    </SetProperty>
    <SetProperty Id="203" ObjectPathId="190" Name="RowLimit">
      <Parameter Type="Number">10</Parameter>
    </SetProperty>
    <SetProperty Id="204" ObjectPathId="190" Name="TotalRowsExactMinimum">
      <Parameter Type="Number">31</Parameter>
    </SetProperty>
    <SetProperty Id="205" ObjectPathId="190" Name="SourceId">
      <Parameter Type="Guid">{8413cd39-2156-4e00-b54d-11efd9abdb89}</Parameter>
    </SetProperty>
    <SetProperty Id="206" ObjectPathId="190" Name="Refiners">
      <Parameter Type="String"></Parameter>
    </SetProperty>
    <SetProperty Id="207" ObjectPathId="190" Name="Refiners">
      <Parameter Type="String">Author(filter=7/0/*),LastModifiedTime(discretize=manual/2010-
11-17T08:00:00Z/2011-05-21T07:00:00Z/2011-10-18T07:00:00Z/2011-11-10T08:00:00Z/2011-11-
17T08:00:00Z),FormatId(filter=7/0/*),contentclass(filter=7/0/*)</Parameter>
    </SetProperty>
    <ObjectPath Id="209" ObjectPathId="208" />
    <Method Name="Clear" Id="210" ObjectPathId="208" />
    <Method Name="Add" Id="211" ObjectPathId="208">
      <Parameters>
        <Parameter Type="String">WorkId</Parameter>
      </Parameters>
    </Method>
    <Method Name="Add" Id="212" ObjectPathId="208">
      <Parameters>
        <Parameter Type="String">Rank</Parameter>
      </Parameters>
    </Method>
  </Actions>
</Request>
```

```
</Parameters>
</Method>
<Method Name="Add" Id="213" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">Title</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="214" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">Author</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="215" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">Size</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="216" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">Path</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="217" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">Description</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="218" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">Write</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="219" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">SiteName</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="220" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">CollapsingStatus</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="221" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">HitHighlightedSummary</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="222" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">HitHighlightedProperties</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="223" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ContentClass</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="224" ObjectPathId="208">
  <Parameters>
```

```

    <Parameter Type="String">IsDocument</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="225" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">PictureThumbnailURL</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="226" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ServerRedirectedURL</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="227" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ServerRedirectedEmbedURL</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="228" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ServerRedirectedPreviewURL</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="229" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">FileExtension</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="230" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">DocumentSummarySize</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="231" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">DocumentSummary</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="232" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ContentTypeId</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="233" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ParentLink</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="234" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ViewsLifeTime</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="235" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">ViewsRecent</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="236" ObjectPathId="208">

```

```

    <Parameters>
      <Parameter Type="String">SectionNames</Parameter>
    </Parameters>
  </Method>
<Method Name="Add" Id="237" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">SectionIndexes</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="238" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">SiteLogo</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="239" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">SiteDescription</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="240" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">deeplinks</Parameter>
  </Parameters>
</Method>
<Method Name="Add" Id="241" ObjectPathId="208">
  <Parameters>
    <Parameter Type="String">importance</Parameter>
  </Parameters>
</Method>
<ObjectPath Id="243" ObjectPathId="242" />
<Method Name="Clear" Id="244" ObjectPathId="242" />
<SetProperty Id="245" ObjectPathId="190" Name="EnableStemming">
  <Parameter Type="Boolean">>true</Parameter>
</SetProperty>
<SetProperty Id="246" ObjectPathId="190" Name="EnablePhonetic">
  <Parameter Type="Boolean">>false</Parameter>
</SetProperty>
<SetProperty Id="247" ObjectPathId="190" Name="EnableNicknames">
  <Parameter Type="Boolean">>false</Parameter>
</SetProperty>
<SetProperty Id="248" ObjectPathId="190" Name="TrimDuplicates">
  <Parameter Type="Boolean">>true</Parameter>
</SetProperty>
<SetProperty Id="249" ObjectPathId="190" Name="ResultsUrl">
  <Parameter
Type="String">http://contoso/sites/search/_layouts/15/start.aspx#/sites/search/Pages/results.
aspx?k=page#hp=%7B%22Default%22%3A%7B%22s%22%3A1%2C%221%22%3A-1%2C%22d%22%3A-
1%2C%22k%22%3A%22home%22%2C%22o%22%3Anull%2C%22x%22%3Anull%2C%22r%22%3Anull%2C%22m%22%3A%22%2
2%7D%7D</Parameter>
  </SetProperty>
<SetProperty Id="250" ObjectPathId="190" Name="BypassResultTypes">
  <Parameter Type="Boolean">>false</Parameter>
</SetProperty>
<SetProperty Id="251" ObjectPathId="190" Name="ClientType">
  <Parameter Type="String">UI</Parameter>
</SetProperty>
<ObjectPath Id="253" ObjectPathId="252" />
<Method Name="Clear" Id="254" ObjectPathId="252" />
<SetProperty Id="255" ObjectPathId="190" Name="EnableInterleaving">

```

```

    <Parameter Type="Boolean">false</Parameter>
  </SetProperty>
  <ObjectPath Id="257" ObjectPathId="256" />
  <ExceptionHandlingScope Id="258">
    <TryScope Id="260">
      <Method Name="ExecuteQueries" Id="262" ObjectPathId="256">
        <Parameters>
          <Parameter Type="Array">
            <Object Type="String">Default</Object>
          </Parameter>
          <Parameter Type="Array">
            <Object ObjectPathId="190" />
          </Parameter>
        </Parameters>
      </Method>
    </TryScope>
    <CatchScope Id="264" />
  </ExceptionHandlingScope>
</Actions>
<ObjectPaths>
  <Constructor Id="190" TypeId="{80173281-ffff-47b6-9a49-312e06ff8428}">
    <Parameters>
      <Parameter ObjectPathId="8" />
    </Parameters>
  </Constructor>
  <Property Id="193" ParentId="190" Name="SortList" />
  <Property Id="197" ParentId="190" Name="RefinementFilters" />
  <Property Id="208" ParentId="190" Name="SelectProperties" />
  <Property Id="242" ParentId="190" Name="HitHighlightedProperties" />
  <Property Id="252" ParentId="190" Name="ReorderingRules" />
  <Constructor Id="256" TypeId="{8d2ac302-db2f-46fe-9015-872b35f15098}" />
  <Property Id="8" ParentId="6" Name="Site" />
  <StaticProperty Id="6" TypeId="{3747adcd-a3c3-41b9-bfab-4a64dd2f1e0a}" Name="Current" />
</ObjectPaths>
</Request>

```

Response

```

[
  {
    "SchemaVersion":"15.0.0.0","LibraryVersion":"15.0.3514.1000","ErrorInfo":null
  },191,{
    "IsNull":false
  },194,{
    "IsNull":false
  },198,{
    "IsNull":false
  },209,{
    "IsNull":false
  },243,{
    "IsNull":false
  },253,{
    "IsNull":false
  },257,{
    "IsNull":false
  },262,{
    "Default":{

```

```

_ObjectType_": "Microsoft.SharePoint.Client.Search.Query.ResultTableCollection", "ElapsedTime":
:514, "Properties": {
  "RowLimit": 10
}, "QueryId": "940b1d2c-322c-44c2-a493-4306e5321c37", "SpellingSuggestion": "", "TriggeredRules": [
], "ResultTables": [
  {
    "_ObjectType_": "Microsoft.SharePoint.Client.Search.Query.ResultTable", "GroupTemplateId": null,
    "ItemTemplateId": null, "Properties": {
      "GenerationId": "9223372036854775806", "QueryModification": "home -ContentClass:urn:content-
class:SPSPeople", "RenderTemplateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisp
lay_Templates\u002fSearch\u002fDefaultGroup.js"
    }, "QueryId": "940b1d2c-322c-44c2-a493-4306e5321c37", "QueryRuleId": "00000000-0000-0000-0000-
000000000000",
    "ResultRows": [
      {
        "Rank": "3.49530363082886", "DocId": "200013", "WorkId": null, "Title": "\r\n\t\r\n\tHome\r\n\r\n", "Au
thor": "CONTOSO\MICHAL; | Michal Piaseczny |
CONTOSO\michal", "Size": "69282", "Path": "http:\u002f\contoso", "Description": "Content
site", "Write": "\/Date(2011,10,15,15,21,48,0)\/","sitename": null, "CollapsingStatus": 0, "HitHigh
lightedSummary": "Page Image\r\n\u00a0\r\nPage Content\r\nWelcome to Microsoft?? SharePoint??
Server 15 (Technical Preview <ddd\u002f> Get started with the new version of Microsoft
SharePoint Server 15 (Technical Preview <ddd\u002f>
", "HitHighlightedProperties": "<HHTitle>\r\n\t\r\n\tHome\r\n\r\n<\u002fHHTitle><HHUrl>http:\u0
02f\u002fcontoso<\u002fHHUrl>", "contentclass": "STS_Site", "IsDocument": false, "PictureThumbnail
URL": null, "ServerRedirectedURL": null, "ServerRedirectedEmbedURL": null, "ServerRedirectedPreview
URL": null, "FileExtension": null, "ContentTypeId": null, "ParentLink": null, "ViewsLifeTime": null, "V
iewsRecent": null, "SectionNames": "", "SectionIndexes": "", "SiteLogo": null, "SiteDescription": "Con
tent
site", "deeplinks": "", "importance": 0, "OriginalPath": "http:\u002f\u002fcontoso", "ResultTypeIdLi
st": "23", "LastModifiedTime": null, "DocumentSummarySize": 2324, "DocumentSummary": "\/Base64Binary
(7L0HYBxJliUmL23Ke39K9UrX4HShCIBgEyTYkEAQ7MGIzeaS7B1pRyMpqyqBymVWZv1mFkDM7Z28995777333nvvfe6
0510J\u002ffff\u002fz9cZmQBbPbOStrJniGAgsgfP358Hz8i\u002fu\u002f\u002f+\u002f\u002f+v3+tx+PX+D
V+nV\u002fj1\u002fj1fr1f49f5NX6DX+PX+DV+jV\u002fj1\u002f81foNf49f5NX6NX+vX+DV+zV\u002fj1\u002
f81fuzX+I1\u002fjd\u002f21\u002fgNfo2U\u002fn\u002fn1\u002fj1fo29X+PX+TUE0M8j+nLc339BP1\u002f
Rz5+iz6a\u002ffxq\u002f7a7ylvle\u002ffxq\u002f9a7T0+zxEn\u002f9R9Pcfr+\u002f+6fT9n0+\u002f\u002
f8X086+in389ffd30M+\u002fl37+I\u002fTZP0Pt\u002f2X6+9+gd\u002f8d+v0\u002fpN\u002f\u002fU\u002
fruv6Wf\u002fyP9\u002f5fTZ\u002f8X\u002ffylf81f\u002f9f4jeJ\u002fv9Wv+Wv9Gr\u002ftr\u002fljv8
aP\u002f5rJr7Hza\u002f56v8aDP\u002fjX+jUe0GeH9Nkpf\u002f81\u002fy1f42X9PP3\u002fjV\u002fnV\u
002fj+\u002fR7Rv\u002fP6e8FtVLRmx\u002fQe384vfFH0Xt\u002fHH32J9Fmf59\u002ffx\u002f\u002fBr
\u002fHX009\u002fG\u002f38+6nNP0Wf\u002fYvU7t+g\u002f\u002f\u002f79Pd\u002fRXD+O\u002frsVxDe\
\u002f53e+z9\u002fzV\u002f31\u002ffi1f63f4Nf4jX4twunX+rV\u002fjd\u002f1\u002fp1f41fQD8\u002f+r
V+vV\u002fjDv3c\u002frV+nV\u002fjHv3+6Nf6tX6Nz6jdm\u002fr796LfX\u002ffxav+av8ZL+\u002fn3ovT+AP
subpUG\u002f\u002f\u002f6JfK\u002fk1fjG1\u002f0Poz+CYP3x9P8\u002fS+nnX0w\u002f\u002f3L6+d
fR+38TtF276fd\u002fkH7\u002fR+j9f5J+\u002ffxfovX+d4P6bBPC\u002ffos\u002f+C\u002fruv6bfffXn9\u002
fF\u002fp7\u002f+Tvv91f+1f59dIfulf99f4zX\u002ftH\u002f1f9df+9f+NdJf+9f7NT6mz0a\u002f9m\u002f
wa9yn3w\u002fp\u002f0\u002fo789\u002f7V\u002f313j+a\u002ffwv8av8Wv8LvTfp\u002fTf70P\u002fXDN\
\u002ffxz99xfTf\u002f8I\u002ffcf0n\u002f\u002fKf33P9J\u002ffz3\u002fmX0z\u002f\u002fYV
03x\u002fwa\u002f0Bv9Yvpv+4a\u002f9C3\u002ftT+i\u002fQ\u002frv+a\u002f9a\u002fwav8av8fzX\u00
2fjV+jZ8hzql+jSXxSM\u002fpr9G82sU\u002fNfJr7H+NWr6Tz4vqTd819NvOXEXWsx+jZ\u002f5NZ7S21NqubDvn
+hvOb37G\u002f8aCbV5Qb9f0bs\u002f82u8\u002fjUyarliGKn9PP01jq1tS\u002f10+ZvwLf12+mvM6ftL+gxQco
Ijn0nb14pzo38\u002fo79NHxVj9Yx+rgmvGbf4Mfvf0OhvHpfB7\u002fZjGhpRdzhaDaN5Qv6DTMONIQXBPeC3z0jH
OV3wPyL+F\u002f3bfg+vvvur4GZntLnC27R0m8p9Yfx1PR7Q\u002f8\u002fp09\u002fd\u002fofJYznPAL0WFGbp
fcN6HXJ\u002f6a\u002ffxu6vcZ\u002f+3fo13vwa4KE5tQ08jHpK6U28f0mfgEqf078ykpYhC7+19A1GNmeM5ozZktu
n2gdGjrgKjF8M4zi2Xx\u002fTJzQXDUPBJDUMQaJ2a5594NjQHLzxi+izgn9Dq1PLTSv6f8Gylf4az7mfnN\u002fCvK
J1xu0MLVruL+UeZ4oVZqfmTzP+NOX3Vvxpq3z0k4qvtEH\u002f77gnjOikW779Nsbs6KfQ11QbU0c41Pbfs8Mvk1wM
1T\u002ffkxGbZ59qfOGvp8yNiXBgxaR\u002fS\u002fo2fo33P65CXjjz7OGYvFr2G4LaP\u002f9+UQFJpQ00C\u002ftr
LiRt6VhS\u002f4G+F0AyWkq+GglbZqfo3Rr+FkCGmaefBLnquWP8fYjulTfI5ZEQ5M7Qg+ot7R60S\u002f+Yg+ulC6r
myrnOcRuDoMADnEMuPvBU7FI8IcGCzR54SpO2UMpzSL4JALxQLfGFP9pFrGaR28XVnedYPhuGedGwgCagCjSrXfX2Q13F
9EfLkM57\u002fGSLzwlSY+XN6Hxpm+v6KpQvjf809og\u002fYp\u002f8nAAD\u002f\u002f\u002f)\", "Partitio
nId": "\/Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\", "UrlZone": 0, "AAMEnabledManagedProperties": "Path;recommendedfor", "ResultTypeI
d": 23, "RenderTemplateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fSiteItem.js", "piSearchResultId": "2_0_1_0"

```


fjXG9PSd+v2IPj+h77+gn6\u002fo50\u002fRZ9Nf49f9Nd7S36tF49f+Nvr6\u002fQ+i3\u002f8w+vyPoXf+VPr55
9LffYH9\u002fCvo519L7\u002fxt9PPvpp\u002f\u002fEH32T1H7f5H+\u002ftfo3X+Lfv\u002f36ff\u002fmL7
7r+nn\u002f0T\u002f\u002f+XU5lfTz1\u002fj1\u002fz1f41f\u002f9f89X6N3+TX\u002fHV+jd+Sfv8df81f+
9f4Xejev351+3qHPxvRz79f8DX6Nw1\u002fz1\u002fo1juj3j\u002fTzt+n7L+nnG\u002fR796af36f\u002ft+j7n
P4u6P8L+rumn5cE75fS\u002f\u002f\u002f\u002fwX\u002fPX\u002fTX+WPrsT6I2fyp9\u002fmfSzz+HYpzFv+av+Wv8
pfT9X0vf\u002fY30999BP\u002f9e+vsfod\u002f\u002fafr9X\u002fg1f91f4+Wv8Wv8Gr8G0ek3\u002fjU+pf9
+H\u002fRvmv77w+i\u002fP4b++wvpv3+I\u002fvv36b\u002f\u002fmP775fTfr\u002f9r\u002fvq\u002f5u9A
\u002f\u002f3u9N+a\u002fvvD6b+\u002fhv77G+m\u002ff4T++1d\u002fzV\u002fj1\u002fg1fo1\u002f9df8
NX6NnyGKV7\u002fgkmb87\u002fpr9H8GgX\u002f9TO\u002fx1P6ZvprRH+Nhf3uRH\u002fLf42asEmozQv6\u002f
2fYreOaf2Nf0n35eEHYD19FtOMPdGjFq\u002f\u002fjUygrbiT1P7bvprHNOBLFU75W9CyPLt9NeY0\u002fexjNdr+
jftz6Tta8W50b+f0d+mj4oxf0Y\u002f14TbjFv8mP3P9OLDvHnc7q3bjmdoNN2xhCPZNI4v6DfQe2j+UpInh9PtMLldq
7+IpPM1\u002ffz+fGj9Jn6EN6PL7MGYpjSPjkaWET6UYhXyQUs1\u002fWugnNON+HxMv7\u002fklhm\u002fk\u002f
4aXxTuObdtCW7OPyv6r6TfVgzFfCa9tF5LazVlziwJA0OpjDFJaZ5z\u002fsg0BgeXPMK3PIacaWtgZwQhKEDxlChu0
V8F9XDN36X0lg\u002f5L7KUE0LtK\u002f02f6t0\u002fHA8\u002fPcwpPk1\u002fja\u002fot4Lxe\u002fNrgA\
u002faX6P5NSCT\u002f08AAAD\u002f\u002fw==)\", "PartitionId": "\\\\Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\\\\", "UrlZone": 0, "AAMEnabledManagedProperties": "Path; recommendedfor", "ResultTypeI
d": 23, "RenderTemplateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fSiteItem.js", "piSearchResultId": "2_2_1_0"
}, {
"Rank": "1.49750876426697", "DocId": 200014, "WorkId": null, "Title": "\r\n\t\r\n\tHome - Corporate
Gallery
Site\r\n\r\n", "Author": "CONTOSO\\MICHAL", "Size": 53253, "Path": "http:\u002f\u002fcontoso\u002fs
ites\u002fac5e5f64-8f6d-4a10-97b2-033f87225068", "Description": "Hosts Corporate Catalog and
Office Extension
Catalog", "Write": "\\\\Date(2011,10,15,15,0,28,0)\\\\", "sitename": null, "CollapsingStatus": 0, "HitHi
ghlightedSummary": "|<c0>Home<\u002fc0> <ddd\u002f> Hosts Corporate Catalog and Office
Extension Catalog <ddd\u002f> ", "HitHighlightedProperties": "<HHTitle>\r\n\t\r\n\tHome -
Corporate Gallery
Site\r\n\r\n<\u002fHHTitle><HHUrl>http:\u002f\u002fcontoso\u002fsites\u002fac5e5f64-8f6d-
4a10-97b2-
033f87225068<\u002fHHUrl>", "contentclass": "STS_Site", "IsDocument": false, "PictureThumbnailURL"
: null, "ServerRedirectedURL": null, "ServerRedirectedEmbedURL": null, "ServerRedirectedPreviewURL"
: null, "FileExtension": null, "ContentTypeId": null, "ParentLink": null, "ViewsLifetime": null, "Views
Recent": null, "SectionNames": "", "SectionIndexes": "", "SiteLogo": null, "SiteDescription": "Hosts
Corporate Catalog and Office Extension
Catalog", "deeplinks": "", "importance": 0, "OriginalPath": "http:\u002f\u002fcontoso\u002fsites\u00
02fac5e5f64-8f6d-4a10-97b2-
033f87225068", "ResultTypeIdList": "23", "LastModifiedTime": null, "DocumentSummarySize": 740, "Docu
mentSummary": "\\\\Base64Binary(7L0HYBxJliUmL23Ke39K9UrX4HShCIBgEyTYkEAQ7MGIZeaS7BlpRyMpqyqBymVW
ZV1mFkDM7Z28995777333nvvvfe6O51OJ\u002ffff\u002fz9cZmQbBpOstrJniGAqsgfP358Hz8i\u002fu\u002f\u002f\u002f\u002f
002f\u002f\u002f\u002f+v3+tx+PX+DV+s1\u002fj1\u002fg1fr1f49f5NX7jX+PHfo3f9tf49X+N3+XX+HV+jd\u002fp
1\u002fg1fo1f49f4dx+NX+\u002fX+Lff4z4f7NX79X+O3+zv+7V\u002fjd\u002fo1fr1f48d\u002fjR\u002f7NbZ
1\u002fjV\u002f\u002f\u002f\u002f\u002fidfo1f49f4NX+NX+FX+I1+jR\u002f\u002fzV+Af3+Ef0+ot\u002f36
feDX+PX+zW06ofJr\u002fFr\u002fRrPfo3f+Nd4Td\u002f9vvtZ9NdIfo2Kfr+mdn\u002fQr\u002fHr\u002fhp\
u002f+K\u002fxG\u002f4afzL9\u002fDp0519M7f9y+v9fTX\u002f\u002fjdTm76Y2\u002f\u002fCv8Wv\u002f
Gv84vffP0d\u002f\u002fBv3979Pv\u002fxml+a9\u002fjV\u002f31zj4NX6NX+PXoLa\u002fLvX8EfV4QD0eUU+
vqaff16d\u002fQQT9DyfIfwZB\u002fosJ8190kP9qgvDv\u002fxr\u002fw6\u002fxa\u002fwav8av8T\u002f8G
r\u002fGr\u002fEzv8a3CZ\u002fFr5ETjgn1Yf47oU\u002frX2PF\u002f2a\u002fRkvpf7\u002fg5\u002fRbsf
\u002fl9Nk1\u002ff361yj4m\u002fdp+5r+n9Fn019j\u002fm8+TXW9NuSvq3432P6dErF\u002fRf8WtM6P81v3
X9aznv2t+s+AWX\u002f4a5\u002fRfwe3TX+P013jH0f8ZsU\u002fmZ4YZif8G7CrfoFLhtzQ382v8QVDf0ttWnqj
pL8E9ivCsuQ+n3Lbkf3deP18wdBzS0f8FIjPp6bflrzGjnzeNqI95RpgsmZLpr\u002fEV\u002fQZapUTVXPvHHP8
\u002fAQAA\u002f\u002f8=)\", "PartitionId": "\\\\Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\\\\", "UrlZone": 0, "AAMEnabledManagedProperties": "Path; recommendedfor", "ResultTypeI
d": 23, "RenderTemplateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fSiteItem.js", "piSearchResultId": "2_3_1_0"
}, {
"Rank": "0.88831901550293", "DocId": 200122, "WorkId": null, "Title": "\r\n\t\r\n\tPages - All
Documents\r\n", "Author": "Michal
Piaseczny", "Size": 0, "Path": "http:\u002f\u002fcontoso\u002fSiteDirectory\u002fPages\u002fForms
\u002fAllItems.aspx", "Description": "This system library was created by the Publishing feature
to store pages that are created in this
site.", "Write": "\\\\Date(2011,10,15,14,0,50,0)\\\\", "sitename": null, "CollapsingStatus": 1, "HitHigh
lightedSummary": "|Search\r\n\r\n|SitesCurrently selected\r\n\r\n|File Not Found <ddd\u002f> Pages
\r\n\u00a0\r\n\r\nThis system library was created by the Publishing feature to store <ddd\u002f>
category \r\n\r\n????\r\n\r\n11\u002f15\u002f2011 2:00 PM Michal Piaseczny \r\n\r\nSite directory
<c0>home<\u002fc0> <ddd\u002f> ", "HitHighlightedProperties": "<HHTitle>\r\n\t\r\n\tPages - All

y\u002f9dX\u002fdX\u002fOvpc\u002f\u002fBvr976bf\u002ffxGC8y\u002fQe\u002f8mwf1PcC7\u002f9Yf\u002ffj
r\u002fG\u002ff01\u002f\u002f\u002ffwa\u002ff3q\u002ff1a\u002ffGv96P\u002fRq\u002f9a\u002ff36\u002ffwan\u002f
002fx6v8GvsU\u002f\u002f\u002ff4z+\u002ff4z+\u002ffr3ouy9\u002ffvV\u002ffv1\u002ffgu\u002ff59+jm\u002f
002f1e\u002ff3q\u002ff7a1zR5z+g3\u002ff9w+v+f+0v9hr\u002ffGn0vt\u002ffzKC8Tf9er\u002ff+r\u002ffHP\u002f
02fhE\u002ffRr\u002ffHP39r1Obf+vX+81+jf+a3v2\u002ff6fdf+9en+f31ief05+9E\u002ff\u002ff\u002ffxX\u002f
2f\u002ffX\u002ffTW26e99+v2Qfj\u002ff59X\u002fftX+Pb9P8vfv3f8Nf4Kfr8D\u002ffgj+f+1f4w+gv3P6\u002ffad
\u002ff\u002ffV\u002ffr11j8+r\u002ff+r3H5R\u002ff4uv8bVr\u002ff8b\u002ffBp\u002ffEP39h9J7fwx99qdQmz\u002f
002fzj\u002ffydfo0\u002ffiz7\u002ffin+zv+zXT36Nv5He+dsIzj9M3\u002ff8z1O5fpp\u002ff\u002ffNv38j+n\u002f
02f\u002ffw21\u002ffx\u002ffp\u002ff7+c2v9f9PPX\u002ffqPo\u002ff78BycRv8Ov8Gr\u002ffxb\u002ffBr\u002ff
Rq\u002ff2W\u002ffw6\u002ff8av\u002ff0f9bvb8Gr\u002ff02fDb\u002ffAb\u002ffBo\u002ffTn\u002ff\u002ff\u002ff
g1\u002ffs1tumz+9Tm0R\u002ff10\u002ff0ah\u002ffT5U\u002ffr8898g+Tve0Tvf\u002ffQ1+w19jRt8vqF1LP3+Gfv
5h9P8\u002ffntr\u002ffKfT\u002ffP5N+\u002ffwvvpnb+K\u002ffv+3UF9\u002ffC332d9J7fx\u002ffB+Aep\u002ffT9
Fff3T9N2\u002ff02fQn\u002ff\u002ff69T236PP\u002fffjNq819TX\u002ff8Nff7L6PP\u002ff1fr6NX\u002ffs1\u002ffk1
fr0f+w1\u002ffj\u002ff2fyx379X+N3+jGiH\u002ff2f38h7eo\u002ff8\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff
Nhv8Gt81\u002ff7\u002ffB\u002ffzRv+av8Qf82K\u002ff5a0z\u002ff6F\u002ff715jSd3N6f\u002ffFjv9avsaL3rv\u002f
002fo3+XX+AGL+UPp7+C3vnj6bM\u002ffndr8OX\u002ff07\u002ffRr\u002ffLn0+V9Gn\u002ff+VP5b8Gn8LvFN3Up
\u002ff\u002ffGH3\u002ff2f1O7f41+\u002ffnv08z+j\u002ff\u002ff\u002ff31P5\u002ffof\u002ff\u002ffSvr9\u002ff
6Z3foPkN\u002ff02fg1fvm\u002ff5f8NX7z5Nf8NX6rP+hB\u002ffjV+q+TX\u002ffjV++TX+QfJr\u002ff02ffX\u002ff
fa\u002ffLr\u002ffxrf+mN+11\u002ffjE2qzT38\u002ffSEhf02fPqM3v9cf8Tr\u002ffGc\u002ffr8K\u002ffr8906SX
2NK78yT3\u002ffDXWNP3v5Ta\u002ffH084+nn386\u002ff8voPZ\u002ffKf3\u002ffr6Lf\u002ffyz65+m\u002ff\u002ff
002f8j10c\u002ffQn3+49Tn07f\u002ffTP0\u002ff2f9JIsP4Veu\u002ff\u002ffWn+21\u002ffj36M2\u002ffzn9\u002ff
2f3+gz382ffRk\u002ff4z8TX+N3+yP\u002ffTV\u002ff02f2f02fSfN\u002ffw1f43f8jck\u002ff\u002ff\u002ff\u002ff\u002ff
002fw9\u002ffgl\u002ffj4N\u002ffx1fo3tP\u002ffbX\u002ffjW26e89+v3Bb\u002ffhr\u002ffRqPfsNf\u002ff9c4+
WN\u002ff21\u002ffjKX3\u002ffBf3\u002ffJ+nz79Hnvz99Pic47wj0O4Lzi+mdP4j+\u002ff4dTmz+R2vzpb0Dp7\u002f
02f\u002ffHP9rL6T2fwm1\u002ff2sJz19H3\u002ff\u002ff\u002ff9P9\u002ffgD7\u002ffR+nzf5I+\u002ff5cIzn9EcP4jgv
Of0j\u002ffFf3\u002ffv6c2v5La\u002ffJ8E5\u002ff+kv3+2+jX+TV+\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff\u002ff
002f81fss\u002ff7rf9NX6r3+g3+DV+Z\u002ffr\u002ffL6TPP6HP79LnB7\u002ffRb\u002ffprfPuP+zV\u002ffjW\u002f
02f\u002ffRr\u002ffm\u002ff7\u002ffUa\u002ff9q\u002ffxk7\u002ffBx5\u002ffenn7I+j\u002ff9PPgv6u6ecl
tf+19P8\u002ff8o9Lf40\u002ffij77kwnGn\u002ffYb\u002ffXq\u002ffxp9Lv\u002ff919P1f\u002ffRslv8bfrP\u002ff
2f9nft\u002ff02fv+c3+g1\u002ffjX+CP9b1P5\u002ff02fffa\u002ff02ffktr8Gr8xyfRv\u002ffJv8Gr\u002ffFb0w0\u002ff
002ff+41Jjumz34N+fuc3\u002ffrV\u002ffjs\u002ffp\u002ff29+49\u002ffw18h+4+TXWPzvx\u002ffavsaC\u002ff
a2p3RW1+8BuTLf6Nf4N344\u002ff543+3X+OPpZ9\u002ffGn32Z9J7f8Fv\u002ffBv9Gn8ttfub6J2\u002fflz7\u002ff
J35jkoU\u002ff\u002ffn6f6Nf5z+v1\u002ffDb\u002ff2fM33+fxCM3+43Ib76TX69X+MX\u002ffia\u002ff1q\u002ffxLf
p5\u002ffzch2aT\u002ff\u002ffx6\u002ffyW\u002ff4azz\u002ff2fZf4\u002ffff+E37x+N79PmE2138Jr\u002ff\u002ff\u002ff
002fH41\u002ffglfo1f49f4XeI\u002ffT+m\u002ff34f+u6b\u002ff\u002ffj6b+fx3Pk1fy\u002ff67w+g\u002ff\u002ff
02f5g+u8voP\u002ff+Evrv\u002ff6b\u002ffqNf6z6f6b73m3zvNy\u002ffk1\u002ffj1\u002ffg1fo3yN\u002ffk1f
o2fIQ+jjWW5Evk\u002ffG\u002ff6azs\u002ffRsF\u002ffnfa61+jpv\u002ffk85Kq47ucfsvJc0GL2a\u002ffxM7\u002ff
002fGU3p7gi0X9v0T\u002ffs2nd3\u002ffjXyOhNi\u002ff02ffo9yt692d+jde\u002ffRkYtVwvj2+n8YFb2p3yl\u002ff
fE741305\u002ffjT19f0mfAUpOcoQZaftacW7072f0t+mjYqye0c814TXjFj9m\u002ffxsevXye8ViBBd77i\u002ffjfy
\u002ffqrphYnVlH9Guf074regezIrrm3mn5rGdc\u002ffXZFn9Xkuz8X03qZ\u002ffxojhFSW3wIdAbNiaTbcsmIoKx5
vSxjJ52PCJi3gaLBqGFpG32JE1\u002ffQTtKq5ffFr\u002ffIB7Mzik5F+C8vi24dFgVf8SLpj1iv57a\u002ffGo+I2cf
58ysAMMZfRka8YzG91eE3BLSimhcE1fBPY+2X1LAZYAseZQuiuzj5b0+c1cZbjj9hw1xE9qdbgp5aRmMnYwQfzDk5zhIz
+X9F2qkBbca8ufNNS2IjxSpge+BR74\u002ffpJ+5vyNcJRQov01PurN80feTI\u002ffp9zcMOSOMZvvtvafah\u002ffQP
Ppvy01OezY+UGn8R0ULe6r7kxYbwf079NeEjf7h+QUdzUzc\u002ffTV+f4KcKc8Dv7u\u002ffxu6vcZ\u002ff+\u002ff
UnGsaDP5e1j6n3K1G1u+HZM8Bqa1Xe\u002ffxu9hr3pB0AvC9bNf4xf\u002ffGs\u002ff1szP6+5f8Gr\u002ffQYm2+P9
O\u002ffzfdP6a9zgrkmaK399kuW2iW9scsj2aH+duxvu8H8v6HxoTU+uySoV\u002ffzbHo3zPv\u002ff2I3ptoldDcN\u002f
002f9iGLvSbFFh2LQA6LrCtabGEvKpUM3AIrorJ+mvy55fNDqBb3R\u002ffhqPVF8vWJe8Vi0k2jmjN58yT0j7i19j69f
4mEzo9OBXBKokMX78a3zya4gVTAf++3jDTBn65TtuFf0F+wD9DGzcXhX8Qw+fUIvfg6j7ND0Hzs768\u002ffcxa8CPmWL
GijwizA7Znplxf5s+L+jnn01ln+Zoh7EKW32XeQDaOwWdvQ9u+wG1FGv4iOiAzw4ZE4wX9v0R24ZDhjb1qGA+F5u3JhgZ
YymfwhaU1JP8LeM5Zzs0tRDSX+PzXwM2qvo1XtK7F\u002ff\u002ffTMVtzjPaE+4NMbbHNxrcYxx2iFazx+G1KNPyMKQY+KemT
j6l1ylzxbv7\u002ffgjkmTmoY\u002fffhZjgrFiRCv+ZPzrweE+s+Odx1L86G+SrO\u002ffTfh\u002ffCwWfGHwUd3c4AA
bON+ayZ7pD8kql7SK3SjRSFjpxgDX72afp1KfQK1+DXg3xlFzaXszZU90DBcM45pGfmxHLfB+IFM3vJFW9d5nVkf8wg
+Yma8\u002ffL6Drkr7HDPy\u002ffd2Zi+tpH\u002ffP3m6WeHzr+EtRN0WEn\u002ff3dr+yC6GkZ1vHaW1tDr4NR7S\u002ff
02f\u002ffHbqfKX8Sfex48oaOzCEw3\u002ffNaUe4YbDQ4\u002ffpc\u002ff\u002ffDNZgjnzOkL7e2S\u002ff\u002ffv9jN+bf
1sSLUOd79PecMgvtF7DgbcIx\u002ffELiaMktoQt+4w5zP39S97Ly3jHOIU+xv\u002ffbqbigN3\u002ffuqPjy15DoFrK
AvwEbOL9kboOaEazdy\u002ffRF1fzapOyba\u002ffojCP7sUvvcjCv8sU3i\u002ffQ+FuZHw7Cr+jT0wQUuVbtTqaIDo8
ZuLW4FD82vcFon\u002ffv208N42nG4f\u002ff308k\u002ff\u002ffjAf+dtMZTT93\u002ffPrXgO+Z0jiBp2SEMM5v\u002f
002fxri2UqMslnvhJrrModUBLornn15TRpgTHQ4o3\u002ffjWZexzcq8pH9X1P\u002ffqG8nK3CaqEJoJnUIq+ZmyzRG
FiyxSj2GY4ih+A6xRX\u002ff25bebo4E9+vcpjWZP37hH\u002ff81vr\u002ffktxHqSKfdXMbpZmPfhgkbtmfmhld25m
RuQpwEuJk8zNLfpDZHibeZWrCtws3Gt8+U\u002ffL9vVpFze84aRfalUqLXkimH+c0Zo+bXwPm\u002ffxMAAP\u002ff
\u002ff)\", \"PartitionId\": \"\\Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\"/\", \"UrlZone\": \"0\", \"AAMEnabledManagedProperties\": \"Path; recommendedfor\", \"ResultTypeI
d\": \"17\", \"RenderTemplateId\": \"~sitecollection\u002ff_catalogs\u002ffmasterpage\u002ffDisplay
Templates\u002ffSearch\u002ffDefaultItem.js\", \"piSearchResultId\": \"2_6_1_0\"
}, {

f\u002fz9cZmQbBbPbOstrJniGAqsgfP358Hz8i\u002fu\u002f\u002f\u002f\u002f\u002fv3+tX+PX+DV+s1\u002ffj1
\u002ffg1fu1f48d+jd\u002f41\u002ffj1f43f9t4tX+N3\u002fHX+PV\u002ffjd\u002ffp1\u002ffg1fo1f49f4sV8
j+TV+\u002fV\u002ffj\u002ffg1fp1f47f9NX6tX+N3+DV+3V8j\u002fTWSX+OTX+PX+TX+s1\u002ffj1\u002ffg1fs
1f49f5NX6jX+PHfo3f5f49X+NX0C\u002ff0S\u002ffj+j3h\u002fTzhH7+XvTzY1\u002ffj1\u002ffolXv8av+6v8f
v8GsmvMaO\u002ff57\u002ffGr\u002ffdrLon\u002ff61\u002ffjN\u002ffg1fumv8Wv\u002ffGn8Itfujqf2fQp\u002ff
92dTMl6ff\u002ff0b670+gd\u002ff7eX+M3\u002ffDX+Sfr5z9HPf5Pe\u002ffXfpnf+M4P0X9N1\u002ffR+\u002ff+T
\u002ffT7L6PffxX9\u002ffD\u002ffo+1\u002ffz1\u002ffylfo1f59f8dX6NH6P\u002ff\u002ffyb0+2\u002ff+a\u002ff
7av8Zv82v+2K+R\u002ffp\u002ff\u002ffq9xhz67S5\u002ff0Wef\u002ffp\u002ff5q9QD8f02dPfs1f99c4o9+\u002ff
002foP\u002ff\u002ffBP3\u002ffK\u002ffrs9\u002ffk1f71f4w+gn\u002ffmv+ev+Go9\u002ffjV\u002ffj1\u002ffg1
qI9f10b3EWE\u002ffJ+yXhPEfTRj\u002ffKYTL30FY\u002ffr2E4T9HGP6bhOG\u002ffs9j9F7\u002ffG81\u002ffz+a
\u002ff5+9B\u002ffP\u002ff1r\u002ffhq\u002ffxq\u002ffxa\u002ffz0r\u002fflr\u002ffBo\u002ff82t8+9e0f03Fr5
H\u002ffGr8xjflH7H8n9Gn9a6z43+zXaOn79Nf4nH4r6b+cPrumv1\u002ff\u002ffGgV\u002ffE2t7wr+hffvRXdNdfgP4
X8b+3ab3+NRr6fEa\u002fftFRJSn+13D7nXufUER+\u002ffpM8KGNVlnx4TxBW1e02f49sptfCvqP9Ri3PGFhBb+g9vXN
BfKbVbch9TaldSnnw6u\u002ffk1n0LCeNw0285ffI1QTin36fc\u002ff+mv8Y6xRtuC3sTP240LkDGSh9LeM0Yqz
RT2K8Ki5D6fctspU8L18wVDz72RAUOM4QmN8Q2N0efvU4aPn0umn8zTgkdtKDqnn1f83Zi\u002ffnXOP6a9xyTDxTUXw5
RtA+ugWI\u002ffYIpi111GP6\u002ffQ331RGGM\u002ff4JfHLtVTAAMf3xzpTogV5ecIu\u002ffIGZU3uq+8Zzgr0LTzH
D6a3xVv+Eb9JVz8vAd7+fwIAAP\u002ff\u002ff\"/>\u002ff\"PartitionId\": \"\"/\u002ffGuid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\"/>\u002ff\"UrlZone\":0,\"AAMEnabledManagedProperties\": \"\"Path;recommendedfor\";\"ResultTypeI
d\":17,\"RenderTemplateId\": \"\"~sitecollection\u002ff_catalogs\u002ffmasterpage\u002ffDisplay
Templates\u002ffSearch\u002ffDefaultItem.js\", \"piSearchResultId\": \"2_8_1_0\"
}, {
\"Rank\": \"0.00864100456237793\", \"DocId\": 200043, \"WorkId\": null, \"Title\": \"\r\n\tStyle Library - All
Documents\r\n\", \"Author\": \"Office Automation Limited
Client\", \"Size\": 0, \"Path\": \"http:\u002f\u002ffcontoso\u002ffsites\u002ffac5e5f64-8f6d-4a10-97b2-
033f87225068\u002ffStyle Library\u002ffForms\u002ffAllItems.aspx\", \"Description\": \"Use the style
library to store style sheets, such as CSS or XSL files. The style sheets in this gallery can
be used by this site or any of its
subsites.\", \"Write\": \"\"/\u002ffDate(2011,10,15,14,31,2,0)\"/>\u002ff\", \"sitename\": null, \"CollapsingStatus\": 0, \"Hit
HighlightedSummary\": \"\"|<c0>Home<\u002ffc0> <ddd\u002ff> Style Library \r\n\u002ff0a0\r\nUse the
style library to store style sheets, such as CSS or XSL files. The style sheets in this
gallery can be used by this site or any of its subsites <ddd\u002ff>
\", \"HitHighlightedProperties\": \"<HHTitle>\r\n\tStyle Library - All
Documents\r\n<\u002ffHHTitle><HHUrl>http:\u002f\u002ffcontoso\u002ffsites\u002ffac5e5f64-8f6d-
4a10-97b2-033f87225068\u002ffStyle
Library\u002ffForms\u002ffAllItems.aspx<\u002ffHHUrl>\", \"contentclass\": \"STS_List_DocumentLibrary\"
, \"IsDocument\": false, \"PictureThumbnailURL\": null, \"ServerRedirectedURL\": null, \"ServerRedirectedEm
bedURL\": null, \"ServerRedirectedPreviewURL\": null, \"FileExtension\": \"aspx\", \"ContentTypeId\": null, \"P
arentLink\": \"http:\u002ff\u002ffcontoso\u002ffsites\u002ffac5e5f64-8f6d-4a10-97b2-
033f87225068\", \"ViewsLifeTime\": null, \"ViewsRecent\": null, \"SectionNames\": \"\", \"
SiteLogo\": null, \"SiteDescription\": null, \"deeplinks\": \"\", \"importance\": 0, \"OriginalPath\": \"http:\u00
2ff\u002ffcontoso\u002ffsites\u002ffac5e5f64-8f6d-4a10-97b2-033f87225068\u002ffStyle
Library\u002ffForms\u002ffAllItems.aspx\", \"ResultTypeIdList\": \"17;21\", \"LastModifiedTime\": null, \"Do
cumentSummarySize\": 1532, \"DocumentSummary\": \"\"/\u002ffBaseBinary(7L0HYBxJliUmL23Ke39K9UrX4H5hCIBgEyt
YkEAQ7MGIzeas7B1pRyMpqyqBymVWZV1mFkDM7Z28995777333nvvvf60510J\u002ff\u002ffz9cZmQbBbPbOstrJni
GAqsgfP358Hz8i\u002ff\u002ff\u002ff\u002ff\u002fv3+tX+PX+DV+s1\u002ffj1\u002ffg1fu1f49f9NX7s1\u00
02ffj1f43f8tft4tX+N3\u002ffbx+Lff42d+jV\u002ffj1\u002ffg1fo1f+9f4dX6NX\u002ffvX+A1+jV\u002ff31\u002ff
hNfo1f\u002ff9f4bX6NX+vx+O1\u002ffjV\u002ff31\u002ffhdfo1f99f43X+NX+\u002ffX2P41fp1fy+\u002ffX+LV+j
fu\u002ffxq\u002ff9azz8NX6tX+Pxr\u002ffFr\u002ffxq\u002ff56\u002ffx6\u002ff4an\u002ff8av\u002ffav8Xv9G
r\u002ffur\u002ffETv8av92v83r\u002ffGr\u002ffVrf\u002ffX+HV+jT\u002ffg1\u002ffj1f435r\u002ffFr\u002ff
xrlr\u002ffFr\u002ffRrVr\u002ffHr\u002ffBrTr\u002ffFr\u002ffRpXv8av82v8zK\u002ffx6\u002ffwaf\u002ffCv8
Wv9Gn\u002ffYr\u002ffFr\u002ffxp\u002ff1K\u002ffxa\u002ff0af+yv8Wv\u002ffGn\u002ffir\u002ffEb\u002ffBrP
f81f49f4NX+NX+fx+I1+jr\u002ff7NX6bX+PX\u002ffzV+Af3+0a\u002ffx6\u002ff4aw\u002ffT7\u002ffV\u002ffj1
u002ff41HtL\u002ffP6\u002ffT+jv3+vx+LV+jRf0+xxv6\u002ff0\u002ff9Gr\u002fferzGhtf02U9TmyX9\u002ffEX0
c03f\u002ffQz9\u002ffIP05x9Bbf54+vxPonZ\u002ff0r3\u002ff59PnfzH9\u002ffzFzR3381\u002ffzr60ffTP\u002ff
f\u002ff002f+33v5u+\u002ff002fv5z9EP\u002ff+xx+M3+DX+OXr3X6H\u002ff\u002ff9v0+39Cn\u002ff02ff0X9P5\u002ffTzj
r\u002ffTz\u002ff\u002ff1rJL\u002ffGj\u002ff2aP\u002ffZr\u002ffJa\u002ff5q\u002ff\u002ffa\u002ffwOv+av+2
v8Lr\u002ffmb\u002ffhrfEI\u002ffd+jn4a\u002ff56\u002ffwav8ev+Rv8Gt\u002ff+NX+tX+M79NnLX\u002ffPX\u002ff
2fjXe0\u002ffpd+\u002ffTz\u002ff\u002ffAPo+p59z+rmg\u002ff9f0+5ra\u002ffIC+\u002ff4MI3h9N7\u002ff4p
9PPp\u002ff\u002ffAvr8L\u002ffk1f81f4y+jn38vtf0bqM3fTr\u002ff\u002ffPftDp\u002ffBr\u002ffng\u002ff
j9Ov\u002ff\u002ffT1P5fpt\u002ff\u002ffLfr+3\u002ff81f91f4\u002ffGv8Wv8Gr8Gj3XJSp+RKP452gU\u002ffwp
h\u002ffT8T5v8rYfs7\u002ffJq\u002ffc\u002ff23Q\u002ff8d0n+\u002ffB\u002ff33HrVh6P\u002ff\u002ffmX67z
u002ff5NX+NX+PX+DX+k1\u002ffz1\u002ffg1fubX+PavUf0ai18j\u002ffzV+Y4zW\u002ffndCn9a\u002ffxor\u002ffz
X6N1r5Pf43P6beS\u002ffsvps2v6+\u002ffWvUfA3r+nfa\u002ff48\u002ffTwe02cTfffaAOpfP9+9WS03KL9Neb8s
u002ffHeKjvtvtdSvtED\u002ff3dYNQ8jpk+bXGPHf619jSp+19H5D\u002ff54QRq\u002ffpJ95Nf43f3m35\u002ffTj\u002ff
2fPqQ+83\u002ffwaY\u002ffrrTQQLH25KrZeKbcF\u002ffX3RGP6W\u002ff0WLC7655dDP+ppz4r1EqGXzwljX\u002ff
c69tNpqtW+atg3hndM1MK4vq02Mvjnn9xrGsGX8LvhdQETPU2pxEpf\u002ffd0EM1EwzC8JAqgwZwXof4133NeSe634J


```

"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_List_330","RefinementValue":"STS_List_330","RefinementToken":"equals(\"STS_List_330\")","RefinementCount":2,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{
"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_List_850","RefinementValue":"STS_List_850","RefinementToken":"equals(\"STS_List_850\")","RefinementCount":2,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{
"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_Site","RefinementValue":"STS_Site","RefinementToken":"equals(\"STS_Site\")","RefinementCount":2,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{
"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_Web","RefinementValue":"STS_Web","RefinementToken":"equals(\"STS_Web\")","RefinementCount":2,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{
"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_List_331","RefinementValue":"STS_List_331","RefinementToken":"equals(\"STS_List_331\")","RefinementCount":1,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{
"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_List_332","RefinementValue":"STS_List_332","RefinementToken":"equals(\"STS_List_332\")","RefinementCount":1,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{
"RefinerName":"contentclass","DisplayName":"","Type":"String","Modifier":"contentclass","Score":"1.81573295593262","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.8157329752657","Sum":"0","RefinementName":"STS_List_Contacts","RefinementValue":"STS_List_Contacts","RefinementToken":"equals(\"STS_List_Contacts\")","RefinementCount":1,"PartitionId":"\\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\\/","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
},{

```

```
"RefinerName":"Author","DisplayName":"","Type":"String","Modifier":"Author","Score":"1.21705436706543","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.21705436319777","Sum":"0","RefinementName":"CONTOSO\MICHAL","RefinementValue":"CONTOSO\MICHAL","RefinementToken":"equals(\\"CONTOSO\MICHAL\"),"RefinementCount":6,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"},{
"RefinerName":"Author","DisplayName":"","Type":"String","Modifier":"Author","Score":"1.21705436706543","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.21705436319777","Sum":"0","RefinementName":"Michal Piaseczny","RefinementValue":"Michal Piaseczny","RefinementToken":"equals(\\"Michal Piaseczny\"),"RefinementCount":5,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"},{
"RefinerName":"Author","DisplayName":"","Type":"String","Modifier":"Author","Score":"1.21705436706543","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.21705436319777","Sum":"0","RefinementName":" | Michal Piaseczny | CONTOSO\Michal","RefinementValue":" | Michal Piaseczny | CONTOSO\Michal","RefinementToken":"equals(\\" | Michal Piaseczny | CONTOSO\Michal\"),"RefinementCount":2,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"},{
"RefinerName":"Author","DisplayName":"","Type":"String","Modifier":"Author","Score":"1.21705436706543","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"1.21705436319777","Sum":"0","RefinementName":"Office Automation Limited Client","RefinementValue":"Office Automation Limited Client","RefinementToken":"equals(\\"Office Automation Limited Client\"),"RefinementCount":1,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"},{
"RefinerName":"FormatId","DisplayName":"","Type":"String","Modifier":"FormatId","Score":"0","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"0","Max":"0","Mean":"0","Entropy":"0","Sum":"0","RefinementName":"html","RefinementValue":"html","RefinementToken":"equals(\\"html\"),"RefinementCount":12,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"},{
"RefinerName":"LastModifiedTime","DisplayName":"","Type":"DateTime","Modifier":"LastModifiedTime","Score":"0","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"980669858332000000","Max":"980669863308000000","Mean":"980669860249000000","Entropy":"0","Sum":"11768038322988000000","RefinementName":"Before 2010-11-17T08:00:00Z","RefinementValue":"Before 2010-11-17T08:00:00Z","RefinementToken":"range(min, 2010-11-17T08:00:00Z)","RefinementCount":0,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"},{
"RefinerName":"LastModifiedTime","DisplayName":"","Type":"DateTime","Modifier":"LastModifiedTime","Score":"0","UniqueCount":0,"HitCount":12,"NonZeroCount":12,"Ratio":"1","Min":"980669858332000000","Max":"980669863308000000","Mean":"980669860249000000","Entropy":"0","Sum":"11768038322988000000","RefinementName":"From 2010-11-17T08:00:00Z up to 2011-05-21T07:00:00Z","RefinementValue":"From 2010-11-17T08:00:00Z up to 2011-05-21T07:00:00Z","RefinementToken":"range(2010-11-17T08:00:00Z, 2011-05-21T07:00:00Z)","RefinementCount":0,"PartitionId":"\Guid(0c37852b-34d0-418e-91c6-2ac25af4be5b)\","UrlZone":0,"AAMEnabledManagedProperties":"Path;recommendedfor","RenderTemplateId":"~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplayTemplates\u002fSearch\u002fDefaultItem.js"}
}
```

```

ateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fDefaultItem.js"
}, {
  "RefinerName": "LastModifiedTime", "DisplayName": "", "Type": "DateTime", "Modifier": "LastModifiedT
ime", "Score": "0", "UniqueCount": 0, "HitCount": 12, "NonZeroCount": 12, "Ratio": "1", "Min": "980669858
3320000000", "Max": "9806698633080000000", "Mean": "9806698602490000000", "Entropy": "0", "Sum": "117
680383229880000000", "RefinementName": "From 2011-05-21T07:00:00Z up to 2011-10-
18T07:00:00Z", "RefinementValue": "From 2011-05-21T07:00:00Z up to 2011-10-
18T07:00:00Z", "RefinementToken": "range(2011-05-21T07:00:00Z, 2011-10-
18T07:00:00Z)", "RefinementCount": 0, "PartitionId": "\/Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\/", "UrlZone": 0, "AAMEnabledManagedProperties": "Path;recommendedfor", "RenderTempl
ateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fDefaultItem.js"
}, {
  "RefinerName": "LastModifiedTime", "DisplayName": "", "Type": "DateTime", "Modifier": "LastModifiedT
ime", "Score": "0", "UniqueCount": 0, "HitCount": 12, "NonZeroCount": 12, "Ratio": "1", "Min": "980669858
3320000000", "Max": "9806698633080000000", "Mean": "9806698602490000000", "Entropy": "0", "Sum": "117
680383229880000000", "RefinementName": "From 2011-10-18T07:00:00Z up to 2011-11-
10T08:00:00Z", "RefinementValue": "From 2011-10-18T07:00:00Z up to 2011-11-
10T08:00:00Z", "RefinementToken": "range(2011-10-18T07:00:00Z, 2011-11-
10T08:00:00Z)", "RefinementCount": 0, "PartitionId": "\/Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\/", "UrlZone": 0, "AAMEnabledManagedProperties": "Path;recommendedfor", "RenderTempl
ateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fDefaultItem.js"
}, {
  "RefinerName": "LastModifiedTime", "DisplayName": "", "Type": "DateTime", "Modifier": "LastModifiedT
ime", "Score": "0", "UniqueCount": 0, "HitCount": 12, "NonZeroCount": 12, "Ratio": "1", "Min": "980669858
3320000000", "Max": "9806698633080000000", "Mean": "9806698602490000000", "Entropy": "0", "Sum": "117
680383229880000000", "RefinementName": "From 2011-11-10T08:00:00Z up to 2011-11-
17T08:00:00Z", "RefinementValue": "From 2011-11-10T08:00:00Z up to 2011-11-
17T08:00:00Z", "RefinementToken": "range(2011-11-10T08:00:00Z, 2011-11-
17T08:00:00Z)", "RefinementCount": 12, "PartitionId": "\/Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\/", "UrlZone": 0, "AAMEnabledManagedProperties": "Path;recommendedfor", "RenderTempl
ateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fDefaultItem.js"
}, {
  "RefinerName": "LastModifiedTime", "DisplayName": "", "Type": "DateTime", "Modifier": "LastModifiedT
ime", "Score": "0", "UniqueCount": 0, "HitCount": 12, "NonZeroCount": 12, "Ratio": "1", "Min": "980669858
3320000000", "Max": "9806698633080000000", "Mean": "9806698602490000000", "Entropy": "0", "Sum": "117
680383229880000000", "RefinementName": "2011-11-17T08:00:00Z or later", "RefinementValue": "2011-
11-17T08:00:00Z or later", "RefinementToken": "range(2011-11-17T08:00:00Z, max,
to=\le\)", "RefinementCount": 0, "PartitionId": "\/Guid(0c37852b-34d0-418e-91c6-
2ac25af4be5b)\/", "UrlZone": 0, "AAMEnabledManagedProperties": "Path;recommendedfor", "RenderTempl
ateId": "~sitecollection\u002f_catalogs\u002fmasterpage\u002fDisplay
Templates\u002fSearch\u002fDefaultItem.js"
}
], "ResultTitle": null, "ResultTitleUrl": null, "RowCount": 18, "TableType": "RefinementResults", "Tot
alRows": 11
}, {
  "_ObjectType": "Microsoft.SharePoint.Client.Search.Query.ResultTable", "GroupTemplateId": null,
  "ItemTemplateId": null, "Properties": {
    "QueryModification": "home", "RenderTemplateId": "~sitecollection\u002f_catalogs\u002fmasterpage
\u002fDisplay Templates\u002fSearch\u002fDefaultGroup.js"
  }, "QueryId": "PersonalFavorite Query", "QueryRuleId": "00000000-0000-0000-0000-000000000000",
  "ResultRows": [

], "ResultTitle": "PERSONAL
FAVORITES", "ResultTitleUrl": null, "RowCount": 0, "TableType": "PersonalFavoriteResults", "TotalRow
s": 0
}
]
}, 258, {
  "HasException": false, "ErrorInfo": null

```

}
]

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft SharePoint Foundation 2013
- Microsoft SharePoint Server 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

7 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

8 Index

A

Abstract data model

[server](#) 18

[Applicability](#) 15

C

[Capability negotiation](#) 16

[Change tracking](#) 104

[Common Exceptions message](#) 17

D

Data model - abstract

[server](#) 18

E

Examples

[Search for the keyword 'home'](#) 83

F

[Fields - vendor-extensible](#) 16

G

[Glossary](#) 13

H

Higher-layer triggered events

[server](#) 18

I

[Implementer - security considerations](#) 102

[Index of security parameters](#) 102

[Informative references](#) 14

Initialization

[server](#) 18

[Introduction](#) 13

M

Messages

[Common Exceptions](#) 17

[Namespaces](#) 17

[transport](#) 17

N

[Namespaces message](#) 17

[Normative references](#) 14

O

Other local events

[server](#) 82

[Overview \(synopsis\)](#) 14

P

[Parameters - security index](#) 102

[Preconditions](#) 15

[Prerequisites](#) 15

[Product behavior](#) 103

R

[References](#) 14

[informative](#) 14

[normative](#) 14

[Relationship to other protocols](#) 15

S

[Search for the keyword 'home' example](#) 83

Security

[implementer considerations](#) 102

[parameter index](#) 102

Server

[abstract data model](#) 18

[higher-layer triggered events](#) 18

[initialization](#) 18

[other local events](#) 82

[timer events](#) 82

[timers](#) 18

[Standards assignments](#) 16

T

Timer events

[server](#) 82

Timers

[server](#) 18

[Tracking changes](#) 104

[Transport](#) 17

Triggered events - higher-layer

[server](#) 18

V

[Vendor-extensible fields](#) 16

[Versioning](#) 16