

[MS-TSWS]:

Translation Services Web Service Protocol

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **License Programs.** To see all of the protocols in scope under a specific license program and the associated patents, visit the [Patent Map](#).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

Support. For questions and support, please contact dochelp@microsoft.com.

Revision Summary

Date	Revision History	Revision Class	Comments
1/20/2012	0.1	New	Released new document.
4/11/2012	0.2	Minor	Clarified the meaning of the technical content.
7/16/2012	0.2	None	No changes to the meaning, language, or formatting of the technical content.
9/12/2012	0.2	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2012	1.0	Major	Significantly changed the technical content.
2/11/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
7/30/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
11/18/2013	1.0	None	No changes to the meaning, language, or formatting of the technical content.
2/10/2014	1.0	None	No changes to the meaning, language, or formatting of the technical content.
4/30/2014	1.1	Minor	Clarified the meaning of the technical content.
7/31/2014	1.1	None	No changes to the meaning, language, or formatting of the technical content.
10/30/2014	1.1	None	No changes to the meaning, language, or formatting of the technical content.
2/26/2016	2.0	Major	Significantly changed the technical content.
7/15/2016	2.0	None	No changes to the meaning, language, or formatting of the technical content.
9/14/2016	2.0	None	No changes to the meaning, language, or formatting of the technical content.
9/19/2017	3.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	9
1.1	Glossary	9
1.2	References	10
1.2.1	Normative References	10
1.2.2	Informative References	11
1.3	Overview	11
1.4	Relationship to Other Protocols	11
1.5	Prerequisites/Preconditions	11
1.6	Applicability Statement	12
1.7	Versioning and Capability Negotiation	12
1.8	Vendor-Extensible Fields	12
1.9	Standards Assignments	12
2	Messages	13
2.1	Transport	13
2.2	Common Message Syntax	13
2.2.1	Namespaces	13
2.2.2	Messages	15
2.2.3	Elements	15
2.2.3.1	GroupId	15
2.2.3.2	JobId	16
2.2.3.3	PartitionId	16
2.2.3.4	Settings	16
2.2.3.5	UserToken	16
2.2.4	Complex Types	16
2.2.4.1	ArrayOfstring	17
2.2.4.2	TranslationJobSettings	17
2.2.4.3	ReadOnlyFault	17
2.2.5	Simple Types	17
2.2.5.1	guid	18
2.2.5.2	SaveBehavior	18
2.2.6	Attributes	18
2.2.7	Groups	19
2.2.8	Attribute Groups	19
3	Protocol Details	20
3.1	Translation Server Details	20
3.1.1	Abstract Data Model	20
3.1.2	Timers	21
3.1.3	Initialization	21
3.1.4	Message Processing Events and Sequencing Rules	21
3.1.4.1	AddGroup	22
3.1.4.1.1	Messages	22
3.1.4.1.1.1	AddGroupRequest	22
3.1.4.1.1.2	AddGroupResponse	22
3.1.4.1.2	Elements	23
3.1.4.1.2.1	AddGroupRequest	23
3.1.4.1.2.2	AddGroupResponse	24
3.1.4.1.3	Complex Types	24
3.1.4.1.4	Simple Types	24
3.1.4.1.5	Attributes	24
3.1.4.1.6	Groups	24
3.1.4.1.7	Attribute Groups	24
3.1.4.2	AddJob	24
3.1.4.2.1	Messages	24

3.1.4.2.1.1	AddJobRequest	25
3.1.4.2.1.2	AddJobResponse	25
3.1.4.2.2	Elements	25
3.1.4.2.2.1	AddJobRequest	25
3.1.4.2.2.2	AddJobResponse	26
3.1.4.2.2.3	JobAdded	26
3.1.4.2.3	Complex Types	26
3.1.4.2.4	Simple Types	26
3.1.4.2.5	Attributes	26
3.1.4.2.6	Groups	27
3.1.4.2.7	Attribute Groups	27
3.1.4.3	AddSyncStreamJob	27
3.1.4.3.1	Messages	27
3.1.4.3.1.1	AddSyncStreamJobRequest	27
3.1.4.3.1.2	AddSyncStreamJobResponse	28
3.1.4.3.2	Elements	28
3.1.4.3.2.1	AddSyncStreamJobRequest	28
3.1.4.3.2.2	AddSyncStreamJobResponse	29
3.1.4.3.3	Complex Types	29
3.1.4.3.4	Simple Types	29
3.1.4.3.5	Attributes	29
3.1.4.3.6	Groups	29
3.1.4.3.7	Attribute Groups	29
3.1.4.4	BatchGetSyncJobStatus	29
3.1.4.4.1	Messages	30
3.1.4.4.1.1	BatchGetSyncJobStatusRequest	30
3.1.4.4.1.2	BatchGetSyncJobStatusResponse	30
3.1.4.4.2	Elements	30
3.1.4.4.2.1	BatchGetSyncJobStatusRequest	31
3.1.4.4.2.2	BatchGetSyncJobStatusResponse	31
3.1.4.4.3	Complex Types	31
3.1.4.4.3.1	ArrayOfNullableOfint	32
3.1.4.4.3.2	ArrayOfbase64Binary	32
3.1.4.4.3.3	ArrayOfunsignedLong	32
3.1.4.4.4	Simple Types	32
3.1.4.4.5	Attributes	33
3.1.4.4.6	Groups	33
3.1.4.4.7	Attribute Groups	33
3.1.4.5	CancelJob	33
3.1.4.5.1	Messages	33
3.1.4.5.1.1	CancelJobRequest	33
3.1.4.5.1.2	CancelJobResponse	34
3.1.4.5.2	Elements	34
3.1.4.5.2.1	CancelJobRequest	34
3.1.4.5.2.2	CancelJobResponse	34
3.1.4.5.3	Complex Types	34
3.1.4.5.4	Simple Types	35
3.1.4.5.5	Attributes	35
3.1.4.5.6	Groups	35
3.1.4.5.7	Attribute Groups	35
3.1.4.6	ConvertBatch	35
3.1.4.6.1	Messages	35
3.1.4.6.1.1	ConvertBatchRequest	35
3.1.4.6.2	Elements	36
3.1.4.6.2.1	ConvertBatchRequest	36
3.1.4.6.3	Complex Types	36
3.1.4.6.3.1	ArrayOfConvertBatchItem	37
3.1.4.6.3.2	ConvertBatchItem	37

3.1.4.6.3.3	ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ	38
3.1.4.6.3.4	ConvertBatchJob	38
3.1.4.6.4	Simple Types	38
3.1.4.6.5	Attributes	39
3.1.4.6.6	Groups	39
3.1.4.6.7	Attribute Groups	39
3.1.4.7	GetConfiguration	39
3.1.4.7.1	Messages	39
3.1.4.7.1.1	GetConfigurationRequest	40
3.1.4.7.1.2	GetConfigurationResponse	40
3.1.4.7.2	Elements	40
3.1.4.7.2.1	GetConfigurationRequest	40
3.1.4.7.2.2	GetConfigurationResponse	40
3.1.4.7.3	Complex Types	41
3.1.4.7.4	Simple Types	41
3.1.4.7.5	Attributes	41
3.1.4.7.6	Groups	41
3.1.4.7.7	Attribute Groups	41
3.1.4.8	GetGroups	41
3.1.4.8.1	Messages	42
3.1.4.8.1.1	GetGroupsRequest	42
3.1.4.8.1.2	GetGroupsResponse	42
3.1.4.8.2	Elements	42
3.1.4.8.2.1	GetGroupsRequest	42
3.1.4.8.2.2	GetGroupsResponse	43
3.1.4.8.3	Complex Types	43
3.1.4.8.3.1	ArrayOfGetGroupsGroup	43
3.1.4.8.3.2	GetGroupsGroup	44
3.1.4.8.4	Simple Types	44
3.1.4.8.5	Attributes	44
3.1.4.8.6	Groups	44
3.1.4.8.7	Attribute Groups	44
3.1.4.9	GetId	44
3.1.4.9.1	Messages	45
3.1.4.9.1.1	GetIdRequest	45
3.1.4.9.1.2	GetIdResponse	45
3.1.4.9.2	Elements	45
3.1.4.9.2.1	GetIdRequest	46
3.1.4.9.2.2	GetIdResponse	46
3.1.4.9.3	Complex Types	46
3.1.4.9.4	Simple Types	46
3.1.4.9.5	Attributes	46
3.1.4.9.6	Groups	46
3.1.4.9.7	Attribute Groups	46
3.1.4.10	GetItems	47
3.1.4.10.1	Messages	47
3.1.4.10.1.1	GetItemsRequest	47
3.1.4.10.1.2	GetItemsResponse	47
3.1.4.10.2	Elements	47
3.1.4.10.2.1	GetItemsRequest	48
3.1.4.10.2.2	GetItemsResponse	48
3.1.4.10.2.3	Items	49
3.1.4.10.3	Complex Types	49
3.1.4.10.3.1	ArrayOfGetItemsItem	49
3.1.4.10.3.2	GetItemsItem	49
3.1.4.10.4	Simple Types	50
3.1.4.10.5	Attributes	50
3.1.4.10.6	Groups	50

3.1.4.10.7	Attribute Groups.....	50
3.1.4.11	GetJobs	50
3.1.4.11.1	Messages	51
3.1.4.11.1.1	GetJobsRequest.....	51
3.1.4.11.1.2	GetJobsResponse.....	51
3.1.4.11.2	Elements	51
3.1.4.11.2.1	GetJobsRequest.....	51
3.1.4.11.2.2	GetJobsResponse.....	52
3.1.4.11.3	Complex Types	52
3.1.4.11.3.1	ArrayOfGetJobsJob.....	52
3.1.4.11.3.2	GetJobsJob	53
3.1.4.11.4	Simple Types	53
3.1.4.11.5	Attributes	53
3.1.4.11.6	Groups.....	53
3.1.4.11.7	Attribute Groups.....	53
3.1.4.12	GetJobStatus.....	53
3.1.4.12.1	Messages	54
3.1.4.12.1.1	GetJobStatusRequest	54
3.1.4.12.1.2	GetJobStatusResponse	54
3.1.4.12.2	Elements.....	54
3.1.4.12.2.1	GetJobStatusRequest	55
3.1.4.12.2.2	GetJobStatusResponse	55
3.1.4.12.3	Complex Types	56
3.1.4.12.4	Simple Types	56
3.1.4.12.5	Attributes	56
3.1.4.12.6	Groups.....	56
3.1.4.12.7	Attribute Groups.....	56
3.1.4.13	GetSyncStreamOutputBytes	56
3.1.4.13.1	Messages	57
3.1.4.13.1.1	GetSyncStreamOutputBytesRequest.....	57
3.1.4.13.1.2	GetSyncStreamOutputBytesResponse.....	57
3.1.4.13.2	Elements.....	57
3.1.4.13.2.1	GetSyncStreamOutputBytesRequest.....	57
3.1.4.13.2.2	GetSyncStreamOutputBytesResponse.....	58
3.1.4.13.3	Complex Types	58
3.1.4.13.4	Simple Types	58
3.1.4.13.5	Attributes	58
3.1.4.13.6	Groups.....	58
3.1.4.13.7	Attribute Groups.....	58
3.1.4.14	Ping	58
3.1.4.14.1	Messages	59
3.1.4.14.1.1	PingRequest	59
3.1.4.14.1.2	PingResponse	59
3.1.4.14.2	Elements.....	59
3.1.4.14.2.1	PingRequest	59
3.1.4.14.2.2	PingResponse	60
3.1.4.14.3	Complex Types	60
3.1.4.14.4	Simple Types	60
3.1.4.14.5	Attributes	60
3.1.4.14.6	Groups.....	60
3.1.4.14.7	Attribute Groups.....	60
3.1.4.15	SubmitJob.....	60
3.1.4.15.1	Messages	61
3.1.4.15.1.1	SubmitJobRequest	61
3.1.4.15.1.2	SubmitJobResponse	61
3.1.4.15.2	Elements.....	61
3.1.4.15.2.1	SubmitJobRequest	62
3.1.4.15.2.2	SubmitJobResponse	62

3.1.4.15.3	Complex Types	62
3.1.4.15.4	Simple Types	62
3.1.4.15.5	Attributes	62
3.1.4.15.6	Groups.....	62
3.1.4.15.7	Attribute Groups.....	62
3.1.5	Timer Events.....	62
3.1.6	Other Local Events.....	63
4	Protocol Examples	64
4.1	Creating a translation job.....	64
4.1.1	Adding the job.....	64
4.1.2	Adding the first group	65
4.1.3	Adding the second group	65
4.1.4	Submitting the job.....	66
4.2	Getting the status of a translation job.....	66
4.2.1	Getting the job.....	66
4.2.2	Getting the job status	67
4.2.3	Getting the groups.....	67
4.2.4	Getting the items in the first group	68
4.2.5	Getting the items in the second group.....	69
4.3	Creating immediate translation jobs	70
4.3.1	Adding a streaming job	70
4.3.2	Getting the job status	71
4.3.3	Completing downloading of the streaming job	72
5	Security.....	73
5.1	Security Considerations for Implementers	73
5.2	Index of Security Parameters	73
6	Appendix A: Full WSDL	74
7	Appendix B: Full XML Schema.....	83
7.1	http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema	84
7.2	http://schemas.microsoft.com/2003/10/Serialization/ Schema	85
7.3	http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response Schema	86
7.4	http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob Schema	86
7.5	http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch Schema	86
7.6	http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration Schema	87
7.7	http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationResp onse Schema.....	87
7.8	http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response Schema	88
7.9	http://schemas.microsoft.com/office/server/translation/2010/11/getGroups Schema	88
7.10	http://schemas.microsoft.com/office/server/translation/2010/11/getId/response Schema	89
7.11	http://schemas.microsoft.com/office/server/translation/2010/11/getId Schema	89
7.12	http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response Schema	89
7.13	http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response Schema	90
7.14	http://schemas.microsoft.com/office/server/translation/2010/11/getItems Schema .	90
7.15	http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response Schema	91
7.16	http://schemas.microsoft.com/office/server/translation/2010/11/getJobs Schema ...	91

7.17	http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response Schema.....	91
7.18	http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus Schema	92
7.19	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/response Schema	92
7.20	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus Schema	93
7.21	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutput Bytes/response Schema.....	93
7.22	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutput Bytes Schema	93
7.23	http://schemas.microsoft.com/office/server/translation/2010/11/ping/response Schema	93
7.24	http://schemas.microsoft.com/office/server/translation/2010/11/addGroup Schema	94
7.25	http://schemas.microsoft.com/office/server/translation/2010/11/ping Schema.....	94
7.26	http://schemas.microsoft.com/office/server/translation/2010/11/service Schema....	94
7.27	http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response Schema	95
7.28	http://schemas.microsoft.com/office/server/translation/2010/11/submitJob Schema	95
7.29	http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings Schema	95
7.30	http://schemas.datacontract.org/2004/07/System Schema	96
7.31	http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response Schema	96
7.32	http://schemas.microsoft.com/office/server/translation/2010/11/addJob Schema....	96
7.33	http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/response Schema	97
7.34	http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob Schema	97
8	Appendix C: Product Behavior	98
9	Change Tracking.....	99
10	Index.....	100

1 Introduction

The Translation Services Web Service Protocol is used to machine translate documents from one language to another.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

1.1 Glossary

This document uses the following terms:

dictionary: A collection of key/value pairs. Each pair consists of a unique key and an associated value. Values in the dictionary are retrieved by providing a key for which the dictionary returns the associated value.

file extension: The sequence of characters in a file's name between the end of the file's name and the last "." character. Vendors of applications choose such sequences for the applications to uniquely identify files that were created by those applications. This allows file management software to determine which application are to be used to open a file.

globally unique identifier (GUID): A term used interchangeably with universally unique identifier (UUID) in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms described in [\[RFC4122\]](#) or [\[C706\]](#) must be used for generating the **GUID**. See also universally unique identifier (UUID).

immediate translation job: A **translation job** that contains only one **translation item** and is executed as a higher priority than a typical translation job.

partition: An area within a shared services database, such as an area that isolates different tenants within a service, or the process of creating such an area in a shared services database.

server-relative URL: A relative URL that does not specify a scheme or host, and assumes a base URI of the root of the host, as described in [\[RFC3986\]](#).

site: A group of related pages and data within a SharePoint site collection. The structure and content of a site is based on a site definition. Also referred to as SharePoint site and web site.

SOAP action: The HTTP request header field used to indicate the intent of the SOAP request, using a URI value. See [\[SOAP1.1\]](#) section 6.1.1 for more information.

SOAP body: A container for the payload data being delivered by a SOAP message to its recipient. See [\[SOAP1.2-1/2007\]](#) section 5.3 for more information.

translation group: A subset of translation items within a **translation job** that share the same base locations for source files and target files.

translation item: A data structure containing information that pertains to the machine translation of a single file, including the locations of the source and target files.

translation job: A set of translation items which are created at the same time and share the same machine translation settings, including target language.

Uniform Resource Locator (URL): A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

Web Services Description Language (WSDL): An XML format for describing network services as a set of endpoints that operate on messages that contain either document-oriented or procedure-oriented information. The operations and messages are described abstractly and are bound to a concrete network protocol and message format in order to define an endpoint. Related concrete endpoints are combined into abstract endpoints, which describe a network service. WSDL is extensible, which allows the description of endpoints and their messages regardless of the message formats or network protocols that are used.

WSDL message: An abstract, typed definition of the data that is communicated during a **WSDL operation** [WSDL]. Also, an element that describes the data being exchanged between web service providers and clients.

WSDL operation: A single action or function of a web service. The execution of a WSDL operation typically requires the exchange of messages between the service requestor and the service provider.

XML namespace: A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [RFC3986]. A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [XMLNS-2ED].

XML namespace prefix: An abbreviated form of an **XML namespace**, as described in [XML].

XML schema: A description of a type of XML document that is typically expressed in terms of constraints on the structure and content of documents of that type, in addition to the basic syntax constraints that are imposed by XML itself. An XML schema provides a view of a document type at a relatively high level of abstraction.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-CSOMSPT] Microsoft Corporation, "[SharePoint Client-Side Object Model Protocol](#)".

[MS-SPS2SAUTH] Microsoft Corporation, "[OAuth 2.0 Authentication Protocol: SharePoint Profile](#)".

[RFC1766] Alvestrand, H., "Tags for the Identification of Languages", RFC 1766, March 1995, <http://www.ietf.org/rfc/rfc1766.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", W3C Note, May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., Ed. and Malhotra, A., Ed., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

1.2.2 Informative References

None.

1.3 Overview

This protocol enables a protocol client to create and manage a persistent queue of document translations. It also allows the protocol client to initiate the machine translation of documents in that queue from one language to another. The protocol server maintains the queue and initiates translations based on requests from a protocol client. The protocol also allows a protocol client to initiate machine translation of a document immediately, bypassing the queue.

1.4 Relationship to Other Protocols

This protocol uses the SOAP message protocol for formatting request and response messages, as described in [\[SOAP1.1\]](#), [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#). It transmits those messages by using HTTP, as described in [\[RFC2616\]](#), or Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS), as described in [\[RFC2818\]](#).

The following diagram shows the underlying messaging and transport stack that is used by the protocol:

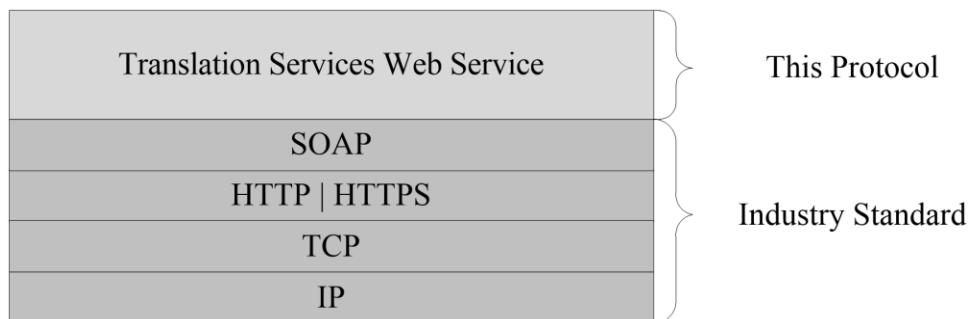


Figure 1: This protocol in relation to underlying messaging and transport stack protocols

1.5 Prerequisites/Preconditions

This protocol operates against a protocol server that exposes one or more endpoint URIs that are known by protocol clients. The endpoint URI of the protocol server and the transport that is used by the protocol server are either known by the protocol client or obtained by using the discovery mechanism that is described in [\[MS-SPTWS\]](#).

The protocol client obtains the requisite ApplicationClassId and ApplicationVersion values and the endpoint URI of the protocol server that provides the discovery mechanism, as described in [\[MS-SPTWS\]](#), by means that are independent of either protocol.

This protocol requires the protocol client to have permission to call the methods on the protocol server.

The protocol client implements the token-based security mechanisms that are required by the protocol server and related security protocols, as described in [\[MS-SPSTWS\]](#).

This protocol assumes that the protocol client provides the input file and output file locations of a **translation item** as **URLs** that are in a format required by the protocol server.

1.6 Applicability Statement

This protocol is intended for use by protocol clients and protocol servers that are connected by high-bandwidth, low-latency network connections.

The protocol was designed to enable a protocol client to communicate with a protocol server to manage a queue of **translation jobs** and initiate document translations from one language to another. The protocol server only performs actions in response to requests from the protocol client:

- Creates translation jobs.
- Cancels translation jobs.
- Provides access to the status of translation jobs.
- Initiates the translation of **translation items**.

1.7 Versioning and Capability Negotiation

This document covers versioning issues in the following areas:

- **Supported Transports:** This protocol can be implemented by using transports that support sending Simple Object Access Protocol (SOAP) messages, as described in section 2.1.
- **Protocol Versions:** This protocol is not versioned.

Capability Negotiation: This protocol does not support version negotiation.

1.8 Vendor-Extensible Fields

None.

1.9 Standards Assignments

None.

2 Messages

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The **WSDL** in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, and **present**.

2.1 Transport

Protocol servers **MUST** support SOAP over HTTP or HTTPS.

All protocol messages **MUST** be transported by using HTTP bindings at the transport level.

Protocol messages **MUST** be formatted as specified in either [\[SOAP1.1\]](#) section 4 or [\[SOAP1.2/1\]](#) section 5. Protocol server faults **MUST** be returned by using either HTTP status codes, as specified in [\[RFC2616\]](#) section 10, or SOAP faults, as specified in [\[SOAP1.1\]](#) section 4.4 or [\[SOAP1.2/1\]](#) section 5.4.

If the HTTPS transport is used, a server certificate **MUST** be deployed.

This protocol **MAY** transmit an additional SOAP header, the **ServiceContext** header, as specified in [\[MS-SPSTWS\]](#).

This protocol does not define any means for activating a protocol server or protocol client. The protocol server **MUST** be configured and begin listening in an implementation-specific way. In addition, the protocol client **MUST** know the format and transport that is used by the protocol server, for example, the SOAP format over an HTTP transport.

2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **WSDL**, as specified in [\[WSDL\]](#).

2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
q1	http://schemas.microsoft.com/office/server/translation/2010/11/ping	
q2	http://schemas.microsoft.com/office/server/translation/2010/11/ping/response	
q3	http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob	
q4	http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response	
q5	http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus	
q6	http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response	

Prefi x	Namespace URI	Reference
q7	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus	
q8	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/res onse	
q9	http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob	
q10	http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/res ponse	
q11	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputB ytes	
q12	http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputB ytes/response	
q13	http://schemas.microsoft.com/office/server/translation/2010/11/addJob	
q14	http://schemas.microsoft.com/2003/10/Serialization/	
q15	http://schemas.microsoft.com/office/server/translation/2010/11/addGroup	
q16	http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response	
q17	http://schemas.microsoft.com/office/server/translation/2010/11/submitJob	
q18	http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response	
q19	http://schemas.microsoft.com/office/server/translation/2010/11/getJobs	
q20	http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response	
q21	http://schemas.microsoft.com/office/server/translation/2010/11/getGroups	
q22	http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response	
q23	http://schemas.microsoft.com/office/server/translation/2010/11/getItems	
q24	http://schemas.datacontract.org/2004/07/System	
q25	http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch	
q26	http://schemas.microsoft.com/office/server/translation/2010/11/getId	
q27	http://schemas.microsoft.com/office/server/translation/2010/11/getId/response	
q28	http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration	
q29	http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationRespo nse	
q30	http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response	
q31	http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response	
soap	http://schemas.xmlsoap.org/wsdl/soap/	[SOAP1.1]
tns	http://schemas.microsoft.com/office/server/translation/2010/11/service	
tns1	http://schemas.microsoft.com/2003/10/Serialization/Arrays	
tns2	http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings	

Prefi x	Namespace URI	Reference
tns3	http://schemas.microsoft.com/office/server/translation/2010/11/service/Imports	
wsaw	http://www.w3.org/2006/05/addressing/wsd	
wsdl	http://schemas.xmlsoap.org/wsd/	[WSDL]
xs	http://www.w3.org/2001/XMLSchema	[XMLSCHEMA 1] [XMLSCHEMA 2]

2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

2.2.3 Elements

The following table summarizes the set of common **XML schema** element definitions defined by this specification. XML schema element definitions that are specific to a particular operation are described with the operation.

Element	Description
GroupId	Uniquely identifies a translation group within a translation job .
JobId	Uniquely identifies a translation job.
PartitionId	Identifies the partition of a translation job.
Settings	Contains a collection of preferred settings for a translation job.
UserToken	Represents user credentials.

This specification does not define any common XML schema element definitions.

2.2.3.1 GroupId

The **GroupId** element contains a 2-byte, signed integer value that identifies a **translation group** within a **translation job**, as follows:

- The value **MUST** be a non-negative integer.
- The value **MUST** be less than 32,768.
- The protocol client **MUST** specify a unique value for each translation group within the same translation job.

```
<xs:element minOccurs="0" name="GroupId" type="xs:short"/>
```

2.2.3.2 JobId

The **JobId** element contains an 8-byte, unsigned integer value that uniquely identifies a **translation job**. The protocol client MUST specify a unique 8-byte value for each translation job.

```
<xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
```

2.2.3.3 PartitionId

The **PartitionId** element contains a **guid** (section [2.2.5.1](#)) value identifying the **partition** of a **translation job**.

```
<xs:element minOccurs="0" name="PartitionId" nillable="true"
xmlns:q1="http://schemas.microsoft.com/2003/10/Serialization/" type="q1:guid"/>
```

2.2.3.4 Settings

The **Settings** element is a **TranslationJobSettings** (section [2.2.4.2](#)) value that specifies a collection of preferred settings for all **translation items** within a **translation job**.

```
<xs:element minOccurs="0" name="Settings" nillable="true"
xmlns:q2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings" type="q2:TranslationJobSettings"/>
```

2.2.3.5 UserToken

The **UserToken** element is a variable-length structure that represents user credentials, encoded as a **base64Binary** value. The user credentials MUST be serialized user information as documented in [\[MS-SPS2SAUTH\]](#) section 3.2.

```
<xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
```

2.2.4 Complex Types

The following table summarizes the set of common **XML schema** complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
ArrayOfstring	The ArrayOfstring complex type represents an array of arbitrary string values.
ReadOnlyFault	The ReadOnlyFault complex type specifies a fault which indicates that the protocol server could not complete a request because the storage used for translation jobs , translation groups , and translation items is in read-only mode.
TranslationJobSettings	The TranslationJobSettings complex type specifies a collection of preferred settings for all translation items within a translation job.

2.2.4.1 ArrayOfstring

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

The **ArrayOfstring** complex type represents an array of arbitrary string values.

```
<xs:complexType name="ArrayOfstring" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

string: A string value.

2.2.4.2 TranslationJobSettings

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings>

The **TranslationJobSettings** complex type specifies a collection of preferred settings for all **translation items** within a **translation job**.

```
<xs:complexType name="TranslationJobSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
xmlns:tns="http://schemas.microsoft.com/office/server/translation/2010/11/service"
minOccurs="0" name="OutputSaveBehavior" type="tns:SaveBehavior"/>
    <xs:element minOccurs="0" name="TargetLanguage" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

OutputSaveBehavior: A **SaveBehavior** (section [2.2.5.2](#)) value that specifies the preferred overwrite behavior of the output file of a translation item when the output file already exists.

TargetLanguage: A language tag as defined in [\[RFC1766\]](#) identifying the language into which translation items will be translated.

2.2.4.3 ReadOnlyFault

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/service>

The **ReadOnlyFault** complex type specifies a fault which indicates that the protocol server could not complete a request because the storage used for **translation jobs**, **translation groups**, and **translation items** is in read-only mode.

```
<xs:complexType name="ReadOnlyFault" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence/>
</xs:complexType>
```

2.2.5 Simple Types

The following table summarizes the set of common **XML schema** simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple type	Description
guid	A string representing a GUID or unique identifier.
SaveBehavior	A string value specifying the preferred overwrite behavior of the output file of a translation item when the output file already exists.

2.2.5.1 guid

Namespace: <http://schemas.microsoft.com/2003/10/Serialization/>

A string representing a **GUID** or unique identifier.

```
<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:pattern value="\da-fA-F}{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
  </xs:restriction>
</xs:simpleType>
```

2.2.5.2 SaveBehavior

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/service>

A string value specifying the preferred overwrite behavior of the output file of a **translation item** when the output file already exists.

```
<xs:simpleType name="SaveBehavior" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="AppendIfPossible"/>
    <xs:enumeration value="AlwaysOverwrite"/>
    <xs:enumeration value="AppendOnly"/>
    <xs:enumeration value="NeverOverwrite"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **SaveBehavior** simple type.

Value	Meaning
AppendIfPossible	If the output file location supports version history, append to the file's version history. If the output file location does not support version history, overwrite the existing file.
AlwaysOverwrite	Always overwrite the existing file.
AppendOnly	If the output file location supports version history, append to the file's version history. If the output file location does not support version history, do not save the output file.
NeverOverwrite	Never overwrite an existing file.

2.2.6 Attributes

This specification does not define any common **XML schema** attribute definitions.

2.2.7 Groups

This specification does not define any common **XML schema** group definitions.

2.2.8 Attribute Groups

This specification does not define any common **XML schema** attribute group definitions.

3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls that are made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret Hypertext Transfer Protocol (HTTP) status codes that are returned by the protocol server as specified in [RFC2616], section 10.

This protocol allows protocol servers to notify protocol clients of application-level faults by using SOAP faults. Except where otherwise specified, these SOAP faults are not significant for interoperability and protocol clients can interpret them in an implementation-specific manner.

This protocol allows protocol servers to perform implementation-specific authorization checks and to notify protocol clients of authorization faults by using either HTTP status codes or SOAP faults, as specified previously in this section.

3.1 Translation Server Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

This protocol uses the following three basic data structures:

- **translation item**: A single translation from an input file to an output file.
- **translation group**: A grouping of translation items whose input files are contained in the same **site** and whose output files will be written to the same site. A translation group is comprised of one or more translation items.
- **translation job**: A logical group of translation groups that also contains translation settings that apply to all translation items within the translation groups. A translation job is comprised of one or more translation groups.

The protocol client builds up a translation job and sends it to the protocol server which stores the data unchanged. The protocol client adds a translation job as follows:

1. The protocol client first calls the **AddJob** (section [3.1.4.2](#)) operation to add a new translation job, specifying the translation job identifier, translation job settings and other data that applies to all translation groups and translation items in the translation job.
2. For each translation group in the translation job, the protocol client calls the **AddGroup** (section [3.1.4.1](#)) operation, specifying the translation group identifier, all translation items in the translation group and other data that applies to all translation items in the translation group.
3. After all translation groups have been added to the translation job, the protocol client submits the translation job by calling the **SubmitJob** (section [3.1.4.15](#)) operation.

The protocol client initiates the translation of one or more translation items on the protocol server using the **ConvertBatch** (section [3.1.4.6](#)) operation. After a translation item has either failed or successfully finished, the protocol server is responsible for updating the status of the translation items in the database.

The protocol client is able to retrieve a list of translation jobs, including the translation job identifier and other metadata, with the **GetJobs** (section [3.1.4.11](#)) operation. The overall status of a specific translation job is returned by the **GetJobStatus** (section [3.1.4.12](#)) operation. To check the status of a specific translation item, the protocol client first uses the **GetGroups** (section [3.1.4.8](#)) operation to retrieve the list of translation groups in a translation job and then uses the **GetItems** (section [3.1.4.10](#)) operation to retrieve the individual translation items in each translation group.

The protocol client is also able to submit an **immediate translation job**, which only contains a single translation item, using the **AddSyncStreamJob** (section [3.1.4.3](#)) operation. The protocol server gives higher priority to immediate translation jobs. The protocol client uses the **BatchGetSyncJobStatus** (section [3.1.4.4](#)) operation to check the status of immediate translation jobs. The protocol client is unable to check the status of immediate translation jobs using the **GetJobs** (section [3.1.4.11](#)), **GetJobStatus** (section [3.1.4.12](#)), **GetGroups** (section [3.1.4.8](#)), or **GetItems** (section [3.1.4.10](#)) operations.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

Operation	Description
AddGroup	Adds a group of translation items to a translation job .
AddJob	Adds a new translation job to the queue.
AddSyncStreamJob	Adds an immediate translation job from a stream containing the input file.
BatchGetSyncJobStatus	Get the status of a number of immediate translation jobs.
CancelJob	Marks a translation job as canceled.
ConvertBatch	Initiates the translation of a batch of translation items.
GetConfiguration	Returns information to the protocol client about the configuration of the protocol server.
GetGroups	Gets a translation job and the translation groups within the translation job.
GetId	Gets the unique identifier of a currently running instance of the protocol server.
GetItems	Gets the translation items in a translation group.
GetJobs	Gets a list of translation jobs.
GetJobStatus	Gets the status of a translation job.
GetSyncStreamOutputBytes	Retrieves the output file for the immediate translation job that was submitted with the AddSyncStreamJob (section 3.1.4.3) WSDL operation .
Ping	Contacts a protocol server to determine the responsiveness of the service.
SubmitJob	Marks a translation job as submitted to specify that all translation groups in a

Operation	Description
	translation job have been added.

3.1.4.1 AddGroup

Adds a group of **translation items** to a **translation job**.

The following is the **WSDL** port type specification of the **AddGroup WSDL operation**.

```
<wsdl:operation name="AddGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
    name="AddGroupRequest" message="tns:AddGroupRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response"
    name="AddGroupResponse" message="tns:AddGroupResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns:ITranslationServiceApplication_AddGroup_ReadOnlyFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **AddGroupRequest** (section [3.1.4.1.1.1](#)) request **WSDL message** for each group of translation items being added to a translation job.

The protocol server MUST respond with an **AddGroupResponse** (section [3.1.4.1.1.2](#)) message.

3.1.4.1.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
AddGroupRequest	The request WSDL message for the AddGroup WSDL operation .
AddGroupResponse	The response WSDL message for the AddGroup WSDL operation .

3.1.4.1.1.1 AddGroupRequest

The request **WSDL message** for the **AddGroup WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/addGroup
```

The **SOAP body** contains the **AddGroupRequest** element.

3.1.4.1.1.2 AddGroupResponse

The response **WSDL message** for the **AddGroup WSDL operation**.

The **SOAP body** contains the **AddGroupResponse** element.

3.1.4.1.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
AddGroupRequest	The input data for the AddGroup WSDL operation .
AddGroupResponse	The result data for the AddGroup WSDL operation .

3.1.4.1.2.1 AddGroupRequest

The **AddGroupRequest** element specifies the input data for the **AddGroup WSDL operation**.

```
<xs:element name="AddGroupRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
      <xs:element xmlns:tnsl="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Items" nillable="true" type="tnsl:ArrayOfstring"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:tnsl="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="OutputItems" nillable="true" type="tnsl:ArrayOfstring"/>
      <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

GroupId: A **GroupId** (section [2.2.3.1](#)) element containing a new, unique value generated by the protocol client that identifies the **translation group** within the **translation job**. This element MUST NOT be null.

InputRoot: A string indicating the location of the input file of all the **translation items** in the translation group. The value MUST be the **URL** of a **site** which implements the [\[MS-CSOMSPT\]](#) protocol. When the protocol server processes translation items in this translation group, it MUST use the [\[MS-CSOMSPT\]](#) protocol to retrieve the input files.

Items: An **ArrayOfstring** (section [2.2.4.1](#)) element containing the **server-relative URL** of the input file of each translation item in the translation group, relative to **InputRoot**. This element MUST NOT be null.

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the translation job to which the translation group belongs. This element MUST NOT be null.

OutputItems: An **ArrayOfstring** (section [2.2.4.1](#)) element containing the server-relative URL of the output file of each translation item in the translation group, relative to **OutputRoot**. This element MUST NOT be null. The length of the array MUST equal the length of the **Items** array.

OutputRoot: A string indicating the location of the output file of all the translation items in the translation group. The value MUST be the URL of a site which implements the [\[MS-CSOMSPT\]](#) protocol. When the protocol server processes translation items in this translation group, it MUST use the [\[MS-CSOMSPT\]](#) protocol to upload the output files.

3.1.4.1.2.2 AddGroupResponse

The **AddGroupResponse** element specifies the result data for the **AddGroup WSDL operation**.

```
<xs:element name="AddGroupResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.1.3 Complex Types

None.

3.1.4.1.4 Simple Types

None.

3.1.4.1.5 Attributes

None.

3.1.4.1.6 Groups

None.

3.1.4.1.7 Attribute Groups

None.

3.1.4.2 AddJob

Adds a new **translation job** to the queue.

The following is the **WSDL** port type specification of the **AddJob WSDL operation**.

```
<wsdl:operation name="AddJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"
    name="AddJobRequest" message="tns:AddJobRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response"
    name="AddJobResponse" message="tns:AddJobResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns:ITranslationServiceApplication AddJob ReadOnlyFaultFault FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **AddJobRequest** (section [3.1.4.2.1.1](#)) request **WSDL message** to add a new translation job to the queue.

The protocol server MUST respond with an **AddJobResponse** (section [3.1.4.2.1.2](#)) message.

3.1.4.2.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
AddJobRequest	The request WSDL message for the AddJob WSDL operation .
AddJobResponse	The response WSDL message for the AddJob WSDL operation .

3.1.4.2.1.1 AddJobRequest

The request **WSDL message** for the **AddJob WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/addJob
```

The **SOAP body** contains the **AddJobRequest** element.

3.1.4.2.1.2 AddJobResponse

The response **WSDL message** for the **AddJob WSDL operation**.

The **SOAP body** contains the **AddJobResponse** element.

3.1.4.2.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
AddJobRequest	The input data for the AddJob WSDL operation .
AddJobResponse	The result data for the AddJob WSDL operation .

3.1.4.2.2.1 AddJobRequest

The **AddJobRequest** element specifies the input data for the **AddJob WSDL operation**.

```
<xs:element name="AddJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="ItemCount" type="xs:int"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      <xs:element
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings"
minOccurs="0" name="Settings" nillable="true" type="tns2:TranslationJobSettings"/>
      <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
```

```
</xs:element>
```

ItemCount: An integer indicating the number of **translation items** which this **translation job** will contain. This element MUST NOT be null.

JobId: A **JobId** (section [2.2.3.2](#)) element containing a new, unique value generated by the protocol client that identifies the translation job. This element MUST NOT be null.

Name: An optional string that is stored along with the translation job.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the translation job.

Settings: A **Settings** (section [2.2.3.4](#)) element that provides a collection of preferred settings for all translation items within the translation job. This element MUST NOT be null.

UserName: A string which identifies the user making the request. This element MUST NOT be null.

UserToken: A **UserToken** (section [2.2.3.5](#)) element that provides user credentials for accessing the input and output files in the translation job. This element MUST NOT be null. The protocol server MUST use these credentials to authenticate to the **sites** containing the input and output files when processing this translation job.

3.1.4.2.2.2 AddJobResponse

The **AddJobResponse** element specifies the result data for the **AddJob WSDL operation**.

```
<xs:element name="AddJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:q31="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response"
        minOccurs="0" ref="q31:JobAdded"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

q31:JobAdded: A **boolean** value specifying whether the **translation job** has been added. For more details, see section [3.1.4.2.2.3](#).

3.1.4.2.2.3 JobAdded

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response>

Specifies whether the **translation job** has been added.

```
<xs:element name="JobAdded" type="xs:boolean"/>
```

3.1.4.2.3 Complex Types

None.

3.1.4.2.4 Simple Types

None.

3.1.4.2.5 Attributes

None.

3.1.4.2.6 Groups

None.

3.1.4.2.7 Attribute Groups

None.

3.1.4.3 AddSyncStreamJob

Adds an **immediate translation job** from a stream containing the input file.

The following is the **WSDL** port type specification of the **AddSyncStreamJob WSDL operation**.

```
<wsdl:operation name="AddSyncStreamJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"
    name="AddSyncStreamJobRequest" message="tns:AddSyncStreamJobRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/
    response" name="AddSyncStreamJobResponse" message="tns:AddSyncStreamJobResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **AddSyncStreamJobRequest** request **WSDL message** to create an immediate translation job. If protocol client cannot send the entire input file in a single request, because of a request size limit, the protocol client **MUST** make multiple **AddSyncStreamJobRequest** requests with the same **JobId**, sending a portion of the input file in each request.

The protocol server **MUST** respond with an **AddSyncStreamJobResponse** response WSDL message.

3.1.4.3.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
AddSyncStreamJobRequest	The request WSDL message for the AddSyncStreamJob WSDL operation .
AddSyncStreamJobResponse	The response WSDL message for the AddSyncStreamJob WSDL operation .

3.1.4.3.1.1 AddSyncStreamJobRequest

The request **WSDL message** for the **AddSyncStreamJob WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob
```

The **SOAP body** contains the **AddSyncStreamJobRequest** element.

3.1.4.3.1.2 AddSyncStreamJobResponse

The response **WSDL message** for the **AddSyncStreamJob WSDL operation**.

The **SOAP body** contains the **AddSyncStreamJobResponse** element.

3.1.4.3.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
AddSyncStreamJobRequest	The input data for the AddSyncStreamJob WSDL operation .
AddSyncStreamJobResponse	The result data for the AddSyncStreamJob WSDL operation .

3.1.4.3.2.1 AddSyncStreamJobRequest

The **AddSyncStreamJobRequest** element specifies the input data for the **AddSyncStreamJob WSDL operation**.

```
<xs:element name="AddSyncStreamJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="FileOpenFormat" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="InputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      <xs:element
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings" minOccurs="0" name="Settings" nillable="true" type="tns2:TranslationJobSettings"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

FileOpenFormat: The **file extension** representing the file format of the input stream. This element MUST be one of the specified file extension values returned by the **Extensions** element of a **GetConfigurationResponse** (section [3.1.4.7.2.2](#)).

InputStreamInBytes: The array of bytes of the input file for the **immediate translation job**. This element MUST NOT be null.

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the immediate translation job. This element MUST NOT be null.

MoreBytesToReceive: The **boolean** value specifying that there are more bytes for the input file. If this is true, the protocol client MUST call the **AddSyncStreamJob WSDL operation** with the same **JobId** and the next array of bytes of the input file.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the immediate translation job.

Settings: A **Settings** (section [2.2.3.4](#)) element that provides a collection of preferred settings for the immediate translation job. This element MUST NOT be null.

3.1.4.3.2 AddSyncStreamJobResponse

The **AddSyncStreamJobResponse** element specifies the result data for the **AddSyncStreamJob WSDL operation**.

```
<xs:element name="AddSyncStreamJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
      <xs:element minOccurs="0" name="OutputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

ErrorCode: An integer value specifying the error code of a failed **immediate translation job**. If the immediate translation job succeeded, this element **MUST** be null. If the immediate translation job failed, this element **MUST NOT** be null or 0. If the immediate translation job is in progress, this element **MUST** be 0, and the protocol client **MUST** use **BatchGetSyncJobStatus** (section [3.1.4.4](#)) to get the final result of the translation.

OutputStreamInBytes: The array of bytes that contains the output file.

If **ErrorCode** is null and **OutputStreamInBytes** is not null, then **OutputStreamInBytes** **MUST** contain the output file.

If **ErrorCode** is null and **OutputStreamInBytes** is null, then the protocol client **MUST** get the output file with the **GetSyncStreamOutputBytes** (section [3.1.4.13](#)) WSDL operation.

3.1.4.3.3 Complex Types

None.

3.1.4.3.4 Simple Types

None.

3.1.4.3.5 Attributes

None.

3.1.4.3.6 Groups

None.

3.1.4.3.7 Attribute Groups

None.

3.1.4.4 BatchGetSyncJobStatus

Get the status of a number of **immediate translation jobs**.

The following is the **WSDL** port type specification of the **BatchGetSyncJobStatus WSDL operation**.

```
<wsdl:operation name="BatchGetSyncJobStatus" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus"
```

```

name="BatchGetSyncJobStatusRequest" message="tns:BatchGetSyncJobStatusRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/
response" name="BatchGetSyncJobStatusResponse" message="tns:BatchGetSyncJobStatusResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **BatchGetSyncJobStatusRequest** request **WSDL message** to get the status of a number of immediate translation jobs.

The protocol server MUST respond with a **BatchGetSyncJobStatusResponse** response WSDL message.

3.1.4.4.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
BatchGetSyncJobStatusRequest	The request WSDL message for the BatchGetSyncJobStatus WSDL operation .
BatchGetSyncJobStatusResponse	The response WSDL message for the BatchGetSyncJobStatus WSDL operation .

3.1.4.4.1.1 BatchGetSyncJobStatusRequest

The request **WSDL message** for the **BatchGetSyncJobStatus WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus
```

The **SOAP body** contains the **BatchGetSyncJobStatusRequest** element.

3.1.4.4.1.2 BatchGetSyncJobStatusResponse

The response **WSDL message** for the **BatchGetSyncJobStatus WSDL operation**.

The **SOAP body** contains the **BatchGetSyncJobStatusResponse** element.

3.1.4.4.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
BatchGetSyncJobStatusRequest	The input data for the BatchGetSyncJobStatus WSDL operation .
BatchGetSyncJobStatusResponse	The result data for the BatchGetSyncJobStatus WSDL operation .

3.1.4.4.2.1 BatchGetSyncJobStatusRequest

The **BatchGetSyncJobStatusRequest** element specifies the input data for the **BatchGetSyncJobStatus WSDL operation**.

```
<xs:element name="BatchGetSyncJobStatusRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

JobIds: An array of **JobId** (section [2.2.3.2](#)) representing the **immediate translation jobs** for which the status is requested.

3.1.4.4.2.2 BatchGetSyncJobStatusResponse

The **BatchGetSyncJobStatusResponse** element specifies the result data for the **BatchGetSyncJobStatus WSDL operation**.

```
<xs:element name="BatchGetSyncJobStatusResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q24="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
        name="ErrorCodes" nillable="true" type="q24:ArrayOfNullableOfint"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
      <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="OutputStreamsInBytes" nillable="true" type="tns1:ArrayOfbase64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

ErrorCodes: An array of **ErrorCode**, which is an integer value specifying the error code of a failed **immediate translation job**. If the immediate translation job succeeded, the value **MUST** be null. If the immediate translation job failed, the value **MUST NOT** be null or 0. If the immediate translation job is in progress, the value **MUST** be 0, and the protocol client **MUST** make another **BatchGetSyncJobStatus** request to get the final result of the translation. The sequence of **ErrorCodes** **MUST** be aligned with the sequence of the array of **JobIds**.

JobIds: An array of **JobId** (section [2.2.3.2](#)). This array is copied from the **jobIds** in the **BatchGetSyncJobStatusRequest** (section [3.1.4.4.1.1](#)).

MoreBytesToReceive: A **Boolean** value that is set to true when the total size of the output files is too large to send in one **BatchGetSyncJobStatusResponse**. When the value of **MoreBytesToReceive** is set to true it indicates that there are some output files that have been translated, but not sent back in this **BatchGetSyncJobStatusResponse** element.

OutputStreamsInBytes: This is a two-dimensional array of bytes. The first dimension matches the **JobIds** array. The second dimension of bytes is the output file's byte stream.

3.1.4.4.3 Complex Types

The following table summarizes the **XML schema** complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfbase64Binary	An array of base64Binary .
ArrayOfNullableOfint	An array of nullable int .
ArrayOfunsignedLong	An array of unsignedlong .

3.1.4.4.3.1 ArrayOfNullableOfint

Namespace: http://schemas.datacontract.org/2004/07/System

An array of nullable **int**.

```
<xs:complexType name="ArrayOfNullableOfint" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="int" nillable="true"
type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

int: A 32-bit signed integer.

3.1.4.4.3.2 ArrayOfbase64Binary

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

An array of **base64Binary**.

```
<xs:complexType name="ArrayOfbase64Binary" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="base64Binary" nillable="true"
type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>
```

base64Binary: An element of base64 encoding.

3.1.4.4.3.3 ArrayOfunsignedLong

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

An array of **unsignedlong**.

```
<xs:complexType name="ArrayOfunsignedLong" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="unsignedLong"
type="xs:unsignedLong"/>
  </xs:sequence>
</xs:complexType>
```

unsignedLong: A 32-bit unsigned integer.

3.1.4.4.4 Simple Types

None.

3.1.4.4.5 Attributes

None.

3.1.4.4.6 Groups

None.

3.1.4.4.7 Attribute Groups

None.

3.1.4.5 CancelJob

Marks a **translation job** as canceled.

The following is the **WSDL** port type specification of the **CancelJob WSDL operation**.

```
<wsdl:operation name="CancelJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob"
    name="CancelJobRequest" message="tns:CancelJobRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/respons
e" name="CancelJobResponse" message="tns:CancelJobResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns:ITranslationServiceApplication_CancelJob_ReadOnlyFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **CancelJobRequest** (section [3.1.4.5.1.1](#)) request **WSDL message** to mark a translation job as canceled.

The protocol server MUST respond with a **CancelJobResponse** (section [3.1.4.5.1.2](#)) response WSDL message.

3.1.4.5.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
CancelJobRequest	The request WSDL message for the CancelJob WSDL operation .
CancelJobResponse	The response WSDL message for the CancelJob WSDL operation .

3.1.4.5.1.1 CancelJobRequest

The request **WSDL message** for the **CancelJob WSDL operation**.

The **SOAP action** value is:

The **SOAP body** contains the **CancelJobRequest** element.

3.1.4.5.1.2 CancelJobResponse

The response **WSDL message** for the **CancelJob WSDL operation**.

The **SOAP body** contains the **CancelJobResponse** element.

3.1.4.5.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
CancelJobRequest	The input data for the CancelJob WSDL operation .
CancelJobResponse	The result data for the CancelJob WSDL operation .

3.1.4.5.2.1 CancelJobRequest

The **CancelJobRequest** element specifies the input data for the **CancelJob WSDL operation**.

```
<xs:element name="CancelJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the **translation job** to mark as canceled. This element MUST NOT be null.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the translation job.

3.1.4.5.2.2 CancelJobResponse

The **CancelJobResponse** element specifies the result data for the **CancelJob WSDL operation**.

```
<xs:element name="CancelJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.5.3 Complex Types

None.

3.1.4.5.4 Simple Types

None.

3.1.4.5.5 Attributes

None.

3.1.4.5.6 Groups

None.

3.1.4.5.7 Attribute Groups

None.

3.1.4.6 ConvertBatch

Initiates the translation of a batch of **translation items**.

The following is the **WSDL** port type specification of the **ConvertBatch WSDL operation**.

```
<wsdl:operation name="ConvertBatch" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
    name="ConvertBatchRequest" message="tns:ConvertBatchRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **ConvertBatchRequest** (section [3.1.4.6.1.1](#)) request **WSDL message** to initiate the translation of a batch of translation items on the currently running instance of the protocol server. The protocol server **MUST** initiate the translation of each translation item specified by a **ConvertBatchItem** element in the **Items** child element of the **ConvertBatchRequest** (section [3.1.4.6.1.1](#)) request WSDL message.

The translation process is asynchronous. There is no response message for the **ConvertBatch** WSDL operation. Clients can query the status of the **translation job** using the **GetJobStatus** WSDL operation as specified in section [3.1.4.12](#).

3.1.4.6.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
ConvertBatchRequest	The request WSDL message for the ConvertBatch WSDL operation .

3.1.4.6.1.1 ConvertBatchRequest

The request **WSDL message** for the **ConvertBatch WSDL operation**.

The **SOAP action** value is:

http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch

The **SOAP body** contains the **ConvertBatchRequest** element.

3.1.4.6.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
ConvertBatchRequest	The input data for the ConvertBatch WSDL operation .

3.1.4.6.2.1 ConvertBatchRequest

The **ConvertBatchRequest** element specifies the input data for the **ConvertBatch WSDL operation**.

```
<xs:element name="ConvertBatchRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
        minOccurs="0" name="Items" nillable="true" type="q25:ArrayOfConvertBatchItem"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="Jobs" nillable="true"
        type="tns1:ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Items: An **ArrayOfConvertBatchItem** element containing the set of **translation items** to be translated. This element MUST NOT be null.

Jobs: An **ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ** element that represents a **dictionary of translation jobs** to which the translation items in the **ConvertBatchRequest** request **WSDL message** belong. This element MUST NOT be null.

3.1.4.6.3 Complex Types

The following table summarizes the **XML schema** complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfConvertBatchItem	Contains a set of ConvertBatchItem elements representing the translation items for which translation is being initiated.
ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ	Contains a dictionary of translation jobs to which the translation items belong.
ConvertBatchItem	Represents a single translation item.
ConvertBatchJob	Represents a single translation job to which one or more translation items belong.

3.1.4.6.3.1 ArrayOfConvertBatchItem

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch

The **ArrayOfConvertBatchItem** complex type contains a set of **ConvertBatchItem** elements representing the **translation items** for which translation is being initiated.

```
<xs:complexType name="ArrayOfConvertBatchItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
      minOccurs="0" maxOccurs="unbounded" name="ConvertBatchItem" nillable="true"
      type="q25:ConvertBatchItem"/>
  </xs:sequence>
</xs:complexType>
```

ConvertBatchItem: A single **ConvertBatchItem** element representing a single translation item.

3.1.4.6.3.2 ConvertBatchItem

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch

The **ConvertBatchItem** complex type represents a single **translation item** in a **ConvertBatchRequest** request **WSDL message**.

```
<xs:complexType name="ConvertBatchItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
    <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="InputWebUrl" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="ItemId" type="xs:int"/>
    <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OutputWebUrl" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

GroupId: A **GroupId** (section [2.2.3.1](#)) element that identifies the **translation group** to which the translation item belongs. This element MUST NOT be null.

InputFile: A string value containing the **server-relative URL** relative to **InputWebUrl** for the input file of the translation item. This element MUST NOT be null.

InputWebUrl: A string value containing the **URL** of the **site** containing the input file. This element MUST NOT be null.

ItemId: An integer value that identifies the translation item within the translation group to which the translation item belongs. This element MUST NOT be null.

JobId: A **JobId** (section [2.2.3.2](#)) element that identifies the **translation job** to which the translation item belongs. This element MUST NOT be null.

OutputFile: A string value containing the server-relative URL relative to **OutputWebUrl** for the output file of the translation item. This element MUST NOT be null.

OutputWebUrl: A string value containing the URL of the site containing the output file. This element MUST NOT be null.

3.1.4.6.3.3 ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ

Namespace: http://schemas.microsoft.com/2003/10/Serialization/Arrays

The **ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ** complex type represents a **dictionary** of **translation jobs** to which the **translation items** in the **ConvertBatchRequest** request **WSDL message** belong.

```
<xs:complexType name="ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded"
name="KeyValueOfunsignedLongConvertBatchJob98aftgpZ">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Key" type="xs:unsignedLong"/>
          <xs:element
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="Value" nillable="true" type="q25:ConvertBatchJob"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>
```

KeyValueOfunsignedLongConvertBatchJob98aftgpZ: A single dictionary entry representing a translation job and the unique identifier of that translation job.

KeyValueOfunsignedLongConvertBatchJob98aftgpZ.Key: The key of the dictionary entry containing an integer value that uniquely identifies the translation job.

KeyValueOfunsignedLongConvertBatchJob98aftgpZ.Value: The **ConvertBatchJob** value of the dictionary entry.

3.1.4.6.3.4 ConvertBatchJob

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch

The **ConvertBatchJob** complex type represents a single **translation job** to which one or more **translation items** in the **ConvertBatchRequest** request **WSDL message** belong.

```
<xs:complexType name="ConvertBatchJob" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
    <xs:element
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings"
minOccurs="0" name="Settings" nillable="true" type="tns2:TranslationJobSettings"/>
    <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>
```

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the translation job.

Settings: A **Settings** (section [2.2.3.4](#)) element specifying the preferred settings for the translation items within the translation job.

UserToken: A **UserToken** (section [2.2.3.5](#)) element that provides user credentials for accessing the input and output files of the translation items within the translation job.

3.1.4.6.4 Simple Types

None.

3.1.4.6.5 Attributes

None.

3.1.4.6.6 Groups

None.

3.1.4.6.7 Attribute Groups

None.

3.1.4.7 GetConfiguration

Returns information to the protocol client about the configuration of the protocol server.

The following is the **WSDL** port type specification of the **GetConfiguration WSDL operation**.

```
<wsdl:operation name="GetConfiguration" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration"
    name="GetConfigurationRequest" message="tns:GetConfigurationRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationR
    esponse" name="GetConfigurationResponse" message="tns:GetConfigurationResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetConfigurationRequest** (section [3.1.4.7.1.1](#)) request **WSDL message** to get information about the following configurable aspects of the protocol server:

- The file name extensions representing the document types for which the protocol server supports translation.
- The [RFC1766](#) language tags representing the languages for which the protocol server supports translation.
- The maximum file size for which the protocol server supports translation.

The protocol server MUST respond with a **GetConfigurationResponse** (section [3.1.4.7.1.2](#)) response WSDL message with the configuration information.

The protocol client uses this information to determine which translation operations it can attempt.

3.1.4.7.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetConfigurationRequest	The request WSDL message for the GetConfiguration WSDL operation .
GetConfigurationResponse	The response WSDL message for the GetConfiguration WSDL operation .

3.1.4.7.1.1 GetConfigurationRequest

The request **WSDL message** for the **GetConfiguration WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration
```

The **SOAP body** contains the **GetConfigurationRequest** element.

3.1.4.7.1.2 GetConfigurationResponse

The response **WSDL message** for the **GetConfiguration WSDL operation**.

The **SOAP body** contains the **GetConfigurationResponse** element.

3.1.4.7.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetConfigurationRequest	The input data for the GetConfiguration WSDL operation .
GetConfigurationResponse	The result data for the GetConfiguration WSDL operation .

3.1.4.7.2.1 GetConfigurationRequest

The **GetConfigurationRequest** element specifies the input data for the **GetConfiguration WSDL operation**.

```
<xs:element name="GetConfigurationRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.7.2.2 GetConfigurationResponse

The **GetConfigurationResponse** element specifies the result data for the **GetConfiguration WSDL operation**.

```
<xs:element name="GetConfigurationResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tnsl="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="Extensions" nillable="true" type="tnsl:ArrayOfstring"/>
      <xs:element xmlns:tnsl="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="Languages" nillable="true" type="tnsl:ArrayOfstring"/>
      <xs:element minOccurs="0" name="MaxBinaryFileSize" type="xs:int"/>
      <xs:element minOccurs="0" name="MaxTextFileSize" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```


Extensions: An **ArrayOfstring** (section [2.2.4.1](#)) that contains a list of file name extensions representing document types for which the protocol server supports translation. This element MUST NOT be null. For each **file extension**, the protocol server MUST support any file which conforms to the corresponding file format, but the protocol server MAY [<1>](#) only support translation of a subset of the textual elements that the file format supports.

Languages: An **ArrayOfstring** (section [2.2.4.1](#)) that contains a list of language tags representing languages for which the protocol server supports translation. This element MUST NOT be null. Each language tag MUST be a valid language tag as described in [\[RFC1766\]](#).

MaxBinaryFileSize: An integer indicating the maximum size in bytes supported by the protocol server for a document that has a binary-based file format. This element MUST NOT be null.

MaxTextFileSize: An integer indicating the maximum size in bytes supported by the protocol server for a document that has a text-based file format. This element MUST NOT be null.

3.1.4.7.3 Complex Types

None.

3.1.4.7.4 Simple Types

None.

3.1.4.7.5 Attributes

None.

3.1.4.7.6 Groups

None.

3.1.4.7.7 Attribute Groups

None.

3.1.4.8 GetGroups

Gets a **translation job** and the **translation groups** within the translation job.

The following is the **WSDL** port type specification of the **GetGroups WSDL operation**.

```
<wsdl:operation name="GetGroups" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"
    name="GetGroupsRequest" message="tns:GetGroupsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/respons
    e" name="GetGroupsResponse" message="tns:GetGroupsResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetGroupsRequest** (section [3.1.4.8.1.1](#)) request **WSDL message** to get a translation job and all translation groups within the translation job.

The protocol server MUST respond with a **GetGroupsResponse** (section [3.1.4.8.1.2](#)) response WSDL message.

3.1.4.8.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetGroupsRequest	The request WSDL message for the GetGroups WSDL operation .
GetGroupsResponse	The response WSDL message for the GetGroups WSDL operation .

3.1.4.8.1.1 GetGroupsRequest

The request **WSDL message** for the **GetGroups WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getGroups
```

The **SOAP body** contains the **GetGroupsRequest** element.

3.1.4.8.1.2 GetGroupsResponse

The response **WSDL message** for the **GetGroups WSDL operation**.

The **SOAP body** contains the **GetGroupsResponse** element.

3.1.4.8.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetGroupsRequest	The input data for the GetGroups WSDL operation .
GetGroupsResponse	The result data for the GetGroups WSDL operation .

3.1.4.8.2.1 GetGroupsRequest

The **GetGroupsRequest** element specifies the input data for the **GetGroups WSDL operation**.

```
<xs:element name="GetGroupsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the **translation job**. This element MUST NOT be null.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the translation job.

3.1.4.8.2.2 GetGroupsResponse

The **GetGroupsResponse** element specifies the result data for the **GetGroups WSDL operation**.

```
<xs:element name="GetGroupsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="Groups" nillable="true"
type="q22:ArrayOfGetGroupsGroup"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

CancelTime: A **dateTime** value specifying when the **translation job** was canceled. If the translation job has not been canceled, the protocol server MUST write a null value.

CreateTime: A **dateTime** value specifying when the translation job was created. This element MUST NOT be null.

Groups: An **ArrayOfGetGroupsGroup** element containing the **translation groups** within the translation job.

NotSubmitted: A **boolean** value specifying if the translation job has not been submitted. This element MUST NOT be null.

Settings: A **Settings** (section [2.2.3.4](#)) element specifying the preferred settings for all **translation items** within the translation job. This element MUST NOT be null.

3.1.4.8.3 Complex Types

The following table summarizes the **XML schema** complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfGetGroupsGroup	Contains a set of GetGroupsGroup elements representing the translation groups in a translation job .
GetGroupsGroup	Represents a single translation group in a translation job.

3.1.4.8.3.1 ArrayOfGetGroupsGroup

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response>

The **ArrayOfGetGroupsGroup** complex type contains a set of **GetGroupsGroup** elements representing the **translation groups** in a **translation job**.

```
<xs:complexType name="ArrayOfGetGroupsGroup" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetGroupsGroup" nillable="true"
      type="q22:GetGroupsGroup"/>
  </xs:sequence>
</xs:complexType>
```

GetGroupsGroup: A single **GetGroupsGroup** element representing a single translation group in a translation job.

3.1.4.8.3.2 GetGroupsGroup

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response

The **GetGroupsGroup** complex type represents a single **translation group** in a **translation job**.

```
<xs:complexType name="GetGroupsGroup" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Id" type="xs:short"/>
    <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

Id: An integer value identifying the translation group.

InputRoot: This MUST be a string value specifying the **URL** of the **site** containing the input files of all **translation items** in the translation group.

OutputRoot: This MUST be a string value specifying the URL of the site to contain the output files of all translation items in the translation group.

3.1.4.8.4 Simple Types

None.

3.1.4.8.5 Attributes

None.

3.1.4.8.6 Groups

None.

3.1.4.8.7 Attribute Groups

None.

3.1.4.9 GetId

Gets the unique identifier of a currently running instance of the protocol server.

The following is the **WSDL** port type specification of the **GetId WSDL operation**.

```

<wsdl:operation name="GetId" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getId"
name="GetIdRequest" message="tns:GetIdRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getId/response"
name="GetIdResponse" message="tns:GetIdResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **GetIdRequest** (section [3.1.4.9.1.1](#)) request **WSDL message** and the protocol server MUST return a **GetIdResponse** (section [3.1.4.9.1.2](#)) response WSDL message, as follows:

- The protocol server MUST return an identifier that uniquely identifies the current instance of the protocol server.
- The protocol server MUST NOT return an identifier used by another protocol server.
- If the current instance of the protocol server has previously received a **GetIdRequest** (section [3.1.4.9.1.1](#)) request WSDL message, the protocol server MUST return the same identifier returned in the previous **GetIdResponse** (section [3.1.4.9.1.2](#)) response WSDL message.
- If the current instance of the protocol server has not previously received a **GetIdRequest** (section [3.1.4.9.1.1](#)) request WSDL message, the protocol server MUST return a new identifier.

3.1.4.9.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetIdRequest	The request WSDL message for the GetId WSDL operation .
GetIdResponse	The response WSDL message for the GetId WSDL operation .

3.1.4.9.1.1 GetIdRequest

The request **WSDL message** for the **GetId WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getId
```

The **SOAP body** contains the **GetIdRequest** element.

3.1.4.9.1.2 GetIdResponse

The response **WSDL message** for the **GetId WSDL operation**.

The **SOAP body** contains the **GetIdResponse** element.

3.1.4.9.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetIdRequest	The input data for the GetId WSDL operation .
GetIdResponse	The result data for the GetId WSDL operation .

3.1.4.9.2.1 GetIdRequest

The **GetIdRequest** element specifies the input data for the **GetId WSDL operation**.

```
<xs:element name="GetIdRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.9.2.2 GetIdResponse

The **GetIdResponse** element specifies the result data for the **GetId WSDL operation**.

```
<xs:element name="GetIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="AssignedItemCount" type="xs:int"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="Id" type="q14:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

AssignedItemCount: An integer value that specifies the count of **translation items** the current running instance of the protocol server is translating. This element **MUST NOT** be null.

Id: A **guid** (section [2.2.5.1](#)) element that uniquely identifies the current running instance of the protocol server. This element **MUST NOT** be null.

3.1.4.9.3 Complex Types

None.

3.1.4.9.4 Simple Types

None.

3.1.4.9.5 Attributes

None.

3.1.4.9.6 Groups

None.

3.1.4.9.7 Attribute Groups

None.

3.1.4.10 GetItems

Gets the **translation items** in a **translation group**.

The following is the **WSDL** port type specification of the **GetItems WSDL operation**.

```
<wsdl:operation name="GetItems" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
    name="GetItemsRequest" message="tns:GetItemsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
    name="GetItemsResponse" message="tns:GetItemsResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetItemsRequest** (section [3.1.4.10.1.1](#)) request **WSDL message** to get the translation items within a translation group.

The protocol server MUST respond with a **GetItemsResponse** (section [3.1.4.10.1.2](#)) response WSDL message.

3.1.4.10.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetItemsRequest	The request WSDL message for the GetItems WSDL operation .
GetItemsResponse	The response WSDL message for the GetItems WSDL operation .

3.1.4.10.1.1 GetItemsRequest

The request **WSDL message** for the **GetItems WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getItems
```

The **SOAP body** contains the **GetItemsRequest** element.

3.1.4.10.1.2 GetItemsResponse

The response **WSDL message** for the **GetItems WSDL operation**.

The **SOAP body** contains the **GetItemsResponse** element.

3.1.4.10.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetItemsRequest	The input data for the GetItems WSDL operation .
GetItemsResponse	The result data for the GetItems WSDL operation .

3.1.4.10.2.1 GetItemsRequest

The **GetItemsRequest** element specifies the input data for the **GetItems WSDL operation**.

```
<xs:element name="GetItemsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Canceled" type="xs:boolean"/>
      <xs:element minOccurs="0" name="Failed" type="xs:boolean"/>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element minOccurs="0" name="InProgress" type="xs:boolean"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="NotStarted" type="xs:boolean"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      <xs:element minOccurs="0" name="Succeeded" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Canceled: A **boolean** value specifying if unfinished **translation items** in a canceled **translation job** are included in the **GetItemsResponse** response **WSDL message**.

Failed: A **boolean** value specifying if failed translation items in a submitted translation job are included in the **GetItemsResponse** response WSDL message.

GroupId: A **GroupId** (section [2.2.3.1](#)) element identifying the **translation group**.

InProgress: A **boolean** value specifying if in-progress translation items in a non-canceled, submitted translation job are included in the **GetItemsResponse** response WSDL message.

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the translation job.

NotStarted: A **boolean** value specifying if unstarted translation items in a non-canceled, submitted translation job are included in the **GetItemsResponse** response WSDL message.

NotSubmitted: A **boolean** value specifying if translation items in a non-submitted and non-cancelled translation job are included in the **GetItemsResponse** response WSDL message.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the translation job.

Succeeded: A **boolean** value specifying if successfully finished translation items in a submitted translation job are included in the **GetItemsResponse** response WSDL message.

3.1.4.10.2.2 GetItemsResponse

The **GetItemsResponse** element specifies the result data for the **GetItems WSDL operation**.


```

<xs:element name="GetItemsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
xmlns:q30="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
minOccurs="0" ref="q30:Items"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

q30:Items: The **translation items** in a **translation group**. For more details, see section [3.1.4.10.2.3](#).

3.1.4.10.2.3 Items

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response

An **ArrayOfGetItemsItem** (section [3.1.4.10.3.1](#)) that specifies the **translation items** in a **translation group**.

```

<xs:element name="Items" nillable="true" type="q30:ArrayOfGetItemsItem"/>

```

3.1.4.10.3 Complex Types

The following table summarizes the **XML schema** complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfGetItemsItem	Contains a set of GetItemsItem elements representing translation items in a translation group .
GetItemsItem	Represents a single translation item in a translation group.

3.1.4.10.3.1 ArrayOfGetItemsItem

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response

The **ArrayOfGetItemsItem** complex type contains a set of **GetItemsItem** elements representing **translation items** in a **translation group**.

```

<xs:complexType name="ArrayOfGetItemsItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetItemsItem" nillable="true"
type="q30:GetItemsItem"/>
  </xs:sequence>
</xs:complexType>

```

GetItemsItem: A single **GetItemsItem** (section [3.1.4.10.3.2](#)) element representing a single translation item in a translation group.

3.1.4.10.3.2 GetItemsItem

Namespace: http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response

The **GetItemsItem** complex type represents a single **translation item** in a **translation group**.

```
<xs:complexType name="GetItemsItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="Id" type="xs:int"/>
    <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StartTime" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="StopTime" nillable="true" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
```

ErrorCode: An integer value specifying the error code of a failed translation item. If the translation item has failed, the protocol server **MUST** write a non-null value.

Id: An integer value that uniquely identifies the translation item within the translation group. This element **MUST NOT** be null.

InputFile: This **MUST** be a string value containing the **server-relative URL** of the input file for the translation item relative to the translation group's input root. This element **MUST NOT** be null.

OutputFile: This **MUST** be a string value containing the server-relative URL of the output file for the translation item relative to the translation group's output root. This element **MUST NOT** be null.

StartTime: A **dateTime** value that specifies when the translation item started. If the translation item has started, this element **MUST NOT** be null. Otherwise, it **MUST** be null.

StopTime: A **dateTime** value that specifies when the translation item finished. If the translation item has completed, this element **MUST NOT** be null. Otherwise, it **MUST** be null.

3.1.4.10.4 Simple Types

None.

3.1.4.10.5 Attributes

None.

3.1.4.10.6 Groups

None.

3.1.4.10.7 Attribute Groups

None.

3.1.4.11 GetJobs

Gets a list of **translation jobs**.

The following is the **WSDL** port type specification of the **GetJobs WSDL operation**.

```
<wsdl:operation name="GetJobs" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"
    name="GetJobsRequest" message="tns:GetJobsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
```

```

<wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"
name="GetJobsResponse" message="tns:GetJobsResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **GetJobsRequest** (section [3.1.4.11.1.1](#)) request **WSDL message** to get a list of translation jobs.

The protocol server MUST respond with a **GetJobsResponse** (section [3.1.4.11.1.2](#)) response WSDL message.

3.1.4.11.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetJobsRequest	The request WSDL message for the GetJobs WSDL operation .
GetJobsResponse	The response WSDL message for the GetJobs WSDL operation .

3.1.4.11.1.1 GetJobsRequest

The request **WSDL message** for the **GetJobs WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getJobs
```

The **SOAP body** contains the **GetJobsRequest** element.

3.1.4.11.1.2 GetJobsResponse

The response **WSDL message** for the **GetJobs WSDL operation**.

The **SOAP body** contains the **GetJobsResponse** element.

3.1.4.11.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetJobsRequest	The input data for the GetJobs WSDL operation .
GetJobsResponse	The result data for the GetJobs WSDL operation .

3.1.4.11.2.1 GetJobsRequest

The **GetJobsRequest** element specifies the input data for the **GetJobs WSDL operation**.

```

<xs:element name="GetJobsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="ActiveOnly" type="xs:boolean"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      <xs:element minOccurs="0" name="SubmittedOnly" type="xs:boolean"/>
      <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

ActiveOnly: A **boolean** value specifying if only non-cancelled **translation jobs** with unfinished **translation items** are included in the **GetJobsResponse** response **WSDL message**.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element specifying the **partition** to return translation jobs from. The protocol server **MUST NOT** return translation jobs that are part of a different partition.

SubmittedOnly: A **boolean** value specifying if only translation jobs that have been submitted are included in the **GetJobsResponse** response WSDL message.

UserName: A **string** value which identifies the user for whom to get translation jobs. If this value is null, then the protocol server returns translation jobs submitted by any user. If this value is not null, then every translation job returned by the protocol server **MUST** have been submitted with an **AddJobRequest** (section [3.1.4.2.2.1](#)) with the **UserName** value equal to this value.

3.1.4.11.2.2 GetJobsResponse

The **GetJobsResponse** element specifies the result data for the **GetJobs WSDL operation**.

```

<xs:element name="GetJobsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Jobs" nillable="true" type="q20:ArrayOfGetJobsJob"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

Jobs: An **ArrayOfGetJobsJob** (section [3.1.4.11.3.1](#)) element containing the **translation jobs**.

3.1.4.11.3 Complex Types

The following table summarizes the **XML schema** complex type definitions that are specific to this operation.

Complex type	Description
ArrayOfGetJobsJob	Contains a set of GetJobsJob elements representing a set of translation jobs .
GetJobsJob	Represents a single translation job.

3.1.4.11.3.1 ArrayOfGetJobsJob

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response>

The **ArrayOfGetJobsJob** complex type contains a set of **GetJobsJob** elements representing a set of **translation jobs**.

```

<xs:complexType name="ArrayOfGetJobsJob" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetJobsJob" nillable="true"
type="q20:GetJobsJob"/>
  </xs:sequence>
</xs:complexType>

```

GetJobsJob: A single **GetJobsJob** element representing a single translation job.

3.1.4.11.3.2 GetJobsJob

Namespace: <http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response>

The **GetJobsJob** complex type represents a single **translation job**.

```

<xs:complexType name="GetJobsJob" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>

```

CancelTime: A **dateTime** value specifying when the translation job was canceled. If the translation job has been canceled, the protocol server **MUST** write a non-null value.

CreateTime: A **dateTime** value specifying when the translation job was created. This element **MUST NOT** be null.

JobId: A **JobId** (section [2.2.3.2](#)) element that identifies the translation job. This element **MUST NOT** be null.

Name: An optional string that is stored along with the translation job.

NotSubmitted: A **Boolean** value specifying whether the translation job has not been submitted.

3.1.4.11.4 Simple Types

None.

3.1.4.11.5 Attributes

None.

3.1.4.11.6 Groups

None.

3.1.4.11.7 Attribute Groups

None.

3.1.4.12 GetJobStatus

Gets the status of a **translation job**.

The following is the **WSDL** port type specification of the **GetJobStatus WSDL operation**.

```
<wsdl:operation name="GetJobStatus" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"
    name="GetJobStatusRequest" message="tns:GetJobStatusRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response"
    name="GetJobStatusResponse" message="tns:GetJobStatusResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetJobStatusRequest** (section [3.1.4.12.1.1](#)) request **WSDL message** to get the status of a translation job.

The protocol server MUST respond with a **GetJobStatusResponse** (section [3.1.4.12.1.2](#)) response **WSDL message**.

3.1.4.12.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetJobStatusRequest	The request WSDL message for the GetJobStatus WSDL operation .
GetJobStatusResponse	The response WSDL message for the GetJobStatus WSDL operation .

3.1.4.12.1.1 GetJobStatusRequest

The request **WSDL message** for the **GetJobStatus WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus
```

The **SOAP body** contains the **GetJobStatusRequest** element.

3.1.4.12.1.2 GetJobStatusResponse

The response **WSDL message** for the **GetJobStatus WSDL operation**.

The **SOAP body** contains the **GetJobStatusResponse** element.

3.1.4.12.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetJobStatusRequest	The input data for the GetJobStatus WSDL operation .

Element	Description
GetJobStatusResponse	The result data for the GetJobStatus WSDL operation.

3.1.4.12.2.1 GetJobStatusRequest

The **GetJobStatusRequest** element specifies the input data for the **GetJobStatus** WSDL operation.

```
<xs:element name="GetJobStatusRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the **translation job**. This element MUST NOT be null.

PartitionId: A **PartitionId** (section [2.2.3.3](#)) element identifying the **partition** of the translation job.

3.1.4.12.2.2 GetJobStatusResponse

The **GetJobStatusResponse** element specifies the result data for the **GetJobStatus** WSDL operation.

```
<xs:element name="GetJobStatusResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Canceled" type="xs:int"/>
      <xs:element minOccurs="0" name="Count" type="xs:int"/>
      <xs:element minOccurs="0" name="Failed" type="xs:int"/>
      <xs:element minOccurs="0" name="InProgress" type="xs:int"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="NotStarted" type="xs:int"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:int"/>
      <xs:element minOccurs="0" name="Succeeded" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Canceled: An integer value specifying the number of unfinished **translation items** in a canceled **translation job**. If the translation job has not been canceled, this value MUST be 0.

Count: An integer value specifying the total count of translation items in a translation job.

Failed: An integer value specifying the count of failed translation items in a submitted translation job. If the translation job has not been submitted, this value MUST be 0.

InProgress: An integer value specifying the count of in-progress translation items in a non-canceled, submitted translation job. If the translation job has been canceled or has not been submitted, this value MUST be 0.

Name: An optional string that is stored along with the translation job.

NotStarted: An integer value specifying the count of unstarted translation items in a non-canceled, submitted translation job. If the translation job has been canceled or has not been submitted, this value MUST be 0.

NotSubmitted: An integer value specifying the count of translation items in a non-submitted and non-canceled translation job. If the translation job has been canceled or has been submitted, this value MUST be 0.

Succeeded: An integer value specifying the count of succeeded translation items in a submitted translation job. If the translation job has not been submitted, this value MUST be 0.

3.1.4.12.3 Complex Types

None.

3.1.4.12.4 Simple Types

None.

3.1.4.12.5 Attributes

None.

3.1.4.12.6 Groups

None.

3.1.4.12.7 Attribute Groups

None.

3.1.4.13 GetSyncStreamOutputBytes

Retrieves the output file for the **immediate translation job** that was submitted with the **AddSyncStreamJob** (section [3.1.4.3](#)) **WSDL operation**.

The following is the **WSDL** port type specification of the **GetSyncStreamOutputBytes** WSDL operation.

```
<wsdl:operation name="GetSyncStreamOutputBytes"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes"
name="GetSyncStreamOutputBytesRequest"
message="tns:GetSyncStreamOutputBytesRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes/response"
name="GetSyncStreamOutputBytesResponse"
message="tns:GetSyncStreamOutputBytesResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetSyncStreamOutputBytesRequest** request **WSDL message** to retrieve the byte representation of the output file for the immediate translation job. If the output file is too large to send in a single request, because of a message size limit, the protocol client MUST send multiple requests with the same **JobId** to retrieve the entire file.

The protocol server MUST respond with a **GetSyncStreamOutputBytesResponse** response WSDL message

3.1.4.13.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
GetSyncStreamOutputBytesRequest	The request WSDL message for the GetSyncStreamOutputBytes WSDL operation .
GetSyncStreamOutputBytesResponse	The response WSDL message for the GetSyncStreamOutputBytes WSDL operation .

3.1.4.13.1.1 GetSyncStreamOutputBytesRequest

The request **WSDL message** for the **GetSyncStreamOutputBytes WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes
```

The **SOAP body** contains the **GetSyncStreamOutputBytesRequest** element.

3.1.4.13.1.2 GetSyncStreamOutputBytesResponse

The response **WSDL message** for the **GetSyncStreamOutputBytes WSDL operation**.

The **SOAP body** contains the **GetSyncStreamOutputBytesResponse** element.

3.1.4.13.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
GetSyncStreamOutputBytesRequest	The input data for the GetSyncStreamOutputBytes WSDL operation .
GetSyncStreamOutputBytesResponse	The result data for the GetSyncStreamOutputBytes WSDL operation .

3.1.4.13.2.1 GetSyncStreamOutputBytesRequest

The **GetSyncStreamOutputBytesRequest** element specifies the input data for the **GetSyncStreamOutputBytes WSDL operation**.

```
<xs:element name="GetSyncStreamOutputBytesRequest"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="BytesReceived" type="xs:int"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
</xs:complexType>
</xs:element>
```

BytesReceived: The integer value specifying the number of bytes of the output file the protocol client has already received.

JobId: A **JobId** (section [2.2.3.2](#)) that identifies the **immediate translation job** for which the output file is requested.

3.1.4.13.2 GetSyncStreamOutputBytesResponse

The **GetSyncStreamOutputBytesResponse** element specifies the result data for the **GetSyncStreamOutputBytes WSDL operation**.

```
<xs:element name="GetSyncStreamOutputBytesResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
      <xs:element minOccurs="0" name="OutputStreamBytes" nillable="true"
        type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

MoreBytesToReceive: The integer value specifying the number of remaining bytes of the output file.

OutputStreamBytes: The array of bytes containing part of the output file.

3.1.4.13.3 Complex Types

None.

3.1.4.13.4 Simple Types

None.

3.1.4.13.5 Attributes

None.

3.1.4.13.6 Groups

None.

3.1.4.13.7 Attribute Groups

None.

3.1.4.14 Ping

Contacts a protocol server to determine the responsiveness of the service.

The following is the **WSDL** port type specification of the **Ping WSDL operation**.

```
<wsdl:operation name="Ping" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input
      wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/ping"
      name="PingRequest" message="tns:PingRequest"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
      wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/ping/response"
      name="PingResponse" message="tns:PingResponse"
      xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>

```

The protocol client sends a **PingRequest** (section [3.1.4.14.1.1](#)) request **WSDL message** and the protocol server MUST return a **PingResponse** (section [3.1.4.14.1.2](#)) response WSDL message.

3.1.4.14.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
PingRequest	The request WSDL message for the Ping WSDL operation .
PingResponse	The response WSDL message for the Ping WSDL operation .

3.1.4.14.1.1 PingRequest

The request **WSDL message** for the **Ping WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/ping
```

The **SOAP body** contains the **PingRequest** element.

3.1.4.14.1.2 PingResponse

The response **WSDL message** for the **Ping WSDL operation**.

The **SOAP body** contains the **PingResponse** element.

3.1.4.14.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
PingRequest	The input data for the Ping WSDL operation .
PingResponse	The result data for the Ping WSDL operation .

3.1.4.14.2.1 PingRequest

The **PingRequest** element specifies the input data for the **Ping WSDL operation**.

```
<xs:element name="PingRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.14.2 PingResponse

The **PingResponse** element specifies the result data for the **Ping WSDL operation**.

```
<xs:element name="PingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Count" type="xs:int"/>
      <xs:element minOccurs="0" name="Received" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="Responded" type="xs:dateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Count: An integer value containing the count of **Ping** operations the protocol server has performed.

Received: A **dateTime** value specifying when the protocol server began the **Ping** operation after receiving the **PingRequest WSDL message**. This element MUST NOT be null.

Responded: A **dateTime** value specifying when the protocol server ended the **Ping** operation before returning the **PingResponse WSDL message**. This element MUST NOT be null.

3.1.4.14.3 Complex Types

None.

3.1.4.14.4 Simple Types

None.

3.1.4.14.5 Attributes

None.

3.1.4.14.6 Groups

None.

3.1.4.14.7 Attribute Groups

None.

3.1.4.15 SubmitJob

Marks a **translation job** as submitted to specify that all **translation groups** in a translation job have been added.

The following is the **WSDL** port type specification of the **SubmitJob WSDL operation**.

```

<wsdl:operation name="SubmitJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob"
name="SubmitJobRequest" message="tns:SubmitJobRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/respons
e" name="SubmitJobResponse" message="tns:SubmitJobResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns:ITranslationServiceApplication_SubmitJob_ReadOnlyFaultFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **SubmitJobRequest** (section [3.1.4.15.1.1](#)) request **WSDL message** to mark a translation job as submitted to specify that all translation groups in the translation job have been added.

The protocol server MUST respond with a **SubmitJobResponse** (section [3.1.4.15.1.2](#)) response WSDL message.

3.1.4.15.1 Messages

The following table summarizes the set of **WSDL message** definitions that are specific to this operation.

Message	Description
SubmitJobRequest	The request WSDL message for the SubmitJob WSDL operation .
SubmitJobResponse	The response WSDL message for the SubmitJob WSDL operation .

3.1.4.15.1.1 SubmitJobRequest

The request **WSDL message** for the **SubmitJob WSDL operation**.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/translation/2010/11/submitJob
```

The **SOAP body** contains the **SubmitJobRequest** element.

3.1.4.15.1.2 SubmitJobResponse

The response **WSDL message** for the **SubmitJob WSDL operation**.

The **SOAP body** contains the **SubmitJobResponse** element.

3.1.4.15.2 Elements

The following table summarizes the **XML schema** element definitions that are specific to this operation.

Element	Description
SubmitJobRequest	The input data for the SubmitJob WSDL operation .
SubmitJobResponse	The result data for the SubmitJob WSDL operation .

3.1.4.15.2.1 SubmitJobRequest

The **SubmitJobRequest** element specifies the input data for the **SubmitJob WSDL operation**.

```
<xs:element name="SubmitJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

JobId: A **JobId** (section [2.2.3.2](#)) element identifying the **translation job** to mark as submitted.

3.1.4.15.2.2 SubmitJobResponse

The **SubmitJobResponse** element specifies the result data for the **SubmitJob WSDL operation**.

```
<xs:element name="SubmitJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

3.1.4.15.3 Complex Types

None.

3.1.4.15.4 Simple Types

None.

3.1.4.15.5 Attributes

None.

3.1.4.15.6 Groups

None.

3.1.4.15.7 Attribute Groups

None.

3.1.5 Timer Events

None.

3.1.6 Other Local Events

None.

4 Protocol Examples

4.1 Creating a translation job

This example demonstrates how a protocol client adds a new **translation job** to the queue.

The protocol client has a folder of five documents to be translated. Additionally, the protocol client has a sixth document to translate that is in a separate folder. The translation job will contain two **translation groups**, with the first translation group containing the five documents in the same folder and the second translation group containing the sixth document.

The following table shows the full input URLs, translation group id and **translation item** id of the six translation items.

Group Id	Item Id	Full Input URL
1	1	http://server/LoremIpsum/Aenean nec.docx
1	2	http://server/LoremIpsum/Fusce aliquet.docx
1	3	http://server/LoremIpsum/Lorem ipsum.docx
1	4	http://server/LoremIpsum/Nunc viverra.docx
1	5	http://server/LoremIpsum/Pellentesque.docx
2	1	http://server/Other/Other.docx

The following table shows the full output URLs, translation group id and translation item id of the six translation items.

Group Id	Item Id	Full Output URL
1	1	http://server/Thai/Aenean nec.docx
1	2	http://server/Thai/Fusce aliquet.docx
1	3	http://server/Thai/Lorem ipsum.docx
1	4	http://server/Thai/Nunc viverra.docx
1	5	http://server/Thai/Pellentesque.docx
2	1	http://server/Thai/Other.docx

The protocol client creates a unique translation job identifier with the value 1118198185349178816.

4.1.1 Adding the job

The protocol client then sends the following **AddJob** request **WSDL message**:

```
<AddJobRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"

  xmlns:b="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
```



```

<JobId>1118198185349178816</JobId>
<Name>Protocol example</Name>
<PartitionId i:nil="true" />
<Settings>
  <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
  <b:TargetLanguage>th</b:TargetLanguage>
</Settings>
<UserToken i:nil="true" />
<ItemCount>6</ItemCount>
<MaxItemsPerDay>10000</MaxItemsPerDay>
<MaxItemsPerPartitionPerDay>1000</MaxItemsPerPartitionPerDay>
</AddJobRequest>

```

The protocol server receives the request and adds the **translation job** to its storage. The protocol server then sends the following **AddJob** response WSDL message:

```

<AddJobResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addJob">
  <JobAdded>true</JobAdded>
</AddJobResponse>

```

4.1.2 Adding the first group

The protocol client then sends the following **AddGroup** request **WSDL message**:

```

<AddGroupRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
  xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <GroupId>1</GroupId>
  <InputRoot>http://server/LoremIpsum/</InputRoot>
  <Items>
    <b:string>Aenean%20nec.docx</b:string>
    <b:string>Fusce%20aliquet.docx</b:string>
    <b:string>Lorem%20ipsum.docx</b:string>
    <b:string>Nunc%20viverra.docx</b:string>
    <b:string>Pellentesque.docx</b:string>
  </Items>
  <JobId>1118198185349178816</JobId>
  <OutputItems>
    <b:string>Aenean%20nec.docx</b:string>
    <b:string>Fusce%20aliquet.docx</b:string>
    <b:string>Lorem%20ipsum.docx</b:string>
    <b:string>Nunc%20viverra.docx</b:string>
    <b:string>Pellentesque.docx</b:string>
  </OutputItems>
  <OutputRoot>http://server/Thai/</OutputRoot>
</AddGroupRequest>

```

The protocol server receives the request and adds the **translation group** to its storage. The protocol server then sends the following **AddGroup** response WSDL message:

```

<AddGroupResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response" />

```

4.1.3 Adding the second group

The protocol client then sends the following **AddGroup** request **WSDL message**:

```

<AddGroupRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
  xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <GroupId>2</GroupId>
  <InputRoot>http://server/Other/</InputRoot>
  <Items>
    <b:string>Other.docx</b:string>
  </Items>
  <JobId>1118198185349178816</JobId>
  <OutputItems>
    <b:string>Other.docx</b:string>
  </OutputItems>
  <OutputRoot>http://server/Thai/</OutputRoot>
</AddGroupRequest>

```

The protocol server receives the request and adds the **translation group** to its storage. The protocol server then sends the following **AddGroup** response WSDL message:

```

<AddGroupResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response" />

```

4.1.4 Submitting the job

The protocol client then sends the following **SubmitJob** request **WSDL message**:

```

<SubmitJobRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob">
  <JobId>1118198185349178816</JobId>
</SubmitJobRequest>

```

The protocol server receives the request and submits the **translation job**. The protocol server then sends the following **SubmitJob** response WSDL message:

```

<SubmitJobResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response"
/>

```

4.2 Getting the status of a translation job

This example demonstrates how a protocol client gets an existing **translation job** and retrieves its status. This example uses the translation job defined in section [4.1](#) with a translation job id of 1118198185349178816.

4.2.1 Getting the job

The protocol client sends the following **GetJobs** request **WSDL message**:

```

<GetJobsRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <ActiveOnly>>false</ActiveOnly>
  <PartitionId i:nil="true" />
  <SubmittedOnly>>true</SubmittedOnly>
  <UserName>>true</UserName>
</GetJobsRequest>

```

The protocol server receives the request and gets the list of **translation jobs** from its storage. The protocol server then sends the following **GetJobs** response WSDL message:

```
<GetJobsResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Jobs>
    <GetJobsJob>
      <CreateTime>2012-01-08T08:42:01.833</CreateTime>
      <JobId>16715329620902290694</JobId>
      <Name>A previous job</Name>
    </GetJobsJob>
    <GetJobsJob>
      <CancelTime>2012-01-10 10:17:27.553</CancelTime>
      <CreateTime>2012-01-10 10:16:26.653</CreateTime>
      <JobId>5718799996475903468</JobId>
      <Name>A canceled job</Name>
    </GetJobsJob>
    <GetJobsJob>
      <CreateTime>2012-01-12T11:19:49.83</CreateTime>
      <JobId>1118198185349178816</JobId>
      <Name>Protocol example</Name>
    </GetJobsJob>
  </Jobs>
</GetJobsResponse>
```

4.2.2 Getting the job status

The protocol client sends the following **GetJobStatus** request **WSDL message**:

```
<GetJobStatusRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <JobId>1118198185349178816</JobId>
  <PartitionId i:nil="true" />
</GetJobStatusRequest>
```

The protocol server receives the request and gets the status of the **translation job** from its storage. The protocol server then sends the following **GetJobStatus** response WSDL message:

```
<GetJobStatusResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response">
  <Canceled>0</Canceled>
  <Count>6</Count>
  <Failed>1</Failed>
  <InProgress>1</InProgress>
  <Name>Protocol example</Name>
  <NotStarted>1</NotStarted>
  <NotSubmitted>0</NotSubmitted>
  <Succeeded>3</Succeeded>
</GetJobStatusResponse>
```

4.2.3 Getting the groups

The protocol client sends the following **GetGroups** request **WSDL message**:

```
<GetGroupsRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
```

```

    <JobId>1118198185349178816</JobId>
    <PartitionId i:nil="true" />
</GetGroupsRequest>

```

The protocol server receives the request and gets the **translation groups** in the **translation job** from its storage. The protocol server then sends the following **GetGroups** response WSDL message:

```

<GetGroupsResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response"

  xmlns:b="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <CancelTime i:nil="true" />
  <CreateTime>2012-01-12T11:19:49.83</CreateTime>
  <Groups>
    <GetGroupsGroup>
      <Id>1</Id>
      <InputRoot>http://server/LoremIpsum</InputRoot>
      <OutputRoot>http://server/Thai</OutputRoot>
    </GetGroupsGroup>
    <GetGroupsGroup>
      <Id>2</Id>
      <InputRoot>http://server/Other</InputRoot>
      <OutputRoot>http://server/Thai</OutputRoot>
    </GetGroupsGroup>
  </Groups>
  <NotSubmitted>>false</NotSubmitted>
  <Settings>
    <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
    <b:TargetLanguage>th</b:TargetLanguage>
  </Settings>
</GetGroupsResponse>

```

4.2.4 Getting the items in the first group

The protocol client sends the following **GetItems** request **WSDL message**:

```

<GetItemsRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Canceled>>false</Canceled>
  <Failed>>true</Failed>
  <GroupId>1</GroupId>
  <InProgress>>true</InProgress>
  <JobId>1118198185349178816</JobId>
  <NotStarted>>true</NotStarted>
  <NotSubmitted>>false</NotSubmitted>
  <PartitionId i:nil="true" />
  <Succeeded>>true</Succeeded>
</GetItemsRequest>

```

The protocol server receives the request and gets the **translation items** in the first **translation group** in the **translation job** from its storage. The protocol server then sends the following **GetItems** response WSDL message:

```

<GetItemsResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Items
    xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response">

```

```

<GetItemsItem>
  <Id>1</Id>
  <InputFile>Aenean%20nec.docx</InputFile>
  <OutputFile>Aenean%20nec.docx</OutputFile>
  <StartTime>2012-01-12T11:20:02.14</StartTime>
  <StopTime>2012-01-12T11:20:06.977</StopTime>
</GetItemsItem>
<GetItemsItem>
  <ErrorCode>99</ErrorCode>
  <Id>2</Id>
  <InputFile>Fusce%20aliquet.docx</InputFile>
  <OutputFile>Fusce%20aliquet.docx</OutputFile>
  <StartTime>2012-01-12T11:20:02.14</StartTime>
  <StopTime>2012-01-12T11:20:07.15</StopTime>
</GetItemsItem>
<GetItemsItem>
  <Id>3</Id>
  <InputFile>Lorem%20ipsum.docx</InputFile>
  <OutputFile>Lorem%20ipsum.docx</OutputFile>
  <StartTime>2012-01-12T11:20:02.14</StartTime>
  <StopTime>2012-01-12T11:20:07.29</StopTime>
</GetItemsItem>
<GetItemsItem>
  <Id>4</Id>
  <InputFile>Nunc%20viverra.docx</InputFile>
  <OutputFile>Nunc%20viverra.docx</OutputFile>
  <StartTime>2012-01-12T11:20:02.14</StartTime>
</GetItemsItem>
<GetItemsItem>
  <Id>5</Id>
  <InputFile>Pellentesque.docx</InputFile>
  <OutputFile>Pellentesque.docx</OutputFile>
</GetItemsItem>
</Items>
</GetItemsResponse>

```

4.2.5 Getting the items in the second group

The protocol client sends the following **GetItems** request **WSDL message**:

```

<GetItemsRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Canceled>false</Canceled>
  <Failed>true</Failed>
  <GroupId>2</GroupId>
  <InProgress>true</InProgress>
  <JobId>1118198185349178816</JobId>
  <NotStarted>true</NotStarted>
  <NotSubmitted>false</NotSubmitted>
  <PartitionId i:nil="true" />
  <Succeeded>true</Succeeded>
</GetItemsRequest>

```

The protocol server receives the request and gets the **translation items** in the second **translation group** in the **translation job** from its storage. The protocol server then sends the following **GetItems** response WSDL message:

```

<GetItemsResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Items
    xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response">

```

```

    <GetItemsItem>
      <Id>1</Id>
      <InputFile>Other.docx</InputFile>
      <OutputFile>Other.pdf</OutputFile>
      <StartTime>2012-01-12T11:21:01.387</StartTime>
      <StopTime>2012-01-12T11:21:01.69</StopTime>
    </GetItemsItem>
  </Items>
</GetItemsResponse>

```

4.3 Creating immediate translation jobs

This example demonstrates how a protocol client creates **immediate translation jobs**.

The client will create one immediate translation job:

- The job translates a file, myfile.doc, stored locally on the protocol client. This job will be created using the **AddSyncStreamJob** operation. The **JobId** will be 1118198185349178817. The protocol client will assume that the protocol server can only accept 12 bytes of file content in a single request. The myfile.doc file contains 24 bytes, so it will be transmitted with two requests.

4.3.1 Adding a streaming job

The protocol client sends the following **AddSyncStreamJobRequest** to the protocol server for the job. This request contains the first 12 bytes of the file myfile.doc.

```

<AddSyncStreamJobRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"

  xmlns:b="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <FileOpenFormat>doc</FileOpenFormat>
  <InputStreamInBytes>TWFuIGlzIGRpc3Rp</InputStreamInBytes>
  <JobId>1118198185349178817</JobId>
  <MoreBytesToReceive>true</MoreBytesToReceive>
  <PartitionId i:nil="true" />
  <Settings>
    <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
    <b:TargetLanguage>th</b:TargetLanguage>
  </Settings>
</AddSyncStreamJobRequest>

```

The protocol server responds with an **AddSyncStreamJobResponse**, which is ignored because **MoreBytesToReceive** was true.

The protocol client sends the following **AddSyncStreamJobRequest** to the protocol server to transmit the last 12 bytes of the file myfile.doc.

```

<AddSyncStreamJobRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"

  xmlns:b="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <FileOpenFormat>doc</FileOpenFormat>
  <InputStreamInBytes>bmX5IGJ5IGhpcyBy</InputStreamInBytes>
  <JobId>1118198185349178817</JobId>
  <MoreBytesToReceive>false</MoreBytesToReceive>
  <PartitionId i:nil="true" />
  <Settings>

```

```

    <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
    <b:TargetLanguage>th</b:TargetLanguage>
  </Settings>
</AddSyncStreamJobRequest>

```

The protocol server begins processing the request and sends the following **AddSyncStreamJobResponse** back to the protocol client.

```

<AddSyncStreamJobResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <ErrorCode>0</ErrorCode>
  <OutputStreamInBytes i:nil="true" />
</AddSyncStreamJobResponse>

```

The protocol client reads the **ErrorCode** of 0, so it will make a **BatchGetSyncJobStatus** request later to get the final status of the job.

4.3.2 Getting the job status

The protocol client sends the following **BatchGetSyncJobStatusRequest** to the protocol server to get the status of the **immediate translation job** it has submitted.

```

<BatchGetSyncJobStatusRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/batchGetSyncJobStatus"
  xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays">
  <JobIds>
    <b:unsignedLong>1118198185349178817</b:unsignedLong>
  </JobIds>
</BatchGetSyncJobStatusRequest>

```

The protocol server has finished translating the job, and the job succeeded. The protocol server sends the following **BatchGetSyncJobStatusResponse** back to the protocol client.

```

<BatchGetSyncJobStatusResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/batchGetSyncJobStatus"
  xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <ErrorCodes>
    <b:NullableOfint i:nil="nil" />
  </ErrorCodes>
  <JobIds>
    <b:unsignedLong>1118198185349178817</b:unsignedLong>
  </JobIds>
  <MoreBytesToReceive>true</MoreBytesToReceive>
  <OutputStreamsInBytes>
    <b:base64Binary i:nil="nil" />
  </OutputStreamsInBytes>
</BatchGetSyncJobStatusResponse>

```

Because the job succeeded, the protocol client will not need to make another request for its status. Because **MoreBytesToReceive** is true, the protocol client will make a **GetSyncStreamOutputBytes** request to get the translated myfile.doc file.

4.3.3 Completing downloading of the streaming job

The protocol client sends the following **GetSyncStreamOutputBytesRequest** to the protocol server to get the translated myfile.doc file.

```
<GetSyncStreamOutputBytesRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/
  GetSyncStreamOutputBytes">

  <BytesReceived>0</BytesReceived>
  <JobId>1118198185349178817</JobId>
</GetSyncStreamOutputBytesRequest>
```

The translated myfile.doc file contains 24 bytes, which is too large to send to the client in a single response. The protocol server sends the following **GetSyncStreamOutputBytesResponse** back to the client with the first 12 bytes of the file.

```
<GetSyncStreamOutputBytesResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/
  GetSyncStreamOutputBytes">
  <MoreBytesToReceive>true</MoreBytesToReceive>
  <OutputStreamInBytes>IGJ5bmx5IcyBGhpy</OutputStreamInBytes>
</GetSyncStreamOutputBytesResponse>
```

The protocol client sends the following **GetSyncStreamOutputBytesRequest** to the protocol server to get the remainder of the translated myfile.doc file.

```
<GetSyncStreamOutputBytesRequest
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/
  GetSyncStreamOutputBytes">

  <BytesReceived>12</BytesReceived>
  <JobId>1118198185349178817</JobId>
</GetSyncStreamOutputBytesRequest>
```

The protocol server sends the following **GetSyncStreamOutputBytesResponse** back to the client with the last 12 bytes of the file.

```
<GetSyncStreamOutputBytesResponse
  xmlns="http://schemas.microsoft.com/office/server/translation/2010/11/
  GetSyncStreamOutputBytes">
  <MoreBytesToReceive>false</MoreBytesToReceive>
  <OutputStreamInBytes>uIGTWFlzIG3RpRpc</OutputStreamInBytes>
</GetSyncStreamOutputBytesResponse>
```

The protocol client has now received the entire translated myfile.doc file.

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

Security Parameter	Section
UserToken	2.2.3.5

6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0" encoding="UTF-8"?>
<wsdl:definitions xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tns="http://schemas.microsoft.com/office/server/translation/2010/11/service"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/service"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xs:schema
xmlns:tns3="http://schemas.microsoft.com/office/server/translation/2010/11/service/Imports"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/service/Imports">
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/re
sponse"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response"
/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationRes
ponse"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response"
/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getId"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getId/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"/>
```

```

    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/respon
se"/>

    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/re
sponse"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutput
Bytes"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutput
Bytes/response"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/ping"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/ping/response"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/service"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response"
/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSetti
ngs"/>
  </xs:schema>
</wsdl:types>
  <wsdl:portType name="ITranslationServiceApplication">
    <wsdl:operation name="Ping">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/ping"
name="PingRequest" message="tns:PingRequest"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/ping/response"
name="PingResponse" message="tns:PingResponse"/>
    </wsdl:operation>
    <wsdl:operation name="CancelJob">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob"
name="CancelJobRequest" message="tns:CancelJobRequest"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/respons
e" name="CancelJobResponse" message="tns:CancelJobResponse"/>
      <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns:ITranslationServiceApplication CancelJob ReadOnlyFaultFault FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetJobStatus">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"
name="GetJobStatusRequest" message="tns:GetJobStatusRequest"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/resp
onse" name="GetJobStatusResponse" message="tns:GetJobStatusResponse"/>
    </wsdl:operation>
    <wsdl:operation name="BatchGetSyncJobStatus">
      <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus"
name="BatchGetSyncJobStatusRequest" message="tns:BatchGetSyncJobStatusRequest"/>
      <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/r
esponse" name="BatchGetSyncJobStatusResponse" message="tns:BatchGetSyncJobStatusResponse"/>
    </wsdl:operation>
    <wsdl:operation name="AddSyncStreamJob">

```

```

    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"
name="AddSyncStreamJobRequest" message="tns:AddSyncStreamJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/
response" name="AddSyncStreamJobResponse" message="tns:AddSyncStreamJobResponse"/>
    </wsdl:operation>
    <wsdl:operation name="GetSyncStreamOutputBytes">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutp
utBytes" name="GetSyncStreamOutputBytesRequest"
message="tns:GetSyncStreamOutputBytesRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutp
utBytes/response" name="GetSyncStreamOutputBytesResponse"
message="tns:GetSyncStreamOutputBytesResponse"/>
    </wsdl:operation>
    <wsdl:operation name="AddJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"
name="AddJobRequest" message="tns:AddJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response"
name="AddJobResponse" message="tns:AddJobResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns:ITranslationServiceApplication_AddJob_ReadOnlyFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="AddGroup">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
name="AddGroupRequest" message="tns:AddGroupRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response"
name="AddGroupResponse" message="tns:AddGroupResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns:ITranslationServiceApplication AddGroup ReadOnlyFaultFault FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="SubmitJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob"
name="SubmitJobRequest" message="tns:SubmitJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/respons
e" name="SubmitJobResponse" message="tns:SubmitJobResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns:ITranslationServiceApplication SubmitJob ReadOnlyFaultFault FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="GetJobs">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"
name="GetJobsRequest" message="tns:GetJobsRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"
name="GetJobsResponse" message="tns:GetJobsResponse"/>
    </wsdl:operation>
    <wsdl:operation name="GetGroups">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"
name="GetGroupsRequest" message="tns:GetGroupsRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/respons
e" name="GetGroupsResponse" message="tns:GetGroupsResponse"/>
    </wsdl:operation>

```

```

        <wsdl:operation name="GetItems">
            <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
name="GetItemsRequest" message="tns:GetItemsRequest"/>
            <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
name="GetItemsResponse" message="tns:GetItemsResponse"/>
        </wsdl:operation>
        <wsdl:operation name="ConvertBatch">
            <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="ConvertBatchRequest" message="tns:ConvertBatchRequest"/>
            </wsdl:operation>
        <wsdl:operation name="GetId">
            <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getId"
name="GetIdRequest" message="tns:GetIdRequest"/>
            <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/getId/response"
name="GetIdResponse" message="tns:GetIdResponse"/>
            </wsdl:operation>
        <wsdl:operation name="GetConfiguration">
            <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration"
name="GetConfigurationRequest" message="tns:GetConfigurationRequest"/>
            <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationR
esponse" name="GetConfigurationResponse" message="tns:GetConfigurationResponse"/>
            </wsdl:operation>
        </wsdl:portType>
        <wsdl:binding name="DefaultBinding ITranslationServiceApplication"
type="tns:ITranslationServiceApplication">
            <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
            <wsdl:operation name="Ping">
                <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/ping"
style="document"/>
                <wsdl:input name="PingRequest">
                    <soap:body use="literal"/>
                </wsdl:input>
                <wsdl:output name="PingResponse">
                    <soap:body use="literal"/>
                </wsdl:output>
            </wsdl:operation>
            <wsdl:operation name="CancelJob">
                <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob"
style="document"/>
                <wsdl:input name="CancelJobRequest">
                    <soap:body use="literal"/>
                </wsdl:input>
                <wsdl:output name="CancelJobResponse">
                    <soap:body use="literal"/>
                </wsdl:output>
                <wsdl:fault name="ReadOnlyFaultFault">
                    <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
                </wsdl:fault>
            </wsdl:operation>
            <wsdl:operation name="GetJobStatus">
                <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"
style="document"/>
                <wsdl:input name="GetJobStatusRequest">
                    <soap:body use="literal"/>
                </wsdl:input>
                <wsdl:output name="GetJobStatusResponse">
                    <soap:body use="literal"/>
                </wsdl:output>
            </wsdl:operation>

```

```

    <wsdl:operation name="BatchGetSyncJobStatus">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus"
style="document"/>
      <wsdl:input name="BatchGetSyncJobStatusRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="BatchGetSyncJobStatusResponse">
        <soap:body use="literal"/>
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddSyncStreamJob">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"
style="document"/>
      <wsdl:input name="AddSyncStreamJobRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="AddSyncStreamJobResponse">
        <soap:body use="literal"/>
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetSyncStreamOutputBytes">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes"
style="document"/>
      <wsdl:input name="GetSyncStreamOutputBytesRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="GetSyncStreamOutputBytesResponse">
        <soap:body use="literal"/>
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddJob">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"
style="document"/>
      <wsdl:input name="AddJobRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="AddJobResponse">
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="AddGroup">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
style="document"/>
      <wsdl:input name="AddGroupRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="AddGroupResponse">
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="SubmitJob">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob"
style="document"/>
      <wsdl:input name="SubmitJobRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="SubmitJobResponse">

```

```

        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetJobs">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"
style="document"/>
        <wsdl:input name="GetJobsRequest">
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output name="GetJobsResponse">
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
<wsdl:operation name="GetGroups">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"
style="document"/>
        <wsdl:input name="GetGroupsRequest">
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output name="GetGroupsResponse">
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
<wsdl:operation name="GetItems">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
style="document"/>
        <wsdl:input name="GetItemsRequest">
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output name="GetItemsResponse">
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
<wsdl:operation name="ConvertBatch">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
style="document"/>
        <wsdl:input name="ConvertBatchRequest">
            <soap:body use="literal"/>
        </wsdl:input>
    </wsdl:operation>
<wsdl:operation name="GetId">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/getId"
style="document"/>
        <wsdl:input name="GetIdRequest">
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output name="GetIdResponse">
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>
<wsdl:operation name="GetConfiguration">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration"
style="document"/>
        <wsdl:input name="GetConfigurationRequest">
            <soap:body use="literal"/>
        </wsdl:input>
        <wsdl:output name="GetConfigurationResponse">
            <soap:body use="literal"/>
        </wsdl:output>
    </wsdl:operation>

```

```

</wsdl:binding>
<wsdl:message name="AddGroupRequest">
  <wsdl:part
xmlns:q15="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
name="parameters" element="q15:AddGroupRequest"/>
</wsdl:message>
<wsdl:message name="AddGroupResponse">
  <wsdl:part
xmlns:q16="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response"
name="parameters" element="q16:AddGroupResponse"/>
</wsdl:message>
<wsdl:message name="AddJobRequest">
  <wsdl:part
xmlns:q13="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"
name="parameters" element="q13:AddJobRequest"/>
</wsdl:message>
<wsdl:message name="AddJobResponse">
  <wsdl:part
xmlns:q13="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"
name="parameters" element="q13:AddJobResponse"/>
</wsdl:message>
<wsdl:message name="AddSyncStreamJobRequest">
  <wsdl:part
xmlns:q9="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob"
name="parameters" element="q9:AddSyncStreamJobRequest"/>
</wsdl:message>
<wsdl:message name="AddSyncStreamJobResponse">
  <wsdl:part
xmlns:q10="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/re
sponse" name="parameters" element="q10:AddSyncStreamJobResponse"/>
</wsdl:message>
<wsdl:message name="BatchGetSyncJobStatusRequest">
  <wsdl:part
xmlns:q7="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus"
name="parameters" element="q7:BatchGetSyncJobStatusRequest"/>
</wsdl:message>
<wsdl:message name="BatchGetSyncJobStatusResponse">
  <wsdl:part
xmlns:q8="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/res
ponse" name="parameters" element="q8:BatchGetSyncJobStatusResponse"/>
</wsdl:message>
<wsdl:message name="CancelJobRequest">
  <wsdl:part
xmlns:q3="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob"
name="parameters" element="q3:CancelJobRequest"/>
</wsdl:message>
<wsdl:message name="CancelJobResponse">
  <wsdl:part
xmlns:q4="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response"
name="parameters" element="q4:CancelJobResponse"/>
</wsdl:message>
<wsdl:message name="ConvertBatchRequest">
  <wsdl:part
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="parameters" element="q25:ConvertBatchRequest"/>
</wsdl:message>
<wsdl:message name="GetConfigurationRequest">
  <wsdl:part
xmlns:q28="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration"
name="parameters" element="q28:GetConfigurationRequest"/>
</wsdl:message>
<wsdl:message name="GetConfigurationResponse">
  <wsdl:part
xmlns:q29="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationRes
ponse" name="parameters" element="q29:GetConfigurationResponse"/>
</wsdl:message>
<wsdl:message name="GetGroupsRequest">

```



```

    <wsdl:part
xmlns:q21="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"
name="parameters" element="q21:GetGroupsRequest"/>
  </wsdl:message>
  <wsdl:message name="GetGroupsResponse">
    <wsdl:part
xmlns:q22="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response"
name="parameters" element="q22:GetGroupsResponse"/>
    </wsdl:message>
    <wsdl:message name="GetIdRequest">
      <wsdl:part
xmlns:q26="http://schemas.microsoft.com/office/server/translation/2010/11/getId"
name="parameters" element="q26:GetIdRequest"/>
      </wsdl:message>
      <wsdl:message name="GetIdResponse">
        <wsdl:part
xmlns:q27="http://schemas.microsoft.com/office/server/translation/2010/11/getId/response"
name="parameters" element="q27:GetIdResponse"/>
        </wsdl:message>
        <wsdl:message name="GetItemsRequest">
          <wsdl:part
xmlns:q23="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
name="parameters" element="q23:GetItemsRequest"/>
          </wsdl:message>
          <wsdl:message name="GetItemsResponse">
            <wsdl:part
xmlns:q23="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
name="parameters" element="q23:GetItemsResponse"/>
            </wsdl:message>
            <wsdl:message name="GetJobsRequest">
              <wsdl:part
xmlns:q19="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"
name="parameters" element="q19:GetJobsRequest"/>
              </wsdl:message>
              <wsdl:message name="GetJobsResponse">
                <wsdl:part
xmlns:q20="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"
name="parameters" element="q20:GetJobsResponse"/>
                </wsdl:message>
                <wsdl:message name="GetJobStatusRequest">
                  <wsdl:part
xmlns:q5="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"
name="parameters" element="q5:GetJobStatusRequest"/>
                  </wsdl:message>
                  <wsdl:message name="GetJobStatusResponse">
                    <wsdl:part
xmlns:q6="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/respons
e" name="parameters" element="q6:GetJobStatusResponse"/>
                    </wsdl:message>
                    <wsdl:message name="GetSyncStreamOutputBytesRequest">
                      <wsdl:part
xmlns:q11="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutput
Bytes" name="parameters" element="q11:GetSyncStreamOutputBytesRequest"/>
                      </wsdl:message>
                      <wsdl:message name="GetSyncStreamOutputBytesResponse">
                        <wsdl:part
xmlns:q12="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutput
Bytes/response" name="parameters" element="q12:GetSyncStreamOutputBytesResponse"/>
                        </wsdl:message>
                        <wsdl:message
name="ITranslationServiceApplication_AddGroup_ReadOnlyFaultFault_FaultMessage">
                          <wsdl:part name="detail" element="tns:ReadOnlyFault"/>
                        </wsdl:message>
                        <wsdl:message name="ITranslationServiceApplication_AddJob_ReadOnlyFaultFault_FaultMessage">
                          <wsdl:part name="detail" element="tns:ReadOnlyFault"/>
                        </wsdl:message>
                        <wsdl:message
name="ITranslationServiceApplication_CancelJob_ReadOnlyFaultFault_FaultMessage">
                          <wsdl:part name="detail" element="tns:ReadOnlyFault"/>
                        </wsdl:message>

```

```
</wsdl:message>
<wsdl:message
name="ITranslationServiceApplication_SubmitJob_ReadOnlyFaultFault_FaultMessage">
  <wsdl:part name="detail" element="tns:ReadOnlyFault"/>
</wsdl:message>
<wsdl:message name="PingRequest">
  <wsdl:part xmlns:q1="http://schemas.microsoft.com/office/server/translation/2010/11/ping"
name="parameters" element="q1:PingRequest"/>
</wsdl:message>
<wsdl:message name="PingResponse">
  <wsdl:part
xmlns:q2="http://schemas.microsoft.com/office/server/translation/2010/11/ping/response"
name="parameters" element="q2:PingResponse"/>
</wsdl:message>
<wsdl:message name="SubmitJobRequest">
  <wsdl:part
xmlns:q17="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob"
name="parameters" element="q17:SubmitJobRequest"/>
</wsdl:message>
<wsdl:message name="SubmitJobResponse">
  <wsdl:part
xmlns:q18="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response"
name="parameters" element="q18:SubmitJobResponse"/>
</wsdl:message>
</wsdl:definitions>
```

7 Appendix B: Full XML Schema

The following schemas are used to communicate information about machine translation requests between the protocol client and the protocol server.

Schema name	Prefix	Section
http://schemas.microsoft.com/2003/10/Serialization/Arrays	tns1	7.1
http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response	q20	7.15
http://schemas.microsoft.com/office/server/translation/2010/11/ping	q1	7.25
http://schemas.microsoft.com/office/server/translation/2010/11/service	tns	7.26
http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response	q18	7.27
http://schemas.microsoft.com/office/server/translation/2010/11/submitJob	q17	7.28
http://schemas.microsoft.com/office/server/translation/2010/11/getItems	q23	7.14
http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings	tns2	7.29
http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response	q30	7.12
http://schemas.microsoft.com/office/server/translation/2010/11/getId/response	q27	7.10
http://schemas.microsoft.com/2003/10/Serialization/	q14	7.2
http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response	q16	7.13
http://schemas.microsoft.com/office/server/translation/2010/11/getJobs	q19	7.16
http://schemas.microsoft.com/office/server/translation/2010/11/addGroup	q15	7.24
http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response	q31	7.31
http://schemas.microsoft.com/office/server/translation/2010/11/addJob	q13	7.32
http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/response	q10	7.33
http://schemas.microsoft.com/office/server/translation/2010/11/getId	q26	7.11
http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob	q9	7.34
http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob	q3	7.4
http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch	q25	7.5
http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration	q28	7.6

Schema name	Prefix	Section
http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationResponse	q29	7.7
http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response	q6	7.17
http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response	q22	7.8
http://schemas.microsoft.com/office/server/translation/2010/11/getGroups	q21	7.9
http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response	q4	7.3
http://schemas.datacontract.org/2004/07/System	q24	7.30
http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus	q5	7.18
http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/response	q8	7.19
http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus	q7	7.20
http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes/response	q12	7.21
http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes	q11	7.22
http://schemas.microsoft.com/office/server/translation/2010/11/ping/response	q2	7.23

For ease of implementation, the following sections provide the full XML schema for this protocol.

7.1 http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"/>
  <xs:complexType name="ArrayOfunsignedLong">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="unsignedLong"
type="xs:unsignedLong"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfunsignedLong" nillable="true" type="tns1:ArrayOfunsignedLong"/>
  <xs:complexType name="ArrayOfbase64Binary">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="base64Binary" nillable="true"
type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfbase64Binary" nillable="true" type="tns1:ArrayOfbase64Binary"/>
  <xs:complexType name="ArrayOfstring">
```

```

    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfstring" nillable="true" type="tns1:ArrayOfstring"/>
  <xs:complexType name="ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded"
name="KeyValueOfunsignedLongConvertBatchJob98aftgpZ">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Key" type="xs:unsignedLong"/>
            <xs:element
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="Value" nillable="true" type="q25:ConvertBatchJob"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ" nillable="true"
type="tns1:ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpZ"/>
</xs:schema>

```

7.2 http://schemas.microsoft.com/2003/10/Serialization/ Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
attributeFormDefault="qualified" elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="anyType" nillable="true" type="xs:anyType"/>
  <xs:element name="anyURI" nillable="true" type="xs:anyURI"/>
  <xs:element name="base64Binary" nillable="true" type="xs:base64Binary"/>
  <xs:element name="boolean" nillable="true" type="xs:boolean"/>
  <xs:element name="byte" nillable="true" type="xs:byte"/>
  <xs:element name="dateTime" nillable="true" type="xs:dateTime"/>
  <xs:element name="decimal" nillable="true" type="xs:decimal"/>
  <xs:element name="double" nillable="true" type="xs:double"/>
  <xs:element name="float" nillable="true" type="xs:float"/>
  <xs:element name="int" nillable="true" type="xs:int"/>
  <xs:element name="long" nillable="true" type="xs:long"/>
  <xs:element name="QName" nillable="true" type="xs:QName"/>
  <xs:element name="short" nillable="true" type="xs:short"/>
  <xs:element name="string" nillable="true" type="xs:string"/>
  <xs:element name="unsignedByte" nillable="true" type="xs:unsignedByte"/>
  <xs:element name="unsignedInt" nillable="true" type="xs:unsignedInt"/>
  <xs:element name="unsignedLong" nillable="true" type="xs:unsignedLong"/>
  <xs:element name="unsignedShort" nillable="true" type="xs:unsignedShort"/>
  <xs:element name="char" nillable="true" type="q14:char"/>
  <xs:simpleType name="char">
    <xs:restriction base="xs:int"/>
  </xs:simpleType>
  <xs:element name="duration" nillable="true" type="q14:duration"/>
  <xs:simpleType name="duration">
    <xs:restriction base="xs:duration">
      <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?"/>
      <xs:minInclusive value="-P10675199DT2H48M5.4775808S"/>
      <xs:maxInclusive value="P10675199DT2H48M5.4775807S"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="guid" nillable="true" type="q14:guid"/>
  <xs:simpleType name="guid">
    <xs:restriction base="xs:string">
      <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
    </xs:restriction>
  </xs:simpleType>

```

```

    </xs:restriction>
  </xs:simpleType>
  <xs:attribute name="FactoryType" type="xs:QName"/>
  <xs:attribute name="Id" type="xs:ID"/>
  <xs:attribute name="Ref" type="xs:IDREF"/>
</xs:schema>

```

7.3 <http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/res
ponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="CancelJobResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.4 <http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="CancelJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.5 <http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="ConvertBatchRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
minOccurs="0" name="Items" nillable="true" type="q25:ArrayOfConvertBatchItem"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Jobs" nillable="true"
type="tns1:ArrayOfKeyValueOfunsignedLongConvertBatchJob98aftgpz"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="ArrayOfConvertBatchItem">
    <xs:sequence>

```

```

    <xs:element
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
minOccurs="0" maxOccurs="unbounded" name="ConvertBatchItem" nillable="true"
type="q25:ConvertBatchItem"/>
  </xs:sequence>
</xs:complexType>
<xs:element
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="ArrayOfConvertBatchItem" nillable="true" type="q25:ArrayOfConvertBatchItem"/>
  <xs:complexType name="ConvertBatchItem">
    <xs:sequence>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="InputWebUrl" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ItemId" type="xs:int"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="OutputWebUrl" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="ConvertBatchItem" nillable="true" type="q25:ConvertBatchItem"/>
  <xs:complexType name="ConvertBatchJob">
    <xs:sequence>
      <xs:element minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      <xs:element
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSett
ings" minOccurs="0" name="Settings" nillable="true" type="tns2:TranslationJobSettings"/>
      <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
xmlns:q25="http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch"
name="ConvertBatchJob" nillable="true" type="q25:ConvertBatchJob"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSetti
ngs"/>
</xs:schema>

```

7.6 http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurat
ion" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetConfigurationRequest">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.7 http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationResponse Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurat
ionResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>

```

```

<xs:element name="GetConfigurationResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Extensions" nillable="true" type="tns1:ArrayOfstring"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Languages" nillable="true" type="tns1:ArrayOfstring"/>
      <xs:element minOccurs="0" name="MaxBinaryFileSize" type="xs:int"/>
      <xs:element minOccurs="0" name="MaxTextFileSize" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:schema>

```

7.8 http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:q22="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/res
ponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSetti
ngs"/>
  <xs:element name="GetGroupsResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
        <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
        <xs:element minOccurs="0" name="Groups" nillable="true"
type="q22:ArrayOfGetGroupsGroup"/>
        <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="ArrayOfGetGroupsGroup">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="GetGroupsGroup" nillable="true"
type="q22:GetGroupsGroup"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfGetGroupsGroup" nillable="true" type="q22:ArrayOfGetGroupsGroup"/>
  <xs:complexType name="GetGroupsGroup">
    <xs:sequence>
      <xs:element minOccurs="0" name="Id" type="xs:short"/>
      <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="GetGroupsGroup" nillable="true" type="q22:GetGroupsGroup"/>
</xs:schema>

```

7.9 http://schemas.microsoft.com/office/server/translation/2010/11/getGroups Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getGroups"
xmlns:xs="http://www.w3.org/2001/XMLSchema">

```



```

<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
<xs:element name="GetGroupsRequest">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong" />
      <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid" />
    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:schema>

```

7.10 <http://schemas.microsoft.com/office/server/translation/2010/11/getId/response> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getId/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="GetIdResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="AssignedItemCount" type="xs:int" />
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="Id" type="q14:guid" />
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.11 <http://schemas.microsoft.com/office/server/translation/2010/11/getId> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getId"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetIdRequest">
    <xs:complexType>
      <xs:sequence />
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.12 <http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:q30="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ArrayOfGetItemsItem">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="GetItemsItem" nillable="true"
type="q30:GetItemsItem" />
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfGetItemsItem" nillable="true" type="q30:ArrayOfGetItemsItem" />
  <xs:complexType name="GetItemsItem">

```

```

<xs:sequence>
  <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
  <xs:element minOccurs="0" name="Id" type="xs:int"/>
  <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="StartTime" nillable="true" type="xs:dateTime"/>
  <xs:element minOccurs="0" name="StopTime" nillable="true" type="xs:dateTime"/>
</xs:sequence>
</xs:complexType>
<xs:element name="GetItemsItem" nillable="true" type="q30:GetItemsItem"/>
<xs:element name="Items" nillable="true" type="q30:ArrayOfGetItemsItem"/>
</xs:schema>

```

7.13 <http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddGroupResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.14 <http://schemas.microsoft.com/office/server/translation/2010/11/getItems> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getItems"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetItemsRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Canceled" type="xs:boolean"/>
        <xs:element minOccurs="0" name="Failed" type="xs:boolean"/>
        <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
        <xs:element minOccurs="0" name="InProgress" type="xs:boolean"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="NotStarted" type="xs:boolean"/>
        <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
        <xs:element minOccurs="0" name="Succeeded" type="xs:boolean"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetItemsResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:q30="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response"
minOccurs="0" ref="q30:Items"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response" />

```

```
</xs:schema>
```

7.15 <http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
  xmlns:q20="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetJobsResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Jobs" nillable="true" type="q20:ArrayOfGetJobsJob"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="ArrayOfGetJobsJob">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="GetJobsJob" nillable="true"
        type="q20:GetJobsJob"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfGetJobsJob" nillable="true" type="q20:ArrayOfGetJobsJob"/>
  <xs:complexType name="GetJobsJob">
    <xs:sequence>
      <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="GetJobsJob" nillable="true" type="q20:GetJobsJob"/>
</xs:schema>
```

7.16 <http://schemas.microsoft.com/office/server/translation/2010/11/getJobs> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobs"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="GetJobsRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="ActiveOnly" type="xs:boolean"/>
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
          minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
        <xs:element minOccurs="0" name="SubmittedOnly" type="xs:boolean"/>
        <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

7.17 <http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
```

```

<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/
response" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetJobStatusResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Canceled" type="xs:int"/>
        <xs:element minOccurs="0" name="Count" type="xs:int"/>
        <xs:element minOccurs="0" name="Failed" type="xs:int"/>
        <xs:element minOccurs="0" name="InProgress" type="xs:int"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="NotStarted" type="xs:int"/>
        <xs:element minOccurs="0" name="NotSubmitted" type="xs:int"/>
        <xs:element minOccurs="0" name="Succeeded" type="xs:int"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.18 http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="GetJobStatusRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.19 http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/response Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobSta
tus/response" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="BatchGetSyncJobStatusResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:q24="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="ErrorCodes" nillable="true" type="q24:ArrayOfNullableOfint"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
        <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="OutputStreamsInBytes" nillable="true" type="tns1:ArrayOfbase64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
</xs:schema>

```

7.20 <http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:element name="BatchGetSyncJobStatusRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

7.21 <http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes/response> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetSyncStreamOutputBytesResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
        <xs:element minOccurs="0" name="OutputStreamBytes" nillable="true"
type="xs:base64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

7.22 <http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetSyncStreamOutputBytesRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="BytesReceived" type="xs:int"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

7.23 <http://schemas.microsoft.com/office/server/translation/2010/11/ping/response> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/ping/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="PingResponse">
    <xs:complexType>
```

```

    <xs:sequence>
      <xs:element minOccurs="0" name="Count" type="xs:int"/>
      <xs:element minOccurs="0" name="Received" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="Responded" type="xs:dateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:schema>

```

7.24 <http://schemas.microsoft.com/office/server/translation/2010/11/addGroup> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/addGroup"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:element name="AddGroupRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
        <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Items" nillable="true" type="tns1:ArrayOfstring"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="OutputItems" nillable="true" type="tns1:ArrayOfstring"/>
        <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.25 <http://schemas.microsoft.com/office/server/translation/2010/11/ping> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/ping"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="PingRequest">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.26 <http://schemas.microsoft.com/office/server/translation/2010/11/service> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:tns="http://schemas.microsoft.com/office/server/translation/2010/11/service"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/service"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ReadOnlyFault">
    <xs:sequence/>
  </xs:complexType>
  <xs:element name="ReadOnlyFault" nillable="true" type="tns:ReadOnlyFault"/>
  <xs:simpleType name="SaveBehavior">
    <xs:restriction base="xs:string">
      <xs:enumeration value="AppendIfPossible"/>
    </xs:restriction>
  </xs:simpleType>

```

```

    <xs:enumeration value="AlwaysOverwrite"/>
    <xs:enumeration value="AppendOnly"/>
    <xs:enumeration value="NeverOverwrite"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SaveBehavior" nillable="true" type="tns:SaveBehavior"/>
</xs:schema>

```

7.27 <http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/res
ponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="SubmitJobResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.28 <http://schemas.microsoft.com/office/server/translation/2010/11/submitJob> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/submitJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="SubmitJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

7.29 <http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings> Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSett
ings" elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/translationJo
bSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/service"/>
  <xs:complexType name="TranslationJobSettings">
    <xs:sequence>
      <xs:element
xmlns:tns="http://schemas.microsoft.com/office/server/translation/2010/11/service"
minOccurs="0" name="OutputSaveBehavior" type="tns:SaveBehavior"/>
      <xs:element minOccurs="0" name="TargetLanguage" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="TranslationJobSettings" nillable="true"
type="tns2:TranslationJobSettings"/>
</xs:schema>

```

7.30 <http://schemas.datacontract.org/2004/07/System> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:q24="http://schemas.datacontract.org/2004/07/System"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ArrayOfNullableOfint">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="int" nillable="true"
type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfNullableOfint" nillable="true" type="q24:ArrayOfNullableOfint"/>
</xs:schema>
```

7.31 <http://schemas.microsoft.com/office/server/translation/2010/11/addJob/resp> onse Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/respon
se" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="JobAdded" type="xs:boolean"/>
</xs:schema>
```

7.32 <http://schemas.microsoft.com/office/server/translation/2010/11/addJob> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/addJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="ItemCount" type="xs:int"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
        <xs:element
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSett
ings" minOccurs="0" name="Settings" nillable="true" type="tns2:TranslationJobSettings"/>
        <xs:element minOccurs="0" name="UserName" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="AddJobResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:q31="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response"
minOccurs="0" ref="q31:JobAdded"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response" />
  <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSett
ings" />
```



```
</xs:schema>
```

7.33 <http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/response> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStream
Job/response" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddSyncStreamJobResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
        <xs:element minOccurs="0" name="OutputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

7.34 <http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob> Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStream
Job" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddSyncStreamJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="FileOpenFormat" nillable="true" type="xs:string"/>
        <xs:element minOccurs="0" name="InputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
        <xs:element xmlns:q14="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="q14:guid"/>
        <xs:element
xmlns:tns2="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSett
ings" minOccurs="0" name="Settings" nillable="true" type="tns2:TranslationJobSettings"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">
    <xs:import
namespace="http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSetti
ngs"/>
</xs:schema>
```

8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include updates to those products.

- Microsoft SharePoint Server 2013
- Microsoft SharePoint Server 2016

Exceptions, if any, are noted in this section. If an update version, service pack or Knowledge Base (KB) number appears with a product name, the behavior changed in that update. The new behavior also applies to subsequent updates unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

[<1> Section 3.1.4.7.2.2](#): SharePoint Server 2013 supports translation of XLIFF documents with **file extension xlf**. However, it does not support translation of every feature of the XLIFF standard. The following XLIFF features are supported. Any feature not explicitly listed here is ignored.

- If a **file** element contains a **source-language** attribute, then the specified language is used as the source language for all content within the **file** element.
- A **trans-unit** element within a **file** element with no **datatype** attribute or **datatype** attribute equal to **plaintext** is considered to have plain text content.
- A **trans-unit** element within a **file** element with **datatype** attribute equal to **asp**, **html**, **htmlbody**, or **xhtml** is considered to have HTML content.
- All other **trans-unit** elements are ignored.
- The inner text of the **source** element within a **trans-unit** element is translated and stored as the inner text of the **target** element within the same **trans-unit** element. If no suitable **target** element exists, a **target** element is created. The inner text is either interpreted as plain text or HTML content.

9 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as Major, Minor, or None.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements.
- A document revision that captures changes to protocol functionality.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **None** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the relevant technical content is identical to the last released version.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

Section	Description	Revision class
3.1.4.2.2.2 AddJobResponse	Added description for element JobAdded.	Minor
3.1.4.2.2.3 JobAdded	Added definition and schema for the JobAdded element.	Major
3.1.4.10.2.2 GetItemsResponse	Added descriptions for the AddJobResponse and Items elements.	Minor
3.1.4.10.2.3 Items	Added definition and schema for the Items element.	Major

10 Index

A

Abstract data model
 [server](#) 20
[Applicability](#) 12
[ArrayOfstring complex type](#) 17
[Attribute groups](#) 19
[Attributes](#) 18

C

[Capability negotiation](#) 12
[Change tracking](#) 99
Client
 [overview](#) 20
[Complex types](#) 16
 [ArrayOfstring](#) 17
 [ReadOnlyFault](#) 17
 [TranslationJobSettings](#) 17
[Creating a translation job example](#) 64
[Creating a translation job example – adding the first group](#) 65
[Creating a translation job example – adding the job](#) 64
[Creating a translation job example – adding the second group](#) 65
[Creating a translation job example – submitting the job](#) 66
[Creating immediate translation jobs example](#) 70
[Creating immediate translation jobs example – adding a streaming job](#) 70
[Creating immediate translation jobs example – completing the downloading of the streaming job](#) 72
[Creating immediate translation jobs example – getting the job status](#) 71

D

Data model - abstract
 [server](#) 20

E

Elements
 [GroupId](#) 15
 [JobId](#) 16
 [PartitionId](#) 16
 [Settings](#) 16
 [UserToken](#) 16
Events
 [local - server](#) 63
 [timer - server](#) 62
Examples
 [creating a translation job](#) 64
 [creating a translation job – adding the first group](#) 65
 [creating a translation job – adding the job](#) 64
 [creating a translation job – adding the second group](#) 65
 [creating a translation job – submitting the job](#) 66

[creating immediate translation jobs](#) 70
 [creating immediate translation jobs – adding a streaming job](#) 70
 [creating immediate translation jobs – completing the downloading of the streaming job](#) 72
 [creating immediate translation jobs – getting the job status](#) 71
 [getting the status of a translation job](#) 66
 [getting the status of a translation job – getting the groups](#) 67
 [getting the status of a translation job – getting the items in the first group](#) 68
 [getting the status of a translation job – getting the items in the second group](#) 69
 [getting the status of a translation job – getting the job](#) 66
 [getting the status of a translation job – getting the job status](#) 67

F

[Fields - vendor-extensible](#) 12
[Full WSDL](#) 74
[Full XML schema](#) 83
 <http://schemas.datacontract.org/2004/07/System.Schema> 96

 <http://schemas.microsoft.com/2003/10/Serialization/Schema> 85

 <http://schemas.microsoft.com/2003/10/Serialization/Arrays.Schema> 84

 <http://schemas.microsoft.com/office/server/translation/2010/11/addGroup.Schema> 94

 <http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response.Schema> 90

 <http://schemas.microsoft.com/office/server/translation/2010/11/addJob.Schema> 96

 <http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response.Schema> 96

 <http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob.Schema> 97

 <http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/response.Schema> 97

 <http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob.Schema> 86

 <http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response.Schema> 86

 <http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch.Schema> 86

<http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration Schema> 87

<http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationResponse Schema> 87

<http://schemas.microsoft.com/office/server/translation/2010/11/getGroups Schema> 88

<http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response Schema> 88

<http://schemas.microsoft.com/office/server/translation/2010/11/getId Schema> 89

<http://schemas.microsoft.com/office/server/translation/2010/11/getId/response Schema> 89

<http://schemas.microsoft.com/office/server/translation/2010/11/getItems Schema> 90

<http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response Schema> 89

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobs Schema> 91

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response Schema> 91

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus Schema> 92

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response Schema> 91

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus Schema> 93

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/response Schema> 92

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes Schema> 93

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes/response Schema> 93

<http://schemas.microsoft.com/office/server/translation/2010/11/ping Schema> 94

<http://schemas.microsoft.com/office/server/translation/2010/11/ping/response Schema> 93

<http://schemas.microsoft.com/office/server/translation/2010/11/service Schema> 94

<http://schemas.microsoft.com/office/server/translation/2010/11/submitJob Schema> 95

<http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response Schema> 95

<http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings Schema> 95

G

[Getting the status of a translation job example](#) 66

[Getting the status of a translation job example – getting the groups](#) 67

[Getting the status of a translation job example – getting the items in the first group](#) 68

[Getting the status of a translation job example – getting the items in the second group](#) 69

[Getting the status of a translation job example – getting the job](#) 66

[Getting the status of a translation job example – getting the job status](#) 67

[Glossary](#) 9

[GroupId element](#) 15

[Groups](#) 19

[guid simple type](#) 18

I

[Implementer - security considerations](#) 73

[Index of security parameters](#) 73

[Informative references](#) 11

Initialization

[server](#) 21

[Introduction](#) 9

J

[JobId element](#) 16

L

Local events

[server](#) 63

M

Message processing

[server](#) 21

Messages

[ArrayOfstring complex type](#) 17

[attribute groups](#) 19

[attributes](#) 18

[complex types](#) 16

[elements](#) 15

[enumerated](#) 15

[GroupId element](#) 15

[groups](#) 19

[guid simple type](#) 18

[JobId element](#) 16

[namespaces](#) 13

[PartitionId element](#) 16

[ReadOnlyFault complex type](#) 17

[SaveBehavior simple type](#) 18

[Settings element](#) 16

- [simple types](#) 17
- [syntax](#) 13
- [TranslationJobSettings complex type](#) 17
- [transport](#) 13
- [UserToken element](#) 16

N

- [Namespaces](#) 13
- [Normative references](#) 10

O

Operations

- [AddGroup](#) 22
- [AddJob](#) 24
- [AddSyncStreamJob](#) 27
- [BatchGetSyncJobStatus](#) 29
- [CancelJob](#) 33
- [ConvertBatch](#) 35
- [GetConfiguration](#) 39
- [GetGroups](#) 41
- [GetId](#) 44
- [GetItems](#) 47
- [GetJobs](#) 50
- [GetJobStatus](#) 53
- [GetSyncStreamOutputBytes](#) 56
- [Ping](#) 58
- [SubmitJob](#) 60

[Overview \(synopsis\)](#) 11

P

- [Parameters - security index](#) 73
- [PartitionId element](#) 16
- [Preconditions](#) 11
- [Prerequisites](#) 11
- [Product behavior](#) 98

Protocol Details

- [overview](#) 20

R

- [ReadOnlyFault complex type](#) 17

[References](#) 10

- [informative](#) 11
- [normative](#) 10

[Relationship to other protocols](#) 11

S

- [SaveBehavior simple type](#) 18

Security

- [implementer considerations](#) 73
- [parameter index](#) 73

Sequencing rules

- [server](#) 21

Server

- [abstract data model](#) 20
- [AddGroup operation](#) 22
- [AddJob operation](#) 24
- [AddSyncStreamJob operation](#) 27
- [BatchGetSyncJobStatus operation](#) 29
- [CancelJob operation](#) 33
- [ConvertBatch operation](#) 35
- [GetConfiguration operation](#) 39
- [GetGroups operation](#) 41
- [GetId operation](#) 44
- [GetItems operation](#) 47
- [GetJobs operation](#) 50
- [GetJobStatus operation](#) 53
- [GetSyncStreamOutputBytes operation](#) 56
- [initialization](#) 21
- [local events](#) 63
- [message processing](#) 21
- [overview](#) 20
- [Ping operation](#) 58
- [sequencing rules](#) 21
- [SubmitJob operation](#) 60
- [timer events](#) 62
- [timers](#) 21
- [Settings element](#) 16
- [Simple types](#) 17
 - [guid](#) 18
 - [SaveBehavior](#) 18
- [Standards assignments](#) 12

Syntax

- [messages - overview](#) 13

T

Timer events

- [server](#) 62

Timers

- [server](#) 21

- [Tracking changes](#) 99
- [TranslationJobSettings complex type](#) 17
- [Transport](#) 13

Types

- [complex](#) 16
- [simple](#) 17

U

- [UserToken element](#) 16

V

- [Vendor-extensible fields](#) 12
- [Versioning](#) 12

W

- [WSDL](#) 74

X

XML schema 83

- <http://schemas.datacontract.org/2004/07/System.Schema> 96
- <http://schemas.microsoft.com/2003/10/Serialization/Schema> 85
- <http://schemas.microsoft.com/2003/10/Serialization/Arrays.Schema> 84

<http://schemas.microsoft.com/office/server/translation/2010/11/addGroup> Schema 94

<http://schemas.microsoft.com/office/server/translation/2010/11/addGroup/response> Schema 90

<http://schemas.microsoft.com/office/server/translation/2010/11/addJob> Schema 96

<http://schemas.microsoft.com/office/server/translation/2010/11/addJob/response> Schema 96

<http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob> Schema 97

<http://schemas.microsoft.com/office/server/translation/2010/11/addSyncStreamJob/response> Schema 97

<http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob> Schema 86

<http://schemas.microsoft.com/office/server/translation/2010/11/cancelJob/response> Schema 86

<http://schemas.microsoft.com/office/server/translation/2010/11/convertBatch> Schema 86

<http://schemas.microsoft.com/office/server/translation/2010/11/GetConfiguration> Schema 87

<http://schemas.microsoft.com/office/server/translation/2010/11/GetConfigurationResponse> Schema 87

<http://schemas.microsoft.com/office/server/translation/2010/11/getGroups> Schema 88

<http://schemas.microsoft.com/office/server/translation/2010/11/getGroups/response> Schema 88

<http://schemas.microsoft.com/office/server/translation/2010/11/getId> Schema 89

<http://schemas.microsoft.com/office/server/translation/2010/11/getId/response> Schema 89

<http://schemas.microsoft.com/office/server/translation/2010/11/getItems> Schema 90

<http://schemas.microsoft.com/office/server/translation/2010/11/getItems/response> Schema 89

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobs> Schema 91

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobs/response> Schema 91

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus> Schema 92

<http://schemas.microsoft.com/office/server/translation/2010/11/getJobStatus/response> Schema 91

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus> Schema 93

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncJobStatus/response> Schema 92

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes> Schema 93

<http://schemas.microsoft.com/office/server/translation/2010/11/getSyncStreamOutputBytes/response> Schema 93

<http://schemas.microsoft.com/office/server/translation/2010/11/ping> Schema 94

<http://schemas.microsoft.com/office/server/translation/2010/11/ping/response> Schema 93

<http://schemas.microsoft.com/office/server/translation/2010/11/service> Schema 94

<http://schemas.microsoft.com/office/server/translation/2010/11/submitJob> Schema 95

<http://schemas.microsoft.com/office/server/translation/2010/11/submitJob/response> Schema 95

<http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings> Schema 95

<http://schemas.microsoft.com/office/server/translation/2010/11/translationJobSettings/response> Schema 95