

# [MS-WEBSS]: Webs Web Service Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability
04/25/2008	0.2	Editorial	Revised and edited the technical content
06/27/2008	1.0	Major	Revised and edited the technical content
10/06/2008	1.01	Editorial	Revised and edited the technical content
12/12/2008	1.02	Editorial	Revised and edited the technical content
07/13/2009	1.03	Major	Revised and edited the technical content
08/28/2009	1.04	Editorial	Revised and edited the technical content
11/06/2009	1.05	Editorial	Revised and edited the technical content
02/19/2010	2.0	Minor	Updated the technical content
03/31/2010	2.01	Editorial	Revised and edited the technical content
04/30/2010	2.02	Editorial	Revised and edited the technical content
06/07/2010	2.03	Editorial	Revised and edited the technical content
06/29/2010	2.04	Minor	Clarified the meaning of the technical content.
07/23/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
09/27/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
06/10/2011	2.04	No change	No changes to the meaning, language, or formatting of the technical content.
01/20/2012	3.0	Major	Significantly changed the technical content.
04/11/2012	3.0	No change	No changes to the meaning, language, or formatting of the technical content.
07/16/2012	3.1	Minor	Clarified the meaning of the technical content.
09/12/2012	3.1	No change	No changes to the meaning, language, or formatting of the technical content.

<b>Date</b>	<b>Revision History</b>	<b>Revision Class</b>	<b>Comments</b>
10/08/2012	3.2	Minor	Clarified the meaning of the technical content.
02/11/2013	3.3	Minor	Clarified the meaning of the technical content.

# Table of Contents

<b>1 Introduction</b>	<b>11</b>
1.1 Glossary	11
1.2 References	12
1.2.1 Normative References	12
1.2.2 Informative References	13
1.3 Overview	13
1.4 Relationship to Other Protocols	13
1.5 Prerequisites/Preconditions	14
1.6 Applicability Statement	14
1.7 Versioning and Capability Negotiation	14
1.8 Vendor-Extensible Fields	14
1.9 Standards Assignments	14
<b>2 Messages</b>	<b>15</b>
2.1 Transport	15
2.2 Common Message Syntax	15
2.2.1 Namespaces	15
2.2.2 Messages	15
2.2.3 Elements	15
2.2.4 Complex Types	16
2.2.4.1 SOAPFaultDetails	16
2.2.4.2 WebDefinition	16
2.2.5 Simple Types	17
2.2.5.1 FALSEONLY	17
2.2.5.2 ONEONLY	17
2.2.5.3 TRUEONLY	18
2.2.6 Attributes	18
2.2.7 Groups	18
2.2.8 Attribute Groups	18
<b>3 Protocol Details</b>	<b>19</b>
3.1 Webs SOAP Server Details	19
3.1.1 Abstract Data Model	19
3.1.2 Timers	19
3.1.3 Initialization	19
3.1.4 Message Processing Events and Sequencing Rules	19
3.1.4.1 CreateContentType	21
3.1.4.1.1 Messages	21
3.1.4.1.1.1 CreateContentTypeSoapIn	21
3.1.4.1.1.2 CreateContentTypeSoapOut	22
3.1.4.1.2 Elements	22
3.1.4.1.2.1 CreateContentType	22
3.1.4.1.2.2 CreateContentTypeResponse	23
3.1.4.1.3 Complex Types	23
3.1.4.1.4 Simple Types	23
3.1.4.1.5 Attributes	23
3.1.4.1.6 Groups	23
3.1.4.1.7 Attribute Groups	23
3.1.4.2 CustomizeCss	23
3.1.4.2.1 Messages	24

3.1.4.2.1.1	CustomizeCssSoapIn.....	24
3.1.4.2.1.2	CustomizeCssSoapOut .....	24
3.1.4.2.2	Elements.....	24
3.1.4.2.2.1	CustomizeCss .....	25
3.1.4.2.2.2	CustomizeCssResponse .....	25
3.1.4.2.3	Complex Types .....	25
3.1.4.2.4	Simple Types.....	25
3.1.4.2.5	Attributes.....	25
3.1.4.2.6	Groups.....	26
3.1.4.2.7	Attribute Groups .....	26
3.1.4.3	DeleteContentType .....	26
3.1.4.3.1	Messages .....	26
3.1.4.3.1.1	DeleteContentTypeSoapIn .....	26
3.1.4.3.1.2	DeleteContentTypeSoapOut .....	27
3.1.4.3.2	Elements.....	27
3.1.4.3.2.1	DeleteContentType .....	27
3.1.4.3.2.2	DeleteContentTypeResponse .....	27
3.1.4.3.3	Complex Types .....	28
3.1.4.3.4	Simple Types.....	28
3.1.4.3.5	Attributes.....	28
3.1.4.3.6	Groups.....	28
3.1.4.3.7	Attribute Groups .....	28
3.1.4.4	GetActivatedFeatures .....	28
3.1.4.4.1	Messages .....	29
3.1.4.4.1.1	GetActivatedFeaturesSoapIn .....	29
3.1.4.4.1.2	GetActivatedFeaturesSoapOut .....	29
3.1.4.4.2	Elements.....	29
3.1.4.4.2.1	GetActivatedFeatures .....	29
3.1.4.4.2.2	GetActivatedFeaturesResponse.....	30
3.1.4.4.3	Complex Types .....	30
3.1.4.4.4	Simple Types.....	30
3.1.4.4.5	Attributes.....	30
3.1.4.4.6	Groups.....	30
3.1.4.4.7	Attribute Groups .....	30
3.1.4.5	GetAllSubWebCollection.....	30
3.1.4.5.1	Messages .....	31
3.1.4.5.1.1	GetAllSubWebCollectionSoapIn.....	31
3.1.4.5.1.2	GetAllSubWebCollectionSoapOut .....	31
3.1.4.5.2	Elements.....	31
3.1.4.5.2.1	GetAllSubWebCollection .....	31
3.1.4.5.2.2	GetAllSubWebCollectionResponse .....	32
3.1.4.5.3	Complex Types .....	32
3.1.4.5.4	Simple Types.....	33
3.1.4.5.5	Attributes.....	33
3.1.4.5.6	Groups.....	33
3.1.4.5.7	Attribute Groups .....	33
3.1.4.6	GetColumns .....	33
3.1.4.6.1	Messages .....	33
3.1.4.6.1.1	GetColumnsSoapIn .....	34
3.1.4.6.1.2	GetColumnsSoapOut.....	34
3.1.4.6.2	Elements.....	34
3.1.4.6.2.1	GetColumns.....	34
3.1.4.6.2.2	GetColumnsResponse.....	34

3.1.4.6.3	Complex Types .....	35
3.1.4.6.4	Simple Types.....	35
3.1.4.6.5	Attributes.....	35
3.1.4.6.6	Groups.....	35
3.1.4.6.7	Attribute Groups .....	35
3.1.4.7	GetContentType .....	35
3.1.4.7.1	Messages .....	36
3.1.4.7.1.1	GetContentTypeSoapIn .....	36
3.1.4.7.1.2	GetContentTypeSoapOut .....	36
3.1.4.7.2	Elements.....	36
3.1.4.7.2.1	GetContentType .....	36
3.1.4.7.2.2	GetContentTypeResponse .....	37
3.1.4.7.3	Complex Types .....	39
3.1.4.7.4	Simple Types.....	39
3.1.4.7.5	Attributes.....	39
3.1.4.7.6	Groups.....	39
3.1.4.7.7	Attribute Groups .....	39
3.1.4.8	GetContentTypes.....	39
3.1.4.8.1	Messages .....	40
3.1.4.8.1.1	GetContentTypesSoapIn .....	40
3.1.4.8.1.2	GetContentTypesSoapOut.....	40
3.1.4.8.2	Elements.....	40
3.1.4.8.2.1	GetContentTypes.....	40
3.1.4.8.2.2	GetContentTypesResponse .....	40
3.1.4.8.3	Complex Types .....	42
3.1.4.8.4	Simple Types.....	42
3.1.4.8.5	Attributes.....	42
3.1.4.8.6	Groups.....	42
3.1.4.8.7	Attribute Groups .....	42
3.1.4.9	GetCustomizedPageStatus .....	42
3.1.4.9.1	Messages .....	43
3.1.4.9.1.1	GetCustomizedPageStatusSoapIn .....	43
3.1.4.9.1.2	GetCustomizedPageStatusSoapOut .....	43
3.1.4.9.2	Elements.....	43
3.1.4.9.2.1	GetCustomizedPageStatus .....	43
3.1.4.9.2.2	GetCustomizedPageStatusResponse.....	44
3.1.4.9.3	Complex Types .....	44
3.1.4.9.4	Simple Types.....	44
3.1.4.9.4.1	CustomizedPageStatus .....	45
3.1.4.9.5	Attributes.....	45
3.1.4.9.6	Groups.....	45
3.1.4.9.7	Attribute Groups .....	45
3.1.4.10	GetListTemplates .....	45
3.1.4.10.1	Messages .....	46
3.1.4.10.1.1	GetListTemplatesSoapIn .....	46
3.1.4.10.1.2	GetListTemplatesSoapOut .....	46
3.1.4.10.2	Elements.....	46
3.1.4.10.2.1	GetListTemplates .....	46
3.1.4.10.2.2	GetListTemplatesResponse.....	47
3.1.4.10.3	Complex Types .....	47
3.1.4.10.4	Simple Types .....	47
3.1.4.10.5	Attributes .....	47
3.1.4.10.6	Groups.....	47

3.1.4.10.7	Attribute Groups.....	47
3.1.4.11	GetObjectIdFromUrl .....	47
3.1.4.11.1	Messages .....	48
3.1.4.11.1.1	GetObjectIdFromUrlSoapIn .....	48
3.1.4.11.1.2	GetObjectIdFromUrlSoapOut .....	48
3.1.4.11.2	Elements .....	48
3.1.4.11.2.1	GetObjectIdFromUrl .....	49
3.1.4.11.2.2	GetObjectIdFromUrlResponse.....	49
3.1.4.11.3	Complex Types .....	51
3.1.4.11.4	Simple Types .....	51
3.1.4.11.5	Attributes .....	51
3.1.4.11.6	Groups.....	51
3.1.4.11.7	Attribute Groups.....	51
3.1.4.12	GetWeb .....	51
3.1.4.12.1	Messages .....	52
3.1.4.12.1.1	GetWebSoapIn .....	52
3.1.4.12.1.2	GetWebSoapOut .....	52
3.1.4.12.2	Elements.....	52
3.1.4.12.2.1	GetWeb .....	53
3.1.4.12.2.2	GetWebResponse.....	53
3.1.4.12.3	Complex Types .....	53
3.1.4.12.4	Simple Types .....	53
3.1.4.12.5	Attributes .....	53
3.1.4.12.6	Groups.....	54
3.1.4.12.7	Attribute Groups.....	54
3.1.4.13	GetWebCollection.....	54
3.1.4.13.1	Messages .....	54
3.1.4.13.1.1	GetWebCollectionSoapIn.....	54
3.1.4.13.1.2	GetWebCollectionSoapOut .....	54
3.1.4.13.2	Elements.....	55
3.1.4.13.2.1	GetWebCollection .....	55
3.1.4.13.2.2	GetWebCollectionResponse .....	55
3.1.4.13.3	Complex Types .....	56
3.1.4.13.4	Simple Types .....	56
3.1.4.13.5	Attributes .....	56
3.1.4.13.6	Groups.....	56
3.1.4.13.7	Attribute Groups.....	56
3.1.4.14	RemoveContentTypeXmlDocument.....	56
3.1.4.14.1	Messages .....	56
3.1.4.14.1.1	RemoveContentTypeXmlDocumentSoapIn.....	57
3.1.4.14.1.2	RemoveContentTypeXmlDocumentSoapOut .....	57
3.1.4.14.2	Elements.....	57
3.1.4.14.2.1	RemoveContentTypeXmlDocument .....	57
3.1.4.14.2.2	RemoveContentTypeXmlDocumentResponse .....	58
3.1.4.14.3	Complex Types .....	58
3.1.4.14.4	Simple Types .....	58
3.1.4.14.5	Attributes .....	58
3.1.4.14.6	Groups.....	58
3.1.4.14.7	Attribute Groups.....	58
3.1.4.15	RevertAllFileContentStreams .....	58
3.1.4.15.1	Messages .....	59
3.1.4.15.1.1	RevertAllFileContentStreamsSoapIn .....	59
3.1.4.15.1.2	RevertAllFileContentStreamsSoapOut .....	59

3.1.4.15.2	Elements .....	59
3.1.4.15.2.1	RevertAllFileContentStreams .....	60
3.1.4.15.2.2	RevertAllFileContentStreamsResponse .....	60
3.1.4.15.3	Complex Types .....	60
3.1.4.15.4	Simple Types .....	60
3.1.4.15.5	Attributes .....	60
3.1.4.15.6	Groups.....	60
3.1.4.15.7	Attribute Groups.....	60
3.1.4.16	RevertCss .....	60
3.1.4.16.1	Messages .....	61
3.1.4.16.1.1	RevertCssSoapIn .....	61
3.1.4.16.1.2	RevertCssSoapOut .....	61
3.1.4.16.2	Elements .....	61
3.1.4.16.2.1	RevertCss .....	61
3.1.4.16.2.2	RevertCssResponse.....	62
3.1.4.16.3	Complex Types .....	62
3.1.4.16.4	Simple Types .....	62
3.1.4.16.5	Attributes .....	62
3.1.4.16.6	Groups.....	62
3.1.4.16.7	Attribute Groups.....	62
3.1.4.17	RevertFileContentStream .....	62
3.1.4.17.1	Messages .....	63
3.1.4.17.1.1	RevertFileContentStreamSoapIn .....	63
3.1.4.17.1.2	RevertFileContentStreamSoapOut .....	63
3.1.4.17.2	Elements .....	63
3.1.4.17.2.1	RevertFileContentStream .....	64
3.1.4.17.2.2	RevertFileContentStreamResponse.....	64
3.1.4.17.3	Complex Types .....	65
3.1.4.17.4	Simple Types .....	65
3.1.4.17.5	Attributes .....	65
3.1.4.17.6	Groups.....	65
3.1.4.17.7	Attribute Groups.....	65
3.1.4.18	UpdateColumns .....	65
3.1.4.18.1	Messages .....	65
3.1.4.18.1.1	UpdateColumnsSoapIn .....	66
3.1.4.18.1.2	UpdateColumnsSoapOut .....	66
3.1.4.18.2	Elements .....	66
3.1.4.18.2.1	UpdateColumns .....	67
3.1.4.18.2.2	UpdateColumnsResponse .....	69
3.1.4.18.3	Complex Types .....	71
3.1.4.18.4	Simple Types .....	71
3.1.4.18.5	Attributes .....	71
3.1.4.18.6	Groups.....	71
3.1.4.18.7	Attribute Groups.....	71
3.1.4.19	UpdateContentType.....	71
3.1.4.19.1	Messages .....	72
3.1.4.19.1.1	UpdateContentTypeSoapIn.....	72
3.1.4.19.1.2	UpdateContentTypeSoapOut .....	72
3.1.4.19.2	Elements .....	72
3.1.4.19.2.1	UpdateContentType .....	73
3.1.4.19.2.2	UpdateContentTypeResponse .....	73
3.1.4.19.3	Complex Types .....	75
3.1.4.19.4	Simple Types .....	75



3.1.4.19.5	Attributes .....	75
3.1.4.19.6	Groups.....	75
3.1.4.19.7	Attribute Groups.....	75
3.1.4.20	UpdateContentTypeXmlDocument .....	76
3.1.4.20.1	Messages .....	76
3.1.4.20.1.1	UpdateContentTypeXmlDocumentSoapIn .....	76
3.1.4.20.1.2	UpdateContentTypeXmlDocumentSoapOut .....	76
3.1.4.20.2	Elements.....	77
3.1.4.20.2.1	UpdateContentTypeXmlDocument .....	77
3.1.4.20.2.2	UpdateContentTypeXmlDocumentResponse .....	78
3.1.4.20.3	Complex Types .....	78
3.1.4.20.4	Simple Types .....	78
3.1.4.20.5	Attributes .....	78
3.1.4.20.6	Groups.....	78
3.1.4.20.7	Attribute Groups.....	78
3.1.4.21	WebUrlFromPageUrl .....	78
3.1.4.21.1	Messages .....	79
3.1.4.21.1.1	WebUrlFromPageUrlSoapIn .....	79
3.1.4.21.1.2	WebUrlFromPageUrlSoapOut .....	79
3.1.4.21.2	Elements.....	79
3.1.4.21.2.1	WebUrlFromPageUrl .....	79
3.1.4.21.2.2	WebUrlFromPageUrlResponse.....	80
3.1.4.21.3	Complex Types .....	80
3.1.4.21.4	Simple Types .....	80
3.1.4.21.5	Attributes .....	80
3.1.4.21.6	Groups.....	80
3.1.4.21.7	Attribute Groups.....	80
3.1.5	Timer Events .....	80
3.1.6	Other Local Events .....	80
<b>4</b>	<b>Protocol Examples.....</b>	<b>81</b>
4.1	GetAllSubWebCollection.....	81
4.2	GetCustomizedPageStatus .....	81
4.3	Update Columns .....	82
4.3.1	Add New Columns .....	82
4.3.2	Update Existing Columns.....	82
4.3.3	Delete Existing Columns.....	83
4.4	WebUrlFromPageUrl .....	83
4.5	GetContentTypes .....	84
4.6	GetContentType .....	88
4.7	CreateContentType .....	92
4.8	UpdateContentType .....	92
4.9	UpdateContentTypeXmlDocument.....	94
<b>5</b>	<b>Security.....</b>	<b>96</b>
5.1	Security Considerations for Implementers.....	96
5.2	Index of Security Parameters .....	96
<b>6</b>	<b>Appendix A: Full WSDL .....</b>	<b>97</b>
<b>7</b>	<b>Appendix B: Product Behavior .....</b>	<b>123</b>
<b>8</b>	<b>Change Tracking.....</b>	<b>126</b>



# 1 Introduction

The Webs Web Service Protocol specifies a SOAP protocol that provides methods for modifying SharePoint sites in a site collection. In the context of the Webs Web Service Protocol, "Webs" refer to sites in a site collection. This protocol provides functions to get and modify content types, pages and files, list templates, columns, **cascading style sheets (CSS)**, and Webs.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**GUID**  
**Hypertext Transfer Protocol (HTTP)**  
**Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**  
**language code identifier (LCID)**  
**XML**

The following terms are defined in [\[MS-OFCGLOS\]](#):

**ActiveX object**  
**cascading style sheet (CSS)**  
**column**  
**content database**  
**content type**  
**content type group**  
**content type identifier**  
**context site**  
**CSS**  
**document template**  
**event receiver**  
**farm**  
**feature**  
**field definition**  
**file**  
**folder**  
**list**  
**list identifier**  
**list item**  
**list template**  
**parent site**  
**sealed content type**  
**Simple Object Access Protocol (SOAP)**  
**site**  
**site collection**  
**site content type**  
**SOAP action**  
**SOAP body**  
**SOAP fault**  
**SOAP message**  
**subsite**

**theme**  
**uncustomized**  
**Uniform Resource Identifier (URI)**  
**Uniform Resource Locator (URL)**  
**Web Services Description Language (WSDL)**  
**WSDL operation**  
**XML document**  
**XML namespace**  
**XML namespace prefix**  
**XML schema**

The following terms are specific to this document:

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[CSS-LEVEL1] Lie, H. and Bos, B., "Cascading Style Sheets: W3C Recommendation", REC CSS1-19990111, January 1999, <http://www.w3.org/TR/1999/REC-CSS1-19990111>

[MS-LISTSWS] Microsoft Corporation, "[Lists Web Service Protocol](#)".

[MS-WSSCAML] Microsoft Corporation, "[Collaborative Application Markup Language \(CAML\) Structure](#)".

[MS-WSSFO2] Microsoft Corporation, "[Windows SharePoint Services \(WSS\): File Operations Database Communications Version 2 Protocol](#)".

[MS-WSSFO3] Microsoft Corporation, "[Windows SharePoint Services \(WSS\): File Operations Database Communications Version 3 Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Beech, D., Maloney, M., Eds., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

### 1.2.2 Informative References

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

### 1.3 Overview


Protocol clients use this protocol to access and modify **sites (2)** in a **site collection** and the attributes of those sites (2). This protocol is used by applications that create or modify the design and layout of these sites (2). Operations of this protocol access the following categories of site design functionality:

- **Content types**, including compound data types such as a mailing address that consists of multiple fields.
- Style, including font, color, layout, and other display attributes commonly defined in cascading style sheet (CSS).
- Sites (2) and information about sites (2) such as the title and **URL**.
- Columns, including properties that control how lists of items are displayed in a table.
- Customized pages, including style settings that differ from one site (2) to another in the same site collection.
- **List templates**, meaning the model or metadata used to define common types of **lists (1)**.

### 1.4 Relationship to Other Protocols

This protocol uses the **SOAP** message protocol for formatting request and response messages, as described in [\[SOAP1.1\]](#), [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#). It transmits those messages by using **HTTP**, as described in [\[RFC2616\]](#), or **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#).

The following diagram shows the underlying messaging and transport stack used by the protocol.

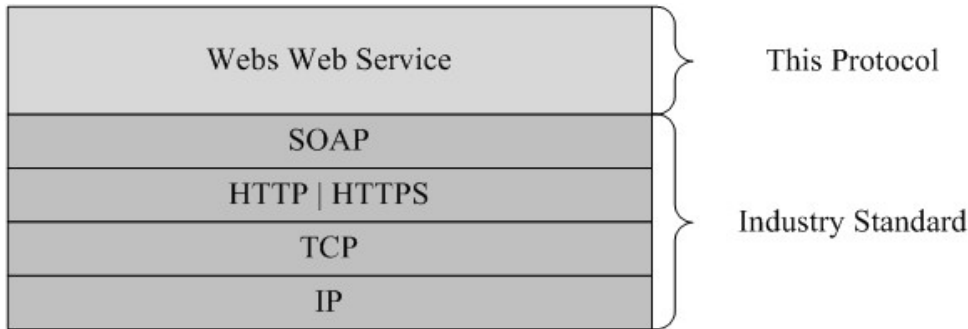

**Figure 1: This protocol in relation to other protocols**

## 1.5 Prerequisites/Preconditions

This protocol operates against a site (2) that is identified by a URL that is known by protocol clients. The protocol server endpoint is formed by appending `"/_vti_bin/webs.asmx"` to the URL of the site (2), for example `http://www.contoso.com/Repository/_vti_bin/webs.asmx`.

This protocol assumes that authentication has been performed by the underlying protocols.

## 1.6 Applicability Statement

The Webs service is applicable when an application or higher-level protocol requires programmatic access to sites (2) and **subsites** in a site collection. Use this protocol to perform the following actions in sites (2) or subsites:

- Retrieve information about objects in sites (2) and subsites.
- Create, delete, or update content types.
- Create, delete, or update customized pages.
- Read list templates.
- Create, delete, or update **columns (1)**.
- Apply or revert styles defined in cascading style sheets (CSS).

## 1.7 Versioning and Capability Negotiation

This document covers versioning issues in one area. This protocol uses multiple transports with SOAP as specified in section [2.1](#).

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

### 2.1 Transport

Protocol servers **MUST** support SOAP over HTTP. Protocol servers **SHOULD** additionally support SOAP over HTTPS for securing communication with clients.

Protocol messages **MUST** be formatted as specified either in [\[SOAP1.1\]](#) section 4, SOAP Envelope or in [\[SOAP1.2/1\]](#) section 5, SOAP Message Construct. Protocol server faults **MUST** be returned using either HTTP Status Codes as specified in [\[RFC2616\]](#) section 10, Status Code Definitions or **SOAP faults** as specified either in [\[SOAP1.1\]](#) section 4.4, SOAP Fault, or in [\[SOAP1.2/1\]](#) section 5.4, SOAP Fault.

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and **WSDL**, as specified in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This protocol specifies and references **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#). Although this document associates an **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

Prefix	Namespace URI	Reference
soap	<a href="http://schemas.xmlsoap.org/wsdl/soap/">http://schemas.xmlsoap.org/wsdl/soap/</a>	<a href="#">[SOAP1.1]</a>
tns	<a href="http://schemas.microsoft.com/sharepoint/soap/">http://schemas.microsoft.com/sharepoint/soap/</a>	
s	<a href="http://www.w3.org/2001/XMLSchema">http://www.w3.org/2001/XMLSchema</a>	<a href="#">[XMLSCHEMA1]</a>
soap12	<a href="http://schemas.xmlsoap.org/wsdl/soap12/">http://schemas.xmlsoap.org/wsdl/soap12/</a>	<a href="#">[SOAP1.2/1]</a> <a href="#">[SOAP1.2/2]</a>
(none)	<a href="http://schemas.microsoft.com/sharepoint/soap/">http://schemas.microsoft.com/sharepoint/soap/</a>	
wsdl	<a href="http://schemas.xmlsoap.org/wsdl/">http://schemas.xmlsoap.org/wsdl/</a>	<a href="#">[WSDL]</a>
core	<a href="http://schema.microsoft.com/sharepoint/soap/">http://schema.microsoft.com/sharepoint/soap/</a>	<a href="#">[MS-WSSCAML]</a>

#### 2.2.2 Messages

This specification does not define any common WSDL message definitions.

#### 2.2.3 Elements

This specification does not define any common XML schema element definitions.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

Complex type	Description
<b>SOAPFaultDetails</b>	Specifies the details of a SOAP fault.
<b>WebDefinition</b>	Specifies a single site (2).

### 2.2.4.1 SOAPFaultDetails

The **SOAPFaultDetails** complex type specifies the details of a SOAP fault. This complex type is defined as follows:

```
<s:schema xmlns:s="http://www.w3.org/2001/XMLSchema" targetNamespace="
http://schemas.microsoft.com/sharepoint/soap">
  <s:complexType name="detail">
    <s:sequence>
      <s:element name="errorstring" type="s:string"/>
      <s:element name="errorcode" type="s:string" minOccurs="0"/>
    </s:sequence>
  </s:complexType>
</s:schema>
```

**errorstring:** A human-readable text explaining the application-level fault.

**errorcode:** The hexadecimal representation (prefixed by 0x) of a 4-byte result code. [<1>](#)

### 2.2.4.2 WebDefinition

The **WebDefinition** complex type specifies a single site (2). It contains a set of XML attributes that identify and describe the site (2). This type is defined as follows:

```
<s:complexType name="WebDefinition">
  <s:attribute name="Title" type="s:string" use="required" />
  <s:attribute name="Url" type="s:string" use="required" />
  <s:attribute name="Description" type="s:string" />
  <s:attribute name="Language" type="s:string" />
  <s:attribute name="Theme" type="s:string" />
  <s:attribute name="FarmId" type="core:UniqueIdentifierWithBraces" />
  <s:attribute name="Id" type="core:UniqueIdentifierWithBraces" />
  <s:attribute name="ExcludeFromOfflineClient" type="core:TRUEFALSE" />
  <s:attribute name="CellStorageWebServiceEnabled" type="core:TRUEFALSE" />
  <s:attribute name="AlternateUrls" type="s:string" />
</s:complexType>
```

**Title:** Specifies the title of the site (2).

**Url:** Specifies the absolute URL of the site (2).

**Description:** Specifies the description of the site (2).



**Language:** Specifies the **language code identifier (LCID)** for the language of the site (2).

**Theme:** Specifies the name of the **theme** that is applied to the site (2).

**FarmId:** A GUID that is the identifier of the **farm**.<2>

**Id:** A GUID that is the identifier of the site (2).<3>

**ExcludeFromOfflineClient:** Specifies if the content in the site (2) can be downloaded to a client or not.<4>

**CellStorageWebServiceEnabled:** Specifies if a cell storage service is enabled on the site (2) or not.<5>

**AlternateUrls:** Alternate URLs are listed in the following zone order, delimited by commas: **Intranet,Default,Extranet,Internet,Custom**.<6>

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

Simple Type	Description
<b>FALSEONLY</b>	A string that is restricted to only the value "FALSE".
<b>ONEONLY</b>	A string that is restricted to only the value "ONE".
<b>TRUEONLY</b>	A string that is restricted to only the value "TRUE".

### 2.2.5.1 FALSEONLY

This simple type is a string that is restricted for only the value FALSE. This type is defined as follows:

```
<s:simpleType name="FALSEONLY">  
  <s:restriction base="s:string">  
    <s:enumeration value="FALSE" />  
  </s:restriction>  
</s:simpleType>
```

### 2.2.5.2 ONEONLY

This simple type is a string that is restricted for only the value 1. This type is defined as follows:

```
<s:simpleType name="ONEONLY">  
  <s:restriction base="s:string">  
    <s:enumeration value="1" />  
  </s:restriction>  
</s:simpleType>
```

### 2.2.5.3 TRUEONLY

This simple type is a string that is restricted for only the value TRUE. This type is defined as follows:

```
<s:simpleType name="TRUEONLY">  
  <s:restriction base="s:string">  
    <s:enumeration value="TRUE" />  
  </s:restriction>  
</s:simpleType>
```

### 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

### 2.2.7 Groups

This specification does not define any common XML schema group definitions.

### 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

## 3 Protocol Details

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls made by the higher-layer protocol or application are passed directly to the transport, and the results returned by the transport are passed directly back to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret HTTP Status Codes returned by the protocol server as specified in [\[RFC2616\]](#) section 10.

This protocol enables protocol servers to notify protocol clients of application-level faults using SOAP faults. This protocol enables protocol servers to provide additional details for SOAP faults by including either a **detail** element as specified in [\[SOAP1.1\]](#) section 4.4 or a **Detail** element as specified in [\[SOAP1.2/1\]](#) section 5.4.5, which conforms to the XML schema of the **SOAPFaultDetails** complex type specified in section [2.2.4.1](#). Except where specified, these SOAP faults are not significant for interoperability, and protocol clients can interpret them in an implementation-specific manner.

This protocol enables protocol servers to perform implementation-specific authorization checks and notify protocol clients of authorization faults either using HTTP Status Codes or using SOAP faults as specified previously in this section.

### 3.1 Webs SOAP Server Details

#### 3.1.1 Abstract Data Model

None.

#### 3.1.2 Timers

None.

#### 3.1.3 Initialization

None.

#### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of **WSDL operations** as defined by this specification:

Operation	Description
<b>CreateContentType</b>	Requests creation of a new content type on the <b>context site</b> .
<b>CustomizeCss</b>	Enables customization of the specified <b>CSS</b> for the context site.
<b>DeleteContentType</b>	Requests removal of a content type from the site (2).
<b>GetActivatedFeatures</b>	Obtains the list of <b>features</b> activated on the site (2) and in the <b>parent site</b> collection.
<b>GetAllSubWebCollection</b>	Obtains a list of the titles and URLs of all sites (2) in the site collection.
<b>GetColumns</b>	Obtains the collection of column definitions for all columns available on the context site.

Operation	Description
<b>GetContentType</b>	Requests a specific content type.
<b>GetContentTypes</b>	Requests all content types on the site (2).
<b>GetCustomizedPageStatus</b>	Obtains the customization status (also known as the <b>uncustomized</b> status) of the specified page or file.
<b>GetListTemplates</b>	Obtains the collection of list template definitions for the context site.
<b>GetObjectIdFromUrl</b>	Obtains the properties of the object that is referenced by a specified URL.
<b>GetWeb</b>	Obtains the details about the specified site (2).
<b>GetWebCollection</b>	Obtains details about all immediate child sites of the context site.
<b>RemoveContentTypeXmlDocument</b>	Removes an XML document in the XML document collection of a <b>site content type</b> .
<b>RevertAllFileContentStreams</b>	Reverts all pages in the context site to their original state.
<b>RevertCss</b>	Reverts the customizations of the context site and returns to the default style.
<b>RevertFileContentStream</b>	Reverts the specified file in the context site to its original state.
<b>UpdateColumns</b>	Adds, deletes, or updates columns on the context site and all child sites in its hierarchy.
<b>UpdateContentType</b>	Updates a content type on the context site.
<b>UpdateContentTypeXmlDocument</b>	Adds or updates an XML document in the XML document collection of a site content type.
<b>WebUrlFromPageUrl</b>	Given the URL of a page on the site, obtains the URL of the parent site.

## Returning Errors

If the user is not authorized to perform the operation, the protocol server MUST return an HTTP 401 error as specified in [\[RFC2616\]](#) section 10.4.

If the protocol server encounters any other application-specific error when running the operation, a SOAP fault message MUST be returned. Error codes corresponding to specific error conditions that can be encountered during each operation are specified in the corresponding sections.

The following schema specifies the structure of the detail element in the SOAP fault used by this protocol.

```
<s:element name="detail">
  <s:complexType>
    <s:sequence>
      <s:element name="errorString" type="s:string" minOccurs="1" maxOccurs="1"/>
      <s:element name="errorCode" type="s:string" minOccurs="0" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

</s:element>

**detail:** A container for **errorString** and **errorCode** elements.

**errorString:** The description of the error.

**errorCode:** An error code.

### 3.1.4.1 CreateContentType

This operation [<7>](#) creates a new content type on the context site. This operation is defined as follows:

```
<wsdl:operation name="CreateContentType">
  <wsdl:input message="tns:CreateContentTypeSoapIn" />
  <wsdl:output message="tns:CreateContentTypeSoapOut" />
</wsdl:operation>
```

The protocol client sends a **CreateContentTypeSoapIn** request message, and the protocol server responds with a **CreateContentTypeSoapOut** response message, as follows:

1. If the **parentType** is not a valid **content type identifier** or is not the content type identifier of a content type that is available on the context site, a SOAP fault MUST be returned.
2. The protocol server creates a new content type on the context site with the specified parent content type and display name.
3. The protocol server adds the specified fields to the newly created content type.
4. The protocol server updates the content type with the specified properties.

The protocol server MUST return a SOAP fault if a problem is encountered in any of these steps. If the protocol server has finished some of the steps in the **CreateContentType** operation prior to encountering an error, the protocol server is not required to undo the finished actions. Consequently, if the protocol server returns a SOAP fault in response to the protocol client request, this does not mean that the protocol server has not created a new content type.

When the protocol server returns a SOAP fault, use **GetContentType** to determine whether the content type was successfully created.

#### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>CreateContentTypeSoapIn</b>	The request for the <b>CreateContentType</b> operation.
<b>CreateContentTypeSoapOut</b>	The response to the <b>CreateContentType</b> operation.

##### 3.1.4.1.1.1 CreateContentTypeSoapIn

This message is the request for the **CreateContentType** operation.

The **SOAP action** value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/CreateContentType
```

The **SOAP body** contains a **CreateContentType** element.

### 3.1.4.1.1.2 CreateContentTypeSoapOut

This message is the response to the **CreateContentType** operation.

The SOAP body contains a **CreateContentTypeResponse** element.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>CreateContentType</b>	The request to create a content type on the context site.
<b>CreateContentTypeResponse</b>	Contains the response to a request to create a new content type on the context site.

#### 3.1.4.1.2.1 CreateContentType

This element specifies details for the request to create a content type on the context site. This element is defined as follows:

```
<s:element name="CreateContentType">
  <s:complexType>
    <s:sequence>
      <s:element name="displayName" type="s:string" minOccurs="1"/>
      <s:element name="parentType" type="core:ContentTypeId" minOccurs="1"/>
      <s:element name="newFields" type="AddOrUpdateFieldsDefinition" minOccurs="0"/>
      <s:element name="contentTypeProperties" minOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:element name="ContentType" type="ContentTypePropertyDefinition" minOccurs="0"
          />
        </s:sequence>
      </s:complexType>
    </s:sequence>
  </s:complexType>
</s:element>
```

**displayName:** The **XML**-encoded name of the content type to be created. A SOAP exception **MUST** be returned if any of the following conditions applies to the unencoded version of this element:

- It contains the name of an existing content type on the context site, ignoring case.
- It is longer than 128 characters.
- It ends with a period or begins or ends with whitespace.

- It contains a tab, two consecutive periods, or any of the following characters: backslash (\), slash (/), colon (:), asterisk (\*), question mark (?), quotation mark ("), number sign (#), percent sign (%), less than (<), greater than (>), opening curly bracket ({), closing curly bracket (}), vertical bar (|), tilde (~), or ampersand (&).

**parentType:** The identifier of a content type from which the content type to be created inherits.

**newFields:** Container for a list of existing fields to be included in the content type. The **AddOrUpdateFieldsDefinition** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.2.

**contentTypeProperties:** Container for properties to set on the content type. MUST NOT contain only whitespace. The **ContentTypePropertyDefinition** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.6.

### 3.1.4.1.2.2 CreateContentTypeResponse

This element contains the response to a request to create a new content type on the context site. This element is defined as follows:

```
<s:element name="CreateContentTypeResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="CreateContentTypeResult" type="core:ContentTypeId" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**CreateContentTypeResult:** If no error conditions as specified in the preceding section cause the protocol server to return a SOAP exception, a **CreateContentTypeResult** MUST be returned containing the content type identifier of the content type created.

### 3.1.4.1.3 Complex Types

None.

### 3.1.4.1.4 Simple Types

None.

### 3.1.4.1.5 Attributes

None.

### 3.1.4.1.6 Groups

None.

### 3.1.4.1.7 Attribute Groups

None.

### 3.1.4.2 CustomizeCss

This operation [<8>](#) enables customization of the specified cascading style sheet (CSS) for the context site. This operation is defined as follows:

```

<wsdl:operation name="CustomizeCss">
  <wsdl:input message="tns:CustomizeCssSoapIn" />
  <wsdl:output message="tns:CustomizeCssSoapOut" />
</wsdl:operation>

```

The protocol client MUST send a **CustomizeCssSoapIn** request message to the protocol server as the first step in customizing those aspects of the style and formatting of the site that are defined in the specified CSS file.

The purpose of this operation is to enable the protocol server to prepare a site-specific copy of the specified CSS file, and configure the protocol server to use this new copy when rendering pages in the context site.

### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>CustomizeCssSoapIn</b>	The request to enable customization of the specified CSS for the context site.
<b>CustomizeCssSoapOut</b>	The response to a request to enable customization of the specified CSS for the context site.

#### 3.1.4.2.1.1 CustomizeCssSoapIn

The **CustomizeCssSoapIn** message contains the **CustomizeCss** SOAP element.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/CustomizeCss
```

The SOAP body contains a **CustomizeCss** element.

#### 3.1.4.2.1.2 CustomizeCssSoapOut

The **CustomizeCssSoapOut** message contains the **CustomizeCssResponse** element.

The SOAP body contains a **CustomizeCssResponse** element.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>CustomizeCss</b>	The request to enable customization of the specified CSS for the context site.
<b>CustomizeCssResponse</b>	Contains the response to a request to enable customization of the specified CSS for the context site.



### 3.1.4.2.2.1 CustomizeCss

The **CustomizeCss** SOAP element is defined as follows:

```
<s:element name="CustomizeCss">
  <s:complexType>
    <s:sequence>
      <s:element name="cssFile" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**cssFile:** The *cssFile* input parameter **MUST** specify the name of one of the CSS files that resides in the default central location on the protocol server. The specific location in which the protocol server maintains the default copy of each CSS is a protocol server-specific implementation detail. [<9>](#) This file name **MUST** match the file name on the protocol server, including the file extension ".css", for example: "core.css". The CSS file **MUST** conform to the CSS standard specified in [\[CSS-LEVEL1\]](#).

### 3.1.4.2.2.2 CustomizeCssResponse

On successful completion, the response SOAP body contains only the **CustomizeCssResponse** element. Other than the namespace attribute, the **CustomizeCssResponse** element contains no other attributes or child elements.

```
<s:element name="CustomizeCssResponse">
  <s:complexType/>
</s:element>
```

If the protocol server encounters one of the error conditions described in the following table when running this operation, a SOAP fault **MUST** be returned that **SHOULD** contain one of the error codes for the specified error condition.

Error Code	Error condition
0x82000001	Blank <b>cssFile</b> specified, or <b>cssFile</b> element missing.
0x80131600	Specified <b>cssFile</b> has no file extension.
0x80070002	Specified <b>cssFile</b> does not exist on the protocol server.
0x81020073	Client specified a <b>cssFile</b> value containing an asterisk (*).

### 3.1.4.2.3 Complex Types

None.

### 3.1.4.2.4 Simple Types

None.

### 3.1.4.2.5 Attributes

None.

### 3.1.4.2.6 Groups

None.

### 3.1.4.2.7 Attribute Groups

None.

### 3.1.4.3 DeleteContentType

This operation [<10>](#) removes a specified content type from the site (2). This operation is defined as follows:

```
<wsdl:operation name="DeleteContentType">
  <wsdl:input message="tns:DeleteContentTypeSoapIn" />
  <wsdl:output message="tns:DeleteContentTypeSoapOut" />
</wsdl:operation>
```

The protocol client sends a **DeleteContentTypeSoapIn** request message, and the protocol server responds with a **DeleteContentTypeSoapOut** response message, as follows:

1. If the **contentTypeId** element is not a valid content type identifier, the protocol server MUST return a SOAP exception.
2. If the content type is not found, the protocol server MUST return a SOAP exception.
3. If the content type is read-only or cannot be deleted for any other reason, the protocol server MUST return a SOAP exception.
4. If no exceptions are encountered during the processing of the request, the content type with the requested identifier MUST be removed from the list of content types on the site (2).

#### 3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>DeleteContentTypeSoapIn</b>	The request to remove a specified content type from the site (2).
<b>DeleteContentTypeSoapOut</b>	The response to a request to remove a specified content type from the site (2).

##### 3.1.4.3.1.1 DeleteContentTypeSoapIn

The SOAP action value of this message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/DeleteContentType
```

The SOAP body contains a **DeleteContentType** element.

### 3.1.4.3.1.2 DeleteContentTypeSoapOut

The SOAP body contains a **DeleteContentTypeResponse** element.

### 3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>DeleteContentType</b>	The request to remove a specified content type from the site (2).
<b>DeleteContentTypeResponse</b>	Contains the response from the protocol server stating that the content type has been removed from the site (2).

#### 3.1.4.3.2.1 DeleteContentType

This is the request element to delete the content type from the site (2). This element is defined as follows:

```
<s:element name="DeleteContentType">
  <s:complexType>
    <s:sequence>
      <s:element name="contentTypeid" type="core:ContentTypeId" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**contentTypeid:** The content type identifier of the content type to be removed from the site (2).

#### 3.1.4.3.2.2 DeleteContentTypeResponse

This is the response from the protocol server stating that the content type has been removed from the site (2). This element is defined as follows:

```
<s:element name="DeleteContentTypeResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="DeleteContentTypeResult" minOccurs="1">
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="Success">
              <s:complexType/>
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**DeleteContentTypeResult:** If the operation succeeds, a **DeleteContentTypeResult** MUST be returned. If the operation fails, a SOAP exception MUST be returned.

### 3.1.4.3.3 Complex Types

None.

### 3.1.4.3.4 Simple Types

None.

### 3.1.4.3.5 Attributes

None.

### 3.1.4.3.6 Groups

None.

### 3.1.4.3.7 Attribute Groups

None.

### 3.1.4.4 GetActivatedFeatures

This operation [<11>](#) obtains a list of activated features on the site (2) and on the parent site collection. This operation is defined as follows:

```
<wsdl:operation name="GetActivatedFeatures">
  <wsdl:input message="tns:GetActivatedFeaturesSoapIn" />
  <wsdl:output message="tns:GetActivatedFeaturesSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetActivatedFeaturesSoapIn** request message, and the protocol server responds with a **GetActivatedFeaturesSoapOut** response message, as follows:

The **GetActivatedFeaturesSoapOut** message MUST contain a single **GetActivatedFeaturesResponse** element. The **GetActivatedFeaturesResponse** element MUST contain a single string, formatted as a comma-delimited list of **GUIDs**, each identifying an activated feature on the site (2) or in the site collection.

The following code example shows a SOAP response:

```
<GetActivatedFeaturesResponse
  xmlns="http://schemas.microsoft.com/sharepoint/soap/">
  <GetActivatedFeaturesResult>
    00bfea71-c796-4402-9f2f-0eb9a6e71b18,
    29d85c25-170c-4df9-a641-12db0b9d4130,
    00bfea71-5932-4f9c-ad71-1557e5751100,
    94c94ca6-b32f-4da9-a9e3-1f3d343d7ecb,
  </GetActivatedFeaturesResult>
</GetActivatedFeaturesResponse>
```

The value of **GetActivatedFeaturesResult** MUST be a comma-delimited list of GUIDs of features activated on the site (2), followed by a comma-delimited list of GUIDs of features activated on the parent site collection.

### 3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetActivatedFeaturesSoapIn</b>	The request for a list of all features that are activated on the site (2) and its parent site collection.
<b>GetActivatedFeaturesSoapOut</b>	The response to a request for a list of features on the site (2) or in its parent site collection.

#### 3.1.4.4.1.1 GetActivatedFeaturesSoapIn

This message requests the list of all features that are activated on the site (2) and its parent site collection.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetActivatedFeatures
```

The SOAP body contains a **GetActivatedFeatures** element.

#### 3.1.4.4.1.2 GetActivatedFeaturesSoapOut

This message is the response to a request for a list of features on the site (2) or in its parent site collection. It consists of a string consisting of a comma-delimited list of GUIDs, where each GUID identifies a feature activated in the site (2) or the site collection.

The SOAP body contains a **GetActivatedFeaturesResponse** element.

### 3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetActivatedFeatures</b>	The request for a list of all features that are activated on the site (2) and its parent site collection.
<b>GetActivatedFeaturesResponse</b>	Contains the response to a request for a list of features on the site (2) or in its parent site collection.

#### 3.1.4.4.2.1 GetActivatedFeatures

The SOAP body contains a **GetActivatedFeatures** element, which has the following definition:

```
<s:element name="GetActivatedFeatures">  
  <s:complexType/>  
</s:element>
```

### 3.1.4.4.2 GetActivatedFeaturesResponse

The SOAP body contains a **GetActivatedFeaturesResponse** element, which has the following definition:

```
<s:element name="GetActivatedFeaturesResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetActivatedFeaturesResult" type="s:string" minOccurs="1"
maxOccurs="1" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetActivatedFeaturesResult:** A comma-delimited list of GUIDs, where each GUID is formatted as a **UniqueIdentifierWithoutBraces** as specified in [\[MS-WSSCAML\]](#) section 2.1.15. The list **MUST** include one GUID identifying every feature activated on the site (2), a tab character followed by one GUID identifying every feature activated in the site collection.

If the protocol client sends the **GetActivatedFeaturesSoapIn** request message to a protocol server URL that does not correspond to a site, the protocol server **MUST** return a SOAP fault.

### 3.1.4.4.3 Complex Types

None.

### 3.1.4.4.4 Simple Types

None.

### 3.1.4.4.5 Attributes

None.

### 3.1.4.4.6 Groups

None.

### 3.1.4.4.7 Attribute Groups

None.

### 3.1.4.5 GetAllSubWebCollection

This operation obtains a list of titles and URLs of all sites (2) in the site collection. A site collection consists of a top-level site and includes every site that falls under its hierarchy. This operation is defined as follows:

```
<wsdl:operation name="GetAllSubWebCollection">
  <wsdl:input message="tns:GetAllSubWebCollectionSoapIn" />
  <wsdl:output message="tns:GetAllSubWebCollectionSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetAllSubWebCollectionSoapIn** request message, and the protocol server responds with a **GetAllSubWebCollectionSoapOut** response message.

If the operation fails, the protocol server MUST return a SOAP exception.

### 3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetAllSubWebCollectionSoapIn</b>	A request for the titles and URLs of all sites (2) in the current site collection.
<b>GetAllSubWebCollectionSoapOut</b>	The response to a request for the title and URL of all sites (2) in the site collection.

#### 3.1.4.5.1.1 GetAllSubWebCollectionSoapIn

This message requests the titles and URLs of all sites in the current site collection.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetAllSubWebCollection
```

The SOAP body contains a **GetAllSubWebCollection** element.

#### 3.1.4.5.1.2 GetAllSubWebCollectionSoapOut

This message returns the title and URL of all sites (2) in the site collection.

The SOAP body contains a **GetAllSubWebCollectionResponse** element.

### 3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetAllSubWebCollection</b>	A request for the titles and URLs of all sites (2) in the current site collection.
<b>GetAllSubWebCollectionResponse</b>	Contains the response to a request for the title and URL of all sites (2) in the site collection.

#### 3.1.4.5.2.1 GetAllSubWebCollection

The SOAP body contains a **GetAllSubWebCollection** element, which has the following definition:

```
<s:element name="GetAllSubWebCollection">  
  <s:complexType/>
```

```
</s:element>
```

### 3.1.4.5.2.2 GetAllSubWebCollectionResponse

The SOAP body contains a **GetAllSubWebCollectionResponse** element, which has the following definition:

```
<s:element name="GetAllSubWebCollectionResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetAllSubWebCollectionResult" minOccurs="1" maxOccurs="1" >
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="Webs">
              <s:complexType>
                <s:sequence>
                  <s:element name="Web" type="tns:WebDefinition" minOccurs="1"
maxOccurs="unbounded" />
                </s:sequence>
              </s:complexType>
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetAllSubWebCollectionResult:** Contains a single **Webs** element.

**Webs:** This element contains one or more **Web** elements.

**Web:** This element is of type **WebDefinition**, as specified in section [2.2.4.2](#). Each **Web** element provides the title and URL of one site (2).

Example:

```
<GetAllSubWebCollectionResult>
  <Webs>
    <Web Title="Home" Url="http://www.example.com" />
    <Web Title="Document Center" Url="http://www.example.com/Docs" />
    <Web Title="News" Url="http://www.example.com/News" />
    <Web Title="Search" Url="http://www.example.com/SearchCenter" />
    <Web Title="Sites" Url="http://www.example.com/SiteDirectory" />
    <Web Title="Stock Market" Url="http://www.example.com/SiteDirectory/Stocks" />
  </Webs>
</GetAllSubWebCollectionResult>
```

The **GetAllSubWebCollectionResult** element MUST contain one child **Webs** element, which MUST contain a sequence of one or more child **Web** elements, one for each site in the current site collection. Each **Web** element MUST specify the title and URL of one site in the collection.

### 3.1.4.5.3 Complex Types

None.



#### 3.1.4.5.4 Simple Types

None.

#### 3.1.4.5.5 Attributes

None.

#### 3.1.4.5.6 Groups

None.

#### 3.1.4.5.7 Attribute Groups

None.

#### 3.1.4.6 GetColumns

This operation [<12>](#) obtains the collection of column definitions for all the columns available on the context site. Each column in the collection is defined as a **field definition** element. This operation is defined as follows:

```
<wsdl:operation name="GetColumns">
  <wsdl:input message="tns:GetColumnsSoapIn" />
  <wsdl:output message="tns:GetColumnsSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetColumnsSoapIn** request message, and the protocol server responds with a **GetColumnsSoapOut** response message, as follows:

1. If the operation succeeds, the protocol server MUST return the collection of column definitions for all the columns available on the context site.
2. If the operation fails, the protocol server MUST return a SOAP exception.
3. A SOAP fault MUST be returned when a **GetColumns** operation is performed on a context site that has invalid column attribute information. Invalid column attribute information could result from a request for **UpdateColumns** made to update a column with no defined type XML attribute.

##### 3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetColumnsSoapIn</b>	The request to obtain the collection of column definitions for all the columns available on the context site.
<b>GetColumnsSoapOut</b>	The response to the request to obtain the collection of column definitions for all columns available on the context site.

### 3.1.4.6.1.1 GetColumnsSoapIn

This message is the request to obtain the collection of column definitions for all the columns available on the context site.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetColumns
```

The SOAP body contains a **GetColumns** element.

### 3.1.4.6.1.2 GetColumnsSoapOut

This message is the response to obtaining the collection of column definitions for all columns available on the context site.

The SOAP body contains a **GetColumnsResponse** element.

### 3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetColumns</b>	The request to obtain the collection of column definitions for all the columns available on the context site.
<b>GetColumnsResponse</b>	Contains the response to the request to obtain the collection of column definitions for all columns available on the context site.

#### 3.1.4.6.2.1 GetColumns

The SOAP body contains a **GetColumns** XML element, which has the following definition:

```
<s:element name="GetColumns">  
  <s:complexType/>  
</s:element>
```

#### 3.1.4.6.2.2 GetColumnsResponse

The SOAP body contains a **GetColumnsResponse** XML element, which has the following definition:

```
<s:element name="GetColumnsResponse">  
  <s:complexType>  
    <s:sequence>  
      <s:element name="GetColumnsResult" minOccurs="1">  
        <s:complexType>  
          <s:sequence>  
            <s:element name="Fields">  
              <s:complexType>  
                <s:sequence>  
                  <s:element name="Field" minOccurs="0" maxOccurs="unbounded"  
                    type="core:FieldDefinition"/>  
                </s:sequence>  
              </s:complexType>  
            </s:element>  
          </s:sequence>  
        </s:complexType>  
      </s:element>  
    </s:sequence>  
  </s:complexType>  
</s:element>
```

```

        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

```

**GetColumnsResult:** An XML element that contains a **Fields** element.

**Fields:** An XML element that contains a collection of **Field** elements.

**Field:** This element represents a column. The whole collection of **Field** elements included by the **Fields** element represents all columns available on the context site. The type is specified in [\[MS-WSSFO3\]](#) section 2.2.7.3.3.

### 3.1.4.6.3 Complex Types

None.

### 3.1.4.6.4 Simple Types

None.

### 3.1.4.6.5 Attributes

None.

### 3.1.4.6.6 Groups

None.

### 3.1.4.6.7 Attribute Groups

None.

### 3.1.4.7 GetContentType

This operation [<13>](#) obtains content type data for a specified content type identifier. This operation is defined as follows:

```

<wsdl:operation name="GetContentType">
  <wsdl:input message="tns:GetContentTypeSoapIn" />
  <wsdl:output message="tns:GetContentTypeSoapOut" />
</wsdl:operation>

```

The protocol client sends a **GetContentTypeSoapIn** request message, and the protocol server responds with a **GetContentTypeSoapOut** response message, as follows:

1. If **contentTypeId** is null or empty, the protocol server MUST return a SOAP exception.

2. If **contentTypeId** does not match the content type identifier of a content type on the site (2), the protocol server **MUST** return a SOAP exception.

### 3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetContentTypeSoapIn</b>	The request for a specified content type.
<b>GetContentTypeSoapOut</b>	The response to a request for a specified content type.

#### 3.1.4.7.1.1 GetContentTypeSoapIn

This **SOAP message** requests content type data.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetContentType
```

The SOAP body contains a **GetContentType** element.

#### 3.1.4.7.1.2 GetContentTypeSoapOut

This SOAP message returns content type data.

The SOAP body contains a **GetContentTypeResponse** element.

### 3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetContentType</b>	The request for a specified content type.
<b>GetContentTypeResponse</b>	Contains the response to a request for a specified content type.

#### 3.1.4.7.2.1 GetContentType

This element is the request for a specified content type. This element is defined as follows:

```
<s:element name="GetContentType">  
  <s:complexType>  
    <s:sequence>  
      <s:element name="contentTypeId" type="core:ContentTypeId" minOccurs="1"/>  
    </s:sequence>  
  </s:complexType>  
</s:element>
```

**contentTypeid:** The identifier of the content type to be returned.

### 3.1.4.7.2.2 GetContentTypeResponse

This element is the response containing the content type data. This element is defined as follows:

```
<s:element name="GetContentTypeResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetContentTypeResult" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="ContentType" minOccurs="1" maxOccurs="1">
              <s:complexType>
                <s:sequence>
                  <s:element name="Folder" minOccurs="0" maxOccurs="1">
                    <s:complexType>
                      <s:sequence />
                      <s:attribute name="TargetName" type="s:string" use="required" />
                    </s:complexType>
                  </s:element>
                  <s:element name="Fields" type="core:FieldDefinitions" minOccurs="1"
maxOccurs="1" >
                    <s:complexType>
                      <s:sequence>
                        <s:element name="Field" minOccurs="0" maxOccurs="unbounded"
type="core:FieldDefinition"/>
                      </s:sequence>
                    </s:complexType>
                  </s:element>
                  <s:element name="DocumentTemplate" minOccurs="0" maxOccurs="1">
                    <s:complexType>
                      <s:sequence />
                      <s:attribute name="TargetName" type="s:string" use="required" />
                    </s:complexType>
                  </s:element>
                  <s:element name="XmlDocuments" type="core:XmlDocumentDefinitionCollection"
minOccurs="0" maxOccurs="1" >
                    <s:complexType>
                      <s:sequence>
                        <s:element name="XmlDocument" minOccurs="0" maxOccurs="unbounded"
type="core:XmlDocumentDefinition"/>
                      </s:sequence>
                    </s:complexType>
                  </s:element>
                </s:sequence>
                <s:attribute name="ID" type="core:ContentTypeId" use="required" />
                <s:attribute name="Name" type="s:string" use="optional" />
                <s:attribute name="Group" type="s:string" use="optional" />
                <s:attribute name="Description" type="s:string" use="optional" />
                <s:attribute name="Hidden" type="TRUEONLY" use="optional" />
                <s:attribute name="NewDocumentControl" type="s:string" use="optional" />
                <s:attribute name="RequireClientRenderingOnNew" type="FALSEONLY" use="optional"
/>
                <s:attribute name="Sealed" type="TRUEONLY" use="optional" />
                <s:attribute name="ReadOnly" type="TRUEONLY" use="optional" />
                <s:attribute name="Locs" type="ONEONLY" use="optional" />
                <s:attribute name="FeatureId" type="s:string" use="optional" />
                <s:attribute name="TargetName" type="s:string" use="optional" />
              </s:sequence>
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

```

        <s:attribute name="Version" type="s:int" use="required" />
    </s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

```

**GetContentTypeResult:** Container node for the content type returned.

**GetContentTypeResult.ContentType:** Content type data requested.

**GetContentTypeResult.ContentType.Folder:** Resource folder to be used by this content type.

**GetContentTypeResult.ContentType.Folder.TargetName:** Name of the resource folder associated with this content type. It MUST be a URL relative to the URL of the site (2) on which the content type is located, and it MUST be under the "\_cts" root directory. It MUST be less than three levels deep with respect to the URL of the site (2) on which the content type is located. For example, "siteA/\_cts/FolderA" is acceptable but "siteA/\_cts/FolderA/FolderB" is not.

**GetContentTypeResult.ContentType.Fields:** Contains references to fields associated with this content type.

**GetContentTypeResult.ContentType.DocumentTemplate:** Specifies the content type **document template (2)**.

**GetContentTypeResult.ContentType.DocumentTemplate.TargetName:** Name of the document template (2) file associated with the content type. It MUST be a site-relative URL.

**GetContentTypeResult.ContentType.XmlDocuments:** Collection of **XML documents** [MS-WSSCAML] section 2.4.11 associated with this content type, which can include forms and **event receiver** manifests.

**GetContentTypeResult.ContentType.XmlDocuments.XmlDocument:** Collection of XML documents associated with this content type, which can include forms and event receiver manifests.

**GetContentTypeResult.ContentType.ID:** Content type identifier for this content type.

**GetContentTypeResult.ContentType.Name:** Name of the content type.

**GetContentTypeResult.ContentType.Group:** Name of the **content type group** that contains this content type.

**GetContentTypeResult.ContentType.Description:** Description of the content type.

**GetContentTypeResult.ContentType.Hidden:** Specifies whether the content type appears in the user interface.

**GetContentTypeResult.ContentType.NewDocumentControl:** The identifier of the **ActiveX object** used to create the new item. Used to assign this value.

**GetContentTypeResult.ContentType.RequireClientRenderingOnNew:** Specifies whether the browser uses the ActiveX object to create a new item.

**GetContentTypeResult.ContentType.Sealed:** Specifies whether another content type can inherit from the current content type.

**GetContentTypeResult.ContentType.ReadOnly:** Specifies whether the content type can be edited.

**GetContentTypeResult.ContentType.Locs:** If the content type has localizations, 1 is returned. Otherwise, nothing is returned.

**GetContentTypeResult.ContentType.FeatureId:** This value MUST be returned only if the content type requested has the **FeatureId** attribute set to a non-empty **GUID**. If the attribute is not an empty GUID, **FeatureId** MUST be the value of that non-empty GUID. Specifies the feature with which this content type is associated.

**GetContentTypeResult.ContentType.Version:** Specifies the current version of the content type. The protocol server MUST increment the value each time the content type definition is edited. The protocol client MUST ignore this attribute.

### 3.1.4.7.3 Complex Types

None.

### 3.1.4.7.4 Simple Types

None.

### 3.1.4.7.5 Attributes

None.

### 3.1.4.7.6 Groups

None.

### 3.1.4.7.7 Attribute Groups

None.

### 3.1.4.8 GetContentTypes

This operation [14](#) retrieves all content types for a specified context site. This operation is defined as follows:

```
<wsdl:operation name="GetContentTypes">
  <wsdl:input message="tns:GetContentTypesSoapIn" />
  <wsdl:output message="tns:GetContentTypesSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetContentTypesSoapIn** request message, and the protocol server responds with a **GetContentTypesSoapOut** response message.

### 3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetContentTypesSoapIn</b>	The request for all content types on a site (2).
<b>GetContentTypesSoapOut</b>	The response to a request for all content types on a site (2).

#### 3.1.4.8.1.1 GetContentTypesSoapIn

This SOAP message requests all content types on a site (2).

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetContentTypes
```

The SOAP body contains a **GetContentTypes** element.

#### 3.1.4.8.1.2 GetContentTypesSoapOut

This SOAP message returns all content types on a site (2).

The SOAP body contains a **GetContentTypesResponse** element.

### 3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetContentTypes</b>	A request for all content types on a site (2).
<b>GetContentTypesResponse</b>	Contains the response containing all content types on a site (2).

#### 3.1.4.8.2.1 GetContentTypes

This element is a request for all content types on a site (2). This element is defined as follows:

```
<s:element name="GetContentTypes">  
  <s:complexType/>  
</s:element>
```

#### 3.1.4.8.2.2 GetContentTypesResponse

This element is a response containing all content types on a site (2). This element is defined as follows:

```
<s:element name="GetContentTypesResponse">  
  <s:complexType/>  
</s:element>
```



```

<s:sequence>
  <s:element name="GetContentTypesResult" minOccurs="0">
    <s:complexType>
      <s:sequence>
        <s:element name="ContentTypes" minOccurs="1" maxOccurs="1">
          <s:complexType>
            <s:sequence>
              <s:element name="ContentType" minOccurs="0" maxOccurs="unbounded">
                <s:complexType>
                  <s:sequence />
                  <s:attribute name="Name" type="s:string" use="required" />
                  <s:attribute name="ID" type="core:ContentTypeId" use="required" />
                  <s:attribute name="Description" type="s:string" use="required" />
                  <s:attribute name="Group" type="s:string" use="required" />
                  <s:attribute name="NewDocumentControl" type="s:string" use="required" />
                  <s:attribute name="Scope" type="s:string" use="required" />
                  <s:attribute name="Version" type="s:int" use="required" />
                  <s:attribute name="RequireClientRenderingOnNew" type="core:TRUEFALSE"
use="required" />
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>
</s:sequence>

```

**GetContentTypesResult:** Container element for the rest of the results.

**GetContentTypesResult.ContentTypes:** Container for each block of content type data.

**GetContentTypesResult.ContentTypes.ContentType:** Instance of content type data.

**GetContentTypesResult.ContentTypes.ContentType.Name:** Name of the content type.

**GetContentTypesResult.ContentTypes.ContentType.ID:** Content type identifier for this content type.

**GetContentTypesResult.ContentTypes.ContentType.Description:** Description of the content type.

**GetContentTypesResult.ContentTypes.ContentType.Group:** Name of the content type group that contains this content type.

**GetContentTypesResult.ContentTypes.ContentType.NewDocumentControl:** Identifier of the ActiveX object used to create the new item. Used to assign this value.

**GetContentTypesResult.ContentTypes.ContentType.Scope:** Fully qualified URL of the content type scope.

**GetContentTypesResult.ContentTypes.ContentType.Version:** Specifies the current version of the content type. The protocol server MUST increment the value each time the content type definition is edited. The protocol client MUST ignore this attribute.

### **GetContentTypesResult.ContentTypes.ContentType.RequireClientRenderingOnNew:**

Specifies whether the browser uses the ActiveX object to create a new item.

#### **3.1.4.8.3 Complex Types**

None.

#### **3.1.4.8.4 Simple Types**

None.

#### **3.1.4.8.5 Attributes**

None.

#### **3.1.4.8.6 Groups**

None.

#### **3.1.4.8.7 Attribute Groups**

None.

#### **3.1.4.9 GetCustomizedPageStatus**

This operation [<15>](#) obtains the customization status (also known as the uncustomized status) of the specified page or **file**. This operation is defined as follows:

```
<wsdl:operation name="GetCustomizedPageStatus">
  <wsdl:input message="tns:GetCustomizedPageStatusSoapIn" />
  <wsdl:output message="tns:GetCustomizedPageStatusSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetCustomizedPageStatusSoapIn** request message to obtain the customization status of the specified page or file. The protocol server responds by sending a **GetCustomizedPageStatusSoapOut** response message. The response specifies customization status of the page or file identified by the **fileUrl**, where the customization status MUST be one of the following:

- None
- Customized
- Uncustomized

The protocol server portion of the HTTP POST address MUST be the address of a site (2). For example, a valid POST address might be "http://www.example.com/SiteDirectory".

The **fileUrl** MUST specify a page or a file on the context site. The **fileUrl** MUST be relative to the POST address. For example, a valid **fileUrl** might be "Pages/category.aspx".

This operation returns a customization status value that specifies whether the **fileUrl** represents a customized page, an uncustomized page, or a file containing static content.

A customized page is a page that the protocol server generates dynamically by some combination of database query and code execution. An uncustomized page is a previously generated page to which the protocol server can refer. A file containing static content is a file, such as an individual text file or a static HTML page that contains no code and requires no access to the **content database** to be rendered.

The table in CustomizedPageStatus (section [3.1.4.9.4.1](#)) specifies the meaning of each customization status value.

### 3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetCustomizedPageStatusSoapIn</b>	The request for the customization status of the specified page or file.
<b>GetCustomizedPageStatusSoapOut</b>	The response to a request for the customization status of the specified page or file.

#### 3.1.4.9.1.1 GetCustomizedPageStatusSoapIn

This is the request message to obtain the customization status of the specified page or file.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetCustomizedPageStatus
```

The SOAP body contains a **GetCustomizedPageStatus** element.

#### 3.1.4.9.1.2 GetCustomizedPageStatusSoapOut

This is the response message containing the customization status of the specified page or file.

The SOAP body contains a **GetCustomizedPageStatusResponse** element.

### 3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetCustomizedPageStatus</b>	The request for the customization status of the specified page or file.
<b>GetCustomizedPageStatusResponse</b>	Contains the response to a request for the customization status of the specified page or file.

#### 3.1.4.9.2.1 GetCustomizedPageStatus

The definition of the **GetCustomizedPageStatus** element is as follows:

```

<s:element name="GetCustomizedPageStatus">
  <s:complexType>
    <s:sequence>
      <s:element name="fileUrl" type="s:string" minOccurs="1" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>

```

**fileUrl:** The URL of a page or file on the protocol server.

### 3.1.4.9.2.2 GetCustomizedPageStatusResponse

The definition of the **GetCustomizedPageStatusResponse** element is as follows:

```

<s:element name="GetCustomizedPageStatusResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetCustomizedPageStatusResult" type="tns:CustomizedPageStatus"/>
    </s:sequence>
  </s:complexType>
</s:element>

```

**GetCustomizedPageStatusResult:** A single element of type only as defined in **CustomizedPageStatus** (section [3.1.4.9.4.1](#)).

If the protocol server encounters the following error condition while running this operation, a SOAP fault with the error code 0x80070002 SHOULD be returned as follows:

- Occurs when relative to the protocol server address, the value of **fileUrl** does not specify a valid page or file.

An example of this error condition is as follows:

1. The protocol server has the following URL address: "http://www.example.com".
2. A valid page has the following full URL: "http://www.example.com/Pages/default.aspx".
3. The protocol client sends a **GetCustomizedPageStatusSoapIn** request message to obtain the protocol server, but erroneously specifies **fileUrl** as "default.aspx", whereas the correct **fileUrl** value would be "Pages/default.aspx".
4. Because the **fileUrl** relative to the protocol server URL does not specify a valid page, the protocol server returns the SOAP fault specified previously.

### 3.1.4.9.3 Complex Types

None.

### 3.1.4.9.4 Simple Types

The following table summarizes the XML schema simple type definitions that are specific to this operation.

Simple type	Description
<b>CustomizedPageStatus</b>	An enumeration of possible statuses related to the customization of a page.

### 3.1.4.9.4.1 CustomizedPageStatus

The **CustomizedPageStatus** type is an enumeration of three possible values defined as follows:

```
<s:simpleType name="CustomizedPageStatus">
  <s:restriction base="s:string">
    <s:enumeration value="None"/>
    <s:enumeration value="Uncustomized"/>
    <s:enumeration value="Customized"/>
  </s:restriction>
</s:simpleType>
```

The following table defines the meaning of each enumeration value.

Value	Meaning
Customized	The page specified by <b>fileUrl</b> was customized on this site (2). The protocol server has stored the contents of this page in the content database. To render the page, the protocol server queries the content database and runs any code on the page.
Uncustomized	The page specified by <b>fileUrl</b> is not customized on this site (2). To render the page, the protocol server MUST NOT run any code: it merely looks up a reference to the previously generated page and returns that data. In some documentation, this state is referred to as uncustomized to indicate that the protocol server renders the page directly from a file, rather than querying the content database and running code to generate the page.
None	The specified <b>fileUrl</b> represents a piece of static content, such as an individual text file or a static HTML file. To render the file, the protocol server can simply return the contents of the file to the caller. The protocol server MUST NOT run any code or query a database. Because static content, by definition, is not generated, the file cannot be considered either customized or uncustomized according to these definitions.

### 3.1.4.9.5 Attributes

None.

### 3.1.4.9.6 Groups

None.

### 3.1.4.9.7 Attribute Groups

None.

### 3.1.4.10 GetListTemplates

This operation obtains the collection of list template definitions for the context site. This operation is defined as follows:

```
<wsdl:operation name="GetListTemplates">
  <wsdl:input message="tns:GetListTemplatesSoapIn" />
```

```
<wsdl:output message="tns:GetListTemplatesSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetListTemplatesSoapIn** request message, and the protocol server responds with a **GetListTemplatesSoapOut** response message.

### 3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetListTemplateSoapIn</b>	The request for the collection of list template definitions for the context site.
<b>GetListTemplateSoapOut</b>	The response containing the collection of list template definitions for the context site.

#### 3.1.4.10.1.1 GetListTemplatesSoapIn

This message is the request message to obtain the collection of list template definitions for the context site.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/GetListTemplates
```

The SOAP body contains a **GetListTemplates** element.

#### 3.1.4.10.1.2 GetListTemplatesSoapOut

This is the response message containing the collection of list template definitions for the context site.

The SOAP body contains a **GetListTemplatesResponse** element as specified in section [3.1.4.10.2.2](#).

### 3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetListTemplates</b>	The request for the collection of list template definitions for the context site.
<b>GetListTemplatesResponse</b>	Contains the response to the request for the collection of list template definitions for the context site.

#### 3.1.4.10.2.1 GetListTemplates

The SOAP body contains a **GetListTemplates** element, which has the following definition:

```
<s:element name="GetListTemplates">
  <s:complexType/>
</s:element>
```

### 3.1.4.10.2 GetListTemplatesResponse

The SOAP body contains a **GetListTemplatesResponse** element, which has the following definition:

```
<s:element name="GetListTemplatesResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetListTemplatesResult" minOccurs="1">
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="ListTemplates" type="core:ListTemplateDefinitions" minOccurs="1"
          >
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetListTemplatesResult:** Contains a **ListTemplates** element.

**ListTemplates:** An element of type **ListTemplateDefinitions** as specified in [\[MS-WSSCAML\]](#) section 2.3.2.12.

### 3.1.4.10.3 Complex Types

None.

### 3.1.4.10.4 Simple Types

None.

### 3.1.4.10.5 Attributes

None.

### 3.1.4.10.6 Groups

None.

### 3.1.4.10.7 Attribute Groups

None.

### 3.1.4.11 GetObjectIdFromUrl

This operation obtains properties of the object referenced by the specified URL. [<16>](#) This operation is defined as follows:

```

<wsdl:operation name="GetObjectIdFromUrl">
  <wsdl:input message="tns:GetObjectIdFromUrlSoapIn" />
  <wsdl:output message="tns:GetObjectIdFromUrlSoapOut" />
</wsdl:operation>

```

The protocol client sends a **GetObjectIdFromUrlSoapIn** request message, and the protocol server responds with a **GetObjectIdFromUrlSoapOut** response message as follows:

1. If the specified URL corresponds to an object on the site (2), use that object.
2. Otherwise, the protocol server MUST return a SOAP exception.

### 3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetObjectIdFromUrlSoapIn</b>	The request for information about the object referenced by the specified URL.
<b>GetObjectIdFromUrlSoapOut</b>	The response to the request for information about the object referenced by the specified URL.

#### 3.1.4.11.1.1 GetObjectIdFromUrlSoapIn

This is the request message to obtain information about the object referenced by the specified URL.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetObjectIdFromUrl
```

The SOAP body contains a **GetObjectIdFromUrl** element.

#### 3.1.4.11.1.2 GetObjectIdFromUrlSoapOut

This is the response message containing information about the object referenced by the specified URL.

The SOAP body contains a **GetObjectIdFromUrlResponse** element.

### 3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetObjectIdFromUrl</b>	The request for information about the object referenced by the specified URL.
<b>GetObjectIdFromUrlResponse</b>	Contains the response to the request for information about the object referenced by the specified URL.



### 3.1.4.11.2.1 GetObjectIdFromUrl

This element represents the input data of a **GetObjectIdFromUrl** operation. This element is defined as follows:

```
<s:element name="GetObjectIdFromUrl">
  <s:complexType>
    <s:sequence>
      <s:element name="objectUrl" type="s:string" minOccurs="1" maxOccurs="1" />
    </s:sequence>
  </s:complexType>
</s:element>
```

**objectUrl:** The URL of the object from which to retrieve information.

### 3.1.4.11.2.2 GetObjectIdFromUrlResponse

This element represents the result data of a **GetObjectIdFromUrl** operation. This element is defined as follows:

```
<s:element name="GetObjectIdFromUrlResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetObjectIdFromUrlResult" minOccurs="1" maxOccurs="1">
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="ObjectId" minOccurs="1" maxOccurs="1">
              <s:complexType>
                <s:attribute name="ListId" type="core:UniqueIdentifierWithBracesOrEmpty" />
                <s:attribute name="ListServerTemplate">
                  <s:simpleType>
                    <s:restriction base="s:int">
                      <s:enumeration value="0"/>
                      <s:enumeration value="100"/>
                      <s:enumeration value="101"/>
                      <s:enumeration value="102"/>
                      <s:enumeration value="103"/>
                      <s:enumeration value="104"/>
                      <s:enumeration value="105"/>
                      <s:enumeration value="106"/>
                      <s:enumeration value="107"/>
                      <s:enumeration value="108"/>
                      <s:enumeration value="109"/>
                      <s:enumeration value="110"/>
                      <s:enumeration value="111"/>
                      <s:enumeration value="112"/>
                      <s:enumeration value="113"/>
                      <s:enumeration value="114"/>
                      <s:enumeration value="115"/>
                      <s:enumeration value="116"/>
                      <s:enumeration value="117"/>
                      <s:enumeration value="118"/>
                      <s:enumeration value="119"/>
                      <s:enumeration value="120"/>
                      <s:enumeration value="121"/>
                      <s:enumeration value="122"/>
                      <s:enumeration value="123"/>
                    </s:restriction>
                  </s:simpleType>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>
```

```

        <s:enumeration value="130"/>
        <s:enumeration value="140"/>
        <s:enumeration value="150"/>
        <s:enumeration value="200"/>
        <s:enumeration value="201"/>
        <s:enumeration value="202"/>
        <s:enumeration value="204"/>
        <s:enumeration value="207"/>
        <s:enumeration value="210"/>
        <s:enumeration value="211"/>
        <s:enumeration value="212"/>
        <s:enumeration value="301"/>
        <s:enumeration value="302"/>
        <s:enumeration value="303"/>
        <s:enumeration value="402"/>
        <s:enumeration value="403"/>
        <s:enumeration value="404"/>
        <s:enumeration value="405"/>
        <s:enumeration value="420"/>
        <s:enumeration value="421"/>
        <s:enumeration value="499"/>
        <s:enumeration value="851"/>
        <s:enumeration value="1100"/>
        <s:enumeration value="1200"/>
        <s:enumeration value="1220"/>
        <s:enumeration value="1221"/>
    </s:restriction>
</s:simpleType>
</s:attribute>
<s:attribute name="ListBaseType">
    <s:simpleType>
        <s:restriction base="s:int">
            <s:enumeration value="0"/>
            <s:enumeration value="1"/>
            <s:enumeration value="2"/>
            <s:enumeration value="3"/>
            <s:enumeration value="4"/>
            <s:enumeration value="5"/>
        </s:restriction>
    </s:simpleType>
</s:attribute>
<s:attribute name="ListItem" type="core:TRUEFALSE" />
<s:attribute name="ListItemId" type="s:string" />
<s:attribute name="File" type="core:TRUEFALSE" />
<s:attribute name="Folder" type="core:TRUEFALSE" />
<s:attribute name="AlternateUrls" type="s:string" />
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

```

**GetObjectFromUrlResult:** If no error conditions as specified earlier cause the protocol server to return a SOAP exception, a **GetObjectFromUrlResult** MUST be returned.

**ObjectId:** The container element for the object properties.

**ObjectId.ListId:** If the object is a list (1) or listItem, the value of the attribute MUST be the **list identifier**. Otherwise, the value of this attribute MUST be an empty string.

**ObjectId.ListServerTemplate:** If the object is a list or listItem, the value of the attribute MUST be one of the list template types as specified in [\[MS-WSSFO2\]](#) section 2.2.3.12. Otherwise, the attribute MUST NOT be present.

**ObjectId.ListBaseType:** If the object is a list or listItem, the value of the attribute MUST be one of the List Base Types as specified in [\[MS-WSSFO2\]](#) section 2.2.3.11. Otherwise, the attribute MUST NOT be present.

**ObjectId.ListItem:** Specifies whether the object is a **list item**.

**ObjectId.ListItemId:** If the object is a list item, the value of the attribute MUST be the identifier of the list item. Otherwise, the attribute MUST NOT be present.

**ObjectId.File:** Specifies whether the object is a file.

**ObjectId.Folder:** Specifies whether the object is a **folder**.

**ObjectId. AlternateUrls:** Alternate URLs are a comma delimited list of other possible URLs for the object. They SHOULD be listed in the following zone order: **Intranet, Default, Extranet, Internet, Custom**.

### 3.1.4.11.3 Complex Types

None.

### 3.1.4.11.4 Simple Types

None.

### 3.1.4.11.5 Attributes

None.

### 3.1.4.11.6 Groups

None.

### 3.1.4.11.7 Attribute Groups

None.

### 3.1.4.12 GetWeb

This operation obtains the title, URL, description, language, and theme properties of the specified site. This operation is defined as follows:

```
<wsdl:operation name="GetWeb">
  <wsdl:input message="tns:GetWebSoapIn" />
  <wsdl:output message="tns:GetWebSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetWebSoapIn** request message, and the protocol server responds with a **GetWebSoapOut** response message, as follows:

1. A valid URL of the site SHOULD be specified in the request message.
2. If the operation succeeds, the protocol server MUST return the title, URL, description, language, and theme properties of the specified site. The **Language** property MUST include an LCID value.
3. If there is any problem in performing the operation, the protocol server MUST return the appropriate error code and error string. Errors specific to this operation are defined with **GetWebSoapOut** message.

### 3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetWebSoapIn</b>	The request for the title, URL, description, language, and theme of the specified site (2).
<b>GetWebSoapOut</b>	The response to the request for the title, URL, description, language, and theme of the specified site (2).

#### 3.1.4.12.1.1 GetWebSoapIn

This message is the request to obtain the title, URL, description, language, and theme of the specified site (2).

The SOAP action value of the message is defined as follows:

`http://schemas.microsoft.com/sharepoint/soap/GetWeb`

The SOAP body contains a **GetWeb** element.

#### 3.1.4.12.1.2 GetWebSoapOut

This message is the response containing the title, URL, description, language, and theme of the specified site (2).

The SOAP body contains a **GetWebResponse** element.

### 3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetWeb</b>	The request for the title, URL, description, language, and theme of the specified site (2).
<b>GetWebResponse</b>	Contains the response to the request for the title, URL, description, language, and theme of the specified site (2).

### 3.1.4.12.2.1 GetWeb

The SOAP body contains a **GetWeb** element, which has the following definition:

```
<s:element name="GetWeb">
  <s:complexType>
    <s:sequence>
      <s:element name="webUrl" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**webUrl:** A string that contains the absolute URL of the site (2). To return information about the context site, a period (.) or an empty string ("") can also be passed for this parameter.

### 3.1.4.12.2.2 GetWebResponse

The SOAP body contains a **GetWebResponse** element, which has the following definition:

```
<s:element name="GetWebResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetWebResult" minOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:element name="Web" type="tns:WebDefinition"/>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**GetWebResult:** An XML element that contains a **Web** element.

**Web:** The structure of this element is defined in **WebDefinition** (section [2.2.4.2](#)).

In case the protocol server encounters the following error condition when running this operation, a SOAP fault with the error code 0x82000001 SHOULD be returned:

- Occurs when an invalid URL is passed in or no **webUrl** element is supplied for the site.

### 3.1.4.12.3 Complex Types

None.

### 3.1.4.12.4 Simple Types

None.

### 3.1.4.12.5 Attributes

None.

### 3.1.4.12.6 Groups

None.

### 3.1.4.12.7 Attribute Groups

None.

### 3.1.4.13 GetWebCollection

This operation is used to get the **Title** and URL properties of all immediate child sites of the context site.

```
<wsdl:operation name="GetWebCollection">
  <wsdl:input message="tns:GetWebCollectionSoapIn" />
  <wsdl:output message="tns:GetWebCollectionSoapOut" />
</wsdl:operation>
```

The protocol client sends a **GetWebCollectionSoapIn** request message, and the protocol server responds with a **GetWebCollectionSoapOut** response message, as follows:

- If the operation succeeds, it MUST return the **Title** and **URL** properties of all immediate child sites of the context site.

There are no error(s) specific to this operation.

#### 3.1.4.13.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>GetWebCollectionSoapIn</b>	The request for the <b>Title</b> and URL properties of all immediate child sites of the context site.
<b>GetWebCollectionSoapOut</b>	The response to the request for the <b>Title</b> and <b>URL</b> properties of all immediate child sites of the context site.

##### 3.1.4.13.1.1 GetWebCollectionSoapIn

This message is the request to obtain the **Title** and URL properties of all immediate child sites of the context site.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/GetWebCollection
```

The SOAP body contains a **GetWebCollection** XML element.

##### 3.1.4.13.1.2 GetWebCollectionSoapOut

This message is the response containing the **Title** and URL properties of all immediate child sites of the context site.

The SOAP body contains a **GetWebCollectionResponse** XML element.

### 3.1.4.13.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>GetWebCollection</b>	The request for the <b>Title</b> and URL properties of all immediate child sites of the context site.
<b>GetWebCollectionResponse</b>	Contains the response to the request for the <b>Title</b> and <b>URL</b> properties of all immediate child sites of the context site.

#### 3.1.4.13.2.1 GetWebCollection

The SOAP body contains a **GetWebCollection** element, which has the following definition:

```
<s:element name="GetWebCollection">
  <s:complexType/>
</s:element>
```

#### 3.1.4.13.2.2 GetWebCollectionResponse

The SOAP body contains a **GetWebCollectionResponse** element, which has the following definition:

```
<s:element name="GetWebCollectionResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetWebCollectionResult" minOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:element name="Webs">
              <s:complexType>
                <s:sequence>
                  <s:element name="Web" type="tns:WebDefinition" minOccurs="0"
maxOccurs="unbounded">
                </s:element>
              </s:sequence>
            </s:complexType>
          </s:element>
        </s:sequence>
      </s:complexType>
    </s:element>
  </s:sequence>
</s:complexType>
```

**GetWebCollectionResult:** This element contains **Webs** element.

**Webs:** This element is a collection of **Web** elements.

**Web:** The structure of the **Web** element is defined by the **WebDefinition** complex type. The **Web** element contains only **Title** and URL attributes of **WebDefinition**. The collection of **Web** elements included in a **Webs** element contains all immediate child sites of the context site.

### 3.1.4.13.3 Complex Types

None.

### 3.1.4.13.4 Simple Types

None.

### 3.1.4.13.5 Attributes

None.

### 3.1.4.13.6 Groups

None.

### 3.1.4.13.7 Attribute Groups

None.

### 3.1.4.14 RemoveContentTypeXmlDocument

This operation [<17>](#) removes a document from the document collection of a site content type. This operation is defined as follows:

```
<wsdl:operation name="RemoveContentTypeXmlDocument">
  <wsdl:input message="tns:RemoveContentTypeXmlDocumentSoapIn" />
  <wsdl:output message="tns:RemoveContentTypeXmlDocumentSoapOut" />
</wsdl:operation>
```

The protocol client sends a **RemoveContentTypeXmlDocumentSoapIn** request message, and the protocol server responds with a **RemoveContentTypeXmlDocumentSoapOut** response message, as follows:

1. If the content type specified by the **contentTypeId** is not found, the protocol server MUST return a SOAP exception.
2. If an XML document in the requested content type has the namespace specified by the **documentUri**, it is removed from the document collection.
3. If no error is raised, the protocol server MUST return a success **RemoveContentTypeXmlDocumentResult**.

#### 3.1.4.14.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.



Message	Description
<b>RemoveContentTypeXmlDocumentSoapIn</b>	The request to remove a document from the document collection of a site content type.
<b>RemoveContentTypeXmlDocumentSoapOut</b>	The response to a request to remove a document from the document collection of a site content type.

### 3.1.4.14.1.1 RemoveContentTypeXmlDocumentSoapIn

The SOAP action value of this message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/RemoveContentTypeXmlDocument
```

The SOAP body contains a **RemoveContentTypeXmlDocument** element.

### 3.1.4.14.1.2 RemoveContentTypeXmlDocumentSoapOut

The SOAP body contains a **RemoveContentTypeXmlDocumentResponse** element.

### 3.1.4.14.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>RemoveContentTypeXmlDocument</b>	The request to remove an XML document from the document collection of a site content type.
<b>RemoveContentTypeXmlDocumentResponse</b>	Contains the response to a request to remove an XML document in the document collection of a site content type.

### 3.1.4.14.2.1 RemoveContentTypeXmlDocument

This is the request to remove an XML document from the document collection of a site content type. This element is defined as follows:

```
<s:element name="RemoveContentTypeXmlDocument">
  <s:complexType>
    <s:sequence>
      <s:element name="contentTypeid" type="core:ContentTypeId" minOccurs="1"/>
      <s:element name="documentUri" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**contentTypeid**: The content type identifier of the site content type to be modified.

**documentUri**: The namespace **URI** of the XML document of the site content type to be removed.

### 3.1.4.14.2.2 RemoveContentTypeXmlDocumentResponse

This is the response to removing an XML document in the document collection of a site content type. This element is defined as follows:

```
<s:element name="RemoveContentTypeXmlDocumentResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="RemoveContentTypeXmlDocumentResult" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="Success" minOccurs="1" maxOccurs="1">
              <s:complexType />
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**RemoveContentTypeXmlDocumentResult:** If the operation succeeds, a **RemoveContentTypeXmlDocumentResult** MUST be returned. If the operation fails, a SOAP exception MUST be returned.

### 3.1.4.14.3 Complex Types

None.

### 3.1.4.14.4 Simple Types

None.

### 3.1.4.14.5 Attributes

None.

### 3.1.4.14.6 Groups

None.

### 3.1.4.14.7 Attribute Groups

None.

### 3.1.4.15 RevertAllFileContentStreams

This operation [<18>](#) reverts all pages in the context site to their original state. This operation is defined as follows:

```
<wsdl:operation name="RevertAllFileContentStreams">
  <wsdl:input message="tns:RevertAllFileContentStreamsSoapIn" />
  <wsdl:output message="tns:RevertAllFileContentStreamsSoapOut" />
</wsdl:operation>
```

The protocol client sends a **RevertAllFileContentStreamsSoapIn** request message, and the protocol server responds with a **RevertAllFileContentStreamsSoapOut** response message, as follows:

- If the operation succeeds, the protocol server MUST return a **RevertAllFileContentStreamsResponse** element.

There are no error codes specific to this operation.

### 3.1.4.15.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>RevertAllFileContentStreamsSoapIn</b>	The request to revert all pages in the context site to their original state.
<b>RevertAllFileContentStreamsSoapOut</b>	The response to the request to revert all pages in the context site to their original state.

#### 3.1.4.15.1.1 RevertAllFileContentStreamsSoapIn

This message is the request to revert all pages in the context site to their original state.

The SOAP action value of the message is defined as follows:

`http://schemas.microsoft.com/sharepoint/soap/RevertAllFileContentStreams`

The SOAP body contains a **RevertAllFileContentStreams** XML element.

#### 3.1.4.15.1.2 RevertAllFileContentStreamsSoapOut

This message is the response to the request to revert all pages in the context site to their original state.

The SOAP body contains a **RevertAllFileContentStreamsResponse** element.

### 3.1.4.15.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>RevertAllFileContentStreams</b>	The request to revert all pages in the context site to their original state.
<b>RevertAllFileContentStreamsResponse</b>	Contains the response to the request to revert all pages in the context site to their original state.

### 3.1.4.15.2.1 RevertAllFileContentStreams

The SOAP body contains a **RevertAllFileContentStreams** element, which has the following definition:

```
<s:element name="RevertAllFileContentStreams">
  <s:complexType/>
</s:element>
```

### 3.1.4.15.2.2 RevertAllFileContentStreamsResponse

The SOAP body contains a **RevertAllFileContentStreamsResponse** element, which has the following definition:

```
<s:element name="RevertAllFileContentStreamsResponse">
  <s:complexType/>
</s:element>
```

### 3.1.4.15.3 Complex Types

None.

### 3.1.4.15.4 Simple Types

None.

### 3.1.4.15.5 Attributes

None.

### 3.1.4.15.6 Groups

None.

### 3.1.4.15.7 Attribute Groups

None.

### 3.1.4.16 RevertCss

This operation [<19>](#) reverts the customizations of the context site defined by the specified CSS file and returns those customizations to the default style. This operation is defined as follows:

```
<wsdl:operation name="RevertCss">
  <wsdl:input message="tns:RevertCssSoapIn" />
  <wsdl:output message="tns:RevertCssSoapOut" />
</wsdl:operation>
```

The protocol client sends a **RevertCssSoapIn** request message specifying the CSS file that defines the customized style and format elements to revert. The protocol server responds by changing the configuration of the site to use the default version of the specified CSS file.

### 3.1.4.16.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>RevertCssSoapIn</b>	The request to revert the customizations of the context site defined by the specified CSS file.
<b>RevertCssSoapOut</b>	The response to a request to revert the customizations of the context site defined by the specified CSS file.

#### 3.1.4.16.1.1 RevertCssSoapIn

This is the request message to revert the customizations of the context site defined by the specified CSS file.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/RevertCss
```

The SOAP body contains a **RevertCss** element.

#### 3.1.4.16.1.2 RevertCssSoapOut

This is the response message to reverting the customizations of the context site defined by the specified CSS file.

The SOAP body contains a **RevertCssResponse** element.

### 3.1.4.16.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>RevertCss</b>	The request to revert the customizations of the context site defined by the specified CSS file.
<b>RevertCssResponse</b>	Contains the response to a request to revert the customizations of the context site defined by the specified CSS file.

#### 3.1.4.16.2.1 RevertCss

The definition of the **RevertCss** element is as follows:

```
<s:element name="RevertCss">  
  <s:complexType>  
    <s:sequence>  
      <s:element name="cssFile" type="s:string" minOccurs="1"/>  
    </s:sequence>  
  </s:complexType>
```

```
</s:element>
```

**cssFile:** Specifies the name of one of the CSS files that resides in the default central location on the protocol server, including the .css file extension. An example of a valid CSS file name is "core.css". If this value does not match one of the CSS files on the protocol server, the protocol server MUST NOT carry out the operation, and it MUST NOT return SOAP fault message.

### 3.1.4.16.2.2 RevertCssResponse

The definition of the **RevertCssResponse** element is as follows:

```
<s:element name="RevertCssResponse">  
  <s:complexType/>  
</s:element>
```

If the protocol server encounters one of the following error conditions while running this operation, a SOAP fault MUST be returned that SHOULD contain one of the error codes in the following table for the specified error condition.

Error Code	Error condition
0x82000001	Blank or null <b>cssFile</b> specified.
0x80131600	Specified <b>cssFile</b> has no file extension.

### 3.1.4.16.3 Complex Types

None.

### 3.1.4.16.4 Simple Types

None.

### 3.1.4.16.5 Attributes

None.

### 3.1.4.16.6 Groups

None.

### 3.1.4.16.7 Attribute Groups

None.

### 3.1.4.17 RevertFileContentStream

This operation [<20>](#) reverts the specified page in the context site to its original state. This operation is defined as follows:

```
<wsdl:operation name="RevertFileContentStream">  
  <wsdl:input message="tns:RevertFileContentStreamSoapIn" />
```

```
<wsdl:output message="tns:RevertFileContentStreamSoapOut" />
</wsdl:operation>
```

The protocol client sends a **RevertFileContentStreamSoapIn** request message, and the protocol server responds with a **RevertFileContentStreamSoapOut** response message, as follows:

1. A valid URL of the page to be reverted MUST be specified in the request message.
2. If the operation succeeds, it MUST return a **RevertFileContentStreamResponse** element.
3. If there is any problem in performing the operation, the protocol server MUST return appropriate error code and error string. Error code(s) specific to this operation are defined in the **RevertFileContentStreamSoapOut** message.

### 3.1.4.17.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>RevertFileContentStreamSoapIn</b>	The request to revert the specified page in the context site to its original state.
<b>RevertFileContentStreamSoapOut</b>	The response to a request to revert the specified page in the context site to its original state.

#### 3.1.4.17.1.1 RevertFileContentStreamSoapIn

This message is the request to revert the specified page in the context site to its original state.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/RevertFileContentStream
```

The SOAP body contains a **RevertFileContentStream** element.

#### 3.1.4.17.1.2 RevertFileContentStreamSoapOut

This message is the response to the request to revert the specified page in the context site to its original state.

The SOAP body contains a **RevertFileContentStreamResponse** element.

### 3.1.4.17.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>RevertFileContentStream</b>	The request to revert the specified page in the context site to its original state.
<b>RevertFileContentStreamResponse</b>	Contains the response to a request to revert the specified page in the context site to its original state.

### 3.1.4.17.2.1 RevertFileContentStream

The SOAP body contains a **RevertFileContentStream** element, which has the following definition:

```
<s:element name="RevertFileContentStream">
  <s:complexType>
    <s:sequence>
      <s:element name="fileUrl" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**fileUrl**: A string that contains the URL of the page. This URL MUST be either the absolute path or the relative path, according to the context site.

### 3.1.4.17.2.2 RevertFileContentStreamResponse

The SOAP body contains a **RevertFileContentStreamResponse** element, which has the following definition:

```
<s:element name="RevertFileContentStreamResponse">
  <s:complexType/>
</s:element>
```

A SOAP fault MUST be returned if the protocol server encounters the following error condition while running this operation:

- Occurs when an invalid URL for the page is passed in.
- Occurs when the site (2) referred by the **fileUrl** is not a valid site (2).
- Occurs when a valid URL is passed in that refers to a page on the parent site (2) of the context site.

If the protocol server encounters one of the following error conditions while running this operation, a SOAP fault MUST be returned that SHOULD contain one of the error codes in the following table for the specified error condition.

Error Code	Error condition
0x80070002	Occurs when a valid URL is passed in that does NOT refer to a page on the context site.
0x82000001	Occurs when an empty URL is passed in or no <b>fileUrl</b> element is supplied.
0x80131600	Occurs when the page to be converted is not part of the site definition.



### 3.1.4.17.3 Complex Types

None.

### 3.1.4.17.4 Simple Types

None.

### 3.1.4.17.5 Attributes

None.

### 3.1.4.17.6 Groups

None.

### 3.1.4.17.7 Attribute Groups

None.

### 3.1.4.18 UpdateColumns

This operation [<21>](#) performs the following operations on the context site and all child sites in its hierarchy:

- Adding one or more specified new columns.
- Updating one or more specified existing columns.
- Deleting one or more specified existing columns.

This operation is defined as follows:

```
<wsdl:operation name="UpdateColumns">
  <wsdl:input message="tns:UpdateColumnsSoapIn" />
  <wsdl:output message="tns:UpdateColumnsSoapOut" />
</wsdl:operation>
```

The protocol client sends an **UpdateColumnsSoapIn** request message, and the protocol server responds with an **UpdateColumnsSoapOut** response message, as follows:

1. A valid *UpdateColumns* parameter MUST be specified in the request message.
2. If the operation succeeds, it MUST return an **UpdateColumnsResponse** element.
3. If an error occurs, the protocol server MUST return an appropriate error code and error string. Error code(s) specific to this operation are defined in **UpdateColumnsResponse** (section [3.1.4.18.2.2](#)).

### 3.1.4.18.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>UpdateColumnsSoapIn</b>	The request to perform the following operations on the context site and all child sites in its hierarchy: <ul style="list-style-type: none"> <li>▪ Add one or more specified new columns.</li> <li>▪ Update one or more specified existing columns.</li> <li>▪ Delete one or more specified existing columns.</li> </ul>
<b>UpdateColumnsSoapOut</b>	The response to an <b>UpdateColumnsSoapIn</b> request.

### 3.1.4.18.1.1 UpdateColumnsSoapIn

This message is the request to perform the following operations on the context site and all child sites in its hierarchy:

- Adding one or more specified new columns.
- Updating one or more specified existing columns.
- Deleting one or more specified existing columns.

The SOAP action value of the message is defined as follows:

`http://schemas.microsoft.com/sharepoint/soap/UpdateColumns`

The SOAP body contains an **UpdateColumns** element.

### 3.1.4.18.1.2 UpdateColumnsSoapOut

This message is the response message to perform the following operations on the context site and all child sites in its hierarchy:

- Adding one or more specified new columns.
- Updating one or more specified existing columns.
- Deleting one or more specified existing columns.

The SOAP body contains an **UpdateColumnsResponse** element.

### 3.1.4.18.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>UpdateColumns</b>	The request to perform the following operations on the context site and all child sites in its hierarchy: <ul style="list-style-type: none"> <li>▪ Add one or more specified new columns.</li> </ul>

Element	Description
	<ul style="list-style-type: none"> <li>▪ Update one or more specified existing columns.</li> <li>▪ Delete one or more specified existing columns.</li> </ul>
<b>UpdateColumnsResponse</b>	Contains the response to an <b>UpdateColumnsSoapIn</b> request, as specified in section <a href="#">3.1.4.18.1.1</a> .

### 3.1.4.18.2.1 UpdateColumns

The SOAP body contains an **UpdateColumns** element, which has the following definition:

```

<s:element name="UpdateColumns">
  <s:complexType>
    <s:sequence>
      <s:element name="newFields" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
              <s:complexType>
                <s:sequence>
                  <s:element name="Field" minOccurs="1" maxOccurs="1"
type="core:FieldDefinition">
                    </s:element>
                  </s:sequence>
                  <s:attribute name="ID" type="s:string" use="required"/>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
      <s:element name="updateFields" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
              <s:complexType>
                <s:sequence>
                  <s:element name="Field" minOccurs="1" maxOccurs="1"
type="core:FieldDefinition">
                    </s:element>
                  </s:sequence>
                  <s:attribute name="ID" type="s:string" use="required"/>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
      <s:element name="deleteFields" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
              <s:complexType>
                <s:sequence>
                  <s:element name="Field" minOccurs="1" maxOccurs="1"
type="core:FieldDefinition">
                    </s:element>
                  </s:sequence>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>

```

```

        <s:attribute name="ID" type="s:string" use="required"/>
    </s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

```

**newFields:** This element represents the collection of columns to be added to the context site and all child sites in its hierarchy.

Each column in the collection is defined as a field definition element. This type is specified in [\[MS-WSSFO2\]](#) section 2.2.8.3.3.

A valid field definition to be added to the context site MUST include the following attributes of the field definition:

- At least one of **Name**, **DisplayName**, or **StaticName**.
- **Type**

**updateFields:** This element represents the collection of columns to be updated on the context site and all child sites in its hierarchy.

Each column in the collection is defined as a field definition element. This type is specified in [\[MS-WSSFO2\]](#) section 2.2.8.3.3.

A valid field definition to be updated on the context site MUST include the following attributes of the field definition:

- **Name** and **Type**.
- All attributes to be updated.

All existing elements and attributes of the column are removed if they are not included in the update call, except the attributes **ID**, **Group**, and **Version**.

**deleteFields:** An element that represents the collection of columns to be deleted from the context site and all child sites in its hierarchy.

Each column in the collection is defined as a field definition element. This type is specified in [\[MS-WSSFO2\]](#) section 2.2.8.3.3.

A valid field definition to be deleted from the context site MUST include the following attributes of the field definition:

- At least one of **ID** and **Name**. If both are present, the **ID** attribute is used.

Although it is defined as required in the field definition element, the **Type** attribute is not required to delete a column from a site and all child sites in its hierarchy.

**Method:** An element that represents a field to be used in the new, update, or delete operation. It MUST contain an **ID** attribute. If the **Method** element does not contain an **ID** attribute, the server does not add, update, or delete columns and does not return an **ErrorCode**.

### 3.1.4.18.2.2 UpdateColumnsResponse

The SOAP body contains an **UpdateColumnsResponse** element, which has the following definition:

```
<s:element name="UpdateColumnsResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="UpdateColumnsResult" minOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:element name="Results">
              <s:complexType>
                <s:sequence>
                  <s:element name="NewFields">
                    <s:complexType>
                      <s:sequence>
                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
                          <s:attribute name="ID" type="s:string" use="required"/>
                          <s:complexType>
                            <s:sequence>
                              <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
                              <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
                              <s:element name="Field" minOccurs="0" maxOccurs="1"
type="core:FieldDefinition"/>
                            </s:sequence>
                          </s:complexType>
                        </s:element>
                      </s:sequence>
                    </s:complexType>
                  <s:element name="UpdateFields">
                    <s:complexType>
                      <s:sequence>
                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
                          <s:attribute name="ID" type="s:string" use="required"/>
                          <s:complexType>
                            <s:sequence>
                              <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
                              <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
                              <s:element name="Field" minOccurs="0" maxOccurs="1"
type="core:FieldDefinition"/>
                            </s:sequence>
                          </s:complexType>
                        </s:element>
                      </s:sequence>
                    </s:complexType>
                  <s:element name="DeleteFields">
                    <s:complexType>
                      <s:sequence>
                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
                          <s:attribute name="ID" type="s:string" use="required"/>
                          <s:complexType>
                            <s:sequence>
```

```

maxOccurs="1"/>
maxOccurs="1"/>
type="core:FieldDefinition"/>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

```

**UpdateColumnsResult:** This element contains a **Results** element.

**Results:** This element contains **NewFields**, **UpdateFields**, and **DeleteFields** elements.

**NewFields:** This element contains one or more **Method** elements for all columns added to the context site and all child sites in its hierarchy.

**UpdateFields:** This element contains one or more **Method** elements for all columns updated on the context site and all child sites in its hierarchy.

**DeleteFields:** This element contains one or more **Method** elements for all columns deleted from the context site and all child sites in its hierarchy.

**Method:** This element contains an **ErrorText**, an **ErrorCode**, and a **Field** element.

**Method.ID:** This attribute MUST have the same value as the **Method.ID** attribute that was sent to the protocol server in the **UpdateColumns** message of this **UpdateColumnsResponse** for an add, update, or delete operation.

**ErrorCode:** A hexadecimal value that represents the error returned by the protocol server.

**ErrorText:** A string value that explains the error returned by the protocol server.

**Field:** A field definition element that represents a column. This type is specified in [\[MS-WSSFO2\]](#) section 2.2.8.3.3.

A SOAP fault MUST be returned if the protocol server encounters the following error condition while running this operation:

- Occurs when an invalid element is the child element of the **newFields**, **updateFields**, or **deleteFields** elements.
- Occurs when one of the **newFields**, **updateFields**, or **deleteFields** elements of the **UpdateColumns** element has multiple **Method** elements without a **Fields** element defined as the root element.

If the protocol server encounters one of the error conditions in the following table while running this operation, **ErrorCode** and **ErrorText** elements MUST be returned in the **UpdateColumnsResponse** element, which SHOULD contain one of the error codes in the following table for the specified error condition.

Error code	Error condition(s)
0x80004005	Occurs when: <ul style="list-style-type: none"> <li>▪ An attempt is made to add an already existing column to the site.</li> <li>▪ An attempt is made to delete a non-existing column from the site.</li> <li>▪ An invalid GUID is passed in as the <b>ID</b> attribute for <b>updateFields</b> and <b>deleteFields</b>.</li> <li>▪ Neither the <b>Name</b> nor the <b>DisplayName</b> attribute is passed in a <b>Field</b> element of <b>newFields</b>.</li> <li>▪ An invalid <b>Field</b> element is passed in any of the parameters.</li> <li>▪ The specified <b>Name</b> attribute does not match any of the existing columns.</li> </ul>

### 3.1.4.18.3 Complex Types

None.

### 3.1.4.18.4 Simple Types

None.

### 3.1.4.18.5 Attributes

None.

### 3.1.4.18.6 Groups

None.

### 3.1.4.18.7 Attribute Groups

None.

### 3.1.4.19 UpdateContentType

This operation [<22>](#) updates a content type on the context site. This operation is defined as follows:

```
<wsdl:operation name="UpdateContentType">
  <wsdl:input message="tns:UpdateContentTypeSoapIn" />
  <wsdl:output message="tns:UpdateContentTypeSoapOut" />
</wsdl:operation>
```

The protocol client sends an **UpdateContentTypeSoapIn** request message, and the protocol server responds with an **UpdateContentTypeSoapOut** response message, as follows:

1. If the **contentTypeId** is not a valid content type identifier or is not the content type identifier of a content type on the context site, the protocol server MUST return a SOAP exception.
2. If the content type was found, the protocol server deletes the appropriate fields from the content type.
3. The protocol server adds the appropriate fields to the content type.
4. The protocol server updates the appropriate fields of the content type.
5. The protocol server updates the content type with the specified properties.

The protocol server MUST return a SOAP exception in the specified cases. The protocol server finishes the operations before returning any error. Therefore, the fact that the protocol server returns a SOAP exception in response to the protocol client request **UpdateContentType** does not mean that the protocol server did not perform any updates on the content type. If changes to the content type are not enabled—for example, because the **Sealed** or **ReadOnly** attribute is set for the content type—the protocol server MUST NOT carry out these operations.

### 3.1.4.19.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>UpdateContentTypeSoapIn</b>	The request to update a content type on the context site.
<b>UpdateContentTypeSoapOut</b>	The response to a request to update a content type on the context site.

#### 3.1.4.19.1.1 UpdateContentTypeSoapIn

This message is the request for the **UpdateContentType** operation. The SOAP action value of the message is defined as follows:

`http://schemas.microsoft.com/sharepoint/soap/UpdateContentType`

The SOAP body contains an **UpdateContentType** element.

#### 3.1.4.19.1.2 UpdateContentTypeSoapOut

This message is the response to the **UpdateContentType** operation.

The SOAP body contains an **UpdateContentTypeResponse** element.

### 3.1.4.19.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>UpdateContentType</b>	The request to update a content type on the context site.



Element	Description
<b>UpdateContentTypeResponse</b>	Contains the response to a request to update a content type on the context site.

### 3.1.4.19.2.1 UpdateContentType

This element is the request to update a content type on the context site. This element is defined as follows:

```
<s:element name="UpdateContentType">
  <s:complexType>
    <s:sequence>
      <s:element name="contentTypeId" type="core:ContentTypeId" minOccurs="1"/>
      <s:element name="contentTypeProperties" minOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:element name="ContentType" type="ContentTypePropertyDefinition" minOccurs="0"
          />
        </s:sequence>
      </s:complexType>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="newFields" type="AddOrUpdateFieldsDefinition" minOccurs="0"/>
<s:element name="updateFields" type="AddOrUpdateFieldsDefinition" minOccurs="0"/>
<s:element name="deleteFields" type="DeleteFieldsDefinition" minOccurs="0"/>
</s:sequence>
</s:complexType>
</s:element>
```

**contentTypeId:** The identifier of the content type to be updated.

**contentTypeProperties:** Container for properties to set on the content type. MUST NOT contain only whitespace. The **ContentTypePropertyDefinition** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.6.

**newFields:** Container for a list of existing fields to be included in the content type. The **AddOrUpdateFieldsDefinition** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.2.

**updateFields:** Container for a list of fields to be updated on the content type. The **AddOrUpdateFieldsDefinition** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.2.

**deleteFields:** Container for a list of fields to be deleted on the content type. The **DeleteFieldsDefinition** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.9.

### 3.1.4.19.2.2 UpdateContentTypeResponse

This element contains the response to a request to update a content type on the context site. This element is defined as follows:

```
<s:element name="UpdateContentTypeResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="UpdateContentTypeResult" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="Results" minOccurs="1" maxOccurs="1">

```

```

<s:complexType>
  <s:sequence>
    <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
      <s:complexType>
        <s:sequence>
          <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
          <s:element name="FieldRef" type="FieldReferenceDefinitionCT"
minOccurs="0" maxOccurs="1"/>
          <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
        </s:sequence>
        <s:attribute name="ID" type="s:string" use="required"/>
      </s:complexType>
    </s:element>
    <s:element name="ListProperties" minOccurs="1" maxOccurs="1">
      <s:complexType>
        <s:sequence />
        <s:attribute name="Description" type="s:string" use="optional" />
        <s:attribute name="FeatureId" type="core:
UniqueIdentifierWithOrWithoutBraces" use="optional" />
        <s:attribute name="Group" type="s:string" use="optional" />
        <s:attribute name="Hidden" type="TRUEONLY" use="optional" />
        <s:attribute name="ID" type="core:ContentTypeId" use="required" />
        <s:attribute name="Locs" type="ONEONLY" use="optional" />
        <s:attribute name="Name" type="s:string" use="optional" />
        <s:attribute name="NewDocumentControl" type="s:string" use="optional"
/>
        <s:attribute name="ReadOnly" type="TRUEONLY" use="optional" />
        <s:attribute name="RequireClientRenderingOnNew" type="FALSEONLY"
use="optional" />
        <s:attribute name="Sealed" type="TRUEONLY" use="optional" />
        <s:attribute name="Version" type="s:long" use="required" />
      </s:complexType>
    </s:element>
  </s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

```

**UpdateContentTypeResult:** If no error conditions as specified previously cause the protocol server to return a SOAP exception, an **UpdateContentTypeResult** MUST be returned.

**Results:** Container for data on the update of a content type

**Method:** Container for data on a field add, update, or remove operation.

**Method.ID:** The identifier of the **Method** that is specified in the request.

**ErrorCode:** For an add or delete operation, if the field was found on the context site, the value of **ErrorCode** MUST be set to 0x00000000. For an update operation, if a reference to the field is found on the content type, the value of **ErrorCode** MUST be set to 0x00000000. Otherwise, the value of **ErrorCode** MUST be nonzero.

**FieldRef:** If **ErrorCode** is set to 0x00000000, **FieldRef** MUST contain data for the reference to the field. The **FieldReferenceDefinitionCT** type is specified in [\[MS-LISTSWS\]](#) section 2.2.4.10.

**ErrorText:** If **ErrorCode** is nonzero, **ErrorText** MUST contain an error string.

**ListProperties:** Contains updated data for the content type.

**ListProperties.Description:** Description of the content type.

**ListProperties.FeatureId:** Specifies the feature with which this content type is associated.

**ListProperties.Group:** Name of the content type group that contains this content type.

**ListProperties.Hidden:** Specifies whether the content type appears in the UI.

**ListProperties.ID:** Content type identifier for this content type.

**ListProperties.Locs:** Specifies whether the content type has localizations. If the content type has localizations, this value MUST be set to 1.

**ListProperties.Name:** Localizations for the content type.

**ListProperties.NewDocumentControl:** The identifier of the ActiveX object used to create a new item. Used to assign this value.

**ListProperties.ReadOnly:** Specifies whether the content type can be edited.

**ListProperties.RequireClientRenderingOnNew:** Specifies whether the browser uses the ActiveX object to create a new item.

**ListProperties.Sealed:** Specifies whether another content type can inherit from the current content type. If this content type is sealed, this value MUST be set to TRUE.

**ListProperties.Version:** Specifies the current version of the content type. The protocol server MUST increment the value each time the content type definition is edited. The protocol client MUST ignore this attribute.

### 3.1.4.19.3 Complex Types

None.

### 3.1.4.19.4 Simple Types

None.

### 3.1.4.19.5 Attributes

None.

### 3.1.4.19.6 Groups

None.

### 3.1.4.19.7 Attribute Groups

None.

### 3.1.4.20 UpdateContentTypeXmlDocument

This operation [<23>](#) adds or updates an XML document in the XML Document collection of a site content type. This operation is defined as follows:

```
<wsdl:operation name="UpdateContentTypeXmlDocument">
  <wsdl:input message="tns:UpdateContentTypeXmlDocumentSoapIn" />
  <wsdl:output message="tns:UpdateContentTypeXmlDocumentSoapOut" />
</wsdl:operation>
```

The protocol client sends an **UpdateContentTypeXmlDocumentSoapIn** request message, and the protocol server responds with an **UpdateContentTypeXmlDocumentSoapOut** response message, as follows:

1. If the content type specified by the **contentTypeId** is not found, the protocol server MUST return a SOAP exception.
2. If the content type specified by the **contentTypeId** is a **sealed content type**, the protocol server MUST return a SOAP exception.
3. If **newDocument** is malformed XML, the protocol server MUST return a SOAP exception.
4. If an XML document with the same namespace URI already exists, it is replaced by the new XML document.
5. Otherwise, the new XML document is wrapped in an **XmlDocument** element and added to the content type XML Document collection.

#### 3.1.4.20.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>UpdateContentTypeXmlDocumentSoapIn</b>	The request to add or update an XML document in the XML Document collection of a site content type.
<b>UpdateContentTypeXmlDocumentSoapOut</b>	The response to a request to add or update an XML document in the XML Document collection of a site content type.

##### 3.1.4.20.1.1 UpdateContentTypeXmlDocumentSoapIn

The SOAP action value of this message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/UpdateContentTypeXmlDocument
```

The SOAP body contains an **UpdateContentTypeXmlDocument** element.

##### 3.1.4.20.1.2 UpdateContentTypeXmlDocumentSoapOut

The SOAP body contains an **UpdateContentTypeXmlDocumentResponse** element.

### 3.1.4.20.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>UpdateContentTypeXmlDocument</b>	The request to add or update an XML document in the XML Document collection of a site content type.
<b>UpdateContentTypeXmlDocumentResponse</b>	Contains the response to a request to add or update an XML document in the XML Document collection of a site content type.

#### 3.1.4.20.2.1 UpdateContentTypeXmlDocument

This element is the request to add or update an XML document in the XML Document collection of a site content type. This element is defined as follows:

```
<s:element name="UpdateContentTypeXmlDocument">
  <s:complexType>
    <s:sequence>
      <s:element name="contentTypeId" type="core:ContentTypeId" minOccurs="1" maxOccurs="1"/>
      <s:element name="newDocument" minOccurs="1" maxOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:any processContents="lax" />
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**contentTypeId:** The content type identifier of the site content type to be modified.

**newDocument:** The XML document to be added to the site content type XML Document collection. The **newDocument** MUST have a namespace defined in it. The protocol client MUST NOT update the XML document with the namespace URIs in the following table.

Namespace URI	Description
http://schemas.microsoft.com/office/2006/metadata/customXsn	<a href="#">[MS-WSSCAML]</a> section 2.5.1.1
office.server.policy	<a href="#">[MS-WSSCAML]</a> section 2.5.1.9
microsoft.office.server.policy.changes	<a href="#">[MS-WSSCAML]</a> section 2.5.1.7
schemas.microsoft.com/sharepoint/v3/contenttype/forms	<a href="#">[MS-WSSCAML]</a> section 2.5.1.3
schemas.microsoft.com/sharepoint/events	<a href="#">[MS-WSSCAML]</a> section 2.5.1.21
schemas.microsoft.com/sharepoint/v3/contenttype/forms/url	<a href="#">[MS-WSSCAML]</a> section 2.5.1.4

### 3.1.4.20.2.2 UpdateContentTypeXmlDocumentResponse

This element is the response to adding or updating an XML document in the XML Document collection of a site content type. This element is defined as follows:

```
<s:element name="UpdateContentTypeXmlDocumentResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="UpdateContentTypeXmlDocumentResult" minOccurs="1" maxOccurs="1">
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="Success" minOccurs="0" maxOccurs="1">
              <s:complexType />
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
```

**UpdateContentTypeXmlDocumentResult:** If the operation succeeds, an **UpdateContentTypeXmlDocumentResult** element MUST be returned. If the operation fails, a SOAP exception MUST be returned.

### 3.1.4.20.3 Complex Types

None.

### 3.1.4.20.4 Simple Types

None.

### 3.1.4.20.5 Attributes

None.

### 3.1.4.20.6 Groups

None.

### 3.1.4.20.7 Attribute Groups

None.

### 3.1.4.21 WebUrlFromPageUrl

This operation obtains the URL of the parent site (2) of the specified URL. This operation is defined as follows:

```
<wsdl:operation name="WebUrlFromPageUrl">
  <wsdl:input message="tns:WebUrlFromPageUrlSoapIn" />
  <wsdl:output message="tns:WebUrlFromPageUrlSoapOut" />
</wsdl:operation>
```

The protocol client sends a **WebUrlFromPageUriSoapIn** request message, and the protocol server responds with a **WebUrlFromPageUriSoapOut** response message.

The specified page URL refers to any page on the site (2). This operation returns the URL of the site (2) that contains the specified page.

### 3.1.4.21.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

Message	Description
<b>WebUrlFromPageUriSoapIn</b>	The request to obtain the URL of the parent site (2) for the specified page URL.
<b>WebUrlFromPageUriSoapOut</b>	The response to a request to obtain the URL of the parent site (2) for the specified page URL.

#### 3.1.4.21.1.1 WebUrlFromPageUriSoapIn

This is the request message to obtain the URL of the parent site (2) for the specified page URL.

The SOAP action value of the message is defined as follows:

```
http://schemas.microsoft.com/sharepoint/soap/WebUrlFromPageUri
```

The SOAP body contains a **WebUrlFromPageUri** element.

#### 3.1.4.21.1.2 WebUrlFromPageUriSoapOut

This is the response message containing the URL of the parent site (2) for the specified page URL.

The SOAP body contains a **WebUrlFromPageUriResponse** element.

### 3.1.4.21.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

Element	Description
<b>WebUrlFromPageUri</b>	The input data of a <b>WebUrlFromPageUri</b> operation.
<b>WebUrlFromPageUriResponse</b>	The result data of a <b>WebUrlFromPageUri</b> operation.

#### 3.1.4.21.2.1 WebUrlFromPageUri

This element represents the input data of a **WebUrlFromPageUri** operation. This element is defined as follows:

```
<s:element name="WebUrlFromPageUri">  
  <s:complexType>  
    <s:sequence>
```

```
    <s:element name="pageUrl" type="s:string" minOccurs="1"/>
  </s:sequence>
</s:complexType>
</s:element>
```

**pageUrl:** A URL that MUST specify a page on the site (2).

#### 3.1.4.21.2.2 WebUrlFromPageUrlResponse

This element represents the result data of a **WebUrlFromPageUrl** operation. This element is defined as follows:

```
<s:element name="WebUrlFromPageUrlResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="WebUrlFromPageUrlResult" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
```

**WebUrlFromPageUrlResult:** MUST be the full URL of the site (2).

#### 3.1.4.21.3 Complex Types

None.

#### 3.1.4.21.4 Simple Types

None.

#### 3.1.4.21.5 Attributes

None.

#### 3.1.4.21.6 Groups

None.

#### 3.1.4.21.7 Attribute Groups

None.

### 3.1.5 Timer Events

None.

### 3.1.6 Other Local Events

None.



## 4 Protocol Examples

### 4.1 GetAllSubWebCollection

The protocol client sends the following SOAP message to the protocol server using the **GetAllSubWebCollection** operation to obtain a list of all sites (2) in the site collection hosted by that protocol server.

The protocol client sends the HTTP POST to the server: `http://www.example.com`.

The POST URL is: `/_vti_bin/webs.asmx`.

The header specifies the following SOAP action:

```
http://schemas.microsoft.com/sharepoint/soap/GetAllSubWebCollection
```

The protocol server responds with the following SOAP message:

```
<soap:Body>
  <GetAllSubWebCollectionResponse xmlns="http://schemas.microsoft.com/sharepoint/soap/">
    <GetAllSubWebCollectionResult>
      <Webs>
        <Web Title="Home" Url="http://www.example.com" />
        <Web Title="Document Center" Url="http://www.example.com/Docs" />
        <Web Title="News" Url="http:// www.example.com/News" />
        <Web Title="Search" Url="http://www.example.com/SearchCenter" />
        <Web Title="Sites" Url="http://www.example.com/SiteDirectory" />
      </Webs>
    </GetAllSubWebCollectionResult>
  </GetAllSubWebCollectionResponse>
</soap:Body>
```

### 4.2 GetCustomizedPageStatus

The protocol client sends the following SOAP message to the protocol server using the **GetCustomizedPageStatus** operation to obtain the customization status of the default.aspx file on the site (2).

The POST URL is: `/_vti_bin/webs.asmx`.

The header specifies the following SOAP action:

```
http://schemas.microsoft.com/sharepoint/soap/GetAllSubWebCollection
```

The body consists of the following SOAP body:

```
<soap:Body>
  <GetCustomizedPageStatus xmlns="http://schemas.microsoft.com/sharepoint/soap/">
    <fileUrl>default.aspx</fileUrl>
  </GetCustomizedPageStatus>
</soap:Body>
```

The protocol server responds with the following SOAP message:

```

<soap:Body>
  <GetCustomizedPageStatusResponse
    xmlns="http://schemas.microsoft.com/sharepoint/soap/">
    <GetCustomizedPageStatusResult>Unc
    customized</GetCustomizedPageStatusResult>
  </GetCustomizedPageStatusResponse>
</soap:Body>

```

## 4.3 Update Columns

### 4.3.1 Add New Columns

The protocol client sends the following SOAP message to the protocol server, using the **UpdateColumns** operation to add the specified columns to the site (2) as follows:

```

<soap:Body>
  <UpdateColumns xmlns="http://schemas.microsoft.com/sharepoint/soap/">
    <newFields>
      <Method ID='1'>
        <Field Name='Column1' DisplayName='Column1DisplayName' Group='Group Name' Type='Text'
          Sortable='FALSE' />
      </Method>
      <Method ID='2'>
        <Field Name='Column2' DisplayName='Column2DisplayName' Group='Group Name' Type='Text'
          Sortable='FALSE' />
      </Method>
      <Method ID='3'>
        <Field Name='Column3' DisplayName='Column3DisplayName' Group='Group Name' Type='Text' />
      </Method>
    </newFields>
  </UpdateColumns>
</soap:Body>

```

This operation creates three columns (Column1, Column2 and Column3) on the context site with specified attributes.

### 4.3.2 Update Existing Columns

The protocol client sends the following SOAP message to the protocol server, using the **UpdateColumns** operation to update the specified attributes of the columns on the context site that were created in the previous section as follows:

```

<soap:Body>
  <UpdateColumns xmlns="http://schemas.microsoft.com/sharepoint/soap/">
    <updateFields>
      <Method ID='1'>
        <Field Name='Column1' DisplayName='Column1DisplayName is updated' Group='Group Name'
          Type='Text' />
      </Method>
      <Method ID='2'>
        <Field Name='Column2' DisplayName='Column2DisplayName is updated' Group='Group Name'
          Type='Text' Sortable='TRUE' />
      </Method>
      <Method ID='3'>
        <Field Name='Column3' DisplayName='Column3DisplayName is updated' Group='Group Name'
          Type='Text' Sortable='TRUE' />
      </Method>
    </updateFields>
  </UpdateColumns>
</soap:Body>

```

```
</Method>
  </updateFields>
</UpdateColumns>
</soap:Body>
```

This operation does the following:

- Updates the **DisplayName** and **Sortable** attributes of **Column2**.
- Updates the **DisplayName** attribute of **Column3**.
- Adds the **Sortable** attribute to **Column3**.
- Deletes the **Sortable** attribute from **Column1**.

### 4.3.3 Delete Existing Columns

The protocol client sends the following SOAP message to the protocol server, using the **UpdateColumns** operation to delete the specified columns on the context site (2) that were updated in the previous section as follows:

```
<soap:Body>
  <UpdateColumns xmlns="http://schemas.microsoft.com/sharepoint/soap/">
    <deleteFields>
      <Method ID='1'>
<Field ID='< GUID of the column Column1>' />
      </Method>
      <Method ID='2'>
<Field Name='Column2' />
      </Method>
      <Method ID='3'>
<Field ID='< GUID of the column Column3>' Name='Column3' />
      </Method>
    </deleteFields>
  </UpdateColumns>
</soap:Body>
```

This operation deletes columns Column1, Column2 and Column3 from the context site.

## 4.4 WebUrlFromPageUrl

The protocol server address in this example is: <http://www.example.com>.

In this example, a site (2) is running at the following URL:

```
http://www.example.com/SiteDirectory/RegionalSales
```

This site has a custom page with the following full URL:

```
http://www.example.com/SiteDirectory/RegionalSales/Lists/Tasks/DispForm.aspx
```

Given this page, the protocol client application uses the **WebUrlFromPageUrl** operation to obtain the URL of the site.

The protocol client sends the HTTP POST to the server: <http://www.example.com>.

The POST URL is: [/\\_vti\\_bin/webs.asmx](/_vti_bin/webs.asmx).

The header specifies the following SOAP action:

```
http://schemas.microsoft.com/sharepoint/soap/WebUrlFromPageUrl
```

The protocol server responds with the following SOAP message:

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <WebUrlFromPageUrlResponse xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <WebUrlFromPageUrlResult>http://www.example.com/SiteDirectory/RegionalSales
    </WebUrlFromPageUrlResult>
    </WebUrlFromPageUrlResponse>
  </soap:Body>
</soap:Envelope>
```

## 4.5 GetContentTypes

The following **GetContentTypes** examples illustrate how a user can discover every content type that exists on a site (2) with a single query. This does not return all the details, but gives a subset of information that can be used to query for more details, as follows:

GETCONTENTTYPES REQUEST

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <GetContentTypes xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      </GetContentTypes>
    </soap:Body>
  </soap:Envelope>
```

GETCONTENTTYPES RESPONSE

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetContentTypesResponse xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <GetContentTypesResult>
        <ContentTypes>
          <ContentType Name="System" ID="0x" Description="" Group="_Hidden" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
          <ContentType Name="Common Indicator Columns" ID="0x00A7470EADF4194E2E9ED1031B61DA0884"
Description="" Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
          <ContentType Name="Indicator using manually entered information"
ID="0x00A7470EADF4194E2E9ED1031B61DA088401" Description="" Group="Business Intelligence"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
          <ContentType Name="Indicator using data in SharePoint list"
ID="0x00A7470EADF4194E2E9ED1031B61DA088402" Description="" Group="Business Intelligence"
```

```

NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Indicator using data in Excel workbook"
ID="0x00A7470EADF4194E2E9ED1031B61DA088403" Description="" Group="Business Intelligence"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Indicator using data in SQL Server 2005 Analysis Services"
ID="0x00A7470EADF4194E2E9ED1031B61DA088404" Description="" Group="Business Intelligence"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Item" ID="0x01" Description="Create a new list item." Group="List
Content Types" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Reusable HTML" ID="0x01002CF74A4DAE39480396EEA7A4BA2BE5FB"
Description="Reusable HTML" Group="_Hidden" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Reusable Text" ID="0x01004D5A79BAFA4A4576B79C56FF3D0D662D"
Description="" Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Page Output Cache" ID="0x010087D89D279834C94E98E5E1B4A913C67E"
Description="Page Output Cache is a system site content type created by the Publishing
Resources feature to define cache profiles." Group="_Hidden" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Document" ID="0x0101" Description="Create a new document."
Group="Document Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="System Page Layout" ID="0x01010007FF3E057FA8AB4AA42FCB67B453FFC1"
Description="System Page Layout is a system site content type created by the Publishing
Resources feature, and it cannot be modified. To add columns to page layouts in the page
layouts gallery and master page gallery, update the Page Layout site content type."
Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Page Layout"
ID="0x01010007FF3E057FA8AB4AA42FCB67B453FFC100E214EEE741181F4E9F7ACC43278EE811"
Description="Page Layout is a system site content type created by the Publishing Resources
feature. All page layouts will have the column templates from Page Layout added."
Group="Publishing Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="System Master Page" ID="0x0101000F1C8B9E0EB4BE489F09807B2C53288F"
Description="System Master Page is a system site content type created by the Publishing
Resources feature, and it cannot be modified. To add columns to master pages in the page
layouts gallery and master page gallery, update the Master Page site content type."
Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Publishing Master Page"
ID="0x0101000F1C8B9E0EB4BE489F09807B2C53288F0054AD6EF48B9F7B45A142F8173F171BD1"
Description="Master Page is a system site content type created by the Publishing Resources
feature. All master pages will have the column templates from Master Page added."
Group="Publishing Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Report" ID="0x01010058DDEB47312E4967BFC1576B96E8C3D4" Description=""
Group="Business Intelligence" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Office Data Connection File"
ID="0x010100629D00608F814DD6AC8A86903AEE72AA" Description="" Group="_Hidden"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Dashboard Page" ID="0x010100A2E3C117A0C5482FAEE3D57C48CB042F"
Description="Create a page that displays Key Performance Indicators and Excel workbooks."
Group="Business Intelligence" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Universal Data Connection File"
ID="0x010100B4CBD48E029A4AD8B62CB0E41868F2B0" Description="Provide a standard place for
applications, such as Microsoft Office InfoPath, to store data connection information."

```

```

Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="System Page" ID="0x010100C568DB52D9D0A14D9B2FDCC96666E9F2"
Description="System Page is a system site content type created by the Publishing Resources
feature, and it cannot be modified. To add columns to the Pages library, update the Page site
content type." Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Page"
ID="0x010100C568DB52D9D0A14D9B2FDCC96666E9F2007948130EC3DB064584E219954237AF39"
Description="Page is a system site content type created by the Publishing Resources feature.
The column templates from Page will be added to all Pages libraries created by the Publishing
feature." Group="Publishing Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Article Page"
ID="0x010100C568DB52D9D0A14D9B2FDCC96666E9F2007948130EC3DB064584E219954237AF3900242457EFB8B24
247815D688C526CD44D" Description="Article Page is a system site content type created by the
Publishing Resources feature. It is the associated site content type for the default page
layouts used to create article pages in sites that have the Publishing feature enabled."
Group="Page Layout Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Welcome Page"
ID="0x010100C568DB52D9D0A14D9B2FDCC96666E9F2007948130EC3DB064584E219954237AF390064DEA0F50FC8C
147B0B6EA0636C4A7D4" Description="Welcome Page is a system site content type created by the
Publishing Resources feature. It is the associated site content type for the default page
layout used to create welcome pages in sites that have the Publishing feature enabled."
Group="Page Layout Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Redirect Page"
ID="0x010100C568DB52D9D0A14D9B2FDCC96666E9F2007948130EC3DB064584E219954237AF3900FD0E870BA0694
8879DBD5F9813CD8799" Description="Redirect Page is a system site content type created by the
Publishing Resources feature. It is the associated site content type for the redirect page
layout" Group="Page Layout Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="InfoPath Form Template" ID="0x010100F8EF98760CBA4A94994F13BA881038FA"
Description="A Microsoft Office InfoPath Form Template." Group="_Hidden"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Form" ID="0x010101" Description="Fill out this form." Group="Document
Content Types" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Picture" ID="0x010102" Description="Upload an image or a photograph."
Group="Document Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Unknown Document Type" ID="0x010104" Description="Allows users to
upload documents of any content type to a library. Unknown documents will be treated as their
original content type in client applications." Group="Special Content Types"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Master Page" ID="0x010105" Description="Create a new master page."
Group="Document Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="User Workflow Document" ID="0x010107" Description="Items for use in
user defined workflows." Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Wiki Page" ID="0x010108" Description="Create a new wiki page."
Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Basic Page" ID="0x010109" Description="Create a new basic page."
Group="Document Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  <ContentType Name="Web Part Page" ID="0x01010901" Description="Create a new Web Part
page." Group="Document Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />

```

```

    <ContentType Name="Link to a Document" ID="0x01010A" Description="Create a link to a
document in a different location." Group="Document Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Dublin Core Columns" ID="0x01010B" Description="The Dublin Core
metadata element set." Group="Document Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Event" ID="0x0102" Description="Create a new meeting, deadline or
other event." Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Issue" ID="0x0103" Description="Track an issue or problem."
Group="List Content Types" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Announcement" ID="0x0104" Description="Create a new news item, status
or other short piece of information." Group="List Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Link" ID="0x0105" Description="Create a new link to a Web page or
other resource." Group="List Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Contact" ID="0x0106" Description="Store information about a business
or personal contact." Group="List Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Message" ID="0x0107" Description="Create a new message." Group="List
Content Types" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Task" ID="0x0108" Description="Track a work item that your team needs
to complete." Group="List Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Workflow Task" ID="0x010801" Description="A work item created by a
workflow that your team needs to complete." Group="_Hidden" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Office SharePoint Server Workflow Task"
ID="0x01080100C9C9515DE4E24001905074F980F93160" Description="A work item created by a
workflow that you or your team needs to complete." Group="_Hidden" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Administrative Task" ID="0x010802" Description="An administrative
work item that an administrator needs to complete." Group="_Hidden" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Workflow History" ID="0x0109" Description="The history of a
workflow." Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Person" ID="0x010A" Description="" Group="_Hidden"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="SharePointGroup" ID="0x010B" Description="" Group="_Hidden"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="DomainGroup" ID="0x010C" Description="" Group="_Hidden"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Post" ID="0x0110" Description="Create a new blog post."
Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Comment" ID="0x0111" Description="Create a new blog comment."
Group="_Hidden" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="East Asia Contact" ID="0x0116" Description="Store information about a
business or personal contact." Group="List Content Types" NewDocumentControl=""
Scope="http://www.contoso.com" Version="0" RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Folder" ID="0x0120" Description="Create a new folder." Group="Folder
Content Types" NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />

```

```

    <ContentType Name="RootOfList" ID="0x012001" Description="" Group="_Hidden"
NewDocumentControl="" Scope="http://www.contoso.com" Version="0"
RequireClientRenderingOnNew="TRUE" />
    <ContentType Name="Discussion" ID="0x012002" Description="Create a new discussion
topic." Group="Folder Content Types" NewDocumentControl="" Scope="http://www.contoso.com"
Version="0" RequireClientRenderingOnNew="TRUE" />
  </ContentTypes>
</GetContentTypesResult>
</GetContentTypesResponse>
</soap:Body>
</soap:Envelope>

```

## 4.6 GetContentType

This example illustrates how after obtaining each content type from the previous **GetContentTypes** request a user is then able to query for all the data about a specific content type using the **GetContentType** operation.

```

GETCONTENTTYPE REQUEST
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <GetContentType xmlns="http://schemas.microsoft.com/sharepoint/soap/">

<contentTypeId>0x010100C568DB52D9D0A14D9B2FDCC96666E9F2007948130EC3DB064584E219954237AF390024
2457EFB8B24247815D688C526CD44D</contentTypeId>
    </GetContentType>
  </soap:Body>
</soap:Envelope>

GETCONTENTTYPE RESPONSE
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <GetContentTypeResponse xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <GetContentTypeResult>
        <ContentType
ID="0x010100C568DB52D9D0A14D9B2FDCC96666E9F2007948130EC3DB064584E219954237AF3900242457EFB8B24
247815D688C526CD44D" Name="Article Page" Group="Page Layout Content Types"
Description="Article Page is a system site content type created by the Publishing Resources
feature. It is the associated site content type for the default page layouts used to create
article pages in sites that have the Publishing feature enabled." Version="0"
FeatureId="{aebc918d-b20f-4a11-a1db-9ed84d79c87e}">
          <Folder TargetName="_cts/Article Page" />
          <Fields>
            <Field ID="{c042a256-787d-4a6f-8a8a-cf6ab767f12d}" Name="ContentType"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="ContentType"
Group="_Hidden" RowOrdinal="0" Type="Text" DisplayName="Content Type" ReadOnly="TRUE"
Sealed="TRUE" ColName="tp_ContentType" PITarget="MicrosoftWindowsSharePointServices"
PIAttribute="ContentTypeID" Customization="" />
            <Field ID="{5f47e085-2150-41dc-b661-442f3027f552}" Name="SelectFilename"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="SelectFilename"
Group="_Hidden" ReadOnly="TRUE" Type="Computed" DisplayName="Select" Hidden="TRUE"
CanToggleHidden="TRUE" Filterable="FALSE" AuthoringInfo="(web part connection)"
HeaderImage="blank.gif" Sortable="FALSE" Customization="">
              <FieldRefs>
                <FieldRef ID="{1d22ea11-1e32-424e-89ab-9fedbadb6ce1}" Name="ID" />

```



```

    </FieldRefs>
    <DisplayPattern>
      <IfEqual>
        <Expr1>
          <GetVar Name="SelectedID" />
        </Expr1>
        <Expr2>
          <Column Name="ID" />
        </Expr2>
        <Then>
          <HTML>
            <![CDATA[
          </HTML>
          <HTML>Selected</HTML>
          <HTML>
            <![CDATA[">]]>
          </HTML>
          </Then>
          <Else>
            <HTML>
              <![CDATA[<a href="javascript:SelectField(')]>
            </HTML>
            <GetVar Name="View" />
            <HTML>
              <![CDATA[',']]>
            </HTML>
            <ScriptQuote NotAddingQuote="TRUE">
              <Column Name="ID" />
            </ScriptQuote>
            <HTML>
              <![CDATA[');return false;" onclick="javascript:SelectField(')]>
            </HTML>
            <GetVar Name="View" />
            <HTML>
              <![CDATA[',']]>
            </HTML>
            <ScriptQuote NotAddingQuote="TRUE">
              <Column Name="ID" />
            </ScriptQuote>
            <HTML>
              <![CDATA[');return false;" target="_self"]>
            </HTML>
            <HTML>
              <![CDATA[
            </HTML>
            <HTML>Normal</HTML>
            <HTML>
              <![CDATA[">]]>
            </HTML>
            <HTML>
              <![CDATA[</a>]]>
            </HTML>
          </Else>
        </IfEqual>
      </DisplayPattern>
    </Field>

```

```

    <Field ID="{8553196d-ec8d-4564-9861-3dbe931050c8}" Name="FileLeafRef"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="FileLeafRef"
Group="_Hidden" ShowInFileDlg="FALSE" ShowInVersionHistory="FALSE" Type="File"
DisplayName="Name" AuthoringInfo="(for use in forms)" List="Docs" FieldRef="ID"
ShowField="LeafName" JoinColName="DoclibRowId" JoinRowOrdinal="0" JoinType="INNER"
Required="TRUE" Customization="" />
    <Field ID="{8c06beca-0777-48f7-91c7-6da68bc07b69}" Name="Created"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="Created" Group="_Hidden"
ColName="tp_Created" RowOrdinal="0" ReadOnly="TRUE" Type="DateTime" DisplayName="Created"
StorageTZ="TRUE" Hidden="TRUE" Customization="" />
    <Field ID="{fa564e0f-0c70-4ab9-b863-0177e6ddd247}" Name="Title"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="Title" Group="_Hidden"
Type="Text" DisplayName="Title" Required="FALSE" FromBaseType="TRUE" Customization=""
ShowInNewForm="FALSE" ShowInEditForm="TRUE" />
    <Field ID="{28cf69c5-fa48-462a-b5cd-27b6f9d2bd5f}" Name="Modified"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="Modified" Group="_Hidden"
ColName="tp_Modified" RowOrdinal="0" ReadOnly="TRUE" Type="DateTime" DisplayName="Modified"
StorageTZ="TRUE" Hidden="TRUE" Customization="" />
    <Field ID="{822c78e3-1ea9-4943-b449-57863ad33ca9}" Name="Modified_x0020_By"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="Modified_x0020_By"
Group="_Hidden" ReadOnly="TRUE" Hidden="FALSE" Type="Text" DisplayName="Document Modified By"
Customization="" />
    <Field ID="{4dd7e525-8d6b-4cb4-9d3e-44ee25f973eb}" Name="Created_x0020_By"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="Created_x0020_By"
Group="_Hidden" ReadOnly="TRUE" Hidden="FALSE" Type="Text" DisplayName="Document Created By"
Customization="" />
    <Field ID="{9da97a8a-1da5-4a77-98d3-4bc10456e700}" Type="Note" RichText="TRUE"
Name="Comments" Group="_Hidden" DisplayName="Description" Sortable="FALSE"
SourceID="http://schemas.microsoft.com/sharepoint/v3" StaticName="Comments" Customization=""
/>
    <Field ID="{51d39414-03dc-4bd0-b777-d3e20cb350f7}" Name="PublishingStartDate"
StaticName="PublishingStartDate" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Scheduling Start Date"
Type="PublishingScheduleStartDateFieldType" Required="FALSE" CanToggleHidden="TRUE"
Sealed="TRUE" StorageTZ="UTC" Customization="" />
    <Field ID="{a990e64f-faa3-49c1-aafa-885fda79de62}" Name="PublishingExpirationDate"
StaticName="PublishingExpirationDate" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Scheduling End Date"
Type="PublishingScheduleEndDateFieldType" Required="FALSE" CanToggleHidden="TRUE"
Sealed="TRUE" StorageTZ="UTC" Customization="" />
    <Field ID="{aeala4dd-0f19-417d-8721-95ald28762ab}" Name="PublishingContact"
StaticName="PublishingContact" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Contact" Type="User" Required="FALSE" Sealed="TRUE"
List="UserInfo" Customization="" />
    <Field ID="{c79dba91-e60b-400e-973d-c6d06f192720}" Name="PublishingContactEmail"
StaticName="PublishingContactEmail" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Contact E-Mail Address" Type="Text" Required="FALSE"
Sealed="TRUE" MaxLength="255" Customization="" />
    <Field ID="{7546ad0d-6c33-4501-b470-fb3003ca14ba}" Name="PublishingContactName"
StaticName="PublishingContactName" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Contact Name" Type="Text" Required="FALSE"
Sealed="TRUE" MaxLength="255" Customization="" />
    <Field ID="{dc47d55f-9bf9-494a-8d5b-e619214dd19a}" Name="PublishingContactPicture"
StaticName="PublishingContactPicture" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Contact Picture" Type="URL" Format="Image"
Required="FALSE" Sealed="TRUE" Customization="" />
    <Field ID="{0f800910-b30d-4c8f-b011-8189b2297094}" Name="PublishingPageLayout"
StaticName="PublishingPageLayout" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="Publishing Columns" DisplayName="Page Layout" Type="URL" Required="FALSE"
Sealed="TRUE" ReadOnly="TRUE" Customization="" />
    <Field ID="{914fdb80-7d4f-4500-bf4c-ce46ad7484a4}" Name="PublishingVariationGroupID"
StaticName="PublishingVariationGroupID" SourceID="http://schemas.microsoft.com/sharepoint/v3"
Group="_Hidden" DisplayName="Variation Group ID" Type="Text" Required="FALSE" Sealed="TRUE"
Hidden="TRUE" MaxLength="255" Customization="" />

```

```

    <Field ID="{766da693-38e5-4b1b-997f-e830b6dfcc7b}"
    Name="PublishingVariationRelationshipLinkFieldID"
    StaticName="PublishingVariationRelationshipLinkFieldID"
    SourceID="http://schemas.microsoft.com/sharepoint/v3" Group="_Hidden" DisplayName="Variation
    Relationship Link" Type="URL" Required="FALSE" Sealed="TRUE" Hidden="TRUE" Customization=""
    />
    <Field ID="{543BC2CF-1F30-488e-8F25-6FE3B689D9AC}" Name="PublishingRollupImage"
    StaticName="PublishingRollupImage" SourceID="http://schemas.microsoft.com/sharepoint/v3"
    Group="Page Layout Columns" DisplayName="Rollup Image" Type="Image" Required="FALSE"
    Sealed="TRUE" RichText="TRUE" RichTextMode="FullHtml" Customization="" />
    <Field ID="{61cbb965-1e04-4273-b658-eedaa662f48d}" Name="Audience"
    StaticName="Audience" SourceID="http://schemas.microsoft.com/sharepoint/v3" Group="Publishing
    Columns" DisplayName="Target Audiences" Type="TargetTo" Required="FALSE" Sealed="TRUE"
    Customization="" />
    <Field ID="{3de94b06-4120-41a5-b907-88773e493458}" Name="PublishingPageImage"
    StaticName="PublishingPageImage" SourceID="http://schemas.microsoft.com/sharepoint/v3"
    Group="Page Layout Columns" DisplayName="Page Image" Type="Image" Required="FALSE"
    Sealed="TRUE" RichText="TRUE" RichTextMode="FullHtml" Customization="" />
    <Field ID="{F55C4D88-1F2E-4ad9-AAA8-819AF4EE7EE8}" Name="PublishingPageContent"
    StaticName="PublishingPageContent" SourceID="http://schemas.microsoft.com/sharepoint/v3"
    Group="Page Layout Columns" DisplayName="Page Content" Type="HTML" Required="FALSE"
    Sealed="TRUE" RichText="TRUE" RichTextMode="FullHtml" Customization="" />
    <Field ID="{B3525EFE-59B5-4f0f-B1E4-6E26CB6EF6AA}" Name="SummaryLinks"
    StaticName="SummaryLinks" SourceID="http://schemas.microsoft.com/sharepoint/v3" Group="Page
    Layout Columns" DisplayName="Summary Links" Type="SummaryLinks" Required="FALSE"
    Sealed="TRUE" RichText="TRUE" RichTextMode="FullHtml" Customization="" />
    <Field ID="{D3429CC9-ADC4-439b-84A8-5679070F84CB}" Name="ArticleByLine"
    StaticName="ArticleByLine" SourceID="http://schemas.microsoft.com/sharepoint/v3" Group="Page
    Layout Columns" DisplayName="Byline" Type="Text" Required="FALSE" Sealed="TRUE"
    MaxLength="255" Customization="" />
    <Field ID="{71316CEA-40A0-49f3-8659-F0CEFDDBD4F}" Name="ArticleStartDate"
    StaticName="ArticleStartDate" SourceID="http://schemas.microsoft.com/sharepoint/v3"
    Group="Publishing Columns" DisplayName="Article Date" Type="DateTime" Format="DateOnly"
    Required="FALSE" Sealed="TRUE" StorageTZ="UTC" Customization="" />
    <Field ID="{66F500E9-7955-49ab-ABB1-663621727D10}" Name="PublishingImageCaption"
    StaticName="PublishingImageCaption" SourceID="http://schemas.microsoft.com/sharepoint/v3"
    Group="Page Layout Columns" DisplayName="Image Caption" Type="HTML" Required="FALSE"
    Sealed="TRUE" RichText="TRUE" RichTextMode="FullHtml" Customization="" />
    <Field ID="{a932ec3f-94c1-48b1-b6dc-41aaa6eb7e54}" Name="HeaderStyleDefinitions"
    StaticName="HeaderStyleDefinitions" SourceID="http://schemas.microsoft.com/sharepoint/v3"
    Group="Page Layout Columns" DisplayName="Style Definitions" Type="HTML" Required="FALSE"
    Sealed="TRUE" RichText="TRUE" RichTextMode="FullHtml" Hidden="TRUE" Customization="">
  </Field>
</Fields>
<DocumentTemplate TargetName="/_layouts/CreatePage.aspx" />
<XmlDocuments>
  <XmlDocument
    NamespaceURI="http://schemas.microsoft.com/sharepoint/v3/contenttype/forms">
    <FormTemplates xmlns="http://schemas.microsoft.com/sharepoint/v3/contenttype/forms">
      <Display>DocumentLibraryForm</Display>
      <Edit>DocumentLibraryForm</Edit>
      <New>DocumentLibraryForm</New>
    </FormTemplates>
  </XmlDocument>
</XmlDocuments>
</ContentType>
</GetContentTypeResult>
</GetContentTypeResponse>
</soap:Body>
</soap:Envelope>

```

## 4.7 CreateContentType

In this example, the user wants to create a new content type on a site (2) for documents relating to travel expenses. The user wants this content type to be called "Travel Document" with the description "Document associated with travel expenses" and inherit from the existing site content type **Document**, which has content type identifier set to 0x0101. The user has already created the site columns "Destination" and "Cost" and wants these to be included in the content type. The protocol client makes the following request:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <CreateContentType xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <displayName>Travel Document</displayName>
      <parentType>0x0101</parentType>
      <newFields>
        <Fields>
          <Method ID="Insert0">
            <Field Name="Destination">
              </Field>
            </Method>
          <Method ID="Insert1">
            <Field Name="Cost">
              </Field>
            </Method>
          </Fields>
        </newFields>
        <contentTypeProperties>
          <ContentType Title="Travel Document" Description="Document associated with travel
expenses" />
        </contentTypeProperties>
      </CreateContentType>
    </soap:Body>
  </soap:Envelope>
```

The protocol client receives the following response from the protocol server:

```
<?xml version="1.0" encoding="utf-8" ?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <CreateContentTypeResponse xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <CreateContentTypeResult>0x010100D0C022956380194BB5407321762A3E3F</CreateContentTypeResult>
    </CreateContentTypeResponse>
  </soap:Body>
</soap:Envelope>
```

## 4.8 UpdateContentType

The user decides to change this content type so that its description is "Travel related documents" and uses the site column "Locale". The user decides that the site column "Cost" is no longer needed and wants the column to be removed.

The protocol client makes the following request using the content type identifier from the previous response:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <UpdateContentType xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <contentTypeId>0x010100D0C022956380194BB5407321762A3E3F</contentTypeId>
      <contentTypeProperties>
        <ContentType Title="Travel Document" Description="Travel related documents" />
      </contentTypeProperties>
      <newFields>
        <Fields>
          <Method ID="Insert">
            <Field Name="Locale">
            </Field>
          </Method>
        </Fields>
      </newFields>
      <deleteFields>
        <Fields>
          <Method ID="Delete">
            <Field Name="Cost">
            </Field>
          </Method>
        </Fields>
      </deleteFields>
    </UpdateContentType>
  </soap:Body>
</soap:Envelope>
```

The protocol client receives the following response from the protocol server:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <UpdateContentTypeResponse xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <UpdateContentTypeResult>
        <Results>
          <Method ID="Delete">
            <ErrorCode>0x00000000</ErrorCode>
            <FieldRef ID="{1d2fb54d-be9b-497f-9c7f-367b769dcd81}" Name="Cost" />
          </Method>
          <Method ID="Insert">
            <ErrorCode>0x00000000</ErrorCode>
            <FieldRef ID="{451a87ae-40a2-4f44-92ba-2112d6504bb1}" Name="Locale"
Required="FALSE" Hidden="FALSE" Customization="" ReadOnly="FALSE" PITarget=""
PrimaryPITarget="" PIAttribute="" PrimaryPIAttribute="" Aggregation="" Node="" />
          </Method>
          <ListProperties ID="0x010100D0C022956380194BB5407321762A3E3F" Name="Travel
Document" Group="Custom Content Types" Description="Travel related documents" Version="6" />
        </Results>
      </UpdateContentTypeResult>
    </UpdateContentTypeResponse>
```

```
</soap:Body>
</soap:Envelope>
```

## 4.9 UpdateContentTypeXmlDocument

A protocol client wants to add some custom information in the XML document to a site content type with identifier 0x0101. This can be done by using **UpdateContentTypeXmlDocument** operation.

The following is a sample request for **UpdateContentTypeXmlDocument**:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <UpdateContentTypeXmlDocument xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <contentTypeId>0x0101</contentTypeId>
      <newDocument>
        <customInfo xmlns="http://www.contoso.com/customInfo">Here is some custom
information</customInfo>
      </newDocument>
    </UpdateContentTypeXmlDocument>
  </soap:Body>
</soap:Envelope>
```

The following is a sample response for **UpdateContentTypeXmlDocument**:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <UpdateContentTypeXmlDocumentResponse
  xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <UpdateContentTypeXmlDocumentResult>
        <Success/>
      </UpdateContentTypeXmlDocumentResult>
    </UpdateContentTypeXmlDocumentResponse>
  </soap:Body>
</soap:Envelope>
```

After the custom information is added, the XML document of the site content type is specified as follows:

```
<XmlDocument NamespaceURI="http://www.contoso.com/customInfo">
  <customInfo xmlns="http://www.contoso.com/customInfo">Here is some custom
information</customInfo>
</XmlDocument>
```

The protocol client can delete the custom information by using **RemoveContentTypeXmlDocument** operation.

A sample request for **RemoveContentTypeXmlDocument** is shown in the following code:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <RemoveContentTypeXmlDocument xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <contentTypeId>0x0101</contentTypeId>
      <documentUri>http://www.contoso.com/customInfo</documentUri>
    </RemoveContentTypeXmlDocument>
  </soap:Body>
</soap:Envelope>
```

The following is a sample response to **RemoveContentTypeXmlDocument**:

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soap:Body>
    <RemoveContentTypeXmlDocumentResponse
xmlns="http://schemas.microsoft.com/sharepoint/soap/">
      <RemoveContentTypeXmlDocumentResult>
        <Success/>
      </RemoveContentTypeXmlDocumentResult>
    </RemoveContentTypeXmlDocumentResponse>
  </soap:Body>
</soap:Envelope>
```

## **5 Security**

### **5.1 Security Considerations for Implementers**

None.

### **5.2 Index of Security Parameters**

None.



## 6 Appendix A: Full WSDL

For ease of implementation, the full WSDL and schema are provided in this appendix. A link to [wsswire.xsd](#) denotes a reference to schemas as specified in [\[MS-WSSCAML\]](#).

```
<?xml version="1.0" encoding="utf-8"?>
<wsdl:definitions xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:tm="http://microsoft.com/wsdl/mime/textMatching/"
xmlns:soapenc="http://schemas.xmlsoap.org/soap/encoding/"
xmlns:mime="http://schemas.xmlsoap.org/wsdl/mime/"
xmlns:tns="http://schemas.microsoft.com/sharepoint/soap/"
xmlns:s="http://www.w3.org/2001/XMLSchema"
xmlns:soap12="http://schemas.xmlsoap.org/wsdl/soap12/"
xmlns:http="http://schemas.xmlsoap.org/wsdl/http/"
targetNamespace="http://schemas.microsoft.com/sharepoint/soap/"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
xmlns:core="http://schemas.microsoft.com/sharepoint/soap">
<s:import namespace="http://schemas.microsoft.com/sharepoint/soap"
schemaLocation="wsswire.xsd"/>

<wsdl:types>
<s:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/sharepoint/soap/">
<s:import namespace="http://www.w3.org/2001/XMLSchema" />

<s:simpleType name="FALSEONLY">
<s:restriction base="s:string">
<s:enumeration value="FALSE" />
</s:restriction>
</s:simpleType>
<s:simpleType name="ONEONLY">
<s:restriction base="s:string">
<s:enumeration value="1" />
</s:restriction>
</s:simpleType>
<s:simpleType name="TRUEONLY">
<s:restriction base="s:string">
<s:enumeration value="TRUE" />
</s:restriction>
</s:simpleType>
<s:complexType name="WebDefinition">
<s:attribute name="Title" type="s:string" use="required" />
<s:attribute name="Url" type="s:string" use="required" />
<s:attribute name="Description" type="s:string" />
<s:attribute name="Language" type="s:string" />
<s:attribute name="Theme" type="s:string" />
<s:attribute name="FarmId" type="core:UniqueIdentifierWithBraces" />
<s:attribute name="Id" type="core:UniqueIdentifierWithBraces" />
<s:attribute name="ExcludeFromOfflineClient" type="core:TRUEFALSE" />
<s:attribute name="CellStorageWebServiceEnabled" type="core:TRUEFALSE" />
<s:attribute name="AlternateUrls" type="s:string" />
</s:complexType>
<s:element name="GetWebCollection">
<s:complexType/>
</s:element>
<s:element name="GetWebCollectionResponse">
<s:complexType>
<s:sequence>
<s:element name="GetWebCollectionResult" minOccurs="1">
```

```

        <s:complexType>
          <s:sequence>
            <s:element name="Webs">
              <s:complexType>
                <s:sequence>
                  <s:element name="Web" type="tns:WebDefinition" minOccurs="0"
maxOccurs="unbounded">
                    </s:element>
                  </s:sequence>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
        <s:element name="GetWeb">
          <s:complexType>
            <s:sequence>
              <s:element name="webUrl" type="s:string" minOccurs="1"/>
            </s:sequence>
          </s:complexType>
        </s:element>
        <s:element name="GetWebResponse">
          <s:complexType>
            <s:sequence>
              <s:element name="GetWebResult" minOccurs="1">
                <s:complexType>
                  <s:sequence>
                    <s:element name="Web" type="tns:WebDefinition"/>
                  </s:sequence>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>

        <s:element name="GetListTemplates">
          <s:complexType/>
        </s:element>
        <s:element name="GetListTemplatesResponse">
          <s:complexType>
            <s:sequence>
              <s:element name="GetListTemplatesResult" minOccurs="1">
                <s:complexType mixed="true">
                  <s:sequence>
                    <s:element name="ListTemplates" type="core:ListTemplateDefinitions" minOccurs="1"
>
                      </s:element>
                    </s:sequence>
                  </s:complexType>
                </s:element>
              </s:sequence>
            </s:complexType>
          </s:element>

        <s:element name="GetAllSubWebCollection">
          <s:complexType/>

```

```

</s:element>
<s:element name="GetAllSubWebCollectionResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetAllSubWebCollectionResult" minOccurs="1" maxOccurs="1" >
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="Webs">
              <s:complexType>
                <s:sequence>
                  <s:element name="Web" type="tns:WebDefinition" minOccurs="1"
maxOccurs="unbounded" />
                </s:sequence>
              </s:complexType>
            </s:element>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>

<s:element name="WebUrlFromPageUrl">
  <s:complexType>
    <s:sequence>
      <s:element name="pageUrl" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="WebUrlFromPageUrlResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="WebUrlFromPageUrlResult" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>

<s:element name="GetObjectidFromUrl">
  <s:complexType>
    <s:sequence>
      <s:element name="objectUrl" type="s:string" minOccurs="1" maxOccurs="1" />
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="GetObjectidFromUrlResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetObjectidFromUrlResult" minOccurs="1" maxOccurs="1">
        <s:complexType mixed="true">
          <s:sequence>
            <s:element name="ObjectId" minOccurs="1" maxOccurs="1">
              <s:complexType>
                <s:attribute name="ListId" type="core:UniqueIdentifierWithBracesOrEmpty" />
                <s:attribute name="ListServerTemplate">
                  <s:simpleType>
                    <s:restriction base="s:int">
                      <s:enumeration value="0"/>
                      <s:enumeration value="100"/>
                      <s:enumeration value="101"/>
                    </s:restriction>
                  </s:simpleType>
                </s:complexType>
              </s:element>
            </s:sequence>
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>

```

```
<s:enumeration value="102"/>
<s:enumeration value="103"/>
<s:enumeration value="104"/>
<s:enumeration value="105"/>
<s:enumeration value="106"/>
<s:enumeration value="107"/>
<s:enumeration value="108"/>
<s:enumeration value="109"/>
<s:enumeration value="110"/>
<s:enumeration value="111"/>
<s:enumeration value="112"/>
<s:enumeration value="113"/>
<s:enumeration value="114"/>
<s:enumeration value="115"/>
<s:enumeration value="116"/>
<s:enumeration value="117"/>
<s:enumeration value="118"/>
<s:enumeration value="119"/>
<s:enumeration value="120"/>
<s:enumeration value="121"/>
<s:enumeration value="122"/>
<s:enumeration value="123"/>
<s:enumeration value="130"/>
<s:enumeration value="140"/>
<s:enumeration value="150"/>
<s:enumeration value="200"/>
<s:enumeration value="201"/>
<s:enumeration value="202"/>
<s:enumeration value="204"/>
<s:enumeration value="207"/>
<s:enumeration value="210"/>
<s:enumeration value="211"/>
<s:enumeration value="212"/>
<s:enumeration value="301"/>
<s:enumeration value="302"/>
<s:enumeration value="303"/>
<s:enumeration value="402"/>
<s:enumeration value="403"/>
<s:enumeration value="404"/>
<s:enumeration value="405"/>
<s:enumeration value="420"/>
<s:enumeration value="421"/>
<s:enumeration value="499"/>
<s:enumeration value="851"/>
<s:enumeration value="1100"/>
<s:enumeration value="1200"/>
<s:enumeration value="1220"/>
<s:enumeration value="1221"/>
</s:restriction>
</s:simpleType>
</s:attribute>
<s:attribute name="ListBaseType">
  <s:simpleType>
    <s:restriction base="s:int">
      <s:enumeration value="0"/>
      <s:enumeration value="1"/>
      <s:enumeration value="2"/>
      <s:enumeration value="3"/>
      <s:enumeration value="4"/>
    </s:restriction>
  </s:simpleType>
</s:attribute>
```

```

        <s:enumeration value="5"/>
    </s:restriction>
</s:simpleType>
</s:attribute>
<s:attribute name="ListItem" type="core:TRUEFALSE" />
<s:attribute name="ListItemId" type="s:string" />
<s:attribute name="File" type="core:TRUEFALSE" />
<s:attribute name="Folder" type="core:TRUEFALSE" />
<s:attribute name="AlternateUrls" type="s:string" />
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>

<s:element name="GetContentTypes">
    <s:complexType/>
</s:element>
<s:element name="GetContentTypesResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="GetContentTypesResult" minOccurs="0">
                <s:complexType>
                    <s:sequence>
                        <s:element name="ContentTypes" minOccurs="1" maxOccurs="1">
                            <s:complexType>
                                <s:sequence>
                                    <s:element name="ContentType" minOccurs="0" maxOccurs="unbounded">
                                        <s:complexType>
                                            <s:sequence />
                                            <s:attribute name="Name" type="s:string" use="required" />
                                            <s:attribute name="ID" type="core:ContentTypeId" use="required" />
                                            <s:attribute name="Description" type="s:string" use="required" />
                                            <s:attribute name="Group" type="s:string" use="required" />
                                            <s:attribute name="NewDocumentControl" type="s:string" use="required" />
                                            <s:attribute name="Scope" type="s:string" use="required" />
                                            <s:attribute name="Version" type="s:int" use="required" />
                                            <s:attribute name="RequireClientRenderingOnNew" type="core:TRUEFALSE"
use="required" />
                                        </s:complexType>
                                    </s:element>
                                </s:sequence>
                            </s:complexType>
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>

<s:element name="GetContentType">
    <s:complexType>
        <s:sequence>
            <s:element name="contentTypeid" type="core:ContentTypeId" minOccurs="1"/>

```

```

        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="GetContentTypeResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="GetContentTypeResult" minOccurs="0">
                <s:complexType>
                    <s:sequence>
                        <s:element name="ContentType" minOccurs="1" maxOccurs="1">
                            <s:complexType>
                                <s:sequence>
                                    <s:element name="Folder" minOccurs="0" maxOccurs="1">
                                        <s:complexType>
                                            <s:sequence />
                                            <s:attribute name="TargetName" type="s:string" use="required" />
                                        </s:complexType>
                                    </s:element>
                                    <s:element name="Fields" type="core:FieldDefinitions" minOccurs="1"
maxOccurs="1" />
                                    <s:element name="DocumentTemplate" minOccurs="0" maxOccurs="1">
                                        <s:complexType>
                                            <s:sequence />
                                            <s:attribute name="TargetName" type="s:string" use="required" />
                                        </s:complexType>
                                    </s:element>
                                    <s:element name="XmlDocuments" type="core:XmlDocumentDefinitionCollection"
minOccurs="0" maxOccurs="1" />
                                </s:sequence>
                                <s:attribute name="ID" type="core:ContentTypeId" use="required" />
                                <s:attribute name="Name" type="s:string" use="optional" />
                                <s:attribute name="Group" type="s:string" use="optional" />
                                <s:attribute name="Description" type="s:string" use="optional" />
                                <s:attribute name="Hidden" type="TRUEONLY" use="optional" />
                                <s:attribute name="NewDocumentControl" type="s:string" use="optional" />
                                <s:attribute name="RequireClientRenderingOnNew" type="FALSEONLY" use="optional"
/>
                                <s:attribute name="Sealed" type="TRUEONLY" use="optional" />
                                <s:attribute name="ReadOnly" type="TRUEONLY" use="optional" />
                                <s:attribute name="Locs" type="ONEONLY" use="optional" />
                                <s:attribute name="FeatureId" type="s:string" use="optional" />
                                <s:attribute name="TargetName" type="s:string" use="optional" />
                                <s:attribute name="Version" type="s:int" use="required" />
                            </s:complexType>
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>
<s:complexType name="AddOrUpdateFieldsDefinition">
    <s:sequence>
        <s:element name="Fields">
            <s:complexType>
                <s:sequence>
                    <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
                        <s:complexType>

```

```

        <s:sequence>
            <s:element name="Field" type="tns:AddOrUpdateFieldDefinition" />
        </s:sequence>
        <s:attribute name="ID" type="s:string" use="required" />
    </s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
<s:complexType name="ContentTypePropertyDefinition">
    <s:sequence />
    <s:attribute name="Description" type="s:string" use="optional" />
    <s:attribute name="DocumentTemplate" type="s:string" use="optional" />
    <s:attribute name="Group" type="s:string" use="optional" />
    <s:attribute name="Title" type="s:string" use="optional" />
    <s:attribute name="NewDocumentControl" type="s:string" use="optional" />
    <s:attribute name="RequireClientRenderingOnNew" type="s:string" use="optional" />
</s:complexType>
<s:complexType name="DeleteFieldsDefinition">
    <s:sequence>
        <s:element name="Fields">
            <s:complexType>
                <s:sequence>
                    <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
                        <s:complexType>
                            <s:sequence>
                                <s:element name="Field" type="tns>DeleteFieldDefinition" minOccurs="0" />
                            </s:sequence>
                                <s:attribute name="ID" type="s:string" use="required" />
                            </s:complexType>
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:sequence>
</s:complexType>
<s:complexType name="FieldReferenceDefinitionCT">
    <s:attribute name="Aggregation" type="s:string"/>
    <s:attribute name="Customization" type="s:string"/>
    <s:attribute name="DisplayName" type="s:string"/>
    <s:attribute name="Format" type="s:string"/>
    <s:attribute name="Hidden" type="core:TRUEFALSE"/>
    <s:attribute name="ID" type="core:UniqueIdentifierWithOrWithoutBraces" use="required"/>
    <s:attribute name="Name" type="s:string" use="required"/>
    <s:attribute name="Node" type="s:string"/>
    <s:attribute name="PIAttribute" type="s:string"/>
    <s:attribute name="PITarget" type="s:string"/>
    <s:attribute name="PrimaryPIAttribute" type="s:string"/>
    <s:attribute name="PrimaryPITarget" type="s:string"/>
    <s:attribute name="ReadOnly" type="core:TRUEFALSE"/>
    <s:attribute name="Required" type="core:TRUEFALSE"/>
    <s:attribute name="ShowInEditForm" type="core:TRUEFALSE"/>
    <s:attribute name="ShowInNewForm" type="core:TRUEFALSE"/>
</s:complexType>
<s:element name="CreateContentType">
    <s:complexType>
        <s:sequence>

```

```

    <s:element name="displayName" type="s:string" minOccurs="1"/>
    <s:element name="parentType" type="core:ContentTypeId" minOccurs="1"/>
    <s:element name="newFields" type="AddOrUpdateFieldsDefinition" minOccurs="0"/>
    <s:element name="contentTypeProperties" minOccurs="1">
      <s:complexType>
        <s:sequence>
          <s:element name="ContentType" type="ContentTypePropertyDefinition" minOccurs="0"
/>
        </s:sequence>
      </s:complexType>
    </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="CreateContentTypeResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="CreateContentTypeResult" type="core:ContentTypeId" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="UpdateContentType">
  <s:complexType>
    <s:sequence>
      <s:element name="contentTypeid" type="core:ContentTypeId" minOccurs="1"/>
      <s:element name="contentTypeProperties" minOccurs="1">
        <s:complexType>
          <s:sequence>
            <s:element name="ContentType" type="ContentTypePropertyDefinition" minOccurs="0"
/>
          </s:sequence>
        </s:complexType>
      </s:element>
      <s:element name="newFields" type="AddOrUpdateFieldsDefinition" minOccurs="0"/>
      <s:element name="updateFields" type="AddOrUpdateFieldsDefinition" minOccurs="0"/>
      <s:element name="deleteFields" type="DeleteFieldsDefinition" minOccurs="0"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="UpdateContentTypeResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="UpdateContentTypeResult" minOccurs="0">
        <s:complexType>
          <s:sequence>
            <s:element name="Results" minOccurs="1" maxOccurs="1">
              <s:complexType>
                <s:sequence>
                  <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
                    <s:complexType>
                      <s:sequence>
                        <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
                        <s:element name="FieldRef" type="FieldReferenceDefinitionCT"
minOccurs="0" maxOccurs="1"/>
                        <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
                      </s:sequence>
                    </s:complexType>
                  </s:element>
                </s:sequence>
              </s:complexType>
            </s:element>
            <s:attribute name="ID" type="s:string" use="required"/>
          </s:sequence>
        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>

```



```

        </s:complexType>
    </s:element>
    <s:element name="ListProperties" minOccurs="1" maxOccurs="1">
        <s:complexType>
            <s:sequence />
            <s:attribute name="Description" type="s:string" use="optional" />
            <s:attribute name="FeatureId" type="core:
UniqueIdentifierWithOrWithoutBraces" use="optional" />
            <s:attribute name="Group" type="s:string" use="optional" />
            <s:attribute name="Hidden" type="TRUEONLY" use="optional" />
            <s:attribute name="ID" type="core:ContentTypeId" use="required" />
            <s:attribute name="Locs" type="ONEONLY" use="optional" />
            <s:attribute name="Name" type="s:string" use="optional" />
            <s:attribute name="NewDocumentControl" type="s:string" use="optional"
/>

            <s:attribute name="ReadOnly" type="TRUEONLY" use="optional" />
            <s:attribute name="RequireClientRenderingOnNew" type="FALSEONLY"
use="optional" />

            <s:attribute name="Sealed" type="TRUEONLY" use="optional" />
            <s:attribute name="Version" type="s:long" use="required" />
        </s:complexType>
    </s:element>
    </s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
<s:element name="DeleteContentType">
    <s:complexType>
        <s:sequence>
            <s:element name="contentTypeId" type="core:ContentTypeId" minOccurs="1"/>
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="DeleteContentTypeResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="DeleteContentTypeResult" minOccurs="1">
                <s:complexType mixed="true">
                    <s:sequence>
                        <s:element name="Success">
                            <s:complexType/>
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="UpdateContentTypeXmlDocument">
    <s:complexType>
        <s:sequence>
            <s:element name="contentTypeId" type="core:ContentTypeId" minOccurs="1" maxOccurs="1"/>
            <s:element name="newDocument" minOccurs="1" maxOccurs="1">
                <s:complexType>

```

```

        <s:sequence>
            <s:any processContents="lax" />
        </s:sequence>
    </s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
<s:element name="UpdateContentTypeXmlDocumentResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="UpdateContentTypeXmlDocumentResult" minOccurs="1" maxOccurs="1">
                <s:complexType mixed="true">
                    <s:sequence>
                        <s:element name="Success" minOccurs="0" maxOccurs="1">
                            <s:complexType />
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="RemoveContentTypeXmlDocument">
    <s:complexType>
        <s:sequence>
            <s:element name="contentTypeid" type="core:ContentTypeId" minOccurs="1"/>
            <s:element name="documentUri" type="s:string" minOccurs="1"/>
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="RemoveContentTypeXmlDocumentResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="RemoveContentTypeXmlDocumentResult" minOccurs="0">
                <s:complexType>
                    <s:sequence>
                        <s:element name="Success" minOccurs="1" maxOccurs="1">
                            <s:complexType />
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>
<s:element name="GetColumns">
    <s:complexType/>
</s:element>
<s:element name="GetColumnsResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="GetColumnsResult" minOccurs="1">
                <s:complexType>
                    <s:sequence>

```

```

        <s:element name="Fields">
            <s:complexType>
                <s:sequence>
                    <s:element name="Field" minOccurs="0" maxOccurs="unbounded"
type="core:FieldDefinition">
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
</s:element>
<s:element name="UpdateColumns">
    <s:complexType>
        <s:sequence>
            <s:element name="newFields" minOccurs="0">
                <s:complexType>
                    <s:sequence>

                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
                            <s:complexType>
                                <s:sequence>
                                    <s:element name="Field" minOccurs="1" maxOccurs="1"
type="core:FieldDefinition">
                                            </s:element>
                                </s:sequence>
                                <s:attribute name="ID" type="s:string" use="required"/>
                            </s:complexType>
                        </s:element>

                    </s:sequence>
                </s:complexType>
            </s:element>
            <s:element name="updateFields" minOccurs="0">
                <s:complexType>
                    <s:sequence>

                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded">
                            <s:complexType>
                                <s:sequence>
                                    <s:element name="Field" minOccurs="1" maxOccurs="1"
type="core:FieldDefinition">
                                            </s:element>
                                </s:sequence>
                                <s:attribute name="ID" type="s:string" use="required"/>
                            </s:complexType>
                        </s:element>

                    </s:sequence>
                </s:complexType>
            </s:element>
            <s:element name="deleteFields" minOccurs="0">

                <s:complexType>
                    <s:sequence>
                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded">

```

```

        <s:complexType>
            <s:sequence>
                <s:element name="Field" minOccurs="1" maxOccurs="1"
type="core:FieldDefinition">
                    </s:element>
                </s:sequence>
                <s:attribute name="ID" type="s:string" use="required"/>
            </s:complexType>

        </s:element>
    </s:sequence>
</s:complexType>
</s:element>
</s:sequence>
</s:complexType>
<s:element name="UpdateColumnsResponse">
    <s:complexType>
        <s:sequence>
            <s:element name="UpdateColumnsResult" minOccurs="1">
                <s:complexType>
                    <s:sequence>
                        <s:element name="Results">
                            <s:complexType>
                                <s:sequence>
                                    <s:element name="NewFields">
                                        <s:complexType>
                                            <s:sequence>
                                                <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
                                                    <s:attribute name="ID" type="s:string" use="required"/>
                                                    <s:complexType>
                                                        <s:sequence>
                                                            <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
                                                            <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
                                                            <s:element name="Field" minOccurs="0" maxOccurs="1"
type="core:FieldDefinition"/>
                                                        </s:sequence>
                                                    </s:complexType>
                                                </s:element>
                                            </s:sequence>
                                        </s:complexType>
                                    </s:element>
                                </s:sequence>
                            </s:complexType>
                        </s:element>
                    </s:sequence>
                </s:complexType>
            <s:element name="UpdateFields">
                <s:complexType>
                    <s:sequence>
                        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
                            <s:attribute name="ID" type="s:string" use="required"/>
                            <s:complexType>
                                <s:sequence>
                                    <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
                                    <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
                                    <s:element name="Field" minOccurs="0" maxOccurs="1"
type="core:FieldDefinition"/>
                                </s:sequence>
                            </s:complexType>
                        </s:element>
                    </s:sequence>
                </s:complexType>
            </s:element>
        </s:sequence>
    </s:complexType>
</s:element>

```

```

        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>
  <s:element name="DeleteFields">
    <s:complexType>
      <s:sequence>
        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
          <s:attribute name="ID" type="s:string" use="required"/>
          <s:complexType>
            <s:sequence>
              <s:element name="ErrorCode" type="s:string" minOccurs="1"
maxOccurs="1"/>
              <s:element name="ErrorText" type="s:string" minOccurs="0"
maxOccurs="1"/>
              <s:element name="Field" minOccurs="0" maxOccurs="1"
type="core:FieldDefinition"/>
            </s:sequence>
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>
  <s:element name="UpdateFields">
    <s:complexType>
      <s:sequence>
        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
          <s:complexType>
            <s:sequence>
              <s:element name="ErrorCode" type="s:string" minOccurs="1" maxOccurs="1"/>
              <s:element name="ErrorText" type="s:string" minOccurs="0" maxOccurs="1"/>
              <s:element name="Field" minOccurs="0" maxOccurs="1" type="core:FieldDefinition"/>
            </s:sequence>
            <s:attribute name="ID" type="s:string" />
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>
  <s:element name="DeleteFields">
    <s:complexType>
      <s:sequence>
        <s:element name="Method" minOccurs="0" maxOccurs="unbounded" >
          <s:complexType>
            <s:sequence>
              <s:element name="ErrorCode" type="s:string" minOccurs="1" maxOccurs="1"/>
              <s:element name="ErrorText" type="s:string" minOccurs="0" maxOccurs="1"/>
              <s:element name="Field" minOccurs="0" maxOccurs="1" type="core:FieldDefinition"/>
            </s:sequence>
            <s:attribute name="ID" type="s:string" />
          </s:complexType>
        </s:element>
      </s:sequence>
    </s:complexType>
  </s:element>

```

```

        </s:complexType>
      </s:element>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="GetCustomizedPageStatus">
  <s:complexType>
    <s:sequence>
      <s:element name="fileUrl" type="s:string" minOccurs="1" maxOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="GetCustomizedPageStatusResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetCustomizedPageStatusResult" type="tns:CustomizedPageStatus"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:simpleType name="CustomizedPageStatus">
  <s:restriction base="s:string">
    <s:enumeration value="None"/>
    <s:enumeration value="Uncustomized"/>
    <s:enumeration value="Customized"/>
  </s:restriction>
</s:simpleType>
<s:element name="RevertFileContentStream">
  <s:complexType>
    <s:sequence>
      <s:element name="fileUrl" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="RevertFileContentStreamResponse">
  <s:complexType/>
</s:element>
<s:element name="RevertAllFileContentStreams">
  <s:complexType/>
</s:element>
<s:element name="RevertAllFileContentStreamsResponse">
  <s:complexType/>
</s:element>
<s:element name="CustomizeCss">
  <s:complexType>
    <s:sequence>
      <s:element name="cssFile" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>
<s:element name="CustomizeCssResponse">
  <s:complexType/>
</s:element>
<s:element name="RevertCss">
  <s:complexType>
    <s:sequence>
      <s:element name="cssFile" type="s:string" minOccurs="1"/>
    </s:sequence>
  </s:complexType>
</s:element>

```

```

<s:element name="RevertCssResponse">
  <s:complexType/>
</s:element>
<s:element name="GetActivatedFeatures">
  <s:complexType/>
</s:element>
<s:element name="GetActivatedFeaturesResponse">
  <s:complexType>
    <s:sequence>
      <s:element name="GetActivatedFeaturesResult" type="s:string" minOccurs="1"
maxOccurs="1" />
    </s:sequence>
  </s:complexType>
</s:element>

  </s:schema>
</wsdl:types>
<wsdl:message name="GetWebCollectionSoapIn">
  <wsdl:part name="parameters" element="tns:GetWebCollection" />
</wsdl:message>
<wsdl:message name="GetWebCollectionSoapOut">
  <wsdl:part name="parameters" element="tns:GetWebCollectionResponse" />
</wsdl:message>
<wsdl:message name="GetWebSoapIn">
  <wsdl:part name="parameters" element="tns:GetWeb" />
</wsdl:message>
<wsdl:message name="GetWebSoapOut">
  <wsdl:part name="parameters" element="tns:GetWebResponse" />
</wsdl:message>
<wsdl:message name="GetListTemplatesSoapIn">
  <wsdl:part name="parameters" element="tns:GetListTemplates" />
</wsdl:message>
<wsdl:message name="GetListTemplatesSoapOut">
  <wsdl:part name="parameters" element="tns:GetListTemplatesResponse" />
</wsdl:message>
<wsdl:message name="GetAllSubWebCollectionSoapIn">
  <wsdl:part name="parameters" element="tns:GetAllSubWebCollection" />
</wsdl:message>
<wsdl:message name="GetAllSubWebCollectionSoapOut">
  <wsdl:part name="parameters" element="tns:GetAllSubWebCollectionResponse" />
</wsdl:message>
<wsdl:message name="WebUrlFromPageUrlSoapIn">
  <wsdl:part name="parameters" element="tns:WebUrlFromPageUrl" />
</wsdl:message>
<wsdl:message name="WebUrlFromPageUrlSoapOut">
  <wsdl:part name="parameters" element="tns:WebUrlFromPageUrlResponse" />
</wsdl:message>
<wsdl:message name="GetObjectIdFromUrlSoapIn">
  <wsdl:part name="parameters" element="tns:GetObjectIdFromUrl" />
</wsdl:message>
<wsdl:message name="GetObjectIdFromUrlSoapOut">
  <wsdl:part name="parameters" element="tns:GetObjectIdFromUrlResponse" />
</wsdl:message>
<wsdl:message name="GetContentTypesSoapIn">
  <wsdl:part name="parameters" element="tns:GetContentTypes" />
</wsdl:message>
<wsdl:message name="GetContentTypesSoapOut">
  <wsdl:part name="parameters" element="tns:GetContentTypesResponse" />
</wsdl:message>

```

```

<wsdl:message name="GetContentTypeSoapIn">
  <wsdl:part name="parameters" element="tns:GetContentType" />
</wsdl:message>
<wsdl:message name="GetContentTypeSoapOut">
  <wsdl:part name="parameters" element="tns:GetContentTypeResponse" />
</wsdl:message>
<wsdl:message name="CreateContentTypeSoapIn">
  <wsdl:part name="parameters" element="tns:CreateContentType" />
</wsdl:message>
<wsdl:message name="CreateContentTypeSoapOut">
  <wsdl:part name="parameters" element="tns:CreateContentTypeResponse" />
</wsdl:message>
<wsdl:message name="UpdateContentTypeSoapIn">
  <wsdl:part name="parameters" element="tns:UpdateContentType" />
</wsdl:message>
<wsdl:message name="UpdateContentTypeSoapOut">
  <wsdl:part name="parameters" element="tns:UpdateContentTypeResponse" />
</wsdl:message>
<wsdl:message name="DeleteContentTypeSoapIn">
  <wsdl:part name="parameters" element="tns>DeleteContentType" />
</wsdl:message>
<wsdl:message name="DeleteContentTypeSoapOut">
  <wsdl:part name="parameters" element="tns>DeleteContentTypeResponse" />
</wsdl:message>
<wsdl:message name="UpdateContentTypeXmlDocumentSoapIn">
  <wsdl:part name="parameters" element="tns:UpdateContentTypeXmlDocument" />
</wsdl:message>
<wsdl:message name="UpdateContentTypeXmlDocumentSoapOut">
  <wsdl:part name="parameters" element="tns:UpdateContentTypeXmlDocumentResponse" />
</wsdl:message>
<wsdl:message name="RemoveContentTypeXmlDocumentSoapIn">
  <wsdl:part name="parameters" element="tns:RemoveContentTypeXmlDocument" />
</wsdl:message>
<wsdl:message name="RemoveContentTypeXmlDocumentSoapOut">
  <wsdl:part name="parameters" element="tns:RemoveContentTypeXmlDocumentResponse" />
</wsdl:message>
<wsdl:message name="GetColumnsSoapIn">
  <wsdl:part name="parameters" element="tns:GetColumns" />
</wsdl:message>
<wsdl:message name="GetColumnsSoapOut">
  <wsdl:part name="parameters" element="tns:GetColumnsResponse" />
</wsdl:message>
<wsdl:message name="UpdateColumnsSoapIn">
  <wsdl:part name="parameters" element="tns:UpdateColumns" />
</wsdl:message>
<wsdl:message name="UpdateColumnsSoapOut">
  <wsdl:part name="parameters" element="tns:UpdateColumnsResponse" />
</wsdl:message>
<wsdl:message name="GetCustomizedPageStatusSoapIn">
  <wsdl:part name="parameters" element="tns:GetCustomizedPageStatus" />
</wsdl:message>
<wsdl:message name="GetCustomizedPageStatusSoapOut">
  <wsdl:part name="parameters" element="tns:GetCustomizedPageStatusResponse" />
</wsdl:message>
<wsdl:message name="RevertFileContentStreamSoapIn">
  <wsdl:part name="parameters" element="tns:RevertFileContentStream" />
</wsdl:message>
<wsdl:message name="RevertFileContentStreamSoapOut">
  <wsdl:part name="parameters" element="tns:RevertFileContentStreamResponse" />

```



```

</wsdl:message>
<wsdl:message name="RevertAllFileContentStreamsSoapIn">
  <wsdl:part name="parameters" element="tns:RevertAllFileContentStreams" />
</wsdl:message>
<wsdl:message name="RevertAllFileContentStreamsSoapOut">
  <wsdl:part name="parameters" element="tns:RevertAllFileContentStreamsResponse" />
</wsdl:message>
<wsdl:message name="CustomizeCssSoapIn">
  <wsdl:part name="parameters" element="tns:CustomizeCss" />
</wsdl:message>
<wsdl:message name="CustomizeCssSoapOut">
  <wsdl:part name="parameters" element="tns:CustomizeCssResponse" />
</wsdl:message>
<wsdl:message name="RevertCssSoapIn">
  <wsdl:part name="parameters" element="tns:RevertCss" />
</wsdl:message>
<wsdl:message name="RevertCssSoapOut">
  <wsdl:part name="parameters" element="tns:RevertCssResponse" />
</wsdl:message>
<wsdl:message name="GetActivatedFeaturesSoapIn">
  <wsdl:part name="parameters" element="tns:GetActivatedFeatures" />
</wsdl:message>
<wsdl:message name="GetActivatedFeaturesSoapOut">
  <wsdl:part name="parameters" element="tns:GetActivatedFeaturesResponse" />
</wsdl:message>
<wsdl:portType name="WebsSoap">
  <wsdl:operation name="GetWebCollection">
    <wsdl:input message="tns:GetWebCollectionSoapIn" />
    <wsdl:output message="tns:GetWebCollectionSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="GetWeb">
    <wsdl:input message="tns:GetWebSoapIn" />
    <wsdl:output message="tns:GetWebSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="GetListTemplates">
    <wsdl:input message="tns:GetListTemplatesSoapIn" />
    <wsdl:output message="tns:GetListTemplatesSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="GetAllSubWebCollection">
    <wsdl:input message="tns:GetAllSubWebCollectionSoapIn" />
    <wsdl:output message="tns:GetAllSubWebCollectionSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="WebUrlFromPageUrl">
    <wsdl:input message="tns:WebUrlFromPageUrlSoapIn" />
    <wsdl:output message="tns:WebUrlFromPageUrlSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="GetObjectIdFromUrl">
    <wsdl:input message="tns:GetObjectIdFromUrlSoapIn" />
    <wsdl:output message="tns:GetObjectIdFromUrlSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="GetContentTypes">
    <wsdl:input message="tns:GetContentTypesSoapIn" />
    <wsdl:output message="tns:GetContentTypesSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="GetContentType">
    <wsdl:input message="tns:GetContentTypeSoapIn" />
    <wsdl:output message="tns:GetContentTypeSoapOut" />
  </wsdl:operation>
  <wsdl:operation name="CreateContentType">

```

```

        <wsdl:input message="tns:CreateContentTypeSoapIn" />
        <wsdl:output message="tns:CreateContentTypeSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="UpdateContentType">
        <wsdl:input message="tns:UpdateContentTypeSoapIn" />
        <wsdl:output message="tns:UpdateContentTypeSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="DeleteContentType">
        <wsdl:input message="tns:DeleteContentTypeSoapIn" />
        <wsdl:output message="tns:DeleteContentTypeSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="UpdateContentTypeXmlDocument">
        <wsdl:input message="tns:UpdateContentTypeXmlDocumentSoapIn" />
        <wsdl:output message="tns:UpdateContentTypeXmlDocumentSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="RemoveContentTypeXmlDocument">
        <wsdl:input message="tns:RemoveContentTypeXmlDocumentSoapIn" />
        <wsdl:output message="tns:RemoveContentTypeXmlDocumentSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetColumns">
        <wsdl:input message="tns:GetColumnsSoapIn" />
        <wsdl:output message="tns:GetColumnsSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="UpdateColumns">
        <wsdl:input message="tns:UpdateColumnsSoapIn" />
        <wsdl:output message="tns:UpdateColumnsSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetCustomizedPageStatus">
        <wsdl:input message="tns:GetCustomizedPageStatusSoapIn" />
        <wsdl:output message="tns:GetCustomizedPageStatusSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="RevertFileContentStream">
        <wsdl:input message="tns:RevertFileContentStreamSoapIn" />
        <wsdl:output message="tns:RevertFileContentStreamSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="RevertAllFileContentStreams">
        <wsdl:input message="tns:RevertAllFileContentStreamsSoapIn" />
        <wsdl:output message="tns:RevertAllFileContentStreamsSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="CustomizeCss">
        <wsdl:input message="tns:CustomizeCssSoapIn" />
        <wsdl:output message="tns:CustomizeCssSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="RevertCss">
        <wsdl:input message="tns:RevertCssSoapIn" />
        <wsdl:output message="tns:RevertCssSoapOut" />
    </wsdl:operation>
    <wsdl:operation name="GetActivatedFeatures">
        <wsdl:input message="tns:GetActivatedFeaturesSoapIn" />
        <wsdl:output message="tns:GetActivatedFeaturesSoapOut" />
    </wsdl:operation>
</wsdl:portType>
<wsdl:binding name="WebsSoap" type="tns:WebsSoap">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http" />
    <wsdl:operation name="GetWebCollection">
        <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetWebCollection" style="document"
/>
        <wsdl:input>

```

```

        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetWeb">
    <soap:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/GetWeb"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetListTemplates">
    <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetListTemplates" style="document"
/>
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetAllSubWebCollection">
    <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetAllSubWebCollection"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="WebUrlFromPageUrl">
    <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/WebUrlFromPageUrl" style="document"
/>
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetObjectIdFromUrl">
    <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetObjectIdFromUrl" style="document"
/>
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>

```

```

    <wsdl:operation name="GetContentTypes">
      <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetContentTypes" style="document" />
      <wsdl:input>
        <soap:body use="literal" />
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal" />
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetContentType">
      <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetContentType" style="document" />
      <wsdl:input>
        <soap:body use="literal" />
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal" />
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="CreateContentType">
      <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/CreateContentType" style="document"
/>
      <wsdl:input>
        <soap:body use="literal" />
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal" />
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateContentType">
      <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/UpdateContentType" style="document"
/>
      <wsdl:input>
        <soap:body use="literal" />
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal" />
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="DeleteContentType">
      <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/DeleteContentType" style="document"
/>
      <wsdl:input>
        <soap:body use="literal" />
      </wsdl:input>
      <wsdl:output>
        <soap:body use="literal" />
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateContentTypeXmlDocument">
      <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/UpdateContentTypeXmlDocument"
style="document" />
      <wsdl:input>
        <soap:body use="literal" />
      </wsdl:input>

```

```

        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RemoveContentTypeXmlDocument">
        <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/RemoveContentTypeXmlDocument"
style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetColumns">
        <soap:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/GetColumns"
style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateColumns">
        <soap:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/UpdateColumns"
style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetCustomizedPageStatus">
        <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetCustomizedPageStatus"
style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RevertFileContentStream">
        <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/RevertFileContentStream"
style="document" />
        <wsdl:input>
            <soap:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RevertAllFileContentStreams">

```

```

    <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/RevertAllFileContentStreams"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CustomizeCss">
    <soap:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/CustomizeCss"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="RevertCss">
    <soap:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/RevertCss"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetActivatedFeatures">
    <soap:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetActivatedFeatures"
style="document" />
    <wsdl:input>
        <soap:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap:body use="literal" />
    </wsdl:output>
</wsdl:operation>
</wsdl:binding>
<wsdl:binding name="WebsSoap12" type="tns:WebsSoap">
    <soap12:binding transport="http://schemas.xmlsoap.org/soap/http" />
    <wsdl:operation name="GetWebCollection">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetWebCollection" style="document"
/>
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetWeb">
        <soap12:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/GetWeb"
style="document" />
        <wsdl:input>
            <soap12:body use="literal" />

```

```

        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetListTemplates">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetListTemplates" style="document"
/>
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetAllSubWebCollection">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetAllSubWebCollection"
style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="WebUrlFromPageUrl">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/WebUrlFromPageUrl" style="document"
/>
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetObjectidFromUrl">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetObjectidFromUrl" style="document"
/>
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetContentTypes">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetContentTypes" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetContentType">

```

```

    <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetContentType" style="document" />
    <wsdl:input>
        <soap12:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CreateContentType">
    <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/CreateContentType" style="document"
/>
    <wsdl:input>
        <soap12:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateContentType">
    <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/UpdateContentType" style="document"
/>
    <wsdl:input>
        <soap12:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="DeleteContentType">
    <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/DeleteContentType" style="document"
/>
    <wsdl:input>
        <soap12:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="UpdateContentTypeXmlDocument">
    <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/UpdateContentTypeXmlDocument"
style="document" />
    <wsdl:input>
        <soap12:body use="literal" />
    </wsdl:input>
    <wsdl:output>
        <soap12:body use="literal" />
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="RemoveContentTypeXmlDocument">
    <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/RemoveContentTypeXmlDocument"
style="document" />
    <wsdl:input>
        <soap12:body use="literal" />
    </wsdl:input>

```



```

        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetColumns">
        <soap12:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/GetColumns"
style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="UpdateColumns">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/UpdateColumns" style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="GetCustomizedPageStatus">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetCustomizedPageStatus"
style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RevertFileContentStream">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/RevertFileContentStream"
style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="RevertAllFileContentStreams">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/RevertAllFileContentStreams"
style="document" />
        <wsdl:input>
            <soap12:body use="literal" />
        </wsdl:input>
        <wsdl:output>
            <soap12:body use="literal" />
        </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="CustomizeCss">
        <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/CustomizeCss" style="document" />

```

```
<wsdl:input>
  <soap12:body use="literal" />
</wsdl:input>
<wsdl:output>
  <soap12:body use="literal" />
</wsdl:output>
</wsdl:operation>
<wsdl:operation name="RevertCss">
  <soap12:operation soapAction="http://schemas.microsoft.com/sharepoint/soap/RevertCss"
style="document" />
  <wsdl:input>
    <soap12:body use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap12:body use="literal" />
  </wsdl:output>
</wsdl:operation>
<wsdl:operation name="GetActivatedFeatures">
  <soap12:operation
soapAction="http://schemas.microsoft.com/sharepoint/soap/GetActivatedFeatures"
style="document" />
  <wsdl:input>
    <soap12:body use="literal" />
  </wsdl:input>
  <wsdl:output>
    <soap12:body use="literal" />
  </wsdl:output>
</wsdl:operation>
</wsdl:binding>
</wsdl:definitions>
```

## 7 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- The 2007 Microsoft Office system
- Microsoft Office 2010 suites
- Microsoft Office 2013
- Windows SharePoint Services 2.0
- Windows SharePoint Services 3.0
- Microsoft SharePoint Foundation 2010
- Microsoft SharePoint Foundation 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.4.1:](#) This attribute is not returned in Windows SharePoint Services 2.0 or Windows SharePoint Services 3.0.

[<2> Section 2.2.4.2:](#) This attribute is not returned in Windows SharePoint Services 2.0 or Windows SharePoint Services 3.0.

[<3> Section 2.2.4.2:](#) This attribute is not returned in Windows SharePoint Services 2.0 or Windows SharePoint Services 3.0.

[<4> Section 2.2.4.2:](#) This attribute is not returned in Windows SharePoint Services 2.0 or Windows SharePoint Services 3.0.

[<5> Section 2.2.4.2:](#) This attribute is not returned in Windows SharePoint Services 2.0 or Windows SharePoint Services 3.0.

[<6> Section 2.2.4.2:](#) This attribute is not returned in Windows SharePoint Services 2.0 or Windows SharePoint Services 3.0.

[<7> Section 3.1.4.1:](#) Windows SharePoint Services 2.0 does not support this operation.

[<8> Section 3.1.4.2:](#) Windows SharePoint Services 2.0 does not support this operation.

[<9> Section 3.1.4.2.2.1:](#) In Windows SharePoint Services 3.0, the scope of the **CustomizeCss** operation is one **SPWeb**, referred to as a site (2) in this documentation.

The client calls **CustomizeCss** as the first step in customizing the styles and formatting of a site (2).

In Windows SharePoint Services 3.0, the default central location in which the server maintains the default copy of each CSS file is in the following folder under the Microsoft Shared folder:

```
\Web Server Extensions\12\TEMPLATE\LAYOUTS\1033\STYLES
```

By default, the style for all sites (2) is controlled by the uncustomized copies of the CSS files that reside in this location.

When the client uses **CustomizeCss**, Windows SharePoint Services 3.0 makes a copy of the CSS file in the following site-specific folder:

```
\layouts\1033\styles\
```

Additionally, the server configures the site to use the non-default copy located in the preceding site-specific folder.

The administrator or client can then customize the CSS file in the site-specific location.

The **cssFile** specified by the input parameter is the name of a CSS file that already exists on the server in the default central location. The **cssFile** name must match the file name of the file in the default style folder on the server, including the .css file extension.

In Office SharePoint Server 2007, the following CSS files are installed in the default location:

- CALENDAR.CSS
- CONTROLS.CSS
- CORE.CSS
- datepicker.css
- EwrDefault.css
- HELP.CSS
- HtmlEditorCustomStyles.css
- HtmlEditorTableFormat.css
- MENU.CSS
- OWSNOCR.CSS
- PORTAL.CSS
- RCA.CSS
- SiteManagerCustomStyles.css

More than one CSS file contributes to the style and formatting of pages on a site (2), and clients can customize multiple CSS files on the same site (2) by using **CustomizeCss** more than one time. After the client has used **CustomizeCss** and the server has copied the CSS file from the default central location to the site-specific folder, the client can change that style sheet, and the server displays those pages using the custom style.

Clients can revert the site from the style and format as specified by the customized CSS files back to the default by using **RevertCss**, specifying that CSS file name as input.

In SharePoint Foundation 2010, the default central location in which the server maintains the default copy of each CSS file is in the following folder under the Microsoft Shared folder:

\\Web Server Extensions\14\TEMPLATE\LAYOUTS\1033\STYLES

In SharePoint Foundation 2013, the default central location in which the server maintains the default copy of each CSS file is in the following folder under the Microsoft Shared folder:

\\Web Server Extensions\15\TEMPLATE\LAYOUTS\1033\STYLES

[<10> Section 3.1.4.3:](#) Windows SharePoint Services 2.0 does not support this operation.

[<11> Section 3.1.4.4:](#) Windows SharePoint Services 2.0 does not support this operation.

[<12> Section 3.1.4.6:](#) Windows SharePoint Services 2.0 does not support this operation.

[<13> Section 3.1.4.7:](#) Windows SharePoint Services 2.0 does not support this operation.

[<14> Section 3.1.4.8:](#) Windows SharePoint Services 2.0 does not support this operation.

[<15> Section 3.1.4.9:](#) Windows SharePoint Services 2.0 does not support this operation.

[<16> Section 3.1.4.11:](#) Windows SharePoint Services 2.0 and Windows SharePoint Services 3.0 do not support this method.

[<17> Section 3.1.4.14:](#) Windows SharePoint Services 2.0 does not support this operation.

[<18> Section 3.1.4.15:](#) Windows SharePoint Services 2.0 does not support this operation.

[<19> Section 3.1.4.16:](#) Windows SharePoint Services 2.0 does not support this operation.

[<20> Section 3.1.4.17:](#) Windows SharePoint Services 2.0 does not support this operation.

[<21> Section 3.1.4.18:](#) Windows SharePoint Services 2.0 does not support this operation.

[<22> Section 3.1.4.19:](#) Windows SharePoint Services 2.0 does not support this operation.

[<23> Section 3.1.4.20:](#) Windows SharePoint Services 2.0 does not support this operation.

## 8 Change Tracking

This section identifies changes that were made to the [MS-WEBSS] protocol document between the October 2012 and February 2013 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">3.1.4 Message Processing Events and Sequencing Rules</a>	Changed the description of the RemoveContentTypeXmlDocument operation from "Adds or updates..." to "Removes..." for clarity.	N	Content updated.
<a href="#">3.1.4.1.1.2 CreateContentTypeSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.2.1.2 CustomizeCssSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.2.2.1 CustomizeCss</a>	Updated product behavior note for the cssFile element to include location details for the default copy of the CSS files.	N	Product behavior note updated.
<a href="#">3.1.4.3.1.2 DeleteContentTypeSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.4.1.2 GetActivatedFeaturesSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.5.1.2 GetAllSubWebCollectionSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.6.1.2 GetColumnsSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.7.1.2 GetContentTypeSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">3.1.4.8.1.2 GetContentTypesSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.9.1.2 GetCustomizedPageStatusSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.10.1.2 GetListTemplatesSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.11.1.2 GetObjectIdFromUrlSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.11.2.2 GetObjectIdFromUrlResponse</a>	Clarified that the "ListServerTemplate" attribute is only present for list or list item objects.	N	Content updated.
<a href="#">3.1.4.11.2.2 GetObjectIdFromUrlResponse</a>	Clarified that the "ListBaseType" attribute is only present for list or list item objects.	N	Content updated.
<a href="#">3.1.4.11.2.2 GetObjectIdFromUrlResponse</a>	In the description for the ListId attribute, changed "If the object is a list (1)..." to "If the object is a list (1) or listItem...".	N	Content updated.
<a href="#">3.1.4.12.1.2 GetWebSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.13.1.2 GetWebCollectionSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.14.1.2 RemoveContentTypeXmlDocumentSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.15.1.2 RevertAllFileContentStreamsSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.16.1.2 RevertCssSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.17.1.2 RevertFileContentStreamSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.18.1.2 UpdateColumnsSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.18.2.1 UpdateColumns</a>	In the description of the Method element, changed "ID field" to "ID attribute" for clarity.	N	Content updated.
<a href="#">3.1.4.18.2.1 UpdateColumns</a>	Clarified the description of the Method element to indicate server behavior when this element does not contain an ID attribute.	N	Content updated.



Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">3.1.4.18.2.2 UpdateColumnsResponse</a>	Clarified the error conditions for returning a SOAP fault.	N	Content updated.
<a href="#">3.1.4.19.1.2 UpdateContentTypeSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.20.1.2 UpdateContentTypeXmlDocumentSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">3.1.4.21.1.2 WebUrlFromPageUrlSoapOut</a>	Removed the SOAP action in SOAP response message.	N	Content removed.
<a href="#">4.3.1 Add New Columns</a>	Removed the element Fields from newFields in the example schema.	N	Content removed.
<a href="#">4.3.2 Update Existing Columns</a>	Removed the element Fields from updateFields in the example schema.	N	Content removed.
<a href="#">4.3.3 Delete Existing Columns</a>	Removed the element Fields from deleteFields in the example schema.	N	Content removed.
<a href="#">6 Appendix A: Full WSDL</a>	Removed the definition for the element Fields from deleteFields.	N	Content removed.

## 9 Index

### A

Abstract data model  
[server](#) 19  
[Add new columns example](#) 82  
[Applicability](#) 14  
[Attribute groups](#) 18  
[Attributes](#) 18

### C

[Capability negotiation](#) 14  
[Change tracking](#) 126  
Client  
[overview](#) 19  
[Complex types](#) 16  
[SOAPFaultDetails](#) 16  
[WebDefinition](#) 16  
[CreateContentType example](#) 92

### D

Data model - abstract  
[server](#) 19  
[Delete existing columns example](#) 83

### E

Events  
[local - server](#) 80  
[timer - server](#) 80  
Example  
[UpdateContentTypeXmlDocument](#) 94  
Examples  
[add new columns](#) 82  
[CreateContentType](#) 92  
[delete existing columns](#) 83  
[GetAllSubWebCollection](#) 81  
[GetContentType](#) 88  
[GetContentTypes](#) 84  
[GetCustomizedPageStatus](#) 81  
[update existing columns](#) 82  
[UpdateContentType](#) 92  
[WebUrlFromPageUrl](#) 83

### F

[FALSEONLY simple type](#) 17  
[Fields - vendor-extensible](#) 14  
[Full WSDL](#) 97

### G

[GetAllSubWebCollection example](#) 81  
[GetContentType example](#) 88  
[GetContentTypes example](#) 84  
[GetCustomizedPageStatus example](#) 81  
[Glossary](#) 11

[Groups](#) 18

### I

[Implementer - security considerations](#) 96  
[Index of security parameters](#) 96  
[Informative references](#) 13  
Initialization  
[server](#) 19  
[Introduction](#) 11

### L

Local events  
[server](#) 80

### M

Message processing  
[server](#) 19  
Messages  
[attribute groups](#) 18  
[attributes](#) 18  
[complex types](#) 16  
[elements](#) 15  
[enumerated](#) 15  
[FALSEONLY simple type](#) 17  
[groups](#) 18  
[namespaces](#) 15  
[ONEONLY simple type](#) 17  
[simple types](#) 17  
[SOAPFaultDetails complex type](#) 16  
[syntax](#) 15  
[transport](#) 15  
[TRUEONLY simple type](#) 18  
[WebDefinition complex type](#) 16

### N

[Namespaces](#) 15  
[Normative references](#) 12

### O

[ONEONLY simple type](#) 17  
Operations  
[CreateContentType](#) 21  
[CustomizeCss](#) 23  
[DeleteContentType](#) 26  
[GetActivatedFeatures](#) 28  
[GetAllSubWebCollection](#) 30  
[GetColumns](#) 33  
[GetContentType](#) 35  
[GetContentTypes](#) 39  
[GetCustomizedPageStatus](#) 42  
[GetListTemplates](#) 45  
[GetObjectidFromUrl](#) 47  
[GetWeb](#) 51

[GetWebCollection](#) 54  
[RemoveContentTypeXmlDocument](#) 56  
[RevertAllFileContentStreams](#) 58  
[RevertCss](#) 60  
[RevertFileContentStream](#) 62  
[UpdateColumns](#) 65  
[UpdateContentType](#) 71  
[UpdateContentTypeXmlDocument](#) 76  
[WebUrlFromPageUrl](#) 78  
[Overview \(synopsis\)](#) 13

## P

[Parameters - security index](#) 96  
[Preconditions](#) 14  
[Prerequisites](#) 14  
[Product behavior](#) 123

## R

[References](#) 12  
  [informative](#) 13  
  [normative](#) 12  
[Relationship to other protocols](#) 13

## S

Security  
  [implementer considerations](#) 96  
  [parameter index](#) 96  
Sequencing rules  
  [server](#) 19  
Server  
  [abstract data model](#) 19  
  [CreateContentType operation](#) 21  
  [CustomizeCss operation](#) 23  
  [DeleteContentType operation](#) 26  
  [GetActivatedFeatures operation](#) 28  
  [GetAllSubWebCollection operation](#) 30  
  [GetColumns operation](#) 33  
  [GetContentType operation](#) 35  
  [GetContentTypes operation](#) 39  
  [GetCustomizedPageStatus operation](#) 42  
  [GetListTemplates operation](#) 45  
  [GetObjectIdFromUrl operation](#) 47  
  [GetWeb operation](#) 51  
  [GetWebCollection operation](#) 54  
  [initialization](#) 19  
  [local events](#) 80  
  [message processing](#) 19  
  [overview](#) 19  
  [RemoveContentTypeXmlDocument operation](#) 56  
  [RevertAllFileContentStreams operation](#) 58  
  [RevertCss operation](#) 60  
  [RevertFileContentStream operation](#) 62  
  [sequencing rules](#) 19  
  [timer events](#) 80  
  [timers](#) 19  
  [UpdateColumns operation](#) 65  
  [UpdateContentType operation](#) 71  
  [UpdateContentTypeXmlDocument operation](#) 76  
  [Webs SOAP server details](#) 19

[WebUrlFromPageUrl operation](#) 78  
[Simple types](#) 17  
  [FALSEONLY](#) 17  
  [ONEONLY](#) 17  
  [TRUEONLY](#) 18  
[SOAPFaultDetails complex type](#) 16  
[Standards assignments](#) 14  
Syntax  
  [messages - overview](#) 15

## T

Timer events  
  [server](#) 80  
Timers  
  [server](#) 19  
[Tracking changes](#) 126  
[Transport](#) 15  
[TRUEONLY simple type](#) 18  
Types  
  [complex](#) 16  
  [simple](#) 17

## U

[Update existing columns example](#) 82  
[UpdateContentType example](#) 92  
[UpdateContentTypeXmlDocument example](#) 94

## V

[Vendor-extensible fields](#) 14  
[Versioning](#) 14

## W

[WebDefinition complex type](#) 16  
[Webs SOAP server details](#) 19  
[WebUrlFromPageUrl example](#) 83  
[WSDL](#) 97