

# [MS-WORDSWCF]: Word Automation Services WCF Service Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

| Date       | Revision History | Revision Class | Comments   |
|------------|------------------|----------------|--|
| 02/19/2010 | 1.0              | Major          | Initial Availability   |
| 03/31/2010 | 1.01             | Editorial      | Revised and edited the technical content                                     |
| 04/30/2010 | 1.02             | Editorial      | Revised and edited the technical content                                     |
| 06/07/2010 | 1.03             | Editorial      | Revised and edited the technical content                                     |
| 06/29/2010 | 1.04             | Editorial      | Changed language and formatting in the technical content.                    |
| 07/23/2010 | 1.05             | Minor          | Clarified the meaning of the technical content.                              |
| 09/27/2010 | 1.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 11/15/2010 | 1.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 12/17/2010 | 1.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 03/18/2011 | 1.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 06/10/2011 | 1.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 01/20/2012 | 2.0              | Major          | Significantly changed the technical content.                                 |
| 04/11/2012 | 2.0              | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 07/16/2012 | 2.0              | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 09/12/2012 | 2.0              | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 10/08/2012 | 3.0              | Major          | Significantly changed the technical content.                                 |
| 02/11/2013 | 3.0              | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 07/30/2013 | 4.0              | Major          | Significantly changed the technical content.                                 |
| 11/18/2013 | 4.0              | No change      | No changes to the meaning, language, or formatting of the technical content. |

# Table of Contents

|  |           |
|--|-----------|
| <b>1 Introduction</b>  | <b>10</b> |
| 1.1 Glossary   | 10        |
| 1.2 References   | 11        |
| 1.2.1 Normative References   | 11        |
| 1.2.2 Informative References   | 11        |
| 1.3 Protocol Overview (Synopsis)   | 12        |
| 1.4 Relationship to Other Protocols  | 13        |
| 1.5 Prerequisites/Preconditions  | 13        |
| 1.6 Applicability Statement  | 13        |
| 1.7 Versioning and Capability Negotiation  | 14        |
| 1.8 Vendor-Extensible Fields   | 14        |
| 1.9 Standards Assignments  | 14        |
| <b>2 Messages</b>  | <b>15</b> |
| 2.1 Transport  | 15        |
| 2.2 Common Message Syntax  | 15        |
| 2.2.1 Namespaces   | 15        |
| 2.2.2 Messages   | 17        |
| 2.2.3 Elements   | 17        |
| 2.2.3.1 ConversionJobSettings (from namespace<br><a href="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings">http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings</a> ) | 17        |
| 2.2.3.2 GroupId  | 18        |
| 2.2.3.3 JobId  | 18        |
| 2.2.3.4 PartitionId  | 18        |
| 2.2.3.5 UserToken  | 18        |
| 2.2.4 Complex Types  | 20        |
| 2.2.4.1 ArrayOfString  | 20        |
| 2.2.4.2 ConversionJobSettings  | 20        |
| 2.2.4.3 FixedFormatSettings  | 21        |
| 2.2.4.4 ReadOnlyFault  | 22        |
| 2.2.5 Simple Types   | 23        |
| 2.2.5.1 BalloonState   | 23        |
| 2.2.5.2 CompatibilityMode  | 24        |
| 2.2.5.3 FixedFormatBookmark  | 24        |
| 2.2.5.4 FixedFormatQuality   | 25        |
| 2.2.5.5 guid   | 25        |
| 2.2.5.6 MarkupTypes  | 25        |
| 2.2.5.7 RevisionState  | 26        |
| 2.2.5.8 SaveBehavior   | 27        |
| 2.2.5.9 SaveFormat   | 27        |
| 2.2.6 Attributes   | 28        |
| 2.2.7 Groups   | 28        |
| 2.2.8 Attribute Groups   | 28        |
| <b>3 Protocol Details</b>  | <b>29</b> |
| 3.1 Server Details   | 29        |
| 3.1.1 Abstract Data Model  | 29        |
| 3.1.1.1 Immediate Conversion Jobs  | 30        |
| 3.1.2 Timers   | 30        |

|             |   |    |
|-------------|---|----|
| 3.1.3       | Initialization .....                                | 30 |
| 3.1.4       | Message Processing Events and Sequencing Rules..... | 30 |
| 3.1.4.1     | AddGroup .....                                      | 31 |
| 3.1.4.1.1   | Messages .....                                      | 32 |
| 3.1.4.1.1.1 | AddGroupRequest.....                                | 32 |
| 3.1.4.1.1.2 | AddGroupResponse.....                               | 32 |
| 3.1.4.1.2   | Elements.....                                       | 32 |
| 3.1.4.1.2.1 | AddGroupRequest.....                                | 32 |
| 3.1.4.1.2.2 | AddGroupResponse.....                               | 33 |
| 3.1.4.1.3   | Complex Types .....                                 | 33 |
| 3.1.4.1.4   | Simple Types.....                                   | 33 |
| 3.1.4.1.5   | Attributes.....                                     | 33 |
| 3.1.4.1.6   | Groups.....   | 33 |
| 3.1.4.1.7   | Attribute Groups .....                              | 33 |
| 3.1.4.2     | AddItems.....                                       | 33 |
| 3.1.4.2.1   | Messages .....                                      | 34 |
| 3.1.4.2.1.1 | AddItemsRequest .....                               | 34 |
| 3.1.4.2.1.2 | AddItemsResponse .....                              | 34 |
| 3.1.4.2.2   | Elements.....                                       | 34 |
| 3.1.4.2.2.1 | AddItemsRequest .....                               | 35 |
| 3.1.4.2.2.2 | AddItemsResponse .....                              | 35 |
| 3.1.4.2.3   | Complex Types .....                                 | 35 |
| 3.1.4.2.4   | Simple Types.....                                   | 35 |
| 3.1.4.2.5   | Attributes.....                                     | 36 |
| 3.1.4.2.6   | Groups.....   | 36 |
| 3.1.4.2.7   | Attribute Groups .....                              | 36 |
| 3.1.4.3     | AddJob .....  | 36 |
| 3.1.4.3.1   | Messages .....                                      | 36 |
| 3.1.4.3.1.1 | AddJobRequest.....                                  | 36 |
| 3.1.4.3.1.2 | AddJobResponse .....                                | 37 |
| 3.1.4.3.2   | Elements.....                                       | 37 |
| 3.1.4.3.2.1 | AddJobRequest.....                                  | 37 |
| 3.1.4.3.2.2 | AddJobResponse .....                                | 38 |
| 3.1.4.3.3   | Complex Types .....                                 | 38 |
| 3.1.4.3.4   | Simple Types.....                                   | 38 |
| 3.1.4.3.5   | Attributes.....                                     | 38 |
| 3.1.4.3.6   | Groups.....   | 38 |
| 3.1.4.3.7   | Attribute Groups .....                              | 38 |
| 3.1.4.4     | CancelJob .....                                     | 38 |
| 3.1.4.4.1   | Messages .....                                      | 39 |
| 3.1.4.4.1.1 | CancelJobRequest.....                               | 39 |
| 3.1.4.4.1.2 | CancelJobResponse.....                              | 39 |
| 3.1.4.4.2   | Elements.....                                       | 39 |
| 3.1.4.4.2.1 | CancelJobRequest.....                               | 39 |
| 3.1.4.4.2.2 | CancelJobResponse.....                              | 40 |
| 3.1.4.4.3   | Complex Types .....                                 | 40 |
| 3.1.4.4.4   | Simple Types.....                                   | 40 |
| 3.1.4.4.5   | Attributes.....                                     | 40 |
| 3.1.4.4.6   | Groups.....   | 40 |
| 3.1.4.4.7   | Attribute Groups .....                              | 40 |
| 3.1.4.5     | ConvertBatch .....                                  | 40 |
| 3.1.4.5.1   | Messages .....                                      | 41 |
| 3.1.4.5.1.1 | ConvertBatchRequest.....                            | 41 |

|             |  |    |
|-------------|--|----|
| 3.1.4.5.2   | Elements.....  | 41 |
| 3.1.4.5.2.1 | ConvertBatchRequest.....                                   | 41 |
| 3.1.4.5.3   | Complex Types .....  | 42 |
| 3.1.4.5.3.1 | ArrayOfConvertBatchItem.....                               | 42 |
| 3.1.4.5.3.2 | ConvertBatchItem .....                                     | 42 |
| 3.1.4.5.3.3 | ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA ..... | 43 |
| 3.1.4.5.3.4 | ConvertBatchJob .....                                      | 44 |
| 3.1.4.5.4   | Simple Types.....  | 44 |
| 3.1.4.5.5   | Attributes.....  | 44 |
| 3.1.4.5.6   | Groups.....  | 44 |
| 3.1.4.5.7   | Attribute Groups .....                                     | 44 |
| 3.1.4.6     | GetGroups .....  | 44 |
| 3.1.4.6.1   | Messages .....   | 45 |
| 3.1.4.6.1.1 | GetGroupsRequest.....                                      | 45 |
| 3.1.4.6.1.2 | GetGroupsResponse.....                                     | 45 |
| 3.1.4.6.2   | Elements.....  | 45 |
| 3.1.4.6.2.1 | GetGroupsRequest.....                                      | 45 |
| 3.1.4.6.2.2 | GetGroupsResponse.....                                     | 46 |
| 3.1.4.6.3   | Complex Types .....  | 46 |
| 3.1.4.6.3.1 | ArrayOfGetGroupsGroup.....                                 | 47 |
| 3.1.4.6.3.2 | GetGroupsGroup .....                                       | 47 |
| 3.1.4.6.4   | Simple Types.....  | 47 |
| 3.1.4.6.5   | Attributes.....  | 47 |
| 3.1.4.6.6   | Groups.....  | 47 |
| 3.1.4.6.7   | Attribute Groups .....                                     | 48 |
| 3.1.4.7     | GetId .....  | 48 |
| 3.1.4.7.1   | Messages .....   | 48 |
| 3.1.4.7.1.1 | GetIdRequest.....  | 48 |
| 3.1.4.7.1.2 | GetIdResponse.....   | 49 |
| 3.1.4.7.2   | Elements.....  | 49 |
| 3.1.4.7.2.1 | GetIdRequest.....  | 49 |
| 3.1.4.7.2.2 | GetIdResponse.....   | 49 |
| 3.1.4.7.3   | Complex Types .....  | 49 |
| 3.1.4.7.4   | Simple Types.....  | 49 |
| 3.1.4.7.5   | Attributes.....  | 50 |
| 3.1.4.7.6   | Groups.....  | 50 |
| 3.1.4.7.7   | Attribute Groups .....                                     | 50 |
| 3.1.4.8     | GetItems .....   | 50 |
| 3.1.4.8.1   | Messages .....   | 50 |
| 3.1.4.8.1.1 | GetItemsRequest.....                                       | 50 |
| 3.1.4.8.1.2 | GetItemsResponse.....                                      | 51 |
| 3.1.4.8.2   | Elements.....  | 51 |
| 3.1.4.8.2.1 | GetItemsRequest.....                                       | 51 |
| 3.1.4.8.2.2 | GetItemsResponse.....                                      | 52 |
| 3.1.4.8.3   | Complex Types .....  | 52 |
| 3.1.4.8.3.1 | ArrayOfGetItemsItem.....                                   | 52 |
| 3.1.4.8.3.2 | GetItemsItem .....   | 52 |
| 3.1.4.8.4   | Simple Types.....  | 53 |
| 3.1.4.8.5   | Attributes.....  | 53 |
| 3.1.4.8.6   | Groups.....  | 53 |
| 3.1.4.8.7   | Attribute Groups .....                                     | 53 |
| 3.1.4.9     | GetJobs.....   | 53 |
| 3.1.4.9.1   | Messages .....   | 54 |

|              |                            |    |
|--------------|----------------------------|----|
| 3.1.4.9.1.1  | GetJobsRequest.....        | 54 |
| 3.1.4.9.1.2  | GetJobsResponse .....      | 54 |
| 3.1.4.9.2    | Elements.....              | 54 |
| 3.1.4.9.2.1  | GetJobsRequest.....        | 55 |
| 3.1.4.9.2.2  | GetJobsResponse .....      | 55 |
| 3.1.4.9.3    | Complex Types .....        | 55 |
| 3.1.4.9.3.1  | ArrayOfGetJobsJob .....    | 56 |
| 3.1.4.9.3.2  | GetJobsJob .....           | 56 |
| 3.1.4.9.4    | Simple Types.....          | 56 |
| 3.1.4.9.5    | Attributes.....            | 56 |
| 3.1.4.9.6    | Groups.....                | 56 |
| 3.1.4.9.7    | Attribute Groups .....     | 57 |
| 3.1.4.10     | GetJobStatus.....          | 57 |
| 3.1.4.10.1   | Messages .....             | 57 |
| 3.1.4.10.1.1 | GetJobStatusRequest .....  | 57 |
| 3.1.4.10.1.2 | GetJobStatusResponse ..... | 57 |
| 3.1.4.10.2   | Elements.....              | 58 |
| 3.1.4.10.2.1 | GetJobStatusRequest .....  | 58 |
| 3.1.4.10.2.2 | GetJobStatusResponse ..... | 58 |
| 3.1.4.10.3   | Complex Types .....        | 59 |
| 3.1.4.10.4   | Simple Types .....         | 59 |
| 3.1.4.10.5   | Attributes .....           | 59 |
| 3.1.4.10.6   | Groups.....                | 59 |
| 3.1.4.10.7   | Attribute Groups.....      | 59 |
| 3.1.4.11     | Ping .....                 | 59 |
| 3.1.4.11.1   | Messages .....             | 60 |
| 3.1.4.11.1.1 | PingRequest.....           | 60 |
| 3.1.4.11.1.2 | PingResponse.....          | 60 |
| 3.1.4.11.2   | Elements.....              | 60 |
| 3.1.4.11.2.1 | PingRequest.....           | 60 |
| 3.1.4.11.2.2 | PingResponse.....          | 61 |
| 3.1.4.11.3   | Complex Types .....        | 61 |
| 3.1.4.11.4   | Simple Types .....         | 61 |
| 3.1.4.11.5   | Attributes .....           | 61 |
| 3.1.4.11.6   | Groups.....                | 61 |
| 3.1.4.11.7   | Attribute Groups.....      | 61 |
| 3.1.4.12     | SubmitJob.....             | 61 |
| 3.1.4.12.1   | Messages .....             | 62 |
| 3.1.4.12.1.1 | SubmitJobRequest .....     | 62 |
| 3.1.4.12.1.2 | SubmitJobResponse .....    | 62 |
| 3.1.4.12.2   | Elements.....              | 62 |
| 3.1.4.12.2.1 | SubmitJobRequest .....     | 63 |
| 3.1.4.12.2.2 | SubmitJobResponse .....    | 63 |
| 3.1.4.12.3   | Complex Types .....        | 63 |
| 3.1.4.12.4   | Simple Types .....         | 63 |
| 3.1.4.12.5   | Attributes .....           | 63 |
| 3.1.4.12.6   | Groups.....                | 63 |
| 3.1.4.12.7   | Attribute Groups.....      | 63 |
| 3.1.4.13     | AddSyncJob .....           | 63 |
| 3.1.4.13.1   | Messages .....             | 64 |
| 3.1.4.13.1.1 | AddSyncJobRequest .....    | 64 |
| 3.1.4.13.1.2 | AddSyncJobResponse .....   | 64 |
| 3.1.4.13.2   | Elements.....              | 64 |

|              |  |           |
|--------------|--|-----------|
| 3.1.4.13.2.1 | AddSyncJobRequest .....                | 65        |
| 3.1.4.13.2.2 | AddSyncJobResponse .....               | 65        |
| 3.1.4.13.3   | Complex Types .....                    | 66        |
| 3.1.4.13.4   | Simple Types .....                     | 66        |
| 3.1.4.13.5   | Attributes .....                       | 66        |
| 3.1.4.13.6   | Groups .....                           | 66        |
| 3.1.4.13.7   | Attribute Groups .....                 | 66        |
| 3.1.4.14     | AddSyncStreamJob .....                 | 66        |
| 3.1.4.14.1   | Messages .....                         | 67        |
| 3.1.4.14.1.1 | AddSyncStreamJobRequest .....          | 67        |
| 3.1.4.14.1.2 | AddSyncStreamJobResponse .....         | 67        |
| 3.1.4.14.2   | Elements .....                         | 67        |
| 3.1.4.14.2.1 | AddSyncStreamJobRequest .....          | 68        |
| 3.1.4.14.2.2 | AddSyncStreamJobResponse .....         | 68        |
| 3.1.4.14.3   | Complex Types .....                    | 69        |
| 3.1.4.14.4   | Simple Types .....                     | 70        |
| 3.1.4.14.5   | Attributes .....                       | 70        |
| 3.1.4.14.6   | Groups .....                           | 70        |
| 3.1.4.14.7   | Attribute Groups .....                 | 70        |
| 3.1.4.15     | BatchGetSyncJobStatus .....            | 70        |
| 3.1.4.15.1   | Messages .....                         | 70        |
| 3.1.4.15.1.1 | BatchGetSyncJobStatusRequest .....     | 70        |
| 3.1.4.15.1.2 | BatchGetSyncJobStatusResponse .....    | 71        |
| 3.1.4.15.2   | Elements .....                         | 71        |
| 3.1.4.15.2.1 | BatchGetSyncJobStatusRequest .....     | 71        |
| 3.1.4.15.2.2 | BatchGetSyncJobStatusResponse .....    | 71        |
| 3.1.4.15.3   | Complex Types .....                    | 73        |
| 3.1.4.15.3.1 | ArrayOfNullableOfint .....             | 73        |
| 3.1.4.15.3.2 | ArrayOfbase64Binary .....              | 73        |
| 3.1.4.15.3.3 | ArrayOfunsignedLong .....              | 73        |
| 3.1.4.15.4   | Simple Types .....                     | 74        |
| 3.1.4.15.5   | Attributes .....                       | 74        |
| 3.1.4.15.6   | Groups .....                           | 74        |
| 3.1.4.15.7   | Attribute Groups .....                 | 74        |
| 3.1.4.16     | GetSyncStreamOutputBytes .....         | 74        |
| 3.1.4.16.1   | Messages .....                         | 74        |
| 3.1.4.16.1.1 | GetSyncStreamOutputBytesRequest .....  | 75        |
| 3.1.4.16.1.2 | GetSyncStreamOutputBytesResponse ..... | 75        |
| 3.1.4.16.2   | Elements .....                         | 75        |
| 3.1.4.16.2.1 | GetSyncStreamOutputBytesRequest .....  | 75        |
| 3.1.4.16.2.2 | GetSyncStreamOutputBytesResponse ..... | 76        |
| 3.1.4.16.3   | Complex Types .....                    | 76        |
| 3.1.4.16.4   | Simple Types .....                     | 76        |
| 3.1.4.16.5   | Attributes .....                       | 76        |
| 3.1.4.16.6   | Groups .....                           | 76        |
| 3.1.4.16.7   | Attribute Groups .....                 | 76        |
| 3.1.5        | Timer Events .....                     | 76        |
| 3.1.6        | Other Local Events .....               | 77        |
| <b>4</b>     | <b>Protocol Examples .....</b>         | <b>78</b> |
| 4.1          | Creating a Conversion Job .....        | 78        |
| 4.1.1        | Adding the Job .....                   | 78        |
| 4.1.2        | Adding the First Group .....           | 79        |

|          |  |            |
|----------|--|------------|
| 4.1.3    | Adding the Second Group .....  | 80         |
| 4.1.4    | Submitting the Job .....   | 80         |
| 4.2      | Getting the Status of a Conversion Job .....   | 80         |
| 4.2.1    | Getting the Jobs .....   | 81         |
| 4.2.2    | Getting the Job Status .....   | 81         |
| 4.2.3    | Getting the Groups .....   | 82         |
| 4.2.4    | Getting the Items in the First Group .....   | 83         |
| 4.2.5    | Getting the Items in the Second Group .....  | 84         |
| 4.3      | Creating an Immediate Conversion Job .....   | 85         |
| 4.3.1    | The input file is stored on the protocol server .....  | 85         |
| 4.3.2    | The input file is stored on a non-server location .....  | 86         |
| <b>5</b> | <b>Security .....</b>  | <b>89</b>  |
| 5.1      | Security Considerations for Implementers .....   | 89         |
| 5.2      | Index of Security Parameters .....   | 89         |
| <b>6</b> | <b>Appendix A: Full WSDL .....</b>   | <b>90</b>  |
| <b>7</b> | <b>Appendix B: Full XML Schema .....</b>   | <b>100</b> |
| 7.1      | http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions<br>Schema .....           | 101        |
| 7.2      | http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema .....                                     | 103        |
| 7.3      | http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob<br>Schema .....                   | 104        |
| 7.4      | http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response<br>Schema .....                 | 104        |
| 7.5      | http://schemas.microsoft.com/office/server/word/2009/08/cancelJob Schema .....                             | 104        |
| 7.6      | http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings<br>Schema .....              | 105        |
| 7.7      | http://schemas.microsoft.com/office/server/word/2009/08/convertBatch Schema .....                          | 106        |
| 7.8      | http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response<br>Schema .....                 | 107        |
| 7.9      | http://schemas.microsoft.com/office/server/word/2009/08/getGroups Schema .....                             | 107        |
| 7.10     | http://schemas.microsoft.com/office/server/word/2009/08/getId/response Schema .....                        | 108        |
| 7.11     | http://schemas.microsoft.com/office/server/word/2009/08/getId Schema .....                                 | 108        |
| 7.12     | http://schemas.microsoft.com/office/server/word/2009/08/getItems/response<br>Schema .....                  | 108        |
| 7.13     | http://schemas.microsoft.com/2003/10/Serialization/ Schema .....   | 109        |
| 7.14     | http://schemas.microsoft.com/office/server/word/2009/08/getItems Schema .....                              | 110        |
| 7.15     | http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response<br>Schema .....                   | 110        |
| 7.16     | http://schemas.microsoft.com/office/server/word/2009/08/getJobs Schema .....                               | 111        |
| 7.17     | http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response<br>Schema .....              | 111        |
| 7.18     | http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus Schema .....                          | 112        |
| 7.19     | http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/respo<br>nse Schema .....         | 112        |
| 7.20     | http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus<br>Schema .....                   | 113        |
| 7.21     | http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBy<br>tes/response Schema ..... | 113        |



|           |   |              |
|-----------|---|--------------|
| 7.22      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBy">http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBy</a>         |              |
|           | tes Schema .....  | 113          |
| 7.23      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/ping/response">http://schemas.microsoft.com/office/server/word/2009/08/ping/response</a>                         | Schema ...   |
| 7.24      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response">http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response</a>                 | Schema ..... |
|           |   | 114          |
| 7.25      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/ping">http://schemas.microsoft.com/office/server/word/2009/08/ping</a>   | Schema ..... |
|           |   | 114          |
| 7.26      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response">http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response</a>               | Schema ..... |
|           |   | 115          |
| 7.27      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/submitJob">http://schemas.microsoft.com/office/server/word/2009/08/submitJob</a>                                 | Schema ..... |
|           |   | 115          |
| 7.28      | <a href="http://schemas.datacontract.org/2004/07/System">http://schemas.datacontract.org/2004/07/System</a>   | Schema ..... |
|           |   | 115          |
| 7.29      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addGroup">http://schemas.microsoft.com/office/server/word/2009/08/addGroup</a>                                   | Schema ..... |
|           |   | 116          |
| 7.30      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addItems">http://schemas.microsoft.com/office/server/word/2009/08/addItems</a>                                   | Schema ..... |
|           |   | 116          |
| 7.31      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addJob">http://schemas.microsoft.com/office/server/word/2009/08/addJob</a>                                       | Schema ..... |
|           |   | 116          |
| 7.32      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response">http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response</a>             | Schema ..... |
|           |   | 117          |
| 7.33      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob">http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob</a>                               | Schema ..... |
|           |   | 117          |
| 7.34      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response">http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response</a> | Schema ..... |
|           |   | 118          |
| 7.35      | <a href="http://schemas.microsoft.com/office/server/word/2009/08/service">http://schemas.microsoft.com/office/server/word/2009/08/service</a>                                     | Schema ..... |
|           |   | 118          |
| <b>8</b>  | <b>Appendix C: Product Behavior .....</b>   | <b>119</b>   |
| <b>9</b>  | <b>Change Tracking.....</b>   | <b>120</b>   |
| <b>10</b> | <b>Index .....</b>  | <b>121</b>   |

# 1 Introduction

The Word Automation Services WCF Service Protocol is used to convert documents from one file format to another file format.

Sections 1.8, 2, and 3 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. Sections 1.5 and 1.9 are also normative but cannot contain those terms. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

- Coordinated Universal Time (UTC)**
- GUID**
- Hypertext Transfer Protocol (HTTP)**
- Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**
- SOAP**
- SOAP action**
- SOAP body**
- SOAP fault**
- XML namespace**

The following terms are defined in [\[MS-OFCGLOS\]](#):

- bookmark**
- Boolean**
- conversion group**
- conversion item**
- conversion job**
- culture name**
- dictionary**
- document template**
- endpoint**
- external group**
- field**
- macro**
- partition**
- Portable Document Format (PDF)**
- SystemID**
- template**
- thumbnail**
- Uniform Resource Identifier (URI)**
- Uniform Resource Locator (URL)**
- Web Services Description Language (WSDL)**
- WSDL message**
- WSDL operation**
- XML namespace prefix**
- XML Paper Specification (XPS)**
- XML schema**

The following terms are specific to this document:

**document property:** A name/value pair that serves as metadata for a document.

**immediate conversion job:** A conversion job that contains only one conversion item and is intended to be executed as a higher priority than a typical conversion job.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-SPSTWS] Microsoft Corporation, "[SharePoint Security Token Service Web Service Protocol](#)".

[MS-WSSFO2] Microsoft Corporation, "[Windows SharePoint Services \(WSS\): File Operations Database Communications Version 2 Protocol](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2616] Fielding, R., Gettys, J., Mogul, J., et al., "Hypertext Transfer Protocol -- HTTP/1.1", RFC 2616, June 1999, <http://www.ietf.org/rfc/rfc2616.txt>

[SOAP1.1] Box, D., Ehnebuske, D., Kakivaya, G., et al., "Simple Object Access Protocol (SOAP) 1.1", May 2000, <http://www.w3.org/TR/2000/NOTE-SOAP-20000508/>

[SOAP1.2/1] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 1: Messaging Framework", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part1-20030624>

[WSDL] Christensen, E., Curbera, F., Meredith, G., and Weerawarana, S., "Web Services Description Language (WSDL) 1.1", W3C Note, March 2001, <http://www.w3.org/TR/2001/NOTE-wsdl-20010315>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Beech, D., Maloney, M., Eds., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

### 1.2.2 Informative References

[ECMA-376] ECMA International, "Office Open XML File Formats", 1st Edition, ECMA-376, December 2006, <http://www.ecma-international.org/publications/standards/Ecma-376.htm>

[ISO/IEC29500-1:2011] ISO/IEC, "Information Technology -- Document description and processing languages -- Office Open XML File Formats -- Part 1: Fundamentals and Markup Language Reference", ISO/IEC 29500-1:2011, 2011, [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=59575](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=59575)

[ISO/IEC29500-4:2011] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 4: Transitional Migration Features", ISO/IEC 29500-4:2011, 2011, [http://www.iso.org/iso/home/store/catalogue\\_ics/catalogue\\_detail\\_ics.htm?csnumber=59578](http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=59578)

[ISO-19005-1] International Organization for Standardization (ISO), "Document management -- Electronic document file format for long-term preservation -- Part 1: Use of PDF 1.4 (PDF/A-1)", 2005, [http://www.iso.org/iso/catalogue\\_detail?csnumber=38920](http://www.iso.org/iso/catalogue_detail?csnumber=38920)

[MSDN-Office2003XMLSchemas] Microsoft Corporation, "Office 2003: XML Reference Schemas", Download Center, <http://www.microsoft.com/en-us/download/details.aspx?id=101>

[MS-DOC] Microsoft Corporation, "[Word Binary File Format \(.doc\) Structure Specification](#)".

[MS-DOCX] Microsoft Corporation, "[Word Extensions to the Office Open XML File Format \(.docx\) Specification](#)".

[MSFT-RTF] Microsoft Corporation, "Rich Text Format (RTF) Specification", version 1.9.1, March 2008, <http://www.microsoft.com/en-us/download/details.aspx?id=10725>

[MSFT-XPS] Microsoft Corporation, "XML Paper Specification", Version 1.0, <http://www.microsoft.com/whdc/xps/xpsspec.msp>

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OFCGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[MS-OFFMACRO] Microsoft Corporation, "[Office Macro-Enabled File Format Specification](#)".

[MS-OFFMACRO2] Microsoft Corporation, "[Office Macro-Enabled File Format Version 2 Structure Specification](#)".

[MS-SPTWS] Microsoft Corporation, "[Service Platform Topology Web Service Protocol](#)".

[RFC2557] Palme, J., Hopmann, A., and Shelness, N., "MIME Encapsulation of Aggregate Documents, such as HTML (MHTML)", RFC 2557, March 1999, <http://www.rfc-editor.org/rfc/rfc2557.txt>

[RFC2818] Rescorla, E., "HTTP Over TLS", RFC 2818, May 2000, <http://www.ietf.org/rfc/rfc2818.txt>

[SOAP1.2/2] Gudgin, M., Hadley, M., Mendelsohn, N., Moreau, J., and Nielsen, H.F., "SOAP Version 1.2 Part 2: Adjuncts", W3C Recommendation, June 2003, <http://www.w3.org/TR/2003/REC-soap12-part2-20030624>


### 1.3 Protocol Overview (Synopsis)

This protocol allows a protocol client to create and manage a persistent queue of document conversions. It also allows the protocol client to initiate the conversion of documents in the queue from one file format to another file format. The protocol server maintains the queue and initiates conversions based on requests from a protocol client.

## 1.4 Relationship to Other Protocols

This protocol uses the **SOAP** message protocol for formatting request and response messages, as described in [\[SOAP1.1\]](#), [\[SOAP1.2/1\]](#) and [\[SOAP1.2/2\]](#). It transmits those messages by using **HTTP**, as described in [\[RFC2616\]](#), or **Hypertext Transfer Protocol over Secure Sockets Layer (HTTPS)**, as described in [\[RFC2818\]](#).

The following diagram shows the underlying messaging and transport stack that is used by the protocol:

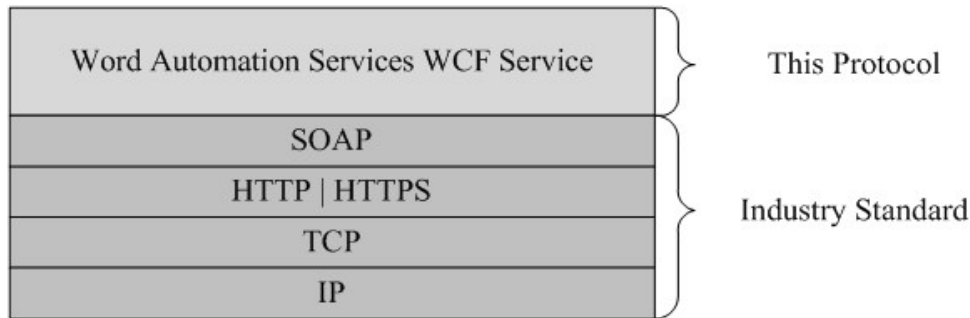

**Figure 1: This protocol in relation to underlying messaging and transport stack protocols**

Although the protocol server processes requests from the protocol client to create and manage a queue of **conversion jobs**, this protocol does not specify the method used by the protocol server to store the queue. Additionally, although the protocol server initiates the conversion of **conversion items** within the queue, this protocol does not specify the storage method of the input and output files.

## 1.5 Prerequisites/Preconditions

This protocol operates against a protocol server that exposes one or more **endpoint (4) URIs** that are known by protocol clients. The endpoint (4) URI of the protocol server and the transport that is used by the protocol server are either known by the protocol client or obtained by using the discovery mechanism that is described in [\[MS-SPTWS\]](#).

The protocol client obtains the requisite ApplicationClassId and ApplicationVersion values as described in [\[MS-SPTWS\]](#) section 3.1.4.1.3.3 and the endpoint (4) URI of the protocol server that provides the discovery mechanism, as described in [\[MS-SPSTWS\]](#), by means that are independent of either protocol.

This protocol requires the protocol client to have appropriate permission to call the methods on the protocol server.

The protocol client implements the token-based security mechanisms that are required by the protocol server and related security protocols, as described in [\[MS-SPSTWS\]](#).

This protocol assumes that the protocol client provides the input file and output file locations of a conversion item as **URLs** that are in a format that is understood by the protocol server.

## 1.6 Applicability Statement

This protocol is intended for use by protocol clients and protocol servers that are connected by high-bandwidth, low-latency network connections.

The protocol was designed to enable a protocol client to communicate with a protocol server to manage a queue of conversion jobs and initiates document conversions from one file format to another. The protocol server only performs actions in response to a request from the protocol client, which:

- Creates conversion jobs.
- Cancels conversion jobs.
- Provides access to the status of conversion jobs.
- Initiates the conversion of conversion items.

## 1.7 Versioning and Capability Negotiation

This specification covers versioning issues in the following areas:

- **Supported Transports:** This protocol can be implemented by using transports that support sending SOAP messages, as specified in section 2.1.
- **Protocol Versions:** This protocol is not versioned.
- **Capability Negotiation:** This protocol does not support version negotiation.

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the protocol. The **WSDL** in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the protocol as specified restricts the same elements to being non-empty, not null, and present.

### 2.1 Transport

Protocol servers **MUST** support SOAP over HTTP or HTTPS.

All protocol messages **MUST** be transported by using HTTP bindings at the transport level.

Protocol messages **MUST** be formatted as specified in either [\[SOAP1.1\]](#) section 4 or [\[SOAP1.2/1\]](#) section 5. Protocol server faults **MUST** be returned by using either HTTP status codes, as specified in [\[RFC2616\]](#) section 10, or **SOAP faults**, as specified in [\[SOAP1.1\]](#) section 4.4 or [\[SOAP1.2/1\]](#) section 5.4.

If the HTTPS transport is used, a server certificate **MUST** be deployed.

This protocol **MAY** transmit an additional SOAP header, the **ServiceContext** header, as specified in [\[MS-SPSTWS\]](#).

This protocol does not define any means for activating a protocol server or protocol client. The protocol server **MUST** be configured and begin listening in an implementation-specific way. In addition, the protocol client **MUST** know the format and transport that is used by the protocol server, for example, the SOAP format over an HTTP transport.

### 2.2 Common Message Syntax

This section contains common definitions that are used by this protocol. The syntax of the definitions uses **XML schema**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#), and WSDL, as specified in [\[WSDL\]](#).

#### 2.2.1 Namespaces

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#). Although this specification associates a specific **XML namespace prefix** for each XML namespace that is used, the choice of any particular XML namespace prefix is implementation-specific and not significant for interoperability.

| Prefix | Namespace URI   | Reference |
|--------|---|-----------|
| q1     | <a href="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch">http://schemas.microsoft.com/office/server/word/2009/08/convertBatch</a>                           |           |
| q10    | <a href="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus">http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus</a>                   |           |
| q11    | <a href="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response">http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response</a> |           |
| q12    | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob">http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob</a>                               |           |
| q13    | <a href="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response">http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response</a>             |           |

| Prefix | Namespace URI   | Reference                 |
|--------|---|---------------------------|
| q14    | http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob                  |                           |
| q15    | http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response         |                           |
| q16    | http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes          |                           |
| q17    | http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/response |                           |
| q18    | http://schemas.microsoft.com/office/server/word/2009/08/addJob                            |                           |
| q19    | http://schemas.microsoft.com/office/server/word/2009/08/addGroup                          |                           |
| q2     | http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings             |                           |
| q20    | http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response                 |                           |
| q21    | http://schemas.microsoft.com/office/server/word/2009/08/addItems                          |                           |
| q22    | http://schemas.microsoft.com/office/server/word/2009/08/submitJob                         |                           |
| q23    | http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response                |                           |
| q24    | http://schemas.microsoft.com/office/server/word/2009/08/getJobs                           |                           |
| q25    | http://schemas.microsoft.com/office/server/word/2009/08/getGroups                         |                           |
| q27    | http://schemas.microsoft.com/office/server/word/2009/08/getItems                          |                           |
| q3     | http://schemas.datacontract.org/2004/07/System  |                           |
| q30    | http://schemas.microsoft.com/office/server/word/2009/08/getId                             |                           |
| q31    | http://schemas.microsoft.com/office/server/word/2009/08/getId/response                    |                           |
| q4     | http://schemas.microsoft.com/office/server/word/2009/08/ping                              |                           |
| q5     | http://schemas.microsoft.com/office/server/word/2009/08/ping/response                     |                           |
| q6     | http://schemas.microsoft.com/office/server/word/2009/08/cancelJob                         |                           |
| q7     | http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response                |                           |
| q8     | http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus                      |                           |
| q9     | http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response             |                           |
| soap   | http://schemas.xmlsoap.org/wsdl/soap/   | <a href="#">[SOAP1.1]</a> |
| tns    | http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions          |                           |
| tns1   | http://schemas.microsoft.com/2003/10/Serialization/Arrays                                 |                           |
| tns2   | http://schemas.microsoft.com/2003/10/Serialization/                                       |                           |
| tns3   | http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response                |                           |



| Prefi<br>x | Namespace URI   | Reference  |
|------------|---|--|
| tns4       | http://schemas.microsoft.com/office/server/word/2009/08/getItems/response |  |
| tns5       | http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response  |  |
| tns6       | http://schemas.microsoft.com/office/server/word/2009/08/service           |  |
| tns7       | http://schemas.microsoft.com/office/server/word/2009/08/service/Imports   |  |
| wsaw       | http://www.w3.org/2006/05/addressing/wsd                                  |  |
| wSDL       | http://schemas.xmlsoap.org/wsd/   | <a href="#">[WSDL]</a>   |
| xs         | http://www.w3.org/2001/XMLSchema  | <a href="#">[XMLSCHEMA<br/>1]</a><br><a href="#">[XMLSCHEMA<br/>2]</a> |

## 2.2.2 Messages

This specification does not define any common **WSDL message** definitions.

## 2.2.3 Elements

The following table summarizes the set of common XML Schema element definitions defined by this specification. XML Schema element definitions that are specific to a particular operation are described with the operation.

| Element                      | Description  |
|------------------------------|--|
| <b>ConversionJobSettings</b> | Contains a collection of preferred settings for a conversion job.      |
| <b>GroupId</b>               | Uniquely identifies a <b>conversion group</b> within a conversion job. |
| <b>JobId</b>                 | Uniquely identifies a conversion job.                                  |
| <b>PartitionId</b>           | Identifies the <b>partition (1)</b> of a conversion job.               |
| <b>UserToken</b>             | Represents user credentials.   |

This specification does not define any common XML schema element definitions.

### 2.2.3.1 ConversionJobSettings (from namespace <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings>)

The **ConversionJobSettings** element is a **ConversionJobSettings** (section [2.2.4.2](#)) value that specifies a collection of preferred settings for all conversion items within a conversion job.

```
<xs:element minOccurs="0" name="Settings" nillable="true"
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
type="q2:ConversionJobSettings"/>
```

### 2.2.3.2 GroupId

The **GroupId** element contains a 2-byte, signed integer value that identifies a conversion group within a conversion job, as follows:

- The value MUST be a non-negative integer.
- The value MUST be less than 32,768.
- The protocol client MUST specify a unique value for each conversion group within the same conversion job.

```
<xs:element minOccurs="0" name="GroupId" type="xs:short"/>
```

### 2.2.3.3 JobId

The **JobId** element contains an 8-byte, unsigned integer value that uniquely identifies a conversion job. The protocol client MUST specify a unique 8-byte value for each conversion job.

```
<xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
```

### 2.2.3.4 PartitionId

The **PartitionId** element contains a **guid** (section [2.2.5.5](#)) value identifying the partition (1) of a conversion job.

```
<xs:element minOccurs="0" name="PartitionId" nillable="true"
xmlns:q1="http://schemas.microsoft.com/2003/10/Serialization/" type="q1:guid"/>
```

### 2.2.3.5 UserToken

The **UserToken** element is a variable-length structure that represents a user, encoded as a **base64Binary** value. This structure specifies the **SystemID** for the user and the **external groups** of which the user is a member

```
<xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
```

The following table specifies the binary format of the user token.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| Time   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Size   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Magic1 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                         |
|-------------------------|
| AuthenticationType      |
| UserSystemIdSize        |
| TokenGroupSize          |
| Magic2                  |
| UserSystemId (variable) |
| ...                     |
| TokenGroups (variable)  |
| ...                     |

**Time (8 bytes):** An 8-byte, unsigned integer value specifying the time that this token was generated, stored as seconds since midnight, January 1, 1899, **Coordinated Universal Time (UTC)**.

**Size (4 bytes):** A 4-byte, unsigned integer value specifying the length of the **UserToken** structure in bytes.

**Magic1 (4 bytes):** A 4-byte, unsigned integer specifying the version of the **UserToken** structure. This version of the protocol MUST always use the value 0xEAEBEEEF.

**AuthenticationType (4 bytes):** A 4-byte, unsigned integer value specifying the authentication provider for the SystemID in the **UserSystemId** field. The following table specifies the allowable values for this field.

| Value      | Meaning                           |
|------------|-----------------------------------|
| 0x00000001 | Windows Integrated Authentication |
| 0x00000003 | ASP.NET Forms Authentication      |

**UserSystemIdSize (4 bytes):** A 4-byte, unsigned integer value specifying the length of the **UserSystemId** field in bytes.

**TokenGroupSize (4 bytes):** A 4-byte, unsigned integer value specifying the length in bytes of the **TokenGroups** field.

**Magic2 (4 bytes):** A 4-byte, unsigned integer specifying the version of the **UserToken** structure. This version of the protocol MUST always use the value 0xDADDBEDF.

**UserSystemId (variable):** A variable-length field containing the serialized binary SystemID for the user. The length of this field is specified in the **UserSystemIdSize** field.

**TokenGroups (variable):** A variable-length field containing a Token Groups structure ([\[MS-WSSFO21\]](#) section 2.2.4.4), which contains serialized binary SystemIDs for the external groups of which the user is a member. The length of this field is specified in the **TokenGroupsSize** field.

## 2.2.4 Complex Types

The following table summarizes the set of common XML schema complex type definitions defined by this specification. XML schema complex type definitions that are specific to a particular operation are described with the operation.

| Complex type                 | Description   |
|------------------------------|---|
| <b>ArrayOfstring</b>         | The <b>ArrayOfstring</b> complex type represents an array of arbitrary string values.   |
| <b>ConversionJobSettings</b> | The <b>ConversionJobSettings</b> complex type specifies a collection of preferred settings for all conversion items within a conversion job.  |
| <b>FixedFormatSettings</b>   | The <b>FixedFormatSettings</b> complex type specifies a collection of preferred settings for the output file all conversion items within a conversion job that has a preferred <b>SaveFormat</b> (section <a href="#">2.2.5.9</a> ) value of <b>PDF</b> or <b>XPS</b> . |
| <b>ReadOnlyFault</b>         | The <b>ReadOnlyFault</b> complex type specifies a fault which indicates that the protocol server could not complete a request because the storage used for conversion jobs, conversion groups, and conversion items is in read-only mode. <a href="#">&lt;1&gt;</a>     |

### 2.2.4.1 ArrayOfstring

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

The **ArrayOfstring** complex type represents an array of arbitrary string values.

```
<xs:complexType name="ArrayOfstring" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**string:** A single string value.

### 2.2.4.2 ConversionJobSettings

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings>

The **ConversionJobSettings** complex type specifies a collection of preferred settings for all conversion items within a conversion job.

```
<xs:complexType name="ConversionJobSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="AddThumbnail" type="xs:boolean"/>
    <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="CompatibilityMode" type="tns:CompatibilityMode"/>
    <xs:element minOccurs="0" name="DefaultLanguageId" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="DoNotEmbedSystemFonts" type="xs:boolean"/>
    <xs:element minOccurs="0" name="EmbedFonts" type="xs:boolean"/>
    <xs:element minOccurs="0" name="FixedFormatSettings" nillable="true"
type="q2:FixedFormatSettings"/>
  </xs:sequence>
</xs:complexType>
```

```

    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="MarkupView" type="tns:MarkupTypes"/>
    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="OutputFormat" type="tns:SaveFormat"/>
    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="OutputSaveBehavior" type="tns:SaveBehavior"/>
    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="RevisionState" type="tns:RevisionState"/>
    <xs:element minOccurs="0" name="SubsetEmbeddedFonts" type="xs:boolean"/>
    <xs:element minOccurs="0" name="UpdateFields" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>

```

**AddThumbnail:** A **Boolean** value that specifies a preference to save the output file of a conversion item with an added **thumbnail**.

**CompatibilityMode:** A **CompatibilityMode** (section [2.2.5.2](#)) value that specifies the preferred compatibility mode of the output file of a conversion item.

**DefaultLanguageId:** A string value that specifies the preferred **culture name** to use when resolving language-dependent ambiguities when saving the output file of a conversion item.

**DoNotEmbedSystemFonts:** A Boolean value that specifies a preference for common fonts to not be saved within the output file of a conversion item.

**EmbedFonts:** A Boolean value that specifies a preference for fonts used within the document to be obfuscated and saved within the output file of a conversion item.

**FixedFormatSettings:** A **FixedFormatSettings** (section [2.2.4.3](#)) element that specifies a collection of preferred settings for all conversion items within a conversion job that has a preferred **SaveFormat** (section [2.2.5.9](#)) value of **PDF** or **XPS**.

**MarkupView:** A **MarkupTypes** (section [2.2.5.6](#)) value that specifies the preferred markup types in the output file of a conversion item.

**OutputFormat:** A **SaveFormat** (section [2.2.5.9](#)) value that specifies the preferred file format of the output file of a conversion item.

**OutputSaveBehavior:** A **SaveBehavior** (section [2.2.5.8](#)) value that specifies the preferred overwrite behavior of the output file of a conversion item when the output file already exists.

**RevisionState:** A **RevisionState** (section [2.2.5.7](#)) value that specifies the preferred visibility of revision marking and comments in the output file of a conversion item.

**SubsetEmbeddedFonts:** A Boolean value that specifies a preference to only save characters required for a document when saving embedded fonts in the output file of a conversion item.

**UpdateFields:** A Boolean value that specifies a preference to automatically update **fields (3)** when saving the output file of a conversion item.

### 2.2.4.3 FixedFormatSettings

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings>

The **FixedFormatSettings** complex type specifies a collection of preferred settings for the output file all conversion items within a conversion job that has a preferred **SaveFormat** (section [2.2.5.9](#)) value of **PDF** or **XPS**.

```
<xs:complexType name="FixedFormatSettings" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="BalloonState" type="tns:BalloonState"/>
    <xs:element minOccurs="0" name="BitmapEmbeddedFonts" type="xs:boolean"/>
    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="Bookmarks" type="tns:FixedFormatBookmark"/>
    <xs:element minOccurs="0" name="IncludeDocumentProperties" type="xs:boolean"/>
    <xs:element minOccurs="0" name="IncludeDocumentStructure" type="xs:boolean"/>
    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="OutputQuality" type="tns:FixedFormatQuality"/>
    <xs:element minOccurs="0" name="UsePDFA" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
```

**BalloonState:** A **BalloonState** (section [2.2.5.1](#)) value that specifies the preferred visibility of markup balloons in the output file of a conversion item.

**BitmapEmbeddedFonts:** A Boolean value that specifies a preference to rasterize fonts when they cannot be embedded in the output file of a conversion item.

**Bookmarks:** A **FixedFormatBookmark** (section [2.2.5.3](#)) value that specifies the preferred **bookmarks** to be created in the output file of a conversion item.

**IncludeDocumentProperties:** A Boolean value that specifies a preference to include **document properties** in the output file of a conversion item.

**IncludeDocumentStructure:** A Boolean value that specifies a preference to include document structure tags in the output file of a conversion item.

**OutputQuality:** A **FixedFormatQuality** (section [2.2.5.4](#)) value that specifies the preferred quality of the output file of a conversion item.

**UsePDFA:** A Boolean value that specifies a preference to use the PDF/A format defined in [ISO-19005-1](#) for the output file all conversion items within a conversion job that has a preferred **SaveFormat** (section [2.2.5.9](#)) value of **PDF**.

#### 2.2.4.4 ReadOnlyFault

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/service>

The **ReadOnlyFault** complex type specifies a fault which indicates that the protocol server could not complete a request because the storage used for conversion jobs, conversion groups, and conversion items is in read-only mode. [<2>](#)

```
<xs:complexType name="ReadOnlyFault" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence/>
</xs:complexType>
```

## 2.2.5 Simple Types

The following table summarizes the set of common XML schema simple type definitions defined by this specification. XML schema simple type definitions that are specific to a particular operation are described with the operation.

| Simple type                | Description   |
|----------------------------|---|
| <b>BalloonState</b>        | A string value specifying the preferred visibility of markup balloons in the output file of a conversion item in a conversion job with a preferred <b>SaveFormat</b> (section <a href="#">2.2.5.9</a> ) value of <b>PDF</b> or <b>XPS</b> . |
| <b>CompatibilityMode</b>   | A string value specifying the preferred compatibility mode of the output file of a conversion item.   |
| <b>FixedFormatBookmark</b> | A string value specifying the preferred creation of bookmarks in the output file of a conversion item in a conversion job with a preferred <b>SaveFormat</b> (section <a href="#">2.2.5.9</a> ) value of <b>PDF</b> or <b>XPS</b> .         |
| <b>FixedFormatQuality</b>  | A string value specifying the preferred quality of the output file of a conversion item in a conversion job with a preferred <b>SaveFormat</b> (section <a href="#">2.2.5.9</a> ) value of <b>PDF</b> or <b>XPS</b> .                       |
| <b>guid</b>                | A string representing a <b>GUID</b> or unique identifier.   |
| <b>MarkupTypes</b>         | A list of string values specifying the preferred markup types to display in the output file of a conversion item.   |
| <b>RevisionState</b>       | A string value specifying the preferred visibility of revision marking and comments in the output file of a conversion item.  |
| <b>SaveBehavior</b>        | A string value specifying the preferred overwrite behavior of the output file of a conversion item when the output file already exists.   |
| <b>SaveFormat</b>          | A string value specifying the preferred file format of the output file of a conversion item.  |

### 2.2.5.1 BalloonState

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions>

A string value specifying the preferred visibility of markup balloons in the output file of a conversion item in a conversion job with a preferred **SaveFormat** (section [2.2.5.9](#)) value of **PDF** or **XPS**.

```
<xs:simpleType name="BalloonState" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="AlwaysUse"/>
    <xs:enumeration value="Inline"/>
    <xs:enumeration value="OnlyCommentsAndFormatting"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **BalloonState** simple type.

| Value     | Meaning  |
|-----------|--|
| AlwaysUse | Display all revision marking and comments in balloons. |

| Value                     | Meaning  |
|---------------------------|--|
| Inline                    | Display all revision marking and comments inline.  |
| OnlyCommentsAndFormatting | Display only comments and formatting revisions in markup balloons and other revision marking inline. |

### 2.2.5.2 CompatibilityMode

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions>

A string value specifying the preferred compatibility mode of the output file of a conversion item.

```
<xs:simpleType name="CompatibilityMode" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Word2003"/>
    <xs:enumeration value="Word2007"/>
    <xs:enumeration value="Word2010"/>
    <xs:enumeration value="Word2013"/>
    <xs:enumeration value="MaintainCurrentSetting"/>
    <xs:enumeration value="Current"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **CompatibilityMode** simple type.

| Value                  | Meaning  |
|------------------------|--|
| Word2003               | Compatible with features defined in <a href="#">[MS-DOC]</a> .   |
| Word2007               | Compatible with word processing features specified in <a href="#">[ECMA-376]</a> .   |
| Word2010               | Compatible with word processing features specified in <a href="#">[ISO/IEC29500-1:2011]</a> and <a href="#">[ISO/IEC29500-4:2011]</a> as well as those specified in <a href="#">[MS-DOCX]</a> except where noted for an <a href="#">[MS-DOCX]</a> section 2.3.5 element with a <b>val</b> attribute whose value is <b>14</b> . |
| Word2013               | Compatible with word processing features specified in <a href="#">[ISO/IEC29500-1:2011]</a> and <a href="#">[ISO/IEC29500-4:2011]</a> as well as those specified in <a href="#">[MS-DOCX]</a> .  |
| MaintainCurrentSetting | Maintain the compatibility mode of the input file.   |
| Current                | Use the latest compatibility mode of the protocol server.  |

### 2.2.5.3 FixedFormatBookmark

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions>

A string value specifying the preferred creation of bookmarks in the output file of a conversion item in a conversion job with a preferred **SaveFormat** (section [2.2.5.9](#)) value of **PDF** or **XPS**.

```
<xs:simpleType name="FixedFormatBookmark" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="None"/>
    <xs:enumeration value="Headings"/>
    <xs:enumeration value="Bookmarks"/>
  </xs:restriction>
</xs:simpleType>
```



```

    </xs:restriction>
  </xs:simpleType>

```

The following table specifies the allowable values for the **FixedFormatBookmark** simple type.

| Value     | Meaning  |
|-----------|--|
| None      | Create no bookmarks.                                   |
| Headings  | Create bookmarks from the headings in the input file.  |
| Bookmarks | Create bookmarks from the bookmarks in the input file. |

#### 2.2.5.4 FixedFormatQuality

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions>

A string value specifying the preferred quality of the output file of a conversion item in a conversion job with a preferred **SaveFormat** (section [2.2.5.9](#)) value of **PDF** or **XPS**.

```

<xs:simpleType name="FixedFormatQuality" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Standard"/>
    <xs:enumeration value="Minimum"/>
  </xs:restriction>
</xs:simpleType>

```

The following table specifies the allowable values for the **FixedFormatQuality** simple type.

| Value    | Meaning                              |
|----------|--------------------------------------|
| Standard | Optimize quality for printing.       |
| Minimum  | Optimize quality for online viewing. |

#### 2.2.5.5 guid

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/>

A string representing a GUID or unique identifier.

```

<xs:simpleType name="guid" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:pattern value="\{8\}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
  </xs:restriction>
</xs:simpleType>

```

#### 2.2.5.6 MarkupTypes

**Namespace:** <http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions>

A list of string values specifying the preferred markup types to display in the output file of a conversion item.

```
<xs:simpleType name="MarkupTypes" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="Comments"/>
        <xs:enumeration value="Ink"/>
        <xs:enumeration value="Text"/>
        <xs:enumeration value="Formatting"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
```

The following table specifies the allowable values for the **MarkupTypes** simple type.

| Value      | Meaning                       |
|------------|-------------------------------|
| Comments   | Display comments.             |
| Ink        | Display ink annotations.      |
| Text       | Display content revisions.    |
| Formatting | Display formatting revisions. |

### 2.2.5.7 RevisionState

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions

A string value specifying the preferred visibility of revision marking and comments in the output file of a conversion item.

```
<xs:simpleType name="RevisionState" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Final"/>
    <xs:enumeration value="FinalShowingMarkup"/>
    <xs:enumeration value="Original"/>
    <xs:enumeration value="OriginalShowingMarkup"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **RevisionState** simple type.

| Value                 | Meaning  |
|-----------------------|--|
| Final                 | Display the final document without revision marking and comments.    |
| FinalShowingMarkup    | Display the final document with revision marking and comments.       |
| Original              | Display the original document without revision marking and comments. |
| OriginalShowingMarkup | Display the original document with revision marking and comments.    |

## 2.2.5.8 SaveBehavior

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions

A string value specifying the preferred overwrite behavior of the output file of a conversion item when the output file already exists.

```
<xs:simpleType name="SaveBehavior" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="AppendIfPossible"/>
    <xs:enumeration value="AlwaysOverwrite"/>
    <xs:enumeration value="AppendOnly"/>
    <xs:enumeration value="NeverOverwrite"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **SaveBehavior** simple type.

| Value            | Meaning  |
|------------------|--|
| AppendIfPossible | If the output file location supports version history, append to the file's version history. If the output file location does not support version history, overwrite the existing file. |
| AlwaysOverwrite  | Always overwrite the existing file.  |
| AppendOnly       | If the output file location supports version history, append to the file's version history. If the output file location does not support version history, do not save the output file. |
| NeverOverwrite   | Never overwrite an existing file.  |

## 2.2.5.9 SaveFormat

**Namespace:** http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions

A string value specifying the preferred file format of the output file of a conversion item.

```
<xs:simpleType name="SaveFormat" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Automatic"/>
    <xs:enumeration value="Document"/>
    <xs:enumeration value="DocumentMacroEnabled"/>
    <xs:enumeration value="Document97"/>
    <xs:enumeration value="Template"/>
    <xs:enumeration value="TemplateMacroEnabled"/>
    <xs:enumeration value="Template97"/>
    <xs:enumeration value="MHTML"/>
    <xs:enumeration value="PDF"/>
    <xs:enumeration value="RTF"/>
    <xs:enumeration value="XML"/>
    <xs:enumeration value="XPS"/>
    <xs:enumeration value="DocumentStrict"/>
  </xs:restriction>
</xs:simpleType>
```

The following table specifies the allowable values for the **SaveFormat** simple type.

| Value                | Meaning  |
|----------------------|--|
| Automatic            | Automatically determined based on the file extension.  |
| Document             | Office Open XML document. For more information, see <a href="#">[ECMA-376]</a> , <a href="#">[ISO/IEC29500-1:2011]</a> , <a href="#">[ISO/IEC29500-4:2011]</a> , and <a href="#">[MS-DOCX]</a> .   |
| DocumentMacroEnabled | Office Open XML document with <b>macros</b> enabled. For more information, see <a href="#">[ECMA-376]</a> , <a href="#">[ISO/IEC29500-1:2011]</a> , <a href="#">[ISO/IEC29500-4:2011]</a> , <a href="#">[MS-DOCX]</a> , <a href="#">[MS-OFFMACRO]</a> , and <a href="#">[MS-OFFMACRO2]</a> .   |
| Document97           | Word Binary File Format document. For more information, see <a href="#">[MS-DOC]</a> .   |
| Template             | Office Open XML document <b>template</b> . For more information, see <a href="#">[ECMA-376]</a> , <a href="#">[ISO/IEC29500-1:2011]</a> , <a href="#">[ISO/IEC29500-4:2011]</a> , and <a href="#">[MS-DOCX]</a> .  |
| TemplateMacroEnabled | Office Open XML document template with macros enabled. For more information, see <a href="#">[ECMA-376]</a> , <a href="#">[ISO/IEC29500-1:2011]</a> , <a href="#">[ISO/IEC29500-4:2011]</a> , <a href="#">[MS-DOCX]</a> , <a href="#">[MS-OFFMACRO]</a> , and <a href="#">[MS-OFFMACRO2]</a> . |
| Template97           | Word Binary File Format <b>document template (1)</b> . For more information, see <a href="#">[MS-DOC]</a> .  |
| MHTML                | Single file web page. For more information, see <a href="#">[RFC2557]</a> .  |
| PDF                  | <b>Portable Document Format (PDF)</b> file. For more information, see <a href="#">[ISO-19005-1]</a> .  |
| RTF                  | Rich Text Format (RTF). For more information, see <a href="#">[MSFT-RTF]</a> .   |
| XML                  | Word XML document. For more information, see <a href="#">[MSDN-Office2003XMLSchemas]</a> .   |
| XPS                  | <b>XML Paper Specification (XPS)</b> file. For more information, see <a href="#">[MSFT-XPS]</a> .  |
| DocumentStrict       | Strict Office Open XML document <a href="#">&lt;3&gt;</a> . For more information, see <a href="#">[ISO/IEC29500-1:2011]</a> , <a href="#">[ISO/IEC29500-4:2011]</a> , and <a href="#">[MS-DOCX]</a> .  |

### 2.2.6 Attributes

This specification does not define any common XML schema attribute definitions.

### 2.2.7 Groups

This specification does not define any common XML schema group definitions.

### 2.2.8 Attribute Groups

This specification does not define any common XML schema attribute group definitions.

## 3 Protocol Details

In the following sections, the schema definition might differ from the processing rules imposed by the protocol. The WSDL in this specification matches the WSDL that shipped with the product and provides a base description of the schema. The text that introduces the WSDL might specify differences that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be **empty**, **null**, or **not present** but the behavior of the protocol as specified restricts the same elements to being **non-empty**, **not null**, and **present**.

The client side of this protocol is simply a pass-through. That is, no additional timers or other state is required on the client side of this protocol. Calls that are made by the higher-layer protocol or application are passed directly to the transport, and the results that are returned by the transport are passed directly to the higher-layer protocol or application.

Except where specified, protocol clients SHOULD interpret Hypertext Transfer Protocol (HTTP) status codes that are returned by the protocol server as specified in [\[RFC2616\]](#), section 10.

This protocol allows protocol servers to notify protocol clients of application-level faults by using SOAP faults. Except where otherwise specified, these SOAP faults are not significant for interoperability and protocol clients can interpret them in an implementation-specific manner.

This protocol allows protocol servers to perform implementation-specific authorization checks and to notify protocol clients of authorization faults by using either HTTP status codes or SOAP faults, as specified previously in this section.

### 3.1 Server Details

#### 3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

This protocol uses the following three basic data structures:

- conversion item: A single conversion from an input file to an output file.
- conversion group: A hierarchical grouping of conversion items based on input file URL and output file URL. A conversion group is comprised of one or more conversion items. There are two logical types of conversion groups.
  - For conversion items within a conversion group that specify a common input root URL and common output root URL, the path specified by a conversion item will be a URL relative to both the common input root and output root URLs.
  - For conversion items within a conversion group that do not specify a common input root URL and common output root URL, the input file and output file paths specified by a conversion item will be a full, absolute URL.
- conversion job: A logical group of conversion groups that also contains conversion settings that apply to all conversion items within the conversion groups. A conversion job is comprised of one or more conversion groups.

The protocol client builds up a conversion job and sends it to the protocol server which stores the data unchanged. The protocol client adds a conversion job as follows:

1. The protocol client first calls the **AddJob** operation to add a new conversion job, specifying the conversion job identifier, conversion job settings and other data that applies to all conversion groups and conversion items in the conversion job.
2. For each conversion group in the conversion job, the protocol client calls the **AddGroup** or **AddItems** operation, specifying the conversion group identifier, all conversion items in the conversion group and other data that applies to all conversion items in the conversion group.
3. After all conversion groups have been added to the conversion job, the protocol client submits the conversion job by calling the **SubmitJob** operation.

The protocol client initiates the conversion of one or more conversion items to the protocol server using the **ConvertBatch** operation.

The protocol client is able to retrieve a list of conversion jobs, including the conversion job identifier and other metadata, with the **GetJobs** operation. The overall status of a specific conversion job is returned by the **GetJobStatus** operation. To check the status of a specific conversion item, the protocol client first uses the **GetGroups** operation to retrieve the list of conversion groups in a conversion job and then uses the **GetItems** operation to retrieve the individual conversion items in each conversion group.

### 3.1.1.1 Immediate Conversion Jobs

An **immediate conversion job** converts an input stream to an output stream.<4> The protocol client adds an immediate conversion job using the **AddSyncJob** operation or the **AddSyncStreamJob** operation.

The protocol client is able to check the status of one or more immediate conversion jobs using the **BatchGetSyncJobStatus** operation.

The protocol client can retrieve the output of the immediate conversion job submitted through the **AddSyncStreamJob** using the **GetSyncStreamOutputBytes** operation.

### 3.1.2 Timers

None.

### 3.1.3 Initialization

None.

### 3.1.4 Message Processing Events and Sequencing Rules

The following table summarizes the list of operations as defined by this specification.

| Operation       | Description   |
|-----------------|---|
| <b>AddGroup</b> | Adds a group of conversion items that share a common input and output path to a conversion job. |
| <b>AddItems</b> | Adds a group of conversion items that do not share a common path to a conversion job.           |

| Operation                       | Description  |
|---------------------------------|--|
| <b>AddJob</b>                   | Adds a new conversion job to the queue.  |
| <b>AddSyncJob</b>               | Adds an immediate conversion job from a source file path and a destination file path.<5>   |
| <b>AddSyncStreamJob</b>         | Adds an immediate conversion job from a stream containing the input file.<6>   |
| <b>BatchGetSyncJobStatus</b>    | Get the status of a number of immediate conversion jobs.<7>  |
| <b>CancelJob</b>                | Marks a conversion job as canceled.  |
| <b>ConvertBatch</b>             | Initiates the conversion of a batch of conversion items.   |
| <b>GetGroups</b>                | Gets a conversion job and the conversion groups within the conversion job.   |
| <b>GetId</b>                    | Gets the unique identifier of a currently running instance of the protocol server.   |
| <b>GetItems</b>                 | Gets the conversion items in a conversion group.   |
| <b>GetJobs</b>                  | Gets a list of conversion jobs.  |
| <b>GetJobStatus</b>             | Gets the status of a conversion job.   |
| <b>GetSyncStreamOutputBytes</b> | Retrieves the output file for the immediate conversion job that was submitted with the <b>AddSyncStreamJob</b> (section 3.1.4.14) <b>WSDL operation</b> .<8> |
| <b>Ping</b>                     | Contacts a protocol server to determine the responsiveness of the service.   |
| <b>SubmitJob</b>                | Marks a conversion job as submitted to specify that all conversion groups in a conversion job have been added.   |

### 3.1.4.1 AddGroup

Adds a group of conversion items that share a common input and output path to a conversion job.

The following is the WSDL port type specification of the **AddGroup** WSDL operation.

```
<wsdl:operation name="AddGroup" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"
    name="AddGroupRequest" message="tns6:AddGroupRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
    name="AddGroupResponse" message="tns6:AddGroupResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns6:IConversionServiceApplication_AddGroup_ReadOnlyFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **AddGroupRequest** request WSDL message for each group of conversion items being added to a conversion job that share a common input and output path.

The protocol server MUST respond with an **AddGroupResponse** message.

### 3.1.4.1.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                 | Description   |
|-------------------------|---|
| <b>AddGroupRequest</b>  | The request WSDL message for the <b>AddGroup</b> WSDL operation.  |
| <b>AddGroupResponse</b> | The response WSDL message for the <b>AddGroup</b> WSDL operation. |

#### 3.1.4.1.1.1 AddGroupRequest

The request WSDL message for the **AddGroup** WSDL operation.

The **SOAP action** value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/addGroup
```

The **SOAP body** contains the **AddGroupRequest** element.

#### 3.1.4.1.1.2 AddGroupResponse

The response WSDL message for the **AddGroup** WSDL operation.

The SOAP body contains the **AddGroupResponse** element.

### 3.1.4.1.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                 | Description   |
|-------------------------|---|
| <b>AddGroupRequest</b>  | The input data for the <b>AddGroup</b> WSDL operation.  |
| <b>AddGroupResponse</b> | The result data for the <b>AddGroup</b> WSDL operation. |

#### 3.1.4.1.2.1 AddGroupRequest

The **AddGroupRequest** element specifies the input data for the **AddGroup** WSDL operation.

```
<xs:element name="AddGroupRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="Items" nillable="true" type="tns1:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```



```

    <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**GroupId:** A **GroupId** (section [2.2.3.2](#)) element containing a new, unique value generated by the protocol client that identifies the conversion group within the conversion job.

**InputRoot:** A string containing the base URL of the input path of all conversion items in the conversion group. This element MUST NOT be null.

**Items:** An **ArrayOfstring** (section [2.2.4.1](#)) element containing the path of each conversion item in the conversion group, relative to the **InputRoot** and **OutputRoot**.

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job to which the conversion group belongs.

**OutputRoot:** A string containing the base URL of the output path of all conversion items in the conversion group. This element MUST NOT be null.

### 3.1.4.1.2.2 AddGroupResponse

The **AddGroupResponse** element specifies the result data for the **AddGroup** WSDL operation.

```

<xs:element name="AddGroupResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>

```

### 3.1.4.1.3 Complex Types

None.

### 3.1.4.1.4 Simple Types

None.

### 3.1.4.1.5 Attributes

None.

### 3.1.4.1.6 Groups

None.

### 3.1.4.1.7 Attribute Groups

None.

### 3.1.4.2 AddItems

Adds a group of conversion items that do not share a common path to a conversion job.

The following is the WSDL port type specification of the **AddItems** WSDL operation.

```
<wsdl:operation name="AddItems" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addItems"
    name="AddItemsRequest" message="tns6:AddItemsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
    name="AddItemsResponse" message="tns6:AddItemsResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns6:IConversionServiceApplication_AddItems_ReadOnlyFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **AddItemsRequest** request WSDL message for each group of conversion items being added to a conversion job that do not necessarily share a common input and output path.

The protocol server MUST respond with an **AddItemsResponse** message.

### 3.1.4.2.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                 | Description   |
|-------------------------|---|
| <b>AddItemsRequest</b>  | The request WSDL message for the <b>AddItems</b> WSDL operation.  |
| <b>AddItemsResponse</b> | The response WSDL message for the <b>AddItems</b> WSDL operation. |

#### 3.1.4.2.1.1 AddItemsRequest

The request WSDL message for the **AddItems** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/addItems
```

The SOAP body contains the **AddItemsRequest** element.

#### 3.1.4.2.1.2 AddItemsResponse

The response WSDL message for the **AddItems** WSDL operation.

The SOAP body contains the **AddItemsResponse** element.

### 3.1.4.2.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                 | Description   |
|-------------------------|---|
| <b>AddItemsRequest</b>  | The input data for the <b>AddItems</b> WSDL operation.  |
| <b>AddItemsResponse</b> | The result data for the <b>AddItems</b> WSDL operation. |

### 3.1.4.2.2.1 AddItemsRequest

The **AddItemsRequest** element specifies the input data for the **AddItems** WSDL operation.

```
<xs:element name="AddItemsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="InputUrls" nillable="true" type="tns1:ArrayOfstring"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="OutputUrls" nillable="true" type="tns1:ArrayOfstring"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**GroupId:** A **GroupId** (section [2.2.3.2](#)) element containing a new, unique value generated by the protocol client that identifies the conversion group within the conversion job.

**InputUrls:** An **ArrayOfstring** (section [2.2.4.1](#)) element containing the full input path of each conversion item in the conversion group. This element MUST contain the same number of strings as the **OutputUrls** element.

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job to which the conversion group belongs.

**OutputUrls:** An **ArrayOfstring** (section [2.2.4.1](#)) element containing the full output path of each conversion item in the conversion group. This element MUST contain the same number of strings as the **InputUrls** element.

### 3.1.4.2.2.2 AddItemsResponse

The **AddItemsResponse** element specifies the result data for the **AddItems** WSDL operation.

```
<xs:element name="AddItemsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

### 3.1.4.2.3 Complex Types

None.

### 3.1.4.2.4 Simple Types

None.

### 3.1.4.2.5 Attributes

None.

### 3.1.4.2.6 Groups

None.

### 3.1.4.2.7 Attribute Groups

None.

### 3.1.4.3 AddJob

Adds a new conversion job to the queue.

The following is the WSDL port type specification of the **AddJob** WSDL operation.

```
<wsdl:operation name="AddJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
    name="AddJobRequest" message="tns6:AddJobRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addJob/response"
    name="AddJobResponse" message="tns6:AddJobResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns6:IConversionServiceApplication_AddJob_ReadOnlyFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends an **AddJobRequest** request WSDL message to add a new conversion job to the queue.

The protocol server MUST respond with an **AddJobResponse** message.

#### 3.1.4.3.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message               | Description   |
|-----------------------|---|
| <b>AddJobRequest</b>  | The request WSDL message for the <b>AddJob</b> WSDL operation.  |
| <b>AddJobResponse</b> | The response WSDL message for the <b>AddJob</b> WSDL operation. |

##### 3.1.4.3.1.1 AddJobRequest

The request WSDL message for the **AddJob** WSDL operation.

The SOAP action value is:

<http://schemas.microsoft.com/office/server/word/2009/08/addJob>

The SOAP body contains the **AddJobRequest** element.

### 3.1.4.3.1.2 AddJobResponse

The response WSDL message for the **AddJob** WSDL operation.

The SOAP body contains the **AddJobResponse** element.

### 3.1.4.3.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element               | Description   |
|-----------------------|---|
| <b>AddJobRequest</b>  | The input data for the <b>AddJob</b> WSDL operation.  |
| <b>AddJobResponse</b> | The result data for the <b>AddJob</b> WSDL operation. |

#### 3.1.4.3.2.1 AddJobRequest

The **AddJobRequest** element specifies the input data for the **AddJob** WSDL operation.

```
<xs:element name="AddJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
      <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
      <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**JobId:** A **JobId** (section [2.2.3.3](#)) element containing a new, unique value generated by the protocol client that identifies the conversion job.

**Name:** An optional string that is stored along with the conversion job.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the conversion job.

**Settings:** An optional **ConversionJobSettings** (section [2.2.4.2](#)) element that provides a collection of preferred settings for all conversion items within the conversion job.

**UserToken:** A **UserToken** (section [2.2.3.5](#)) element that provides user credentials for accessing the input and output files in the conversion job.

### 3.1.4.3.2 AddJobResponse

The **AddJobResponse** element specifies the result data for the **AddJob** WSDL operation.

```
<xs:element name="AddJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

### 3.1.4.3.3 Complex Types

None.

### 3.1.4.3.4 Simple Types

None.

### 3.1.4.3.5 Attributes

None.

### 3.1.4.3.6 Groups

None.

### 3.1.4.3.7 Attribute Groups

None.

### 3.1.4.4 CancelJob

Marks a conversion job as canceled.

The following is the WSDL port type specification of the **CancelJob** WSDL operation.

```
<wsdl:operation name="CancelJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob"
    name="CancelJobRequest" message="tns6:CancelJobRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response"
    name="CancelJobResponse" message="tns6:CancelJobResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
    name="ReadOnlyFaultFault"
    message="tns6:IConversionServiceApplication_CancelJob_ReadOnlyFaultFault_FaultMessage"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **CancelJobRequest** request WSDL message to mark a conversion job as canceled.

The protocol server MUST respond with a **CancelJobResponse** response WSDL message.

### 3.1.4.4.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                  | Description  |
|--------------------------|--|
| <b>CancelJobRequest</b>  | The request WSDL message for the <b>CancelJob</b> WSDL operation.  |
| <b>CancelJobResponse</b> | The response WSDL message for the <b>CancelJob</b> WSDL operation. |

#### 3.1.4.4.1.1 CancelJobRequest

The request WSDL message for the **CancelJob** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/cancelJob
```

The SOAP body contains the **CancelJobRequest** element.

#### 3.1.4.4.1.2 CancelJobResponse

The response WSDL message for the **CancelJob** WSDL operation.

The SOAP body contains the **CancelJobResponse** element.

### 3.1.4.4.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                  | Description  |
|--------------------------|--|
| <b>CancelJobRequest</b>  | The input data for the <b>CancelJob</b> WSDL operation.  |
| <b>CancelJobResponse</b> | The result data for the <b>CancelJob</b> WSDL operation. |

#### 3.1.4.4.2.1 CancelJobRequest

The **CancelJobRequest** element specifies the input data for the **CancelJob** WSDL operation.

```
<xs:element name="CancelJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>  
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job to mark as canceled.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the conversion job.

### 3.1.4.4.2 CancelJobResponse

The **CancelJobResponse** element specifies the result data for the **CancelJob** WSDL operation.

```
<xs:element name="CancelJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

### 3.1.4.4.3 Complex Types

None.

### 3.1.4.4.4 Simple Types

None.

### 3.1.4.4.5 Attributes

None.

### 3.1.4.4.6 Groups

None.

### 3.1.4.4.7 Attribute Groups

None.

### 3.1.4.5 ConvertBatch

Initiates the conversion of a batch of conversion items.

The following is the WSDL port type specification of the **ConvertBatch** WSDL operation.

```
<wsdl:operation name="ConvertBatch" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"
    name="ConvertBatchRequest" message="tns6:ConvertBatchRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **ConvertBatchRequest** request WSDL message to initiate the conversion of a batch of conversion items on the currently running instance of the protocol server and the protocol server MUST initiate the conversion of each conversion item specified by a **ConvertBatchItem** element in the **Items** child element of the **ConvertBatchRequest** request WSDL message.



The conversion process is asynchronous. There is no response message for the **ConvertBatch** WSDL operation. Clients can query the status of the conversion job using the **GetJobStatus** WSDL operation as specified in section [3.1.4.10](#).

### 3.1.4.5.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                    | Description  |
|----------------------------|--|
| <b>ConvertBatchRequest</b> | The request WSDL message for the <b>ConvertBatch</b> WSDL operation. |

#### 3.1.4.5.1.1 ConvertBatchRequest

The request WSDL message for the **ConvertBatch** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/convertBatch
```

The SOAP body contains the **ConvertBatchRequest** element.

### 3.1.4.5.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                    | Description  |
|----------------------------|--|
| <b>ConvertBatchRequest</b> | The input data for the <b>ConvertBatch</b> WSDL operation. |

#### 3.1.4.5.2.1 ConvertBatchRequest

The **ConvertBatchRequest** element specifies the input data for the **ConvertBatch** WSDL operation.

```
<xs:element name="ConvertBatchRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Items" nillable="true"
type="q1:ArrayOfConvertBatchItem"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Jobs" nillable="true"
type="tns1:ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**Items:** An **ArrayOfConvertBatchItem** element containing the set of conversion items to be converted.

**Jobs:** An **ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA** element that represents a **dictionary** of conversion jobs to which the conversion items in the **ConvertBatchRequest** request WSDL message belong.

### 3.1.4.5.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type  | Description  |
|---|--|
| <b>ArrayOfConvertBatchItem</b>                              | The <b>ArrayOfConvertBatchItem</b> complex type contains a set of <b>ConvertBatchItem</b> elements representing the conversion items for which conversion is being initiated.  |
| <b>ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA</b> | The <b>ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA</b> complex type represents a dictionary of conversion jobs to which the conversion items in the <b>ConvertBatchRequest</b> request WSDL message belong. |
| <b>ConvertBatchItem</b>                                     | The <b>ConvertBatchItem</b> complex type represents a single conversion item in a <b>ConvertBatchRequest</b> request WSDL message.   |
| <b>ConvertBatchJob</b>                                      | The <b>ConvertBatchJob</b> complex type represents a single conversion job to which one or more conversion items in the <b>ConvertBatchRequest</b> request WSDL message belong.                                      |

#### 3.1.4.5.3.1 ArrayOfConvertBatchItem

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/convertBatch>

The **ArrayOfConvertBatchItem** complex type contains a set of **ConvertBatchItem** elements representing the conversion items for which conversion is being initiated.

```
<xs:complexType name="ArrayOfConvertBatchItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="ConvertBatchItem" nillable="true"
      type="q1:ConvertBatchItem"/>
  </xs:sequence>
</xs:complexType>
```

**ConvertBatchItem:** A single **ConvertBatchItem** element representing a single conversion item.

#### 3.1.4.5.3.2 ConvertBatchItem

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/convertBatch>

The **ConvertBatchItem** complex type represents a single conversion item in a **ConvertBatchRequest** request WSDL message.

```
<xs:complexType name="ConvertBatchItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
```

```

<xs:sequence>
  <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
  <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
  <xs:element minOccurs="0" name="ItemId" type="xs:int"/>
  <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
  <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
</xs:sequence>
</xs:complexType>

```

**GroupId:** A **GroupId** (section [2.2.3.2](#)) element that identifies the conversion group to which the conversion item belongs.

**InputFile:** A string value containing the full path for the input file of the conversion item.

**ItemId:** An integer value that identifies the conversion item within the conversion group to which the conversion item belongs.

**JobId:** A **JobId** (section [2.2.3.3](#)) element that identifies the conversion job to which the conversion item belongs.

**OutputFile:** A string value containing the full path for the output file of the conversion item.

### 3.1.4.5.3.3 ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA

**Namespace:** http://schemas.microsoft.com/2003/10/Serialization/Arrays

The **ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA** complex type represents a dictionary of conversion jobs to which the conversion items in the **ConvertBatchRequest** request WSDL message belong.

```

<xs:complexType name="ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded"
      name="KeyValueOfunsignedLongConvertBatchJobdfuNjXEA">
      <xs:complexType>
        <xs:sequence>
          <xs:element name="Key" type="xs:unsignedLong"/>
          <xs:element
            xmlns:q1="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch" name="Value"
            nillable="true" type="q1:ConvertBatchJob"/>
        </xs:sequence>
      </xs:complexType>
    </xs:element>
  </xs:sequence>
</xs:complexType>

```

**KeyValueOfunsignedLongConvertBatchJobdfuNjXEA:** A single dictionary entry representing a conversion job and the unique identifier of that conversion job.

**KeyValueOfunsignedLongConvertBatchJobdfuNjXEA.Key:** The key of the dictionary entry containing an integer value that uniquely identifies the conversion job.

**KeyValueOfunsignedLongConvertBatchJobdfuNjXEA.Value:** The **ConvertBatchJob** value of the dictionary entry.

### 3.1.4.5.3.4 ConvertBatchJob

**Namespace:** http://schemas.microsoft.com/office/server/word/2009/08/convertBatch

The **ConvertBatchJob** complex type represents a single conversion job to which one or more conversion items in the **ConvertBatchRequest** request WSDL message belong.

```
<xs:complexType name="ConvertBatchJob" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element
      xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
      minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
    <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>
```

**Settings:** A **ConversionJobSettings** (section [2.2.4.2](#)) element specifying the preferred settings for the conversion items within the conversion job.

**UserToken:** A **UserToken** (section [2.2.3.5](#)) element that provides user credentials for accessing the input and output files of the conversion items within the conversion job.

### 3.1.4.5.4 Simple Types

None.

### 3.1.4.5.5 Attributes

None.

### 3.1.4.5.6 Groups

None.

### 3.1.4.5.7 Attribute Groups

None.

### 3.1.4.6 GetGroups

Gets a conversion job and the conversion groups within the conversion job.

The following is the WSDL port type specification of the **GetGroups** WSDL operation.

```
<wsdl:operation name="GetGroups" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"
    name="GetGroupsRequest" message="tns6:GetGroupsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"
    name="GetGroupsResponse" message="tns6:GetGroupsResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetGroupsRequest** request WSDL message to get a conversion job and all conversion groups within the conversion job.

The protocol server MUST respond with a **GetGroupsResponse** response WSDL message.

### 3.1.4.6.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                  | Description  |
|--------------------------|--|
| <b>GetGroupsRequest</b>  | The request WSDL message for the <b>GetGroups</b> WSDL operation.  |
| <b>GetGroupsResponse</b> | The response WSDL message for the <b>GetGroups</b> WSDL operation. |

#### 3.1.4.6.1.1 GetGroupsRequest

The request WSDL message for the **GetGroups** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getGroups
```

The SOAP body contains the **GetGroupsRequest** element.

#### 3.1.4.6.1.2 GetGroupsResponse

The response WSDL message for the **GetGroups** WSDL operation.

The SOAP body contains the **GetGroupsResponse** element.

### 3.1.4.6.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                  | Description  |
|--------------------------|--|
| <b>GetGroupsRequest</b>  | The input data for the <b>GetGroups</b> WSDL operation.  |
| <b>GetGroupsResponse</b> | The result data for the <b>GetGroups</b> WSDL operation. |

#### 3.1.4.6.2.1 GetGroupsRequest

The **GetGroupsRequest** element specifies the input data for the **GetGroups** WSDL operation.

```
<xs:element name="GetGroupsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>  
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"  
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

```

    </xs:complexType>
  </xs:element>

```

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the conversion job.

### 3.1.4.6.2.2 GetGroupsResponse

The **GetGroupsResponse** element specifies the result data for the **GetGroups** WSDL operation.

```

<xs:element name="GetGroupsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="Groups" nillable="true"
type="tns3:ArrayOfGetGroupsGroup"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
      <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**CancelTime:** A **dateTime** value specifying when the conversion job was canceled. If the conversion job has not been canceled, the protocol server MUST write a null value.

**CreateTime:** A **dateTime** value specifying when the conversion job was created.

**Groups:** An **ArrayOfGetGroupsGroup** element containing the conversion groups within the conversion job.

**NotSubmitted:** A Boolean value specifying if the conversion job has not been submitted.

**Settings:** A **ConversionJobSettings** (section [2.2.4.2](#)) element specifying the preferred settings for all conversion items within the conversion job.

### 3.1.4.6.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                 | Description  |
|------------------------------|--|
| <b>ArrayOfGetGroupsGroup</b> | The <b>ArrayOfGetGroupsGroup</b> complex type contains a set of <b>GetGroupsGroup</b> elements representing the conversion groups in a conversion job. |
| <b>GetGroupsGroup</b>        | The <b>GetGroupsGroup</b> complex type represents a single conversion group in a conversion job.   |

### 3.1.4.6.3.1 ArrayOfGetGroupsGroup

**Namespace:** http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response

The **ArrayOfGetGroupsGroup** complex type contains a set of **GetGroupsGroup** elements representing the conversion groups in a conversion job.

```
<xs:complexType name="ArrayOfGetGroupsGroup" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetGroupsGroup" nillable="true"
      type="tns3:GetGroupsGroup"/>
  </xs:sequence>
</xs:complexType>
```

**GetGroupsGroup:** A single **GetGroupsGroup** element representing a single conversion group in a conversion job.

### 3.1.4.6.3.2 GetGroupsGroup

**Namespace:** http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response

The **GetGroupsGroup** complex type represents a single conversion group in a conversion job.

```
<xs:complexType name="GetGroupsGroup" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="Id" type="xs:short"/>
    <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
  </xs:sequence>
</xs:complexType>
```

**Id:** An integer value identifying the conversion group.

**InputRoot:** If this value is non-null, this MUST be a string value specifying the base input URL of the of all conversion items in the conversion group.

**OutputRoot:** If the **InputRoot** element has a non-null value, this MUST be a string value specifying the base output URL of all conversion items in the conversion group. Otherwise, this element MUST be ignored.

### 3.1.4.6.4 Simple Types

None.

### 3.1.4.6.5 Attributes

None.

### 3.1.4.6.6 Groups

None.

### 3.1.4.6.7 Attribute Groups

None.

### 3.1.4.7 GetId

Gets the unique identifier of a currently running instance of the protocol server.

The following is the WSDL port type specification of the **GetId** WSDL operation.

```
<wsdl:operation name="GetId" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getId"
    name="GetIdRequest" message="tns6:GetIdRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getId/response"
    name="GetIdResponse" message="tns6:GetIdResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetIdRequest** request WSDL message and the protocol server MUST return a **GetIdResponse** response WSDL message, as follows:

- The protocol server MUST return an identifier that uniquely identifies the current instance of the protocol server.
- The protocol server MUST NOT return an identifier used by another protocol server.
- If the current instance of the protocol server has previously received a **GetIdRequest** request WSDL message, the protocol server MUST return the same identifier returned in the previous **GetIdResponse** response WSDL message.
- If the current instance of the protocol server has not previously received a **GetIdRequest** request WSDL message, the protocol server MUST return a new identifier.

#### 3.1.4.7.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message              | Description  |
|----------------------|--|
| <b>GetIdRequest</b>  | The request WSDL message for the <b>GetId</b> WSDL operation.  |
| <b>GetIdResponse</b> | The response WSDL message for the <b>GetId</b> WSDL operation. |

##### 3.1.4.7.1.1 GetIdRequest

The request WSDL message for the **GetId** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getId
```

The SOAP body contains the **GetIdRequest** element.



### 3.1.4.7.1.2 GetIdResponse

The response WSDL message for the **GetId** WSDL operation.

The SOAP body contains the **GetIdResponse** element.

### 3.1.4.7.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element              | Description  |
|----------------------|--|
| <b>GetIdRequest</b>  | The input data for the <b>GetId</b> WSDL operation.  |
| <b>GetIdResponse</b> | The result data for the <b>GetId</b> WSDL operation. |

#### 3.1.4.7.2.1 GetIdRequest

The **GetIdRequest** element specifies the input data for the **GetId** WSDL operation.

```
<xs:element name="GetIdRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

#### 3.1.4.7.2.2 GetIdResponse

The **GetIdResponse** element specifies the result data for the **GetId** WSDL operation.

```
<xs:element name="GetIdResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="AssignedItemCount" type="xs:int"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
        minOccurs="0" name="Id" type="tns2:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**AssignedItemCount:** An integer value that specifies the count of conversion items the current running instance of the protocol server is converting.

**Id:** A **guid** (section [2.2.5.5](#)) element that uniquely identifies the current running instance of the protocol server.

#### 3.1.4.7.3 Complex Types

None.

#### 3.1.4.7.4 Simple Types

None.

### 3.1.4.7.5 Attributes

None.

### 3.1.4.7.6 Groups

None.

### 3.1.4.7.7 Attribute Groups

None.

### 3.1.4.8 GetItems

Gets the conversion items in a conversion group.

The following is the WSDL port type specification of the **GetItems** WSDL operation.

```
<wsdl:operation name="GetItems" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
    name="GetItemsRequest" message="tns6:GetItemsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"
    name="GetItemsResponse" message="tns6:GetItemsResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetItemsRequest** request WSDL message to get conversion items within a conversion group.

The protocol server MUST respond with a **GetItemsResponse** response WSDL message.

#### 3.1.4.8.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                 | Description   |
|-------------------------|---|
| <b>GetItemsRequest</b>  | The request WSDL message for the <b>GetItems</b> WSDL operation.  |
| <b>GetItemsResponse</b> | The response WSDL message for the <b>GetItems</b> WSDL operation. |

##### 3.1.4.8.1.1 GetItemsRequest

The request WSDL message for the **GetItems** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getItems
```

The SOAP body contains the **GetItemsRequest** element.

### 3.1.4.8.1.2 GetItemsResponse

The response WSDL message for the **GetItems** WSDL operation.

The SOAP body contains the **GetItemsResponse** element.

### 3.1.4.8.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                 | Description   |
|-------------------------|---|
| <b>GetItemsRequest</b>  | The input data for the <b>GetItems</b> WSDL operation.  |
| <b>GetItemsResponse</b> | The result data for the <b>GetItems</b> WSDL operation. |

#### 3.1.4.8.2.1 GetItemsRequest

The **GetItemsRequest** element specifies the input data for the **GetItems** WSDL operation.

```
<xs:element name="GetItemsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Canceled" type="xs:boolean"/>
      <xs:element minOccurs="0" name="Failed" type="xs:boolean"/>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element minOccurs="0" name="InProgress" type="xs:boolean"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="NotStarted" type="xs:boolean"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
      <xs:element minOccurs="0" name="Succeeded" type="xs:boolean"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**Canceled:** A Boolean value specifying if unfinished conversion items in a canceled conversion job are included in the **GetItemsResponse** response WSDL message.

**Failed:** A Boolean value specifying if failed conversion items in a submitted conversion job are included in the **GetItemsResponse** response WSDL message.

**GroupId:** A **GroupId** (section [2.2.3.2](#)) element identifying the conversion group.

**InProgress:** A Boolean value specifying if in-progress conversion items in a non-canceled, submitted conversion job are included in the **GetItemsResponse** response WSDL message.

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job.

**NotStarted:** A Boolean value specifying if unstarted conversion items in a non-canceled, submitted conversion job are included in the **GetItemsResponse** response WSDL message.

**NotSubmitted:** A Boolean value specifying if conversion items in a non-submitted and non-cancelled conversion job are included in the **GetItemsResponse** response WSDL message.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the conversion job.

**Succeeded:** A Boolean value specifying if successfully finished conversion items in a submitted conversion job are included in the **GetItemsResponse** response WSDL message.

### 3.1.4.8.2.2 GetItemsResponse

The **GetItemsResponse** element specifies the result data for the **GetItems** WSDL operation.

```
<xs:element name="GetItemsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element
        xmlns:tns4="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"
        minOccurs="0" ref="tns4:Items"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**tns4:Items:** An **ArrayOfGetItemsItem** element containing a set of conversion items.

### 3.1.4.8.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type               | Description   |
|----------------------------|---|
| <b>ArrayOfGetItemsItem</b> | The <b>ArrayOfGetItemsItem</b> complex type contains a set of <b>GetItemsItem</b> elements representing conversion items in a conversion group. |
| <b>GetItemsItem</b>        | The <b>GetItemsItem</b> complex type represents a single conversion item in a conversion group.   |

#### 3.1.4.8.3.1 ArrayOfGetItemsItem

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/getItems/response>

The **ArrayOfGetItemsItem** complex type contains a set of **GetItemsItem** elements representing conversion items in a conversion group.

```
<xs:complexType name="ArrayOfGetItemsItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetItemsItem" nillable="true"
      type="tns4:GetItemsItem"/>
  </xs:sequence>
</xs:complexType>
```

**GetItemsItem:** A single **GetItemsItem** element representing a single conversion item in a conversion group.

#### 3.1.4.8.3.2 GetItemsItem

**Namespace:** <http://schemas.microsoft.com/office/server/word/2009/08/getItems/response>

The **GetItemsItem** complex type represents a single conversion item in a conversion group.

```
<xs:complexType name="GetItemsItem" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="Id" type="xs:int"/>
    <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StartTime" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="StopTime" nillable="true" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
```

**ErrorCode:** An integer value specifying the error code of a failed conversion item. If the conversion item has failed, the protocol server **MUST** write a non-null value.

**Id:** An integer value that uniquely identifies the conversion item within the conversion group.

**InputFile:** If the conversion group specifies base input and output URLs, this **MUST** be a string value containing the path of the conversion item relative to those URLs. If the conversion group does not specify base input and output URLs, this **MUST** be a string value containing the full input path of the conversion item.

**OutputFile:** If the conversion group specifies base input and output URLs, the protocol client **MUST** ignore this element. If the conversion group does not specify base input and output URLs, this **MUST** be a string value containing the full output path of the conversion item.

**StartTime:** A **dateTime** value that specifies when the conversion item started.

**StopTime:** A **dateTime** value that specifies when the conversion item finished.

#### 3.1.4.8.4 Simple Types

None.

#### 3.1.4.8.5 Attributes

None.

#### 3.1.4.8.6 Groups

None.

#### 3.1.4.8.7 Attribute Groups

None.

#### 3.1.4.9 GetJobs

Gets a list of conversion jobs.

The following is the WSDL port type specification of the **GetJobs** WSDL operation.

```
<wsdl:operation name="GetJobs" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
```

```

    <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"
    name="GetJobsRequest" message="tns6:GetJobsRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
    <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"
    name="GetJobsResponse" message="tns6:GetJobsResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  </wsdl:operation>

```

The protocol client sends a **GetJobsRequest** request WSDL message to get a list of conversion jobs.

The protocol server MUST respond with a **GetJobsResponse** response WSDL message.

### 3.1.4.9.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                | Description  |
|------------------------|--|
| <b>GetJobsRequest</b>  | The request WSDL message for the <b>GetJobs</b> WSDL operation.  |
| <b>GetJobsResponse</b> | The response WSDL message for the <b>GetJobs</b> WSDL operation. |

#### 3.1.4.9.1.1 GetJobsRequest

The request WSDL message for the **GetJobs** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getJobs
```

The SOAP body contains the **GetJobsRequest** element.

#### 3.1.4.9.1.2 GetJobsResponse

The response WSDL message for the **GetJobs** WSDL operation.

The SOAP body contains the **GetJobsResponse** element.

### 3.1.4.9.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                | Description  |
|------------------------|--|
| <b>GetJobsRequest</b>  | The input data for the <b>GetJobs</b> WSDL operation.  |
| <b>GetJobsResponse</b> | The result data for the <b>GetJobs</b> WSDL operation. |

### 3.1.4.9.2.1 GetJobsRequest

The **GetJobsRequest** element specifies the input data for the **GetJobs** WSDL operation.

```
<xs:element name="GetJobsRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="ActiveOnly" type="xs:boolean"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
      <xs:element minOccurs="0" name="SubmittedOnly" type="xs:boolean"/>
      <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**ActiveOnly:** A Boolean value specifying if only non-cancelled conversion jobs with unfinished conversion items are included in the **GetJobsResponse** response WSDL message.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element specifying the partition (1) to return conversion jobs from. The protocol server MUST NOT return conversion jobs that are part of a different partition (1).

**SubmittedOnly:** A Boolean value specifying if only conversion jobs that have been submitted are included in the **GetJobsResponse** response WSDL message.

**UserToken:** A **UserToken** (section [2.2.3.5](#)) element that provides user credentials for accessing the input and output files in the conversion job.

### 3.1.4.9.2.2 GetJobsResponse

The **GetJobsResponse** element specifies the result data for the **GetJobs** WSDL operation.

```
<xs:element name="GetJobsResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Jobs" nillable="true" type="tns5:ArrayOfGetJobsJob"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**Jobs:** An **ArrayOfGetJobsJob** element containing the conversion jobs.

### 3.1.4.9.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type             | Description   |
|--------------------------|---|
| <b>ArrayOfGetJobsJob</b> | The <b>ArrayOfGetJobsJob</b> complex type contains a set of <b>GetJobsJob</b> elements representing a set of conversion jobs. |
| <b>GetJobsJob</b>        | The <b>GetJobsJob</b> complex type represents a single conversion job.  |

### 3.1.4.9.3.1 ArrayOfGetJobsJob

**Namespace:** http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response

The **ArrayOfGetJobsJob** complex type contains a set of **GetJobsJob** elements representing a set of conversion jobs.

```
<xs:complexType name="ArrayOfGetJobsJob" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetJobsJob" nillable="true"
      type="tns5:GetJobsJob"/>
  </xs:sequence>
</xs:complexType>
```

**GetJobsJob:** A single **GetJobsJob** element representing a single conversion job.

### 3.1.4.9.3.2 GetJobsJob

**Namespace:** http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response

The **GetJobsJob** complex type represents a single conversion job.

```
<xs:complexType name="GetJobsJob" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
```

**CancelTime:** A **dateTime** value specifying when the conversion job was canceled. If the conversion job has been canceled, the protocol server **MUST** write a non-null value.

**CreateTime:** A **dateTime** value specifying when the conversion job was created.

**JobId:** A **JobId** (section [2.2.3.3](#)) element that identifies the conversion job.

**Name:** An optional string that is stored along with the conversion job.

**NotSubmitted:** A Boolean value specifying that the conversion job has been submitted.

### 3.1.4.9.4 Simple Types

None.

### 3.1.4.9.5 Attributes

None.

### 3.1.4.9.6 Groups

None.



### 3.1.4.9.7 Attribute Groups

None.

### 3.1.4.10 GetJobStatus

Gets the status of a conversion job.

The following is the WSDL port type specification of the **GetJobStatus** WSDL operation.

```
<wsdl:operation name="GetJobStatus" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"
    name="GetJobStatusRequest" message="tns6:GetJobStatusRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response"
    name="GetJobStatusResponse" message="tns6:GetJobStatusResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetJobStatusRequest** request WSDL message to get the status of a conversion job.

The protocol server MUST respond with a **GetJobStatusResponse** response WSDL message.

#### 3.1.4.10.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                     | Description   |
|-----------------------------|---|
| <b>GetJobStatusRequest</b>  | The request WSDL message for the <b>GetJobStatus</b> WSDL operation.  |
| <b>GetJobStatusResponse</b> | The response WSDL message for the <b>GetJobStatus</b> WSDL operation. |

##### 3.1.4.10.1.1 GetJobStatusRequest

The request WSDL message for the **GetJobStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus
```

The SOAP body contains the **GetJobStatusRequest** element.

##### 3.1.4.10.1.2 GetJobStatusResponse

The response WSDL message for the **GetJobStatus** WSDL operation.

The SOAP body contains the **GetJobStatusResponse** element.

### 3.1.4.10.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                     | Description   |
|-----------------------------|---|
| <b>GetJobStatusRequest</b>  | The input data for the <b>GetJobStatus</b> WSDL operation.  |
| <b>GetJobStatusResponse</b> | The result data for the <b>GetJobStatus</b> WSDL operation. |

#### 3.1.4.10.2.1 GetJobStatusRequest

The **GetJobStatusRequest** element specifies the input data for the **GetJobStatus** WSDL operation.

```
<xs:element name="GetJobStatusRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the conversion job.

#### 3.1.4.10.2.2 GetJobStatusResponse

The **GetJobStatusResponse** element specifies the result data for the **GetJobStatus** WSDL operation.

```
<xs:element name="GetJobStatusResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Canceled" type="xs:int"/>
      <xs:element minOccurs="0" name="Count" type="xs:int"/>
      <xs:element minOccurs="0" name="Failed" type="xs:int"/>
      <xs:element minOccurs="0" name="InProgress" type="xs:int"/>
      <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="NotStarted" type="xs:int"/>
      <xs:element minOccurs="0" name="NotSubmitted" type="xs:int"/>
      <xs:element minOccurs="0" name="Succeeded" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**Canceled:** An integer value specifying the number of unfinished conversion items in a canceled conversion job. If the conversion job has not been canceled, this value **MUST** be 0.

**Count:** An integer value specifying the total count of conversion items in a conversion job.

**Failed:** An integer value specifying the count of failed conversion items in a submitted conversion job. If the conversion job has not been submitted, this value MUST be 0.

**InProgress:** An integer value specifying the count of in-progress conversion items in a non-canceled, submitted conversion job. If the conversion job has been canceled or has not been submitted, this value MUST be 0.

**Name:** An optional string that is stored along with the conversion job.

**NotStarted:** An integer value specifying the count of unstarted conversion items in a non-canceled, submitted conversion job. If the conversion job has been canceled or has not been submitted, this value MUST be 0.

**NotSubmitted:** An integer value specifying the count of conversion items in a non-submitted and non-canceled conversion job. If the conversion job has been canceled or has been submitted, this value MUST be 0.

**Succeeded:** An integer value specifying the count of succeeded conversion items in a submitted conversion job. If the conversion job has not been submitted, this value MUST be 0.

### 3.1.4.10.3 Complex Types

None.

### 3.1.4.10.4 Simple Types

None.

### 3.1.4.10.5 Attributes

None.

### 3.1.4.10.6 Groups

None.

### 3.1.4.10.7 Attribute Groups

None.

### 3.1.4.11 Ping

Contacts a protocol server to determine the responsiveness of the service.

The following is the WSDL port type specification of the **Ping** WSDL operation.

```
<wsdl:operation name="Ping" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/ping"
    name="PingRequest" message="tns6:PingRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/ping/response"
    name="PingResponse" message="tns6:PingResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **PingRequest** request WSDL message and the protocol server MUST increment a counter and MUST return a **PingResponse** response WSDL message.

### 3.1.4.11.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message             | Description   |
|---------------------|---|
| <b>PingRequest</b>  | The request WSDL message for the <b>Ping</b> WSDL operation.  |
| <b>PingResponse</b> | The response WSDL message for the <b>Ping</b> WSDL operation. |

#### 3.1.4.11.1.1 PingRequest

The request WSDL message for the **Ping** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/ping
```

The SOAP body contains the **PingRequest** element.

#### 3.1.4.11.1.2 PingResponse

The response WSDL message for the **Ping** WSDL operation.

The SOAP body contains the **PingResponse** element.

### 3.1.4.11.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element             | Description   |
|---------------------|---|
| <b>PingRequest</b>  | The input data for the <b>Ping</b> WSDL operation.  |
| <b>PingResponse</b> | The result data for the <b>Ping</b> WSDL operation. |

#### 3.1.4.11.2.1 PingRequest

The **PingRequest** element specifies the input data for the **Ping** WSDL operation.

```
<xs:element name="PingRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">  
  <xs:complexType>  
    <xs:sequence/>  
  </xs:complexType>  
</xs:element>
```

### 3.1.4.11.2.2 PingResponse

The **PingResponse** element specifies the result data for the **Ping** WSDL operation.

```
<xs:element name="PingResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Count" type="xs:int"/>
      <xs:element minOccurs="0" name="Received" type="xs:dateTime"/>
      <xs:element minOccurs="0" name="Responded" type="xs:dateTime"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**Count:** An integer value containing the count of **Ping** operations the protocol server has performed.

**Received:** A **dateTime** value specifying when the protocol server began the **Ping** operation after receiving the **PingRequest** WSDL message.

**Responded:** A **dateTime** value specifying when the protocol server ended the **Ping** operation before returning the **PingResponse** WSDL message.

### 3.1.4.11.3 Complex Types

None.

### 3.1.4.11.4 Simple Types

None.

### 3.1.4.11.5 Attributes

None.

### 3.1.4.11.6 Groups

None.

### 3.1.4.11.7 Attribute Groups

None.

### 3.1.4.12 SubmitJob

Marks a conversion job as submitted to specify that all conversion groups in a conversion job have been added.

The following is the WSDL port type specification of the **SubmitJob** WSDL operation.

```
<wsdl:operation name="SubmitJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/submitJob"
    name="SubmitJobRequest" message="tns6:SubmitJobRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response"
```

```

name="SubmitJobResponse" message="tns6:SubmitJobResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns6:IConversionServiceApplication_SubmitJob_ReadOnlyFaultFault_FaultMessage"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends a **SubmitJobRequest** request WSDL message to mark a conversion job as submitted to specify that all conversion groups in the conversion job have been added.

The protocol server MUST respond with a **SubmitJobResponse** response WSDL message.

### 3.1.4.12.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                  | Description  |
|--------------------------|--|
| <b>SubmitJobRequest</b>  | The request WSDL message for the <b>SubmitJob</b> WSDL operation.  |
| <b>SubmitJobResponse</b> | The response WSDL message for the <b>SubmitJob</b> WSDL operation. |

#### 3.1.4.12.1.1 SubmitJobRequest

The request WSDL message for the **SubmitJob** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/submitJob
```

The SOAP body contains the **SubmitJobRequest** element.

#### 3.1.4.12.1.2 SubmitJobResponse

The response WSDL message for the **SubmitJob** WSDL operation.

The SOAP body contains the **SubmitJobResponse** element.

### 3.1.4.12.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                  | Description  |
|--------------------------|--|
| <b>SubmitJobRequest</b>  | The input data for the <b>SubmitJob</b> WSDL operation.  |
| <b>SubmitJobResponse</b> | The result data for the <b>SubmitJob</b> WSDL operation. |

### 3.1.4.12.2.1 SubmitJobRequest

The **SubmitJobRequest** element specifies the input data for the **SubmitJob** WSDL operation.

```
<xs:element name="SubmitJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job to mark as submitted.

### 3.1.4.12.2.2 SubmitJobResponse

The **SubmitJobResponse** element specifies the result data for the **SubmitJob** WSDL operation.

```
<xs:element name="SubmitJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence/>
  </xs:complexType>
</xs:element>
```

### 3.1.4.12.3 Complex Types

None.

### 3.1.4.12.4 Simple Types

None.

### 3.1.4.12.5 Attributes

None.

### 3.1.4.12.6 Groups

None.

### 3.1.4.12.7 Attribute Groups

None.

### 3.1.4.13 AddSyncJob

Adds an immediate conversion job from a source file path and a destination file path. [<9>](#)

The following is the WSDL port type specification of the **AddSyncJob** WSDL operation.

```
<wsdl:operation name="AddSyncJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob"
```

```

name="AddSyncJobRequest" message="tns6:AddSyncJobRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response"
name="AddSyncJobResponse" message="tns6:AddSyncJobResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>

```

The protocol client sends an **AddSyncJobRequest** request WSDL message to create an immediate conversion job.

The protocol server MUST initiate the process of converting the file at the location specified by the **inputUrl** to a new file at the location specified by the **outputUrl**. The protocol server MUST respond with an **AddSyncJobResponse** response WSDL message.

### 3.1.4.13.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                   | Description   |
|---------------------------|---|
| <b>AddSyncJobRequest</b>  | The request WSDL message for the <b>AddSyncJob</b> WSDL operation.  |
| <b>AddSyncJobResponse</b> | The response WSDL message for the <b>AddSyncJob</b> WSDL operation. |

#### 3.1.4.13.1.1 AddSyncJobRequest

The request WSDL message for the **AddSyncJob** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob
```

The SOAP body contains the **AddSyncJobRequest** element.

#### 3.1.4.13.1.2 AddSyncJobResponse

The response WSDL message for the **AddSyncJob** WSDL operation.

The SOAP body contains the **AddSyncJobResponse** element.

### 3.1.4.13.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                   | Description   |
|---------------------------|---|
| <b>AddSyncJobRequest</b>  | The input data for the <b>AddSyncJob</b> WSDL operation.  |
| <b>AddSyncJobResponse</b> | The result data for the <b>AddSyncJob</b> WSDL operation. |



### 3.1.4.13.2.1 AddSyncJobRequest

The **AddSyncJobRequest** element specifies the input data for the **AddSyncJob** WSDL operation.

```
<xs:element name="AddSyncJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
      <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
      <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
      <xs:element minOccurs="0" name="inputUrl" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="outputUrl" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the immediate conversion job.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the immediate conversion job.

**Settings:** An optional **ConversionJobSettings** (section [2.2.4.2](#)) element that provides a collection of preferred settings for the immediate conversion job.

**UserToken:** A **UserToken** (section [2.2.3.5](#)) element that provides user credentials for accessing the input and output file in the immediate conversion job.

**inputUrl:** A string value that specifies the full input path of the immediate conversion job.

**outputUrl:** A string value that specifies the full output path of the immediate conversion job.

### 3.1.4.13.2.2 AddSyncJobResponse

The **AddSyncJobResponse** element specifies the result data for the **AddSyncJob** WSDL operation.

```
<xs:element name="AddSyncJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**ErrorCode:** An integer value specifying the error code of a failed or incomplete immediate conversion job. If the immediate conversion job has failed or is not complete, the protocol server MUST write a non-null value. The **ErrorCode** can be, but is not restricted to, the following values.

| Value | Description   |
|-------|---|
| null  | The immediate conversion job is complete and has succeeded. |
| -1    | Unknown Failure   |

| Value | Description   |
|-------|---|
| 0     | The immediate conversion job is still being processed.  |
| 1     | Input file was not found.   |
| 2     | Insufficient permissions to download the input file.  |
| 3     | Usertoken used for conversion expired before the input file could be downloaded.                          |
| 4     | Insufficient permissions to upload the converted file.  |
| 5     | Usertoken used for conversion expired before the converted file could be uploaded.                        |
| 6     | The input file could not be downloaded for some unknown reason.   |
| 7     | The converted file could not be uploaded for some unknown reason.   |
| 9     | Item assigned worker died.  |
| 10    | Item exceeded the maximum conversion time.  |
| 11    | The number of in-progress immediate conversion requests exceeds the limit specified by the administrator. |
| 12    | The administrator has specified that the server cannot accept synchronous conversion requests.            |

### 3.1.4.13.3 Complex Types

None.

### 3.1.4.13.4 Simple Types

None.

### 3.1.4.13.5 Attributes

None.

### 3.1.4.13.6 Groups

None.

### 3.1.4.13.7 Attribute Groups

None.

### 3.1.4.14 AddSyncStreamJob

Adds an immediate conversion job from a stream containing the input file. [<10>](#)

The following is the WSDL port type specification of the **AddSyncStreamJob** WSDL operation.

```
<wsdl:operation name="AddSyncStreamJob" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob"
```

```

name="AddSyncStreamJobRequest" message="tns6:AddSyncStreamJobRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsd1"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/respons
e" name="AddSyncStreamJobResponse" message="tns6:AddSyncStreamJobResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsd1"/>
  </wsdl:operation>

```

The protocol client sends an **AddSyncStreamJobRequest** request WSDL message to create an immediate conversion job.

If the protocol server has received a complete input file, as determined by the **MoreBytesToReceive** member of the **AddSyncStreamJobRequest**, then it MUST initiate the conversion of the input file. The protocol client can retrieve the result either from the **OutputStreamInBytes** member of the **AddSyncStreamJobResponse** message, if provided by the protocol server, or by using the **GetSyncStreamOutputBytes** method (section [3.1.4.16](#)).

The protocol server MUST respond with an **AddSyncStreamJobResponse** response WSDL message

### 3.1.4.14.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                         | Description   |
|---------------------------------|---|
| <b>AddSyncStreamJobRequest</b>  | The request WSDL message for the <b>AddSyncStreamJob</b> WSDL operation.  |
| <b>AddSyncStreamJobResponse</b> | The response WSDL message for the <b>AddSyncStreamJob</b> WSDL operation. |

#### 3.1.4.14.1.1 AddSyncStreamJobRequest

The request WSDL message for the **AddSyncStreamJob** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob
```

The SOAP body contains the **AddSyncStreamJobRequest** element.

#### 3.1.4.14.1.2 AddSyncStreamJobResponse

The response WSDL message for the **AddSyncStreamJob** WSDL operation.

The SOAP body contains the **AddSyncStreamJobResponse** element.

### 3.1.4.14.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                         | Description   |
|---------------------------------|---|
| <b>AddSyncStreamJobRequest</b>  | The input data for the <b>AddSyncStreamJob</b> WSDL operation.  |
| <b>AddSyncStreamJobResponse</b> | The result data for the <b>AddSyncStreamJob</b> WSDL operation. |

### 3.1.4.14.2.1 AddSyncStreamJobRequest

The **AddSyncStreamJobRequest** element specifies the input data for the **AddSyncStreamJob** WSDL operation.

```
<xs:element name="AddSyncStreamJobRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="InputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
      <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
      <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**InputStreamInBytes:** The array of bytes of the input file for the immediate conversion job. If the protocol server has previously received an **AddSyncStreamJobRequest** message with the same **JobId** and with **MoreBytesToReceive** set to true, then the protocol server MUST append the bytes in **InputStreamInBytes** to the value of the **InputStreamInBytes** from the previous message.

The protocol server MUST treat the concatenated values of multiple **InputStreamInBytes** elements from multiple requests with the same **JobId** as a single file for purposes of conversion.

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the immediate conversion job.

**MoreBytesToReceive:** A Boolean value specifying whether there are more bytes for the input file.

If this is true, the protocol server MUST NOT initiate the conversion until the protocol client has called **AddSyncStreamJob** again with the same **JobId** and **MoreBytesToReceive** not set to true.

**PartitionId:** A **PartitionId** (section [2.2.3.4](#)) element identifying the partition (1) of the immediate conversion job.

**Settings:** An optional **ConversionJobSettings** (section [2.2.4.2](#)) element that provides a collection of preferred settings for the immediate conversion job.

### 3.1.4.14.2.2 AddSyncStreamJobResponse

The **AddSyncStreamJobResponse** element specifies the result data for the **AddSyncStreamJob** WSDL operation.

```
<xs:element name="AddSyncStreamJobResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
```

```

    <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="OutputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>
</xs:element>

```

**ErrorCode:** An integer value specifying the error code of a failed immediate conversion job. If the immediate conversion job has failed, the protocol server **MUST** write a non-null value.

**ErrorCode** can be, but is not restricted to, the following values.

| Value | Description   |
|-------|---|
| null  | The immediate conversion job is successful.   |
| -1    | Unknown Failure   |
| 0     | Not Failed. It is still being processed.  |
| 1     | Input file was not found.   |
| 2     | Insufficient permissions to download the input file.  |
| 3     | Usertoken used for conversion expired before the input file could be downloaded.                          |
| 4     | Insufficient permissions to upload the converted file.  |
| 5     | Usertoken used for conversion expired before the converted file could be uploaded.                        |
| 6     | The input file could not be downloaded for some unknown reason.   |
| 7     | The converted file could not be uploaded for some unknown reason.   |
| 9     | Item assigned worker died.  |
| 10    | Item exceeded the maximum conversion time.  |
| 11    | The number of in-progress immediate conversion requests exceeds the limit specified by the administrator. |
| 12    | The administrator has specified that the server cannot accept synchronous conversion requests.            |
| 13    | Input stream cannot be loaded because of running out of memory or space.                                  |
| 14    | Output stream cannot be saved because of running out of memory or space.                                  |

**OutputStreamInBytes:** An array of bytes that contains the output file.

If **ErrorCode** is null and **OutputStreamInBytes** is not null, then **OutputStreamInBytes** **MUST** contain the output file.

If **ErrorCode** is null and **OutputStreamInBytes** is null, then the protocol client can obtain the output file with the **GetSyncStreamOutputBytes** (section [3.1.4.16](#)) WSDL operation.

### 3.1.4.14.3 Complex Types

None.

#### 3.1.4.14.4 Simple Types

None.

#### 3.1.4.14.5 Attributes

None.

#### 3.1.4.14.6 Groups

None.

#### 3.1.4.14.7 Attribute Groups

None.

#### 3.1.4.15 BatchGetSyncJobStatus

Get the status of a number of immediate conversion jobs. [<11>](#)

The following is the WSDL port type specification of the **BatchGetSyncJobStatus** WSDL operation.

```
<wsdl:operation name="BatchGetSyncJobStatus" xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus"
    name="BatchGetSyncJobStatusRequest" message="tns6:BatchGetSyncJobStatusRequest"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
    wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/respons
    e" name="BatchGetSyncJobStatusResponse" message="tns6:BatchGetSyncJobStatusResponse"
    xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **BatchGetSyncJobStatusRequest** request WSDL message to get the status of a number of immediate conversion jobs.

The protocol server MUST respond by sending a **BatchGetSyncJobStatusResponse** (section [3.1.4.15.2.2](#)).

##### 3.1.4.15.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                              | Description  |
|--------------------------------------|--|
| <b>BatchGetSyncJobStatusRequest</b>  | The request WSDL message for the <b>BatchGetSyncJobStatus</b> WSDL operation.  |
| <b>BatchGetSyncJobStatusResponse</b> | The response WSDL message for the <b>BatchGetSyncJobStatus</b> WSDL operation. |

##### 3.1.4.15.1.1 BatchGetSyncJobStatusRequest

The request WSDL message for the **BatchGetSyncJobStatus** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus
```

The SOAP body contains the **BatchGetSyncJobStatusRequest** element.

### 3.1.4.15.1.2 BatchGetSyncJobStatusResponse

The response WSDL message for the **BatchGetSyncJobStatus** WSDL operation.

The SOAP body contains the **BatchGetSyncJobStatusResponse** element.

### 3.1.4.15.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                              | Description  |
|--------------------------------------|--|
| <b>BatchGetSyncJobStatusRequest</b>  | The input data for the <b>BatchGetSyncJobStatus</b> WSDL operation.  |
| <b>BatchGetSyncJobStatusResponse</b> | The result data for the <b>BatchGetSyncJobStatus</b> WSDL operation. |

#### 3.1.4.15.2.1 BatchGetSyncJobStatusRequest

The **BatchGetSyncJobStatusRequest** element specifies the input data for the **BatchGetSyncJobStatus** WSDL operation.

```
<xs:element name="BatchGetSyncJobStatusRequest" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**JobIds:** An array of **JobId** (section [2.2.3.3](#))

#### 3.1.4.15.2.2 BatchGetSyncJobStatusResponse

The **BatchGetSyncJobStatusResponse** element specifies the result data for the **BatchGetSyncJobStatus** WSDL operation.

```
<xs:element name="BatchGetSyncJobStatusResponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element xmlns:q3="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
        name="ErrorCodes" nillable="true" type="q3:ArrayOfNullableOfint"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
      <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
      <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
        minOccurs="0" name="OutputStreamsInBytes" nillable="true" type="tns1:ArrayOfbase64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>

```

**ErrorCodes:** An array of **ErrorCode**, which is an integer value specifying the error code of a failed or incomplete immediate conversion job. If the immediate conversion job has failed or is incomplete, the protocol server MUST write a non-null value. **ErrorCodes'** sequence MUST be aligned with the sequence of the array of **JobIds**.

**ErrorCode** Can be, but is not restricted to, the following values.

| Value | Description   |
|-------|---|
| null  | The immediate conversion job is successful.   |
| -1    | Unknown Failure   |
| 0     | The immediate conversion job is incomplete.   |
| 1     | Input file was not found in the SharePoint library.   |
| 2     | Insufficient permissions to download the input file.  |
| 3     | Usertoken used for conversion expired before the input file could be downloaded.                          |
| 4     | Insufficient permissions to upload the converted file.  |
| 5     | Usertoken used for conversion expired before the converted file could be uploaded.                        |
| 6     | The input file could not be downloaded for some unknown reason.   |
| 7     | The converted file could not be uploaded for some unknown reason.   |
| 9     | Item assigned worker died.  |
| 10    | Item exceeded the maximum conversion time.  |
| 11    | The number of in-progress immediate conversion requests exceeds the limit specified by the administrator. |
| 12    | The administrator has specified that the server cannot accept synchronous conversion requests.            |
| 13    | Input stream cannot be loaded because of running out of memory or space.                                  |
| 14    | Output stream cannot be saved because of running out of memory or space.                                  |

**JobIds:** An array of **JobId** (section [2.2.3.3](#)). This array is copied from the **jobIds** in **BatchGetSyncJobStatusRequest**.

**MoreBytesToReceive:** A Boolean value that is set to true when the total size of the output files is too large to send in one **BatchGetSyncJobStatusResponse**. When the value of **MoreBytesToReceive** is set to true it indicates that there are some output files that have been converted, but not sent back in this **BatchGetSyncJobStatusResponse** element.

**OutputStreamsInBytes:** This is a two-dimensional array of bytes. The first dimension matches the **JobIds** array. The second dimension of bytes is the output file's byte stream. The protocol server MUST NOT return a byte stream for conversion jobs initiated with the **AddSyncJob** WSDL operation



(section [3.1.4.13](#)), only for those initiated with the **AddSyncStreamJob** WSDL operation (section [3.1.4.14](#)).

### 3.1.4.15.3 Complex Types

The following table summarizes the XML schema complex type definitions that are specific to this operation.

| Complex type                | Description                  |
|-----------------------------|------------------------------|
| <b>ArrayOfbase64Binary</b>  | Array of <b>base64Binary</b> |
| <b>ArrayOfNullableOfint</b> | Array of nullable <b>int</b> |
| <b>ArrayOfunsignedLong</b>  | Array of <b>unsignedlong</b> |

#### 3.1.4.15.3.1 ArrayOfNullableOfint

**Namespace:** <http://schemas.datacontract.org/2004/07/System>

Array of nullable **int**

```
<xs:complexType name="ArrayOfNullableOfint" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="int" nillable="true"
type="xs:int"/>
  </xs:sequence>
</xs:complexType>
```

**int:** integer

#### 3.1.4.15.3.2 ArrayOfbase64Binary

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

Array of **base64Binary**

```
<xs:complexType name="ArrayOfbase64Binary" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="base64Binary" nillable="true"
type="xs:base64Binary"/>
  </xs:sequence>
</xs:complexType>
```

**base64Binary:** Array of bytes

#### 3.1.4.15.3.3 ArrayOfunsignedLong

**Namespace:** <http://schemas.microsoft.com/2003/10/Serialization/Arrays>

Array of **unsignedlong**

```
<xs:complexType name="ArrayOfunsignedLong" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:sequence>
```

```
<xs:element minOccurs="0" maxOccurs="unbounded" name="unsignedLong"
type="xs:unsignedLong"/>
</xs:sequence>
</xs:complexType>
```

**unsignedLong:** an 8-byte, unsigned integer

#### 3.1.4.15.4 Simple Types

None.

#### 3.1.4.15.5 Attributes

None.

#### 3.1.4.15.6 Groups

None.

#### 3.1.4.15.7 Attribute Groups

None.

#### 3.1.4.16 GetSyncStreamOutputBytes

Retrieves the output file for the immediate conversion job that was submitted with the **AddSyncStreamJob** (section [3.1.4.14](#)) WSDL operation. [<12>](#)

The following is the WSDL port type specification of the **GetSyncStreamOutputBytes** WSDL operation.

```
<wsdl:operation name="GetSyncStreamOutputBytes"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes
" name="GetSyncStreamOutputBytesRequest" message="tns6:GetSyncStreamOutputBytesRequest"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
  <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes
/response" name="GetSyncStreamOutputBytesResponse"
message="tns6:GetSyncStreamOutputBytesResponse"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"/>
</wsdl:operation>
```

The protocol client sends a **GetSyncStreamOutputBytesRequest** request WSDL message to retrieve the byte representation of the output file for the immediate conversion job.

The protocol server MUST respond with a **GetSyncStreamOutputBytesResponse** response WSDL message.

#### 3.1.4.16.1 Messages

The following table summarizes the set of WSDL message definitions that are specific to this operation.

| Message                                 | Description   |
|---|---|
| <b>GetSyncStreamOutputBytesRequest</b>  | The request WSDL message for the <b>GetSyncStreamOutputBytes</b> WSDL operation.  |
| <b>GetSyncStreamOutputBytesResponse</b> | The response WSDL message for the <b>GetSyncStreamOutputBytes</b> WSDL operation. |

### 3.1.4.16.1.1 GetSyncStreamOutputBytesRequest

The request WSDL message for the **GetSyncStreamOutputBytes** WSDL operation.

The SOAP action value is:

```
http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes
```

The SOAP body contains the **GetSyncStreamOutputBytesRequest** element.

### 3.1.4.16.1.2 GetSyncStreamOutputBytesResponse

The response WSDL message for the **GetSyncStreamOutputBytes** WSDL operation.

The SOAP body contains the **GetSyncStreamOutputBytesResponse** element.

### 3.1.4.16.2 Elements

The following table summarizes the XML schema element definitions that are specific to this operation.

| Element                                 | Description   |
|---|---|
| <b>GetSyncStreamOutputBytesRequest</b>  | The input data for the <b>GetSyncStreamOutputBytes</b> WSDL operation.  |
| <b>GetSyncStreamOutputBytesResponse</b> | The result data for the <b>GetSyncStreamOutputBytes</b> WSDL operation. |

### 3.1.4.16.2.1 GetSyncStreamOutputBytesRequest

The **GetSyncStreamOutputBytesRequest** element specifies the input data for the **GetSyncStreamOutputBytes** WSDL operation.

```
<xs:element name="GetSyncStreamOutputBytesRequest"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="BytesReceived" type="xs:int"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**BytesReceived:** The integer value specifying the number of bytes of the output file that the protocol client has already received.

**JobId:** A **JobId** (section [2.2.3.3](#)) element identifying the conversion job to which the output file belongs.

### 3.1.4.16.2.2 GetSyncStreamOutputBytesResponse

The **GetSyncStreamOutputBytesResponse** element specifies the result data for the **GetSyncStreamOutputBytes** WSDL operation.

```
<xs:element name="GetSyncStreamOutputBytesResponse"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
      <xs:element minOccurs="0" name="OutputStreamBytes" nillable="true"
        type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

**MoreBytesToReceive:** The Boolean value specifying whether there are additional bytes that need to be sent to the protocol client. If **MoreBytesToReceive** is false and this is the first response from the protocol server, **OutputStreamBytes** MUST contain the whole output file. If **MoreBytesToReceive** is false and this is not the first response from the protocol server, **OutputStreamBytes** MUST contain the last set of bytes of the output file.

**OutputStreamBytes:** The array of bytes containing part of the output file, beginning at the offset specified in the **BytesReceived** member of the **GetSyncStreamOutputBytesRequest**. The protocol server MUST set it to NULL if there is no stream available for the **JobId** that was sent in the **GetSyncStreamOutputBytesRequest** message or if **BytesReceived** specifies an offset larger than the size of the output file.

### 3.1.4.16.3 Complex Types

None.

### 3.1.4.16.4 Simple Types

None.

### 3.1.4.16.5 Attributes

None.

### 3.1.4.16.6 Groups

None.

### 3.1.4.16.7 Attribute Groups

None.

## 3.1.5 Timer Events

None.

### 3.1.6 Other Local Events

None.

## 4 Protocol Examples

### 4.1 Creating a Conversion Job

This example demonstrates how a protocol client adds a new conversion job to the queue.

The protocol client has a folder of five documents to convert to PDF. Additionally, the protocol client has a sixth document to convert to PDF that is in a separate folder. The conversion job will contain two conversion groups, with the first conversion group containing the five documents in the same folder and the second conversion group containing the sixth document.

The following table shows the full input URLs, conversion group id and conversion item id of the six conversion items.

| Group Id | Item Id | Full Input URL                              |
|----------|---------|---|
| 1        | 1       | http://server/LoremIpsum/Aenean nec.docx    |
| 1        | 2       | http://server/LoremIpsum/Fusce aliquet.docx |
| 1        | 3       | http://server/LoremIpsum/Lorem ipsum.docx   |
| 1        | 4       | http://server/LoremIpsum/Nunc viverra.docx  |
| 1        | 5       | http://server/LoremIpsum/Pellentesque.docx  |
| 2        | 1       | http://server/Other/Other.docx              |

The following table shows the full output URLs, conversion group id and conversion item id of the six conversion items.

| Group Id | Item Id | Full Output URL                         |
|----------|---------|---|
| 1        | 1       | http://server/Archive/Aenean nec.pdf    |
| 1        | 2       | http://server/Archive/Fusce aliquet.pdf |
| 1        | 3       | http://server/Archive/Lorem ipsum.pdf   |
| 1        | 4       | http://server/Archive/Nunc viverra.pdf  |
| 1        | 5       | http://server/Archive/Pellentesque.pdf  |
| 2        | 1       | http://server/Archive/Other.pdf         |

The protocol client creates a unique conversion job identifier with the value 11181981853491788161.

#### 4.1.1 Adding the Job

The protocol client then sends the following **AddJob** request WSDL message:

```
<AddJobRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
  xmlns:b="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
```

```

<JobId>11181981853491788161</JobId>
<Name>Protocol example</Name>
<PartitionId i:nil="true" />
<Settings>
  <b:AddThumbnail>>false</b:AddThumbnail>
  <b:CompatibilityMode>MaintainCurrentSetting</b:CompatibilityMode>
  <b:DoNotEmbedSystemFonts>>true</b:DoNotEmbedSystemFonts>
  <b:EmbedFonts>>false</b:EmbedFonts>
  <b:FixedFormatSettings>
    <b:BalloonState>OnlyCommentsAndFormatting</b:BalloonState>
    <b:BitmapEmbeddedFonts>>true</b:BitmapEmbeddedFonts>
    <b:Bookmarks>None</b:Bookmarks>
    <b:IncludeDocumentProperties>>true</b:IncludeDocumentProperties>
    <b:IncludeDocumentStructure>>true</b:IncludeDocumentStructure>
    <b:OutputQuality>Standard</b:OutputQuality>
    <b:UsePDFA>>false</b:UsePDFA>
  </b:FixedFormatSettings>
  <b:MarkupView>Comments Ink Text Formatting</b:MarkupView>
  <b:OutputFormat>PDF</b:OutputFormat>
  <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
  <b:RevisionState>FinalShowingMarkup</b:RevisionState>
  <b:SubsetEmbeddedFonts>>false</b:SubsetEmbeddedFonts>
  <b:UpdateFields>>false</b:UpdateFields>
</Settings>
<UserToken i:nil="true" />
</AddJobRequest>

```

The protocol server receives the request and creates the conversion job. The protocol server then sends the following **AddJob** response WSDL message:

```

<AddJobResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addJob" />

```

#### 4.1.2 Adding the First Group

The protocol client then sends the following **AddGroup** request WSDL message:

```

<AddGroupRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"
  xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <GroupId>1</GroupId>
  <InputRoot>http://server/LoremIpsum</InputRoot>
  <Items>
    <b:string>Aenean%20nec.docx</b:string>
    <b:string>Fusce%20aliquet.docx</b:string>
    <b:string>Lorem%20ipsum.docx</b:string>
    <b:string>Nunc%20viverra.docx</b:string>
    <b:string>Pellentesque.docx</b:string>
  </Items>
  <JobId>11181981853491788161</JobId>
  <OutputRoot>http://server/Archive</OutputRoot>
</AddGroupRequest>

```

The protocol server receives the request and adds the conversion group to the conversion job. The protocol server then sends the following **AddGroup** response WSDL message:

```
<AddGroupResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response" />
```

#### 4.1.3 Adding the Second Group

The protocol client then sends the following **AddItems** request WSDL message:

```
<AddItemsRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addItems"
  xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <GroupId>2</GroupId>
  <InputUrls>
    <b:string>http://server/Other/Other.docx</b:string>
  </InputUrls>
  <JobId>11181981853491788161</JobId>
  <OutputUrls>
    <b:string>http://server/Archive/Other.pdf</b:string>
  </OutputUrls>
</AddItemsRequest>
```

The protocol server receives the request and adds the conversion group to the conversion job. The protocol server then sends the following **AddItems** response WSDL message:

```
<AddItemsResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response" />
```

#### 4.1.4 Submitting the Job

The protocol client then sends the following **SubmitJob** request WSDL message:

```
<SubmitJobRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/submitJob">
  <JobId>11181981853491788161</JobId>
</SubmitJobRequest>
```

The protocol server receives the request and records that the conversion group has been submitted. The protocol server then sends the following **SubmitJob** response WSDL message:

```
<SubmitJobResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response" />
```

## 4.2 Getting the Status of a Conversion Job

This example demonstrates how a protocol client gets an existing conversion job and retrieves its status. This example uses the conversion job defined in section [4.1](#) with an conversion job id of 11181981853491788161.



## 4.2.1 Getting the Jobs

The protocol client sends the following **GetJobs** request WSDL message:

```
<GetJobsRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <ActiveOnly>false</ActiveOnly>
  <PartitionId i:nil="true" />
  <SubmittedOnly>true</SubmittedOnly>
  <UserToken i:nil="true" />
</GetJobsRequest>
```

The protocol server receives the request and sends the following **GetJobs** response WSDL message:

```
<GetJobsResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Jobs>
    <GetJobsJob>
      <CreateTime>2010-01-08T08:42:01.833</CreateTime>
      <JobId>16715329620902290694</JobId>
      <Name>A previous job</Name>
    </GetJobsJob>
    <GetJobsJob>
      <CancelTime>2010-01-10 10:17:27.553</CancelTime>
      <CreateTime>2010-01-10 10:16:26.653</CreateTime>
      <JobId>5718799996475903468</JobId>
      <Name>A canceled job</Name>
    </GetJobsJob>
    <GetJobsJob>
      <CreateTime>2010-01-12T11:19:49.83</CreateTime>
      <JobId>11181981853491788161</JobId>
      <Name>Protocol example</Name>
    </GetJobsJob>
  </Jobs>
</GetJobsResponse>
```

## 4.2.2 Getting the Job Status

The protocol client sends the following **GetJobStatus** request WSDL message:

```
<GetJobStatusRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <JobId>11181981853491788161</JobId>
  <PartitionId i:nil="true" />
</GetJobStatusRequest>
```

The protocol server receives the request and sends the following **GetJobStatus** response WSDL message:

```
<GetJobStatusResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response">
```

```

    <Canceled>0</Canceled>
    <Count>6</Count>
    <Failed>1</Failed>
    <InProgress>1</InProgress>
    <Name>Protocol example</Name>
    <NotStarted>1</NotStarted>
    <NotSubmitted>0</NotSubmitted>
    <Succeeded>3</Succeeded>
  </GetJobStatusResponse>

```

This response tells the protocol client that there are six conversion items in the conversion job. Three have already succeeded, one has failed, one is in progress, and one has not started.

### 4.2.3 Getting the Groups

The protocol client sends the following **GetGroups** request WSDL message:

```

<GetGroupsRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <JobId>11181981853491788161</JobId>
  <PartitionId i:nil="true" />
</GetGroupsRequest>

```

The protocol server receives the request and sends the following **GetGroups** response WSDL message:

```

<GetGroupsResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"
  xmlns:b="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <CancelTime i:nil="true" />
  <CreateTime>2010-01-12T11:19:49.83</CreateTime>
  <Groups>
    <GetGroupsGroup>
      <Id>1</Id>
      <InputRoot>http://server/LoremIpsum</InputRoot>
      <OutputRoot>http://server/Archive</OutputRoot>
    </GetGroupsGroup>
    <GetGroupsGroup>
      <Id>2</Id>
    </GetGroupsGroup>
  </Groups>
  <NotSubmitted>>false</NotSubmitted>
  <Settings>
    <b:AddThumbnail>>false</b:AddThumbnail>
    <b:CompatibilityMode>MaintainCurrentSetting</b:CompatibilityMode>
    <b:DoNotEmbedSystemFonts>>true</b:DoNotEmbedSystemFonts>
    <b:EmbedFonts>>false</b:EmbedFonts>
    <b:FixedFormatSettings>
      <b:BalloonState>OnlyCommentsAndFormatting</b:BalloonState>
      <b:BitmapEmbeddedFonts>>true</b:BitmapEmbeddedFonts>
      <b:Bookmarks>None</b:Bookmarks>
      <b:IncludeDocumentProperties>>true</b:IncludeDocumentProperties>
      <b:IncludeDocumentStructure>>true</b:IncludeDocumentStructure>
      <b:OutputQuality>Standard</b:OutputQuality>
    </b:FixedFormatSettings>
  </Settings>

```

```

    <b:UsePDFA>>false</b:UsePDFA>
  </b:FixedFormatSettings>
  <b:MarkupView>Comments Ink Text Formatting</b:MarkupView>
  <b:OutputFormat>PDF</b:OutputFormat>
  <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
  <b:RevisionState>FinalShowingMarkup</b:RevisionState>
  <b:SubsetEmbeddedFonts>>false</b:SubsetEmbeddedFonts>
  <b:UpdateFields>>false</b:UpdateFields>
</Settings>
</GetGroupsResponse>

```

This response tells the protocol client that there are two conversion groups. One group is made up of conversion items that share a common root directory and the other is made up of conversion items that each specify their own full input and output URLs. The contents of the **Settings** element match those sent as part of the original **AddJob** request WSDL message in section [4.1.1](#).

#### 4.2.4 Getting the Items in the First Group

The protocol client sends the following **GetItems** request WSDL message:

```

<GetItemsRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Canceled>>false</Canceled>
  <Failed>>true</Failed>
  <GroupId>1</GroupId>
  <InProgress>>true</InProgress>
  <JobId>11181981853491788161</JobId>
  <NotStarted>>true</NotStarted>
  <NotSubmitted>>false</NotSubmitted>
  <PartitionId i:nil="true" />
  <Succeeded>>true</Succeeded>
</GetItemsRequest>

```

The protocol server receives the request and sends the following **GetItems** response WSDL message:

```

<GetItemsResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Items
    xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response">
    <GetItemsItem>
      <Id>1</Id>
      <InputFile>Aenean%20nec.docx</InputFile>
      <StartTime>2010-01-12T11:20:02.14</StartTime>
      <StopTime>2010-01-12T11:20:06.977</StopTime>
    </GetItemsItem>
    <GetItemsItem>
      <ErrorCode>99</ErrorCode>
      <Id>2</Id>
      <InputFile>Fusce%20aliquet.docx</InputFile>
      <StartTime>2010-01-12T11:20:02.14</StartTime>
      <StopTime>2010-01-12T11:20:07.15</StopTime>
    </GetItemsItem>
    <GetItemsItem>

```

```

    <Id>3</Id>
    <InputFile>Lorem%20ipsum.docx</InputFile>
    <StartTime>2010-01-12T11:20:02.14</StartTime>
    <StopTime>2010-01-12T11:20:07.29</StopTime>
  </GetItemsItem>
  <GetItemsItem>
    <Id>4</Id>
    <InputFile>Nunc%20viverra.docx</InputFile>
    <StartTime>2010-01-12T11:20:02.14</StartTime>
  </GetItemsItem>
  <GetItemsItem>
    <Id>5</Id>
    <InputFile>Pellentesque.docx</InputFile>
  </GetItemsItem>
</Items>
</GetItemsResponse>

```

Of the five conversion items in this conversion group, two have succeeded, one has failed with an error code of 99, one is in progress and one has not started.

#### 4.2.5 Getting the Items in the Second Group

The protocol client sends the following **GetItems** request WSDL message:

```

<GetItemsRequest
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Canceled>false</Canceled>
  <Failed>true</Failed>
  <GroupId>2</GroupId>
  <InProgress>true</InProgress>
  <JobId>11181981853491788161</JobId>
  <NotStarted>true</NotStarted>
  <NotSubmitted>false</NotSubmitted>
  <PartitionId i:nil="true" />
  <Succeeded>true</Succeeded>
</GetItemsRequest>

```

The protocol server receives the request and sends the following **GetItems** response WSDL message:

```

<GetItemsResponse
  xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
  xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
  <Items
    xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response">
    <GetItemsItem>
      <Id>1</Id>
      <InputFile>http://server/Other/Other.docx</InputFile>
      <OutputFile>http://server/Archive/Other.pdf</OutputFile>
      <StartTime>2010-01-12T11:21:01.387</StartTime>
      <StopTime>2010-01-12T11:21:01.69</StopTime>
    </GetItemsItem>
  </Items>
</GetItemsResponse>

```

This is one conversion item in this conversion group and it has successfully converted.

### 4.3 Creating an Immediate Conversion Job

This example demonstrates how a protocol client submits a new immediate conversion job.

There are two scenarios for creating an immediate conversion job. The first one is for when an input file is stored on the protocol server and the second one is for when an input file is stored on a non-server location to which the protocol client has access.

For the first scenario, the protocol client has the following input file URL, and desired output file URL to convert to PDF:

Input URL: `http://server/Other/Other.docx`

Output URL: `http://server/Other/Other.pdf`

The protocol client creates a unique conversion job identifier with the value 4077080388989660114.

For the second scenario, the protocol client has the following base-64 encoded byte stream as an input file: `UEsDBBQABgAIAAAAI`, and it requests the input file stream to be converted to [\[MS-DOC\]](#) format. It creates a unique conversion job identifier with the value 3508186235466465020.

#### 4.3.1 The input file is stored on the protocol server

The protocol client sends the following **AddSyncJobRequest** WSDL message:

```
<AddSyncJobRequest
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob">
  <JobId>4077080388989660114</JobId>
  <PartitionId i:nil="true"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></PartitionId>
  <Settings
xmlns:b="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <b:AddThumbnail>>false</b:AddThumbnail>
    <b:CompatibilityMode>MaintainCurrentSetting</b:CompatibilityMode>
    <b:DoNotEmbedSystemFonts>true</b:DoNotEmbedSystemFonts>
    <b:EmbedFonts>>false</b:EmbedFonts>
    <b:FixedFormatSettings>
      <b:BalloonState>OnlyCommentsAndFormatting</b:BalloonState>
      <b:BitmapEmbeddedFonts>true</b:BitmapEmbeddedFonts>
      <b:Bookmarks>None</b:Bookmarks>
      <b:IncludeDocumentProperties>true</b:IncludeDocumentProperties>
      <b:IncludeDocumentStructure>true</b:IncludeDocumentStructure>
      <b:OutputQuality>Standard</b:OutputQuality>
      <b:UsePDFFA>>false</b:UsePDFFA>
    </b:FixedFormatSettings>
    <b:MarkupView>Comments Ink Text Formatting</b:MarkupView>
    <b:OutputFormat>PDF</b:OutputFormat>
    <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
    <b:RevisionState>FinalShowingMarkup</b:RevisionState>
    <b:SubsetEmbeddedFonts>>false</b:SubsetEmbeddedFonts>
    <b:UpdateFields>>false</b:UpdateFields>
  </Settings>
  <UserToken>S6JG1AAAAAB9</UserToken>
  <inputUrl>http://server/Other/Other.docx</inputUrl>
  <outputUrl>http://server/Other/Other.pdf</outputUrl>
```

```
</AddSyncJobRequest>
```

The protocol server initiates the conversion of Other.docx to Other.pdf. It responds with the following **AddSyncJobResponse** WSDL message

```
<AddSyncJobResponse
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response"><ErrorCod
e>0</ErrorCode>
</AddSyncJobResponse>
```

If the **ErrorCode** is not 0, then the protocol client is finished.

If the **ErrorCode** is 0, which is true in our example, then the conversion job has not finished yet. The protocol client sends a **BatchGetSyncJobStatusRequest** WSDL message to the protocol server. The protocol client could group this **JobId** with those of other pending jobs into a single request, but there is only one job in this example.

```
<BatchGetSyncJobStatusRequest
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus">
<JobIds xmlns:b="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<b:unsignedLong>4077080388989660114</b:unsignedLong>
</JobIds>
</BatchGetSyncJobStatusRequest>
```

The protocol server stores the result of the conversion in the given output URL and responds with the following **BatchGetSyncJobStatusResponse** to the protocol client.

```
<BatchGetSyncJobStatusResponse
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response">
<ErrorCodes xmlns:d4pl="http://schemas.datacontract.org/2004/07/System"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<d4pl:int i:nil="true"></d4pl:int>
</ErrorCodes>
<JobIds xmlns:d4pl="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<d4pl:unsignedLong>4077080388989660114</d4pl:unsignedLong>
</JobIds>
<MoreBytesToReceive>false</MoreBytesToReceive>
<OutputStreamsInBytes xmlns:d4pl="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
<d4pl:base64Binary i:nil="true"></d4pl:base64Binary>
</OutputStreamsInBytes>
</BatchGetSyncJobStatusResponse>
```

The first element of the **ErrorCodes** array is null, which specifies that the conversion has finished successfully. The first entry of **OutputStreamsInBytes** is null because this conversion is not stream-based. At this point, the protocol client can retrieve Other.pdf from the output URL through normal means.

#### 4.3.2 The input file is stored on a non-server location

The protocol client sends the following **AddSyncStreamJobRequest** WSDL message to the protocol server:

```

<AddSyncStreamJobRequest
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob">
  <InputStreamInBytes>UESDBBQABgAIAAAAI</InputStreamInBytes>
  <JobId>3508186235466465020</JobId>
  <MoreBytesToReceive>true</MoreBytesToReceive>
  <PartitionId i:nil="true"
    xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></PartitionId>
  <Settings
xmlns:b=http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings
xmlns:i="http://www.w3.org/2001/XMLSchema-instance">
    <b:AddThumbnail>>false</b:AddThumbnail>
    <b:CompatibilityMode>MaintainCurrentSetting</b:CompatibilityMode>
    <b:DoNotEmbedSystemFonts>true</b:DoNotEmbedSystemFonts>
    <b:EmbedFonts>>false</b:EmbedFonts>
    <b:FixedFormatSettings>
      <b:BalloonState>OnlyCommentsAndFormatting</b:BalloonState>
      <b:BitmapEmbeddedFonts>true</b:BitmapEmbeddedFonts>
      <b:Bookmarks>None</b:Bookmarks>
      <b:IncludeDocumentProperties>true</b:IncludeDocumentProperties>
      <b:IncludeDocumentStructure>true</b:IncludeDocumentStructure>
      <b:OutputQuality>Standard</b:OutputQuality>
      <b:UsePDFA>>false</b:UsePDFA>
    </b:FixedFormatSettings>
    <b:MarkupView>Comments Ink Text Formatting</b:MarkupView>
    <b:OutputFormat>Document97</b:OutputFormat>
    <b:OutputSaveBehavior>AppendIfPossible</b:OutputSaveBehavior>
    <b:RevisionState>FinalShowingMarkup</b:RevisionState>
    <b:SubsetEmbeddedFonts>>false</b:SubsetEmbeddedFonts>
    <b:UpdateFields>>false</b:UpdateFields>
  </Settings>
</AddSyncStreamJobRequest>

```

The protocol server responds with the following **AddSyncStreamJobResponse** WSDL message

```

<AddSyncStreamJobResponse
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response">
  <ErrorCode i:nil="true" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></ErrorCode>
  <OutputStreamInBytes i:nil="true" xmlns:i="http://www.w3.org/2001/XMLSchema-instance"></OutputStreamInBytes>
</AddSyncStreamJobResponse>

```

If the **ErrorCode** is not 0, then the protocol client is finished.

In our case, the **ErrorCode** is null, which means the job finished successfully. If **OutputStreamInBytes** is not null, then this is the complete output file stream. If it is null, then the protocol client needs to send **GetSyncStreamOutputBytes** for the remaining pieces of the output file stream. In our case, the protocol client sends the following **GetSyncStreamOutputBytesRequest**

```

<GetSyncStreamOutputBytesRequest
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes">
  <BytesReceived>0</BytesReceived>
  <JobId>3508186235466465020</JobId>
</GetSyncStreamOutputBytesRequest>

```

The protocol server responds with the following **GetSyncStreamOutputBytesResponse**

```
<GetSyncStreamOutputBytesResponse
xmlns="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/respo
nse">
  <MoreBytesToReceive>false</MoreBytesToReceive>
  <OutputStreamBytes>0M8R4KGxGuEAAAAAAAAAAAAAAAAAAAAAP+8/4</OutputStreamBytes>
</GetSyncStreamOutputBytesResponse>
```

If **MoreBytesToReceive** attribute in **GetSyncStreamOutputBytesResponse** is true, then the protocol client needs to keep sending **GetSyncStreamOutputBytesRequest** with the correct **BytesReceived** attribute, until **MoreBytesToReceive** in **GetSyncStreamOutputBytesResponse** becomes false.



## 5 Security

### 5.1 Security Considerations for Implementers

This protocol does not introduce any additional security considerations beyond those that apply to its underlying protocols.

### 5.2 Index of Security Parameters

| Security Parameter | Section                 |
|--------------------|-------------------------|
| UserToken          | <a href="#">2.2.3.5</a> |

## 6 Appendix A: Full WSDL

For ease of implementation, the full WSDL is provided in this appendix.

```
<?xml version="1.0"?>
<wsdl:definitions
xmlns:tns6="http://schemas.microsoft.com/office/server/word/2009/08/service"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:wsaw="http://www.w3.org/2006/05/addressing/wsdl"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/service"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/">
  <wsdl:types>
    <xs:schema
xmlns:tns7="http://schemas.microsoft.com/office/server/word/2009/08/service/Imports"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/service/Imports">
      <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"/>
      <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
      <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays" />
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addItems"/>
      <xs:import namespace="http://schemas.microsoft.com/office/server/word/2009/08/addJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response"
/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"/>
      <xs:import namespace="http://schemas.microsoft.com/office/server/word/2009/08/getId"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getId/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getItems"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"/>
      <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"/>
```

```

    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response"
/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes"/
>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/r
esponse"/>
    <xs:import namespace="http://schemas.microsoft.com/office/server/word/2009/08/ping"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/ping/response"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/service"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/submitJob"/>
    <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response"/>
</xs:schema>
</wsdl:types>
<wsdl:portType name="IConversionServiceApplication">
  <wsdl:operation name="Ping">
    <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/ping"
name="PingRequest" message="tns6:PingRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/ping/response"
name="PingResponse" message="tns6:PingResponse"/>
  </wsdl:operation>
  <wsdl:operation name="CancelJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob"
name="CancelJobRequest" message="tns6:CancelJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response"
name="CancelJobResponse" message="tns6:CancelJobResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns6:IConversionServiceApplication_CancelJob_ReadOnlyFaultFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetJobStatus">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"
name="GetJobStatusRequest" message="tns6:GetJobStatusRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response"
name="GetJobStatusResponse" message="tns6:GetJobStatusResponse"/>
  </wsdl:operation>
  <wsdl:operation name="BatchGetSyncJobStatus">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus"
name="BatchGetSyncJobStatusRequest" message="tns6:BatchGetSyncJobStatusRequest"/>

```

```

    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/respons
e" name="BatchGetSyncJobStatusResponse" message="tns6:BatchGetSyncJobStatusResponse"/>
    </wsdl:operation>
    <wsdl:operation name="AddSyncJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob"
name="AddSyncJobRequest" message="tns6:AddSyncJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response"
name="AddSyncJobResponse" message="tns6:AddSyncJobResponse"/>
    </wsdl:operation>
    <wsdl:operation name="AddSyncStreamJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob"
name="AddSyncStreamJobRequest" message="tns6:AddSyncStreamJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/respons
e" name="AddSyncStreamJobResponse" message="tns6:AddSyncStreamJobResponse"/>
    </wsdl:operation>
    <wsdl:operation name="GetSyncStreamOutputBytes">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes
" name="GetSyncStreamOutputBytesRequest" message="tns6:GetSyncStreamOutputBytesRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes
/response" name="GetSyncStreamOutputBytesResponse"
message="tns6:GetSyncStreamOutputBytesResponse"/>
    </wsdl:operation>
    <wsdl:operation name="AddJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
name="AddJobRequest" message="tns6:AddJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addJob/response"
name="AddJobResponse" message="tns6:AddJobResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns6:IConversionServiceApplication_AddJob_ReadOnlyFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="AddGroup">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"
name="AddGroupRequest" message="tns6:AddGroupRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
name="AddGroupResponse" message="tns6:AddGroupResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns6:IConversionServiceApplication_AddGroup_ReadOnlyFaultFault_FaultMessage"/>
    </wsdl:operation>
    <wsdl:operation name="AddItems">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addItems"
name="AddItemsRequest" message="tns6:AddItemsRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
name="AddItemsResponse" message="tns6:AddItemsResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"

```

```

name="ReadOnlyFaultFault"
message="tns6:IConversionServiceApplication_AddItems_ReadOnlyFaultFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="SubmitJob">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/submitJob"
name="SubmitJobRequest" message="tns6:SubmitJobRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response"
name="SubmitJobResponse" message="tns6:SubmitJobResponse"/>
    <wsdl:fault
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/readOnlyFault"
name="ReadOnlyFaultFault"
message="tns6:IConversionServiceApplication_SubmitJob_ReadOnlyFaultFault_FaultMessage"/>
  </wsdl:operation>
  <wsdl:operation name="GetJobs">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"
name="GetJobsRequest" message="tns6:GetJobsRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"
name="GetJobsResponse" message="tns6:GetJobsResponse"/>
  </wsdl:operation>
  <wsdl:operation name="GetGroups">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"
name="GetGroupsRequest" message="tns6:GetGroupsRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"
name="GetGroupsResponse" message="tns6:GetGroupsResponse"/>
  </wsdl:operation>
  <wsdl:operation name="GetItems">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
name="GetItemsRequest" message="tns6:GetItemsRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"
name="GetItemsResponse" message="tns6:GetItemsResponse"/>
  </wsdl:operation>
  <wsdl:operation name="ConvertBatch">
    <wsdl:input
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"
name="ConvertBatchRequest" message="tns6:ConvertBatchRequest"/>
  </wsdl:operation>
  <wsdl:operation name="GetId">
    <wsdl:input wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getId"
name="GetIdRequest" message="tns6:GetIdRequest"/>
    <wsdl:output
wsaw:Action="http://schemas.microsoft.com/office/server/word/2009/08/getId/response"
name="GetIdResponse" message="tns6:GetIdResponse"/>
  </wsdl:operation>
</wsdl:portType>
  <wsdl:binding name="DefaultBinding_IConversionServiceApplication"
type="tns6:IConversionServiceApplication">
    <soap:binding transport="http://schemas.xmlsoap.org/soap/http"/>
    <wsdl:operation name="Ping">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/ping" style="document"/>
      <wsdl:input name="PingRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="PingResponse">

```

```

        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="CancelJob">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob"
style="document"/>
    <wsdl:input name="CancelJobRequest">
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="CancelJobResponse">
        <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
    </wsdl:fault>
</wsdl:operation>
<wsdl:operation name="GetJobStatus">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"
style="document"/>
    <wsdl:input name="GetJobStatusRequest">
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="GetJobStatusResponse">
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="BatchGetSyncJobStatus">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus"
style="document"/>
    <wsdl:input name="BatchGetSyncJobStatusRequest">
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="BatchGetSyncJobStatusResponse">
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="AddSyncJob">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob"
style="document"/>
    <wsdl:input name="AddSyncJobRequest">
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="AddSyncJobResponse">
        <soap:body use="literal"/>
    </wsdl:output>
</wsdl:operation>
<wsdl:operation name="AddSyncStreamJob">
    <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob"
style="document"/>
    <wsdl:input name="AddSyncStreamJobRequest">
        <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="AddSyncStreamJobResponse">
        <soap:body use="literal"/>
    </wsdl:output>

```

```

    </wsdl:operation>
    <wsdl:operation name="GetSyncStreamOutputBytes">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes"
style="document"/>
      <wsdl:input name="GetSyncStreamOutputBytesRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="GetSyncStreamOutputBytesResponse">
        <soap:body use="literal"/>
      </wsdl:output>
    </wsdl:operation>
    <wsdl:operation name="AddJob">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
style="document"/>
      <wsdl:input name="AddJobRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="AddJobResponse">
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="AddGroup">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"
style="document"/>
      <wsdl:input name="AddGroupRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="AddGroupResponse">
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="AddItems">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/addItems"
style="document"/>
      <wsdl:input name="AddItemsRequest">
        <soap:body use="literal"/>
      </wsdl:input>
      <wsdl:output name="AddItemsResponse">
        <soap:body use="literal"/>
      </wsdl:output>
      <wsdl:fault name="ReadOnlyFaultFault">
        <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
      </wsdl:fault>
    </wsdl:operation>
    <wsdl:operation name="SubmitJob">
      <soap:operation
soapAction="http://schemas.microsoft.com/office/server/word/2009/08/submitJob"
style="document"/>
      <wsdl:input name="SubmitJobRequest">
        <soap:body use="literal"/>

```

```

    </wsdl:input>
    <wsdl:output name="SubmitJobResponse">
      <soap:body use="literal"/>
    </wsdl:output>
    <wsdl:operation name="ReadOnlyFaultFault">
      <soap:fault use="literal" name="ReadOnlyFaultFault" namespace=""/>
    </wsdl:operation>
  </wsdl:binding>
  <wsdl:operation name="GetJobs">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"
      style="document"/>
    <wsdl:input name="GetJobsRequest">
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="GetJobsResponse">
      <soap:body use="literal"/>
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="GetGroups">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"
      style="document"/>
    <wsdl:input name="GetGroupsRequest">
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="GetGroupsResponse">
      <soap:body use="literal"/>
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="GetItems">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
      style="document"/>
    <wsdl:input name="GetItemsRequest">
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="GetItemsResponse">
      <soap:body use="literal"/>
    </wsdl:output>
  </wsdl:operation>
  <wsdl:operation name="ConvertBatch">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"
      style="document"/>
    <wsdl:input name="ConvertBatchRequest">
      <soap:body use="literal"/>
    </wsdl:input>
  </wsdl:operation>
  <wsdl:operation name="GetId">
    <soap:operation
      soapAction="http://schemas.microsoft.com/office/server/word/2009/08/getId" style="document"/>
    <wsdl:input name="GetIdRequest">
      <soap:body use="literal"/>
    </wsdl:input>
    <wsdl:output name="GetIdResponse">
      <soap:body use="literal"/>
    </wsdl:output>
  </wsdl:operation>
</wsdl:binding>

```



```

    <wsdl:message name="AddGroupRequest">
      <wsdl:part xmlns:q19="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"
name="parameters" element="q19:AddGroupRequest"/>
    </wsdl:message>
    <wsdl:message name="AddGroupResponse">
      <wsdl:part
xmlns:q20="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
name="parameters" element="q20:AddGroupResponse"/>
    </wsdl:message>
    <wsdl:message name="AddItemsRequest">
      <wsdl:part xmlns:q21="http://schemas.microsoft.com/office/server/word/2009/08/addItems"
name="parameters" element="q21:AddItemsRequest"/>
    </wsdl:message>
    <wsdl:message name="AddItemsResponse">
      <wsdl:part
xmlns:q20="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
name="parameters" element="q20:AddItemsResponse"/>
    </wsdl:message>
    <wsdl:message name="AddJobRequest">
      <wsdl:part xmlns:q18="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
name="parameters" element="q18:AddJobRequest"/>
    </wsdl:message>
    <wsdl:message name="AddJobResponse">
      <wsdl:part xmlns:q18="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
name="parameters" element="q18:AddJobResponse"/>
    </wsdl:message>
    <wsdl:message name="AddSyncJobRequest">
      <wsdl:part xmlns:q12="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob"
name="parameters" element="q12:AddSyncJobRequest"/>
    </wsdl:message>
    <wsdl:message name="AddSyncJobResponse">
      <wsdl:part
xmlns:q13="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response"
name="parameters" element="q13:AddSyncJobResponse"/>
    </wsdl:message>
    <wsdl:message name="AddSyncStreamJobRequest">
      <wsdl:part
xmlns:q14="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob"
name="parameters" element="q14:AddSyncStreamJobRequest"/>
    </wsdl:message>
    <wsdl:message name="AddSyncStreamJobResponse">
      <wsdl:part
xmlns:q15="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response"
name="parameters" element="q15:AddSyncStreamJobResponse"/>
    </wsdl:message>
    <wsdl:message name="BatchGetSyncJobStatusRequest">
      <wsdl:part
xmlns:q10="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus"
name="parameters" element="q10:BatchGetSyncJobStatusRequest"/>
    </wsdl:message>
    <wsdl:message name="BatchGetSyncJobStatusResponse">
      <wsdl:part
xmlns:q11="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response"
name="parameters" element="q11:BatchGetSyncJobStatusResponse"/>
    </wsdl:message>
    <wsdl:message name="CancelJobRequest">
      <wsdl:part xmlns:q6="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob"
name="parameters" element="q6:CancelJobRequest"/>
    </wsdl:message>
    <wsdl:message name="CancelJobResponse">

```

```

    <wsdl:part
xmlns:q7="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response"
name="parameters" element="q7:CancelJobResponse"/>
  </wsdl:message>
  <wsdl:message name="ConvertBatchRequest">
    <wsdl:part
xmlns:q1="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"
name="parameters" element="q1:ConvertBatchRequest"/>
  </wsdl:message>
  <wsdl:message name="GetGroupsRequest">
    <wsdl:part xmlns:q25="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"
name="parameters" element="q25:GetGroupsRequest"/>
  </wsdl:message>
  <wsdl:message name="GetGroupsResponse">
    <wsdl:part
xmlns:tns3="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"
name="parameters" element="tns3:GetGroupsResponse"/>
  </wsdl:message>
  <wsdl:message name="GetIdRequest">
    <wsdl:part xmlns:q30="http://schemas.microsoft.com/office/server/word/2009/08/getId"
name="parameters" element="q30:GetIdRequest"/>
  </wsdl:message>
  <wsdl:message name="GetIdResponse">
    <wsdl:part
xmlns:q31="http://schemas.microsoft.com/office/server/word/2009/08/getId/response"
name="parameters" element="q31:GetIdResponse"/>
  </wsdl:message>
  <wsdl:message name="GetItemsRequest">
    <wsdl:part xmlns:q27="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
name="parameters" element="q27:GetItemsRequest"/>
  </wsdl:message>
  <wsdl:message name="GetItemsResponse">
    <wsdl:part xmlns:q27="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
name="parameters" element="q27:GetItemsResponse"/>
  </wsdl:message>
  <wsdl:message name="GetJobsRequest">
    <wsdl:part xmlns:q24="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"
name="parameters" element="q24:GetJobsRequest"/>
  </wsdl:message>
  <wsdl:message name="GetJobsResponse">
    <wsdl:part
xmlns:tns5="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"
name="parameters" element="tns5:GetJobsResponse"/>
  </wsdl:message>
  <wsdl:message name="GetJobStatusRequest">
    <wsdl:part
xmlns:q8="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"
name="parameters" element="q8:GetJobStatusRequest"/>
  </wsdl:message>
  <wsdl:message name="GetJobStatusResponse">
    <wsdl:part
xmlns:q9="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response"
name="parameters" element="q9:GetJobStatusResponse"/>
  </wsdl:message>
  <wsdl:message name="GetSyncStreamOutputBytesRequest">
    <wsdl:part
xmlns:q16="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes"
name="parameters" element="q16:GetSyncStreamOutputBytesRequest"/>
  </wsdl:message>
  <wsdl:message name="GetSyncStreamOutputBytesResponse">

```

```

    <wsdl:part
xmlns:q17="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/r
response" name="parameters" element="q17:GetSyncStreamOutputBytesResponse"/>
  </wsdl:message>
  <wsdl:message
name="IConversionServiceApplication_AddGroup_ReadOnlyFaultFault_FaultMessage">
    <wsdl:part name="detail" element="tns6:ReadOnlyFault"/>
  </wsdl:message>
  <wsdl:message
name="IConversionServiceApplication_AddItems_ReadOnlyFaultFault_FaultMessage">
    <wsdl:part name="detail" element="tns6:ReadOnlyFault"/>
  </wsdl:message>
  <wsdl:message name="IConversionServiceApplication_AddJob_ReadOnlyFaultFault_FaultMessage">
    <wsdl:part name="detail" element="tns6:ReadOnlyFault"/>
  </wsdl:message>
  <wsdl:message
name="IConversionServiceApplication_CancelJob_ReadOnlyFaultFault_FaultMessage">
    <wsdl:part name="detail" element="tns6:ReadOnlyFault"/>
  </wsdl:message>
  <wsdl:message
name="IConversionServiceApplication_SubmitJob_ReadOnlyFaultFault_FaultMessage">
    <wsdl:part name="detail" element="tns6:ReadOnlyFault"/>
  </wsdl:message>
  <wsdl:message name="PingRequest">
    <wsdl:part xmlns:q4="http://schemas.microsoft.com/office/server/word/2009/08/ping"
name="parameters" element="q4:PingRequest"/>
  </wsdl:message>
  <wsdl:message name="PingResponse">
    <wsdl:part
xmlns:q5="http://schemas.microsoft.com/office/server/word/2009/08/ping/response"
name="parameters" element="q5:PingResponse"/>
  </wsdl:message>
  <wsdl:message name="SubmitJobRequest">
    <wsdl:part xmlns:q22="http://schemas.microsoft.com/office/server/word/2009/08/submitJob"
name="parameters" element="q22:SubmitJobRequest"/>
  </wsdl:message>
  <wsdl:message name="SubmitJobResponse">
    <wsdl:part
xmlns:q23="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response"
name="parameters" element="q23:SubmitJobResponse"/>
  </wsdl:message>
</wsdl:definitions>

```

## 7 Appendix B: Full XML Schema

| Schema name   | Prefix | Section              |
|---|--------|----------------------|
| http://schemas.datacontract.org/2004/07<br>/Microsoft.Office.Word.Server.Conversions          | tns    | <a href="#">7.1</a>  |
| http://schemas.microsoft.com/2003/10/Serialization/Arrays                                     | tns1   | <a href="#">7.2</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob                      | q14    | <a href="#">7.3</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response                    | q7     | <a href="#">7.4</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/cancelJob                             | q6     | <a href="#">7.5</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08<br>/conversionJobSettings             | q2     | <a href="#">7.6</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/convertBatch                          | q1     | <a href="#">7.7</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response                    | tns3   | <a href="#">7.8</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/getGroups                             | q25    | <a href="#">7.9</a>  |
| http://schemas.microsoft.com/office/server/word/2009/08/getId/response                        | q31    | <a href="#">7.10</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getId                                 | q30    | <a href="#">7.11</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getItems/response                     | tns4   | <a href="#">7.12</a> |
| http://schemas.microsoft.com/2003/10/Serialization/   | tns2   | <a href="#">7.13</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getItems                              | q27    | <a href="#">7.14</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response                      | tns5   | <a href="#">7.15</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getJobs                               | q24    | <a href="#">7.16</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus<br>/response             | q9     | <a href="#">7.17</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus                          | q8     | <a href="#">7.18</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus<br>/response         | q11    | <a href="#">7.19</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus                      | q10    | <a href="#">7.20</a> |
| http://schemas.microsoft.com/office/server/word/2009/08<br>/getSyncStreamOutputBytes/response | q17    | <a href="#">7.21</a> |
| http://schemas.microsoft.com/office/server/word/2009/08<br>/getSyncStreamOutputBytes          | q16    | <a href="#">7.22</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/ping/response                         | q5     | <a href="#">7.23</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response                     | q20    | <a href="#">7.24</a> |

| Schema name   | Prefix | Section              |
|---|--------|----------------------|
| http://schemas.microsoft.com/office/server/word/2009/08/ping                      | q4     | <a href="#">7.25</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/service                   | tns6   | <a href="#">7.35</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response        | q23    | <a href="#">7.26</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/submitJob                 | q22    | <a href="#">7.27</a> |
| http://schemas.datacontract.org/2004/07/System                                    | q3     | <a href="#">7.28</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addGroup                  | q19    | <a href="#">7.29</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addItems                  | q21    | <a href="#">7.30</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addJob                    | q18    | <a href="#">7.31</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response       | q13    | <a href="#">7.32</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob                | q12    | <a href="#">7.33</a> |
| http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response | q15    | <a href="#">7.34</a> |

For ease of implementation, the following sections provide the full XML schema for this protocol.

## 7.1

### **http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions Schema**

```
<?xml version="1.0"?>
<xs:schema
  xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:simpleType name="CompatibilityMode">
    <xs:restriction base="xs:string">
      <xs:enumeration value="Word2003"/>
      <xs:enumeration value="Word2007"/>
      <xs:enumeration value="Word2010"/>
      <xs:enumeration value="Word2013"/>
      <xs:enumeration value="MaintainCurrentSetting"/>
      <xs:enumeration value="Current"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="CompatibilityMode" nillable="true" type="tns:CompatibilityMode"/>
  <xs:simpleType name="BalloonState">
    <xs:restriction base="xs:string">
      <xs:enumeration value="AlwaysUse"/>
      <xs:enumeration value="Inline"/>
      <xs:enumeration value="OnlyCommentsAndFormatting"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="BalloonState" nillable="true" type="tns:BalloonState"/>
  <xs:simpleType name="FixedFormatBookmark">
    <xs:restriction base="xs:string">
```

```

    <xs:enumeration value="None"/>
    <xs:enumeration value="Headings"/>
    <xs:enumeration value="Bookmarks"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="FixedFormatBookmark" nillable="true" type="tns:FixedFormatBookmark"/>
<xs:simpleType name="FixedFormatQuality">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Standard"/>
    <xs:enumeration value="Minimum"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="FixedFormatQuality" nillable="true" type="tns:FixedFormatQuality"/>
<xs:simpleType name="MarkupTypes">
  <xs:list>
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:enumeration value="Comments"/>
        <xs:enumeration value="Ink"/>
        <xs:enumeration value="Text"/>
        <xs:enumeration value="Formatting"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:list>
</xs:simpleType>
<xs:element name="MarkupTypes" nillable="true" type="tns:MarkupTypes"/>
<xs:simpleType name="SaveFormat">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Automatic"/>
    <xs:enumeration value="Document"/>
    <xs:enumeration value="DocumentMacroEnabled"/>
    <xs:enumeration value="Document97"/>
    <xs:enumeration value="Template"/>
    <xs:enumeration value="TemplateMacroEnabled"/>
    <xs:enumeration value="Template97"/>
    <xs:enumeration value="MHTML"/>
    <xs:enumeration value="PDF"/>
    <xs:enumeration value="RTF"/>
    <xs:enumeration value="XML"/>
    <xs:enumeration value="XPS"/>
    <xs:enumeration value="DocumentStrict"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SaveFormat" nillable="true" type="tns:SaveFormat"/>
<xs:simpleType name="SaveBehavior">
  <xs:restriction base="xs:string">
    <xs:enumeration value="AppendIfPossible"/>
    <xs:enumeration value="AlwaysOverwrite"/>
    <xs:enumeration value="AppendOnly"/>
    <xs:enumeration value="NeverOverwrite"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SaveBehavior" nillable="true" type="tns:SaveBehavior"/>
<xs:simpleType name="RevisionState">
  <xs:restriction base="xs:string">
    <xs:enumeration value="Final"/>
    <xs:enumeration value="FinalShowingMarkup"/>
    <xs:enumeration value="Original"/>
    <xs:enumeration value="OriginalShowingMarkup"/>
  </xs:restriction>

```

```

    </xs:restriction>
  </xs:simpleType>
  <xs:element name="RevisionState" nillable="true" type="tns:RevisionState"/>
</xs:schema>

```

## 7.2 http://schemas.microsoft.com/2003/10/Serialization/Arrays Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import
    namespace="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"/>
  <xs:complexType name="ArrayOfunsignedLong">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="unsignedLong"
        type="xs:unsignedLong"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfunsignedLong" nillable="true" type="tns1:ArrayOfunsignedLong"/>
  <xs:complexType name="ArrayOfbase64Binary">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="base64Binary" nillable="true"
        type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfbase64Binary" nillable="true" type="tns1:ArrayOfbase64Binary"/>
  <xs:complexType name="ArrayOfstring">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="string" nillable="true"
        type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfstring" nillable="true" type="tns1:ArrayOfstring"/>
  <xs:complexType name="ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded"
        name="KeyValueOfunsignedLongConvertBatchJobdfuNjXEA">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="Key" type="xs:unsignedLong"/>
            <xs:element
              xmlns:q1="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch" name="Value"
              nillable="true" type="q1:ConvertBatchJob"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA" nillable="true"
    type="tns1:ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA"/>
</xs:schema>

```

## 7.3

### <http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddSyncStreamJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="InputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
        <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings" />
</xs:schema>
```

## 7.4

### <http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="CancelJobResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

## 7.5 <http://schemas.microsoft.com/office/server/word/2009/08/cancelJob> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/cancelJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="CancelJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```



```

        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
</xs:schema>

```

## 7.6

### <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings Schema>

```

<?xml version="1.0"?>
<xs:schema
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:import
namespace="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
/>
    <xs:complexType name="ConversionJobSettings">
        <xs:sequence>
            <xs:element minOccurs="0" name="AddThumbnail" type="xs:boolean"/>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="CompatibilityMode" type="tns:CompatibilityMode"/>
            <xs:element minOccurs="0" name="DefaultLanguageId" nillable="true" type="xs:string"/>
            <xs:element minOccurs="0" name="DoNotEmbedSystemFonts" type="xs:boolean"/>
            <xs:element minOccurs="0" name="EmbedFonts" type="xs:boolean"/>
            <xs:element minOccurs="0" name="FixedFormatSettings" nillable="true"
type="q2:FixedFormatSettings"/>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="MarkupView" type="tns:MarkupTypes"/>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="OutputFormat" type="tns:SaveFormat"/>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="OutputSaveBehavior" type="tns:SaveBehavior"/>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="RevisionState" type="tns:RevisionState"/>
            <xs:element minOccurs="0" name="SubsetEmbeddedFonts" type="xs:boolean"/>
            <xs:element minOccurs="0" name="UpdateFields" type="xs:boolean"/>
        </xs:sequence>
    </xs:complexType>
    <xs:element name="ConversionJobSettings" nillable="true" type="q2:ConversionJobSettings"/>
    <xs:complexType name="FixedFormatSettings">
        <xs:sequence>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="BalloonState" type="tns:BalloonState"/>
            <xs:element minOccurs="0" name="BitmapEmbeddedFonts" type="xs:boolean"/>
            <xs:element
xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
minOccurs="0" name="Bookmarks" type="tns:FixedFormatBookmark"/>
            <xs:element minOccurs="0" name="IncludeDocumentProperties" type="xs:boolean"/>
            <xs:element minOccurs="0" name="IncludeDocumentStructure" type="xs:boolean"/>

```

```

    <xs:element
      xmlns:tns="http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions"
      minOccurs="0" name="OutputQuality" type="tns:FixedFormatQuality"/>
    <xs:element minOccurs="0" name="UsePDFA" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="FixedFormatSettings" nillable="true" type="q2:FixedFormatSettings"/>
</xs:schema>

```

## 7.7 http://schemas.microsoft.com/office/server/word/2009/08/convertBatch Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:q1="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/convertBatch"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="ConvertBatchRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Items" nillable="true"
          type="q1:ArrayOfConvertBatchItem"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
          minOccurs="0" name="Jobs" nillable="true"
          type="tns1:ArrayOfKeyValueOfunsignedLongConvertBatchJobdfuNjXEA"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="ArrayOfConvertBatchItem">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="ConvertBatchItem" nillable="true"
        type="q1:ConvertBatchItem"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfConvertBatchItem" nillable="true"
    type="q1:ArrayOfConvertBatchItem"/>
  <xs:complexType name="ConvertBatchItem">
    <xs:sequence>
      <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
      <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="ItemId" type="xs:int"/>
      <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ConvertBatchItem" nillable="true" type="q1:ConvertBatchItem"/>
  <xs:complexType name="ConvertBatchJob">
    <xs:sequence>
      <xs:element
        xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
        minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
      <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ConvertBatchJob" nillable="true" type="q1:ConvertBatchJob"/>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:import
    namespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"/>

```

```
</xs:schema>
```

## 7.8

### http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response Schema

```
<?xml version="1.0"?>
<xs:schema
  xmlns:tns3="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import
    namespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"/>
  <xs:element name="GetGroupsResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
        <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
        <xs:element minOccurs="0" name="Groups" nillable="true"
          type="tns3:ArrayOfGetGroupsGroup"/>
        <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:complexType name="ArrayOfGetGroupsGroup">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="GetGroupsGroup" nillable="true"
        type="tns3:GetGroupsGroup"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfGetGroupsGroup" nillable="true"
    type="tns3:ArrayOfGetGroupsGroup"/>
  <xs:complexType name="GetGroupsGroup">
    <xs:sequence>
      <xs:element minOccurs="0" name="Id" type="xs:short"/>
      <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
      <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="GetGroupsGroup" nillable="true" type="tns3:GetGroupsGroup"/>
</xs:schema>
```

## 7.9 http://schemas.microsoft.com/office/server/word/2009/08/getGroups Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getGroups"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="GetGroupsRequest">
    <xs:complexType>
      <xs:sequence>
```

```

        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
</xs:schema>

```

## 7.10

### **http://schemas.microsoft.com/office/server/word/2009/08/getId/response Schema**

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getId/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">
    <xs:element name="GetIdResponse">
        <xs:complexType>
            <xs:sequence>
                <xs:element minOccurs="0" name="AssignedItemCount" type="xs:int"/>
                <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="Id" type="tns2:guid"/>
            </xs:sequence>
        </xs:complexType>
    </xs:element>
</xs:schema>

```

## 7.11 http://schemas.microsoft.com/office/server/word/2009/08/getId Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getId"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:element name="GetIdRequest">
        <xs:complexType>
            <xs:sequence/>
        </xs:complexType>
    </xs:element>
</xs:schema>

```

## 7.12

### **http://schemas.microsoft.com/office/server/word/2009/08/getItems/response Schema**

```

<?xml version="1.0"?>
<xs:schema
xmlns:tns4="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:complexType name="ArrayOfGetItemsItem">
        <xs:sequence>
            <xs:element minOccurs="0" maxOccurs="unbounded" name="GetItemsItem" nillable="true"
type="tns4:GetItemsItem"/>
        </xs:sequence>
    </xs:complexType>

```

```

    </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfGetItemsItem" nillable="true" type="tns4:ArrayOfGetItemsItem"/>
<xs:complexType name="GetItemsItem">
  <xs:sequence>
    <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
    <xs:element minOccurs="0" name="Id" type="xs:int"/>
    <xs:element minOccurs="0" name="InputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="OutputFile" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="StartTime" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="StopTime" nillable="true" type="xs:dateTime"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="GetItemsItem" nillable="true" type="tns4:GetItemsItem"/>
<xs:element name="Items" nillable="true" type="tns4:ArrayOfGetItemsItem"/>
</xs:schema>

```

### 7.13 http://schemas.microsoft.com/2003/10/Serialization/ Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
  attributeFormDefault="qualified" elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/2003/10/Serialization/"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="anyType" nillable="true" type="xs:anyType"/>
  <xs:element name="anyURI" nillable="true" type="xs:anyURI"/>
  <xs:element name="base64Binary" nillable="true" type="xs:base64Binary"/>
  <xs:element name="boolean" nillable="true" type="xs:boolean"/>
  <xs:element name="byte" nillable="true" type="xs:byte"/>
  <xs:element name="dateTime" nillable="true" type="xs:dateTime"/>
  <xs:element name="decimal" nillable="true" type="xs:decimal"/>
  <xs:element name="double" nillable="true" type="xs:double"/>
  <xs:element name="float" nillable="true" type="xs:float"/>
  <xs:element name="int" nillable="true" type="xs:int"/>
  <xs:element name="long" nillable="true" type="xs:long"/>
  <xs:element name="QName" nillable="true" type="xs:QName"/>
  <xs:element name="short" nillable="true" type="xs:short"/>
  <xs:element name="string" nillable="true" type="xs:string"/>
  <xs:element name="unsignedByte" nillable="true" type="xs:unsignedByte"/>
  <xs:element name="unsignedInt" nillable="true" type="xs:unsignedInt"/>
  <xs:element name="unsignedLong" nillable="true" type="xs:unsignedLong"/>
  <xs:element name="unsignedShort" nillable="true" type="xs:unsignedShort"/>
  <xs:element name="char" nillable="true" type="tns2:char"/>
  <xs:simpleType name="char">
    <xs:restriction base="xs:int"/>
  </xs:simpleType>
  <xs:element name="duration" nillable="true" type="tns2:duration"/>
  <xs:simpleType name="duration">
    <xs:restriction base="xs:duration">
      <xs:pattern value="\-?P(\d*D)?(T(\d*H)?(\d*M)?(\d*(\.\d*)?S)?)?"/>
      <xs:minInclusive value="-P10675199DT2H48M5.4775808S"/>
      <xs:maxInclusive value="P10675199DT2H48M5.4775807S"/>
    </xs:restriction>
  </xs:simpleType>
  <xs:element name="guid" nillable="true" type="tns2:guid"/>
  <xs:simpleType name="guid">
    <xs:restriction base="xs:string">

```

```

        <xs:pattern value="[\da-fA-F]{8}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{4}-[\da-fA-F]{12}"/>
    </xs:restriction>
</xs:simpleType>
<xs:attribute name="FactoryType" type="xs:QName"/>
<xs:attribute name="Id" type="xs:ID"/>
<xs:attribute name="Ref" type="xs:IDREF"/>
</xs:schema>

```

## 7.14 <http://schemas.microsoft.com/office/server/word/2009/08/getItems> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getItems"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetItemsRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Canceled" type="xs:boolean"/>
        <xs:element minOccurs="0" name="Failed" type="xs:boolean"/>
        <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
        <xs:element minOccurs="0" name="InProgress" type="xs:boolean"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="NotStarted" type="xs:boolean"/>
        <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
        <xs:element minOccurs="0" name="Succeeded" type="xs:boolean"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:element name="GetItemsResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element
xmlns:tns4="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response"
minOccurs="0" ref="tns4:Items"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/getItems/response" />
</xs:schema>

```

## 7.15 <http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response> Schema

```

<?xml version="1.0"?>
<xs:schema
xmlns:tns5="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">

```

```

<xs:element name="GetJobsResponse">
  <xs:complexType>
    <xs:sequence>
      <xs:element minOccurs="0" name="Jobs" nillable="true" type="tns5:ArrayOfGetJobsJob"/>
    </xs:sequence>
  </xs:complexType>
</xs:element>
<xs:complexType name="ArrayOfGetJobsJob">
  <xs:sequence>
    <xs:element minOccurs="0" maxOccurs="unbounded" name="GetJobsJob" nillable="true"
type="tns5:GetJobsJob"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="ArrayOfGetJobsJob" nillable="true" type="tns5:ArrayOfGetJobsJob"/>
<xs:complexType name="GetJobsJob">
  <xs:sequence>
    <xs:element minOccurs="0" name="CancelTime" nillable="true" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="CreateTime" type="xs:dateTime"/>
    <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="NotSubmitted" type="xs:boolean"/>
  </xs:sequence>
</xs:complexType>
<xs:element name="GetJobsJob" nillable="true" type="tns5:GetJobsJob"/>
</xs:schema>

```

## 7.16 <http://schemas.microsoft.com/office/server/word/2009/08/getJobs> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobs"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="GetJobsRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="ActiveOnly" type="xs:boolean"/>
        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
        <xs:element minOccurs="0" name="SubmittedOnly" type="xs:boolean"/>
        <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.17 <http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/respons
e" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetJobStatusResponse">

```

```

<xs:complexType>
  <xs:sequence>
    <xs:element minOccurs="0" name="Canceled" type="xs:int"/>
    <xs:element minOccurs="0" name="Count" type="xs:int"/>
    <xs:element minOccurs="0" name="Failed" type="xs:int"/>
    <xs:element minOccurs="0" name="InProgress" type="xs:int"/>
    <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
    <xs:element minOccurs="0" name="NotStarted" type="xs:int"/>
    <xs:element minOccurs="0" name="NotSubmitted" type="xs:int"/>
    <xs:element minOccurs="0" name="Succeeded" type="xs:int"/>
  </xs:sequence>
</xs:complexType>
</xs:element>
</xs:schema>

```

## 7.18 <http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:element name="GetJobStatusRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.19 <http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/res
ponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="BatchGetSyncJobStatusResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:q3="http://schemas.datacontract.org/2004/07/System" minOccurs="0"
name="ErrorCodes" nillable="true" type="q3:ArrayOfNullableOfint"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
        <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="OutputStreamsInBytes" nillable="true" type="tns1:ArrayOfbase64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.datacontract.org/2004/07/System"/>

```



```

    <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
</xs:schema>

```

## 7.20

### <http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:element name="BatchGetSyncJobStatusRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="JobIds" nillable="true" type="tns1:ArrayOfunsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.21

### <http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/response> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetSyncStreamOutputBytesResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="MoreBytesToReceive" type="xs:boolean"/>
        <xs:element minOccurs="0" name="OutputStreamBytes" nillable="true"
type="xs:base64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.22

### <http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="GetSyncStreamOutputBytesRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="BytesReceived" type="xs:int"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

```

    </xs:sequence>
  </xs:complexType>
</xs:element>
</xs:schema>

```

## 7.23

### <http://schemas.microsoft.com/office/server/word/2009/08/ping/response> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/ping/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="PingResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="Count" type="xs:int"/>
        <xs:element minOccurs="0" name="Received" type="xs:dateTime"/>
        <xs:element minOccurs="0" name="Responded" type="xs:dateTime"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.24

### <http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddGroupResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
  <xs:element name="AddItemsResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.25 <http://schemas.microsoft.com/office/server/word/2009/08/ping> Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/ping"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="PingRequest">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>

```

```
</xs:element>
</xs:schema>
```

## 7.26

### <http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="SubmitJobResponse">
    <xs:complexType>
      <xs:sequence/>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

## 7.27 <http://schemas.microsoft.com/office/server/word/2009/08/submitJob> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/submitJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="SubmitJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

## 7.28 <http://schemas.datacontract.org/2004/07/System> Schema

```
<?xml version="1.0"?>
<xs:schema xmlns:q3="http://schemas.datacontract.org/2004/07/System"
elementFormDefault="qualified"
targetNamespace="http://schemas.datacontract.org/2004/07/System"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ArrayOfNullableOfint">
    <xs:sequence>
      <xs:element minOccurs="0" maxOccurs="unbounded" name="int" nillable="true"
type="xs:int"/>
    </xs:sequence>
  </xs:complexType>
  <xs:element name="ArrayOfNullableOfint" nillable="true" type="q3:ArrayOfNullableOfint"/>
</xs:schema>
```

## 7.29 <http://schemas.microsoft.com/office/server/word/2009/08/addGroup> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addGroup"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:element name="AddGroupRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
        <xs:element minOccurs="0" name="InputRoot" nillable="true" type="xs:string"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="Items" nillable="true" type="tns1:ArrayOfstring"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="OutputRoot" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

## 7.30 <http://schemas.microsoft.com/office/server/word/2009/08/addItems> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addItems"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/Arrays"/>
  <xs:element name="AddItemsRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="GroupId" type="xs:short"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="InputUrls" nillable="true" type="tns1:ArrayOfstring"/>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element xmlns:tns1="http://schemas.microsoft.com/2003/10/Serialization/Arrays"
minOccurs="0" name="OutputUrls" nillable="true" type="tns1:ArrayOfstring"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

## 7.31 <http://schemas.microsoft.com/office/server/word/2009/08/addJob> Schema

```
<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddJobRequest">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
        <xs:element minOccurs="0" name="Name" nillable="true" type="xs:string"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>
```

```

        <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
        <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
        <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
    </xs:sequence>
</xs:complexType>
</xs:element>
<xs:element name="AddJobResponse">
    <xs:complexType>
        <xs:sequence/>
    </xs:complexType>
</xs:element>
<xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/">
<xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"/>
</xs:schema>

```

### 7.32

#### **http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response Schema**

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:element name="AddSyncJobResponse">
        <xs:complexType>
            <xs:sequence>
                <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
            </xs:sequence>
        </xs:complexType>
    </xs:element>
</xs:schema>

```

### 7.33 http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob Schema

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
    <xs:element name="AddSyncJobRequest">
        <xs:complexType>
            <xs:sequence>
                <xs:element minOccurs="0" name="JobId" type="xs:unsignedLong"/>
                <xs:element xmlns:tns2="http://schemas.microsoft.com/2003/10/Serialization/"
minOccurs="0" name="PartitionId" nillable="true" type="tns2:guid"/>
                <xs:element
xmlns:q2="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings"
minOccurs="0" name="Settings" nillable="true" type="q2:ConversionJobSettings"/>
                <xs:element minOccurs="0" name="UserToken" nillable="true" type="xs:base64Binary"/>
                <xs:element minOccurs="0" name="inputUrl" nillable="true" type="xs:string"/>
                <xs:element minOccurs="0" name="outputUrl" nillable="true" type="xs:string"/>
            </xs:sequence>
        </xs:complexType>
    </xs:element>
</xs:schema>

```

```

    </xs:complexType>
  </xs:element>
  <xs:import namespace="http://schemas.microsoft.com/2003/10/Serialization/" />
  <xs:import
namespace="http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings" />
</xs:schema>

```

## 7.34

### **http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response Schema**

```

<?xml version="1.0"?>
<xs:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/res
ponse" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="AddSyncStreamJobResponse">
    <xs:complexType>
      <xs:sequence>
        <xs:element minOccurs="0" name="ErrorCode" nillable="true" type="xs:int"/>
        <xs:element minOccurs="0" name="OutputStreamInBytes" nillable="true"
type="xs:base64Binary"/>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```

## 7.35 http://schemas.microsoft.com/office/server/word/2009/08/service Schema

```

<?xml version="1.0"?>
<xs:schema xmlns:tns6="http://schemas.microsoft.com/office/server/word/2009/08/service"
elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/server/word/2009/08/service"
xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:complexType name="ReadOnlyFault">
    <xs:sequence/>
  </xs:complexType>
  <xs:element name="ReadOnlyFault" nillable="true" type="tns6:ReadOnlyFault"/>
</xs:schema>

```

## 8 Appendix C: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft SharePoint Server 2010
- Microsoft SharePoint Server 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

[<1> Section 2.2.4:](#) This complex type is available only in SharePoint Server 2013.

[<2> Section 2.2.4.4:](#) This complex type is available only in SharePoint Server 2013.

[<3> Section 2.2.5.9:](#) This is available only in SharePoint Server 2013.

[<4> Section 3.1.1.1:](#) This is available only in SharePoint Server 2013.

[<5> Section 3.1.4:](#) This operation is available only in SharePoint Server 2013.

[<6> Section 3.1.4:](#) This operation is available only in SharePoint Server 2013.

[<7> Section 3.1.4:](#) This operation is available only in SharePoint Server 2013.

[<8> Section 3.1.4:](#) This operation is available only in SharePoint Server 2013.

[<9> Section 3.1.4.13:](#) This operation is available only in SharePoint Server 2013.

[<10> Section 3.1.4.14:](#) This operation is available only in SharePoint Server 2013.

[<11> Section 3.1.4.15:](#) This operation is available only in SharePoint Server 2013.

[<12> Section 3.1.4.16:](#) This operation is available only in SharePoint Server 2013.

## 9 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.



## 10 Index

### A

Abstract data model  
  [server](#) 29  
[Applicability](#) 13  
[ArrayOfstringcomplex type](#) 20  
[Attribute groups](#) 28  
[Attributes](#) 28

### B

[BalloonStatesimple type](#) 23

### C

[Capability negotiation](#) 14  
[Change tracking](#) 120  
[CompatibilityModesimple type](#) 24  
[Complex types](#) 20  
  [ArrayOfstring](#) 20  
  [ConversionJobSettings](#) 20  
  [FixedFormatSettings](#) 21  
  [ReadOnlyFault](#) 22  
[ConversionJobSettings \(from namespace <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings>\)element](#) 17  
[ConversionJobSettingscomplex type](#) 20  
[Creating a conversion job example](#) 78  
  [adding the first group](#) 79  
  [adding the job](#) 78  
  [adding the second group](#) 80  
  [submitting the job](#) 80  
[Creating an immediate conversion job example](#) 85  
  [input file stored on a non-server location](#) 86  
  [input file stored on the protocol server](#) 85

### D

Data model - abstract  
  [server](#) 29

### E

Elements  
  [ConversionJobSettings \(from namespace <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings>\)](#) 17  
  [GroupId](#) 18  
  [JobId](#) 18  
  [PartitionId](#) 18  
  [UserToken](#) 18  
Events  
  [local - server](#) 77  
  [timer - server](#) 76  
Example  
  [creating a conversion job](#) 78  
  [creating an immediate conversion job](#) 85  
  [getting the status of a conversion job](#) 80  
Examples

[overview](#) 78

### F

[Fields - vendor-extensible](#) 14  
[FixedFormatBookmarksimple type](#) 24  
[FixedFormatQualitysimple type](#) 25  
[FixedFormatSettingscomplex type](#) 21  
[Full WSDL](#) 90  
[Full XML Schema](#) 100  
  <http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions> Schema 101  
  <http://schemas.datacontract.org/2004/07/System> Schema 115  
  <http://schemas.microsoft.com/2003/10/Serialization/> Schema 109  
  <http://schemas.microsoft.com/2003/10/Serialization/Arrays> Schema 103  
  <http://schemas.microsoft.com/office/server/word/2009/08/addGroup> Schema 116  
  <http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response> Schema 114  
  <http://schemas.microsoft.com/office/server/word/2009/08/addItems> Schema 116  
  <http://schemas.microsoft.com/office/server/word/2009/08/addJob> Schema 116  
  <http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob> Schema 117  
  <http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response> Schema 117  
  <http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob> Schema 104  
  <http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response> Schema 118  
  <http://schemas.microsoft.com/office/server/word/2009/08/cancelJob> Schema 104  
  <http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response> Schema 104  
  <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings> Schema 105  
  <http://schemas.microsoft.com/office/server/word/2009/08/convertBatch> Schema 106  
  <http://schemas.microsoft.com/office/server/word/2009/08/getGroups> Schema 107  
  <http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response> Schema 107  
  <http://schemas.microsoft.com/office/server/word/2009/08/getId> Schema 108  
  <http://schemas.microsoft.com/office/server/word/2009/08/getId/response> Schema 108  
  <http://schemas.microsoft.com/office/server/word/2009/08/getItems> Schema 110  
  <http://schemas.microsoft.com/office/server/word/2009/08/getItems/response> Schema 108  
  <http://schemas.microsoft.com/office/server/word/2009/08/getJobs> Schema 111

<http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response Schema> 110  
<http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus Schema> 112  
<http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response Schema> 111  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus Schema> 113  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response Schema> 112  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes Schema> 113  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/response Schema> 113  
<http://schemas.microsoft.com/office/server/word/2009/08/ping Schema> 114  
<http://schemas.microsoft.com/office/server/word/2009/08/ping/response Schema> 114  
<http://schemas.microsoft.com/office/server/word/2009/08/service Schema> 118  
<http://schemas.microsoft.com/office/server/word/2009/08/submitJob Schema> 115  
<http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response Schema> 115

## G

[Getting the status of a conversion job example](#) 80  
[getting the groups](#) 82  
[getting the items in the first group](#) 83  
[getting the items in the second group](#) 84  
[getting the job status](#) 81  
[getting the jobs](#) 81  
[Glossary](#) 10  
[GroupIdelement](#) 18  
[Groups](#) 28  
[guidsimple type](#) 25

## I

[Implementer - security considerations](#) 89  
[Index of security parameters](#) 89  
[Informative references](#) 11  
Initialization  
[server](#) 30  
[Introduction](#) 10

## J

[JobIdelement](#) 18

## L

Local events  
[server](#) 77

## M

[MarkupTypessimple type](#) 25

Message processing  
[server](#) 30

## Messages

[ArrayOfstringcomplex type](#) 20  
[attribute groups](#) 28  
[attributes](#) 28  
[BalloonStatesimple type](#) 23  
[CompatibilityModesimple type](#) 24  
[complex types](#) 20  
[ConversionJobSettings \(from namespace <http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings>\)element](#) 17  
[ConversionJobSettingscomplex type](#) 20  
[elements](#) 17  
[enumerated](#) 17  
[FixedFormatBookmarksimple type](#) 24  
[FixedFormatQualitysimple type](#) 25  
[FixedFormatSettingscomplex type](#) 21  
[GroupIdelement](#) 18  
[groups](#) 28  
[guidsimple type](#) 25  
[JobIdelement](#) 18  
[MarkupTypessimple type](#) 25  
[namespaces](#) 15  
[PartitionIdelement](#) 18  
[ReadOnlyFaultcomplex type](#) 22  
[RevisionStatesimple type](#) 26  
[SaveBehaviorsimple type](#) 27  
[SaveFormatsimple type](#) 27  
[simple types](#) 23  
[syntax](#) 15  
[transport](#) 15  
[UserTokenelement](#) 18

## N

[Namespaces](#) 15  
[Normative references](#) 11

## O

### Operations

[AddGroup](#) 31  
[AddItems](#) 33  
[AddJob](#) 36  
[AddSyncJob](#) 63  
[AddSyncStreamJob](#) 66  
[BatchGetSyncJobStatus](#) 70  
[CancelJob](#) 38  
[ConvertBatch](#) 40  
[GetGroups](#) 44  
[GetId](#) 48  
[GetItems](#) 50  
[GetJobs](#) 53  
[GetJobStatus](#) 57  
[GetSyncStreamOutputBytes](#) 74  
[Ping](#) 59  
[SubmitJob](#) 61  
[Overview \(synopsis\)](#) 12

## P

[Parameters - security index](#) 89  
[PartitionIdelement](#) 18  
[Preconditions](#) 13  
[Prerequisites](#) 13  
[Product behavior](#) 119  
Protocol Details  
[overview](#) 29

## R

[ReadOnlyFaultcomplex type](#) 22  
[References](#) 11  
[informative](#) 11  
[normative](#) 11  
[Relationship to other protocols](#) 13  
[RevisionStatesimple type](#) 26

## S

[SaveBehaviorsimple type](#) 27  
[SaveFormatsimple type](#) 27  
Security  
[implementer considerations](#) 89  
[parameter index](#) 89  
Sequencing rules  
[server](#) 30  
Server  
[abstract data model](#) 29  
[AddGroup operation](#) 31  
[AddItems operation](#) 33  
[AddJob operation](#) 36  
[AddSyncJob operation](#) 63  
[AddSyncStreamJob operation](#) 66  
[BatchGetSyncJobStatus operation](#) 70  
[CancelJob operation](#) 38  
[ConvertBatch operation](#) 40  
[GetGroups operation](#) 44  
[GetId operation](#) 48  
[GetItems operation](#) 50  
[GetJobs operation](#) 53  
[GetJobStatus operation](#) 57  
[GetSyncStreamOutputBytes operation](#) 74  
[initialization](#) 30  
[local events](#) 77  
[message processing](#) 30  
[Ping operation](#) 59  
[sequencing rules](#) 30  
[SubmitJob operation](#) 61  
[timer events](#) 76  
[timers](#) 30  
[Simple types](#) 23  
[BalloonState](#) 23  
[CompatibilityMode](#) 24  
[FixedFormatBookmark](#) 24  
[FixedFormatQuality](#) 25  
[guid](#) 25  
[MarkupTypes](#) 25  
[RevisionState](#) 26  
[SaveBehavior](#) 27  
[SaveFormat](#) 27  
[Standards assignments](#) 14  
Syntax

[messages - overview](#) 15

## T

Timer events  
[server](#) 76  
Timers  
[server](#) 30  
[Tracking changes](#) 120  
[Transport](#) 15  
Types  
[complex](#) 20  
[simple](#) 23

## U

[UserTokenelement](#) 18

## V

[Vendor-extensible fields](#) 14  
[Versioning](#) 14

## W

[WSDL](#) 90

## X

[XML Schema](#) 100  
<http://schemas.datacontract.org/2004/07/Microsoft.Office.Word.Server.Conversions> Schema 101  
<http://schemas.datacontract.org/2004/07/System> Schema 115  
<http://schemas.microsoft.com/2003/10/Serialization/> Schema 109  
<http://schemas.microsoft.com/2003/10/Serialization/Arrays> Schema 103  
<http://schemas.microsoft.com/office/server/word/2009/08/addGroup> Schema 116  
<http://schemas.microsoft.com/office/server/word/2009/08/addGroup/response> Schema 114  
<http://schemas.microsoft.com/office/server/word/2009/08/addItems> Schema 116  
<http://schemas.microsoft.com/office/server/word/2009/08/addJob> Schema 116  
<http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob> Schema 117  
<http://schemas.microsoft.com/office/server/word/2009/08/addSyncJob/response> Schema 117  
<http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob> Schema 104  
<http://schemas.microsoft.com/office/server/word/2009/08/addSyncStreamJob/response> Schema 118  
<http://schemas.microsoft.com/office/server/word/2009/08/cancelJob> Schema 104  
<http://schemas.microsoft.com/office/server/word/2009/08/cancelJob/response> Schema 104  
<http://schemas.microsoft.com/office/server/word/2009/08/conversionJobSettings> Schema 105

<http://schemas.microsoft.com/office/server/word/2009/08/convertBatch> Schema 106  
<http://schemas.microsoft.com/office/server/word/2009/08/getGroups> Schema 107  
<http://schemas.microsoft.com/office/server/word/2009/08/getGroups/response> Schema 107  
<http://schemas.microsoft.com/office/server/word/2009/08/getId> Schema 108  
<http://schemas.microsoft.com/office/server/word/2009/08/getId/response> Schema 108  
<http://schemas.microsoft.com/office/server/word/2009/08/getItems> Schema 110  
<http://schemas.microsoft.com/office/server/word/2009/08/getItems/response> Schema 108  
<http://schemas.microsoft.com/office/server/word/2009/08/getJobs> Schema 111  
<http://schemas.microsoft.com/office/server/word/2009/08/getJobs/response> Schema 110  
<http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus> Schema 112  
<http://schemas.microsoft.com/office/server/word/2009/08/getJobStatus/response> Schema 111  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus> Schema 113  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncJobStatus/response> Schema 112  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes> Schema 113  
<http://schemas.microsoft.com/office/server/word/2009/08/getSyncStreamOutputBytes/response> Schema 113  
<http://schemas.microsoft.com/office/server/word/2009/08/ping> Schema 114  
<http://schemas.microsoft.com/office/server/word/2009/08/ping/response> Schema 114  
<http://schemas.microsoft.com/office/server/word/2009/08/service> Schema 118  
<http://schemas.microsoft.com/office/server/word/2009/08/submitJob> Schema 115  
<http://schemas.microsoft.com/office/server/word/2009/08/submitJob/response> Schema 115