

[MS-XJRNL]: Journal Record Message File Format

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.msp>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
04/04/2008	0.1		Initial Availability.
04/25/2008	0.2		Revised and updated property names and other technical content.
06/27/2008	1.0		Initial Release.
08/06/2008	1.01		Revised and edited technical content.
09/03/2008	1.02		Revised and edited technical content.
12/03/2008	1.03		Updated IP notice.
04/10/2009	2.0		Updated technical content and applicable product releases.
07/15/2009	3.0	Major	Revised and edited for technical content.
11/04/2009	3.1.0	Minor	Updated the technical content.
02/10/2010	3.2.0	Minor	Updated the technical content.
05/05/2010	3.2.1	Editorial	Revised and edited the technical content.
08/04/2010	4.0	Major	Significantly changed the technical content.
11/03/2010	4.0	No change	No changes to the meaning, language, or formatting of the technical content.
03/18/2011	4.0	No change	No changes to the meaning, language, and formatting of the technical content.
08/05/2011	4.0	No change	No changes to the meaning, language, or formatting of the technical content.

Table of Contents

1 Introduction	4
1.1 Glossary	4
1.2 References	5
1.2.1 Normative References	5
1.2.2 Informative References	5
1.3 Overview	5
1.3.1 Body Text of the Journal-Report Message	5
1.3.2 original-message	6
1.4 Relationship to Protocols and Other Structures	6
1.5 Applicability Statement	7
1.6 Versioning and Localization	7
1.7 Vendor-Extensible Fields	7
2 Structures	8
2.1 Envelope-Part	8
2.1.1 Sender	8
2.1.2 Subject	8
2.1.3 Message-ID	9
2.1.4 recipient-specification	9
2.1.4.1 recipient-p2-type	9
2.1.4.2 forward-path	9
2.1.4.3 redirection-type	9
2.1.4.3.1 Expanded	9
2.1.4.3.2 Forwarded	10
2.1.4.4 original-forward-path	10
2.1.5 Label	10
2.1.6 On-Behalf-Of	10
2.1.7 Mailbox	10
2.1.8 SentUtc	11
2.1.9 ReceivedUtc	11
2.2 Original-Message-Part	11
3 Structure Examples	12
4 Security Considerations	13
4.1 Security Considerations for Implementers	13
4.2 Index of Security Fields	13
5 Appendix A: Product Behavior	14
6 Change Tracking	15
7 Index	16

1 Introduction

Journal record messages are e-mail messages that are generated by the server to capture and report information about messages sent to and from users of the e-mail system. For background information about how journaling works, see [\[MSFT-WPXTJ\]](#).

This document specifies an extension to [\[RFC2045\]](#) and [\[RFC2046\]](#) to accommodate journal record messages.

1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

ASCII
Augmented Backus-Naur Form (ABNF)
Coordinated Universal Time (UTC)
distinguished name (DN)

The following terms are defined in [\[MS-OXGLOS\]](#):

base64 encoding
blind carbon copy (Bcc) recipient
body part
carbon copy (Cc) recipient
character set
distribution list
header
journal
MIME content-type
MIME message
Multipurpose Internet Mail Extensions (MIME)
recipient
Simple Mail Transfer Protocol (SMTP)
To recipient

The following terms are specific to this document:

body: The contents of a body part or an entire message that contains several body parts, as described in [\[RFC2045\]](#).

encoding: A process that specifies a Content-Transfer-Encoding for transforming character data from one form to another.

Envelope-Part: A portion of a Journal-Report. It contains metadata about the journaled message in machine-readable form.

MIME attachment: A body part that is in a MIME message, for example, an e-mail message or a file that is attached to an e-mail message.

recipient forwarding: A feature that enables a message to be redirected to a different e-mail address, which is referred to as the "forwarded address," from the address to which it is sent originally. Depending on the implementation, a message can be redirected to the forwarded address without sending a copy to the original e-mail address, or the original e-mail address can additionally receive a copy of the message.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[MS-OXMSG] Microsoft Corporation, "[Outlook Item \(.msg\) File Format](#)".

[MS-OXOABK] Microsoft Corporation, "[Address Book Object Protocol Specification](#)".

[RFC2045] Freed, N., and Borenstein, N., "Multipurpose Internet Mail Extensions (MIME) Part One: Format of Internet Message Bodies", RFC 2045, November 1996, <http://ietf.org/rfc/rfc2045.txt>

[RFC2046] Freed, N., and Borenstein, N., "Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types", RFC 2046, November 1996, <http://ietf.org/rfc/rfc2046.txt>

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2821] Klensin, J., "Simple Mail Transfer Protocol", STD 10, RFC 2821, April 2001, <http://www.ietf.org/rfc/rfc2821.txt>

[RFC2822] Resnick, P., Ed., "Internet Message Format", STD 11, RFC 2822, April 2001, <http://www.ietf.org/rfc/rfc2822.txt>

[RFC5234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <http://www.rfc-editor.org/rfc/rfc5234.txt>

1.2.2 Informative References

[MSFT-WPXTJ] Microsoft Corporation, "White Paper: Exchange 2007 Transport Journaling", September 2007, [http://technet.microsoft.com/en-us/library/bb738122\(EXCHG.80\).aspx](http://technet.microsoft.com/en-us/library/bb738122(EXCHG.80).aspx)

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-OXGLOS] Microsoft Corporation, "[Exchange Server Protocols Master Glossary](#)".

1.3 Overview

Journal-Reports are **MIME messages** produced by the server that capture information about other ordinary (non-Journal-Report) messages sent through the server. These other messages are referred to here as original-messages.

1.3.1 Body Text of the Journal-Report Message

The **body** text of the Journal-Report message lists the e-mail addresses of the sender and **recipients** of the message, the subject, the Internet **Message-ID** field, and certain other metadata

about the original-message. The body text is referred to as the **Envelope-Part** of the Journal-Report. This document formally specifies the structure of the Envelope-Part.

1.3.2 original-message

The original-message is attached as a **MIME attachment** to the Envelope-Part. This is referred to as the Original-Message-Part of the Journal-Report. How the Original-Message-Part is attached to the Envelope-Part is fully described in [\[RFC2045\]](#) and [\[RFC2046\]](#).

1.4 Relationship to Protocols and Other Structures

The Envelope-Part that is documented here is a substructure within the larger structure of the Journal-Report MIME message. The Journal-Report structure is a MIME message and conforms to [\[RFC2045\]](#) and [\[RFC2046\]](#).

[\[RFC2045\]](#) describes how messages with a **MIME content-type** of message/rfc822 might be nested recursively as attachments. The outermost message/rfc822 **body part** of the Journal-Report contains the Envelope-Part as the body.

The Envelope-Part is encoded using the mechanisms described in [\[RFC2045\]](#), such as the Content-Transfer-Encoding mechanism, which specifies details such as the **character set** and **encoding** used for the data in the Envelope-Part. This document specifies the syntax of the Envelope-Part prior to any **MIME** encoding being applied.

To illustrate the concept of encoding: The Envelope-Part could contain textual data outside the **ASCII** character set range if the original-message had any non-English text. The MIME message is in many circumstances constrained to contain only data in the ASCII character range, so the MIME standards define methods of encoding non-ASCII data using mechanisms such as **base64 encoding** and quote-printable encoding. Thus, if an encoding mechanism was specified for the Envelope-Part using standardized MIME conventions, decoding would be done before processing the Envelope-Part structure.

The terms Content-Transfer-Encoding, character set, and encoding are described in [\[RFC2045\]](#). The mechanism for decoding the Envelope-Part is described in [\[RFC2045\]](#) section 6.

The following figure shows how the Envelope-Part substructure is placed in relation to the various other substructures in the Journal-Report MIME message.

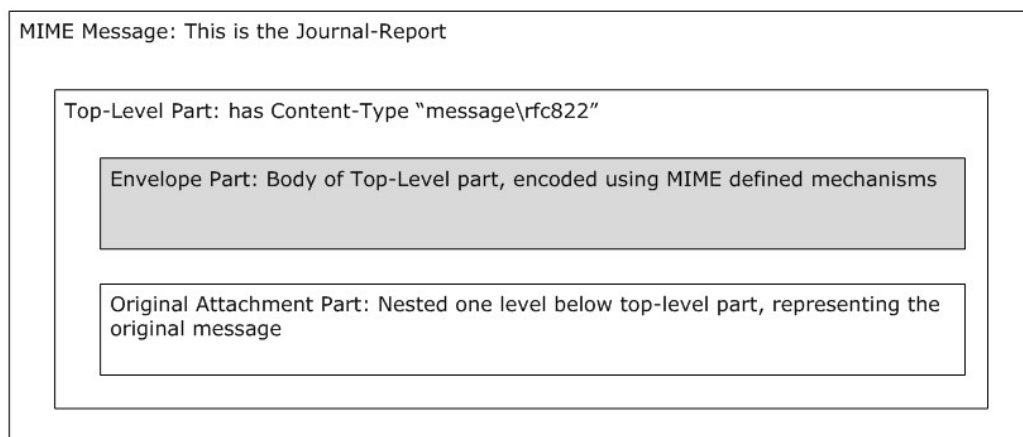


Figure 1: MIME structure of a Journal-Report message

1.5 Applicability Statement

Applications can use this protocol to create and consume **journal** record messages.

1.6 Versioning and Localization

None.

1.7 Vendor-Extensible Fields

None.

2 Structures

Journal-Reports extend the structures defined in [\[RFC2045\]](#) and [\[RFC2046\]](#) by defining a substructure called the Envelope-Part, which is embedded within the MIME message.

2.1 Envelope-Part

The **Augmented Backus-Naur Form (ABNF)** notation [\[RFC5234\]](#) is used to specify the format of the Envelope-Part. The format is a series of field/value pairs on CRLF terminated lines.

```
<Envelope-Part>          = <sender> CRLF
                           [<sent-on-behalf> CRLF]
                           (<subject> CRLF <message-id> CRLF) / (<message-id> CRLF <subject>
CRLF)
                           [<label> CRLF]
                           [<mailbox-owner> CRLF]
                           1*<recipient-specification>
                           [<sent-time> CRLF]
                           [<received-time> CRLF]

<sender>                  = "Sender:" SP <reverse-path>
<sent-on-behalf>         = "On-Behalf-Of:" SP <on-behalf-path>
<subject>                 = "Subject:" SP <subject-string>
<message-id>             = "Message-ID:" SP <msg-id>
<label>                  = "Label:" SP 1*255CHAR
<mailbox-owner>          = "Mailbox:" SP <mailbox-owner-address>
<recipient-specification> = <recipient-p2-type> ":" SP <forward-path>
                           ["," SP <redirection-type> ":" SP <original-forward-path>] CRLF
<sent-time>              = "SentUtc:" SP <sent-time-string>
<received-time>          = "ReceivedUtc:" SP <received-time-string>

<recipient-p2-type>      = "Bcc" / "To" / "Cc" / "Recipient"
<redirection-type>      = "Expanded" / "Forwarded"
```

2.1.1 Sender

The **reverse-path** field MUST be set to the e-mail address of the sender of the original-message. This field MUST be formatted as one of the following:

- An **SMTP** e-mail address as specified in [\[RFC2821\]](#).
- A **distinguished name (DN)** address formatted according to the following ABNF notation. The format for x500-dn is specified in [\[MS-OXOABK\]](#) section 2.2.1.1.

```
<distinguished-name-address> = "[EX:" x500-dn "]"
```

2.1.2 Subject

The **subject-string** field MUST contain the data from the "Subject" **header** of the original-message. This header is specified in [\[RFC2822\]](#).

The **subject-string** can consist of characters outside the ASCII character set range as specified in [\[RFC2045\]](#) and [\[RFC2046\]](#). The MIME content-type header of the respective body part in which Envelope-Part is embedded MUST specify the character set to use to interpret the **subject-string** in accordance with the MIME specifications [\[RFC2045\]](#) and [\[RFC2046\]](#).

2.1.3 Message-ID

The **msg-id** field MUST contain the value of the **Message-ID** field ([\[RFC2822\]](#) section 3.6.4) of the original-message.

2.1.4 recipient-specification

One or more occurrences of **recipient-specification** give information about the recipients of the original-message that was journaled.

2.1.4.1 recipient-p2-type

This field MUST be set according to the following table.

Value	Meaning
"Bcc"	The recipient listed in forward-path is addressed as a Bcc recipient .
"To"	The recipient listed in forward-path is addressed as a To recipient .
"Cc"	The recipient listed in forward-path is addressed as a Cc recipient .
"Recipient"	The server is unable to determine how the recipient is addressed.

2.1.4.2 forward-path

This field MUST be set to the e-mail address of a recipient of the original-message. This address MUST be formatted in one of the following formats:

- An SMTP e-mail address as specified in [\[RFC2821\]](#).
- A **DN** address as specified in section [2.1.1](#).

Neither format is preferred over the other. The choice of format is left to the implementation.

2.1.4.3 redirection-type

This field MUST be set to either "Expanded" or "Forwarded."

2.1.4.3.1 Expanded

A message sent to a **distribution list** is redirected instead to the users and distribution lists contained within the distribution list. This process is known as "expansion" and the distribution list is said to have been "expanded." The expansion is repeated for the nested distribution lists until all distribution lists have been expanded to ordinary users. The **redirection-type** field, when set to "Expanded", denotes that the sender of the message sent it originally to **original-forward-path**, which was a distribution list. This distribution list was then expanded to one or more recipients (perhaps expanding nested recipients repeatedly until all recipients were non-distribution list, ordinary recipients). Each of these expanded recipients is listed in the **forward-path** field of a **recipient-specification**.

2.1.4.3.2 Forwarded

A **redirection-type** of "Forwarded" indicates that the recipient indicated by **original-forward-path** was configured for **recipient forwarding**. The message was forwarded to the recipient indicated by **forward-path**.

2.1.4.4 original-forward-path

The **original-forward-path** field is the e-mail address of the recipient that was redirected to **forward-path**. This address MUST be formatted in one of the following formats:

- An SMTP e-mail address as specified in [\[RFC2821\]](#).
- A DN address as specified in section [2.1.1](#).

Neither format is preferred over the other. The choice of format is left to the implementation.

Although syntactically identical to **forward-path**, it has different semantics. The appearance of **redirection-type** and **original-forward-path** in a **recipient-specification** indicates that originally the message that was journaled was sent to the recipient with address **original-forward-path** and the server did one of the following:

- Changed the recipient address to **forward-path**.
- Added a new recipient with the address **forward-path** due to the **original-forward-path** recipient being present.

If the **redirection-type** and **original-forward-path** elements are omitted, the server did not have information about what type of forwarding or expansion was done on the recipient when it generated the Journal-Report.

2.1.5 Label

If present, this optional field MUST contain a text value, the contents of which are implementation-specific.

2.1.6 On-Behalf-Of

This field is optional. If present, the **on-behalf-path** field contains the e-mail address of the sending mailbox owner. This e-mail address MUST be different than the address contained in the **reverse-path** field. This address MUST be formatted in one of the following formats:

- An SMTP e-mail address as specified in [\[RFC2821\]](#).
- A DN address as specified in section [2.1.1](#).

Neither format is preferred over the other. The choice of format is left to the implementation.

2.1.7 Mailbox

This field is optional. If present, the **mailbox-owner-address** field contains the SMTP e-mail address of the sending mailbox owner.

2.1.8 SentUtc

This field is optional. If present, the **sent-time-string** field contains a string representing the date and time that the original-message was sent in **Coordinated Universal Time (UTC)**. The exact format of the string contained in the **sent-time-string** field is implementation-dependent.

2.1.9 ReceivedUtc

This field is optional. If present, the **received-time-string** field contains a string representing the date and time that the original-message was received in Coordinated Universal Time (UTC). The exact format of the string contained in the **received-time-string** field is implementation-dependent.

2.2 Original-Message-Part

This data MUST be one of the following:

- A MIME attachment of type message/rfc822.
- A .MSG file as specified in [\[MS-OXMSG\]](#).

Neither format is preferred over the other. The choice of format is left to the implementation.

3 Structure Examples

The following is an example of the Envelope-Part of Journal-Report, followed by an explanation of the various syntax elements (note that the line numbers are not present in the actual Envelope-Part, but are shown here so the structure can be discussed line by line):

```
Sender: sender@contoso.com
Subject: Sample Message
Message-ID: <12345@contoso.com>
To: dl-to-member1@contoso.com, Expanded: dl-to@contoso.com
To: dl-to-member2@contoso.com, Expanded: dl-to@contoso.com
Cc: fwd@contoso.com, Forwarded: user@contoso.com
Bcc: dl-bcc-member@contoso.com, Expanded: dl-bcc@contoso.com
Bcc: fwd2@contoso.com, Forwarded: user2@contoso.com
Recipient: user-unk@contoso.com
```

1. The sender of the original-message was "sender@contoso.com."
2. The subject of the original-message was "Sample Message."
3. The value of the **Message-ID** field ([\[RFC2822\]](#) section 3.6.4) of the original-message was "12345@contoso.com."
4. The original-message was sent to dl-to@contoso.com as a To recipient, which is a distribution list that was expanded to dl-to-member1@contoso.com and dl-to-member2@contoso.com (captured in Line 5) by the server.
5. See (4).
6. The original-message was sent to user@contoso.com as a Cc recipient, which was changed by the e-mail server to fwd@contoso.com because recipient forwarding was configured. User@contoso.com did not receive a copy of the message because there is no **recipient-specification** where user@contoso.com was listed in the **forward-path**.
7. The original-message was sent by the mail client to dl-bcc@contoso.com as a Bcc recipient, which is a distribution list that was expanded to dl-bcc-member@contoso.com.
8. The original-message was sent to user2@contoso.com as a Bcc recipient, which was rewritten by the e-mail server to fwd2@contoso.com because recipient forwarding was configured. User2@contoso.com did not receive a copy of the message because there is no **recipient-specification** where user2@contoso.com was listed in the **forward-path**.
9. Finally, there is no information about whether user-unk@contoso.com was sent the original-message as a To recipient, Cc recipient, or Bcc recipient. It is also not known whether this recipient got the message due to distribution list expansion, recipient forwarding, or was directly addressed by the sender. The "Recipient:" element indicates that the server was only able to capture that user-unk@contoso.com was a recipient of the message and no further recipient metadata was available.

4 Security Considerations

This format does not implement or concern itself with security, but relies on the underlying e-mail transport software and e-mail storage software to provide security as applicable.

4.1 Security Considerations for Implementers

None.

4.2 Index of Security Fields

None.

5 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft® Exchange Server 2007
- Microsoft® Exchange Server 2010
- Microsoft® Office Outlook® 2007
- Microsoft® Outlook® 2010

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

6 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

7 Index

A

[Applicability](#) 7

C

[Change tracking](#) 15

[Common data types and fields](#) 8

D

[Data types and fields - common](#) 8

Details

[common data types and fields](#) 8

E

[Examples](#) 12

F

[Fields - vendor-extensible](#) 7

G

[Glossary](#) 4

I

Implementer - security considerations ([section 4](#)
13, [section 4.1](#) 13)

[Informative references](#) 5

[Introduction](#) 4

L

[Localization](#) 7

N

[Normative references](#) 5

O

[Overview \(synopsis\)](#) 5

P

[Product behavior](#) 14

R

References

[informative](#) 5

[normative](#) 5

[Relationship to protocols and other structures](#) 6

S

Security

[implementer considerations](#) 13

[index of security fields](#) 13

[Security - implementer considerations](#) 13

Structures

[overview](#) 8

T

[Tracking changes](#) 15

V

[Vendor-extensible fields](#) 7

[Versioning](#) 7